


FCC RADIO TEST REPORT

The device described below is tested by Dongguan Nore Testing Center Co., Ltd. to determine the maximum emission levels emanating from the device, the severe levels which the device can endure and E.U.T.'s performance criterion. The test results, data evaluation, test procedures, and equipment of configurations shown in this report were made in accordance with the procedures in ANSI C63.10(2013).

Applicant : EXPRESS LUCK INDUSTRIAL (SHENZHEN) LIMITED
Address : Floor1, Workshop1, NO.88, SOUTH BAOTONG ROAD, XIKENG COMMUNITY, YUANSAN STREET, LONGGANG DISTRICT, SHENZHEN, CHINA
Manufacturer /Factory : EXPRESS LUCK INDUSTRIAL (SHENZHEN) LIMITED
Address : Floor1, Workshop1, NO.88, SOUTH BAOTONG ROAD, XIKENG COMMUNITY, YUANSAN STREET, LONGGANG DISTRICT, SHENZHEN, CHINA.
E.U.T. : WIFI Bluetooth module
Brand Name : Caixun
Model No. : SKI.WB7638U.1_MT7668BU
FCC ID : 2AWY6-MT7668BU
Measurement Standard : FCC PART 15.247
Date of Receiver : July 11, 2020
Date of Test : July 15, 2020 to August 10, 2020
Date of Report : August 10, 2020

This Test Report is Issued Under the Authority of :

Prepared by

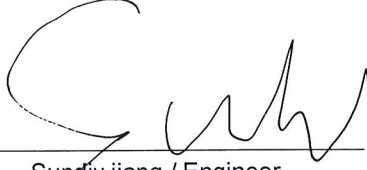
Supply jiang / Engineer

Approved & Authorized Signer


Lori Fan / Authorized Signatory

This test report is for the customer shown above and their specific product only. This report applies to above tested sample only and shall not be reproduced in part without written approval of Dongguan Nore Testing Center Co., Ltd.

Table of Contents

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	7
1.3 TEST METHODOLOGY	7
1.4 EQUIPMENT MODIFICATIONS	7
1.5 SUPPORT DEVICE	7
1.6 TEST FACILITY AND LOCATION	8
1.7 DEVIATIONS AND ABNORMALITIES FROM STANDARD CONDITIONS	8
1.8 SUMMARY OF TEST RESULTS	9
2. SYSTEM TEST CONFIGURATION	10
2.1 EUT CONFIGURATION	10
2.2 DESCRIPTION OF TEST MODES	10
2.3 EUT EXERCISE	10
3. CONDUCTED EMISSIONS TEST	11
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
3.2 TEST CONDITION	11
3.3 MEASUREMENT RESULTS	11
4. MAX. CONDUCTED OUTPUT POWER	14
4.1 MEASUREMENT PROCEDURE	14
4.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
4.3 MEASUREMENT RESULTS	14
5. 6DB BANDWIDTH	16
5.1 MEASUREMENT PROCEDURE	16
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
5.3 MEASUREMENT RESULTS	16
6. POWER SPECTRAL DENSITY	20
6.1 MEASUREMENT PROCEDURE	20
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	20
6.3 MEASUREMENT RESULTS	20
7. BAND EDGE AND CONDUCTED SPURIOUS EMISSIONS	24
7.1 REQUIREMENT AND MEASUREMENT PROCEDURE	24
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	24
7.3 MEASUREMENT RESULTS	24



8. RADIATED SPURIOUS EMISSIONS AND RESTRICTED BANDS..... 28

8.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)28

8.2 MEASUREMENT PROCEDURE29

8.3 LIMIT30

8.4 MEASUREMENT RESULTS30

9. ANTENNA APPLICATION 34

9.1 ANTENNA REQUIREMENT.....34

9.2 MEASUREMENT RESULTS34

10. TEST EQUIPMENT LIST..... 35

Revision History

Report Number	Description	Issued Date
NTC2007102FV00	Initial Issue	2020-08-10

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

E.U.T.	:	WIFI Bluetooth module
Main Model Number	:	SKI.WB7638U.1_MT7668BU
Additional Model Number	:	N/A
Description of Model Difference	:	N/A
Brand Name	:	Caixun
E.U.T. Type	:	Class B
Rating	:	DC 3.3V (From PCB board)
Adapter	:	N/A
Test Voltage	:	AC 120V/60Hz
Cable	:	N/A
Hardware Version	:	V1.0
Software Version	:	V1.0
Note	:	N/A
Remark	:	This product contains multiple wireless features, and this report applies only to 2.4G WIFI technology.

Technical Specification (2.4G WIFI):

Frequency Range	:	2412MHz~2462MHz(802.11b/802.11g/802.11n(HT20)) 2422MHz~2452MHz(802.11n(HT40))
Modulation Type	:	CCK, DQPSK, DBPSK for 802.11b OFDM for 802.11g/n(HT20)/n(HT40)
Number of Channel	:	11 for 802.11b/g/n(HT20) 7 for 802.11n(HT40)
Channel space	:	5MHz
Antenna Type	:	FPC Antenna *2
Antenna Gain	:	2.3dBi

Appendix I - Channel List and Test Channel

IEEE 802.11 b/g/n(HT20)		IEEE 802.11n(HT40)	
Channel	Frequency MHz	Channel	Frequency MHz
1	2412	-	-
2	2417	-	-
3	2422	3	2422
4	2427	4	2427
5	2432	5	2432
6	2437	6	2437
7	2442	7	2442
8	2447	8	2447
9	2452	9	2452
10	2457	-	-
11	2462	-	-
-	-	-	-

Note: According to section 15.31(m), regards to the operating frequency range over 10MHz, the lowest, middle, and the highest frequency of channel were selected to perform the test. The selected frequency see below:

IEEE 802.11 b/g/n(HT20)		IEEE 802.11n(HT40)	
Channel	Frequency MHz	Channel	Frequency MHz
1	2412	3	2422
6	2437	6	2437
11	2462	9	2452
Test SW Version		Signalling	

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AWY6-MT7668BU filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rule and DTS KDB 558074 D01 15.247 Meas Guidance v05r02.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

Notebook	:	Manufacturer: IBM Model: 1834 P/N: 13N5615 CE, FCC: DOC
Adapter (For Notebook)	:	Manufacturer: Huntkey Model: HKA09019047-6D I/P: AC 100-240V 50-60Hz, 1.5A O/P: DC 19V 4.74A
TV (Terminal Product)	:	Provided by the manufacturer Manufacturer: Express Luck Model: LE-50N3

1.6 Test Facility and Location

Site Description

EMC Lab : Listed by CNAS, August 13, 2018
The certificate is valid until August 13, 2024
The Laboratory has been assessed and proved to be in compliance with CNAS/CL01
The Certificate Registration Number is L5795.

Listed by A2LA, November 01, 2017
The certificate is valid until December 31, 2021
The Laboratory has been assessed and proved to be in compliance with ISO17025
The Certificate Registration Number is 4429.01

Listed by FCC, November 06, 2017
The Designation Number is CN1214
Test Firm Registration Number: 907417

Listed by Industry Canada, June 08, 2017
The Certificate Registration Number. Is 46405-9743A

Name of Firm : Dongguan Nore Testing Center Co., Ltd.
(Dongguan NTC Co., Ltd.)

Site Location : Building D, Gaosheng Science and Technology Park, Hongtu Road,
Nancheng District, Dongguan City, Guangdong Province, China

1.7 Deviations and Abnormalities from Standard Conditions

No additions, deviations and exclusions from the standard.

1.8 Summary of Test Results

FCC Rules	Description Of Test	Uncertainty	Result
§15.207 (a)	AC Power Conducted Emission	±2.52dB	Compliant
§15.247(b)(3)	Max. Conducted Output Power	±0.84dB	Compliant
§15.247(a)(2)	6dB Bandwidth	±1.79%	Compliant
§15.247(e)	Power Spectral Density	±1.06dB	Compliant
§15.247(d)	Band Edge and Conducted Spurious Emissions	±1.14dB	Compliant
§15.247(d), §15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	±4.68dB	Compliant
§15.203	Antenna Requirement	N/A	Compliant

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.


2.2 Description of test modes

The EUT has been tested under continuous operating condition. Test program used to control the EUT staying in continuous transmitting mode. The Lowest, middle and highest channel were chosen for testing, and modulation type CCK, DQPSK, DBPSK, OFDM and all data rate were tested. But only the worst case data is shown in this report.

2.3 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

3.1 Test SET-UP (Block Diagram of Configuration)





Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>


Conducted Emission Measurement

File :SKI

Data :#5

Date: 2020/7/29

Time: 22:02:53

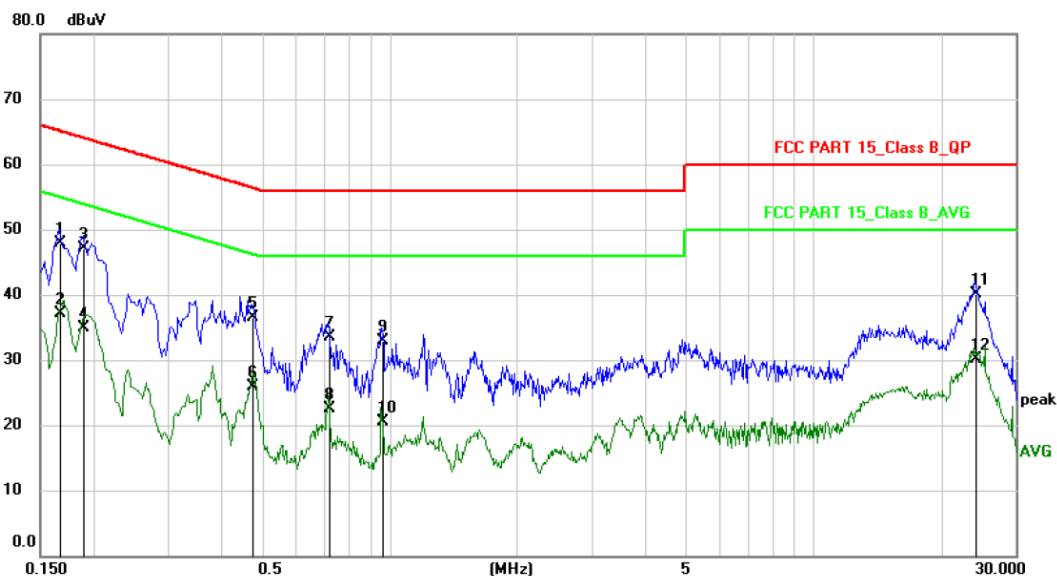

Site

Phase: **L1**

Temperature: 26

Limit: FCC PART 15_Class B_QP

Power: AC120V/60Hz

Humidity: 50 %

EUT: WIFI Bluetooth module

M/N: SKI.WB7638U.1_MT7668BU

Mode: TX(2.4G WLAN)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1660	37.40	10.60	48.00	65.16	-17.16	QP	
2		0.1660	26.60	10.60	37.20	55.16	-17.96	AVG	
3	*	0.1900	36.60	10.60	47.20	64.04	-16.84	QP	
4		0.1900	24.30	10.60	34.90	54.04	-19.14	AVG	
5		0.4739	25.88	10.62	36.50	56.45	-19.95	QP	
6		0.4739	15.28	10.62	25.90	46.45	-20.55	AVG	
7		0.7179	22.94	10.66	33.60	56.00	-22.40	QP	
8		0.7179	11.84	10.66	22.50	46.00	-23.50	AVG	
9		0.9619	22.21	10.69	32.90	56.00	-23.10	QP	
10		0.9619	9.91	10.69	20.60	46.00	-25.40	AVG	
11		24.0900	29.32	10.78	40.10	60.00	-19.90	QP	
12		24.0900	19.32	10.78	30.10	50.00	-19.90	AVG	



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Conducted Emission Measurement


File :SKI

Data :#6

Date: 2020/7/29

Time: 22:09:51

80.0 dBuV

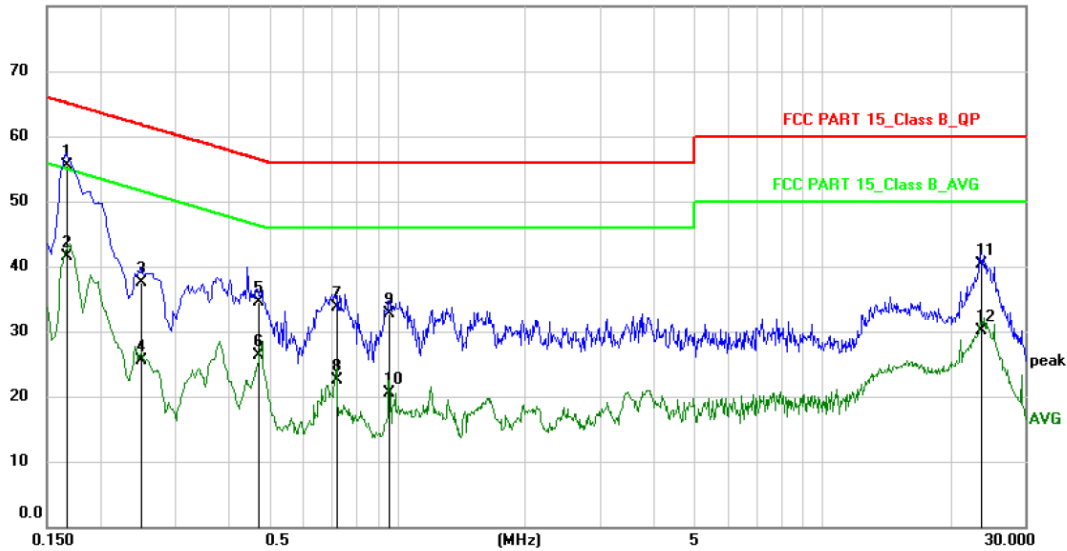

Site

Phase: **N**

Temperature: 26

Limit: FCC PART 15_Class B_QP

Power: AC120V/60Hz

Humidity: 50 %

EUT: WIFI Bluetooth module

M/N: SKI.WB7638U.1_MT7668BU

Mode: TX(2.4G WLAN)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1660	45.00	10.60	55.60	65.16	-9.56	QP	
2		0.1660	30.90	10.60	41.50	55.16	-13.66	AVG	
3		0.2505	26.90	10.60	37.50	61.74	-24.24	QP	
4		0.2505	15.00	10.60	25.60	51.74	-26.14	AVG	
5		0.4700	23.98	10.62	34.60	56.51	-21.91	QP	
6		0.4700	15.78	10.62	26.40	46.51	-20.11	AVG	
7		0.7217	23.14	10.66	33.80	56.00	-22.20	QP	
8		0.7217	11.84	10.66	22.50	46.00	-23.50	AVG	
9		0.9578	22.01	10.69	32.70	56.00	-23.30	QP	
10		0.9578	9.91	10.69	20.60	46.00	-25.40	AVG	
11		23.5700	29.52	10.78	40.30	60.00	-19.70	QP	
12		23.5700	19.32	10.78	30.10	50.00	-19.90	AVG	

4. Max. Conducted Output Power


4.1 Measurement Procedure

Maximum Conducted Output power at Antenna Terminals, FCC Rules 15.247(b)(3):

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

4.2 Test SET-UP (Block Diagram of Configuration)



4.3 Measurement Results

Pass

Please refer to following table.

Temperature :	22 °C	Humidity :	53%		
Test By:	Sance	Test Date :	July 15, 2020		
Test Result:	PASS				
Frequency MHz	Data Rate Mbps	Peak Output Power dBm		Limit dBm	
IEEE 802.11b Mode (CCK, Antenna Gain=2.3dBi)					
Low Channel: 2412	1	13.16		30	
Middle Channel: 2437	1	12.93		30	
High Channel: 2462	1	13.11		30	
IEEE 802.11g Mode (OFDM, Antenna Gain=2.3dBi)					
Low Channel: 2412	6	15.39		30	
Middle Channel: 2437	6	14.82		30	
High Channel: 2462	6	14.93		30	
IEEE 802.11n(HT20) Mode (OFDM, Antenna Directional gain =5.31dBi)					
Low Channel: 2412	6.5	ANT_0	ANT_1	Total	30
		14.27	13.78	17.04	
Middle Channel: 2437	6.5	13.58	13.41	16.51	30
High Channel: 2462	6.5	13.76	13.73	16.76	30
IEEE 802.11n(HT40) Mode (OFDM, Antenna Directional gain =5.31dBi)					
Low Channel: 2422	13.5	13.60	12.75	16.21	30
Middle Channel: 2437	13.5	12.51	12.30	15.41	30
High Channel: 2452	13.5	12.65	12.31	15.49	30
Note: 1. CCK was worst case of the 802.11b 2. As for IEEE 802.11b and IEEE 802.11g mode, both of antennas have considered during pre-test, but only the worst case (ANT_0) was recorded. 3. As for IEEE 802.11n mode, EUT working in MIMO mode. Directional gain for MIMO Mode. 4. Antenna Directional gain = 2.3 dBi +10 log(2)=5.31dBi					

5. 6dB Bandwidth


5.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074(v05):

1. Set resolution bandwidth (RBW) = 100kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

5.2 Test SET-UP (Block Diagram of Configuration)




5.3 Measurement Results

Pass


Please refer to following table and plots.

Temperature :	22 °C	Humidity :	53 %
Test By:	Sance	Test Date :	July 15, 2020
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	6dB Bandwidth MHz	Limit
IEEE 802.11b Mode (CCK)			
Low Channel: 2412	1	8.56	>500KHz
Middle Channel: 2437	1	9.06	>500KHz
High Channel: 2462	1	9.08	>500KHz
IEEE 802.11g Mode (OFDM)			
Low Channel: 2412	6	15.72	>500KHz
Middle Channel: 2437	6	15.72	>500KHz
High Channel: 2462	6	15.72	>500KHz
IEEE 802.11n(HT20) Mode (OFDM)			
Low Channel: 2412	6.5	16.95	>500KHz
Middle Channel: 2437	6.5	16.58	>500KHz
High Channel: 2462	6.5	16.58	>500KHz
IEEE 802.11n(HT40) Mode (OFDM)			
Low Channel: 2422	13.5	35.66	>500KHz
Middle Channel: 2437	13.5	35.68	>500KHz
High Channel: 2452	13.5	35.67	>500KHz
Note: 1. CCK was worst case of the 802.11b 2. Both of antennas have considered during pre-test, but only the worst case (ANT_0) was recorded.			


IEEE 802.11b Low Channel

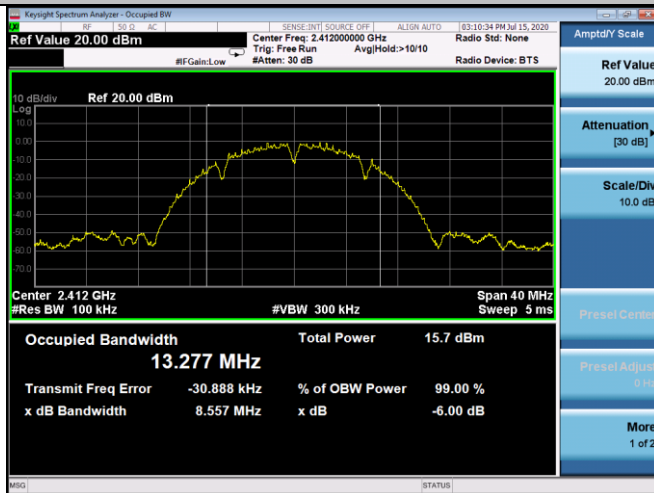


IEEE 802.11b Middle Channel

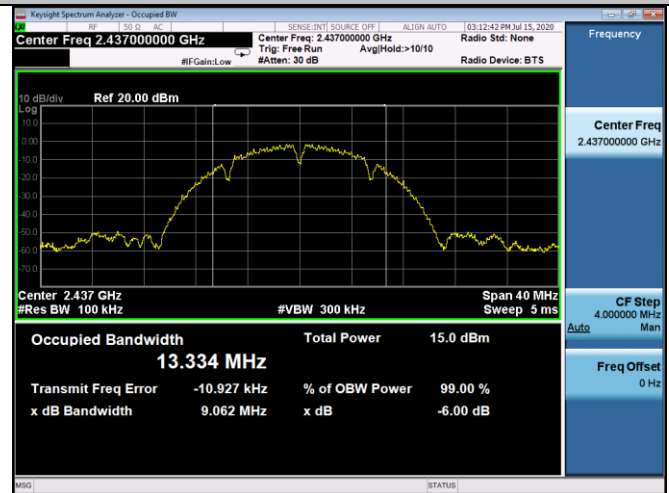


IEEE 802.11b High Channel

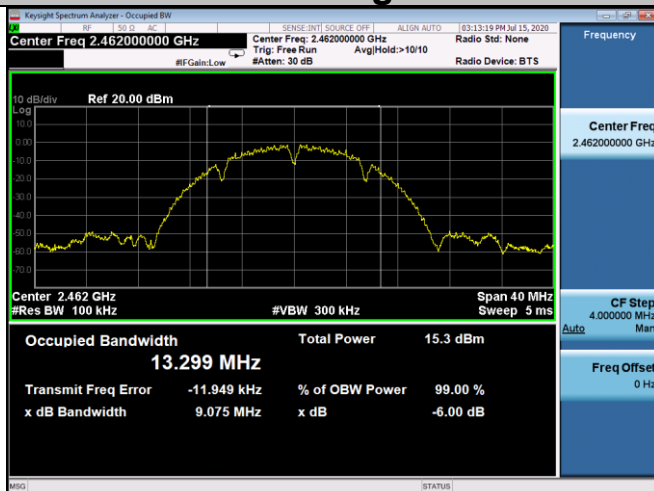


IEEE 802.11g Low Channel

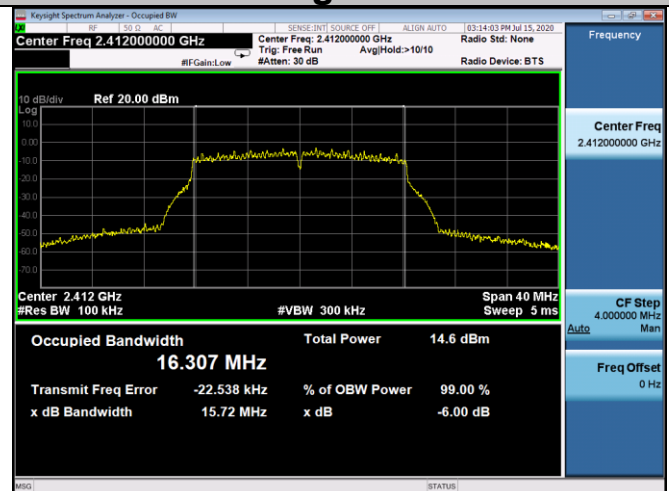


IEEE 802.11g Middle Channel

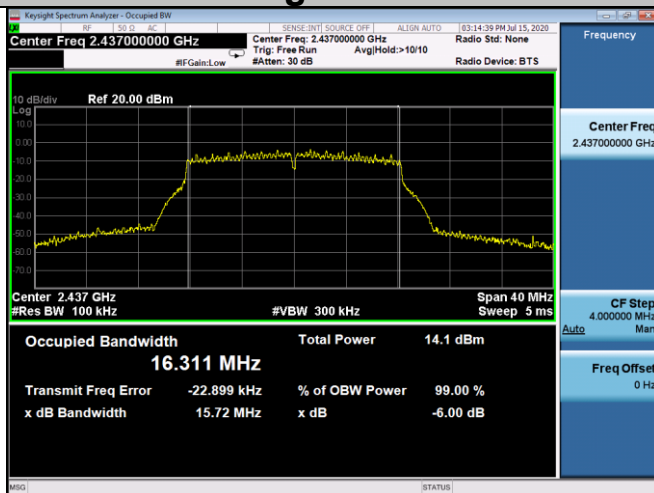


IEEE 802.11g High Channel

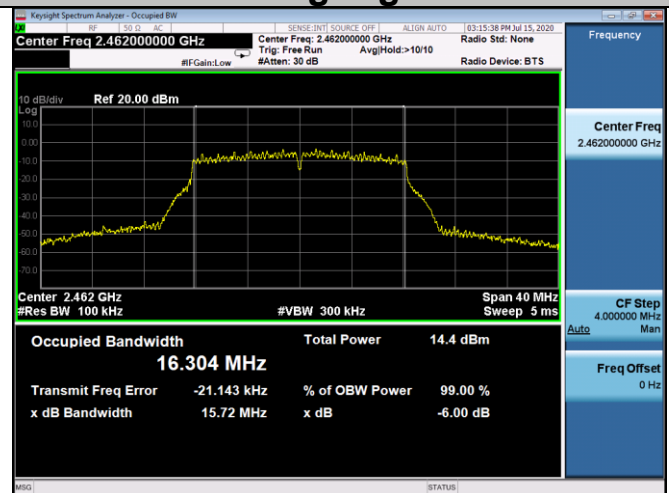


IEEE 802.11n(HT20) Low Channel

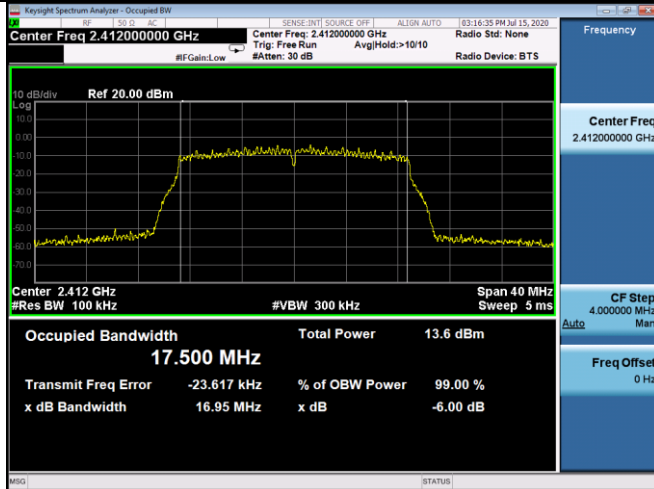


IEEE 802.11n(HT20) Middle Channel

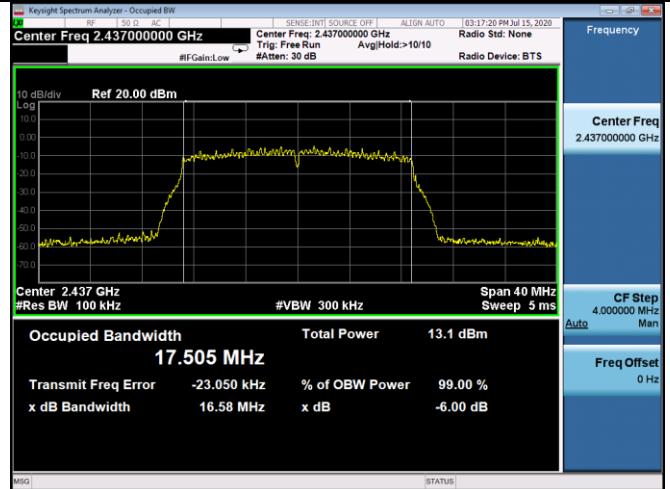


IEEE 802.11n(HT20) High Channel

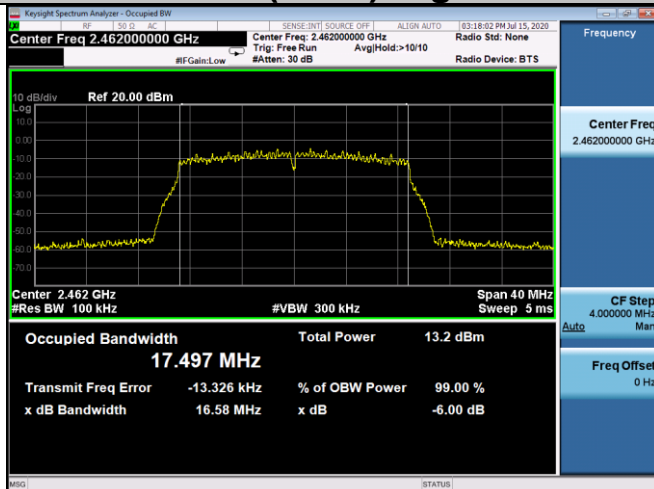


IEEE 802.11n(HT40) Low Channel

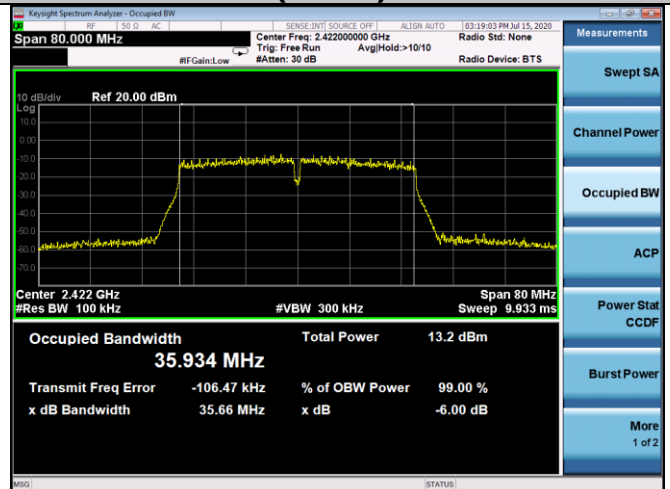

IEEE 802.11n(HT40) Middle Channel

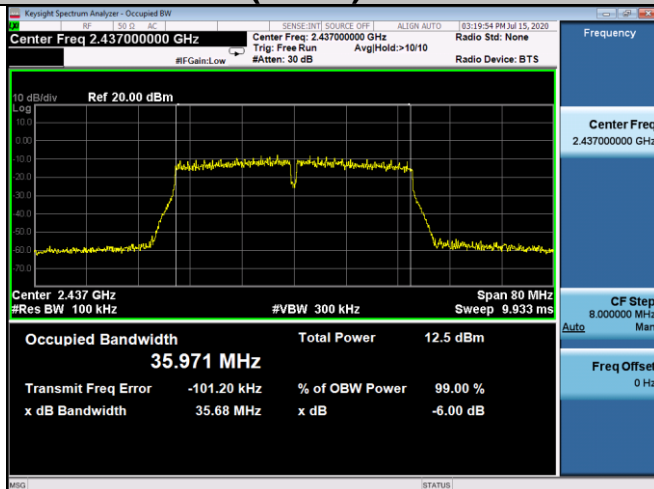

IEEE 802.11n(HT40) Channel

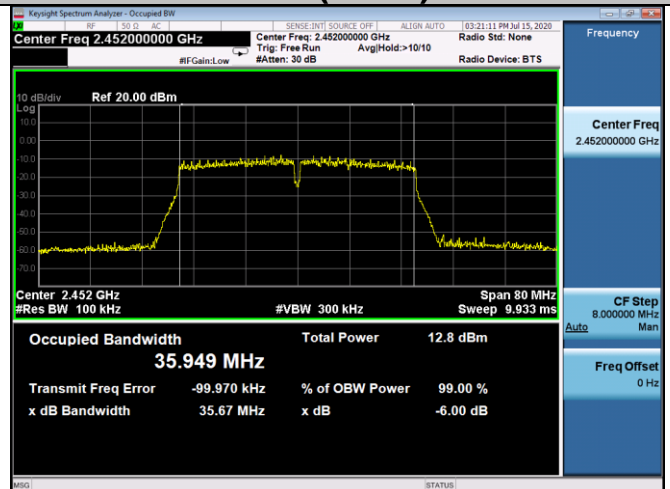

6. Power Spectral Density


6.1 Measurement Procedure

Power Spectral Density, FCC Rule 15.247(e):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below according to FCC KDB558074 (v05):

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ KHz}$
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.2 Test SET-UP (Block Diagram of Configuration)




6.3 Measurement Results

Pass


Please refer to following table and plots.

Temperature :	22 °C	Humidity :	53%		
Test By:	Sance	Test Date :	July 15, 2020		
Test Result:	PASS				
Frequency MHz	Data Rate Mbps	PSD dBm/3kHz		Limit dBm/3kHz	
IEEE 802.11b Mode (CCK)					
Low Channel: 2412	1	-16.294		8	
Middle Channel: 2437	1	-13.668		8	
High Channel: 2462	1	-15.703		8	
IEEE 802.11g Mode (OFDM)					
Low Channel: 2412	6	-16.374		8	
Middle Channel: 2437	6	-16.708		8	
High Channel: 2462	6	-15.846		8	
IEEE 802.11n(HT20) Mode (OFDM)					
Low Channel: 2412	6.5	ANT_0	ANT_1	Total	-
		-19.085	-18.344	-15.688	8
Middle Channel: 2437	6.5	-18.717	-19.121	-15.904	8
High Channel: 2462	6.5	-18.421	-18.615	-15.507	8
IEEE 802.11n(HT40) Mode (OFDM)					
Low Channel: 2422	13.5	-20.797	-21.130	-17.950	8
Middle Channel: 2437	13.5	-21.958	-21.821	-18.879	8
High Channel: 2452	13.5	-21.030	-21.856	-18.413	8
Note: 1. CCK was worst case of the 802.11b 2. As for IEEE 802.11b and IEEE 802.11g mode, both of antennas have considered during pre-test, but only the worst case (ANT_0) was recorded. 3. As for IEEE 802.11n mode, EUT working in MIMO mode. Directional gain for MIMO Mode. 4. Antenna Directional gain = 2.3 dBi +10 log(2)=5.31dBi					


IEEE 802.11b Low Channel

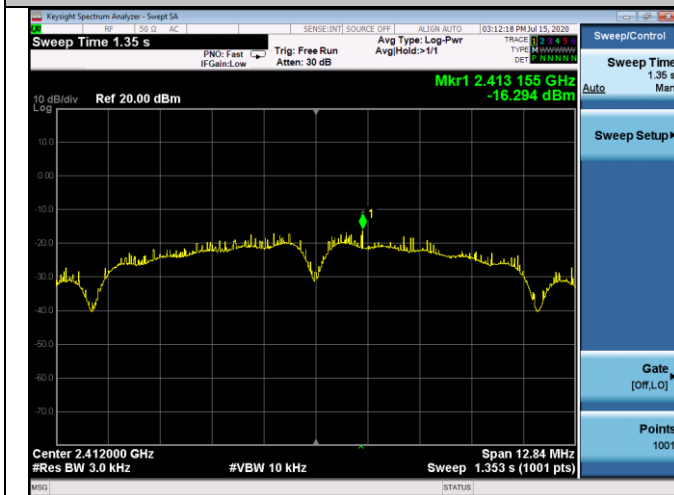


IEEE 802.11b Middle Channel

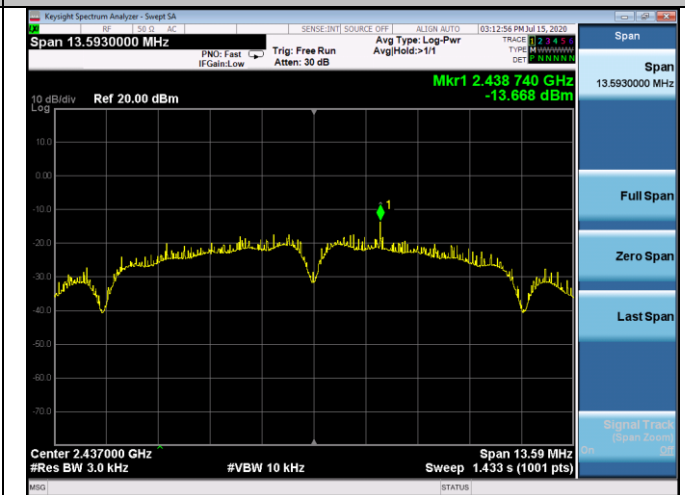


IEEE 802.11b High Channel

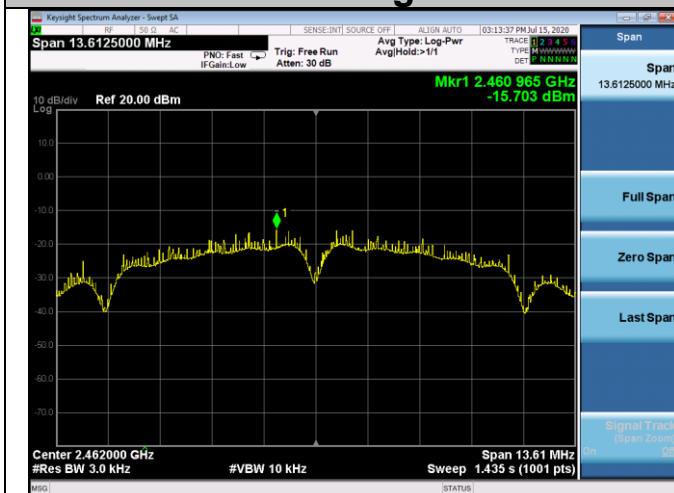


IEEE 802.11g Low Channel

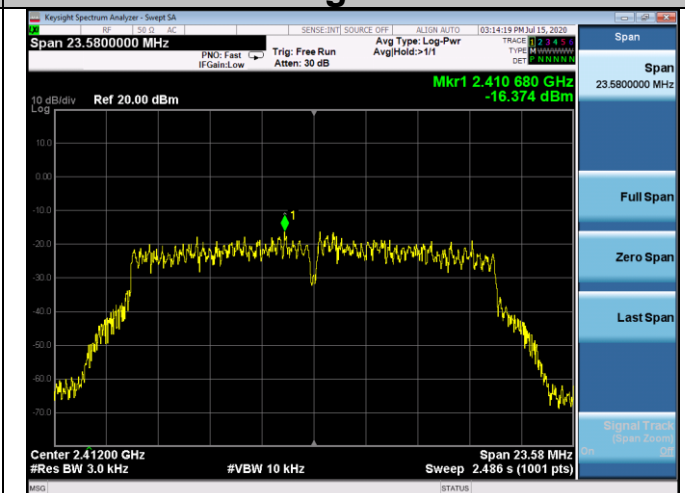


IEEE 802.11g Middle Channel

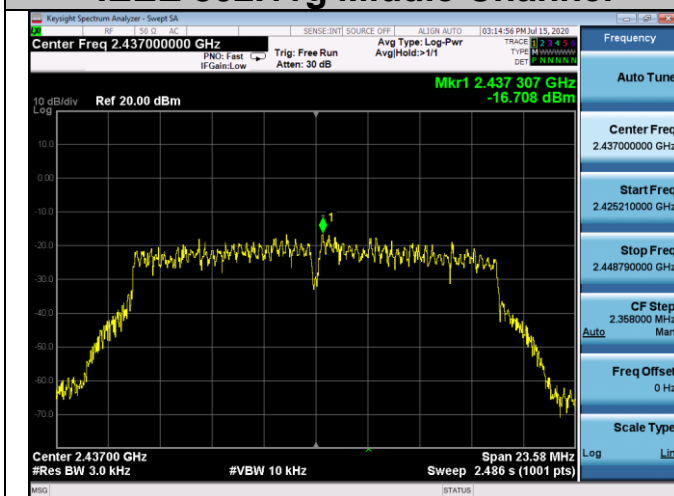


IEEE 802.11g High Channel

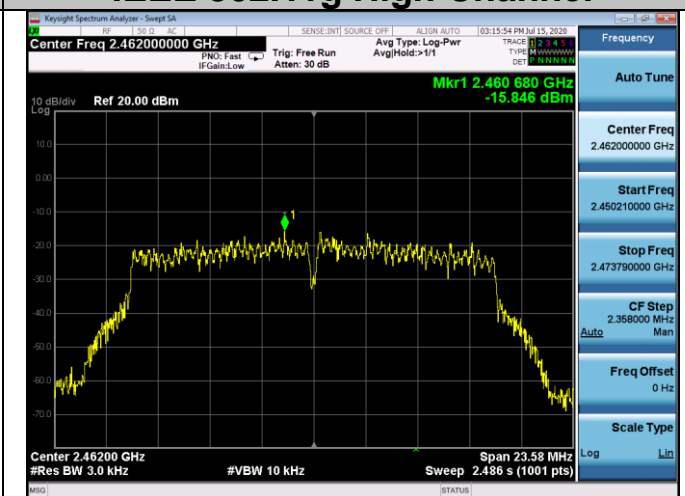


IEEE 802.11n(HT20) Low Channel

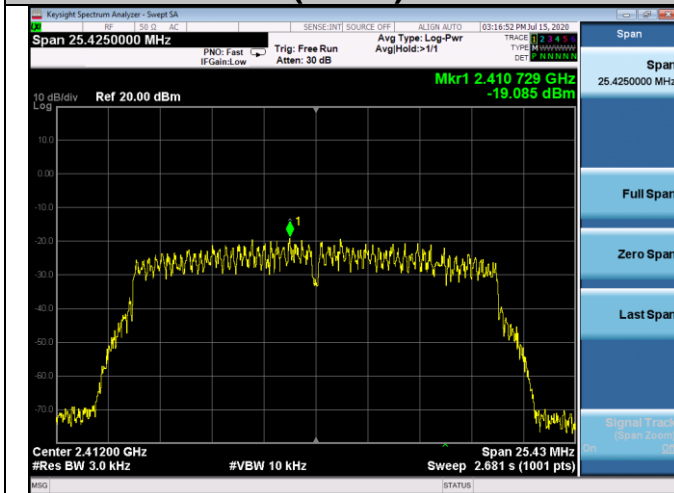


IEEE 802.11n(HT20) Middle Channel

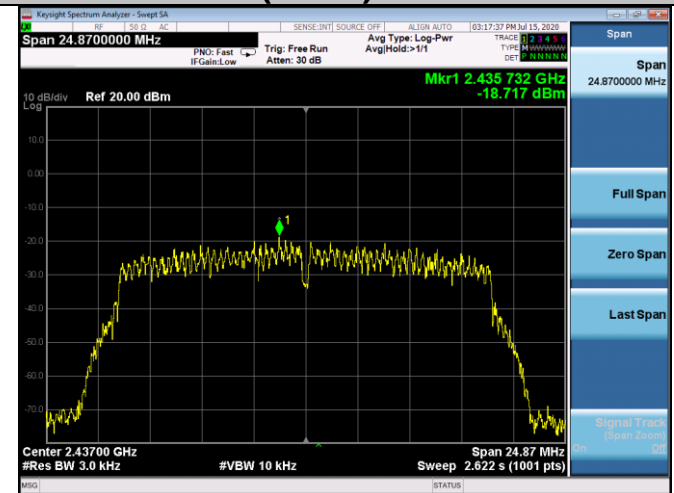


IEEE 802.11n(HT20) High Channel

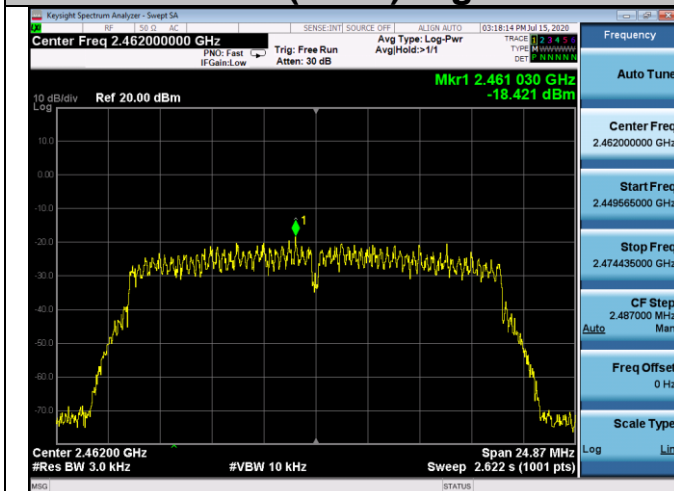


IEEE 802.11n(HT40) Low Channel

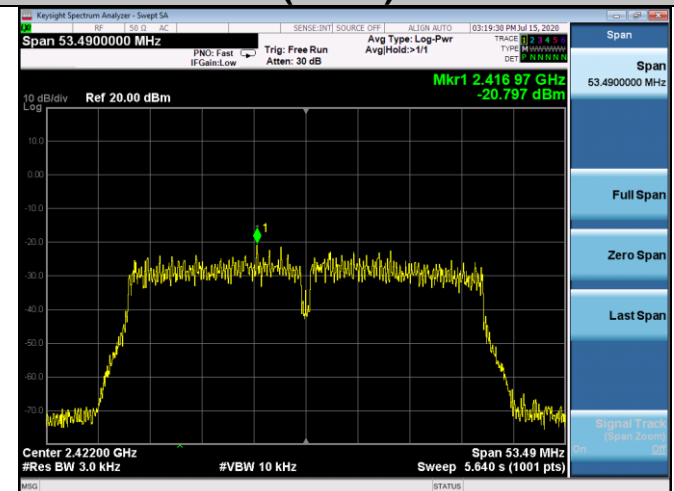

IEEE 802.11n(HT40) Middle Channel

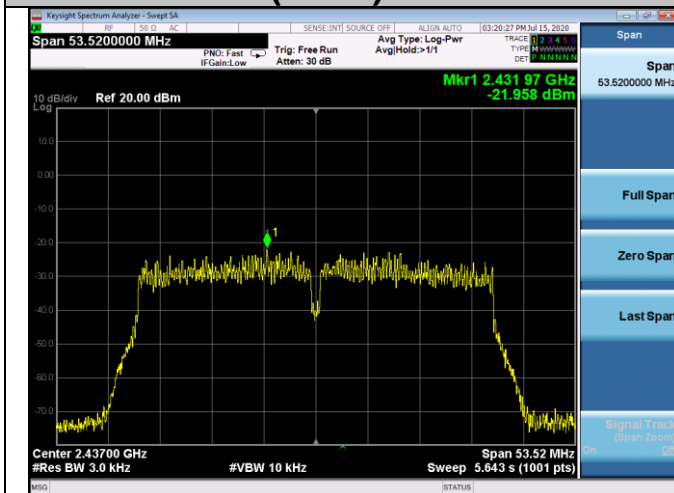

IEEE 802.11n(HT40) Channel

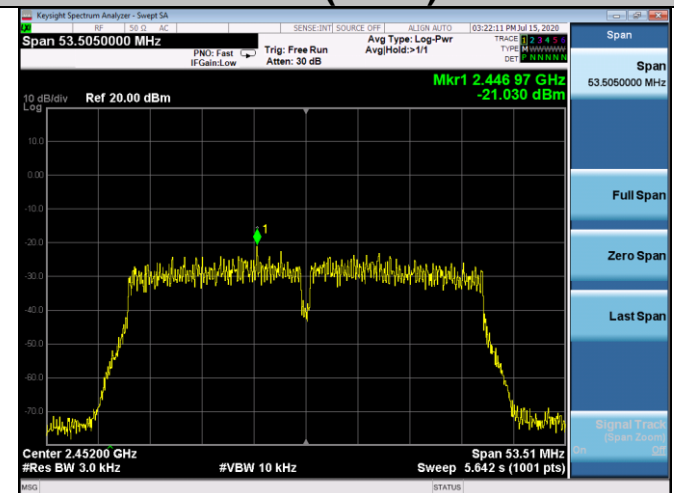

7. Band Edge and Conducted Spurious Emissions

7.1 Requirement and Measurement Procedure

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below.


MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

7.2 Test SET-UP (Block Diagram of Configuration)




7.3 Measurement Results


The test plots and table showed all spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the pass band. Please refer to below plots.

Band Edge


IEEE 802.11b Low Channel

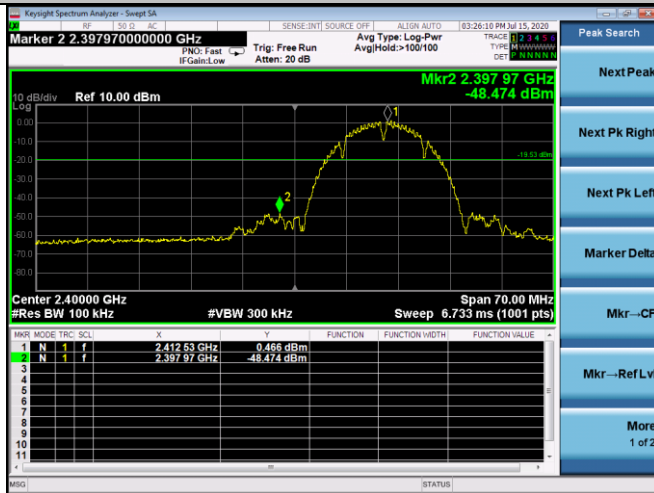


IEEE 802.11b High Channel

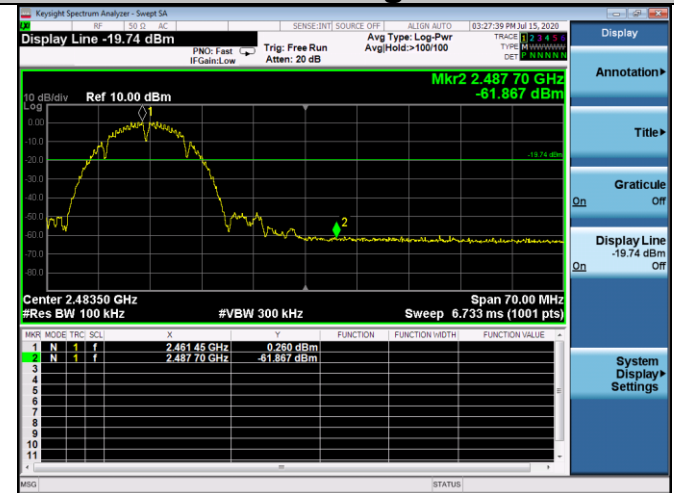


IEEE 802.11g Low Channel

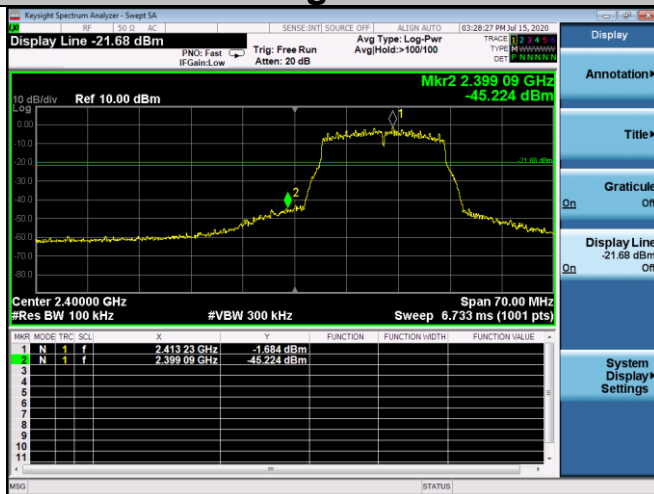

IEEE 802.11g High Channel

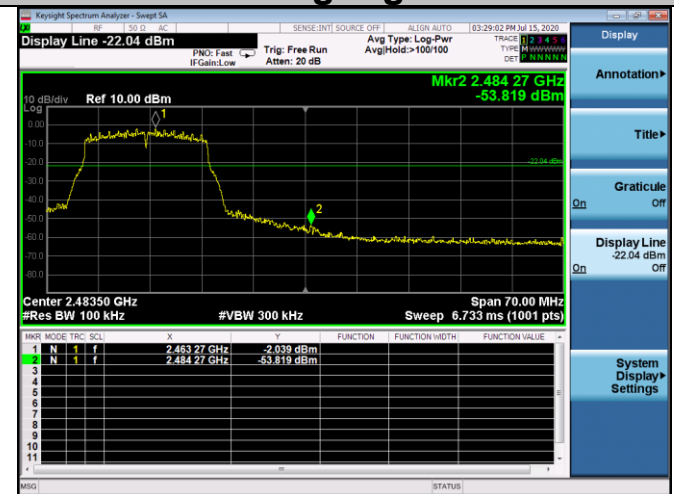


IEEE 802.11n(HT20) Low Channel

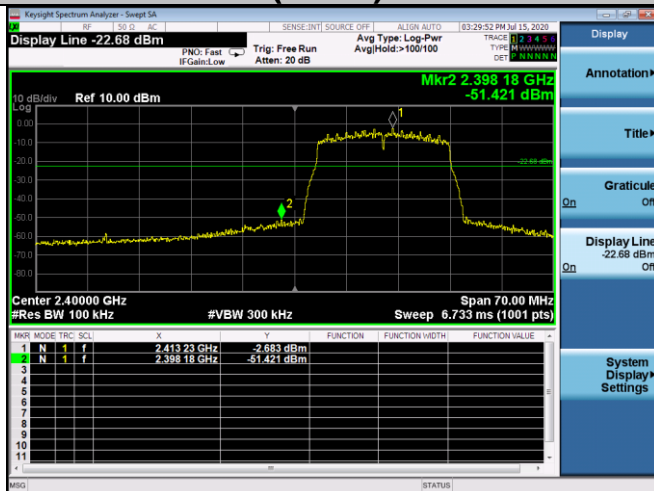


IEEE 802.11n(HT20) High Channel



IEEE 802.11n(HT40) Low Channel


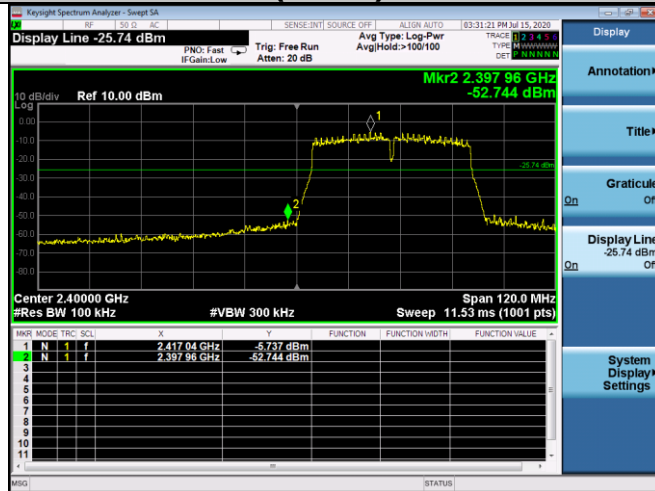


IEEE 802.11n(HT40) Channel


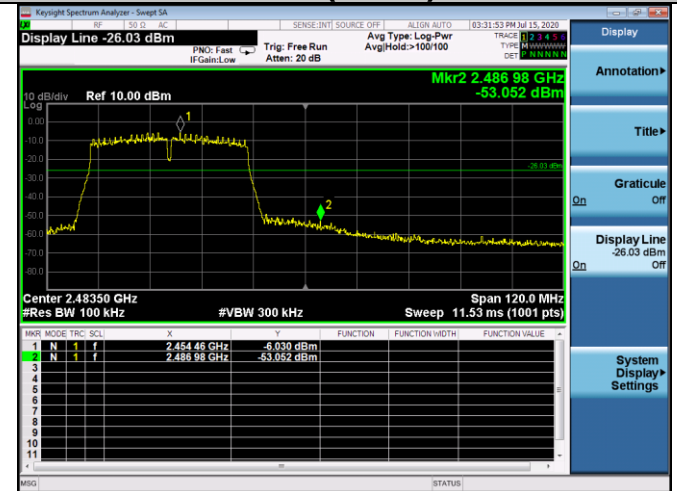


Conducted Spurious Emissions (The worst case: IEEE 802.11g)



Low Channel

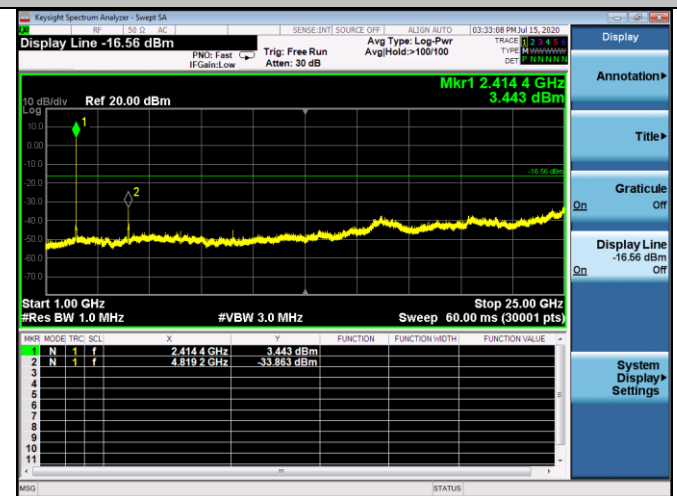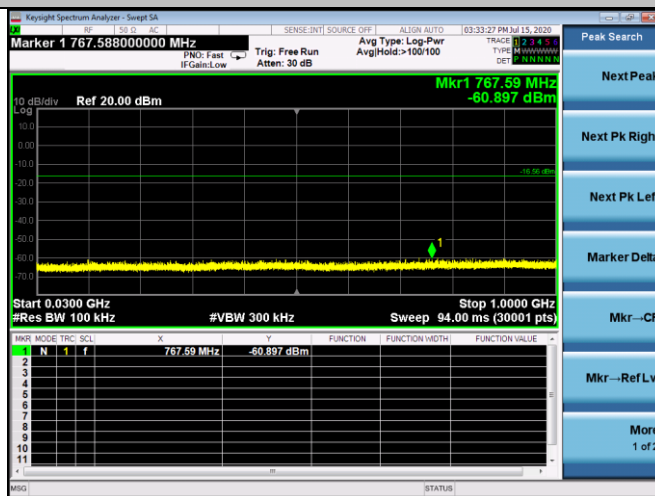

Middle Channel

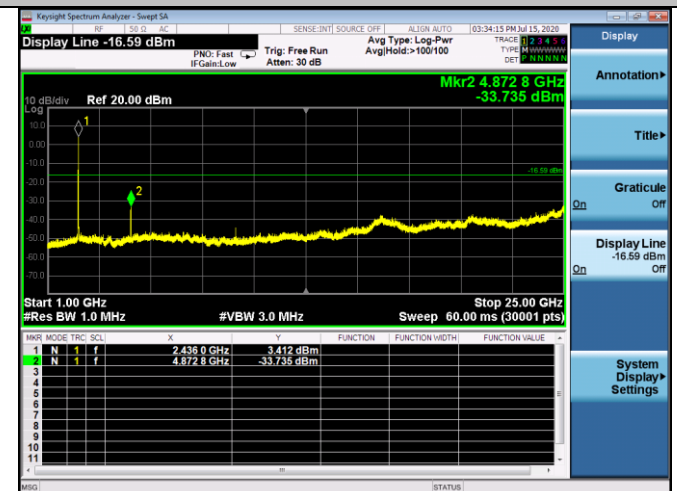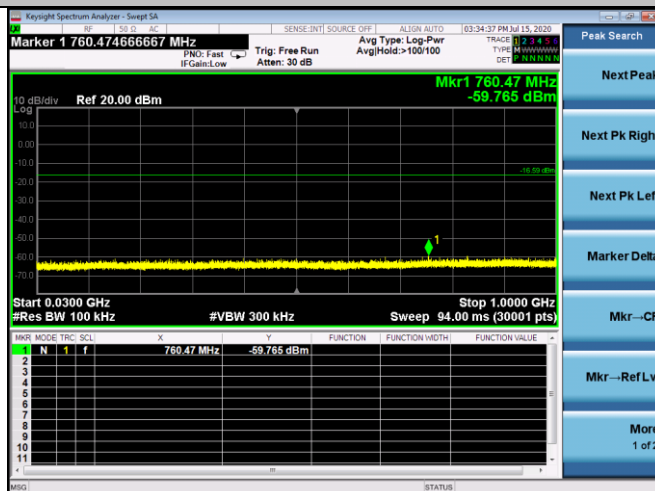


High Channel

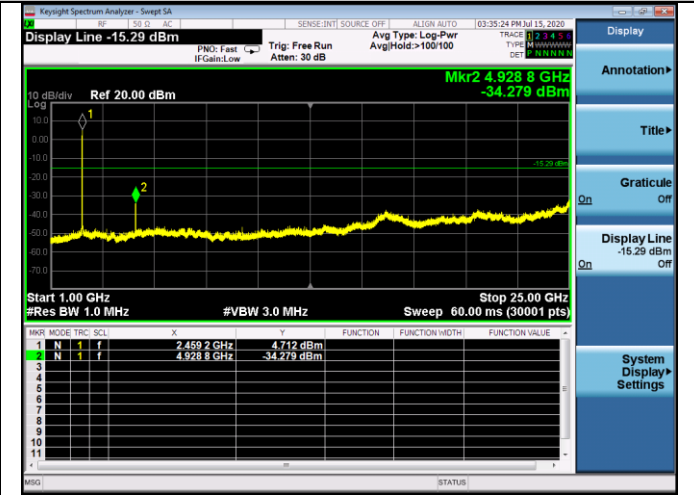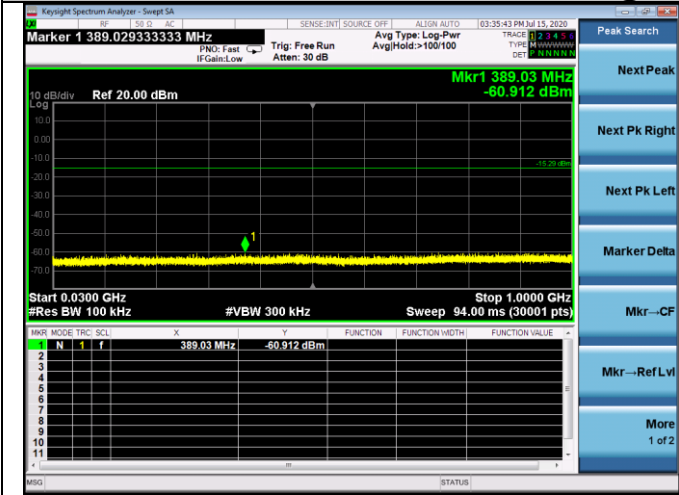


8. Radiated Spurious Emissions and Restricted Bands

8.1 Test SET-UP (Block Diagram of Configuration)

8.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

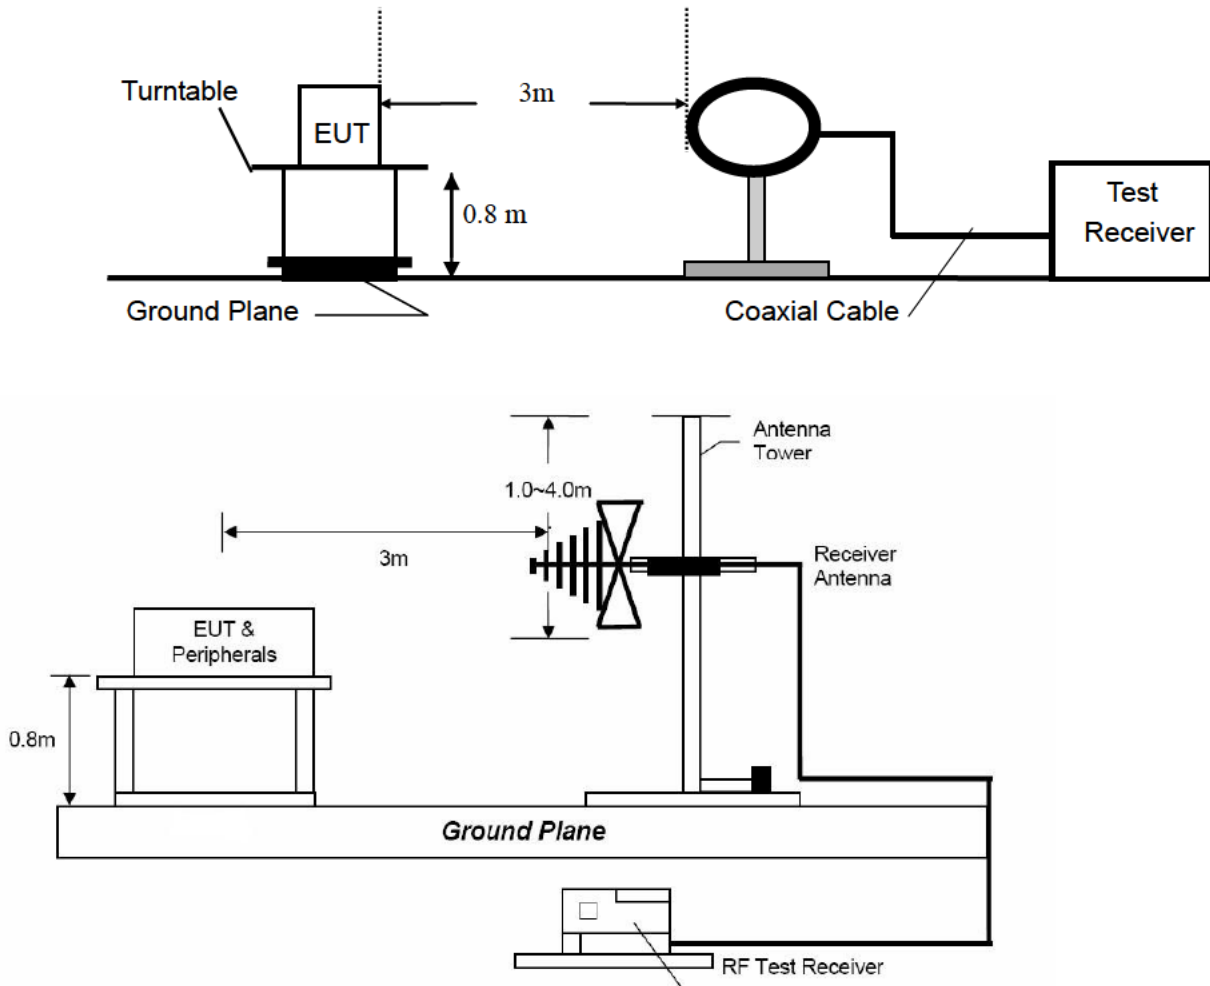

8.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

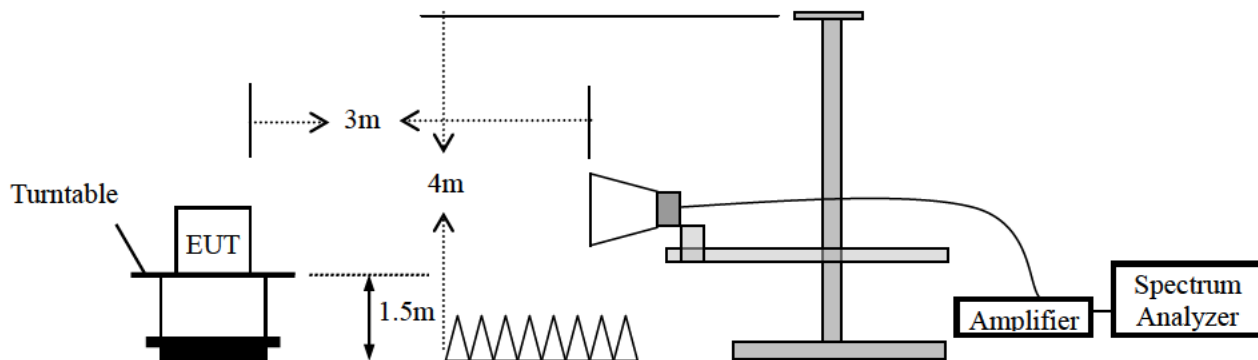

8.2 Measurement Procedure

- a. Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- b. For the radiated emission test above 1GHz:
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- f. A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

8.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

Remark: (1) Emission level $(\text{dB})_{\mu\text{V}} = 20 \log \text{Emission level } \mu\text{V/m}$
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
 (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

8.4 Measurement Results

Please refer to following plots of the worst case: TX (802.11n(HT20) Low Channel)



Dongguan NTC Co., Ltd.
 Tel: +86-769-22022444 Fax: +86-769-22022799
 Web: <http://www.ntc-c.com>


Radiated Emission Measurement

File : SKI.WB7638U.1_MT7668BU

Data : #36

Date: 2020/7/28

Time: 19:40:22

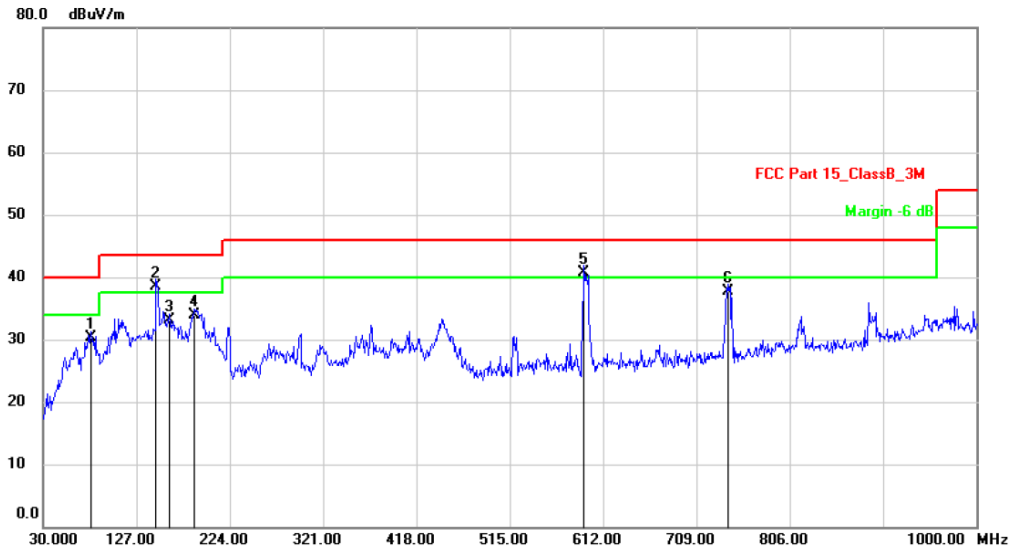

Site: 3m Chamber

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Part 15_ClassB_3M

Power: AC120V/60Hz

Humidity: 47 %

EUT: WIFI Bluetooth module

Distance: 3m

M/N: SKI.WB7638U.1_MT7668BU

Mode: TX(2.4G WLAN)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		79.4700	42.23	-11.83	30.40	40.00	-9.60	QP
2	*	147.3700	49.52	-10.92	38.60	43.50	-4.90	QP
3		160.9500	43.60	-10.40	33.20	43.50	-10.30	QP
4		187.1400	42.43	-8.53	33.90	43.50	-9.60	QP
5	!	591.6300	40.35	0.45	40.80	46.00	-5.20	QP
6		741.9800	34.90	2.90	37.80	46.00	-8.20	QP

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>


Radiated Emission Measurement

File: SKI.WB7638U.1_MT7668BU

Data: #35

Date: 2020/7/28

Time: 19:33:41

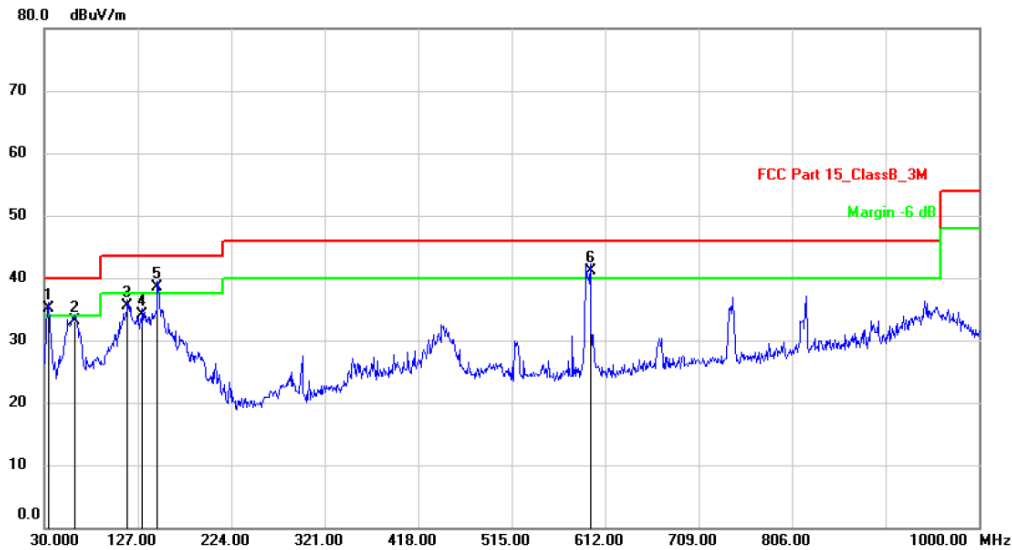

Site: 3m Chamber

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part 15_ClassB_3M

Power: AC120V/60Hz

Humidity: 47 %

EUT: WIFI Bluetooth module

Distance: 3m

M/N: SKI.WB7638U.1_MT7668BU

Mode: TX(2.4G WLAN)

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	34.8500	44.36	-9.16	35.20	40.00	-4.80	QP
2		62.0100	41.42	-8.32	33.10	40.00	-6.90	QP
3		116.3300	46.50	-10.90	35.60	43.50	-7.90	QP
4		131.8500	45.41	-11.31	34.10	43.50	-9.40	QP
5	!	147.3700	50.25	-11.75	38.50	43.50	-5.00	QP
6	!	596.4800	41.60	-0.40	41.20	46.00	-4.80	QP

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

Temperature : 26 °C				Humidity : 47 %				Test Date: July 27, 2020			
Measured Distance: 3m				Test By: Sance				Test Result: PASS			
Frequency Range: 1-25GHz				Modulation: IEEE 802.11n(HT20) (The Worst Case)							
Freq. (MHz)	Ant. Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)		
		PK	AV		PK	AV	PK	AV	PK	AV	
Operation Mode: TX Mode (Low Channel)											
4824	V	45.46	31.46	6.38	51.84	37.84	74.00	54.00	-22.16	-16.16	
7236	V	45.89	31.11	10.48	56.37	41.59	74.00	54.00	-17.63	-12.41	

4824	H	45.96	31.47	6.38	52.34	37.85	74.00	54.00	-21.66	-16.15	
7236	H	44.77	30.93	10.48	55.25	41.41	74.00	54.00	-18.75	-12.59	

Operation Mode: TX Mode (Middle Channel)											
4874	V	48.27	37.08	6.56	54.83	43.64	74.00	54.00	-19.17	-10.36	
7311	V	47.46	35.67	10.53	57.99	46.20	74.00	54.00	-16.01	-7.80	

4874	H	47.05	34.37	6.56	53.61	40.93	74.00	54.00	-20.39	-13.07	
7311	H	46.42	32.00	10.53	56.95	42.53	74.00	54.00	-17.05	-11.47	

Operation Mode: TX Mode (High Channel)											
4924	V	45.37	31.14	6.76	52.13	37.90	74.00	54.00	-21.87	-16.10	
7386	V	45.74	31.27	10.57	56.31	41.84	74.00	54.00	-17.69	-12.16	

4924	H	45.98	32.13	6.76	52.74	38.89	74.00	54.00	-21.26	-15.11	
7386	H	45.86	31.29	10.57	56.43	41.86	74.00	54.00	-17.57	-12.14	

Spurious Emission in restricted band:											
2399.000	H	52.16	33.16	0.09	52.25	33.25	74.00	54.00	-21.75	-20.75	
2399.000	V	56.17	33.88	0.09	56.26	33.97	74.00	54.00	-17.74	-20.03	
2483.560	H	50.99	32.87	0.35	51.34	33.22	74.00	54.00	-22.66	-20.78	
2483.560	V	48.37	33.96	0.35	48.72	34.31	74.00	54.00	-25.28	-19.69	
Remark: (1) All Readings are Peak Value and AV. (2) Emission Level= Reading Level + Factor (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain (4) Data of measurement within this frequency range shown “ ---” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.											

9. Antenna Application

9.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

9.2 Measurement Results

The antenna is FPC antenna that no antenna other than furnished by the responsible party shall be used with the device, and the best case gain of the antenna is 2.3dBi. Therefore, the antenna is consider meet the requirement.

10. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI7	100837	Mar. 13, 2020	1 Year
2.	Antenna	Schwarzbeck	VULB9162	9162-010	Mar. 23, 2020	1 Year
3.	Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	Mar. 13, 2020	1 Year
4.	Spectrum Analyzer	Keysight	N9020A	MY54200831	Mar. 13, 2020	1 Year
5.	Spectrum Analyzer	Rohde & Schwarz	FSV40	101094	Mar. 13, 2020	1 Year
6.	Horn Antenna	Schwarzbeck	BBHA9170	9170-172	Mar. 22, 2019	2 Year
7.	Power Sensor	DARE	RPR3006W	15I00041SN O64	Mar. 13, 2020	1 Year
8.	Power Sensor	DARE	RPR3006W	15I00041SN O88	Mar. 13, 2020	1 Year
9.	Communication Tester	Rohde & Schwarz	CMW500	149004	Mar. 13, 2020	1 Year
10.	Horn Antenna	COM-Power	AH-118	071078	Mar. 23, 2020	1 Year
11.	Pre-Amplifier	HP	HP 8449B	3008A00964	Mar. 13, 2020	1 Year
12.	Pre-Amplifier	HP	HP 8447D	1145A00203	Mar. 13, 2020	1 Year
13.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-272	Mar. 23, 2020	1 Year
14.	Test Receiver	Rohde & Schwarz	ESCI	101152	Mar. 14, 2020	1 Year
15.	L.I.S.N	Rohde & Schwarz	ENV 216	101317	Mar. 13, 2020	1 Year
16.	L.I.S.N	Rohde & Schwarz	ESH2-Z5	893606/014	Mar. 13, 2020	1 Year
17.	RF Switching Unit	Compliance Direction Systems Inc.	RSU-M2	38311	Mar.13, 2020	1 Year
18.	Temperature & Humidity Chamber	REMAFEE	SYHR225L	N/A	Mar. 13, 2020	1 Year
19.	DC Source	Maynuo	MY8811	N/A	Mar. 13, 2020	1 Year
20.	Temporary antenna connector	TESCOM	SS402	N/A	N/A	N/A
21.	Chamber	SAEMC	9*7*7m	N/A	Jun. 20, 2019	2 Year
22.	Test Software	EZ	EZ_EMCC	N/A	N/A	N/A
Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.						

---End---