

TEST REPORT

Product Name : Embedded Wi-Fi/BT Module
Model Number : EMC3280-P, EMC3280-E, EMC3280-EW
FCC ID : P53-EMC3280

Prepared for : Shanghai MXCHIP Information Technology Co., Ltd.
Address : 9th Floor, No. 5, Lane 2145 Jinsha Jiang Road, Putuo District, Shanghai, China (200333)

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ES210118059W02-1
Date(s) of Tests : June 24, 2021 to July 12, 2021
Date of issue : July 13, 2021

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	EUT TECHNICAL DESCRIPTION	4
3	SUMMARY OF TEST RESULT	5
4	TEST METHODOLOGY	6
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
4.2	MEASUREMENT EQUIPMENT USED	6
4.3	DESCRIPTION OF TEST MODES	7
5	FACILITIES AND ACCREDITATIONS	8
5.1	FACILITIES	8
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	8
6	TEST SYSTEM UNCERTAINTY	9
7	SETUP OF EQUIPMENT UNDER TEST	10
7.1	RADIO FREQUENCY TEST SETUP 1	10
7.2	RADIO FREQUENCY TEST SETUP 2	10
7.3	CONDUCTED EMISSION TEST SETUP	12
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	13
7.5	SUPPORT EQUIPMENT	13
8	TEST REQUIREMENTS	14
8.1	DTS (6DB) BANDWIDTH	14
8.2	MAXIMUM CONDUCTED OUTPUT POWER	21
8.3	MAXIMUM POWER SPECTRAL DENSITY	30
8.4	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	37
8.5	RADIATED SPURIOUS EMISSION	42
8.6	CONDUCTED EMISSIONS TEST	74
8.7	ANTENNA APPLICATION	77

1 TEST RESULT CERTIFICATION

Applicant : Shanghai MXCHIP Information Technology Co., Ltd.
Address : 9th Floor, No.5, Lane 2145 Jinsha Jiang Road, Putuo District, Shanghai, China (200333)
Manufacturer : Shanghai MXCHIP Information Technology Co., Ltd.
Address : 9F, Building B, Lane 2145, Jinshajiang Road, Putuo District, Shanghai, China
Trade Mark : **MXCHIP**[®]
EUT : Embedded Wi-Fi/BT Module
Model Number : EMC3280-P, EMC3280-E, EMC3280-EW

Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 , Subpart J FCC 47 CFR Part 15 , Subpart C	PASS


The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.247

The test results of this report relate only to the tested sample identified in this report.

Date of Test : June 24, 2021 to July 12, 2021

Prepared by : 
Sewen Guo /Editor

Reviewer : 
Mill Chen /Supervisor

Approve & Authorized Signer : 
Lisa Wang/Manager



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Product	Embedded Wi-Fi/BT Module
Model Number	EMC3280-P, EMC3280-E, EMC3280-EW (All models are identical in circuitry and electrical, mechanical and physical construction; the only difference is EMC3280-P model with PCB antenna; EMC3280-E model with IPEX antenna connector; EMC3280-EW replaced the original EMC3280-E model IPEX antenna with another new IPEX antenna)
Sample Number	2#
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(40MHz channel bandwidth)
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Operating Frequency Range	<input checked="" type="checkbox"/> 2412-2462MHz for 802.11b/g/n(HT20); <input checked="" type="checkbox"/> 2422-2452MHz for 802.11n(HT40);
Number of Channels	<input checked="" type="checkbox"/> 11 channels for 802.11b/g/n(HT20); <input checked="" type="checkbox"/> 7 Channels for 802.11n(HT40);
Transmit Power Max	16.23 dBm
Antenna Gain	EMC3280-P(Antenna 1): PCB Antenna; Max Antenna Gain 2dBi EMC3280-E(Antenna 2): IPEX connector; Max Support Antenna Gain 2dBi EMC3280-EW(Antenna 3): IPEX connector; Max Support Antenna Gain 2dBi
Power Supply:	DC 2.7V to 3.3V
Test Power:	DC 3.3V via R&D board (R&D board power supply via USB Port 5V)
Date of Received:	June 24, 2021
Temperature Range:	-20°C ~ 85°C

Note1: for more details, please refer to the User's manual of the EUT.

Note2: Add the model EMC3280-EW to the original report (ES210118059W01), this model adds an IPEX Antenna on the original basis, update the Radiated Spurious Emissions test, and other test data are quoted from the original report.

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	PASS	
	NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.		

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: P53-EMC3280 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/16/2021	05/15/2022
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/16/2021	05/15/2022
50Ω Coaxial Switch	Anritsu	MP59B	M20531	05/16/2021	05/15/2022
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/16/2021	05/15/2022
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/16/2021	05/15/2022
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/16/2021	05/15/2022

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/16/2021	05/15/2022
Pre-Amplifier	HP	8447D	2944A07999	05/16/2021	05/15/2022
Bilog Antenna	Schwarzbeck	VULB9163	142	05/16/2021	05/15/2022
Loop Antenna	ARA	PLA-1030/B	1029	05/16/2021	05/15/2022
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/16/2021	05/15/2022
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/16/2021	05/15/2022
Cable	Schwarzbeck	AK9513	ACRX1	05/16/2021	05/15/2022
Cable	Rosenberger	N/A	FP2RX2	05/16/2021	05/15/2022
Cable	Schwarzbeck	AK9513	CRPX1	05/16/2021	05/15/2022
Cable	Schwarzbeck	AK9513	CRRX2	05/16/2021	05/15/2022

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Signal Analyzer	Agilent	N9010A	My53470879	05/16/2021	05/15/2022
Power meter	Anritsu	ML2495A	0824006	05/16/2021	05/15/2022
Power sensor	Anritsu	MA2411B	0738172	05/16/2021	05/15/2022
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	05/16/2021	05/15/2022

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (☒802.11b:1 Mbps; ☒802.11g: 6 Mbps; ☒802.11n(HT20): MCS0; ☒802.11n(HT40): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

☒Frequency and Channel list for 802.11b/g/n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432	10	2457		

☒Frequency and Channel list for 802.11n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442		
5	2432	8	2447		

☒Test Frequency and Channel for 802.11b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

☒Test Frequency and channel for 802.11n (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description	
EMC Lab.	<p>Accredited by CNAS The Certificate Registration Number is L2291. The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)</p> <p>Accredited by FCC Designation Number: CN1204 Test Firm Registration Number: 882943</p> <p>Accredited by A2LA The Certificate Number is 4321.01.</p> <p>Accredited by Industry Canada The Conformity Assessment Body Identifier is CN0008</p>
Name of Firm	: EMTEK (SHENZHEN) CO., LTD.
Site Location	: Building 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antennaplane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

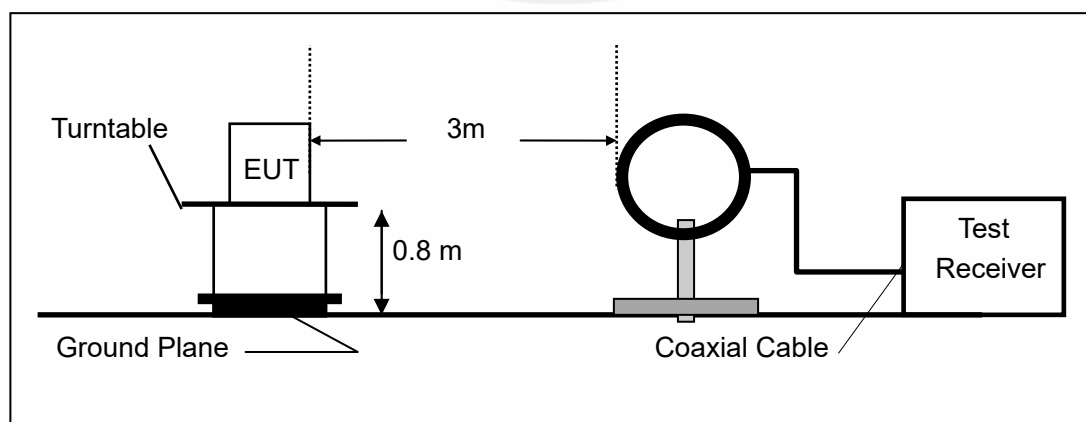

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

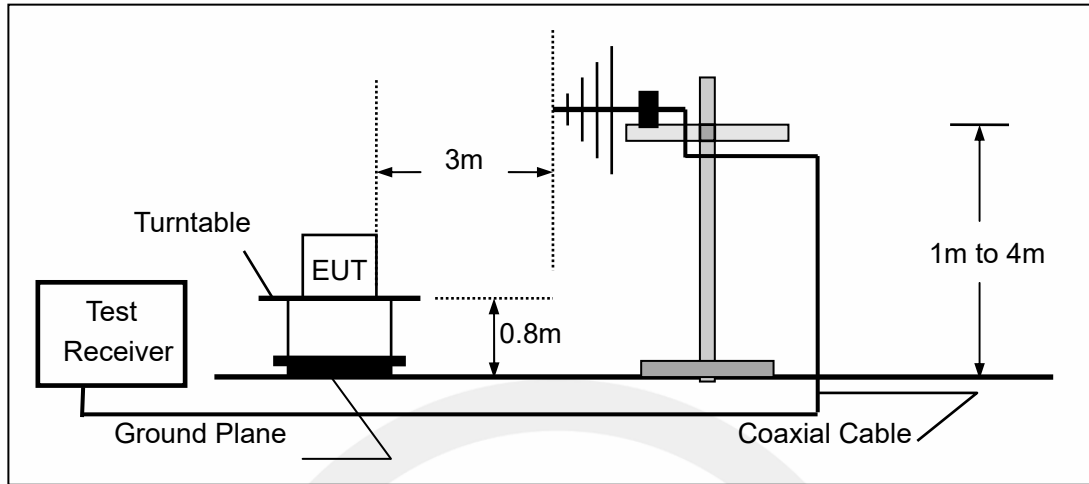

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

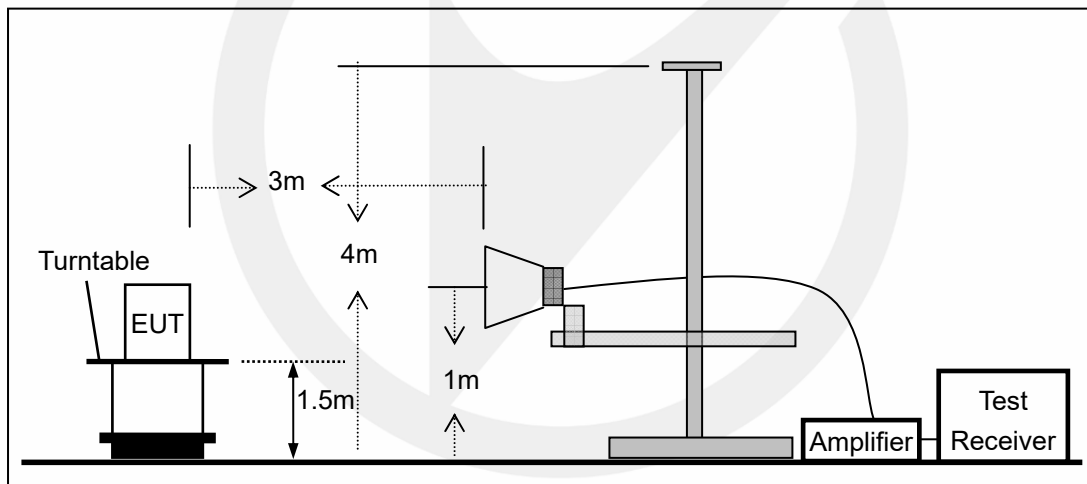


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

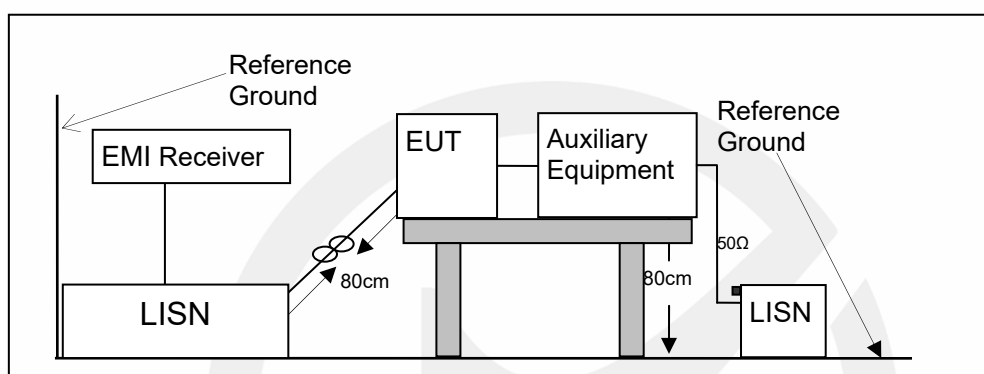

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

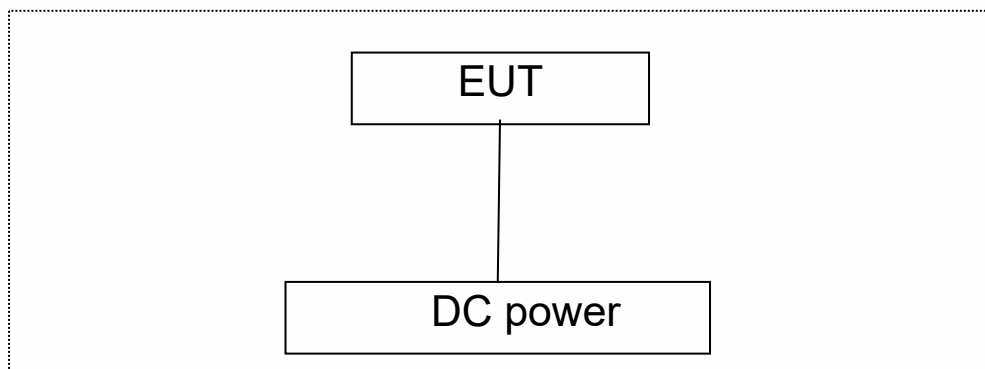

7.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	acer	ZR1	LXTECOCO76643158 372500

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment

8 TEST REQUIREMENTS

8.1 DTS (6DB) BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part15.247 (a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.


8.1.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)	Limit (kHz)	Verdict
802.11b	1	2412	10.07	>500	PASS
	6	2437	10.07	>500	PASS
	11	2462	10.07	>500	PASS
802.11g	1	2412	16.54	>500	PASS
	6	2437	16.54	>500	PASS
	11	2462	16.53	>500	PASS
802.11n (HT20)	1	2412	17.68	>500	PASS
	6	2437	17.70	>500	PASS
	11	2462	17.69	>500	PASS
802.11n (HT40)	3	2422	36.40	>500	PASS
	6	2437	36.42	>500	PASS
	9	2452	36.40	>500	PASS


Test Model

DTS (6dB) Bandwidth
802.11b
Channel 1: 2412MHz

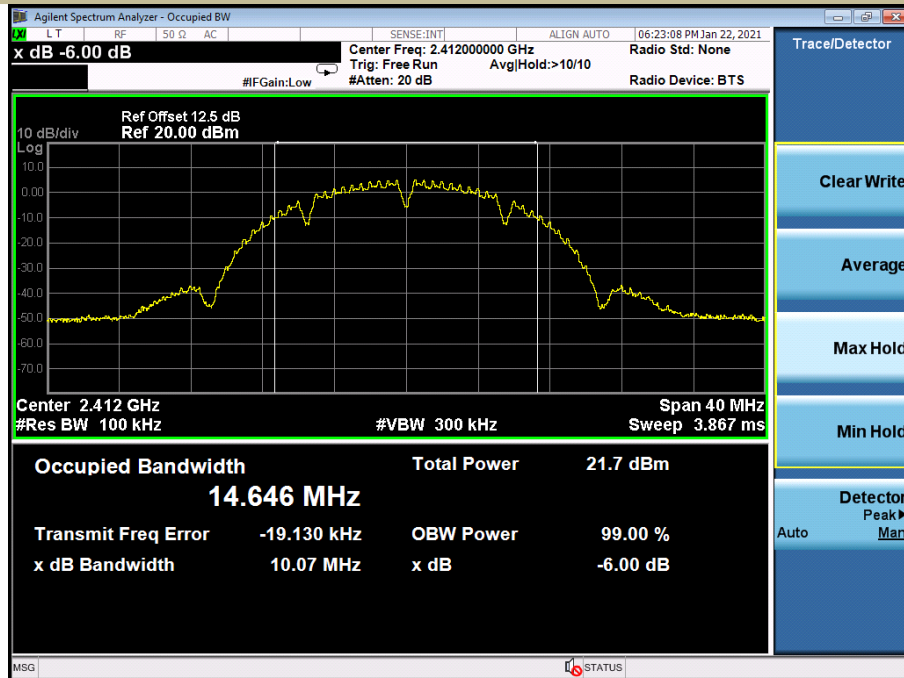


Test Model

DTS (6dB) Bandwidth
802.11b
Channel 6: 2437MHz

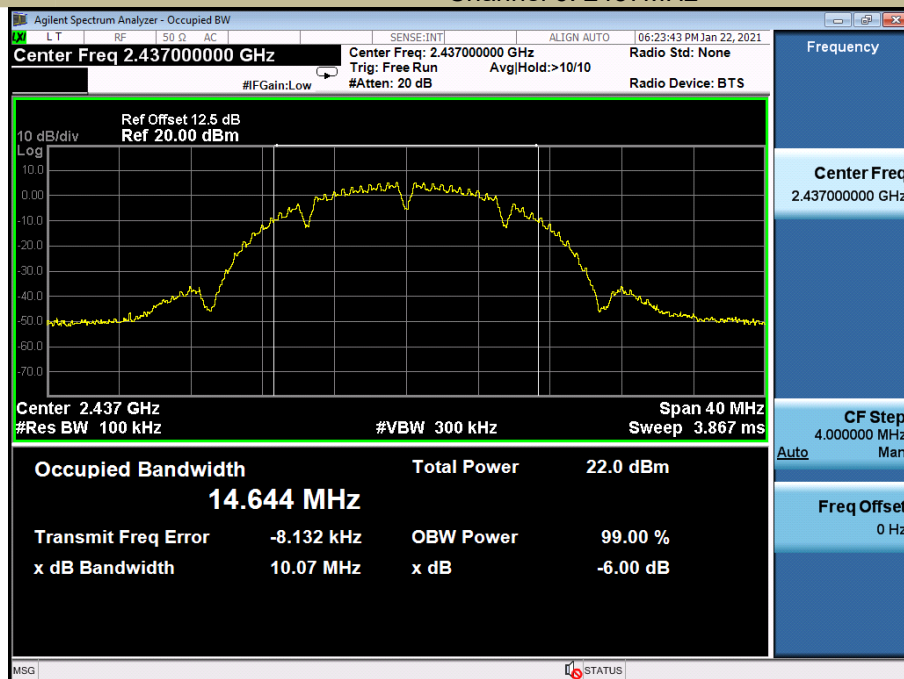


Test Model

DTS (6dB) Bandwidth
802.11b
Channel 11: 2462MHz

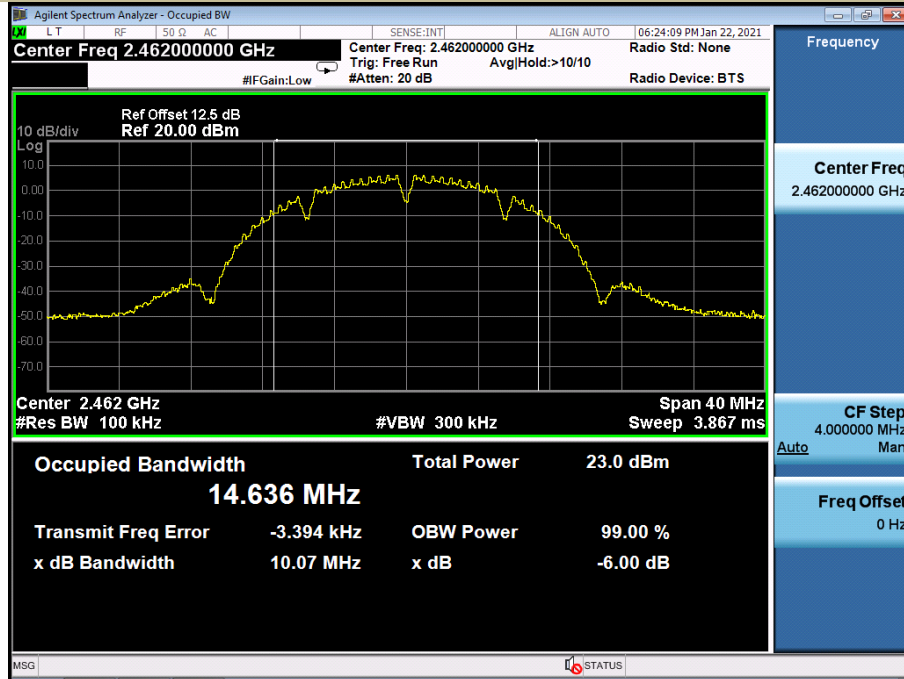


Test Model

DTS (6dB) Bandwidth
802.11g
Channel 1: 2412MHz

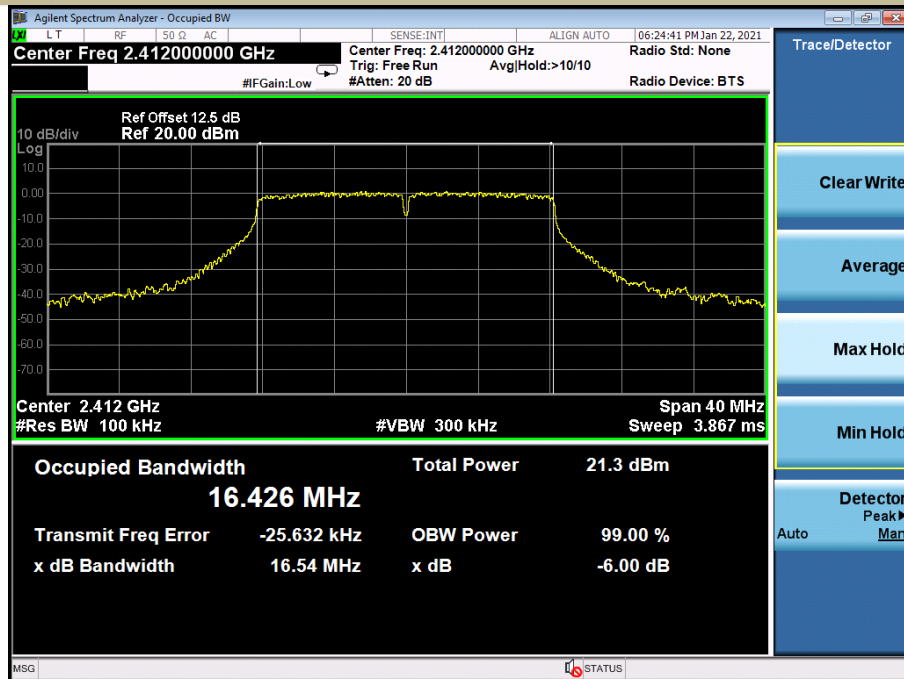


Test Model

DTS (6dB) Bandwidth
802.11g
Channel 6: 2437MHz

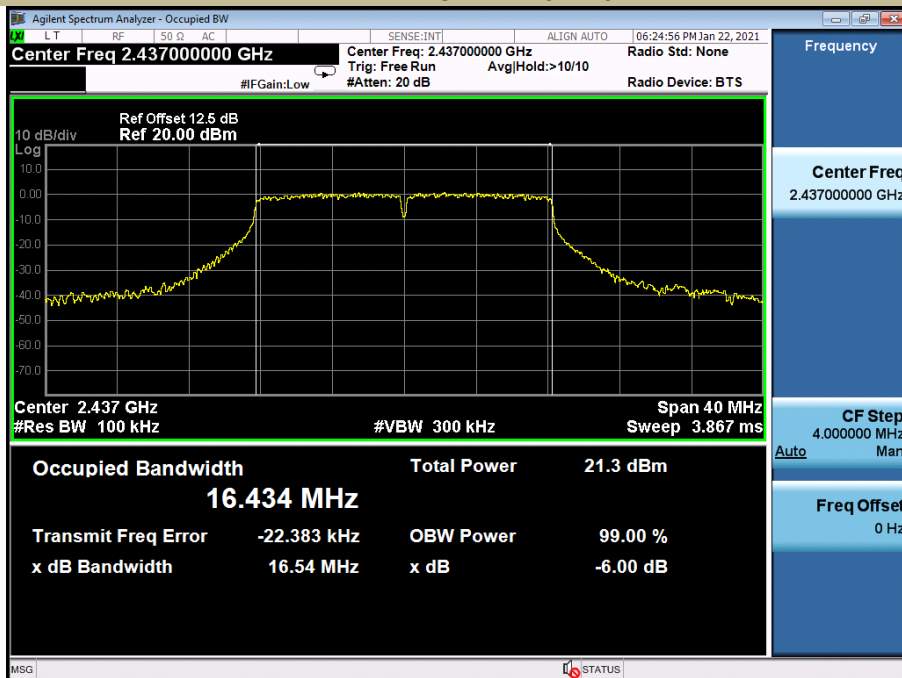


Test Model

DTS (6dB) Bandwidth
802.11g
Channel 11: 2462MHz

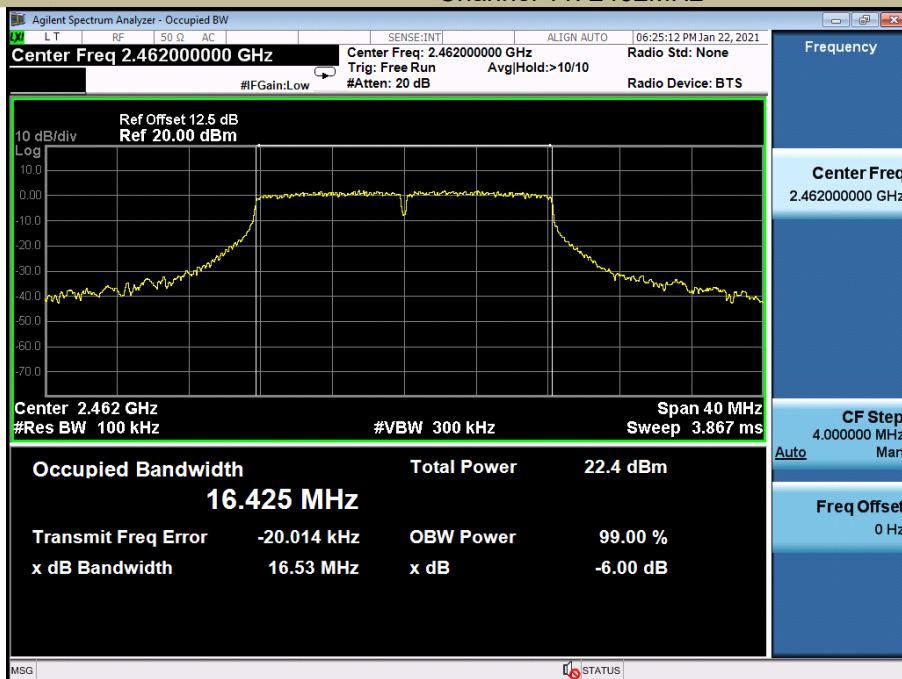


Test Model

DTS (6dB) Bandwidth
802.11n (HT20)
Channel 1: 2412MHz

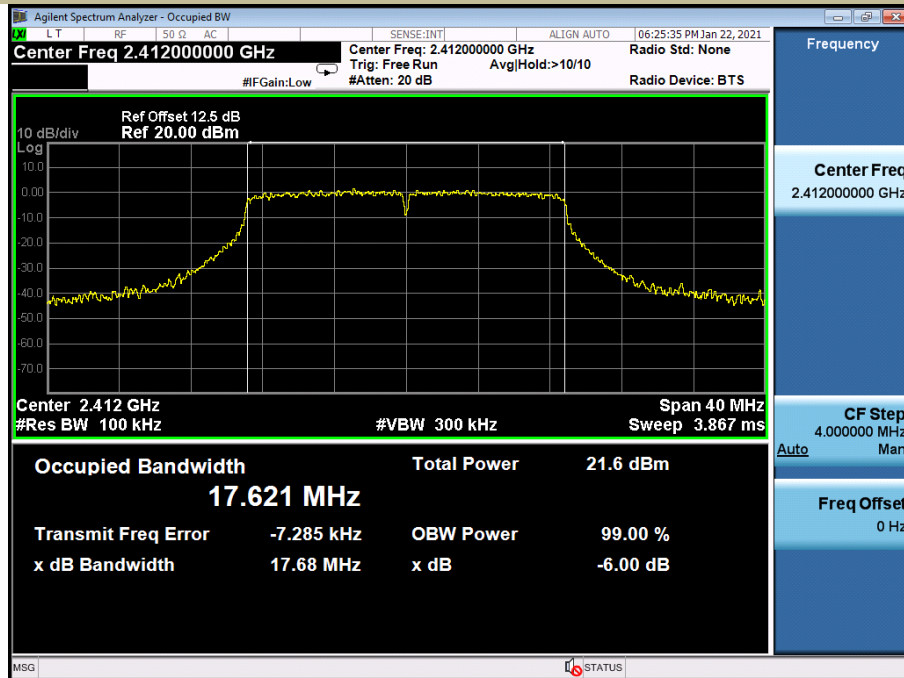


Test Model

DTS (6dB) Bandwidth
802.11n (HT20)
Channel 6: 2437MHz

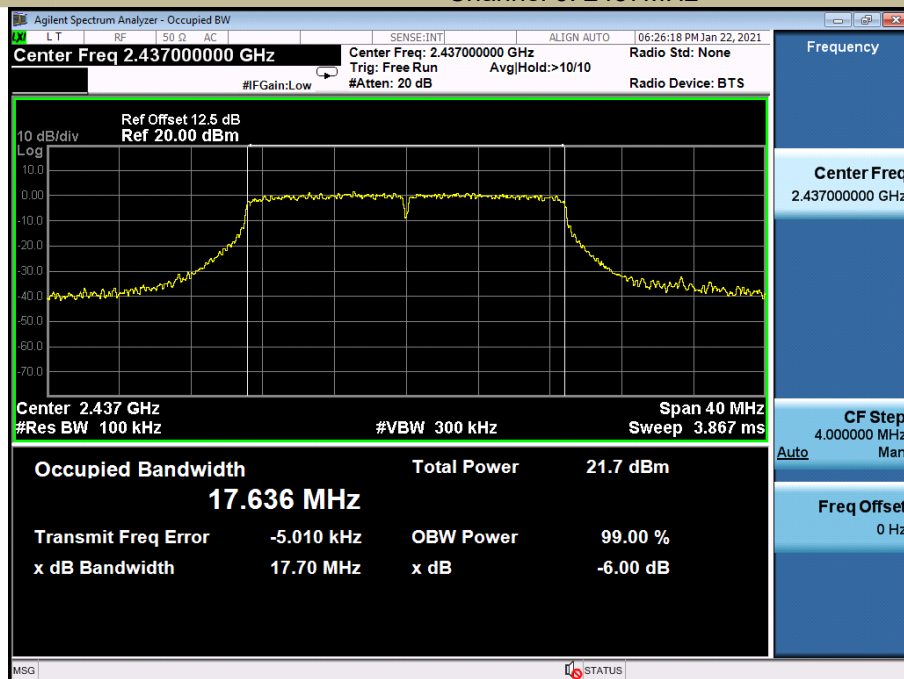


Test Model

DTS (6dB) Bandwidth
802.11n (HT20)
Channel 11: 2462MHz

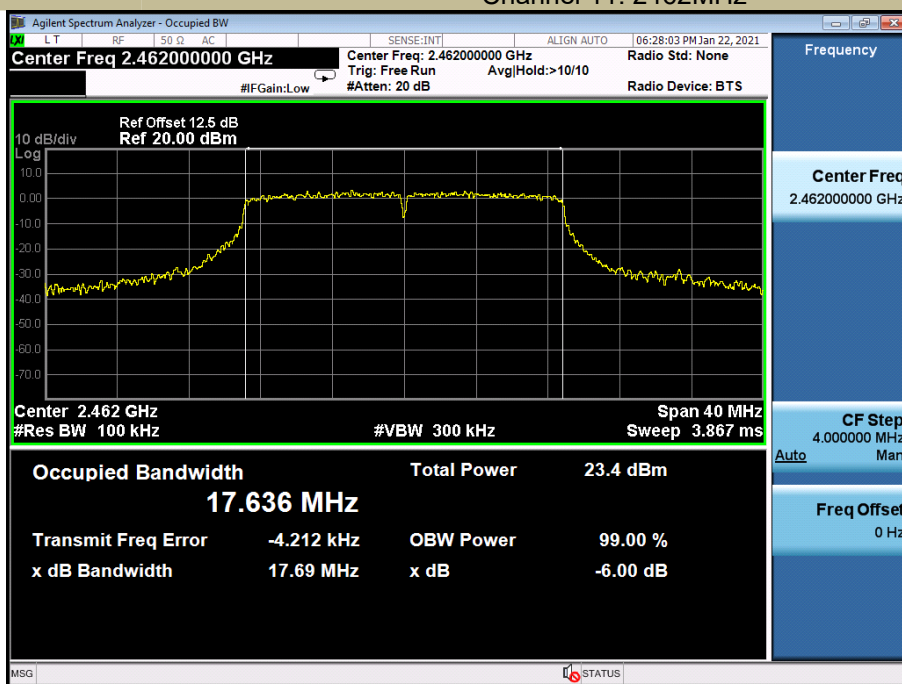


Test Model


DTS (6dB) Bandwidth
802.11n (HT40)
Channel 3: 2422MHz

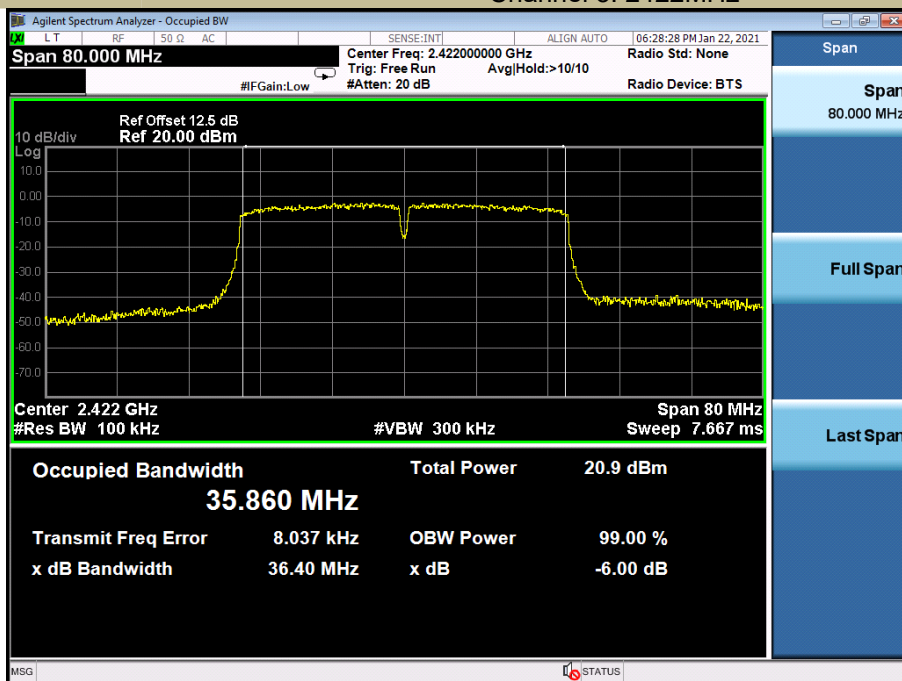

Test Model	DTS (6dB) Bandwidth 802.11n (HT40) Channel 6: 2437MHz
------------	---

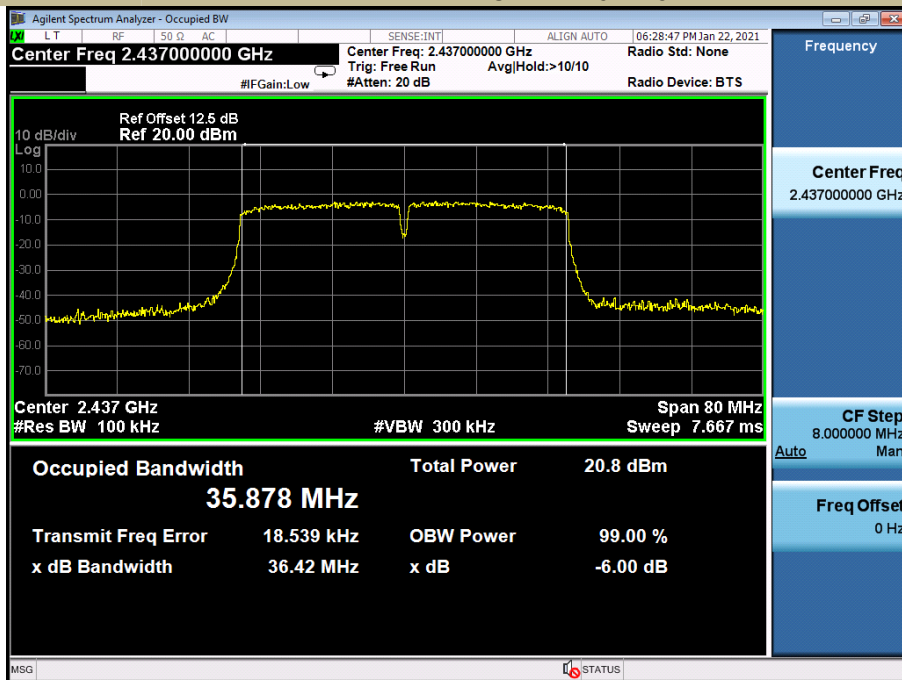

Test Model	DTS (6dB) Bandwidth 802.11n (HT40) Channel 9: 2452MHz
------------	---

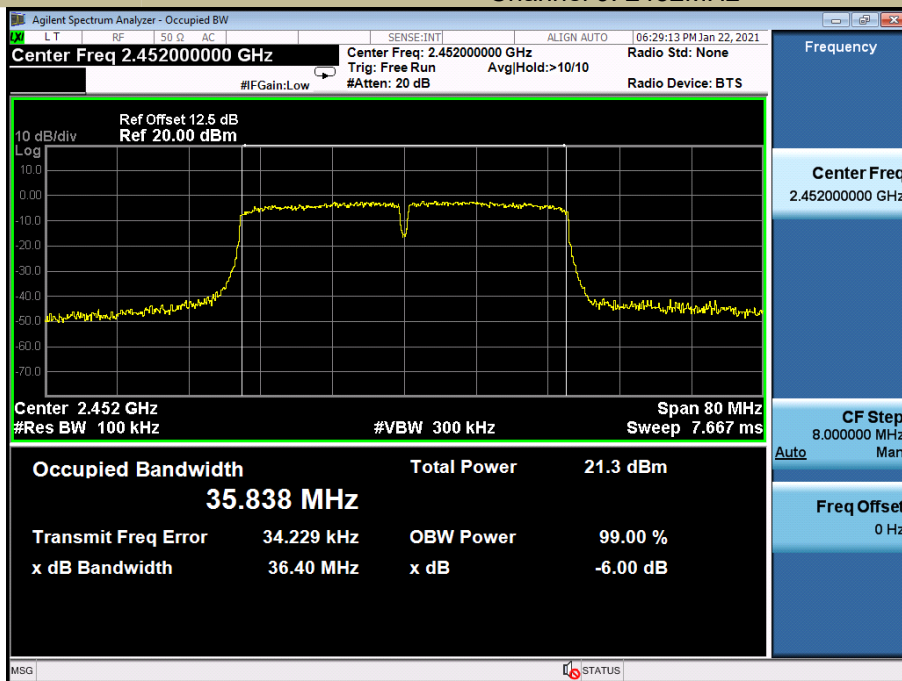

8.2 MAXIMUM CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part15.247 (b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.2.2 Conformance Limit

The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.4 Test Procedure

- Set span to at least 1.5 times the OBW.
- Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- Set VBW $\geq 3 \times$ RBW.
- Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This gives bin-to-bin spacing $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- Sweep time = auto.
- Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.


8.2.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
802.11b	1	2412	14.30	30	PASS
	6	2437	14.57	30	PASS
	11	2462	15.59	30	PASS
802.11g	1	2412	14.80	30	PASS
	6	2437	14.75	30	PASS
	11	2462	15.93	30	PASS
802.11n (HT20)	1	2412	15.01	30	PASS
	6	2437	15.13	30	PASS
	11	2462	16.23	30	PASS
802.11n (HT40)	3	2422	14.38	30	PASS
	6	2437	14.35	30	PASS
	9	2452	13.89	30	PASS

Duty Cycle


802.11b

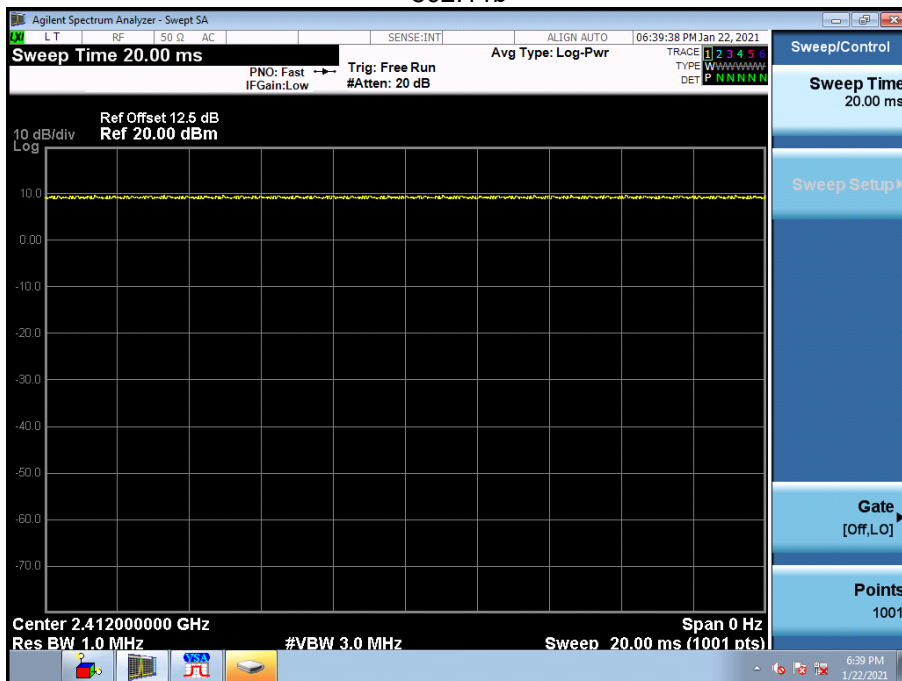


802.11g

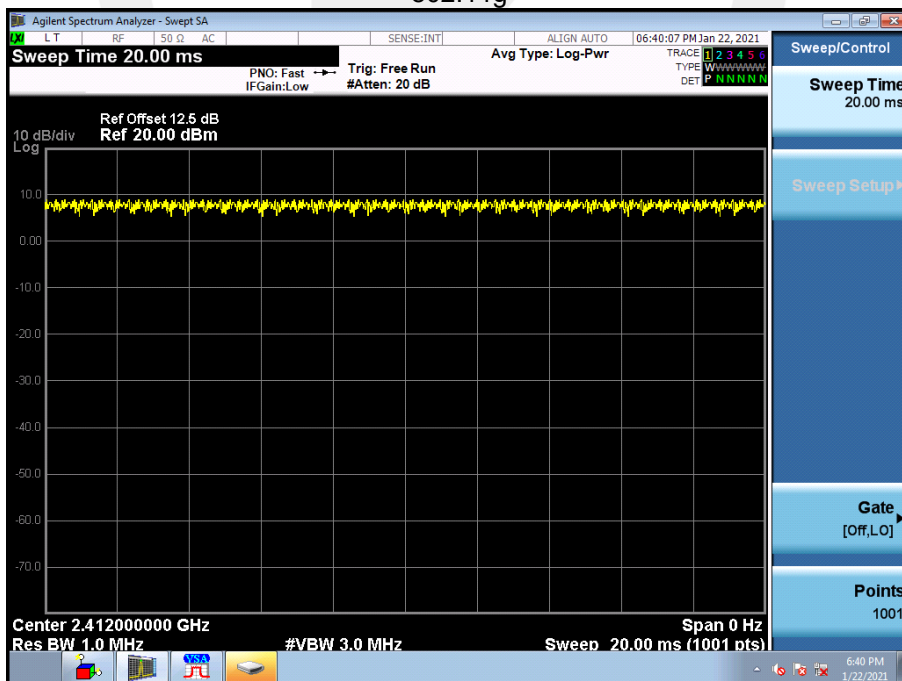

802.11n (HT20)

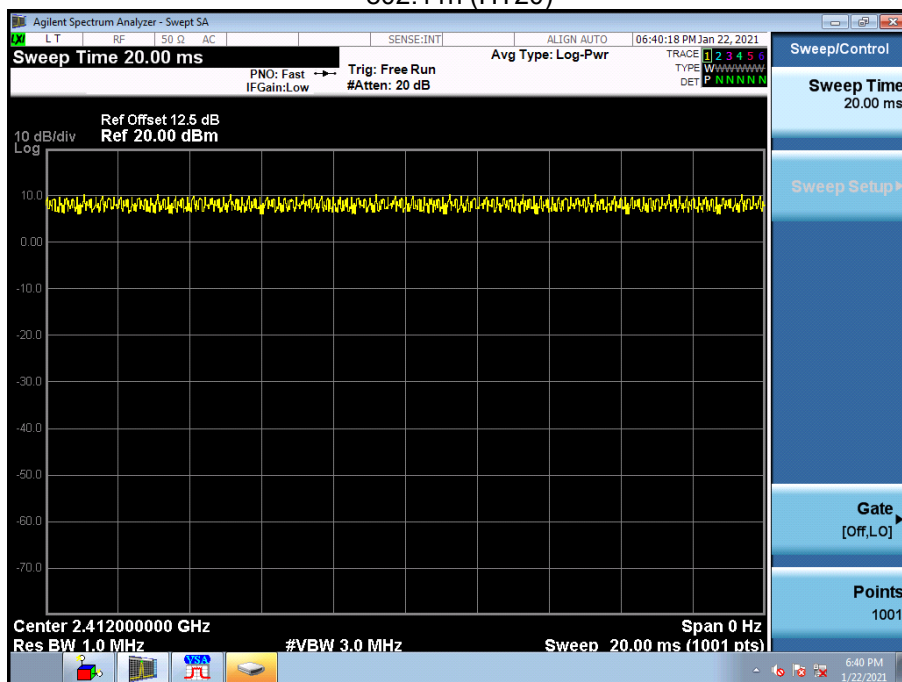

802.11n (HT40)

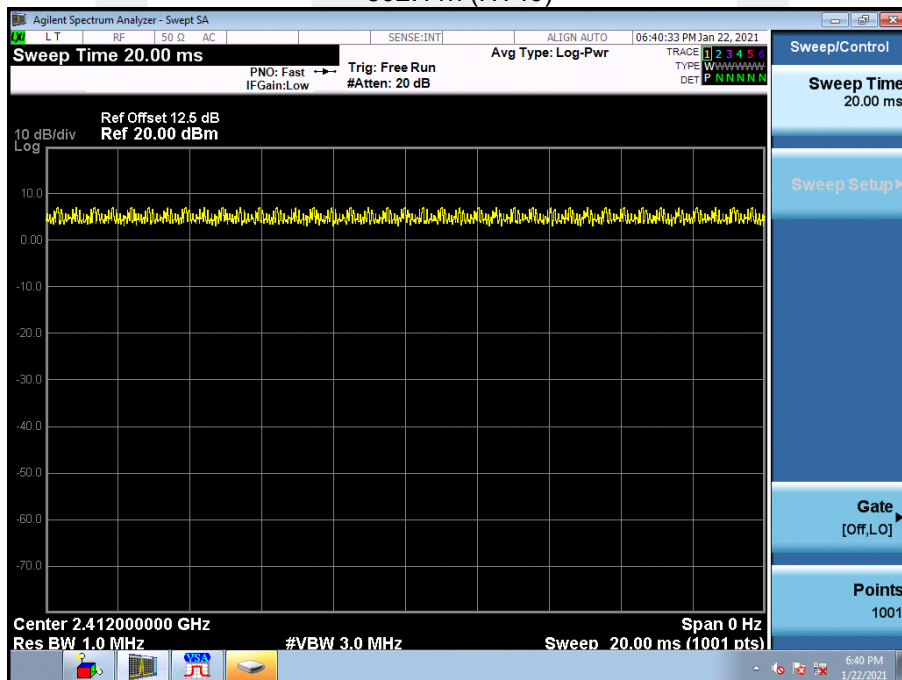


Test Model

Maximum Conducted Output Power

802.11b

Channel 1: 2412MHz

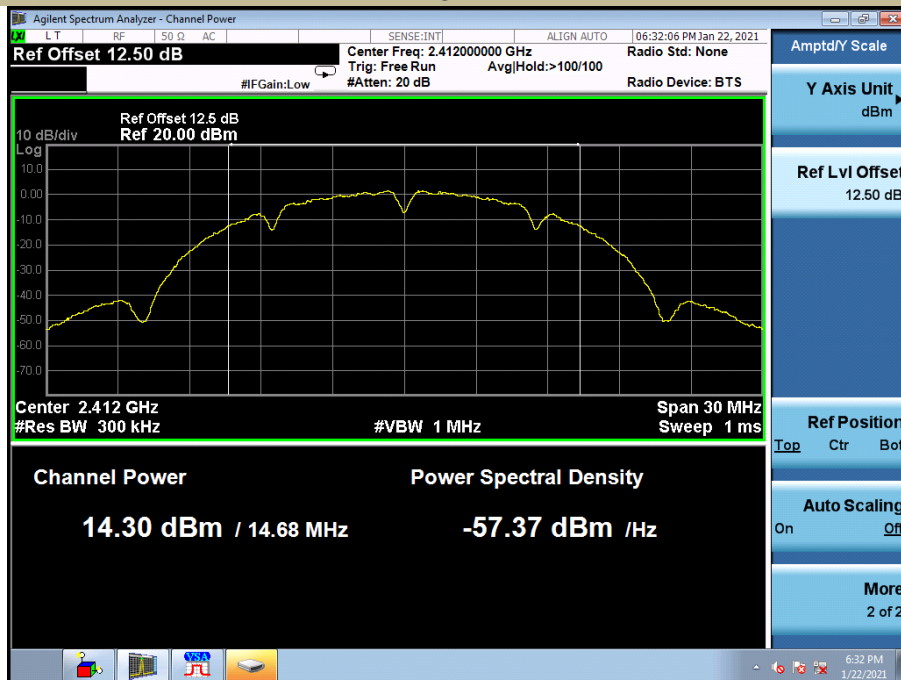


Test Model

Maximum Conducted Output Power


802.11b

Channel 6: 2437MHz

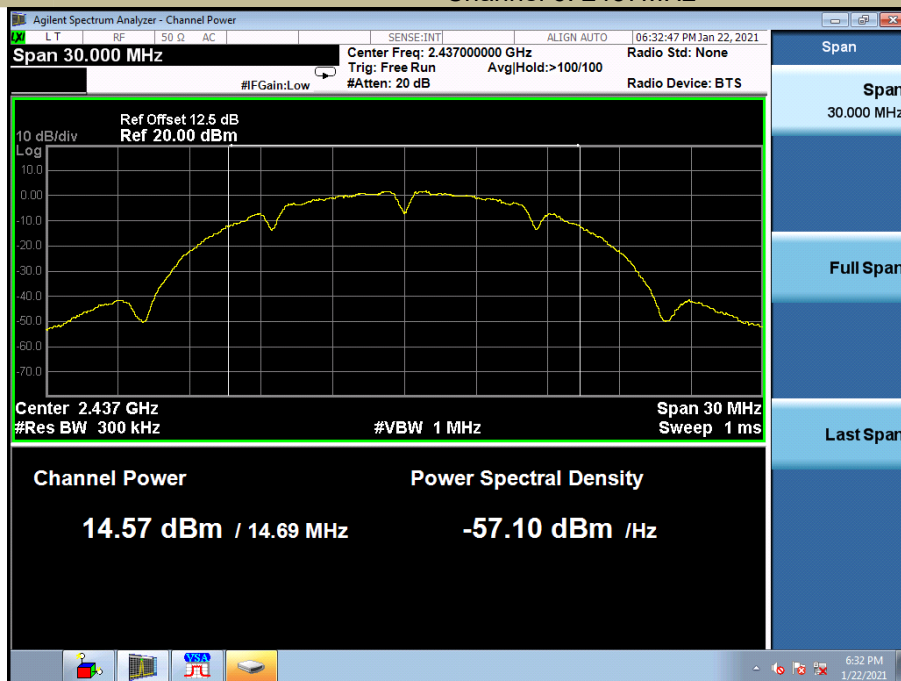


Test Model

Maximum Conducted Output Power
802.11b
Channel 11: 2462MHz

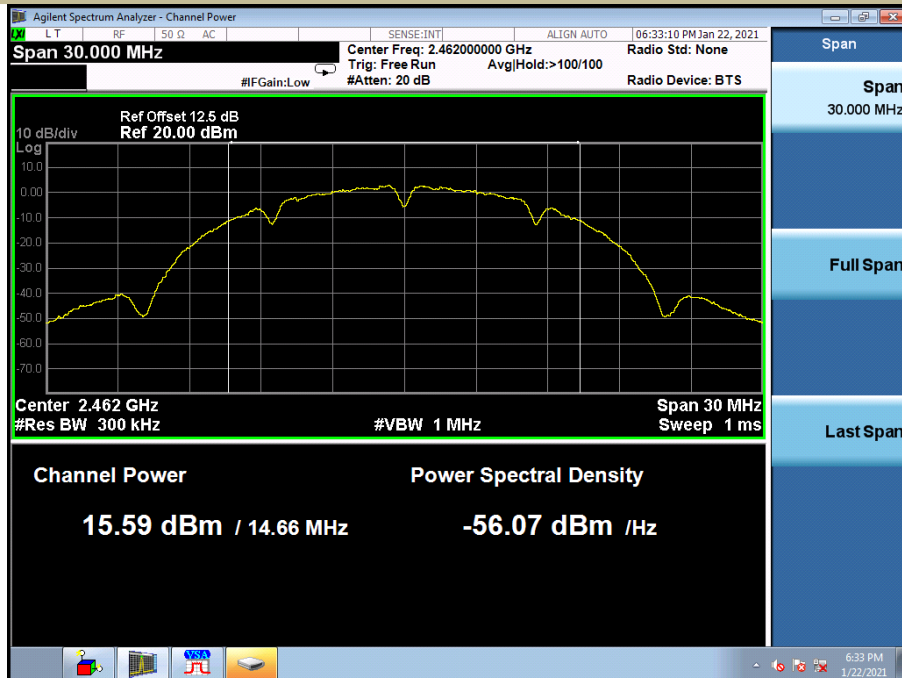


Test Model

Maximum Conducted Output Power
802.11g
Channel 1: 2412MHz

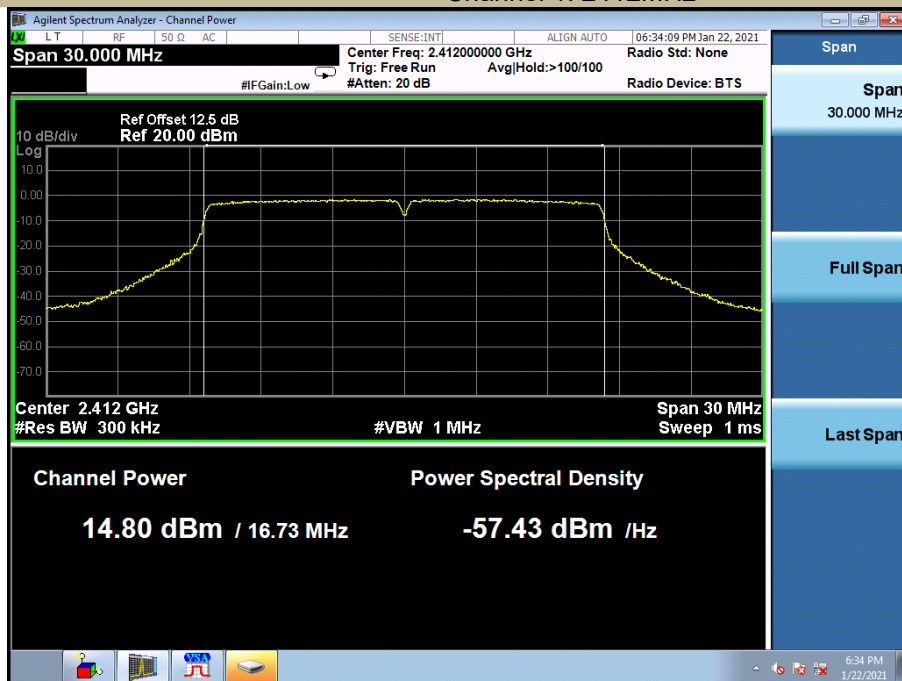


Test Model

Maximum Conducted Output Power
802.11g
Channel 6: 2437MHz

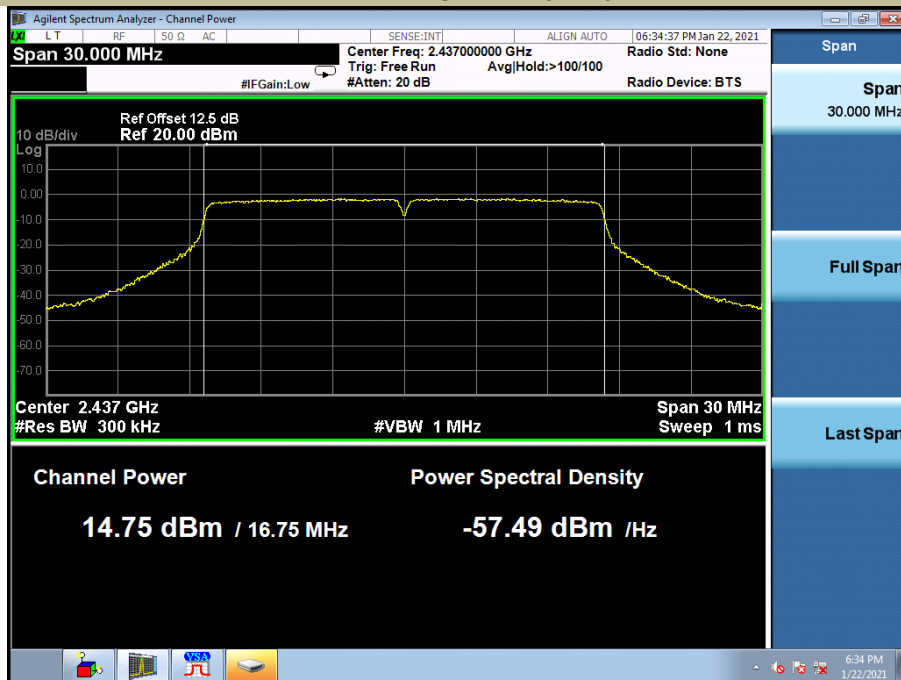


Test Model

Maximum Conducted Output Power
802.11g
Channel 11: 2462MHz

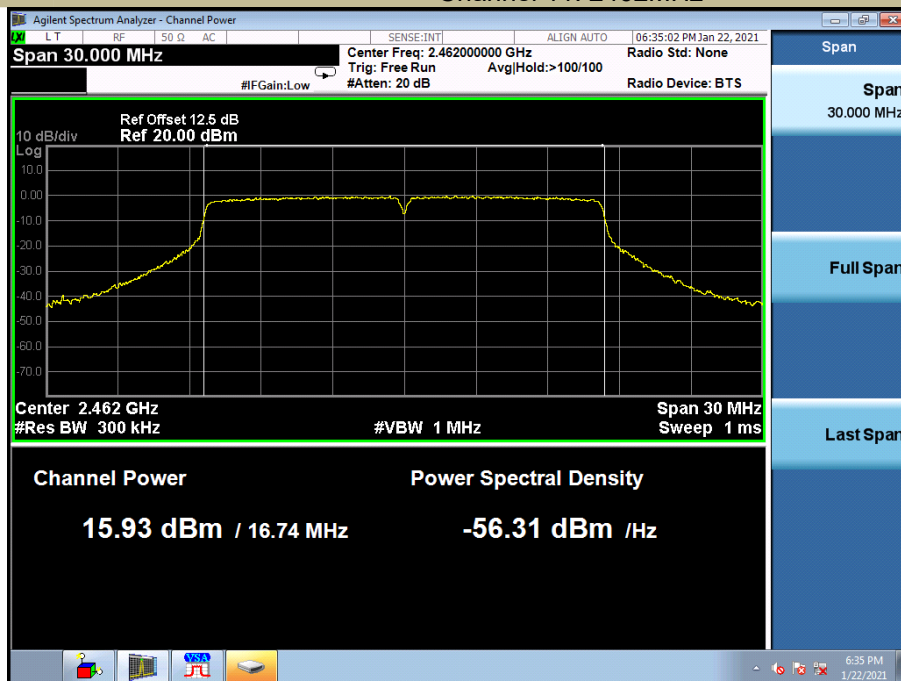


Test Model

Maximum Conducted Output Power
802.11n (HT20)
Channel 1: 2412MHz

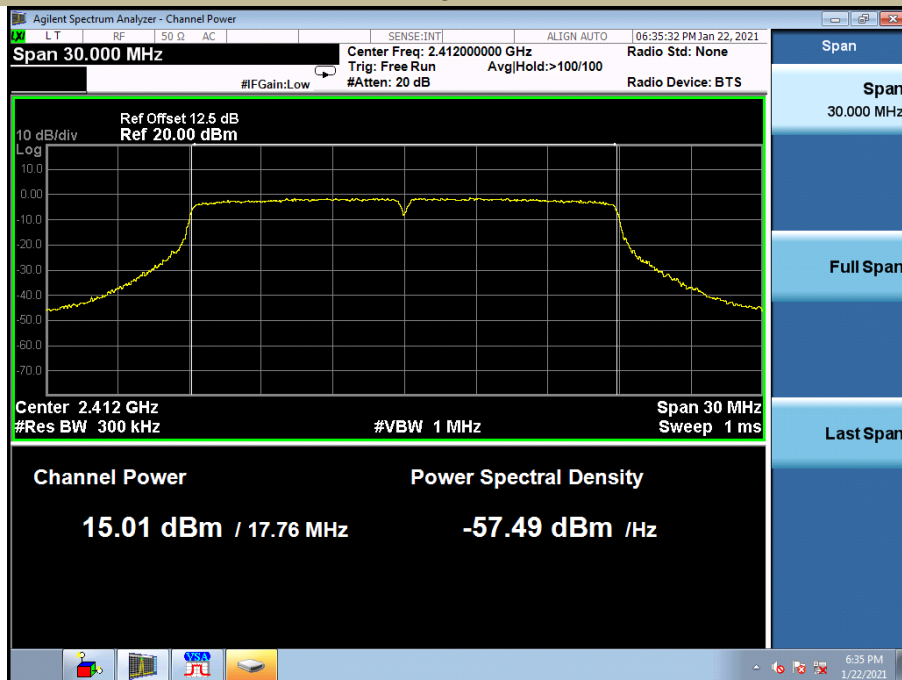


Test Model

Maximum Conducted Output Power
802.11n (HT20)
Channel 6: 2437MHz

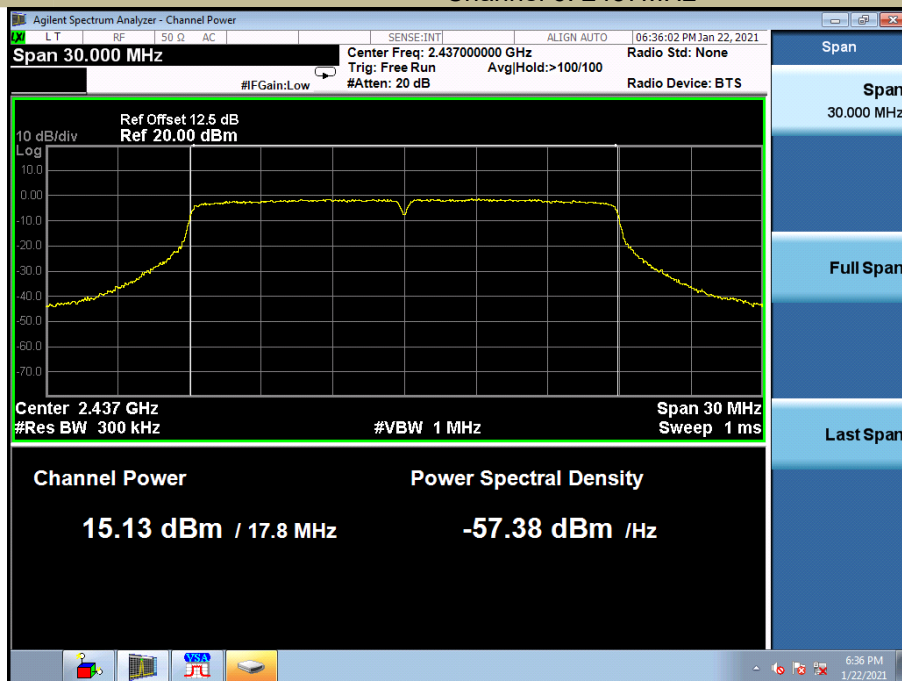


Test Model

Maximum Conducted Output Power
802.11n (HT20)
Channel 11: 2462MHz

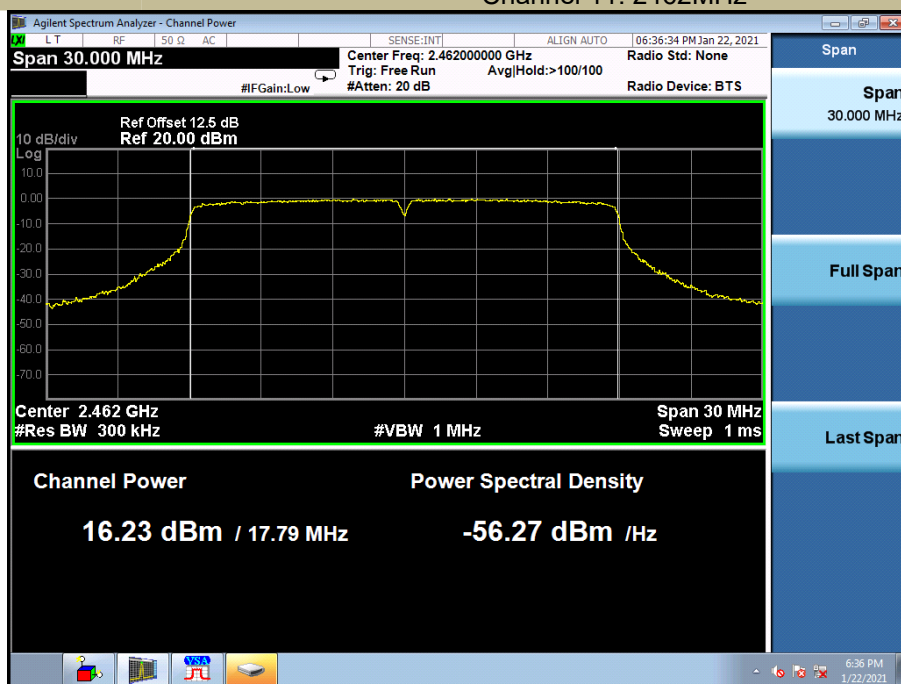


Test Model


Maximum Conducted Output Power
802.11n (HT40)
Channel 3: 2422MHz

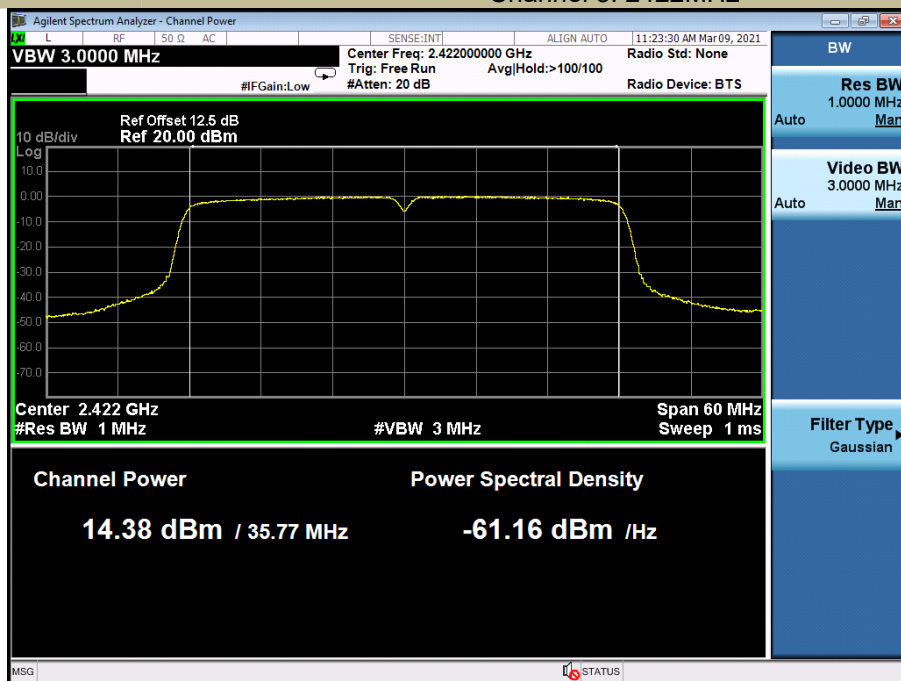

Test Model	Maximum Conducted Output Power 802.11n (HT40) Channel 6: 2437MHz
------------	--

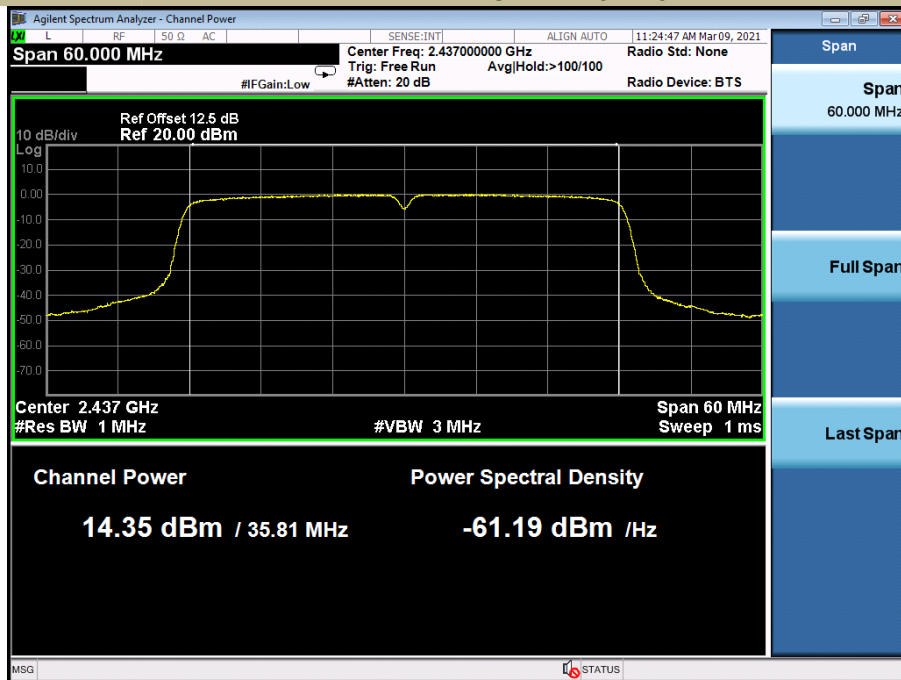

Test Model	Maximum Conducted Output Power 802.11n (HT40) Channel 9: 2452MHz
------------	--

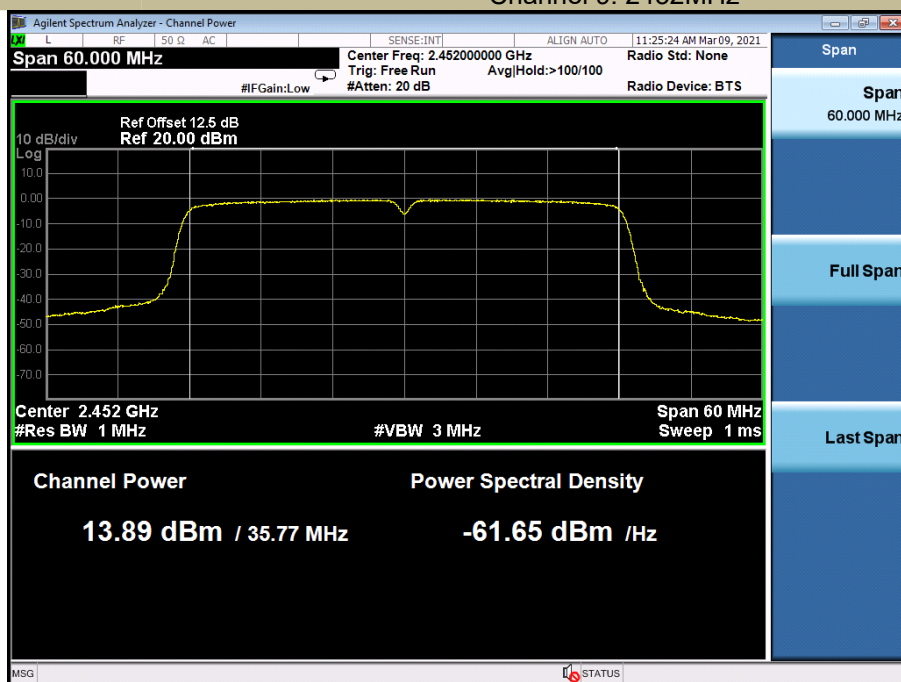

8.3 MAXIMUM POWER SPECTRAL DENSITY

8.3.1 Applicable Standard

According to FCC Part15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to:10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

Note: If antenna Gain exceeds 6 dBi, then PSD Limit=8-(Gain- 6)

8.3.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	1	2412	-9.476	8	PASS
	6	2437	-9.329	8	PASS
	11	2462	-8.146	8	PASS
802.11g	1	2412	-9.392	8	PASS
	6	2437	-8.906	8	PASS
	11	2462	-8.035	8	PASS
802.11n (HT20)	1	2412	-8.502	8	PASS
	6	2437	-9.213	8	PASS
	11	2462	-7.374	8	PASS
802.11n (HT40)	3	2422	-13.972	8	PASS
	6	2437	-12.973	8	PASS
	9	2452	-12.041	8	PASS

Test Model

Power Spectral Density
802.11b
Channel 1: 2412MHz



Test Model

Power Spectral Density
802.11b
Channel 6: 2437MHz




Test Model

Power Spectral Density
802.11b
Channel 11: 2462MHz




Test Model

Power Spectral Density
802.11g
Channel 1: 2412MHz

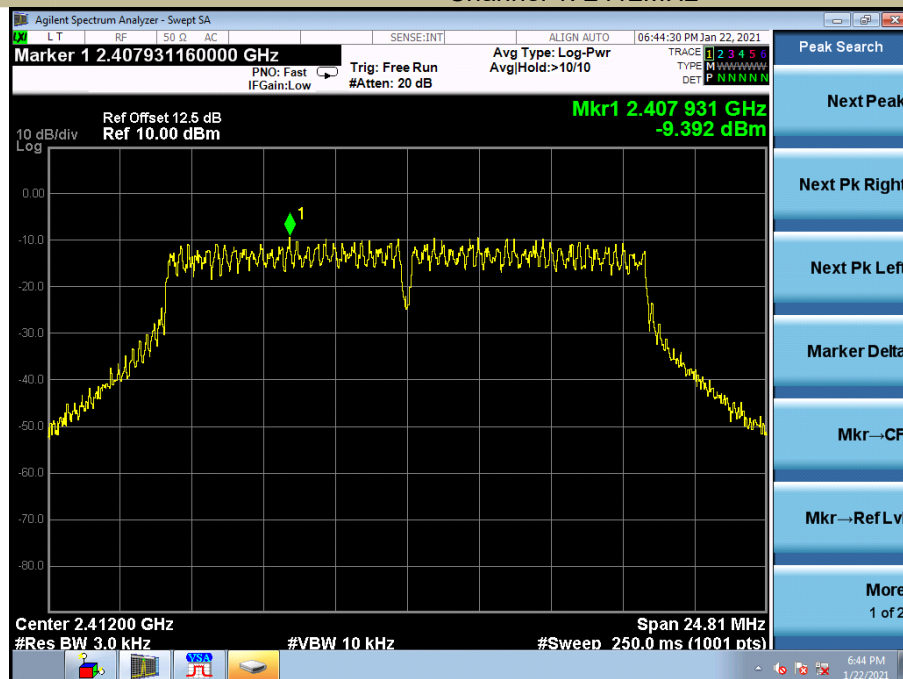


Test Model

Power Spectral Density
802.11g
Channel 6: 2437MHz

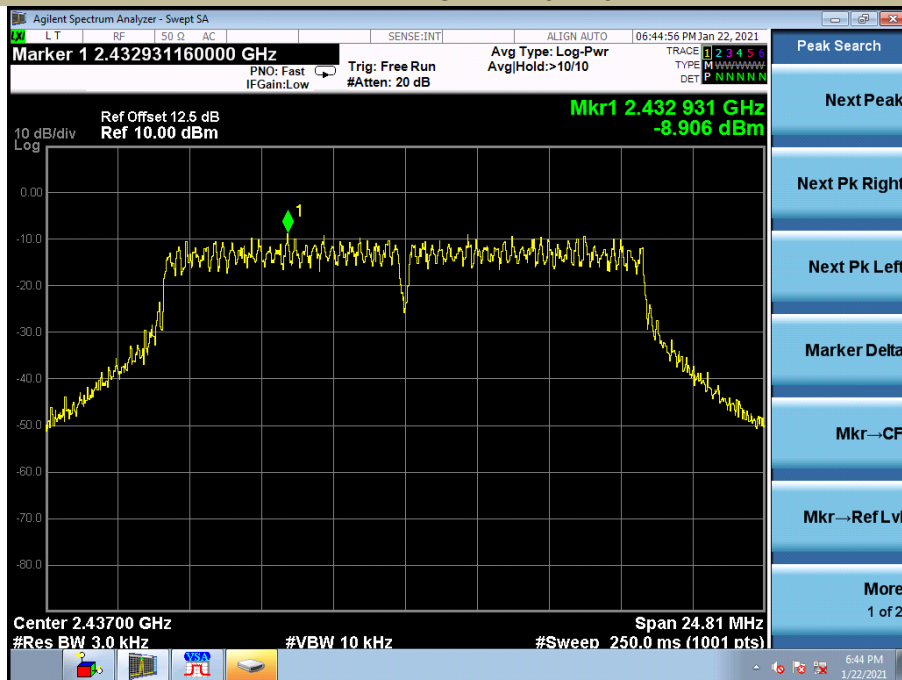


Test Model

Power Spectral Density
802.11g
Channel 11: 2462MHz

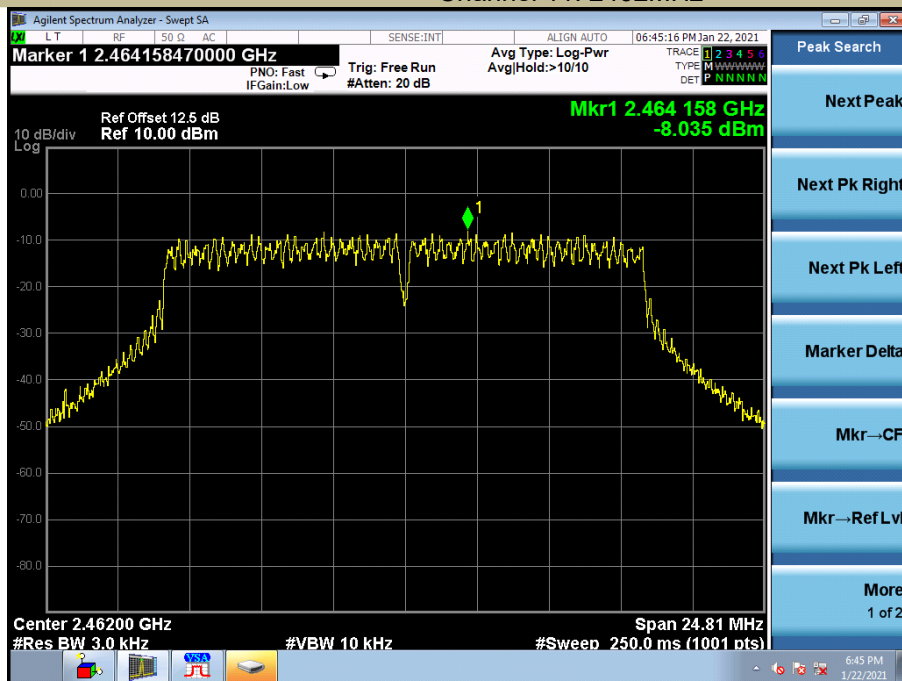


Test Model

Power Spectral Density
802.11n (HT20)
Channel 1: 2412MHz

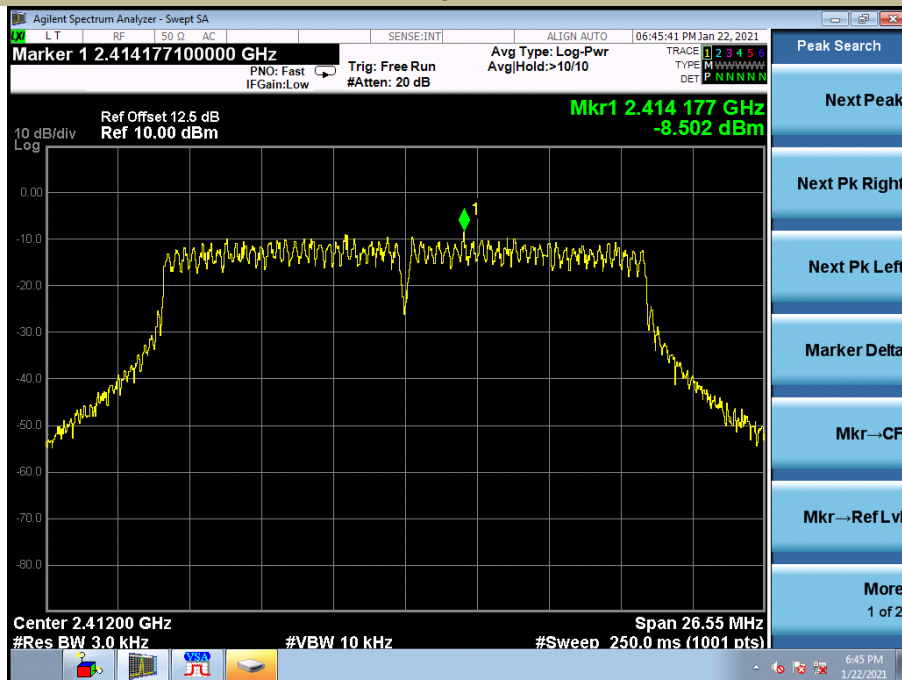


Test Model

Power Spectral Density
802.11n (HT20)
Channel 6: 2437MHz

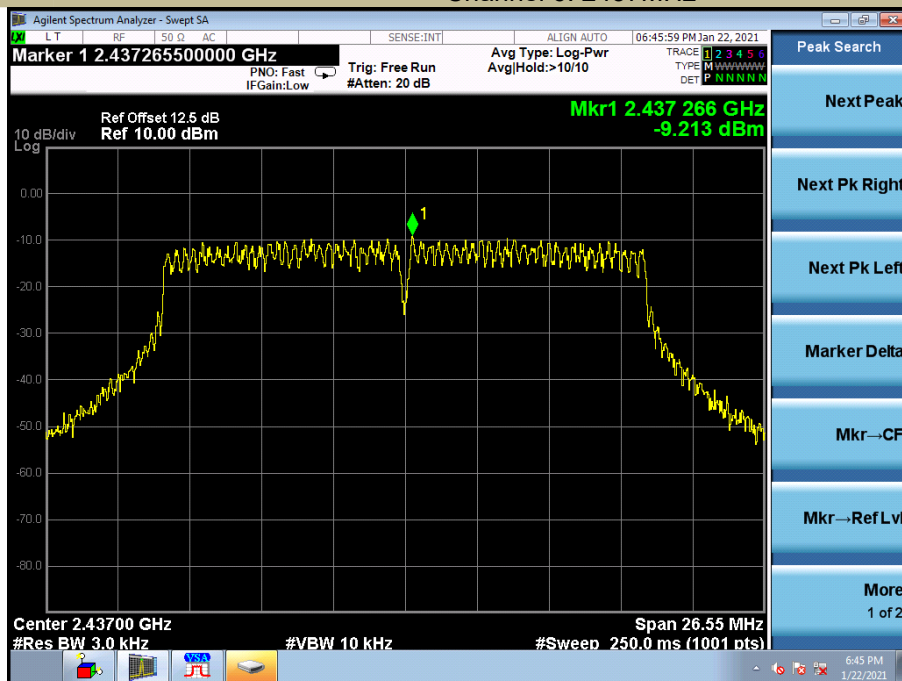


Test Model

Power Spectral Density
802.11n (HT20)
Channel 11: 2462MHz

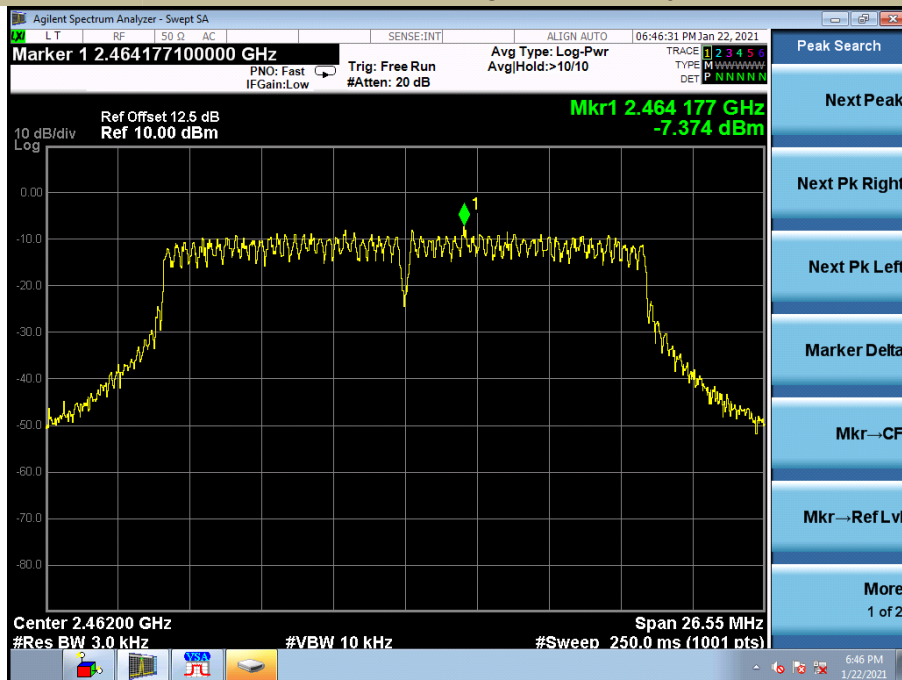


Test Model

Power Spectral Density
802.11n (HT40)
Channel 3: 2422MHz

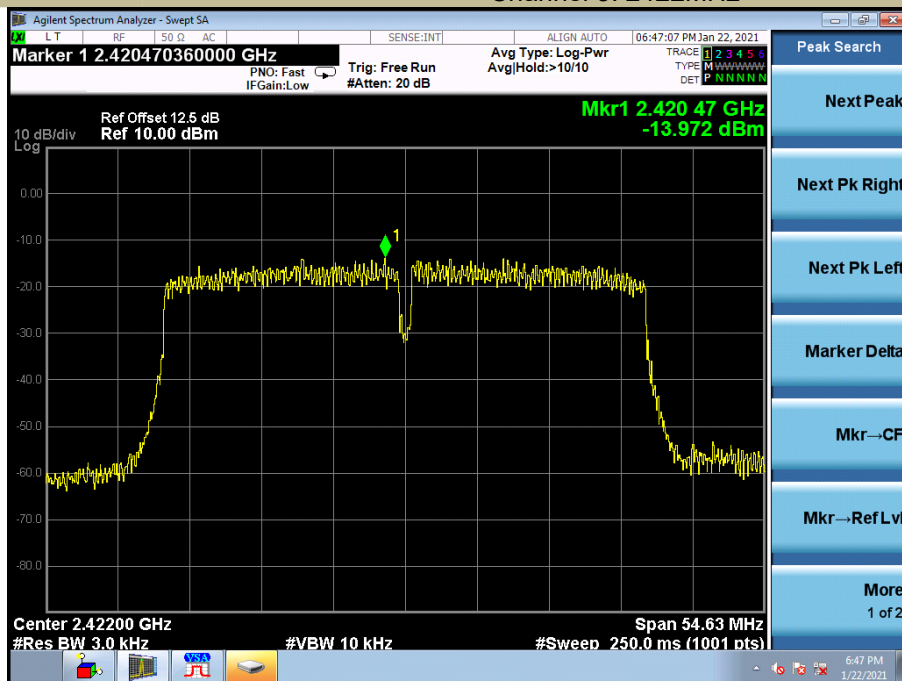


Test Model

Power Spectral Density
802.11n (HT40)
Channel 6: 2437MHz

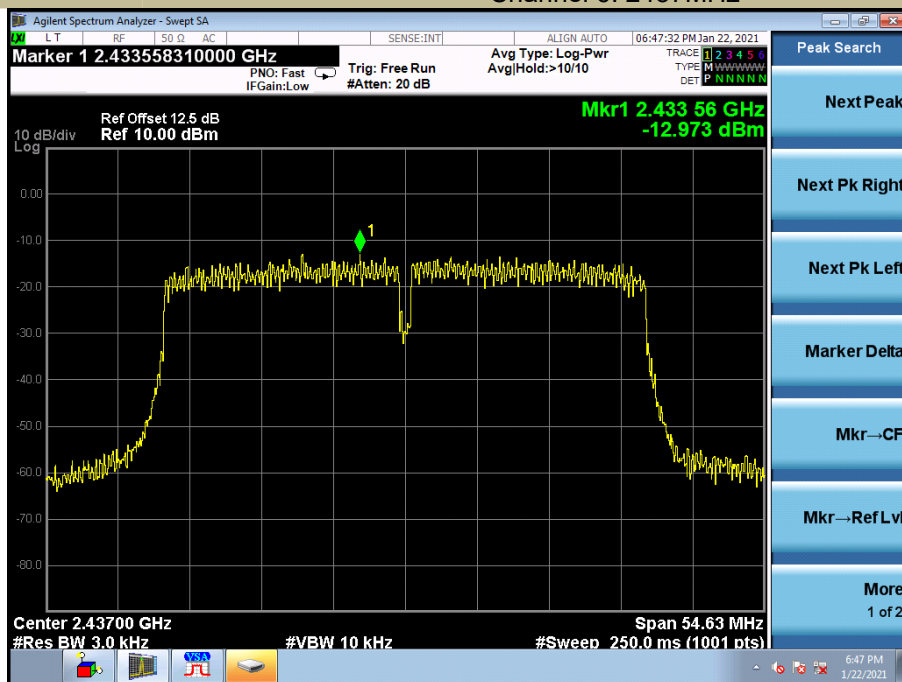

Test Model

Power Spectral Density
802.11n (HT40)
Channel 9: 2452MHz

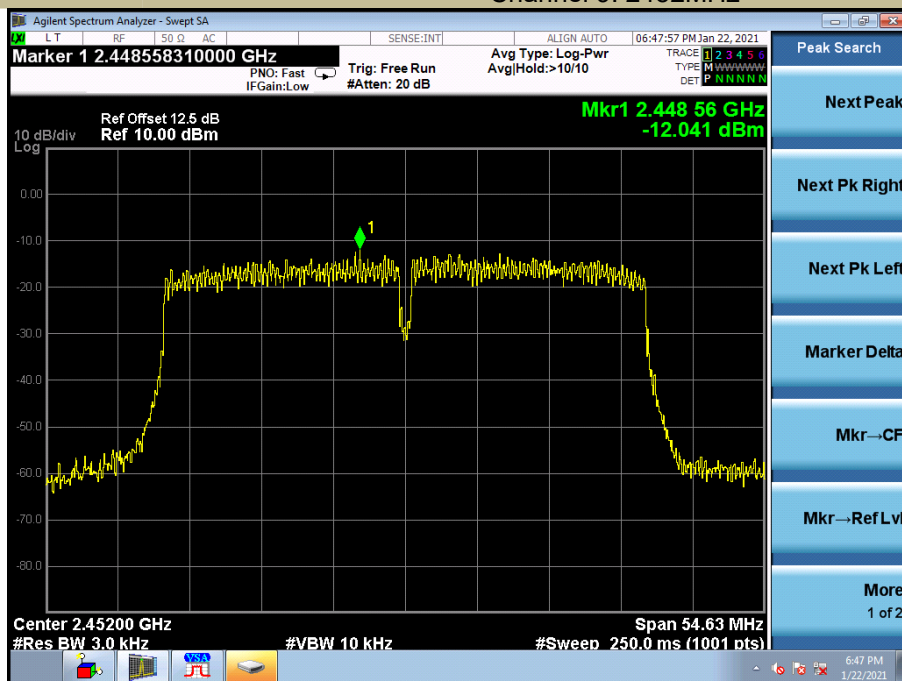

8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02

8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.


Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

8.4.5 Test Results

All the antennas and modulation modes were tested, and the worst data for is shown in the table below.


Test Model	PSD(Power Spectral Density) RBW=100kHz			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz	<input type="checkbox"/> Channel 3: 2422MHz		

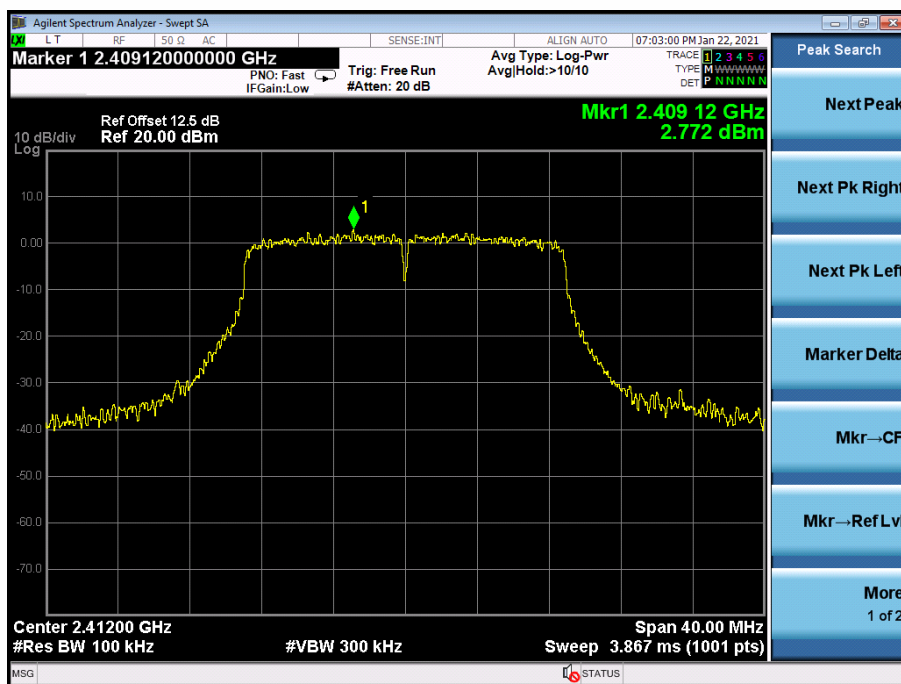


Test Model	Unwanted Emissions in non-restricted frequency bands			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz	<input type="checkbox"/> Channel 3: 2422MHz		



Test Model	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz	<input type="checkbox"/> Channel 3: 2422MHz		

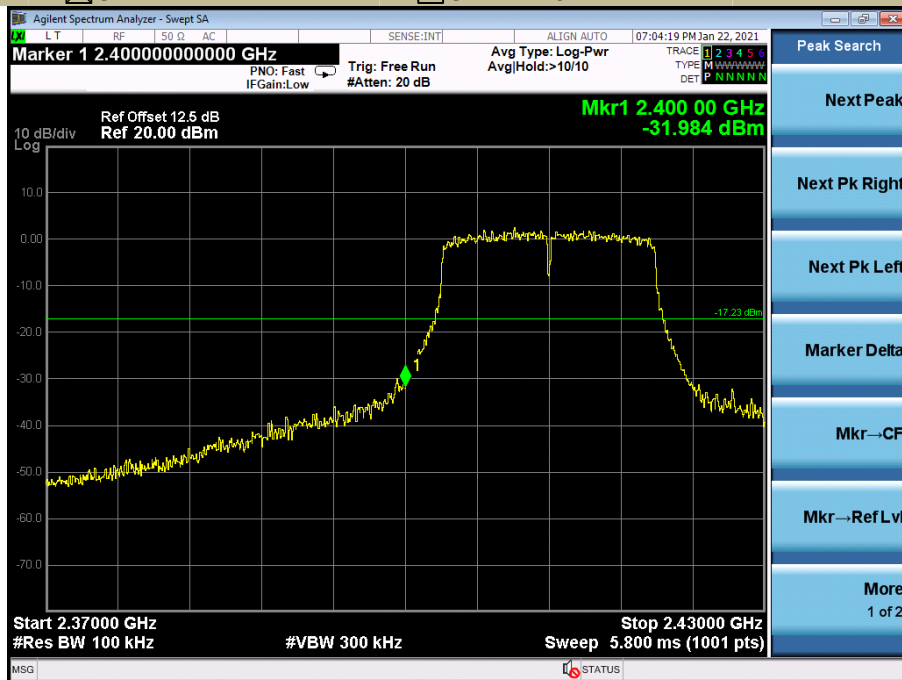


Test Model	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	PSD(Power Spectral Density) RBW=100kHz Channel 6: 2437MHz			

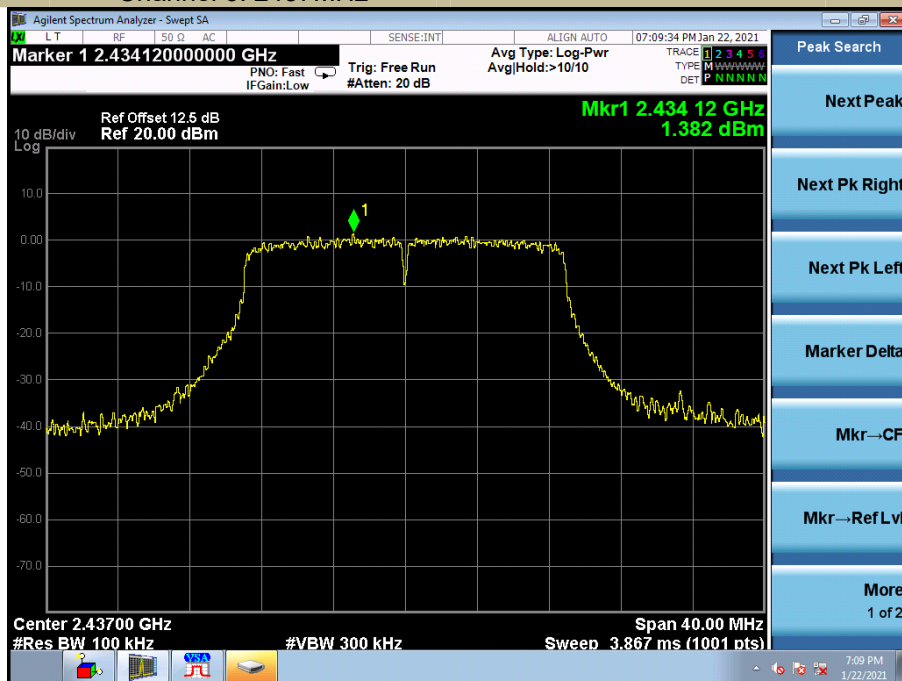


Test Model	Unwanted Emissions In Non-Restricted Frequency Bands			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
Channel 6: 2437MHz				



Test Model	PSD(Power Spectral Density) RBW=100kHz			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
<input checked="" type="checkbox"/> Channel 11: 2462MHz <input type="checkbox"/> Channel 9: 2452MHz				

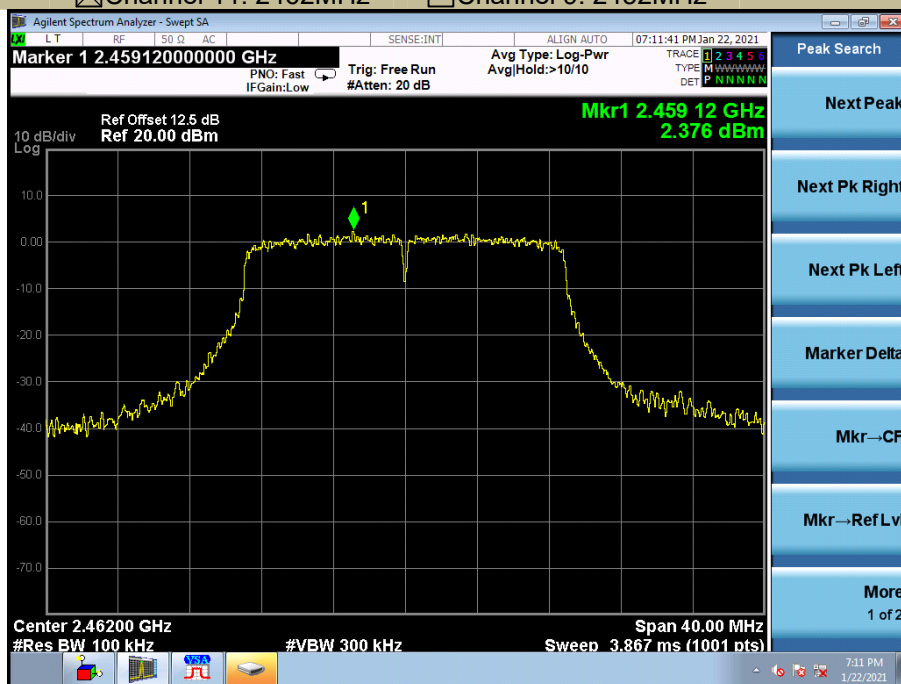

Test Model	Unwanted Emissions In Non-Restricted Frequency Bands			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz	<input type="checkbox"/> Channel 9: 2452MHz		

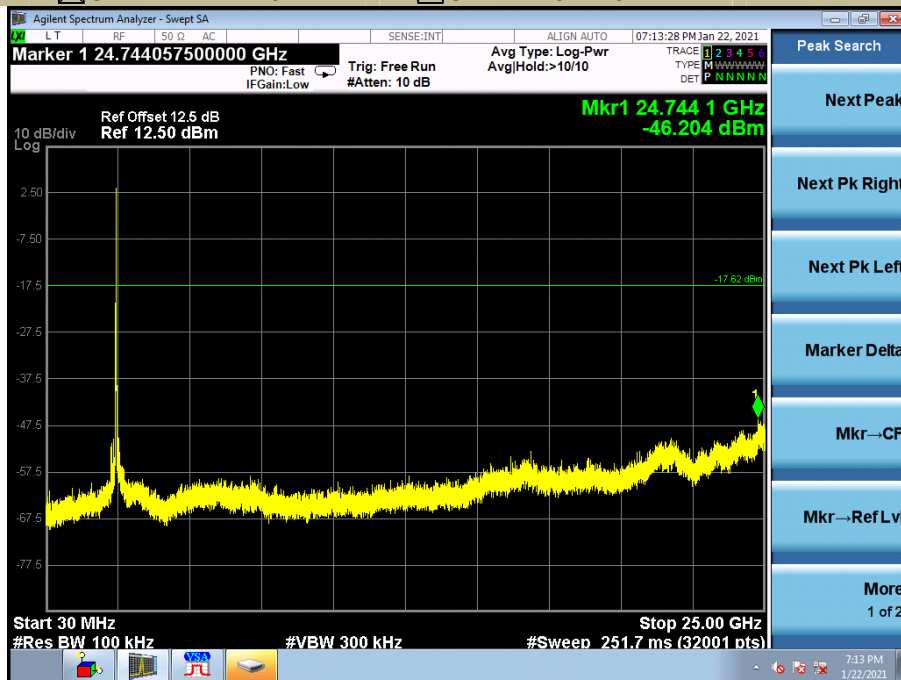

Test Model	Band edge			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz	<input type="checkbox"/> Channel 9: 2452MHz		



8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz (1GHz to 25GHz), 100 kHz for $f < 1$ GHz (30MHz to 1GHz), 200Hz for $f < 150$ KHz (9KHz to 150KHz), 9KHz for $f < 30$ MHz (150KHz to 30KHz)

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.5.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

■ Spurious Emission below 30MHz(9KHz to 30MHz)

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})$ (dB);

Limit line = Specific limits(dBuV) + distance extrapolation factor

- Spurious Emission Above 1GHz(1GHz to 25GHz)
- All antenna modes 2.4G 802.11b/g/n have been tested, and the worst result recorded was report as below:

Antenna 1:

Test mode: 802.11 g Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
3068.45	V	43.01	28.60	74	54	-30.99	-25.4
7173.30	V	49.72	34.50	74	54	-24.28	-19.5
14792.42	V	56.06	38.30	74	54	-17.94	-15.7
3048.56	H	43.47	28.30	74	54	-30.53	-25.7
7098.02	H	49.79	33.80	74	54	-24.21	-20.2
14741.21	H	56.68	37.90	74	54	-17.32	-16.1

Test mode: 802.11 g Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
3094.28	V	43.03	28.20	74	54	-30.97	-25.8
7179.52	V	49.43	34.70	74	54	-24.57	-19.3
14692.29	V	56.66	37.60	74	54	-17.34	-16.4
3118.52	H	43.46	28.60	74	54	-30.54	-25.4
8149.66	H	49.37	34.20	74	54	-24.63	-19.8
14692.29	H	56.17	37.70	74	54	-17.83	-16.3

Test mode: 802.11 g Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
2965.14	V	43.12	28.40	74	54	-30.88	-25.6
5676.81	V	46.20	31.40	74	54	-27.8	-22.6
10732.58	V	54.37	36.80	74	54	-19.63	-17.2
3041.96	H	43.75	27.80	74	54	-30.25	-26.2
7694.13	H	49.83	34.30	74	54	-24.17	-19.7
11894.03	H	55.36	37.10	74	54	-18.64	-16.9

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Antenna 2:

Test mode: 802.11 g Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
3068.45	V	42.51	27.30	74	54	-31.49	-26.7
6573.70	V	48.59	34.40	74	54	-25.41	-19.6
11607.05	V	54.06	36.60	74	54	-19.94	-17.4
4824.28	H	44.30	29.30	74	54	-29.7	-24.7
8062.97	H	49.67	34.80	74	54	-24.33	-19.2
11851.13	H	54.77	36.90	74	54	-19.23	-17.1

Test mode: 802.11 g Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
3094.28	V	43.53	29.40	74	54	-30.47	-24.6
7179.52	V	48.93	34.50	74	54	-25.07	-19.5
14692.29	V	56.16	37.60	74	54	-17.84	-16.4
3118.52	H	43.96	28.70	74	54	-30.04	-25.3
7567.31	H	49.07	34.60	74	54	-24.93	-19.4
14692.29	H	55.67	37.10	74	54	-18.33	-16.9

Test mode: 802.11 g Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
2965.14	V	42.62	28.10	74	54	-31.38	-25.9
5676.81	V	46.20	32.10	74	54	-27.8	-21.9
12885.46	V	54.91	36.60	74	54	-19.09	-17.4
3041.96	H	42.75	27.90	74	54	-31.25	-26.1
7694.13	H	50.83	34.00	74	54	-23.17	-20
11682.78	H	55.06	37.20	74	54	-18.94	-16.8

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Antenna 3:

Test mode: 802.11 g Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
7368.200	V	50.60	33.12	74	54	-23.40	-20.88
14435.95	V	57.29	40.36	74	54	-16.71	-13.64
17963.45	V	64.50	48.47	74	54	-9.50	-5.53
7797.450	H	50.20	33.08	74	54	-23.80	-20.92
14169.05	H	57.06	41.71	74	54	-16.94	-12.29
17984.70	H	65.24	47.56	74	54	-8.76	-6.44

Test mode: 802.11 g Frequency: Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
7821.250	V	50.41	33.82	74	54	-23.59	-20.18
14190.30	V	57.24	41.09	74	54	-16.76	-12.91
17978.75	V	64.66	47.53	74	54	-9.34	-6.47
7324.000	H	49.97	33.64	74	54	-24.03	-20.36
14227.70	H	57.68	41.19	74	54	-16.32	-12.81
17991.50	H	64.11	47.93	74	54	-9.89	-6.07

Test mode: 802.11 g Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
7640.200	V	51.00	33.61	74	54	-23.00	-20.39
14146.95	V	57.07	41.95	74	54	-16.93	-12.05
17807.05	V	63.68	46.83	74	54	-10.32	-7.17
7583.250	H	50.51	32.26	74	54	-23.49	-21.74
14446.15	H	57.39	41.69	74	54	-16.61	-12.31
17944.75	H	64.17	48.49	74	54	-9.83	-5.51

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz
All antenna modes 2.4G 802.11b/g/n have been tested, and the worst result recorded was report as below:

Antenna 1:

Test mode: 802.11 g Frequency: Channel 1: 2412MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2389.99	H	62.72	74	41.10	54
2389.63	V	56.34	74	37.30	54

Test mode: 802.11 g Frequency: Channel 11: 2462MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2483.56	H	70.79	74	50.43	54
2484.25	V	63.35	74	45.60	54

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Spurious Emission in Restricted Band 2310-2390MHz				
Test Model	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz		<input type="checkbox"/> Channel 3: 2422MHz	
VBW=3MHz				
Polarity: H				

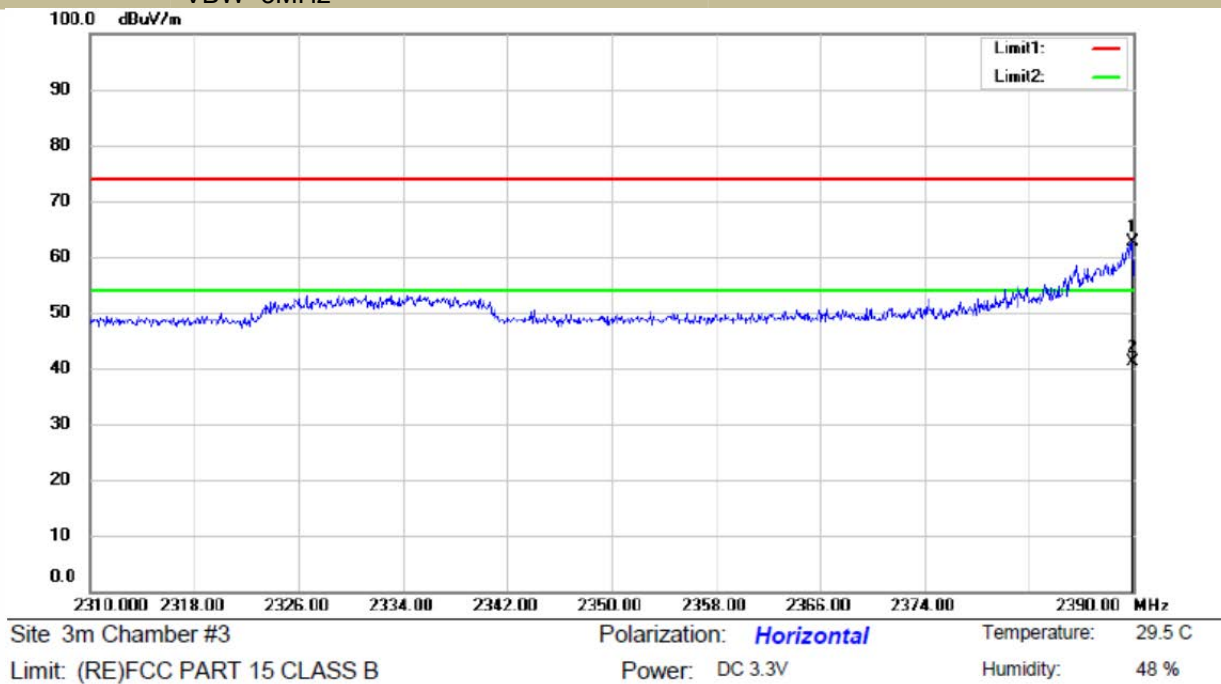

Spurious Emission in Restricted Band 2310-2390MHz				
Test Model	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz		<input type="checkbox"/> Channel 3: 2422MHz	
VBW=3MHz				
Polarity: V				

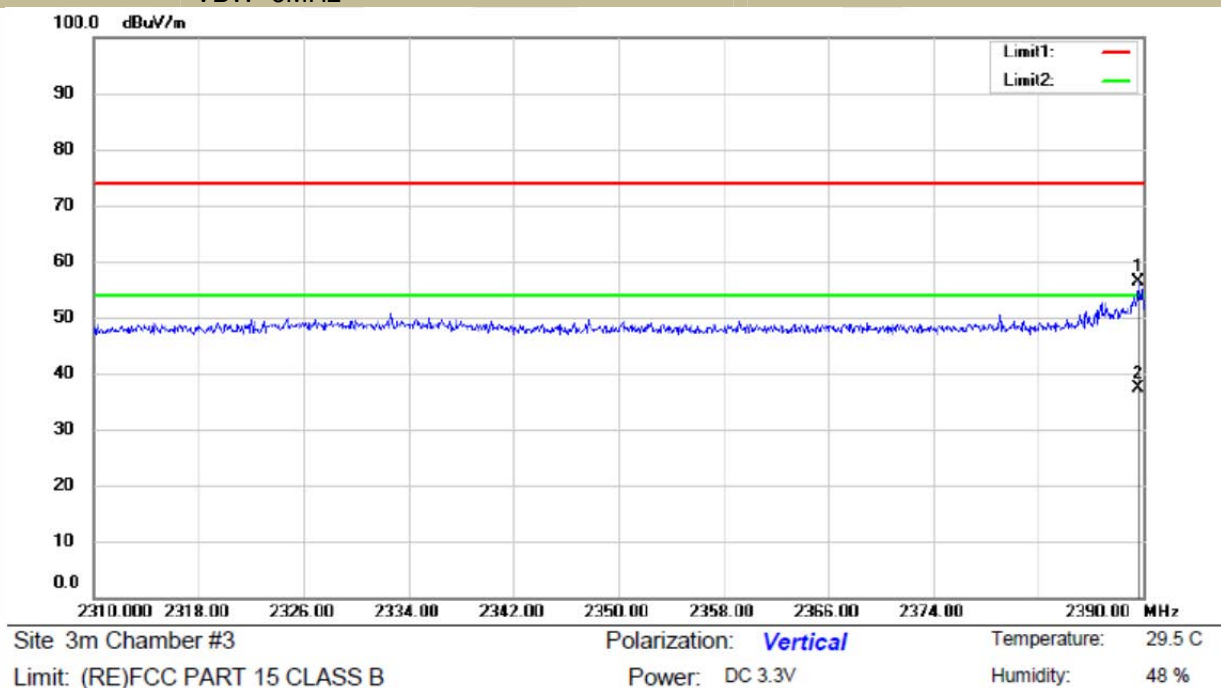

Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz	<input type="checkbox"/> Channel 9: 2452MHz	Polarity: H	
	VBW=3MHz			

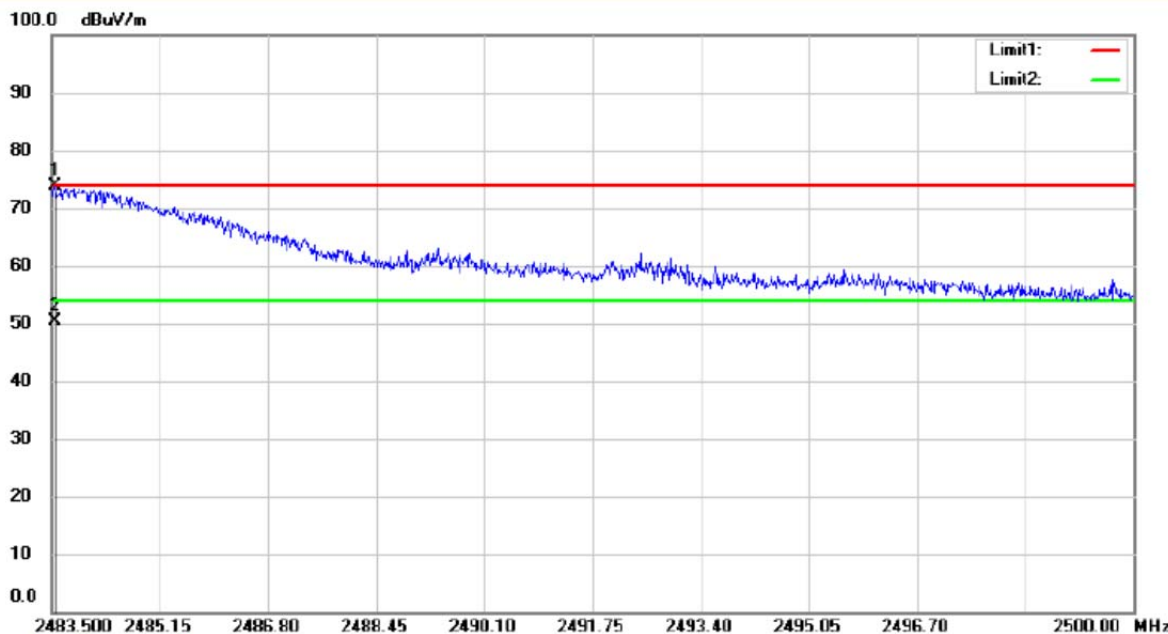

Site 3m Chamber #3

Polarization: **Horizontal**


Temperature: 29.5 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC 3.3V

Humidity: 48 %

Test Model	Spurious Emission in Restricted Band2483.5-2500MHz			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz	<input type="checkbox"/> Channel 9: 2452MHz	Polarity: V	
	VBW=3MHz			

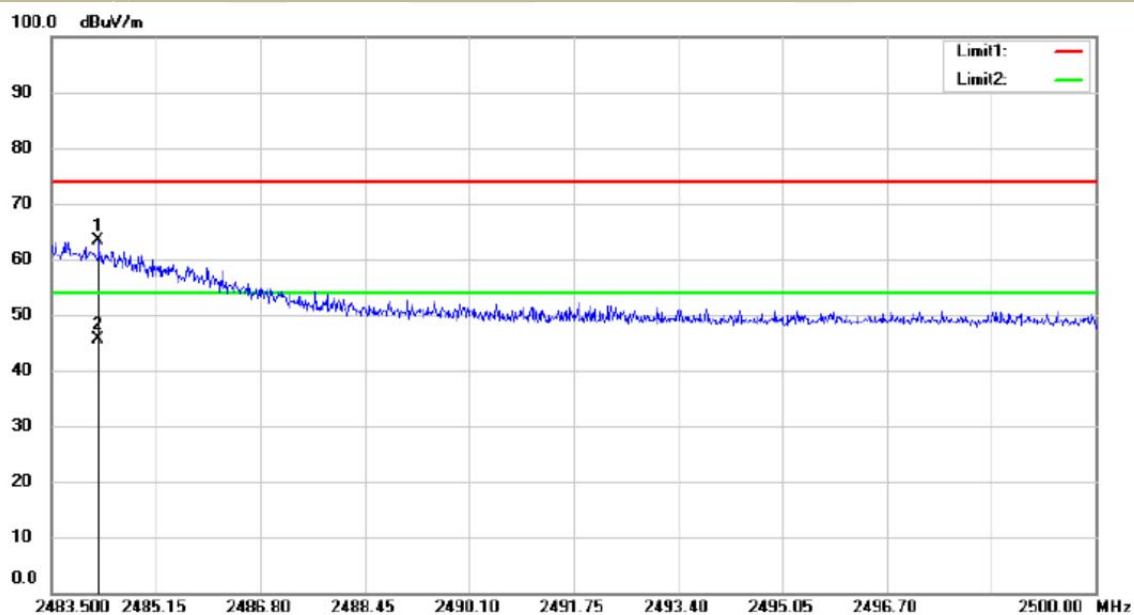

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 29.5 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC 3.3V

Humidity: 48 %

Antenna 2:

Test mode: 802.11g Frequency: Channel 1: 2412MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2389.99	H	60.72	74	40.20	54
2389.63	V	55.34	74	38.90	54

Test mode: 802.11g Frequency: Channel 11: 2462MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2483.56	H	71.29	74	49.80	54
2484.25	V	62.35	74	46.80	54

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Spurious Emission in Restricted Band 2310-2390MHz				
Test Model	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz	<input type="checkbox"/> Channel 3: 2422MHz	Polarity: H	
VBW=3MHz				

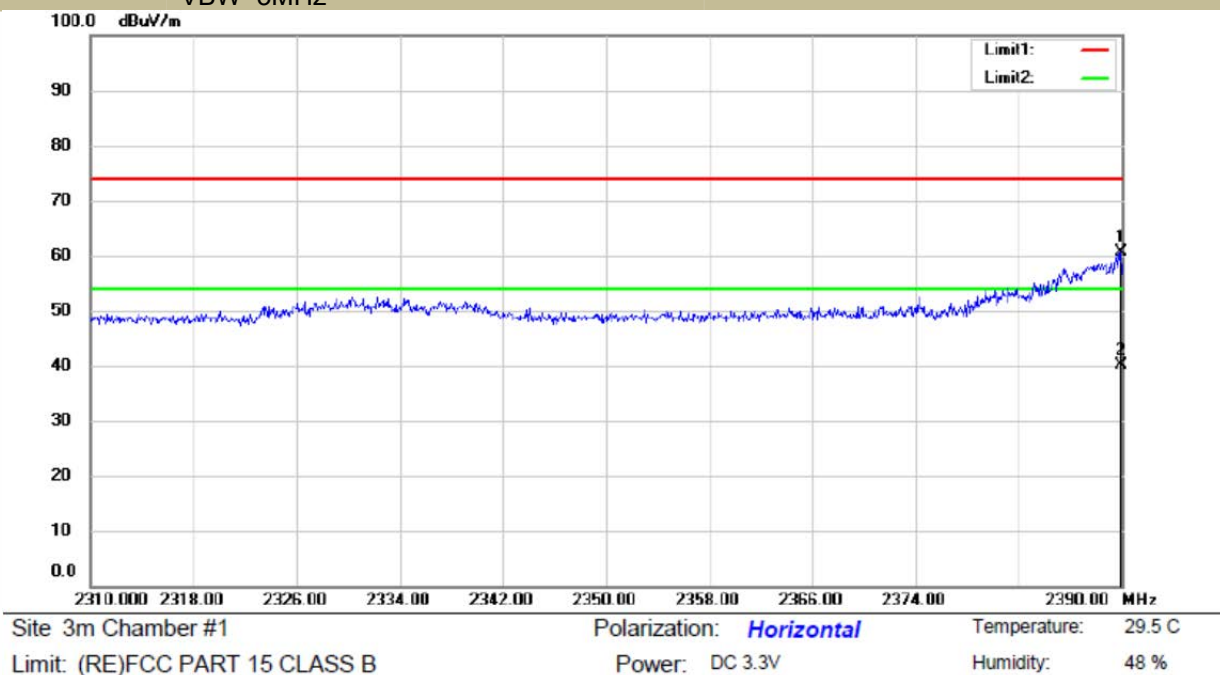


Spurious Emission in Restricted Band 2310-2390MHz				
Test Model	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz	<input type="checkbox"/> Channel 3: 2422MHz	Polarity: V	
VBW=3MHz				

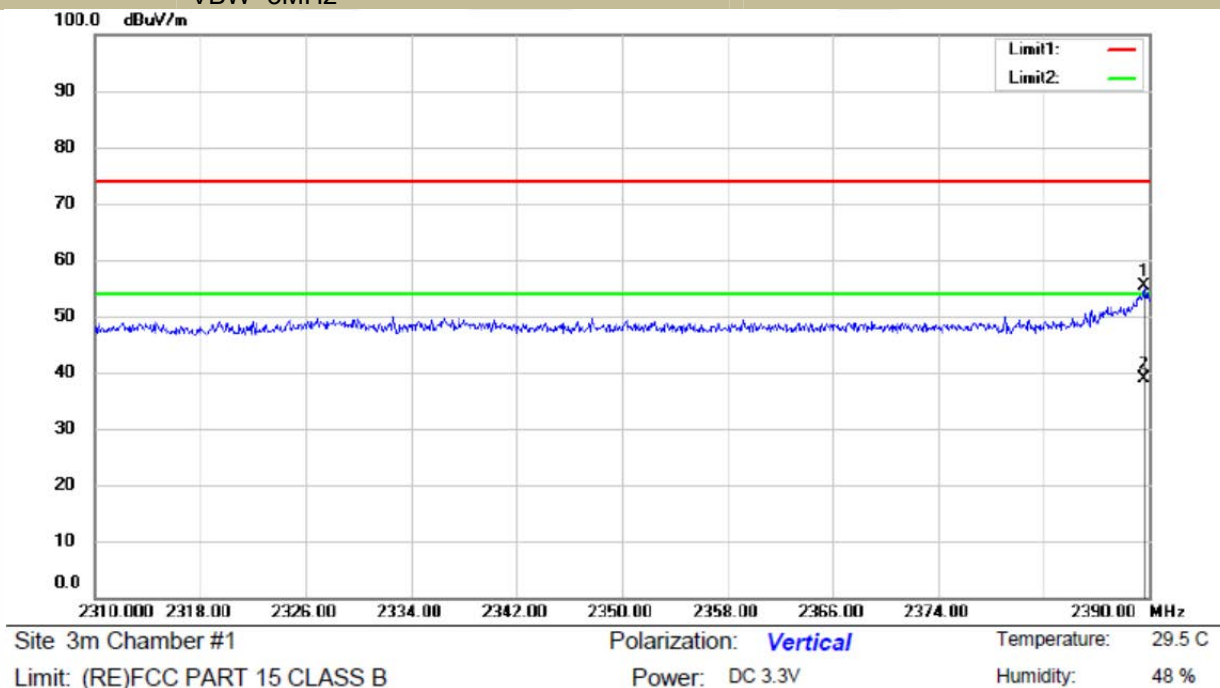

Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz	<input type="checkbox"/> Channel 9: 2452MHz	Polarity: H	
	VBW=3MHz			

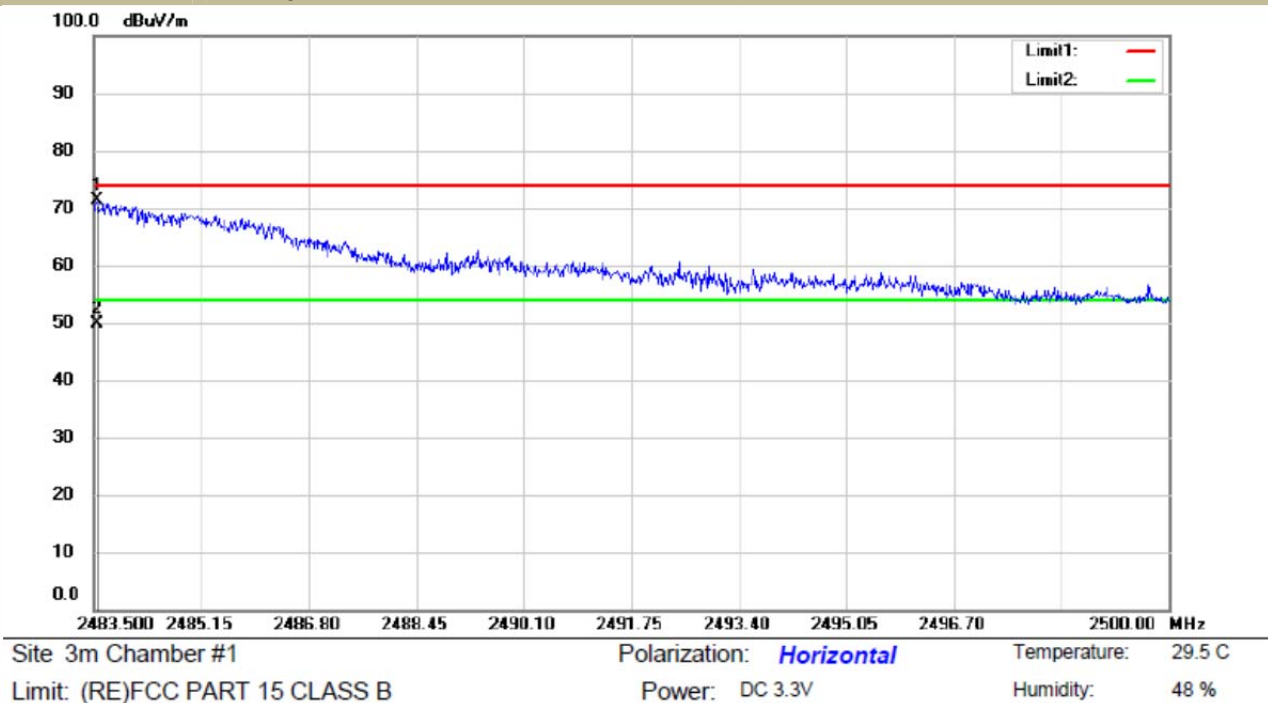

Test Model	Spurious Emission in Restricted Band2483.5-2500MHz			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz	<input type="checkbox"/> Channel 9: 2452MHz	Polarity: V	
	VBW=3MHz			

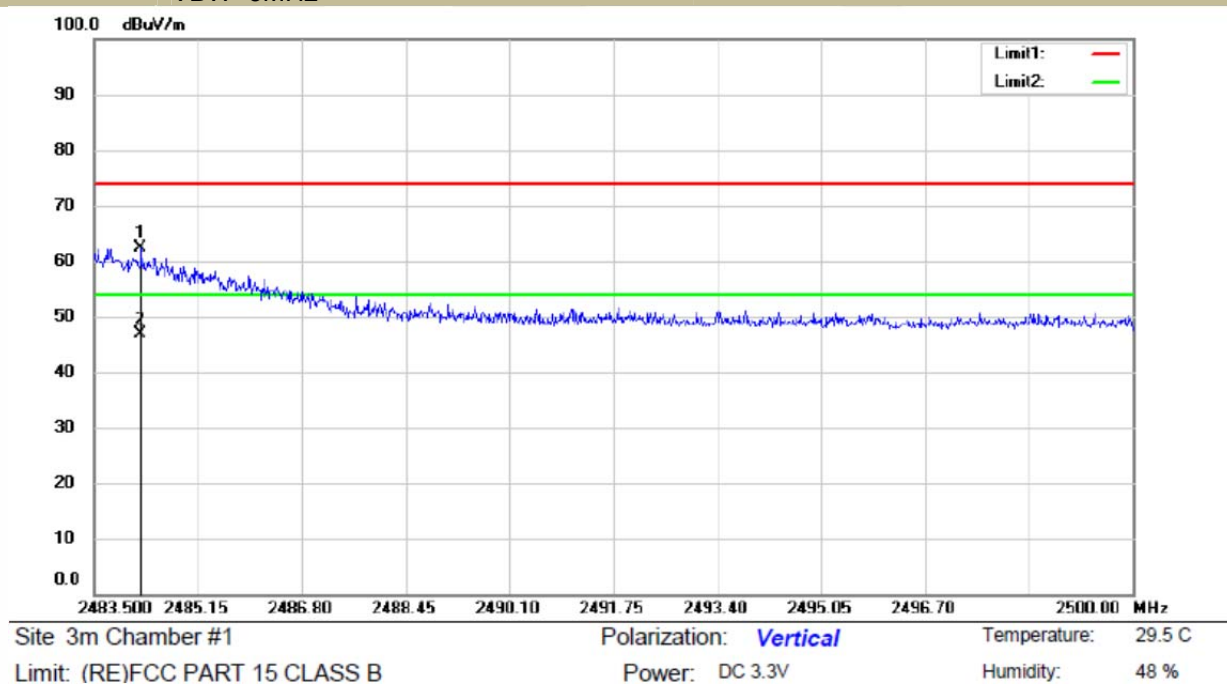

Antenna 3:

Test mode: 802.11 g Frequency: Channel 1: 2412MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2389.948	H	59.10	74	42.38	54
2386.544	V	49.42	74	31.67	54

Test mode: 802.11 g Frequency: Channel 11: 2462MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2483.500	H	64.81	74	46.33	54
2483.553	V	57.05	74	41.58	54

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Correct Factor.
 - (3) Correct Factor= Ant_F + Cab_L - Preamp
 - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Spurious Emission in Restricted Band 2310-2390MHz				
Test Model	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz	<input type="checkbox"/> Channel 3: 2422MHz	Polarity: H	
VBW=3MHz				

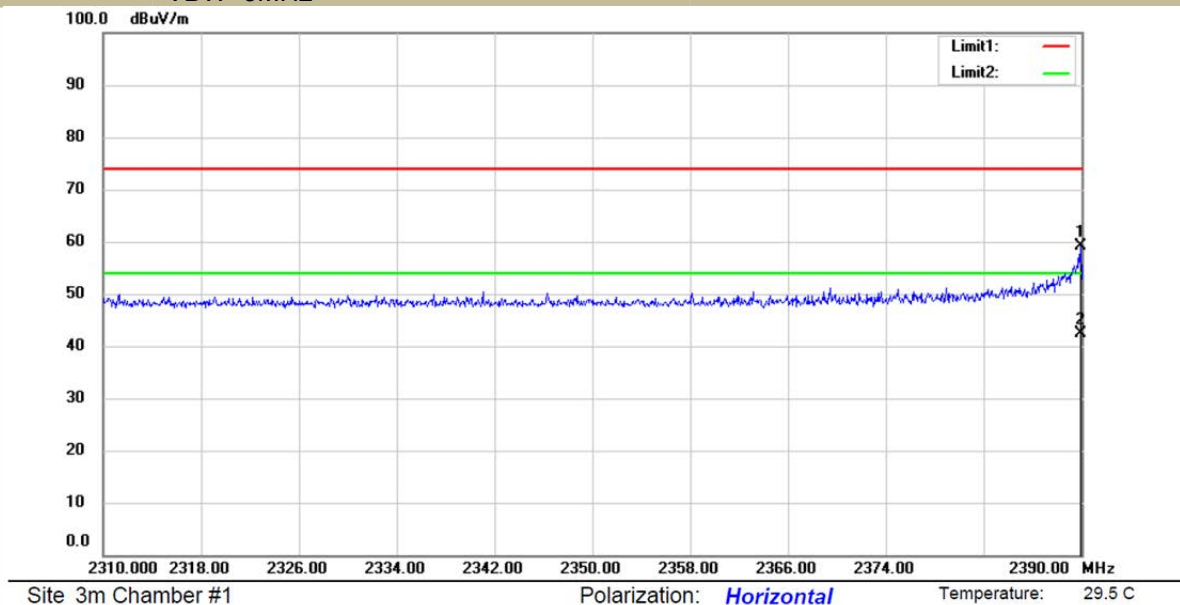


Spurious Emission in Restricted Band 2310-2390MHz				
Test Model	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz	<input type="checkbox"/> Channel 3: 2422MHz	Polarity: V	
VBW=3MHz				

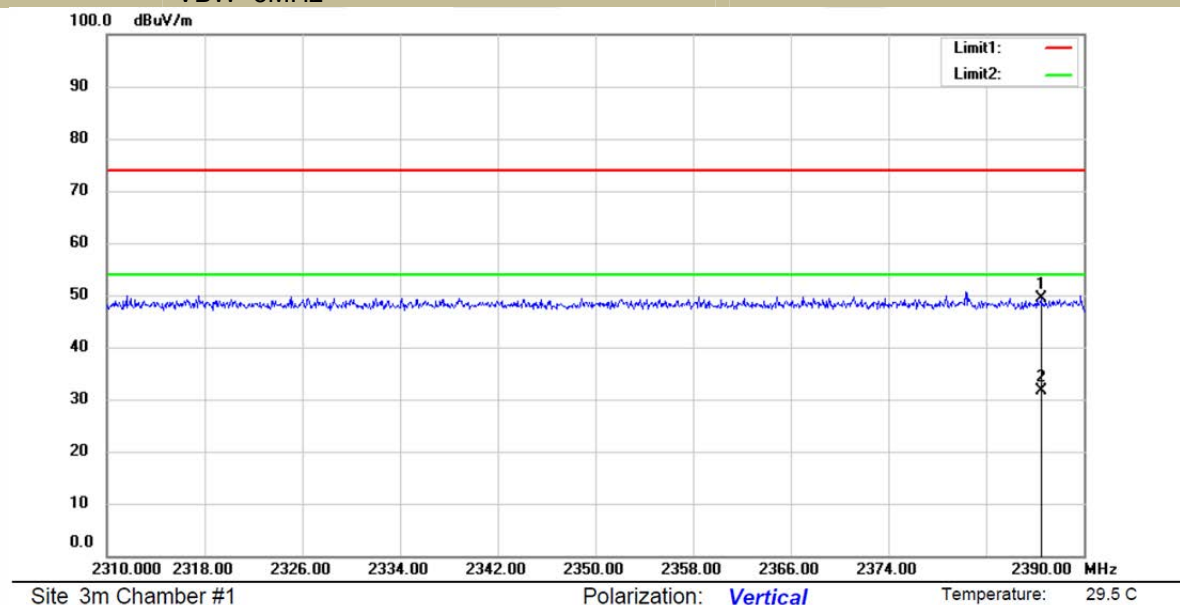

Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz	<input type="checkbox"/> Channel 9: 2452MHz	Polarity: H	
	VBW=3MHz			

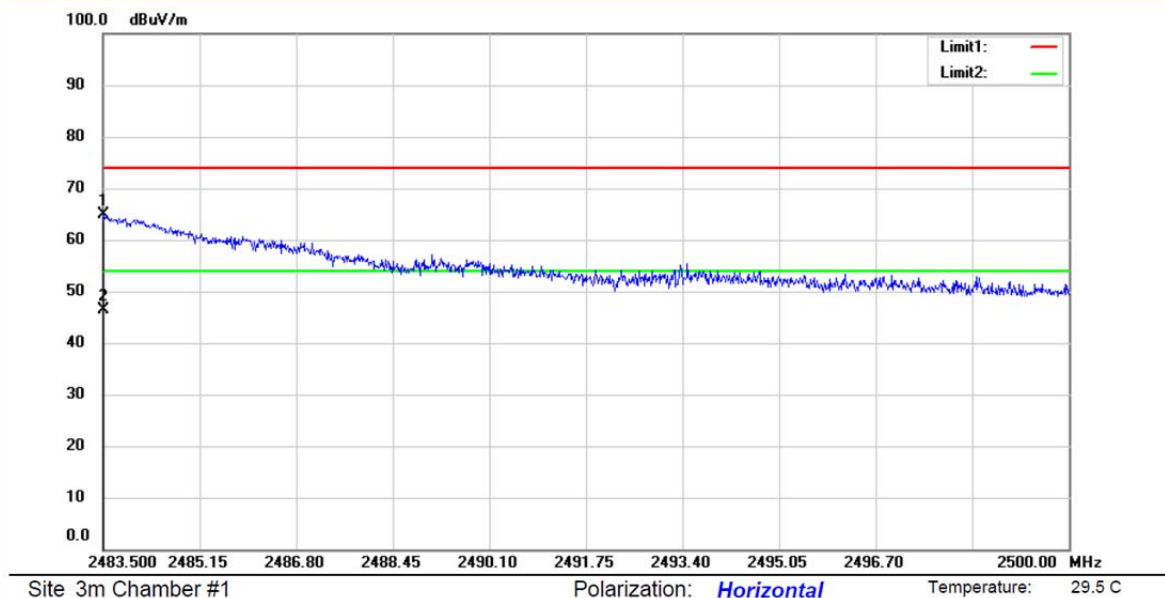


Test Model	Spurious Emission in Restricted Band2483.5-2500MHz			
	<input type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz	<input type="checkbox"/> Channel 9: 2452MHz	Polarity: V	
	VBW=3MHz			

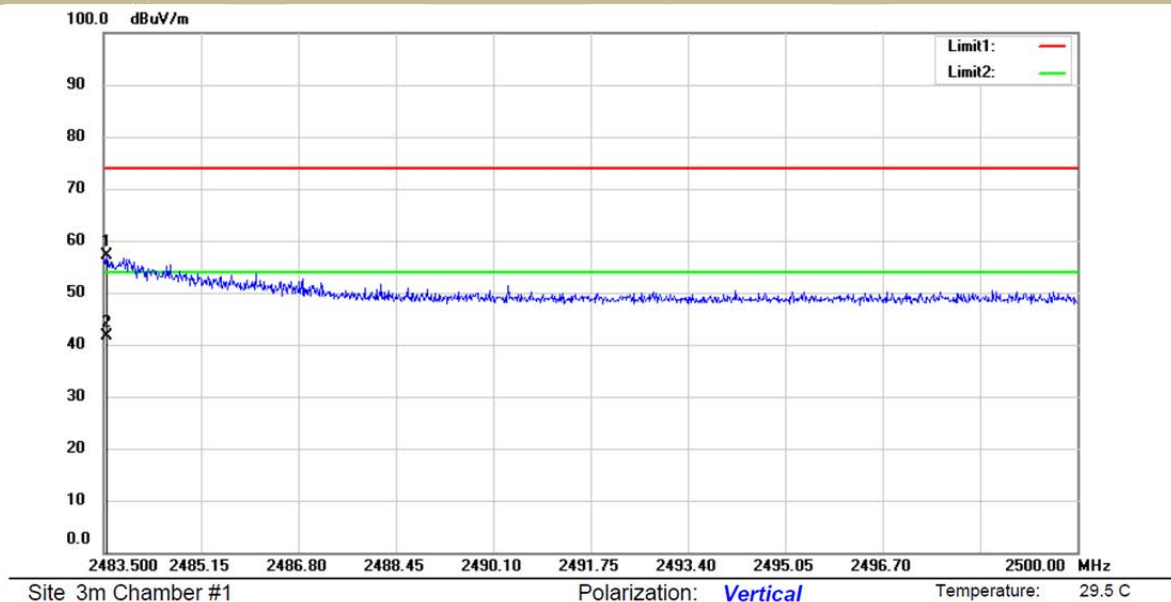


- Spurious Emission below 1GHz (30MHz to 1GHz)
- All antenna modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11g recorded was report as below:


Antenna 1:

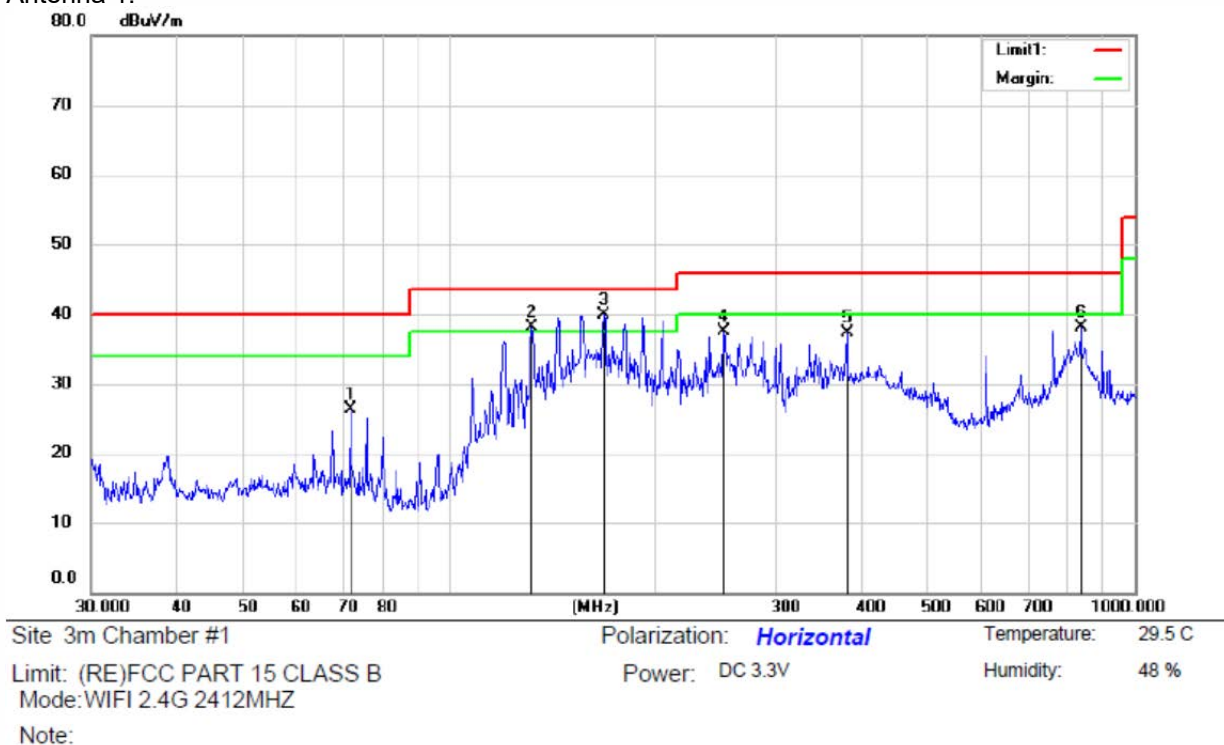


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		71.6747	39.72	-13.50	26.22	40.00	-13.78	QP		
2	!	132.1046	52.42	-14.23	38.19	43.50	-5.31	QP		
3	*	168.0450	54.02	-14.11	39.91	43.50	-3.59	QP		
4		251.9522	48.61	-11.19	37.42	46.00	-8.58	QP		
5		380.9146	44.45	-7.08	37.37	46.00	-8.63	QP		
6		834.7794	35.42	2.64	38.06	46.00	-7.94	QP		

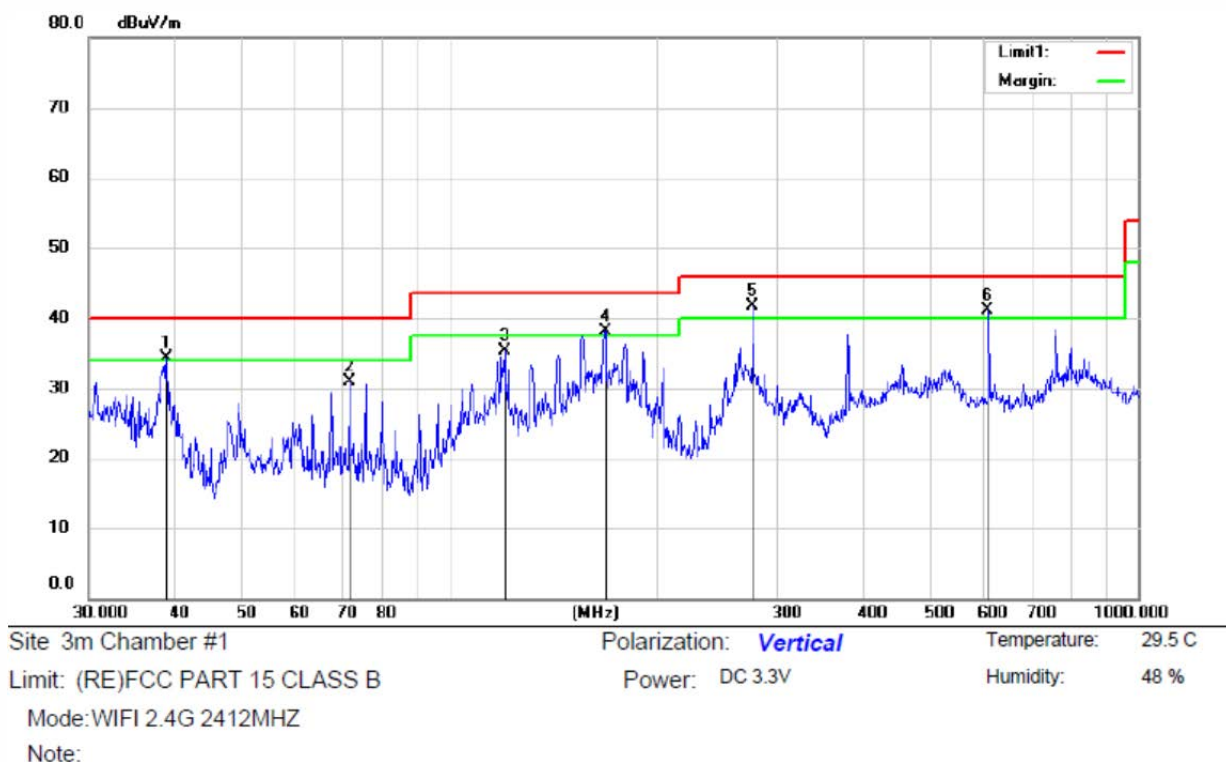


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	!	38.9050	47.45	-13.12	34.33	40.00	-5.67	QP		
2		71.6747	44.42	-13.50	30.92	40.00	-9.08	QP		
3		120.6462	49.63	-14.36	35.27	43.50	-8.23	QP		
4	!	168.4137	52.26	-14.09	38.17	43.50	-5.33	QP		
5	*	276.6081	51.74	-10.06	41.68	46.00	-4.32	QP		
6	!	606.9880	43.91	-2.75	41.16	46.00	-4.84	QP		

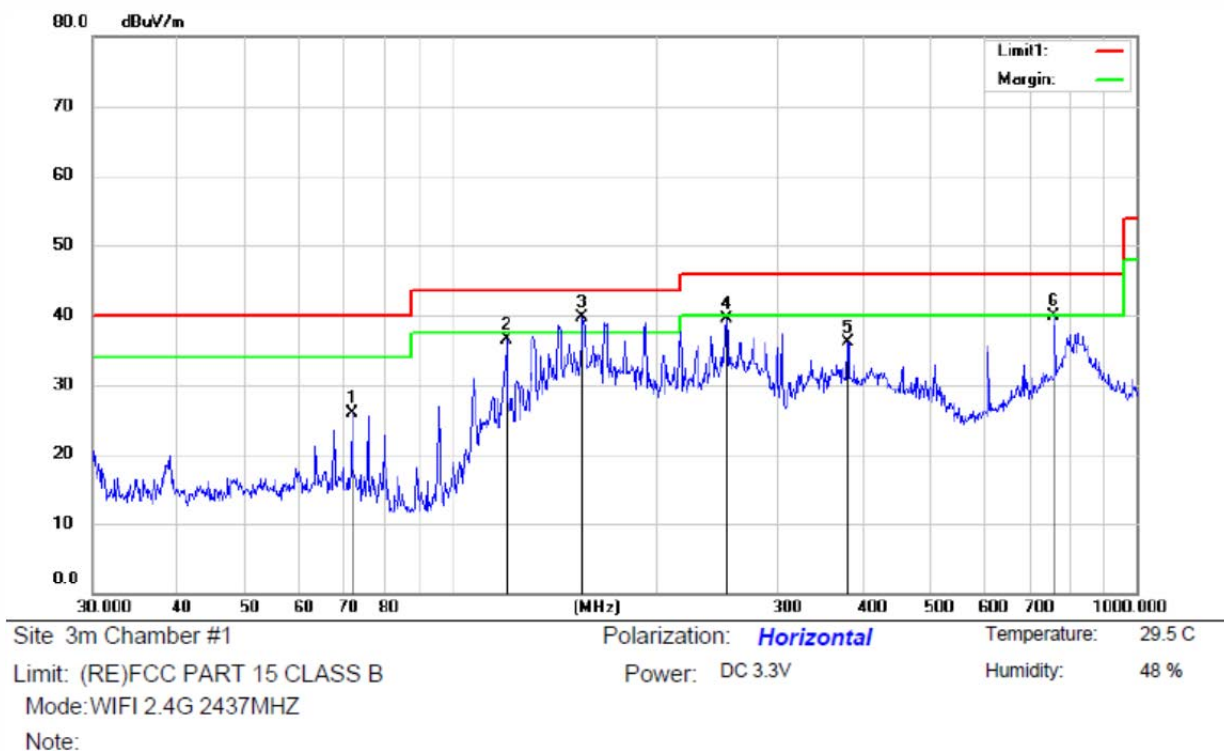


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		71.6747	39.45	-13.50	25.95	40.00	-14.05	QP		
2		120.4348	50.86	-14.36	36.50	43.50	-7.00	QP		
3	*	155.7051	53.64	-13.92	39.72	43.50	-3.78	QP		
4		252.3944	50.66	-11.18	39.48	46.00	-6.52	QP		
5		379.7475	43.22	-7.13	36.09	46.00	-9.91	QP		
6		760.0370	39.44	0.54	39.98	46.00	-6.02	QP		

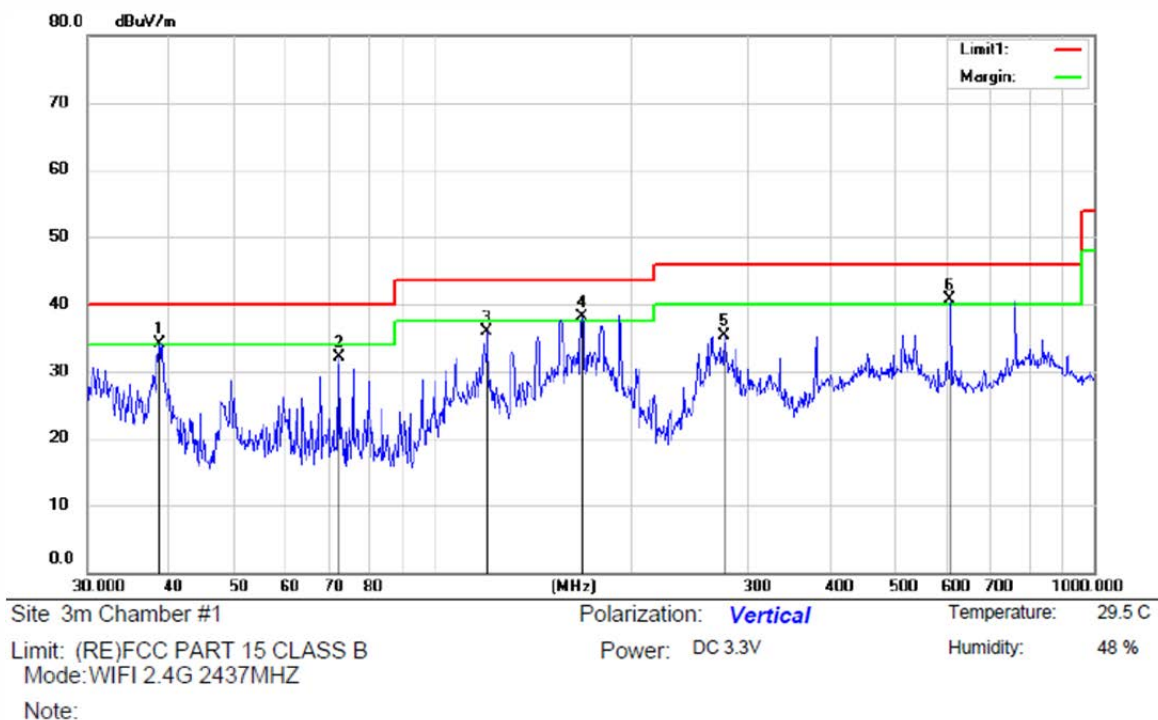

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	!	38.4978	47.22	-13.20	34.02	40.00	-5.98	QP		
2		72.1160	45.64	-13.60	32.04	40.00	-7.96	QP		
3		120.8580	50.19	-14.36	35.83	43.50	-7.67	QP		
4	!	168.2661	52.12	-14.10	38.02	43.50	-5.48	QP		
5		276.4870	45.31	-10.06	35.25	46.00	-10.75	QP		
6	*	606.9880	43.44	-2.75	40.69	46.00	-5.31	QP		

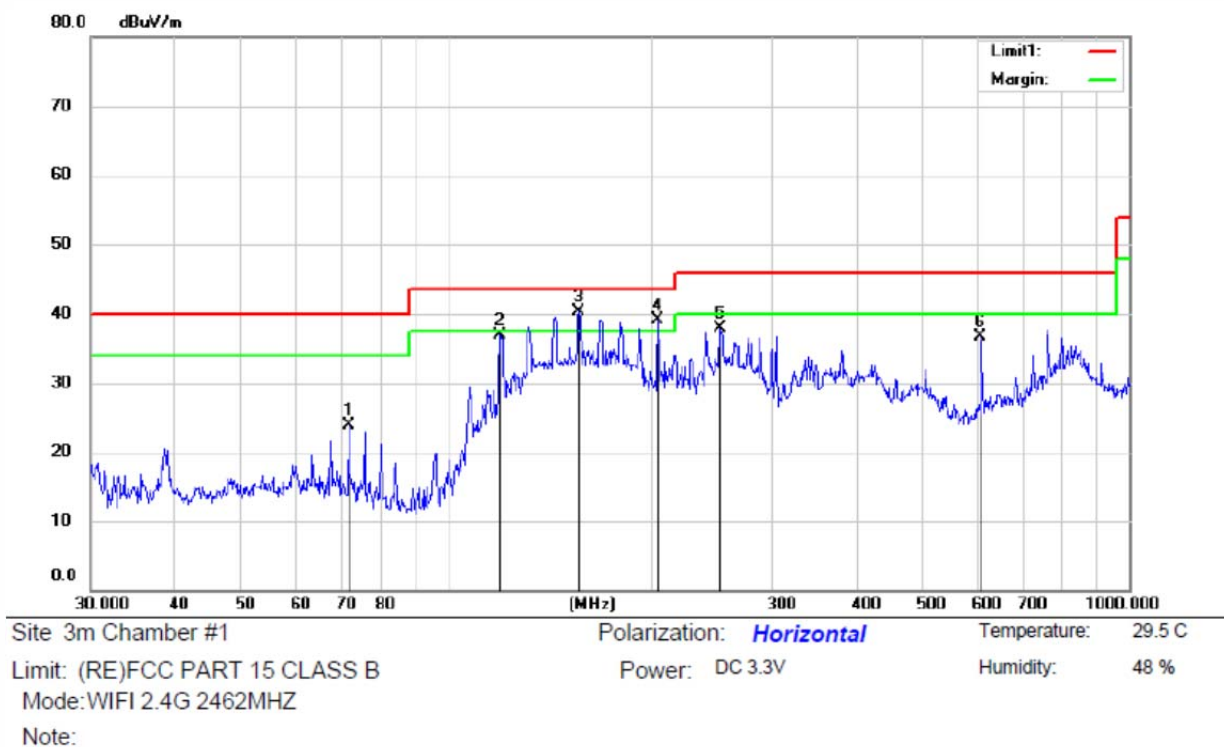


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		71.6747	37.35	-13.50	23.85	40.00	-16.15			QP	
2		119.8030	51.22	-14.34	36.88	43.50	-6.62			QP	
3	*	155.9101	54.27	-13.91	40.36	43.50	-3.14			QP	
4	!	203.8800	52.71	-13.68	39.03	43.50	-4.47			QP	
5		251.7315	49.20	-11.20	38.00	46.00	-8.00			QP	
6		606.9880	39.48	-2.75	36.73	46.00	-9.27			QP	

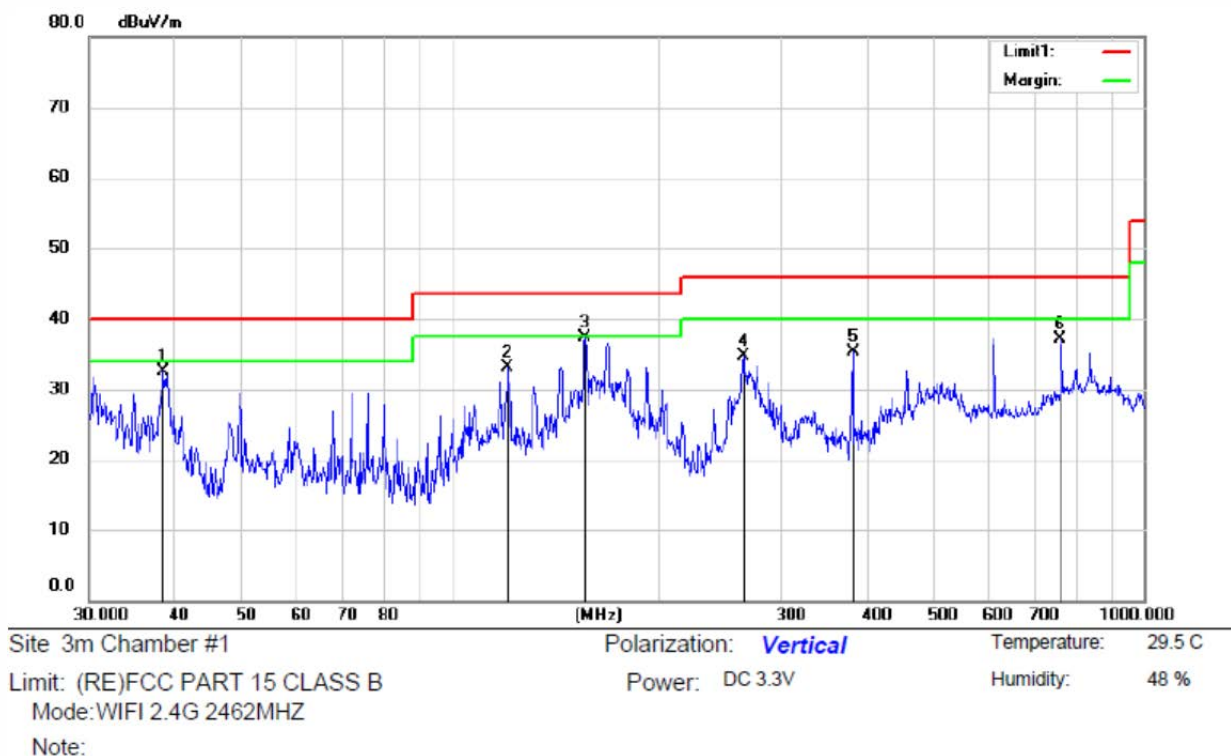


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		38.4640	45.79	-13.21	32.58	40.00	-7.42	QP		
2		120.9110	47.52	-14.36	33.16	43.50	-10.34	QP		
3	*	155.9101	51.19	-13.91	37.28	43.50	-6.22	QP		
4		264.2820	45.55	-10.81	34.74	46.00	-11.26	QP		
5		380.5808	42.41	-7.10	35.31	46.00	-10.69	QP		
6		758.7056	36.67	0.48	37.15	46.00	-8.85	QP		


Antenna 2:

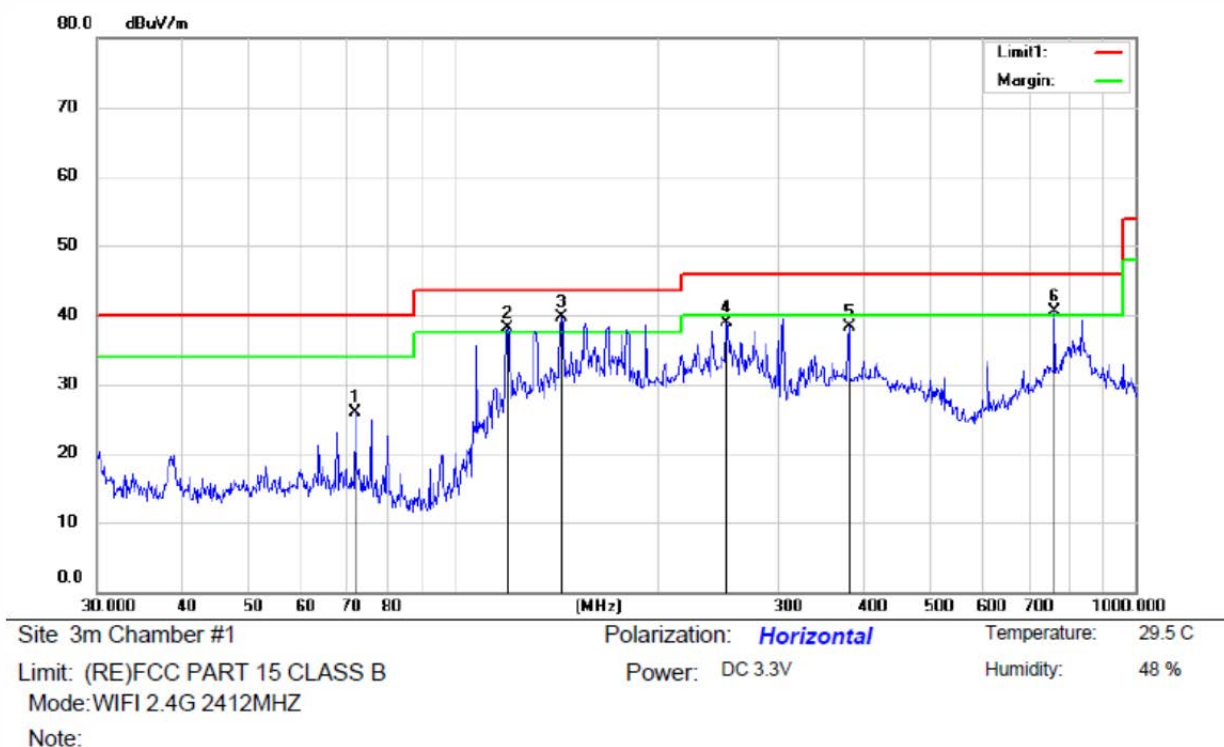


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		71.6747	39.43	-13.50	25.93	40.00	-14.07	QP		
2	!	119.9607	52.43	-14.35	38.08	43.50	-5.42	QP		
3	*	143.8925	53.88	-14.25	39.63	43.50	-3.87	QP		
4		251.5110	50.11	-11.20	38.91	46.00	-7.09	QP		
5		380.9146	45.31	-7.08	38.23	46.00	-7.77	QP		
6	!	761.7045	39.92	0.59	40.51	46.00	-5.49	QP		

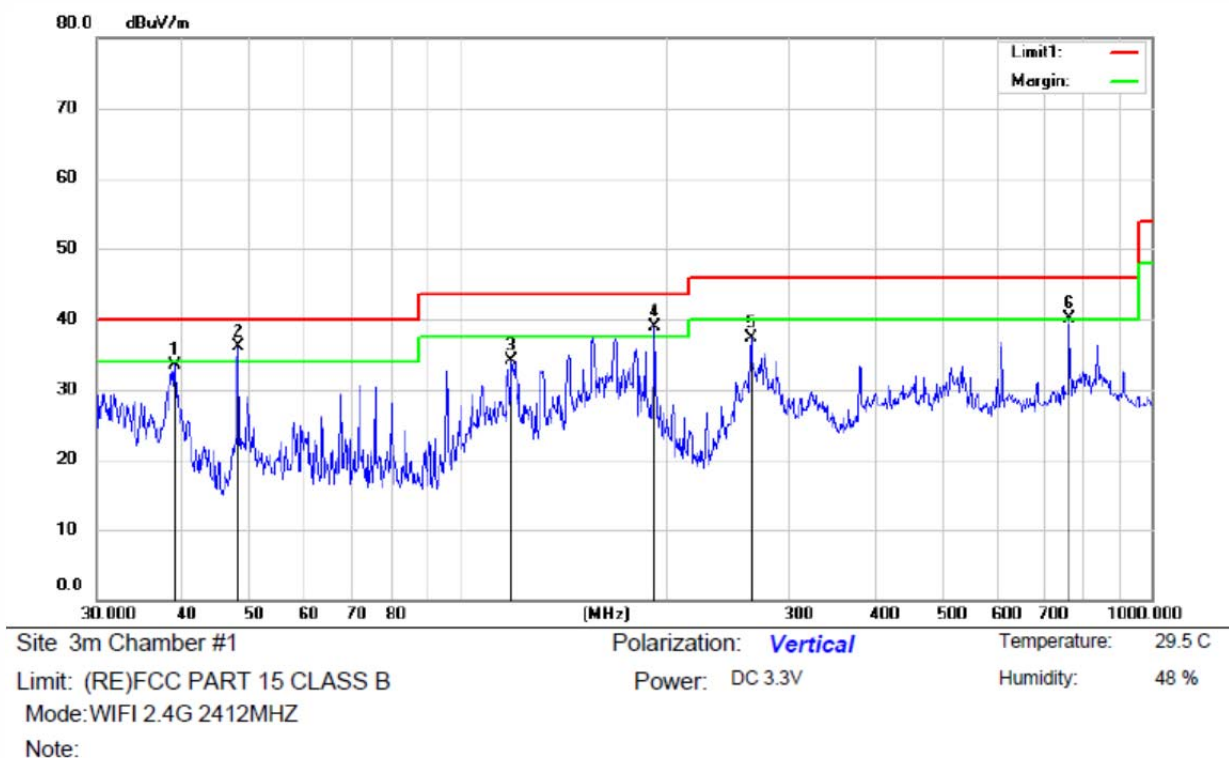


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		38.9220	46.70	-13.12	33.58	40.00	-6.42	QP		
2	*	47.9940	48.57	-12.52	36.05	40.00	-3.95	QP		
3		119.1223	48.41	-14.32	34.09	43.50	-9.41	QP		
4	!	191.9131	52.59	-13.74	38.85	43.50	-4.65	QP		
5		264.3977	48.01	-10.79	37.22	46.00	-8.78	QP		
6	!	761.7045	39.46	0.59	40.05	46.00	-5.95	QP		

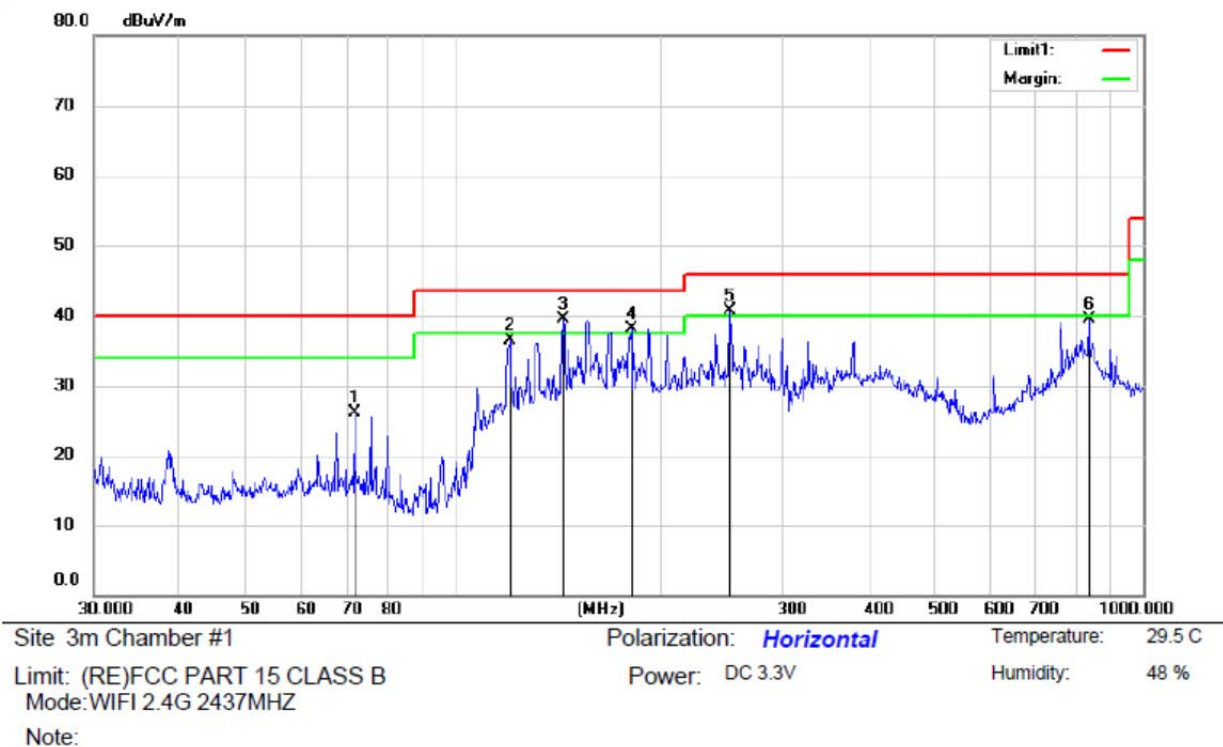


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		71.7061	39.57	-13.51	26.06	40.00	-13.94	QP		
2		120.2766	50.79	-14.36	36.43	43.50	-7.07	QP		
3	*	143.8925	53.73	-14.25	39.48	43.50	-4.02	QP		
4	!	180.8865	52.17	-14.00	38.17	43.50	-5.33	QP		
5	!	251.7315	51.84	-11.20	40.64	46.00	-5.36	QP		
6		834.7794	36.93	2.64	39.57	46.00	-6.43	QP		

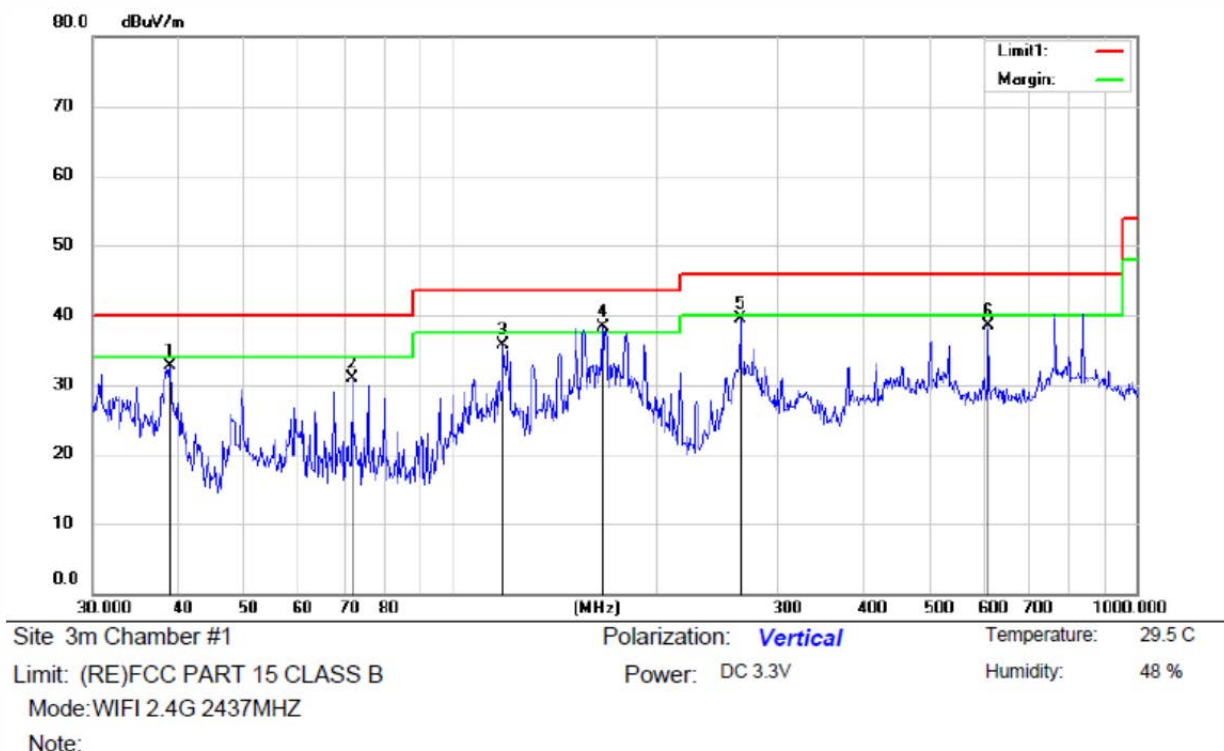

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Table	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		38.8878	45.76	-13.12	32.64	40.00	-7.36	QP		
2		71.7061	44.34	-13.51	30.83	40.00	-9.17	QP		
3		119.1745	50.13	-14.33	35.80	43.50	-7.70	QP		
4	*	166.3594	52.53	-14.20	38.33	43.50	-5.17	QP		
5		264.3977	50.28	-10.79	39.49	46.00	-6.51	QP		
6		609.3872	41.22	-2.73	38.49	46.00	-7.51	QP		

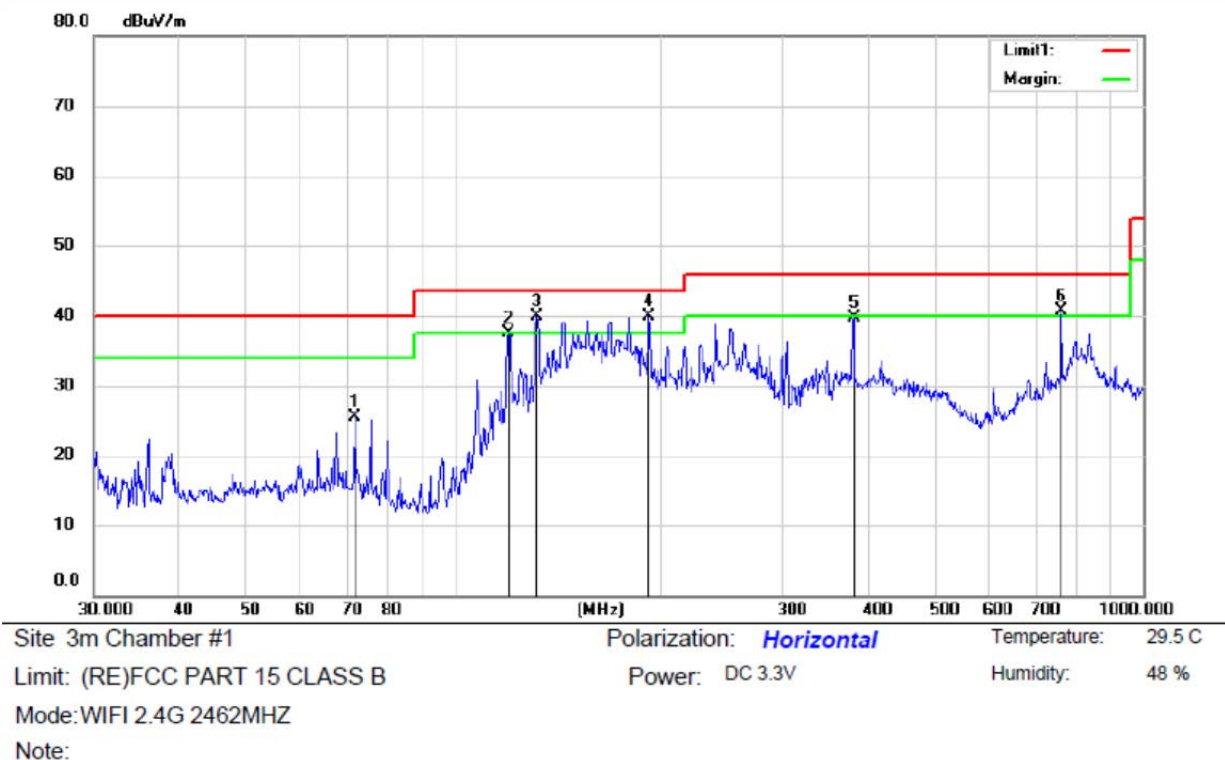


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		71.6747	39.10	-13.50	25.60	40.00	-14.40	QP		
2		120.0133	51.78	-14.35	37.43	43.50	-6.07	QP		
3	!	132.1626	54.03	-14.22	39.81	43.50	-3.69	QP		
4	*	192.1657	53.70	-13.72	39.98	43.50	-3.52	QP		
5		380.5808	46.86	-7.10	39.76	46.00	-6.24	QP		
6	!	761.3706	40.13	0.59	40.72	46.00	-5.28	QP		

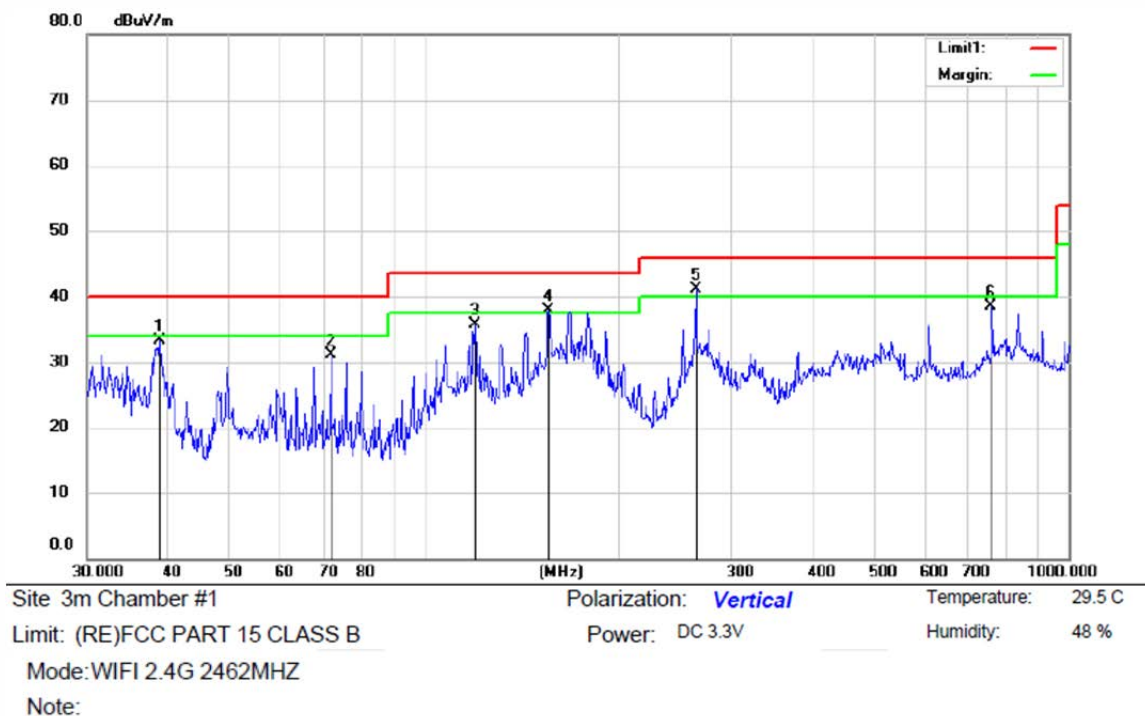


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		38.9220	46.34	-13.12	33.22	40.00	-6.78	QP		
2		71.6747	44.51	-13.50	31.01	40.00	-8.99	QP		
3		120.1185	50.00	-14.35	35.65	43.50	-7.85	QP		
4	!	155.9101	51.83	-13.91	37.92	43.50	-5.58	QP		
5	*	263.8190	52.03	-10.83	41.20	46.00	-4.80	QP		
6		760.0370	38.03	0.54	38.57	46.00	-7.43	QP		


Antenna 3:

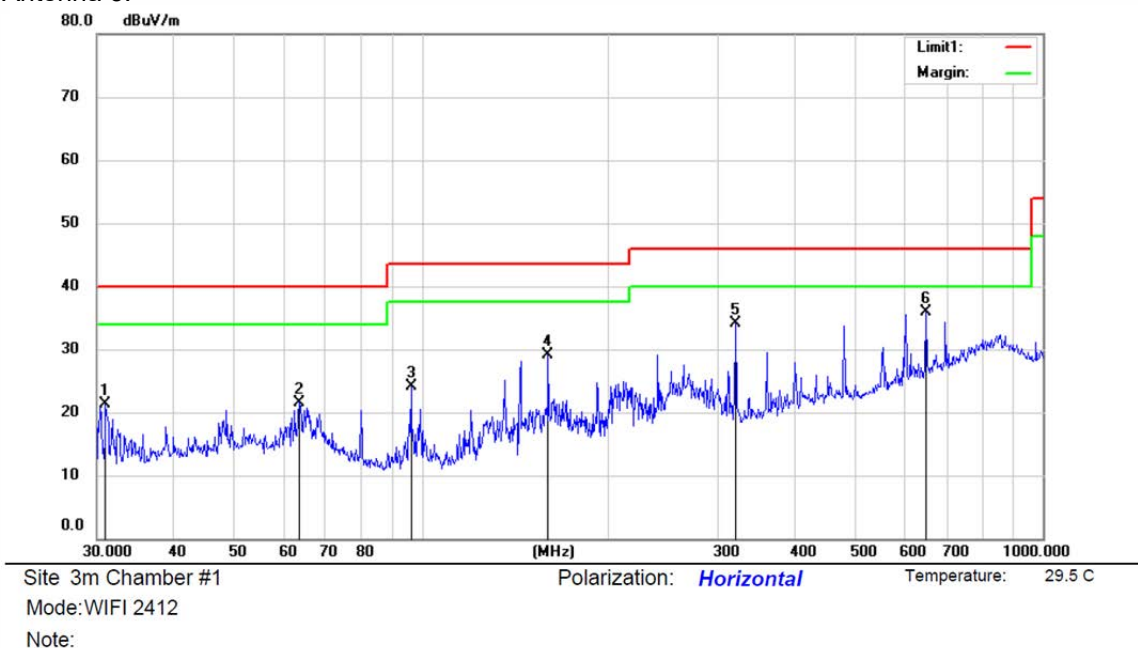


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
							Detector		Comment
1		31.0298	35.91	-14.52	21.39	40.00	-18.61	QP	
2		63.6471	33.68	-12.08	21.60	40.00	-18.40	QP	
3		96.2672	38.69	-14.67	24.02	43.50	-19.48	QP	
4		159.9947	43.04	-13.88	29.16	43.50	-14.34	QP	
5		320.0772	42.89	-8.74	34.15	46.00	-11.85	QP	
6	*	649.9445	37.68	-1.79	35.89	46.00	-10.11	QP	

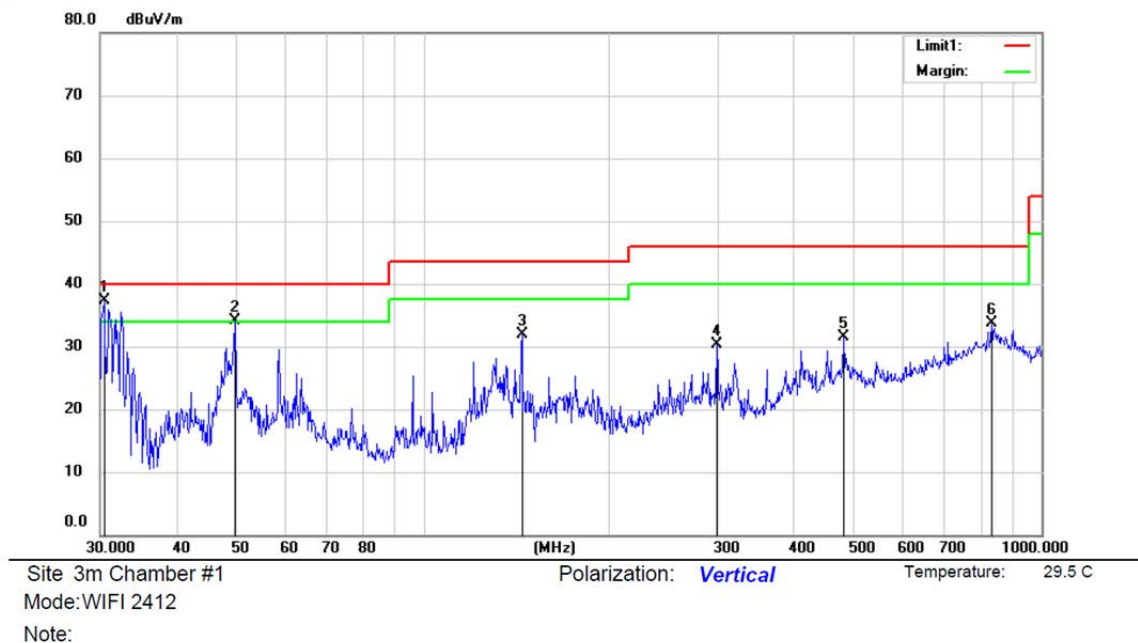


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	30.4238	51.78	-14.56	37.22	40.00	-2.78	QP		
2	!	49.5762	46.14	-12.11	34.03	40.00	-5.97	QP		
3		144.3980	46.17	-14.22	31.95	43.50	-11.55	QP		
4		298.6606	39.38	-9.05	30.33	46.00	-15.67	QP		
5		480.1065	36.99	-5.48	31.51	46.00	-14.49	QP		
6		831.4928	31.14	2.50	33.64	46.00	-12.36	QP		

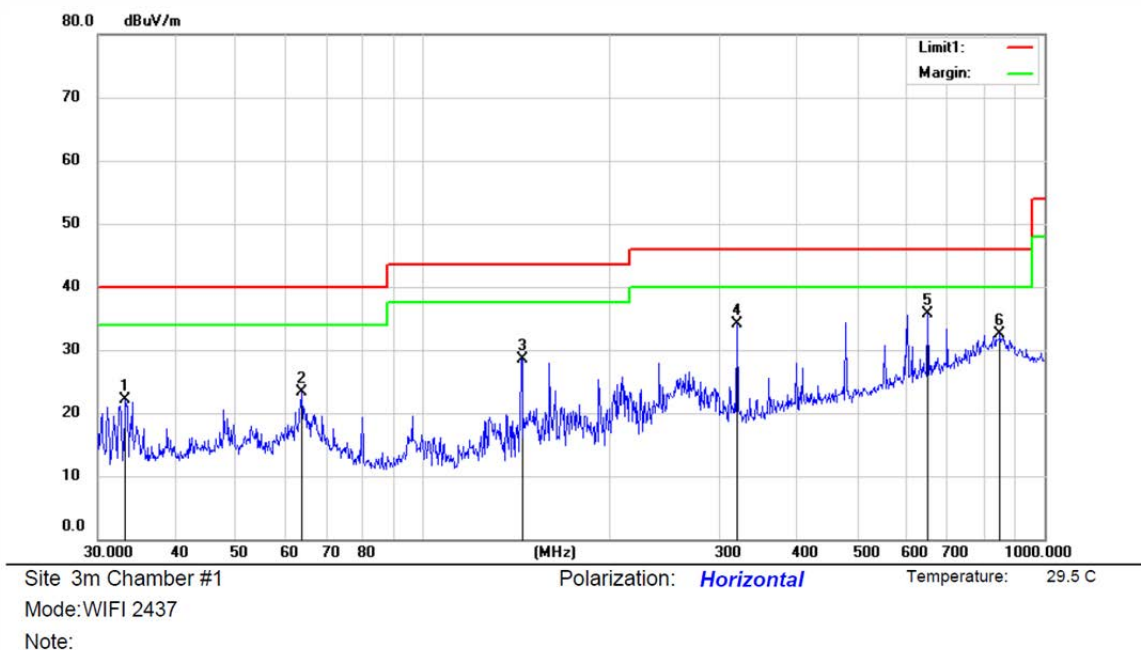


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		33.2112	36.46	-14.27	22.19	40.00	-17.81	QP		
2		63.8987	35.46	-12.08	23.38	40.00	-16.62	QP		
3		144.3980	42.80	-14.22	28.58	43.50	-14.92	QP		
4		320.0772	42.82	-8.74	34.08	46.00	-11.92	QP		
5	*	649.6597	37.50	-1.80	35.70	46.00	-10.30	QP		
6		850.2896	29.68	2.91	32.59	46.00	-13.41	QP		

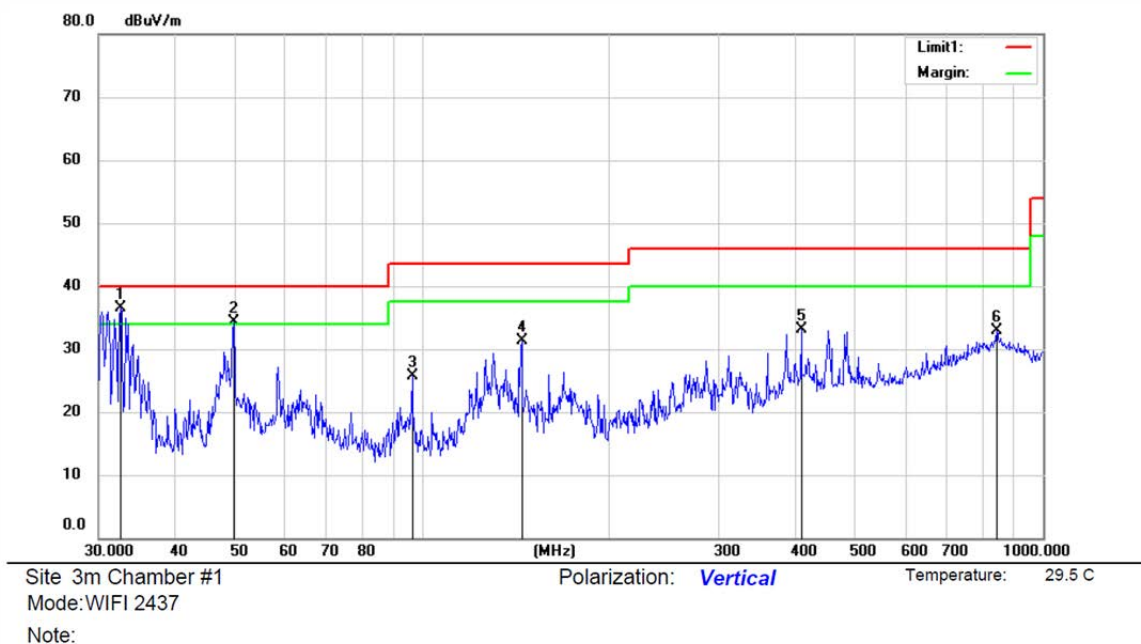

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	32.6054	50.88	-14.37	36.51	40.00	-3.49	QP	
2	!	49.5545	46.35	-12.11	34.24	40.00	-5.76	QP	
3		96.3517	40.28	-14.67	25.61	43.50	-17.89	QP	
4		144.3348	45.50	-14.23	31.27	43.50	-12.23	QP	
5		408.0507	39.25	-6.24	33.01	46.00	-12.99	QP	
6		842.4988	29.95	2.88	32.83	46.00	-13.17	QP	

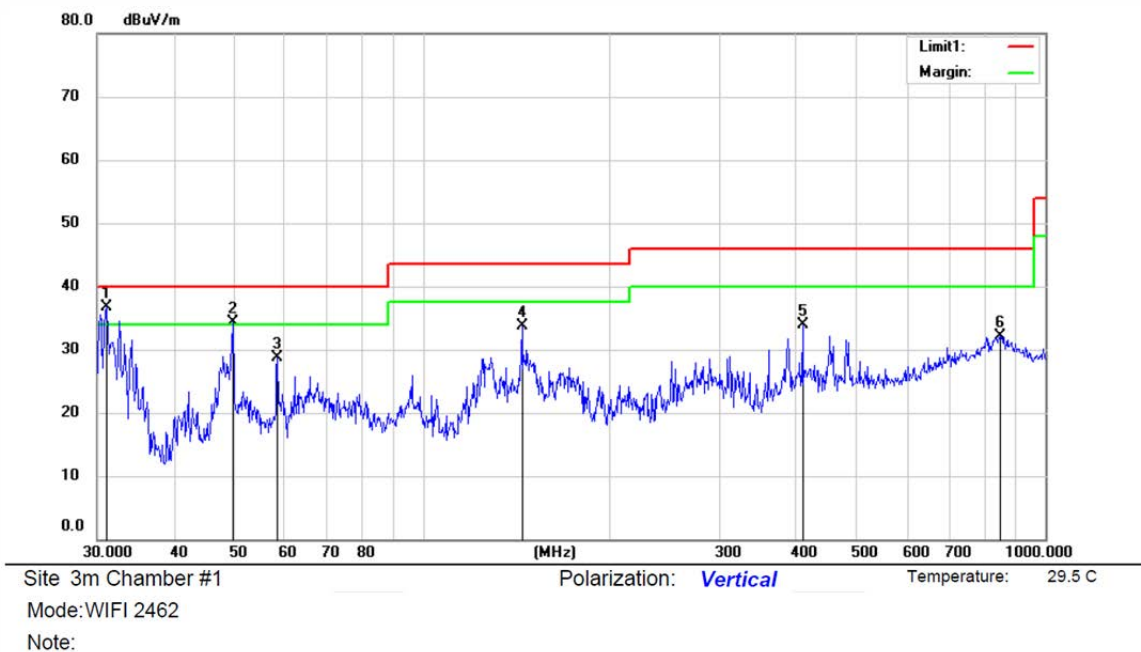

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	31.0706	51.28	-14.52	36.76	40.00	-3.24	QP		
2	!	49.5545	46.35	-12.11	34.24	40.00	-5.76	QP		
3		58.4331	40.71	-12.07	28.64	40.00	-11.36	QP		
4		144.3980	47.86	-14.22	33.64	43.50	-9.86	QP		
5		408.0507	40.23	-6.24	33.99	46.00	-12.01	QP		
6		845.4583	29.15	2.89	32.04	46.00	-13.96	QP		

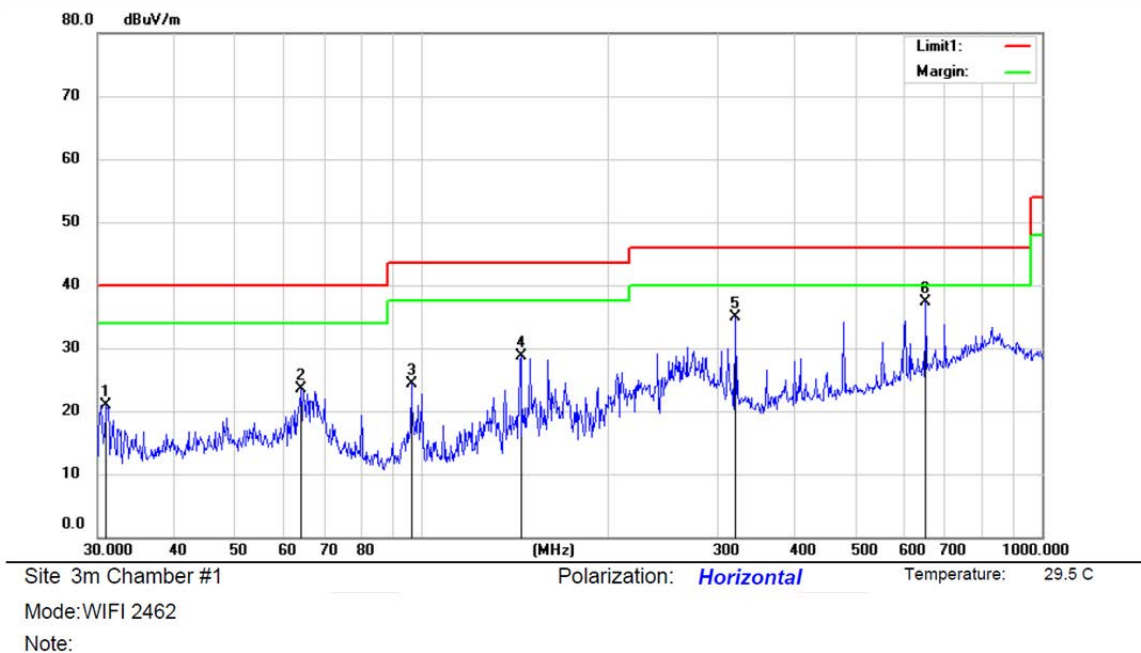

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		31.0570	35.37	-14.52	20.85	40.00	-19.15	QP		
2		63.8427	35.58	-12.08	23.50	40.00	-16.50	QP		
3		96.1830	38.88	-14.67	24.21	43.50	-19.29	QP		
4		144.3980	42.83	-14.22	28.61	43.50	-14.89	QP		
5		320.0772	43.59	-8.74	34.85	46.00	-11.15	QP		
6	*	649.9445	39.03	-1.79	37.24	46.00	-8.76	QP		

8.6 CONDUCTED EMISSIONS TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration


Test according to clause 7.3conducted emission test setup

8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

PASS

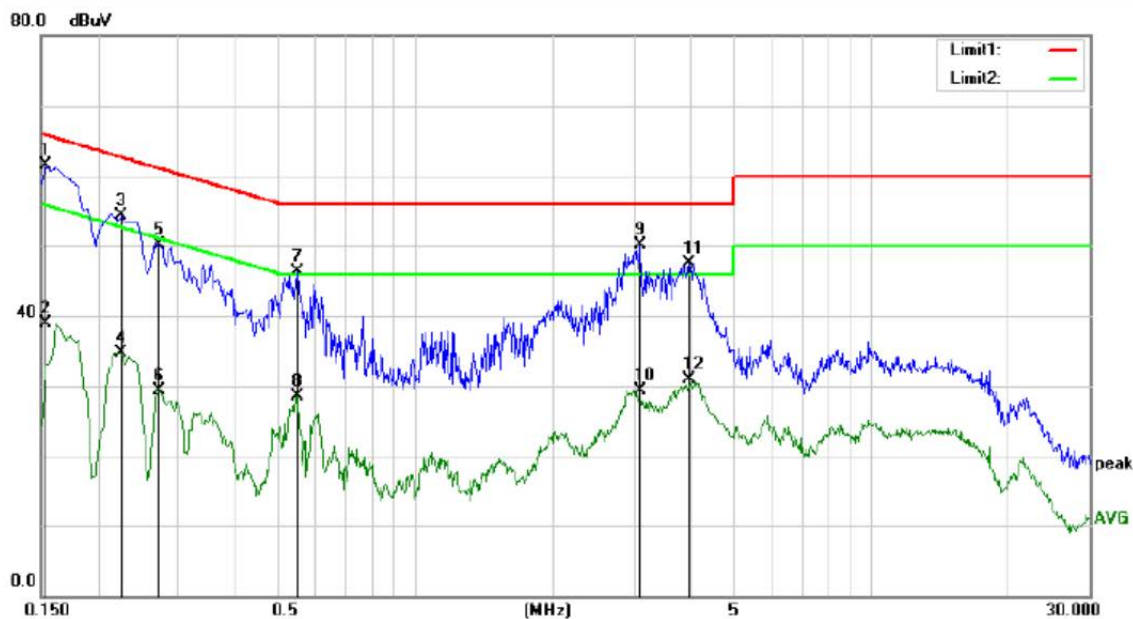

Site Conduction #1

Phase: **N**

Temperature: 19.4

Limit: (CE)FCC PART 15 class B_QP


Power: AC120V/60Hz

Humidity: 37 %

Mode: WIFI Mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1540	52.12	9.44	61.56	65.78	-4.22	QP	
2		0.1540	29.38	9.44	38.82	55.78	-16.96	AVG	
3		0.2260	44.88	9.40	54.28	62.60	-8.32	QP	
4		0.2260	25.38	9.40	34.78	52.60	-17.82	AVG	
5		0.2740	40.69	9.32	50.01	61.00	-10.99	QP	
6		0.2740	20.02	9.32	29.34	51.00	-21.66	AVG	
7		0.5500	37.12	9.28	46.40	56.00	-9.60	QP	
8		0.5500	19.29	9.28	28.57	46.00	-17.43	AVG	
9		3.1020	40.26	9.82	50.08	56.00	-5.92	QP	
10		3.1020	19.42	9.82	29.24	46.00	-16.76	AVG	
11		3.9700	37.75	9.82	47.57	56.00	-8.43	QP	
12		3.9700	21.17	9.82	30.99	46.00	-15.01	AVG	

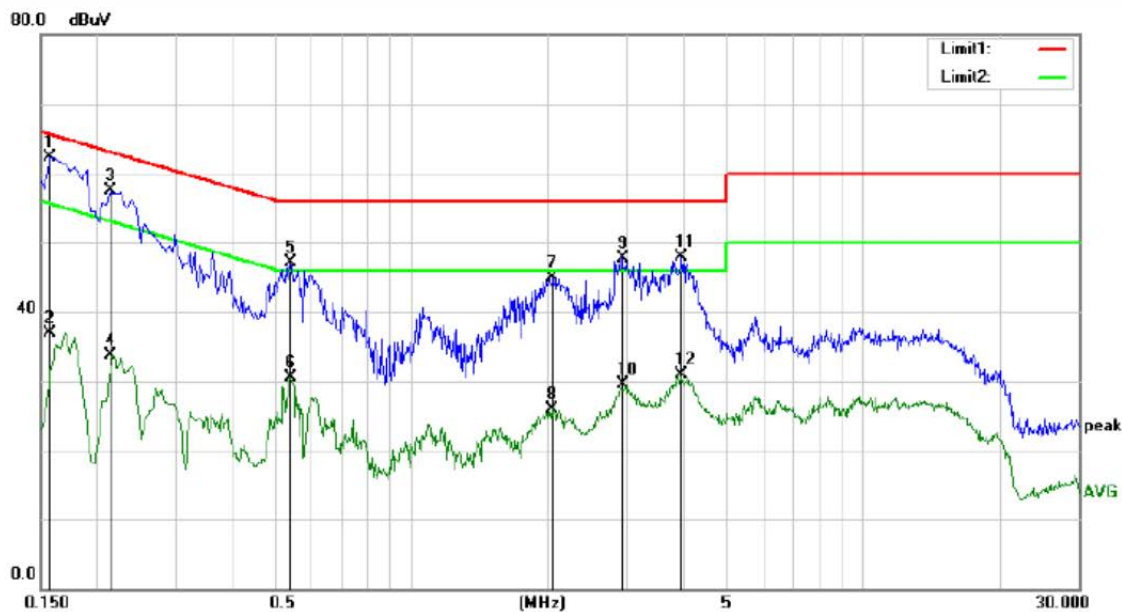

Site Conduction #1

Phase: **L1**

Temperature: 19.4

Limit: (CE)FCC PART 15 class B_QP

Power: AC120V/60Hz

Humidity: 37 %

Mode: WIFI Mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1580	52.94	9.44	62.38	65.57	-3.19	QP	
2		0.1580	27.46	9.44	36.90	55.57	-18.67	AVG	
3		0.2140	48.06	9.42	57.48	63.05	-5.57	QP	
4		0.2140	24.28	9.42	33.70	53.05	-19.35	AVG	
5		0.5380	37.81	9.27	47.08	56.00	-8.92	QP	
6		0.5380	21.23	9.27	30.50	46.00	-15.50	AVG	
7		2.0540	35.09	9.81	44.90	56.00	-11.10	QP	
8		2.0540	16.17	9.81	25.98	46.00	-20.02	AVG	
9		2.9180	37.98	9.82	47.80	56.00	-8.20	QP	
10		2.9180	19.77	9.82	29.59	46.00	-16.41	AVG	
11		3.9500	38.16	9.82	47.98	56.00	-8.02	QP	
12		3.9500	21.00	9.82	30.82	46.00	-15.18	AVG	

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

PASS.

- The EUT has 3 antennas: One PCB antenna, two IPEX connector antenna; their antenna gains are both 2.0 dBi;

Note: ☒ Antenna uses a permanently attached antenna which is not replaceable.
☒ Not using a standard antenna jack or electrical connector for antenna replacement
☐ The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos.

Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

----- END OF REPORT -----