


EUT:	LED Playback Control Processor	Polarity:	NEUTRAL
Model:	TU20 Pro	Power Supply:	ADS-36MG-12
Mode:	Mode 1	Voltage:	120V/60Hz
Environment:	Temp: 24°C; Humi:52%	Engineer:	Amos Xia
Remark:	Transmit by 802.11ac20 - CDD at Channel 5825MHz		

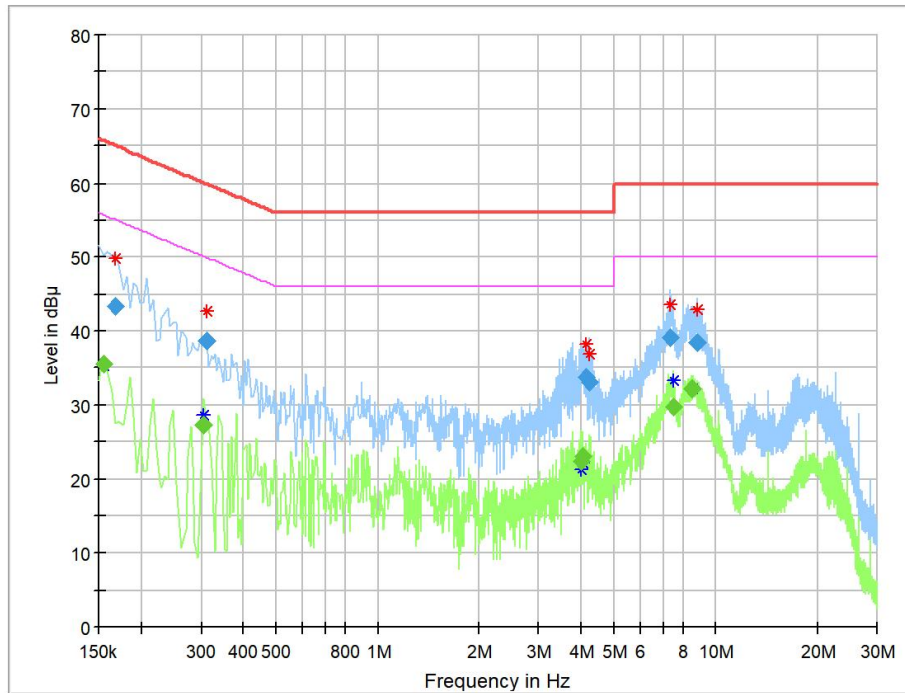

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.154500	---	35.56	55.75	20.20	100.0	9.000	N	ON	9.6
0.168000	43.44	---	65.06	21.62	100.0	9.000	N	ON	9.6
0.303000	---	27.18	50.16	22.98	100.0	9.000	N	ON	9.6
0.312000	38.70	---	59.92	21.21	100.0	9.000	N	ON	9.6
3.997500	---	22.33	46.00	23.67	100.0	9.000	N	ON	9.6
4.038000	---	23.09	46.00	22.91	100.0	9.000	N	ON	9.7
4.137000	33.75	---	56.00	22.25	100.0	9.000	N	ON	9.7
4.231500	33.16	---	56.00	22.84	100.0	9.000	N	ON	9.7
7.372500	39.04	---	60.00	20.96	100.0	9.000	N	ON	9.7
7.480500	---	29.72	50.00	20.28	100.0	9.000	N	ON	9.7
8.470500	---	32.19	50.00	17.81	100.0	9.000	N	ON	9.7
8.754000	38.42	---	60.00	21.58	100.0	9.000	N	ON	9.7

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **LED Playback Control Processor** is in compliance with Part 15E of the FCC Rules.

_____ The End _____