



FCC Test Report

FCC ID	:	SUFTRKRF10
Equipment	:	2.4G RF MODULE_BL10
Model No.	:	TRK-RF-10
Brand Name	:	DIGI
Applicant	:	DIGI SINGAPORE PTE LTD
Address	:	4 Leng Kee Rd, #05-03/04/05&11, SIS Building, Singapore 159088
Standard	:	47 CFR FCC Part 15.249
Received Date	:	Nov. 21, 2022
Tested Date	:	Nov. 23 ~ Dec. 01, 2022

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:

ong Chen

Along Cheid/ Assistant Manager

Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	.5
1.1	Information	.5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	
1.4	The Equipment List	.8
1.5	Test Standards	.9
1.6	Deviation from Test Standard and Measurement Procedure	
1.7	Measurement Uncertainty	.9
2	TEST CONFIGURATION1	0
2.1	Testing Facility1	0
2.2	The Worst Test Modes and Channel Details1	0
3	TRANSMITTER TEST RESULTS1	1
3.1	Unwanted Emission1	
3.2	20dB and Occupied Bandwidth1	
3.3	AC Power Line Conducted Emissions1	15
4	TEST LABORATORY INFORMATION1	6

Appendix A. Unwanted Emission

Appendix B. 20dB and Occupied Bandwidth

Appendix C. AC Power Line Conducted Emissions



Release Record

Report No.	Version	Description	Issued Date
FR2N2105	Rev. 01	Initial issue	Jan. 03, 2023



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 19.326MHz 38.88 (Margin -11.12dB) - AV	Pass
15.249(a)	Field Strength of Fundamental	Meet the requirement of limit	Pass
15.249(a)(d)	Field Strength of Harmonics and Emissions Radiated outside of the Specified Frequency Bands	Meet the requirement of limit	Pass
15.215(c)	20dB bandwidth	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information							
Frequency Range (MHz) Modulation Ch. Freq. (MHz) Channel Number Data Rate							
2402-2480	GFSK	2402-2480	0-78 [79]	250 KBPS			

1.1.2 Antenna Details

Ant. No.	Туре	Connector	Gain (dBi)	Remarks
1	CHIP	PCB	-0.61	

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Type	3Vdc from battery

1.1.4 Accessories

N/A



1.1.5 Channel List

	Frequency	band (MHz)			2400~2	2483.5	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

1.1.6 Test Tool and Duty Cycle

Test Tool	SmartRF, V1.16.1				
Duty Cycle and Duty Easter	Duty Cycle (%)	Duty Factor (dB)			
Duty Cycle and Duty Factor	42.77	3.69			

1.1.7 Power Index of Test Tool


Test Frequency (MHz)						
2402 2440 2480						
Default	Default	Default				



1.2 Local Support Equipment List

	Support Equipment List							
No.	No. Equipment Brand Model FCC ID Remarks							
1	DC Power Supply	GWINSTEK	GPC-60300					
2	Notebook	DELL	Latitude 5400	DoC				
3	Evaluation Board	Texas instrument	SmartRF05EB		Provided by applicant.			

1.3 Test Setup Chart

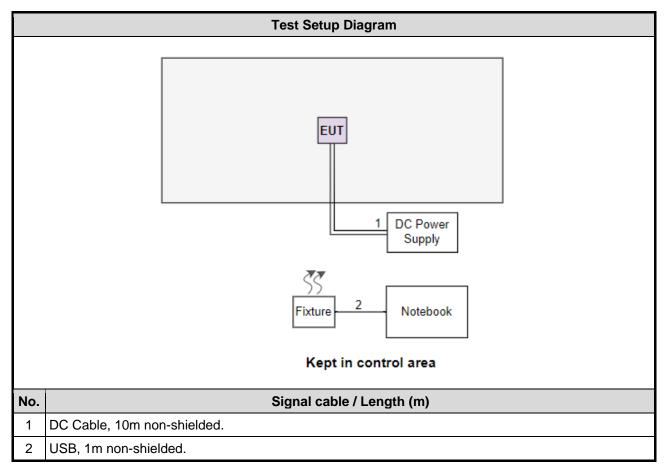



The Equipment List 1.4

Test Item	Conducted Emission								
Test Site	Conduction room 1 / (CO01-WS)								
Tested Date	Dec. 01, 2022								
Instrument	Brand	Brand Model No. Serial No. Calibration Date Calibration Until							
Receiver	R&S	ESR3	101658	Feb. 16, 2022	Feb. 15, 2023				
LISN	R&S	ENV216	101579	Apr. 21, 2022	Apr. 20, 2023				
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127667	Jan .07, 2022	Jan .06, 2023				
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 17, 2022	Oct. 16, 2023				
50 ohm terminal (Support Unit)	NA	50	01	May 10, 2022	May 09, 2023				
Measurement Software									
Note: Calibration Inter	rval of instruments liste	d above is one year.							

Test Item	Radiated Emission				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Nov. 23 ~ Nov. 25, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 15, 2022	Mar. 14, 2023
Spectrum Analyzer	R&S	FSV40	101499	Mar. 08, 2022	Mar. 07, 2023
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 01, 2022	Oct. 31, 2023
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jun. 28, 2022	Jun. 27, 2023
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 20, 2021	Dec. 19, 2022
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Jan. 11, 2022	Jan. 10, 2023
Preamplifier	EMC	EMC02325	980187	Jul. 16, 2022	Jul. 15, 2023
Preamplifier	EMC	EMC184045SE	980897	Aug. 01, 2022	Jul. 31, 2023
Preamplifier	EMC	EMC184045SE	980903	Jul. 16, 2022	Jul. 15, 2023
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 04, 2022	Oct. 03, 2023
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Sep. 23, 2022	Sep. 22, 2023
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 23, 2022	Sep. 22, 2023
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 23, 2022	Sep. 22, 2023
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 23, 2022	Sep. 22, 2023
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 23, 2022	Sep. 22, 2023
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					



1.5 Test Standards

47 CFR FCC Part 15.249 ANSI C63.10-2013

1.6 Deviation from Test Standard and Measurement Procedure

None

1.7 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty		
Parameters	Uncertainty	
Bandwidth	±34.130 Hz	
AC conducted emission	±2.92 dB	
Unwanted Emission ≤ 1GHz	±3.96 dB	
Unwanted Emission > 1GHz	±4.51 dB	



2 Test Configuration

2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
Test Site	03CH03-WS
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)
CCC Designation No.	TW0000

FCC Designation No.: TW0009

➤ FCC site registration No.: 207696

➢ ISED#: 10807C

➤ CAB identifier: TW2732

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Test Configuration	
AC Power Line Conducted Emissions	GFSK	2440	-	
Field Strength of Fundamental	GFSK	2402, 2440, 2480	-	
Unwanted Emissions ≤ 1GHz	GFSK	2440	-	
Unwanted Emissions > 1GHz	GFSK	2402, 2440, 2480	-	
20dB bandwidth	GFSK	2402, 2440, 2480	-	
NOTE:				

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.



3 Transmitter Test Results

3.1 Unwanted Emission

This section includes field strength of fundamental, field strength of harmonics and emissions radiated outside of the operating frequency bands.

3.1.1 Limit of field strength of fundamental and field strength of harmonics

Fundamental Frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
2400–2483.5 MHz	50	500

3.1.2 Limit of Unwanted Emissions

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in below table, whichever is the lesser attenuation.

Radiated emission limits			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.



3.1.3 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
- Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


- Radiated emission below 1GHz
 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission
- 2. Radiated emission above 1GHz / Peak value except fundamental RBW=1MHz, VBW=3MHz and Peak detector
- Radiated emission above 1GHz / Average value for field strength of fundamental and harmonics The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula:

 $20\log (\text{Duty cycle}) = 20\log \frac{0.7 \text{x3ms}}{100 \text{ ms}} = -33.56 \text{dB}$

- 4. Radiated emission above 1GHz / Average value for other emissions RBW=1MHz, VBW=1/T and Peak detector
- 5. Radiated emission Peak value for fundamental RBW=2MHz, VBW=10MHz and Peak detector



3.1.4 Test Setup

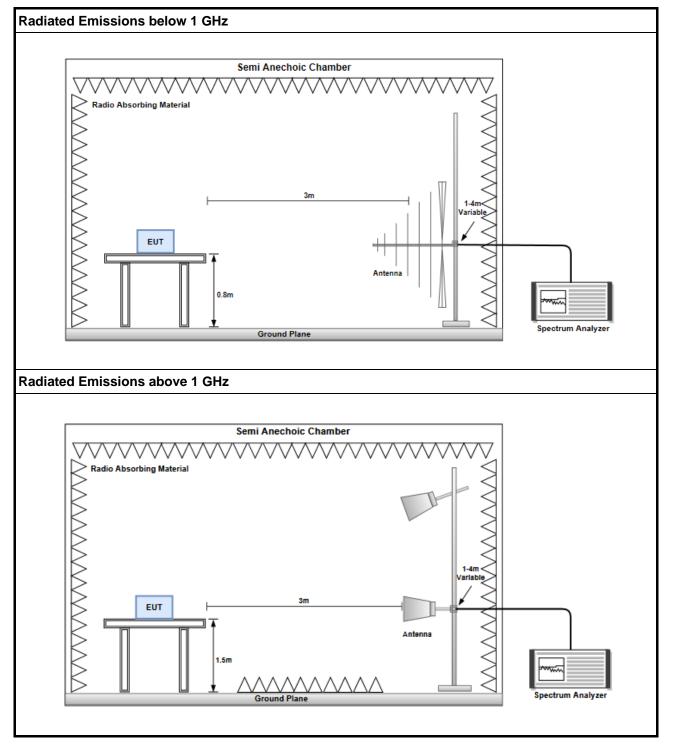

3.1.5 Test Results

Refer to Appendix A.




3.2 20dB and Occupied Bandwidth

3.2.1 Test Procedures

- 1. Set resolution bandwidth (RBW) = 10 kHz, Video bandwidth = 30 kHz.
- 2. Detector = Peak(20 dB bandwidth) / Sample(Occupied bandwidth), Trace mode = max hold
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20dB relative to the maximum level measured in the fundamental emission.
- 5. Use the occupied measurement function of specturm analyzer to measure 99% occupied bandwidth.

3.2.2 Test Setup



3.2.3 Test Results

Ambient Condition24°C / 66%Tested ByAkun Chung
--

Refer to Appendix B.



3.3 AC Power Line Conducted Emissions


3.3.1 Limit of AC Power Line Conducted Emissions

Conducted Emissions Limit			
Frequency Emission (MHz)	Quasi-Peak	Average	
0.15-0.5	66 - 56 *	56 - 46 *	
0.5-5	56	46	
5-30	60	50	
Note 1: * Decreases with the logarithm of the frequency.			

3.3.2 Test Procedures

- The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical 1. conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- This measurement was performed with AC 120V / 60Hz. 4.

3.3.3 Test Setup

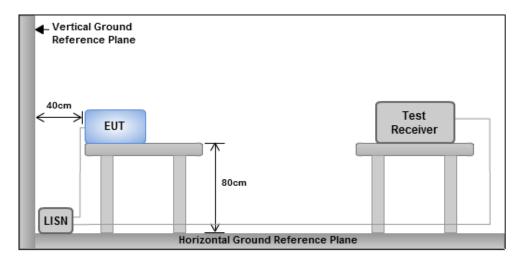

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.3.4 Test Results

Refer to Appendix C.



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <u>http://www.icertifi.com.tw</u>.

Linkou

Tel: 886-2-2601-1640 No.30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan (R.O.C.)

Kwei Shan

Tel: 886-3-271-8666 No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.) No.2-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

Kwei Shan Site II

Tel: 886-3-271-8640 No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)


If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666 Fax: 886-3-318-0345 Email: ICC_Service@icertifi.com.tw


—END—



Unwanted Emissions (Below 1GHz)

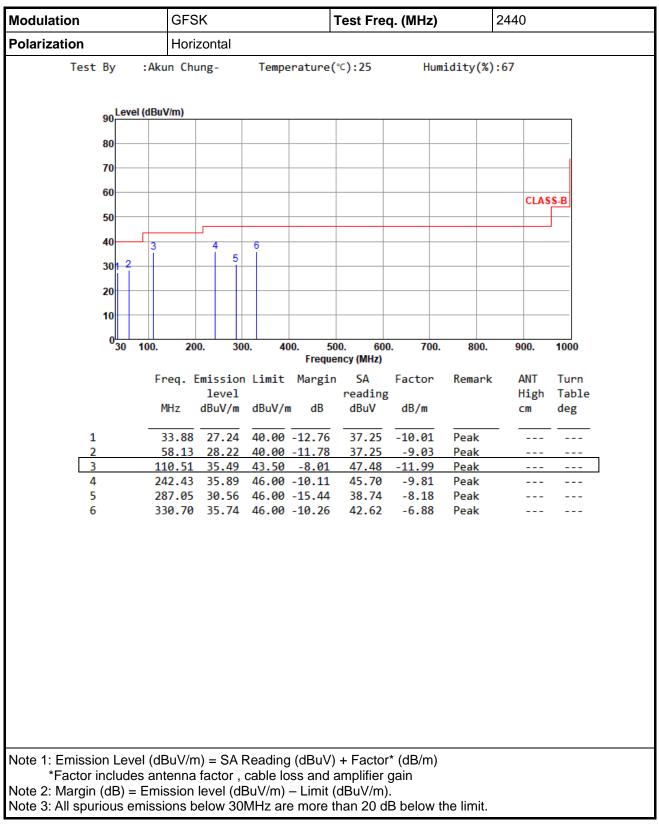




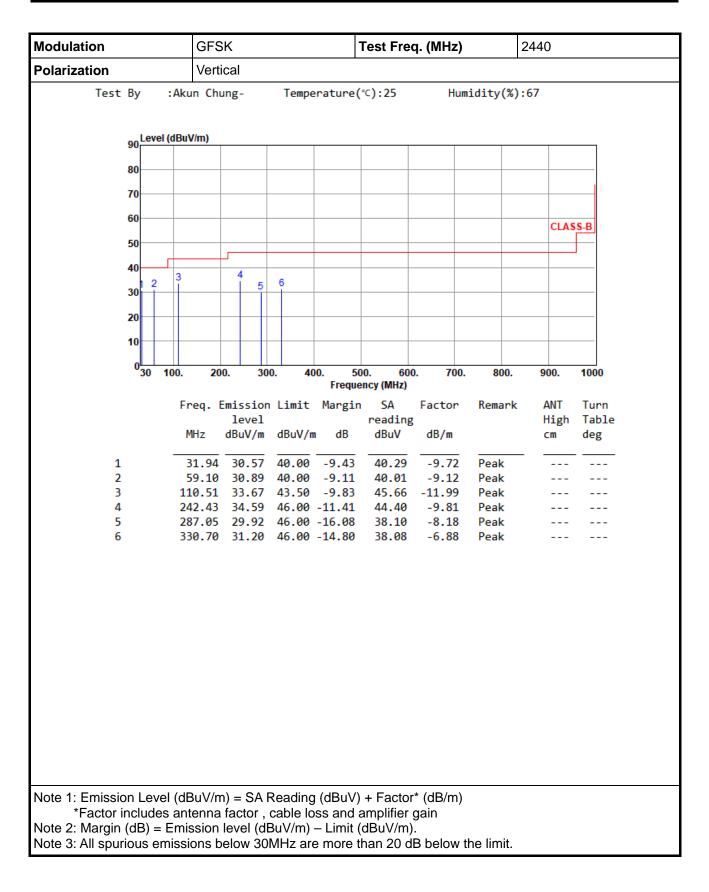





Unwanted Emissions (Above 1GHz)

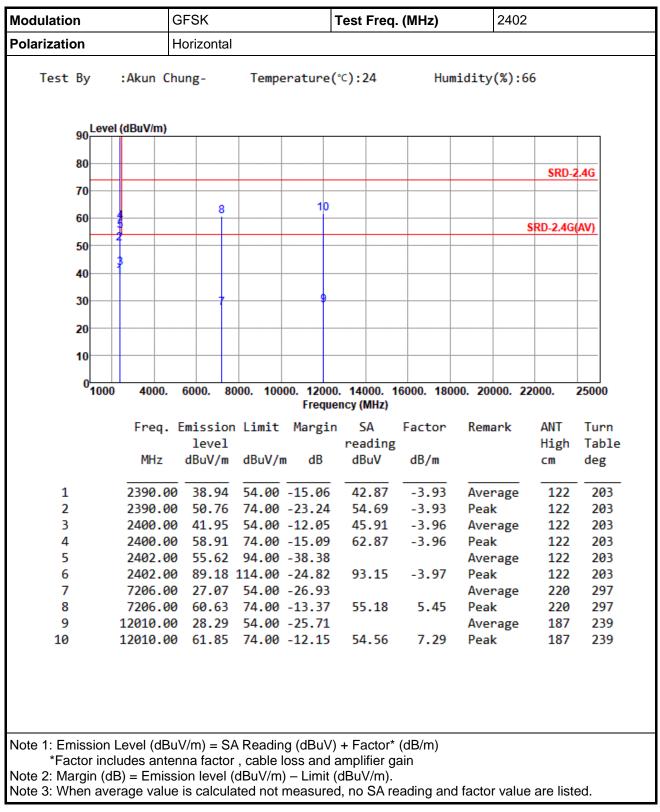




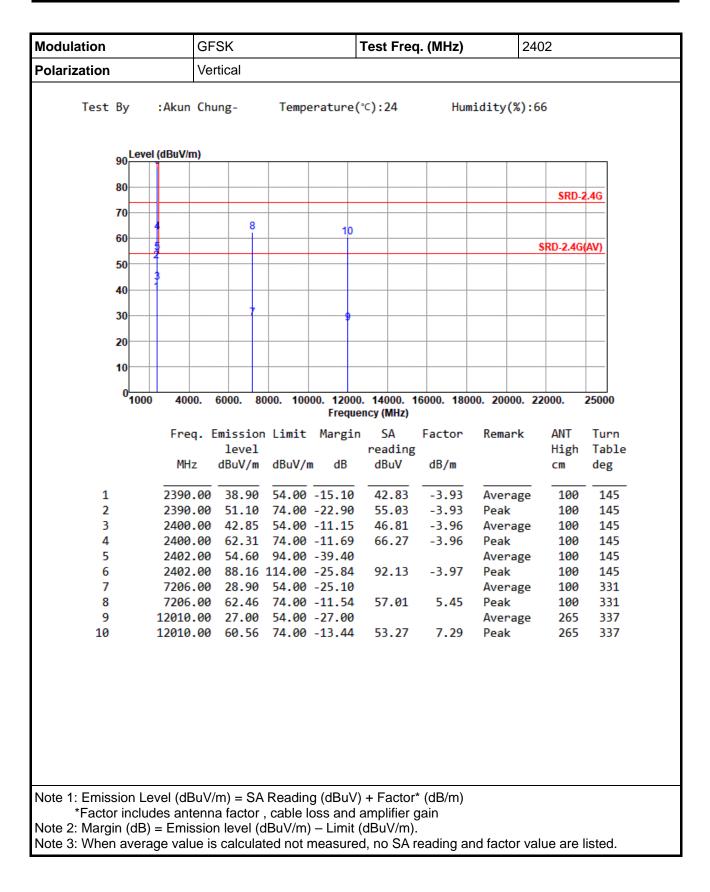




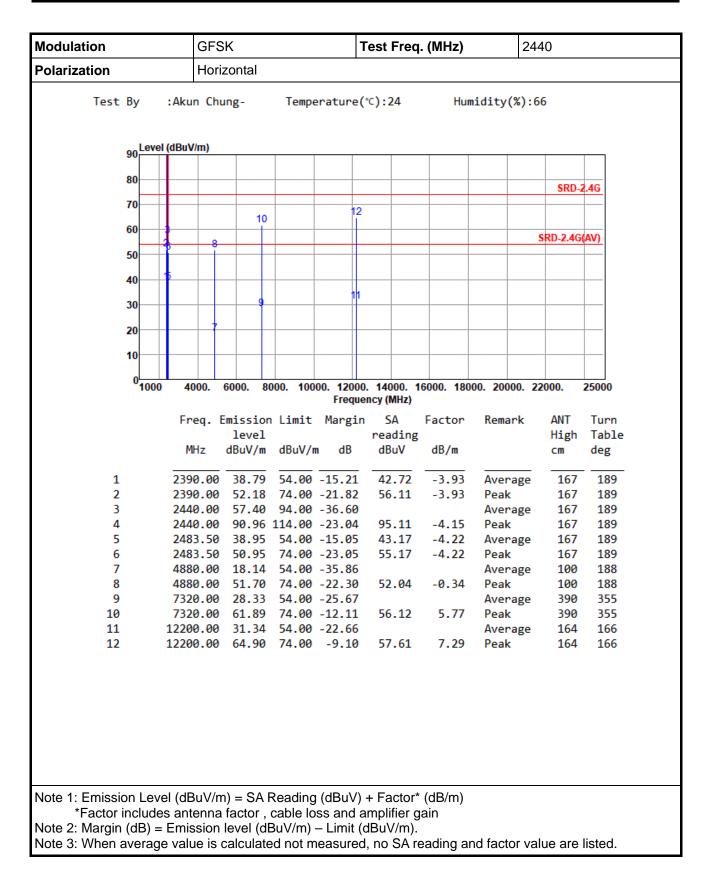




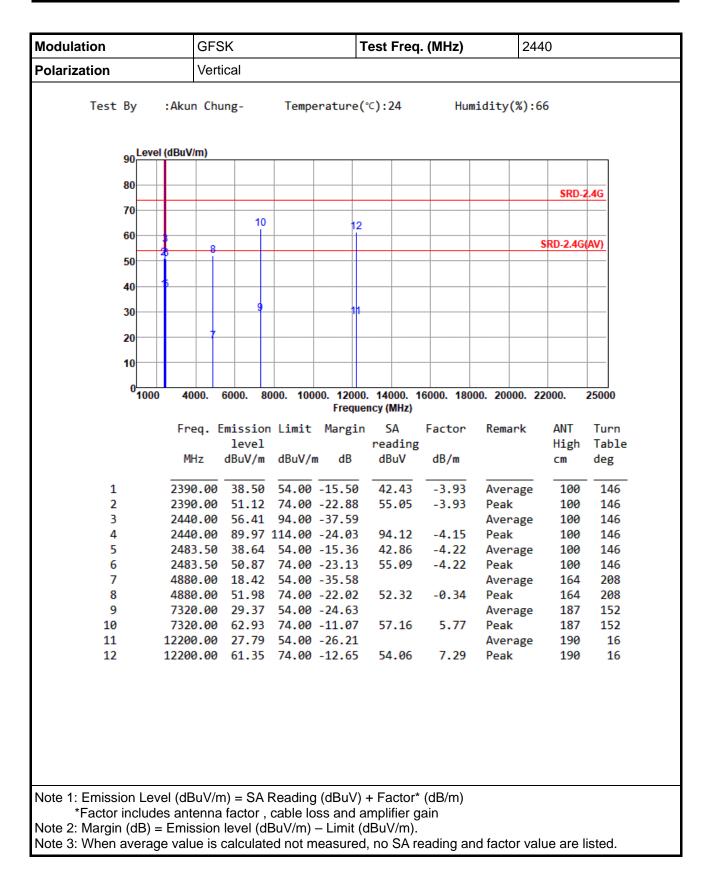



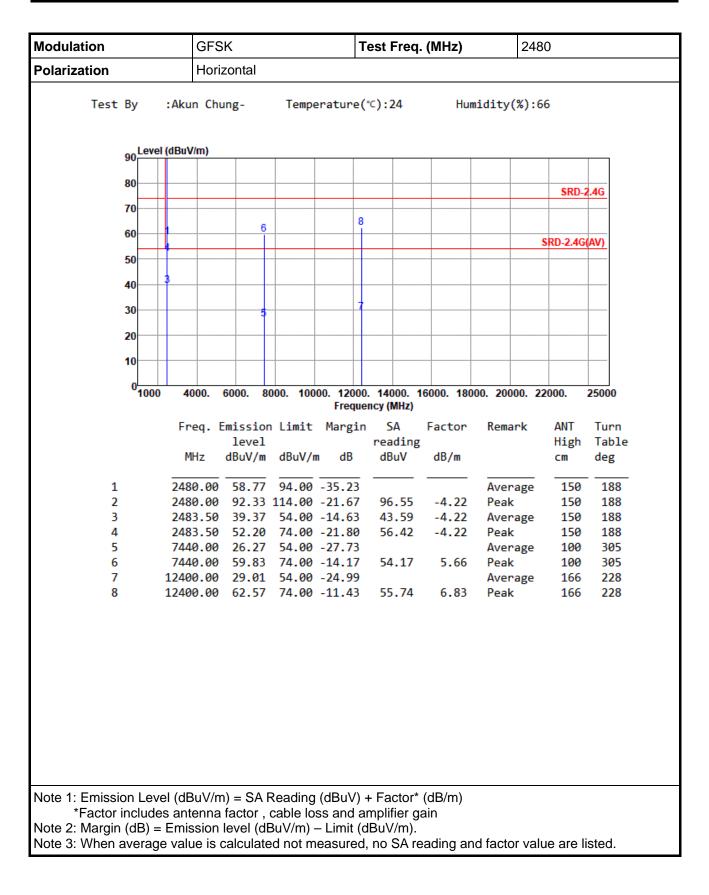




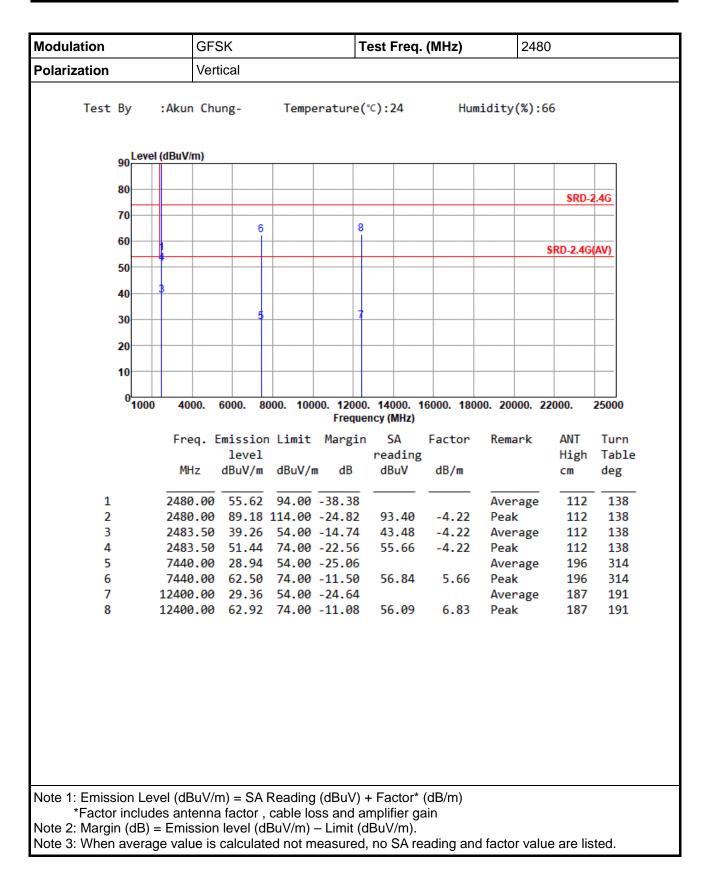





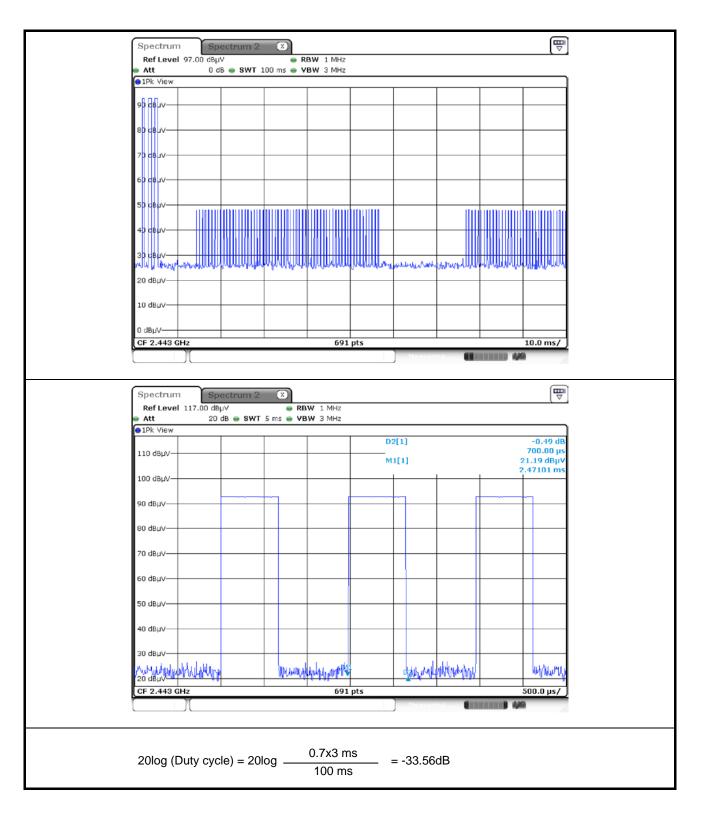



Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
2402	0.278	0.265
2442	0.279	0.265
2480	0.278	0.265

