

# Intermec Technologies Corporation

## **Bluetooth (8520-00080) in 6820**

Co-located with 802.11(b) (2011B), Bluetooth (8520-00080),  
& CDMA (EM3420) in 700C

July 7, 2004

Report No. ITRM0030.1

Report Prepared By:



1-888-EMI-CERT

© 2003 Northwest EMC, Inc

**Test Report**



22975 NW Evergreen Parkway  
Suite 400  
Hillsboro, Oregon 97124

## Certificate of Test

Issue Date: June 6, 2004

Intermec Technologies Corporation

Model: Bluetooth (Model 8520-00080) in 6820 with  
802.11(b) (Model 2011B), Bluetooth (Model 8520-00080),  
& CDMA (Model EM3420) in 700C

Emissions		
Description	Pass	Fail
FCC 15.247(c) Spurious Radiated Emissions:2003	<input checked="" type="checkbox"/>	<input type="checkbox"/>

### Modifications made to the product

See the Modifications section of this report

#### Test Facility

- The measurement facility used to collect the data is located at:  
Northwest EMC, Inc.; 22975 NW Evergreen Parkway, Suite 400; Hillsboro, OR 97124  
Phone: (503) 844-4066 Fax: 844-3826  
This site has been fully described in a report filed with and accepted by the FCC (Federal Communications Commission) and Industry Canada.

#### Approved By:

Donald Facteau, IS Manager

*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.*

*Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested, the specific description is noted in each of the individual sections of the test report supporting this certificate of test.*

Revision Number	Description	Date	Page Number
00	None		

**FCC:** Accredited by NVLAP for performance of FCC radio, digital, and ISM device testing. Our Open Area Test Sites, certification chambers, and conducted measurement facilities, have been fully described in reports filed with the FCC and accepted by the FCC in letters maintained in our files. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by the FCC as a Telecommunications Certification Body (TCB). This allows Northwest EMC to certify transmitters to FCC specifications in accordance with 47 CFR 2.960 and 2.962.



**NVLAP:** Northwest EMC, Inc. is recognized under the United States Department of Commerce, National Institute of Standards and Technology, National Voluntary Laboratory Accreditation Program for satisfactory compliance with the requirements of ISO/IEC 17025 for Testing Laboratories. The NVLAP accreditation encompasses Electromagnetic Compatibility Testing in accordance with the European Union EMC Directive 89/336/EEC, ANSI C63.4, MIL-STD 461E, DO-160D and SAE J1113. Additionally, Northwest EMC is accredited by NVLAP to perform radio testing in accordance with the European Union R&TTE Directive 1999/5/EEC, the requirements of FCC, and the RSS radio standards for Industry Canada. Accreditation has been granted to Northwest EMC, Inc. under Certificate Numbers: 200629-0, 200630-0, and 200676-0.



**Industry Canada:** Accredited by NVLAP for performance of Industry Canada RSS and ICES testing. Our Open Area Test Sites and certification chambers comply with RSS 212, Issue 1 (Provisional) and have been filed with Industry Canada and accepted. Northwest EMC has been accredited by ANSI to ISO / IEC Guide 65 as a product certifier. We have been designated by NIST and recognized by Industry Canada as a Certification Body (CB) per the APEC Mutual Recognition Arrangement (MRA). This allows Northwest EMC to certify transmitters to Industry Canada technical requirements.



**CAB:** Designated by NIST and validated by the European Commission as a Conformity Assessment Body (CAB) to conduct tests and approve products to the EMC directive and transmitters to the R&TTE directive, as described in the U.S. - EU Mutual Recognition Agreement



**TÜV Product Service:** Included in TÜV Product Service Group's Listing of Recognized Laboratories. It qualifies in connection with the TÜV Certification after Recognition of Agent's Testing Program for the product categories and/or standards shown in TÜV's current Listing of CARAT Laboratories available from TÜV. A certificate was issued to represent that this laboratory continues to meet TÜV's CARAT Program requirements. Certificate No. USA0401C



**TÜV Rheinland:** Authorized to carryout EMC tests by order and under supervision of TÜV Rheinland. This authorization is based on "Conditions for EMC-Subcontractors" of November 1992.



**NEMKO:** Assessed and accredited by NEMKO (Norwegian testing and certification body) for European emissions and immunity testing. As a result of NEMKO's laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification (Authorization No. ELA 119).



**Technology International:** Assessed in accordance with ISO Guide 25 defining the general international requirements for the competence of calibration and testing laboratories and with ITI assessment criteria LACO196. Based upon that assessment Interference Technology International, Ltd., has granted approval for specifications implementing the EU Directive on EMC (89/336/EEC and amendments). The scope of the approval was provided on a Schedule of Assessment supplied with the certificate and is available upon request.



**Australia/New Zealand:** The National Association of Testing Authorities (NATA), Australia has been appointed by the ACA as an accreditation body to accredit test laboratories and competent bodies for EMC standards. Accredited test reports or assessments by competent bodies must carry the NATA logo. Test reports made by an overseas laboratory that has been accredited for the relevant standards by an overseas accreditation body that has a Mutual Recognition Agreement (MRA) with NATA are also accepted as technical grounds for product conformity. The report should be endorsed with the respective logo of the accreditation body. (NVLAP)



**VCCI:** Accepted as an Associate Member to the VCCI, Acceptance No. 564. Conducted and radiated measurement facilities have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. (*Registration Nos. - Evergreen: C-1071 and R-1025, Trails End: C-1877 and R-1760, Sultan: R-871, C-1784 and R-1761*)



**BSMI:** Northwest EMC has been designated by NIST and validated by C-Taipei (BSMI) as a CAB to conduct tests as described in the APEC Mutual Recognition Agreement. License No.SL2-IN-E-1017.



**GOST:** Northwest EMC, Inc. has been assessed and accredited by the Russian Certification bodies Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC, to perform EMC and Hygienic testing for Information Technology Products. As a result of their laboratory assessment, they will accept test results from Northwest EMC, Inc. for product certification



## SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/scope.asp>

**What is measurement uncertainty?**

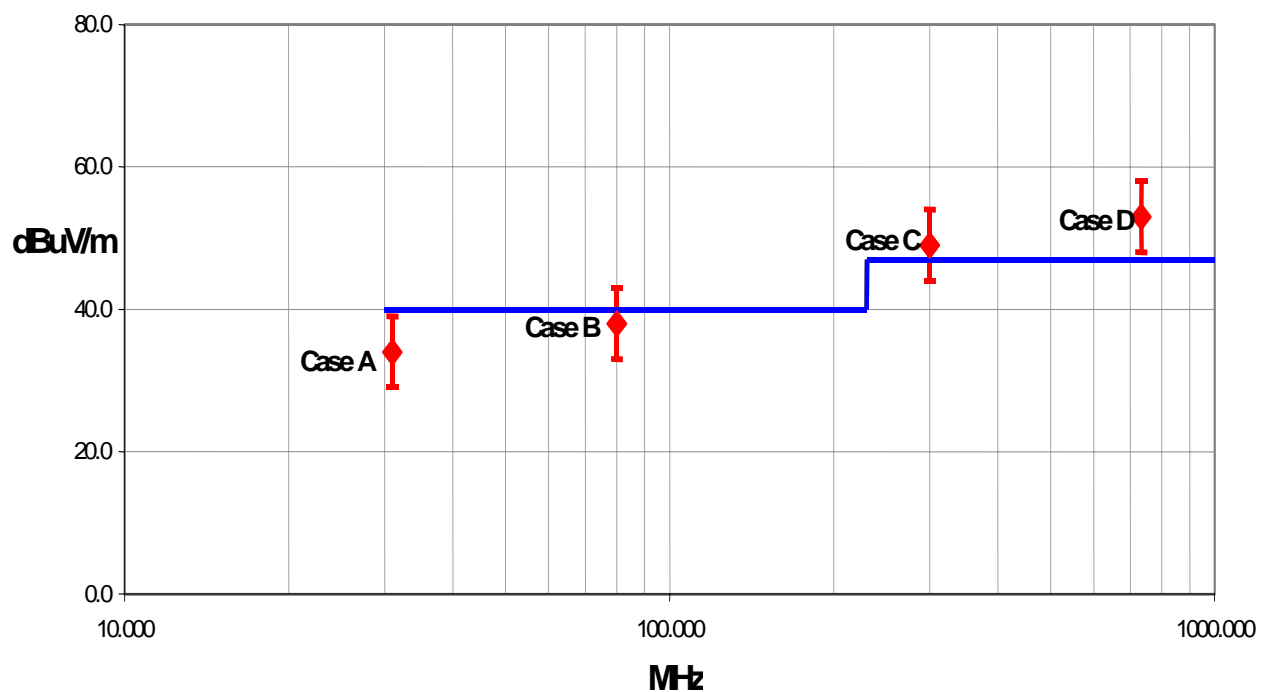
When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. The following statement of measurement uncertainty is used to reflect the accuracy of the measured result as compared with its “true” value. In the case of transient tests (ESD, EFT, Surge, Voltage Dips and Interruptions), the test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements.

The following documents were the basis for determining the uncertainty levels of our measurements:

- “ISO Guide to the Expression of Uncertainty in Measurements”, October 1993
- “NIS81: The Treatment of Uncertainty in EMC Measurements”, May 1994
- “IEC CISPR 16-3 A1 f1 Ed.1: Radio-interference measurements and statistical techniques”, December 2000

**How might measurement uncertainty be applied to test results?**

If the diamond marks the measured value for the test and the vertical bars bracket the range of + and – measurement uncertainty, then test results can be interpreted from the diagram below.

**Test Result Scenarios:**

**Case A:** Product complies.

**Case B:** Product conditionally complies. It is not possible to say with 95% confidence that the product complies.

**Case C:** Product conditionally does not comply. It is not possible to say with 95% confidence that the product does not comply.

**Case D:** Product does not comply.

**Radiated Emissions  $\leq 1$  GHz**

Value (dB)

Test Distance	Probability Distribution	Biconical Antenna		Log Periodic Antenna		Dipole Antenna	
		3m	10m	3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.86 - 1.88	+ 1.82 - 1.87	+ 2.23 - 1.41	+ 1.29 - 1.26	+ 1.31 - 1.27	+ 1.25 - 1.25
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k=2)	+ 3.72 - 3.77	+ 3.64 - 3.73	+ 4.46 - 2.81	+ 2.59 - 2.52	+ 2.61 - 2.55	+ 2.49 - 2.49

**Radiated Emissions  $> 1$  GHz**

Value (dB)

Test Distance	Probability Distribution	Without High Pass Filter		With High Pass Filter	
		3m	10m	3m	10m
Combined standard uncertainty $u_c(y)$	normal	+ 1.29 - 1.25	+ 1.38 - 1.35	+ 1.29 - 1.25	+ 1.38 - 1.35
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k=2)	+ 2.57 - 2.51	+ 2.76 - 2.70	+ 2.57 - 2.51	+ 2.76 - 2.70

**Conducted Emissions**

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.48	1.48
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.97	2.97

**Radiated Immunity**

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.05	1.05
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.11	2.11

**Conducted Immunity**

Test Distance	Probability Distribution	Value (+/- dB)	
		3m	10m
Combined standard uncertainty $u_c(y)$	normal	1.05	1.05
Expanded uncertainty $U$ (level of confidence $\approx 95\%$ )	normal (k = 2)	2.10	2.10

**Legend**

$u_c(y)$  = square root of the sum of squares of the individual standard uncertainties

$U$  = combined standard uncertainty multiplied by the coverage factor:  $k$ . This defines an interval about the measured result that will encompass the true value with a confidence level of approximately 95%. If a higher level of confidence is required, then  $k=3$  (CL of 99.7%) can be used. Please note that with a coverage factor of one,  $u_c(y)$  yields a confidence level of only 68%.



**California****Orange County Facility**

41 Tesla Ave.  
Irvine, CA 92618  
(888) 364-2378  
FAX (503) 844-3826

**Oregon****Evergreen Facility**

22975 NW Evergreen Pkwy.,  
Suite 400  
Hillsboro, OR 97124  
(503) 844-4066  
FAX (503) 844-3826

**Oregon****Trails End Facility**

30475 NE Trails End Lane  
Newberg, OR 97132  
(503) 844-4066  
FAX (503) 537-0735

**Washington****Sultan Facility**

14128 339<sup>th</sup> Ave. SE  
Sultan, WA 98294  
(888) 364-2378  
FAX (360) 793-2536



**Party Requesting the Test**

<b>Company Name:</b>	Intermec Technologies Corporation
<b>Address:</b>	550 Second St. SE
<b>City, State, Zip:</b>	Cedar Rapids, IA 52401-2023
<b>Test Requested By:</b>	Scott Holub
<b>Equipment Under Test:</b>	Bluetooth in 6820 co-located with new CDMA in 700C
<b>Model:</b>	8520-00080 (Bluetooth)
<b>First Date of Test:</b>	06-28-2004
<b>Last Date of Test:</b>	07-07-2004
<b>Receipt Date of Samples:</b>	06-15-2004
<b>Equipment Design Stage:</b>	Production
<b>Equipment Condition:</b>	No visual damage.

**Information Provided by the Party Requesting the Test**

**Clocks/Oscillators:** Not provided at the time of test.

**Functional Description of the EUT (Equipment Under Test):**

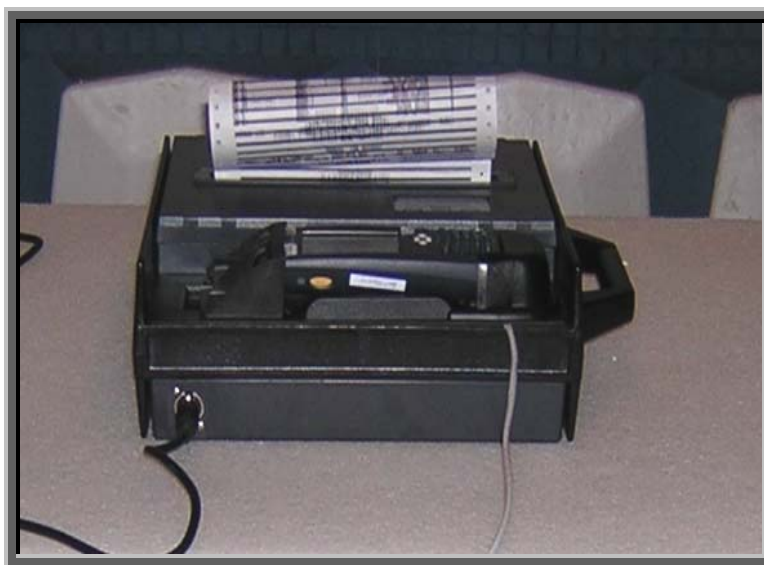
Bluetooth radio installed in an Intermec Printer, Model 6820. The printer includes a charging cradle for the Intermec Handheld Computer, Model 700C. When this computer is installed, the printer's Bluetooth radio can simultaneously transmit with the 700C's Bluetooth, 802.11(b), and CDMA radios. The CDMA radio is new, Model EM3420.

**Client Justification for EUT Selection:**

The EUT is a representative production sample.

**Client Justification for Test Selection:**

These tests satisfy the requirements FCC 15.247 (c) for co-located transmitters.

**EUT Photo**

Equipment modifications					
Item	Test	Date	Modification	Note	Disposition of EUT
1	Spurious Radiated Emissions	06/28/2004	No EMI suppression devices were added or modified during this test.	Same configuration as delivered.	EUT remained at Northwest EMC.
2	Spurious Radiated Emissions	06/29/2004	No EMI suppression devices were added or modified during this test.	Same configuration as delivered.	EUT remained at Northwest EMC.
3	Spurious Radiated Emissions	07/07/2004	No EMI suppression devices were added or modified during this test.	Same configuration as delivered.	EUT was returned to client following testing.

**Justification**

The EUT is a previously certified Bluetooth radio module located in Intermec's Printer, Model 6820 (FCC ID: EHABTS0080). The printer has a cradle for the Intermec Handheld Computer, Model 700C. When the handheld computer is lodged in the cradle, the printer's Bluetooth radio can simultaneously transmit with the Bluetooth, and 802.11(b) radios in the 700C (FCC ID: EHABTS0080, and FCC ID: HN22011B-2, respectively). The printer's Bluetooth radio module was previously certified to transmit simultaneously with the radios in the 700C, but the hand-held computer now contains a new CDMA radio module, Model EM3420 (FCC ID: EHAEM3420). This test demonstrates compliance with FCC 15.247(c) emissions limits while the previously certified Bluetooth radio is co-located with the new CDMA radio. Each radio transmits through its own antenna.

All possible combinations of harmonic emissions from the CDMA, 802.11(b), and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. All the radios were configured for simultaneous transmission at the channels specified below:

**Channels in Specified Band Investigated:**

<b>802.11(b):</b>	1, 11
<b>CDMA (Cellular):</b>	54, 55, 395, 467
<b>CDMA (PCS):</b>	1, 35, 1153
<b>Bluetooth:</b>	5, 11, 62, 68, 79

**Operating Modes Investigated:****Bluetooth in 6820 Simultaneously Transmitting with CDMA PCS (high band), 802.11(b), and Bluetooth in 700C**

Simultaneous transmission of Bluetooth Ch. 11, CDMA (PCS) Ch. 1, and 802.11(b) Ch. 1
Simultaneous transmission of Bluetooth Ch. 11, CDMA (PCS) Ch. 1153, and 802.11(b) Ch. 1
Simultaneous transmission of Bluetooth Ch. 68, CDMA (PCS) Ch. 35, and 802.11(b) Ch. 11
Simultaneous transmission of Bluetooth Ch. 62, CDMA (PCS) Ch. 1153, and 802.11(b) Ch. 11

**Bluetooth in 6820 Simultaneously Transmitting with CDMA Cellular (lowband), 802.11(b), and Bluetooth in 700C**

Simultaneous transmission of Bluetooth Ch. 11, CDMA (cellular) Ch. 467, and 802.11(b) Ch. 1
Simultaneous transmission of Bluetooth Ch. 5, CDMA (cellular) Ch. 395, and 802.11(b) Ch. 1
Simultaneous transmission of Bluetooth Ch. 79, CDMA (cellular) Ch. 55, and 802.11(b) Ch. 11
Simultaneous transmission of Bluetooth Ch. 79, CDMA (cellular) Ch. 54, and 802.11(b) Ch. 11

**Data Rates Investigated:**

Maximum
---------

**Antennas Investigated:**

<b>802.11(b):</b>	Custom internal to 700C
<b>CDMA (Cellular):</b>	805-606-102 Dual Band CDMA 900/1900MHz Antenna (SB555)
<b>CDMA (PCS):</b>	805-666-204 Single Band CDMA 1900MHz Antenna (SB555)
<b>Bluetooth:</b>	Integral PCB trace

**Output Power Setting(s) Investigated:**

Maximum
---------

**Power Input Settings Investigated:**

120 VAC, 60 Hz.

**Frequency Range Investigated**

<b>Start Frequency</b>	1 GHz	<b>Stop Frequency</b>	26 GHz
------------------------	-------	-----------------------	--------

**Software\Firmware Applied During Test**

<b>Exercise software</b>	Blue Test CDMA FCC Test PrismTestCe	<b>Version</b>	Unknown 6/7/04 6/1/04
--------------------------	-------------------------------------------	----------------	-----------------------------

**Description**

The system was tested using special test software to exercise the functions of the device during the testing such as channels, power, and modulation.

**EUT and Peripherals**

<b>Description</b>	<b>Manufacturer</b>	<b>Model/Part Number</b>	<b>Serial Number</b>
Bluetooth Radio in Printer	Intermec Technologies Corporation	8520-0080	Unknown
Printer	Intermec Technologies Corporation	6820	N/A
AC Adapter	Intermec Technologies Corporation	851-064-001	0001771
Handheld Computer	Intermec Technologies Corporation	700C	13790400008
802.11(b) Radio	Intermec Technologies Corporation	2011B	N/A
CDMA Radio	Intermec Technologies Corporation	EM3420	Unknown
Bluetooth Radio in Handheld Computer	Intermec Technologies Corporation	8520-0080	Unknown

**Remote Equipment Outside of Test Setup Boundary**

<b>Description</b>	<b>Manufacturer</b>	<b>Model/Part Number</b>	<b>Serial Number</b>
Remote laptop	Dell	TS30G	7247346BYK0204A
Equipment isolated from the EUT so as not to contribute to the measurement result is considered to be outside the test setup boundary			

**Cables**

<b>Cable Type</b>	<b>Shield</b>	<b>Length (m)</b>	<b>Ferrite</b>	<b>Connection 1</b>	<b>Connection 2</b>
AC Power	No	2.0	No	AC Adapter	AC Mains
DC Leads	PA	1.8	PA	Printer	AC Adapter
Serial	Yes	4.0	No	Printer	Remote laptop
<b>PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.</b>					

Measurement Equipment					
Description	Manufacturer	Model	Identifier	Last Cal	Interval
Antenna, Horn	EMCO	3160-09	AHG	NCR	NA
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	10/08/2003	12 mo
Antenna, Horn	EMCO	3160-08	AHK	NCR	NA
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APC	10/08/2003	12 mo
Antenna, Horn	EMCO	3115	AHC	09/18/2003	12 mo
Pre-Amplifier	Miteq	AMF-4D-005180-24-10P	APJ	01/05/2004	13 mo
Antenna, Biconilog	EMCO	3141	AXE	12/03/2003	24 mo
Pre-Amplifier	Amplifier Research	LN1000A	APS	02/05/2004	13 mo
High Pass Filter	Micro-Tronics	HPM50111	HFO	04/13/2004	13 mo
Attenuator	Pasternack	PE7001-10	ATD	02/03/2004	13 mo
Attenuator		2082-6148-20	ATE	02/03/2004	13 mo
Antenna, Horn	EMCO	3115	AHF	03/18/2004	24 mo
Signal Generator	Hewlett Packard	8341B	TGN	01/23/2004	13 mo
Antenna, Dipole (ADAA included)	Roberts	Roberts	ADA	12/27/2002	24 mo
Spectrum Analyzer	Hewlett-Packard	8566B	AAL	12/23/2003	13 mo

### Test Description

**Requirement:** Per 15.247(c), the field strength of any spurious emissions or modulation products that fall in a restricted band, as defined in 15.205, is measured. The peak level must comply with the limits specified in 15.35(b). The average level (taken with a 10Hz VBW) must comply with the limits specified in 15.209.

**Configuration:** The EUT is a previously certified Bluetooth radio module located in Intermec's Printer, Model 6820 (FCC ID: EHABTS0080). The printer has a cradle for the Intermec Handheld Computer, Model 700C. When the handheld computer is lodged in the cradle, the printer's Bluetooth radio can simultaneously transmit with the Bluetooth, and 802.11(b) radios in the 700C (FCC ID: EHABTS0080, and FCC ID: HN22011B-2, respectively). The printer's Bluetooth radio module was previously certified to transmit simultaneously with the radios in the 700C, but the hand-held computer now contains a new CDMA radio module, Model EM3420 (FCC ID: EHAEM3420). Each radio transmits through its own antenna.

The following is an excerpt from the FCC / TCB Training Q & A, October 2002, Day 2, Question 7:


**Assuming that the radios do not share an antenna, only radiated tests for simultaneous transmission is required. If the radios share an antenna, antenna conducted measurements would also be required. Only one set of worst case simultaneous transmission data is going to be requested to be submitted at this time. The test engineer should indicate the worst case condition and provide justification as to why the worst case condition was chosen. The grantee should be reminded that even if the FCC requests one set of data, they are responsible for compliance for all modes of simultaneous transmission.**


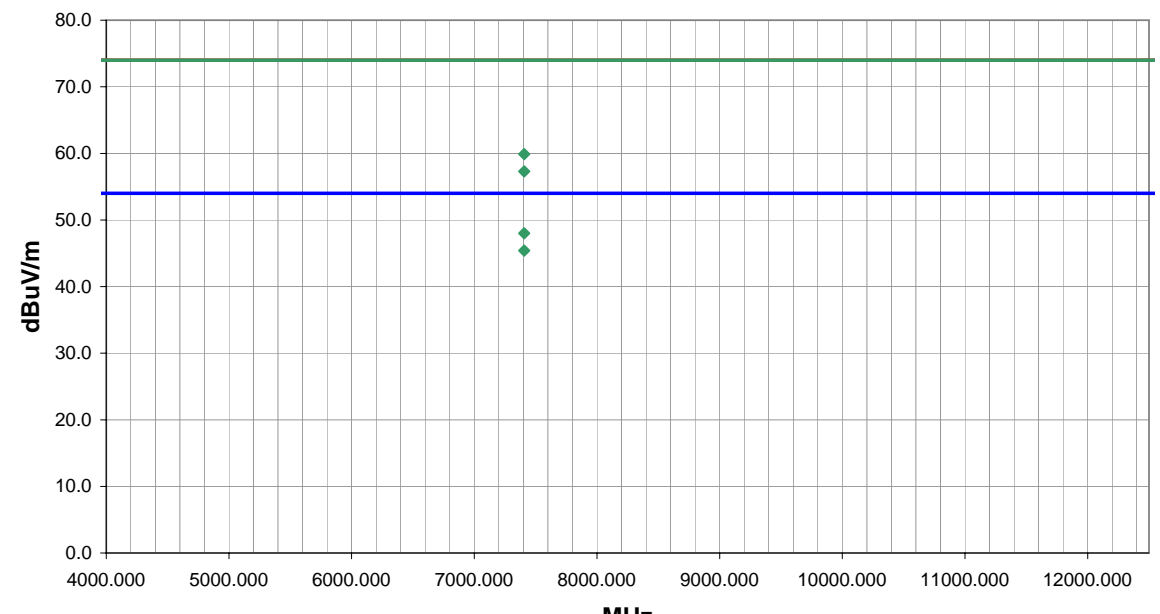
All possible combinations of harmonic emissions from the CDMA, 802.11(b), and Bluetooth radios were compared numerically. It was determined that there were no possible coincidental harmonics below 1 GHz. The frequency range from 1 GHz to 26 GHz was investigated for channel combinations that would produce coincidental harmonics. Compliance with the restricted band at 2483.5 – 2500 MHz was also measured.

All the radios were configured for simultaneous transmission at the channels specified in the previous pages. The highest gain antennas to be used with the radios were tested. The spectrum was scanned throughout the specified range. While scanning, emissions from the radios were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antennas in three orthogonal axes, and adjusting the measurement antenna height and polarization (per ANSI C63.4:1992). A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.


Bandwidths Used for Measurements			
Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 – 0.15	1.0	0.2	0.2
0.15 – 30.0	10.0	9.0	9.0
30.0 – 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0
<i>Measurements were made using the bandwidths and detectors specified. No video filter was used.</i>			

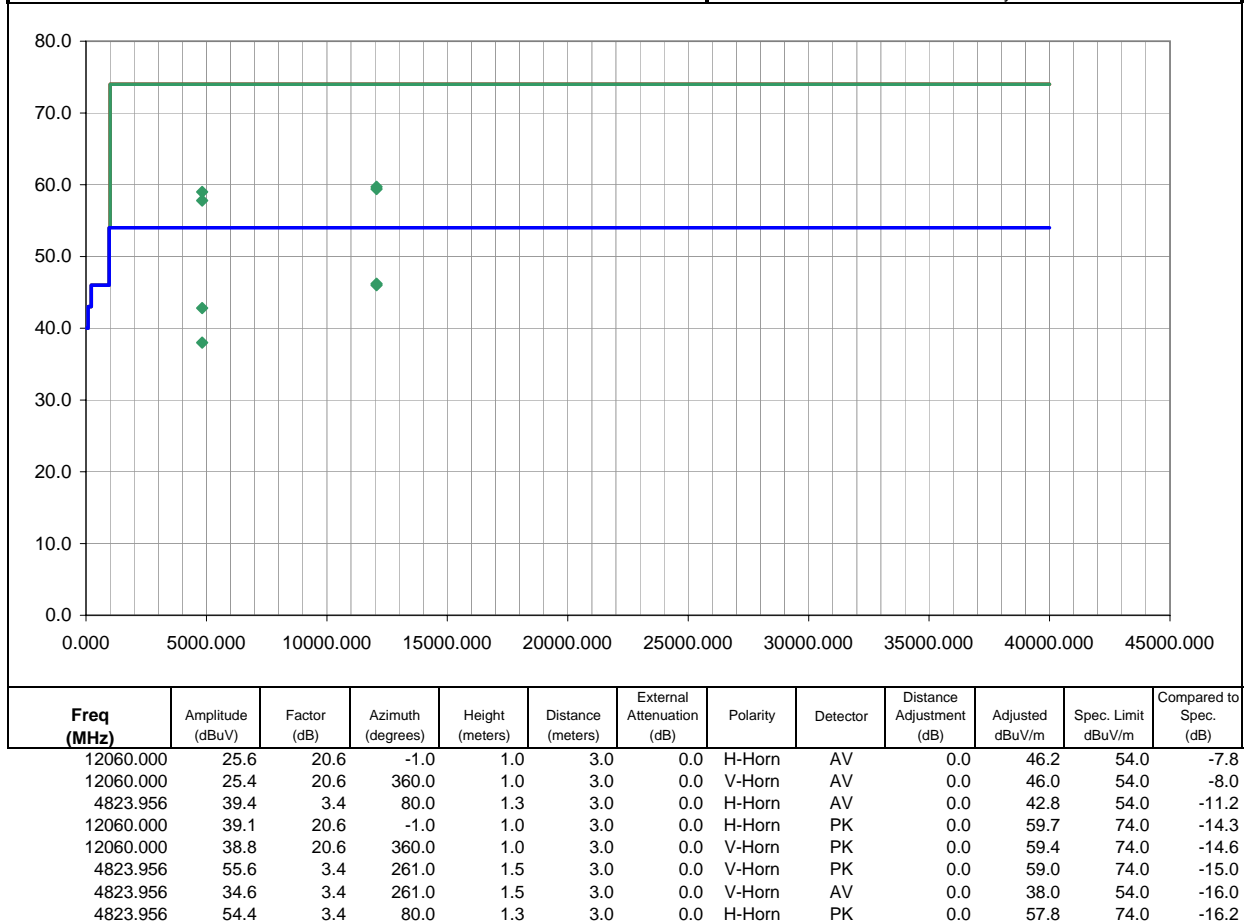
Completed by:


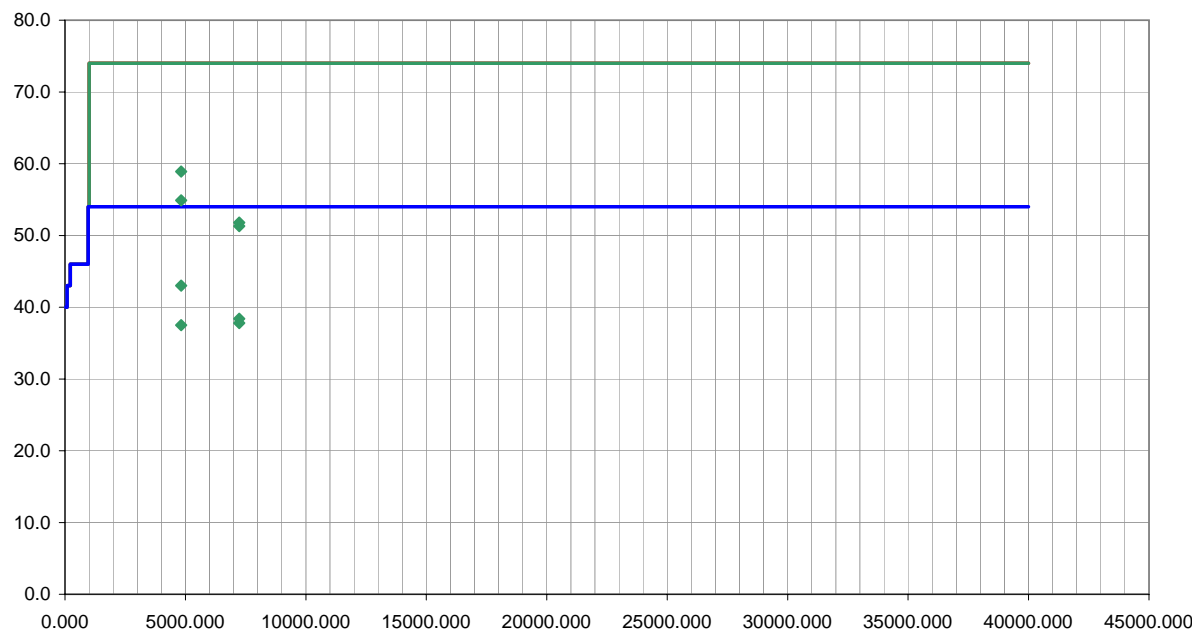



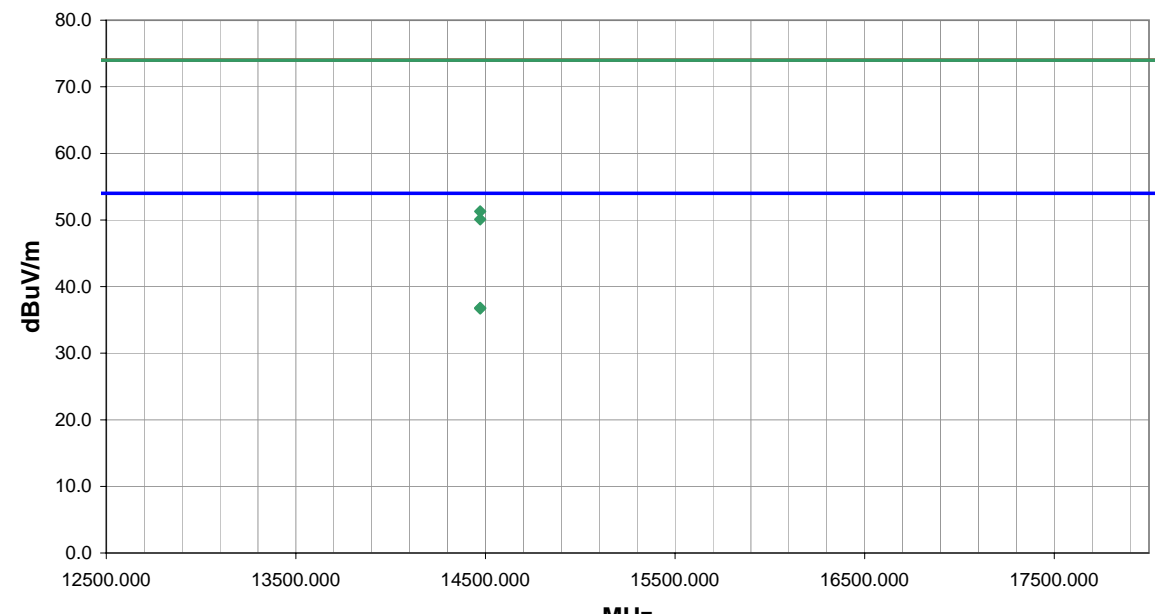
NORTHWEST EMC										REV d4.13 05/06/2004			
RADIATED EMISSIONS DATA SHEET													
EUT: Bluetooth in 6820 co-located with new CDMA , 802.11(b), and Bluetooth in 700C										Work Order: ITRM0030			
Serial Number:										Date: 07/07/04			
Customer: Intermec Technologies Corporation										Temperature: 73			
Attendees: none										Humidity: 41%			
Cust. Ref. No.:										Barometric Pressure: 30.09			
Tested by: Holly Ashkannejhad						Power: 120VAC, 60Hz		Job Site: EV01					
TEST SPECIFICATIONS													
Specification: FCC 15.247(c) Spurious Radiated Emissions										Year: 2003			
Method: ANSI C63.4										Year: 2001			
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Simultaneous transmission of 6820 printer (Bluetooth) with 700C (CDMA(PCS)/802.11b/Bluetooth)													
EUT OPERATING MODES													
Transmitting channel 35 CDMA PCS, 802.11b channel 11, Bluetooth channel 68													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS												Run #	
Pass												24	
Other													
										 Tested By:			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
7407.031	37.0	11.0	309.0	1.6	3.0	0.0	V-Horn	AV	0.0	48.0	54.0	-6.0	
7407.031	34.4	11.0	297.0	1.3	3.0	0.0	H-Horn	AV	0.0	45.4	54.0	-8.6	
7407.031	48.9	11.0	309.0	1.6	3.0	0.0	V-Horn	PK	0.0	59.9	74.0	-14.1	
7407.031	46.3	11.0	297.0	1.3	3.0	0.0	H-Horn	PK	0.0	57.3	74.0	-16.7	


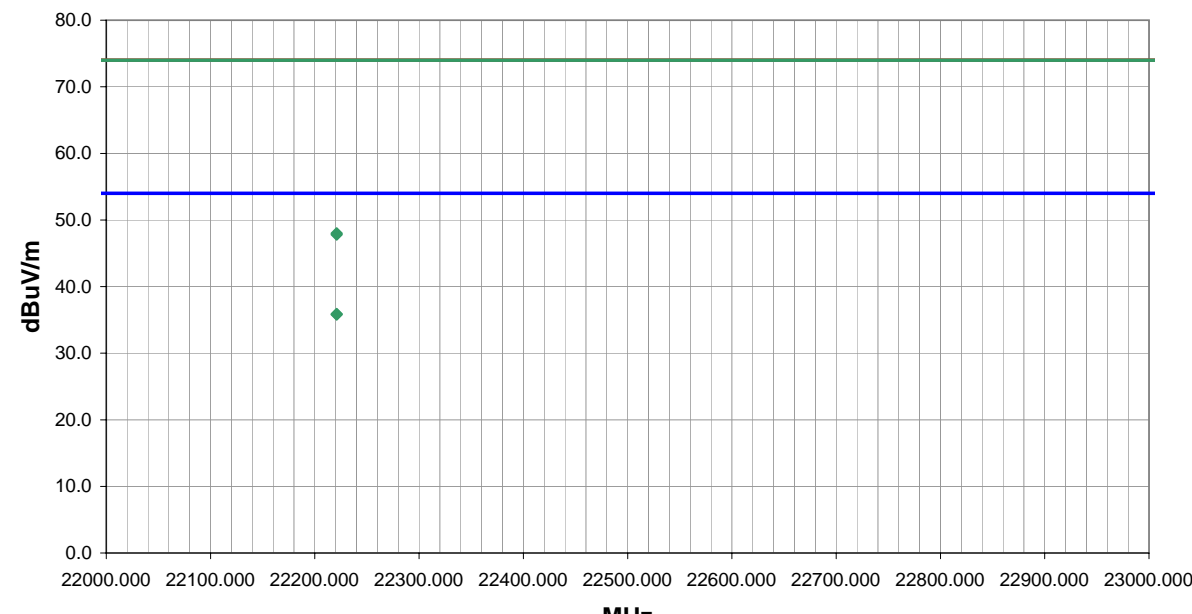



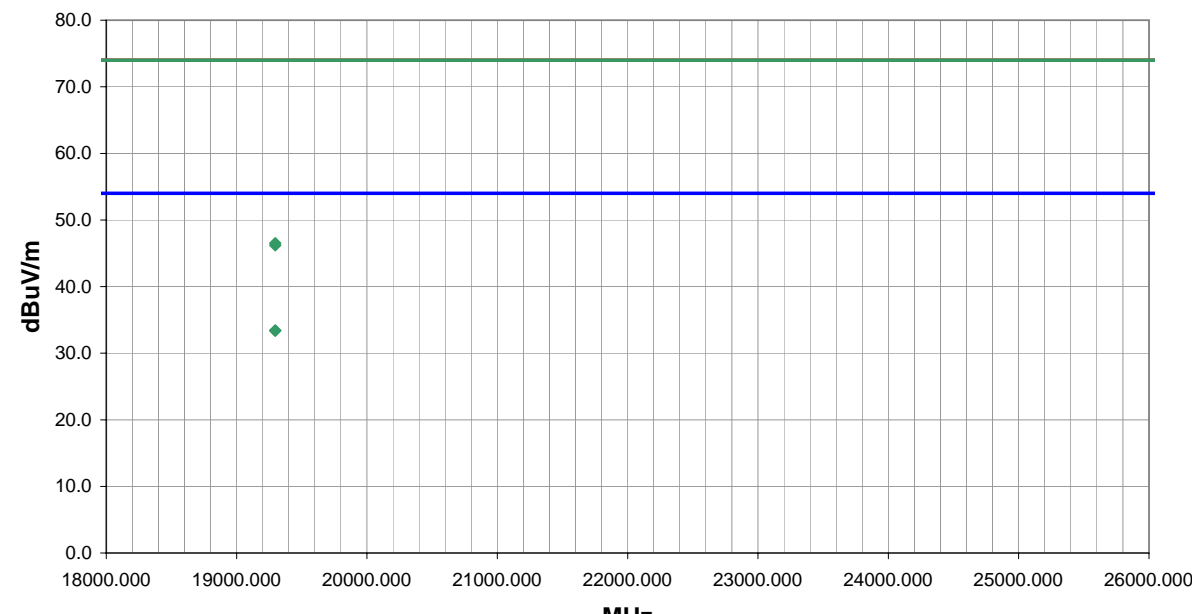
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		REV dtd. 13 05/06/2004	
EUT: Bluetooth in 6820 co-located with new CDMA , 802.11(b), and Bluetooth in 700C		Work Order: ITRM0030			
Serial Number:		Date: 07/07/04			
Customer: Intermec Technologies Corporation		Temperature: 73			
Attendees: none		Humidity: 41%			
Cust. Ref. No.:		Barometric Pressure: 30.09			
Tested by: Holly Ashkannejhad		Power: 120VAC, 60Hz		Job Site: EV01	
<b>TEST SPECIFICATIONS</b>					
Specification: FCC 15.247(c) Spurious Radiated Emissions				Year: 2003	
Method: ANSI C63.4				Year: 2001	
<b>SAMPLE CALCULATIONS</b>					
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation					
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator					
<b>COMMENTS</b>					
Simultaneous transmission of 6820 printer (Bluetooth) with 700C (CDMA(PCS)/802.11b/Bluetooth)					
<b>EUT OPERATING MODES</b>					
Transmitting channel 1153 CDMA PCS, Channel 1 802.11b, Bluetooth channel 11					
<b>DEVIATIONS FROM TEST STANDARD</b>					
No deviations.					
<b>RESULTS</b>				<b>Run #</b>	
Pass				25	
Other					
				 Tested By:	


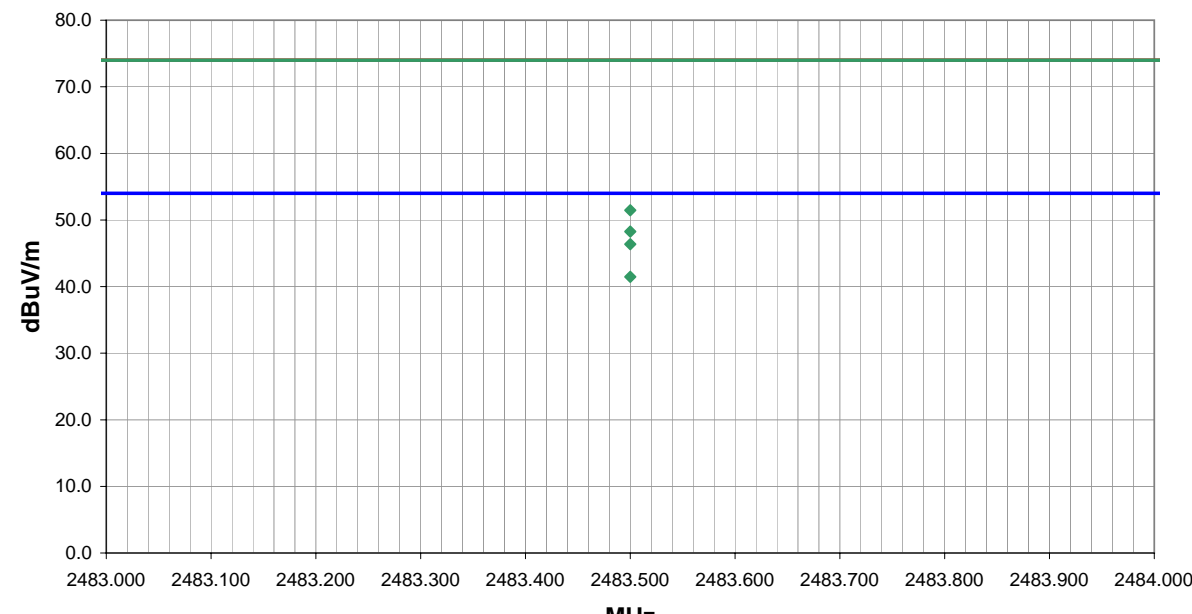



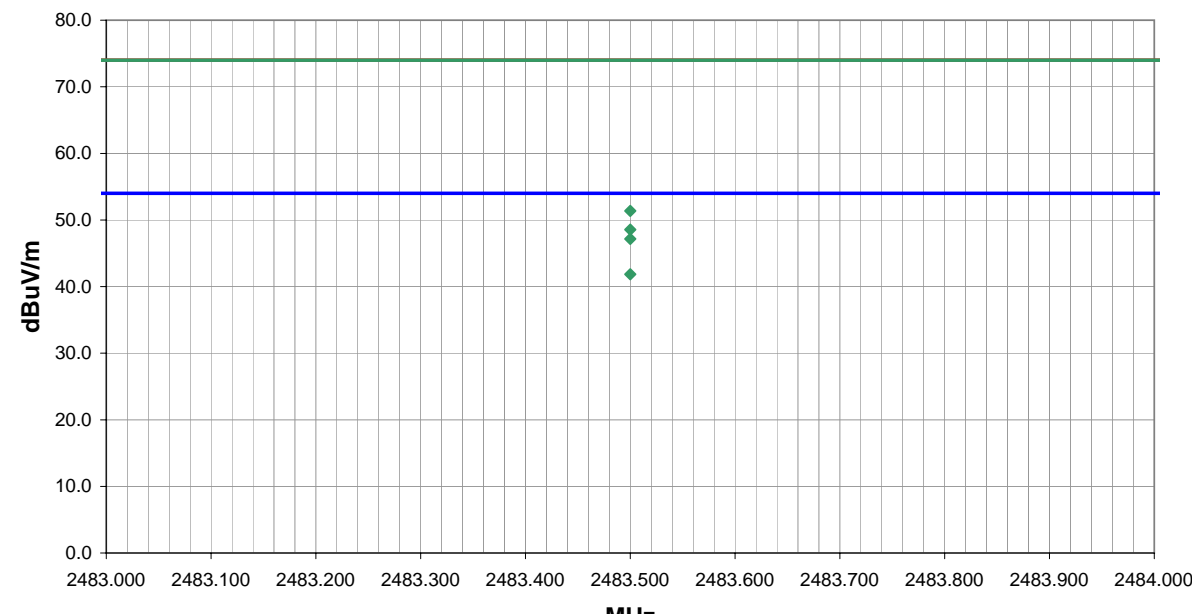
NORTHWEST <b>EMC</b>										<b>RADIATED EMISSIONS DATA SHEET</b>				REV dtd. 13 05/06/2004	
EUT: Bluetooth in 6820 co-located with new CDMA , 802.11(b), and Bluetooth in 700C										Work Order: ITRM0030					
Serial Number:										Date: 07/07/04					
Customer: Intermec Technologies Corporation										Temperature: 73					
Attendees: none										Humidity: 41%					
Cust. Ref. No.:										Barometric Pressure: 30.09					
Tested by: Holly Ashkannejhad						Power: 120VAC, 60Hz		Job Site: EV01							
<b>TEST SPECIFICATIONS</b>															
Specification: FCC 15.247(c) Spurious Radiated Emissions										Year: 2003					
Method: ANSI C63.4										Year: 2001					
<b>SAMPLE CALCULATIONS</b>															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
<b>COMMENTS</b>															
Simultaneous transmission of 6820 printer (Bluetooth) with 700C (CDMA(PCS)/802.11b/Bluetooth)															
<b>EUT OPERATING MODES</b>															
Transmitting Channel 1 CDMA PCS, Channel 1 802.11b, Bluetooth channel 11															
<b>DEVIATIONS FROM TEST STANDARD</b>															
No deviations.															
<b>RESULTS</b>															
Pass												Run #			
												26			
Other						 Tested By:									
															
<b>Freq (MHz)</b>	<b>Amplitude (dBuV)</b>	<b>Factor (dB)</b>	<b>Azimuth (degrees)</b>	<b>Height (meters)</b>	<b>Distance (meters)</b>	<b>External Attenuation (dB)</b>	<b>Polarity</b>	<b>Detector</b>	<b>Distance Adjustment (dB)</b>	<b>Adjusted dBuV/m</b>	<b>Spec. Limit dBuV/m</b>	<b>Compared to Spec. (dB)</b>			
4824.010	39.6	3.4	18.0	1.0	3.0	0.0	V-Horn	AV	0.0	43.0	54.0	-11.0			
4824.010	55.5	3.4	18.0	1.0	3.0	0.0	V-Horn	PK	0.0	58.9	74.0	-15.1			
7236.000	28.0	10.4	82.0	1.3	3.0	0.0	V-Horn	AV	0.0	38.4	54.0	-15.6			
7236.000	27.4	10.4	338.0	1.3	3.0	0.0	H-Horn	AV	0.0	37.8	54.0	-16.2			
4824.010	34.1	3.4	325.0	1.0	3.0	0.0	H-Horn	AV	0.0	37.5	54.0	-16.5			
4824.010	51.5	3.4	325.0	1.0	3.0	0.0	H-Horn	PK	0.0	54.9	74.0	-19.1			
7236.000	41.4	10.4	82.0	1.3	3.0	0.0	V-Horn	PK	0.0	51.8	74.0	-22.2			
7236.000	40.9	10.4	338.0	1.3	3.0	0.0	H-Horn	PK	0.0	51.3	74.0	-22.7			

NORTHWEST EMC										REV d4.13 05/06/2004			
RADIATED EMISSIONS DATA SHEET													
EUT: Bluetooth in 6820 co-located with new CDMA , 802.11(b), and Bluetooth in 700C						Work Order: ITRM0030							
Serial Number:						Date: 07/07/04							
Customer: Intermec Technologies Corporation						Temperature: 73							
Attendees: none						Humidity: 41%							
Cust. Ref. No.:						Barometric Pressure: 30.09							
Tested by: Holly Ashkannejhad				Power: 120VAC, 60Hz		Job Site: EV01							
TEST SPECIFICATIONS													
Specification: FCC 15.247(c) Spurious Radiated Emissions						Year: 2003							
Method: ANSI C63.4						Year: 2001							
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Simultaneous transmission of 6820 printer (Bluetooth) with 700C (CDMA(PCS)/802.11b/Bluetooth)													
EUT OPERATING MODES													
Transmitting Channel 1 CDMA PCS, Channel 1 802.11b, Bluetooth channel 11													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS										Run #			
Pass										27			
Other													
										 Tested By:			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
14472.000	26.9	9.9	323.0	1.0	3.0	0.0	H-Horn	AV	0.0	36.8	54.0	-17.2	
14472.000	26.8	9.9	-1.0	1.2	3.0	0.0	V-Horn	AV	0.0	36.7	54.0	-17.3	
14472.000	41.4	9.9	-1.0	1.2	3.0	0.0	V-Horn	PK	0.0	51.3	74.0	-22.7	
14472.000	40.2	9.9	323.0	1.0	3.0	0.0	H-Horn	PK	0.0	50.1	74.0	-23.9	


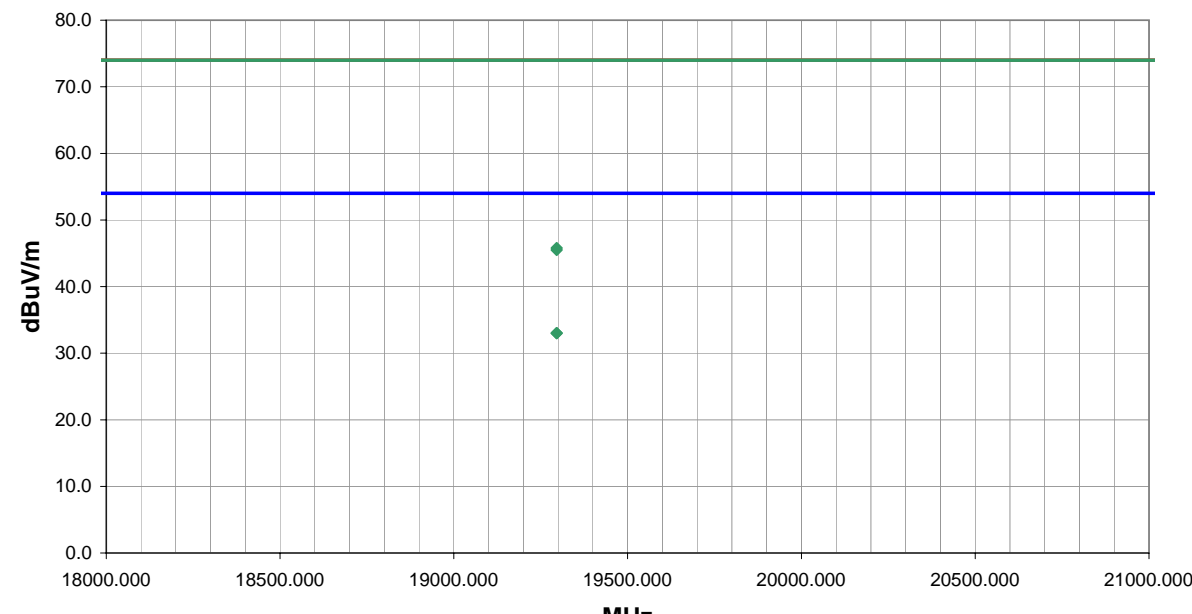
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		REV d4.13 05/06/2004								
EUT: Bluetooth in 6820 co-located with new CDMA , 802.11(b), and Bluetooth in 700C		Work Order: ITRM0030										
Serial Number:		Date: 06/28/04										
Customer: Intermec Technologies Corporation		Temperature: 75										
Attendees: none		Humidity: 45%										
Cust. Ref. No.:		Barometric Pressure: 30.16										
Tested by: Holly Ashkannejhad		Power: 120VAC, 60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(c) Spurious Radiated Emissions				Year: 2003								
Method: ANSI C63.4				Year: 2001								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
Simultaneous transmission of 6820 printer (Bluetooth) with 700C (CDMA(PCS)/802.11b/Bluetooth)												
EUT OPERATING MODES												
Transmitting channel 35 CDMA PCS, 802.11b channel 11, Bluetooth channel 68												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS				Run #								
Pass				28								
Other				 Tested By:								
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
22221.000	26.9	9.0	362.0	1.0	3.0	0.0	V-High Horr	AV	0.0	35.9	54.0	-18.1
22221.000	26.8	9.0	-3.0	1.0	3.0	0.0	V-High Horr	AV	0.0	35.8	54.0	-18.2
22221.000	39.0	9.0	362.0	1.0	3.0	0.0	V-High Horr	PK	0.0	48.0	74.0	-26.0
22221.000	38.8	9.0	-3.0	1.0	3.0	0.0	V-High Horr	PK	0.0	47.8	74.0	-26.2


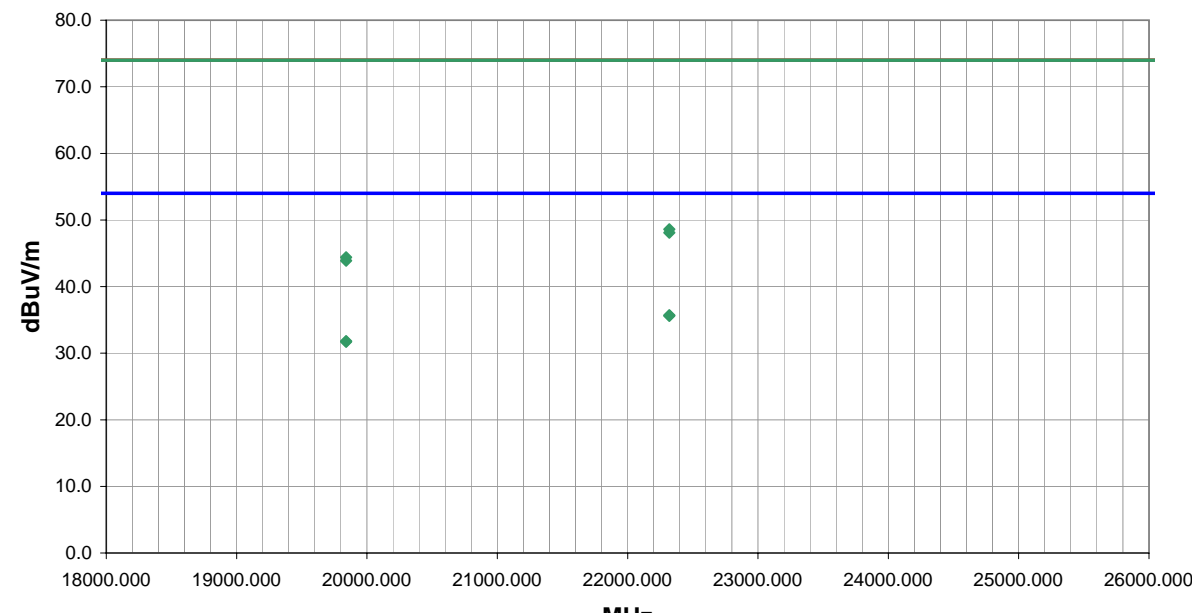
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV dtd. 13 05/06/2004	
EUT: Bluetooth in 6820 co-located with new CDMA , 802.11(b), and Bluetooth in 700C										Work Order: ITRM0030					
Serial Number:										Date: 06/28/04					
Customer: Intermec Technologies Corporation										Temperature: 75					
Attendees: none										Humidity: 45%					
Cust. Ref. No.:										Barometric Pressure: 30.16					
Tested by: Holly Ashkannejhad						Power: 120VAC, 60Hz		Job Site: EV01							
TEST SPECIFICATIONS															
Specification: FCC 15.247(c) Spurious Radiated Emissions										Year: 2003					
Method: ANSI C63.4										Year: 2001					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission of 6820 printer (Bluetooth) with 700C (CDMA(PCS)/802.11b/Bluetooth)															
EUT OPERATING MODES															
Transmitting channel 1153 CDMA PCS, 802.11b channel 1, Bluetooth channel 11															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS															
Pass												Run #			
												29			
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
19296.000	25.4	8.0	361.0	1.0	3.0	0.0	I-High Horr	AV	0.0	33.4	54.0	-20.6			
19296.000	25.4	8.0	-2.0	1.0	3.0	0.0	V-High Horr	AV	0.0	33.4	54.0	-20.6			
19296.000	38.5	8.0	-2.0	1.0	3.0	0.0	V-High Horr	PK	0.0	46.5	74.0	-27.5			
19296.000	38.2	8.0	361.0	1.0	3.0	0.0	I-High Horr	PK	0.0	46.2	74.0	-27.8			


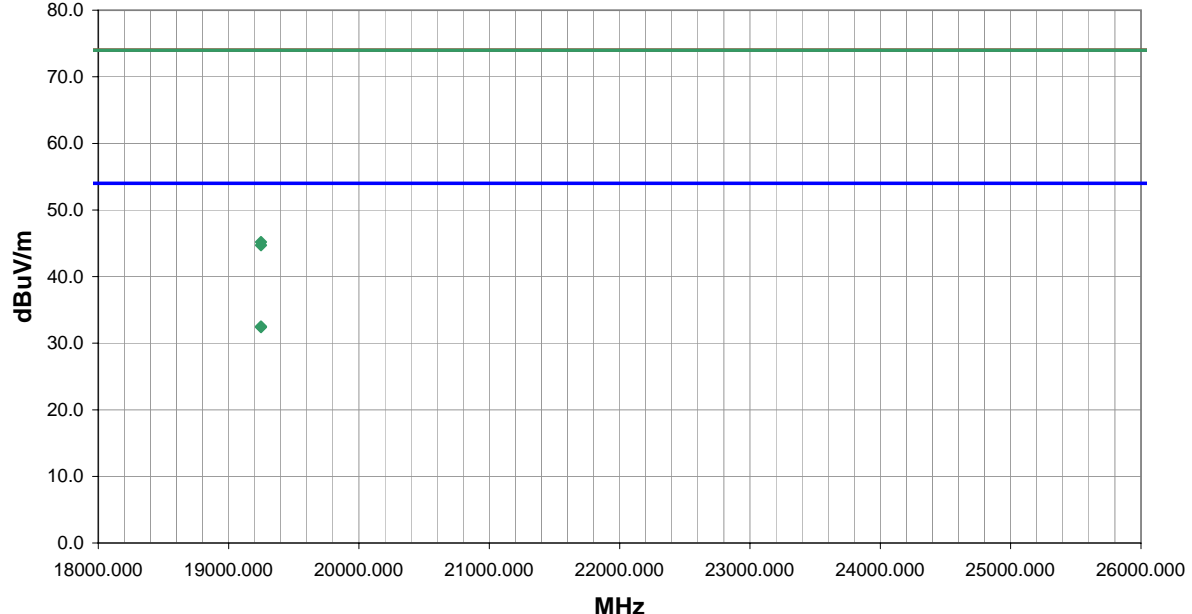
NORTHWEST EMC										REV d14.13 05/06/2004			
RADIATED EMISSIONS DATA SHEET													
EUT: Bluetooth in 6820 co-located with new CDMA , 802.11(b), and Bluetooth in 700C						Work Order: ITRM0030							
Serial Number:						Date: 06/28/04							
Customer: Intermec Technologies Corporation						Temperature: 75							
Attendees: none						Humidity: 45%							
Cust. Ref. No.:						Barometric Pressure: 30.16							
Tested by: Holly Ashkannejhad				Power: 120VAC, 60Hz		Job Site: EV01							
TEST SPECIFICATIONS													
Specification: FCC 15.247(c) Spurious Radiated Emissions						Year: 2003							
Method: ANSI C63.4						Year: 2001							
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Simultaneous transmission of 6820 printer (Bluetooth) with 700C (CDMA(PCS)/802.11b/Bluetooth)													
EUT OPERATING MODES													
Transmitting channel 1153 CDMA PCS, 802.11b channel 11, Bluetooth channel 62													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS										Run #			
Pass										30			
Other													
										 Tested By:			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
2483.500	26.5	29.4	61.0	1.3	1.0	0.0	H-Horn	AV	-9.5	46.4	54.0	-7.6	
2483.500	21.6	29.4	49.0	1.1	1.0	0.0	V-Horn	AV	-9.5	41.5	54.0	-12.5	
2483.500	31.6	29.4	61.0	1.3	1.0	0.0	H-Horn	PK	-9.5	51.5	74.0	-22.5	
2483.500	28.4	29.4	49.0	1.1	1.0	0.0	V-Horn	PK	-9.5	48.3	74.0	-25.7	


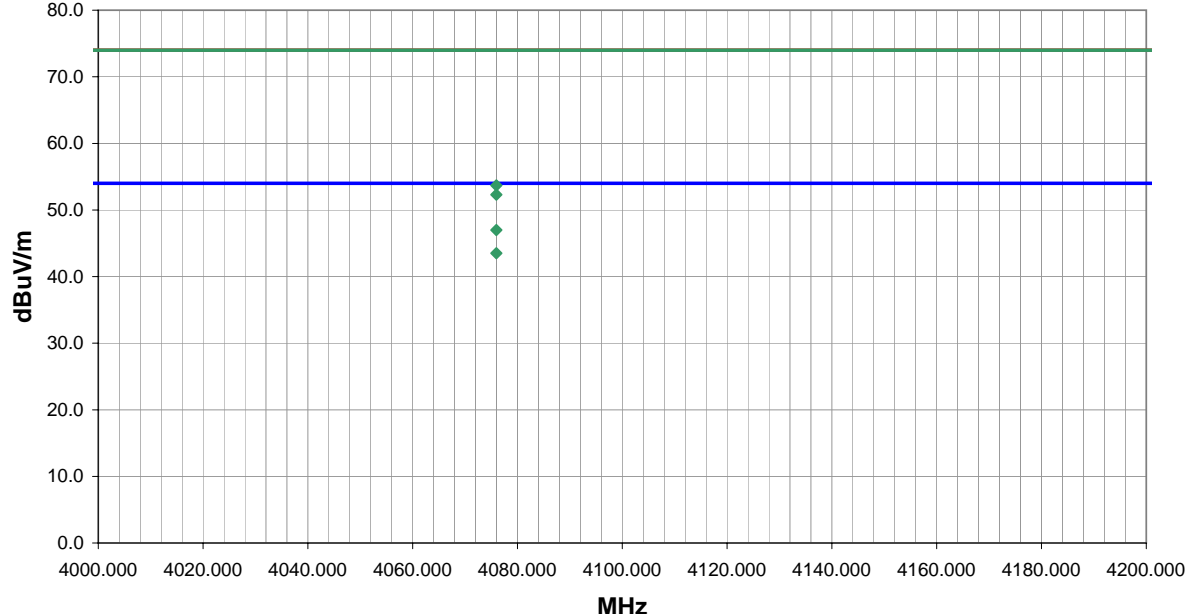
NORTHWEST EMC										REV d14.13 05/06/2004			
RADIATED EMISSIONS DATA SHEET													
EUT: Bluetooth in 6820 co-located with new CDMA , 802.11(b), and Bluetooth in 700C						Work Order: ITRM0030							
Serial Number:						Date: 06/28/04							
Customer: Intermec Technologies Corporation						Temperature: 75							
Attendees: none						Humidity: 45%							
Cust. Ref. No.:						Barometric Pressure: 30.16							
Tested by: Holly Ashkannejhad				Power: 120VAC, 60Hz		Job Site: EV01							
TEST SPECIFICATIONS													
Specification: FCC 15.247(c) Spurious Radiated Emissions						Year: 2003							
Method: ANSI C63.4						Year: 2001							
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Simultaneous transmission of 6820 printer (Bluetooth) with 700C (CDMA(cellular)/802.11b/Bluetooth)													
EUT OPERATING MODES													
Transmitting channel 54 CDMA cellular, 802.11b channel 11, Bluetooth channel 79													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS										Run #			
Pass										31			
Other													
										 Tested By:			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
2483.500	27.3	29.4	61.0	1.3	1.0	0.0	H-Horn	AV	-9.5	47.2	54.0	-6.8	
2483.500	22.0	29.4	55.0	1.1	1.0	0.0	V-Horn	AV	-9.5	41.9	54.0	-12.1	
2483.500	31.5	29.4	61.0	1.3	1.0	0.0	H-Horn	PK	-9.5	51.4	74.0	-22.6	
2483.500	28.7	29.4	55.0	1.1	1.0	0.0	V-Horn	PK	-9.5	48.6	74.0	-25.4	




NORTHWEST EMC										REV d14.13 05/06/2004			
RADIATED EMISSIONS DATA SHEET													
EUT: Bluetooth in 6820 co-located with new CDMA , 802.11(b), and Bluetooth in 700C										Work Order: ITRM0030			
Serial Number:										Date: 06/28/04			
Customer: Intermec Technologies Corporation										Temperature: 75			
Attendees: none										Humidity: 45%			
Cust. Ref. No.:										Barometric Pressure: 30.16			
Tested by: Holly Ashkannejhad						Power: 120VAC, 60Hz		Job Site: EV01					
TEST SPECIFICATIONS													
Specification: FCC 15.247(c) Spurious Radiated Emissions										Year: 2003			
Method: ANSI C63.4										Year: 2001			
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Simultaneous transmission of 6820 printer (Bluetooth) with 700C (CDMA(cellular)/802.11b/Bluetooth)													
EUT OPERATING MODES													
Transmitting channel 467 CDMA cellular, 802.11b channel 1, Bluetooth channel 11													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS												Run #	
Pass												32	
Other													
										 Tested By:			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
19296.000	25.0	8.0	362.0	1.0	3.0	0.0	I-High Horr	AV	0.0	33.0	54.0	-21.0	
19296.000	25.0	8.0	-3.0	1.0	3.0	0.0	V-High Horr	AV	0.0	33.0	54.0	-21.0	
19296.000	37.8	8.0	362.0	1.0	3.0	0.0	I-High Horr	PK	0.0	45.8	74.0	-28.2	
19296.000	37.5	8.0	-3.0	1.0	3.0	0.0	V-High Horr	PK	0.0	45.5	74.0	-28.5	

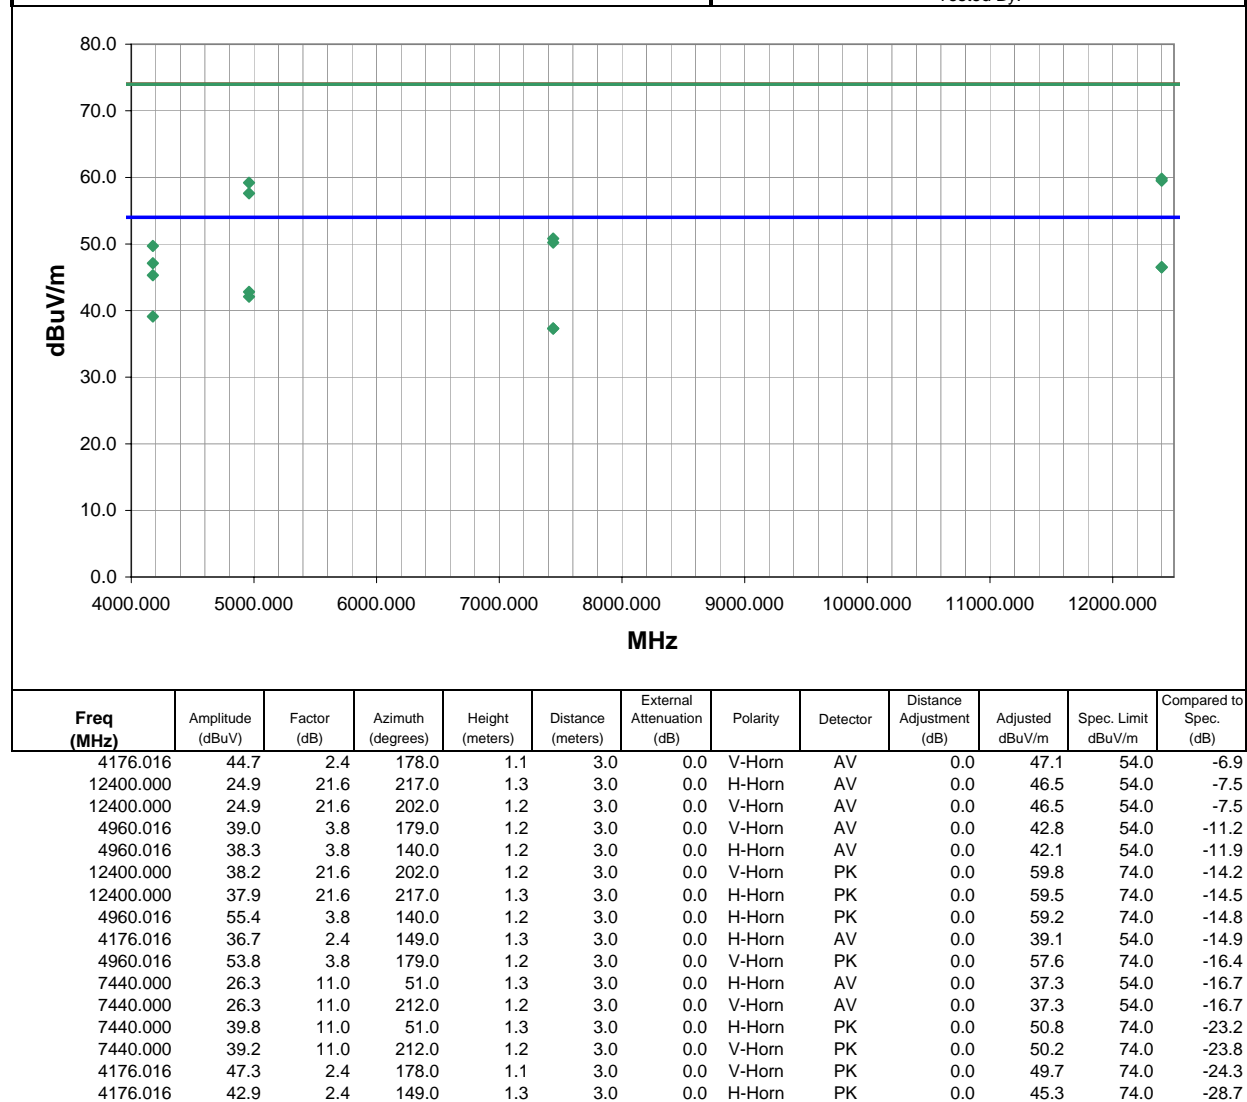
NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		REV d4.13 05/06/2004								
EUT: Bluetooth in 6820 co-located with new CDMA , 802.11(b), and Bluetooth in 700C		Work Order: ITRM0030										
Serial Number:		Date: 06/28/04										
Customer: Intermec Technologies Corporation		Temperature: 75										
Attendees: none		Humidity: 45%										
Cust. Ref. No.:		Barometric Pressure: 30.16										
Tested by: Holly Ashkannejhad		Power: 120VAC, 60Hz		Job Site: EV01								
TEST SPECIFICATIONS												
Specification: FCC 15.247(c) Spurious Radiated Emissions				Year: 2003								
Method: ANSI C63.4				Year: 2001								
SAMPLE CALCULATIONS												
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation												
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator												
COMMENTS												
Simultaneous transmission of 6820 printer (Bluetooth) with 700C (CDMA(cellular)/802.11b/Bluetooth)												
EUT OPERATING MODES												
Transmitting channel 55 CDMA cellular, 802.11b channel 11, Bluetooth channel 79												
DEVIATIONS FROM TEST STANDARD												
No deviations.												
RESULTS				Run #								
Pass				33								
Other												
				 Tested By:								
												
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)
22320.000	26.5	9.2	-3.0	1.0	3.0	0.0	I-High Horr	AV	0.0	35.7	54.0	-18.3
22320.000	26.4	9.2	361.0	1.0	3.0	0.0	V-High Horr	AV	0.0	35.6	54.0	-18.4
19840.000	22.9	8.9	-3.0	1.0	3.0	0.0	I-High Horr	AV	0.0	31.8	54.0	-22.2
19840.000	22.8	8.9	361.0	1.0	3.0	0.0	V-High Horr	AV	0.0	31.7	54.0	-22.3
22320.000	39.4	9.2	361.0	1.0	3.0	0.0	V-High Horr	PK	0.0	48.6	74.0	-25.4
22320.000	38.9	9.2	-3.0	1.0	3.0	0.0	I-High Horr	PK	0.0	48.1	74.0	-25.9
19840.000	35.5	8.9	361.0	1.0	3.0	0.0	V-High Horr	PK	0.0	44.4	74.0	-29.6
19840.000	35.0	8.9	-3.0	1.0	3.0	0.0	I-High Horr	PK	0.0	43.9	74.0	-30.1


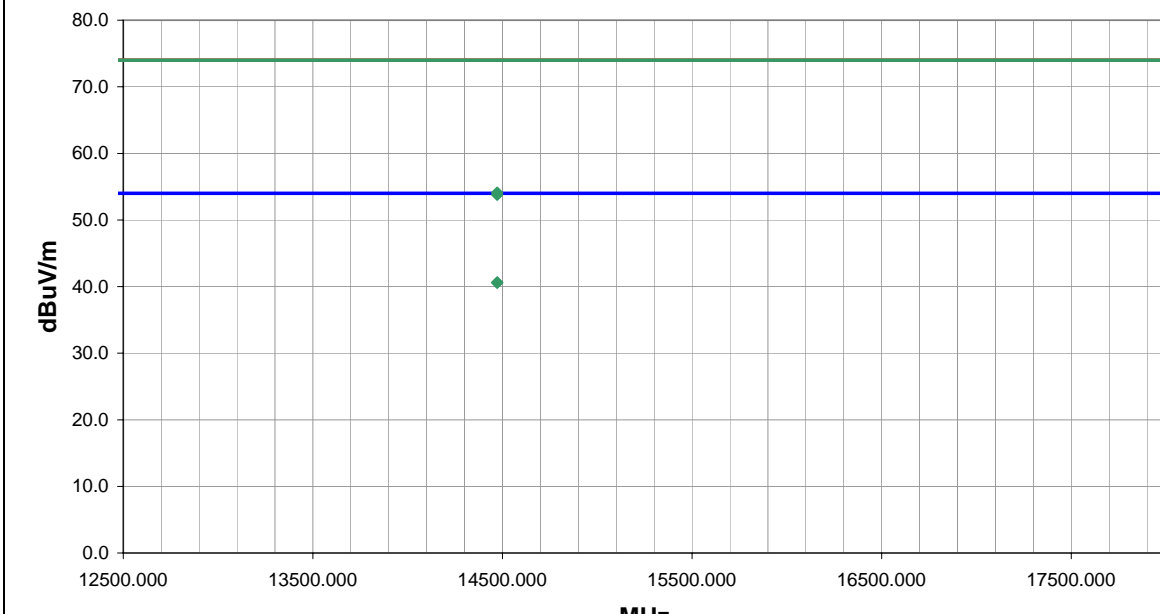
NORTHWEST EMC										RADIATED EMISSIONS DATA SHEET				REV d14.13 05/06/2004	
EUT: Bluetooth in 6820 co-located with new CDMA , 802.11(b), and Bluetooth in 700C										Work Order: ITRM0030					
Serial Number:										Date: 06/28/04					
Customer: Intermec Technologies Corporation										Temperature: 75					
Attendees: none										Humidity: 45%					
Cust. Ref. No.:										Barometric Pressure: 30.16					
Tested by: Holly Ashkannejhad						Power: 120VAC, 60Hz		Job Site: EV01							
TEST SPECIFICATIONS															
Specification: FCC 15.247(c) Spurious Radiated Emissions										Year: 2003					
Method: ANSI C63.4										Year: 2001					
SAMPLE CALCULATIONS															
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation															
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator															
COMMENTS															
Simultaneous transmission of 6820 printer (Bluetooth) with 700C (CDMA(cellular)/802.11b/Bluetooth)															
EUT OPERATING MODES															
Transmitting channel 395 CDMA cellular, 802.11b channel 1, Bluetooth channel 5															
DEVIATIONS FROM TEST STANDARD															
No deviations.															
RESULTS															
Pass												Run #		34	
Other															
										 Tested By:					
															
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)			
19248.000	24.7	7.8	-2.0	1.0	3.0	0.0	I-High Horr	AV	0.0	32.5	54.0	-21.5			
19248.000	24.6	7.8	361.0	1.0	3.0	0.0	V-High Horr	AV	0.0	32.4	54.0	-21.6			
19248.000	37.4	7.8	361.0	1.0	3.0	0.0	V-High Horr	PK	0.0	45.2	74.0	-28.8			
19248.000	36.9	7.8	-2.0	1.0	3.0	0.0	I-High Horr	PK	0.0	44.7	74.0	-29.3			

NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET										REV d14.13 05/06/2004	
EUT: Bluetooth in 6820 co-located with new CDMA , 802.11(b), and Bluetooth in 700C		Work Order: ITRM0030											
Serial Number:		Date: 06/28/04											
Customer: Intermec Technologies Corporation		Temperature: 75											
Attendees: none		Humidity: 45%											
Cust. Ref. No.:		Barometric Pressure: 30.16											
Tested by: Holly Ashkannejhad		Power: 120VAC, 60Hz		Job Site: EV01									
TEST SPECIFICATIONS													
Specification: FCC 15.247(c) Spurious Radiated Emissions		Year: 2003											
Method: ANSI C63.4		Year: 2001											
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Simultaneous transmission of 6820 printer (Bluetooth) with 700C (CDMA(cellular)/802.11b/Bluetooth)													
EUT OPERATING MODES													
Transmitting channel 395 CDMA cellular, 802.11b channel 1, Bluetooth channel 5													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS												Run #	
Pass												35	
Other													
												 Tested By:	
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
4075.971	49.8	2.5	172.0	1.2	3.0	0.0	V-Horn	AV	0.0	52.3	54.0	-1.7	
4075.971	41.0	2.5	262.0	1.3	3.0	0.0	H-Horn	AV	0.0	43.5	54.0	-10.5	
4075.971	51.2	2.5	172.0	1.2	3.0	0.0	V-Horn	PK	0.0	53.7	74.0	-20.3	
4075.971	44.5	2.5	262.0	1.3	3.0	0.0	H-Horn	PK	0.0	47.0	74.0	-27.0	



NORTHWEST EMC		RADIATED EMISSIONS DATA SHEET		REV d14.13 05/06/2004
EUT: Bluetooth in 6820 co-located with new CDMA , 802.11(b), and Bluetooth in 700C		Work Order: ITRM0030		
Serial Number:		Date: 06/28/04		
Customer: Intermec Technologies Corporation		Temperature: 75		
Attendees: none		Humidity: 45%		
Cust. Ref. No.:		Barometric Pressure: 30.16		
Tested by: Holly Ashkannejhad		Power: 120VAC, 60Hz		Job Site: EV01
<b>TEST SPECIFICATIONS</b>				
Specification: FCC 15.247(c) Spurious Radiated Emissions		Year: 2003		
Method: ANSI C63.4		Year: 2001		
<b>SAMPLE CALCULATIONS</b>				
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation				
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator				
<b>COMMENTS</b>				
Simultaneous transmission of 6820 printer (Bluetooth) with 700C (CDMA(cellular)/802.11b/Bluetooth)				
<b>EUT OPERATING MODES</b>				
Transmitting channel 55 CDMA cellular, 802.11b channel 11, Bluetooth channel 79				
<b>DEVIATIONS FROM TEST STANDARD</b>				
No deviations.				
<b>RESULTS</b>				Run #
Pass				37
<b>Other</b>				
 Tested By:				



NORTHWEST EMC										REV dtd. 13 05/06/2004			
RADIATED EMISSIONS DATA SHEET													
EUT: Bluetooth in 6820 co-located with new CDMA , 802.11(b), and Bluetooth in 700C										Work Order: ITRM0030			
Serial Number:										Date: 06/29/04			
Customer: Intermec Technologies Corporation										Temperature: 75			
Attendees: none										Humidity: 45%			
Cust. Ref. No.:										Barometric Pressure: 30.16			
Tested by: Holly Ashkannejhad						Power: 120VAC, 60Hz		Job Site: EV01					
TEST SPECIFICATIONS													
Specification: FCC 15.247(c) Spurious Radiated Emissions										Year: 2003			
Method: ANSI C63.4										Year: 2001			
SAMPLE CALCULATIONS													
Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation													
Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator													
COMMENTS													
Simultaneous transmission of 6820 printer (Bluetooth) with 700C (CDMA(cellular)/802.11b/Bluetooth)													
EUT OPERATING MODES													
Transmitting channel 467 CDMA cellular, 802.11b channel 1, Bluetooth channel 11													
DEVIATIONS FROM TEST STANDARD													
No deviations.													
RESULTS												Run #	
Pass												38	
Other													
										 Tested By:			
													
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Azimuth (degrees)	Height (meters)	Distance (meters)	External Attenuation (dB)	Polarity	Detector	Distance Adjustment (dB)	Adjusted dBuV/m	Spec. Limit dBuV/m	Compared to Spec. (dB)	
14472.000	26.8	13.8	17.0	3.2	3.0	0.0	H-Horn	AV	0.0	40.6	54.0	-13.4	
14472.000	26.8	13.8	155.0	3.3	3.0	0.0	V-Horn	AV	0.0	40.6	54.0	-13.4	
14472.000	40.3	13.8	17.0	3.2	3.0	0.0	H-Horn	PK	0.0	54.1	74.0	-19.9	
14472.000	40.0	13.8	155.0	3.3	3.0	0.0	V-Horn	PK	0.0	53.8	74.0	-20.2	



