

CENTRE OF TESTING SERVICE INTERNATIONAL

OPERATE ACCORDING TO ISO/IEC 17025

FCC ID/IC TEST REPORT

TEST REPORT NUMBER: CGZ3160104-00003-EFI



CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China





TEST REPORT For FCC ID/IC			
47 CFR PA	ART 15 OCT, 2015; RSS-210 Issue 8		
Report Reference No	CGZ3160104-00003-EFI		
Date of issue	11 January 2016		
Testing Laboratory Name	CENTRE OF TESTING SERVICE CO., LTD.		
Address	A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China		
Testing location/ procedure	Full application of Harmonised standards ■		
	Partial application of Harmonised standards \square		
	Other standard testing method \square		
Applicant's name	Horizon Hobby, LLC		
Address	4105 Fieldstone Road, Champaign, IL 61822, USA		
Test specification			
Standard	47 CFR PART 15 OCT, 2015; RSS-210 Issue 8; RSS-Gen Issue 4		
	ANSI C63.10:2013		
Test Report Form No	CTSEMC-1.0		
TRF Originator	CENTRE OF TESTING SERVICE CO., LTD.		
Master TRF	Dated 2009-01		
CENTRE OF TESTING SERVICE CO	O., LTD. All rights reserved.		
CENTRE OF TESTING SERVICE CO material. CENTRE OF TESTING SEI	in whole or in part for non-commercial purposes as long as the O., LTD is acknowledged as copyright owner and source of the RVICE CO., LTD takes no responsibility for and will not assume liability or's interpretation of the reproduced material due to its placement and		
Test item description	Blade 120 S Helicopter		
Trade Mark	Blade		
Manufacturer	Horizon Hobby, LLC		
Model/Type reference	BLH4100		
Ratings	Battery 3.7V		
Operating Frequency	2404.0MHz ~2476.0MHz		
Result	Positive		

Compiled by:

Supervised by:

Approved by:

Kate zhang / Fileadministrators

Duke yang / Technique principal

Vincent yao / Manager

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





FCC ID/IC -- TEST REPORT

Test Report No. :	CGZ3160104-00003-EFI	11 January 2016 Date of issue

	7111110
Type / Model	BLH4100
EUT	Blade 120 S Helicopter
	Diago 120 o Honooptoi
A 11 /	
Applicant	Horizon Hobby, LLC
Address	4105 Fieldstone Road, Champaign, IL 61822, USA
Telephone	+1-217 4033657
Fax	
Contact	Erin Hassan
Manufacturer	Horizon Hobby, LLC
Address	4105 Fieldstone Road, Champaign, IL 61822, USA
Telephone	+1-217 4033657
Fax	
Contact	Erin Hassan
Factory	Yeeunc International Co., Ltd.
<u> </u>	,
Address	
Telephone	
Fax	1
Contact	

Test Result according to the standards on page 1: PASSED

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn



TABLE OF CONTENTS

<u>Description</u>	Page
1.TEST STANDARDS	5
2.SUMMARY	5
2.1 GENERAL REMARKS	5
2.2 FINAL ASSESSMENT	5
3.EQUIPMENT UNDER TEST	5
3.1 Power supply system utilised	5
3.2 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
3.3 EUT OPERATION MODE	
3.4 EUT CONFIGURATION	
4.TEST ENVIRONMENT	7
4.1 Address of the test laboratory	7
4.2 Test facility	
4.3 Environmental conditions	7
4.4 DEFINITIONS OF SYMBOLS USED IN THIS TEST REPORT	
4.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY	
4.6 MEASUREMENT UNCERTAINTY	8
5.SUMMARY OF STANDARDS AND RESULTS	8
5.1.DESCRIPTION OF STANDARDS AND RESULTS	8
6.POWER LINE CONDUCTED EMISSION TEST	9
6.1.Test Equipment	9
6.2. BLOCK DIAGRAM OF TEST SETUP	9
6.3. POWER LINE CONDUCTED EMISSION TEST LIMITS	9
6.4.Test Procedure	9
6.5. Power Line Conducted Emission Test Results	9
7.RADIATED DISTURBANCE (ELECTRIC FIELD)	10
7.1.Test Equipment	10
7.2.BLOCK DIAGRAM OF TEST SETUP	10
7.3.RADIATED EMISSION LIMIT:	
7.4.Test Procedure	
7.5.RADIATED EMISSION TEST RESULTS	12
8.BAND EDGE COMPLIANCE TEST	24
8.1. Test Equipment	
8.2. Test Information	24
Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.	

CENTRE OF TESTING SERVICE CO., LTD.

FCC ID:BRWGEN1AR6400H IC: 6157A-GEN1AR6400H CENTRE OF TESTING SERVICE





8.3. TEST PROCEDURE	24
8.4. TEST RESULTS	
9. 99% BANDWIDTH	29
9.1 Test procedure	29
9.2. TEST EQUIPMENT	
9.3. TEST RESULTS	29
10 DEVIATION TO TEST SPECIFICATIONS	32

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





1.TEST STANDARDS

The tests were performed according to following standards:

- 47 CFR PART 15 OCT, 2015
- RSS-210 Issue 8
- RSS-Gen Issue 4
- ANSI C63.10:2013

2.SUMMARY

2.1 GENERAL REMARKS

Date of receipt of test sample	04 January 2016	
Testing commenced on	04~11 January 2016	
Testing concluded on	11 January 2016	

2.2 FINAL ASSESSMENT

The FCC/IC requirements pertaining to the technical standards and tested operation modes are

- fulfilled.
- □ **not** fulfilled.

The equipment under test

- fulfils the FCC/IC requirements cited on page 1.
- does not fulfil the FCC/IC requirements cited on page 1.

3.EQUIPMENT UNDER TEST

3.1 Power supply system utilised

Power supply voltage : ■ Battery 3.7V

3.2 Short description of the Equipment under Test (EUT)

Number of tested samples: 1

Serial number: Prototype

3.3 EUT operation mode

The equipment under test was operated during the measurement under the following conditions:

- ☐ TX- Y position
- ☐ TX- Zposition
- TX- X position

Operation mode 1:TX-X Position Low (2404MHz), TX-X Position Middle (2440MHz),

TX-X Position High (2476MHz)

Note:Operation mode 1 TX -X position of EUT is the radiated test worst case; so only these test results be recorded in the test report.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





3.4 EUT configuration

3.4.1. Description of configuration (EUT)

Description	:	Blade 120 S Helicopter
Model Number	:	BLH4100
Operation frequency	:	2404~ 2476 MHz ISM Band
Modulation Technology	:	DSSS Modulation
Antenna	:	Internal antenna, met requirement of FCC 15.203

3.4.2. Tested Supporting System Details

N/A

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





4.TEST ENVIRONMENT

4.1 Address of the test laboratory

A101, No.65, Zhuji Highway, Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

4.2 Test facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L3394

CENTRE OF TESTING SERVICE CO., LTD has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

IC-Registration No.: 8374A

The 3m Alternate Test Site of CENTRE OF TESTING SERVICE CO., LTD has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 8374A on June 6, 2011.

FCC-Registration No.: 971995

CENTRE OF TESTING SERVICE CO., LTD, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration No.791995, July 13,2012.

4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35 ° C
Humidity:	25~75 %
Atmospheric pressure:	86~106 kPa

4.4 Definitions of symbols used in this test report

- The black square indicates that the listed condition, standard or equipment is applicable for this report.
- The empty square indicates that the listed condition, standard or equipment is **not** applicable for this report.

4.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the CTS quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3160104-00003-EFI Page 7 of 32





4.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conduction disturbance	150kHz~30MHz	±1.22dB	(1)
Power disturbance	30MHz~300MHz	±1.38dB	(1)
Radiation emission (3m)	30MHz~300MHz	±3.14dB	(1)
	300MHz~1000MHz	±3.18dB	(1)
	1GHz~26.5GHz	±3.54dB	(1)

^{(1).} This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5. Summary of standards and results

5.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Results	
Conducted Emission Test	FCC Part 15 § 15.207 RSS-Gen Issue 4§ 7.2.4 ANSI C63.10:2013	N/A	
Radiated Emission Test	RSS-Gen Issue 4§ 7.2 RSS-210 Issue 8 § A2.9 FCC Part 15 C § 15.249 FCC Part 15 § 209 ANSI C63.10:2013	PASSED	
Receiver Spurious Emissions	RSS-Gen Issue 4§ 4.10 ANSI C63.10:2013	PASSED	
Band Edge Compliance Test	RSS-210 Issue 8 § 1.1 RSS-Gen Issue 4 § 8.10 FCC Part 15 C § 15.249 ANSI C63.10:2013	PASSED	
99% Bandwidth	RSS-Gen Issue 4 § 6.6 ANSI C63.10:2013	PASSED	
N/A is an abbreviation for Not Applicable.			

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





6. Power Line Conducted Emission Test

6.1.Test Equipment

Conduc	Conducted Disturbance					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	
1	EMI Test Receiver	ROHDE & SCHWARZ	ESHS10	842884/012	2015/10	
2	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/025	2015/10	
3	Artificial Mains	ROHDE & SCHWARZ	ESH3-Z5	832479/026	2015/10	
4	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100301	2015/10	
5	EMI Test Software	ROHDE & SCHWARZ	ESK1	N/A	2015/10	

6.2. Block Diagram of Test Setup

EUT

(EUT: Blade 120 S Helicopter)

6.3. Power Line Conducted Emission Test Limits

Standard: RSS-Gen: 7.2.4, FCC Part 15: 15.207, ANSI C63.10:2013

		Maximum RF Line Voltage	
Frequency		Quasi-Peak Level	Average Level
		dB(μV)	dB(μV)
150kHz	~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz	~ 5MHz	56	46
5MHz	~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

6.4.Test Procedure

The Notebook Power connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the EUT. Please refer the block diagram of the test setup and photographs. The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#1). Power on the PC and let it work normally, we use a keyboard test soft ware, let EUT working in test mode, then test it. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC Part 15C on Conducted Emission Test.

6.5. Power Line Conducted Emission Test Results

N/A

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

^{2.} The lower limit shall apply at the transition frequencies.






7. Radiated disturbance (electric field)

7.1.Test Equipment

Radia	Radiated disturbance (electric field)								
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.				
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100868	2015/10				
2	Biconical Antenna	ROHDE & SCHWARZ	HK116	100221	2015/03				
3	Log per Antenna	ROHDE & SCHWARZ	HL223	100226	2015/03				
4	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2015/03				
5	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2015/03				
6	Loop Antenna	A.R.A	PLA-1030/B	1030	2015/10				

7.2.Block Diagram of Test Setup

7.2.1 Block Diagram of connection between EUT and simulators

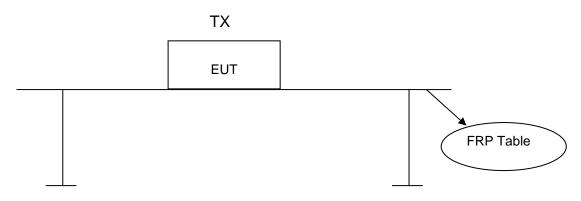

(EUT: Blade 120 S Helicopter)

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471

E-mail: cts@cts-lab.com.cn





7.2.2 Anechoic Chamber Setup Diagram

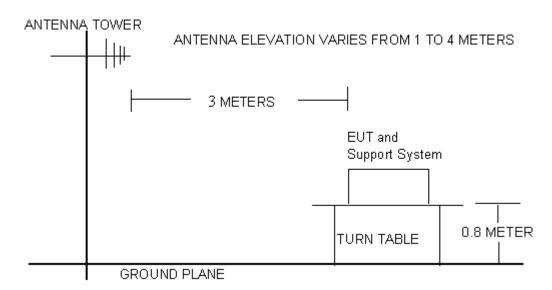

7.3. Radiated Emission Limit:

Standard: FCC 15.249, FCC 15.209; RSS-Gen:7.2; RSS-210 A2.9.

Except as provided in paragraph (a) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (µV/m)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

FRE	FREQUENCY		DISTANCE	FIELD STRENGTHS LIMIT		
I	MHz		Meters	μV/m	dB(μV)/m	
0.009	~	0.490	300	2400/F(kHz)		
0.490	~	1.705	30	24000/F(kHz)		
1.705	~	30	30	30		
30	~	88	3	100	40.0	
88	~	216	3	150	43.5	
216	~	960	3	200	46.0	
960	~	1000	3	500	54.0	
٨٨	Above 1000		0	Other:74.0 dB(μV)/m (Peak)		
At	Jove II	JUU	3	54.0 dB(μV)/m (Average)		

Remark:

- (1) Emission level $dB\mu V = 20 log Emission level <math>\mu V/m$
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





7.4.Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated emission Test.

The frequency range from 30MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 120kHz RBW below 1GHz and a Peak and Average detector with 2MHz RBW above 1GHz,

All measurements for radiated emissions within the restricted bands were performed using a Quasi-Peak detector with 300kHz VBW below 1GHz and a Peak detector with1MHz VBW above 1GHz, A average detector with 10Hz VBW above 1GHz

Pretest x, y, z position of EUT, final, select the worst case x position test and record the test results in the report.

The test modes (TX Mode) is tested in Anechoic Chamber and all the scanning waveforms are reported on section 7.5

7.5. Radiated Emission Test Results

PASSED.

The frequency range from 9KHz~30MHz,30MHz to 230MHz, 230MHz to 1000MHz and above 1GHz. is investigated. Please see the following pages.

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

FCC ID:BRWGEN1AR6400H IC: 6157A-GEN1AR6400H CENTRE OF TESTING SERVICE





Test Mode: TX –X Position Mode Result: □ - passed □ - not passed

No.	Frequency (MHz)	Factor (dB)		Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
Rema	Remark: The test result reading value is to low, margin all > 10dB of the limit.								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





Channel:	TX –X Position	Result:	■ - passed
Test point:	Horizontal		☐ - not passed
Frequency range:	30MHz-1GHz		

EUT	Blade 120 S Helicopter			
Test Condition	Ambient Temperature: 25°C Humidity: 56%			
Test distance	3 Meter			
Test Date:	04~11 January 2016			
Operator	Duke			
MODEL NO	BLH4100			

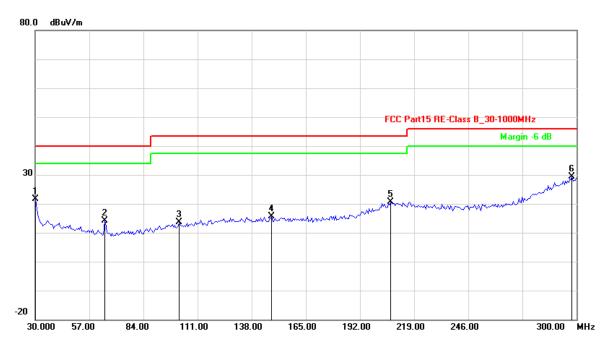


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	30.0000	-16.04	37.76	21.72	40.00	-18.28	QP		
2	64.6293	-20.19	34.40	14.21	40.00	-25.79	QP		
3	101.9639	-18.04	31.65	13.61	43.50	-29.89	QP		
4	147.9559	-15.98	31.53	15.55	43.50	-27.95	QP		
5	207.4750	-10.72	31.29	20.57	43.50	-22.93	QP		
6	297.8357	-1.99	31.38	29.39	46.00	-16.61	QP		
Remark	Remark: Other frequency mini margin all >6 dB of Limit								

CENTRE OF TESTING SERVICE CO., LTD.





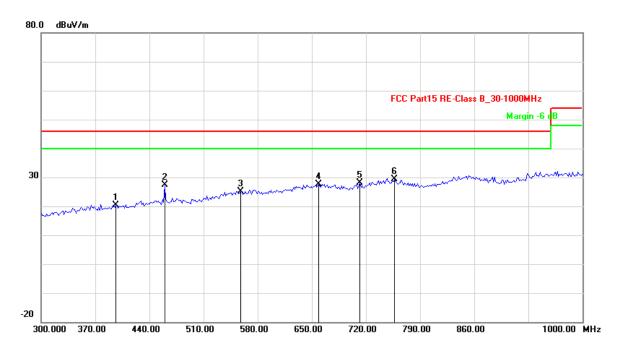

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1	396.7936	-10.56	31.06	20.50	46.00	-25.50	QP			
2	459.9198	-8.39	35.86	27.47	46.00	-18.53	QP			
3	558.1162	-5.66	30.78	25.12	46.00	-20.88	QP			
4	659.1182	-3.32	30.91	27.59	46.00	-18.41	QP			
5	712.4248	-3.19	31.34	28.15	46.00	-17.85	QP			
6	757.3146	-1.84	31.27	29.43	46.00	-16.57	QP			
Remark	: Other frequen	Remark: Other frequency mini margin all >6 dB of Limit								

FCC ID:BRWGEN1AR6400H IC: 6157A-GEN1AR6400H CENTRE OF TESTING SERVICE





Channel:	TX –X Position Low CH	Result:	■ - passed	
Test point:	Horizontal		□ - not passed	
Frequency range:	1GHz-26.5GHz		_ not paccou	

	No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
Ī	1	2404.00	-6.83	89.70	82.87	114.00	-31.13	Peak
Ī	2	2404.00	-6.83	86.89	80.06	94.00	-13.94	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1903.808	-9.86	51.91	42.05	74.00	-31.95	peak		
2	1903.808	-9.86	37.24	27.38	54.00	-26.62	AVG		
3	5893.788	6.21	40.97	47.18	74.00	-26.82	peak		
4	5893.788	6.21	26.48	32.69	54.00	-21.31	AVG		
Remark	Remark: Other frequency mini margin all >6 dB of Limit								

Channel:	TX –X Position Middle CH	Result:	■ - passed
Test point:	Horizontal		☐ - not passed
Frequency range:	1GHz-26.5GHz		

	No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
Ī	1	2440.00	-6.62	89.27	82.65	114.00	-31.35	Peak
ſ	2	2440.00	-6.62	86.95	80.33	94.00	-13.67	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1903.808	-9.86	37.44	27.58	74.00	-46.42	peak		
2	1903.808	-9.86	23.51	13.65	54.00	-40.35	AVG		
3	6114.229	6.83	37.95	44.78	74.00	-29.22	peak		
4	6114.229	6.83	23.31	30.14	74.00	-43.86	peak		
Remark:	Remark: Other frequency mini margin all >6 dB of Limit								

Channel:	TX –X Position High CH	Result:	■ - passed
Test point:	Horizontal		☐ - not passed
Frequency range:	1GHz-26.5GHz		τ.,

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2476.00	-6.40	88.43	82.03	114.00	-31.97	Peak
2	2476.00	-6.40	87.19	80.79	94.00	-13.21	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1881.764	-10.01	37.77	27.76	74.00	-46.24	peak		
2	1881.764	-10.01	24.37	14.36	54.00	-39.64	AVG		
3	5474.950	4.67	37.22	41.89	74.00	-32.11	peak		
4	5474.950	4.67	21.92	26.59	54.00	-27.41	AVG		
Remark	Remark: Other frequency mini margin all >6 dB of Limit								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn








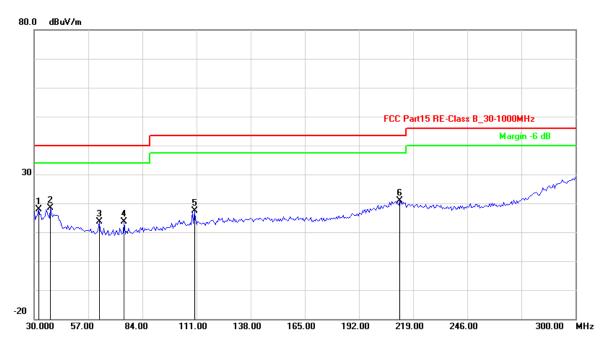

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1	32.1643	-16.32	34.19	17.87	40.00	-22.13	QP			
2	38.1162	-17.09	35.37	18.28	40.00	-21.72	QP			
3	62.4649	-19.95	33.62	13.67	40.00	-26.33	QP			
4	74.9098	-20.36	34.06	13.70	40.00	-26.30	QP			
5	110.0802	-17.30	34.77	17.47	43.50	-26.03	QP			
6	212.3447	-10.36	31.13	20.77	43.50	-22.73	QP			
Remark:	Remark: Other frequency mini margin all >6 dB of Limit									





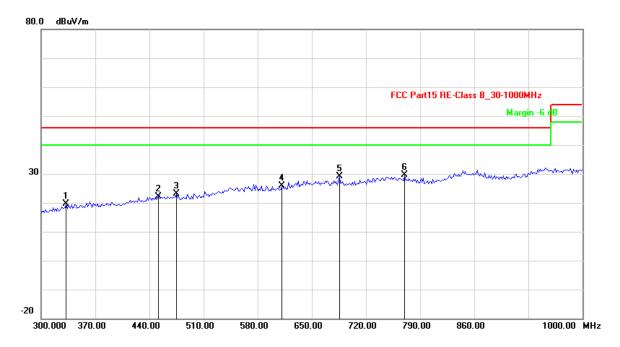

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.			
1	332.2645	-12.16	31.72	19.56	46.00	-26.44	QP			
2	451.5030	-8.45	30.62	22.17	46.00	-23.83	QP			
3	475.3507	-8.29	31.45	23.16	46.00	-22.84	QP			
4	611.4228	-5.02	30.90	25.88	46.00	-20.12	QP			
5	685.7715	-3.57	32.80	29.23	46.00	-16.77	QP			
6	769.9399	-2.27	31.82	29.55	46.00	-16.45	QP			
Remark	Remark: Other frequency mini margin all >6 dB of Limit									

FCC ID:BRWGEN1AR6400H IC: 6157A-GEN1AR6400H CENTRE OF TESTING SERVICE





Channel:	TX –X Position Low CH	Result:	■ - passed	
Test point:	Vertical		□ - not passed	
Frequency range:	1GHz-26.5GHz		passed	

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2404.00	-6.83	84.94	78.11	114.00	-35.89	Peak
2	2404.00	-6.83	83.64	76.81	94.00	-17.19	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	1903.808	-9.86	43.17	33.31	74.00	-40.69	peak	
2	1903.808	-9.86	29.54	19.68	54.00	-34.32	AVG	
3	5805.611	5.88	40.06	45.94	74.00	-28.06	peak	
4	5805.611	5.88	25.38	31.26	54.00	-22.74	AVG	
Remark: Other frequency mini margin all >6 dB of Limit								

Channel:	TX –X Position Middle CH	Result:	■ - passed
Test point:	Vertical		☐ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2440.00	-6.62	84.78	78.16	114.00	-35.84	Peak
2	2440.00	-6.62	83.14	76.52	94.00	-17.48	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	1705.411	-11.17	41.42	30.25	74.00	-43.75	peak	
2	1705.411	-11.17	27.55	16.38	54.00	-37.62	AVG	
3	5915.832	6.30	40.96	47.26	74.00	-26.74	peak	
4	5915.832	6.30	26.29	32.59	54.00	-21.41	AVG	
Remark:	Remark: Other frequency mini margin all >6 dB of Limit							

Channel:	TX –X Position High CH	Result:	■ - passed
Test point:	Vertical		☐ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	2476.00	-6.40	84.76	78.36	114.00	-35.64	Peak
2	2476.00	-6.40	82.53	76.13	94.00	-17.87	AVG

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	1771.543	-10.74	37.97	27.23	74.00	-46.77	peak		
2	1771.543	-10.74	24.03	13.29	54.00	-40.71	AVG		
3	5739.479	5.64	37.35	42.99	74.00	-31.01	peak		
4	5739.479	5.64	20.94	26.58	74.00	-47.42	peak		
Remark:	Remark: Other frequency mini margin all >6 dB of Limit								

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406


Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





Channel:	RX	Result:	■ - passed
Test point:	Horizontal		☐ - not passed
Frequency range:	30MHz-1GHz		

EUT	Blade 120 S Helicopter
Test Condition	Ambient Temperature: 25°C Humidity: 56%
Test distance	3 Meter
Test Date:	04~11 January 2016
Operator	Duke
MODEL NO	BLH4100

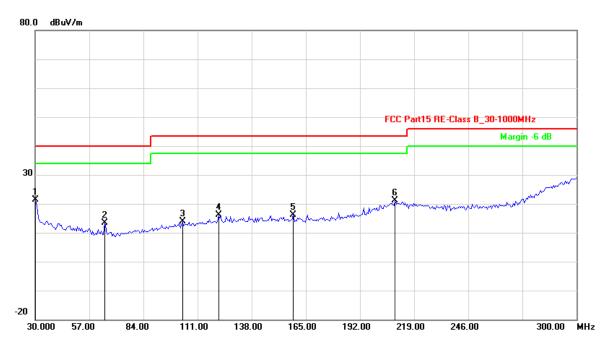

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	30.0000	-16.04	37.32	21.28	40.00	-18.72	QP		
2	64.6293	-20.19	33.52	13.33	40.00	-26.67	QP		
3	103.5872	-17.89	31.73	13.84	43.50	-29.66	QP		
4	121.4429	-16.64	32.66	16.02	43.50	-27.48	QP		
5	158.7776	-15.97	32.22	16.25	43.50	-27.25	QP		
6	209.6393	-10.27	31.37	21.10	43.50	-22.40	QP		
Remark	Remark: Other frequency mini margin all >6 dB of Limit								

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





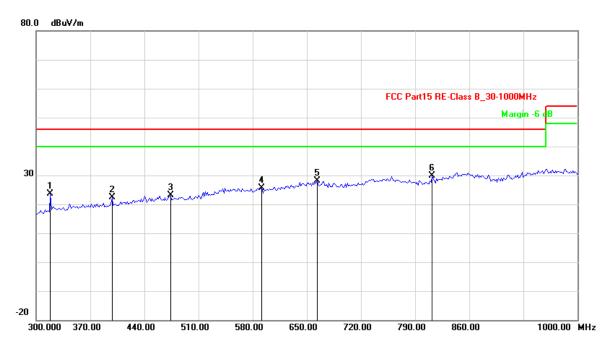

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	318.2365	-12.79	36.52	23.73	46.00	-22.27	QP		
2	398.1964	-10.54	32.97	22.43	46.00	-23.57	QP		
3	473.9479	-8.30	31.46	23.16	46.00	-22.84	QP		
4	591.7836	-5.57	31.19	25.62	46.00	-20.38	QP		
5	663.3267	-3.36	31.56	28.20	46.00	-17.80	QP		
6	812.0240	-2.55	32.43	29.88	46.00	-16.12	QP		
Remark	Remark: Other frequency mini margin all >6 dB of Limit								

Channel:	RX	Result:	■ - passed
Test point:	Horizontal		□ - not passed
Frequency range:	1GHz-26.5GHz		=et passea

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	1903.808	-9.86	38.34	28.48	74.00	-45.52	peak	
2	1903.808	-9.86	24.44	14.58	54.00	-39.42	AVG	
3	5959.920	6.46	38.21	44.67	74.00	-29.33	peak	
4	5959.920	6.46	23.82	30.28	54.00	-23.72	AVG	
Remark	Remark: Other frequency mini margin all >6 dB of Limit							

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn







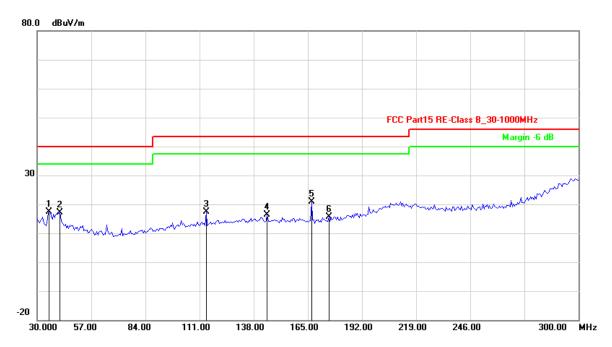

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	
1	35.9519	-16.81	34.14	17.33	40.00	-22.67	QP	
2	41.3627	-17.51	34.60	17.09	40.00	-22.91	QP	
3	114.4088	-17.04	34.38	17.34	43.50	-26.16	QP	
4	144.7094	-16.01	32.30	16.29	43.50	-27.21	QP	
5	166.8938	-15.98	36.88	20.90	43.50	-22.60	QP	
6	175.5511	-15.54	31.11	15.57	43.50	-27.93	QP	
Remark:	Remark: Other frequency mini margin all >6 dB of Limit							


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





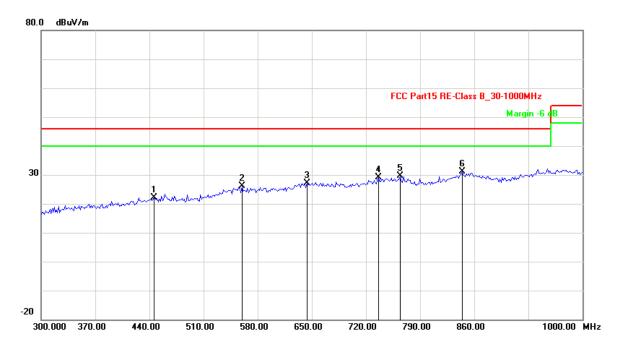

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.		
1	445.8918	-8.63	30.72	22.09	46.00	-23.91	QP		
2	559.5190	-5.66	31.83	26.17	46.00	-19.83	QP		
3	643.6874	-3.52	30.76	27.24	46.00	-18.76	QP		
4	736.2725	-2.18	31.20	29.02	46.00	-16.98	QP		
5	764.3287	-2.08	31.72	29.64	46.00	-16.36	QP		
6	844.2886	-0.63	31.75	31.12	46.00	-14.88	QP		
Remark:	Remark: Other frequency mini margin all >6 dB of Limit								

Channel:	RX	Result:	■ - passed
Test point:	Vertical		□ - not passed
Frequency range:	1GHz-26.5GHz		

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.
1	1705.411	-11.17	37.74	26.57	74.00	-47.43	peak
2	1705.411	-11.17	24.43	13.26	54.00	-40.74	AVG
3	5166.333	3.77	37.45	41.22	74.00	-32.78	peak
4	5166.333	3.77	22.81	26.58	54.00	-27.42	AVG
Remark: Other frequency mini margin all >6 dB of Limit							

CENTRE OF TESTING SERVICE CO., LTD.





8. Band Edge Compliance test

8.1. Test Equipment

Band Edge Compliance test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	10868	2015/10	
2	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2015/03	
3	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2015/03	

8.2. Test Information

EUT	Blade 120 S Helicopter	
Test Condition	Ambient Temperature: 25°C Humidity: 56%	
Test distance	3 Meter	
Test Date:	04~11 January 2016	
Operator	Duke	
MODEL NO	BLH4100	

8.3. Test procedure

- 1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setp 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz; VBW=1KHz(1/on Time) / Sweep=AUTO

8.4. Test Results

PASSED.

The EUT operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

Test Mode	Channel	Test Result Highest Emission (dBuv/m)			
	Marked Frequency	Horizontal		Vertical	
		Peak	Average	Peak	Average
Low Channel	2390MHz	45.75	22.09	42.52	20.22
	2400MHz	57.49	35.07	53.15	31.92
High Channel	2483.5MHz	50.68	23.99	47.51	21.40
	2500MHz	42.14	21.36	39.52	19.58

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines)


Complaint line: +86-20-85533471


E-mail: cts@cts-lab.com.cn





Band Edges (Low)

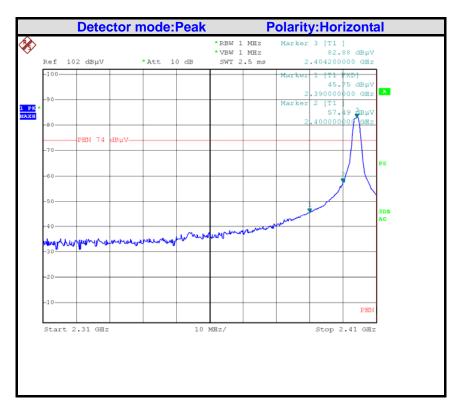

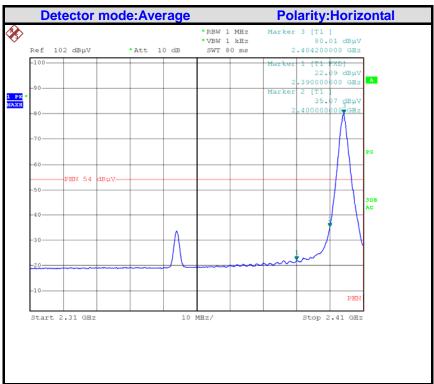

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.


CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn



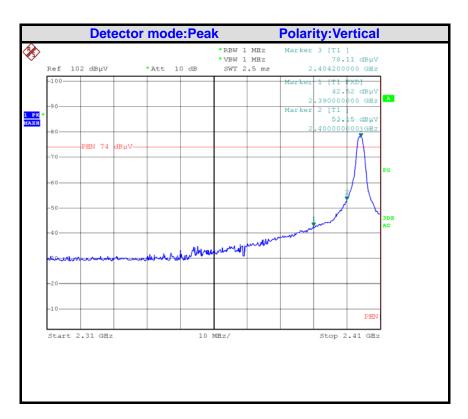

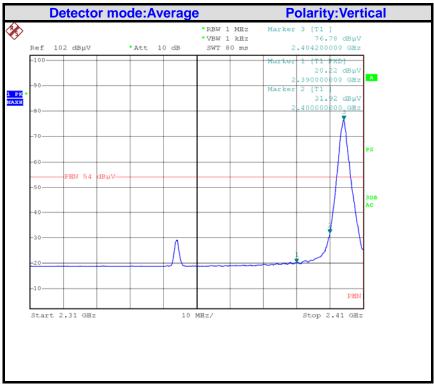

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





Band Edges (High)

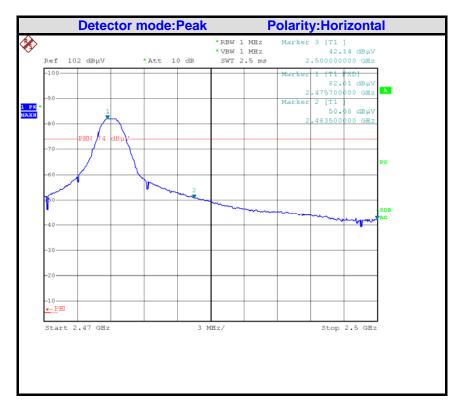



Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

CENTRE OF TESTING SERVICE CO., LTD.


A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China


Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





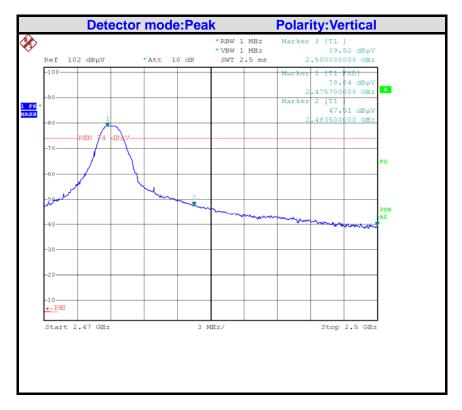

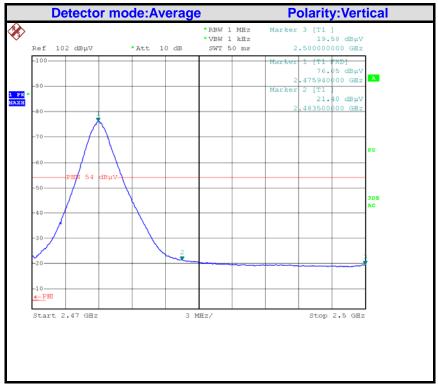

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn





9. 99% bandwidth

9.1 Test procedure

According to RSS-210 A1.1.3 and RSS-Gen 4.6.1 The Receiver output is connected to the spectrum analyzer. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The sweep time is coupled.

9.2. Test Equipment

Band Edge Compliance test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	
1	Log per Antenna	ROHDE & SCHWARZ	HL050	100186	2015/03/30	
2	Signal analyzer	ROHDE & SCHWARZ	FSIQ26	100311	2015/03/25	

9.3. Test Results


PASSED.


Channel	Frequency (MHz)	Bandwidth (MHz)
Low	2404	1.216
Middle	2440	1.264
High	2476	1.364

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.





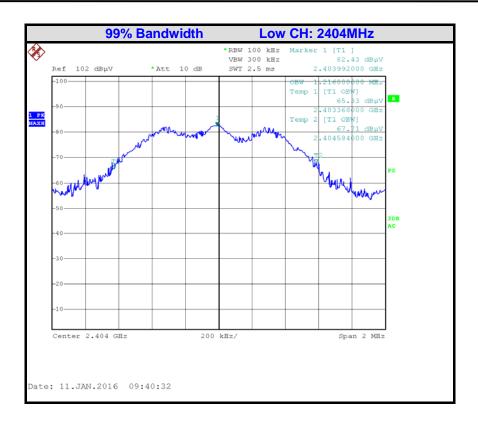

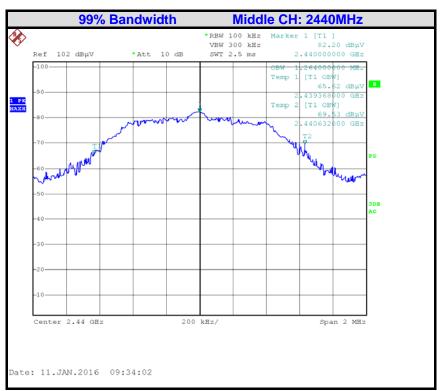

CENTRE OF TESTING SERVICE CO., LTD.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China

Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406

Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn











10. Deviation to test specifications

The following identical model(s):

BLH4180

Belong to the tested device:

Product description: Blade 120 S Helicopter Model name: BLH4100

Copyright of this report is owned by Centre of Testing Service and may not be reproduced other than in full except with the written approval of the issuing Company.

A101, No.65, Zhuji Highway,Tianhe District, Guangzhou, China
Tel: +86-20-85543113 (32 lines) Fax: +86-20-38780406
Complaint line: +86-20-85533471 E-mail: cts@cts-lab.com.cn

See Reverse For Terms And Conditions of Service

Report No.: CGZ3160104-00003-EFI