



REPORT No.: SZ18060085W03

TEST REPORT

APPLICANT : Hot Pepper, Inc.

PRODUCT NAME : 4G Smart Phone

MODEL NAME : VLE5

BRAND NAME : Hot Pepper

FCC ID : 2APD4-A80C

STANDARD(S) : 47 CFR Part 15 Subpart C

TEST DATE : 2018-06-14 to 2018-07-16

ISSUE DATE : 2018-07-18

Tested by:

Su Hang
Su Hang (Test Engineer)

Approved by:

Peng Huarui
Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Technical Information	4
1.1. Applicant and Manufacturer Information	4
1.2. Equipment Under Test (EUT) Description	4
1.3. Test Standards and Results	5
1.4. Environmental Conditions	5
2. 47 CFR Part 15C Requirements	6
2.1. Antenna requirement	6
2.2. Peak Output Power	6
2.3. Bandwidth	9
2.4. Conducted Spurious Emissions and Band Edge	18
2.5. Power spectral density (PSD)	31
2.6. Conducted Emission	40
2.7. Restricted Frequency Bands	43
2.8. Radiated Emission	55
Annex A Test Uncertainty	71
Annex B Testing Laboratory Information	72



REPORT No.: SZ18060085W03

Change History		
Issue	Date	Reason for change
1.0	2018-07-18	First edition



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Hot Pepper, Inc.
Applicant Address:	5151 California Ave., Suite 100, Irvine 92617, USA
Manufacturer:	Hot Pepper, Inc.
Manufacturer Address:	5151 California Ave., Suite 100, Irvine 92617, USA

1.2. Equipment Under Test (EUT) Description

Product Name:	4G Smart Phone
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	HXF-M 94V-0
Software Version:	HPP-VLE5180706
Modulation Type:	DSSS, OFDM
Operating Frequency Range:	802.11b/g/n-20MHz: 2.412GHz - 2.462GHz 802.11n-40MHz: 2.422GHz - 2.452GHz
Channel Number:	802.11b/g/n-20MHz: 11 802.11n-40MHz: 7
Antenna Type:	PIFA Antenna
Antenna Gain:	0.2dBi

Note 1: The EUT is operating at 2.4GHz ISM; it supports 802.11b, 802.11g, 802.11n and they are all tested in this report.

For 802.11b/g/n-20MHz (2.4GHz band), the frequencies allocated is $F \text{ (MHz)} = 2412 + 5 \times (n-1)$ ($1 \leq n \leq 11$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 1 (2412MHz), 6 (2437MHz) and 11 (2462MHz).

For 802.11n-40MHz, the frequencies allocated is $F \text{ (MHz)} = 2412 + 5 \times (n-1)$ ($3 \leq n \leq 9$). The lowest, middle, highest channel numbers of the EUT used and tested in this report are separately 3 (2422MHz), 6 (2437MHz) and 9 (2452MHz).

Note 2: The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result
1	15.203	Antenna Requirement	N/A	N/A	PASS
2	15.247(b)	Peak Output Power	Jun 14, 2018	Su Hang	PASS
3	15.247(a)	Bandwidth	Jun 14, 2018	Su Hang	PASS
4	15.247(d)	Conducted Spurious Emission and Band Edge	Jun 14, 2018	Su Hang	PASS
5	15.247(e)	Power spectral density (PSD)	Jun 14, 2018	Su Hang	PASS
6	15.207	Conducted Emission	Jun 25, 2018	Wang Dalong	PASS
7	15.247(d)	Restricted Frequency Bands	Jul 12, 2018	Wang Dalong	PASS
8	15.209, 15.247(d)	Radiated Emission	Jul 16, 2018	Wang Dalong	PASS

Note: The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2013 and KDB558074 D01 v04 (04/05/2017).

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Peak Output Power


2.2.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

A. Test Setup:

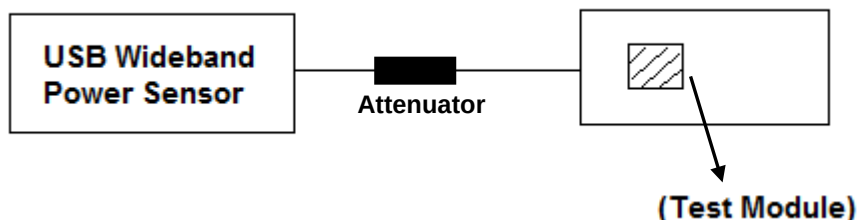



The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Please refer ANNEX A(1.5).

2.2.3. Test Result

2.2.3.1 802.11b Test Mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	20.73	0.11830	30	1	PASS
6	2437	21.28	0.13428			PASS
11	2462	20.89	0.12274			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	17.63	0.05794	30	1	PASS
6	2437	17.78	0.05998			PASS
11	2462	17.60	0.05754			PASS

2.2.3.2 802.11g Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	21.97	0.15740	30	1	PASS
6	2437	22.55	0.17989			PASS
11	2462	21.91	0.15524			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	12.48	0.01770	30	1	PASS
6	2437	12.38	0.01730			PASS
11	2462	12.05	0.01603			PASS

**2.2.3.3 802.11n-20MHz Test mode**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	19.04	0.08017	30	1	PASS
6	2437	19.00	0.07943			PASS
11	2462	19.12	0.08166			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
1	2412	8.47	0.00703	30	1	PASS
6	2437	8.11	0.00647			PASS
11	2462	7.96	0.00625			PASS

2.2.3.4 802.11n-40MHz Test mode

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	18.55	0.07161	30	1	PASS
6	2437	18.57	0.07194			PASS
9	2452	17.92	0.06194			PASS

Channel	Frequency (MHz)	Measured Output Average Power		Limit		Verdict
		dBm	W	dBm	W	
3	2422	7.66	0.00583	30	1	PASS
6	2437	7.36	0.00545			PASS
9	2452	6.84	0.00483			PASS


2.3. Bandwidth

2.3.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2. Test Description

A. Test Set:

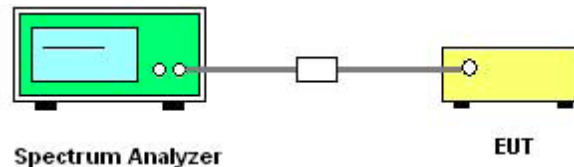

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 8.1 Option 1 was used in order to prove compliance.

B. Equipments List:

Please refer ANNEX A(1.5).



2.3.3. Test Result

2.3.3.1 802.11b Test mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	7.563	≥500	PASS
6	2437	7.562	≥500	PASS
11	2462	7.108	≥500	PASS

B. Test Plots



(Channel 1, 2412MHz, 802.11b)



(Channel 6, 2437 MHz, 802.11b)



(Channel 11, 2462MHz, 802.11b)




2.3.3.2 802.11g Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	16.37	≥500	PASS
6	2437	16.37	≥500	PASS
11	2462	16.41	≥500	PASS


B. Test Plots:

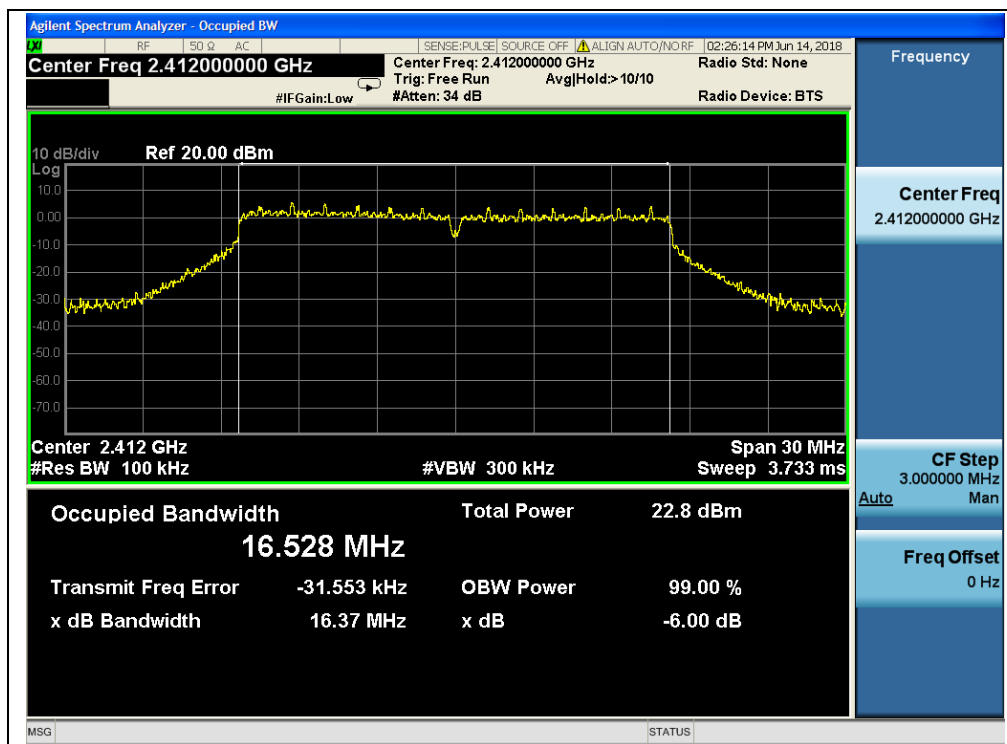

(Channel 1, 2412MHz, 802.11g)

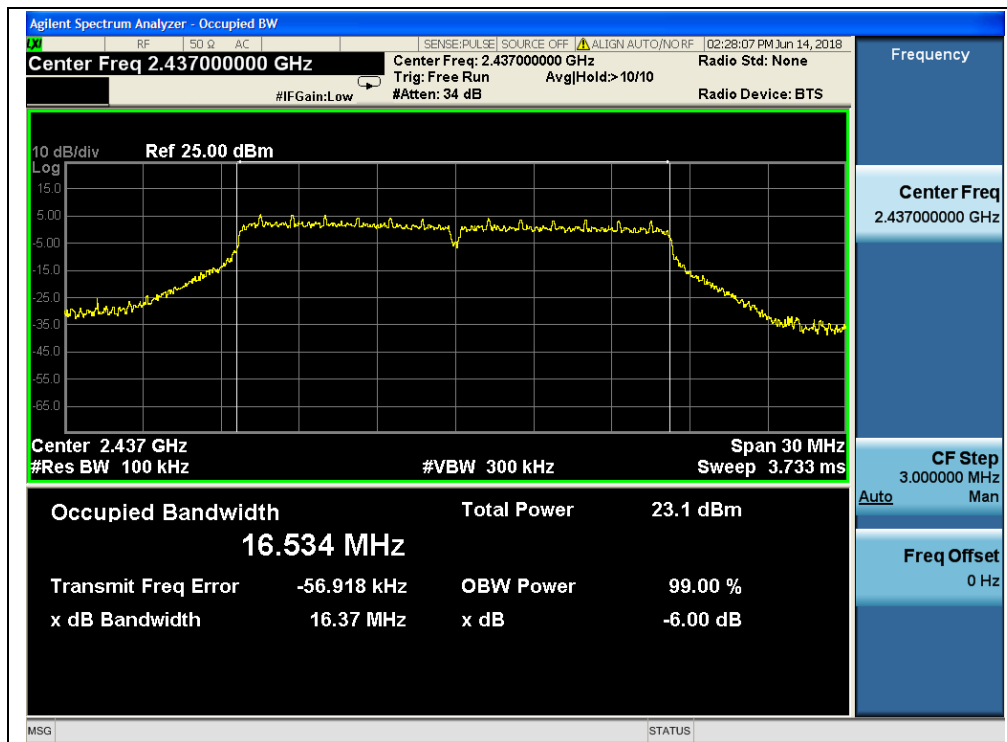

(Channel 6, 2437MHz, 802.11g)

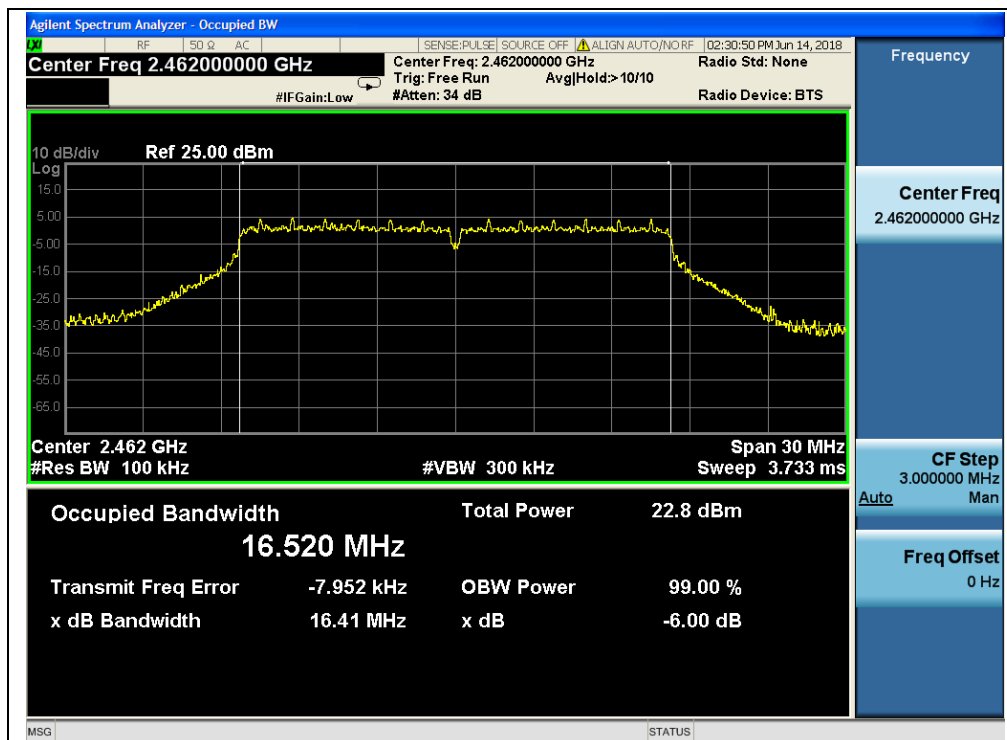

(Channel 11, 2462MHz, 802.11g)




2.3.3.3 802.11n-20 Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
1	2412	17.57	≥500	PASS
6	2437	17.34	≥500	PASS
11	2462	17.61	≥500	PASS


B. Test Plots:

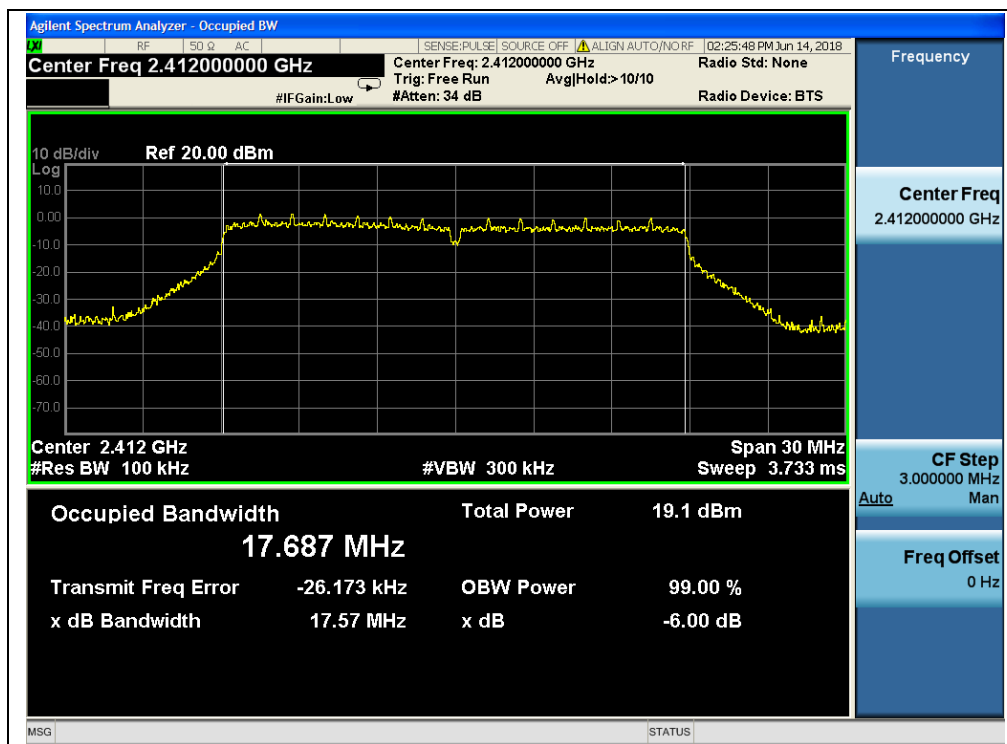

(Channel 1, 2412MHz, 802.11n-20)

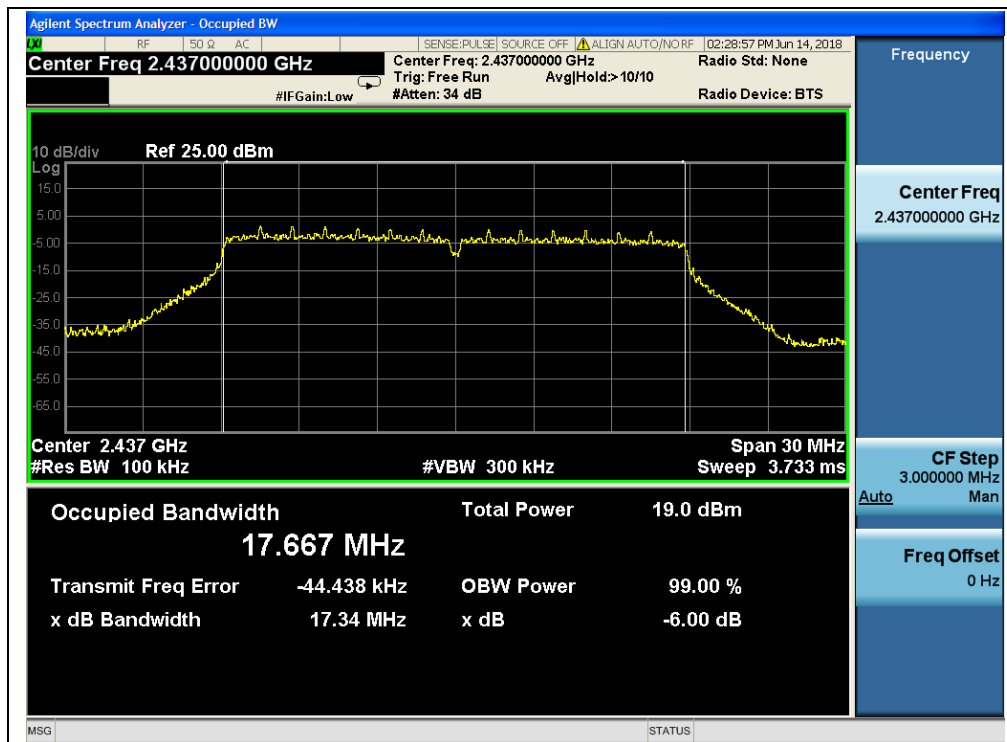

(Channel 6, 2437MHz, 802.11n-20)

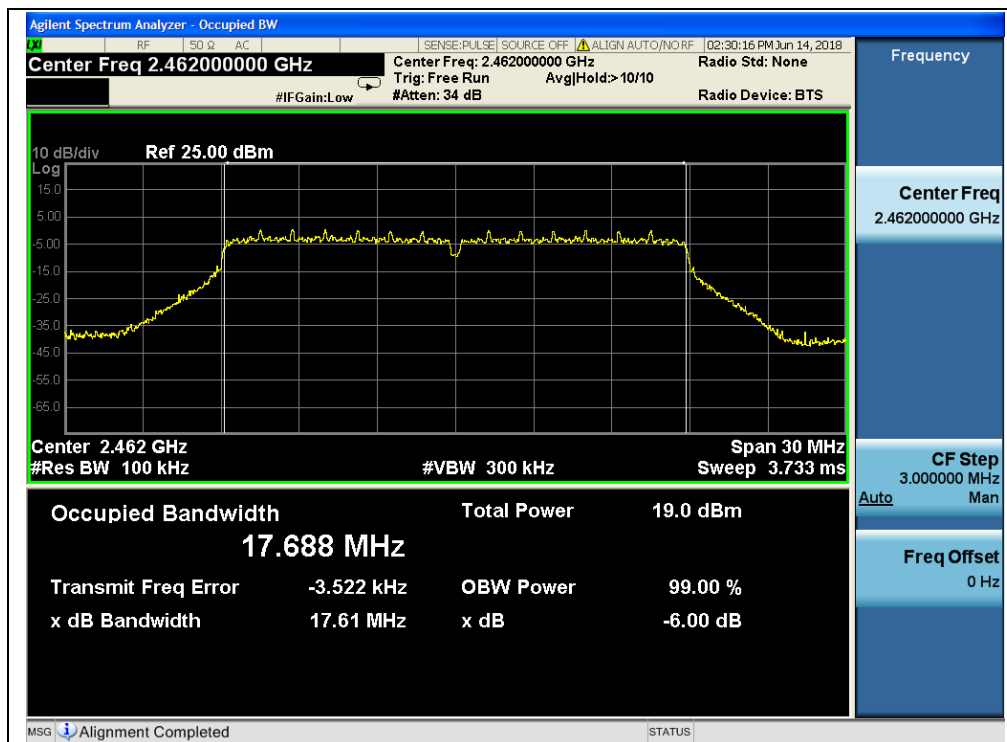

(Channel 11, 2462MHz, 802.11n-20)




2.3.3.4 802.11n-40 Test mode


A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits (kHz)	Result
3	2422	35.70	≥500	PASS
6	2437	35.13	≥500	PASS
9	2452	35.92	≥500	PASS


B. Test Plots:

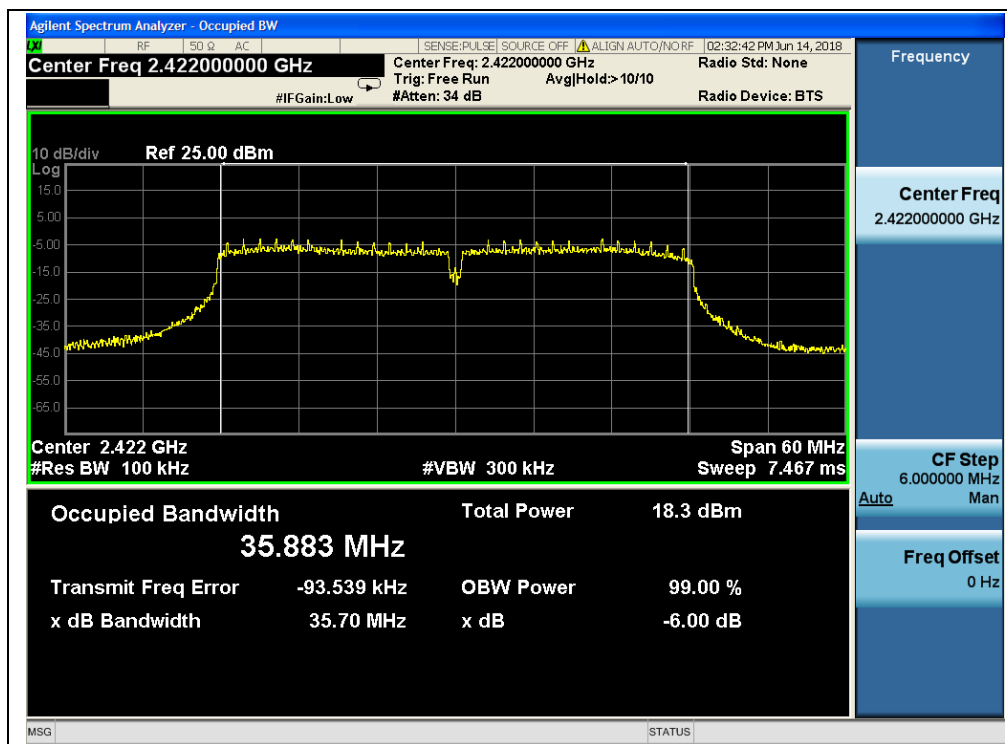

(Channel 3, 2422Mz, 802.11n-40)

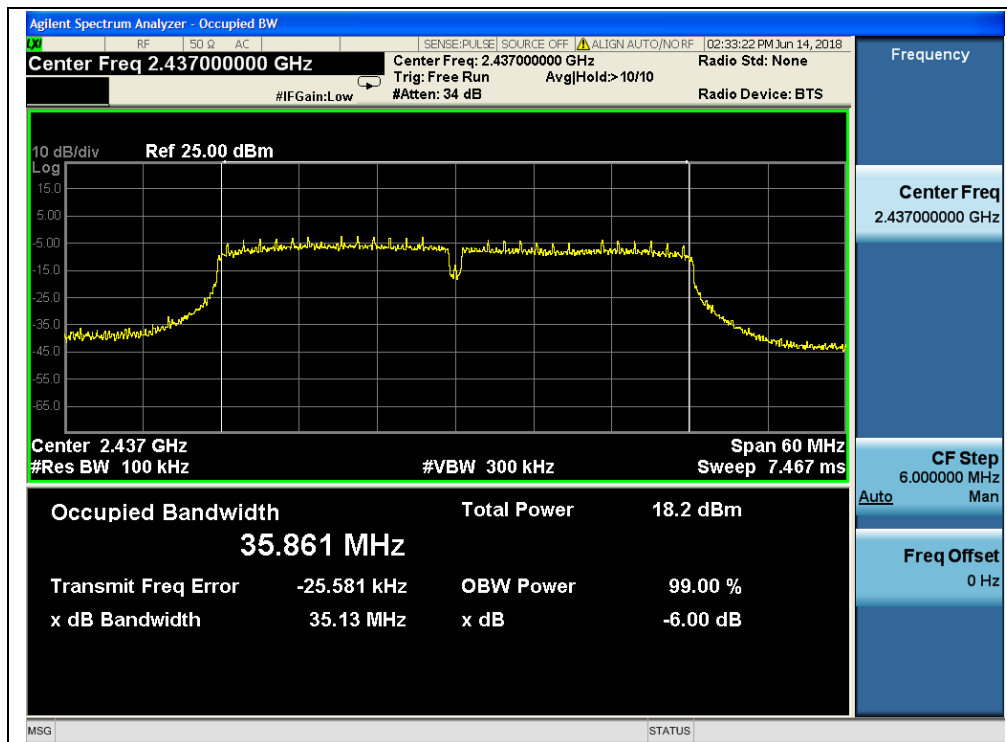

(Channel 6, 2437MHz, 802.11n-40)

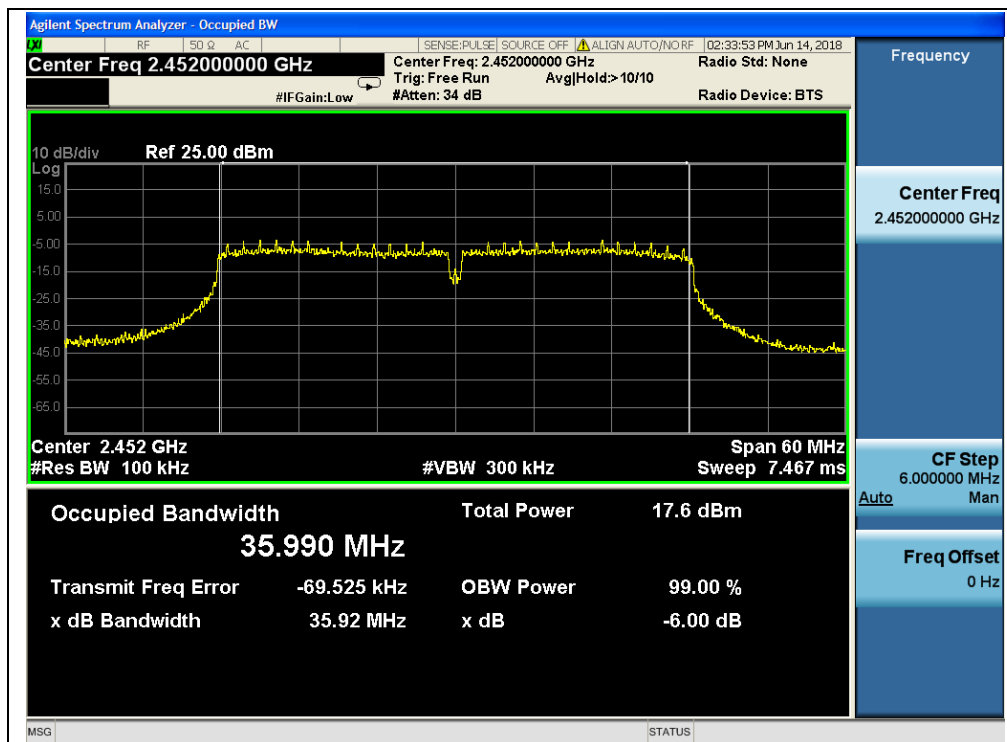

(Channel 9, 2452MHz, 802.11n-40)


2.4. Conducted Spurious Emissions and Band Edge

2.4.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2. Test Description

A. Test Set:

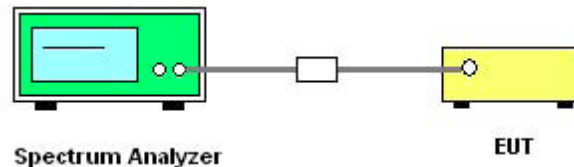

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

KDB 558074 Section 11.0 was used in order to prove compliance.

B. Equipments List:

Please refer ANNEX A(1.5).



2.4.3. Test Result


2.4.3.1 802.11b Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-38.52	12.01	-7.99	PASS
6	2437	-38.25	13.34	-6.66	PASS
11	2462	-39.59	13.39	-6.61	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.

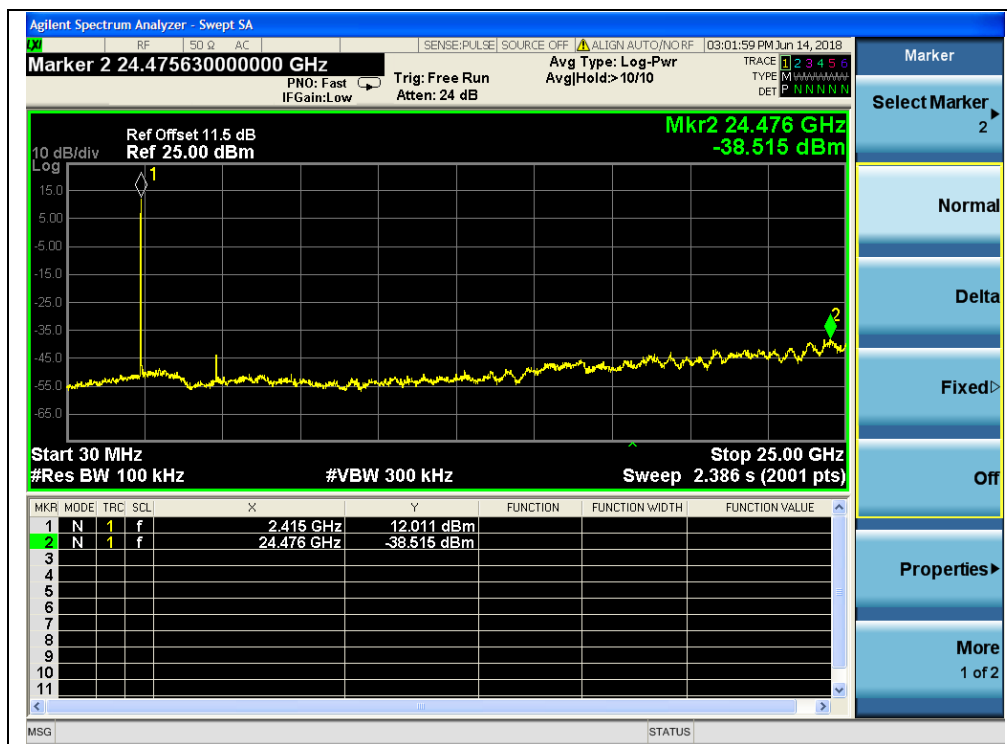

(Channel = 1, 30MHz to 25GHz)

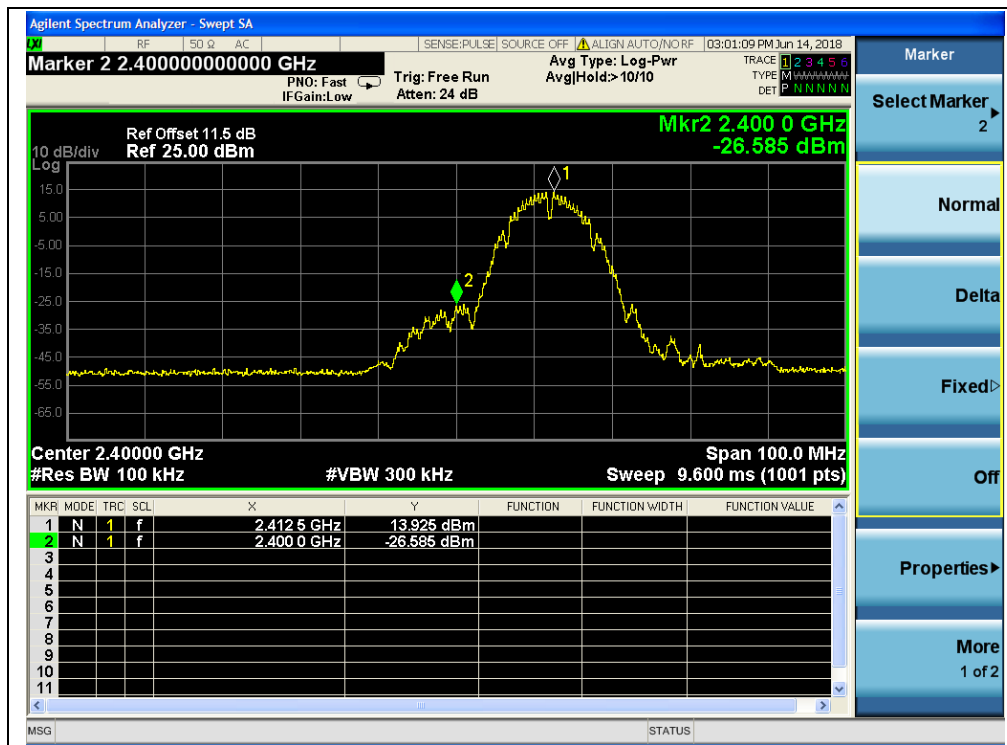


(Band Edge, Channel = 1)

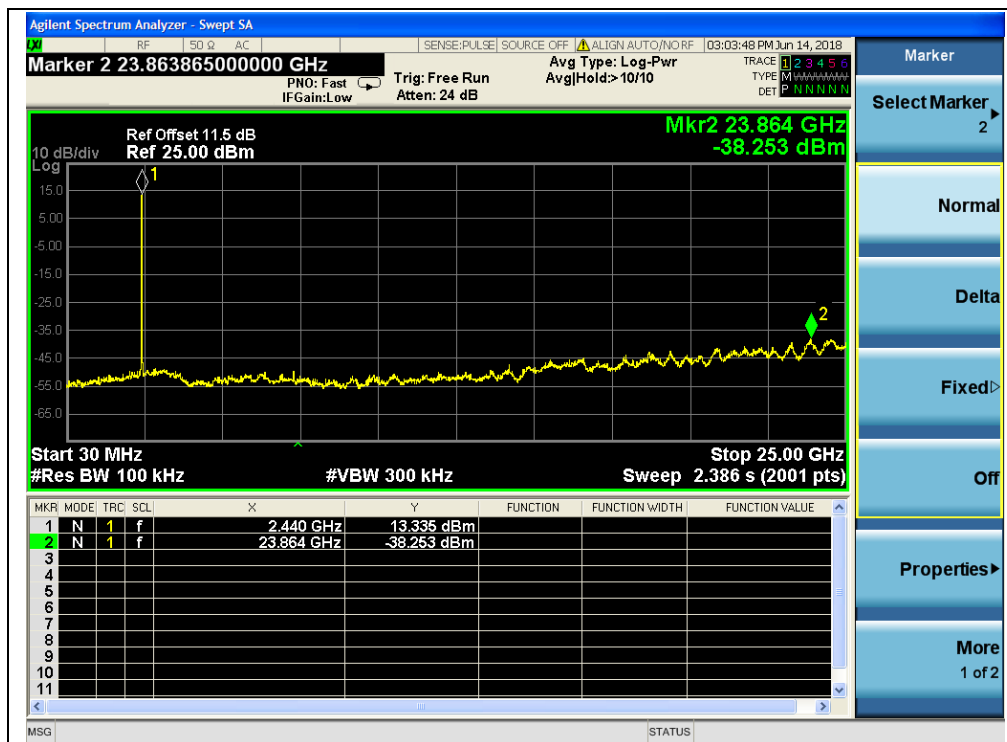

(Channel = 6, 30MHz to 25GHz)



(Channel = 11, 30MHz to 25GHz)

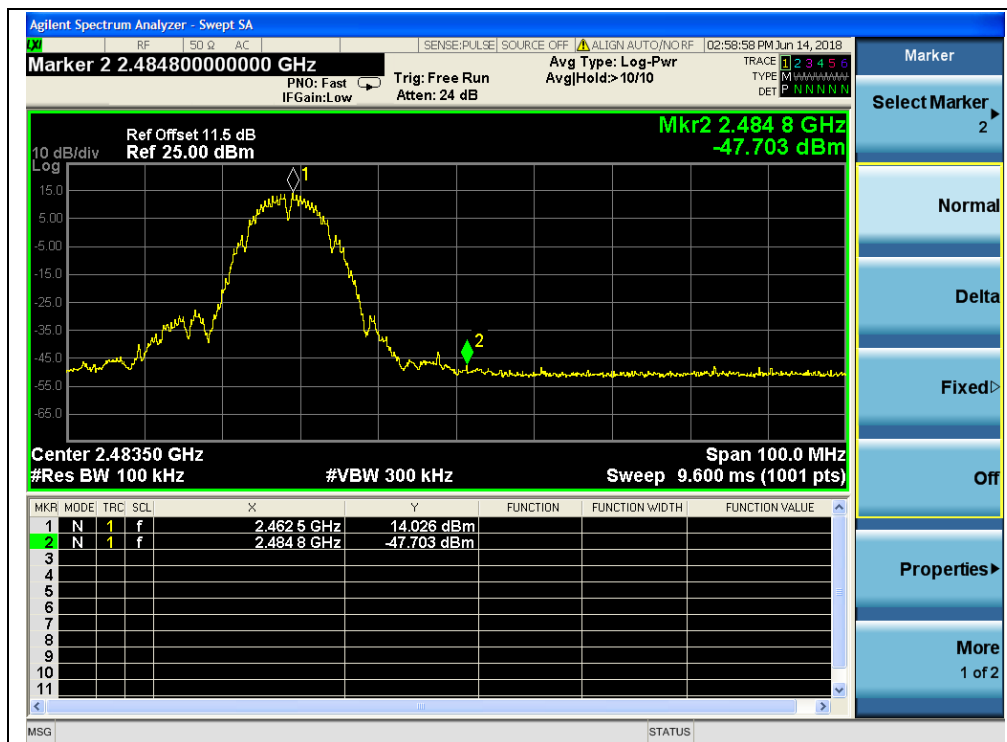

(Band Edge, Channel = 11)



2.4.3.2 802.11g Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-37.97	6.19	-13.81	PASS
6	2437	-38.40	5.33	-14.67	PASS
11	2462	-38.07	5.21	-14.79	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.




(Channel = 1, 30MHz to 25GHz)

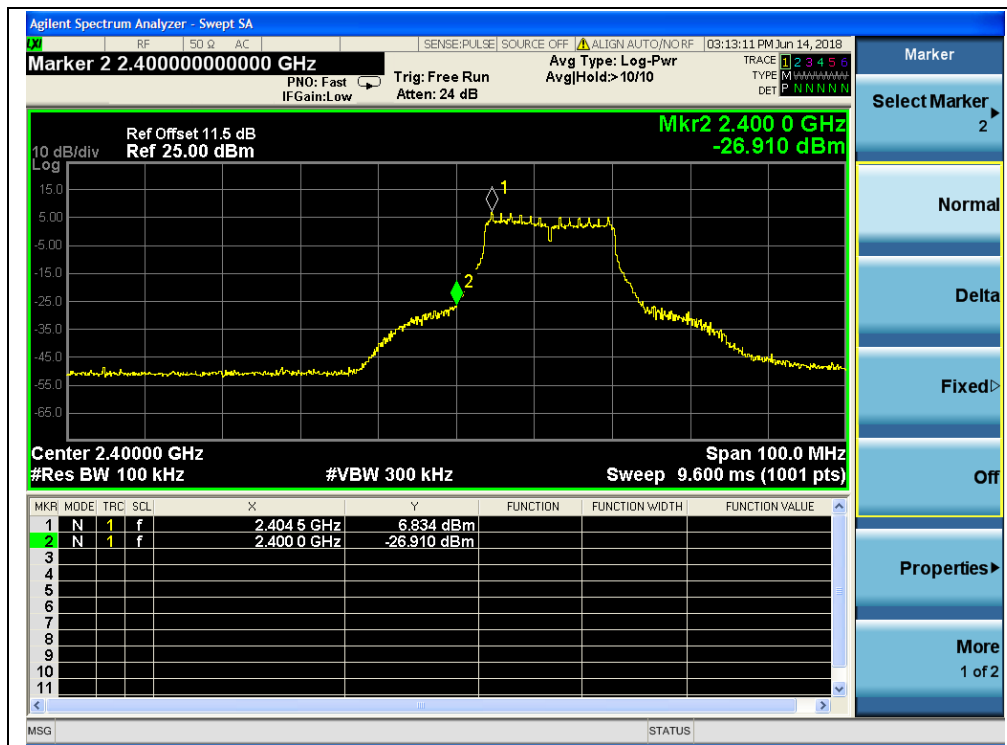


(Band Edge, Channel = 1)

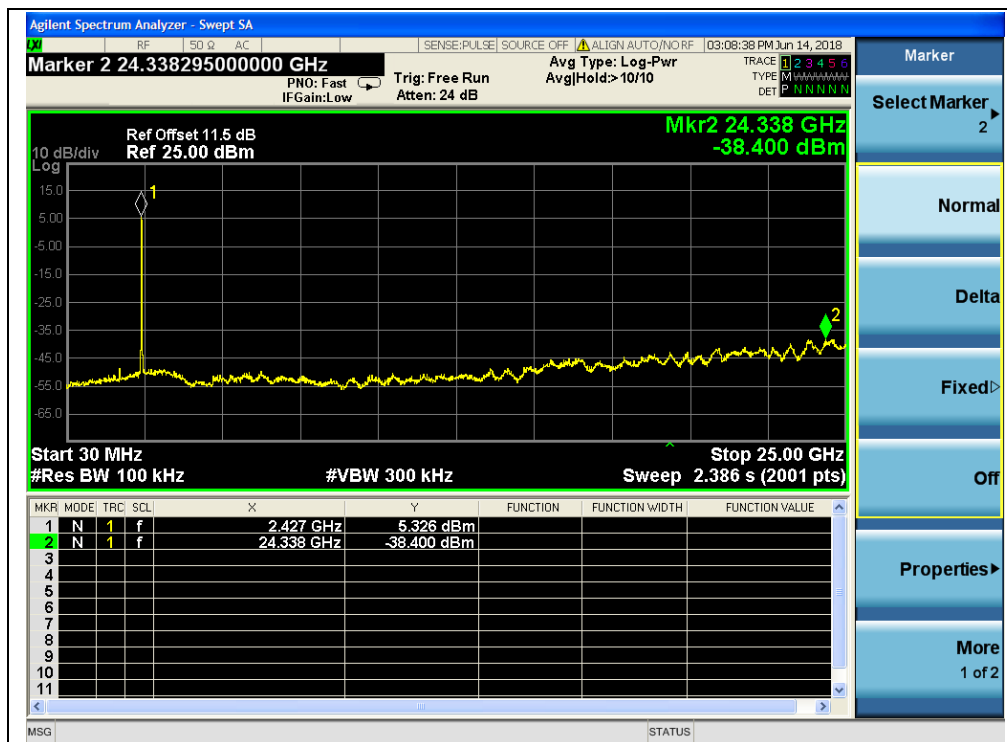

(Channel = 6, 30MHz to 25GHz)

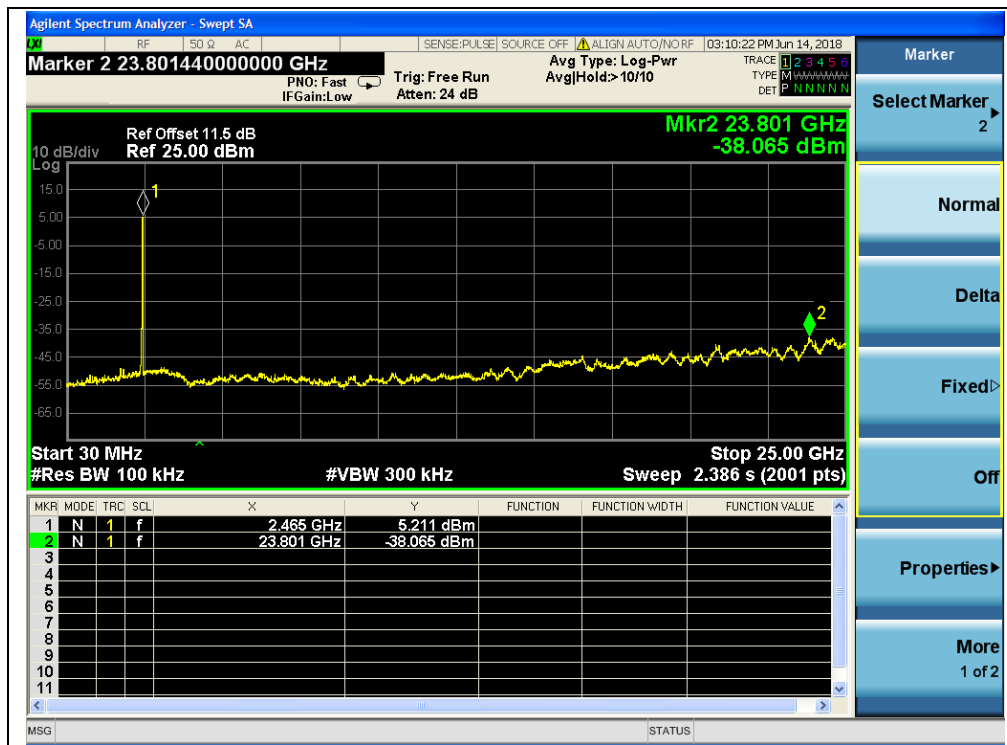

(Channel = 11, 30MHz to 25GHz)

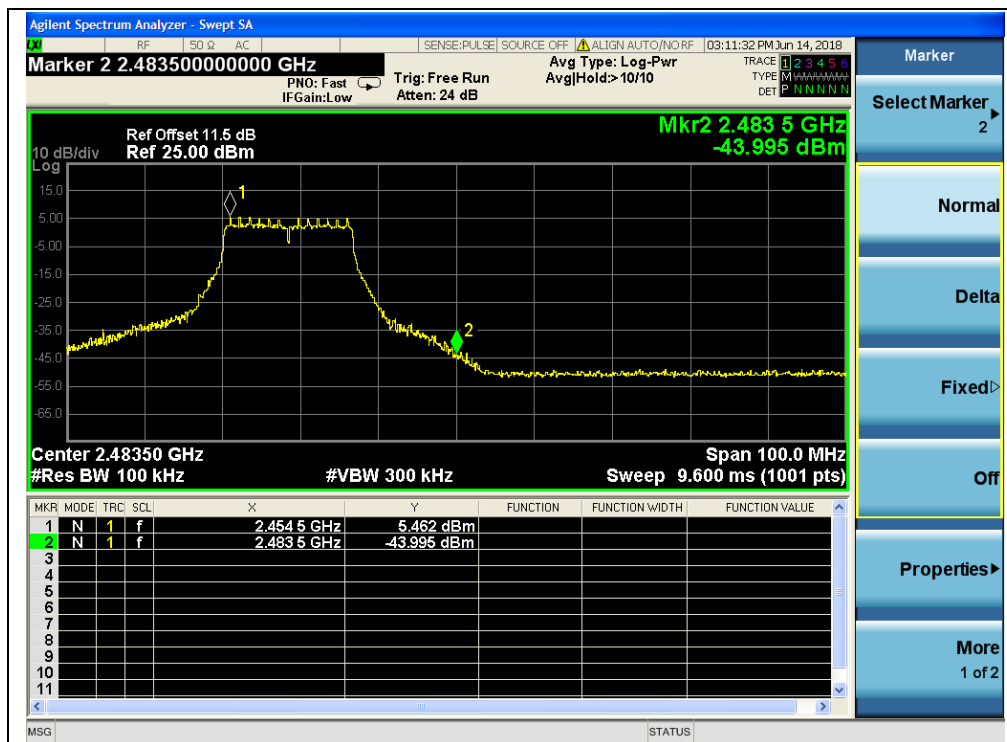

(Band Edge, Channel = 11)



2.4.3.3 802.11n -20MHz Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-37.50	1.79	-18.21	PASS
6	2437	-37.15	1.58	-18.42	PASS
11	2462	-38.49	1.18	-18.82	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.




(Channel = 1, 30MHz to 25GHz)

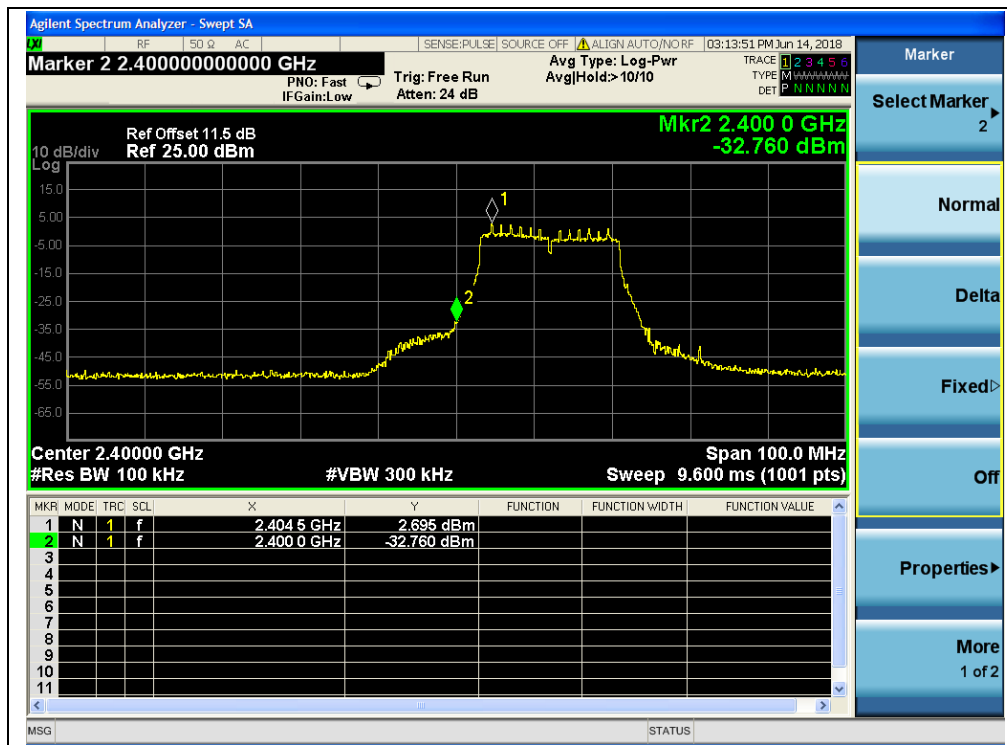


(Band Edge, Channel = 1)

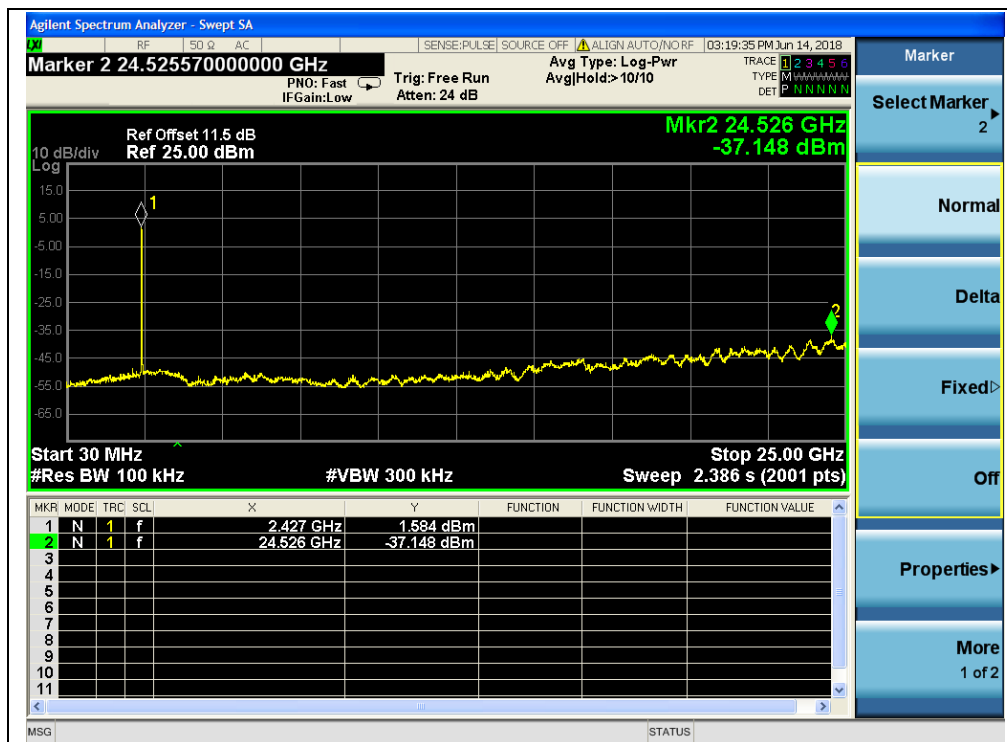

(Channel = 6, 30MHz to 25GHz)

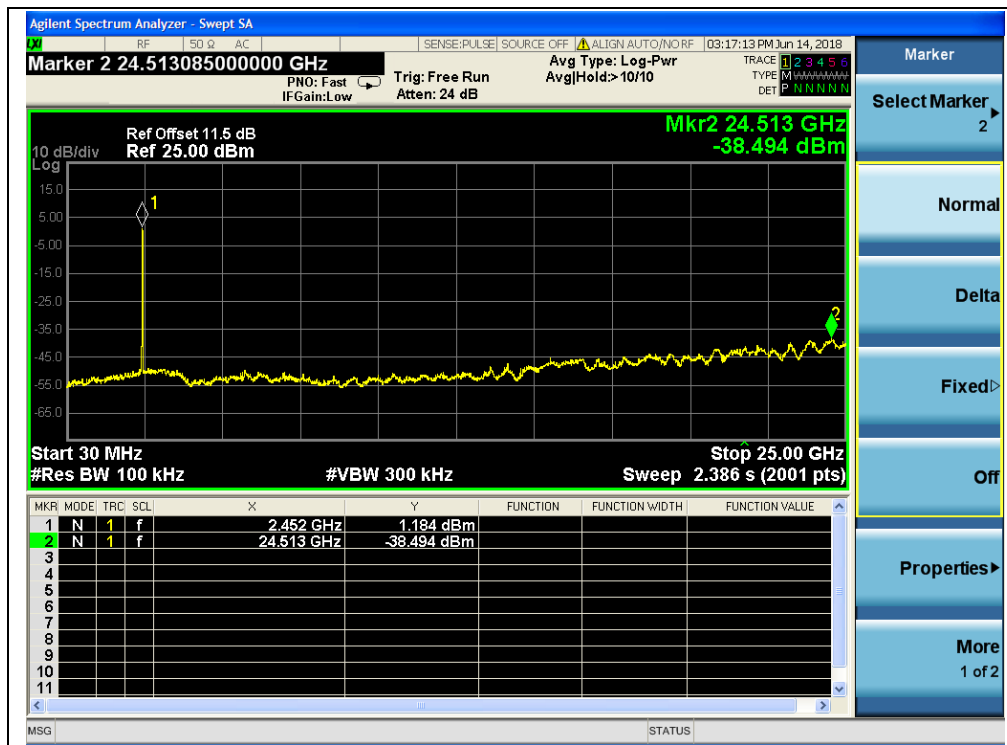

(Channel = 11, 30MHz to 25GHz)

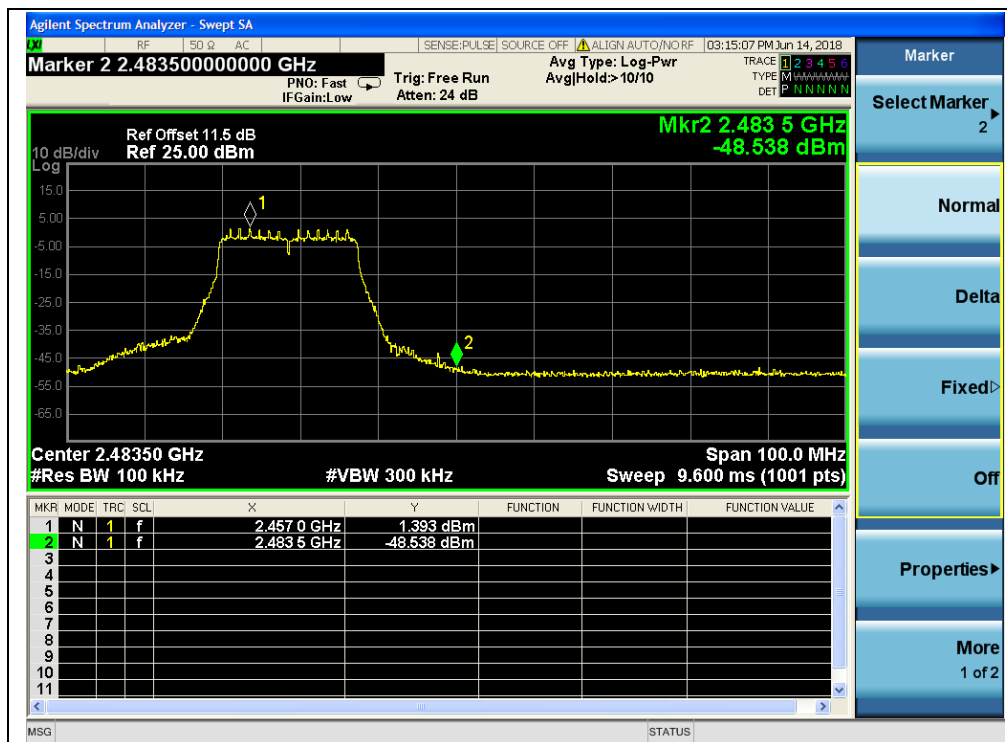

(Band Edge, Channel = 11)



2.4.3.4 802.11n -40MHz Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
3	2422	-37.91	-0.70	-20.70	PASS
6	2437	-37.86	-1.41	-21.41	PASS
9	2452	-38.03	-2.41	-22.41	PASS

B. Test Plots:

Note: The power of the Module transmitting frequency should be ignored.




(Channel = 3, 30MHz to 25GHz)

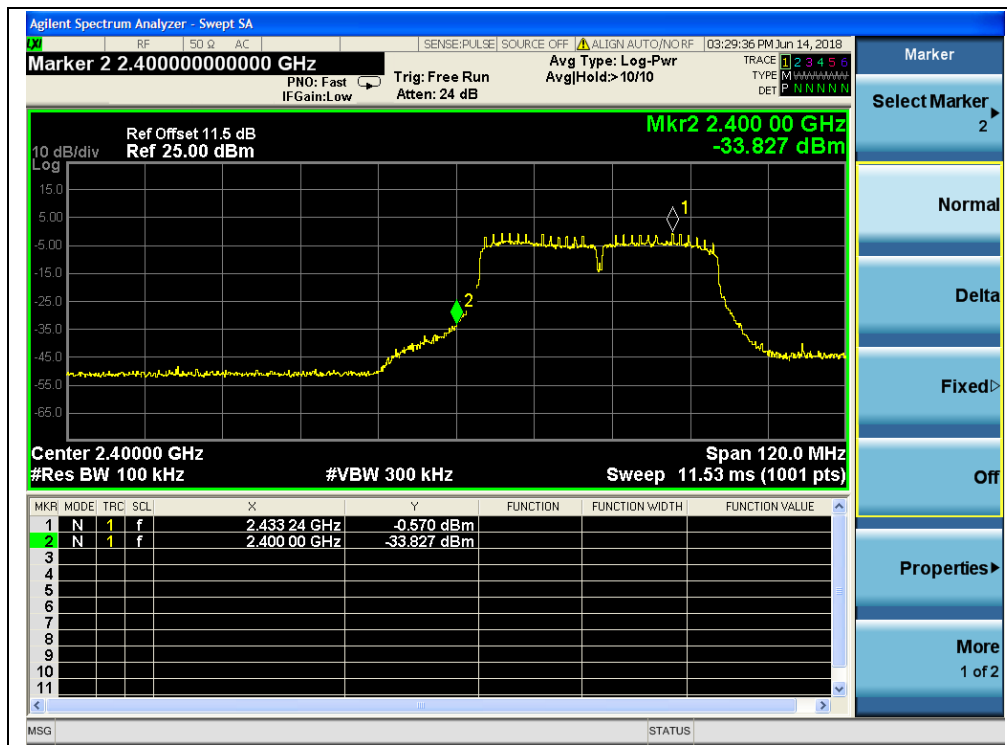


(Band Edge, Channel = 3)



(Channel = 6, 30MHz to 25GHz)

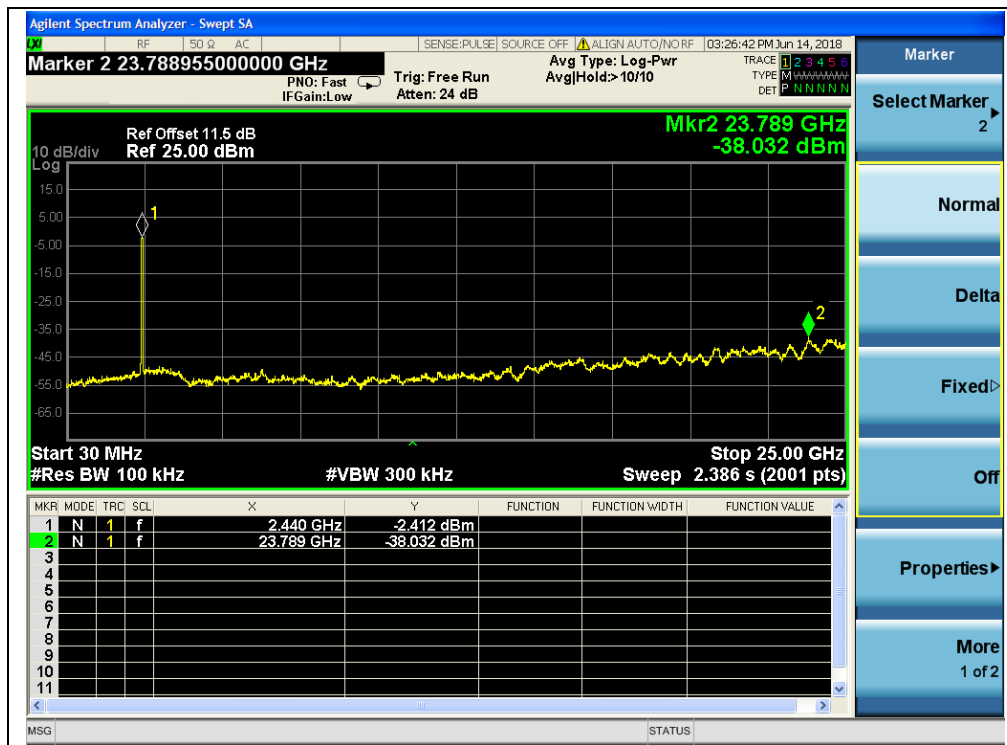

(Channel = 9, 30MHz to 25GHz)

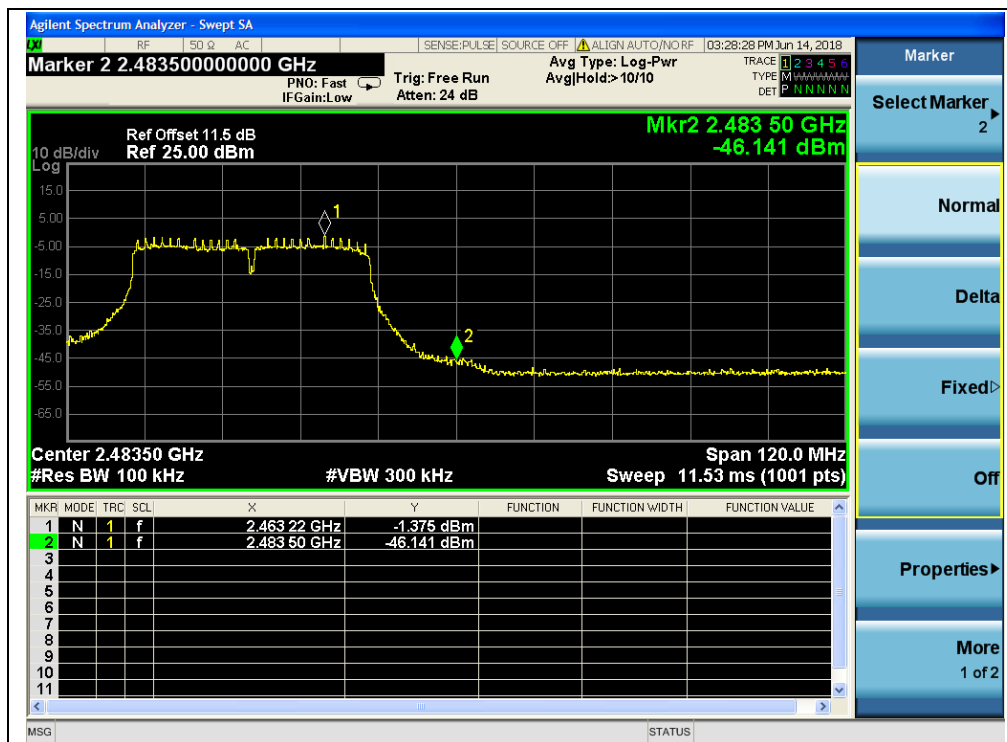

(Band Edge, Channel = 9)

2.5. Power spectral density (PSD)

2.5.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


2.5.2. Test Description

A. Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the span to 1.5 times DTS
- c) Set the RBW to 3 kHz
- d) Set the VBW to 10 kHz
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

B. Test Set:

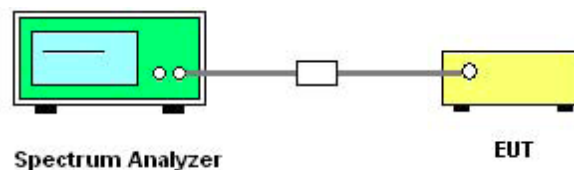

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

KDB 558074 Section 10.2 was used in order to prove compliance.

C. Equipments List:

Please refer ANNEX A(1.5).

2.5.3. Test Result

2.5.3.1 802.11b Test mode

A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-0.30	8	PASS
6	2437	-0.06	8	PASS
11	2462	-0.04	8	PASS

B. Test Plots:



(Channel = 1, 802.11b)



(Channel = 6, 802.11b)



(Channel = 11, 802.11b)




2.5.3.2 802.11g Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-6.65	8	PASS
6	2437	-7.36	8	PASS
11	2462	-7.78	8	PASS


B. Test Plots:

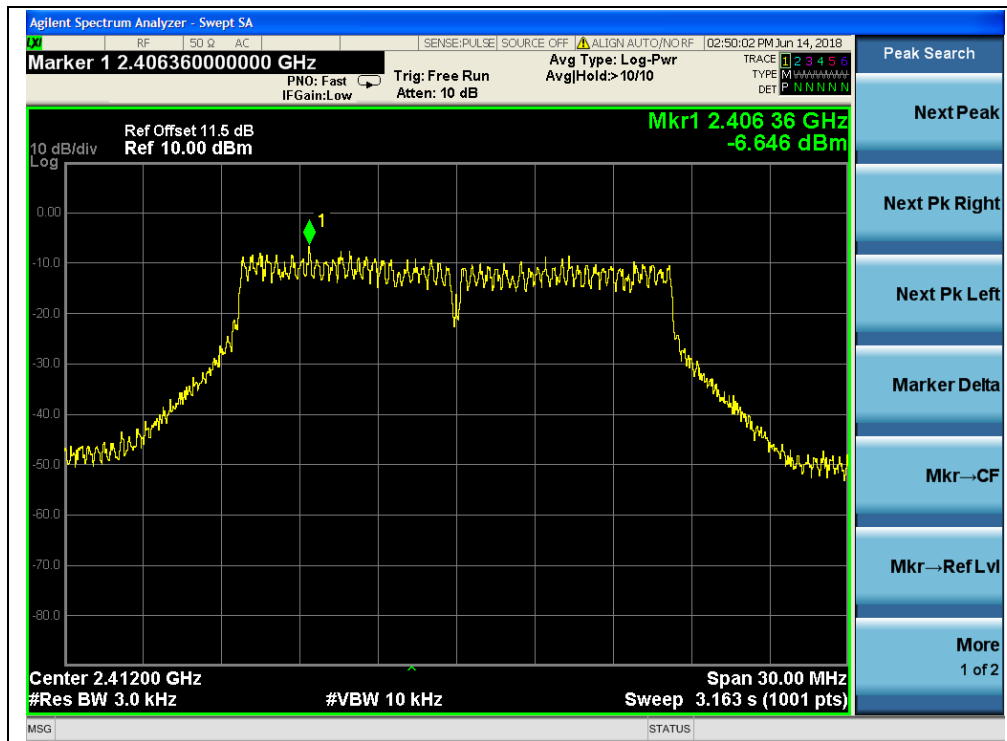

(Channel = 1, 802.11g)

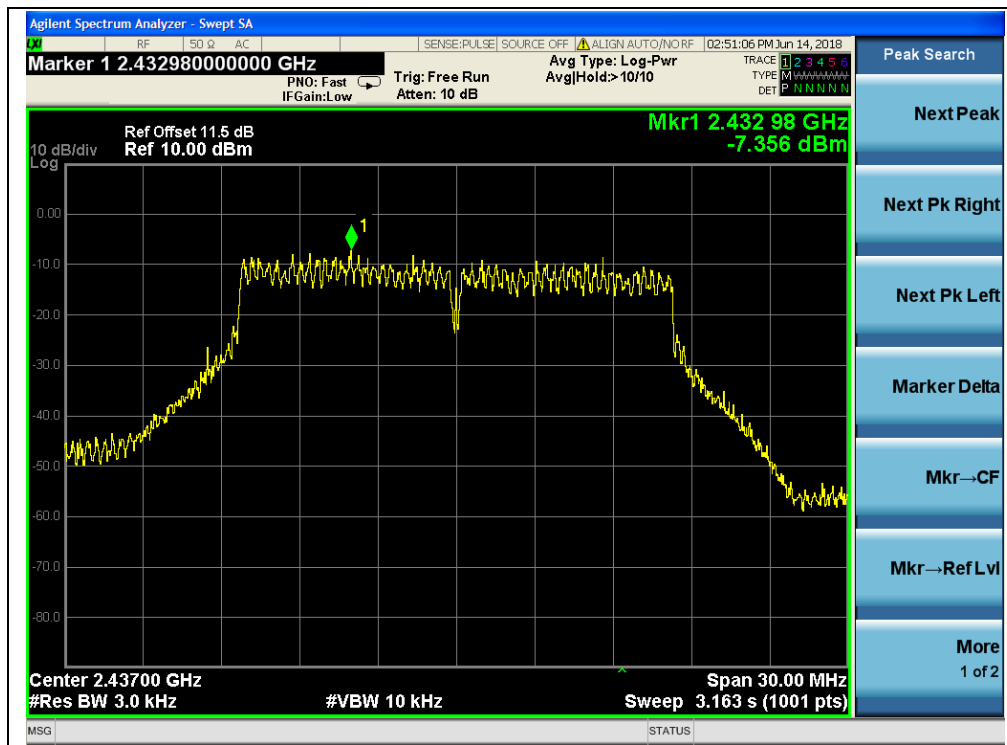

(Channel = 6, 802.11g)

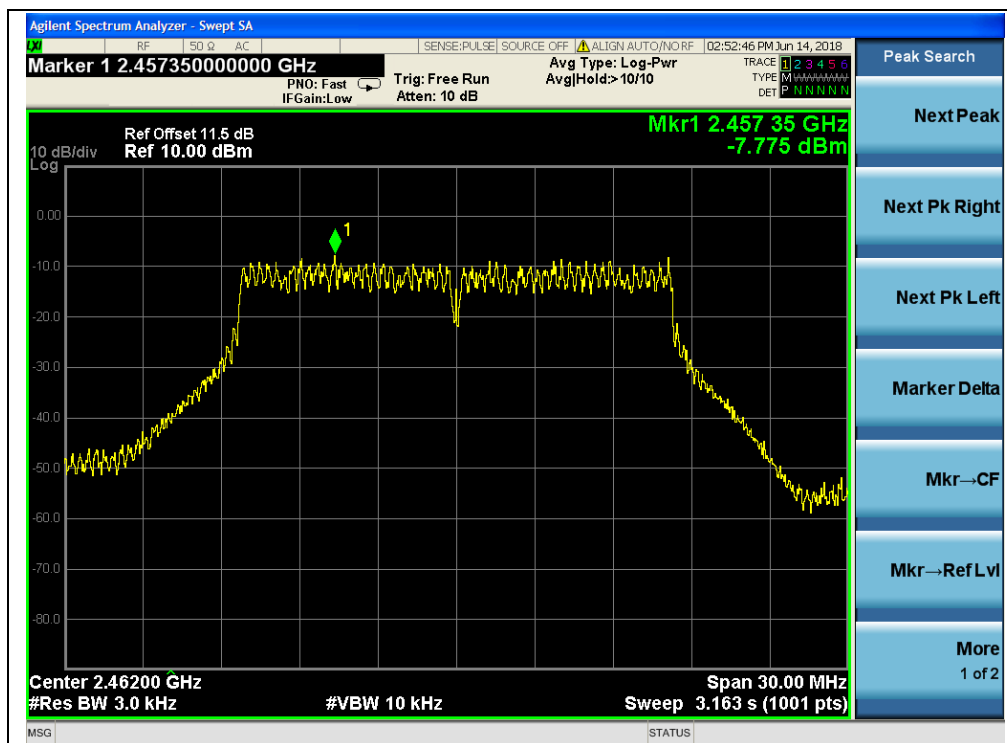

(Channel = 11, 802.11g)




2.5.3.3 802.11n-20MHz Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
1	2412	-11.73	8	PASS
6	2437	-10.81	8	PASS
11	2462	-13.12	8	PASS


B. Test Plots:

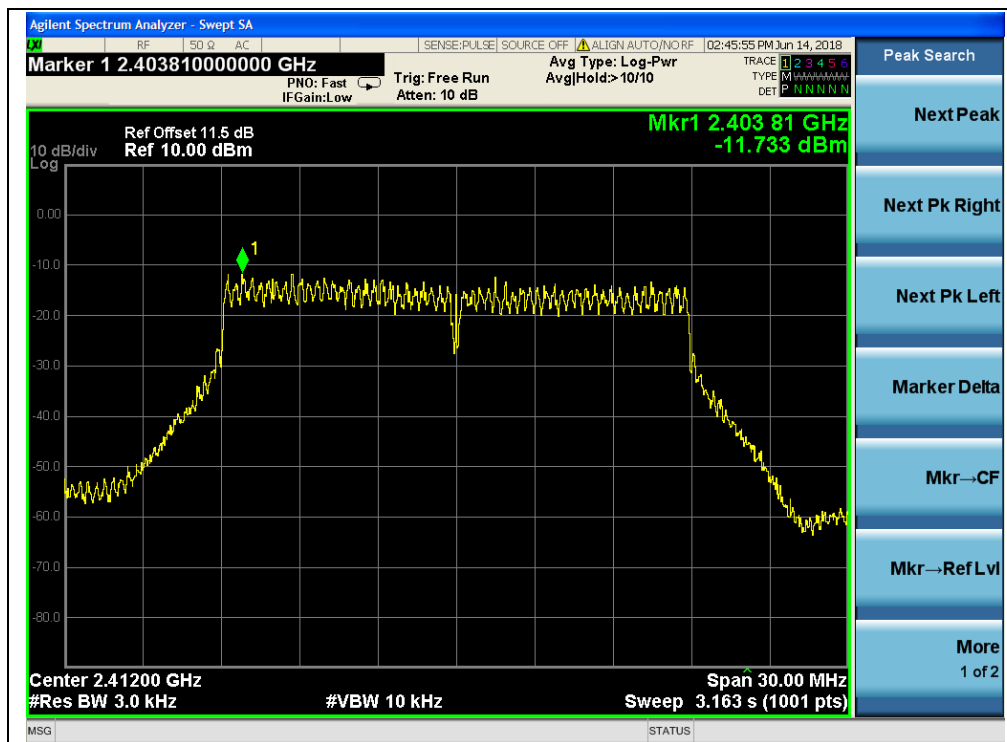

(Channel = 1, 802.11n-20MHz)

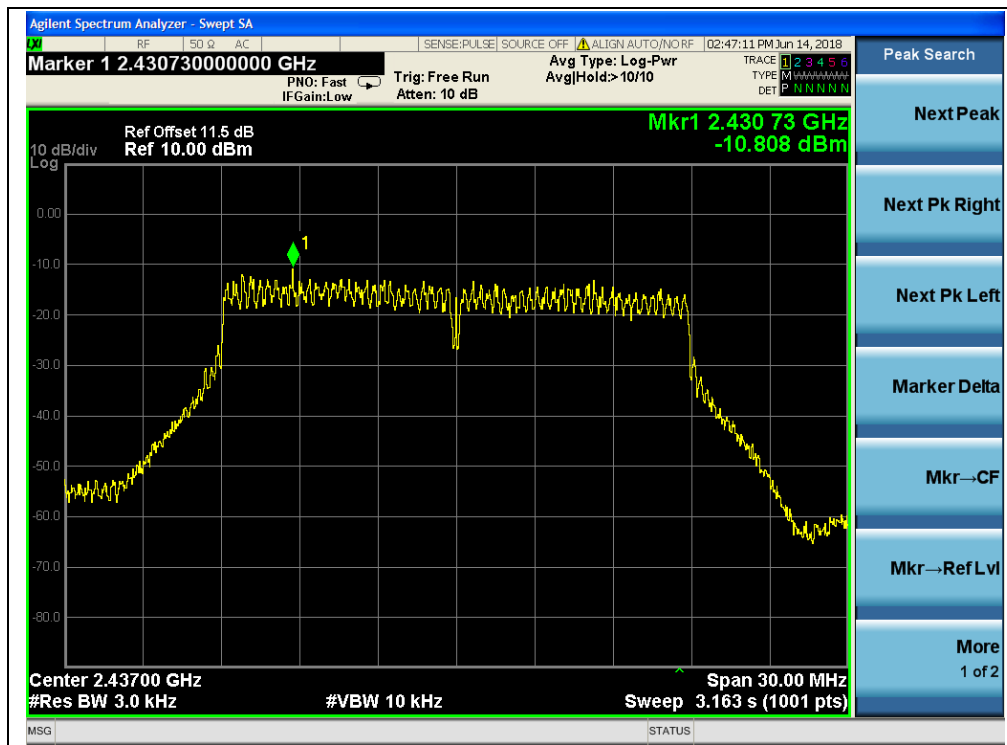

(Channel = 6, 802.11n-20MHz)

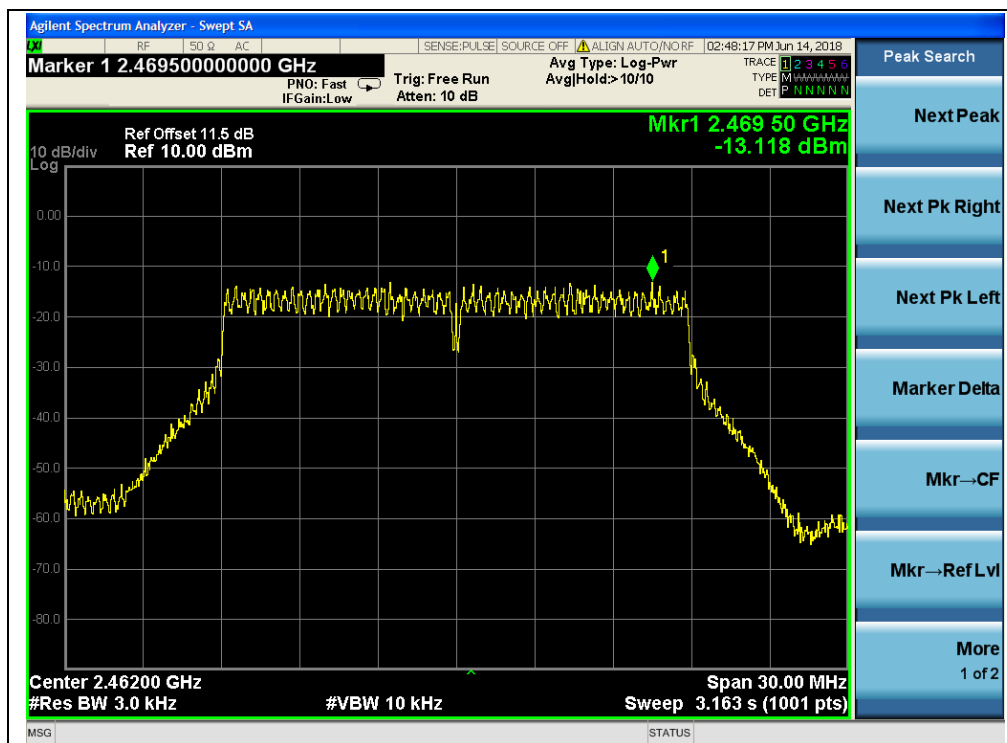

(Channel = 11, 802.11n-20MHz)




2.5.3.4 802.11n-40MHz Test mode


A. Test Verdict:

Spectral power density (dBm/3kHz)				
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
3	2422	-15.06	8	PASS
6	2437	-13.48	8	PASS
9	2452	-16.13	8	PASS


B. Test Plots:

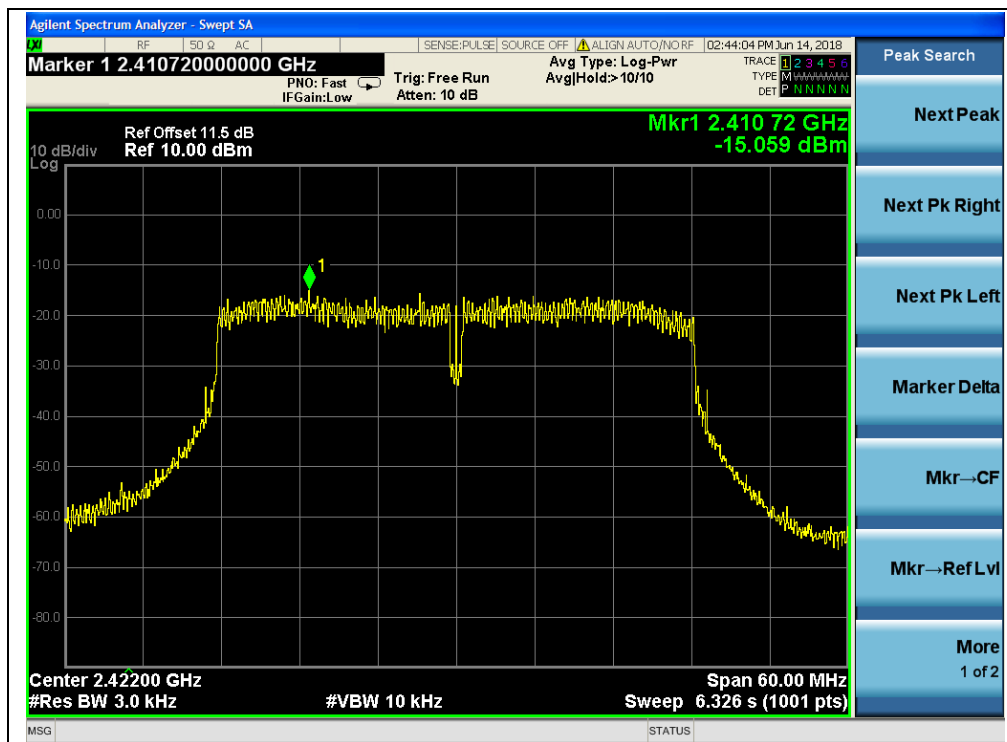

(Channel = 3, 802.11n-40MHz)

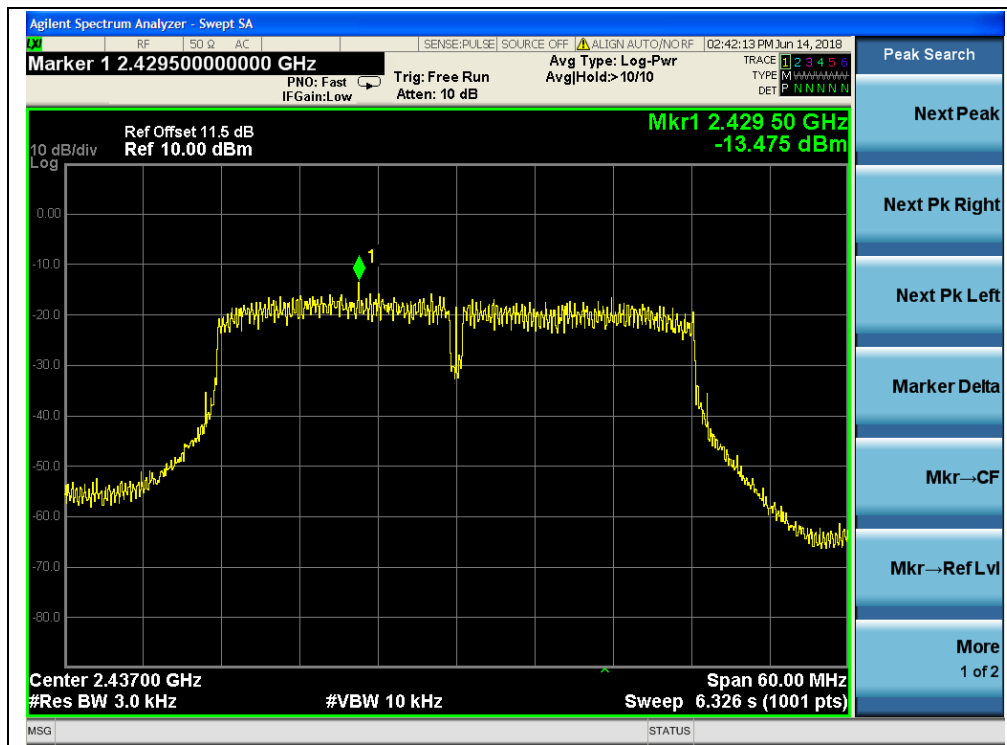

(Channel = 6, 802.11n-40MHz)

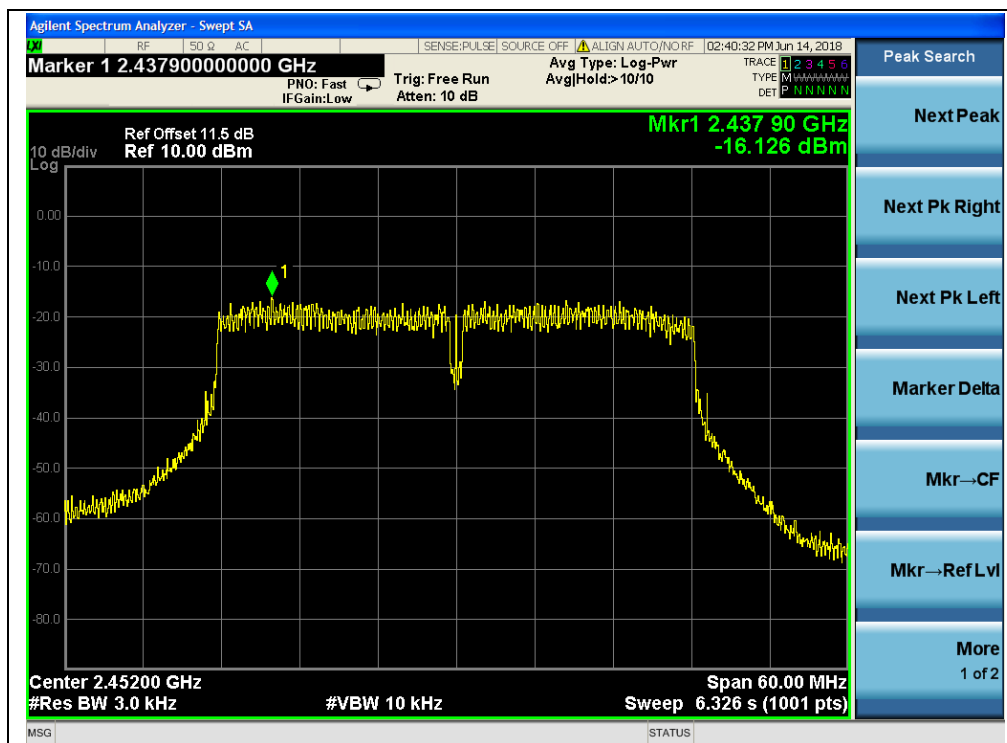

(Channel = 9, 802.11n-40MHz)

2.6. Conducted Emission

2.6.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.6.2. Test Description

A. Test Setup:

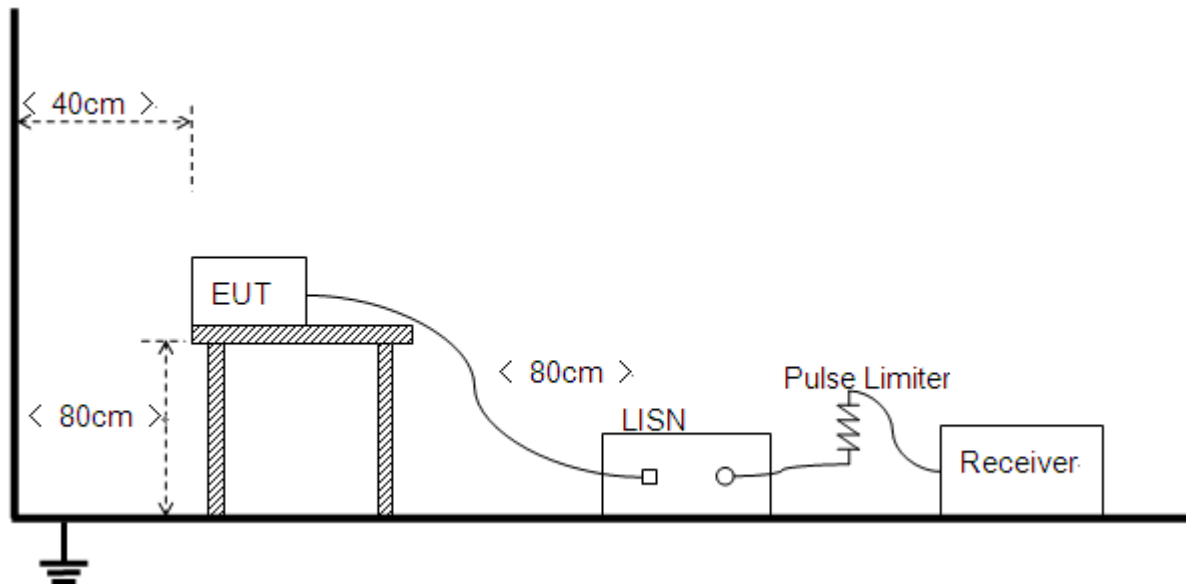

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.

B. Equipments List:

Please refer ANNEX A(1.5).

2.6.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.


Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.


Note: The test voltage is AC 120V/60Hz.

B. Test Plots:

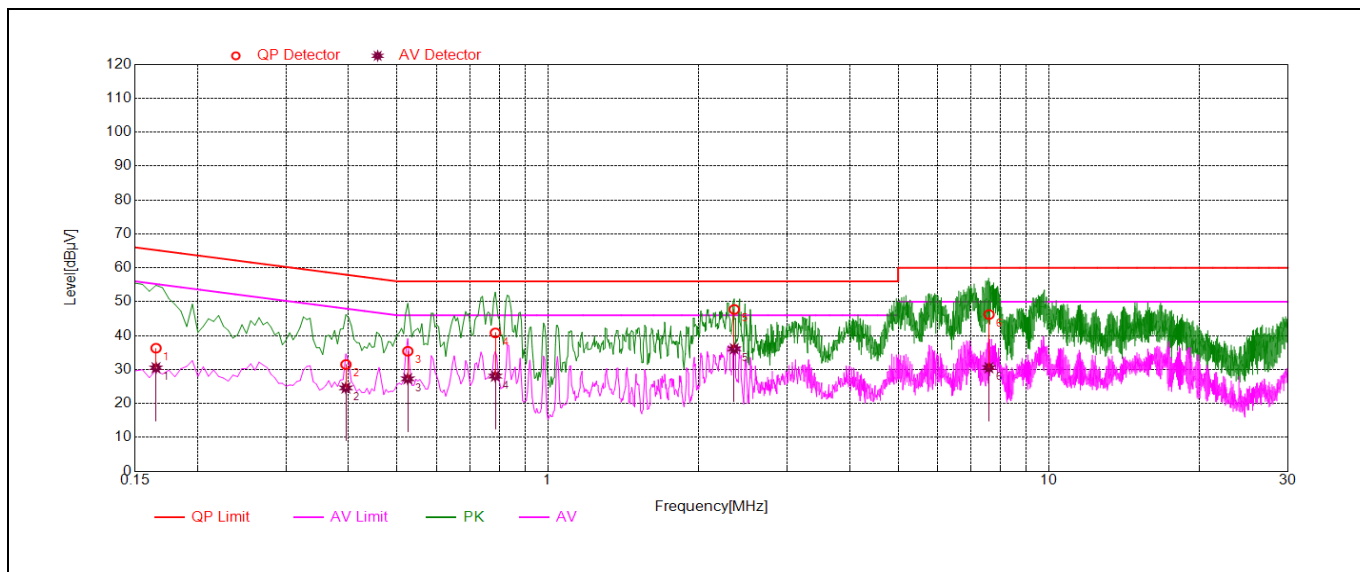

(Plot A: L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.17	36.30	30.51	65.21	55.21	Line	PASS
2	0.40	31.47	24.58	57.96	47.96		PASS
3	0.52	35.39	27.26	56.00	46.00		PASS
4	0.79	40.81	28.05	56.00	46.00		PASS
5	2.35	47.71	36.11	56.00	46.00		PASS
6	7.59	46.22	30.54	60.00	50.00		PASS

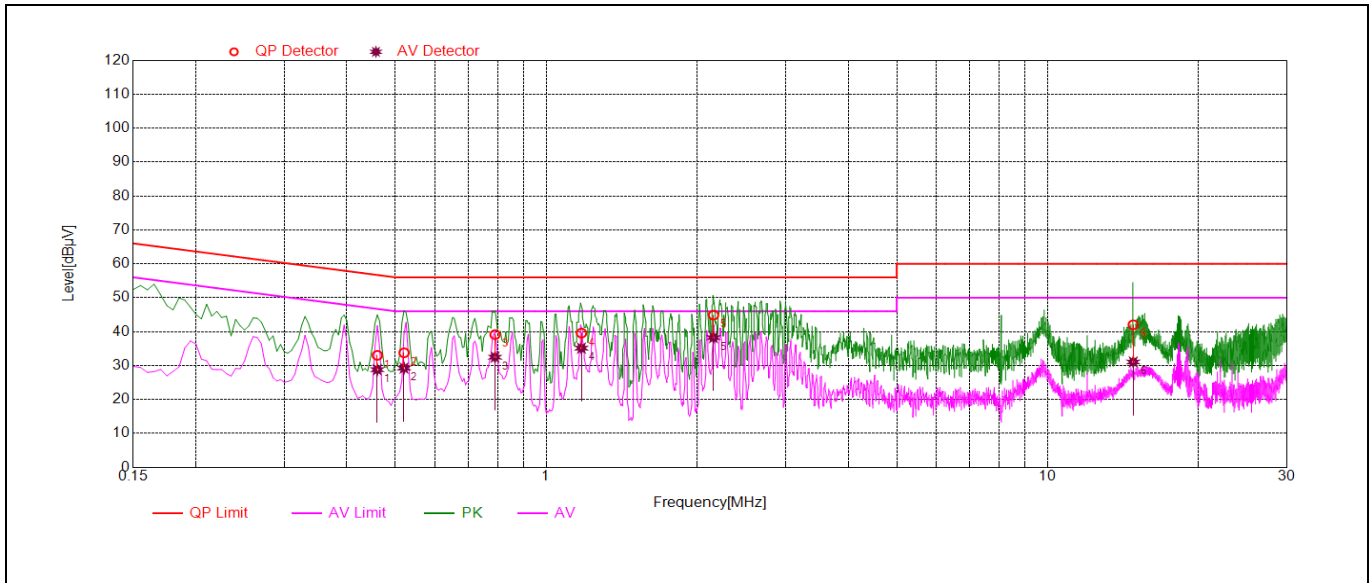

(Plot B: N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.46	33.01	28.77	56.69	46.69	Neutral	PASS
2	0.52	33.76	29.24	56.00	46.00		PASS
3	0.79	39.12	32.46	56.00	46.00		PASS
4	1.17	39.56	35.12	56.00	46.00		PASS
5	2.15	44.88	38.23	56.00	46.00		PASS
6	14.82	42.02	31.04	60.00	50.00		PASS


2.7. Restricted Frequency Bands

2.7.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.7.2. Test Description

A. Test Setup

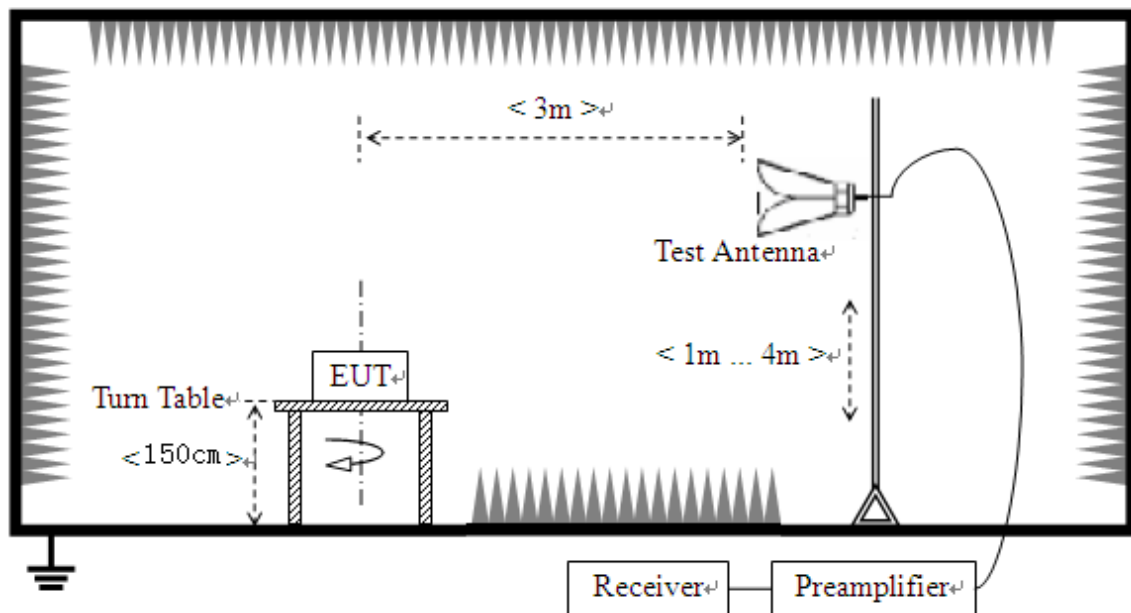

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

KDB 558074 Section 12.1 was used in order to prove compliance.

**B. Equipments List:**

Please refer ANNEX A(1.5).

2.7.3. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

2.6.3.1 802.11b Test mode**A. Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2384.45	PK	46.65	-33.63	32.56	45.58	74	PASS
1	2387.92	AV	32.74	-33.63	32.56	31.67	54	PASS
11	2484.53	PK	48.73	-33.18	32.50	48.05	74	PASS
11	2484.15	AV	33.51	-33.18	32.50	32.83	54	PASS



B. Test Plots:

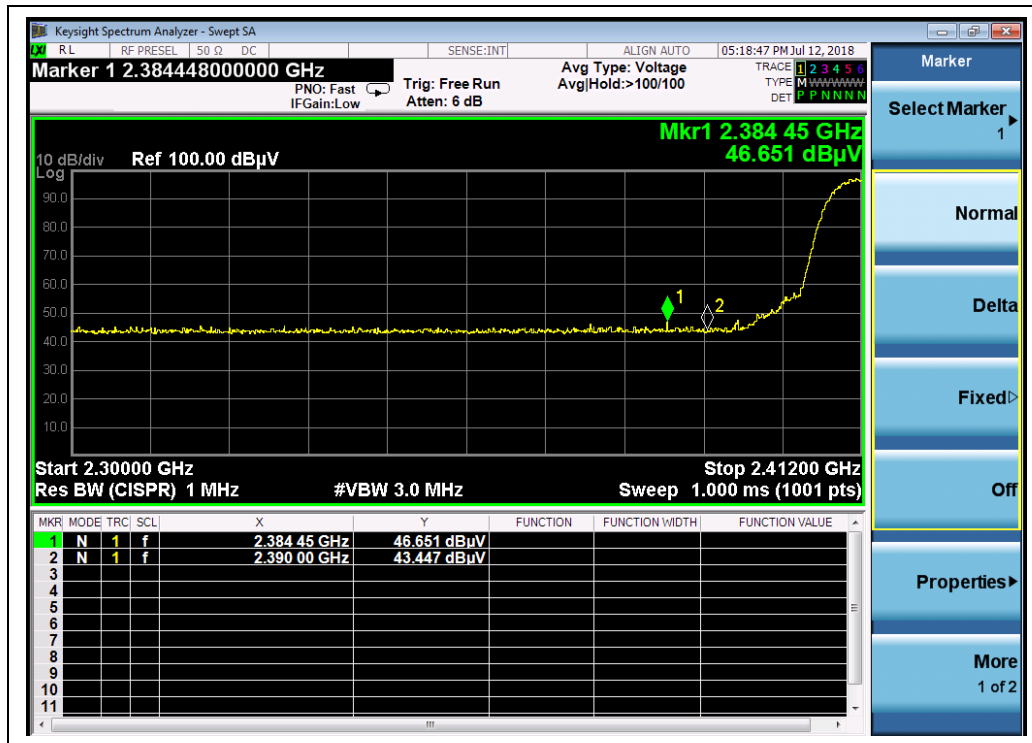


(Channel = 1 PEAK, 802.11b)

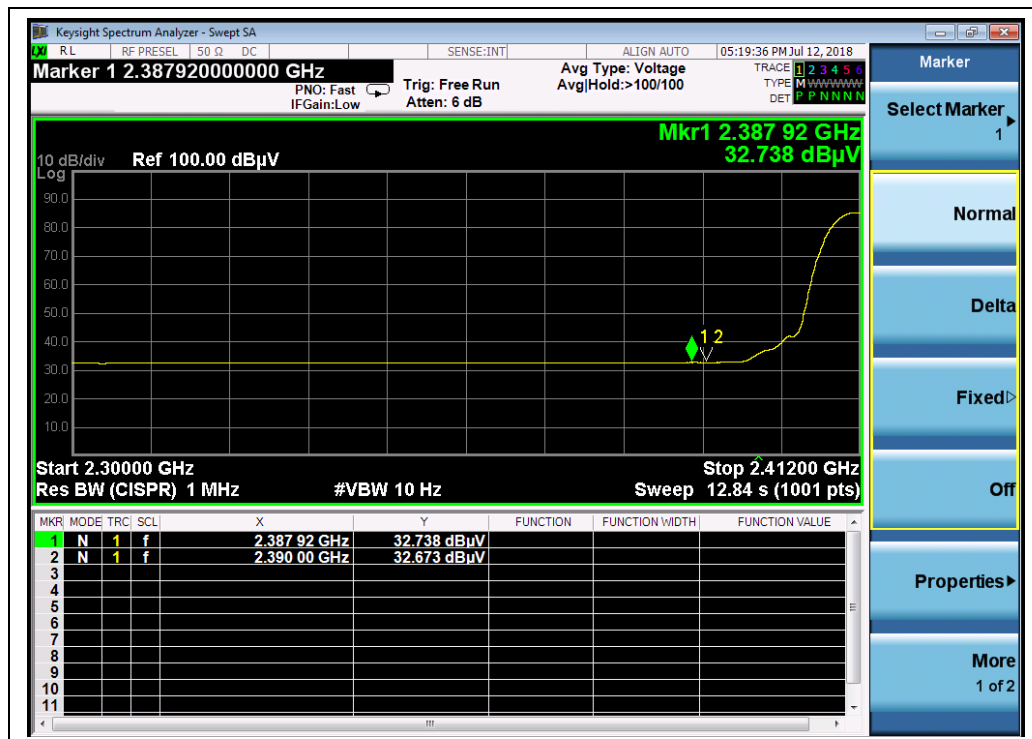

(Channel = 1 AVG, 802.11b)



(Channel = 11 PEAK, 802.11b)

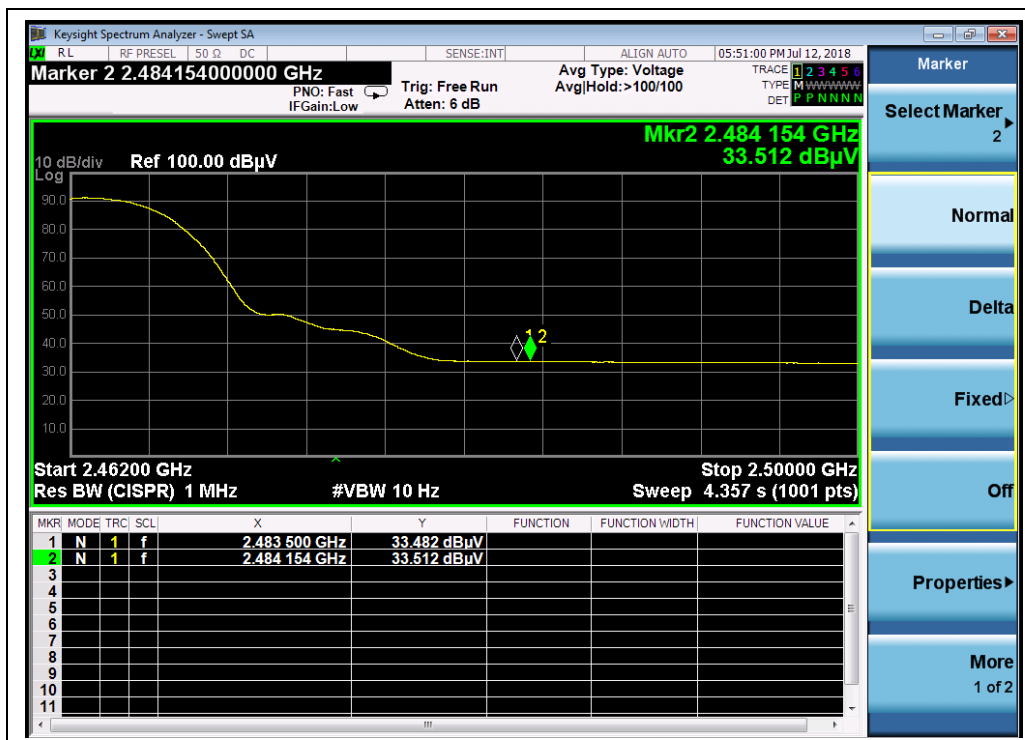

(Channel = 11 AVG, 802.11b)




2.6.3.2 802.11g Test mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
1	2388.93	PK	54.88	-33.63	32.56	53.81	74	PASS
1	2389.49	AV	37.76	-33.63	32.56	36.69	54	PASS
11	2483.70	PK	55.17	-33.18	32.50	54.49	74	PASS
11	2483.81	AV	37.67	-33.18	32.50	36.99	54	PASS

B. Test Plots:

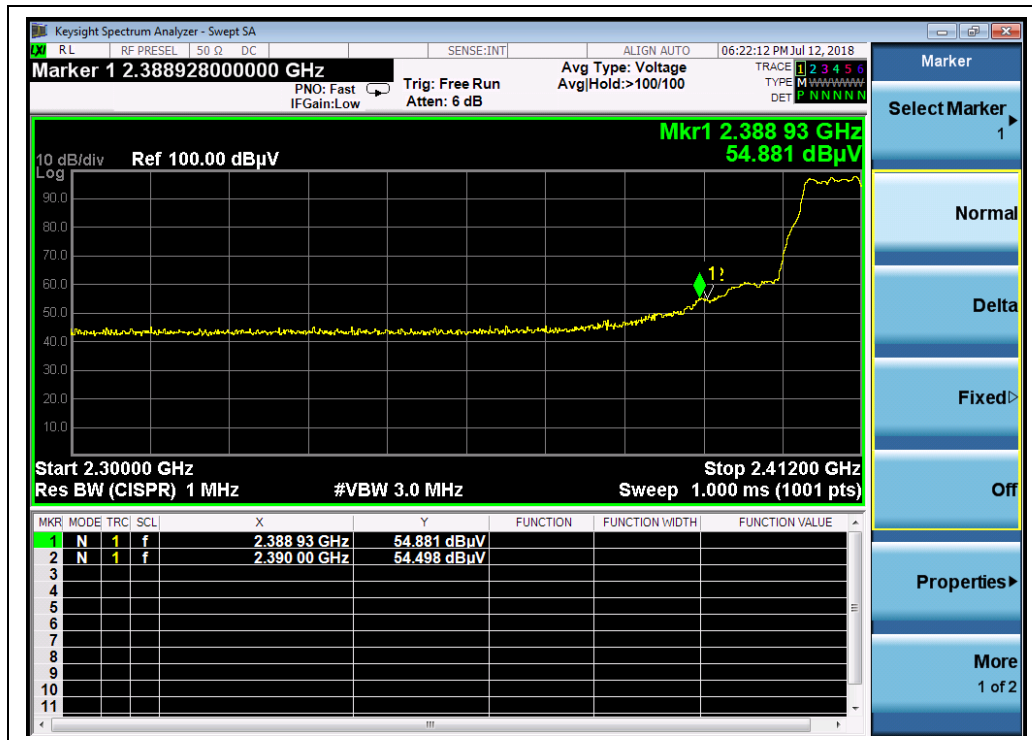


(Channel = 1 PEAK, 802.11g)

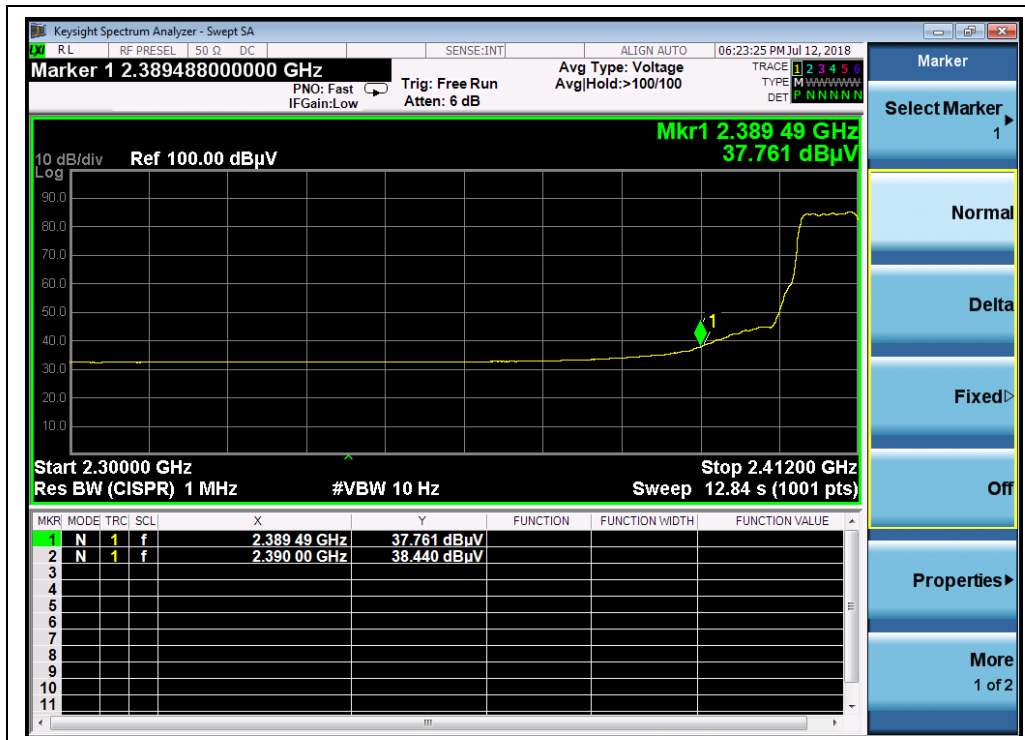

(Channel = 1 AVG, 802.11g)



(Channel = 11 PEAK, 802.11g)

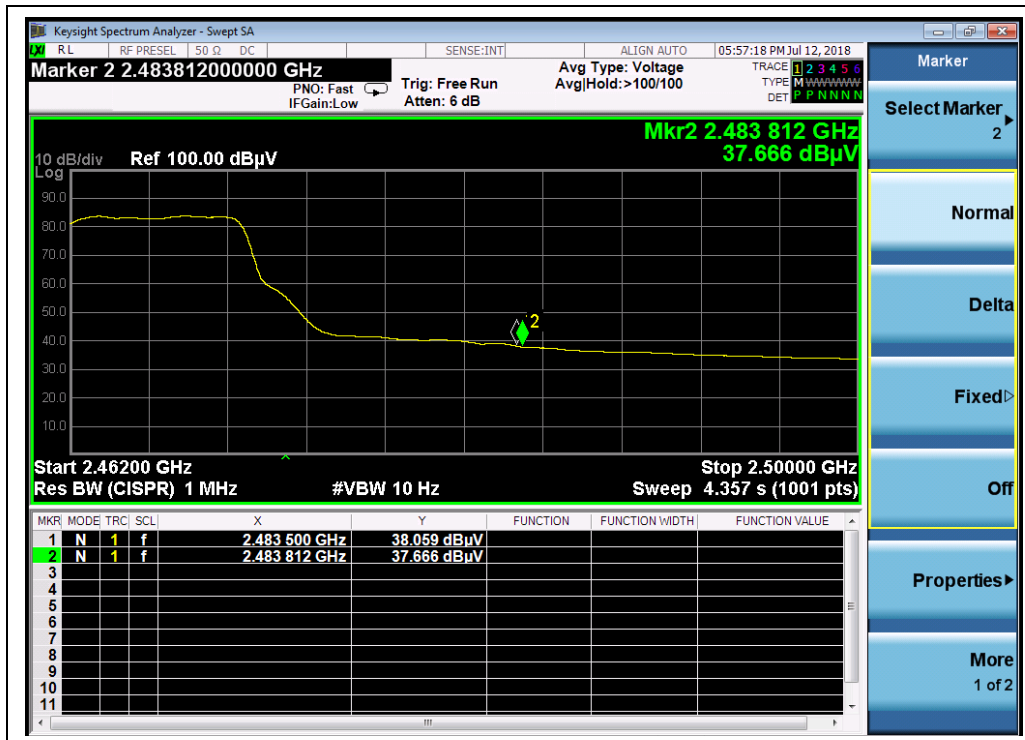

(Channel = 11 AVG, 802.11g)

2.6.3.3 802.11n-20MHz Test mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2389.26	PK	54.96	-33.63	32.56	53.89	74	PASS
1	2389.49	AV	36.56	-33.63	32.56	35.49	54	PASS
11	2484.76	PK	56.88	-33.18	32.50	56.2	74	PASS
11	2484.04	AV	37.62	-33.18	32.50	36.94	54	PASS




B. Test Plots:




(Channel = 1 PEAK, 802.11n-20)

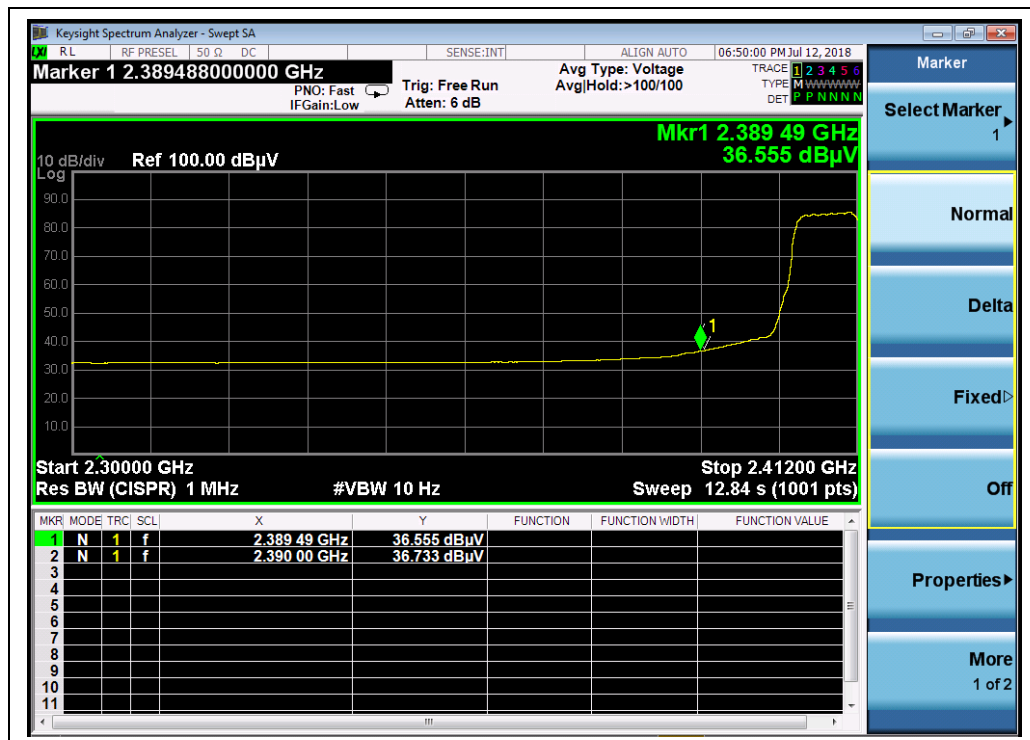

(Channel = 1 AVG, 802.11n-20)

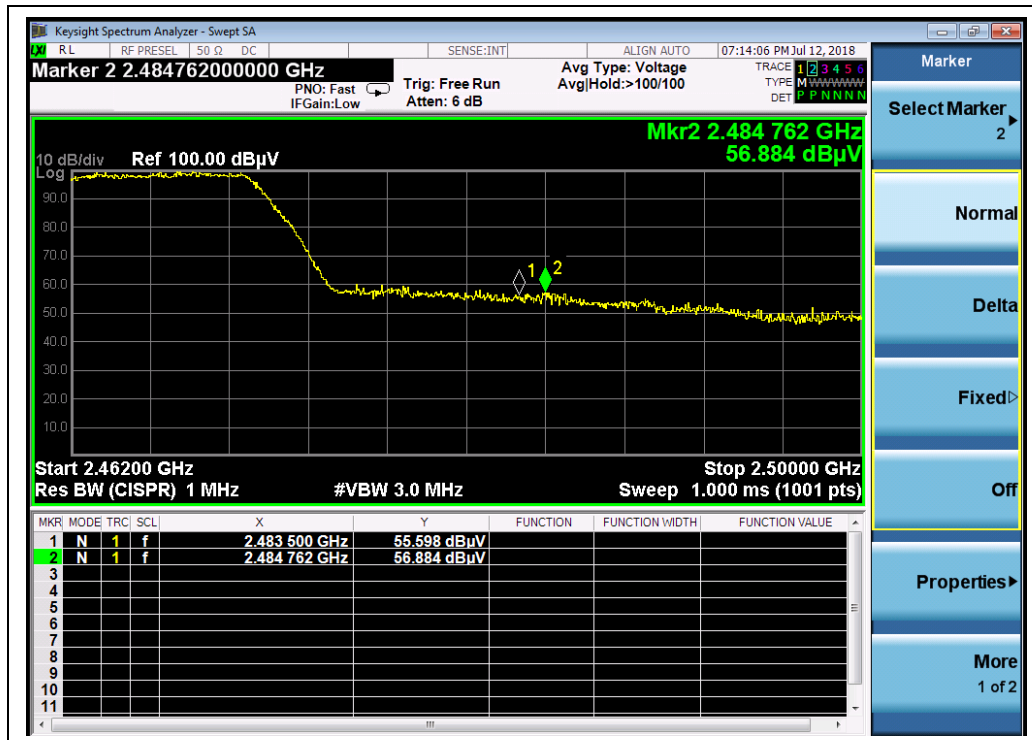

(Channel = 11 PEAK, 802.11n-20)

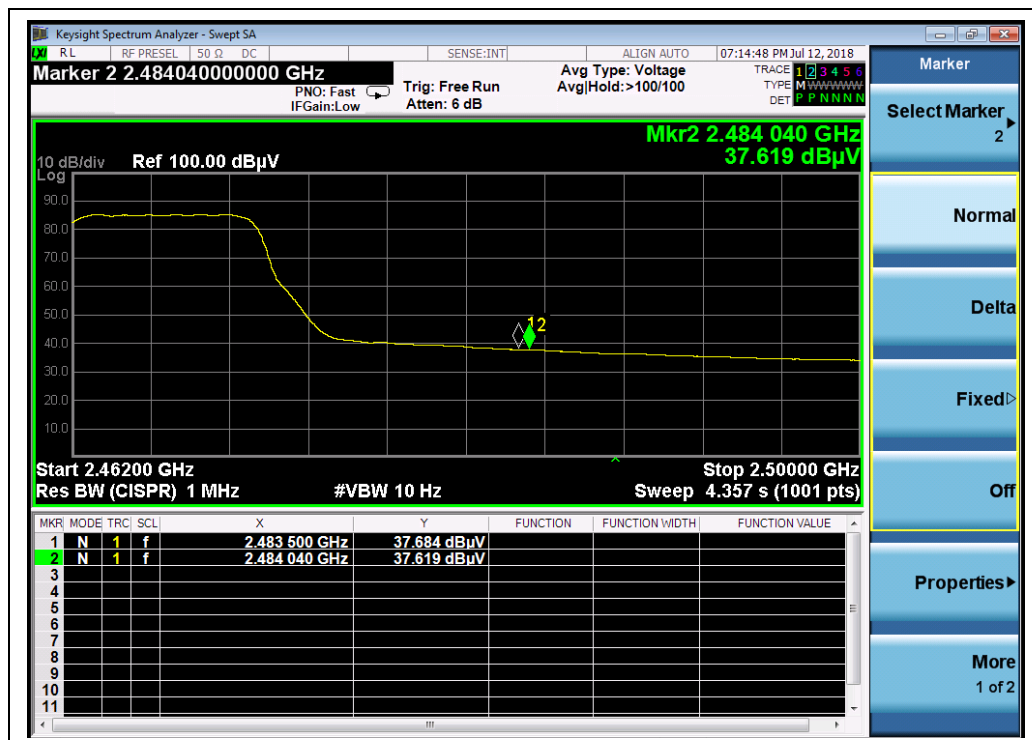

(Channel = 11 AVG, 802.11n-20)




2.6.3.4 802.11n-40MHz Test mode

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
3	2383.22	PK	59.57	-33.63	32.56	58.50	74	Pass
3	2389.26	AV	36.10	-33.63	32.56	35.03	54	Pass
9	2485.10	PK	57.46	-33.18	32.50	56.78	74	Pass
9	2484.34	AV	36.94	-33.18	32.50	36.26	54	Pass


B. Test Plots:

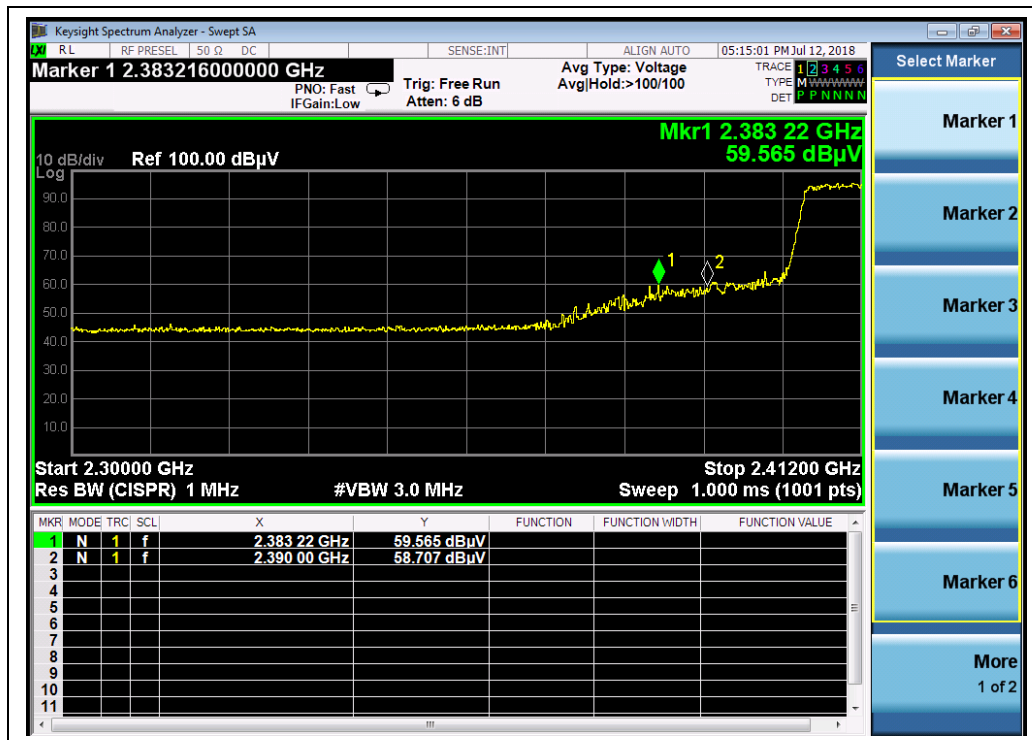


(Channel = 3 PEAK, 802.11n-40)



(Channel = 3 AVG, 802.11n-40)

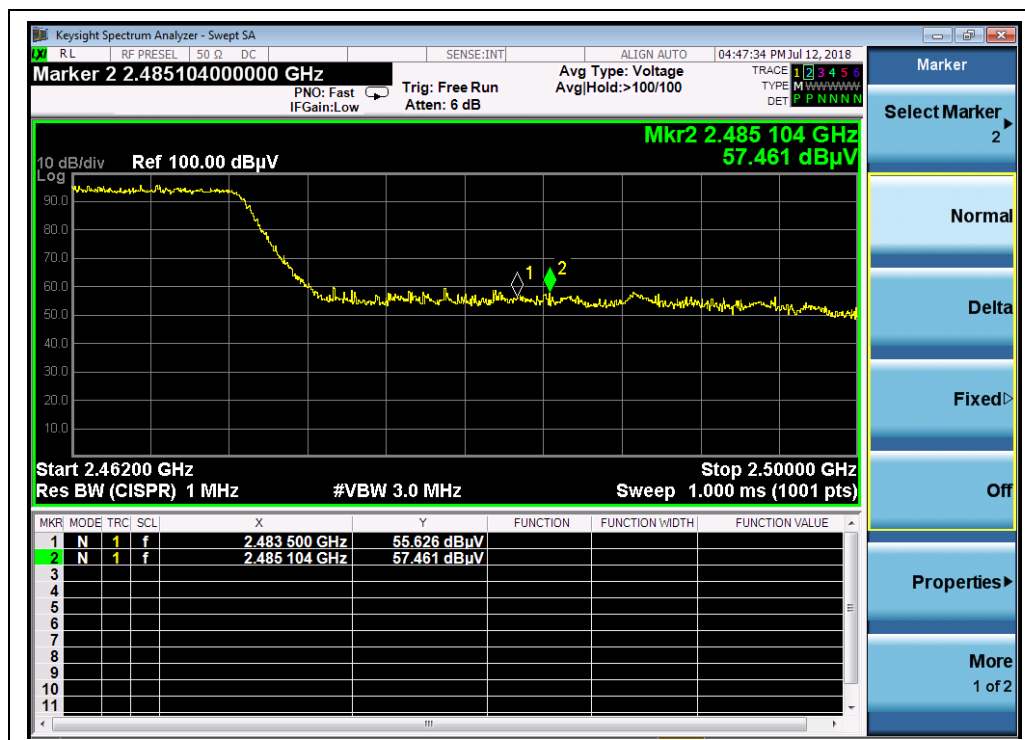

(Channel = 9 PEAK, 802.11n-40)

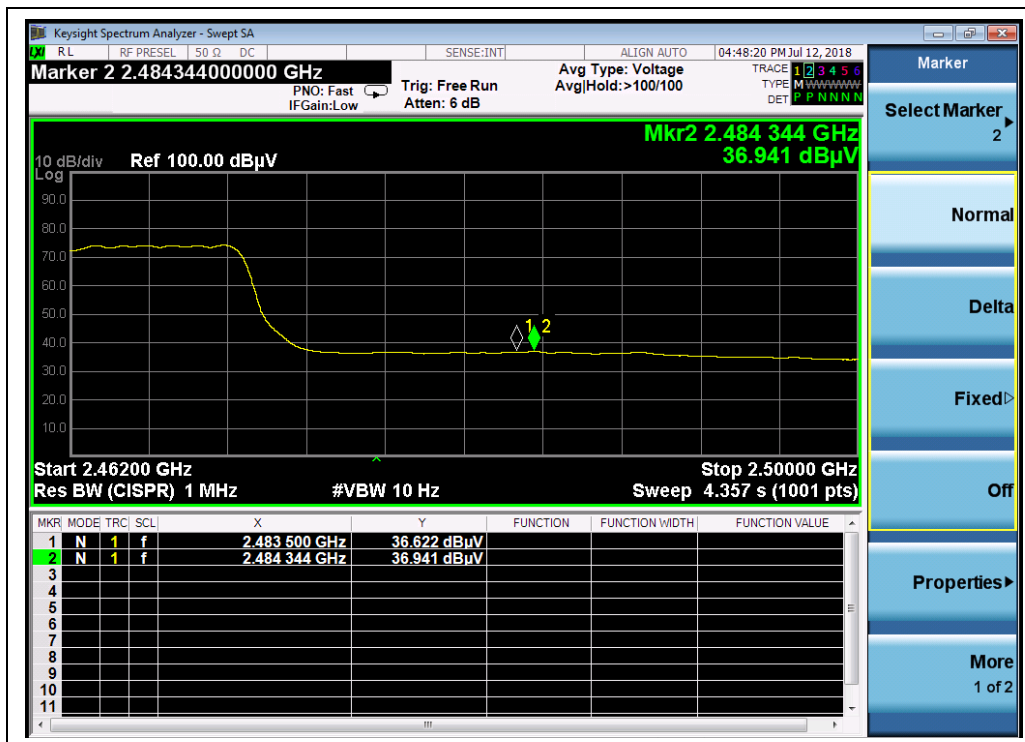

(Channel = 9 AVG, 802.11n-40)



2.8. Radiated Emission

2.8.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.


For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.8.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

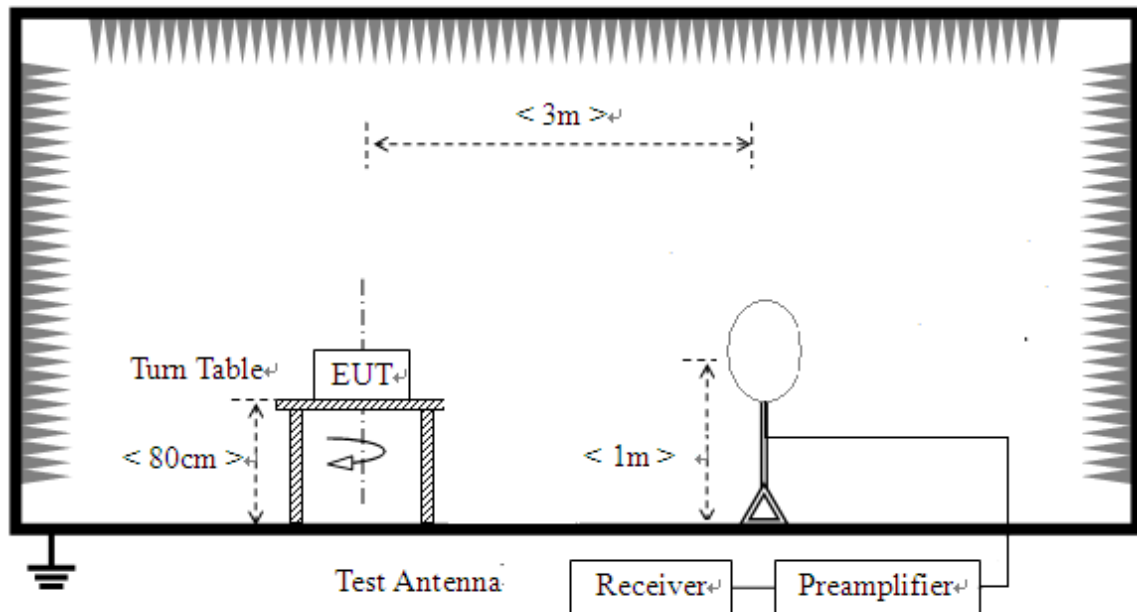

- 2) For radiated emissions from 30MHz to 1GHz

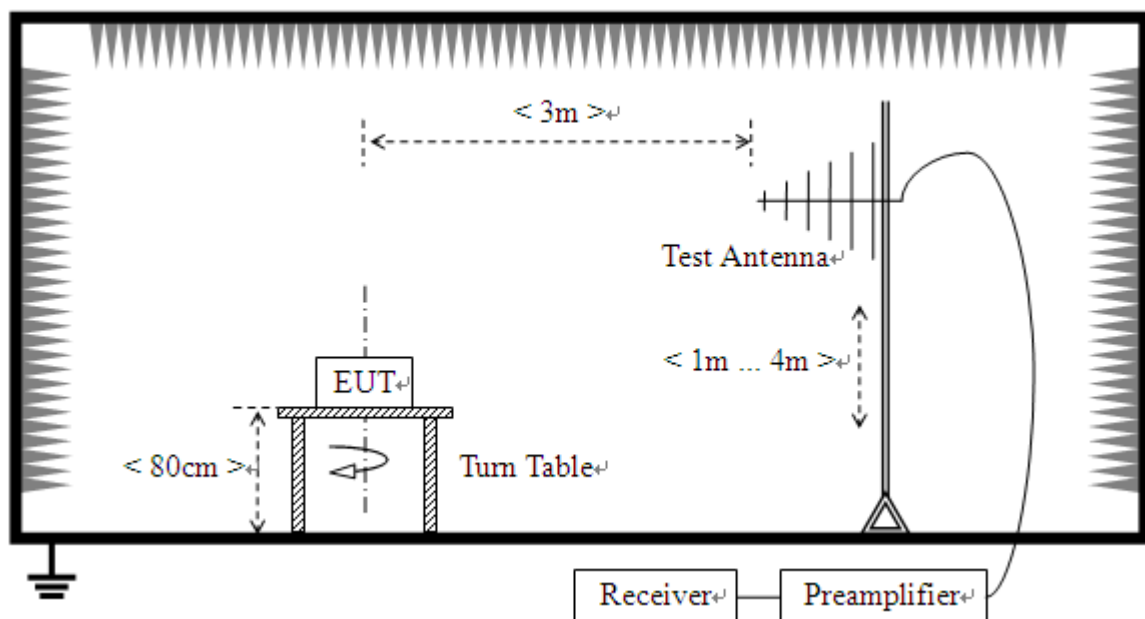

3) For radiated emissions above 1GHz

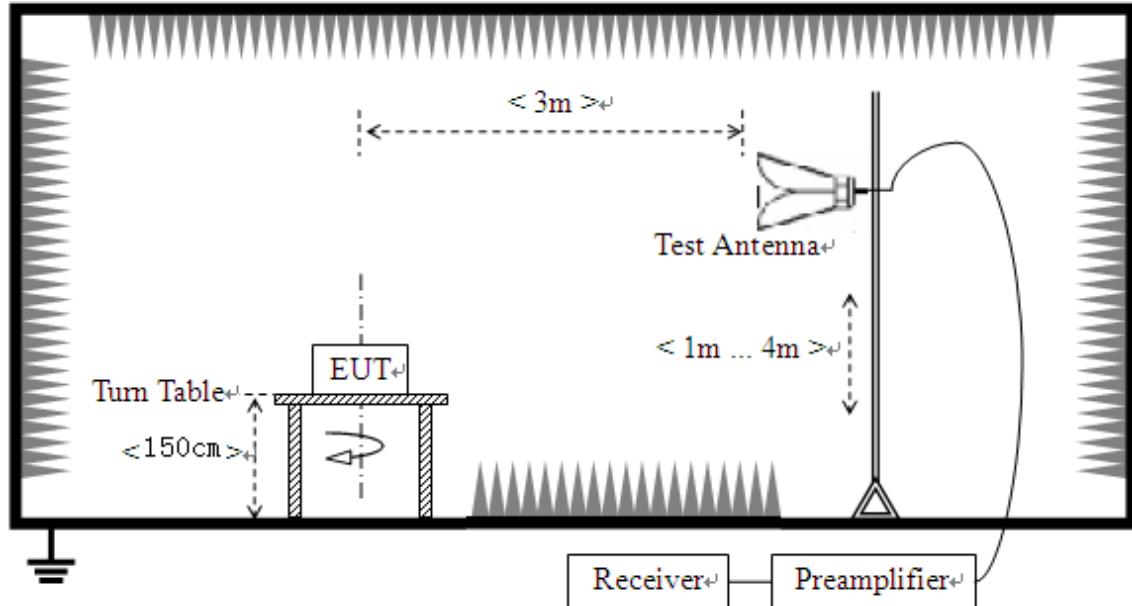

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading



For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

A. Equipments List:

Please refer ANNEX A(1.5).

2.8.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain


A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 25GHz to 40GHz, was pre-scanned and the result which was 10dB lower than the limit was not recorded.

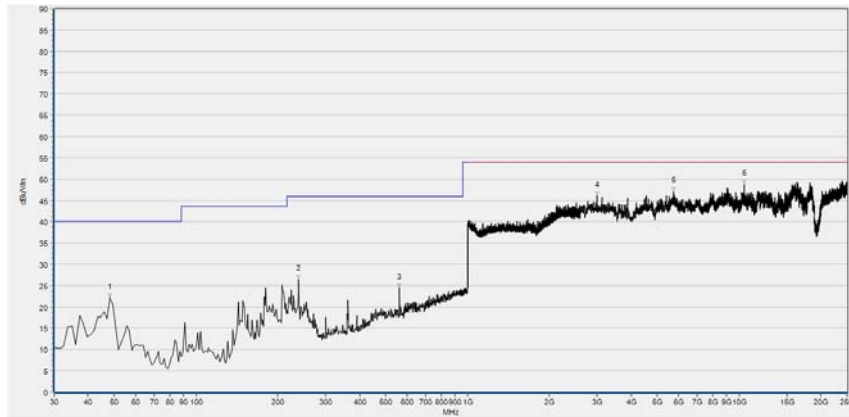**2.8.3.1 802.11b Test mode****Plots for Channel = 1**

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	22.17	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
238.811	26.54	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
560.526	24.39	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2991.053	46.05	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5740.644	47.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10421.058	48.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

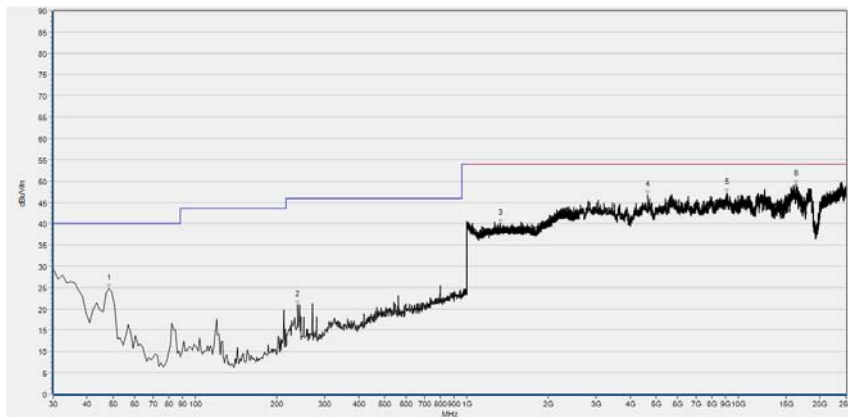


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	24.75	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
238.811	21.02	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1330.372	39.98	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4648.954	46.79	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9084.961	47.24	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16396.836	49.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




Plot for Channel = 6

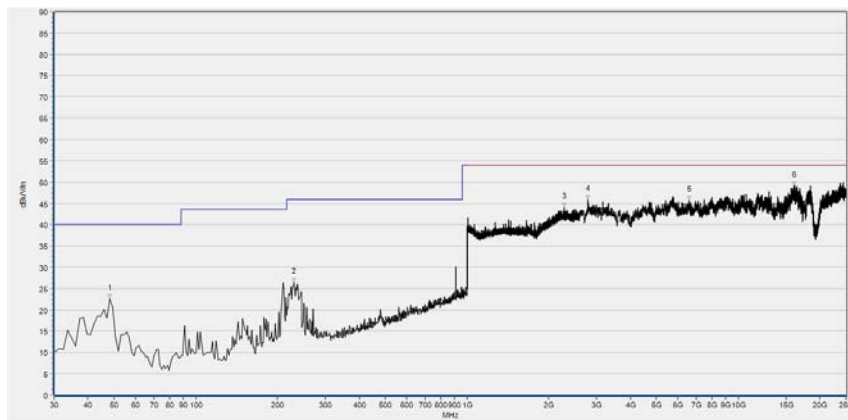


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	22.62	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
230.313	26.40	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2282.433	44.03	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2787.380	45.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6583.852	45.77	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16030.224	49.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

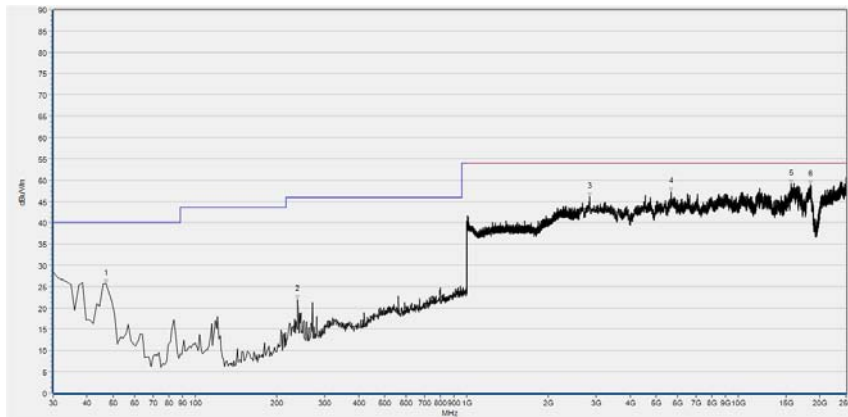


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
46.996	25.58	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
238.811	21.94	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2840.335	46.02	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5679.542	47.32	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15683.979	49.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18458.011	49.00	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

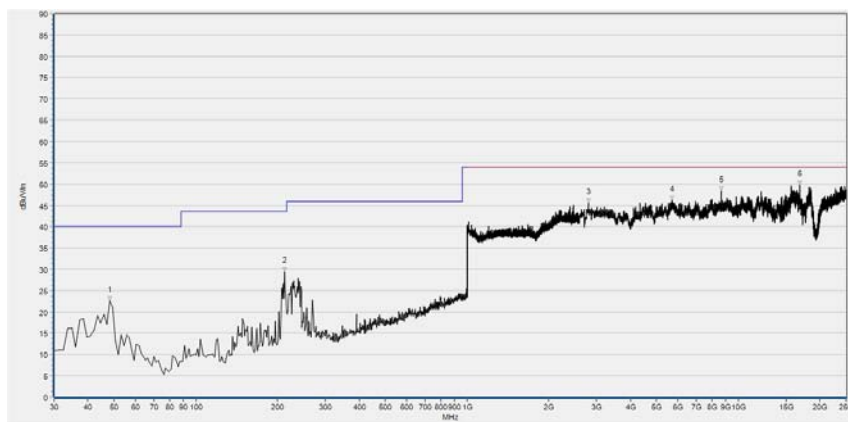Plot for Channel = 11

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	22.69	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
212.103	29.51	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2799.600	45.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5687.689	46.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8665.394	48.37	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16820.476	49.83	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

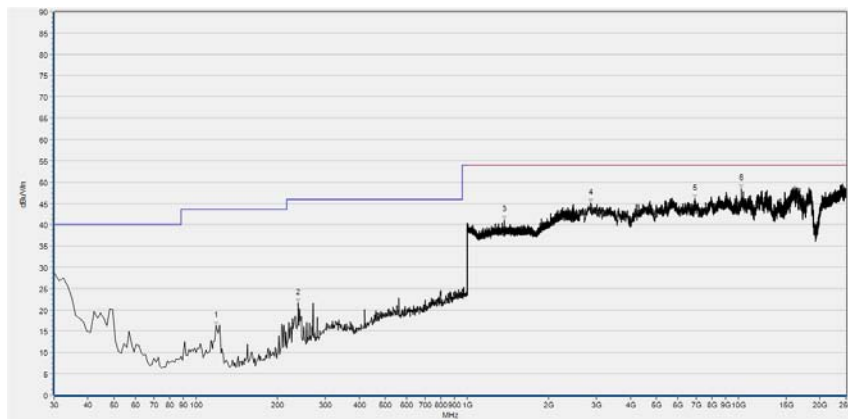


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
118.623	16.24	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
238.811	21.57	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1375.830	41.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2856.628	45.12	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6921.949	46.02	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10286.634	48.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

**2.8.3.2 802.11g Test mode****Plots for Channel = 1**

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	20.51	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
238.811	28.96	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2282.433	43.84	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5121.477	45.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7891.435	47.44	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18547.627	48.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

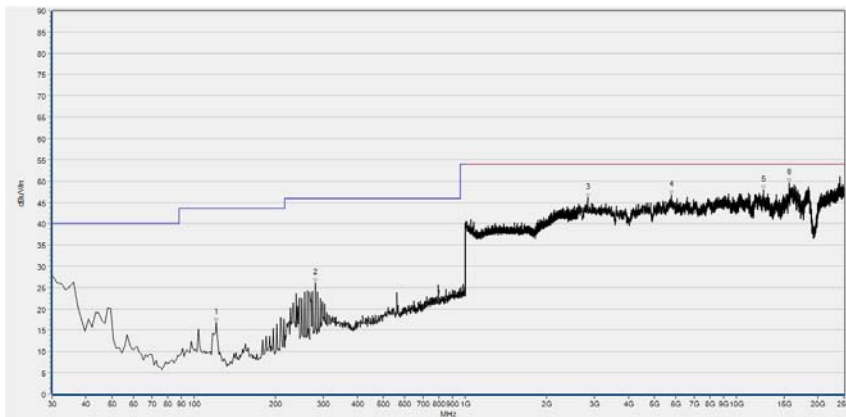


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
121.051	16.80	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
280.088	26.08	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2832.188	46.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5765.085	46.68	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12596.290	47.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15692.126	49.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




Plot for Channel = 6

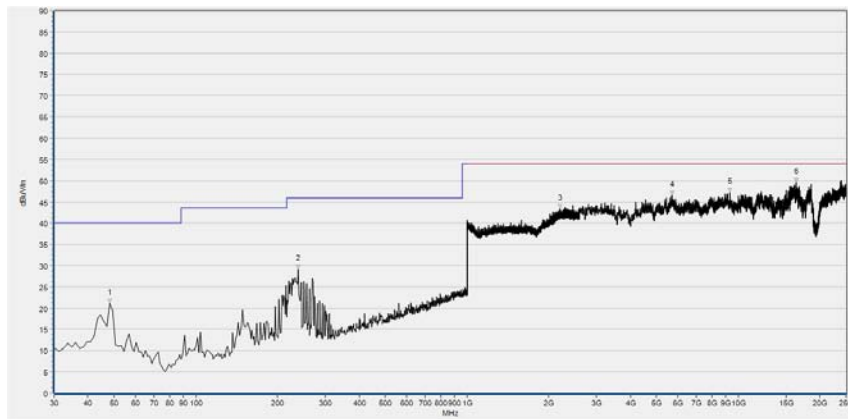

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	21.07	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
238.811	29.13	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2201.120	43.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5699.909	46.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9337.516	47.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16356.101	49.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

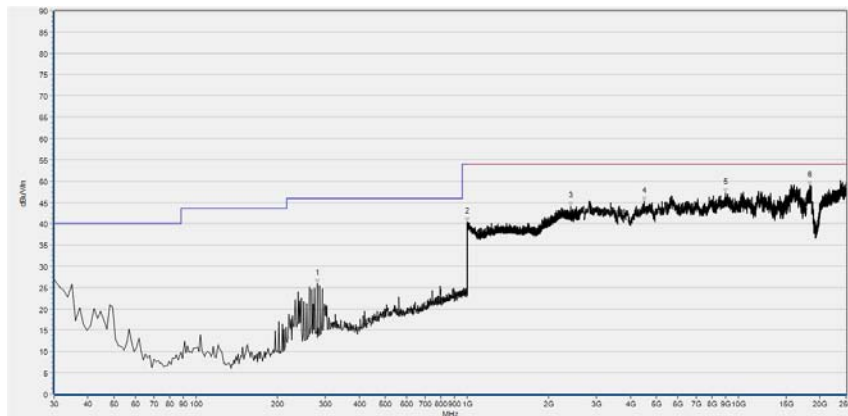

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
280.088	25.91	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1000.640	40.46	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2412.405	44.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4502.310	45.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8966.830	47.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18372.468	49.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

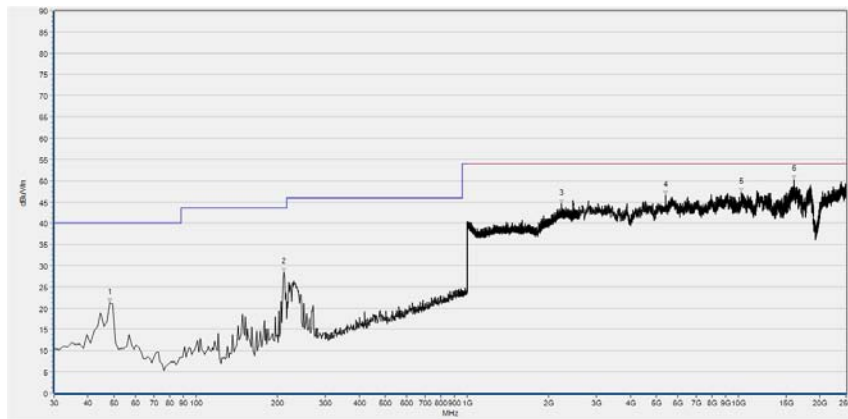

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	21.32	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
210.889	28.46	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2226.090	44.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5398.472	46.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10274.414	47.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16038.371	50.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

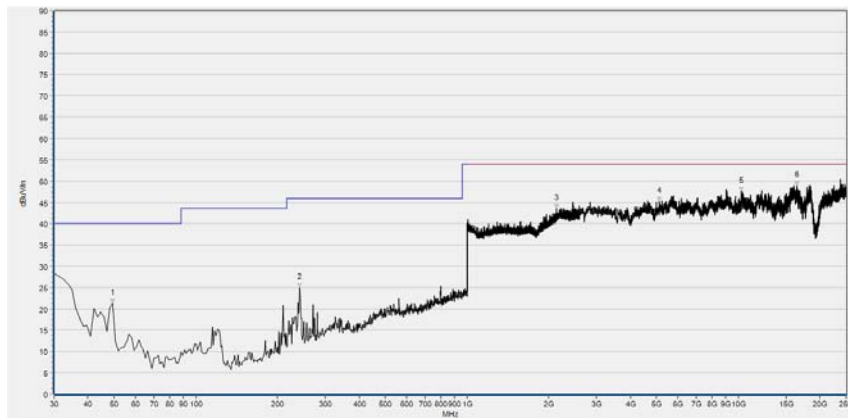


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	21.28	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
241.239	24.98	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2135.814	43.59	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5109.256	45.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10278.487	47.65	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
16433.497	48.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

**2.8.3.3 802.11n-20MHz Test mode****Plots for Channel = 1**

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	23.00	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
238.811	22.10	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2309.324	49.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5805.819	46.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11724.568	47.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18470.231	48.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

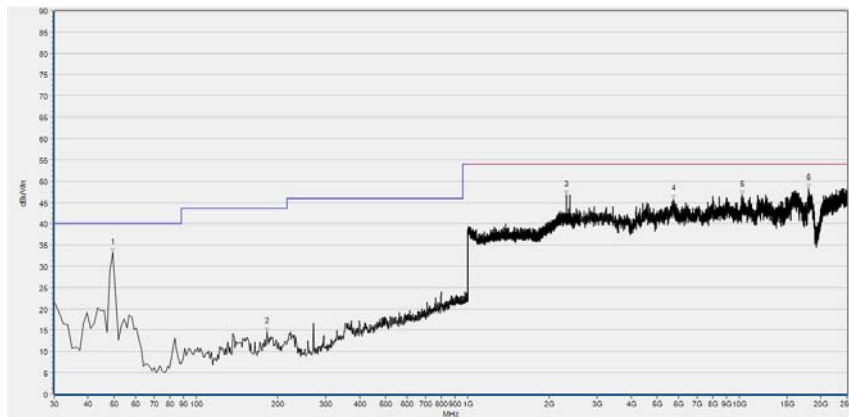

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	33.14	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
182.966	14.54	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2309.964	46.82	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5740.644	45.70	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10282.560	46.80	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18005.856	48.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 6

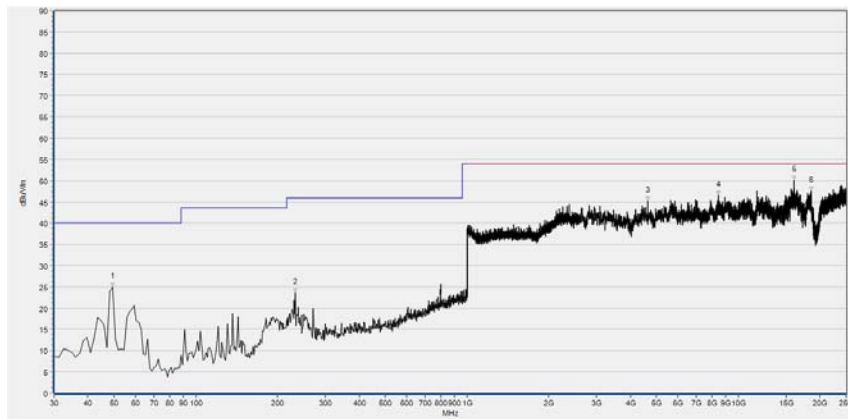

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	24.95	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
232.741	23.57	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
4632.660	45.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8433.206	46.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
16034.297	50.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18584.288	47.55	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 25GHz)

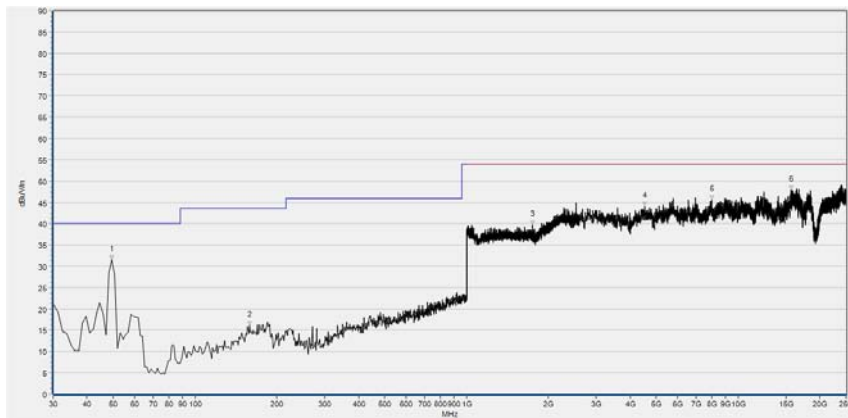

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	31.45	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
158.686	16.13	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1749.100	39.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4538.971	44.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7985.125	45.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15663.612	48.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 25GHz)

Plot for Channel = 11

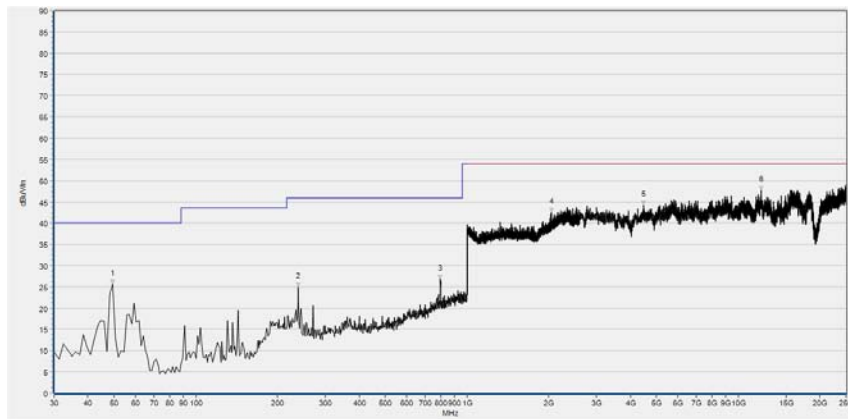

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	25.69	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
238.811	24.95	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
797.259	26.85	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2051.941	42.65	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4486.016	44.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12119.694	47.84	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

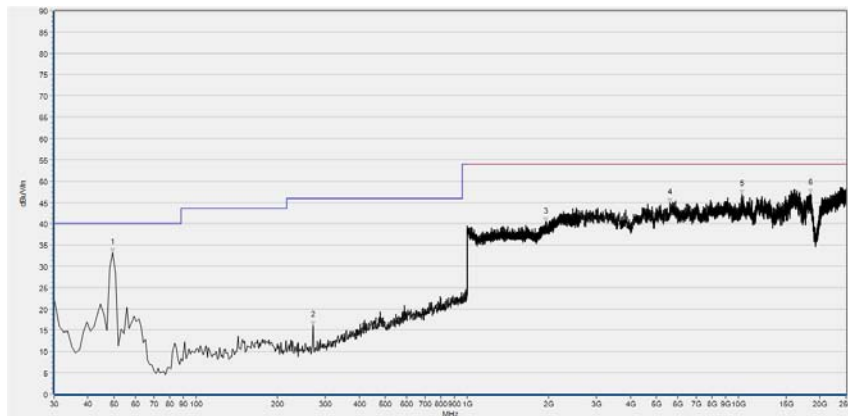


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	33.20	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
270.375	16.07	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1948.860	40.35	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5610.293	44.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10290.707	46.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18470.231	47.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)


2.8.3.4 802.11n-40MHz Test mode

Plots for Channel = 3

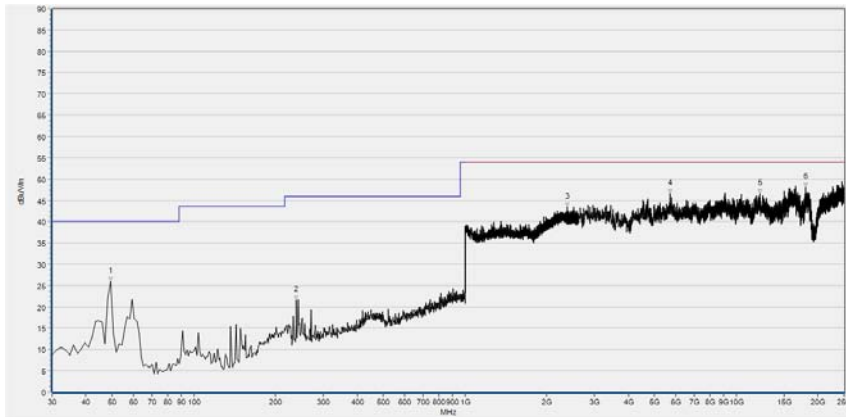

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	25.97	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
238.811	21.63	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2379.112	43.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5712.129	46.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12225.605	46.64	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18018.076	48.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

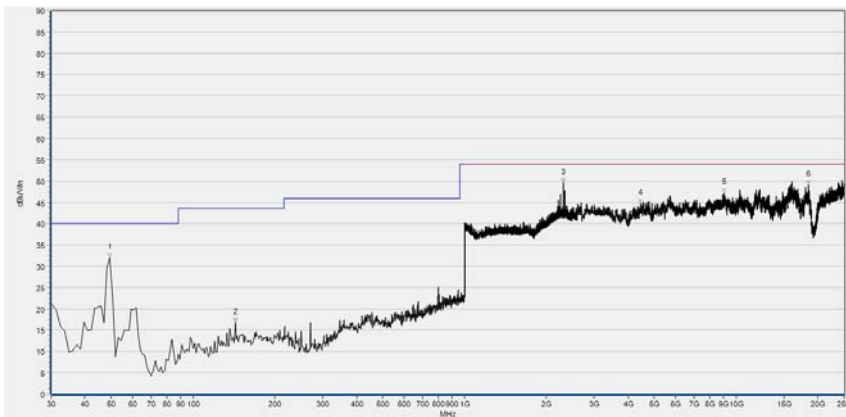


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	31.99	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
142.904	16.83	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2309.324	49.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4457.501	44.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9048.300	47.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
18458.011	49.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




Plots for Channel = 6

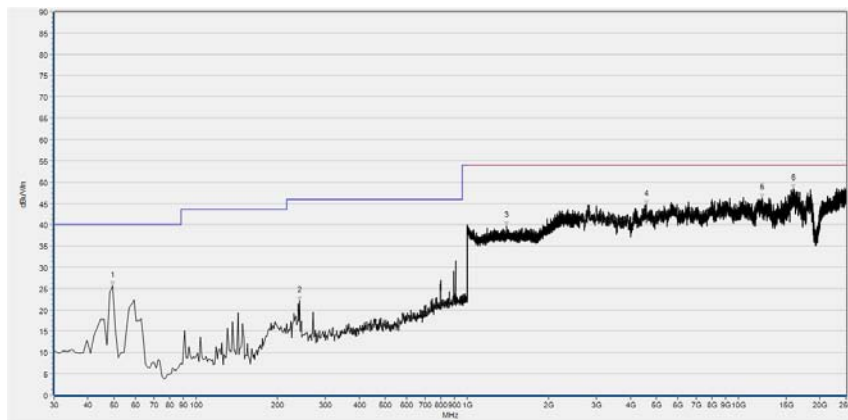

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	25.65	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
241.239	22.10	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
1401.441	39.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4575.632	44.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12233.752	46.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
15932.460	48.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

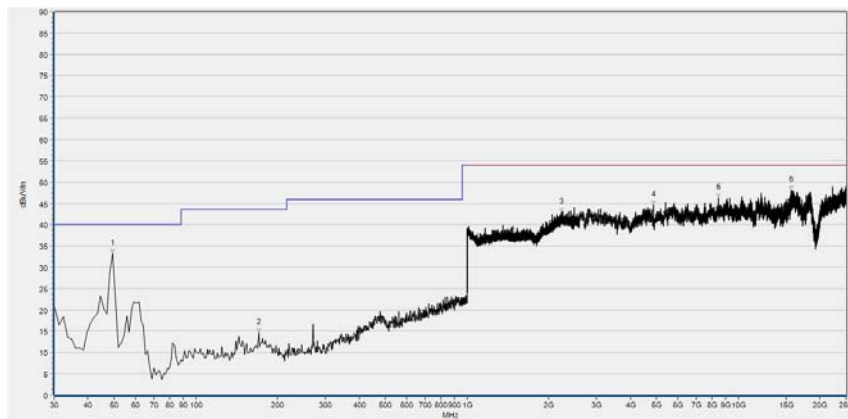


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	33.27	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
170.826	14.55	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2223.529	42.93	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4864.848	44.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8433.206	46.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15675.832	48.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




Plots for Channel = 9

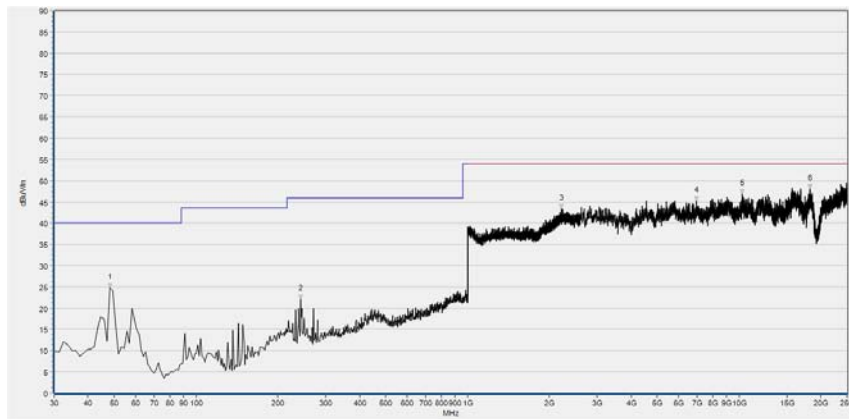

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	24.76	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
242.453	22.14	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2209.444	43.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
6974.905	45.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10286.634	46.95	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
18217.676	48.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

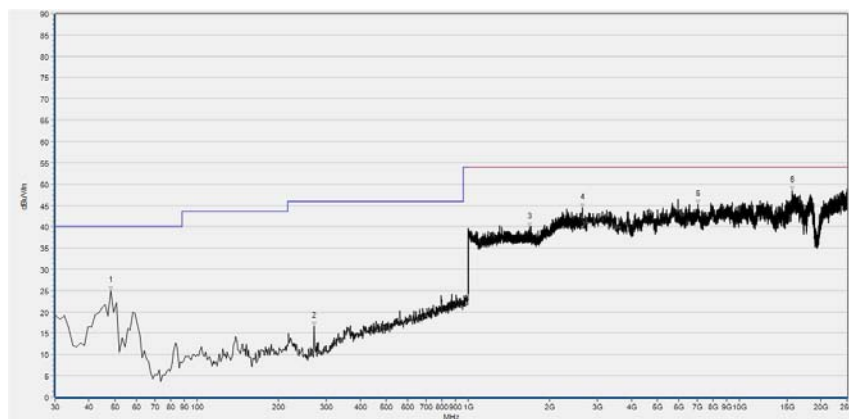

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	30.36	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
270.375	16.58	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1690.196	39.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2644.808	44.48	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7036.007	45.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
15683.979	48.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)

Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{ dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



4. Test Equipments Utilized

4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Power Splitter	NW521	1506A	Weinschel	2018.04.17	2019.04.16
Attenuator 1	(N/A.)	10dB	Resnet	2018.04.17	2019.04.16
Attenuator 2	(N/A.)	3dB	Resnet	2018.04.17	2019.04.16
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2017.12.03	2018.12.02
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2018.04.17	2019.04.16
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Receiver	MY56400093	N9038A	KEYSIGHT	2018.05.08	2019.05.07
LISN	812744	NSLK 8127	Schwarzbeck	2018.05.08	2019.05.07
Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2018.05.08	2019.05.07
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

4.3 Auxiliary Test Equipment

Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal.Due Date
Computer	T430i	Think Pad	Lenovo	N/A	N/A

4.4 List of Software Used

Description	Manufacturer	Software Version
Test system	Tonscend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V 1.0

**4.5 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
Receiver	MY54130016	N9038A	Agilent	2018.05.08	2019.05.07
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2018.05.08	2019.05.07
Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2017.09.13	2018.09.12
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2018.03.03	2019.03.02
Test Antenna - Horn	01774	BBHA 9120D	Schwarzbeck	2017.09.13	2018.09.12
Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2018.05.08	2019.05.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2017.11.19	2020.11.18

_____ END OF REPORT _____