

FCC UNII REPORT

Certification

Applicant Name:
HYUNDAI MOBIS CO., LTD.

Date of Issue:
January 17, 2019

Address:
203, Teheran-ro, Gangnam-gu, Seoul, 135-977, South
Korea

Test Site/Location:
HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-
myeo, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-1901-FC012

FCC ID: TQ8-ATC42G2AN

APPLICANT: HYUNDAI MOBIS CO., LTD.

Model: ATC42G2AN
Additional Model: ATC43G2AN, ATC41G7AN
EUT Type: Car Audio System
Modulation type OFDM
FCC Classification: Unlicensed National Information Infrastructure(UNII)
FCC Rule Part(s): Part 15.407

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



Report prepared by : Se Wook Park
Engineer of Telecommunication testing center



Approved by : Kwon Jeong
Manager of Telecommunication testing center

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1901-FC012	January 17, 2019	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	5
2. MAXIMUM OUTPUT POWER	6
3. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE.....	7
GENERAL TEST PROCEDURES.....	7
DESCRIPTION OF TEST MODES.....	7
4. INSTRUMENT CALIBRATION	8
5. FACILITIES AND ACCREDITATIONS.....	8
5.1 FACILITIES	8
5.2 EQUIPMENT.....	8
6. ANTENNA REQUIREMENTS.....	8
7. MEASUREMENT UNCERTAINTY	9
8. DESCRIPTION OF TESTS	10
8. SUMMARY OF TEST RESULTS	27
9. TEST RESULT	28
9.1 DUTY CYCLE.....	28
9.2 26DB BANDWIDTH.....	30
9.3 6DB BANDWIDTH.....	38
9.4 OUTPUT POWER MEASUREMENT	41
9.5 POWER SPECTRAL DENSITY	65
9.6 FREQUENCY STABILITY.....	71
9.6.1 20MHz BW	71
9.6.2 40MHz BW	87
9.6.3 80MHz BW	103
9.7 STRADDLE CHANNEL.....	119
9.7.1 26dB Bandwidth.....	119
9.7.2 Output Power	122
9.7.3 Power Spectral Density	125
9.8 RADIATED SPURIOUS EMISSIONS.....	128
9.9 RADIATED RESTRICTED BAND EDGE.....	168
9.10 LIST OF TEST EQUIPMENT.....	184

10.1 LIST OF TEST EQUIPMENT(Conducted Test)	1 8 4
11. ANNEX A_ TEST SETUP PHOTO.....	1 8 6

1. GENERAL INFORMATION

Model	ATC42G2AN	
Additional Model	ATC43G2AN, ATC41G7AN	
EUT Type	Car Audio System	
Power Supply	DC 14.40 V	
Modulation Type	OFDM : 802.11a, 802.11n, 802.11ac	
Frequency Range (MHz)	UNII 1	20MHz BW : 5180 - 5240 40MHz BW : 5190 - 5230 80MHz BW : 5210
	UNII 2A	20MHz BW : 5260 - 5320 40MHz BW : 5270 - 5310 80MHz BW : 5290
	UNII 2C	20MHz BW : 5500 - 5720 40MHz BW : 5510 - 5710 80MHz BW : 5530 - 5690
	UNII 3	20MHz BW : 5745 - 5825 40MHz BW : 5755 - 5795 80MHz BW : 5775
Antenna Type	Wi-Fi Dual Band Antenna	
Antenna Peak gain (dBi)	UNII 1 : 3.51 UNII 2A : 3.12 UNII 2C : 2.28 UNII 3 : -0.84	
Straddle channel	Supported	
TDWR Band	Not Supported	
Dynamic Frequency Selection	Slave without radar detection	
Date(s) of Tests	November 9, 2018 ~ November 30, 2018	

2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Band	Mode	Power (dBm)	Power (W)
UNII1	802.11a	8.78	0.0076
	802.11n (HT20)	8.55	0.0072
	802.11n (HT40)	4.07	0.0026
	802.11ac (VHT20)	8.44	0.0070
	802.11ac (VHT40)	4.09	0.0026
	802.11ac (VHT80)	4.06	0.0025
UNII2A	802.11a	9.11	0.0081
	802.11n (HT20)	8.82	0.0076
	802.11n (HT40)	8.83	0.0076
	802.11ac (VHT20)	8.75	0.0075
	802.11ac (VHT40)	9.03	0.0080
	802.11ac (VHT80)	8.07	0.0064
UNII2C	802.11a	8.53	0.0071
	802.11n (HT20)	8.24	0.0067
	802.11n (HT40)	8.13	0.0065
	802.11ac (VHT20)	8.17	0.0066
	802.11ac (VHT40)	8.25	0.0067
	802.11ac (VHT80)	8.72	0.0074
UNII3	802.11a	8.35	0.0068
	802.11n (HT20)	8.08	0.0064
	802.11n (HT40)	8.02	0.0063
	802.11ac (VHT20)	8.82	0.0076
	802.11ac (VHT40)	7.98	0.0063
	802.11ac (VHT80)	8.07	0.0064

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E" and ANSI C63.10 (Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices' were used in the measurement.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

See Section from 8.1 to 8.4.(KDB 789033 D02 v02r01)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203, §15.407:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

* The E.U.T Complies with the requirement of §15.203, §15.407

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

8. DESCRIPTION OF TESTS

8.1. Duty Cycle

Test Configuration

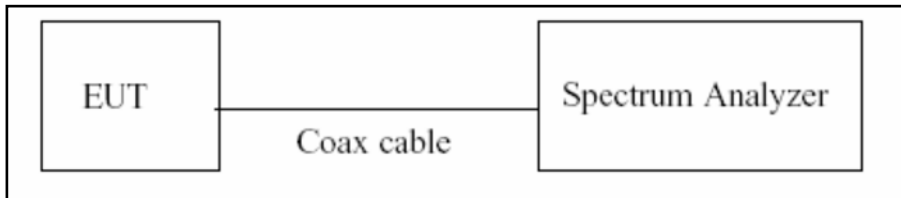

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = $T_{\text{on}} / T_{\text{total}}$ and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

8.2. Bandwidth Measurement

Limit

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Configuration

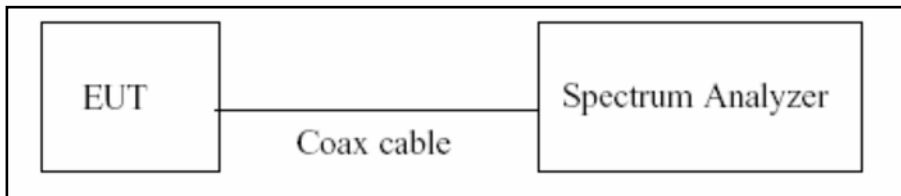

Test Procedure(26dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure(6dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW $\geq 3 \times$ RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.


8.3. Output Power Measurement

Limit


Band	Limit
UNII 1	- Master : Not exceed 1 W(=30dBm) - Slave : Not exceed 250 mW(=23.98 dBm)
UNII 2A, 2C	Not exceed the lesser of 250 mW or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)
UNII 3	Not exceed 1 W(=30dBm)

Test Configuration

Power Meter(BW : 20MHz)

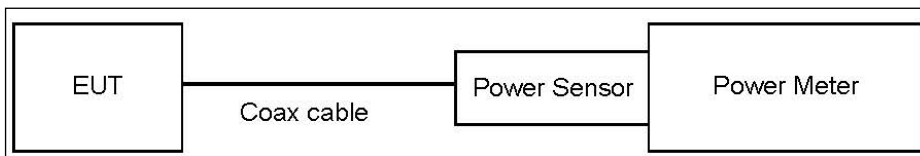

Spectrum Analyzer(BW : 40MHz, 80MHz)

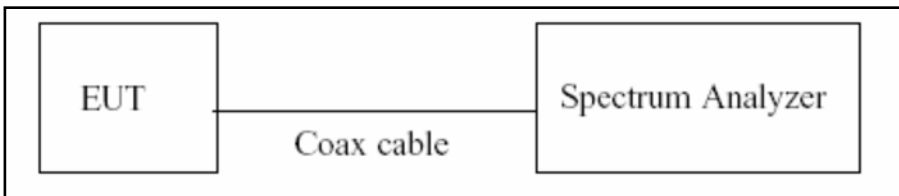

Test Procedure(Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test Procedure(Spectrum Analyzer)

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW \geq 3 MHz.
5. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

Note

1. Spectrum reading values are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	11.1
UNII 2A	11.1
UNII 2C	11.1
UNII 3	11.1


(Actual value of loss for the attenuator and cable combination)

8.4. Power Spectral Density

Limit

Band	Limit
UNII 1	11 dBm/MHz
UNII 2A, 2C	11 dBm/MHz
UNII 3	30 dBm/500 kHz

Test Configuration

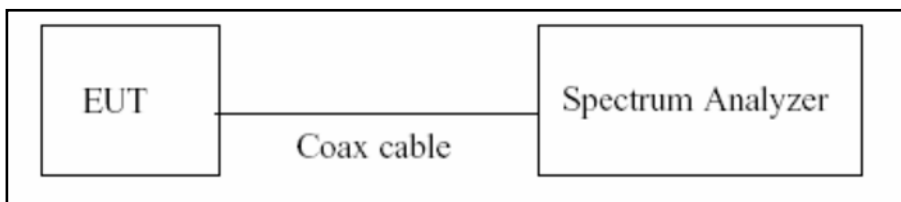

Test Procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz(510 kHz for UNII 3)
3. VBW \geq 3 MHz
4. Number of points in sweep \geq 2*span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Note

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	11.1
UNII 2A	11.1
UNII 2C	11.1
UNII 3	11.1


(Actual value of loss for the attenuator and cable combination)

8.5. Frequency Stability

Limit

Maintained within the band

Test Configuration

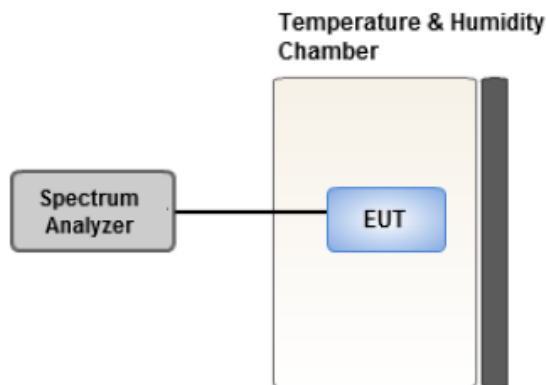

Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

8.6. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

8.7. Radiated Test


Limit

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.
3. UNII 3: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
4. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

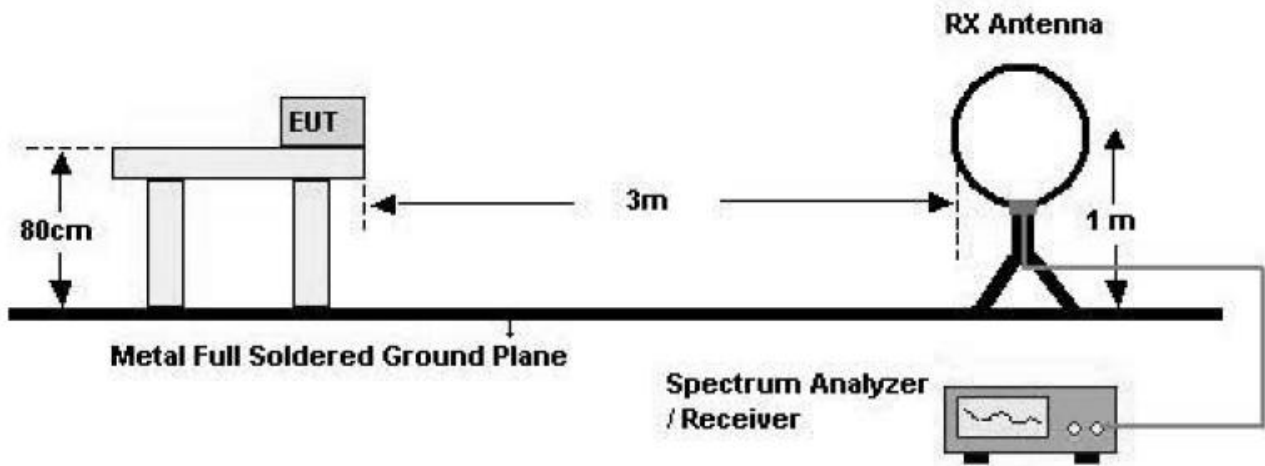

30 MHz - 1 GHz

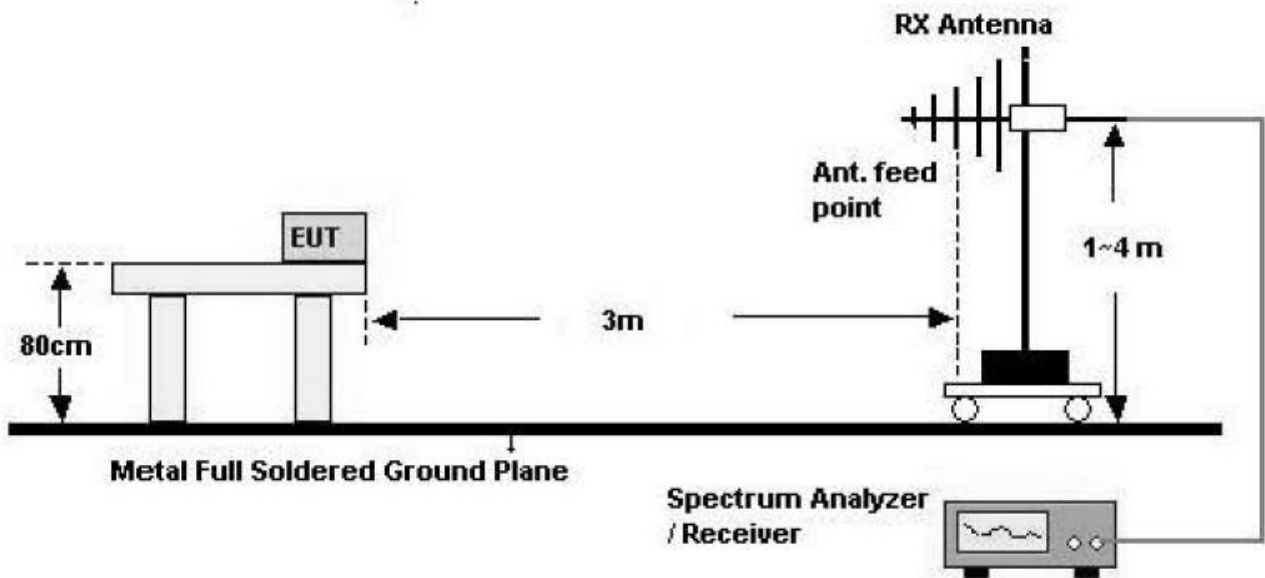

Above 1 GHz

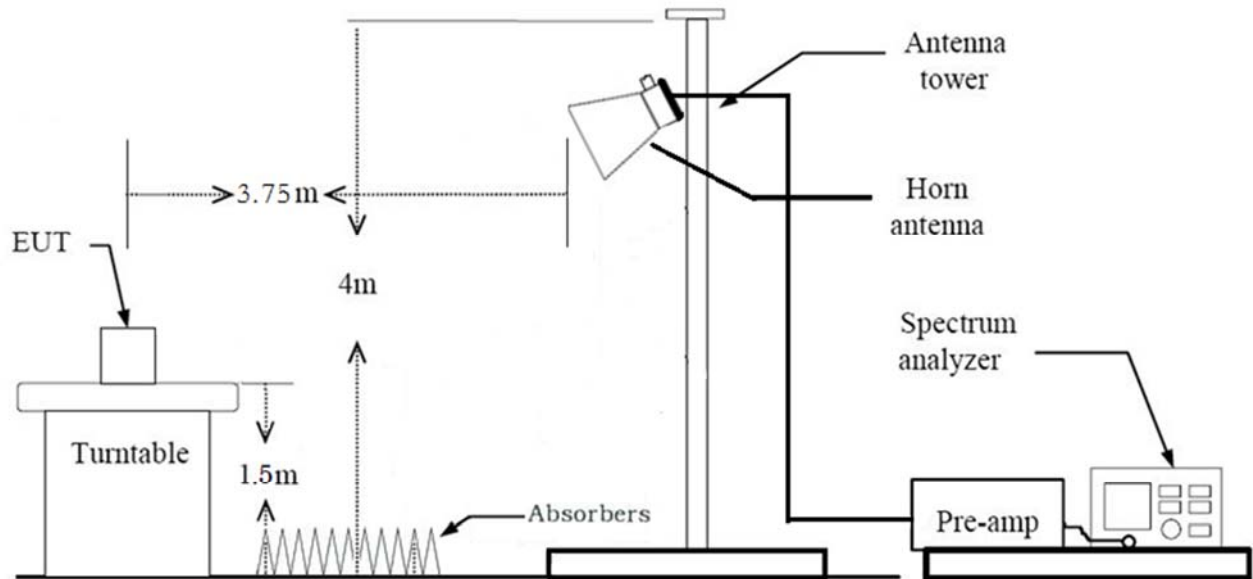

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40 \cdot \log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$

Measurement Distance : 3 m

7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40 \cdot \log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$

Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW $\geq 3 \cdot \text{RBW}$

9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. The test results for below 30 MHz is correlated to an open site.

The result on OATS is about 2 dB higher than semi-anechoic chamber(10 m chamber)

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW $\geq 3 \cdot \text{RBW}$

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

*In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log (\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 percent) = $\text{VBW} \leq \text{RBW}/100$ (i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is $<$ 98 percent) = $\text{VBW} \geq 1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
11. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
12. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
*Distance extrapolation factor = $20 \cdot \log (\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 percent) = $\text{VBW} \leq \text{RBW}/100$ (i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is $<$ 98 percent) = $\text{VBW} \geq 1/T$, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

10. Measured Frequency Range :

- 4500MHz ~ 5150MHz
- 5350MHz ~ 5460MHz
- 5460MHz ~ 5470MHz
- (75 MHz or more below the 5725MHz) ~ 5725MHz
- 5850MHz ~ (75 MHz or more above the 5850MHz)

11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

The actual setting value of VBW

Mode	Worst Data rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	VBW(1/T) (Hz)	The actual setting value of VBW (Hz)
802.11a	6	1.428	1.530	0.933	700	1000
802.11n(HT20)	MCS 0	1.334	1.438	0.928	750	1000
802.11ac(VHT20)	MCS 0	1.342	1.446	0.928	745	1000
802.11n(HT40)	MCS 0	0.662	0.766	0.864	1511	3000
802.11ac(VHT40)	MCS 0	0.666	0.770	0.865	1502	3000
802.11ac(VHT80)	MCS 0	0.328	0.432	0.759	3049	10000

8.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + external accessories(earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X
3. All data rate of operation were investigated and the test results are worst case in lowest data rate of each mode.
 - 802.11a : 6Mbps
 - 802.11n : MCS0
 - 802.11ac : MCS0
4. ATC42G2AN & Additional Models were tested and the worst case results are reported.
(Worst case : ATC42G2AN)

AC Power line Conducted Emissions

1. We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

Conducted test

1. The EUT was configured with data rate of highest power.
 - 802.11a : 6Mbps
 - 802.11n : MCS0
 - 802.11ac : MCS0
2. ATC42G2AN & Additional Models were tested and the worst case results are reported.
(Worst case : ATC42G2AN)

8. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26dB Bandwidth	§15.407 (for Power Measurement)	N/A	Conducted	PASS
6 dB Bandwidth	§15.407(e)	>500 kHz (5725-5850 MHz)		PASS
Maximum Conducted Output Power	§15.407(a)(1)	< 250 mW(5150-5250 MHz) < 250 mW or 11+10 log log ₁₀ (BW) dBm (5250-5350 MHz) < 250 mW or 11+10 log log ₁₀ (BW) dBm (5470-5725 MHz) <1 W(5725-5850 MHz)		PASS
Peak Power Spectral Density	§15.407(a)(1),(5)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
Frequency Stability	§15.407(g) §2.1055	Maintained within the band		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207	<FCC 15.207 limits		N/A
Undesirable Emissions	§15.407(b)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) cf. Section 8.7 (UNII 3)	Radiated	PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS

Note:

We don't perform AC Conducted Emissions test. Because this EUT is used with vehicle.

9. TEST RESULT

9.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11a	6	1.428	1.530	0.933	0.300
	9	0.947	1.062	0.892	0.498
	12	0.713	0.821	0.868	0.613
	18	0.490	0.594	0.825	0.836
	24	0.370	0.475	0.779	1.085
	36	0.255	0.358	0.712	1.473
	48	0.195	0.297	0.657	1.827
	54	0.179	0.281	0.637	1.959

Mode	MCS Index	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11n(HT20)	0	1.334	1.438	0.928	0.326
	1	0.685	0.789	0.868	0.614
	2	0.471	0.573	0.822	0.851
	3	0.364	0.466	0.781	1.073
	4	0.255	0.357	0.714	1.461
	5	0.197	0.301	0.654	1.841
	6	0.183	0.285	0.642	1.924
	7	0.167	0.270	0.619	2.086
802.11n(HT40)	0	0.662	0.766	0.864	0.634
	1	0.349	0.453	0.770	1.133
	2	0.247	0.349	0.708	1.501
	3	0.195	0.297	0.657	1.827
	4	0.143	0.245	0.584	2.338
	5	0.115	0.217	0.530	2.758
	6	0.107	0.210	0.510	2.928
	7	0.099	0.201	0.493	3.076

Mode	MCS Index	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11ac(VHT20)	0	1.342	1.446	0.928	0.324
	1	0.688	0.796	0.864	0.633
	2	0.464	0.570	0.814	0.894
	3	0.365	0.466	0.783	1.061
	4	0.257	0.362	0.710	1.488
	5	0.202	0.305	0.662	1.789
	6	0.187	0.289	0.647	1.891
	7	0.170	0.273	0.623	2.057
	8	0.151	0.255	0.592	2.276
802.11ac(VHT40)	0	0.666	0.770	0.865	0.630
	1	0.355	0.458	0.775	1.106
	2	0.251	0.353	0.711	1.481
	3	0.197	0.302	0.652	1.855
	4	0.148	0.249	0.594	2.259
	5	0.119	0.221	0.538	2.688
	6	0.111	0.213	0.521	2.831
	7	0.104	0.205	0.507	2.947
	8	0.095	0.198	0.480	3.189
	9	0.087	0.198	0.439	3.571
802.11ac(VHT80)	0	0.328	0.432	0.759	1.196
	1	0.187	0.290	0.645	1.906
	2	0.140	0.242	0.579	2.377
	3	0.116	0.217	0.535	2.720
	4	0.090	0.193	0.466	3.313
	5	0.079	0.181	0.436	3.601
	6	0.075	0.178	0.421	3.754
	7	0.071	0.173	0.410	3.868
	8	0.067	0.169	0.396	4.018
	9	0.063	0.165	0.382	4.181

9.2 26DB BANDWIDTH

802.11a Mode		26dB Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	20.78
5200	40	21.01
5240	48	20.91
5260	52	21.11
5300	60	20.93
5320	64	20.86
5500	100	20.94
5580	116	21.24
5720	144	20.99
5745	149	21.18
5785	157	21.02
5825	165	21.09

802.11n(HT20) Mode		26dB Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	21.10
5200	40	21.25
5240	48	21.27
5260	52	21.38
5300	60	21.34
5320	64	21.16
5500	100	21.32
5580	116	21.25
5720	144	21.26
5745	149	21.53
5785	157	21.28
5825	165	21.38

802.11n(HT40) Mode		26dB Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5190	38	39.25
5230	46	39.74
5270	54	39.33
5310	62	39.35
5510	102	39.19
5550	110	39.51
5710	142	39.13
5755	151	39.25
5795	159	39.66

802.11ac(VHT20) Mode		26dB Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5180	36	21.41
5200	40	21.40
5240	48	21.14
5260	52	21.45
5300	60	21.34
5320	64	21.30
5500	100	21.48
5580	116	21.10
5720	144	21.72
5745	149	21.45
5785	157	21.26
5825	165	21.64

802.11ac(VHT40) Mode		26dB Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5190	38	39.44
5230	46	39.51
5270	54	39.38
5310	62	39.53
5510	102	39.31
5550	110	39.34
5710	142	39.72
5755	151	39.38
5795	159	39.36


802.11ac(VHT80) Mode		26dB Bandwidth [MHz]
Frequency [MHz]	Channel No.	
5210	42	81.30
5290	58	80.79
5530	106	81.07
5690	138	81.27
5775	155	81.57

■ Test Plots(802.11a)


Note:

In order to simplify the report, attached plots were only the most wide channel.

802.11a UNII 1 BAND 26dB Bandwidth (CH 40)

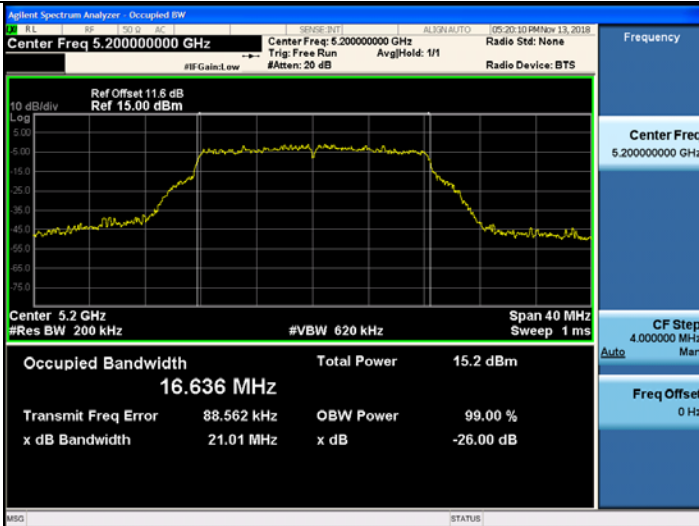

802.11a UNII 2A BAND 26dB Bandwidth (CH 52)

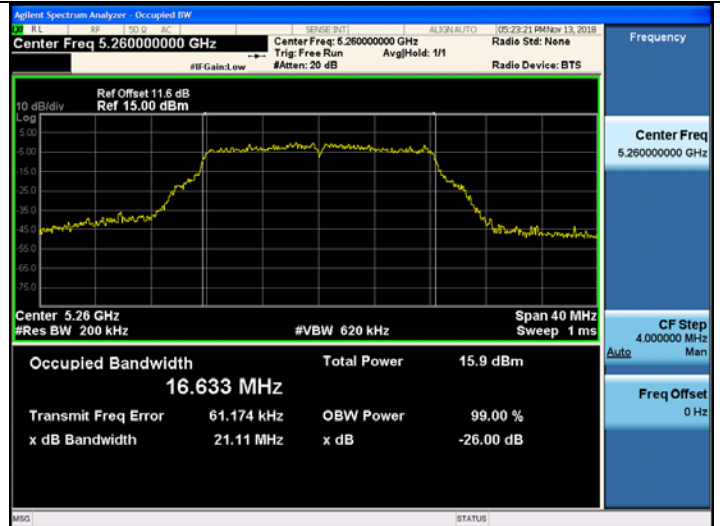

802.11a UNII 2C BAND 26dB Bandwidth (CH116)



802.11a UNII 3 BAND 26dB Bandwidth (CH 149)




Test Plots(802.11n(HT20))


Note:

In order to simplify the report, attached plots were only the most wide channel.


802.11n_HT20 UNII 1 BAND 26dB Bandwidth(CH 48)

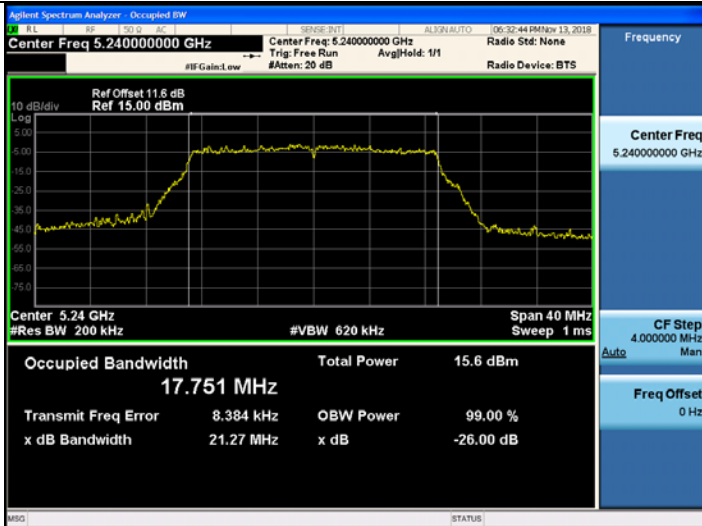


802.11n_HT20 UNII 2A BAND 26dB Bandwidth(CH 52)

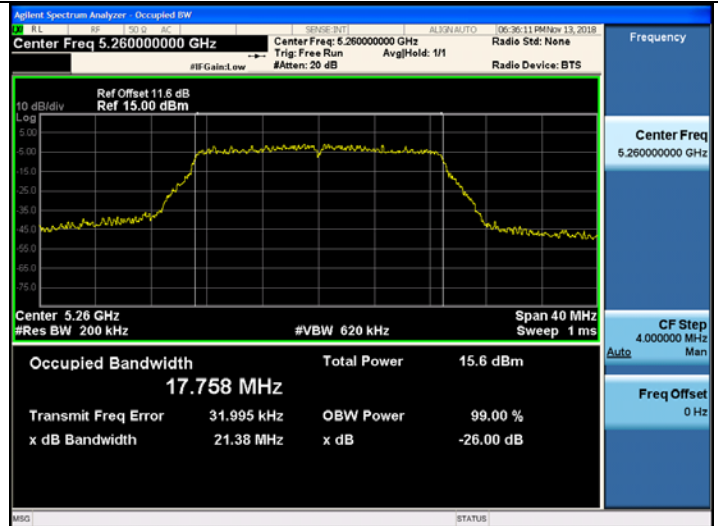

802.11n_HT20 UNII 2C BAND 26dB Bandwidth(CH 100)

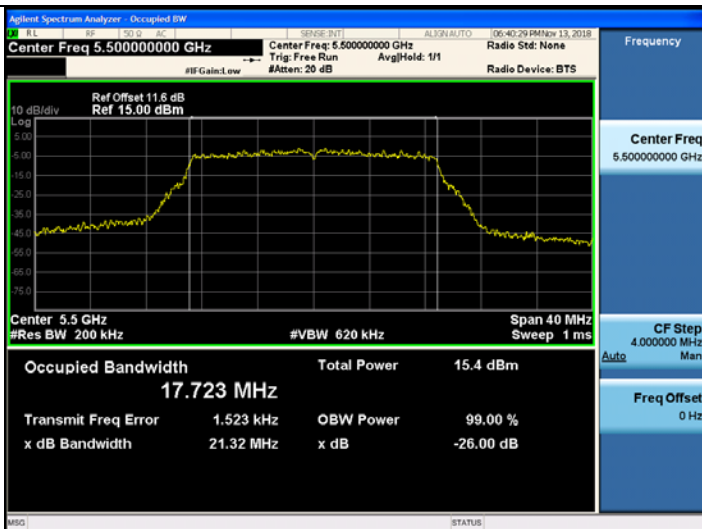

802.11n_HT20 UNII 3 BAND 26dB Bandwidth(CH 149)

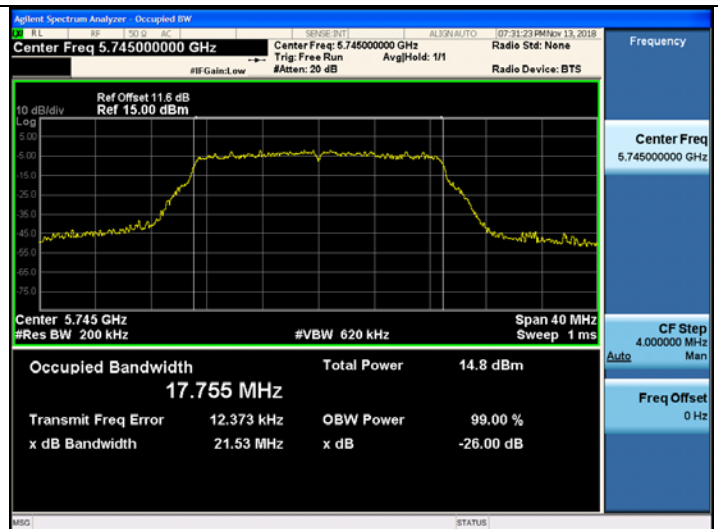


■ Test Plots(802.11n(HT40))

Note:

In order to simplify the report, attached plots were only the most wide channel.


802.11n_HT40 UNII 1 BAND 26dB Bandwidth(CH 46)

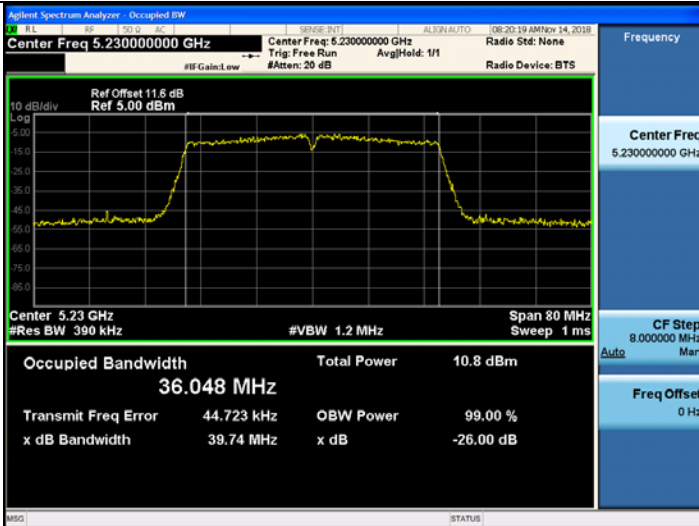


802.11n_HT40 UNII 2A BAND 26dB Bandwidth (CH 62)



802.11n_HT40 UNII 2C BAND 26dB Bandwidth(CH 110)

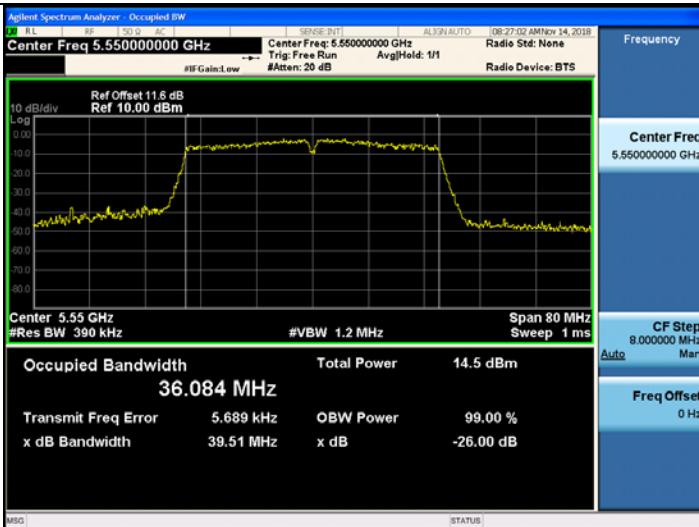


802.11n_HT40 UNII 3 BAND 26dB Bandwidth (CH 159)

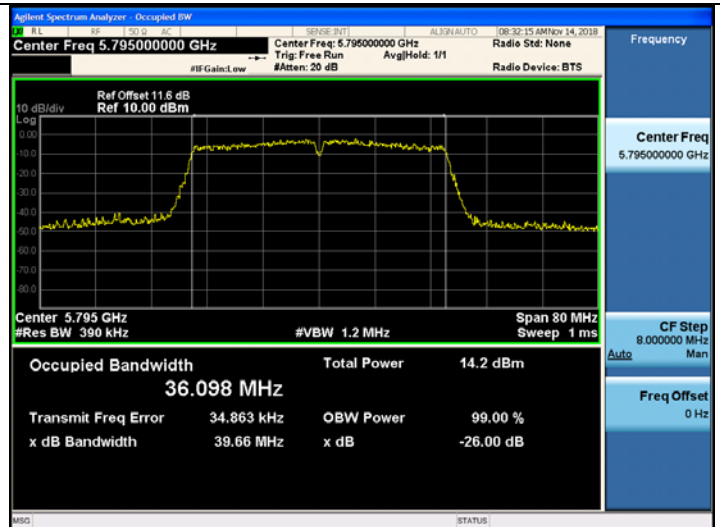


■ Test Plots(802.11ac(VHT20))


802.11ac(VHT20) UNII 1 BAND 26dB Bandwidth(CH 36)

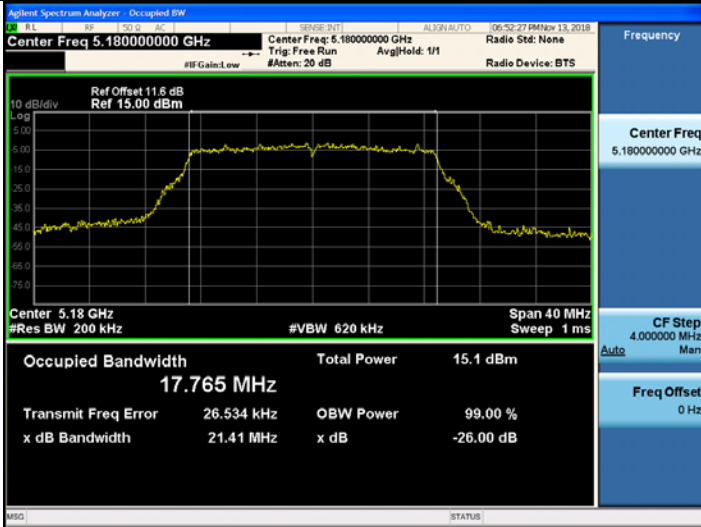


802.11ac(VHT20) UNII 2A BAND 26dB Bandwidth(CH 52)

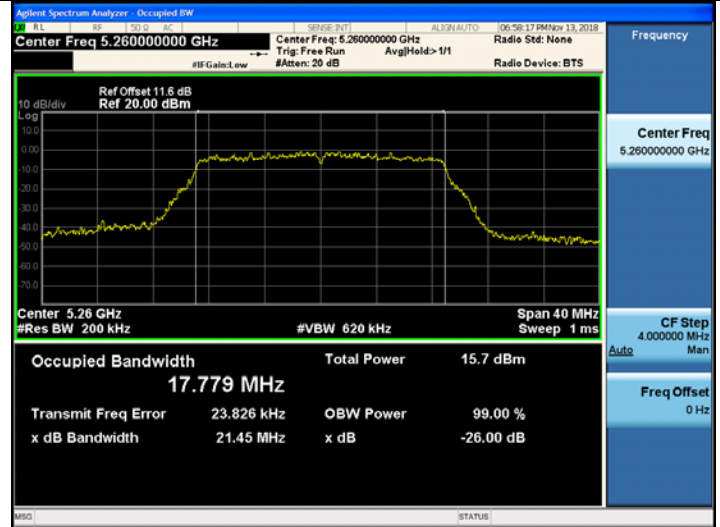

802.11ac(VHT20) UNII 2C BAND 26dB Bandwidth(CH 144)

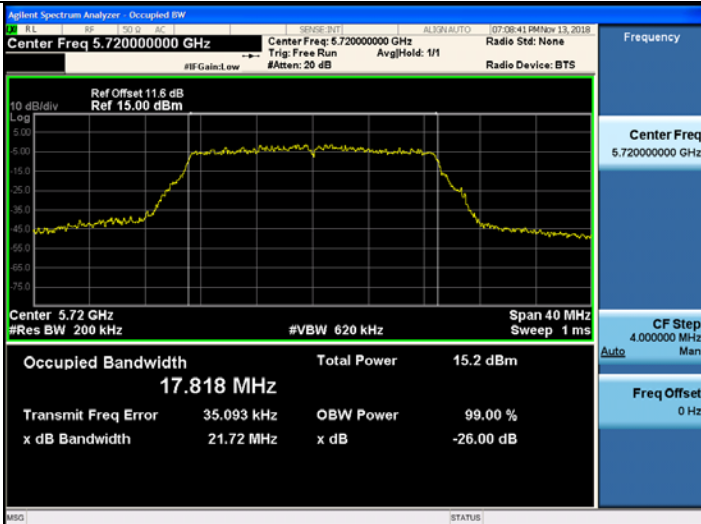

802.11ac(VHT20) UNII 3 BAND 26dB Bandwidth(CH 165)

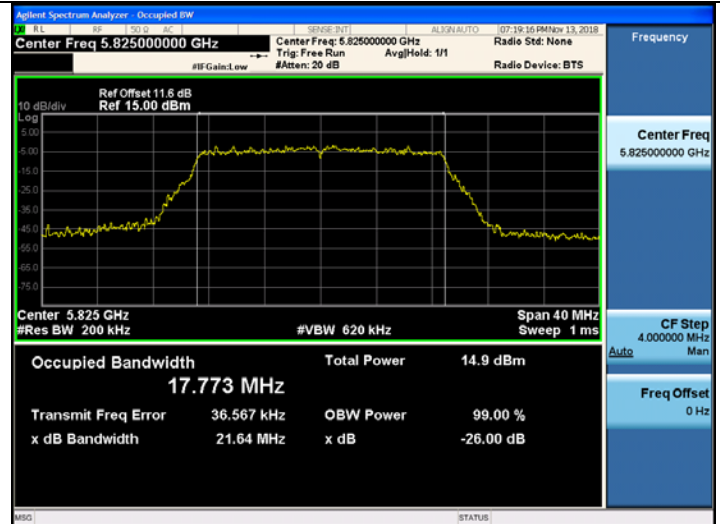


Note:


In order to simplify the report, attached plots were only the most wide channel.

■ Test Plots(802.11ac(VHT40))


802.11ac(VHT40) UNII 1 BAND 26dB Bandwidth(CH 46)

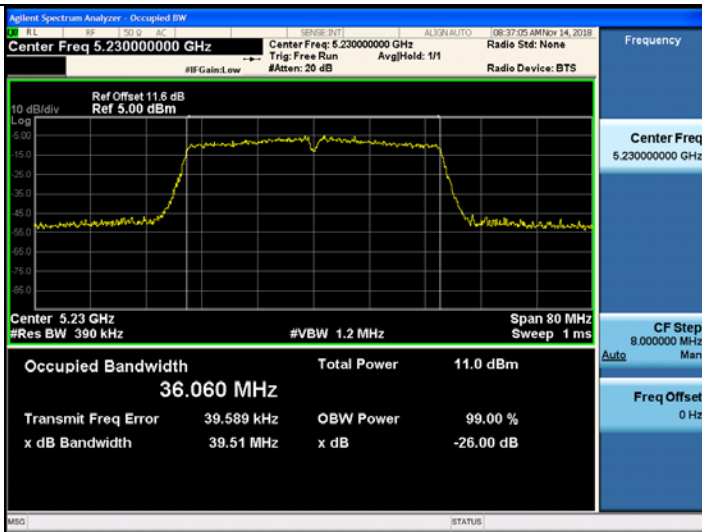


802.11ac(VHT40) UNII 2A BAND 26dB Bandwidth(CH 62)

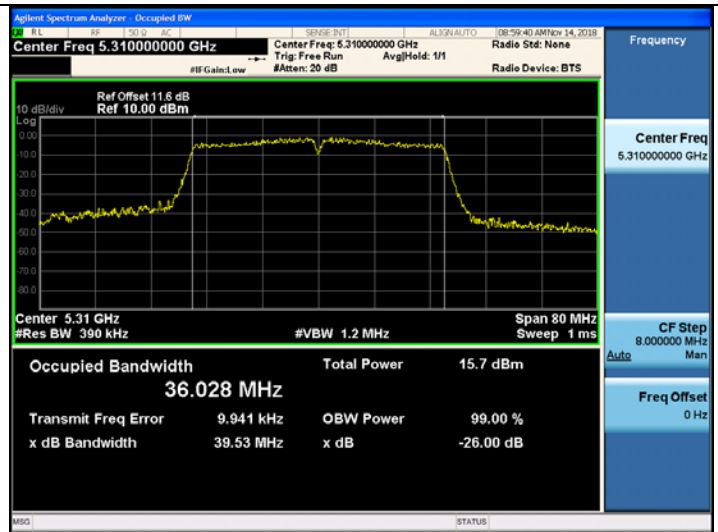

802.11ac(VHT40) UNII 2C BAND 26dB Bandwidth(CH 142)

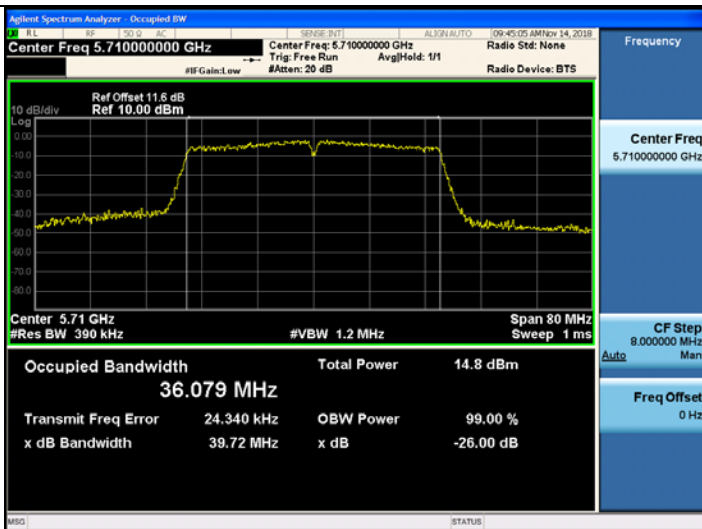

802.11ac(VHT40) UNII 3 BAND 26dB Bandwidth(CH 151)

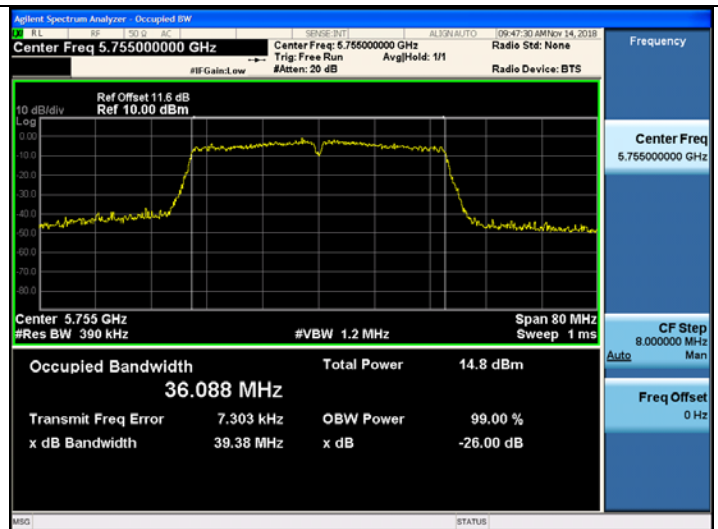


Note:


In order to simplify the report, attached plots were only the most wide channel.

■ Test Plots(802.11ac(VHT80))


802.11ac(VHT80) UNII 1 BAND 26dB Bandwidth(CH 42)

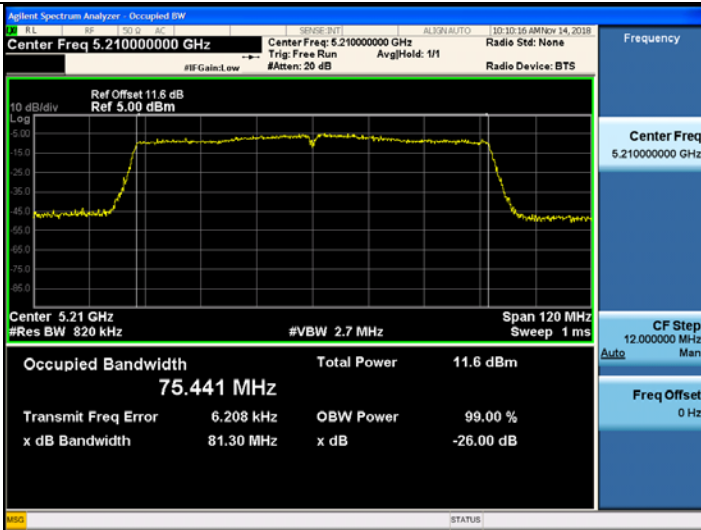


802.11ac(VHT80) UNII 2A BAND 26dB Bandwidth(CH 58)

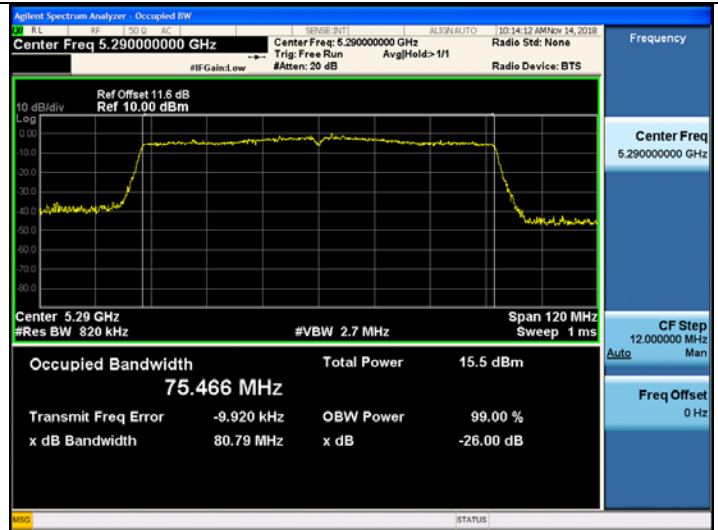

802.11ac(VHT80) UNII 2C BAND 26dB Bandwidth(CH 138)

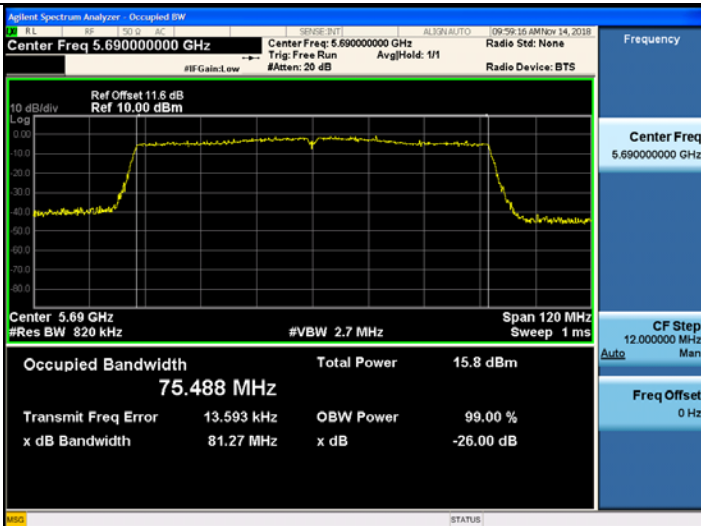

802.11ac(VHT80) UNII 3 BAND 26dB Bandwidth(CH 155)

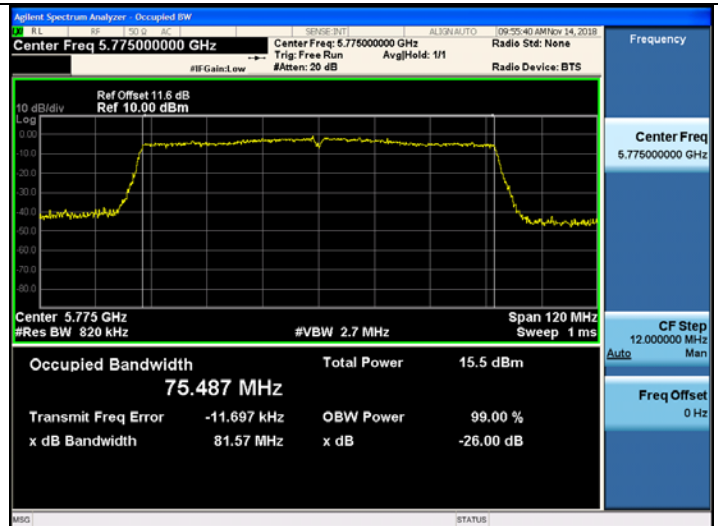

Note:

In order to simplify the report, attached plots were only the most wide channel.

9.3 6DB BANDWIDTH

802.11a Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	16.30	> 0.5	Pass

5785	157	16.32	> 0.5	Pass
5825	165	16.32	> 0.5	Pass

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.59	> 0.5	Pass
5785	157	17.59	> 0.5	Pass
5825	165	17.57	> 0.5	Pass

802.11n(HT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.44	> 0.5	Pass
5795	159	35.47	> 0.5	Pass

802.11ac(VHT20) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.58	> 0.5	Pass
5785	157	17.54	> 0.5	Pass
5825	165	17.32	> 0.5	Pass

802.11ac(VHT40) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	35.39	> 0.5	Pass
5795	159	35.68	> 0.5	Pass

802.11ac(VHT80) Mode		Measured Bandwidth [MHz]	Limit [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	75.31	> 0.5	Pass


■ Test Plots

Note:


In order to simplify the report, attached plots were only the most narrow channel.

802.11a (CH.149)


802.11n(HT20) (CH.165)

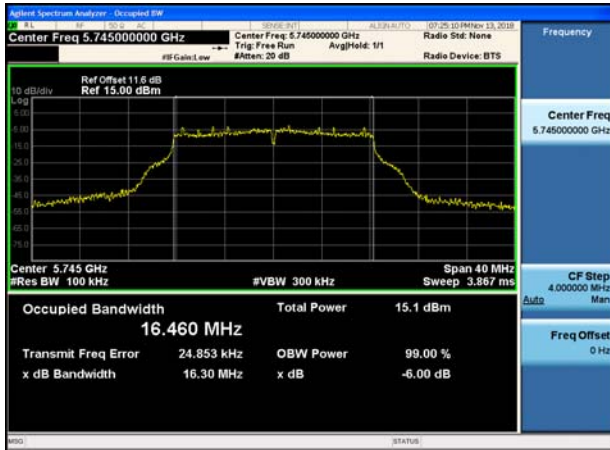


802.11n(HT40) (CH.151)

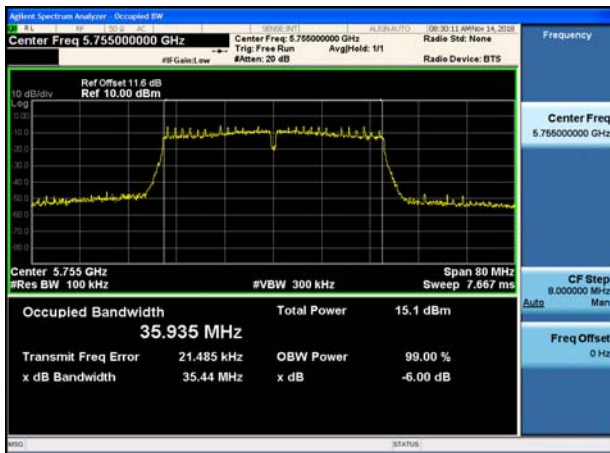


802.11ac(VHT20) (CH.165)

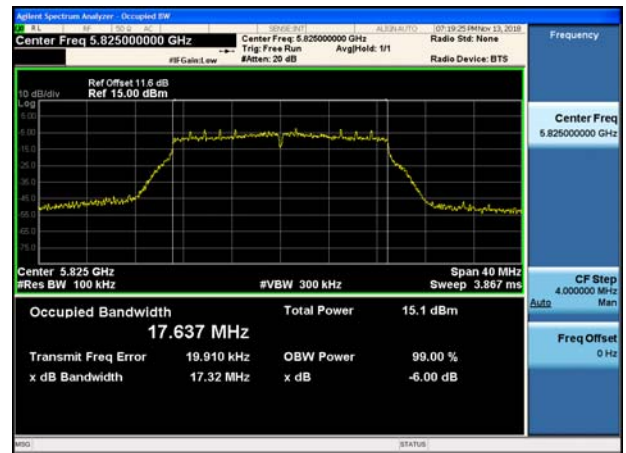

802.11ac(VHT40) (CH.151)

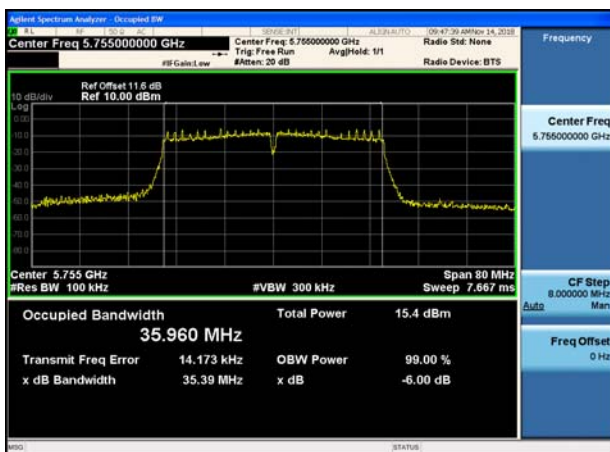

802.11ac(VHT80) (CH.155)

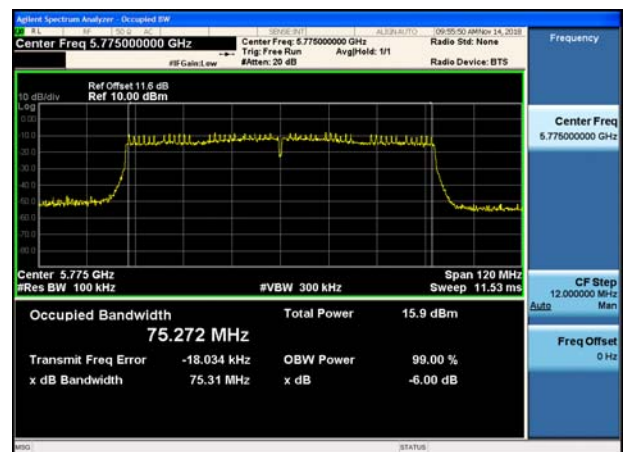

9.4 OUTPUT POWER MEASUREMENT

802.11a Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6	8.00	0.30	8.30	23.98
		9	7.81	0.50	8.31	23.98
		12	7.71	0.61	8.32	23.98
		18	7.17	0.84	8.01	23.98
		24	6.91	1.08	7.99	23.98
		36	6.52	1.47	7.99	23.98
		48	6.14	1.83	7.97	23.98
		54	6.02	1.96	7.98	23.98
5200	40	6	8.08	0.30	8.38	23.98
		9	8.01	0.50	8.51	23.98
		12	7.83	0.61	8.44	23.98
		18	7.41	0.84	8.25	23.98
		24	6.99	1.08	8.07	23.98
		36	6.79	1.47	8.26	23.98
		48	6.41	1.83	8.24	23.98
		54	6.24	1.96	8.20	23.98
5240	48	6	8.38	0.30	8.68	23.98
		9	8.25	0.50	8.75	23.98
		12	8.17	0.61	8.78	23.98
		18	7.67	0.84	8.51	23.98
		24	7.37	1.08	8.45	23.98
		36	6.91	1.47	8.38	23.98
		48	6.77	1.83	8.60	23.98
		54	6.53	1.96	8.49	23.98

802.11a Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5260	52	6	8.61	0.30	8.91	23.98
		9	8.39	0.50	8.89	23.98
		12	8.28	0.61	8.89	23.98
		18	7.76	0.84	8.60	23.98
		24	7.43	1.08	8.51	23.98
		36	7.17	1.47	8.64	23.98
		48	6.85	1.83	8.68	23.98
		54	6.62	1.96	8.58	23.98
5300	60	6	8.56	0.30	8.86	23.98
		9	8.45	0.50	8.95	23.98
		12	8.36	0.61	8.97	23.98
		18	7.85	0.84	8.69	23.98
		24	7.52	1.08	8.60	23.98
		36	7.23	1.47	8.70	23.98
		48	6.92	1.83	8.75	23.98
		54	6.79	1.96	8.75	23.98
5320	64	6	8.73	0.30	9.03	23.98
		9	8.61	0.50	9.11	23.98
		12	8.37	0.61	8.98	23.98
		18	7.92	0.84	8.76	23.98
		24	7.54	1.08	8.62	23.98
		36	7.22	1.47	8.69	23.98
		48	6.86	1.83	8.69	23.98
		54	6.79	1.96	8.75	23.98

802.11a Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5500	100	6	8.08	0.30	8.38	23.98
		9	8.03	0.50	8.53	23.98
		12	7.83	0.61	8.44	23.98
		18	7.37	0.84	8.21	23.98
		24	7.15	1.08	8.23	23.98
		36	6.76	1.47	8.23	23.98
		48	6.40	1.83	8.23	23.98
		54	6.23	1.96	8.19	23.98
5580	116	6	7.93	0.30	8.23	23.98
		9	7.91	0.50	8.41	23.98
		12	7.68	0.61	8.29	23.98
		18	7.31	0.84	8.15	23.98
		24	6.91	1.08	7.99	23.98
		36	6.51	1.47	7.98	23.98
		48	6.23	1.83	8.06	23.98
		54	6.03	1.96	7.99	23.98
5720	144	6	7.79	0.30	8.09	23.98
		9	7.64	0.50	8.14	23.98
		12	7.49	0.61	8.10	23.98
		18	7.10	0.84	7.94	23.98
		24	6.84	1.08	7.92	23.98
		36	6.46	1.47	7.93	23.98
		48	6.08	1.83	7.91	23.98
		54	5.93	1.96	7.89	23.98

802.11a Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6	7.90	0.30	8.20	30
		9	7.77	0.50	8.27	30
		12	7.62	0.61	8.23	30
		18	6.94	0.84	7.78	30
		24	6.66	1.08	7.74	30
		36	6.31	1.47	7.78	30
		48	6.07	1.83	7.90	30
		54	5.89	1.96	7.85	30
5785	157	6	7.95	0.30	8.25	30
		9	7.85	0.50	8.35	30
		12	7.64	0.61	8.25	30
		18	7.23	0.84	8.07	30
		24	6.74	1.08	7.82	30
		36	6.46	1.47	7.93	30
		48	6.16	1.83	7.99	30
		54	5.90	1.96	7.86	30
5825	165	6	7.90	0.30	8.20	30
		9	7.83	0.50	8.33	30
		12	7.65	0.61	8.26	30
		18	7.11	0.84	7.95	30
		24	6.82	1.08	7.90	30
		36	6.42	1.47	7.89	30
		48	6.15	1.83	7.98	30
		54	5.89	1.96	7.85	30

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	0	7.76	0.33	8.09	23.98
		1	7.49	0.61	8.10	23.98
		2	7.26	0.85	8.11	23.98
		3	6.93	1.07	8.00	23.98
		4	6.63	1.46	8.09	23.98
		5	6.11	1.84	7.95	23.98
		6	5.93	1.92	7.85	23.98
		7	5.88	2.09	7.97	23.98
5200	40	0	7.90	0.33	8.23	23.98
		1	7.69	0.61	8.30	23.98
		2	7.48	0.85	8.33	23.98
		3	6.99	1.07	8.06	23.98
		4	6.64	1.46	8.10	23.98
		5	6.26	1.84	8.10	23.98
		6	6.13	1.92	8.05	23.98
		7	6.08	2.09	8.17	23.98
5240	48	0	8.21	0.33	8.54	23.98
		1	7.94	0.61	8.55	23.98
		2	7.66	0.85	8.51	23.98
		3	7.19	1.07	8.26	23.98
		4	6.90	1.46	8.36	23.98
		5	6.58	1.84	8.42	23.98
		6	6.42	1.92	8.34	23.98
		7	6.29	2.09	8.38	23.98

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5260	52	0	8.35	0.33	8.68	23.98
		1	8.04	0.61	8.65	23.98
		2	7.74	0.85	8.59	23.98
		3	7.32	1.07	8.39	23.98
		4	6.97	1.46	8.43	23.98
		5	6.68	1.84	8.52	23.98
		6	6.55	1.92	8.47	23.98
		7	6.47	2.09	8.56	23.98
5300	60	0	8.44	0.33	8.77	23.98
		1	8.13	0.61	8.74	23.98
		2	7.93	0.85	8.78	23.98
		3	7.47	1.07	8.54	23.98
		4	7.03	1.46	8.49	23.98
		5	6.81	1.84	8.65	23.98
		6	6.62	1.92	8.54	23.98
		7	6.49	2.09	8.58	23.98
5320	64	0	8.49	0.33	8.82	23.98
		1	8.19	0.61	8.80	23.98
		2	7.93	0.85	8.78	23.98
		3	7.51	1.07	8.58	23.98
		4	7.13	1.46	8.59	23.98
		5	6.81	1.84	8.65	23.98
		6	6.71	1.92	8.63	23.98
		7	6.53	2.09	8.62	23.98

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5500	100	0	7.86	0.33	8.19	23.98
		1	7.63	0.61	8.24	23.98
		2	7.38	0.85	8.23	23.98
		3	6.95	1.07	8.02	23.98
		4	6.43	1.46	7.89	23.98
		5	6.31	1.84	8.15	23.98
		6	5.96	1.92	7.88	23.98
		7	5.82	2.09	7.91	23.98
5580	116	0	7.63	0.33	7.96	23.98
		1	7.35	0.61	7.96	23.98
		2	7.21	0.85	8.06	23.98
		3	6.86	1.07	7.93	23.98
		4	6.48	1.46	7.94	23.98
		5	6.10	1.84	7.94	23.98
		6	5.99	1.92	7.91	23.98
		7	5.91	2.09	8.00	23.98
5720	144	0	7.58	0.33	7.91	23.98
		1	7.29	0.61	7.90	23.98
		2	7.08	0.85	7.93	23.98
		3	6.65	1.07	7.72	23.98
		4	6.25	1.46	7.71	23.98
		5	6.09	1.84	7.93	23.98
		6	5.91	1.92	7.83	23.98
		7	5.62	2.09	7.71	23.98

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	0	7.58	0.33	7.91	30
		1	7.28	0.61	7.89	30
		2	7.02	0.85	7.87	30
		3	6.53	1.07	7.60	30
		4	6.15	1.46	7.61	30
		5	5.83	1.84	7.67	30
		6	5.80	1.92	7.72	30
		7	5.74	2.09	7.83	30
5785	157	0	7.75	0.33	8.08	30
		1	7.38	0.61	7.99	30
		2	7.18	0.85	8.03	30
		3	6.87	1.07	7.94	30
		4	6.36	1.46	7.82	30
		5	6.22	1.84	8.06	30
		6	5.85	1.92	7.77	30
		7	5.75	2.09	7.84	30
5825	165	0	7.74	0.33	8.07	30
		1	7.39	0.61	8.00	30
		2	7.16	0.85	8.01	30
		3	6.83	1.07	7.90	30
		4	6.45	1.46	7.91	30
		5	6.09	1.84	7.93	30
		6	5.92	1.92	7.84	30
		7	5.81	2.09	7.90	30

802.11n(HT40) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	0	3.02	0.63	3.65	23.98
		1	2.48	1.13	3.61	23.98
		2	2.11	1.50	3.61	23.98
		3	1.86	1.83	3.69	23.98
		4	1.38	2.34	3.72	23.98
		5	0.92	2.76	3.68	23.98
		6	0.84	2.93	3.77	23.98
		7	0.54	3.08	3.62	23.98
5230	46	0	3.26	0.63	3.89	23.98
		1	2.86	1.13	3.99	23.98
		2	2.32	1.50	3.82	23.98
		3	2.03	1.83	3.86	23.98
		4	1.62	2.34	3.96	23.98
		5	1.18	2.76	3.94	23.98
		6	1.14	2.93	4.07	23.98
		7	0.95	3.08	4.03	23.98

802.11n(HT40) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5270	54	0	7.82	0.63	8.45	23.98
		1	7.38	1.13	8.51	23.98
		2	7.11	1.50	8.61	23.98
		3	6.86	1.83	8.69	23.98
		4	6.15	2.34	8.49	23.98
		5	5.67	2.76	8.43	23.98
		6	5.58	2.93	8.51	23.98
		7	5.41	3.08	8.49	23.98
5310	62	0	7.93	0.63	8.56	23.98
		1	7.56	1.13	8.69	23.98
		2	7.21	1.50	8.71	23.98
		3	6.93	1.83	8.76	23.98
		4	6.48	2.34	8.82	23.98
		5	6.07	2.76	8.83	23.98
		6	5.72	2.93	8.65	23.98
		7	5.56	3.08	8.64	23.98

802.11n(HT40) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5510	102	0	7.45	0.63	8.08	23.98
		1	6.95	1.13	8.08	23.98
		2	6.41	1.50	7.91	23.98
		3	6.06	1.83	7.89	23.98
		4	5.66	2.34	8.00	23.98
		5	5.24	2.76	8.00	23.98
		6	5.17	2.93	8.10	23.98
		7	5.05	3.08	8.13	23.98
5550	110	0	7.37	0.63	8.00	23.98
		1	6.85	1.13	7.98	23.98
		2	6.39	1.50	7.89	23.98
		3	6.18	1.83	8.01	23.98
		4	5.66	2.34	8.00	23.98
		5	5.13	2.76	7.89	23.98
		6	5.09	2.93	8.02	23.98
		7	4.91	3.08	7.99	23.98
5710	142	0	7.11	0.63	7.74	23.98
		1	6.73	1.13	7.86	23.98
		2	6.39	1.50	7.89	23.98
		3	5.93	1.83	7.76	23.98
		4	5.36	2.34	7.70	23.98
		5	5.03	2.76	7.79	23.98
		6	4.96	2.93	7.89	23.98
		7	4.56	3.08	7.64	23.98

802.11n(HT40) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5755	151	0	7.12	0.63	7.75	30
		1	6.66	1.13	7.79	30
		2	6.35	1.50	7.85	30
		3	5.96	1.83	7.79	30
		4	5.48	2.34	7.82	30
		5	5.06	2.76	7.82	30
		6	4.99	2.93	7.92	30
		7	4.75	3.08	7.83	30
5795	159	0	7.11	0.63	7.74	30
		1	6.69	1.13	7.82	30
		2	6.31	1.50	7.81	30
		3	5.97	1.83	7.80	30
		4	5.46	2.34	7.80	30
		5	5.07	2.76	7.83	30
		6	5.09	2.93	8.02	30
		7	4.76	3.08	7.84	30

802.11ac(VHT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	0	7.56	0.32	7.88	23.98
		1	7.28	0.63	7.91	23.98
		2	7.12	0.89	8.01	23.98
		3	6.62	1.06	7.68	23.98
		4	5.94	1.49	7.43	23.98
		5	5.84	1.79	7.63	23.98
		6	5.72	1.89	7.61	23.98
		7	5.68	2.06	7.74	23.98
		8	5.56	2.28	7.84	23.98
5200	40	0	7.73	0.32	8.05	23.98
		1	7.56	0.63	8.19	23.98
		2	7.27	0.89	8.16	23.98
		3	6.81	1.06	7.87	23.98
		4	6.42	1.49	7.91	23.98
		5	6.11	1.79	7.90	23.98
		6	6.09	1.89	7.98	23.98
		7	5.95	2.06	8.01	23.98
		8	5.71	2.28	7.99	23.98
5240	48	0	8.12	0.32	8.44	23.98
		1	7.72	0.63	8.35	23.98
		2	7.55	0.89	8.44	23.98
		3	7.04	1.06	8.10	23.98
		4	6.64	1.49	8.13	23.98
		5	6.49	1.79	8.28	23.98
		6	6.36	1.89	8.25	23.98
		7	6.23	2.06	8.29	23.98
		8	6.01	2.28	8.29	23.98

802.11ac(VHT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5260	52	0	8.16	0.32	8.48	23.98
		1	7.81	0.63	8.44	23.98
		2	7.65	0.89	8.54	23.98
		3	7.14	1.06	8.20	23.98
		4	6.86	1.49	8.35	23.98
		5	6.57	1.79	8.36	23.98
		6	6.47	1.89	8.36	23.98
		7	6.34	2.06	8.40	23.98
		8	6.09	2.28	8.37	23.98
5300	60	0	8.24	0.32	8.56	23.98
		1	7.98	0.63	8.61	23.98
		2	7.75	0.89	8.64	23.98
		3	7.32	1.06	8.38	23.98
		4	6.84	1.49	8.33	23.98
		5	6.66	1.79	8.45	23.98
		6	6.53	1.89	8.42	23.98
		7	6.44	2.06	8.50	23.98
		8	6.32	2.28	8.60	23.98
5320	64	0	8.36	0.32	8.68	23.98
		1	8.12	0.63	8.75	23.98
		2	7.81	0.89	8.70	23.98
		3	7.36	1.06	8.42	23.98
		4	7.07	1.49	8.56	23.98
		5	6.75	1.79	8.54	23.98
		6	6.67	1.89	8.56	23.98
		7	6.47	2.06	8.53	23.98
		8	6.26	2.28	8.54	23.98

802.11ac(VHT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5500	100	0	7.63	0.32	7.95	23.98
		1	7.42	0.63	8.05	23.98
		2	7.28	0.89	8.17	23.98
		3	6.81	1.06	7.87	23.98
		4	6.42	1.49	7.91	23.98
		5	6.03	1.79	7.82	23.98
		6	5.93	1.89	7.82	23.98
		7	5.74	2.06	7.80	23.98
		8	5.53	2.28	7.81	23.98
5580	116	0	7.52	0.32	7.84	23.98
		1	7.34	0.63	7.97	23.98
		2	7.12	0.89	8.01	23.98
		3	6.68	1.06	7.74	23.98
		4	6.32	1.49	7.81	23.98
		5	6.02	1.79	7.81	23.98
		6	5.91	1.89	7.80	23.98
		7	5.69	2.06	7.75	23.98
		8	5.55	2.28	7.83	23.98
5720	144	0	7.48	0.32	7.80	23.98
		1	7.25	0.63	7.88	23.98
		2	7.01	0.89	7.90	23.98
		3	6.55	1.06	7.61	23.98
		4	6.18	1.49	7.67	23.98
		5	5.94	1.79	7.73	23.98
		6	5.77	1.89	7.66	23.98
		7	5.65	2.06	7.71	23.98
		8	5.43	2.28	7.71	23.98

802.11ac(VHT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	0	7.54	0.32	7.86	30
		1	7.22	0.63	7.85	30
		2	6.92	0.89	7.81	30
		3	6.51	1.06	7.57	30
		4	6.13	1.49	7.62	30
		5	5.79	1.79	7.58	30
		6	5.65	1.89	7.54	30
		7	5.57	2.06	7.63	30
		8	5.41	2.28	7.69	30
5785	157	0	7.59	0.32	7.91	30
		1	7.31	0.63	7.94	30
		2	7.17	0.89	8.06	30
		3	6.56	1.06	7.62	30
		4	6.28	1.49	7.77	30
		5	6.04	1.79	7.83	30
		6	5.88	1.89	7.77	30
		7	5.68	2.06	7.74	30
		8	5.52	2.28	7.80	30
5825	165	0	7.55	0.32	7.87	30
		1	7.28	0.63	7.91	30
		2	7.15	0.89	8.04	30
		3	7.76	1.06	8.82	30
		4	6.32	1.49	7.81	30
		5	5.99	1.79	7.78	30
		6	5.84	1.89	7.73	30
		7	5.73	2.06	7.79	30
		8	5.54	2.28	7.82	30

802.11ac(VHT40) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	0	3.01	0.63	3.64	23.98
		1	2.43	1.11	3.54	23.98
		2	2.08	1.48	3.56	23.98
		3	1.85	1.86	3.71	23.98
		4	1.20	2.26	3.46	23.98
		5	0.81	2.69	3.50	23.98
		6	0.72	2.83	3.55	23.98
		7	0.55	2.95	3.50	23.98
		8	0.45	3.19	3.64	23.98
		9	0.22	3.57	3.79	23.98
5230	46	0	3.28	0.63	3.91	23.98
		1	2.91	1.11	4.02	23.98
		2	2.36	1.48	3.84	23.98
		3	2.23	1.86	4.09	23.98
		4	1.66	2.26	3.92	23.98
		5	1.29	2.69	3.98	23.98
		6	1.01	2.83	3.84	23.98
		7	0.82	2.95	3.77	23.98
		8	0.65	3.19	3.84	23.98
		9	0.49	3.57	4.06	23.98

802.11ac(VHT40) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5270	54	0	7.89	0.63	8.52	23.98
		1	7.44	1.11	8.55	23.98
		2	6.98	1.48	8.46	23.98
		3	6.69	1.86	8.55	23.98
		4	6.25	2.26	8.51	23.98
		5	5.83	2.69	8.52	23.98
		6	5.77	2.83	8.60	23.98
		7	5.63	2.95	8.58	23.98
		8	5.46	3.19	8.65	23.98
		9	5.19	3.57	8.76	23.98
5310	62	0	7.95	0.63	8.58	23.98
		1	7.53	1.11	8.64	23.98
		2	7.20	1.48	8.68	23.98
		3	6.75	1.86	8.61	23.98
		4	6.33	2.26	8.59	23.98
		5	5.85	2.69	8.54	23.98
		6	5.82	2.83	8.65	23.98
		7	5.66	2.95	8.61	23.98
		8	5.57	3.19	8.76	23.98
		9	5.46	3.57	9.03	23.98

802.11ac(VHT40) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5510	102	0	7.16	0.63	7.79	23.98
		1	6.71	1.11	7.82	23.98
		2	6.50	1.48	7.98	23.98
		3	6.15	1.86	8.01	23.98
		4	5.58	2.26	7.84	23.98
		5	5.26	2.69	7.95	23.98
		6	5.21	2.83	8.04	23.98
		7	5.01	2.95	7.96	23.98
		8	4.90	3.19	8.09	23.98
		9	4.68	3.57	8.25	23.98
5550	110	0	7.39	0.63	8.02	23.98
		1	6.89	1.11	8.00	23.98
		2	6.39	1.48	7.87	23.98
		3	6.24	1.86	8.10	23.98
		4	5.71	2.26	7.97	23.98
		5	5.43	2.69	8.12	23.98
		6	5.06	2.83	7.89	23.98
		7	4.92	2.95	7.87	23.98
		8	4.79	3.19	7.98	23.98
		9	4.61	3.57	8.18	23.98
5710	142	0	7.05	0.63	7.68	23.98
		1	6.55	1.11	7.66	23.98
		2	6.22	1.48	7.70	23.98
		3	5.93	1.86	7.79	23.98
		4	5.52	2.26	7.78	23.98
		5	5.18	2.69	7.87	23.98
		6	4.92	2.83	7.75	23.98
		7	4.79	2.95	7.74	23.98
		8	4.63	3.19	7.82	23.98
		9	4.36	3.57	7.93	23.98

802.11ac(VHT40) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5755	151	0	7.03	0.63	7.66	30
		1	6.57	1.11	7.68	30
		2	6.26	1.48	7.74	30
		3	6.05	1.86	7.91	30
		4	5.47	2.26	7.73	30
		5	5.04	2.69	7.73	30
		6	4.89	2.83	7.72	30
		7	4.72	2.95	7.67	30
		8	4.55	3.19	7.74	30
		9	4.41	3.57	7.98	30
5795	159	0	7.07	0.63	7.70	30
		1	6.52	1.11	7.63	30
		2	6.21	1.48	7.69	30
		3	5.90	1.86	7.76	30
		4	5.49	2.26	7.75	30
		5	5.19	2.69	7.88	30
		6	4.95	2.83	7.78	30
		7	4.77	2.95	7.72	30
		8	4.52	3.19	7.71	30
		9	4.33	3.57	7.90	30

802.11ac(VHT80) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5210	42	0	2.78	1.20	3.98	23.98
		1	2.15	1.91	4.06	23.98
		2	1.53	2.38	3.91	23.98
		3	1.17	2.72	3.89	23.98
		4	0.62	3.31	3.93	23.98
		5	0.39	3.60	3.99	23.98
		6	0.21	3.75	3.96	23.98
		7	0.18	3.87	4.05	23.98
		8	-0.11	4.02	3.91	23.98
		9	-0.18	4.18	4.00	23.98

802.11ac(VHT80) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5290	58	0	6.66	1.20	7.86	23.98
		1	6.16	1.91	8.07	23.98
		2	5.59	2.38	7.97	23.98
		3	5.02	2.72	7.74	23.98
		4	4.66	3.31	7.97	23.98
		5	4.29	3.60	7.89	23.98
		6	4.23	3.75	7.98	23.98
		7	4.03	3.87	7.90	23.98
		8	3.89	4.02	7.91	23.98
		9	3.74	4.18	7.92	23.98

802.11ac(VHT80) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5530	106	0	7.39	1.20	8.59	23.98
		1	6.81	1.91	8.72	23.98
		2	6.14	2.38	8.52	23.98
		3	5.77	2.72	8.49	23.98
		4	5.32	3.31	8.63	23.98
		5	4.81	3.60	8.41	23.98
		6	4.73	3.75	8.48	23.98
		7	4.56	3.87	8.43	23.98
		8	4.47	4.02	8.49	23.98
		9	4.35	4.18	8.53	23.98
5690	138	0	7.07	1.20	8.27	23.98
		1	6.32	1.91	8.23	23.98
		2	5.95	2.38	8.33	23.98
		3	5.46	2.72	8.18	23.98
		4	4.98	3.31	8.29	23.98
		5	4.51	3.60	8.11	23.98
		6	4.37	3.75	8.12	23.98
		7	4.24	3.87	8.11	23.98
		8	4.12	4.02	8.14	23.98
		9	4.02	4.18	8.20	23.98

802.11ac(VHT80) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.					
5775	155	0	6.78	1.20	7.98	30
		1	6.08	1.91	7.99	30
		2	5.58	2.38	7.96	30
		3	5.12	2.72	7.84	30
		4	4.75	3.31	8.06	30
		5	4.45	3.60	8.05	30
		6	4.31	3.75	8.06	30
		7	4.20	3.87	8.07	30
		8	3.92	4.02	7.94	30
		9	3.76	4.18	7.94	30

9.5 POWER SPECTRAL DENSITY

802.11a Mode		Measured Density (dBm)	Duty Cycle Factor (dB)	Measured Density(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.				
5180	36	-1.948	0.613	-1.335	11
5200	40	-1.545	0.498	-1.047	11
5240	48	-1.177	0.613	-0.564	11
5260	52	-1.209	0.300	-0.909	11
5300	60	-1.629	0.613	-1.016	11
5320	64	-1.098	0.498	-0.600	11
5500	100	-1.558	0.498	-1.060	11
5580	116	-1.755	0.498	-1.257	11
5720	144	-2.113	0.498	-1.615	11
5745	149	-4.695	0.498	-4.197	30
5785	157	-4.965	0.498	-4.467	30
5825	165	-4.562	0.498	-4.064	30

802.11n(HT20) Mode		Measured Density (dBm)	Duty Cycle Factor (dB)	Measured Density(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.				
5180	36	-2.272	0.851	-1.421	11
5200	40	-2.332	0.851	-1.481	11
5240	48	-1.860	0.614	-1.246	11
5260	52	-1.704	0.326	-1.378	11
5300	60	-2.119	0.851	-1.268	11
5320	64	-1.221	0.326	-0.895	11
5500	100	-2.059	0.614	-1.445	11
5580	116	-2.413	0.851	-1.562	11
5720	144	-2.484	0.851	-1.633	11
5745	149	-4.957	0.326	-4.631	30
5785	157	-4.845	0.326	-4.519	30
5825	165	-4.965	0.326	-4.639	30

802.11n(HT40) Mode		Measured Density (dBm)	Duty Cycle Factor (dB)	Measured Density(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.				
5190	38	-12.165	2.928	-9.237	11
5230	46	-11.529	2.928	-8.601	11
5270	54	-6.668	1.827	-4.841	11
5310	62	-6.990	2.758	-4.232	11
5510	102	-7.948	3.076	-4.872	11
5550	110	-7.693	2.928	-4.765	11
5710	142	-6.977	1.501	-5.476	11
5755	151	-10.357	2.928	-7.429	30
5795	159	-10.478	2.928	-7.550	30

802.11ac(VHT20) Mode		Measured Density (dBm)	Duty Cycle Factor (dB)	Measured Density(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.				
5180	36	-2.389	0.894	-1.495	11
5200	40	-2.154	0.633	-1.521	11
5240	48	-1.627	0.324	-1.303	11
5260	52	-2.065	0.894	-1.171	11
5300	60	-1.916	0.894	-1.022	11
5320	64	-1.375	0.633	-0.742	11
5500	100	-1.937	0.894	-1.043	11
5580	116	-2.328	0.894	-1.434	11
5720	144	-2.469	0.894	-1.575	11
5745	149	-4.938	0.324	-4.614	30
5785	157	-5.481	0.894	-4.587	30
5825	165	-6.908	1.061	-5.847	30


802.11ac(VHT40) Mode		Measured Density (dBm)	Duty Cycle Factor (dB)	Measured Density(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.				
5190	38	-12.442	3.571	-8.871	11
5230	46	-10.590	1.855	-8.735	11
5270	54	-7.321	3.571	-3.750	11
5310	62	-7.141	3.571	-3.570	11
5510	102	-7.559	3.571	-3.988	11
5550	110	-7.585	3.571	-4.014	11
5710	142	-7.782	3.571	-4.211	11
5755	151	-10.132	3.571	-6.561	30
5795	159	-10.106	3.571	-6.535	30

802.11ac(VHT80) Mode		Measured Density (dBm)	Duty Cycle Factor (dB)	Measured Density(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
Frequency [MHz]	Channel No.				
5210	42	-13.622	1.906	-11.716	11
5290	58	-9.760	1.906	-7.854	11
5530	106	-9.123	1.906	-7.217	11
5690	138	-9.611	2.377	-7.234	11
5775	155	-14.069	3.868	-10.201	30

■ Test Plots(802.11n(HT40))

Note:


In order to simplify the report, attached plots were only channel of highest power.

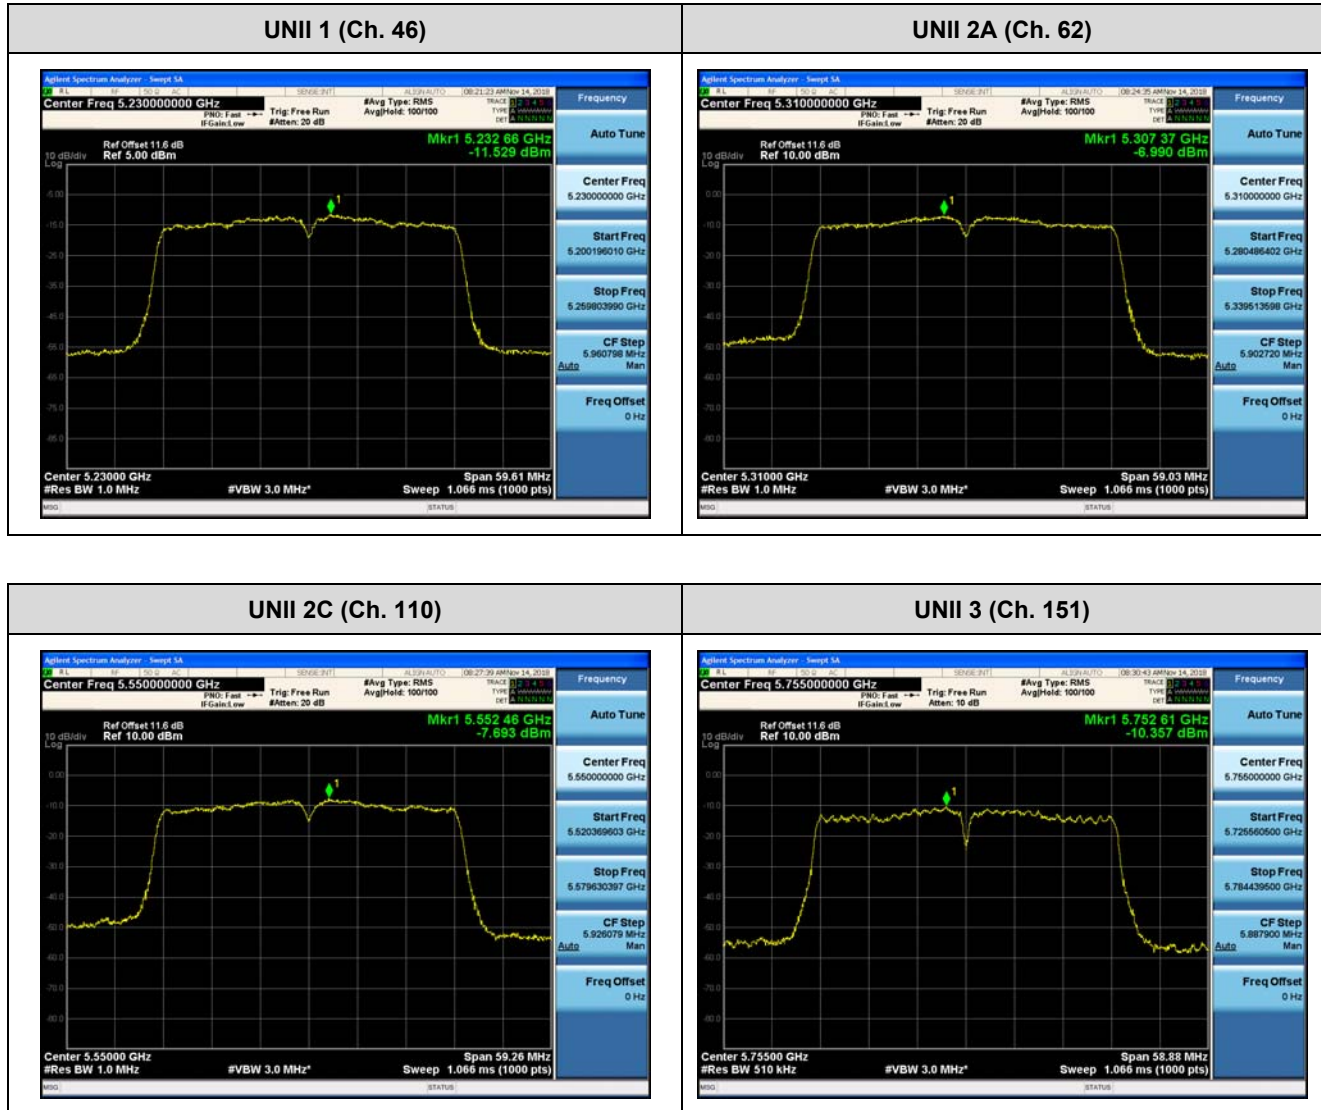

■ Test Plots(802.11ac(VHT40))

Note:


In order to simplify the report, attached plots were only channel of highest power.

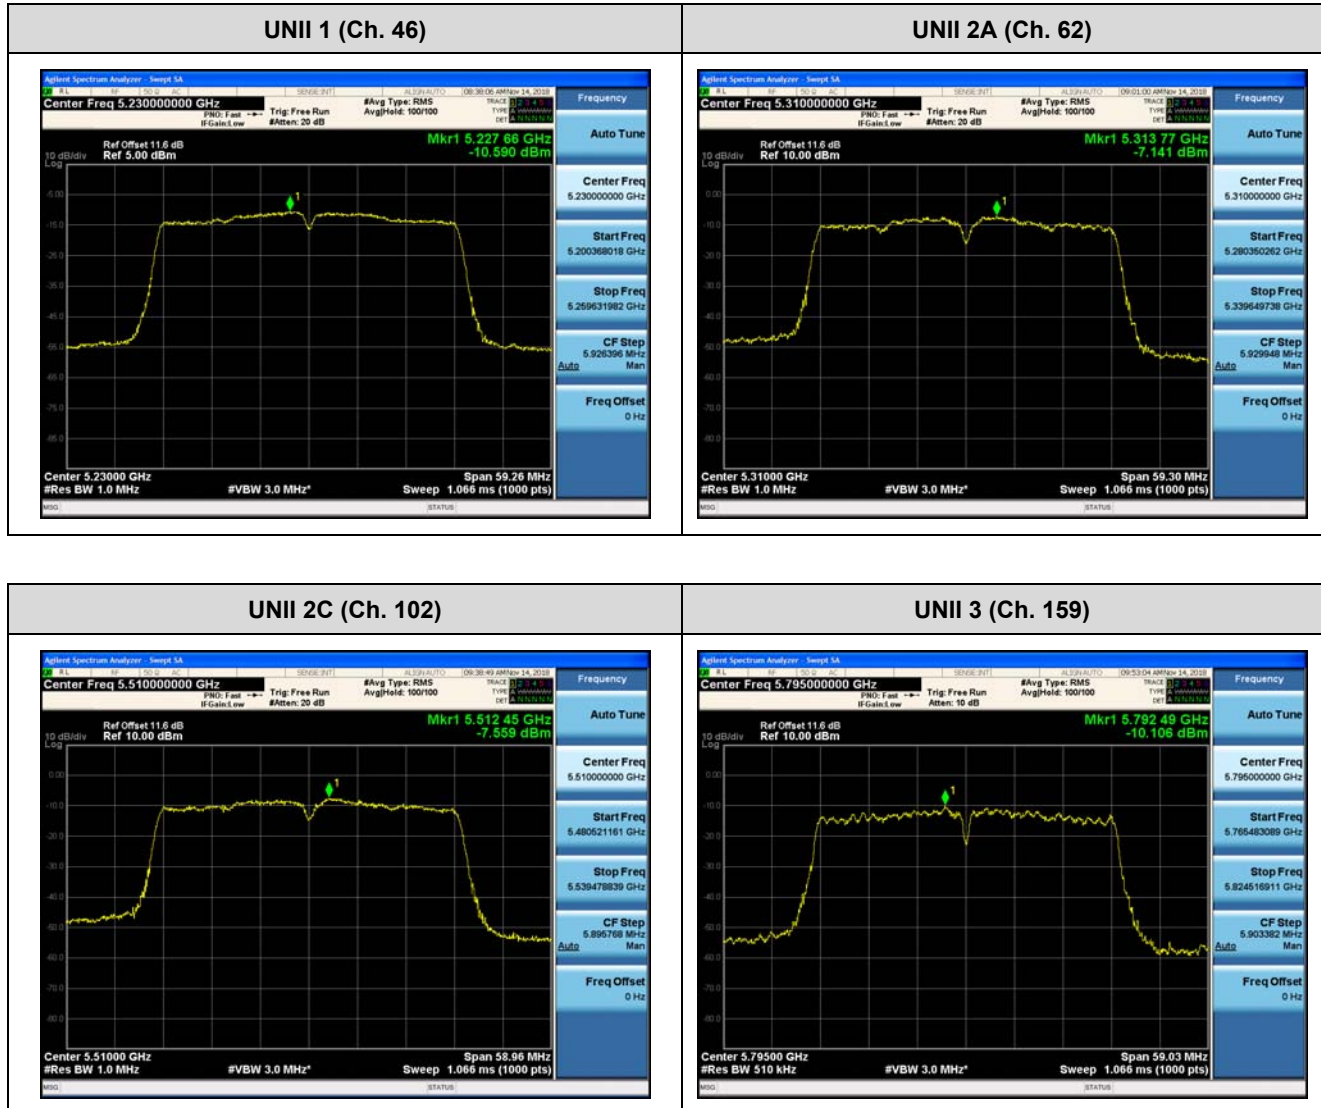

■ Test Plots(802.11ac(VHT80))

Note:

In order to simplify the report, attached plots were only channel of highest power.

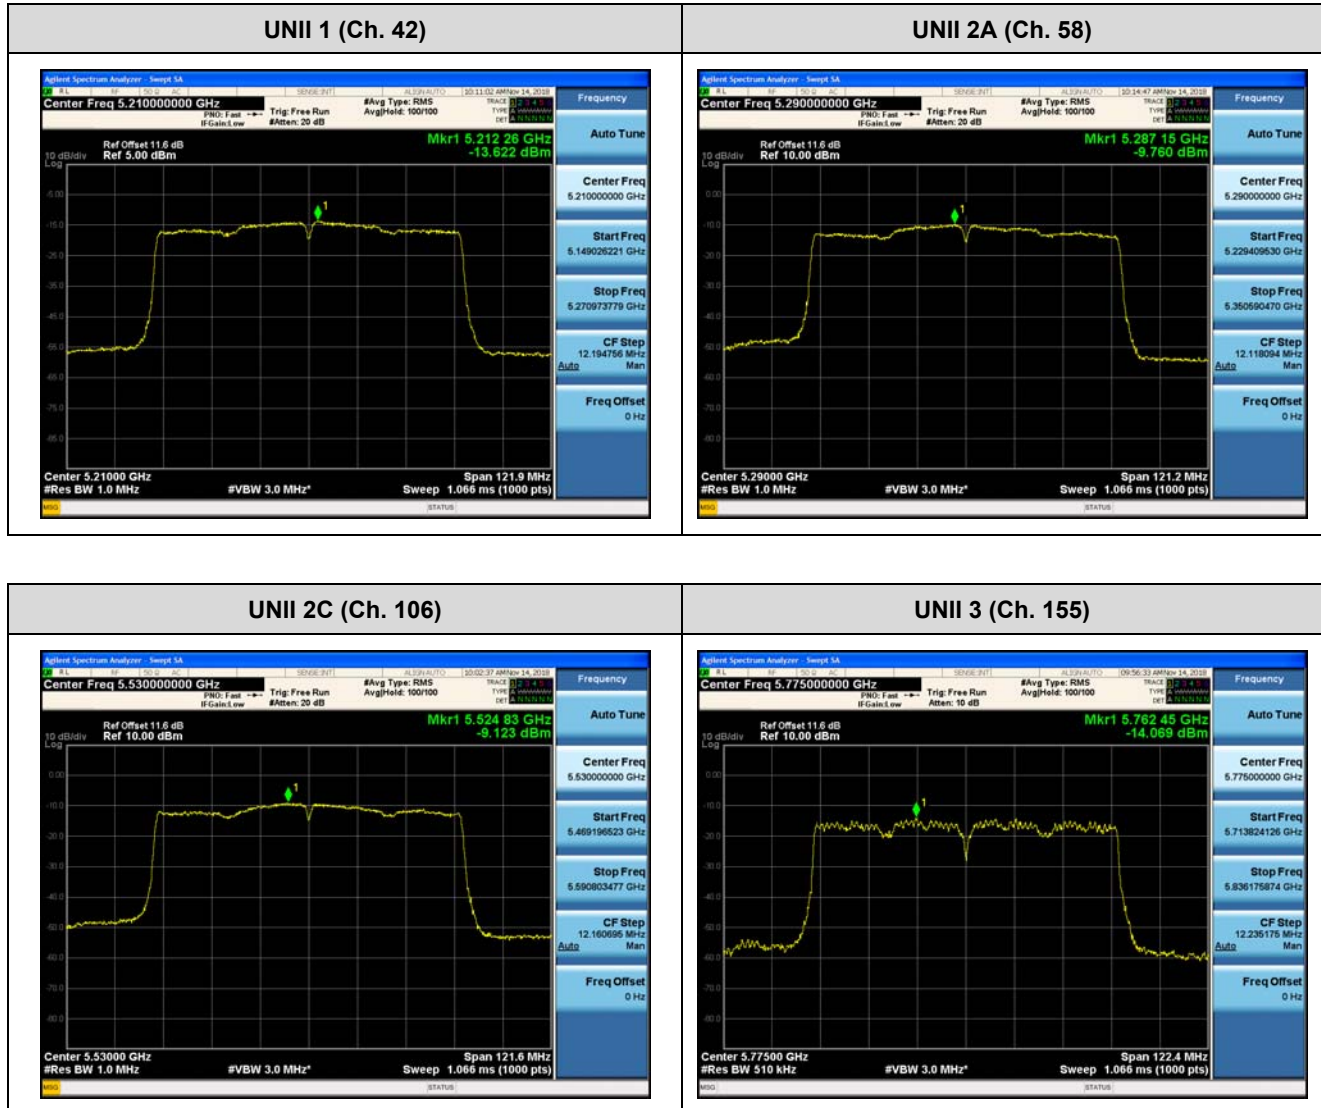

9.6 FREQUENCY STABILITY.

9.6.1 20MHz BW

Startup after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,180,000,000 Hz
CHANNEL:	36
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5180062.18	62.18
100%		-30	5180020.66	20.66
100%		-20	5180072.72	72.72
100%		-10	5180080.95	80.95
100%		0	5180097.50	97.50
100%		+10	5180046.50	46.50
100%		+30	5180056.33	56.33
100%		+40	5180063.46	63.46
100%		+50	5180099.72	99.72
High	16.0	+20	5180073.20	73.20
Low	9.0	+20	5180072.96	72.96

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5260078.25	78.25
100%		-30	5260072.09	72.09
100%		-20	5260055.90	55.9
100%		-10	5260081.33	81.33
100%		0	5260014.55	14.55
100%		+10	5260056.42	56.42
100%		+30	5260071.82	71.82
100%		+40	5260063.31	63.31
100%		+50	5260070.62	70.62
High	16.0	+20	5260026.69	26.69
Low	9.0	+20	5260037.31	37.31

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,500,000,000 Hz
CHANNEL:	100
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5500098.86	98.86
100%		-30	5500063.60	63.60
100%		-20	5500009.13	9.13
100%		-10	5500055.29	55.29
100%		0	5500050.26	50.26
100%		+10	5500097.11	97.11
100%		+30	5500030.73	30.73
100%		+40	5500098.29	98.29
100%		+50	5500084.51	84.51
High	16.0	+20	5500073.73	73.73
Low	9.0	+20	5500027.16	27.16

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,745,000,000 Hz
CHANNEL:	149
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5745050.99	50.99
100%		-30	5745040.42	40.42
100%		-20	5745026.98	26.98
100%		-10	5745067.90	67.9
100%		0	5745083.85	83.85
100%		+10	5745078.69	78.69
100%		+30	5745063.20	63.2
100%		+40	5745042.70	42.7
100%		+50	5745079.64	79.64
High	16.0	+20	5745091.17	91.17
Low	9.0	+20	5745055.59	55.59

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

2 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5180037.26	37.26
100%		-30	5180088.31	88.31
100%		-20	5180022.19	22.19
100%		-10	5180032.57	32.57
100%		0	5180081.49	81.49
100%		+10	5180082.65	82.65
100%		+30	5180081.52	81.52
100%		+40	5180019.30	19.30
100%		+50	5180041.36	41.36
High	16.0	+20	5180082.08	82.08
Low	9.0	+20	5180066.95	66.95

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5260029.68	29.68
100%		-30	5260019.15	19.15
100%		-20	5260043.18	43.18
100%		-10	5260016.04	16.04
100%		0	5260092.27	92.27
100%		+10	5260009.05	9.05
100%		+30	5260090.33	90.33
100%		+40	5260051.56	51.56
100%		+50	5260044.68	44.68
High	16.0	+20	5260091.41	91.41
Low	9.0	+20	5260036.28	36.28

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,500,000,000 Hz
CHANNEL:	100
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5500087.54	87.54
100%		-30	5500046.53	46.53
100%		-20	5500004.09	4.09
100%		-10	5500001.28	1.28
100%		0	5500026.71	26.71
100%		+10	5500094.33	94.33
100%		+30	5500092.06	92.06
100%		+40	5500084.80	84.8
100%		+50	5500079.52	79.52
High	16.0	+20	5500052.48	52.48
Low	9.0	+20	5500038.19	38.19

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,745,000,000 Hz
CHANNEL:	149
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5745032.69	32.69
100%		-30	5745016.45	16.45
100%		-20	5745072.42	72.42
100%		-10	5745085.14	85.14
100%		0	5745070.70	70.70
100%		+10	5745047.32	47.32
100%		+30	5745001.53	1.53
100%		+40	5745096.67	96.67
100%		+50	5745077.83	77.83
High	16.0	+20	5745058.71	58.71
Low	9.0	+20	5745081.05	81.05

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

5 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5180016.52	16.52
100%		-30	5180071.39	71.39
100%		-20	5180086.37	86.37
100%		-10	5180079.14	79.14
100%		0	5180055.71	55.71
100%		+10	5180035.63	35.63
100%		+30	5180082.30	82.30
100%		+40	5180075.03	75.03
100%		+50	5180080.20	80.20
High	16.0	+20	5180018.98	18.98
Low	9.0	+20	5180084.48	84.48

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5260046.62	46.62
100%		-30	5260091.98	91.98
100%		-20	5260074.73	74.73
100%		-10	5260059.19	59.19
100%		0	5260077.52	77.52
100%		+10	5260077.15	77.15
100%		+30	5260007.42	7.42
100%		+40	5260011.83	11.83
100%		+50	5260061.74	61.74
High	16.0	+20	5260024.79	24.79
Low	9.0	+20	5260040.96	40.96

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,500,000,000 Hz
CHANNEL:	100
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5500054.73	54.73
100%		-30	5500099.43	99.43
100%		-20	5500095.59	95.59
100%		-10	5500081.79	81.79
100%		0	5500061.64	61.64
100%		+10	5500009.49	9.49
100%		+30	5500042.57	42.57
100%		+40	5500006.67	6.67
100%		+50	5500057.97	57.97
High	16.0	+20	5500052.63	52.63
Low	9.0	+20	5500077.27	77.27

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,745,000,000 Hz
CHANNEL:	149
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5745048.02	48.02
100%		-30	5745055.27	55.27
100%		-20	5745053.15	53.15
100%		-10	5745085.49	85.49
100%		0	5745018.75	18.75
100%		+10	5745057.61	57.61
100%		+30	5745037.15	37.15
100%		+40	5745033.72	33.72
100%		+50	5745018.29	18.29
High	16.0	+20	5745024.40	24.40
Low	9.0	+20	5745062.79	62.79

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5180034.88	34.88
100%		-30	5180006.82	6.82
100%		-20	5180005.65	5.65
100%		-10	5180033.59	33.59
100%		0	5180034.59	34.59
100%		+10	5180068.14	68.14
100%		+30	5180005.66	5.66
100%		+40	5180048.73	48.73
100%		+50	5180025.65	25.65
High	16.0	+20	5180017.38	17.38
Low	9.0	+20	5180087.34	87.34

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5260026.54	26.54
100%		-30	5260097.24	97.24
100%		-20	5260066.43	66.43
100%		-10	5260038.82	38.82
100%		0	5260059.38	59.38
100%		+10	5260066.47	66.47
100%		+30	5260086.82	86.82
100%		+40	5260058.58	58.58
100%		+50	5260026.02	26.02
High	16.0	+20	5260097.47	97.47
Low	9.0	+20	5260089.31	89.31

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,500,000,000 Hz
CHANNEL:	100
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5500068.58	68.58
100%		-30	5500002.56	2.56
100%		-20	5500001.92	1.92
100%		-10	5500064.27	64.27
100%		0	5500089.13	89.13
100%		+10	5500061.34	61.34
100%		+30	5500034.11	34.11
100%		+40	5500012.88	12.88
100%		+50	5500058.19	58.19
High	16.0	+20	5500035.59	35.59
Low	9.0	+20	5500098.66	98.66

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,745,000,000 Hz
CHANNEL:	149
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5745040.25	40.25
100%		-30	5745061.60	61.60
100%		-20	5745054.72	54.72
100%		-10	5745038.97	38.97
100%		0	5745083.76	83.76
100%		+10	5745033.72	33.72
100%		+30	5745032.20	32.2
100%		+40	5745068.35	68.35
100%		+50	5745083.47	83.47
High	16.0	+20	5745002.04	2.04
Low	9.0	+20	5745027.87	27.87

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

9.6.2 40MHz BW

Startup after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,190,000,000 Hz
 CHANNEL: 38
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5190039.64	39.64
100%		-30	5190075.68	75.68
100%		-20	5190036.77	36.77
100%		-10	5190051.88	51.88
100%		0	5190021.43	21.43
100%		+10	5190079.35	79.35
100%		+30	5190024.38	24.38
100%		+40	5190033.02	33.02
100%		+50	5190001.54	1.54
High	16.0	+20	5190080.13	80.13
Low	9.0	+20	5190095.23	95.23

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,270,000,000 Hz
 CHANNEL: 54
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5270008.50	8.50
100%		-30	5270081.27	81.27
100%		-20	5270087.16	87.16
100%		-10	5270009.53	9.53
100%		0	5270081.60	81.6
100%		+10	5270026.49	26.49
100%		+30	5270087.92	87.92
100%		+40	5270001.37	1.37
100%		+50	5270016.87	16.87
High	16.0	+20	5270037.63	37.63
Low	9.0	+20	5270062.30	62.3

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,510,000,000 Hz
CHANNEL:	102
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5510023.67	23.67
100%		-30	5510068.90	68.90
100%		-20	5510051.80	51.8
100%		-10	5510001.14	1.14
100%		0	5510027.95	27.95
100%		+10	5510073.33	73.33
100%		+30	5510051.49	51.49
100%		+40	5510001.89	1.89
100%		+50	5510002.89	2.89
High	16.0	+20	5510003.54	3.54
Low	9.0	+20	5510087.59	87.59

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,755,000,000 Hz
 CHANNEL: 151
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5755052.28	52.28
100%		-30	5755076.58	76.58
100%		-20	5755015.76	15.76
100%		-10	5755078.70	78.7
100%		0	5755084.86	84.86
100%		+10	5755022.39	22.39
100%		+30	5755041.23	41.23
100%		+40	5755034.47	34.47
100%		+50	5755086.92	86.92
High	16.0	+20	5755099.61	99.61
Low	9.0	+20	5755043.65	43.65

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

2 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,190,000,000 Hz
 CHANNEL: 38
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5190075.44	75.44
100%		-30	5190035.16	35.16
100%		-20	5190063.84	63.84
100%		-10	5190027.40	27.40
100%		0	5190050.61	50.61
100%		+10	5190087.81	87.81
100%		+30	5190008.93	8.93
100%		+40	5190089.88	89.88
100%		+50	5190085.12	85.12
High	16.0	+20	5190056.02	56.02
Low	9.0	+20	5190067.04	67.04

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,270,000,000 Hz
 CHANNEL: 54
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5270007.57	7.57
100%		-30	5270045.81	45.81
100%		-20	5270007.45	7.45
100%		-10	5270087.61	87.61
100%		0	5270073.03	73.03
100%		+10	5270031.23	31.23
100%		+30	5270085.49	85.49
100%		+40	5270072.77	72.77
100%		+50	5270041.07	41.07
High	16.0	+20	5270006.39	6.39
Low	9.0	+20	5270097.66	97.66

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,510,000,000 Hz
CHANNEL:	102
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5510044.58	44.58
100%		-30	5510038.12	38.12
100%		-20	5510001.23	1.23
100%		-10	5510050.24	50.24
100%		0	5510069.81	69.81
100%		+10	5510038.47	38.47
100%		+30	5510093.42	93.42
100%		+40	5510012.55	12.55
100%		+50	5510078.26	78.26
High	16.0	+20	5510079.26	79.26
Low	9.0	+20	5510007.19	7.19

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,755,000,000 Hz
 CHANNEL: 151
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5755036.33	36.33
100%		-30	5755006.13	6.13
100%		-20	5755075.93	75.93
100%		-10	5755004.72	4.72
100%		0	5755015.72	15.72
100%		+10	5755020.66	20.66
100%		+30	5755008.86	8.86
100%		+40	5755016.92	16.92
100%		+50	5755014.72	14.72
High	16.0	+20	5755047.79	47.79
Low	9.0	+20	5755065.83	65.83

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

5 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,190,000,000 Hz
 CHANNEL: 38
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5190046.67	46.67
100%		-30	5190044.33	44.33
100%		-20	5190052.88	52.88
100%		-10	5190043.90	43.90
100%		0	5190070.15	70.15
100%		+10	5190010.22	10.22
100%		+30	5190022.91	22.91
100%		+40	5190097.36	97.36
100%		+50	5190029.20	29.20
High	16.0	+20	5190050.82	50.82
Low	9.0	+20	5190009.87	9.87

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,270,000,000 Hz
 CHANNEL: 54
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5270035.39	35.39
100%		-30	5270083.96	83.96
100%		-20	5270060.45	60.45
100%		-10	5270059.37	59.37
100%		0	5270083.54	83.54
100%		+10	5270034.67	34.67
100%		+30	5270094.18	94.18
100%		+40	5270091.76	91.76
100%		+50	5270083.24	83.24
High	16.0	+20	5270042.79	42.79
Low	9.0	+20	5270045.59	45.59

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,510,000,000 Hz
CHANNEL:	102
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5510086.43	86.43
100%		-30	5510074.65	74.65
100%		-20	5510051.44	51.44
100%		-10	5510094.99	94.99
100%		0	5510015.56	15.56
100%		+10	5510003.42	3.42
100%		+30	5510084.53	84.53
100%		+40	5510062.69	62.69
100%		+50	5510008.14	8.14
High	16.0	+20	5510070.18	70.18
Low	9.0	+20	5510030.90	30.9

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,755,000,000 Hz
CHANNEL:	151
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5755088.70	88.70
100%		-30	5755074.75	74.75
100%		-20	5755001.25	1.25
100%		-10	5755083.02	83.02
100%		0	5755090.05	90.05
100%		+10	5755049.17	49.17
100%		+30	5755086.97	86.97
100%		+40	5755011.57	11.57
100%		+50	5755095.32	95.32
High	16.0	+20	5755039.43	39.43
Low	9.0	+20	5755071.75	71.75

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,190,000,000 Hz
 CHANNEL: 38
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5190029.74	29.74
100%		-30	5190046.86	46.86
100%		-20	5190021.83	21.83
100%		-10	5190099.52	99.52
100%		0	5190013.29	13.29
100%		+10	5190045.07	45.07
100%		+30	5190077.77	77.77
100%		+40	5190040.39	40.39
100%		+50	5190087.49	87.49
High	16.0	+20	5190059.30	59.30
Low	9.0	+20	5190064.96	64.96

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,270,000,000 Hz
 CHANNEL: 54
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5270024.27	24.27
100%		-30	5270002.55	2.55
100%		-20	5270009.64	9.64
100%		-10	5270002.70	2.7
100%		0	5270095.88	95.88
100%		+10	5270055.58	55.58
100%		+30	5270070.79	70.79
100%		+40	5270051.42	51.42
100%		+50	5270084.12	84.12
High	16.0	+20	5270004.60	4.60
Low	9.0	+20	5270050.79	50.79

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,510,000,000 Hz
CHANNEL:	102
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5510026.41	26.41
100%		-30	5510048.85	48.85
100%		-20	5510079.87	79.87
100%		-10	5510053.97	53.97
100%		0	5510090.15	90.15
100%		+10	5510035.02	35.02
100%		+30	5510041.91	41.91
100%		+40	5510091.11	91.11
100%		+50	5510026.38	26.38
High	16.0	+20	5510036.50	36.50
Low	9.0	+20	5510062.04	62.04

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,755,000,000 Hz
CHANNEL:	151
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5755078.31	78.31
100%		-30	5755037.12	37.12
100%		-20	5755089.14	89.14
100%		-10	5755095.39	95.39
100%		0	5755074.05	74.05
100%		+10	5755027.82	27.82
100%		+30	5755088.86	88.86
100%		+40	5755069.29	69.29
100%		+50	5755074.81	74.81
High	16.0	+20	5755011.71	11.71
Low	9.0	+20	5755074.54	74.54

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

9.6.3 80MHz BW

Startup after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,210,000,000 Hz
 CHANNEL: 42
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5210070.67	70.67
100%		-30	5210036.66	36.66
100%		-20	5210001.15	1.15
100%		-10	5210030.95	30.95
100%		0	5210058.39	58.39
100%		+10	5210093.71	93.71
100%		+30	5210025.07	25.07
100%		+40	5210010.61	10.61
100%		+50	5210058.27	58.27
High	16.0	+20	5210001.79	1.79
Low	9.0	+20	5210049.43	49.43

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,290,000,000 Hz
 CHANNEL: 58
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5290081.69	81.69
100%		-30	5290033.71	33.71
100%		-20	5290058.65	58.65
100%		-10	5290046.85	46.85
100%		0	5290006.13	6.13
100%		+10	5290096.08	96.08
100%		+30	5290049.99	49.99
100%		+40	5290042.72	42.72
100%		+50	5290018.67	18.67
High	16.0	+20	5290018.26	18.26
Low	9.0	+20	5290090.49	90.49

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5530091.73	91.73
100%		-30	5530099.92	99.92
100%		-20	5530077.91	77.91
100%		-10	5530003.51	3.51
100%		0	5530047.42	47.42
100%		+10	5530026.66	26.66
100%		+30	5530007.28	7.28
100%		+40	5530085.42	85.42
100%		+50	5530050.76	50.76
High	16.0	+20	5530089.50	89.50
Low	9.0	+20	5530055.20	55.2

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5775087.61	87.61
100%		-30	5775059.51	59.51
100%		-20	5775048.41	48.41
100%		-10	5775046.24	46.24
100%		0	5775034.06	34.06
100%		+10	5775016.64	16.64
100%		+30	5775005.89	5.89
100%		+40	5775057.65	57.65
100%		+50	5775098.30	98.30
High	16.0	+20	5775041.11	41.11
Low	9.0	+20	5775073.65	73.65

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

2 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,210,000,000 Hz
 CHANNEL: 42
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5210064.81	64.81
100%		-30	5210060.05	60.05
100%		-20	5210016.77	16.77
100%		-10	5210013.93	13.93
100%		0	5210042.38	42.38
100%		+10	5210001.80	1.80
100%		+30	5210067.25	67.25
100%		+40	5210077.47	77.47
100%		+50	5210062.08	62.08
High	16.0	+20	5210069.12	69.12
Low	9.0	+20	5210074.76	74.76

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,290,000,000 Hz
 CHANNEL: 58
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5290005.49	5.49
100%		-30	5290049.99	49.99
100%		-20	5290064.43	64.43
100%		-10	5290092.58	92.58
100%		0	5290044.60	44.6
100%		+10	5290053.44	53.44
100%		+30	5290073.41	73.41
100%		+40	5290097.50	97.50
100%		+50	5290010.14	10.14
High	16.0	+20	5290083.65	83.65
Low	9.0	+20	5290026.30	26.30

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5530079.30	79.30
100%		-30	5530081.86	81.86
100%		-20	5530017.71	17.71
100%		-10	5530095.05	95.05
100%		0	5530048.91	48.91
100%		+10	5530073.93	73.93
100%		+30	5530084.26	84.26
100%		+40	5530080.41	80.41
100%		+50	5530082.99	82.99
High	16.0	+20	5530039.95	39.95
Low	9.0	+20	5530002.36	2.36

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5775007.52	7.52
100%		-30	5775054.75	54.75
100%		-20	5775097.25	97.25
100%		-10	5775005.14	5.14
100%		0	5775043.57	43.57
100%		+10	5775017.71	17.71
100%		+30	5775056.17	56.17
100%		+40	5775033.65	33.65
100%		+50	5775048.25	48.25
High	16.0	+20	5775016.09	16.09
Low	9.0	+20	5775080.94	80.94

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

5 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,210,000,000 Hz
 CHANNEL: 42
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5210082.50	82.50
100%		-30	5210019.50	19.50
100%		-20	5210006.48	6.48
100%		-10	5210034.99	34.99
100%		0	5210036.30	36.30
100%		+10	5210009.69	9.69
100%		+30	5210027.25	27.25
100%		+40	5210084.42	84.42
100%		+50	5210005.96	5.96
High	16.0	+20	5210098.14	98.14
Low	9.0	+20	5210095.48	95.48

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,290,000,000 Hz
 CHANNEL: 58
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5290082.85	82.85
100%		-30	5290072.45	72.45
100%		-20	5290066.72	66.72
100%		-10	5290030.31	30.31
100%		0	5290063.91	63.91
100%		+10	5290011.51	11.51
100%		+30	5290005.68	5.68
100%		+40	5290041.67	41.67
100%		+50	5290022.31	22.31
High	16.0	+20	5290019.19	19.19
Low	9.0	+20	5290020.32	20.32

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5530078.91	78.91
100%		-30	5530053.84	53.84
100%		-20	5530049.72	49.72
100%		-10	5530068.32	68.32
100%		0	5530064.48	64.48
100%		+10	5530053.89	53.89
100%		+30	5530027.19	27.19
100%		+40	5530047.78	47.78
100%		+50	5530034.48	34.48
High	16.0	+20	5530049.53	49.53
Low	9.0	+20	5530030.61	30.61

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5775026.22	26.22
100%		-30	5775015.69	15.69
100%		-20	5775039.12	39.12
100%		-10	5775063.15	63.15
100%		0	5775029.85	29.85
100%		+10	5775052.07	52.07
100%		+30	5775091.46	91.46
100%		+40	5775023.05	23.05
100%		+50	5775069.31	69.31
High	16.0	+20	5775021.41	21.41
Low	9.0	+20	5775089.87	89.87

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10 minutes after the EUT is energized

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,210,000,000 Hz
 CHANNEL: 42
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5210046.74	46.74
100%		-30	5210013.18	13.18
100%		-20	5210050.93	50.93
100%		-10	5210062.81	62.81
100%		0	5210055.07	55.07
100%		+10	5210097.15	97.15
100%		+30	5210071.03	71.03
100%		+40	5210070.78	70.78
100%		+50	5210009.72	9.72
High	16.0	+20	5210034.31	34.31
Low	9.0	+20	5210081.18	81.18

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND: UNII Band 2A
 OPERATING FREQUENCY: 5,290,000,000 Hz
 CHANNEL: 58
 REFERENCE VOLTAGE: 14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5290016.39	16.39
100%		-30	5290056.31	56.31
100%		-20	5290072.04	72.04
100%		-10	5290088.80	88.8
100%		0	5290020.53	20.53
100%		+10	5290086.57	86.57
100%		+30	5290010.19	10.19
100%		+40	5290098.84	98.84
100%		+50	5290012.77	12.77
High	16.0	+20	5290014.26	14.26
Low	9.0	+20	5290036.95	36.95

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5530019.48	19.48
100%		-30	5530089.36	89.36
100%		-20	5530006.38	6.38
100%		-10	5530041.77	41.77
100%		0	5530068.21	68.21
100%		+10	5530020.71	20.71
100%		+30	5530034.92	34.92
100%		+40	5530069.67	69.67
100%		+50	5530078.77	78.77
High	16.0	+20	5530080.95	80.95
Low	9.0	+20	5530022.06	22.06

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	14.40 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	14.40	+20(Ref)	5775045.40	45.40
100%		-30	5775036.24	36.24
100%		-20	5775014.34	14.34
100%		-10	5775044.58	44.58
100%		0	5775095.07	95.07
100%		+10	5775047.84	47.84
100%		+30	5775098.72	98.72
100%		+40	5775054.43	54.43
100%		+50	5775037.35	37.35
High	16.0	+20	5775007.83	7.83
Low	9.0	+20	5775016.38	16.38

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

9.7 STRADDLE CHANNEL

9.7.1 26dB Bandwidth

Mode	Frequency [MHz]	Channel No.	26dB Bandwidth [MHz]
802.11a	5720 (UNII 2C Band)	144	15.48
802.11n(HT20)			15.64
802.11ac(VHT20)			15.64
802.11a	5720 (UNII 3 Band)	144	5.48
802.11n(HT20)			5.64
802.11ac(VHT20)			5.60

Mode	Frequency [MHz]	Channel No.	26dB Bandwidth [MHz]
802.11n(HT40)	5710 (UNII 2C Band)	142	34.60
802.11ac(VHT40)			34.60
802.11n(HT40)	5710 (UNII 3 Band)	142	4.68
802.11ac(VHT40)			4.60

Mode	Frequency [MHz]	Channel No.	26dB Bandwidth [MHz]
802.11ac(VHT80)	5690 (UNII 2C Band)	138	75.20
	5690 (UNII 3 Band)	138	5.80

■ Test Plots

802.11a UNII Band



802.11n(HT20) UNII Band



802.11ac(VHT20) UNII Band



802.11n(HT40) UNII Band



802.11ac(VHT40) UNII Band



802.11ac(VHT80) UNII Band



9.7.2 Output Power


Mode	Frequency [MHz]	Channel	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11a	5720 (UNII 2C Band)	144	7.34	0.498	7.84	22.90
802.11n(HT20)			6.69	0.851	7.54	22.94
802.11ac(VHT20)			6.60	0.894	7.49	22.94
802.11a	5720 (UNII 3 Band)	144	0.11	0.498	0.61	30.00
802.11n(HT20)			0.05	0.851	0.90	30.00
802.11ac(VHT20)			0.01	0.894	0.90	30.00

Mode	Frequency [MHz]	Channel	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11n(HT40)	5710 (UNII 2C Band)	142	6.52	1.501	8.02	24.00
802.11ac(VHT40)			4.72	3.571	8.29	24.00
802.11n(HT40)	5710 (UNII 3 Band)	142	-5.15	1.501	-3.65	30.00
802.11ac(VHT40)			-6.61	3.571	-3.04	30.00

Mode	Frequency [MHz]	Channel	Measured Power (dBm)	Duty Cycle Factor (dB)	Measured Power(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11ac(VHT80)	5690 (UNII 2C Band)	138	6.08	2.377	8.46	24.00
	5690 (UNII 3 Band)	138	-9.05	2.377	-6.67	30.00

■ Test Plots


802.11a UNII 2C Band

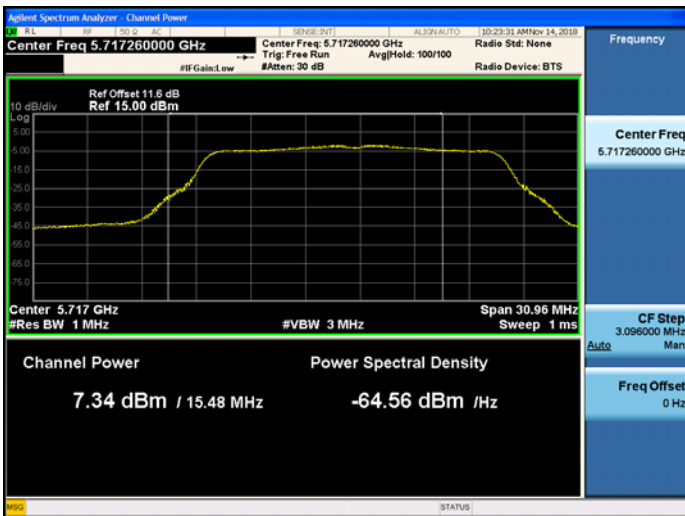


802.11a UNII 3 Band




802.11n(HT20) UNII 2C Band

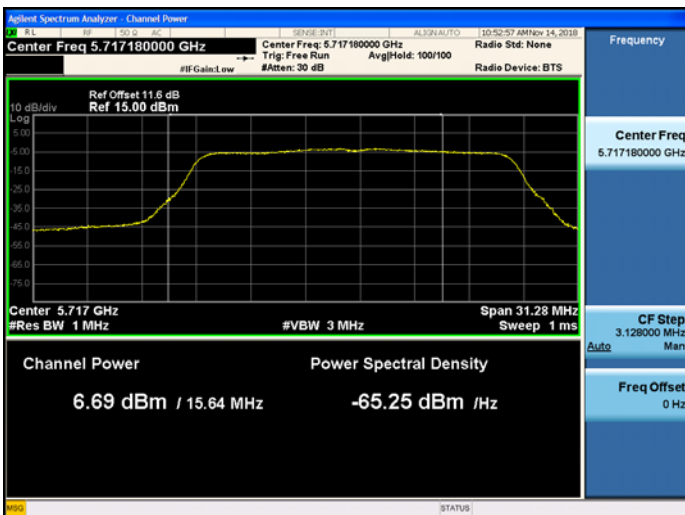

802.11n(HT20) UNII 3 Band

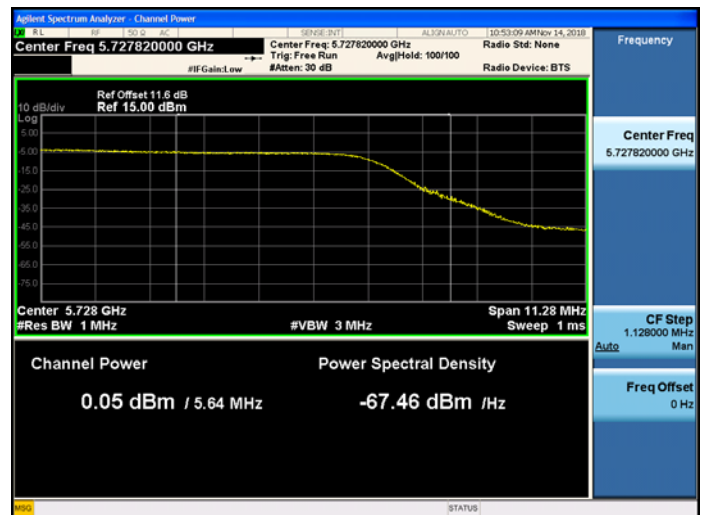


802.11ac(VHT20) UNII 2C Band

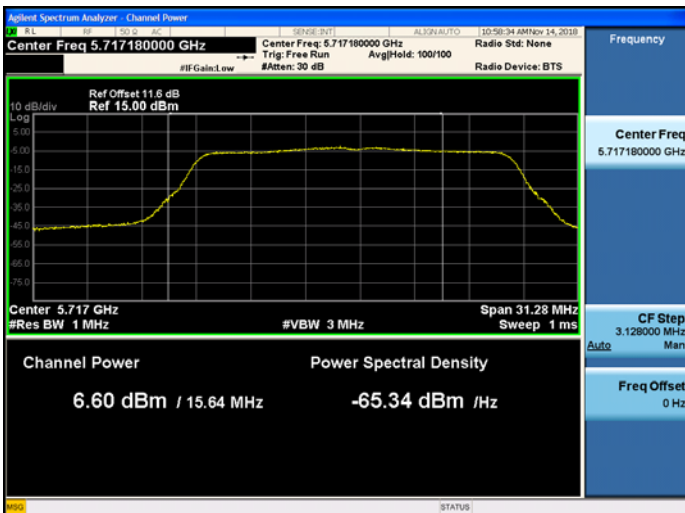


802.11ac(VHT20) UNII 3 Band




802.11n(HT40) UNII 2C Band

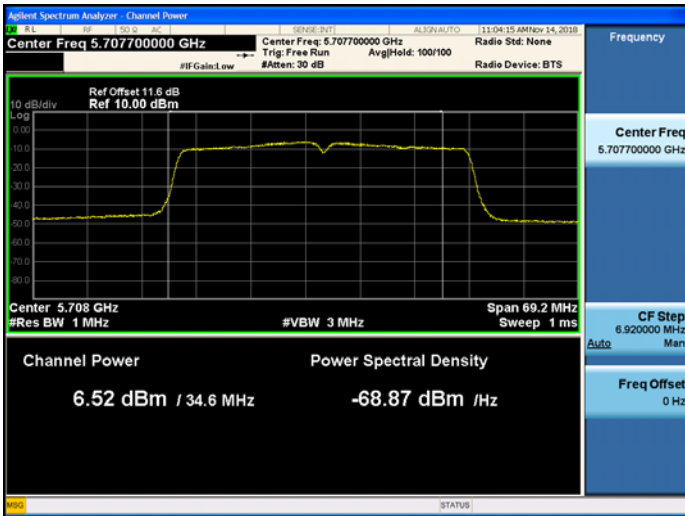


802.11n(HT40) UNII 3 Band

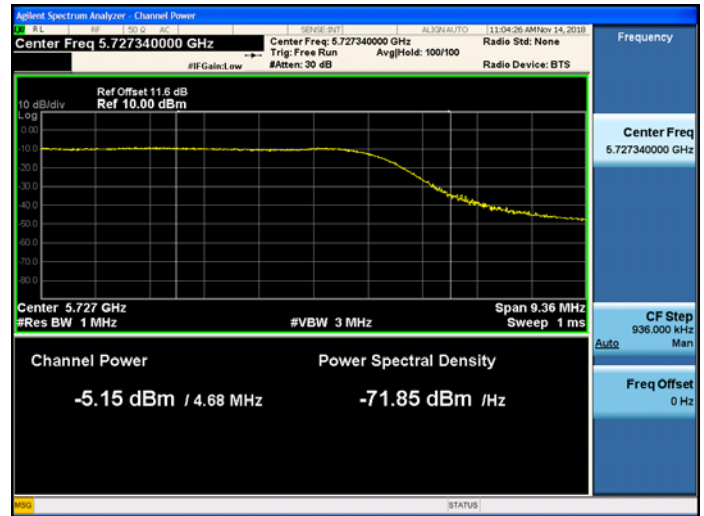


802.11ac(VHT40) UNII 2C Band

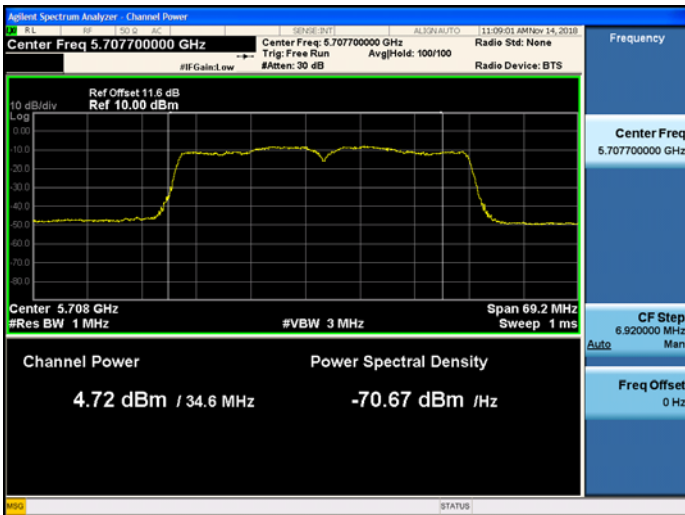


802.11ac(VHT40) UNII 3 Band

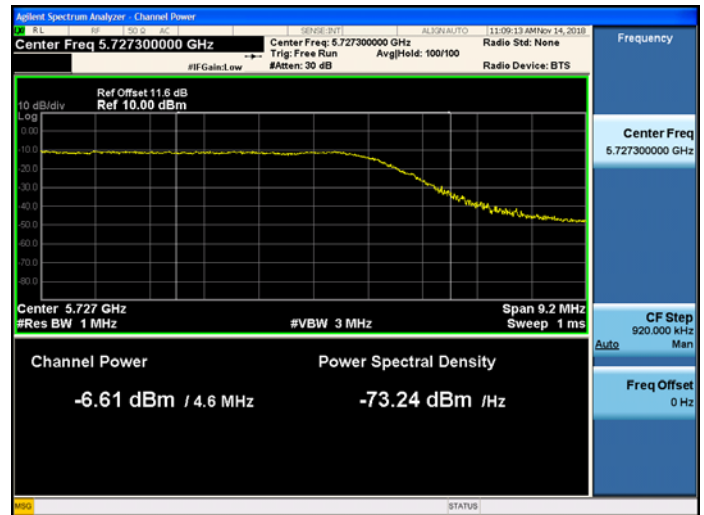

802.11ac(VHT80) UNII 2C Band

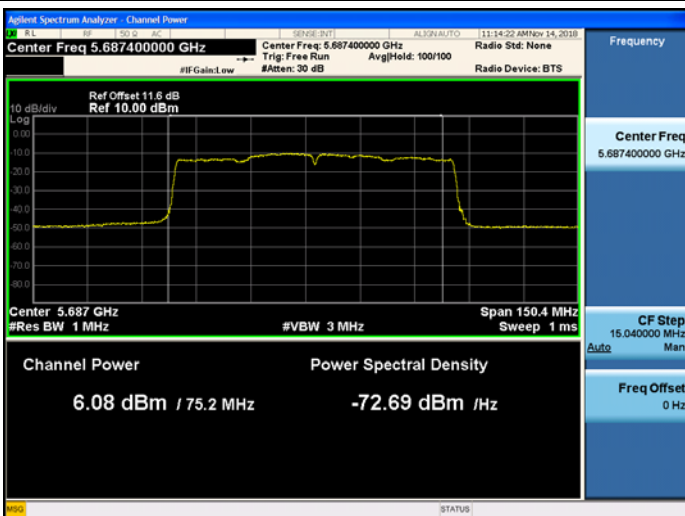

802.11ac(VHT80) UNII 3 Band

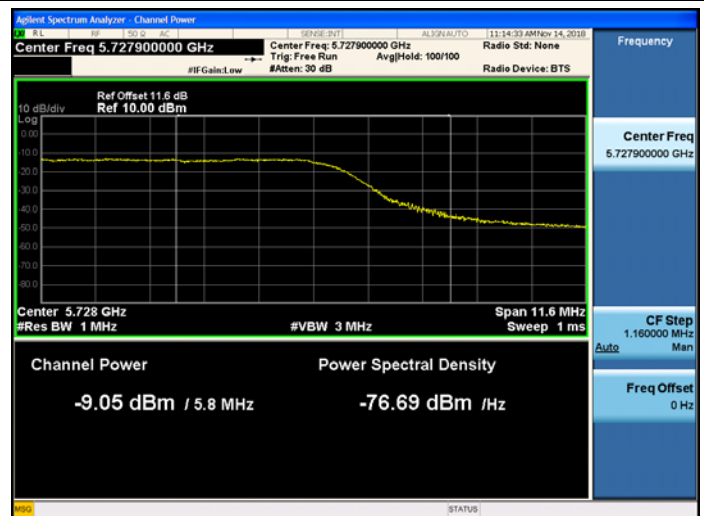

9.7.3 Power Spectral Density

Mode	Frequency [MHz]	Channel	Measured Density (dBm)	Duty Cycle Factor (dB)	Measured Density(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11a	5720 (UNII 2C Band)	144	-1.879	0.498	-1.381	11.00
802.11n(HT20)			-2.794	0.851	-1.943	11.00
802.11ac(VHT20)			-2.712	0.894	-1.818	11.00
802.11a	5720 (UNII 3 Band)	144	-7.412	0.498	-6.914	30.00
802.11n(HT20)			-8.077	0.851	-7.226	30.00
802.11ac(VHT20)			-7.600	0.894	-6.706	30.00

Mode	Frequency [MHz]	Channel	Measured Density (dBm)	Duty Cycle Factor (dB)	Measured Density(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11n(HT40)	5710 (UNII 2C Band)	142	-6.300	1.501	-4.799	11.00
802.11ac(VHT40)			-7.712	3.571	-4.141	11.00
802.11n(HT40)	5710 (UNII 3 Band)	142	-11.722	1.501	-10.221	30.00
802.11ac(VHT40)			-12.016	3.571	-8.445	30.00

Mode	Frequency [MHz]	Channel	Measured Density (dBm)	Duty Cycle Factor (dB)	Measured Density(dBm) + Duty Cycle Factor(dB)	Limit (dBm)
802.11ac(VHT80)	5690 (UNII 2C Band)	138	-9.907	2.377	-7.530	11.00
	5690 (UNII 3 Band)	138	-15.441	2.377	-13.064	30.00