



SAR TEST REPORT

No. I19Z61614-SEM02

For

Samsung Electronics Co., Ltd.

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model Name: SM-A207M

With

Hardware Version: MP1.0

Software Version: A207MUBU0ASH1

FCC ID: ZCasma207M

Issued Date: 2019-9-24



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Issue Date	Description
I19Z61614-SEM02	Rev.0	2019-9-24	Initial creation of test report
I19Z61614-SEM02	Rev.1	2019-9-26	Update the testing end date on section 1.3 and able B.1 on page220

TABLE OF CONTENT

1 TEST LABORATORY	5
1.1 TESTING LOCATION	5
1.2 TESTING ENVIRONMENT.....	5
1.3 PROJECT DATA	5
1.4 SIGNATURE.....	5
2 STATEMENT OF COMPLIANCE	6
3 CLIENT INFORMATION	8
3.1 APPLICANT INFORMATION	8
3.2 MANUFACTURER INFORMATION	8
4 EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	9
4.1 ABOUT EUT	9
4.2 INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	10
4.3 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	10
5 TEST METHODOLOGY	11
5.1 APPLICABLE LIMIT REGULATIONS	11
5.2 APPLICABLE MEASUREMENT STANDARDS.....	11
6 SPECIFIC ABSORPTION RATE (SAR).....	12
6.1 INTRODUCTION.....	12
6.2 SAR DEFINITION	12
7 TISSUE SIMULATING LIQUIDS	13
7.1 TARGETS FOR TISSUE SIMULATING LIQUID	13
7.2 DIELECTRIC PERFORMANCE	13
8 SYSTEM VERIFICATION	20
8.1 SYSTEM SETUP.....	20
8.2 SYSTEM VERIFICATION.....	21
9 MEASUREMENT PROCEDURES	22
9.1 TESTS TO BE PERFORMED	22
9.2 GENERAL MEASUREMENT PROCEDURE.....	24
9.3 WCDMA MEASUREMENT PROCEDURES FOR SAR	25
9.4 SAR MEASUREMENT FOR LTE.....	26
9.5 BLUETOOTH & WI-FI MEASUREMENT PROCEDURES FOR SAR	26
9.6 POWER DRIFT.....	27
10 AREA SCAN BASED 1-G SAR.....	27
10.1 REQUIREMENT OF KDB.....	27
10.2 FAST SAR ALGORITHMS	27
11 CONDUCTED OUTPUT POWER.....	28

11.1 GSM MEASUREMENT RESULT	28
11.2 WCDMA MEASUREMENT RESULT.....	30
11.3 LTE MEASUREMENT RESULT	32
11.4 Wi-Fi AND BT MEASUREMENT RESULT	56
12 SIMULTANEOUS TX SAR CONSIDERATIONS.....	57
12.1 INTRODUCTION.....	57
12.2 TRANSMIT ANTENNA SEPARATION DISTANCES	57
12.3 SAR MEASUREMENT POSITIONS	58
12.4 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	58
13 EVALUATION OF SIMULTANEOUS.....	59
14 SAR TEST RESULT	60
14.1 SAR RESULTS FOR FAST SAR.....	62
14.2 SAR RESULTS FOR STANDARD PROCEDURE	73
14.3 WLAN EVALUATION FOR 2.4G	79
14.5 SAR RESULTS FOR BT	82
15 SAR MEASUREMENT VARIABILITY.....	83
16 MEASUREMENT UNCERTAINTY	84
16.1 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (300MHz~3GHz)	84
16.2 MEASUREMENT UNCERTAINTY FOR NORMAL SAR TESTS (3~6GHz)	85
16.3 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (300MHz~3GHz)	86
16.4 MEASUREMENT UNCERTAINTY FOR FAST SAR TESTS (3~6GHz).....	87
17 MAIN TEST INSTRUMENTS.....	88
ANNEX A GRAPH RESULTS.....	89
ANNEX B SYSTEM VERIFICATION RESULTS	125
ANNEX C SAR MEASUREMENT SETUP	138
ANNEX D POSITION OF THE WIRELESS DEVICE IN RELATION TO THE PHANTOM	144
ANNEX E EQUIVALENT MEDIA RECIPES	147
ANNEX F SYSTEM VALIDATION	148
ANNEX G PROBE CALIBRATION CERTIFICATE.....	149
ANNEX H DIPOLE CALIBRATION CERTIFICATE	160
ANNEX I DYNAMIC ANTENNA SWITCHING TEST CONSIDERATIONS.....	210
ANNEX J SPOT CHECK	213
ANNEX K PROBE CALIBRATION CERTIFICATE	221
ANNEX L ACCREDITATION CERTIFICATE.....	257

1 Test Laboratory

1.1 Testing Location

Company Name:	CTTL(Shouxiang)
Address:	No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District, Beijing, P. R. China100191

1.2 Testing Environment

Temperature:	18°C~25°C,
Relative humidity:	30%~ 70%
Ground system resistance:	< 0.5 Ω
Ambient noise & Reflection:	< 0.012 W/kg


1.3 Project Data

Project Leader:	Qi Dianyuan
Test Engineer:	Lin Xiaojun
Testing Start Date:	August 19, 2019
Testing End Date:	September 24, 2019


1.4 Signature



Lin Xiaojun
(Prepared this test report)

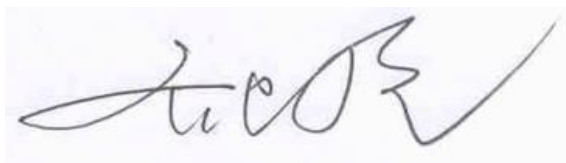

Qi Dianyuan
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2 Statement of Compliance

This EUT is a variant product and the report of original sample is No.I19Z61434-SEM04.

The original is a dual SIM card slot product and the variant is Single SIM card slot. We do the spot check on highest value point of the original report for head and body respectively. The results of spot check are presented in the annex J.

The maximum results of Specific Absorption Rate (SAR) found during testing for Samsung Electronics Co., Ltd. Multi-band GSM/WCDMA/LTE phone with Bluetooth, SM-A207M are as follows:

Table 2.1: Highest Reported SAR (1g)

Exposure Configuration	Technology Band	Highest Reported SAR 1g(W/kg)	Equipment Class
Head (Separation Distance 0mm)	GSM850	0.26	PCE
	GSM1900	0.11	
	WCDMA1900	0.22	
	WCDMA1700	0.15	
	WCDMA 850	0.24	
	LTE Band2	0.19	
	LTE Band5	0.17	
	LTE Band7	0.23	
	LTE Band12	0.13	
	LTE Band13	0.10	
	LTE Band41	0.13	
	LTE Band66	0.08	
	WLAN 2.4 GHz	0.69	DTS
Hotspot (Separation Distance 10mm/15mm)	GSM850	0.40	PCE
	GSM1900	0.18	
	WCDMA1900	0.22	
	WCDMA1700	0.60	
	WCDMA 850	0.12	
	LTE Band2	0.36	
	LTE Band5	0.27	
	LTE Band7	0.36	
	LTE Band12	0.11	
	LTE Band13	0.23	
	LTE Band41	0.22	
	LTE Band66	1.43	
	WLAN 2.4 GHz	0.18	DTS

The SAR values found for the Mobile Phone are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1g tissue according to the ANSI C95.1-1992.

For body operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and which provides a minimum separation distance of 10 mm or 15mm between this device and the body of the user. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The EUT battery must be fully charged and checked periodically during the test to ascertain uniform

power output.

The measurement together with the test system set-up is described in annex C of this test report. A detailed description of the equipment under test can be found in chapter 4 of this test report. The highest reported SAR value is obtained at the case of **(Table 2.1)**, and the values are: **1.43 W/kg (1g)**.

Table 2.2: The sum of reported SAR values for main antenna and WiFi 2.4G

	Position	Main antenna	WLAN	Sum
Maximum reported SAR value for Head	Right hand, Touch cheek	0.26	0.15	0.41
Maximum reported SAR value for Body	Bottom 15mm	1.43	/	1.43
Maximum reported SAR value for Head	Left hand, Tilt	0.16	0.69	0.85

Table 2.4: The sum of reported SAR values for main antenna and BT

	Position	Main antenna	BT	Sum
Maximum reported SAR value for Head	Right hand, Touch cheek	0.26	<0.01	0.26
Maximum reported SAR value for Body	Rear 10mm	1.43	<0.01	1.43

[1] - The SAR results of BT is too low to be measured, we use "< 0.01" to indicate the value.

According to the above tables, the highest sum of reported SAR values is **1.43 W/kg (1g)**. The detail for simultaneous transmission consideration is described in chapter 13.



3 Client Information

3.1 Applicant Information

Company Name:	Samsung Electronics Co., Ltd.
Address/Post:	19 Chapin Rd.,Building D Pine Brook, NJ 07058
Contact Person:	Jenni Chun
Contact Email:	/
Telephone:	/

3.2 Manufacturer Information

Company Name:	Jiaxing Yongrui Electron Technology Co., Ltd.
Address/Post:	NO.777 Yazhong Road, Daqiao Town, Nanhu District, Jiaxing City ,Zhejiang
Contact Person:	/
Contact Email:	/
Telephone:	/

4 Equipment Under Test (EUT) and Ancillary Equipment (AE)

4.1 About EUT

Description:	Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN
Model name:	SM-A207M
Operating mode(s):	GSM850/1900, WCDMA850/1700/1900, LTE Band 2/5/7/12/13/41/66, BT, Wi-Fi(2.4G)
Tested Tx Frequency:	824 – 849 MHz (GSM 850)
	1850 – 1910 MHz (GSM 1900)
	824 – 849 MHz (WCDMA 850 Band V)
	1850 – 1910 MHz (WCDMA1900 Band IV)
	1710-1755 MHz (WCDMA1700 Band II)
	2500 -2570 (LTE Band 2)
	824-849 (LTE Band 5)
	2500 – 2570 MHz (LTE Band 7)
	699 – 716 MHz (LTE Band 12)
	779.5 –784.5 MHz (LTE Band 13)
	2535 – 2655 MHz (LTE Band41)
	1710.7 –1779.3 MHz (LTE Band 66)
	2400 – 2483.5 MHz (Bluetooth)
	2412 – 2462 MHz (Wi-Fi 2.4G)
GPRS/EGPRS Multislot Class:	33
GPRS capability Class:	B
Test device Production information:	Production unit
Device type:	Portable device
Antenna type:	Integrated antenna
Accessories/Body-worn configurations:	Headset
Hotspot mode:	Support
Product Dimension:	L: 163.31mm W: 77.52mm overall diagonal: 180.8mm

4.2 Internal Identification of EUT used during the test

EUT ID*	IMEI	HW	SW Version
EUT1	358242100017462	MP1.0	A207MUBU0ASH1
EUT2	358242100017066	MP1.0	A207MUBU0ASH1
EUT3	357863100007541	MP1.0	A207MUBU0ASH1
EUT4	357863100007558	MP1.0	A207MUBU0ASH1

*EUT ID: is used to identify the test sample in the lab internally.

Note: It is performed to test SAR with the EUT1-2 and conducted power with the EUT3-4.

4.3 Internal Identification of AE used during the test

AE ID*	Description	Model	Manufacturer
AE1	Battery	SCUD-WT-N6	SCUD
AE2	Battery	SWD-WT-N6	Sunwoda
AE4	Headset	GH59-15054A	WATA

*AE ID: is used to identify the test sample in the lab internally.

5 TEST METHODOLOGY

5.1 Applicable Limit Regulations

ANSI C95.1–1992:IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

IEEE 1528–2013: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

KDB447498 D01: General RF Exposure Guidance v06: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies.

KDB648474 D04 Handset SAR v01r03: SAR Evaluation Considerations for Wireless Handsets.

KDB941225 D01 SAR test for 3G devices v03r01: SAR Measurement Procedures for 3G Devices

KDB941225 D05 SAR for LTE Devices v02r05: SAR Evaluation Considerations for LTE Devices

KDB941225 D06 Hotspot Mode SAR v02r01: SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

KDB248227 D01 802.11 Wi-Fi SAR v02r02: SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS

KDB865664 D01SAR measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz.

KDB865664 D02RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations

6 Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 Tissue Simulating Liquids

7.1 Targets for tissue simulating liquid

Table 7.1: Targets for tissue simulating liquid


Frequency(MHz)	Liquid Type	Conductivity(σ)	$\pm 5\%$ Range	Permittivity(ϵ)	$\pm 5\%$ Range
835	Head	0.90	0.86~0.95	41.5	39.4~43.6
835	Body	0.97	0.92~1.02	55.2	52.4~58.0
1750	Head	1.37	1.30~1.44	40.08	38.1~42.1
1750	Body	1.49	1.42~1.56	53.4	50.7~56.1
1900	Head	1.40	1.33~1.47	40.0	38.0~42.0
1900	Body	1.52	1.44~1.60	53.3	50.6~56.0
2450	Head	1.80	1.71~1.89	39.2	37.2~41.2
2450	Body	1.95	1.85~2.05	52.7	50.1~55.3
2600	Head	1.96	1.86~2.06	39.01	37.1~41.0
2600	Body	2.16	2.05~2.27	52.5	49.9~55.1

7.2 Dielectric Performance

Table 7.2: Dielectric Performance of Tissue Simulating Liquid

Measurement Date (yyyy-mm-dd)	Type	Frequency	Permittivity ϵ	Drift (%)	Conductivity σ (S/m)	Drift (%)
2019-8-19	Head	750 MHz	41.7	-0.57	0.898	0.90
	Body	750 MHz	55.35	-0.27	0.951	-0.94
2019-8-20	Head	835 MHz	41.6	0.24	0.901	0.11
	Body	835 MHz	56.1	1.63	0.988	1.86
2019-8-21	Head	1750 MHz	40.68	1.50	1.38	0.73
	Body	1750 MHz	53.22	-0.34	1.514	1.61
2019-8-22	Head	1900 MHz	39.55	-1.13	1.39	-0.71
	Body	1900 MHz	53.19	-0.21	1.536	1.05
2019-8-23	Head	2450 MHz	39.05	-0.38	1.784	-0.89
	Body	2450 MHz	53.36	1.25	1.966	0.82
2019-8-24	Head	2600 MHz	39.57	1.44	1.966	0.31
	Body	2600 MHz	51.61	-1.70	2.138	-1.02


Note: The liquid temperature is 22.0°C

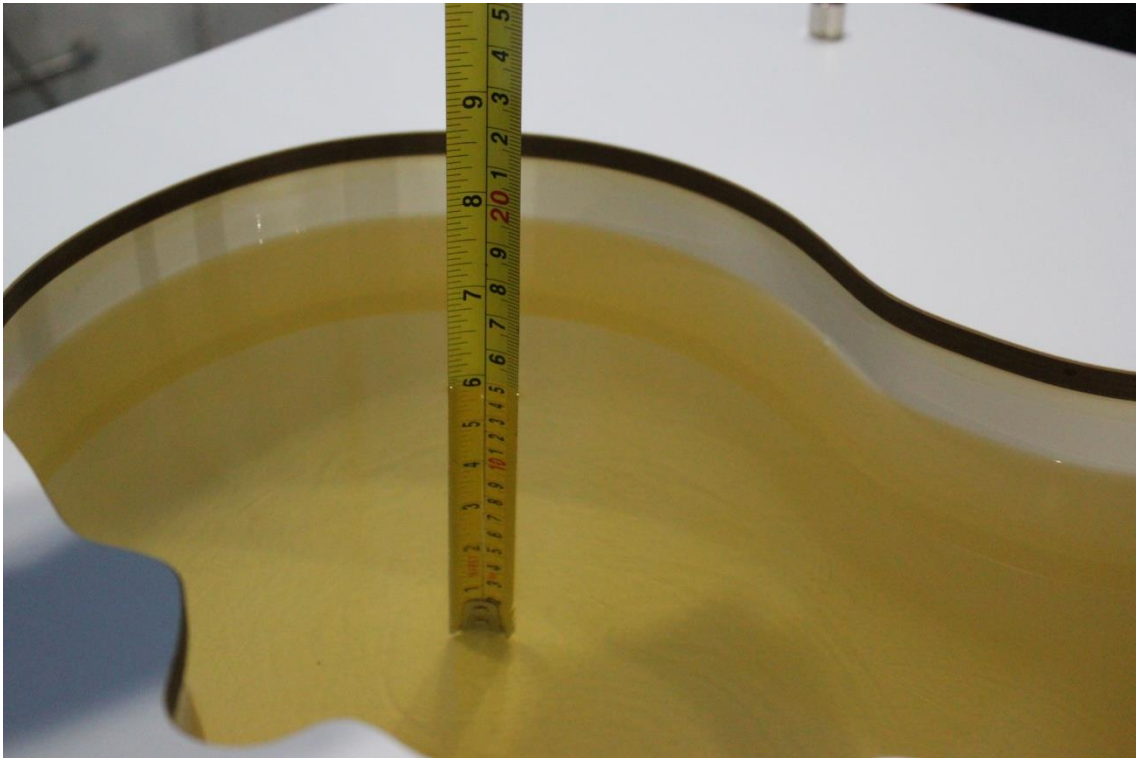


Picture 7-1 Liquid depth in the Head Phantom (750MHz)



Picture 7-2 Liquid depth in the Flat Phantom (750MHz)

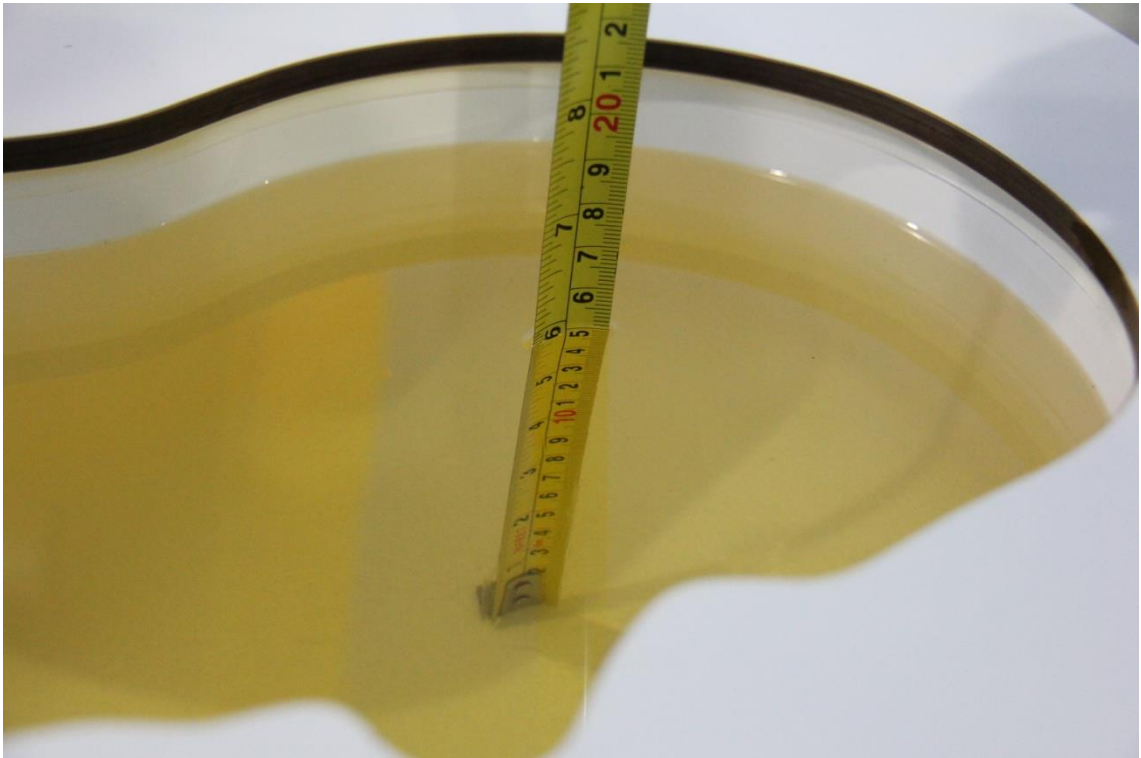


Picture 7-3 Liquid depth in the Head Phantom (835 MHz)

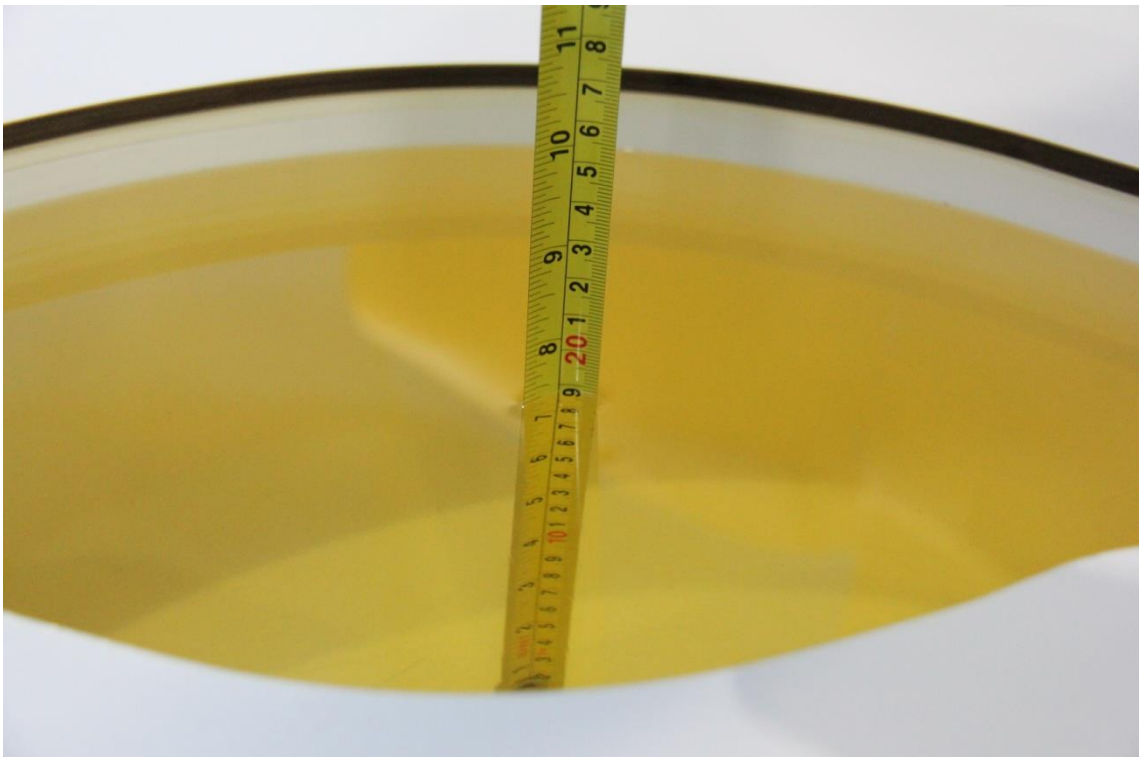

Picture 7-4 Liquid depth in the Flat Phantom (835 MHz)




Picture 7-5 Liquid depth in the Head Phantom (1750 MHz)

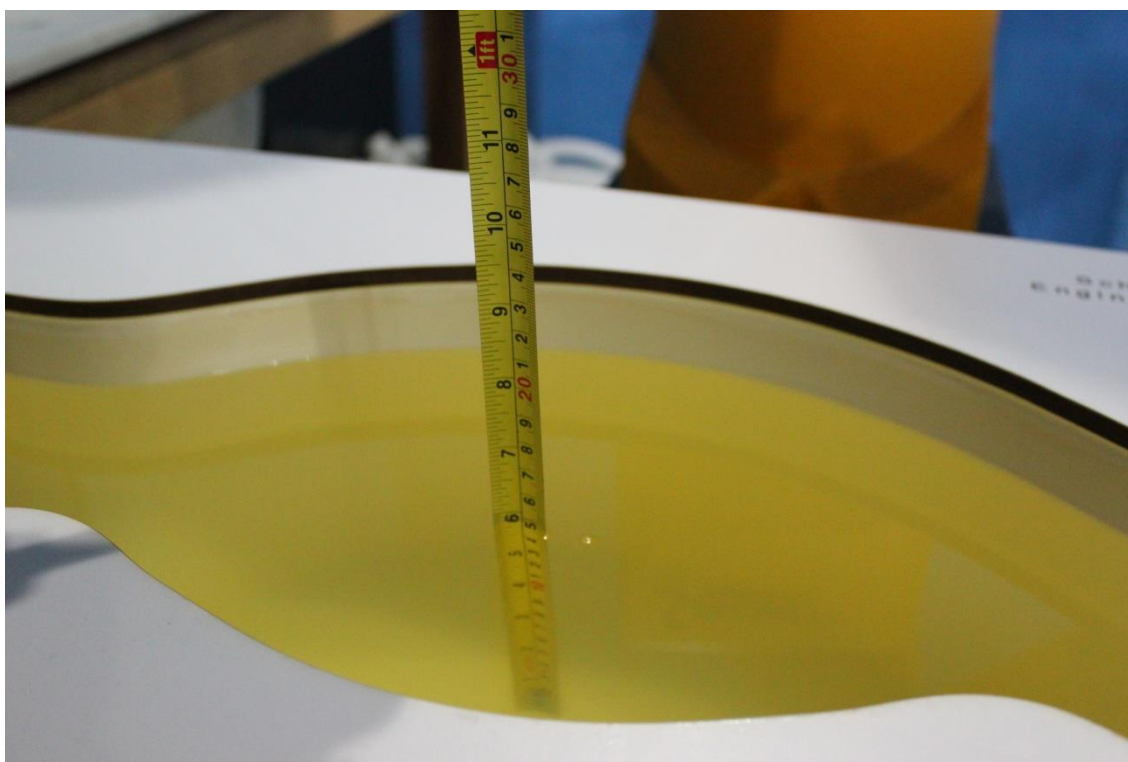

Picture 7-6 Liquid depth in the Flat Phantom (1750MHz)




Picture 7-7 Liquid depth in the Head Phantom (1900 MHz)

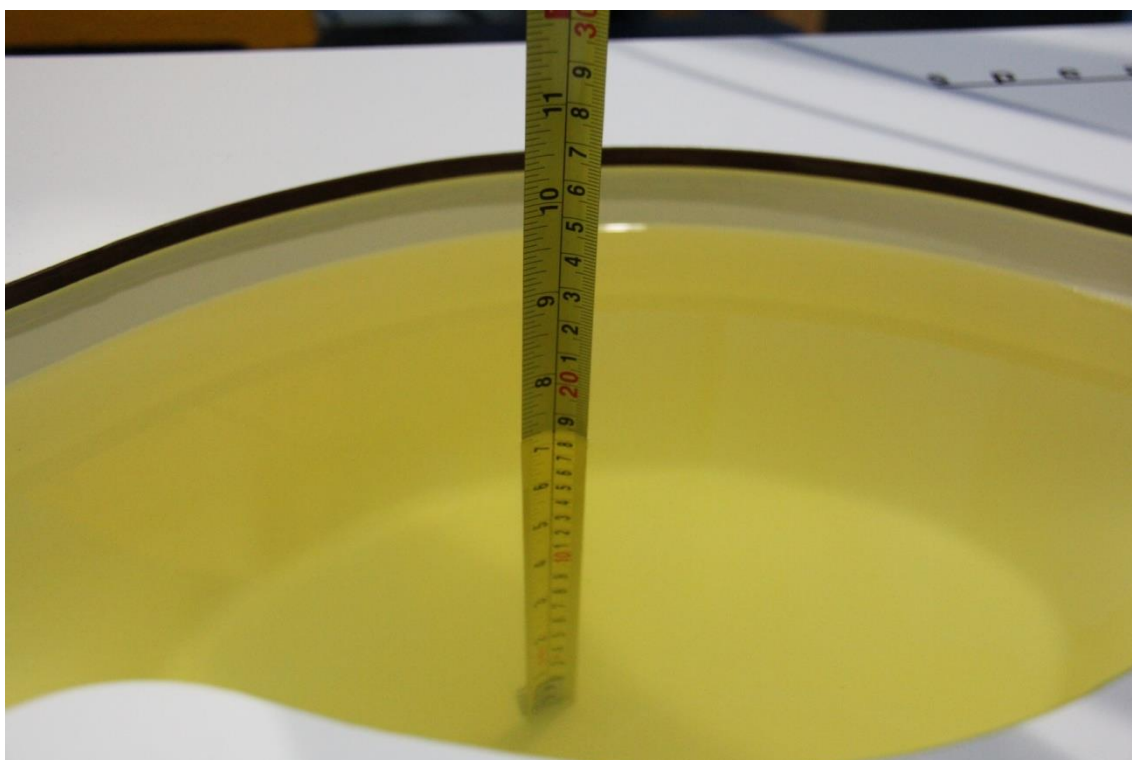

Picture 7-8 Liquid depth in the Flat Phantom (1900MHz)




Picture 7-9 Liquid depth in the Head Phantom (2450MHz)

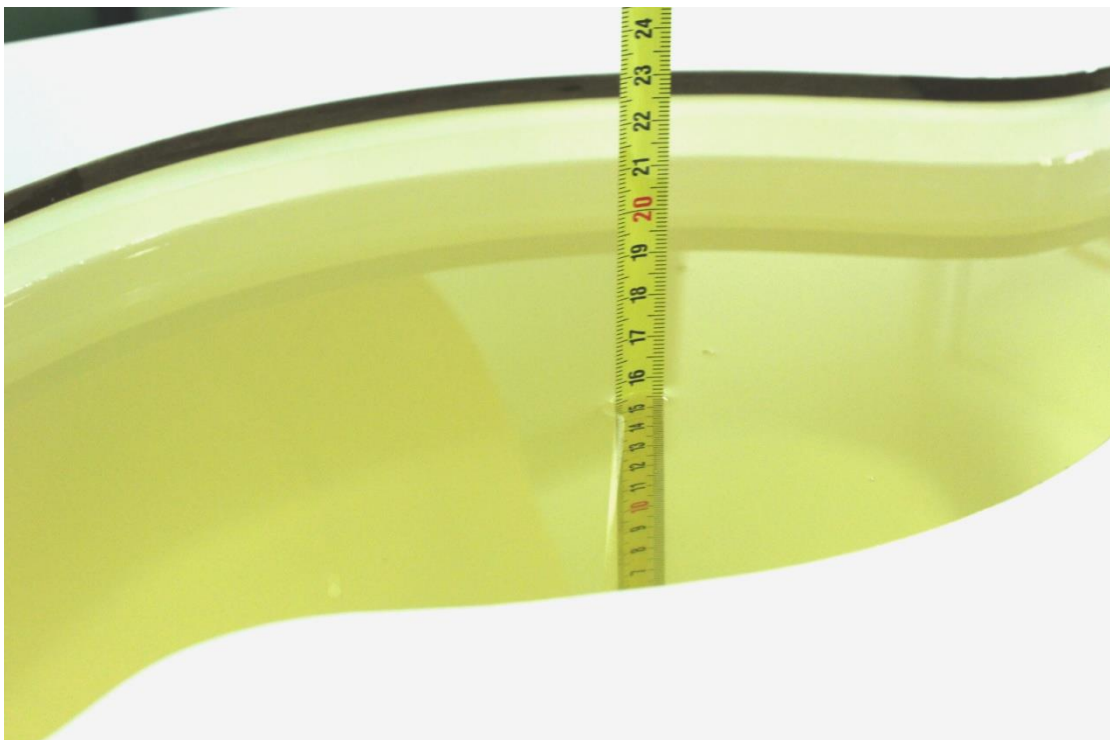

Picture 7-10 Liquid depth in the Flat Phantom (2450MHz)



Picture 7-11 Liquid depth in the Head Phantom (2600 MHz Head)

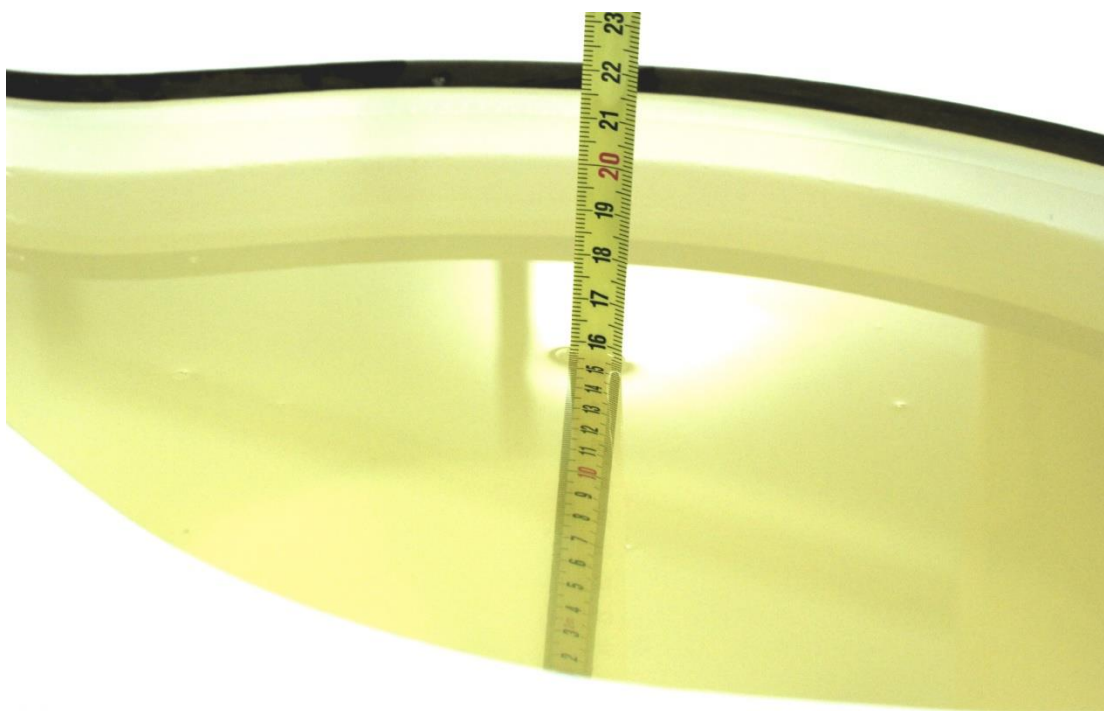


Picture 7-12 Liquid depth in the Flat Phantom (2600MHz)

8 System verification

8.1 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

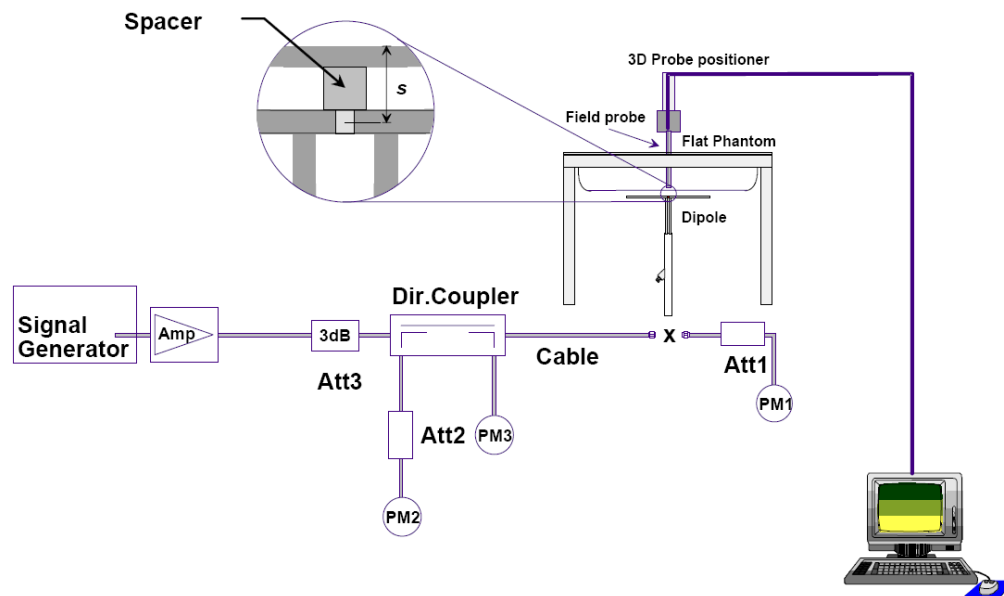

Picture 8.1 System Setup for System Evaluation



Picture 8.2 Photo of Dipole Setup

8.2 System Verification

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device.

The system verification results are required that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR. The details are presented in annex B.

Table 8.1: System Verification of Head

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value(W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2019-8-19	750 MHz	5.34	8.20	5.28	8.2	-1.12%	0.00%
2019-8-20	835 MHz	6.06	9.40	6.08	9.52	0.33%	1.28%
2019-8-21	1750 MHz	18.9	35.9	19	35.32	0.53%	-1.62%
2019-8-22	1900 MHz	21.0	40.0	20.8	40.6	-0.95%	1.50%
2019-8-23	2450 MHz	24.7	52.2	25.12	53.16	1.70%	1.84%
2019-8-24	2600 MHz	25.8	57.9	25.96	58.8	0.62%	1.55%

Table 8.2: System Verification of Body

Measurement Date (yyyy-mm-dd)	Frequency	Target value (W/kg)		Measured value (W/kg)		Deviation	
		10 g Average	1 g Average	10 g Average	1 g Average	10 g Average	1 g Average
2019-8-19	750 MHz	5.68	8.63	5.64	8.8	-0.70%	1.97%
2019-8-20	835 MHz	6.28	9.53	6.36	9.36	1.27%	-1.78%
2019-8-21	1750 MHz	19.3	36.4	19.56	36.08	1.35%	-0.88%
2019-8-22	1900 MHz	21.4	40.4	21.12	40	-1.31%	-0.99%
2019-8-23	2450 MHz	24.1	51.3	23.72	50.76	-1.58%	-1.05%
2019-8-24	2600 MHz	24.5	54.1	24.88	53.24	1.55%	-1.59%

9 Measurement Procedures

9.1 Tests to be performed

In order to determine the highest value of the peak spatial-average SAR of a handset, all device positions, configurations and operational modes shall be tested for each frequency band according to steps 1 to 3 below. A flowchart of the test process is shown in picture 9.1.


Step 1: The tests described in 9.2 shall be performed at the channel that is closest to the centre of the transmit frequency band (f_c) for:

- a) all device positions (cheek and tilt, for both left and right sides of the SAM phantom, as described in annex D),
- b) all configurations for each device position in a), e.g., antenna extended and retracted, and
- c) all operational modes, e.g., analogue and digital, for each device position in a) and configuration in b) in each frequency band.


If more than three frequencies need to be tested according to 11.1 (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing highest peak spatial-average SAR determined in Step 1, perform all tests described in 9.2 at all other test frequencies, i.e., lowest and highest frequencies. In addition, for all other conditions (device position, configuration and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies shall be tested as well.

Step 3: Examine all data to determine the highest value of the peak spatial-average SAR found in Steps 1 to 2.

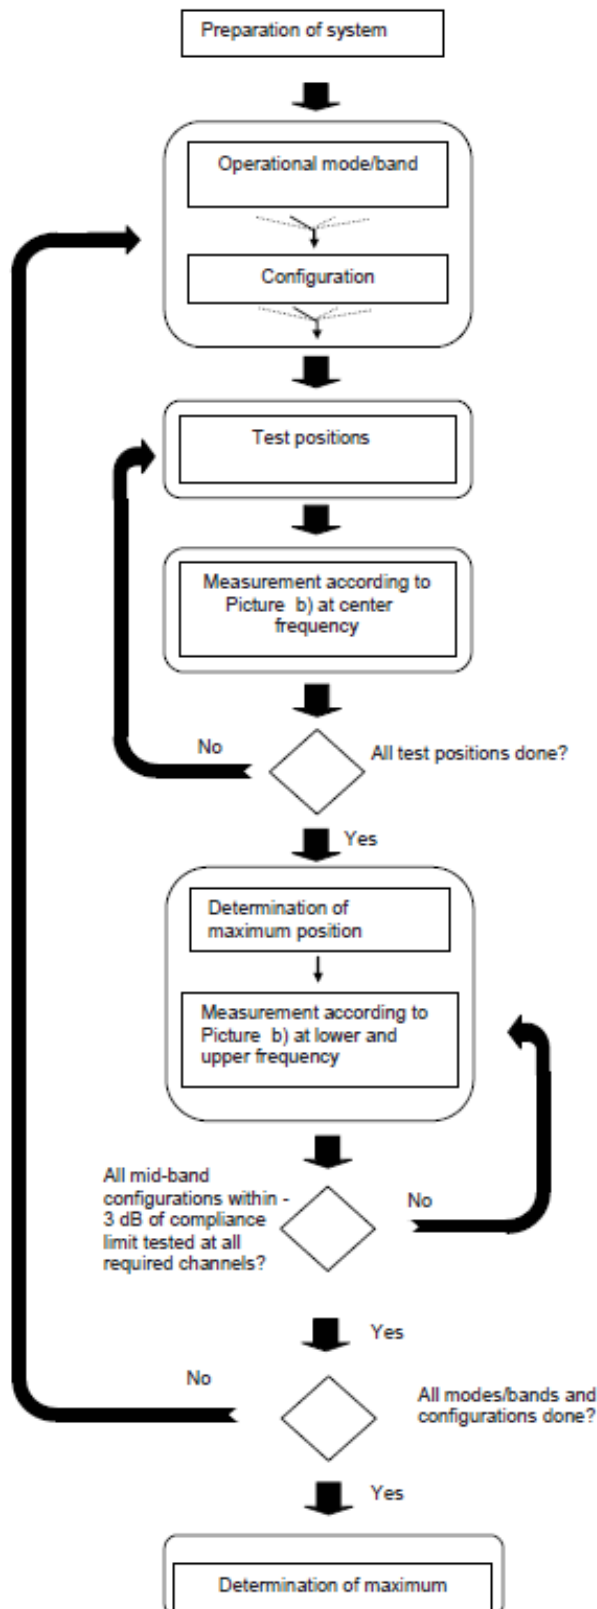

Picture a – Tests to be performed

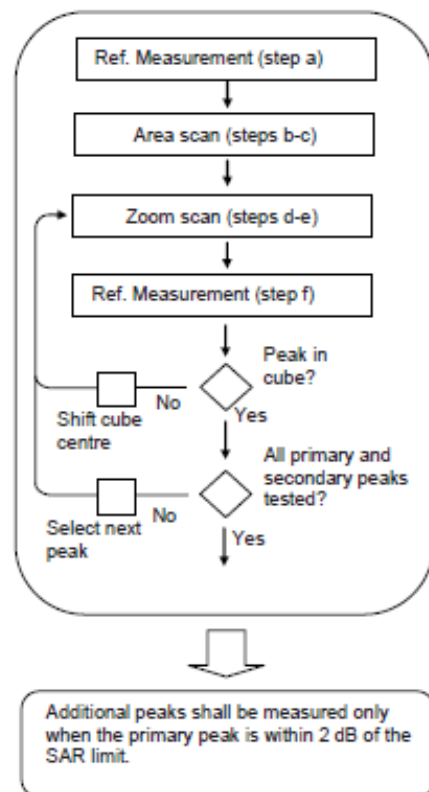

Picture b – General procedure

Picture 9.1 Block diagram of the tests to be performed

9.2 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2003. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.3 WCDMA Measurement Procedures for SAR

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH_n), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

For Release 5 HSDPA Data Devices:

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM/dB
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15	15/15	64	12/15	24/25	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

For Release 6 HSPA Data Devices

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI
1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	1.5	1.5	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	1.5	1.5	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	1.5	1.5	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	1.5	1.5	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	1.5	1.5	21	81

Rel.8 DC-HSDPA (Cat 24)

SAR test exclusion for Rel.8 DC-HSDPA must satisfy the SAR test exclusion requirements of Rel.5 HSDPA. SAR test exclusion for DC-HSDPA devices is determined by power measurements according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to qualify for SAR test exclusion.

9.4 SAR Measurement for LTE

SAR tests for LTE are performed with a base station simulator, Rohde & Schwarz CMW500. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. All powers were measured with the CMW 500.

It is performed for conducted power and SAR based on the KDB941225 D05.

SAR is evaluated separately according to the following procedures for the different test positions in each exposure condition – head, body, body-worn accessories and other use conditions. The procedures in the following subsections are applied separately to test each LTE frequency band.

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

9.5 Bluetooth & Wi-Fi Measurement Procedures for SAR

Normal network operating configurations are not suitable for measuring the SAR of 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.6 Power Drift

To control the output power stability during the SAR test, DASY4 system calculates the power drift by measuring the E-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in section 14 labeled as: (Power Drift [dB]). This ensures that the power drift during one measurement is within 5%.

10 Area Scan Based 1-g SAR

10.1 Requirement of KDB

According to the KDB447498 D01 v05, when the implementation is based on the specific polynomial fit algorithm as presented at the 29th Bioelectromagnetics Society meeting (2007) and the estimated 1-g SAR is ≤ 1.2 W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. The SAR system verification must also demonstrate that the area scan estimated 1-g SAR is within 3% of the zoom scan 1-g SAR (See Annex B). When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

10.2 Fast SAR Algorithms

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1- and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm were 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30-6000 MHz. Details of this study can be found in the BEMS 2007 Proceedings.

Both algorithms are implemented in DASY software.

11 Conducted Output Power

There are two sets of tune-up power, Normal power and Low power, for GSM 1900, WCDMA 1900/1700 and LTE Band2/7/66 by proximity sensor. The detail of proximity sensor is presented in annex I.

11.1 GSM Measurement result

During the process of testing, the EUT was controlled via Agilent Digital Radio Communication tester (E5515C) to ensure the maximum power transmission and proper modulation. This result contains conducted output power for the EUT. In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

Table 11.1-1: The conducted power measurement results for GSM– Normal power

GSM 850 Speech (GMSK)	Measured Power (dBm)			Tune up	calculation	Averaged Power (dBm)		
	251	190	128			251	190	128
1 Txslot	33.00	32.96	32.93	34.00	/	/	/	/
GSM 850 GPRS (GMSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	251	190	128			251	190	128
1 Txslot	32.62	32.61	32.58	34.00	-9.03	23.59	23.58	23.55
2 Txslots	31.15	31.19	31.13	32.00	-6.02	25.13	25.17	25.11
3Txslots	28.55	28.45	28.42	29.00	-4.26	24.29	24.19	24.16
4 Txslots	27.56	27.51	27.52	28.50	-3.01	24.55	24.50	24.51
GSM 850 EGPRS (GMSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	251	190	128			251	190	128
1 Txslot	32.56	32.53	32.45	34.00	-9.03	23.53	23.50	23.42
2 Txslots	31.17	31.11	31.01	32.00	-6.02	25.15	25.09	24.99
3Txslots	28.46	28.45	28.37	29.00	-4.26	24.20	24.19	24.11
4 Txslots	27.48	27.40	27.44	28.50	-3.01	24.47	24.39	24.43
GSM 850 EGPRS (8PSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	251	190	128			251	190	128
1 Txslot	27.06	27.23	26.93	28.00	-9.03	18.03	18.20	17.90
2 Txslots	23.78	23.86	23.80	24.50	-6.02	17.76	17.84	17.78
3Txslots	22.21	22.17	22.40	22.50	-4.26	17.95	17.91	18.14
4 Txslots	21.47	21.45	21.50	21.50	-3.01	18.46	18.44	18.49
PCS1900 Speech (GMSK)	Measured Power (dBm)			Tune up	calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	30.35	30.34	30.57	31.50	/	/	/	/
PCS1900 GPRS (GMSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	30.87	30.91	30.89	31.50	-9.03	21.84	21.88	21.86
2 Txslots	29.17	29.18	29.14	29.50	-6.02	23.15	23.16	23.12
3Txslots	27.50	27.53	27.55	28.00	-4.26	23.24	23.27	23.29
4 Txslots	24.78	24.84	24.99	25.50	-3.01	21.77	21.83	21.98

PCS1900 EGPRS (GMSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	30.88	30.91	30.89	31.50	-9.03	21.85	21.88	21.86
2 Txslots	28.68	28.75	29.16	29.50	-6.02	22.66	22.73	23.14
3Txslots	27.36	27.38	27.69	28.00	-4.26	23.10	23.12	23.43
4 Txslots	24.44	24.79	24.94	25.50	-3.01	21.43	21.78	21.93
PCS1900 EGPRS (8PSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	25.83	25.92	26.06	26.50	-9.03	16.80	16.89	17.03
2 Txslots	25.01	25.11	25.49	25.50	-6.02	18.99	19.09	19.47
3Txslots	23.70	23.80	23.97	24.00	-4.26	19.44	19.54	19.71
4 Txslots	22.81	22.82	22.86	23.00	-3.01	19.80	19.81	19.85

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 2Txslots for GSM850 and 3Txslots for GSM1900.

Table 11.1-2: The conducted power measurement results for GSM– Low power

PCS1900 Speech (GMSK)	Measured Power (dBm)			Tune up	calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	28.62	28.56	29.00	29.00	/	/	/	/
PCS1900 GPRS (GMSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	28.62	28.59	29.00	29.00	-9.03	19.59	19.56	19.97
2 Txslots	26.01	26.30	26.40	26.50	-6.02	19.99	20.28	20.38
3Txslots	24.44	24.63	24.81	25.00	-4.26	20.18	20.37	20.55
4 Txslots	23.49	23.51	23.66	24.00	-3.01	20.48	20.50	20.65
PCS1900 EGPRS (GMSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	28.66	28.61	28.51	29.00	-9.03	19.63	19.58	19.48
2 Txslots	26.45	26.43	26.50	26.50	-6.02	20.43	20.41	20.48
3Txslots	24.80	24.76	24.96	25.00	-4.26	20.54	20.50	20.70
4 Txslots	23.69	23.64	23.96	24.00	-3.01	20.68	20.63	20.95
PCS1900 EGPRS (8PSK)	Measured Power (dBm)				calculation	Averaged Power (dBm)		
	810	661	512			810	661	512
1 Txslot	25.69	25.68	25.71	26.00	-9.03	16.66	16.65	16.68
2 Txslots	23.72	23.82	23.62	25.00	-6.02	17.70	17.80	17.60
3Txslots	22.59	22.59	22.62	24.00	-4.26	18.33	18.33	18.36
4 Txslots	22.13	22.24	22.14	23.00	-3.01	19.12	19.23	19.13

NOTES:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots for GSM1900.

11.2 WCDMA Measurement result

Table 11.2-1: The conducted Power for WCDMA– Normal Power

Item	band	FDDV result			
	ARFCN	4233 (846.6MHz)	4182 (836.4MHz)	4132 (826.4MHz)	Tune up
WCDMA	\	23.49	23.39	23.45	24.5
HSUPA	1	22.62	22.45	22.75	22.50
	2	20.72	20.56	20.72	22.00
	3	21.67	21.63	21.77	21.80
	4	20.73	20.60	20.79	22.50
	5	22.57	22.35	22.47	23.00
DC-HSDPA	1	22.66	22.52	22.71	23.2
	2	22.55	22.64	22.70	23.2
	3	22.12	22.12	22.18	22.7
	4	22.12	22.13	22.14	22.6
Item	band	FDDII result			
	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)	Tune up
WCDMA	\	23.57	23.70	23.37	24.50
HSUPA	1	22.86	22.71	22.61	22.20
	2	20.81	20.71	20.60	21.80
	3	21.74	21.71	21.65	21.30
	4	20.86	20.88	20.69	21.80
	5	22.7	22.63	22.47	22.80
DC-HSDPA	1	22.83	22.81	22.65	22.7
	2	22.61	22.70	22.65	22.7
	3	22.18	22.19	22.20	22.2
	4	22.19	22.17	22.18	22.2
Item	band	FDDIV result			
	ARFCN	1513 (1752.6MHz)	1412(1732.4MHz)	1312 (1712.4MHz)	Tune up
WCDMA	\	23.47	23.28	23.24	24.00
HSUPA	1	22.5	22.52	22.52	23.00
	2	20.68	20.58	20.64	21.00

	3	21.79	21.47	21.43	22.00
	4	20.83	20.60	20.68	21.00
	5	22.46	22.22	22.43	22.50
DC-HSDPA	1	22.4	22.50	22.47	22.50
	2	22.41	22.49	22.44	22.50
	3	21.97	22.07	22.08	22.50
	4	22.03	22.09	22.15	22.50

Table 11.2-2: The conducted Power for WCDMA– Low Power

Item	band	FDDII result			
	ARFCN	9538 (1907.6MHz)	9400 (1880MHz)	9262 (1852.4MHz)	Tune up
WCDMA	\	19.83	19.78	19.56	20.50
HSUPA	1	18.83	18.68	18.51	19.00
	2	16.8	16.78	16.56	17.00
	3	17.95	17.79	17.57	18.00
	4	16.87	16.76	16.65	17.00
	5	18.77	18.56	18.59	19.00
DC-HSDPA	1	18.71	18.75	18.52	19.00
	2	18.64	18.69	18.53	19.00
	3	18.22	18.24	18.13	19.00
	4	18.2	18.24	18.14	19.00
Item	band	FDDIV result			
	ARFCN	1513 (1752.6MHz)	1412(1732.4MHz)	1312 (1712.4MHz)	Tune up
WCDMA	\	19.75	19.54	19.69	20.50
HSUPA	1	18.8	18.65	18.76	19.00
	2	16.72	16.54	16.73	17.00
	3	17.58	17.47	17.56	18.00
	4	16.75	16.60	16.59	17.00
	5	18.7	18.42	18.64	19.00
DC-HSDPA	1	18.79	18.65	18.78	19.00
	2	18.77	18.57	18.72	19.00
	3	18.27	18.19	18.28	19.00
	4	18.28	18.20	18.25	19.00

11.3 LTE Measurement result

Table 11.4-1: Maximum Power Reduction (MPR) for LTE

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR (dB)
	1.4	3	5	10	15	20	
	MHz	MHz	MHz	MHz	MHz	MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	3

Table 11.4-2: The tune up for LTE – Normal Power

Band	Tune up
LTE Band 2	24
LTE Band 5	24
LTE Band 7	24
LTE Band 12	24
LTE Band 13	24
LTE Band 41	23
LTE Band 66	24

Table 11.4-3: The tune up for LTE – Low Power

Band	Tune up
LTE Band 2	20.5
LTE Band 7	21
LTE Band 66	20.5

Note: The MPR is not apply to the low power

Table 11.4-1: The conducted Power for LTE– Normal power

LTE B2

Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)		
	RB offset		QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	1909.3 (19193)	23.48	22.02	21.55
		1880 (18900)	23.52	22.06	21.63
		1850.7 (18607)	23.28	22.36	21.38
	1RB-Middle (3)	1909.3 (19193)	23.58	22.09	21.66
		1880 (18900)	23.85	22.10	21.94
		1850.7 (18607)	23.71	22.54	21.72
	1RB-Low (0)	1909.3 (19193)	22.44	22.03	20.52
		1880 (18900)	22.87	22.02	20.97
		1850.7 (18607)	23.35	22.42	21.65
	3RB-High (3)	1909.3 (19193)	23.60	22.02	21.89
		1880 (18900)	23.63	22.26	21.88
		1850.7 (18607)	23.26	22.31	21.50
	3RB-Middle (1)	1909.3 (19193)	23.20	22.04	21.60
		1880 (18900)	23.33	22.05	21.63
		1850.7 (18607)	23.28	22.31	21.63
	3RB-Low (0)	1909.3 (19193)	23.39	22.00	21.73
		1880 (18900)	23.42	22.23	21.71
		1850.7 (18607)	23.46	22.35	21.48
	6RB (0)	1909.3 (19193)	22.46	21.53	20.92
		1880 (18900)	22.63	21.81	20.92
		1850.7 (18607)	22.37	21.72	20.68
3MHz	1RB-High (14)	1908.5 (19185)	23.38	21.69	21.45
		1880 (18900)	23.58	22.04	21.69
		1851.5 (18615)	23.42	21.98	21.52
	1RB-Middle (7)	1908.5 (19185)	23.39	21.99	21.47
		1880 (18900)	23.37	22.05	21.46
		1851.5 (18615)	23.45	21.94	21.46
	1RB-Low (0)	1908.5 (19185)	22.66	21.65	20.74
		1880 (18900)	22.70	21.86	20.80
		1851.5 (18615)	22.80	21.65	21.10
	8RB-High (7)	1908.5 (19185)	22.42	21.38	20.70
		1880 (18900)	22.84	21.57	20.99
		1851.5 (18615)	22.62	21.21	20.87
	8RB-Middle (4)	1908.5 (19185)	22.41	21.44	20.81
		1880 (18900)	22.55	21.64	20.85
		1851.5 (18615)	22.36	21.61	20.71
	8RB-Low (0)	1908.5 (19185)	22.38	21.55	20.72
		1880 (18900)	22.55	21.56	20.84
		1851.5 (18615)	22.38	21.80	20.40
	15RB (0)	1908.5 (19185)	22.55	21.59	20.91
		1880 (18900)	22.62	21.28	20.91
		1851.5 (18615)	22.46	21.49	20.77

5MHz	1RB-High (24)	1907.5 (19175)	23.19	21.56	21.26
		1880 (18900)	23.43	21.80	21.54
		1852.5 (18625)	23.47	21.72	21.57
	1RB-Middle (12)	1907.5 (19175)	23.78	21.62	21.86
		1880 (18900)	23.70	21.71	21.79
		1852.5 (18625)	23.79	21.69	21.80
	1RB-Low (0)	1907.5 (19175)	23.14	21.37	21.22
		1880 (18900)	23.54	21.60	21.64
		1852.5 (18625)	23.51	21.52	21.81
	12RB-High (13)	1907.5 (19175)	22.44	21.52	20.73
		1880 (18900)	22.63	21.49	20.89
		1852.5 (18625)	22.66	21.32	20.91
	12RB-Middle (6)	1907.5 (19175)	22.47	21.58	20.87
		1880 (18900)	22.61	21.45	20.91
		1852.5 (18625)	22.50	21.41	20.86
	12RB-Low (0)	1907.5 (19175)	22.39	21.52	20.73
		1880 (18900)	22.65	21.50	20.93
		1852.5 (18625)	22.60	21.41	20.62
	25RB (0)	1907.5 (19175)	22.49	21.69	20.95
		1880 (18900)	22.65	21.63	20.93
		1852.5 (18625)	22.49	21.57	20.80
10MHz	1RB-High (49)	1905 (19150)	23.37	21.74	21.44
		1880 (18900)	23.54	21.99	21.65
		1855 (18650)	23.24	21.89	21.34
	1RB-Middle (24)	1905 (19150)	23.39	21.58	21.47
		1880 (18900)	23.61	22.29	21.70
		1855 (18650)	23.58	22.53	21.59
	1RB-Low (0)	1905 (19150)	23.63	21.65	21.71
		1880 (18900)	23.57	22.03	21.67
		1855 (18650)	23.53	22.00	21.83
	25RB-High (25)	1905 (19150)	22.34	21.59	20.63
		1880 (18900)	22.53	21.65	20.78
		1855 (18650)	22.42	21.56	20.66
	25RB-Middle (12)	1905 (19150)	22.35	21.66	20.75
		1880 (18900)	22.56	21.61	20.86
		1855 (18650)	22.45	21.49	20.80
	25RB-Low (0)	1905 (19150)	22.32	21.53	20.66
		1880 (18900)	22.57	21.56	20.86
		1855 (18650)	22.36	21.51	20.38
	50RB (0)	1905 (19150)	22.31	21.22	20.77
		1880 (18900)	22.54	21.56	20.82
		1855 (18650)	22.42	21.66	20.74

15MHz	1RB-High (74)	1902.5 (19125)	23.23	22.18	21.30
		1880 (18900)	23.65	22.22	21.76
		1857.5 (18675)	23.31	21.90	21.41
	1RB-Middle (37)	1902.5 (19125)	23.84	23.04	21.92
		1880 (18900)	23.96	22.47	19.95
		1857.5 (18675)	23.83	21.94	21.84
	1RB-Low (0)	1902.5 (19125)	23.44	22.78	21.52
		1880 (18900)	23.43	22.16	21.53
		1857.5 (18675)	23.20	21.96	21.51
	36RB-High (38)	1902.5 (19125)	22.38	21.40	20.66
		1880 (18900)	22.75	21.74	20.90
		1857.5 (18675)	22.58	21.55	20.83
	36RB-Middle (19)	1902.5 (19125)	22.44	21.50	20.84
		1880 (18900)	22.70	21.73	20.90
		1857.5 (18675)	22.58	21.77	20.94
	36RB-Low (0)	1902.5 (19125)	22.53	21.50	20.87
		1880 (18900)	22.69	21.63	20.97
		1857.5 (18675)	22.65	21.31	20.67
	75RB (0)	1902.5 (19125)	22.53	21.52	20.99
		1880 (18900)	22.69	21.66	20.97
		1857.5 (18675)	22.62	21.46	20.94
20MHz	1RB-High (99)	1900 (19100)	23.55	21.86	21.62
		1880 (18900)	23.56	21.85	21.67
		1860 (18700)	23.26	21.72	21.36
	1RB-Middle (50)	1900 (19100)	23.76	21.91	21.84
		1880 (18900)	23.48	22.00	21.57
		1860 (18700)	23.52	22.08	21.53
	1RB-Low (0)	1900 (19100)	23.46	21.59	21.54
		1880 (18900)	23.46	21.97	21.56
		1860 (18700)	23.10	21.48	21.40
	50RB-High (50)	1900 (19100)	22.43	21.54	20.72
		1880 (18900)	22.66	21.69	20.91
		1860 (18700)	22.71	21.72	20.96
	50RB-Middle (25)	1900 (19100)	22.50	21.52	20.90
		1880 (18900)	22.65	21.63	20.95
		1860 (18700)	22.53	21.65	20.89
	50RB-Low (0)	1900 (19100)	22.59	21.61	20.93
		1880 (18900)	22.66	21.54	20.95
		1860 (18700)	22.82	21.43	20.84
	100RB (0)	1900 (19100)	22.53	21.56	20.99
		1880 (18900)	22.68	21.80	20.96
		1860 (18700)	22.59	21.55	20.90

LTE B5

BANDWIDTH	Number of RBs	Frequency	QPSK	16QAM	64QAM
Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)		
	RB offset		QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	848.3 (20643)	23.50	21.80	21.64
		836.5 (20525)	23.31	22.08	21.08
		824.7 (20407)	23.53	22.28	21.19
	1RB-Middle (3)	848.3 (20643)	23.55	22.24	21.15
		836.5 (20525)	23.42	22.21	21.13
		824.7 (20407)	23.82	21.89	21.23
	1RB-Low (0)	848.3 (20643)	23.51	21.73	21.67
		836.5 (20525)	23.55	22.11	21.74
		824.7 (20407)	23.70	21.93	21.72
	3RB-High (3)	848.3 (20643)	23.57	21.93	21.85
		836.5 (20525)	23.49	21.99	21.68
		824.7 (20407)	23.66	22.12	21.97
	3RB-Middle (1)	848.3 (20643)	23.62	21.96	21.90
		836.5 (20525)	23.44	22.04	21.91
		824.7 (20407)	23.74	22.19	21.92
	3RB-Low (0)	848.3 (20643)	23.62	21.97	21.83
		836.5 (20525)	23.41	22.13	21.70
		824.7 (20407)	23.60	22.15	21.91
	6RB (0)	848.3 (20643)	22.52	21.45	20.82
		836.5 (20525)	22.52	21.49	20.69
		824.7 (20407)	22.60	21.69	20.83
3MHz	1RB-High (14)	847.5 (20635)	23.78	22.15	21.92
		836.5 (20525)	23.63	22.06	21.40
		825.5 (20415)	23.74	22.23	21.39
	1RB-Middle (7)	847.5 (20635)	23.74	22.15	21.33
		836.5 (20525)	23.77	22.46	21.48
		825.5 (20415)	23.77	22.11	21.18
	1RB-Low (0)	847.5 (20635)	23.73	21.88	21.90
		836.5 (20525)	23.68	21.80	21.87
		825.5 (20415)	23.42	22.15	21.44
	8RB-High (7)	847.5 (20635)	22.51	21.30	20.79
		836.5 (20525)	22.65	21.39	20.84
		825.5 (20415)	22.56	21.67	20.87
	8RB-Middle (4)	847.5 (20635)	22.52	21.29	20.80
		836.5 (20525)	22.63	21.49	21.10
		825.5 (20415)	22.52	21.42	20.90
	8RB-Low (0)	847.5 (20635)	22.49	21.38	20.71
		836.5 (20525)	22.48	21.55	20.78
		825.5 (20415)	22.67	21.57	20.98
	15RB (0)	847.5 (20635)	22.58	21.45	20.89
		836.5 (20525)	22.56	21.37	20.73
		825.5 (20415)	22.53	21.63	20.77

5MHz	1RB-High (24)	846.5 (20625)	23.30	21.68	21.44
		836.5 (20525)	23.44	21.96	21.21
		826.5 (20425)	23.32	21.67	21.07
	1RB-Middle (12)	846.5 (20625)	23.74	21.76	21.34
		836.5 (20525)	23.72	21.92	21.43
		826.5 (20425)	23.60	21.99	21.01
	1RB-Low (0)	846.5 (20625)	23.51	21.59	21.68
		836.5 (20525)	23.29	21.53	21.48
		826.5 (20425)	23.46	21.94	21.48
	12RB-High (13)	846.5 (20625)	22.46	21.31	20.74
		836.5 (20525)	22.50	21.29	20.69
		826.5 (20425)	22.56	21.43	20.88
	12RB-Middle (6)	846.5 (20625)	22.54	21.46	20.82
		836.5 (20525)	22.54	21.33	20.91
		826.5 (20425)	22.64	21.59	20.92
	12RB-Low (0)	846.5 (20625)	22.50	21.26	20.72
		836.5 (20525)	22.50	21.50	20.80
		826.5 (20425)	22.59	21.38	20.90
	25RB (0)	846.5 (20625)	22.53	21.60	20.83
		836.5 (20525)	22.51	21.35	20.68
		826.5 (20425)	22.60	21.57	20.83
10MHz	1RB-High (49)	844 (20600)	23.50	21.93	21.64
		836.5 (20525)	23.66	22.09	21.43
		829 (20450)	23.48	21.70	21.14
	1RB-Middle (24)	844 (20600)	23.72	21.97	21.31
		836.5 (20525)	23.54	22.14	21.25
		829 (20450)	23.90	22.29	21.31
	1RB-Low (0)	844 (20600)	23.53	21.64	21.70
		836.5 (20525)	23.29	21.97	21.48
		829 (20450)	23.61	21.91	21.63
	25RB-High (25)	844 (20600)	22.56	21.48	20.84
		836.5 (20525)	22.60	21.73	20.79
		829 (20450)	22.55	21.36	20.86
	25RB-Middle (12)	844 (20600)	22.58	21.51	20.86
		836.5 (20525)	22.52	21.57	20.99
		829 (20450)	22.59	21.50	20.98
	25RB-Low (0)	844 (20600)	22.57	21.51	20.79
		836.5 (20525)	22.53	21.67	20.83
		829 (20450)	22.58	21.50	20.89
	50RB (0)	844 (20600)	22.51	21.41	20.81
		836.5 (20525)	22.52	21.45	20.68
		829 (20450)	22.56	21.54	20.79

LTE B7

Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)		
	RB offset		QPSK	16QAM	64QAM
5MHz	1RB-High (24)	2567.5 (21425)	23.42	22.12	21.32
		2535 (21100)	23.63	22.20	21.20
		2502.5 (20775)	23.32	22.44	20.66
	1RB-Middle (12)	2567.5 (21425)	23.54	22.32	21.31
		2535 (21100)	23.70	22.68	21.06
		2502.5 (20775)	23.49	22.70	20.90
	1RB-Low (0)	2567.5 (21425)	23.32	22.08	21.36
		2535 (21100)	23.63	22.01	21.29
		2502.5 (20775)	23.21	22.03	20.67
	12RB-High (13)	2567.5 (21425)	22.47	21.05	19.84
		2535 (21100)	22.70	21.09	20.01
		2502.5 (20775)	22.51	21.10	19.99
	12RB-Middle (6)	2567.5 (21425)	22.59	21.10	19.96
		2535 (21100)	22.71	21.14	20.02
		2502.5 (20775)	22.59	21.16	20.20
	12RB-Low (0)	2567.5 (21425)	22.52	21.03	20.01
		2535 (21100)	22.64	21.13	20.07
		2502.5 (20775)	22.46	21.09	19.90
	25RB (0)	2567.5 (21425)	22.47	21.11	19.73
		2535 (21100)	22.73	21.29	20.18
		2502.5 (20775)	22.63	21.24	20.00
10MHz	1RB-High (49)	2565 (21400)	23.50	22.45	21.40
		2535 (21100)	23.78	22.46	21.35
		2505 (20800)	23.55	22.30	20.89
	1RB-Middle (24)	2565 (21400)	23.97	22.65	21.74
		2535 (21100)	23.84	22.36	21.20
		2505 (20800)	23.62	22.73	21.03
	1RB-Low (0)	2565 (21400)	23.69	22.46	21.74
		2535 (21100)	23.67	22.02	21.33
		2505 (20800)	23.52	22.50	20.98
	25RB-High (25)	2565 (21400)	22.57	21.08	19.94
		2535 (21100)	22.69	21.16	20.00
		2505 (20800)	22.56	21.17	20.05
	25RB-Middle (12)	2565 (21400)	22.66	21.17	20.02
		2535 (21100)	22.74	21.27	20.04
		2505 (20800)	22.73	21.22	20.33
	25RB-Low (0)	2565 (21400)	22.67	21.17	20.16
		2535 (21100)	22.74	21.17	20.16
		2505 (20800)	22.65	21.09	20.09
	50RB (0)	2565 (21400)	22.62	21.05	19.89
		2535 (21100)	22.71	21.17	20.15
		2505 (20800)	22.64	21.02	20.02

15MHz	1RB-High (74)	2562.5 (21375)	23.77	22.18	20.99
		2535 (21100)	23.59	22.40	21.10
		2507.5 (20825)	23.50	23.38	21.21
	1RB-Middle (37)	2562.5 (21375)	23.81	23.08	20.94
		2535 (21100)	23.75	22.48	21.29
		2507.5 (20825)	23.34	23.24	20.94
	1RB-Low (0)	2562.5 (21375)	23.51	22.55	21.16
		2535 (21100)	23.59	22.47	21.04
		2507.5 (20825)	23.59	23.26	21.08
	36RB-High (38)	2562.5 (21375)	22.65	21.08	19.96
		2535 (21100)	22.73	21.26	20.16
		2507.5 (20825)	22.60	20.95	20.10
	36RB-Middle (19)	2562.5 (21375)	22.68	21.11	20.03
		2535 (21100)	22.78	21.20	20.20
		2507.5 (20825)	22.60	21.15	20.23
	36RB-Low (0)	2562.5 (21375)	22.77	21.28	20.15
		2535 (21100)	22.73	21.31	20.23
		2507.5 (20825)	22.58	20.94	20.04
	75RB (0)	2562.5 (21375)	22.78	21.19	20.05
		2535 (21100)	22.69	21.27	20.18
		2507.5 (20825)	22.56	21.13	20.06
20MHz	1RB-High (99)	2560 (21350)	23.07	22.17	20.97
		2535 (21100)	23.69	22.36	21.26
		2510 (20850)	23.67	22.38	21.01
	1RB-Middle (50)	2560 (21350)	23.41	22.92	21.18
		2535 (21100)	23.75	22.52	21.11
		2510 (20850)	23.66	22.44	21.07
	1RB-Low (0)	2560 (21350)	23.09	22.18	21.13
		2535 (21100)	23.57	22.10	21.24
		2510 (20850)	23.60	22.42	21.06
	50RB-High (50)	2560 (21350)	22.78	21.15	19.96
		2535 (21100)	22.79	21.30	20.06
		2510 (20850)	22.67	21.23	20.15
	50RB-Middle (25)	2560 (21350)	22.70	21.40	20.06
		2535 (21100)	22.72	21.30	20.03
		2510 (20850)	22.60	21.09	20.21
	50RB-Low (0)	2560 (21350)	22.73	21.22	20.21
		2535 (21100)	22.74	21.20	20.16
		2510 (20850)	22.56	21.07	20.00
	100RB (0)	2560 (21350)	22.75	21.25	20.01
		2535 (21100)	22.74	21.15	20.19
		2510 (20850)	22.58	21.12	19.96

LTE B12

Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)		
	RB offset		QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	715.3 (23173)	23.45	22.73	20.80
		707.5 (23095)	23.72	22.36	21.03
		699.7 (23017)	23.34	22.37	20.32
	1RB-Middle (3)	715.3 (23173)	23.77	22.64	21.15
		707.5 (23095)	23.70	23.22	21.12
		699.7 (23017)	23.43	22.57	20.46
	1RB-Low (0)	715.3 (23173)	23.80	22.71	21.13
		707.5 (23095)	23.70	22.50	21.17
		699.7 (23017)	23.22	22.50	20.71
	3RB-High (3)	715.3 (23173)	23.55	22.73	19.78
		707.5 (23095)	23.68	22.29	20.16
		699.7 (23017)	23.41	22.30	19.82
	3RB-Middle (1)	715.3 (23173)	23.67	22.74	20.11
		707.5 (23095)	23.55	22.38	20.08
		699.7 (23017)	23.78	22.44	20.15
	3RB-Low (0)	715.3 (23173)	23.71	22.97	20.15
		707.5 (23095)	23.72	22.66	19.90
		699.7 (23017)	23.36	22.42	19.64
	6RB (0)	715.3 (23173)	22.58	21.64	18.84
		707.5 (23095)	22.53	21.72	18.71
		699.7 (23017)	22.53	21.32	18.65
3MHz	1RB-High (14)	714.5 (23165)	23.70	22.51	21.04
		707.5 (23095)	23.64	22.31	20.96
		700.5 (23025)	23.49	22.51	20.47
	1RB-Middle (7)	714.5 (23165)	24.07	22.96	21.45
		707.5 (23095)	23.87	22.79	21.28
		700.5 (23025)	23.62	22.64	20.65
	1RB-Low (0)	714.5 (23165)	23.73	22.43	21.07
		707.5 (23095)	23.79	22.50	21.26
		700.5 (23025)	23.66	22.68	21.15
	8RB-High (7)	714.5 (23165)	22.61	21.98	18.84
		707.5 (23095)	22.63	21.55	19.11
		700.5 (23025)	22.75	21.53	19.16
	8RB-Middle (4)	714.5 (23165)	22.68	22.07	19.12
		707.5 (23095)	22.59	21.75	19.11
		700.5 (23025)	22.70	21.56	19.08
	8RB-Low (0)	714.5 (23165)	22.65	21.98	19.10
		707.5 (23095)	22.63	21.64	18.81
		700.5 (23025)	22.76	21.52	19.04
	15RB (0)	714.5 (23165)	22.71	21.87	18.97
		707.5 (23095)	22.68	21.58	18.87
		700.5 (23025)	22.72	21.31	18.84

5MHz	1RB-High (24)	713.5 (23155)	23.40	22.07	20.74
		707.5 (23095)	23.33	22.47	20.64
		701.5 (23035)	23.50	22.06	20.48
	1RB-Middle (12)	713.5 (23155)	23.68	22.35	21.07
		707.5 (23095)	23.79	22.94	21.20
		701.5 (23035)	23.71	22.58	20.74
	1RB-Low (0)	713.5 (23155)	23.45	21.92	20.78
		707.5 (23095)	23.15	22.38	20.61
		701.5 (23035)	23.45	22.46	20.95
	12RB-High (13)	713.5 (23155)	22.53	21.52	18.76
		707.5 (23095)	22.55	21.37	19.02
		701.5 (23035)	22.67	21.46	19.09
	12RB-Middle (6)	713.5 (23155)	22.56	21.61	19.00
		707.5 (23095)	22.71	21.62	19.23
		701.5 (23035)	22.74	21.56	19.12
	12RB-Low (0)	713.5 (23155)	22.58	21.56	19.03
		707.5 (23095)	22.57	21.34	18.75
		701.5 (23035)	22.67	21.49	18.96
	25RB (0)	713.5 (23155)	22.54	21.59	18.79
		707.5 (23095)	22.67	21.57	18.85
		701.5 (23035)	22.67	21.53	18.79
10MHz	1RB-High (49)	711 (23130)	23.56	22.47	20.90
		707.5 (23095)	23.55	22.51	20.87
		704 (23060)	23.74	22.50	20.72
	1RB-Middle (24)	711 (23130)	23.70	22.33	21.09
		707.5 (23095)	23.59	22.78	21.01
		704 (23060)	24.00	22.92	21.03
	1RB-Low (0)	711 (23130)	23.52	21.94	20.85
		707.5 (23095)	23.61	22.52	21.08
		704 (23060)	23.34	22.42	20.83
	25RB-High (25)	711 (23130)	22.59	21.65	18.82
		707.5 (23095)	22.59	21.58	19.07
		704 (23060)	22.63	21.42	19.04
	25RB-Middle (12)	711 (23130)	22.64	21.84	19.08
		707.5 (23095)	22.58	21.56	19.10
		704 (23060)	22.67	21.58	19.04
	25RB-Low (0)	711 (23130)	22.57	21.82	19.02
		707.5 (23095)	22.62	21.54	18.80
		704 (23060)	22.80	21.44	19.08
	50RB (0)	711 (23130)	22.57	21.68	18.83
		707.5 (23095)	22.66	21.42	18.84
		704 (23060)	22.69	21.30	18.81

LTE B13

Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)		
	RB offset		QPSK	16QAM	64QAM
5MHz	1RB-High (24)	784.5 (23255)	23.46	21.01	21.39
		782 (23230)	23.71	21.55	21.30
		779.5 (23205)	23.75	21.41	21.35
	1RB-Middle (12)	784.5 (23255)	23.94	21.70	21.26
		782 (23230)	23.80	21.51	21.35
		779.5 (23205)	23.98	21.56	21.40
	1RB-Low (0)	784.5 (23255)	23.49	20.72	21.41
		782 (23230)	23.59	20.93	21.47
		779.5 (23205)	23.67	20.84	21.32
	12RB-High (13)	784.5 (23255)	22.08	20.63	19.97
		782 (23230)	22.13	20.47	19.77
		779.5 (23205)	22.13	20.65	19.96
	12RB-Middle (6)	784.5 (23255)	22.22	20.70	19.98
		782 (23230)	22.18	20.61	19.71
		779.5 (23205)	22.20	20.69	20.11
	12RB-Low (0)	784.5 (23255)	22.06	20.54	19.75
		782 (23230)	22.12	20.38	20.19
		779.5 (23205)	22.27	20.75	20.17
	25RB (0)	784.5 (23255)	22.04	20.77	20.08
		782 (23230)	22.10	20.55	19.63
		779.5 (23205)	22.12	20.49	19.96
10MHz	1RB-High (49)	782 (23230)	23.55	21.39	21.20
	1RB-Middle (24)	782 (23230)	23.78	21.85	21.25
	1RB-Low (0)	782 (23230)	23.60	21.36	21.32
	25RB-High (25)	782 (23230)	21.96	20.68	20.04
	25RB-Middle (12)	782 (23230)	22.03	20.44	20.03
	25RB-Low (0)	782 (23230)	22.03	20.51	20.02
	50RB (0)	782 (23230)	22.05	20.45	19.82

LTE B41

Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)		
	RB offset		QPSK	16QAM	64QAM
5MHz	1RB-High (24)	2652.5(41215)	22.67	21.41	20.31
		2613.5(40825)	22.71	21.77	20.37
		2575.5(40445)	22.61	21.51	20.48
		2537.5(40065)	22.59	21.39	20.22
	1RB-Middle (12)	2652.5(41215)	22.90	21.66	20.56
		2613.5(40825)	22.64	21.40	20.32
		2575.5(40445)	22.52	21.89	20.69
		2537.5(40065)	22.81	21.59	20.43
	1RB-Low (0)	2652.5(41215)	22.59	21.42	20.26
		2613.5(40825)	22.73	21.77	20.38
		2575.5(40445)	22.55	21.49	20.65
		2537.5(40065)	22.59	21.37	20.44
	12RB-High (13)	2652.5(41215)	21.87	20.80	19.97
		2613.5(40825)	21.71	20.94	19.69
		2575.5(40445)	21.62	20.47	19.64
		2537.5(40065)	21.69	20.80	19.78
	12RB-Middle (6)	2652.5(41215)	21.78	20.84	19.96
		2613.5(40825)	21.75	20.96	19.83
		2575.5(40445)	21.61	20.54	19.92
		2537.5(40065)	21.97	20.87	19.93
	12RB-Low (0)	2652.5(41215)	21.67	20.78	19.78
		2613.5(40825)	21.83	20.90	19.83
		2575.5(40445)	21.53	20.51	19.84
		2537.5(40065)	21.83	20.81	19.99
	25RB (0)	2652.5(41215)	21.70	20.68	19.71
		2613.5(40825)	21.72	21.13	19.91
		2575.5(40445)	21.60	20.59	19.74
		2537.5(40065)	21.76	20.90	19.81
10MHz	1RB-High (49)	2650(41190)	22.59	21.99	20.23
		2612(40810)	22.79	21.50	20.45
		2576(40450)	22.82	21.48	20.69
		2540(40099)	22.59	21.29	20.22
	1RB-Middle (24)	2650(41190)	22.95	21.96	20.61
		2612(40810)	23.13	21.56	20.81
		2576(40450)	22.74	21.37	20.91
		2540(40099)	22.88	22.40	20.50
	1RB-Low (0)	2650(41190)	22.52	21.92	20.19
		2612(40810)	22.55	21.50	20.20
		2576(40450)	22.61	21.38	20.71
		2540(40099)	22.57	22.37	20.43
	25RB-High (25)	2650(41190)	21.59	20.74	19.70
		2612(40810)	21.57	20.85	19.56
		2576(40450)	21.46	20.62	19.48
		2540(40099)	21.52	20.75	19.61
	25RB-Middle (12)	2650(41190)	21.69	20.74	19.87
		2612(40810)	21.58	20.95	19.66
		2576(40450)	21.60	20.66	19.91
		2540(40099)	21.64	20.75	19.71
	25RB-Low (0)	2650(41190)	21.66	20.92	19.77
		2612(40810)	21.59	20.96	19.59
		2576(40450)	21.60	20.71	19.91
		2540(40099)	21.57	20.71	19.72
	50RB (0)	2650(41190)	21.76	20.91	19.77
		2612(40810)	21.60	20.81	19.79
		2576(40450)	21.65	20.73	19.80
		2540(40099)	21.64	20.84	19.69

15MHz	1RB-High (74)	2647.5(41165)	22.81	21.51	20.45
		2612.5(40815)	22.85	21.39	20.51
		2577.5(40465)	22.41	21.45	20.28
		2542.5(40115)	22.76	21.44	20.39
	1RB-Middle (37)	2647.5(41165)	22.99	21.54	20.65
		2612.5(40815)	22.89	21.82	20.58
		2577.5(40465)	22.68	21.64	20.85
		2542.5(40115)	22.74	21.38	20.36
	1RB-Low (0)	2647.5(41165)	22.79	21.55	20.46
		2612.5(40815)	22.85	21.45	20.50
		2577.5(40465)	22.62	21.52	20.72
		2542.5(40115)	22.87	21.58	20.73
	36RB-High (38)	2647.5(41165)	21.66	20.72	19.76
		2612.5(40815)	21.72	21.06	19.70
		2577.5(40465)	21.66	20.82	19.68
		2542.5(40115)	21.59	20.65	19.69
	36RB-Middle (19)	2647.5(41165)	21.67	20.81	19.85
		2612.5(40815)	21.68	20.97	19.76
		2577.5(40465)	21.60	20.77	19.91
		2542.5(40115)	21.76	20.68	19.83
	36RB-Low (0)	2647.5(41165)	21.66	20.72	19.77
		2612.5(40815)	21.69	20.73	19.69
		2577.5(40465)	21.55	20.78	19.86
		2542.5(40115)	21.68	20.68	19.84
	75RB (0)	2647.5(41165)	21.65	20.77	19.65
		2612.5(40815)	21.67	20.74	19.85
		2577.5(40465)	21.52	20.68	19.67
		2542.5(40115)	21.84	20.90	19.89
20MHz	1RB-High (99)	2645(41140)	22.80	21.26	20.54
		2611(40800)	22.57	21.63	20.23
		2578(40470)	22.48	21.05	20.15
		2545(40140)	22.81	21.19	20.44
	1RB-Middle (50)	2645(41140)	22.90	21.43	20.56
		2611(40800)	22.72	21.08	20.40
		2578(40470)	22.56	21.20	20.53
		2545(40140)	22.86	21.19	20.48
	1RB-Low (0)	2645(41140)	22.53	21.23	20.20
		2611(40800)	22.56	21.59	20.21
		2578(40470)	22.41	21.07	20.31
		2545(40140)	22.84	21.30	20.69
	50RB-High (50)	2645(41140)	21.68	20.93	19.78
		2611(40800)	21.71	20.79	19.69
		2578(40470)	21.73	20.74	19.75
		2545(40140)	21.66	20.73	19.75
	50RB-Middle (25)	2645(41140)	21.65	20.93	19.83
		2611(40800)	21.74	20.74	19.75
		2578(40470)	21.55	20.66	19.86
		2545(40140)	21.68	20.67	19.75
	50RB-Low (0)	2645(41140)	21.62	20.76	19.73
		2611(40800)	21.65	20.78	19.65
		2578(40470)	21.53	20.58	19.84
		2545(40140)	21.67	20.74	19.83
	100RB (0)	2645(41140)	21.64	20.80	19.65
		2611(40800)	21.69	20.85	19.88
		2578(40470)	21.55	20.52	19.69
		2545(40140)	21.77	20.70	19.82

LTE B66

Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)		
	RB offset		QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	1779.3 (132665)	22.88	21.76	21.36
		1745 (132322)	23.04	22.01	22.18
		1710.7 (131979)	22.82	22.01	21.14
	1RB-Middle (3)	1779.3 (132665)	22.96	21.75	21.20
		1745 (132322)	23.14	22.06	21.55
		1710.7 (131979)	22.88	22.06	21.03
	1RB-Low (0)	1779.3 (132665)	22.98	21.77	21.16
		1745 (132322)	23.19	22.00	21.95
		1710.7 (131979)	23.00	22.10	21.96
	3RB-High (3)	1779.3 (132665)	22.99	21.54	21.98
		1745 (132322)	23.12	21.99	21.99
		1710.7 (131979)	22.88	21.93	21.88
	3RB-Middle (1)	1779.3 (132665)	22.99	21.59	21.98
		1745 (132322)	23.23	21.97	21.94
		1710.7 (131979)	22.91	21.94	21.86
	3RB-Low (0)	1779.3 (132665)	22.93	21.62	21.99
		1745 (132322)	23.18	21.96	22.19
		1710.7 (131979)	22.98	21.91	22.06
	6RB (0)	1779.3 (132665)	21.88	21.55	20.99
		1745 (132322)	22.11	21.28	20.80
		1710.7 (131979)	21.82	21.11	20.76
3MHz	1RB-High (14)	1778.5 (132657)	22.75	21.59	21.23
		1745 (132322)	23.29	21.83	21.93
		1711.5 (131987)	22.88	21.62	21.20
	1RB-Middle (7)	1778.5 (132657)	23.05	21.92	21.29
		1745 (132322)	23.37	22.01	21.58
		1711.5 (131987)	23.08	21.94	21.23
	1RB-Low (0)	1778.5 (132657)	22.90	21.63	21.08
		1745 (132322)	23.17	21.87	21.83
		1711.5 (131987)	22.74	21.70	21.70
	8RB-High (7)	1778.5 (132657)	21.72	20.84	20.91
		1745 (132322)	22.02	21.07	20.99
		1711.5 (131987)	21.84	20.61	20.84
	8RB-Middle (4)	1778.5 (132657)	21.74	20.80	20.83
		1745 (132322)	22.09	21.17	20.91
		1711.5 (131987)	21.79	21.08	20.74
	8RB-Low (0)	1778.5 (132657)	21.74	20.78	20.80
		1745 (132322)	22.07	21.09	20.98
		1711.5 (131987)	21.76	21.14	20.84
	15RB (0)	1778.5 (132657)	21.79	21.08	20.90
		1745 (132322)	22.08	21.20	20.77
		1711.5 (131987)	21.87	20.72	20.81

5MHz	1RB-High (24)	1777.5 (132647)	22.83	21.63	21.31
		1745 (132322)	23.17	21.70	21.92
		1712.5 (131997)	22.74	21.41	21.06
	1RB-Middle (12)	1777.5 (132647)	23.39	21.77	21.63
		1745 (132322)	23.61	21.94	21.82
		1712.5 (131997)	23.12	21.76	21.27
	1RB-Low (0)	1777.5 (132647)	22.82	21.42	21.50
		1745 (132322)	23.19	21.45	21.85
		1712.5 (131997)	22.71	21.31	21.67
	12RB-High (13)	1777.5 (132647)	21.84	20.83	20.93
		1745 (132322)	22.11	21.15	20.98
		1712.5 (131997)	21.86	20.81	20.86
	12RB-Middle (6)	1777.5 (132647)	21.82	21.08	20.91
		1745 (132322)	22.13	21.30	20.98
		1712.5 (131997)	21.87	20.88	20.82
	12RB-Low (0)	1777.5 (132647)	21.89	20.88	20.95
		1745 (132322)	22.00	21.25	20.91
		1712.5 (131997)	21.88	20.83	20.96
	25RB (0)	1777.5 (132647)	21.95	20.88	20.96
		1745 (132322)	22.15	21.29	20.84
		1712.5 (131997)	21.92	21.07	20.86
10MHz	1RB-High (49)	1775 (132622)	22.95	21.93	21.43
		1745 (132322)	23.11	21.88	21.95
		1715 (132022)	22.82	21.77	21.54
	1RB-Middle (24)	1775 (132622)	23.18	22.24	21.62
		1745 (132322)	23.11	22.18	21.89
		1715 (132022)	23.00	21.90	21.61
	1RB-Low (0)	1775 (132622)	22.95	21.63	21.63
		1745 (132322)	23.14	21.92	21.90
		1715 (132022)	22.81	21.90	21.77
	25RB-High (25)	1775 (132622)	21.78	20.93	20.97
		1745 (132322)	22.10	21.22	20.97
		1715 (132022)	21.93	21.11	20.93
	25RB-Middle (12)	1775 (132622)	21.82	20.98	20.91
		1745 (132322)	22.13	21.47	20.98
		1715 (132022)	22.02	21.20	20.97
	25RB-Low (0)	1775 (132622)	21.89	20.95	20.95
		1745 (132322)	22.05	21.25	20.96
		1715 (132022)	21.90	20.98	20.98
	50RB (0)	1775 (132622)	21.84	20.70	20.95
		1745 (132322)	22.18	21.08	20.87
		1715 (132022)	21.93	20.94	20.87

15MHz	1RB-High (74)	1772.5 (132597)	22.95	21.93	21.43
		1745 (132322)	23.07	21.70	21.91
		1717.5 (132047)	22.84	22.16	21.16
	1RB-Middle (37)	1772.5 (132597)	23.18	22.34	21.42
		1745 (132322)	23.19	21.99	21.40
		1717.5 (132047)	22.83	22.40	20.98
	1RB-Low (0)	1772.5 (132597)	23.31	21.80	21.49
		1745 (132322)	23.19	21.90	21.85
		1717.5 (132047)	22.75	22.28	21.71
	36RB-High (38)	1772.5 (132597)	21.75	20.85	20.94
		1745 (132322)	22.08	21.24	20.95
		1717.5 (132047)	21.77	21.06	20.77
	36RB-Middle (19)	1772.5 (132597)	21.79	20.87	20.88
		1745 (132322)	22.07	21.17	20.92
		1717.5 (132047)	21.88	21.19	20.83
	36RB-Low (0)	1772.5 (132597)	21.80	20.71	20.86
		1745 (132322)	21.92	21.10	20.93
		1717.5 (132047)	21.81	20.92	20.89
	75RB (0)	1772.5 (132597)	21.79	20.91	20.90
		1745 (132322)	21.97	21.27	20.66
		1717.5 (132047)	21.92	20.95	20.86
20MHz	1RB-High (99)	1770 (132572)	22.87	21.55	21.35
		1745 (132322)	22.68	21.75	21.62
		1720 (132072)	22.77	21.83	21.19
	1RB-Middle (50)	1770 (132572)	22.97	21.68	21.21
		1745 (132322)	23.23	21.90	21.44
		1720 (132072)	22.97	21.90	21.12
	1RB-Low (0)	1770 (132572)	22.74	21.34	21.12
		1745 (132322)	22.74	21.82	21.40
		1720 (132072)	22.35	21.21	21.31
	50RB-High (50)	1770 (132572)	21.66	20.85	20.85
		1745 (132322)	21.97	21.04	20.94
		1720 (132072)	21.95	21.10	20.95
	50RB-Middle (25)	1770 (132572)	21.71	20.93	20.80
		1745 (132322)	22.02	21.12	20.97
		1720 (132072)	21.90	21.04	20.85
	50RB-Low (0)	1770 (132572)	21.75	20.88	20.81
		1745 (132322)	22.04	21.12	20.95
		1720 (132072)	21.92	21.11	20.90
	100RB (0)	1770 (132572)	21.73	20.84	20.84
		1745 (132322)	22.04	21.16	20.73
		1720 (132072)	21.87	20.94	20.81

Table 11.3-2: The conducted Power for LTE– Low power

LTE B2

Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)		
	RB offset		QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	1909.3 (19193)	19.88	18.09	17.67
		1880 (18900)	19.84	18.05	17.73
		1850.7 (18607)	19.87	18.04	17.88
	1RB-Middle (3)	1909.3 (19193)	19.98	18.08	17.71
		1880 (18900)	19.97	18.13	17.72
		1850.7 (18607)	20.01	18.03	17.82
	1RB-Low (0)	1909.3 (19193)	19.90	18.05	17.65
		1880 (18900)	20.03	18.29	17.84
		1850.7 (18607)	19.82	18.03	17.92
	3RB-High (3)	1909.3 (19193)	19.99	18.04	17.44
		1880 (18900)	19.88	18.01	17.38
		1850.7 (18607)	19.99	18.06	17.47
	3RB-Middle (1)	1909.3 (19193)	20.01	18.05	17.51
		1880 (18900)	20.11	17.96	17.49
		1850.7 (18607)	20.03	17.83	17.43
	3RB-Low (0)	1909.3 (19193)	19.95	17.87	17.43
		1880 (18900)	19.97	17.92	17.42
		1850.7 (18607)	19.97	17.79	17.42
	6RB (0)	1909.3 (19193)	19.43	18.01	16.76
		1880 (18900)	19.47	18.01	16.69
		1850.7 (18607)	19.45	17.89	16.74
3MHz	1RB-High (14)	1908.5 (19185)	20.01	17.86	17.63
		1880 (18900)	19.89	17.70	17.54
		1851.5 (18615)	19.94	17.79	17.66
	1RB-Middle (7)	1908.5 (19185)	20.17	17.80	17.65
		1880 (18900)	20.02	18.10	17.57
		1851.5 (18615)	20.07	17.84	17.65
	1RB-Low (0)	1908.5 (19185)	20.15	17.73	17.54
		1880 (18900)	20.03	17.56	17.65
		1851.5 (18615)	20.07	17.65	17.63
	8RB-High (7)	1908.5 (19185)	19.41	18.01	16.93
		1880 (18900)	19.45	17.74	16.75
		1851.5 (18615)	19.48	17.76	16.82
	8RB-Middle (4)	1908.5 (19185)	19.49	18.19	16.88
		1880 (18900)	19.42	17.84	16.73
		1851.5 (18615)	19.45	17.98	16.82
	8RB-Low (0)	1908.5 (19185)	19.31	18.04	16.87
		1880 (18900)	19.50	17.99	16.78
		1851.5 (18615)	19.48	17.92	16.89
	15RB (0)	1908.5 (19185)	19.48	18.25	16.86
		1880 (18900)	19.47	18.01	16.82
		1851.5 (18615)	19.49	17.94	16.81

5MHz	1RB-High (24)	1907.5 (19175)	19.79	17.75	17.71
		1880 (18900)	19.62	17.87	17.79
		1852.5 (18625)	19.89	17.76	17.71
	1RB-Middle (12)	1907.5 (19175)	20.18	17.89	17.73
		1880 (18900)	20.01	17.98	17.71
		1852.5 (18625)	20.14	17.80	17.65
	1RB-Low (0)	1907.5 (19175)	19.97	17.97	17.68
		1880 (18900)	19.76	17.89	17.74
		1852.5 (18625)	20.01	17.84	17.72
	12RB-High (13)	1907.5 (19175)	19.42	17.81	16.80
		1880 (18900)	19.40	17.84	16.75
		1852.5 (18625)	19.42	17.91	16.80
	12RB-Middle (6)	1907.5 (19175)	19.44	17.81	16.78
		1880 (18900)	19.49	17.93	16.77
		1852.5 (18625)	19.46	17.90	16.82
	12RB-Low (0)	1907.5 (19175)	19.49	17.86	16.85
		1880 (18900)	19.45	17.72	16.78
		1852.5 (18625)	19.46	17.93	16.84
	25RB (0)	1907.5 (19175)	19.46	17.92	16.97
		1880 (18900)	19.45	17.82	16.83
		1852.5 (18625)	19.49	17.97	16.96
10MHz	1RB-High (49)	1905 (19150)	19.84	17.87	17.67
		1880 (18900)	19.86	17.90	17.76
		1855 (18650)	20.00	17.86	17.83
	1RB-Middle (24)	1905 (19150)	20.06	18.09	17.63
		1880 (18900)	20.12	17.85	17.66
		1855 (18650)	20.08	18.05	17.80
	1RB-Low (0)	1905 (19150)	19.87	17.68	17.61
		1880 (18900)	19.92	17.81	17.69
		1855 (18650)	20.02	17.80	17.91
	25RB-High (25)	1905 (19150)	19.44	17.94	17.11
		1880 (18900)	19.40	17.96	16.92
		1855 (18650)	19.47	18.02	17.06
	25RB-Middle (12)	1905 (19150)	19.50	18.09	17.12
		1880 (18900)	19.47	18.12	16.94
		1855 (18650)	19.49	18.10	17.15
	25RB-Low (0)	1905 (19150)	19.45	17.89	16.90
		1880 (18900)	19.35	18.11	16.96
		1855 (18650)	19.47	17.91	16.84
	50RB (0)	1905 (19150)	19.47	18.00	16.90
		1880 (18900)	19.43	17.97	16.93
		1855 (18650)	19.43	17.92	16.98

15MHz	1RB-High (74)	1902.5 (19125)	19.72	18.18	17.74
		1880 (18900)	19.91	17.94	17.58
		1857.5 (18675)	19.71	17.93	17.84
	1RB-Middle (37)	1902.5 (19125)	19.90	18.08	17.94
		1880 (18900)	20.01	18.02	17.99
		1857.5 (18675)	19.86	17.91	17.81
	1RB-Low (0)	1902.5 (19125)	19.79	18.02	17.73
		1880 (18900)	20.07	17.95	17.62
		1857.5 (18675)	19.88	17.93	17.79
	36RB-High (38)	1902.5 (19125)	19.48	17.89	16.91
		1880 (18900)	19.37	17.83	16.94
		1857.5 (18675)	19.49	17.92	16.91
	36RB-Middle (19)	1902.5 (19125)	19.47	17.87	16.96
		1880 (18900)	19.42	17.91	16.96
		1857.5 (18675)	19.49	18.01	16.97
	36RB-Low (0)	1902.5 (19125)	19.41	17.84	16.92
		1880 (18900)	19.42	17.95	16.81
		1857.5 (18675)	19.44	17.91	16.97
	75RB (0)	1902.5 (19125)	19.48	17.85	16.82
		1880 (18900)	19.35	17.95	16.90
		1857.5 (18675)	19.48	17.91	16.85
20MHz	1RB-High (99)	1900 (19100)	19.76	17.87	17.56
		1880 (18900)	19.77	17.85	17.35
		1860 (18700)	19.79	17.80	17.50
	1RB-Middle (50)	1900 (19100)	20.19	17.84	17.54
		1880 (18900)	20.01	17.70	17.55
		1860 (18700)	19.92	17.88	17.63
	1RB-Low (0)	1900 (19100)	19.85	17.85	17.50
		1880 (18900)	19.78	17.97	17.59
		1860 (18700)	19.69	17.83	17.58
	50RB-High (50)	1900 (19100)	19.43	17.96	16.96
		1880 (18900)	19.36	17.91	16.84
		1860 (18700)	19.49	17.92	16.89
	50RB-Middle (25)	1900 (19100)	19.45	17.99	16.92
		1880 (18900)	19.40	17.85	16.96
		1860 (18700)	19.52	17.95	16.88
	50RB-Low (0)	1900 (19100)	19.45	17.81	16.89
		1880 (18900)	19.37	17.94	16.88
		1860 (18700)	19.49	17.81	16.97
	100RB (0)	1900 (19100)	19.43	17.90	16.87
		1880 (18900)	19.38	17.97	16.78
		1860 (18700)	19.46	17.88	16.92

LTE B7

Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)		
	RB offset		QPSK	16QAM	64QAM
5MHz	1RB-High (24)	2567.5 (21425)	20.07	18.09	18.02
		2535 (21100)	20.27	18.39	18.17
		2502.5 (20775)	20.32	18.28	18.42
	1RB-Middle (12)	2567.5 (21425)	20.48	18.03	18.21
		2535 (21100)	20.45	18.19	18.37
		2502.5 (20775)	20.49	18.35	18.43
	1RB-Low (0)	2567.5 (21425)	20.19	18.04	18.27
		2535 (21100)	20.38	18.09	18.36
		2502.5 (20775)	20.37	18.05	18.42
	12RB-High (13)	2567.5 (21425)	19.76	18.39	17.53
		2535 (21100)	19.94	18.30	18.05
		2502.5 (20775)	20.02	18.39	17.98
	12RB-Middle (6)	2567.5 (21425)	19.79	18.40	18.08
		2535 (21100)	19.88	18.43	18.04
		2502.5 (20775)	20.05	18.34	18.12
	12RB-Low (0)	2567.5 (21425)	19.73	18.38	18.13
		2535 (21100)	19.85	18.31	18.01
		2502.5 (20775)	20.14	18.48	18.22
	25RB (0)	2567.5 (21425)	19.72	18.17	17.96
		2535 (21100)	19.89	18.38	17.91
		2502.5 (20775)	19.94	18.42	17.94
10MHz	1RB-High (49)	2565 (21400)	20.44	18.05	18.32
		2535 (21100)	20.41	18.36	18.54
		2505 (20800)	20.01	18.21	18.36
	1RB-Middle (24)	2565 (21400)	20.30	18.33	18.35
		2535 (21100)	20.21	18.55	18.41
		2505 (20800)	20.33	18.79	18.54
	1RB-Low (0)	2565 (21400)	19.41	18.14	18.36
		2535 (21100)	19.47	18.40	18.67
		2505 (20800)	19.73	18.37	18.65
	25RB-High (25)	2565 (21400)	19.83	18.39	17.70
		2535 (21100)	19.79	18.65	17.97
		2505 (20800)	19.90	18.38	19.95
	25RB-Middle (12)	2565 (21400)	19.85	18.65	18.06
		2535 (21100)	19.79	18.64	18.17
		2505 (20800)	19.96	18.60	18.41
	25RB-Low (0)	2565 (21400)	19.84	18.40	18.04
		2535 (21100)	19.91	18.37	18.01
		2505 (20800)	19.96	18.52	18.32
	50RB (0)	2565 (21400)	19.87	18.34	17.91
		2535 (21100)	19.90	18.46	17.94
		2505 (20800)	19.97	18.61	17.98

15MHz	1RB-High (74)	2562.5 (21375)	20.36	18.25	18.36
		2535 (21100)	20.47	18.27	18.38
		2507.5 (20825)	20.26	18.66	18.38
	1RB-Middle (37)	2562.5 (21375)	20.72	18.61	18.26
		2535 (21100)	20.35	18.21	18.42
		2507.5 (20825)	20.82	18.62	18.36
	1RB-Low (0)	2562.5 (21375)	20.52	18.26	18.42
		2535 (21100)	20.30	18.01	18.44
		2507.5 (20825)	20.44	18.49	18.53
	36RB-High (38)	2562.5 (21375)	19.89	18.32	17.83
		2535 (21100)	19.92	18.37	17.93
		2507.5 (20825)	19.90	18.23	17.93
	36RB-Middle (19)	2562.5 (21375)	19.83	18.44	17.97
		2535 (21100)	19.88	18.59	17.99
		2507.5 (20825)	19.88	18.34	17.92
	36RB-Low (0)	2562.5 (21375)	19.89	18.35	17.90
		2535 (21100)	19.89	18.44	17.91
		2507.5 (20825)	19.97	18.35	17.87
	75RB (0)	2562.5 (21375)	19.82	18.36	17.84
		2535 (21100)	19.85	18.28	17.88
		2507.5 (20825)	19.94	18.45	17.88
20MHz	1RB-High (99)	2560 (21350)	20.26	18.27	18.07
		2535 (21100)	20.33	18.17	18.15
		2510 (20850)	20.27	18.09	18.20
	1RB-Middle (50)	2560 (21350)	20.84	18.46	18.27
		2535 (21100)	20.55	18.24	18.25
		2510 (20850)	20.53	18.54	18.37
	1RB-Low (0)	2560 (21350)	20.37	18.06	18.27
		2535 (21100)	20.21	18.04	18.19
		2510 (20850)	20.13	18.08	18.46
	50RB-High (50)	2560 (21350)	19.80	18.46	17.71
		2535 (21100)	19.90	18.31	17.86
		2510 (20850)	19.97	18.56	17.78
	50RB-Middle (25)	2560 (21350)	19.87	18.59	17.78
		2535 (21100)	19.91	18.32	17.93
		2510 (20850)	19.88	18.57	17.92
	50RB-Low (0)	2560 (21350)	19.85	18.51	17.79
		2535 (21100)	19.90	18.33	17.94
		2510 (20850)	19.96	18.58	17.90
	100RB (0)	2560 (21350)	19.85	18.49	17.80
		2535 (21100)	19.84	18.38	17.80
		2510 (20850)	19.90	18.32	17.83

LTE B66

Bandwidth (MHz)	RB allocation	Frequency (MHz)	Actual output power (dBm)		
	RB offset		QPSK	16QAM	64QAM
1.4MHz	1RB-High (5)	1779.3 (132665)	19.79	18.47	18.10
		1745 (132322)	20.01	18.42	18.34
		1710.7 (131979)	20.06	18.22	18.28
	1RB-Middle (3)	1779.3 (132665)	19.97	18.33	18.18
		1745 (132322)	20.17	18.38	18.16
		1710.7 (131979)	20.18	18.18	18.22
	1RB-Low (0)	1779.3 (132665)	20.03	18.26	18.11
		1745 (132322)	20.34	18.44	18.35
		1710.7 (131979)	20.11	18.33	18.23
	3RB-High (3)	1779.3 (132665)	20.00	18.49	18.36
		1745 (132322)	20.14	18.35	18.43
		1710.7 (131979)	20.06	18.25	17.87
	3RB-Middle (1)	1779.3 (132665)	20.06	18.26	18.29
		1745 (132322)	20.20	18.50	18.41
		1710.7 (131979)	20.02	18.30	17.95
	3RB-Low (0)	1779.3 (132665)	19.74	18.48	18.43
		1745 (132322)	20.15	18.80	18.45
		1710.7 (131979)	20.09	18.47	17.96
	6RB (0)	1779.3 (132665)	19.53	18.64	17.03
		1745 (132322)	19.66	18.77	17.27
		1710.7 (131979)	19.56	18.58	17.01
3MHz	1RB-High (14)	1778.5 (132657)	19.90	18.38	17.93
		1745 (132322)	19.92	18.52	18.24
		1711.5 (131987)	20.13	18.24	18.01
	1RB-Middle (7)	1778.5 (132657)	20.00	18.37	18.11
		1745 (132322)	20.14	18.53	18.26
		1711.5 (131987)	20.19	18.60	18.16
	1RB-Low (0)	1778.5 (132657)	19.88	18.15	18.03
		1745 (132322)	20.09	18.42	18.41
		1711.5 (131987)	19.80	18.33	18.19
	8RB-High (7)	1778.5 (132657)	19.59	18.20	17.05
		1745 (132322)	19.64	18.57	17.23
		1711.5 (131987)	19.53	18.38	17.05
	8RB-Middle (4)	1778.5 (132657)	19.54	18.43	17.17
		1745 (132322)	19.74	18.70	17.31
		1711.5 (131987)	19.60	18.60	17.00
	8RB-Low (0)	1778.5 (132657)	19.56	18.40	17.04
		1745 (132322)	19.71	18.71	17.21
		1711.5 (131987)	19.58	18.55	17.01
	15RB (0)	1778.5 (132657)	19.57	18.40	17.11
		1745 (132322)	19.77	18.70	17.32
		1711.5 (131987)	19.64	18.47	17.09

5MHz	1RB-High (24)	1777.5 (132647)	19.84	18.09	17.98
		1745 (132322)	20.06	18.19	18.05
		1712.5 (131997)	19.88	18.07	17.90
	1RB-Middle (12)	1777.5 (132647)	20.01	18.09	18.04
		1745 (132322)	20.18	18.03	18.37
		1712.5 (131997)	20.24	18.08	18.03
	1RB-Low (0)	1777.5 (132647)	19.84	18.01	17.91
		1745 (132322)	20.09	18.09	18.04
		1712.5 (131997)	19.83	18.02	17.94
	12RB-High (13)	1777.5 (132647)	19.39	18.51	17.19
		1745 (132322)	19.69	18.45	17.09
		1712.5 (131997)	19.54	18.35	16.85
	12RB-Middle (6)	1777.5 (132647)	19.49	18.46	17.14
		1745 (132322)	19.76	18.51	17.15
		1712.5 (131997)	19.52	18.39	16.95
	12RB-Low (0)	1777.5 (132647)	19.53	18.21	17.02
		1745 (132322)	19.70	18.43	17.19
		1712.5 (131997)	19.54	18.42	17.01
	25RB (0)	1777.5 (132647)	19.55	18.44	17.13
		1745 (132322)	19.67	18.64	17.20
		1712.5 (131997)	19.56	18.51	17.04
10MHz	1RB-High (49)	1775 (132622)	20.06	18.22	18.17
		1745 (132322)	20.39	18.37	18.31
		1715 (132022)	20.11	18.21	18.11
	1RB-Middle (24)	1775 (132622)	20.09	18.74	18.26
		1745 (132322)	20.37	18.76	18.36
		1715 (132022)	20.23	18.35	18.04
	1RB-Low (0)	1775 (132622)	20.02	18.15	18.14
		1745 (132322)	20.14	18.50	18.42
		1715 (132022)	20.07	18.11	17.99
	25RB-High (25)	1775 (132622)	19.54	18.54	16.99
		1745 (132322)	19.62	18.61	17.25
		1715 (132022)	19.66	18.54	16.93
	25RB-Middle (12)	1775 (132622)	19.59	18.45	17.00
		1745 (132322)	19.73	18.77	17.63
		1715 (132022)	19.52	18.75	16.81
	25RB-Low (0)	1775 (132622)	19.53	18.39	17.04
		1745 (132322)	19.77	18.81	17.34
		1715 (132022)	19.59	18.78	17.04
	50RB (0)	1775 (132622)	19.52	18.34	17.11
		1745 (132322)	19.64	18.60	17.24
		1715 (132022)	19.53	18.53	17.03

15MHz	1RB-High (74)	1772.5 (132597)	20.04	18.32	18.23
		1745 (132322)	19.93	18.40	18.47
		1717.5 (132047)	19.80	18.70	18.36
	1RB-Middle (37)	1772.5 (132597)	19.99	18.71	18.17
		1745 (132322)	20.08	18.56	18.48
		1717.5 (132047)	19.94	18.89	18.34
	1RB-Low (0)	1772.5 (132597)	20.19	18.12	18.20
		1745 (132322)	19.95	18.14	18.43
		1717.5 (132047)	19.86	18.51	18.31
	36RB-High (38)	1772.5 (132597)	19.61	18.42	17.16
		1745 (132322)	19.60	18.54	17.41
		1717.5 (132047)	19.66	18.53	17.29
	36RB-Middle (19)	1772.5 (132597)	19.52	18.29	17.20
		1745 (132322)	19.60	18.62	17.37
		1717.5 (132047)	19.67	18.54	17.41
	36RB-Low (0)	1772.5 (132597)	19.59	18.36	17.14
		1745 (132322)	19.78	18.71	17.54
		1717.5 (132047)	19.54	18.36	17.29
	75RB (0)	1772.5 (132597)	19.59	18.28	17.03
		1745 (132322)	19.67	18.60	17.32
		1717.5 (132047)	19.60	18.56	17.32
20MHz	1RB-High (99)	1770 (132572)	19.82	18.58	18.06
		1745 (132322)	19.76	18.22	18.23
		1720 (132072)	19.89	18.22	18.44
	1RB-Middle (50)	1770 (132572)	20.04	18.02	18.29
		1745 (132322)	20.16	18.34	18.42
		1720 (132072)	20.05	18.36	18.46
	1RB-Low (0)	1770 (132572)	19.89	18.07	18.12
		1745 (132322)	19.78	18.36	18.42
		1720 (132072)	19.77	18.06	18.32
	50RB-High (50)	1770 (132572)	19.51	18.23	17.15
		1745 (132322)	19.50	18.39	17.35
		1720 (132072)	19.51	18.49	17.44
	50RB-Middle (25)	1770 (132572)	19.54	18.40	17.28
		1745 (132322)	19.53	18.51	17.38
		1720 (132072)	19.60	18.63	17.36
	50RB-Low (0)	1770 (132572)	19.63	18.23	17.26
		1745 (132322)	19.92	18.61	17.51
		1720 (132072)	19.64	18.39	17.16
	100RB (0)	1770 (132572)	19.55	18.32	17.02
		1745 (132322)	19.56	18.48	17.44
		1720 (132072)	19.54	18.47	17.35

11.4 Wi-Fi and BT Measurement result

The maximum output power of BT is 9.82dBm.

The maximum tune up of BT is 10dBm.

The average conducted power for Wi-Fi is as following:

Normal power

802.11b (dBm)

Channel\data	1Mbps	2Mbps	5.5Mbps	11Mbps
11(2462MHz)	18.51	18.42	18.46	18.45
6(2437(MHz)	17.58	/	/	/
1(2412MHz)	17.42	/	/	/
tuneup	19.00	19.00	19.00	19.00

802.11g (dBm)

Channel\data	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
11(2462MHz)	15.59	/	/	/	/	/	/	/
tuneup	16.00	/	/	/	/	/	/	/
6(2437(MHz)	16.56	15.99	15.28	14.77	14.23	13.71	13.22	12.74
tuneup	17.50	17.50	16.50	16.00	15.50	15.00	14.50	14.00
1(2412MHz)	14.70	/	/	/	/	/	/	/
tuneup	16.00	/	/	/	/	/	/	/

802.11n (dBm) - HT20 (2.4G)

Channel\data	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
11(2462MHz)	15.06	/	/	/	/	/	/	/
tuneup	16.00	/	/	/	/	/	/	/
6(2437(MHz)	15.76	14.87	14.23	13.65	13.10	12.64	11.67	10.70
tuneup	17.00	16.00	15.50	15.00	14.50	14.00	13.00	12.00
1(2412MHz)	14.68	/	/	/	/	/	/	/
tuneup	16.00	/	/	/	/	/	/	/

Low power

802.11b (dBm)

Channel\data	1Mbps	2Mbps	5.5Mbps	11Mbps
11(2462MHz)	15.58	15.51	15.55	15.56
6(2437(MHz)	14.60	/	/	/
1(2412MHz)	14.52	/	/	/
tuneup	16.00	16.00	16.00	16.00

802.11g (dBm)

Channel\data	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
11(2462MHz)	15.49	15.23	15.16	15.10	14.52	14.49	13.47	12.96
6(2437(MHz)	14.86	/	/	/	/	/	/	/
1(2412MHz)	14.68	/	/	/	/	/	/	/
tuneup	16.00	16.00	16.00	16.00	15.50	15.00	14.50	14.00

802.11n (dBm) - HT20 (2.4G)

Channel\data	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
11(2462MHz)	15.10	15.07	14.49	13.93	13.41	12.88	11.89	10.91
6(2437(MHz)	14.65	/	/	/	/	/	/	/
1(2412MHz)	14.68	/	/	/	/	/	/	/
tuneup	16.00	16.00	15.50	15.00	14.50	14.00	13.00	12.00

12 Simultaneous TX SAR Considerations

12.1 Introduction

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as 802.11 a/b/g and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Transmit Antenna Separation Distances



Antenna	Mode	Band
#1 (Main ANT)	GSM	2,3,5,8
	WCDMA	1,2,4,5,8
	LTE	1,2,3,4,5,7,8,12,13,17,20,28,38,40,41
#2 (DIV ANT)	GSM	2,3,5,8
	WCDMA	1,2,4,5,8
	LTE	1,2,3,4,5,7,8,12,13,17,20,28,38,40,41
#3 (GPS WIFI ANT)	GPS	GPS
	WIFI	2.4G
	BT	BT

Picture 12.1 Antenna Locations

12.3 SAR Measurement Positions

According to the KDB941225 D06 Hot Spot SAR v01, the edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

SAR measurement positions						
Mode	Front	Rear	Left edge	Right edge	Top edge	Bottom edge
Main antenna	Yes	Yes	Yes	Yes	No	Yes
WLAN	Yes	Yes	Yes	No	Yes	No

12.4 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR, where}$$

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Table 12.1: Standalone SAR test exclusion considerations

Band/Mode	F(GHz)	Position	SAR test exclusion threshold(mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.441	Head	9.60	10	10	No
		Body	19.20	10	10	Yes
2.4GHz WLAN	2.45	Head	9.58	16	39.8	No
		Body	19.17	19	79.4	No

13 Evaluation of Simultaneous

Table 13.1: The sum of reported SAR values for main antenna and WiFi 2.4G

	Position	Main antenna	WLAN	Sum
Maximum reported SAR value for Head	Right hand, Touch cheek	0.26	0.15	0.41
Maximum reported SAR value for Body	Bottom 15mm	1.43	/	1.43
Maximum reported SAR value for Head	Left hand, Tilt	0.16	0.69	0.85

Table 13.2: The sum of reported SAR values for main antenna and BT

	Position	Main antenna	BT	Sum
Maximum reported SAR value for Head	Right hand, Touch cheek	0.26	<0.01	0.26
Maximum reported SAR value for Body	Rear 10mm	1.43	<0.01	1.43

[1] - The SAR results of BT is too low to be measured, we use "< 0.01" to indicate the value.

Conclusion:

According to the above tables, the sum of reported SAR values is < 1.6W/kg. So the simultaneous transmission SAR with volume scans is not required.

14 SAR Test Result

It is determined by user manual for the distance between the EUT and the phantom bottom.
The distance is 10 mm or 15mm and just applied to the condition of body worn accessory.

It is performed for all SAR measurements with area scan based 1-g SAR estimation (Fast SAR). A zoom scan measurement is added when the estimated 1-g SAR is the highest measured SAR in each exposure configuration, wireless mode and frequency band combination or more than 1.2W/kg.

The calculated SAR is obtained by the following formula:

$$\text{Reported SAR} = \text{Measured SAR} \times 10^{(P_{\text{Target}} - P_{\text{Measured}})/10}$$

Where P_{Target} is the power of manufacturing upper limit;

P_{Measured} is the measured power in chapter 11.

Table 14.1: Duty Cycle

Mode	Duty Cycle
Speech for GSM	1:8.3
GPRS&EGPRS for GSM850	1:4
GPRS&EGPRS for GSM1900	1:4
WCDMA<E FDD	1:1
LTE TDD	1:1.58

We'll perform the head measurement in all bands with the primary battery and SIM card depending on the evaluation of multi-batteries and multi-SIM cards and retest on highest value point with other batteries and SIM cards. Then, repeat the measurement in the Body test.

Table 14.2: The evaluation of multi-SIM cards for Head Test

Frequency		Mode/Band	Side	Position	SIM Type	1g SAR (W/kg)	PowerDrift
MHz	Channel						
1909.8	810	GSM1900	Left	Cheek	SIM1	0.60	-0.06
1909.8	810	GSM1900	Left	Cheek	SIM2	0.52	-0.05

Note: According to the values in the above table, the **SIM1** is the primary SIM card.

We'll perform the head measurement with the SIM1 and retest on highest value point with others.

Table 14.3: The evaluation of multi-SIM cards for Body Test

Frequency		Mode/Band	Position	SIM Type	1g SAR (W/kg)	PowerDrift
MHz	Channel					
1900	19100	LTE B2	Front	SIM1	0.222	0.01
1900	19100	LTE B2	Front	SIM2	0.205	0.17

Note: According to the values in the above table, the **SIM1** is the primary SIM card.

We'll perform the body measurement with the SIM1 and retest on highest value point with others.

Table 14.4: The evaluation of multi-batteries for Head Test

Frequency		Mode/Band	Side	Test Position	Battery Type	SAR(1g) (W/kg)	Power Drift(dB)
MHz	Ch.						
2535	21100	LTE Band7	Left	Touch	B1	0.111	-0.10
2535	21100	LTE Band7	Left	Touch	B2	0.098	-0.06

Note: According to the values in the above table, the battery of **B1** is the primary battery.

We'll perform the head measurement with this battery and retest on highest value point with others.

Table 14.5: The evaluation of multi-batteries for Body Test

Frequency		Mode/Band	Test Position	Spacing (mm)	Battery Type	SAR(1g) (W/kg)	Power Drift(dB)
MHz	Ch.						
2535	21100	LTE Band7	Front	10	B1	0.297	-0.04
2535	21100	LTE Band7	Front	10	B2	0.274	0.11

Note: According to the values in the above table, the battery of **B1** is the primary battery.

We'll perform the body measurement with this battery and retest on highest value point with others.

Note:

S: SIM2

B1: The battery of CUD-WT-N6 by SCUD.

B2: The battery of SWD-WT-N6 by Sunwoda.

H: The Headset of GH59-15054A by WATA

14.1 SAR results for Fast SAR

Table 14.1-1: SAR Values (GSM 850 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
190	836.6	Left	Cheek	/	32.96	34.00	0.101	0.13	0.134	0.17	0.12
190	836.6	Left	Tilt	/	32.96	34.00	0.099	0.13	0.124	0.16	-0.13
251	848.8	Right	Cheek	/	33.00	34.00	0.116	0.15	0.149	0.19	0.05
190	836.6	Right	Cheek	/	32.96	34.00	0.139	0.18	0.174	0.22	0.12
128	824.2	Right	Cheek	Fig.1	32.93	34.00	0.159	0.20	0.204	0.26	0.11
190	836.6	Right	Tilt	/	32.96	34.00	0.093	0.12	0.111	0.14	-0.13
128	824.2	Right	Cheek	S	32.93	34.00	0.151	0.19	0.187	0.24	0.08
128	824.2	Right	Cheek	B2	32.93	34.00	0.147	0.19	0.179	0.23	-0.06

Table 14.1-2: SAR Values (GSM 850 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode (number of timeslots)	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
190	836.6	GPRS (2)	Front	/	31.19	32.00	0.115	0.14	0.184	0.22	-0.01
251	848.8	GPRS (2)	Rear	/	31.15	32.00	0.164	0.20	0.275	0.33	0.07
190	836.6	GPRS (2)	Rear	Fig.2	31.19	32.00	0.196	0.24	0.332	0.40	-0.03
128	824.2	GPRS (2)	Rear	/	31.13	32.00	0.185	0.23	0.317	0.39	-0.10
190	836.6	GPRS (2)	Left	/	31.19	32.00	0.117	0.14	0.178	0.21	0.09
190	836.6	GPRS (2)	Right	/	31.19	32.00	0.061	0.07	0.092	0.11	-0.02
190	836.6	GPRS (2)	Bottom	/	31.19	32.00	0.112	0.13	0.199	0.24	0.10
190	836.6	EGPRS (2)	Rear	/	31.11	32.00	0.190	0.23	0.305	0.37	0.05
190	836.6	GPRS (2)	Rear	S	31.19	32.00	0.177	0.21	0.313	0.38	0.05
190	836.6	GPRS (2)	Rear	B2	31.19	32.00	0.175	0.21	0.309	0.37	0.07

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.1-3: SAR Values (GSM 1900 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
810	1909.8	Left	Cheek	/	30.35	31.50	0.037	0.05	0.060	0.08	-0.06
661	1880	Left	Cheek	Fig.3	30.34	31.50	0.050	0.07	0.082	0.11	-0.09
512	1850.2	Left	Cheek	/	30.57	31.50	0.043	0.05	0.068	0.08	-0.02
661	1880	Left	Tilt	/	30.34	31.50	0.030	0.04	0.045	0.06	0.01

661	1880	Right	Cheek	/	30.34	31.50	0.034	0.04	0.049	0.06	0.05
661	1880	Right	Tilt	/	30.34	31.50	0.035	0.05	0.055	0.07	0.12
661	1880	Left	Cheek	S	30.34	31.50	0.045	0.06	0.077	0.10	0.1
661	1880	Left	Cheek	B2	30.34	31.50	0.041	0.05	0.072	0.09	0.04

Table 14.1-4: SAR Values (GSM 1900 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode (number of timeslots)	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
661	1880	GPRS (2)	Front	/	27.53	28.00	0.083	0.09	0.133	0.15	0.08
810	1909.8	GPRS (2)	Rear	Note2	27.50	28.00	0.087	0.10	0.138	0.15	-0.09
661	1880	GPRS (2)	Rear	Note2	27.53	28.00	0.091	0.10	0.148	0.16	-0.04
512	1850.2	GPRS (2)	Rear	Note2	27.55	28.00	0.102	0.11	0.157	0.17	0.04
661	1880	GPRS (2)	Left	/	27.53	28.00	0.031	0.03	0.049	0.05	0.08
661	1880	GPRS (2)	Right	/	27.53	28.00	0.017	0.02	0.030	0.03	-0.10
661	1880	GPRS (2)	Bottom	Note2	27.53	28.00	0.081	0.09	0.129	0.14	0.07
512	1850.2	EGPRS (2)	Rear	Note2	27.69	28.00	0.101	0.11	0.162	0.17	-0.02
810	1909.8	GPRS (2)	Rear	/	23.49	24.00	0.100	0.11	0.155	0.17	-0.10
661	1880	GPRS (2)	Rear	/	23.51	24.00	0.098	0.11	0.156	0.17	-0.06
512	1850.2	GPRS (2)	Rear	Fig.4	23.66	24.00	0.102	0.11	0.169	0.18	0.07
661	1880	GPRS (2)	Bottom	/	23.51	24.00	0.072	0.08	0.116	0.13	-0.07
512	1850.2	GPRS (2)	Rear	S	23.66	24.00	0.084	0.09	0.154	0.17	0.08
512	1850.2	GPRS (2)	Rear	B2	23.66	24.00	0.091	0.10	0.159	0.17	0.10

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The distance between the EUT and the phantom bottom is 15mm.

Table 14.1-5: SAR Values (WCDMA 850 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
4233	846.6	Left	Cheek	/	23.49	24.50	0.059	0.07	0.077	0.10	-0.09
4183	836.6	Left	Cheek	Fig.5	23.39	24.50	0.143	0.18	0.186	0.24	-0.09
4132	826.4	Left	Cheek	/	23.45	24.50	0.065	0.08	0.084	0.11	0.06
4183	836.6	Left	Tilt	/	23.39	24.50	0.035	0.05	0.046	0.06	0.00
4183	836.6	Right	Cheek	/	23.39	24.50	0.100	0.13	0.134	0.17	-0.08
4183	836.6	Right	Tilt	/	23.39	24.50	0.073	0.09	0.094	0.12	-0.12
4183	836.6	Left	Cheek	S	23.39	24.50	0.140	0.18	0.171	0.22	0.07
4183	836.6	Left	Cheek	B2	23.39	24.50	0.141	0.18	0.178	0.23	-0.10

Table 14.1-6: SAR Values (WCDMA 850 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
4233	846.6	Front	/	23.49	24.50	0.053	0.07	0.088	0.11	0.13
4183	836.6	Front	/	23.39	24.50	0.056	0.07	0.088	0.11	-0.07
4132	826.4	Front	Fig.6	23.45	24.50	0.058	0.07	0.094	0.12	0.08
4183	836.6	Rear	/	23.39	24.50	0.038	0.05	0.064	0.08	0.04
4183	836.6	Left	/	23.39	24.50	0.025	0.03	0.037	0.05	0.03
4183	836.6	Right	/	23.39	24.50	0.028	0.04	0.043	0.06	0.01
4183	836.6	Bottom	/	23.39	24.50	0.026	0.03	0.047	0.06	-0.10
4132	826.4	Front	S	23.45	24.50	0.048	0.06	0.089	0.11	0.09
4132	826.4	Front	B2	23.45	24.50	0.049	0.06	0.090	0.11	0.10

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.1-7: SAR Values (WCDMA 1700 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
1513	1752.6	Left	Cheek	/	23.47	24.00	0.079	0.09	0.115	0.13	-0.08
1412	1732.4	Left	Cheek	Fig.7	23.28	24.00	0.076	0.09	0.123	0.15	-0.11
1312	1712.4	Left	Cheek	/	23.24	24.00	0.069	0.08	0.116	0.14	-0.08
1412	1732.4	Left	Tilt	/	23.28	24.00	0.031	0.04	0.049	0.06	0.02
1412	1732.4	Right	Cheek	/	23.28	24.00	0.050	0.06	0.078	0.09	-0.07
1412	1732.4	Right	Tilt	/	23.28	24.00	0.029	0.03	0.066	0.08	-0.12
1412	1732.4	Left	Cheek	S	23.28	24.00	0.065	0.08	0.102	0.12	0.08
1412	1732.4	Left	Cheek	B2	23.28	24.00	0.070	0.08	0.115	0.14	0.09

Table 14.1-8: SAR Values (WCDMA 1700 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
1412	1732.4	Front	/	23.28	24.00	0.155	0.18	0.294	0.35	0.09
1412	1732.4	Rear	Note2	23.28	24.00	0.173	0.20	0.314	0.37	-0.11
1412	1732.4	Left	/	23.28	24.00	0.083	0.10	0.144	0.17	-0.02
1412	1732.4	Right	/	23.28	24.00	0.033	0.04	0.056	0.07	0.12
1513	1752.6	Bottom	Note2	23.47	24.00	0.201	0.23	0.365	0.41	-0.10
1412	1732.4	Bottom	Note2	23.28	24.00	0.236	0.28	0.431	0.51	-0.08
1312	1712.4	Bottom	Note2	23.24	24.00	0.234	0.28	0.422	0.50	0.11
1412	1732.4	Rear	/	19.54	20.50	0.192	0.24	0.367	0.46	0.09

1513	1752.6	Bottom	/	19.75	20.50	0.248	0.29	0.469	0.56	0.09
1412	1732.4	Bottom	Fig.8	19.54	20.50	0.252	0.31	0.478	0.60	-0.05
1312	1712.4	Bottom	/	19.69	20.50	0.247	0.30	0.469	0.56	-0.08
1412	1732.4	Bottom	S	19.54	20.50	0.248	0.31	0.465	0.58	0.07
1412	1732.4	Bottom	B2	19.54	20.50	0.239	0.30	0.455	0.57	0.08

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The distance between the EUT and the phantom bottom is 15mm.

Table 14.1-9: SAR Values (WCDMA 1900 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5 °C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
9538	1907.6	Left	Cheek	/	23.57	24.50	0.073	0.09	0.122	0.15	-0.07
9400	1880	Left	Cheek	Fig.9	23.70	24.50	0.110	0.13	0.182	0.22	-0.10
9262	1852.4	Left	Cheek	/	23.37	24.50	0.077	0.10	0.127	0.16	-0.12
9400	1880	Left	Tilt	/	23.70	24.50	0.066	0.08	0.107	0.13	0.06
9400	1880	Right	Cheek	/	23.70	24.50	0.082	0.10	0.125	0.15	-0.02
9400	1880	Right	Tilt	/	23.70	24.50	0.060	0.07	0.098	0.12	-0.10
9400	1880	Left	Cheek	S	23.70	24.50	0.101	0.12	0.178	0.21	0.08
9400	1880	Left	Cheek	B2	23.70	24.50	0.099	0.12	0.170	0.20	0.04

Table 14.1-10: SAR Values (WCDMA 1900 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5 °C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
9400	1880	Front	/	23.70	24.50	0.081	0.10	0.134	0.16	0.10
9538	1907.6	Rear	Note2	23.57	24.50	0.090	0.11	0.153	0.19	0.11
9400	1880	Rear	Note2	23.70	24.50	0.097	0.12	0.164	0.20	-0.11
9262	1852.4	Rear	Note2 Fig.10	23.37	24.50	0.102	0.13	0.172	0.22	-0.11
9400	1880	Left	/	23.70	24.50	0.037	0.05	0.063	0.08	0.10
9400	1880	Right	/	23.70	24.50	0.027	0.03	0.048	0.06	0.10
9400	1880	Bottom	Note2	23.70	24.50	0.090	0.11	0.155	0.19	-0.09
9538	1907.6	Rear	/	19.24	20.50	0.047	0.06	0.084	0.11	-0.06
9400	1880	Rear	/	19.44	20.50	0.053	0.07	0.097	0.12	-0.01
9262	1852.4	Rear	/	19.12	20.50	0.055	0.08	0.100	0.14	0.10
9400	1880	Bottom	/	19.44	20.50	0.042	0.05	0.075	0.10	0.03
9262	1852.4	Rear	S	23.37	24.50	0.098	0.13	0.165	0.21	0.05
9262	1852.4	Rear	B2	23.37	24.50	0.094	0.12	0.161	0.21	0.07

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The distance between the EUT and the phantom bottom is 15mm.

Table 14.1-11: SAR Values (LTE Band2 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
19100	1900	1RB-Middle	Left	Cheek	/	23.76	24	0.097	0.10	0.159	0.17	-0.11
19100	1900	1RB-Middle	Left	Tilt	/	23.76	24	0.057	0.06	0.068	0.07	-0.08
19100	1900	1RB-Middle	Right	Cheek	/	23.76	24	0.077	0.08	0.098	0.10	-0.01
19100	1900	1RB-Middle	Right	Tilt	/	23.76	24	0.040	0.04	0.062	0.07	0.02
18700	1860	50RB-Low	Left	Cheek	Fig.11	22.82	23	0.110	0.11	0.182	0.19	0.09
18700	1860	50RB-Low	Left	Tilt	/	22.82	23	0.067	0.07	0.104	0.11	0.02
18700	1860	50RB-Low	Right	Cheek	/	22.82	23	0.070	0.07	0.143	0.15	-0.02
18700	1860	50RB-Low	Right	Tilt	/	22.82	23	0.057	0.06	0.062	0.06	0.04
18700	1860	50RB-Low	Left	Cheek	S	22.82	23	0.098	0.10	0.175	0.18	0.07
18700	1860	50RB-Low	Left	Cheek	B2	22.82	23	0.091	0.09	0.175	0.18	-0.08

Note1: The LTE mode is QPSK_20MHz.

Table 14.1-12: SAR Values (LTE Band2 - Body)

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5°C											
Frequency		Mode	Test Position	Figure No./ Note	Conduc ted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
19100	1900	1RB-Middle	Front	/	23.76	24	0.138	0.15	0.222	0.23	0.01
19100	1900	1RB-Middle	Rear	Note2	23.76	24	0.188	0.20	0.314	0.33	0.08
19100	1900	1RB-Middle	Left	/	23.76	24	0.095	0.10	0.155	0.16	-0.01
19100	1900	1RB-Middle	Right	/	23.76	24	0.073	0.08	0.128	0.14	0.01
19100	1900	1RB-Middle	Bottom	Note2	23.76	24	0.158	0.17	0.266	0.28	0.02
18700	1860	50RB-Low	Front	/	22.82	23	0.165	0.17	0.266	0.28	0.12
18700	1860	50RB-Low	Rear	Note2 Fig.12	22.82	23	0.212	0.22	0.347	0.36	0.10
18700		1860	50RB-Low	Left	/	22.82	23	0.082	0.09	0.134	0.14
18700	1860	50RB-Low	Right	/	22.82	23	0.057	0.06	0.102	0.11	-0.06
18700	1860	50RB-Low	Bottom	Note2	22.82	23	0.156	0.16	0.258	0.27	-0.06
19100	1900	1RB-Middle	Rear	/	20.19	20.5	0.183	0.20	0.317	0.34	-0.13
19100	1900	1RB-Middle	Bottom	/	20.19	20.5	0.147	0.16	0.257	0.28	-0.02
18700	1860	50RB-Low	Rear	/	19.52	20.5	0.183	0.23	0.270	0.34	-0.10
18700	1860	50RB-Low	Bottom	/	19.52	20.5	0.139	0.17	0.242	0.30	-0.09
18700	1860	50RB-Low	Rear	S	20.19	20.5	0.199	0.21	0.311	0.33	0.08
18700	1860	50RB-Low	Rear	B2	20.19	20.5	0.201	0.22	0.320	0.34	0.07

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The distance between the EUT and the phantom bottom is 15mm.

Note3: The LTE mode is QPSK_20MHz.

Table 14.1-13: SAR Values (LTE Band5 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g)(W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
20450	829	1RB-Middle	Left	Cheek	Fig.13	23.90	24	0.129	0.13	0.170	0.17	-0.05
20450	829	1RB-Middle	Left	Tilt	/	23.90	24	0.041	0.04	0.055	0.06	0.12
20450	829	1RB-Middle	Right	Cheek	/	23.90	24	0.069	0.07	0.099	0.10	0.11
20450	829	1RB-Middle	Right	Tilt	/	23.90	24	0.048	0.05	0.063	0.06	0.13
20525	836.5	25RB-High	Left	Cheek	/	22.60	23	0.076	0.08	0.100	0.11	-0.07
20525	836.5	25RB-High	Left	Tilt	/	22.60	23	0.046	0.05	0.060	0.07	-0.10
20525	836.5	25RB-High	Right	Cheek	/	22.60	23	0.060	0.07	0.082	0.09	-0.06
20525	836.5	25RB-High	Right	Tilt	/	22.60	23	0.036	0.04	0.047	0.05	-0.03
20450	829	1RB-Middle	Left	Cheek	S	23.90	24	0.111	0.11	0.159	0.16	0.05
20450	829	1RB-Middle	Left	Cheek	B2	23.90	24	0.108	0.11	0.160	0.16	0.07

Note1: The LTE mode is QPSK_10MHz.

Table 14.1-14: SAR Values (LTE Band5 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conduc ted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
20450	829	1RB-Middle	Front	/	23.90	24	0.159	0.16	0.240	0.25	-0.03
20450	829	1RB-Middle	Rear	/	23.90	24	0.168	0.17	0.249	0.25	0.08
20450	829	1RB-Middle	Left	Fig.14	23.90	24	0.185	0.19	0.261	0.27	0.05
20450	829	1RB-Middle	Right	/	23.90	24	0.125	0.13	0.175	0.18	0.02
20450	829	1RB-Middle	Bottom	/	23.90	24	0.100	0.10	0.164	0.17	-0.03
20525	836.5	25RB-High	Front	/	22.60	23	0.123	0.14	0.188	0.21	-0.10
20525	836.5	25RB-High	Rear	/	22.60	23	0.156	0.17	0.240	0.26	-0.04
20525	836.5	25RB-High	Left	/	22.60	23	0.129	0.14	0.179	0.20	-0.03
20525	836.5	25RB-High	Right	/	22.60	23	0.062	0.07	0.084	0.09	-0.05
20525	836.5	25RB-High	Bottom	/	22.60	23	0.096	0.11	0.161	0.18	-0.07
20450	829	1RB-Middle	Left	S	23.90	24	0.170	0.17	0.251	0.26	0.09
20450	829	1RB-Middle	Left	B2	23.90	24	0.171	0.17	0.249	0.25	0.10

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_10MHz.

Table 14.1-15: SAR Values (LTE Band7 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g)(W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
21100	2535	1RB-Middle	Left	Cheek	/	23.75	24	0.062	0.07	0.111	0.12	-0.10
21100	2535	1RB-Middle	Left	Tilt	/	23.75	24	0.041	0.04	0.079	0.08	0.04
21100	2535	1RB-Middle	Right	Cheek	Fig.15	23.75	24	0.114	0.12	0.217	0.23	-0.08
21100	2535	1RB-Middle	Right	Tilt	/	23.75	24	0.057	0.06	0.111	0.12	-0.04
21100	2535	50RB-High	Left	Cheek	/	22.79	23	0.040	0.04	0.072	0.08	0.10
21100	2535	50RB-High	Left	Tilt	/	22.79	23	0.026	0.03	0.050	0.05	0.07
21100	2535	50RB-High	Right	Cheek	/	22.79	23	0.072	0.08	0.137	0.14	-0.08
21100	2535	50RB-High	Right	Tilt	/	22.79	23	0.034	0.04	0.066	0.07	-0.09
21100	2535	1RB-Middle	Right	Cheek	S	23.75	24	0.111	0.12	0.201	0.21	0.09
21100	2535	1RB-Middle	Right	Cheek	B2	23.75	24	0.105	0.11	0.211	0.22	0.11

Note1: The LTE mode is QPSK_20MHz.

Table 14.1-16: SAR Values (LTE Band7 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conduc ted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
21100	2535	1RB-Middle	Front	/	23.75	24	0.166	0.18	0.297	0.31	-0.04
21100	2535	1RB-Middle	Rear	Note2	23.75	24	0.038	0.04	0.067	0.07	0.09
21100	2535	1RB-Middle	Left	/	23.75	24	0.054	0.06	0.095	0.10	0.03
21100	2535	1RB-Middle	Right	Fig.16	23.75	24	0.177	0.19	0.336	0.36	0.11
21100	2535	1RB-Middle	Bottom	Note2	23.75	24	0.083	0.09	0.153	0.16	0.13
21100	2535	50RB-High	Front	/	22.79	23	0.099	0.10	0.176	0.18	-0.03
21100	2535	50RB-High	Rear	Note2	22.79	23	0.062	0.07	0.117	0.12	0.05
21100	2535	50RB-High	Left	/	22.79	23	0.035	0.04	0.061	0.06	-0.01
21100	2535	50RB-High	Right	/	22.79	23	0.103	0.11	0.195	0.20	-0.02
21100	2535	50RB-High	Bottom	Note2	22.79	23	0.081	0.08	0.149	0.16	-0.04
21350	2560	1RB-Middle	Rear	/	20.84	21	0.092	0.10	0.187	0.19	0.03
21350	2560	1RB-Middle	Bottom	/	20.84	21	0.098	0.10	0.196	0.20	0.07
20850	2510	50RB-High	Rear	/	19.97	21	0.089	0.11	0.166	0.21	0.02
20850	2510	50RB-High	Bottom	/	19.97	21	0.105	0.13	0.203	0.26	-0.03
21100	2535	1RB-Middle	Right	S	23.75	24	0.159	0.17	0.301	0.32	0.08
21100	2535	1RB-Middle	Right	B2	23.75	24	0.161	0.17	0.317	0.34	0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The distance between the EUT and the phantom bottom is 15mm.

Note3: The LTE mode is QPSK_20MHz.

Table 14.1-17: SAR Values (LTE Band12 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g)(W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
23060	704	1RB-Middle	Left	Cheek	/	24.00	24	0.046	0.05	0.077	0.08	0.00
23060	704	1RB-Middle	Left	Tilt	/	24.00	24	0.030	0.03	0.053	0.05	0.09
23060	704	1RB-Middle	Right	Cheek	Fig.17	24.00	24	0.104	0.10	0.133	0.13	0.02
23060	704	1RB-Middle	Right	Tilt	/	24.00	24	0.059	0.06	0.071	0.07	0.12
23060	704	25RB-Low	Left	Cheek	/	22.80	23	0.030	0.03	0.045	0.05	-0.03
23060	704	25RB-Low	Left	Tilt	/	22.80	23	0.015	0.02	0.023	0.02	-0.11
23060	704	25RB-Low	Right	Cheek	/	22.80	23	0.053	0.06	0.069	0.07	-0.02
23060	704	25RB-Low	Right	Tilt	/	22.80	23	0.000	0.00	0.000	0.00	0.11
23060	704	1RB-Middle	Right	Cheek	S	24.00	24	0.097	0.10	0.124	0.12	0.07
23060	704	1RB-Middle	Right	Cheek	B2	24.00	24	0.095	0.09	0.119	0.12	0.06

Note1: The LTE mode is QPSK_20MHz.

Table 14.1-18: SAR Values (LTE Band12 - Body)

Ambient Temperature: 22.9 °C					Liquid Temperature: 22.5°C						
Frequency		Mode	Test Position	Figure No./ Note	Conduc ted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
23060	704	1RB-Middle	Front	/	24.00	24	0.069	0.07	0.087	0.09	0.11
23060	704	1RB-Middle	Rear	/	24.00	24	0.000	0.00	0.000	0.00	-0.10
23060	704	1RB-Middle	Left	Fig.18	24.00	24	0.084	0.08	0.115	0.11	-0.09
23060	704	1RB-Middle	Right	/	24.00	24	0.063	0.06	0.086	0.09	-0.07
23060	704	1RB-Middle	Bottom	/	24.00	24	0.000	0.00	0.000	0.00	-0.05
23060	704	25RB-Low	Bottom	/	22.80	23	0.039	0.04	0.049	0.05	0.07
23060	704	25RB-Low	Bottom	/	22.80	23	0.000	0.00	0.000	0.00	-0.10
23060	704	25RB-Low	Front	/	22.80	23	0.049	0.05	0.068	0.07	-0.07
23060	704	25RB-Low	Rear	/	22.80	23	0.034	0.04	0.048	0.05	0.13
23060	704	25RB-Low	Left	/	22.80	23	0.000	0.00	0.000	0.00	-0.08
23060	704	1RB-Middle	Right	S	24.00	24	0.071	0.07	0.094	0.09	0.08
23060	704	1RB-Middle	Bottom	B2	24.00	24	0.066	0.07	0.101	0.10	0.04

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz

Table 14.1-19: SAR Values (LTE Band13 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g)(W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
23230	782	1RB-Middle	Left	Cheek	Fig.19	23.78	24	0.077	0.08	0.099	0.10	-0.01
23230	782	1RB-Middle	Left	Tilt	/	23.78	24	0.043	0.05	0.054	0.06	-0.10
23230	782	1RB-Middle	Right	Cheek	/	23.78	24	0.060	0.06	0.078	0.08	-0.10
23230	782	1RB-Middle	Right	Tilt	/	23.78	24	0.020	0.02	0.030	0.03	-0.08
23230	782	25RB-Low	Left	Cheek	/	22.05	23	0.052	0.06	0.067	0.08	-0.06
23230	782	25RB-Low	Left	Tilt	/	22.05	23	0.031	0.04	0.039	0.05	0.08
23230	782	25RB-Low	Right	Cheek	/	22.05	23	0.044	0.05	0.057	0.07	0.08
23230	782	25RB-Low	Right	Tilt	/	22.05	23	0.020	0.02	0.028	0.03	-0.10
23230	782	1RB-Middle	Left	Cheek	S	23.78	24	0.065	0.07	0.090	0.09	0.02
23230	782	1RB-Middle	Left	Cheek	B2	23.78	24	0.061	0.06	0.086	0.09	0.03

Note1: The LTE mode is QPSK_20MHz.

Table 14.1-20: SAR Values (LTE Band13 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
23230	782	1RB-Middle	Front	/	23.78	24	0.098	0.10	0.131	0.14	0.09
23230	782	1RB-Middle	Rear	Fig.20	23.78	24	0.128	0.13	0.214	0.23	0.12
23230	782	1RB-Middle	Left	/	23.78	24	0.088	0.09	0.136	0.14	0.01
23230	782	1RB-Middle	Right	/	23.78	24	0.059	0.06	0.093	0.10	-0.11
23230	782	1RB-Middle	Bottom	/	23.78	24	0.080	0.08	0.141	0.15	0.09
23230	782	25RB-Low	Front	/	22.05	23	0.069	0.09	0.094	0.12	0.06
23230	782	25RB-Low	Rear	/	22.05	23	0.090	0.11	0.149	0.19	0.09
23230	782	25RB-Low	Left	/	22.05	23	0.078	0.10	0.117	0.15	0.13
23230	782	25RB-Low	Right	/	22.05	23	0.045	0.06	0.067	0.08	0.11
23230	782	25RB-Low	Bottom	/	22.05	23	0.072	0.09	0.125	0.16	0.06
23230	782	1RB-Middle	Rear	S	23.78	24	0.114	0.12	0.201	0.21	0.02
23230	782	1RB-Middle	Rear	B2	23.78	24	0.105	0.11	0.197	0.21	0.08

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.1-21: SAR Values (LTE Band41 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g)(W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
41140	2645	1RB-Middle	Left	Cheek	/	22.90	23	0.030	0.03	0.061	0.06	-0.04
41140	2645	1RB-Middle	Left	Cheek	/	22.90	23	0.019	0.02	0.042	0.04	0.07
41140	2645	1RB-Middle	Right	Cheek	Fig.21	22.90	23	0.067	0.07	0.129	0.13	0.01
41140	2645	1RB-Middle	Right	Tilt	/	22.90	23	0.038	0.04	0.077	0.08	0.10
40800	2611	50RB-Middle	Left	Cheek	/	21.74	22	0.028	0.03	0.051	0.05	-0.01
40800	2611	50RB-Middle	Left	Tilt	/	21.74	22	0.019	0.02	0.037	0.04	0.12
40800	2611	50RB-Middle	Right	Cheek	/	21.74	22	0.044	0.05	0.086	0.09	0.09
40800	2611	50RB-Middle	Right	Tilt	/	21.74	22	0.025	0.03	0.052	0.05	-0.09
41140	2645	1RB-Middle	Right	Cheek	S	22.90	23	0.060	0.06	0.112	0.11	0.05
41140	2645	1RB-Middle	Right	Tilt	B2	22.90	23	0.059	0.06	0.118	0.12	0.08

Note1: The LTE mode is QPSK_20MHz.

Table 14.1-22: SAR Values (LTE Band41 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conduc ted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
41140	2645	1RB-Middle	Front	/	22.90	23	0.079	0.08	0.154	0.16	-0.12
41140	2645	1RB-Middle	Rear	Fig.22	22.90	23	0.104	0.11	0.218	0.22	0.04
41140	2645	1RB-Middle	Left	/	22.90	23	0.022	0.02	0.045	0.05	0.09
41140	2645	1RB-Middle	Right	/	22.90	23	0.074	0.08	0.149	0.15	0.07
41140	2645	1RB-Middle	Bottom	/	22.90	23	0.091	0.09	0.198	0.20	0.12
40800	2611	50RB-Middle	Front	/	21.74	22	0.059	0.06	0.122	0.13	-0.04
40800	2611	50RB-Middle	Rear	/	21.74	22	0.075	0.08	0.184	0.20	0.08
40800	2611	50RB-Middle	Left	/	21.74	22	0.016	0.02	0.033	0.03	0.11
40800	2611	50RB-Middle	Right	/	21.74	22	0.046	0.05	0.092	0.10	-0.06
40800	2611	50RB-Middle	Bottom	/	21.74	22	0.072	0.08	0.167	0.18	-0.03
41140	2645	1RB-Middle	Rear	S	22.90	23	0.097	0.10	0.201	0.21	0.07
41140	2645	1RB-Middle	Rear	B2	22.90	23	0.091	0.09	0.197	0.20	-0.07

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz

Table 14.1-23: SAR Values (LTE Band66 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
------------------------------	--	--	--	--	--	----------------------------	--	--	--	--	--	--

Frequency		Mode	Side	Test Position	Figure No./ Note	Conduct ed Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
132322	1745	1RB-Middle	Left	Cheek	/	23.23	24	0.034	0.04	0.053	0.06	0.06
132322	1745	1RB-Middle	Left	Tilt	/	23.23	24	0.022	0.03	0.037	0.04	0.06
132322	1745	1RB-Middle	Right	Cheek	Fig.23	23.23	24	0.041	0.05	0.063	0.08	-0.01
132322	1745	1RB-Middle	Right	Tilt	/	23.23	24	0.027	0.03	0.043	0.05	-0.10
132322	1745	50RB-Low	Left	Cheek	/	22.04	23	0.025	0.03	0.041	0.05	0.08
132322	1745	50RB-Low	Left	Tilt	/	22.04	23	0.018	0.02	0.030	0.04	-0.04
132322	1745	50RB-Low	Right	Cheek	/	22.04	23	0.030	0.04	0.046	0.06	-0.03
132322	1745	50RB-Low	Right	Tilt	/	22.04	23	0.019	0.02	0.031	0.04	-0.10
132322	1745	1RB-Middle	Right	Cheek	S	23.23	24	0.039	0.05	0.060	0.07	0.08
132322	1745	1RB-Middle	Right	Cheek	B2	23.23	24	0.037	0.04	0.058	0.07	0.09

Note1: The LTE mode is QPSK_20MHz.

Table 14.1-24: SAR Values (LTE Band41 - Body)

Frequency		Mode	Test Position	Figure No./ Note	Conduc ted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
132322	1745	1RB-Middle	Front	/	23.23	24	0.420	0.50	0.758	0.91	0.06
132322	1745	1RB-Middle	Rear	Note2	23.23	24	0.578	0.69	1.018	1.22	-0.01
132322	1745	1RB-Middle	Left	/	23.23	24	0.114	0.14	0.202	0.24	0.13
132322	1745	1RB-Middle	Right	/	23.23	24	0.119	0.14	0.207	0.25	0.12
132322	1745	1RB-Middle	Bottom	Note2 Fig.24	23.23	24	0.675	0.81	1.200	1.43	-0.04
132322	1745	50RB-Low	Front	/	22.04	23	0.337	0.42	0.608	0.76	0.10
132322	1745	50RB-Low	Rear	Note2	22.04	23	0.468	0.58	0.824	1.03	0.00
132322	1745	50RB-Low	Left	/	22.04	23	0.085	0.11	0.148	0.18	0.01
132322	1745	50RB-Low	Right	/	22.04	23	0.087	0.11	0.150	0.19	0.11
132322	1745	50RB-Low	Bottom	Note2	22.04	23	0.505	0.63	0.899	1.12	-0.06
132322	1745	1RB-Middle	Rear	/	20.16	20.5	0.267	0.29	0.460	0.50	0.03
132322	1745	1RB-Middle	Bottom	/	20.16	20.5	0.288	0.31	0.507	0.55	-0.06
132322	1745	50RB-Low	Rear	/	19.92	20.5	0.236	0.27	0.406	0.46	0.05
132322	1745	50RB-Low	Bottom	/	19.92	20.5	0.274	0.31	0.485	0.55	0.10
132322	1745	1RB-Middle	Bottom	S	23.23	24	0.660	0.79	1.050	1.25	0.08
132322	1745	1RB-Middle	Bottom	B2	23.23	24	0.654	0.78	1.120	1.34	0.07
132322	1745	1RB-Middle	Bottom	H	23.23	24	0.651	0.78	1.110	1.33	0.09

Note1: The distance between the EUT and the phantom bottom is 10mm. Note2: The distance between the EUT and the phantom bottom is 15mm. Note3: The LTE mode is QPSK_20MHz.

14.2 SAR results for Standard procedure

There is zoom scan measurement to be added for the highest measured SAR in each exposure configuration/band.

Table 14.2-1: SAR Values (GSM 850 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
128	824.2	Right	Cheek	Fig.1	32.93	34.00	0.159	0.20	0.204	0.26	0.11

Table 14.2-2: SAR Values (GSM 850 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode (number of timeslots)	Test Position	Figure No./ Note	Conducte d Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measure d SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
190	836.6	GPRS (3)	Rear	Fig.2	30.18	29.00	0.196	0.15	0.332	0.25	-0.03

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-3: SAR Values (GSM 1900 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
661	1880	Left	Cheek	Fig.3	30.34	31.50	0.050	0.07	0.082	0.11	-0.09

Table 14.2-4: SAR Values (GSM 1900 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode (number of timeslots)	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
512	1850.2	GPRS (2)	Rear	Fig.4	23.66	24.00	0.102	0.11	0.169	0.18	0.07

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-5: SAR Values (WCDMA 850 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
4183	836.6	Left	Cheek	Fig.5	23.39	24.50	0.143	0.18	0.186	0.24	-0.09

Table 14.2-6: SAR Values (WCDMA 850 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g)(W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
4132	826.4	Front	Fig.6	23.45	24.50	0.058	0.07	0.094	0.12	0.08

Note: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-7: SAR Values (WCDMA 1700 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
1412	1732.4	Left	Cheek	Fig.7	23.28	24.00	0.076	0.09	0.123	0.15	-0.11

Table 14.2-8: SAR Values (WCDMA 1700 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g)(W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
1412	1732.4	Bottom	Fig.8	19.54	20.50	0.252	0.31	0.478	0.60	-0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

Table 14.2-9: SAR Values (WCDMA 1900 MHz Band - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
9400	1880	Left	Cheek	Fig.9	23.70	24.50	0.110	0.13	0.182	0.22	-0.10

Table 14.2-10: SAR Values (WCDMA 1900 MHz Band - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz									
9262	1852.4	Rear	Fig.10	23.37	24.50	0.102	0.13	0.172	0.22	-0.11

Note1: The distance between the EUT and the phantom bottom is 15mm.

Table 14.2-11: SAR Values (LTE Band2 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
18700	1860	50RB-Low	Left	Cheek	Fig.11	22.82	23	0.110	0.11	0.182	0.19	0.09

Note1: The LTE mode is QPSK_20MHz.

Table 14.2-12: SAR Values (LTE Band2 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
18700	1860	50RB-Low	Rear	Fig.12	22.82	23	0.212	0.22	0.347	0.36	0.10

Note1: The distance between the EUT and the phantom bottom is 15mm.

Note3: The LTE mode is QPSK_20MHz.

Table 14.2-13: SAR Values (LTE Band5 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
20450	829	1RB-Middle	Left	Cheek	Fig.13	23.90	24	0.129	0.13	0.170	0.17	-0.05

Note1: The LTE mode is QPSK_10MHz.

Table 14.2-14: SAR Values (LTE Band5 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conduc ted Power (dBm)	Max. tune-up Power (dBm)	Measure d SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measure d SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
20450	829	1RB-Middle	Left	Fig.14	23.90	24	0.185	0.19	0.261	0.27	0.05

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_10MHz.

Table 14.2-15: SAR Values (LTE Band7 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
21100	2535	1RB-Middle	Right	Cheek	Fig.15	23.75	24	0.114	0.12	0.217	0.23	-0.08

Note1: The LTE mode is QPSK_20MHz.

Table 14.2-16: SAR Values (LTE Band7 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conduc ted Power (dBm)	Max. tune-up Power (dBm)	Measure d SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measure d SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
21100	2535	1RB-Middle	Right	Fig.16	23.75	24	0.177	0.19	0.336	0.36	0.11

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note3: The LTE mode is QPSK_20MHz.

Table 14.2-17: SAR Values (LTE Band12 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
23060	704	1RB-Middle	Right	Cheek	Fig.17	24.00	24	0.104	0.10	0.133	0.13	0.02

Note1: The LTE mode is QPSK_20MHz.

Table 14.2-18: SAR Values (LTE Band12 - Body)

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5°C											
Frequency		Mode	Test Position	Figure No./ Note	Conduc- ted Power (dBm)	Max. tune-up Power (dBm)	Measure d SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measure d SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
23060	704	1RB-Middle	Left	Fig.18	24.00	24	0.084	0.08	0.115	0.11	-0.09

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz

Table 14.2-19: SAR Values (LTE Band13 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
23230	782	1RB-Middle	Left	Cheek	Fig.19	23.78	24	0.077	0.08	0.099	0.10	-0.01

Note1: The LTE mode is QPSK_20MHz.

Table 14.2-20: SAR Values (LTE Band13 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
23230	782	1RB-Middle	Rear	Fig.20	23.78	24	0.128	0.13	0.214	0.23	0.12

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz.

Table 14.2-21: SAR Values (LTE Band41 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
41140	2645	1RB-Middle	Right	Cheek	Fig.21	22.90	23	0.067	0.07	0.129	0.13	0.01

Note1: The LTE mode is QPSK_20MHz.

Table 14.2-22: SAR Values (LTE Band41 - Body)

Ambient Temperature: 22.9 °C Liquid Temperature: 22.5°C											
Frequency		Mode	Test Position	Figure No./ Note	Conduc ted Power (dBm)	Max. tune-up Power (dBm)	Measure d SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measure d SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
41140	2645	1RB-Middle	Rear	Fig.22	22.90	23	0.104	0.11	0.218	0.22	0.04

Note1: The distance between the EUT and the phantom bottom is 10mm.

Note2: The LTE mode is QPSK_20MHz

Table 14.2-23: SAR Values (LTE Band66 - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C						
Frequency		Mode	Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz											
132322	1745	1RB-Middle	Right	Cheek	Fig.23	23.23	24	0.041	0.05	0.063	0.08	-0.01

Note1: The LTE mode is QPSK_20MHz.

Table 14.2-24: SAR Values (LTE Band41 - Body)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Mode	Test Position	Figure No./ Note	Conduc ted Power (dBm)	Max. tune-up Power (dBm)	Measure d SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measure d SAR(1g) (W/kg)	Reported SAR(1g) (W/kg)	Power Drift (dB)
Ch.	MHz										
132322	1745	1RB-Middle	Bottom	Fig.24	23.23	24	0.675	0.81	1.200	1.43	-0.04

Note1: The distance between the EUT and the phantom bottom is 15mm.

14.3 WLAN Evaluation for 2.4G

According to the KDB248227 D01, SAR is measured for 2.4GHz 802.11b DSSS using the initial test position procedure.

Head Evaluation

Table 14.4-1: SAR Values (WLAN - Head)– 802.11b (Fast SAR)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
2462	11	Left	Cheek	/	15.58	16.00	0.172	0.19	0.335	0.37	0.02
2462	11	Left	Tilt	/	15.58	16.00	0.184	0.20	0.398	0.44	0.11
2462	11	Right	Cheek	/	15.58	16.00	0.066	0.07	0.133	0.15	0.09
2462	11	Right	Tilt	/	15.58	16.00	0.086	0.10	0.178	0.20	-0.04
2462	11	Left	Tilt	/	15.58	16.00	0.175	0.19	0.378	0.42	0.05
2462	11	Left	Tilt	/	15.58	16.00	0.174	0.19	0.390	0.43	0.08

As shown above table, the initial test position for head is “Left Touch”. So the head SAR of WLAN is presented as below:

Table 14.4-2: SAR Values (WLAN - Head)– 802.11b (Full SAR)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C					
Frequency		Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.										
2462	11	Left	Cheek	Fig.25	15.58	16.00	0.164	0.18	0.405	0.45	0.03

Note1: When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the reported SAR is $\leq$ 0.8 W/kg.

Note2: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is $\leq$ 1.2 W/kg or all required channels are tested.

According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

Table 14.4-3: SAR Values (WLAN - Head) – 802.11b (Scaled Reported SAR)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C	
Frequency		Side	Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
MHz	Ch.						
2412	1	Left	Cheek	100%	100%	0.45	0.45

SAR is not required for OFDM because the 802.11b adjusted SAR $\leq$ 1.2 W/kg.

Body Evaluation of 10mm

Table 14.4-4: SAR Values (WLAN - Body)– 802.11b (Fast SAR)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.									
2462	11	Front	/	18.51	19.00	0.045	0.05	0.092	0.10	0.07
2462	11	Rear	/	18.51	19.00	0.054	0.06	0.113	0.13	-0.09
2462	11	Left	/	18.51	19.00	0.020	0.02	0.032	0.04	0.13
2462	11	Top	/	18.51	19.00	0.064	0.07	0.155	0.17	-0.04
2462	11	Top	/	18.51	19.00	0.057	0.06	0.148	0.17	0.05
2462	11	Top	/	18.51	19.00	0.055	0.06	0.138	0.15	0.11

As shown above table, the initial test position for body is “Right”. So the body SAR of WLAN is presented as below:

Table 14.4-5: SAR Values (WLAN - Body)– 802.11b (Full SAR)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency		Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
MHz	Ch.									
2462	11	Top	Fig.26	18.51	19.00	0.07	0.08	0.164	0.18	-0.14

Note1: When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest estimated 1-g SAR conditions determined by area scans, on the highest maximum output power channel, until the reported SAR is $\leq$ 0.8 W/kg.
Note2: For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel until the reported SAR is $\leq$ 1.2 W/kg or all required channels are tested.


According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. The scaled reported SAR is presented as below.

Table 14.4-6: SAR Values (WLAN - Body) – 802.11b (Scaled Reported SAR)


Ambient Temperature: 22.9 °C				Liquid Temperature: 22.5°C		
Frequency		Test Position	Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
MHz	Ch.					
2412	1	Right	100%	100%	0.18	0.18

SAR is not required for OFDM because the 802.11b adjusted SAR $\leq$ 1.2 W/kg.

Note: The distance between the EUT and the phantom bottom is 10mm.

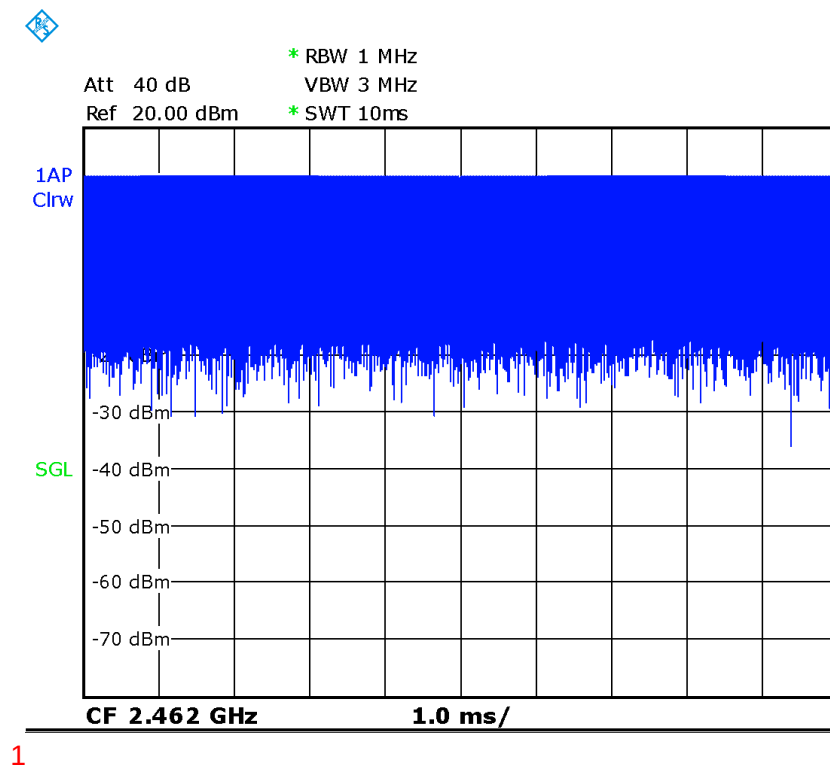

Picture 14.1 Duty factor plot for head

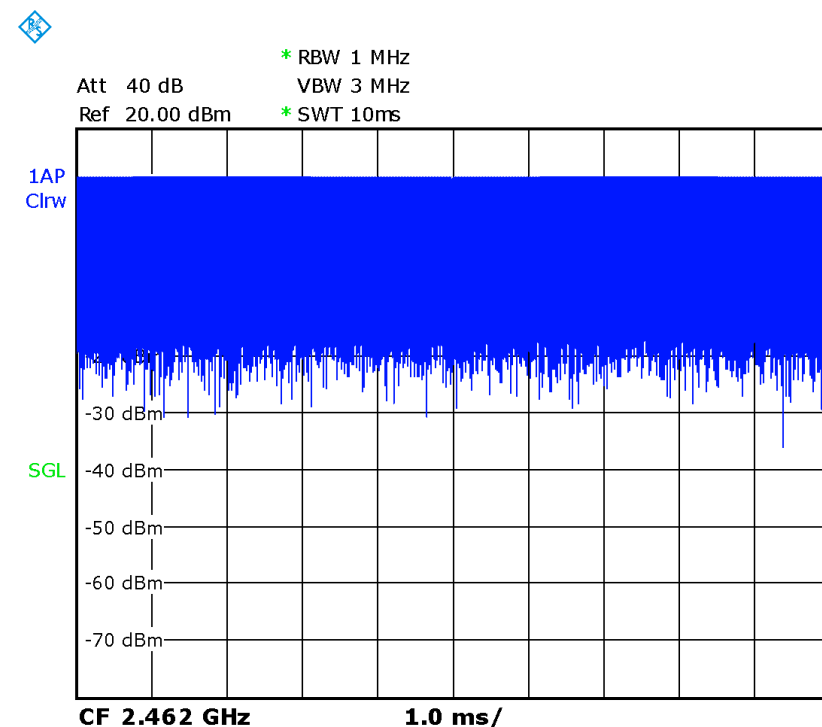

Picture 14.2 Duty factor plot for body

14.5 SAR results for BT

Table 14.5-1: SAR Values (BT - Head)

Ambient Temperature: 22.9 °C						Liquid Temperature: 22.5°C				
Frequency	Side	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
Ch.										
39	Left	Cheek	/	9.82	10	<0.01	<0.01	<0.01	<0.01	/

Table 14.5-2: SAR Values (BT - Body)

Ambient Temperature: 22.9 °C					Liquid Temperature: 22.5°C				
Frequency	Test Position	Figure No./ Note	Conducted Power (dBm)	Max. tune-up Power (dBm)	Measured SAR(10g) (W/kg)	Reported SAR(10g) (W/kg)	Measured SAR(1g) (W/kg)	Reported SAR(1g)(W/kg)	Power Drift (dB)
Ch.									
39	Top	/	9.82	10	<0.01	<0.01	<0.01	<0.01	/

Note1: The distance between the EUT and the phantom bottom is 10mm.

15 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Table 15.1: SAR Measurement Variability for Body LTEB66 (1g)

Frequency		Test Position	Mode	Spacing (mm)	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio	Second Repeated SAR (W/kg)
Ch.	MHz							
132322	1745	Rear	1RB-Middle	15	1.22	1.19	1.02	/
132322	1745	Bottom	1RB-Middle	15	1.43	1.38	1.04	/
132322	1745	Rear	50RB-Low	15	1.03	0.99	1.04	/
132322	1745	Bottom	50RB-Low	15	1.12	1.08	1.04	/

16 Measurement Uncertainty

16.1 Measurement Uncertainty for Normal SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	N	1	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RF ambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521

Combined standard uncertainty	$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$					9.55	9.43	257
Expanded uncertainty (confidence interval of 95 %)	$u_e = 2u_c$					19.1	18.9	

16.2 Measurement Uncertainty for Normal SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RFambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
Test sample related										
14	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
15	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
16	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
17	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
18	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
19	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
20	Liquid permittivity	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞

	(target)									
21	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c' = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$						10.7	10.6	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						21.4	21.1	

16.3 Measurement Uncertainty for Fast SAR Tests (300MHz~3GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.0	N	1	1	1	6.0	6.0	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RFambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
12	Probe positioning with respect to phantom shell	B	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	7.0	R	$\sqrt{3}$	1	1	4.0	4.0	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder uncertainty	A	3.4	N	1	1	1	3.4	3.4	5
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞

19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						10.4	10.3	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						20.8	20.6	

16.4 Measurement Uncertainty for Fast SAR Tests (3~6GHz)

No.	Error Description	Type	Uncertainty value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement system										
1	Probe calibration	B	6.55	N	1	1	1	6.55	6.55	∞
2	Isotropy	B	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
3	Boundary effect	B	2.0	R	$\sqrt{3}$	1	1	1.2	1.2	∞
4	Linearity	B	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
5	Detection limit	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Readout electronics	B	0.3	R	$\sqrt{3}$	1	1	0.3	0.3	∞
7	Response time	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
8	Integration time	B	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
9	RF ambient conditions-noise	B	0	R	$\sqrt{3}$	1	1	0	0	∞
10	RFambient conditions-reflection	B	0	R	$\sqrt{3}$	1	1	0	0	∞
11	Probe positioned mech. Restrictions	B	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
12	Probe positioning with respect to phantom shell	B	6.7	R	$\sqrt{3}$	1	1	3.9	3.9	∞
13	Post-processing	B	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
14	Fast SAR z-Approximation	B	14.0	R	$\sqrt{3}$	1	1	8.1	8.1	∞
Test sample related										
15	Test sample positioning	A	3.3	N	1	1	1	3.3	3.3	71
16	Device holder	A	3.4	N	1	1	1	3.4	3.4	5

	uncertainty									
17	Drift of output power	B	5.0	R	$\sqrt{3}$	1	1	2.9	2.9	∞
Phantom and set-up										
18	Phantom uncertainty	B	4.0	R	$\sqrt{3}$	1	1	2.3	2.3	∞
19	Liquid conductivity (target)	B	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
20	Liquid conductivity (meas.)	A	2.06	N	1	0.64	0.43	1.32	0.89	43
21	Liquid permittivity (target)	B	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
22	Liquid permittivity (meas.)	A	1.6	N	1	0.6	0.49	1.0	0.8	521
Combined standard uncertainty		$u'_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$						13.5	13.4	257
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$						27.0	26.8	

17 MAIN TEST INSTRUMENTS

Table 17.1: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	E5071C	MY46110673	January 24, 2019	One year
02	Power meter	NRVD	102083	October 24, 2018	One year
03	Power sensor	NRV-Z5	100542		
04	Power sensor	NRP6A	101369	April 11, 2019	One Year
05	Signal Generator	E4438C	MY49070393	January 4, 2019	One Year
06	Amplifier	60S1G4	0331848	No Calibration Requested	
07	Directional Coupler	778D	MY48220584	No Calibration Requested	
08	Directional Coupler	772D	MY46151265	No Calibration Requested	
09	BTS	E5515C	MY50263375	January 17, 2019	One year
10	BTS	CMW500	159890	January 3, 2019	One year
11	E-field Probe	SPEAG EX3DV4	7514	August 27, 2018	One year
12	DAE	SPEAG DAE4	771	January 11, 2019	One year
13	Dipole Validation Kit	SPEAG D750V3	1017	July 18, 2019	One year
14	Dipole Validation Kit	SPEAG D835V2	4d069	July 18, 2019	One year
15	Dipole Validation Kit	SPEAG D1900V2	5d101	July 17, 2019	One year
16	Dipole Validation Kit	SPEAG D1750V2	1003	July 16, 2019	One year
17	Dipole Validation Kit	SPEAG D2450V2	853	July 17, 2019	One year
18	Dipole Validation Kit	SPEAG D2600V2	1012	July 17, 2019	One year

END OF REPORT BODY

ANNEX A Graph Results

GSM850_CH128 Right Check

Date: 8/20/2019

Electronics: DAE4 Sn1525

Medium: body 835 MHz

Medium parameters used: $f = 824.2$; $\sigma = 0.978$ mho/m; $\epsilon_r = 56.11$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: GSM850 824.2 Duty Cycle: 1:8.3

Probe: EX3DV4 – SN7514 ConvF(9.47,9.47,9.47)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.243 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.830 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.261 W/kg

SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.242 W/kg

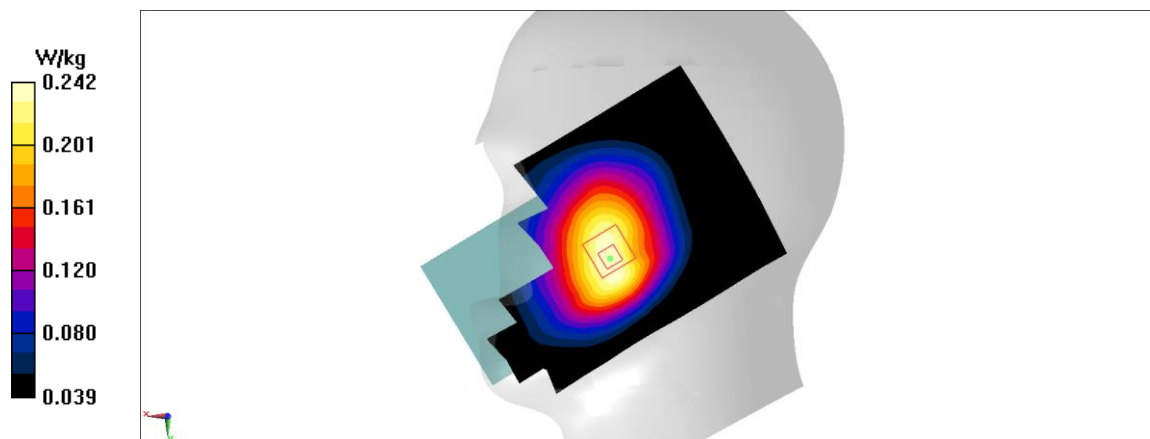


Fig A.1

GSM850_CH190 Rear

Date: 8/20/2019

Electronics: DAE4 Sn1525

Medium: body 835 MHz

Medium parameters used: $f = 836.6$; $\sigma = 0.99$ mho/m; $\epsilon_r = 56.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: GSM850 836.6 Duty Cycle: 1:4

Probe: EX3DV4 – SN7514 ConvF(9.47,9.47,9.47)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.441 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.59 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.571 W/kg

SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.445 W/kg

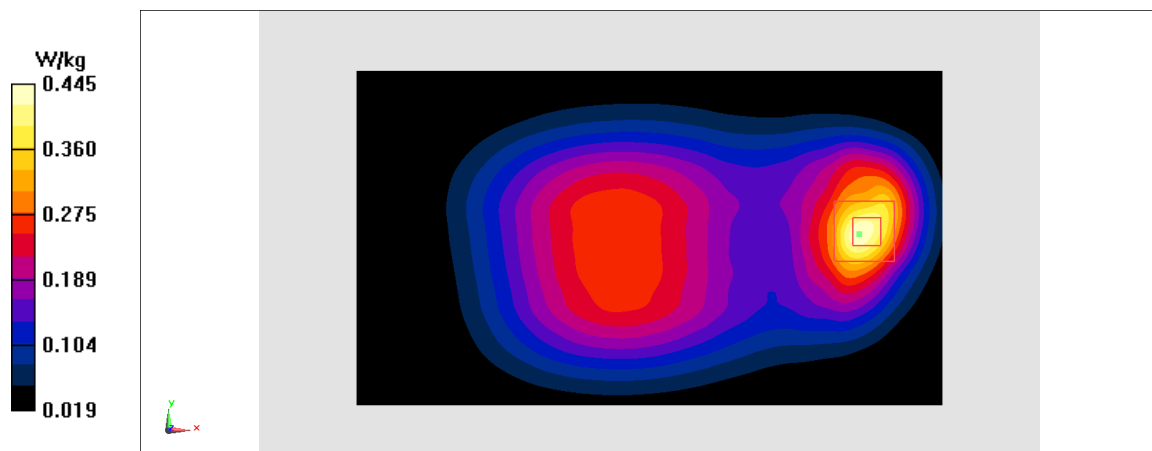


Fig A.2

PCS1900_CH661 Left Cheek

Date: 8/22/2019

Electronics: DAE4 Sn1525

Medium: head 1900 MHz

Medium parameters used: $f = 1880$; $\sigma = 1.371$ mho/m; $\epsilon_r = 39.57$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: PCS1900 1880 Duty Cycle: 1:8.3

Probe: EX3DV4 – SN7514 ConvF(7.73,7.73,7.73)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.114 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.083 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.05 W/kg

Maximum value of SAR (measured) = 0.114 W/kg

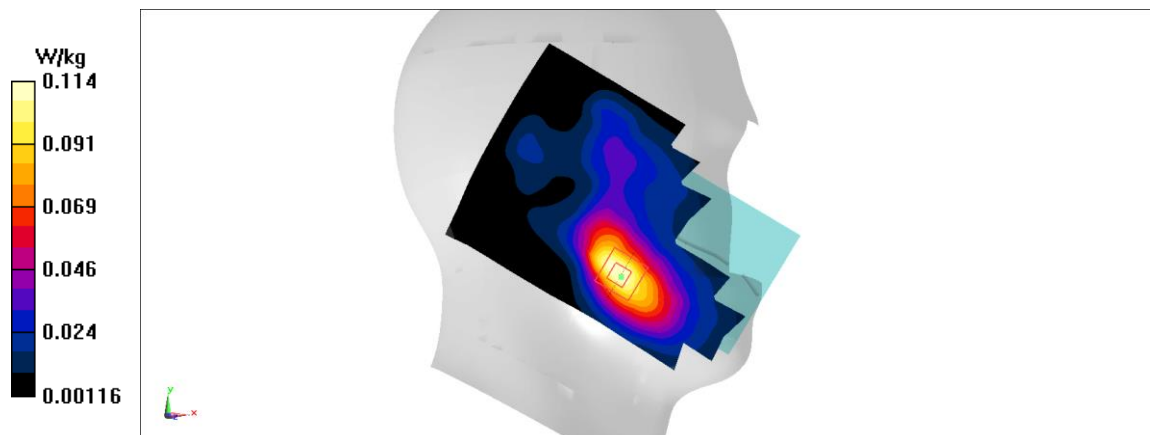


Fig A.3

PCS1900_CH512 Rear

Date: 8/22/2019

Electronics: DAE4 Sn1525

Medium: body 1900 MHz

Medium parameters used: $f = 1850.2$; $\sigma = 1.488$ mho/m; $\epsilon_r = 53.25$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: PCS1900 1850.2 Duty Cycle: 1:4

Probe: EX3DV4 – SN7514 ConvF(7.53,7.53,7.53)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.222 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.647 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.276 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.224 W/kg

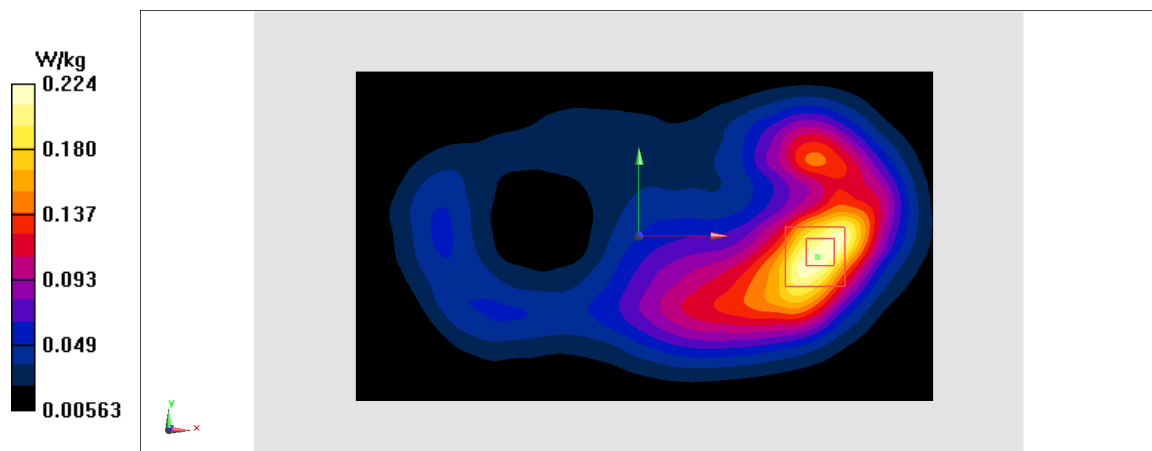


Fig A.4

WCDMA850-BV_CH4183 Left Cheek

Date: 8/20/2019

Electronics: DAE4 Sn1525

Medium: head 835 MHz

Medium parameters used: $f = 836.6$; $\sigma = 0.903$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA850-BV 836.6 Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.09,9.09,9.09)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.209 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.291 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.213 W/kg

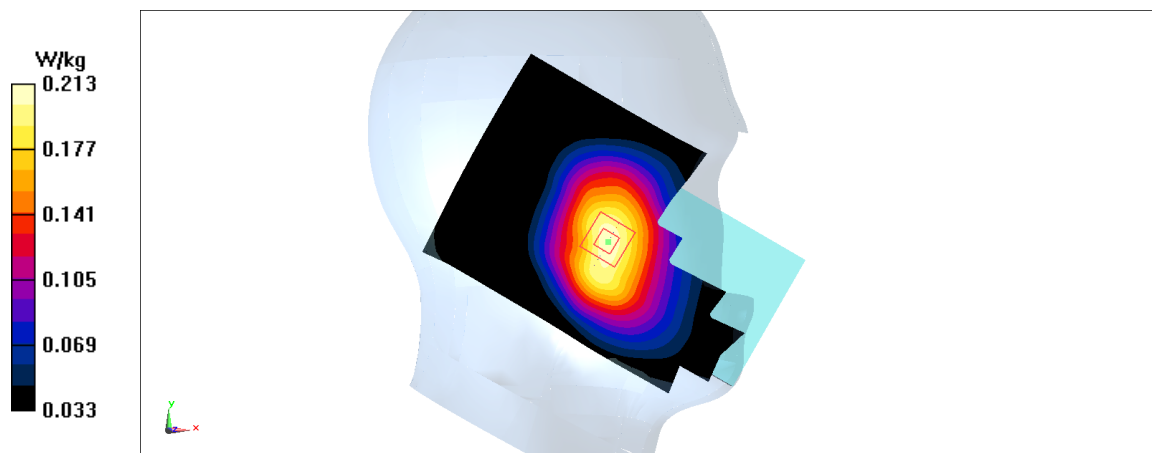


Fig A.5

WCDMA850-BV_CH4132 Front

Date: 8/20/2019

Electronics: DAE4 Sn1525

Medium: body 835 MHz

Medium parameters used: $f = 826.4$; $\sigma = 0.979$ mho/m; $\epsilon_r = 56.11$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA850-BV 826.4 Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.47,9.47,9.47)

Area Scan (71x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.121 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.401 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.0944 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.124 W/kg

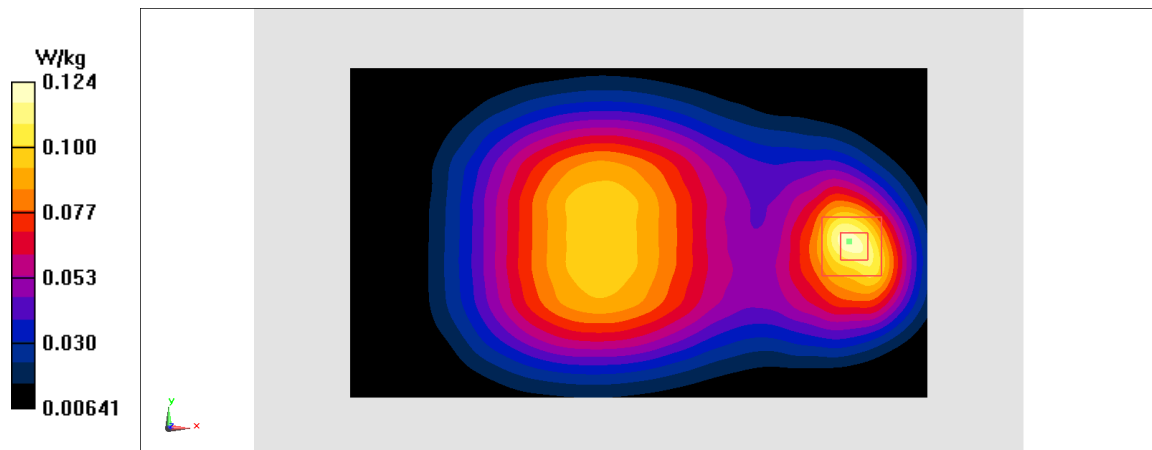


Fig A.6

WCDMA1700-BIV_CH1412 Left Cheek

Date: 8/21/2019

Electronics: DAE4 Sn1525

Medium: head 1750 MHz

Medium parameters used: $f = 1732.4$; $\sigma = 1.363$ mho/m; $\epsilon_r = 40.7$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA1700-BIV 1732.4 Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(8.10,8.10,8.10)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.162 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.745 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.123 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.153 W/kg

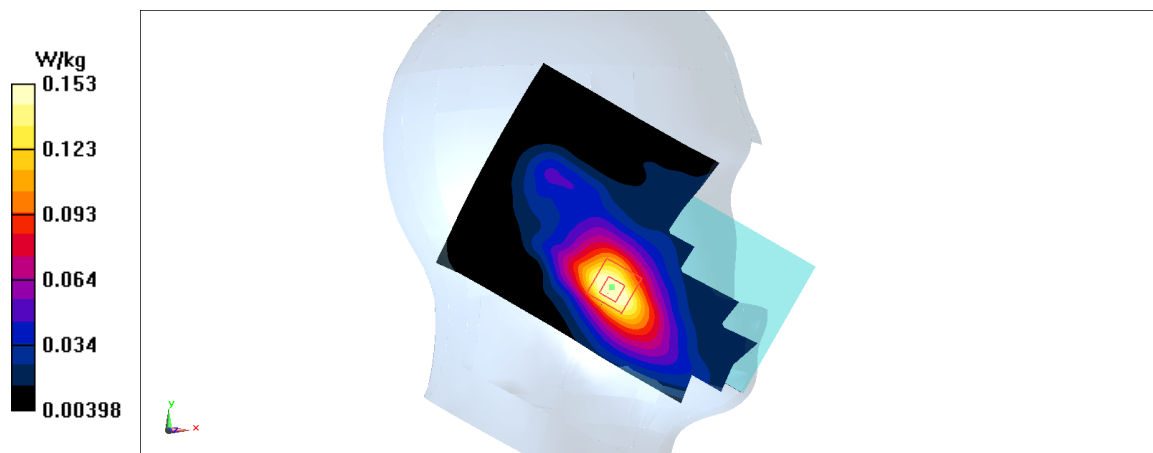


Fig A.7

WCDMA1700-BIV_CH1412 Bottom

Date: 8/21/2019

Electronics: DAE4 Sn1525

Medium: body 1750 MHz

Medium parameters used: $f = 1732.4$; $\sigma = 1.497$ mho/m; $\epsilon_r = 53.24$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA1700-BIV 1732.4 Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(7.82,7.82,7.82)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.672 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.98 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.812 W/kg

SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.649 W/kg

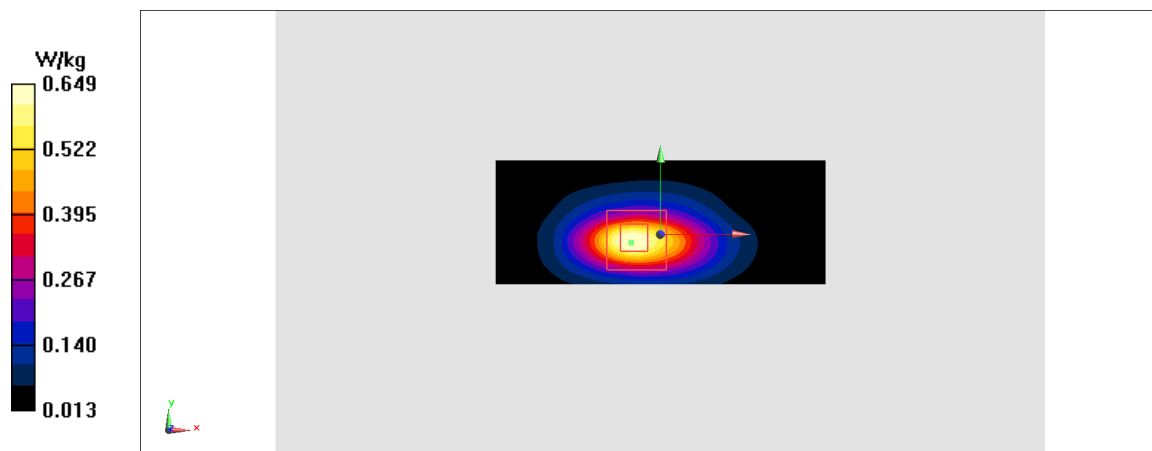


Fig A.8

WCDMA850-BV_CH4183 Left Cheek

Date: 8/20/2019

Electronics: DAE4 Sn1525

Medium: head 835 MHz

Medium parameters used: $f = 836.6$; $\sigma = 0.903$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA850-BV 836.6 Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.09,9.09,9.09)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.209 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.291 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.213 W/kg

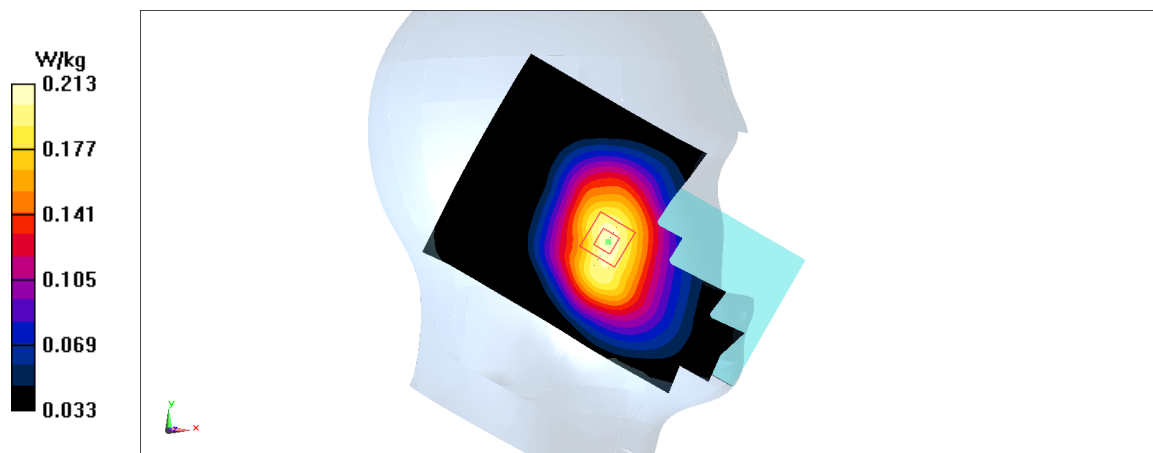


Fig A.9

WCDMA850-BV_CH4132 Front

Date: 8/20/2019

Electronics: DAE4 Sn1525

Medium: body 835 MHz

Medium parameters used: $f = 826.4$; $\sigma = 0.979$ mho/m; $\epsilon_r = 56.11$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WCDMA850-BV 826.4 Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.47,9.47,9.47)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.121 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.401 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.0944 W/kg; SAR(10 g) = 0.058 W/kg

Maximum value of SAR (measured) = 0.124 W/kg

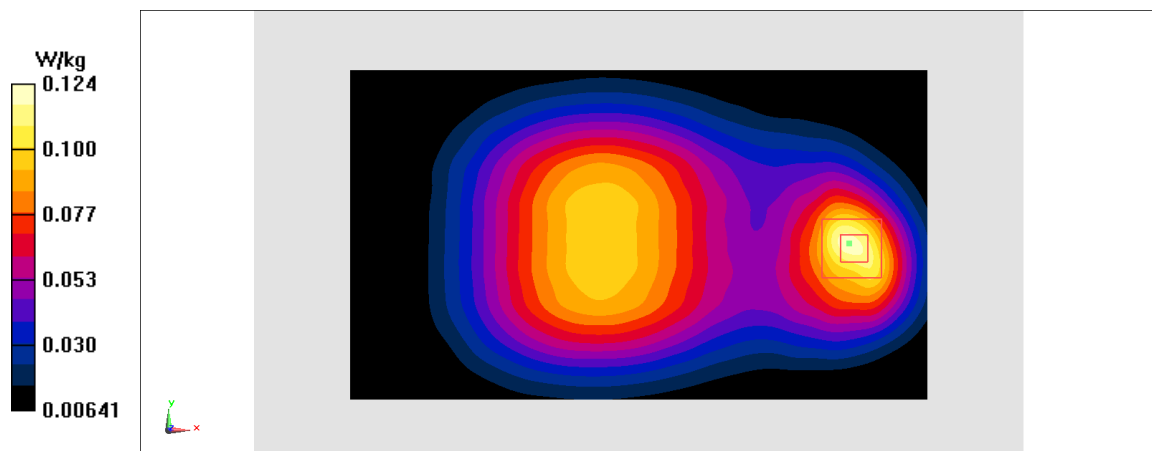


Fig A.10

LTE1900-FDD2_CH18700 Left Cheek

Date: 8/22/2019

Electronics: DAE4 Sn1525

Medium: head 1900 MHz

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.352$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE1900-FDD2 1860 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(7.73,7.73,7.73)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.195 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.910 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.11 W/kg

Maximum value of SAR (measured) = 0.193 W/kg

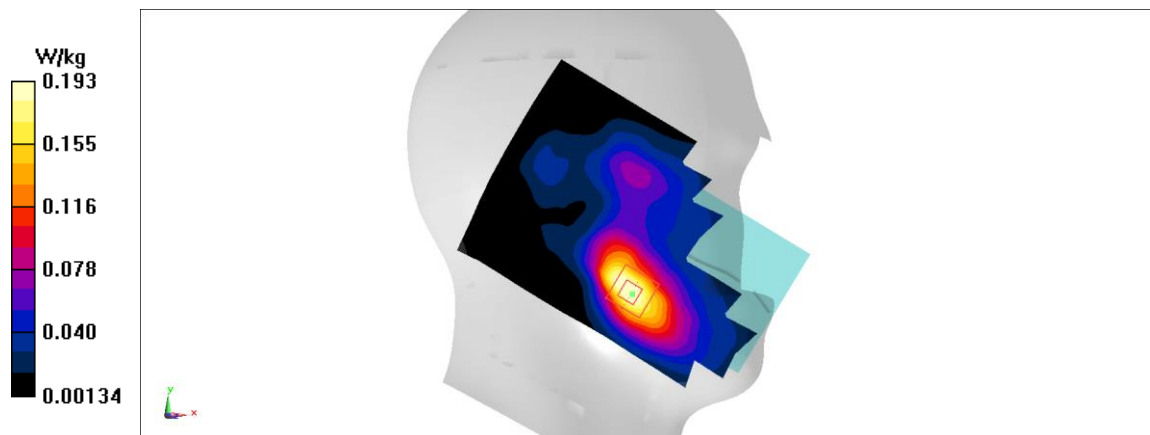


Fig A.11

LTE1900-FDD2_CH18700 Rear

Date: 8/22/2019

Electronics: DAE4 Sn1525

Medium: body 1900 MHz

Medium parameters used: $f = 1860$ MHz; $\sigma = 1.498$ mho/m; $\epsilon_r = 53.24$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE1900-FDD2 1860 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(7.53,7.53,7.53)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.451 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.868 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 0.544 W/kg

SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.445 W/kg

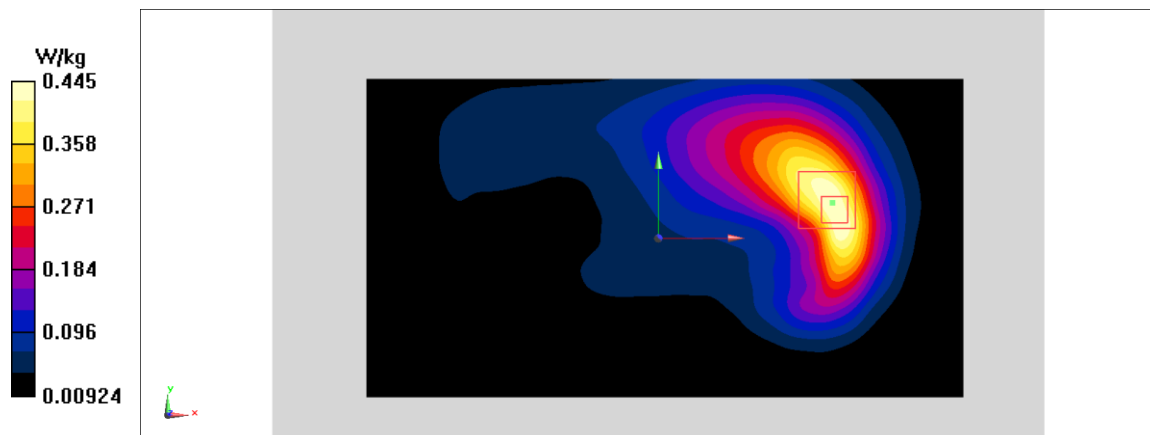


Fig A.12

LTE850-FDD5_CH20450 Left Cheek

Date: 8/20/2019

Electronics: DAE4 Sn1525

Medium: head 835 MHz

Medium parameters used: $f = 829$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.61$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE850-FDD5 829 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.09,9.09,9.09)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.187 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 2.918 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.217 W/kg

SAR(1 g) = 0.17 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.196 W/kg

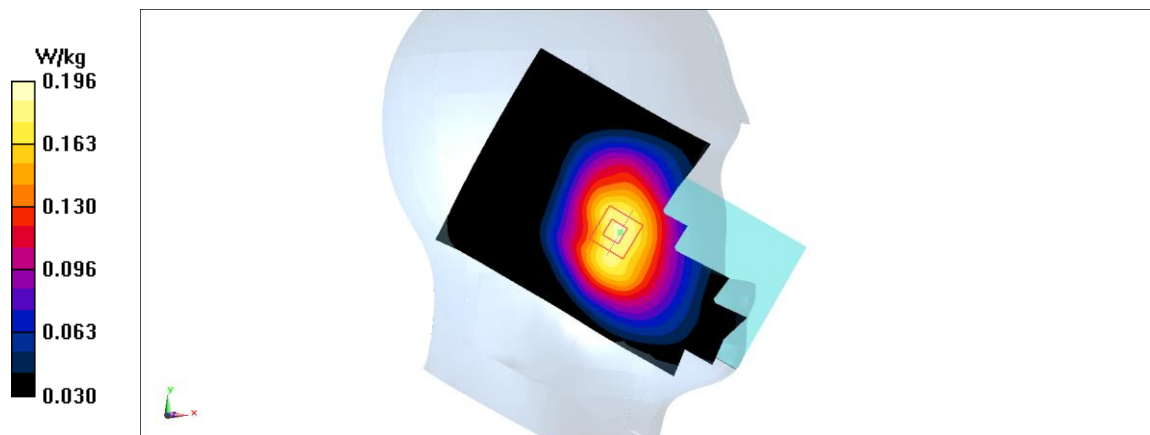


Fig A.13

LTE850-FDD5_CH20450 Left Edge

Date: 8/20/2019

Electronics: DAE4 Sn1525

Medium: body 835 MHz

Medium parameters used: $f = 829$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 56.11$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE850-FDD5 829 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.47,9.47,9.47)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.311 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.27 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.358 W/kg

SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.315 W/kg

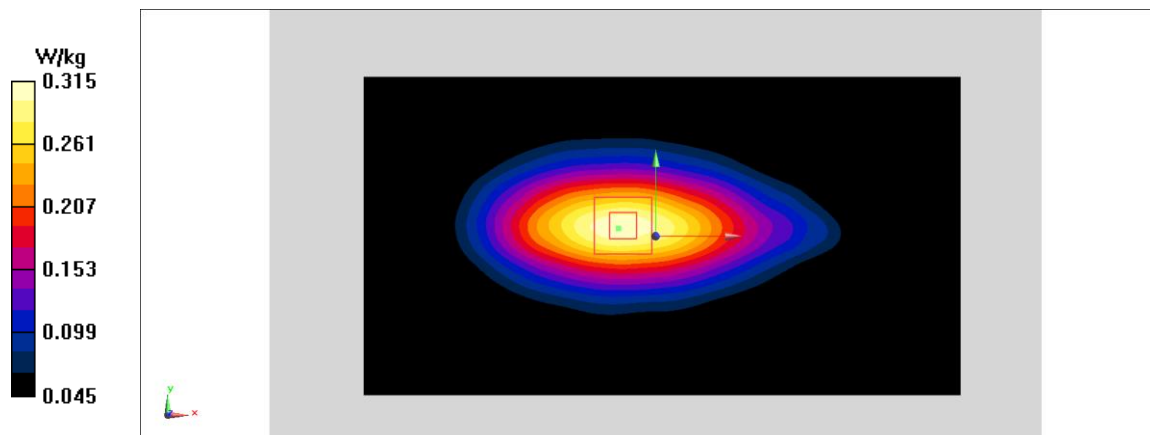


Fig A.14

LTE2500-FDD7_CH21100 Right Check

Date: 8/24/2019

Electronics: DAE4 Sn1525

Medium: body 2600 MHz

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.076$ mho/m; $\epsilon_r = 51.69$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE2500-FDD7 2535 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(7.06,7.06,7.06)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.314 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.155 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.311 W/kg

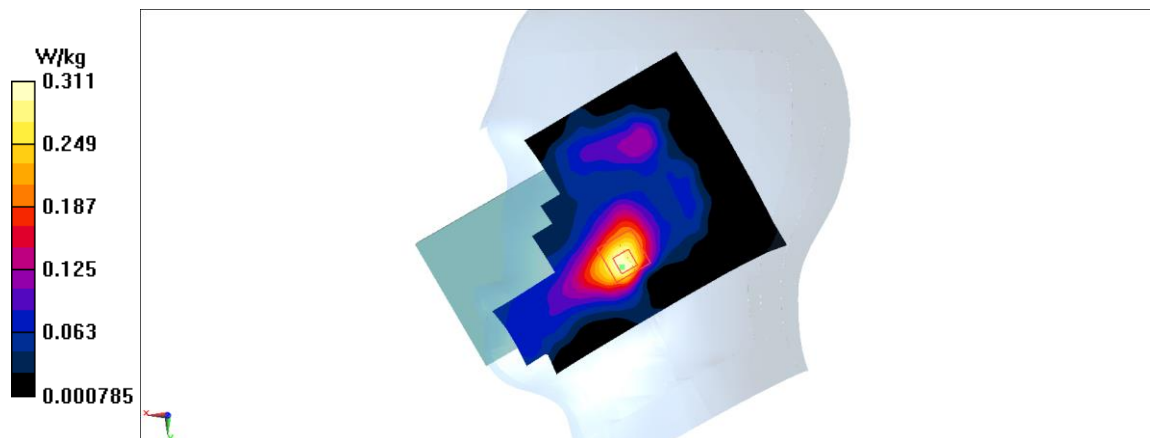


Fig A.15

LTE2500-FDD7_CH21100 Right Edge

Date: 8/24/2019

Electronics: DAE4 Sn1525

Medium: body 2600 MHz

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.076$ mho/m; $\epsilon_r = 51.69$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE2500-FDD7 2535 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(7.06,7.06,7.06)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.488 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.40 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.177 W/kg

Maximum value of SAR (measured) = 0.481 W/kg

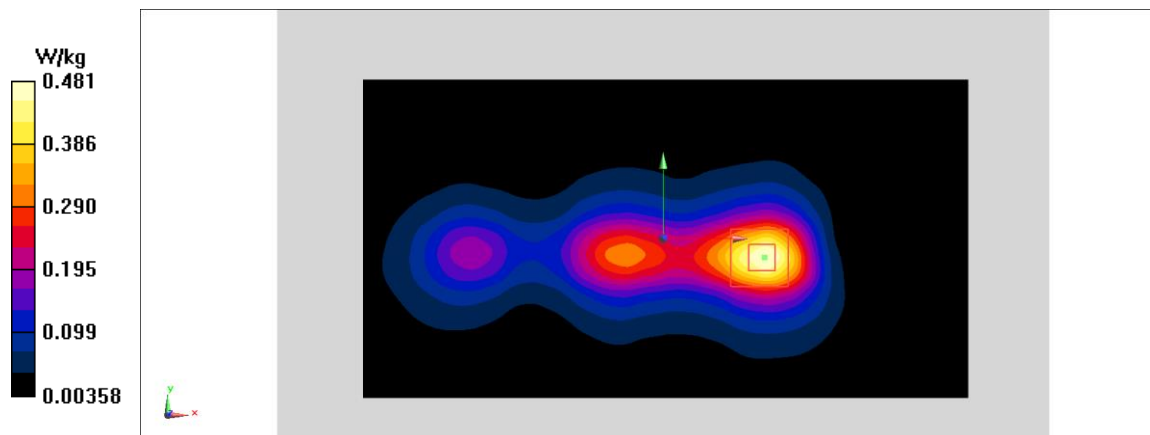


Fig A.16

LTE700-FDD12_CH23060 Right Check

Date: 8/19/2019

Electronics: DAE4 Sn1525

Medium: body 750 MHz

Medium parameters used: $f = 704$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 55.41$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE700-FDD12 704 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.68,9.68,9.68)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.146 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.186 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.150 W/kg

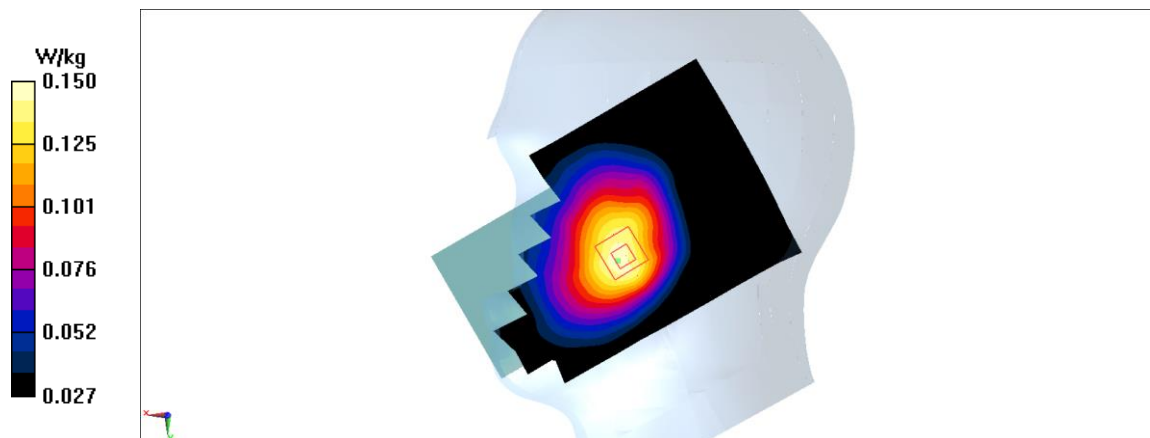


Fig A.17

LTE700-FDD12_CH23060 Left Edge

Date: 8/19/2019

Electronics: DAE4 Sn1525

Medium: body 750 MHz

Medium parameters used: $f = 704$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 55.41$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE700-FDD12 704 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.68,9.68,9.68)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.139 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.38 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.154 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.0835 W/kg

Maximum value of SAR (measured) = 0.137 W/kg

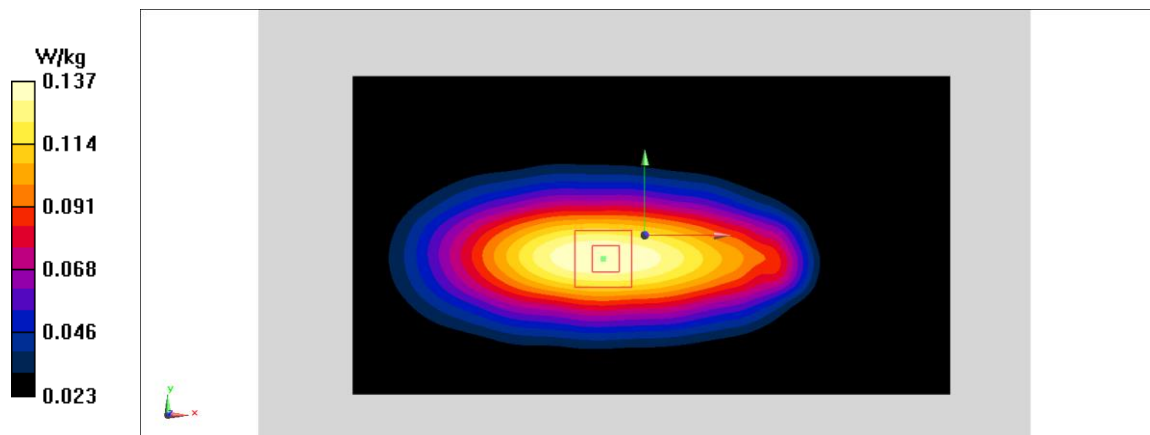


Fig A.18

LTE750-FDD13_CH23230 Left Cheek

Date: 8/19/2019

Electronics: DAE4 Sn1525

Medium: head 750 MHz

Medium parameters used: $f = 782$ MHz; $\sigma = 0.928$ mho/m; $\epsilon_r = 41.66$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE750-FDD13 782 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.47,9.47,9.47)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.113 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.967 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.0773 W/kg

Maximum value of SAR (measured) = 0.113 W/kg

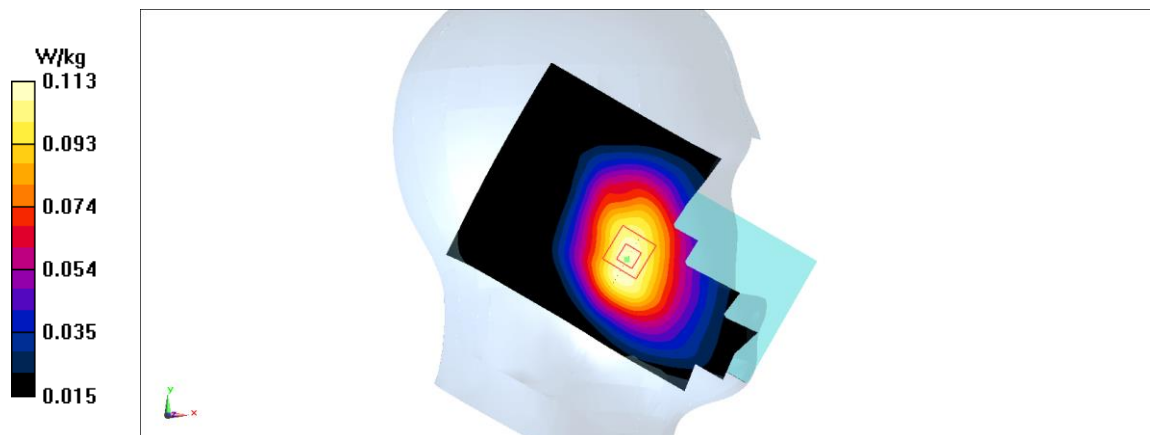


Fig A.19

LTE750-FDD13_CH23230 Rear

Date: 8/19/2019

Electronics: DAE4 Sn1525

Medium: body 750 MHz

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.981 \text{ mho/m}$; $\epsilon_r = 55.31$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE750-FDD13 782 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.68,9.68,9.68)

Area Scan (71x121x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.293 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.78 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.362 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.128 W/kg

Maximum value of SAR (measured) = 0.285 W/kg

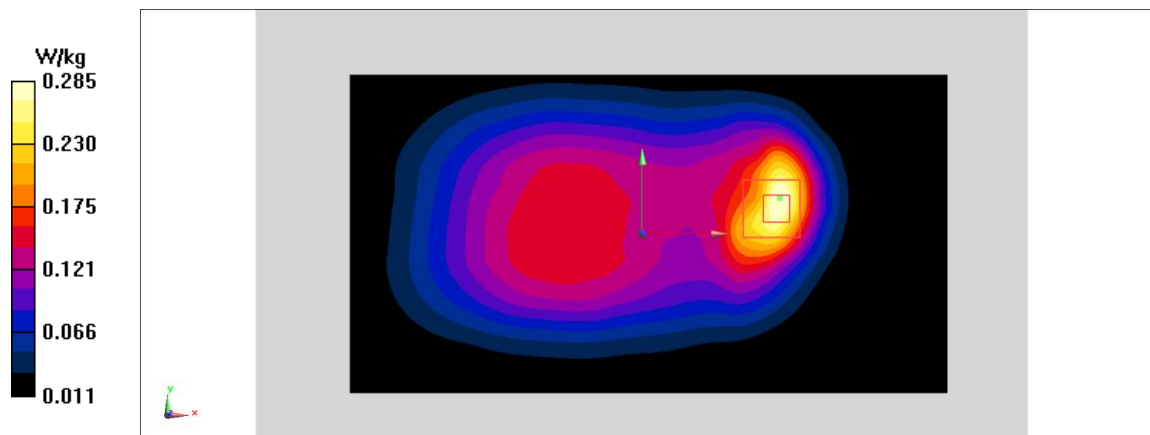


Fig A.20

LTE2500-TDD41_CH41140 Right Check

Date: 8/24/2019

Electronics: DAE4 Sn1525

Medium: body 2600 MHz

Medium parameters used: $f = 2645$ MHz; $\sigma = 2.181$ mho/m; $\epsilon_r = 51.56$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE2500-TDD41 2645 MHz Duty Cycle: 1:1.58

Probe: EX3DV4 – SN7514 ConvF(7.06,7.06,7.06)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.196 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.671 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.0669 W/kg

Maximum value of SAR (measured) = 0.183 W/kg

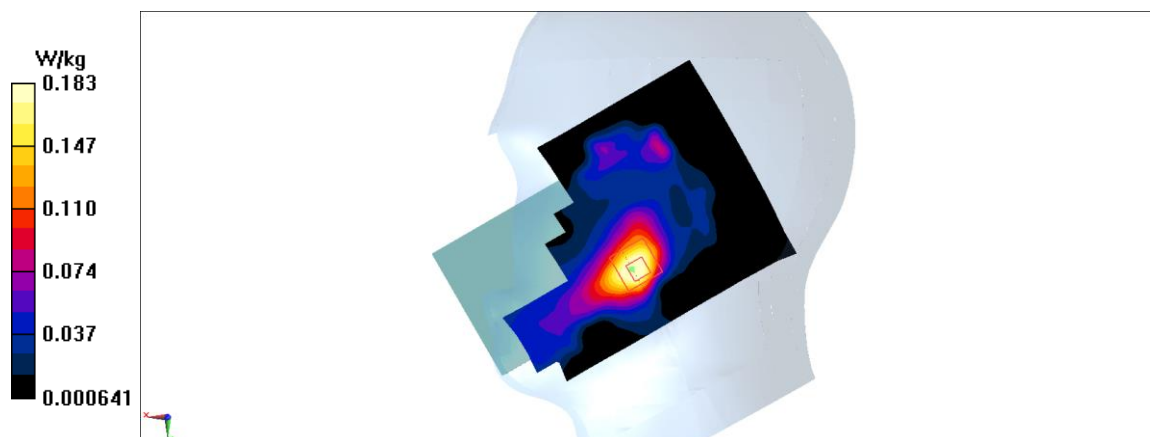


Fig A.21

LTE2500-TDD41_CH41140 Rear

Date: 8/24/2019

Electronics: DAE4 Sn1525

Medium: body 2600 MHz

Medium parameters used: $f = 2645$ MHz; $\sigma = 2.181$ mho/m; $\epsilon_r = 51.56$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE2500-TDD41 2645 MHz Duty Cycle: 1:1.58

Probe: EX3DV4 – SN7514 ConvF(7.06,7.06,7.06)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.289 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.224 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.104 W/kg

Maximum value of SAR (measured) = 0.326 W/kg

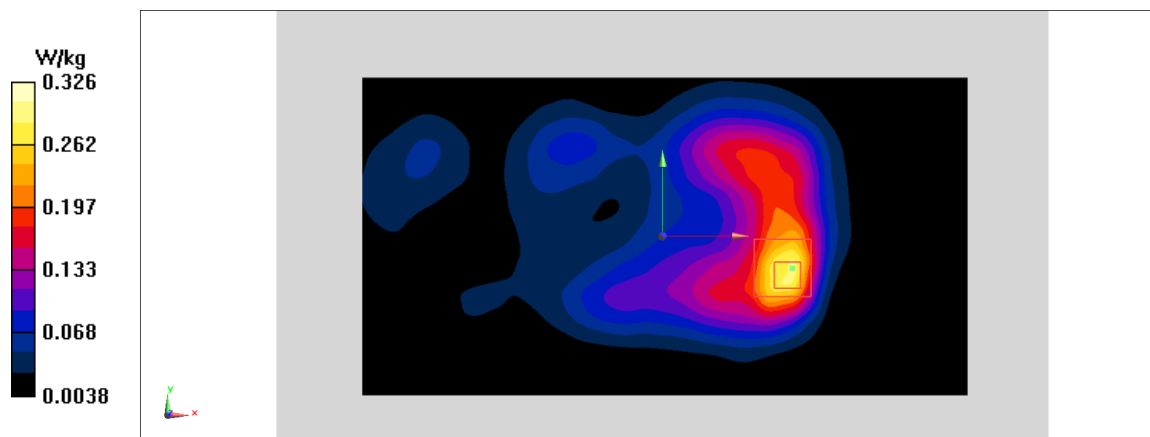


Fig A.22

LTE1700-FDD66_CH132322 Right Check

Date: 8/21/2019

Electronics: DAE4 Sn1525

Medium: body 1750 MHz

Medium parameters used: $f = 2645$ MHz; $\sigma = 2.364$ mho/m; $\epsilon_r = 52.15$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE1700-FDD66 2645 MHz Duty Cycle: 1:1.58

Probe: EX3DV4 – SN7514 ConvF(7.82,7.82,7.82)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0829 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.754 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0910 W/kg

SAR(1 g) = 0.0629 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0782 W/kg

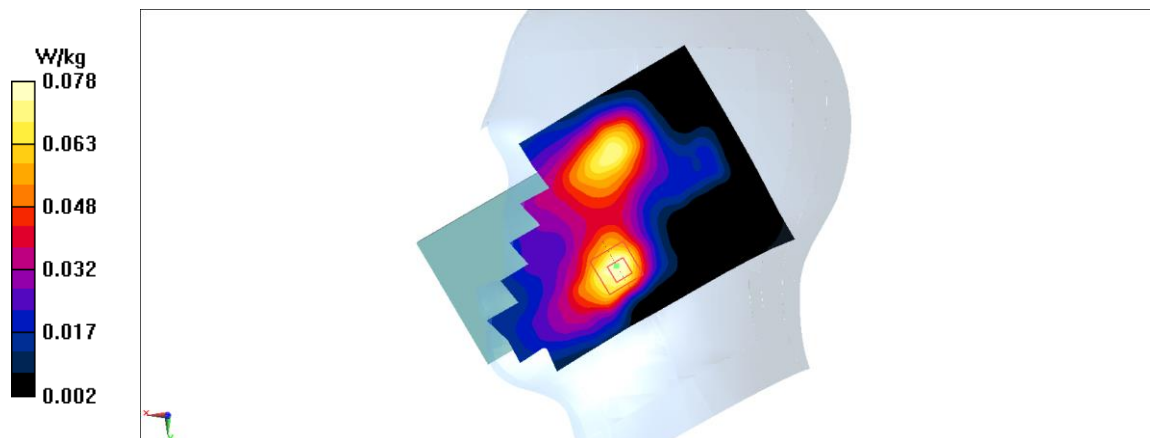


Fig A.23

LTE1700-FDD66_CH132322 Bottom

Date: 8/21/2019

Electronics: DAE4 Sn1525

Medium: body 1750 MHz

Medium parameters used: $f = 2645$ MHz; $\sigma = 2.364$ mho/m; $\epsilon_r = 52.15$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: LTE1700-FDD66 2645 MHz Duty Cycle: 1:1.58

Probe: EX3DV4 – SN7514 ConvF(7.82,7.82,7.82)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.66 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.77 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.92 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.675 W/kg

Maximum value of SAR (measured) = 1.60 W/kg

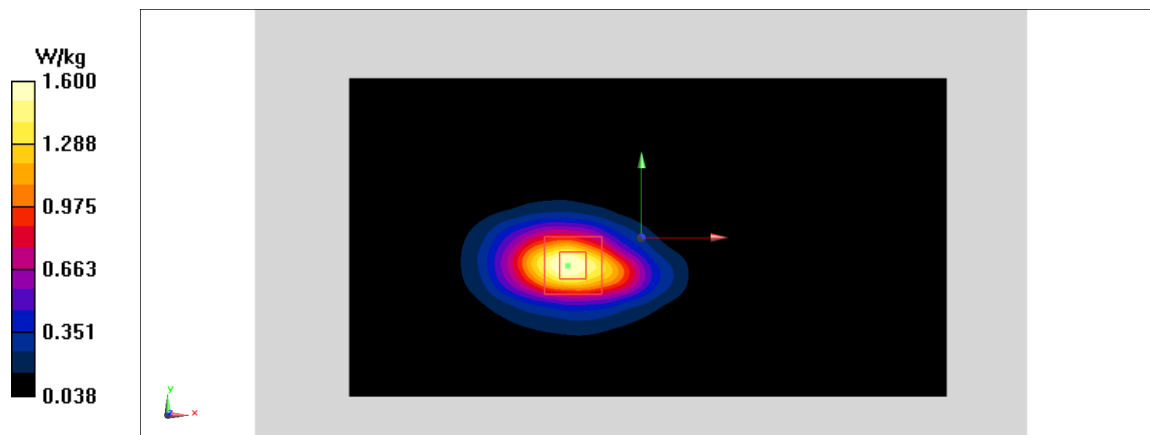


Fig A.24

WLAN2450_CH11 Left Tilt

Date: 8/23/2019

Electronics: DAE4 Sn1525

Medium: head 2450 MHz

Medium parameters used: $f = 2412$; $\sigma = 1.748$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WLAN2450 2412 Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(6.95,6.95,6.95)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.766 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.097 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.809 W/kg

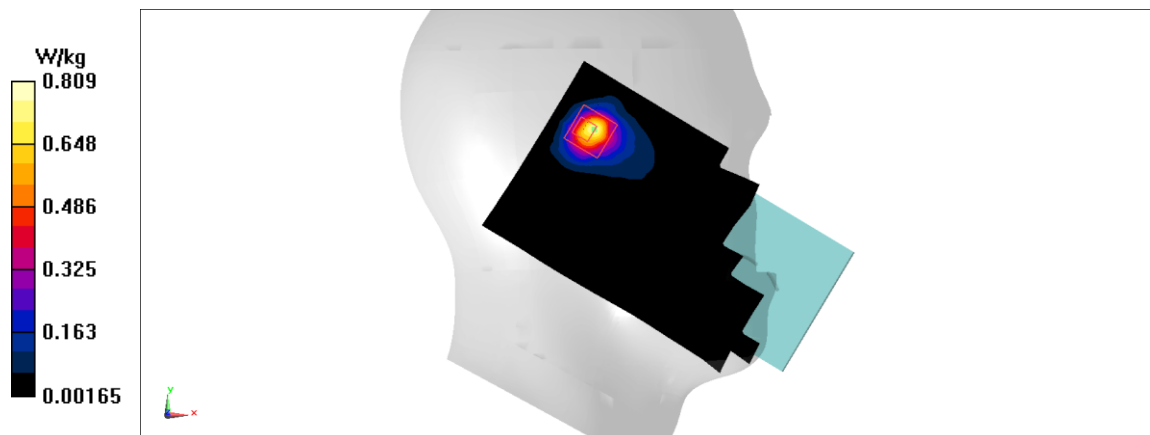


Fig A.25

WLAN2450_CH11 Top Edge

Date: 8/23/2019

Electronics: DAE4 Sn1525

Medium: body 2450 MHz

Medium parameters used: $f = 2412$; $\sigma = 1.93$ mho/m; $\epsilon_r = 53.41$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C, Liquid Temperature: 22.3°C

Communication System: WLAN2450 2412 Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(7.13,7.13,7.13)

Area Scan (71x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.284 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.716 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.07 W/kg

Maximum value of SAR (measured) = 0.281 W/kg

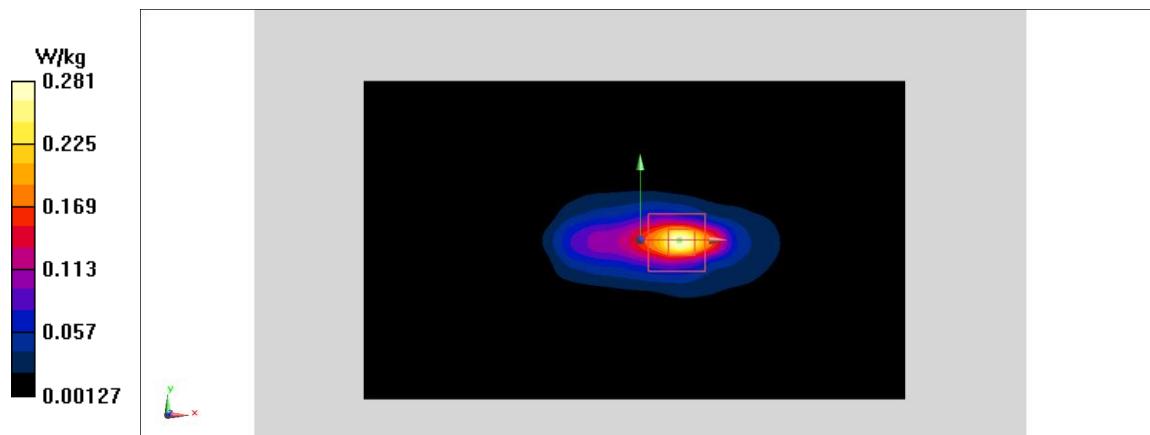


Fig A.26

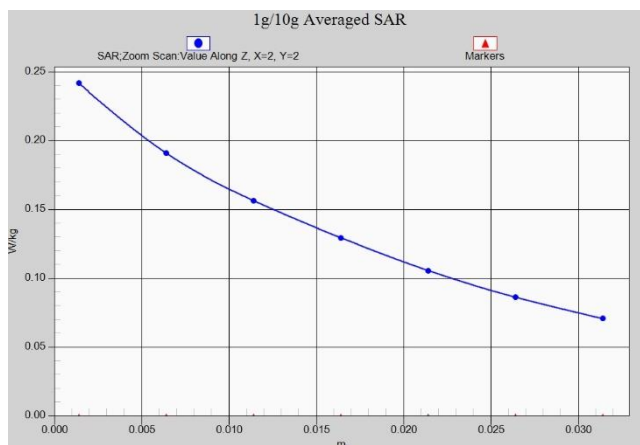


Fig. 1-1 Z-Scan at power reference point (GSM 850)

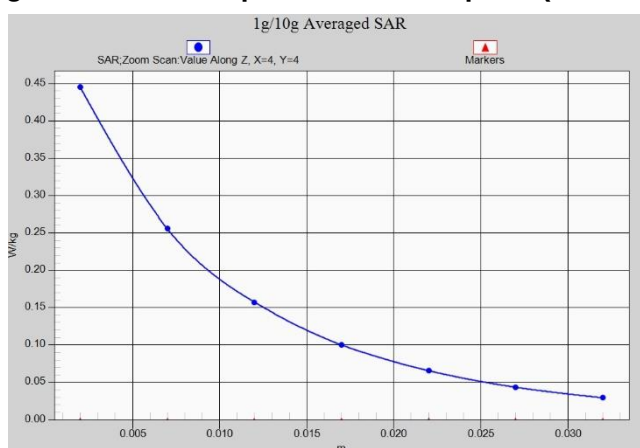


Fig. 2-1 Z-Scan at power reference point (GSM 850)

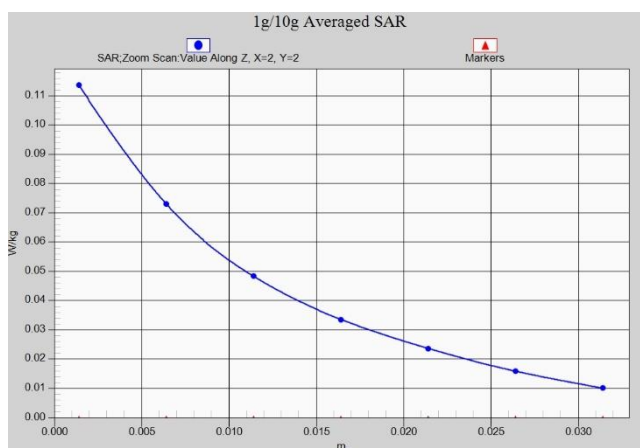


Fig. 3-1 Z-Scan at power reference point (GSM 1900)



Fig. 4-1 Z-Scan at power reference point (GSM 1900)

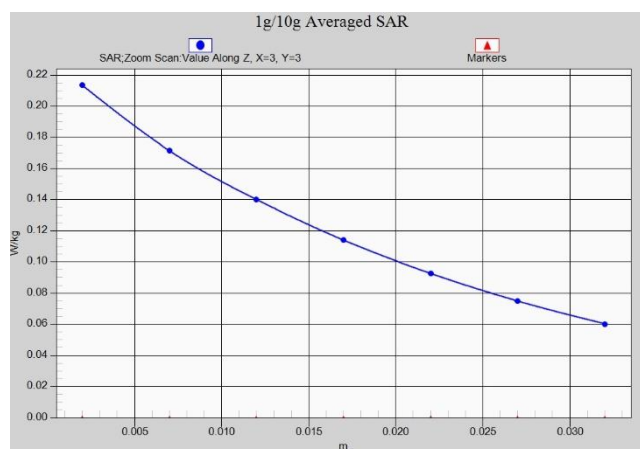


Fig. 5-1 Z-Scan at power reference point (WCDMA 850)

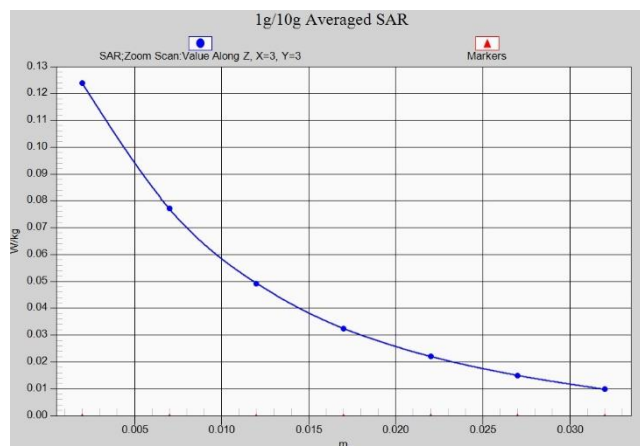


Fig. 6-1 Z-Scan at power reference point (WCDMA 850)

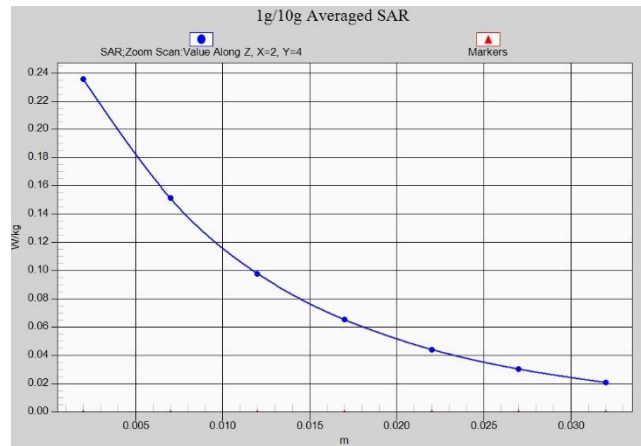


Fig. 7-1 Z-Scan at power reference point (WCDMA 1900)

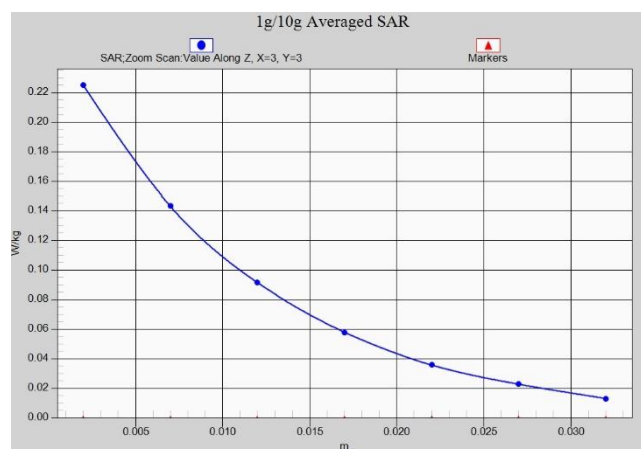


Fig. 8-1 Z-Scan at power reference point (WCDMA 1900)

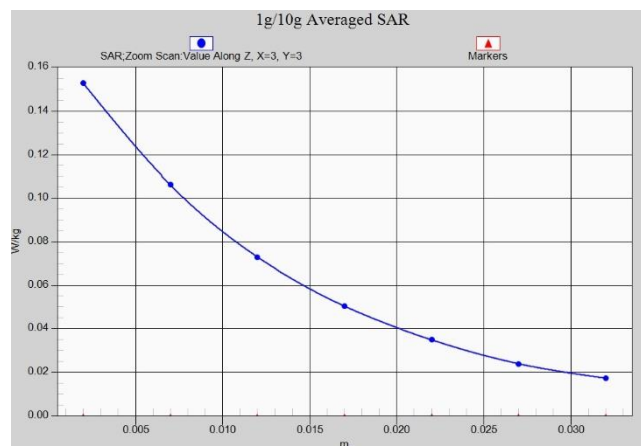


Fig. 9-1 Z-Scan at power reference point (WCDMA 1700)

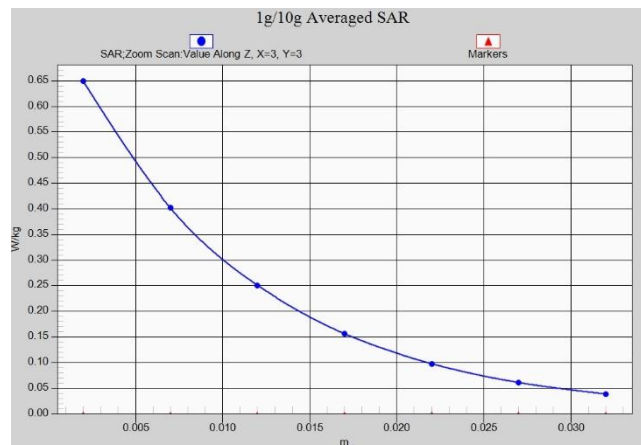


Fig. 10-1 Z-Scan at power reference point (WCDMA 1700)

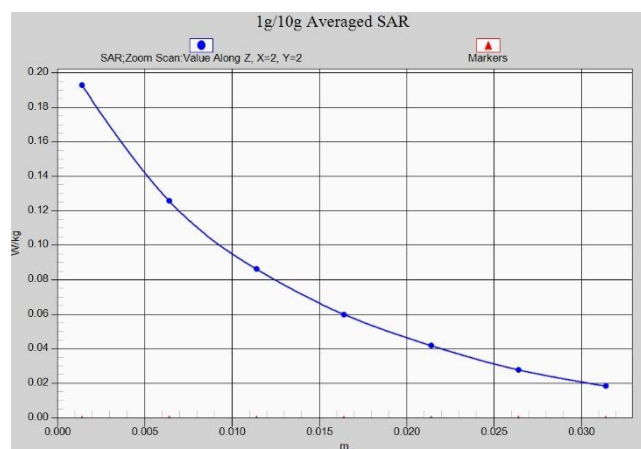


Fig. 11-1 Z-Scan at power reference point (LTE Band2)

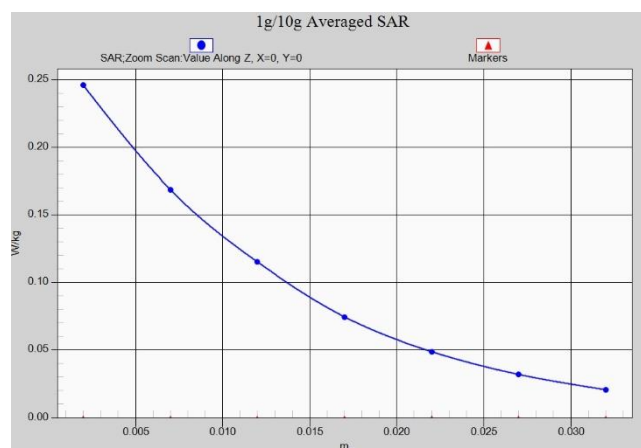


Fig. 12-1 Z-Scan at power reference point (LTE Band2)



Fig. 13-1 Z-Scan at power reference point (LTE Band2)

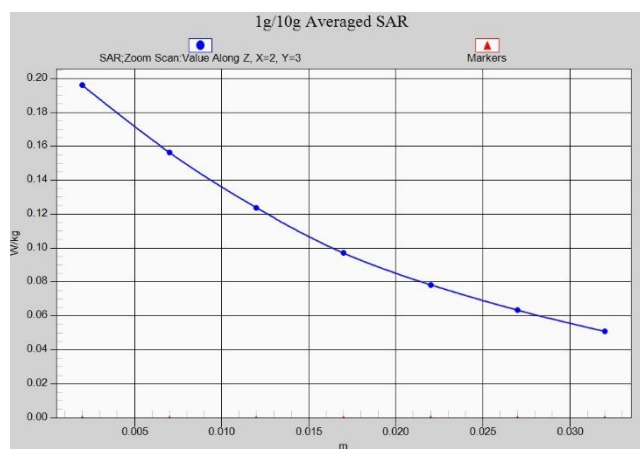


Fig. 14-1 Z-Scan at power reference point (LTE Band5)

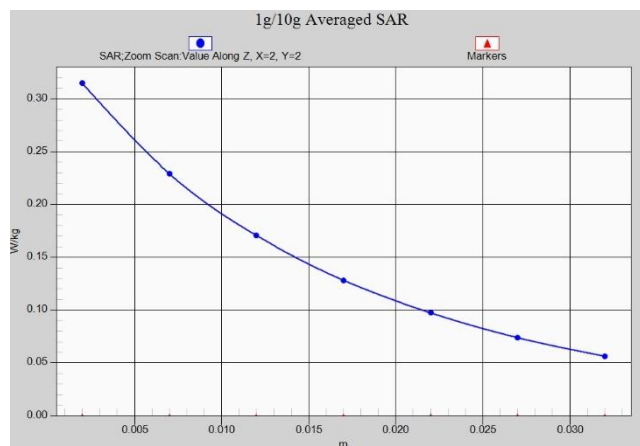


Fig. 15-1 Z-Scan at power reference point (LTE Band5)

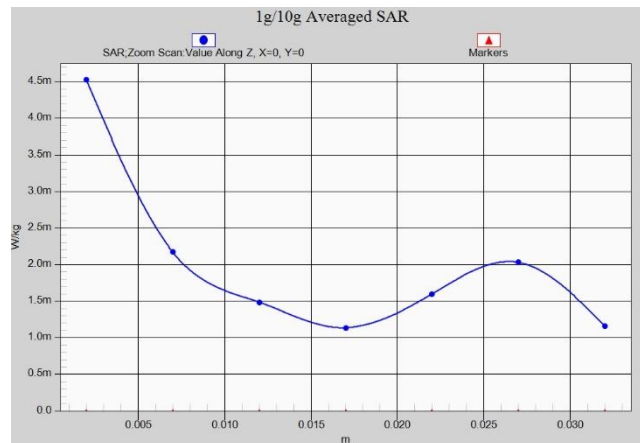


Fig. 16-1 Z-Scan at power reference point (LTE Band7)

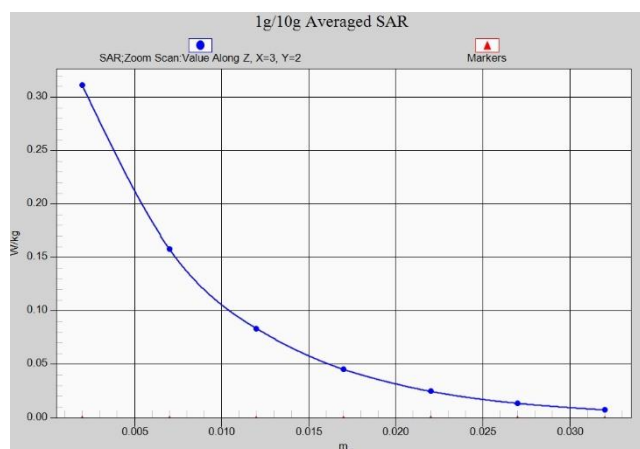


Fig. 17-1 Z-Scan at power reference point (LTE Band7)

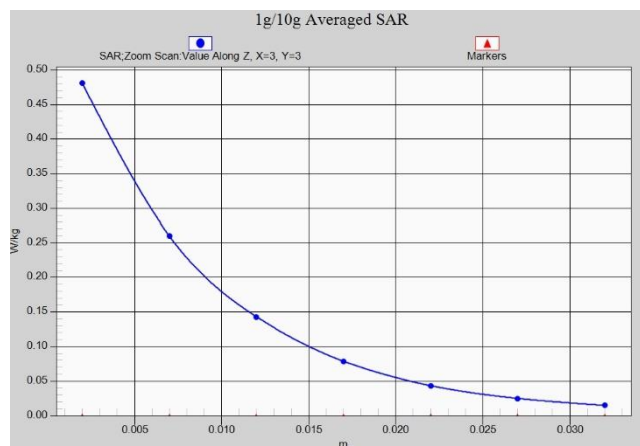


Fig. 18-1 Z-Scan at power reference point (LTE Band7)

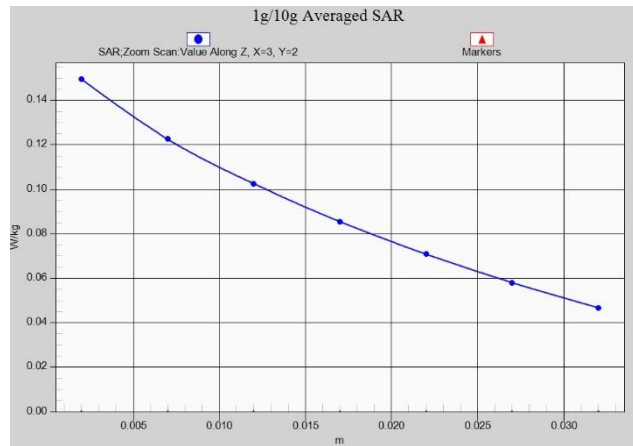


Fig. 19-1 Z-Scan at power reference point (LTE Band12)

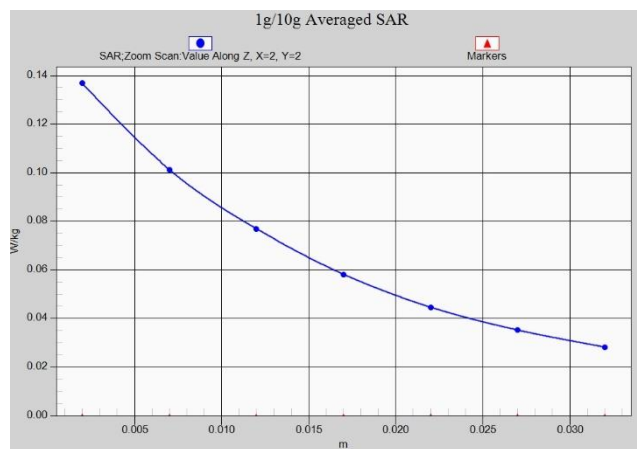


Fig. 20-1 Z-Scan at power reference point (LTE Band12)



Fig. 21-1 Z-Scan at power reference point (LTE Band13)

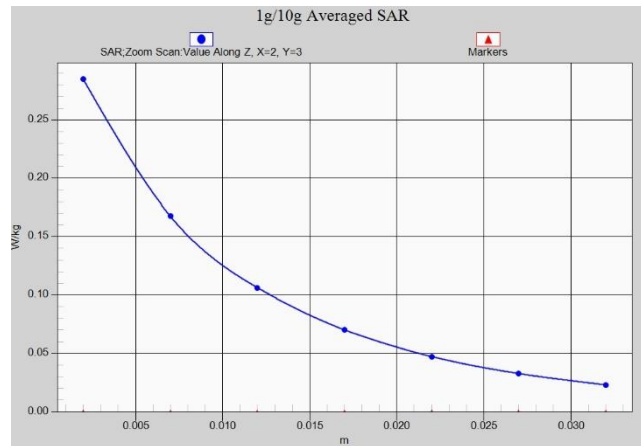


Fig. 22-1 Z-Scan at power reference point (LTE Band13)

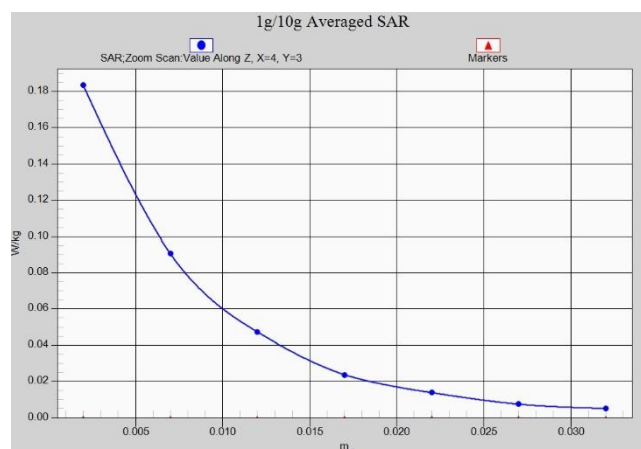


Fig. 23-1 Z-Scan at power reference point (LTE Band41)

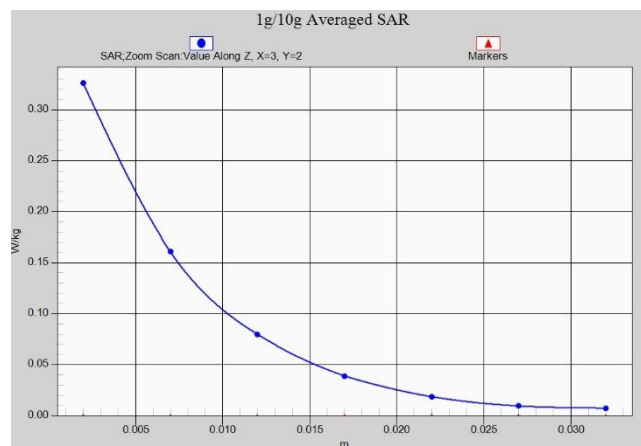


Fig. 24-1 Z-Scan at power reference point (LTE Band41)

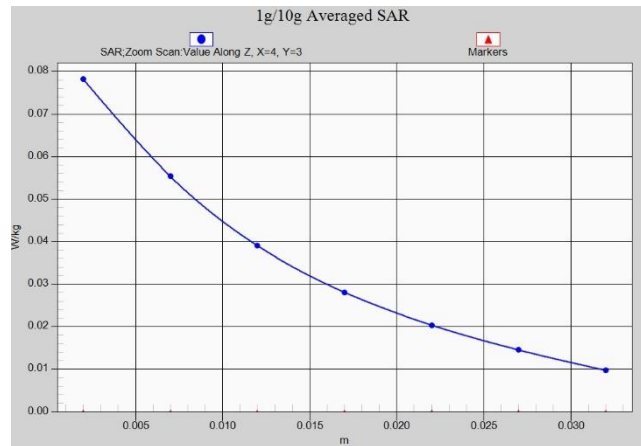


Fig. 25-1 Z-Scan at power reference point (LTE Band66)

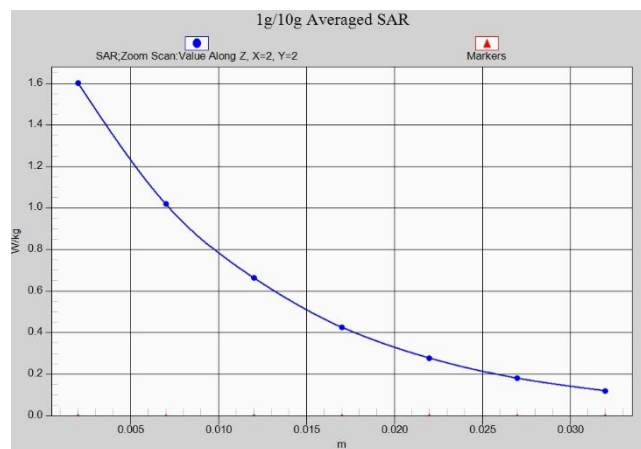


Fig. 26-1 Z-Scan at power reference point (LTE Band66)

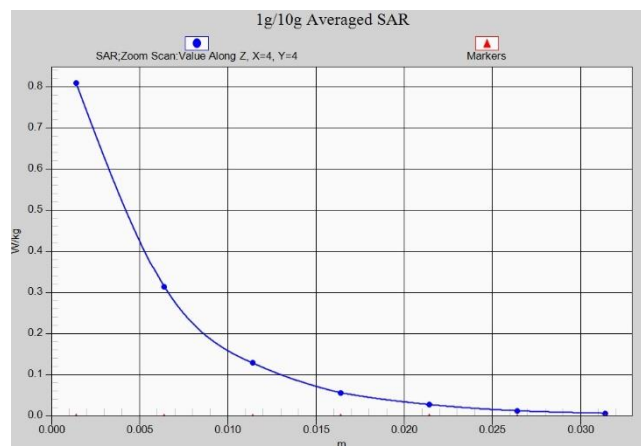


Fig. 27-1 Z-Scan at power reference point (WIFI 2.4G)

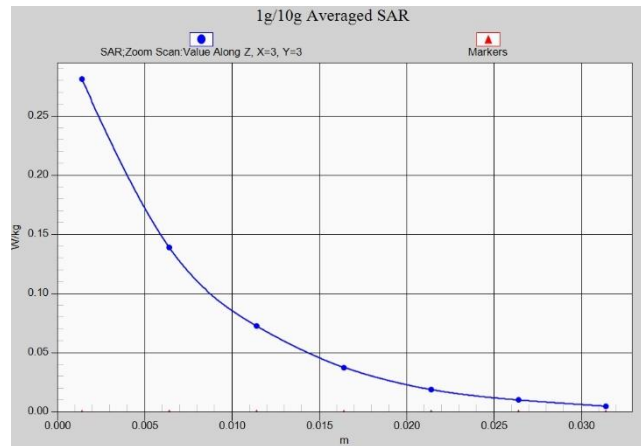


Fig. 28-1 Z-Scan at power reference point (WIFI 2.4G)

ANNEX B System Verification Results

750 MHz

Date: 8/19/2019

Electronics: DAE4 Sn1525

Medium: Head 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.898 \text{ mho/m}$; $\epsilon_r = 41.7$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 750 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.47,9.47,9.47)

System Validation /Area Scan (81x191x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 60.38 V/m; Power Drift = 0.03

Fast SAR: SAR(1 g) = 2.02 W/kg; SAR(10 g) = 1.36 W/kg

Maximum value of SAR (interpolated) = 2.78 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 60.38 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.02 W/kg

SAR(1 g) = 2.05 W/kg; SAR(10 g) = 1.32 W/kg

Maximum value of SAR (measured) = 2.82 W/kg

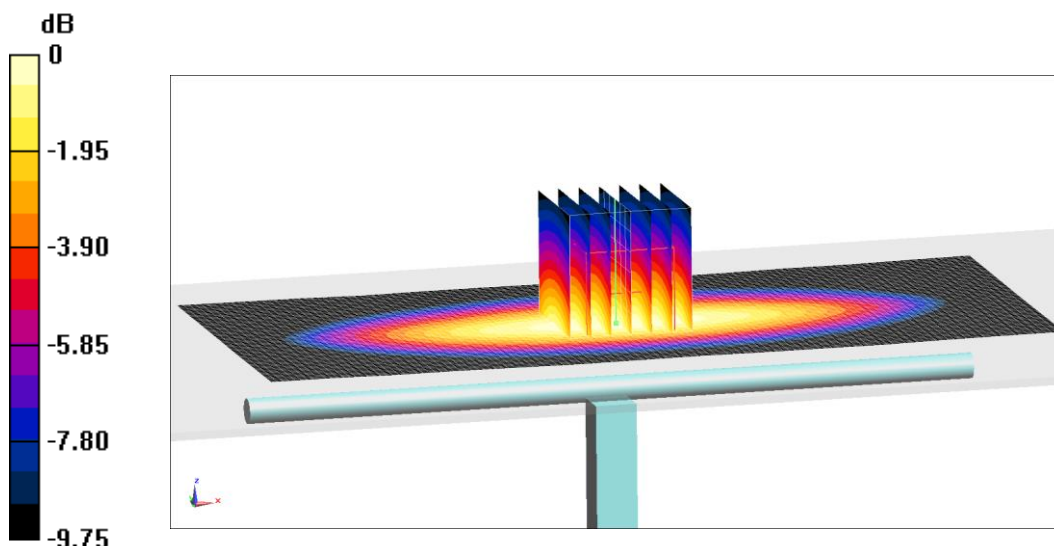

0 dB = 2.82 W/kg = 4.5 dB W/kg

Fig.B.1 validation 750 MHz 250mW

750 MHz

Date: 8/19/2019

Electronics: DAE4 Sn1525

Medium: Body 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.951 \text{ mho/m}$; $\epsilon_r = 55.35$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 750 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.68,9.68,9.68)

System Validation /Area Scan (81x191x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 56.8 V/m ; Power Drift = -0.03

Fast SAR: SAR(1 g) = 2.15 W/kg ; SAR(10 g) = 1.42 W/kg

Maximum value of SAR (interpolated) = 3.23 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.8 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.3 W/kg

SAR(1 g) = 2.2 W/kg ; SAR(10 g) = 1.41 W/kg

Maximum value of SAR (measured) = 2.9 W/kg

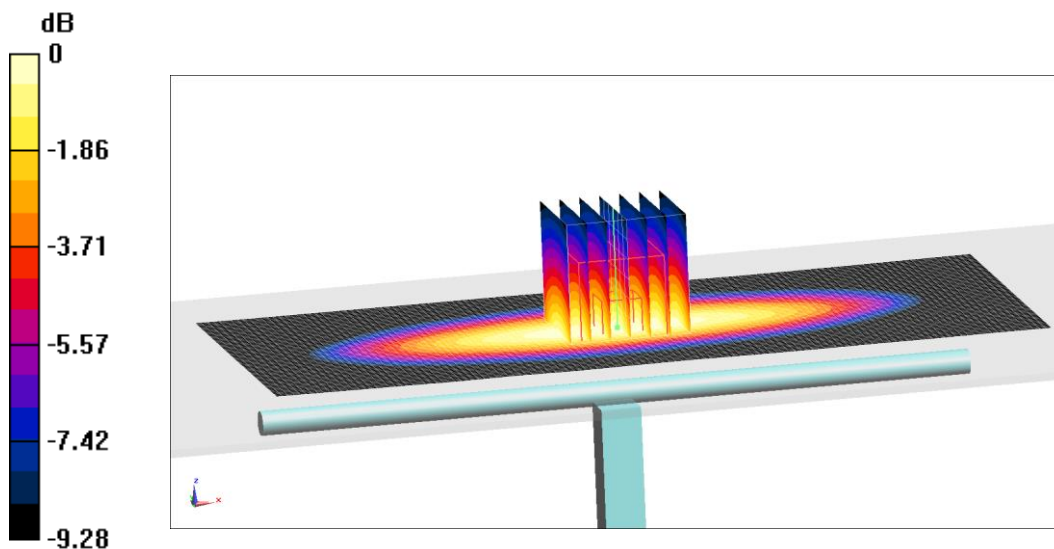

0 dB = 2.9 W/kg = 4.62 dB W/kg

Fig.B.2 validation 750 MHz 250mW

835 MHz

Date: 8/20/2019

Electronics: DAE4 Sn1525

Medium: Head 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.6$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.09,9.09,9.09)

System Validation /Area Scan (81x191x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 64.81 V/m ; Power Drift = 0.04

Fast SAR: SAR(1 g) = 2.35 W/kg ; SAR(10 g) = 1.5 W/kg

Maximum value of SAR (interpolated) = 3.8 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 64.81 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 4.12 W/kg

SAR(1 g) = 2.38 W/kg ; SAR(10 g) = 1.52 W/kg

Maximum value of SAR (measured) = 3.63 W/kg

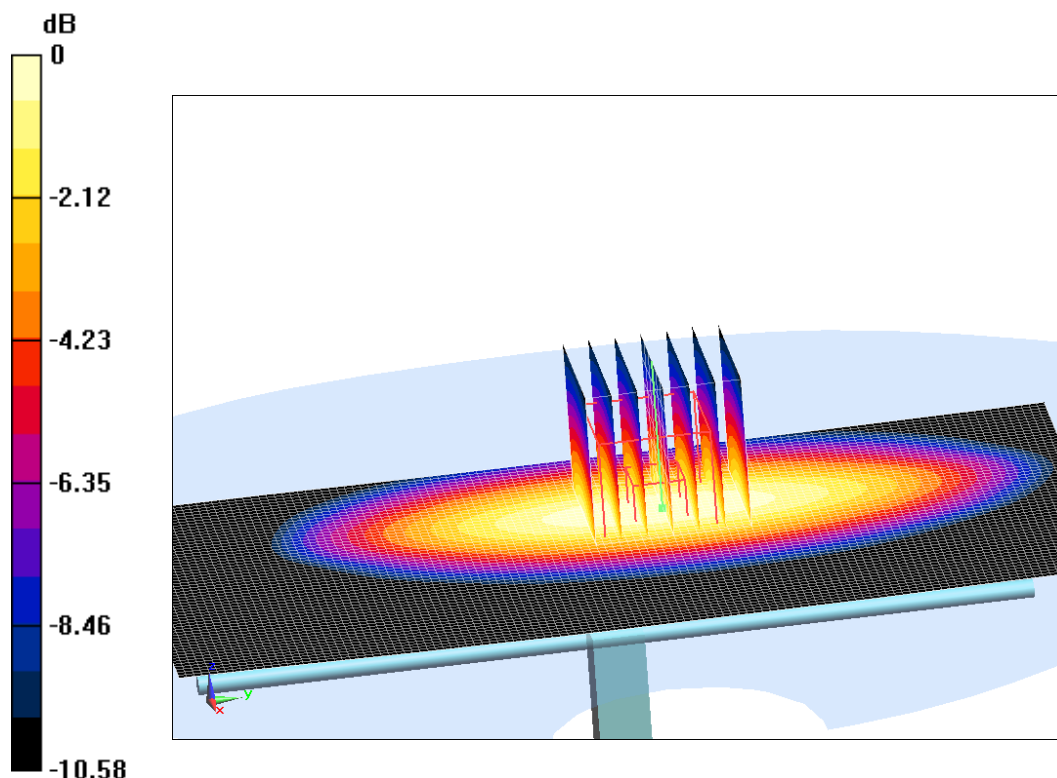

0 dB = 3.63 W/kg = 5.6 dB W/kg

Fig.B.3 validation 835 MHz 250mW

835 MHz

Date: 8/20/2019

Electronics: DAE4 Sn1525

Medium: Body 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.988 \text{ mho/m}$; $\epsilon_r = 56.1$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(9.47,9.47,9.47)

System Validation /Area Scan (81x191x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Reference Value = 59.21 V/m ; Power Drift = -0.09

Fast SAR: SAR(1 g) = 2.35 W/kg ; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (interpolated) = 3.58 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 59.21 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 3.7 W/kg

SAR(1 g) = 2.34 W/kg ; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 3.2 W/kg

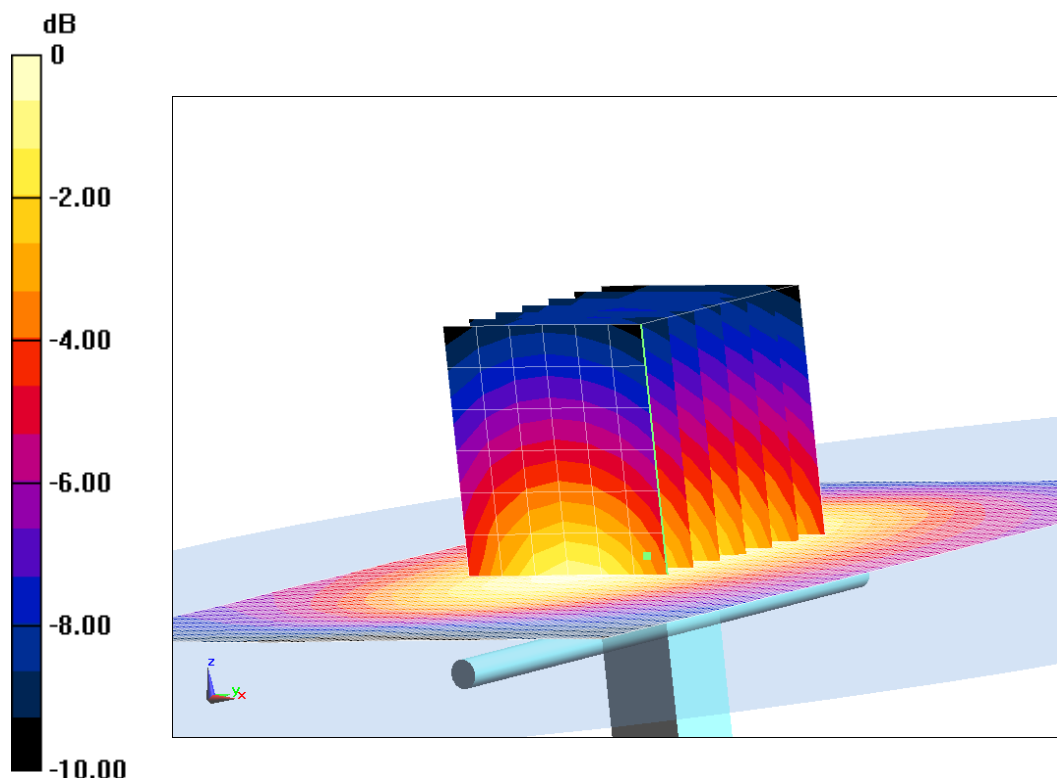

$0 \text{ dB} = 3.2 \text{ W/kg} = 5.05 \text{ dB W/kg}$

Fig.B.4 validation 835 MHz 250mW

1750 MHz

Date: 8/21/2019

Electronics: DAE4 Sn1525

Medium: Head 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.38$ mho/m; $\epsilon_r = 40.68$; $\rho = 1000$ kg/m³

Ambient Temperature: 22.5°C Liquid Temperature: 22.3°C

Communication System: CW Frequency: 1750 MHz Duty Cycle: 1:1

Probe: EX3DV4 – SN7514 ConvF(8.10,8.10,8.10)

System Validation /Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Reference Value = 104.5 V/m; Power Drift = 0.06

Fast SAR: SAR(1 g) = 8.86 W/kg; SAR(10 g) = 4.73 W/kg

Maximum value of SAR (interpolated) = 14.9 W/kg


System Validation /Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value =104.5 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 17.93 W/kg

SAR(1 g) = 8.83 W/kg; SAR(10 g) = 4.75 W/kg

Maximum value of SAR (measured) = 14.5 W/kg

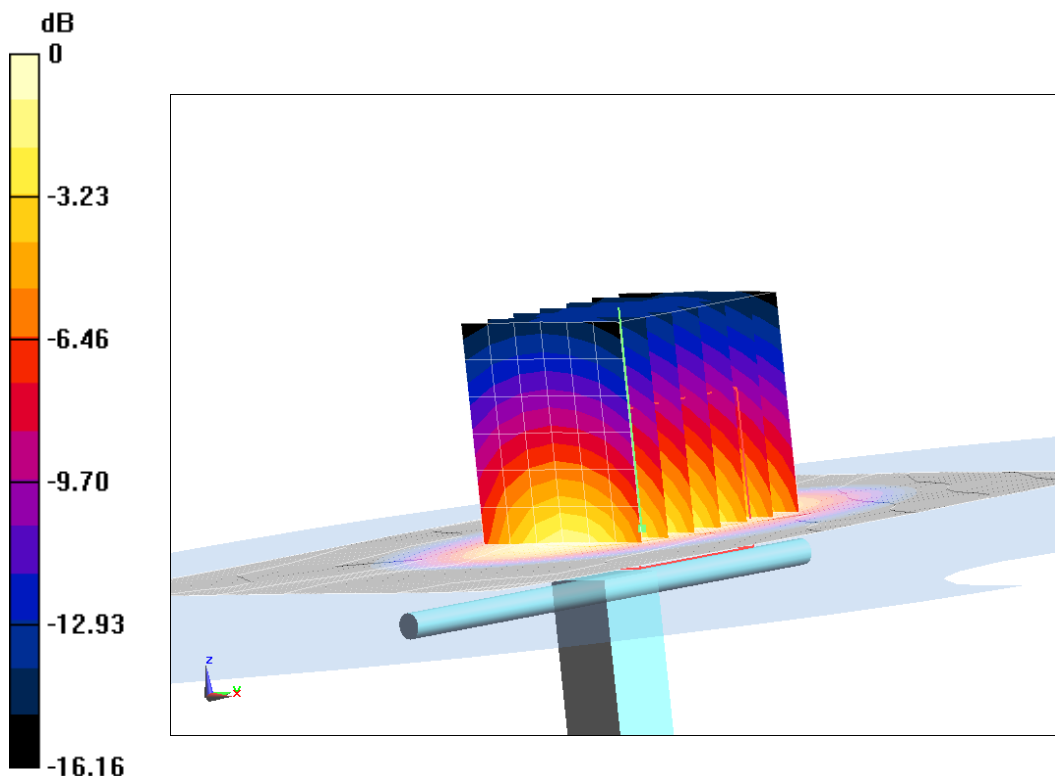

0 dB = 14.5 W/kg = 11.61 dB W/kg

Fig.B.5 validation 1750 MHz 250mW