



Valued Quality. Delivered.

TEST REPORT

Report Number: 16060748HKG-005R1

Application
for
Original Grant of 47 CFR Part 15 Certification

Learning App TV Console

FCC ID: G2R-1947A

This report supersedes previous report with report number 16060748HKG-005 dated July 21, 2016.

Prepared and Checked by:

Approved by:

Signed On File

Josie Yao
Engineer

Koo Wai Ip
Assistant Supervisor
August 29, 2016

- Intertek's standard Terms and Conditions can be obtained at our website: <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- © 2016 Intertek

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

INTERTEK TESTING SERVICES

GENERAL INFORMATION

Applicant Name:	VTech Telecommunications Ltd.
Applicant Address:	23/F., Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road, Tai Po, Hong Kong.
FCC Specification Standard:	FCC Part 15, October 1, 2014 Edition
FCC ID:	G2R-1947A
FCC Model(s):	1947
Type of EUT:	Digital Transmission System Transmitter
Description of EUT:	Learning App TV Console
Serial Number:	N/A
Sample Receipt Date:	June 13, 2016
Date of Test:	June 13, 2016 to July 12, 2016
Report Date:	August 29, 2016
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

INTERTEK TESTING SERVICES

Table of Contents

1.0 Test Results Summary & Statement of Compliance	4
1.1 Summary of Test Results	4
1.2 Statement of Compliance	4
2.0 General Description	6
2.1 Product Description	6
2.2 Test Methodology	6
2.3 Test Facility	6
2.4 Related Submittal(s) Grants	6
3.0 System Test Configuration	8
3.1 Justification	8
3.2 EUT Exercising Software	9
3.3 Details of EUT and Description of Accessories	10
3.4 Measurement Uncertainty	10
4.0 Test Results	12
4.1 Maximum Conducted Output Power at Antenna Terminals	12
4.2 Minimum 6dB RF Bandwidth	14
4.3 Maximum Power Spectral Density	23
4.4 Out of Band Conducted Emissions	32
4.5 Field Strength Calculation	45
4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	46
4.6.1 Radiated Emission Configuration Photograph	46
4.6.2 Radiated Emission Data	46
4.6.3 Transmitter Duty Cycle Calculation	61
4.7 AC Power Line Conducted Emission	61
4.7.1 AC Power Line Conducted Emission Configuration Photograph	61
4.7.2 AC Power Line Conducted Emission Data	61
5.0 Equipment List	65

INTERTEK TESTING SERVICES

EXHIBIT 1 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

INTERTEK TESTING SERVICES

1.0 Test Results Summary & Statement of Compliance

1.1 Summary of Test Results

Test Items	FCC Part 15 Section	Results	Details see section
Antenna Requirement	15.203	Pass	2.1
Max. Conducted Output Power (average)	15.247(b)(3)&(4)	Pass	4.1
Min. 6dB RF Bandwidth	15.247(a)(2)	Pass	4.2
Max. Power Density (average)	15.247(e)	Pass	4.3
Out of Band Antenna Conducted Emission	15.247(d)	Pass	4.4
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209 & 15.109	Pass	4.6
AC Power Line Conducted Emission	15.207 & 15.107	Pass	4.7

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

Please refer TC-S16-016 Letter issued on August 29, 2016 for the detail Amendment Summary.

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2014 Edition

INTERTEK TESTING SERVICES

EXHIBIT 2 GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

2.0 General Description

2.1 Product Description

The Equipment-Under-Test (EUT) 1947 is a Learning App TV Console. The EUT contains both WLAN (Wi-Fi) and 2.4GHz modules. For the 2.4GHz module, it has 14 channels and the operation frequency range is 2412-2475MHz. It can operate with the accessories via 2.4GHz module and access Internet via Wi-Fi module. The EUT is powered by 120VAC and 3VDC (1 x 3V CR2032 backup battery).

For the WLAN (WiFi) module:

For 802.11b mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via direct-sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11Mbps. For 802.11g mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps. For 802.11n (HT20 with 20MHz bandwidth) mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation (mcs0 to mcs7). Maximum bit rate can support up to 65Mbps. For 802.11n (HT40 with 40MHz bandwidth) mode, it operates at frequency range of 2422.000MHz to 2452.000MHz with 9 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation (mcs0 to mcs7). Maximum bit rate can support up to 130Mbps.

Antenna Type: Internal, Integral

The circuit description is saved with filename: descri.pdf.

2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No. 558074 D01 v03r05 (08 Apr, 2016) All other measurements were made in accordance with the procedures in 47 CFR Part 2.

2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC.

2.4 Related Submittal(s) Grants

This is a single application for certification of a transceiver (WiFi portion).

The computer peripheral portion of the product has been subjected to the FCC 15 DOC procedure.

INTERTEK TESTING SERVICES

EXHIBIT 3 SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

3.0 **System Test Configuration**

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by a 120V 60Hz 150mA to 5V 1000mA adaptor.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 Limits.

INTERTEK TESTING SERVICES

3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.2.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.6.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

The EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT power cord connected to one LISN (Line impedance stabilization network), which provided 50ohm coupling impedance for measuring instrument. Meanwhile, the peripheral or support equipment power cords connected to a separate LISN. The ac powers for all LISNs were obtained from the same power source. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled. Power cords of non-EUT equipment (peripherals) were not bundled. AC power cords of peripheral equipments draped over the rear edge of the table, and routed them down onto the floor of the ac power line conducted emission test site to the second LISN.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst case data is included in this report.

All data rates were tested under normal mode of WiFi. Only the worst-case data is shown in the report for DSSS and OFDM

For simultaneous transmission, both WiFi and 2.4GHz FSK module portions are also switched on when taking radiated emission for determining worst-case spurious emission.

3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

INTERTEK TESTING SERVICES

3.3 Details of EUT and Description of Accessories

Details of EUT:

An AC adaptor (provided with the unit) was used to power the device. Their description are listed below.

- (1) An AC adaptor (120VAC to 5VDC 1000mA, Model: SJB0501000VU)
(Supplied by Client)

Description of Accessories:

- (1) 1 x USB ferrite core cable with length of 1.0m long
(Supplied by Client)
- (2) 1 x HDMI ferrite core cable with length of 1.42m long
(Supplied by Client)
- (3) 1 x 8GB microSD card
(Supplied by Client)

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are $\pm 5.3\text{dB}$ and $\pm 0.99\text{dB}$ respectively. The value of the Measurement uncertainty for conducted emission test is $\pm 4.2\text{dB}$.


Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

INTERTEK TESTING SERVICES

EXHIBIT 4 TEST RESULTS

INTERTEK TESTING SERVICES

4.0 Test Results



4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

The antenna port of the EUT was connected to the input of a spectrum analyzer.

- ☒ External attenuation and cable loss were compensated for using the OFFSET function of the analyser. The measurement procedure 9.2.2 was used.
- ☐ The EUT should be configured to transmit continuously (at a minimum duty cycle of 98%) at full power over the measurement duration. The measurement procedure AVG1 was used.

IEEE 802.11b (DSSS, 1 Mbps) Antenna Gain = 0 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	17.6	57.544
Middle Channel: 2437	18.0	63.096
High Channel: 2462	20.3	107.152

IEEE 802.11g (OFDM, 6 Mbps) Antenna Gain = 0 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	19.2	83.176
Middle Channel: 2437	19.5	89.125
High Channel: 2462	22.1	162.181

IEEE 802.11n (20MHz) (OFDM, MCS0) Antenna Gain = 0 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2412	18.9	77.625
Middle Channel: 2437	19.3	85.114
High Channel: 2462	21.1	128.825

INTERTEK TESTING SERVICES

4.1 Maximum Conducted Output Power at Antenna Terminals – Cont'd

IEEE 802.11n (40MHz) (OFDM, MCS0) Antenna Gain = 0 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2422	21.06	127.644
Middle Channel: 2437	21.40	138.038
High Channel: 2452	23.23	210.378

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation: ☒ included in OFFSET function
☐ added to SA raw reading

IEEE 802.11b (DSSS, 1 Mbps)
max. conducted (average) output level = 20.3 dBm

IEEE 802.11g (OFDM, 9 Mbps)
max. conducted (average) output level = 22.1 dBm

IEEE 802.11n (20MHz) (OFDM, MCS0)
max. conducted (average) output level = 21.1 dBm

IEEE 802.11n (40MHz) (OFDM, MCS0)
max. conducted (peak) output level = 23.23 dBm

Limits:

☒ 1W (30dBm) for antennas with gains of 6dBi or less

☐ ___W (___dBm) for antennas with gains more than 6dBi

INTERTEK TESTING SERVICES

4.2 Minimum 6dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. The EBW measurement procedure was used. A PEAK output reading was taken, a DISPLAY line was drawn 6dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.

IEEE 802.11b (DSSS, 1 Mbps)	
Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	10.3
Middle Channel: 2442	10.2
High Channel: 2462	10.2

IEEE 802.11g (OFDM, 6 Mbps)	
Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	16.8
Middle Channel: 2442	16.8
High Channel: 2462	16.8

IEEE 802.11n (20MHz) (OFDM, MCS0)	
Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2412	18.1
Middle Channel: 2442	18.1
High Channel: 2462	18.0

IEEE 802.11n (40MHz) (OFDM, MCS0)	
Frequency (MHz)	6dB Bandwidth (MHz)
Low Channel: 2422	36.92
Middle Channel: 2437	36.92
High Channel: 2452	36.92

Limits


6 dB bandwidth shall be at least 500kHz

The plots of 6dB RF bandwidth and occupied bandwidth are saved as below.


INTERTEK TESTING SERVICES

Plots of 6dB RF bandwidth

802.11b, Lowest Channel

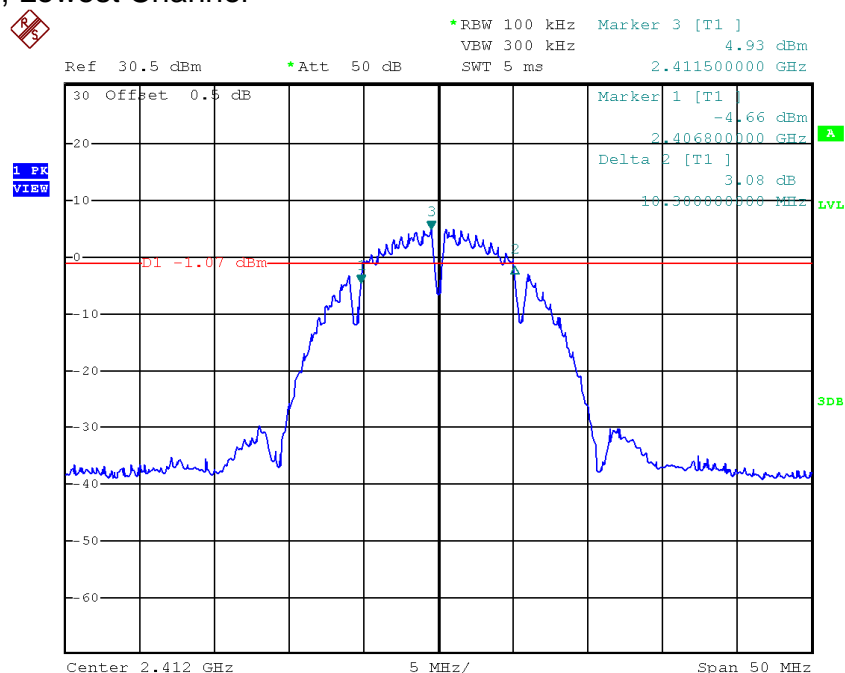


802.11b, Middle Channel

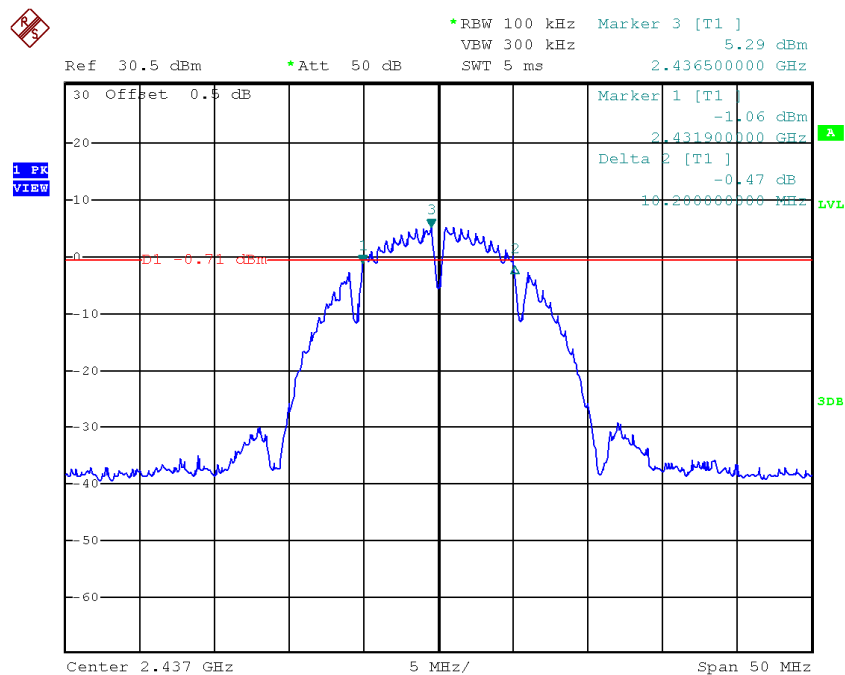

INTERTEK TESTING SERVICES


Plots of 6dB RF bandwidth
802.11b, Highest Channel

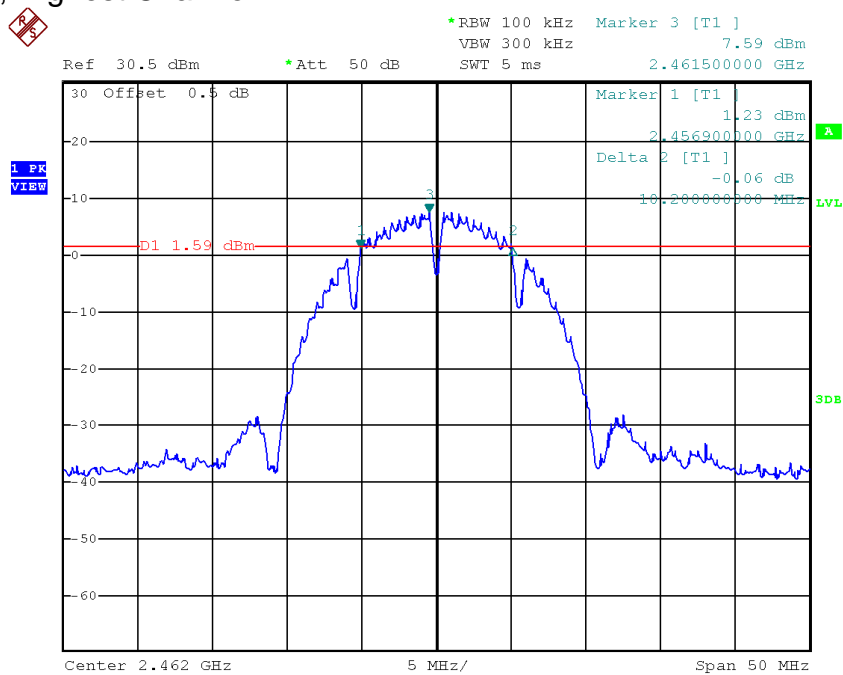


INTERTEK TESTING SERVICES

Plots of 6dB RF bandwidth

802.11g, Lowest Channel

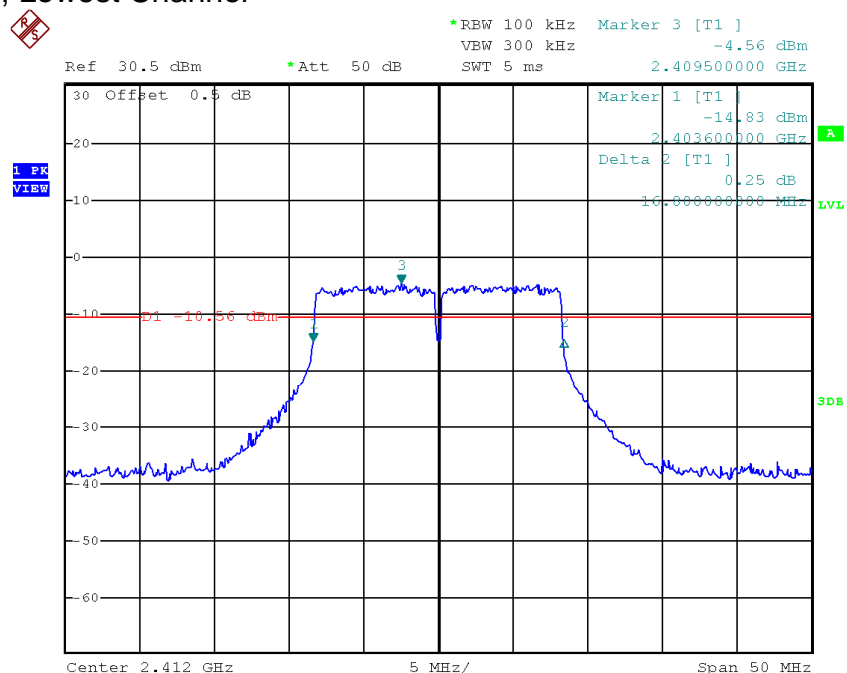


802.11g, Middle Channel

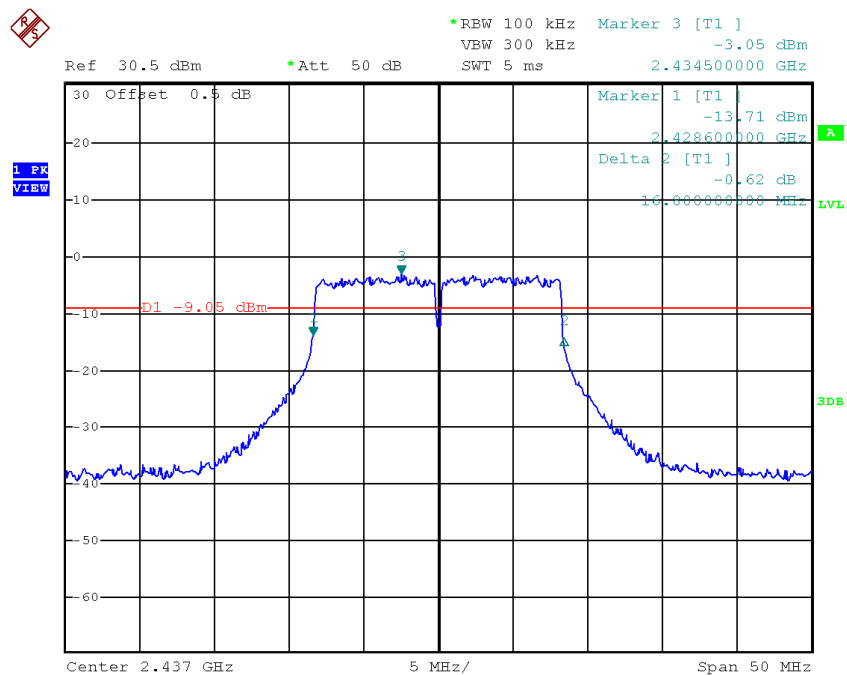

INTERTEK TESTING SERVICES


Plots of 6dB RF bandwidth
802.11g, Highest Channel

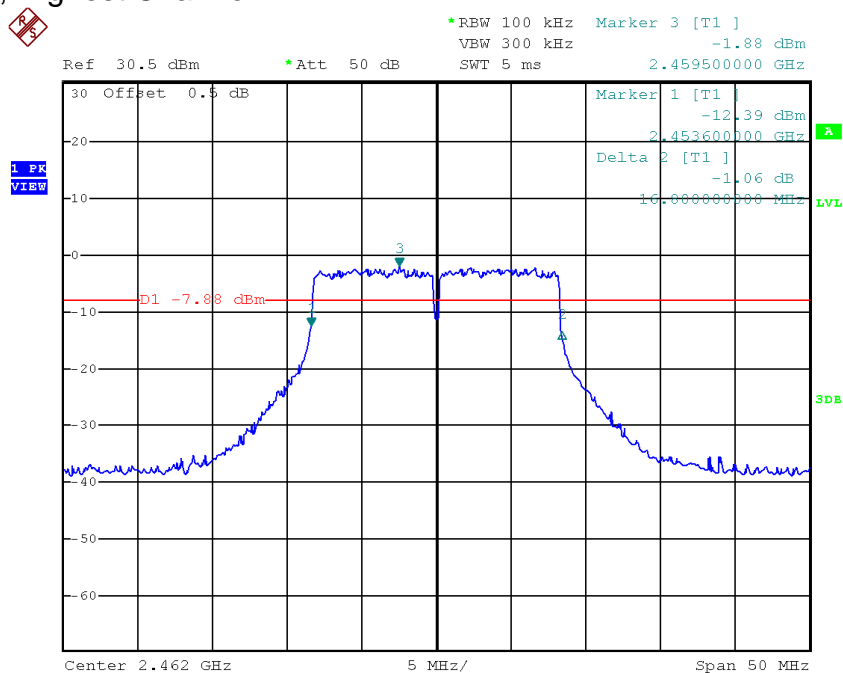


INTERTEK TESTING SERVICES

Plots of 6dB RF bandwidth

802.11n(20M), Lowest Channel

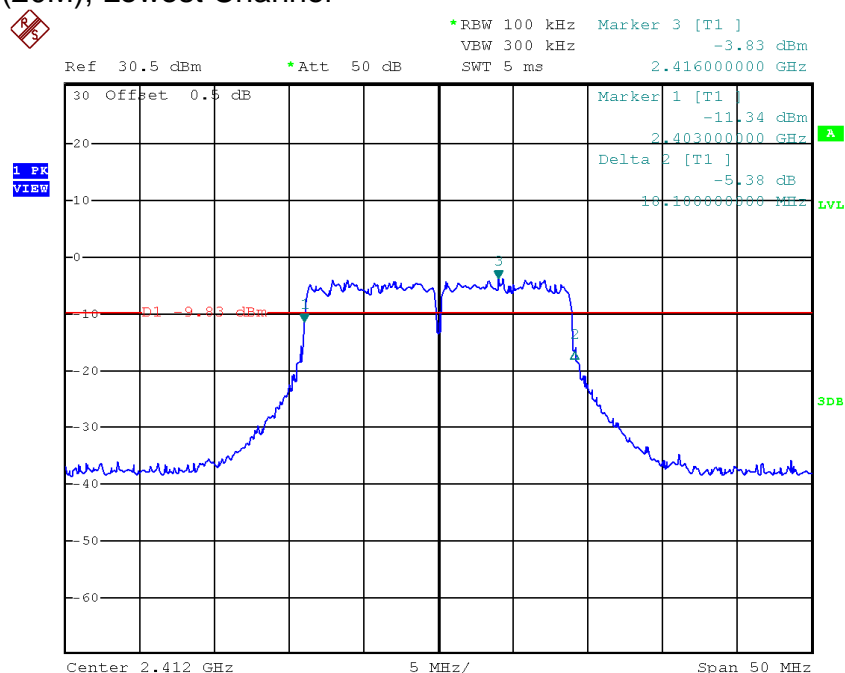


802.11n(20M), Middle Channel

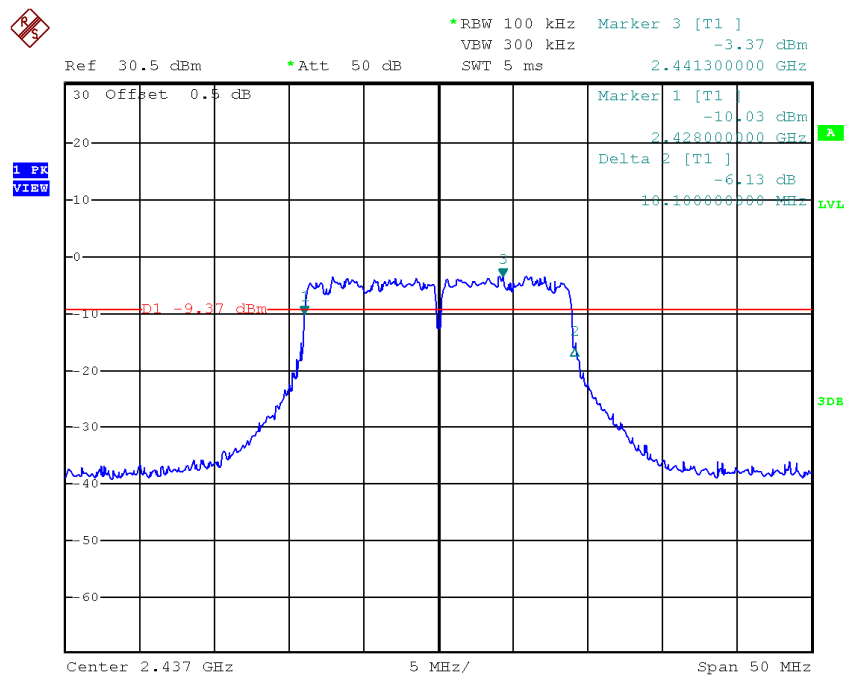

INTERTEK TESTING SERVICES


Plots of 6dB RF bandwidth
802.11n(20M), Highest Channel

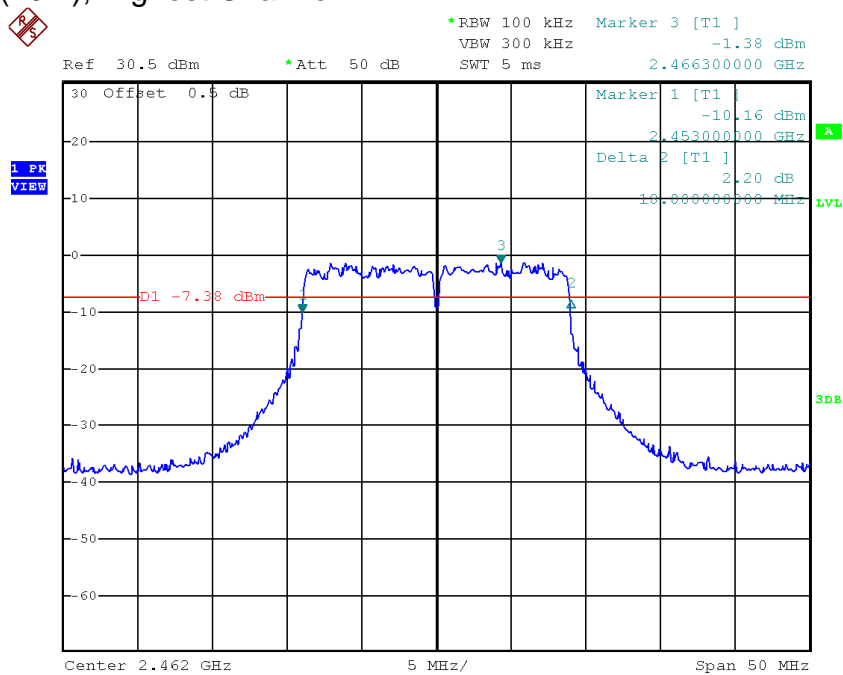


INTERTEK TESTING SERVICES

Plots of 6dB RF bandwidth

802.11n(40M), Lowest Channel

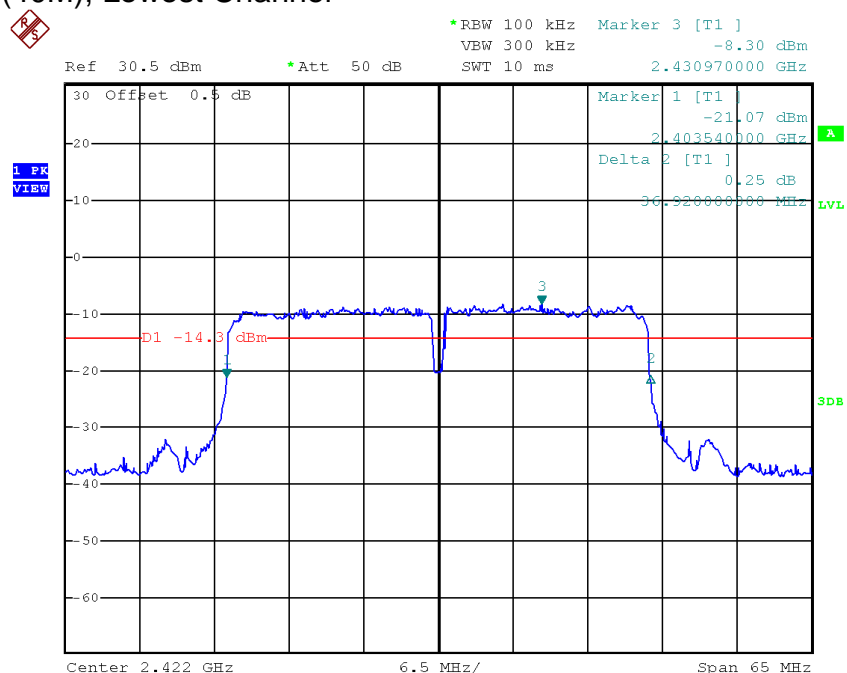


802.11n(40M), Middle Channel

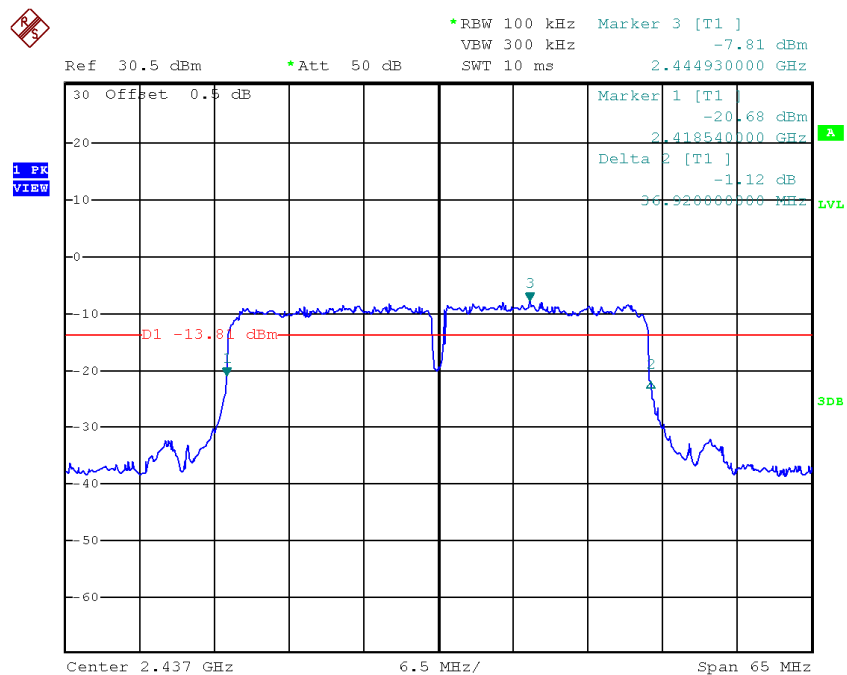

INTERTEK TESTING SERVICES

Plots of 6dB RF bandwidth
802.11n(20M), Highest Channel

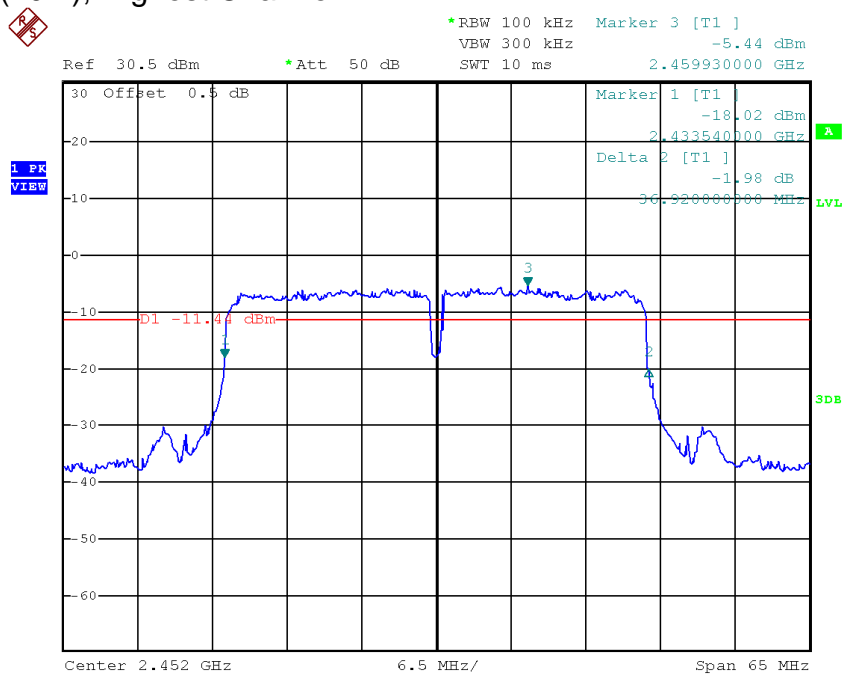

INTERTEK TESTING SERVICES

4.3 Maximum Power Spectral Density

Antenna output of the EUT was coupled directly to spectrum analyzer. The measurement procedure 10.2 PKPSD-1 was used. If an external attenuator and/or cable was used, these losses are compensated for using the OFFSET function of the analyser.

IEEE 802.11b (DSSS, 1 Mbps)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	5.44
Middle Channel: 2442	5.60
High Channel: 2462	7.88

IEEE 802.11g (OFDM, 6 Mbps)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	-4.18
Middle Channel: 2442	-3.93
High Channel: 2462	-1.60

IEEE 802.11n (20MHz) (OFDM, MCS0)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2412	-3.59
Middle Channel: 2442	-3.14
High Channel: 2462	-0.90

IEEE 802.11n (40MHz) (OFDM, MCS0)	
Frequency (MHz)	PSD in 100kHz (dBm)
Low Channel: 2422	-8.15
Middle Channel: 2437	-7.80
High Channel: 2452	-5.76


Cable Loss: 0.5 dB

Limit:
8dBm


The plots of n power spectral density are as below.

INTERTEK TESTING SERVICES

Plots of power spectral density
802.11b, Lowest channel

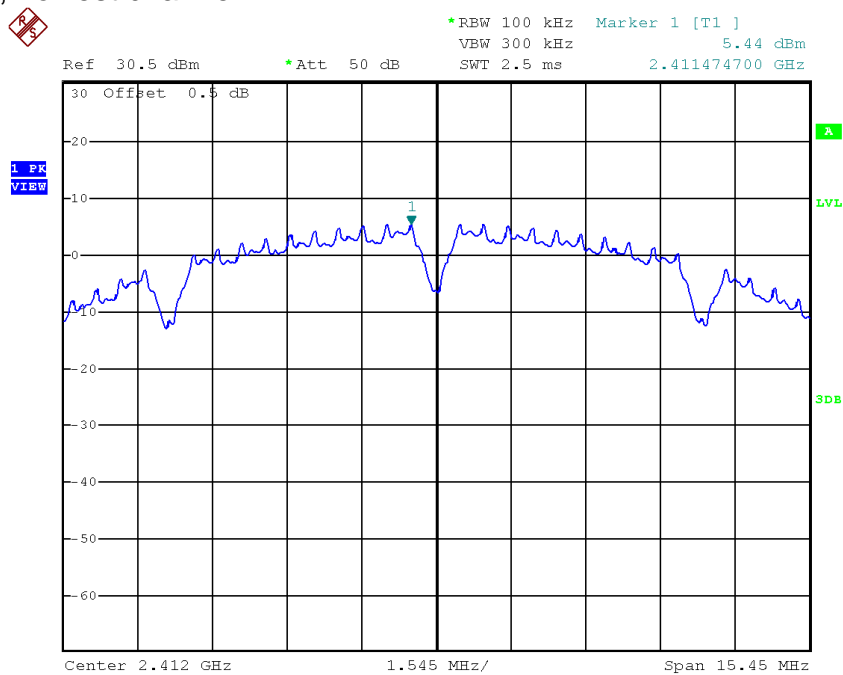


802.11b, Middle channel

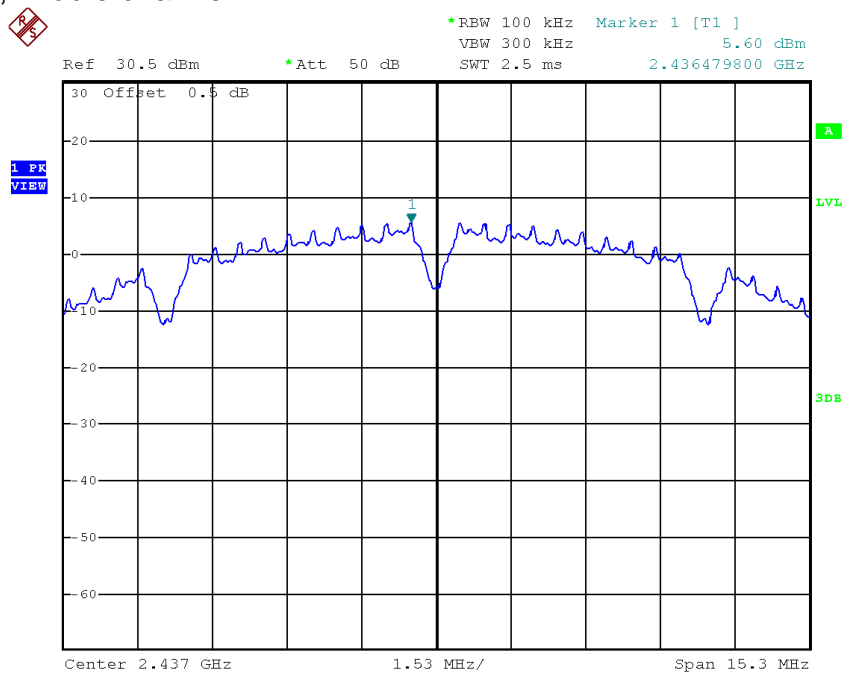

INTERTEK TESTING SERVICES

Plots of power spectral density


802.11b, Highest channel

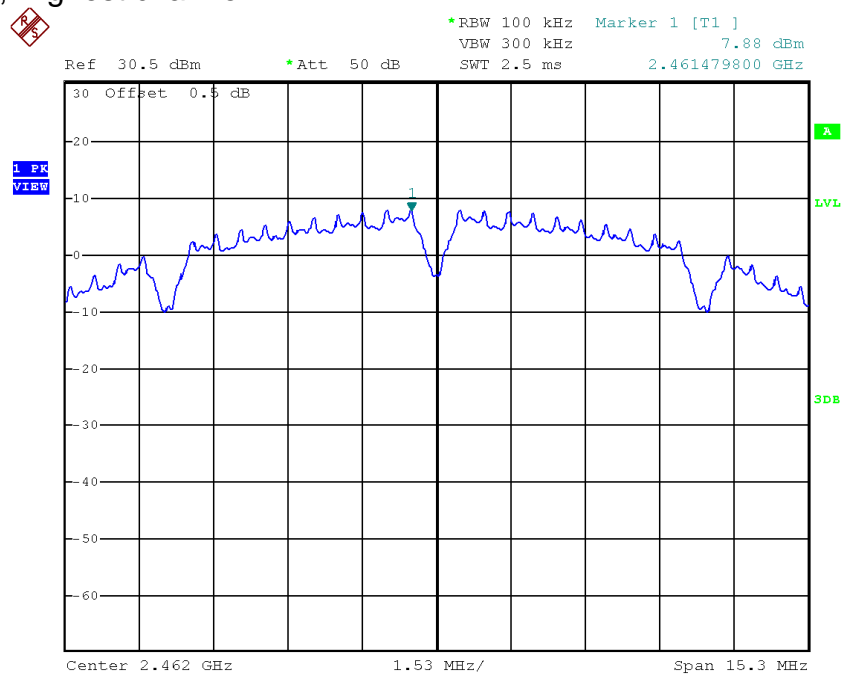


INTERTEK TESTING SERVICES

Plots of power spectral density

802.11g, Lowest channel

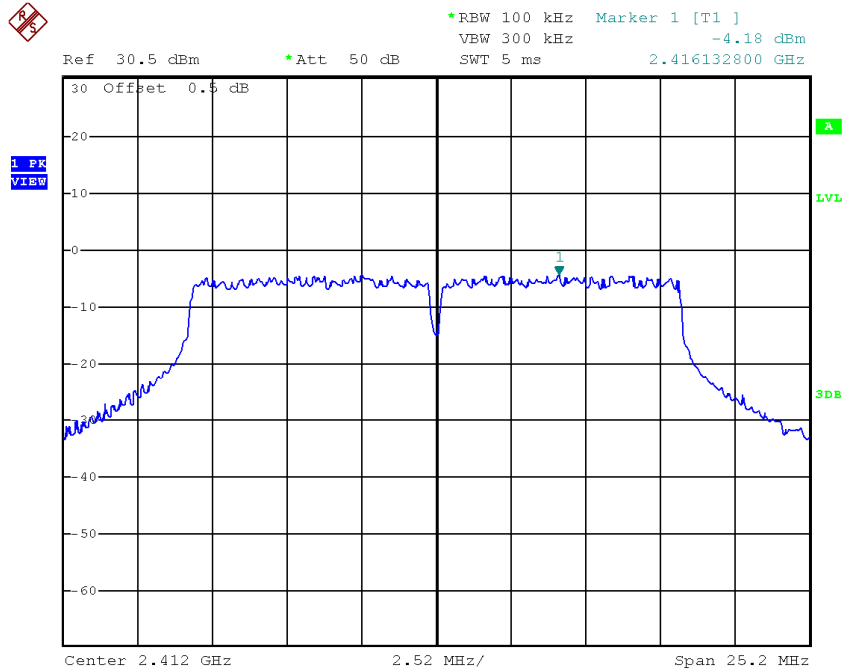


802.11g, Middle channel

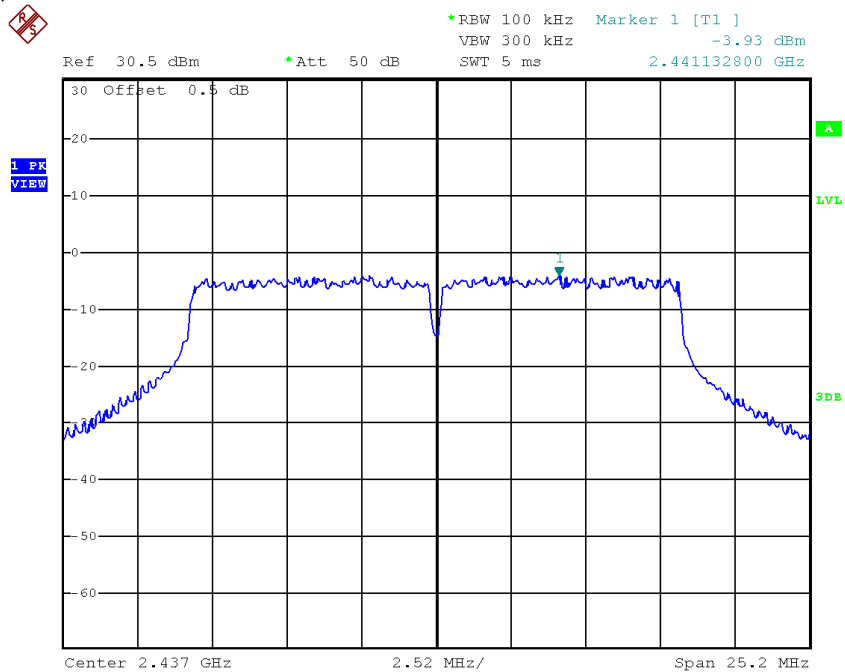


Plots of power spectral density

802.11g, Highest channel

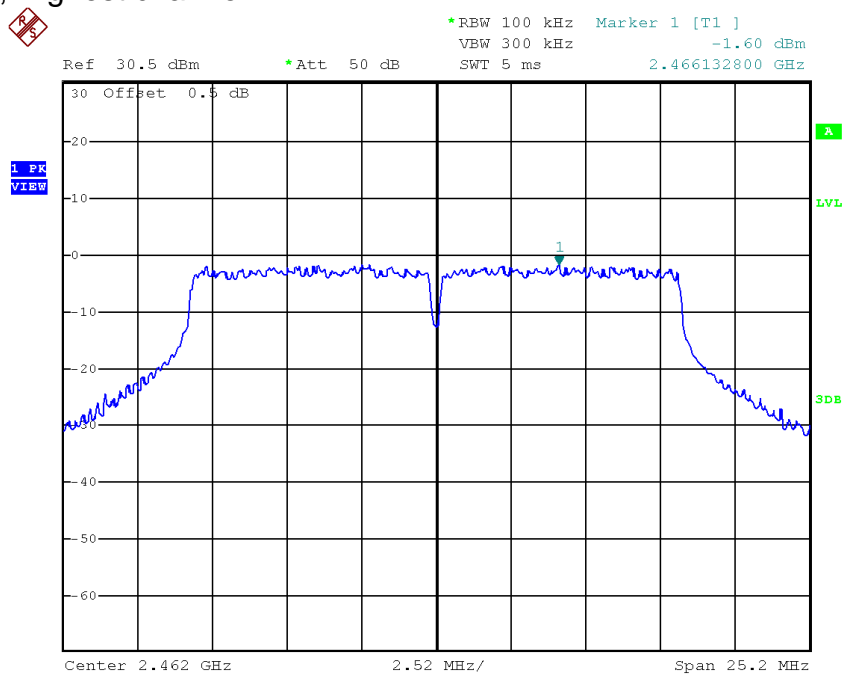


INTERTEK TESTING SERVICES

Plots of power spectral density
802.11n(20M), Lowest channel

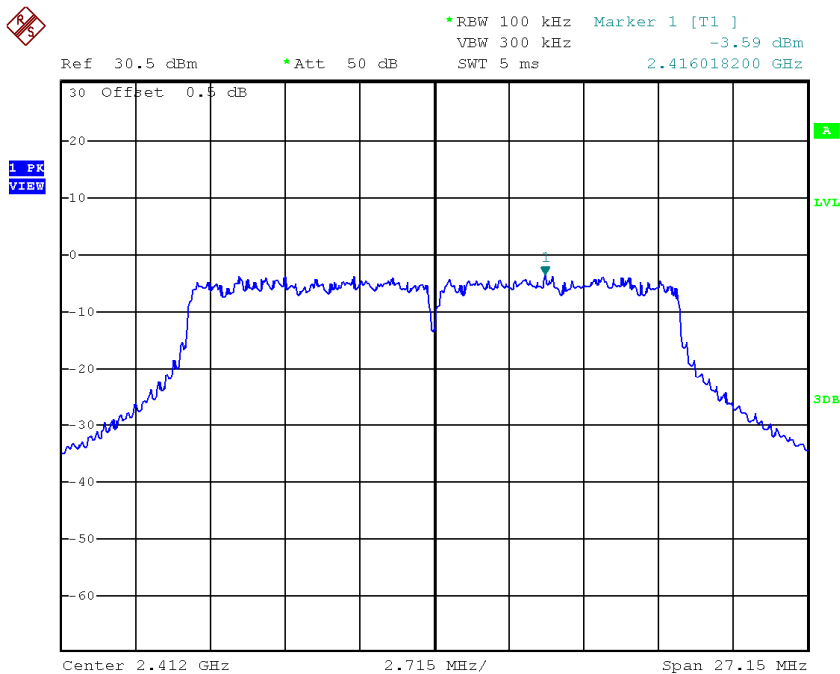


802.11n(20M), Middle channel

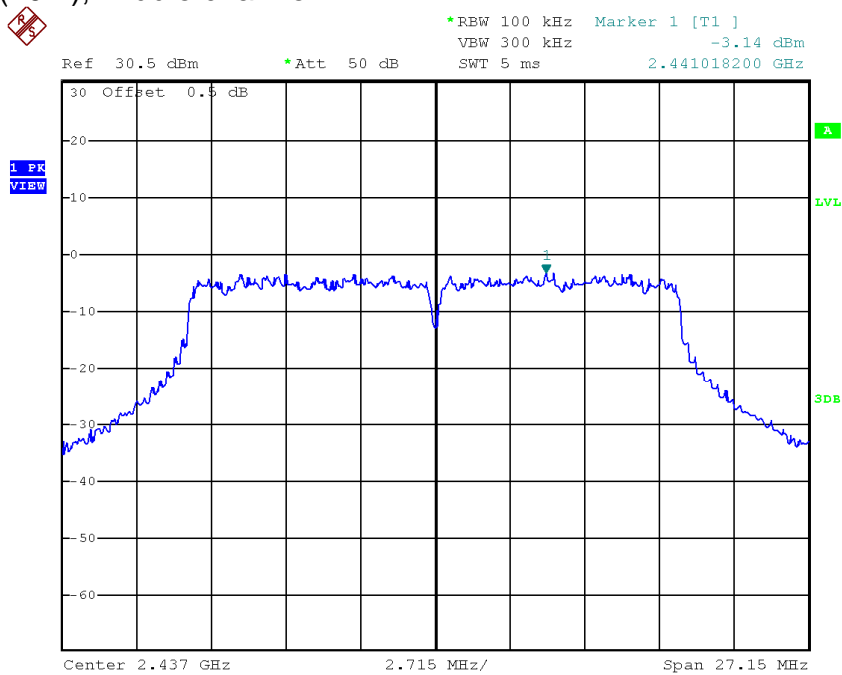

Plots of power spectral density


802.11n(20M), Highest channel

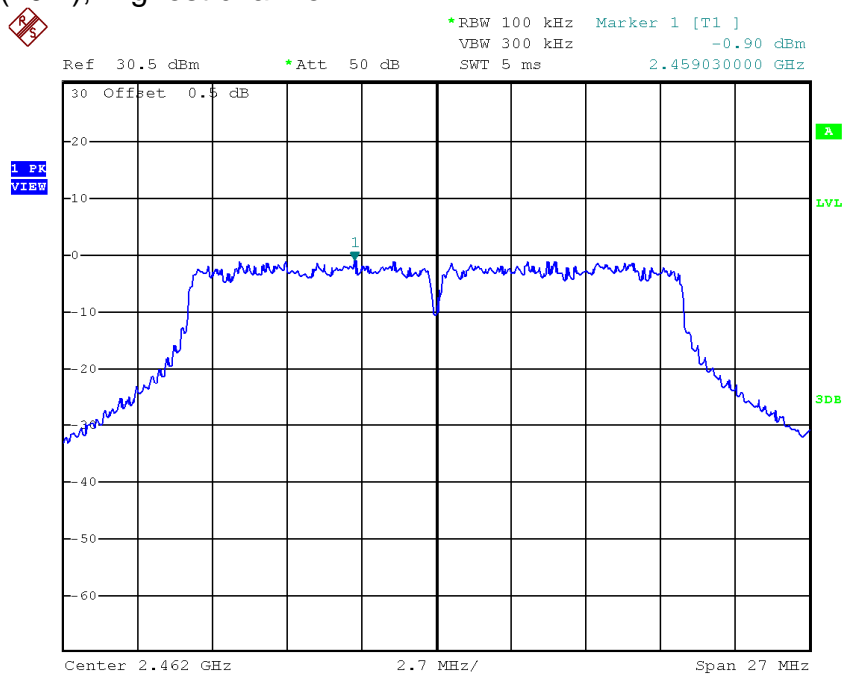


INTERTEK TESTING SERVICES

Plots of power spectral density

802.11n(40M), Lowest channel

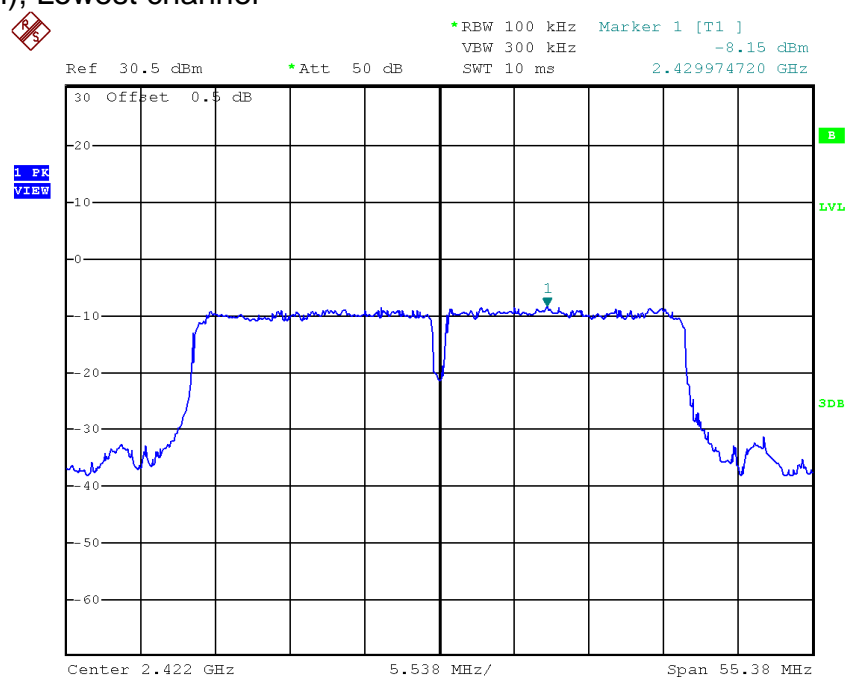


802.11n(40M), Middle channel

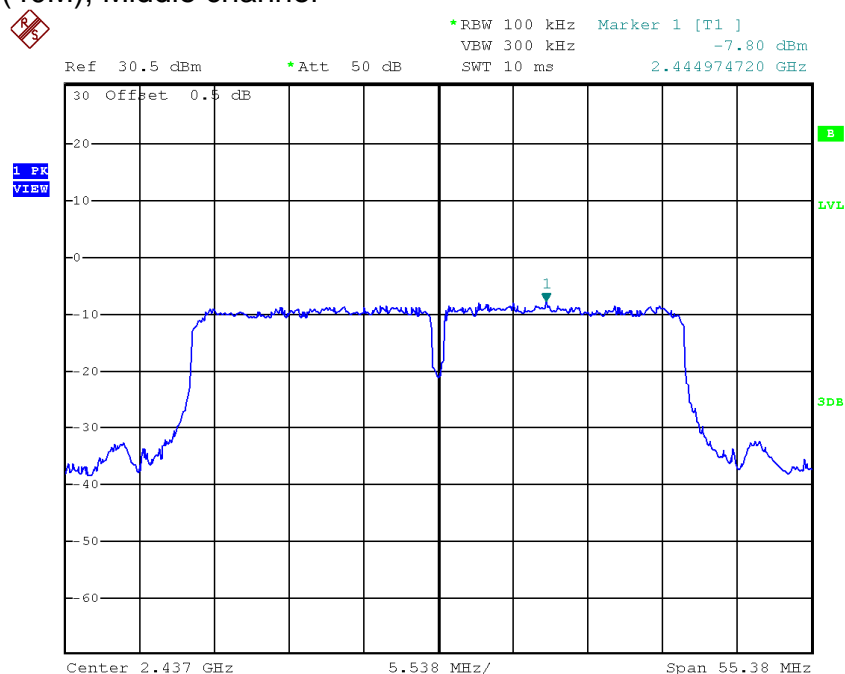

INTERTEK TESTING SERVICES

Plots of power spectral density

802.11n(40M), Highest channel

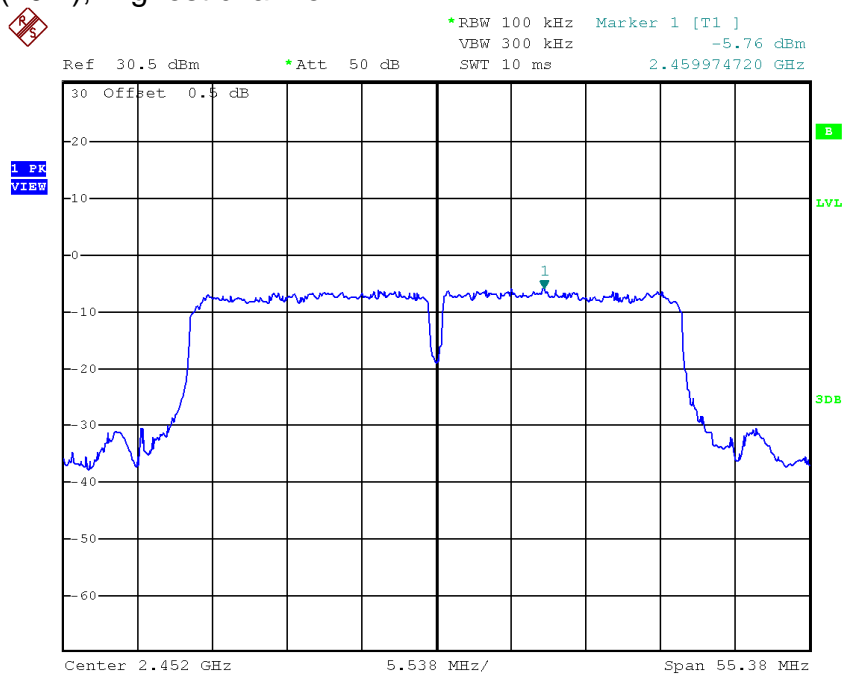

INTERTEK TESTING SERVICES

4.4 Out of Band Conducted Emissions

For 802.11b/g/n20MHz/n40MHz, the maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth.

The measurement procedures under sections 11 of KDB558074 D01 v03r05 (08-Apr-2016) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

Limits:


All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB for 802.11b,g, n20MHz & n40MHz below the maximum measured in-band peak PSD level.

The plots of reference level measurement and out of band conducted emissions are as below.


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11b, Lowest Channel, Plot A

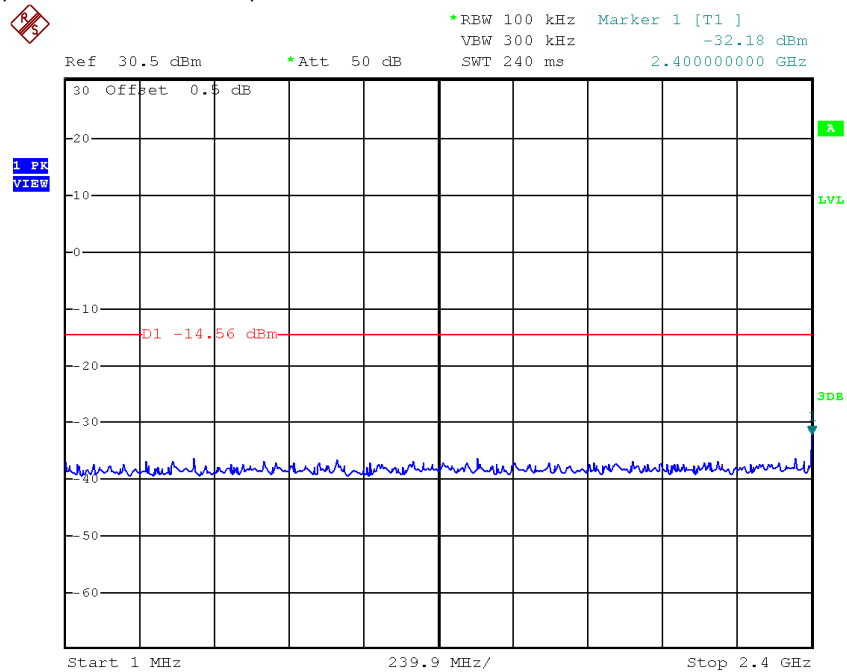


802.11b, Lowest Channel, Plot B

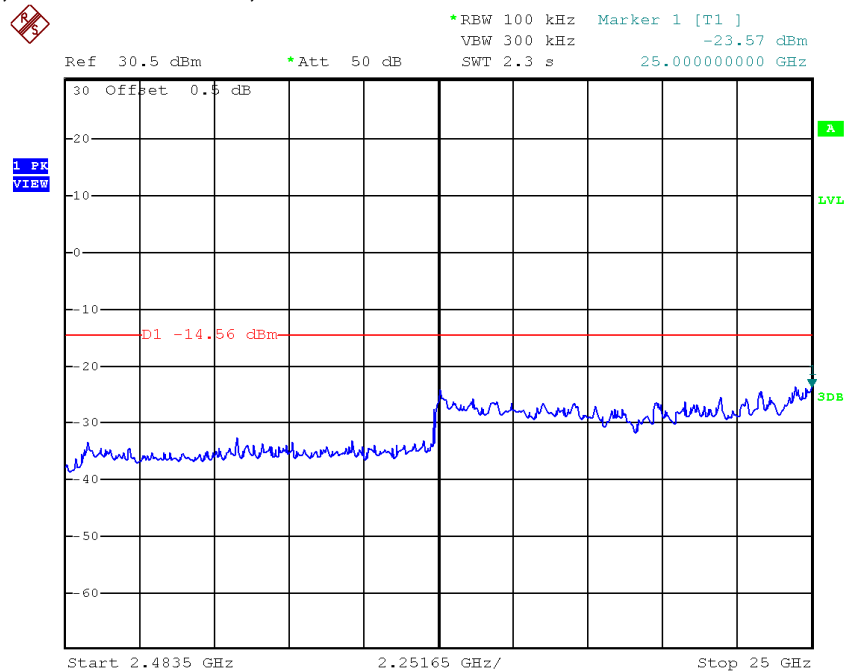


Plots of out of band conducted emissions

802.11b, Middle Channel, Plot A

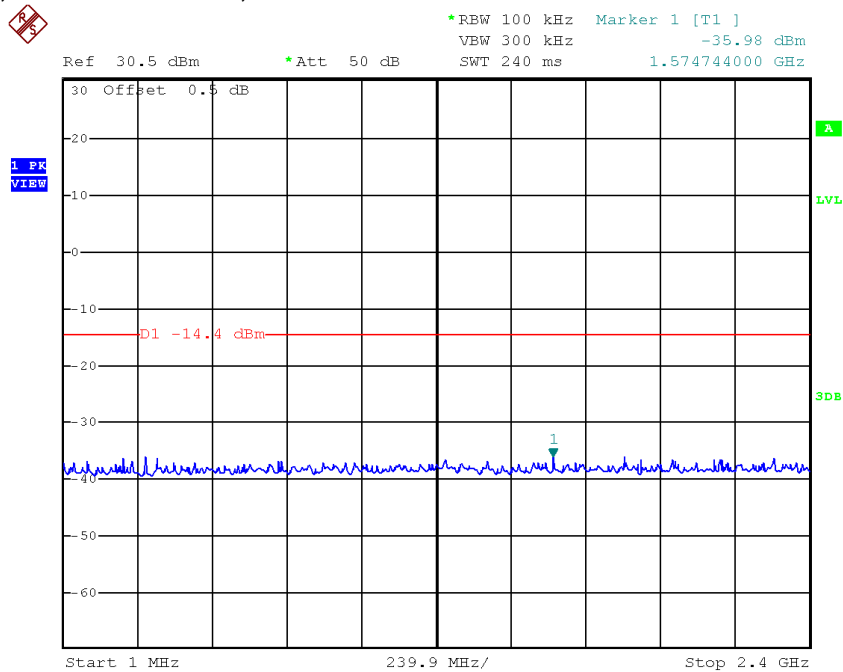


802.11b, Middle Channel, Plot B

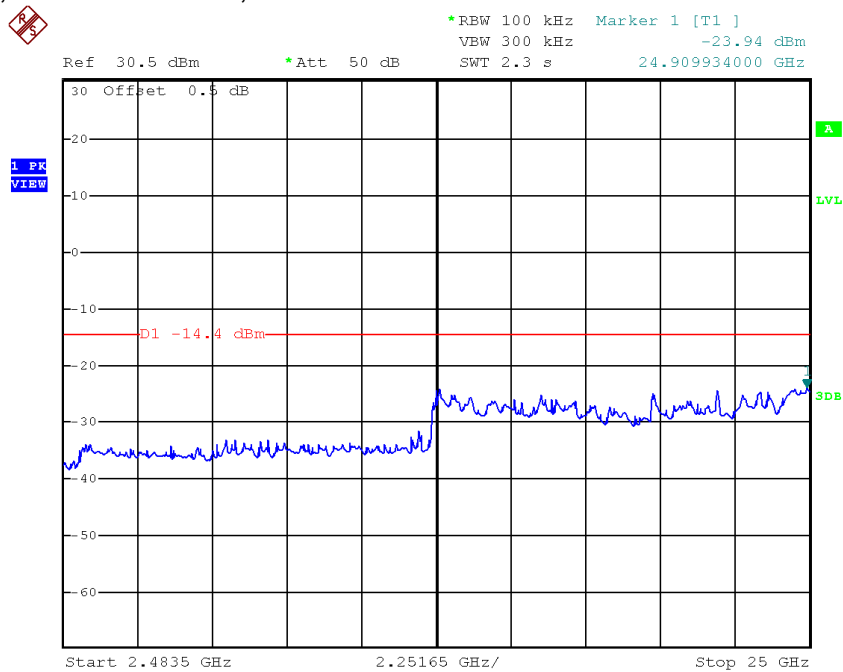


Plots of out of band conducted emissions

802.11b, Highest Channel, Plot A

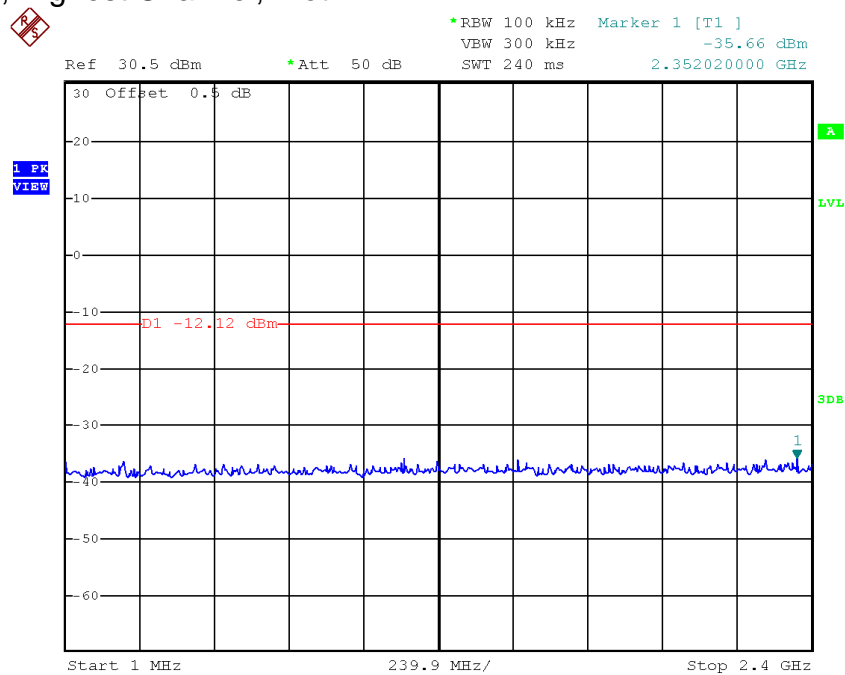


802.11b, Highest Channel, Plot B

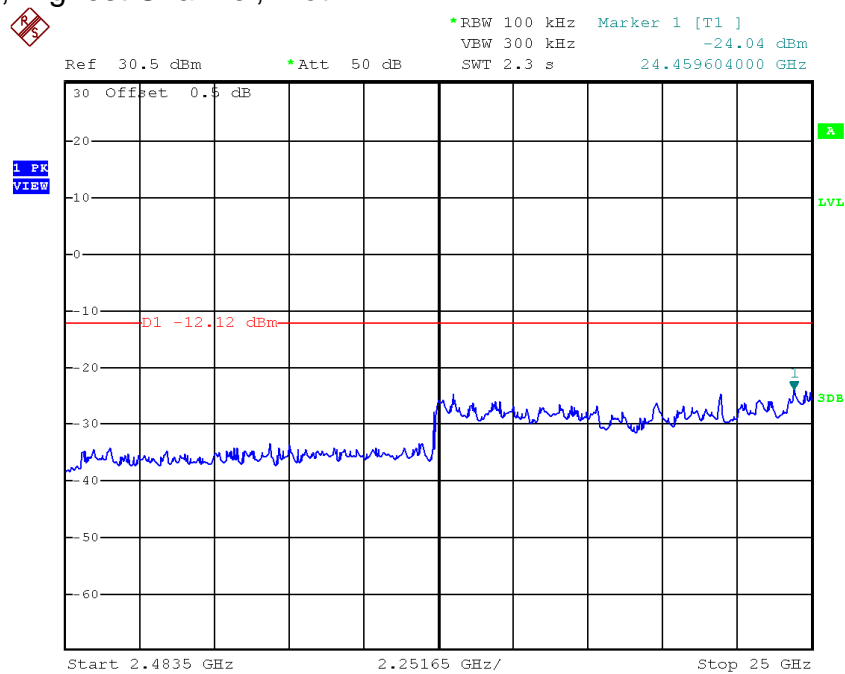


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11g, Lowest Channel, Plot A

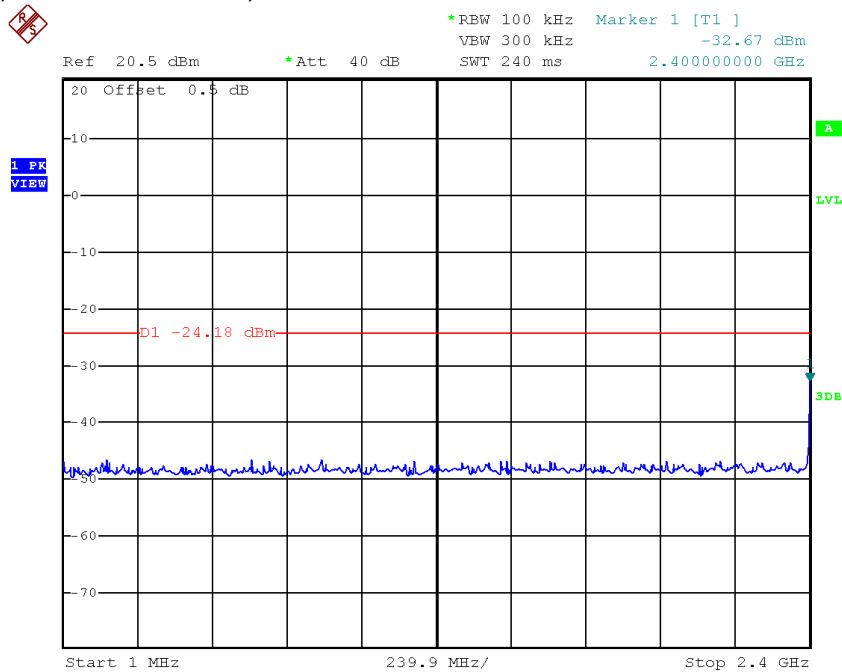


802.11g, Lowest Channel, Plot B

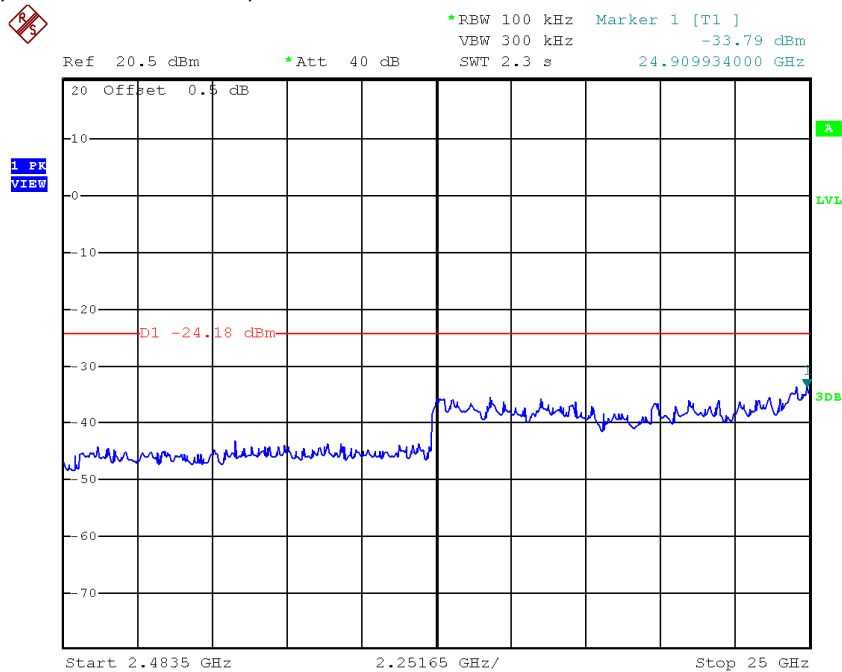


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11g, Middle Channel, Plot A

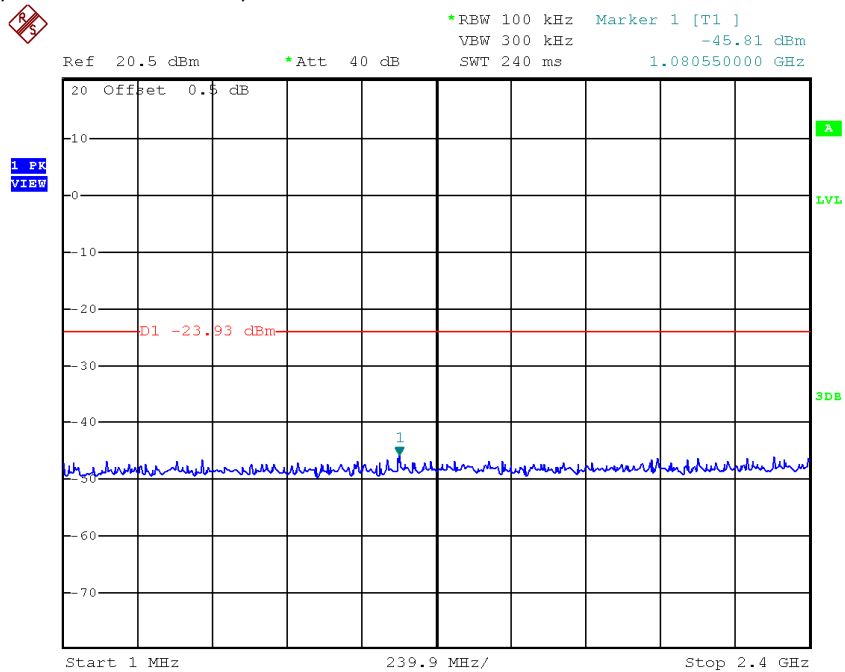


802.11g, Middle Channel, Plot B

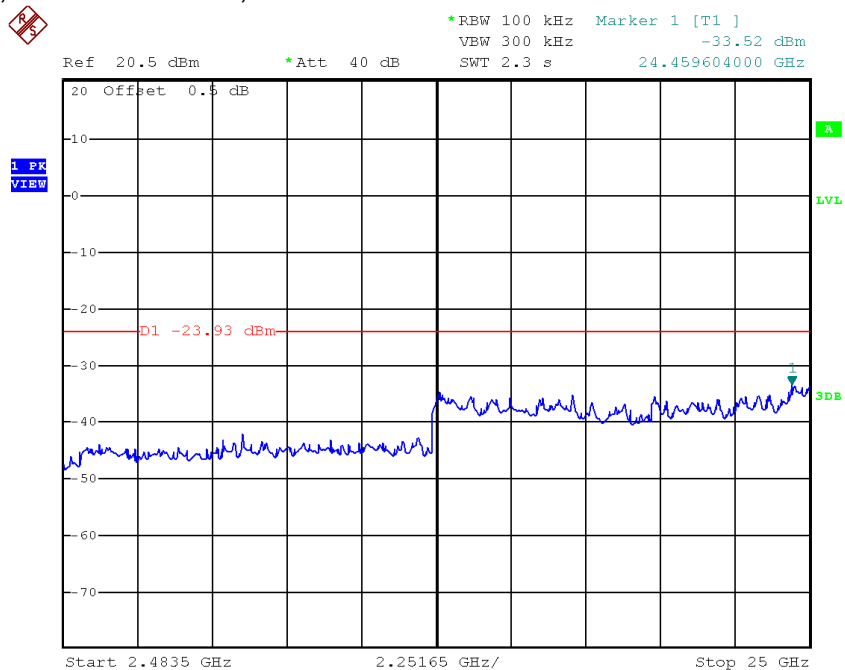


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11g, Highest Channel, Plot A

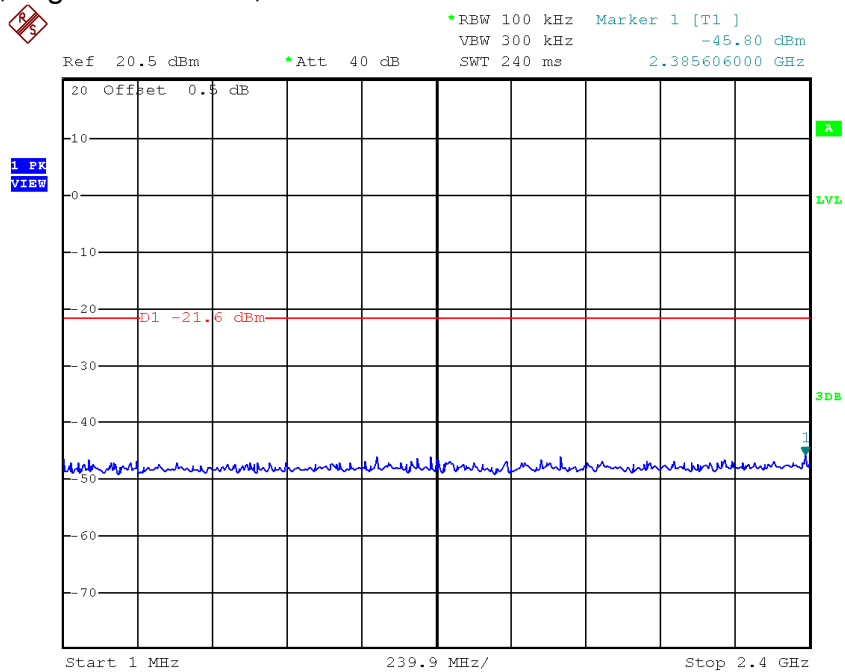


802.11g, Highest Channel, Plot B

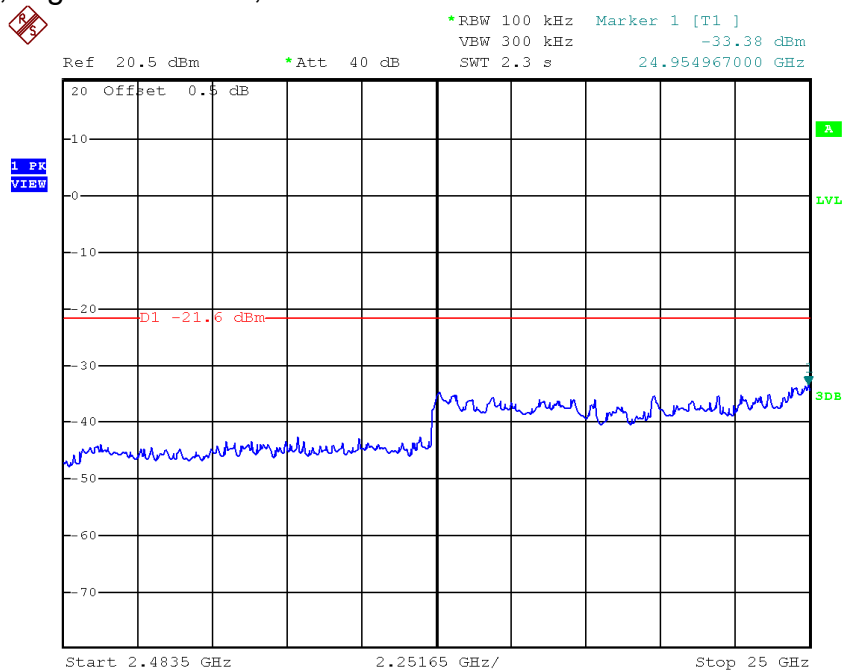


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11n (20m), Lowest Channel, Plot A

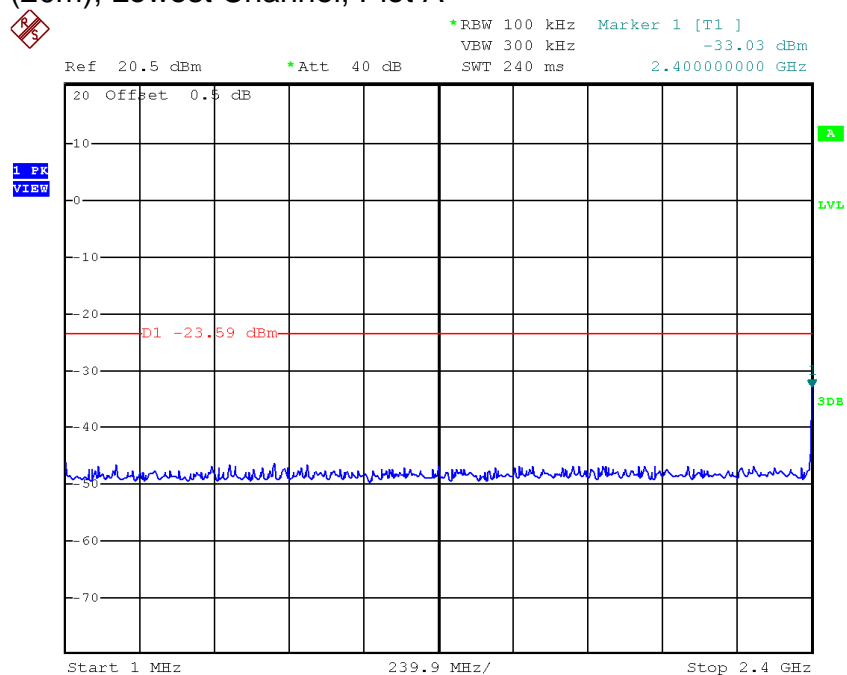


802.11n (20m), Lowest Channel, Plot B

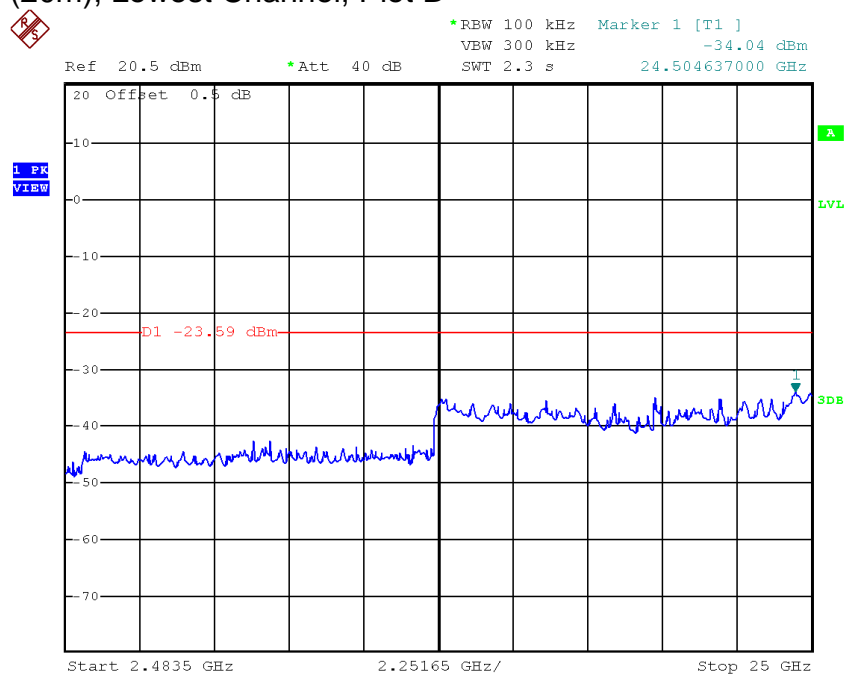


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions
802.11n (20m), Middle Channel, Plot A

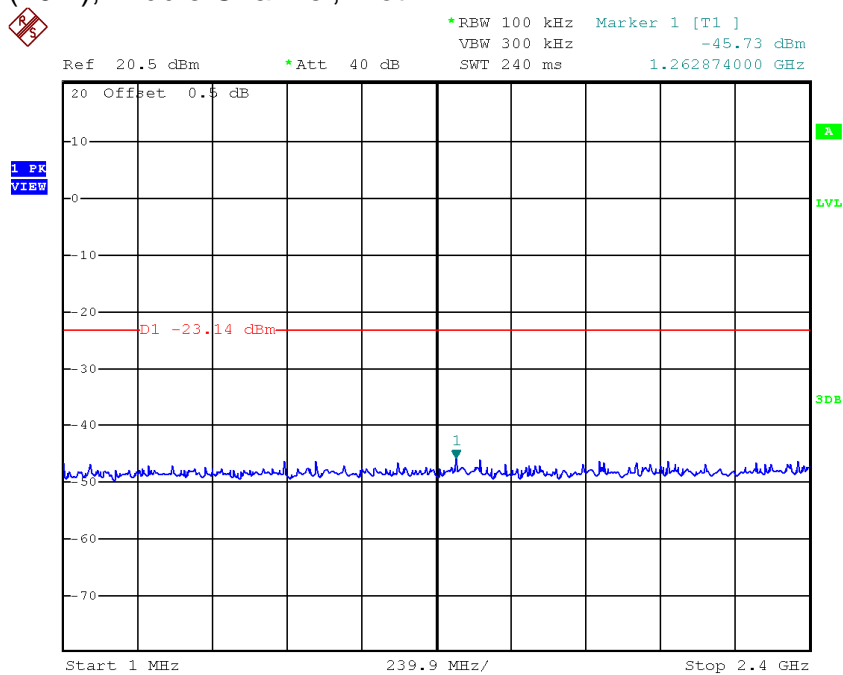


802.11n (20m), Middle Channel, Plot B

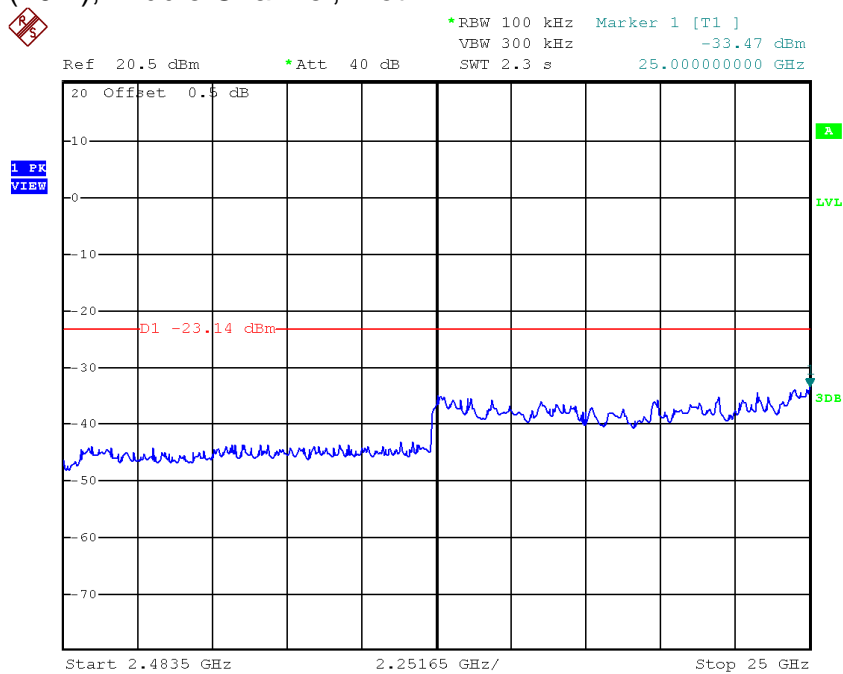


Plots of out of band conducted emissions

802.11n (20m), Highest Channel, Plot A

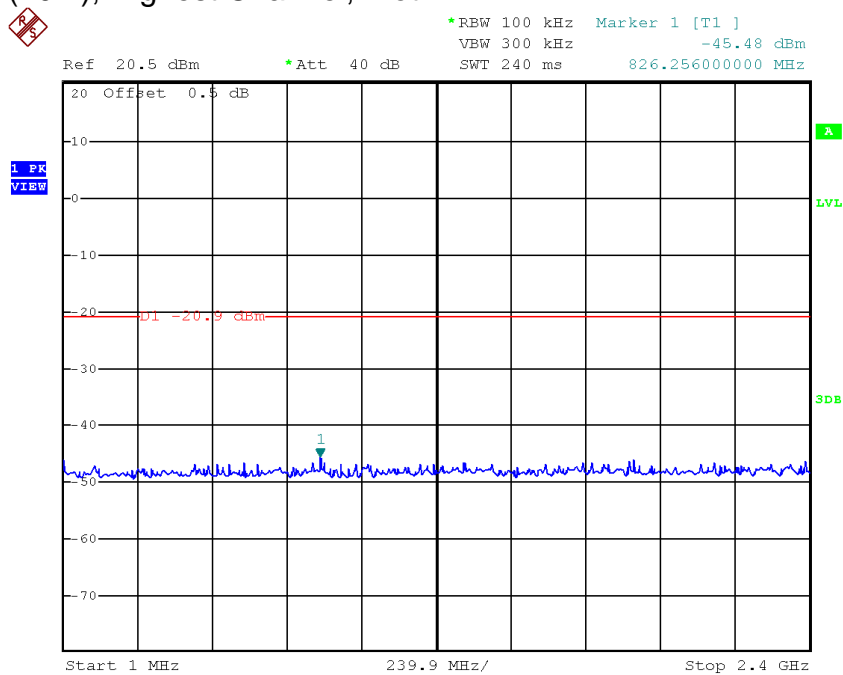


802.11n (20m), Highest Channel, Plot B

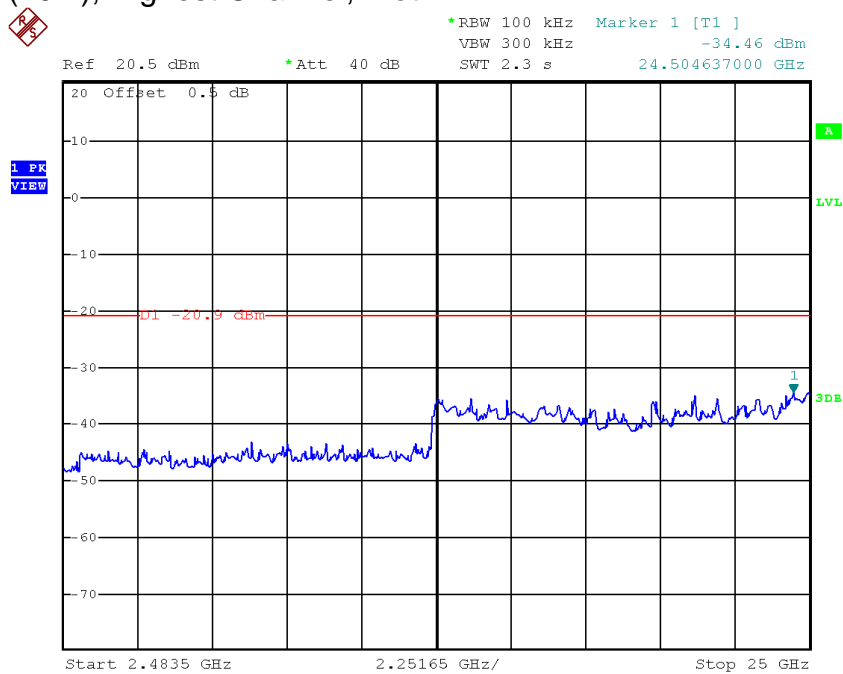


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11n (40m), Lowest Channel, Plot A

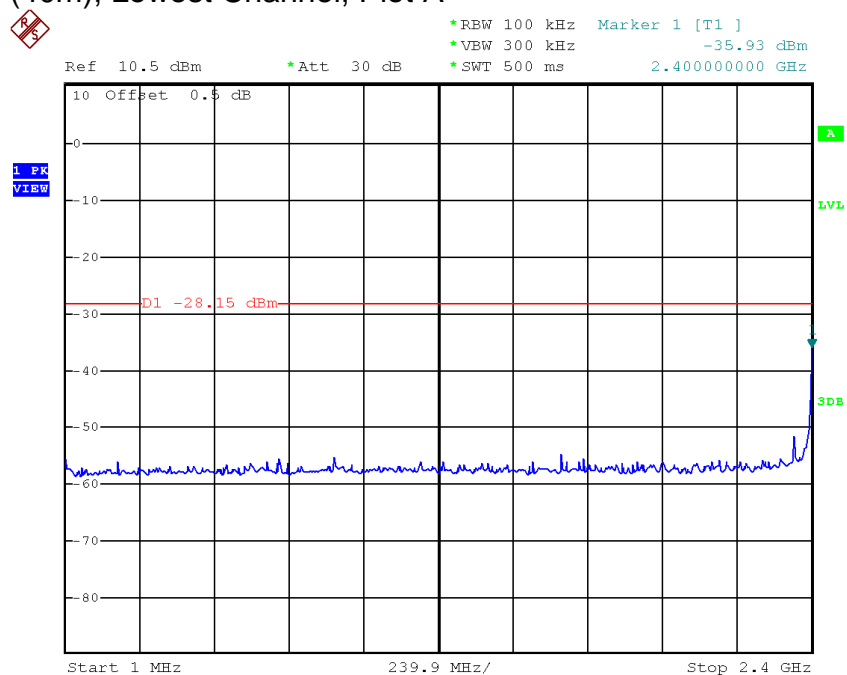


802.11n (40m), Lowest Channel, Plot B

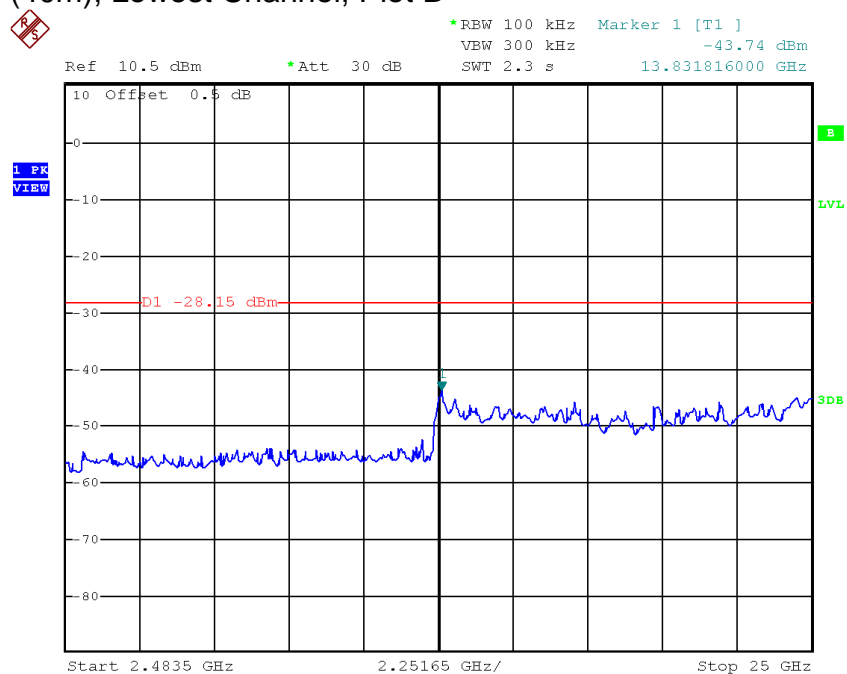


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11n (40m), Middle Channel, Plot A

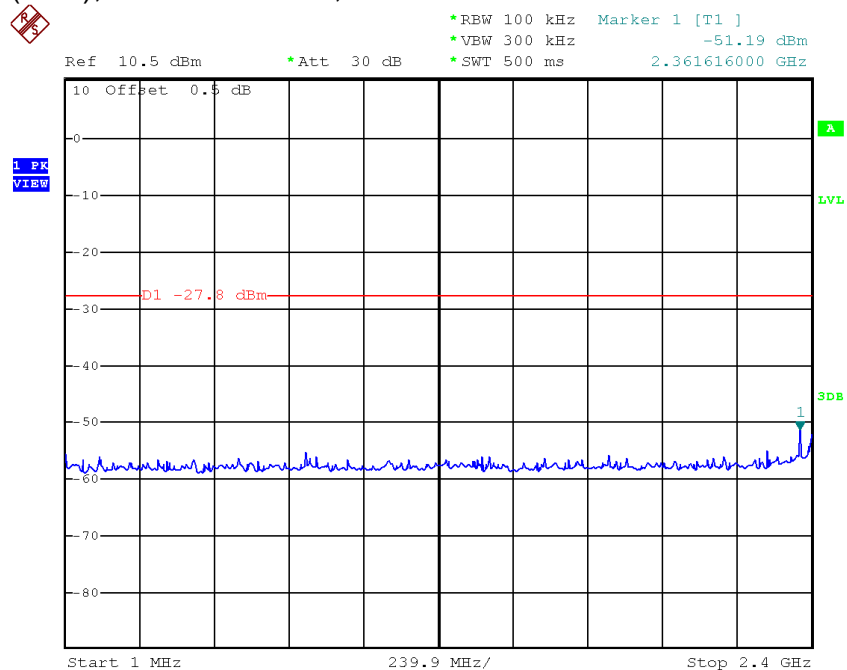


802.11n (40m), Middle Channel, Plot B

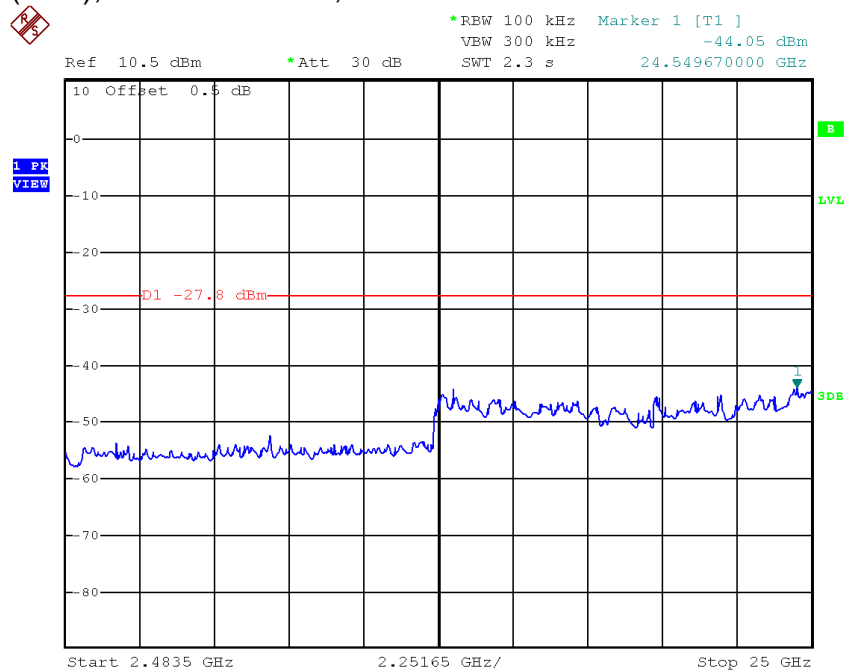


INTERTEK TESTING SERVICES

Plots of out of band conducted emissions

802.11n (40m), Highest Channel, Plot A

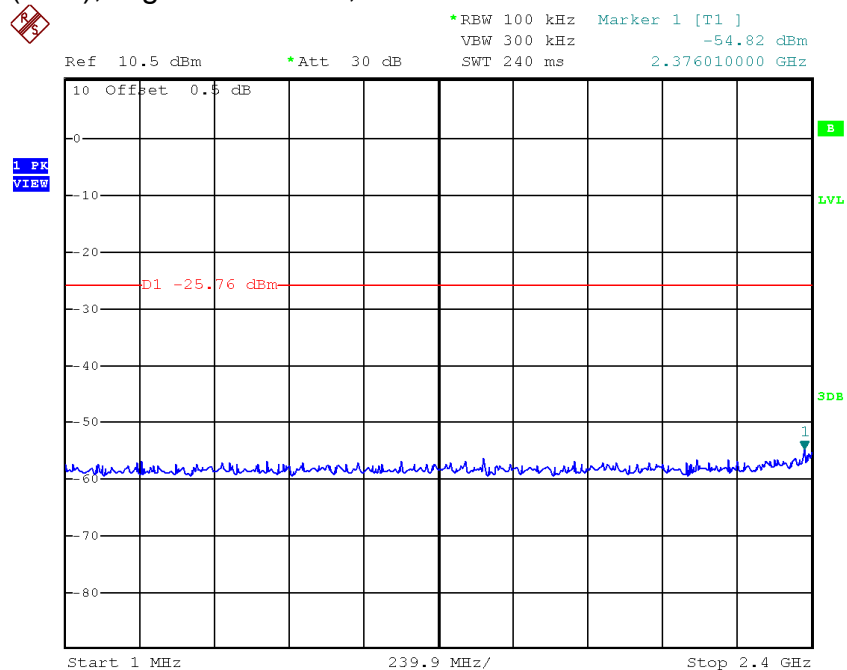

802.11n (40m), Highest Channel, Plot B

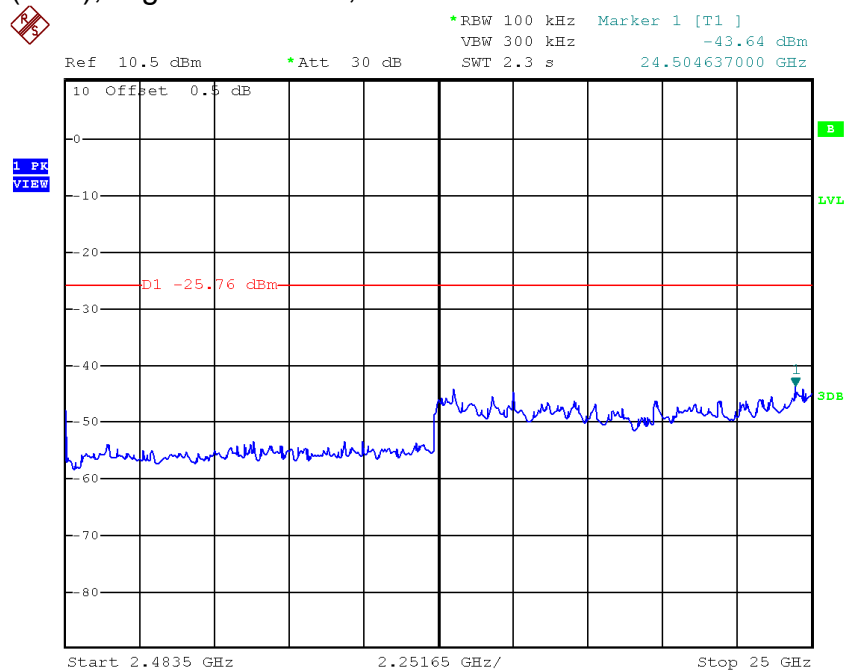

INTERTEK TESTING SERVICES

4.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in dB μ V/m
 RA = Receiver Amplitude (including preamplifier) in dB μ V
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB
 PD = Pulse Desensitization in dB
 AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB μ V/m. This value in dB μ V/m is converted to its corresponding level in μ V/m.

RA = 62.0 dB μ V
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0.0 dB
AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

4.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

4.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission
at

4924.000 MHz

The worst case radiated emission configuration photographs are saved with filename:
config photos.pdf

4.6.2 Radiated Emission Data

The data in tables 1-10 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 0.6 dB margin compare with limit

INTERTEK TESTING SERVICES

Mode: TX-Channel 01

Table 1
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
<i>H</i>	<i>2390.000</i>	<i>51.2</i>	<i>33</i>	<i>29.4</i>	<i>47.6</i>	<i>54.0</i>	<i>-6.4</i>
<i>V</i>	<i>4824.000</i>	<i>47.7</i>	<i>33</i>	<i>34.9</i>	<i>49.6</i>	<i>54.0</i>	<i>-4.4</i>
<i>V</i>	<i>12060.000</i>	<i>32.2</i>	<i>33</i>	<i>40.5</i>	<i>39.7</i>	<i>54.0</i>	<i>-14.3</i>
<i>V</i>	<i>14472.000</i>	<i>33.7</i>	<i>33</i>	<i>40.0</i>	<i>40.7</i>	<i>54.0</i>	<i>-13.3</i>

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
<i>H</i>	<i>2390.000</i>	<i>63.8</i>	<i>33</i>	<i>29.4</i>	<i>60.2</i>	<i>74.0</i>	<i>-13.8</i>
<i>V</i>	<i>4824.000</i>	<i>52.4</i>	<i>33</i>	<i>34.9</i>	<i>54.3</i>	<i>74.0</i>	<i>-19.7</i>
<i>V</i>	<i>12060.000</i>	<i>42.7</i>	<i>33</i>	<i>40.5</i>	<i>50.2</i>	<i>74.0</i>	<i>-23.8</i>
<i>V</i>	<i>14472.000</i>	<i>44.0</i>	<i>33</i>	<i>40.0</i>	<i>51.0</i>	<i>74.0</i>	<i>-23.0</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Average detector is used according to ANSI 63.10 (2013).

INTERTEK TESTING SERVICES

Mode: TX-Channel 06

Table 2
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	49.6	33	34.9	51.5	54.0	-2.5
V	7311.000	35.1	33	37.9	40.0	54.0	-14.0
V	12185.000	32.2	33	40.5	39.7	54.0	-14.3

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	55.3	33	34.9	57.2	74.0	-16.8
V	7311.000	43.7	33	37.9	48.6	74.0	-25.4
V	12185.000	42.6	33	40.5	50.1	74.0	-23.9

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Average detector is used according to ANSI 63.10 (2013).

INTERTEK TESTING SERVICES

Mode: TX-Channel 11

Table 3
IEEE 802.11b (DSSS, 1 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>51.8</i>	<i>33</i>	<i>29.4</i>	<i>48.2</i>	<i>54.0</i>	<i>-5.8</i>
<i>V</i>	<i>4924.000</i>	<i>51.5</i>	<i>33</i>	<i>34.9</i>	<i>53.4</i>	<i>54.0</i>	<i>-0.6</i>
<i>V</i>	<i>7386.000</i>	<i>36.5</i>	<i>33</i>	<i>37.9</i>	<i>41.4</i>	<i>54.0</i>	<i>-12.6</i>
<i>V</i>	<i>12310.000</i>	<i>32.3</i>	<i>33</i>	<i>40.5</i>	<i>39.8</i>	<i>54.0</i>	<i>-14.2</i>

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
<i>H</i>	<i>2483.000</i>	<i>64.9</i>	<i>33</i>	<i>29.4</i>	<i>61.3</i>	<i>74.0</i>	<i>-12.7</i>
<i>V</i>	<i>4924.000</i>	<i>59.3</i>	<i>33</i>	<i>34.9</i>	<i>61.2</i>	<i>74.0</i>	<i>-12.8</i>
<i>V</i>	<i>7386.000</i>	<i>44.3</i>	<i>33</i>	<i>37.9</i>	<i>49.2</i>	<i>74.0</i>	<i>-24.8</i>
<i>V</i>	<i>12310.000</i>	<i>42.8</i>	<i>33</i>	<i>40.5</i>	<i>50.3</i>	<i>74.0</i>	<i>-23.7</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Average detector is used according to ANSI 63.10 (2013).

INTERTEK TESTING SERVICES

Mode: TX-Channel 01

Table 4
IEEE 802.11g (OFDM, 6 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2390.000</i>	<i>50.7</i>	<i>33</i>	<i>29.4</i>	<i>47.1</i>	<i>54.0</i>	<i>-6.9</i>
<i>V</i>	<i>4824.000</i>	<i>40.7</i>	<i>33</i>	<i>34.9</i>	<i>42.6</i>	<i>54.0</i>	<i>-11.4</i>
<i>V</i>	<i>12060.000</i>	<i>32.7</i>	<i>33</i>	<i>40.5</i>	<i>40.2</i>	<i>54.0</i>	<i>-13.8</i>
<i>V</i>	<i>14472.000</i>	<i>33.9</i>	<i>33</i>	<i>40.0</i>	<i>40.9</i>	<i>54.0</i>	<i>-13.1</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2390.000</i>	<i>63.4</i>	<i>33</i>	<i>29.4</i>	<i>59.8</i>	<i>74.0</i>	<i>-14.2</i>
<i>V</i>	<i>4824.000</i>	<i>49.3</i>	<i>33</i>	<i>34.9</i>	<i>51.2</i>	<i>74.0</i>	<i>-22.8</i>
<i>V</i>	<i>12060.000</i>	<i>42.1</i>	<i>33</i>	<i>40.5</i>	<i>49.6</i>	<i>74.0</i>	<i>-24.4</i>
<i>V</i>	<i>14472.000</i>	<i>43.6</i>	<i>33</i>	<i>40.0</i>	<i>50.6</i>	<i>74.0</i>	<i>-23.4</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Average detector is used according to ANSI 63.10 (2013).

INTERTEK TESTING SERVICES

Mode: TX-Channel 06

Table 5
IEEE 802.11g (OFDM, 6 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
V	4874.000	42.6	33	34.9	44.5	54.0	-9.5
V	7311.000	31.4	33	37.9	36.3	54.0	-17.7
V	12185.000	33.1	33	40.5	40.6	54.0	-13.4

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
V	4874.000	51.4	33	34.9	53.3	74.0	-20.7
V	7311.000	40.7	33	37.9	45.6	74.0	-28.4
V	12185.000	42.5	33	40.5	50.0	74.0	-24.0

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Average detector is used according to ANSI 63.10 (2013).

INTERTEK TESTING SERVICES

Mode: TX-Channel 11

Table 6
IEEE 802.11g (OFDM, 6 Mbps)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>56.2</i>	<i>33</i>	<i>29.4</i>	<i>52.6</i>	<i>54.0</i>	<i>-1.4</i>
<i>V</i>	<i>4924.000</i>	<i>43.4</i>	<i>33</i>	<i>34.9</i>	<i>45.3</i>	<i>54.0</i>	<i>-8.7</i>
<i>V</i>	<i>7386.000</i>	<i>31.6</i>	<i>33</i>	<i>37.9</i>	<i>36.5</i>	<i>54.0</i>	<i>-17.5</i>
<i>V</i>	<i>12310.000</i>	<i>33.0</i>	<i>33</i>	<i>40.5</i>	<i>40.5</i>	<i>54.0</i>	<i>-13.5</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>69.8</i>	<i>33</i>	<i>29.4</i>	<i>66.2</i>	<i>74.0</i>	<i>-7.8</i>
<i>V</i>	<i>4924.000</i>	<i>52.7</i>	<i>33</i>	<i>34.9</i>	<i>54.6</i>	<i>74.0</i>	<i>-19.4</i>
<i>V</i>	<i>7386.000</i>	<i>40.9</i>	<i>33</i>	<i>37.9</i>	<i>45.8</i>	<i>74.0</i>	<i>-28.2</i>
<i>V</i>	<i>12310.000</i>	<i>42.3</i>	<i>33</i>	<i>40.5</i>	<i>49.8</i>	<i>74.0</i>	<i>-24.2</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Average detector is used according to ANSI 63.10 (2013).

INTERTEK TESTING SERVICES

Mode: TX-Channel 01

Table 7
IEEE 802.11n (20MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2390.000</i>	<i>50.4</i>	<i>33</i>	<i>29.4</i>	<i>46.8</i>	<i>54.0</i>	<i>-7.2</i>
<i>V</i>	<i>4824.000</i>	<i>37.7</i>	<i>33</i>	<i>34.9</i>	<i>39.6</i>	<i>54.0</i>	<i>-14.4</i>
<i>V</i>	<i>12060.000</i>	<i>31.9</i>	<i>33</i>	<i>40.5</i>	<i>39.4</i>	<i>54.0</i>	<i>-14.6</i>
<i>V</i>	<i>14472.000</i>	<i>33.1</i>	<i>33</i>	<i>40.0</i>	<i>40.1</i>	<i>54.0</i>	<i>-13.9</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2390.000</i>	<i>62.3</i>	<i>33</i>	<i>29.4</i>	<i>58.7</i>	<i>74.0</i>	<i>-15.3</i>
<i>V</i>	<i>4824.000</i>	<i>44.8</i>	<i>33</i>	<i>34.9</i>	<i>46.7</i>	<i>74.0</i>	<i>-27.3</i>
<i>V</i>	<i>12060.000</i>	<i>42.3</i>	<i>33</i>	<i>40.5</i>	<i>49.8</i>	<i>74.0</i>	<i>-24.2</i>
<i>V</i>	<i>14472.000</i>	<i>43.7</i>	<i>33</i>	<i>40.0</i>	<i>50.7</i>	<i>74.0</i>	<i>-23.3</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Average detector is used according to ANSI 63.10 (2013).

INTERTEK TESTING SERVICES

Mode: TX-Channel 06

Table 8
IEEE 802.11n (20MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	38.1	33	34.9	40.0	54.0	-14.0
V	7311.000	30.4	33	37.9	35.3	54.0	-18.7
V	12185.000	31.7	33	40.5	39.2	54.0	-14.8

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	45.1	33	34.9	47.0	74.0	-27.0
V	7311.000	40.6	33	37.9	45.5	74.0	-28.5
V	12185.000	42.1	33	40.5	49.6	74.0	-24.4

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Average detector is used according to ANSI 63.10 (2013).

INTERTEK TESTING SERVICES

Mode: TX-Channel 11

Table 9
IEEE 802.11n (20MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>55.4</i>	<i>33</i>	<i>29.4</i>	<i>51.8</i>	<i>54.0</i>	<i>-2.2</i>
<i>V</i>	<i>4924.000</i>	<i>37.5</i>	<i>33</i>	<i>34.9</i>	<i>39.4</i>	<i>54.0</i>	<i>-14.6</i>
<i>V</i>	<i>7386.000</i>	<i>30.8</i>	<i>33</i>	<i>37.9</i>	<i>35.7</i>	<i>54.0</i>	<i>-18.3</i>
<i>V</i>	<i>12310.000</i>	<i>31.9</i>	<i>33</i>	<i>40.5</i>	<i>39.4</i>	<i>54.0</i>	<i>-14.6</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2483.500</i>	<i>69.5</i>	<i>33</i>	<i>29.4</i>	<i>65.9</i>	<i>74.0</i>	<i>-8.1</i>
<i>V</i>	<i>4924.000</i>	<i>44.6</i>	<i>33</i>	<i>34.9</i>	<i>46.5</i>	<i>74.0</i>	<i>-27.5</i>
<i>V</i>	<i>7386.000</i>	<i>40.8</i>	<i>33</i>	<i>37.9</i>	<i>45.7</i>	<i>74.0</i>	<i>-28.3</i>
<i>V</i>	<i>12310.000</i>	<i>42.2</i>	<i>33</i>	<i>40.5</i>	<i>49.7</i>	<i>74.0</i>	<i>-24.3</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Average detector is used according to ANSI 63.10 (2013).

INTERTEK TESTING SERVICES

Mode: TX-Channel 03

Table 7
IEEE 802.11n (40MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2390.000</i>	<i>51.3</i>	<i>33</i>	<i>29.4</i>	<i>47.7</i>	<i>54.0</i>	<i>-6.3</i>
<i>V</i>	<i>4844.000</i>	<i>35.9</i>	<i>33</i>	<i>34.9</i>	<i>37.8</i>	<i>54.0</i>	<i>-16.2</i>
<i>V</i>	<i>7266.000</i>	<i>30.6</i>	<i>33</i>	<i>37.9</i>	<i>35.5</i>	<i>54.0</i>	<i>-18.5</i>
<i>V</i>	<i>12110.000</i>	<i>32.3</i>	<i>33</i>	<i>40.5</i>	<i>39.8</i>	<i>54.0</i>	<i>-14.2</i>

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
<i>H</i>	<i>2390.000</i>	<i>63.7</i>	<i>33</i>	<i>29.4</i>	<i>60.1</i>	<i>74.0</i>	<i>-13.9</i>
<i>V</i>	<i>4844.000</i>	<i>43.1</i>	<i>33</i>	<i>34.9</i>	<i>45.0</i>	<i>74.0</i>	<i>-29.0</i>
<i>V</i>	<i>7266.000</i>	<i>41.4</i>	<i>33</i>	<i>37.9</i>	<i>46.3</i>	<i>74.0</i>	<i>-27.7</i>
<i>V</i>	<i>12110.000</i>	<i>42.6</i>	<i>33</i>	<i>40.5</i>	<i>50.1</i>	<i>74.0</i>	<i>-23.9</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Average detector is used according to ANSI 63.10 (2013).

INTERTEK TESTING SERVICES

Mode: TX-Channel 06

Table 8
IEEE 802.11n (40MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	35.6	33	34.9	37.5	54.0	-16.5
V	7311.000	30.7	33	37.9	35.6	54.0	-18.4
V	12185.000	32.0	33	40.5	39.5	54.0	-14.5

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
V	4874.000	42.9	33	34.9	44.8	74.0	-29.2
V	7311.000	40.5	33	37.9	45.4	74.0	-28.6
V	12185.000	42.3	33	40.5	49.8	74.0	-24.2

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Average detector is used according to ANSI 63.10 (2013).

INTERTEK TESTING SERVICES

Mode: TX-Channel 09

Table 9
IEEE 802.11n (40MHz) (OFDM, MCS0)

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	52.1	33	29.4	48.5	54.0	-5.5
V	4904.000	35.4	33	34.9	37.3	54.0	-16.7
V	7356.000	30.9	33	37.9	35.8	54.0	-18.2
V	12260.000	31.8	33	40.5	39.3	54.0	-14.7

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2483.500	65.7	33	29.4	62.1	74.0	-11.9
V	4904.000	42.7	33	34.9	44.6	74.0	-29.4
V	7356.000	40.6	33	37.9	45.5	74.0	-28.5
V	12260.000	42.0	33	40.5	49.5	74.0	-24.5

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
 6. Average detector is used according to ANSI 63.10 (2013).

INTERTEK TESTING SERVICES

Mode: Wi-Fi connect

Table 10

Radiated Emission Data


Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	31.338	26.5	16	10.0	20.5	40.0	-19.5
V	74.116	38.9	16	6.0	28.9	40.0	-11.1
V	222.803	33.3	16	18.0	35.3	46.0	-10.7
H	330.053	23.3	16	24.0	31.3	46.0	-14.7
H	371.247	32.3	16	24.0	40.3	46.0	-5.7
H	445.469	22.2	16	26.0	32.2	46.0	-13.8
H	449.978	22.8	16	26.0	32.8	46.0	-13.2
V	528.100	20.8	16	27.0	31.8	46.0	-14.2
H	720.053	17.8	16	30.0	31.8	46.0	-14.2
V	797.200	17.3	16	31.0	32.3	46.0	-13.7
H	900.063	15.1	16	32.0	31.1	46.0	-14.9

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.


INTERTEK TESTING SERVICES

Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

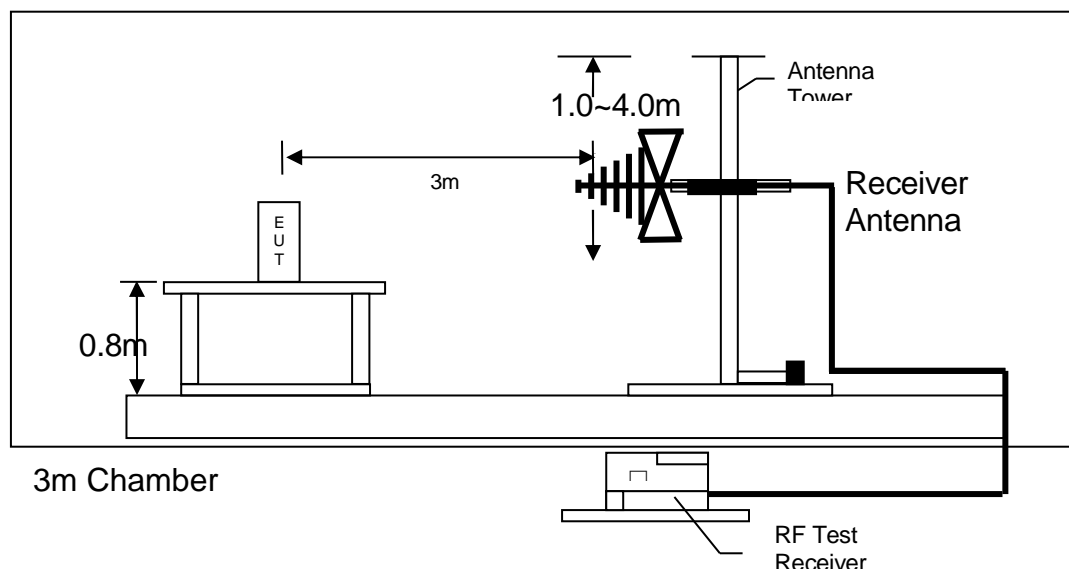

Test setup of radiated emissions up to 1GHz

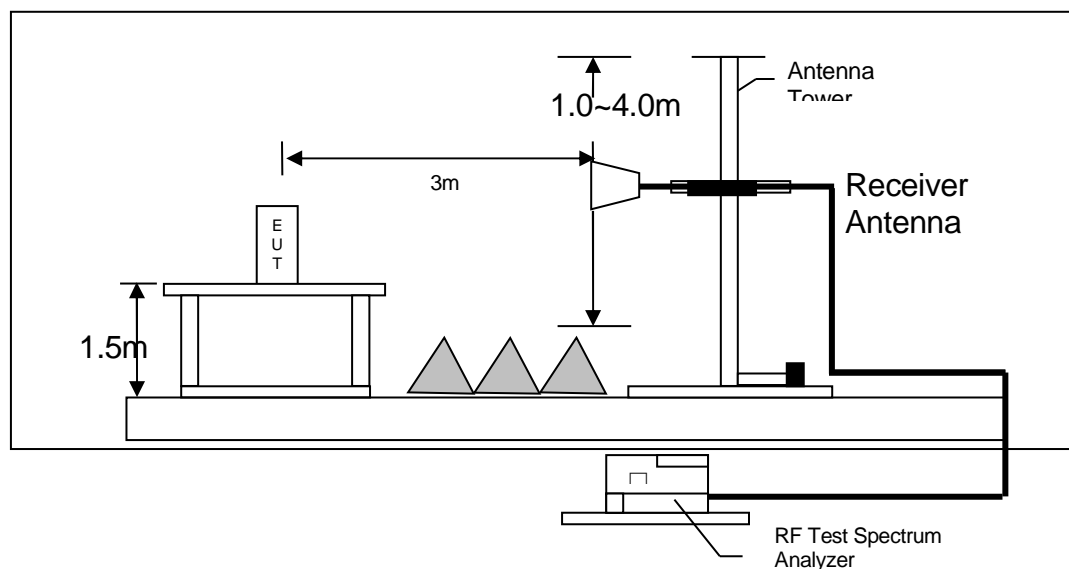

Test setup of radiated emissions above 1GHz

INTERTEK TESTING SERVICES

4.6.3 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

4.7 AC Power Line Conducted Emission

- ☐ Not applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration
at

438 kHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf


4.7.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 3.96 dB margin compare with quasi-peak limit

INTERTEK TESTING SERVICES

Worst Case: Console (WiFi)

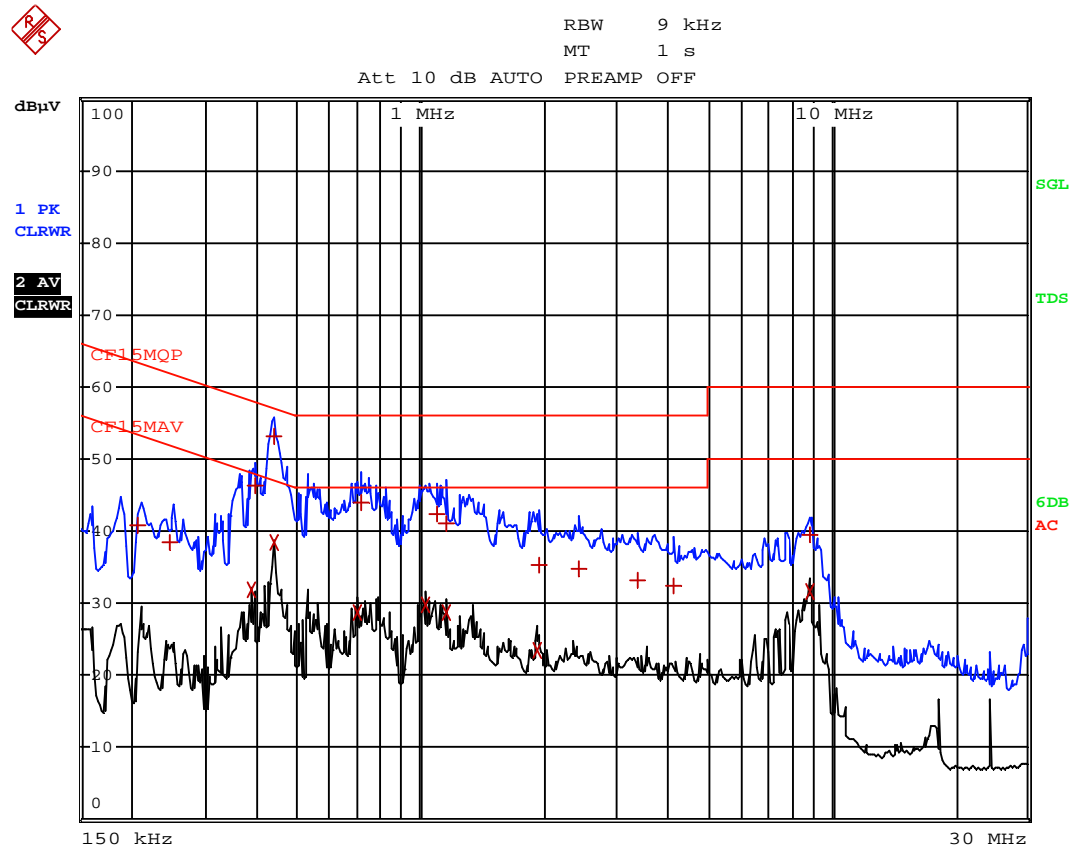

Date: 12.JUL.2016 14:06:14

INTERTEK TESTING SERVICES

Worst Case: Console (WiFi)

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CF15MQP				
Trace2:	CF15MAV				
Trace3:	---				
TRACE	FREQUENCY	LEVEL	dBμV	DELTA	LIMIT dB
1 Quasi Peak	208.5 kHz	40.80	L1	-22.46	
1 Quasi Peak	249 kHz	38.54	L1	-23.25	
2 CISPR Average	384 kHz	31.79	L1	-16.40	
1 Quasi Peak	393 kHz	46.26	N	-11.73	
1 Quasi Peak	438 kHz	53.13	N	-3.96	
2 CISPR Average	438 kHz	38.48	L1	-8.61	
2 CISPR Average	703.5 kHz	28.85	N	-17.14	
1 Quasi Peak	717 kHz	44.02	L1	-11.97	
2 CISPR Average	1.0275 MHz	29.79	L1	-16.20	
1 Quasi Peak	1.0905 MHz	42.41	L1	-13.58	
1 Quasi Peak	1.149 MHz	40.98	N	-15.01	
2 CISPR Average	1.149 MHz	28.69	L1	-17.30	
2 CISPR Average	1.9185 MHz	23.61	N	-22.38	
1 Quasi Peak	1.941 MHz	35.18	N	-20.81	
1 Quasi Peak	2.418 MHz	34.71	L1	-21.28	
1 Quasi Peak	3.372 MHz	33.30	L1	-22.69	
1 Quasi Peak	4.1235 MHz	32.29	N	-23.70	
1 Quasi Peak	8.844 MHz	39.53	L1	-20.46	
2 CISPR Average	8.907 MHz	31.72	N	-18.27	

Date: 12.JUL.2016 14:06:08

INTERTEK TESTING SERVICES

EXHIBIT 5 EQUIPMENT LIST

INTERTEK TESTING SERVICES

5.0 Equipment List

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	BiConiLog Antenna
Registration No.	EW-3156	EW-2466	EW-3061
Manufacturer	R&S	R&S	EMCO
Model No.	ESR26	FSP30	3412E
Calibration Date	Nov. 03, 2015	Sep. 16, 2015	Jul. 22, 2015
Calibration Due Date	Nov. 03, 2016	Aug. 20, 2016	Jul. 22, 2016

Equipment	Biconical Antenna	Log Periodic Antenna	Double Ridged Guide Antenna
Registration No.	EW-0571	EW-0447	EW-1133
Manufacturer	EMCO	EMCO	EMCO
Model No.	3104C	3146	3115
Calibration Date	Jun. 23, 2015	Mar. 16, 2015	Nov. 05, 2015
Calibration Due Date	Dec. 23, 2016	Sep. 16, 2016	May 05, 2017

2) Conducted Emissions Test

Equipment	EMI Test Receiver	LISN
Registration No.	EW-2500	EW-2501
Manufacturer	R&S	R&S
Model No.	ESCI	ENV-216
Calibration Date	Jan. 28, 2016	Jan. 28, 2016
Calibration Due Date	Jan. 28, 2017	Jan. 28, 2017

3) Conductive Measurement Test

Equipment	RF Power Meter with Power Sensor	RF Power Meter with Power Sensor	Spectrum Analyzer
Registration No.	EW-2270	SZ182-02-01	EW-2249
Manufacturer	AGILENTTECH	ANRITSU	R&S
Model No.	N1911A	ML2496A	FSP30
Calibration Date	Jan. 19, 2016	May 23, 2016	Nov. 17, 2015
Calibration Due Date	Jan. 19, 2017	May 23, 2017	Nov. 27, 2016

END OF TEST REPORT