

ANNEX D TEST DATA

For

Project No.:	8228EU011501W
Client:	Dongguan Youshifa Electronic Technology Co., Ltd.
Product Description:	Double 4 inches Light up Wireless Speaker
Model No.:	V60101BT-BLK
FCC ID:	2BB2T-V60101BT
Technology:	Bluetooth BDR&EDR
Test Engineer:	<i>Mikoy zhu</i>
Test Date:	2024-04-16

Test Summary

Item	Result
Duty Cycle	Pass
Bandwidth	Pass
Maximum Conducted Output Power	Pass
Carrier Frequency Separation	Pass
Number of Hopping Frequencies	Pass
Time of Occupancy (Dwell Time)	Pass
Unwanted Emissions In Non-restricted Frequency Bands	Pass


1. Bandwidth


1.1 OBW


1.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.825	/	Pass
		2441	DH5	1	0.825	/	Pass
		2480	DH5	1	0.824	/	Pass
$\pi/4$ DQPSK	SISO	2402	2DH5	1	1.175	/	Pass
		2441	2DH5	1	1.175	/	Pass
		2480	2DH5	1	1.175	/	Pass
8DPSK	SISO	2402	3DH5	1	1.178	/	Pass
		2441	3DH5	1	1.179	/	Pass
		2480	3DH5	1	1.179	/	Pass


1.1.2 Test Graph

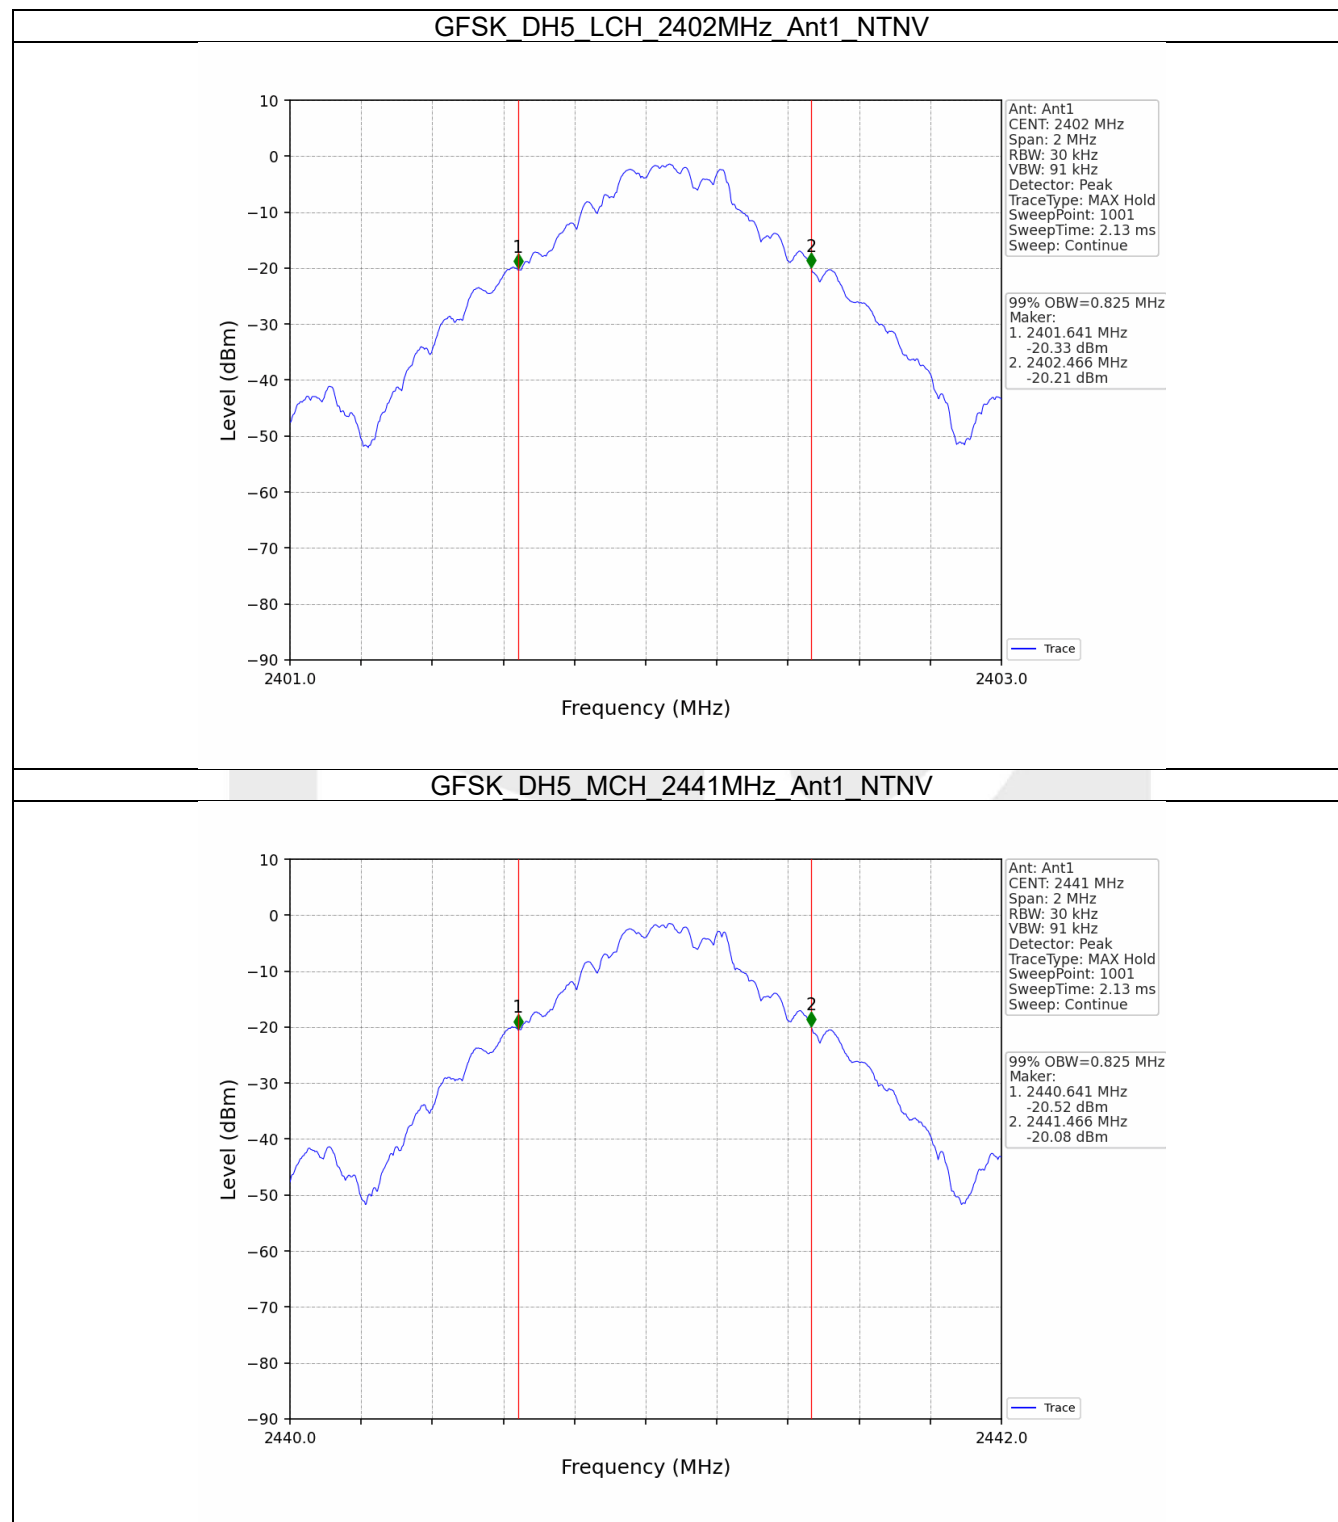

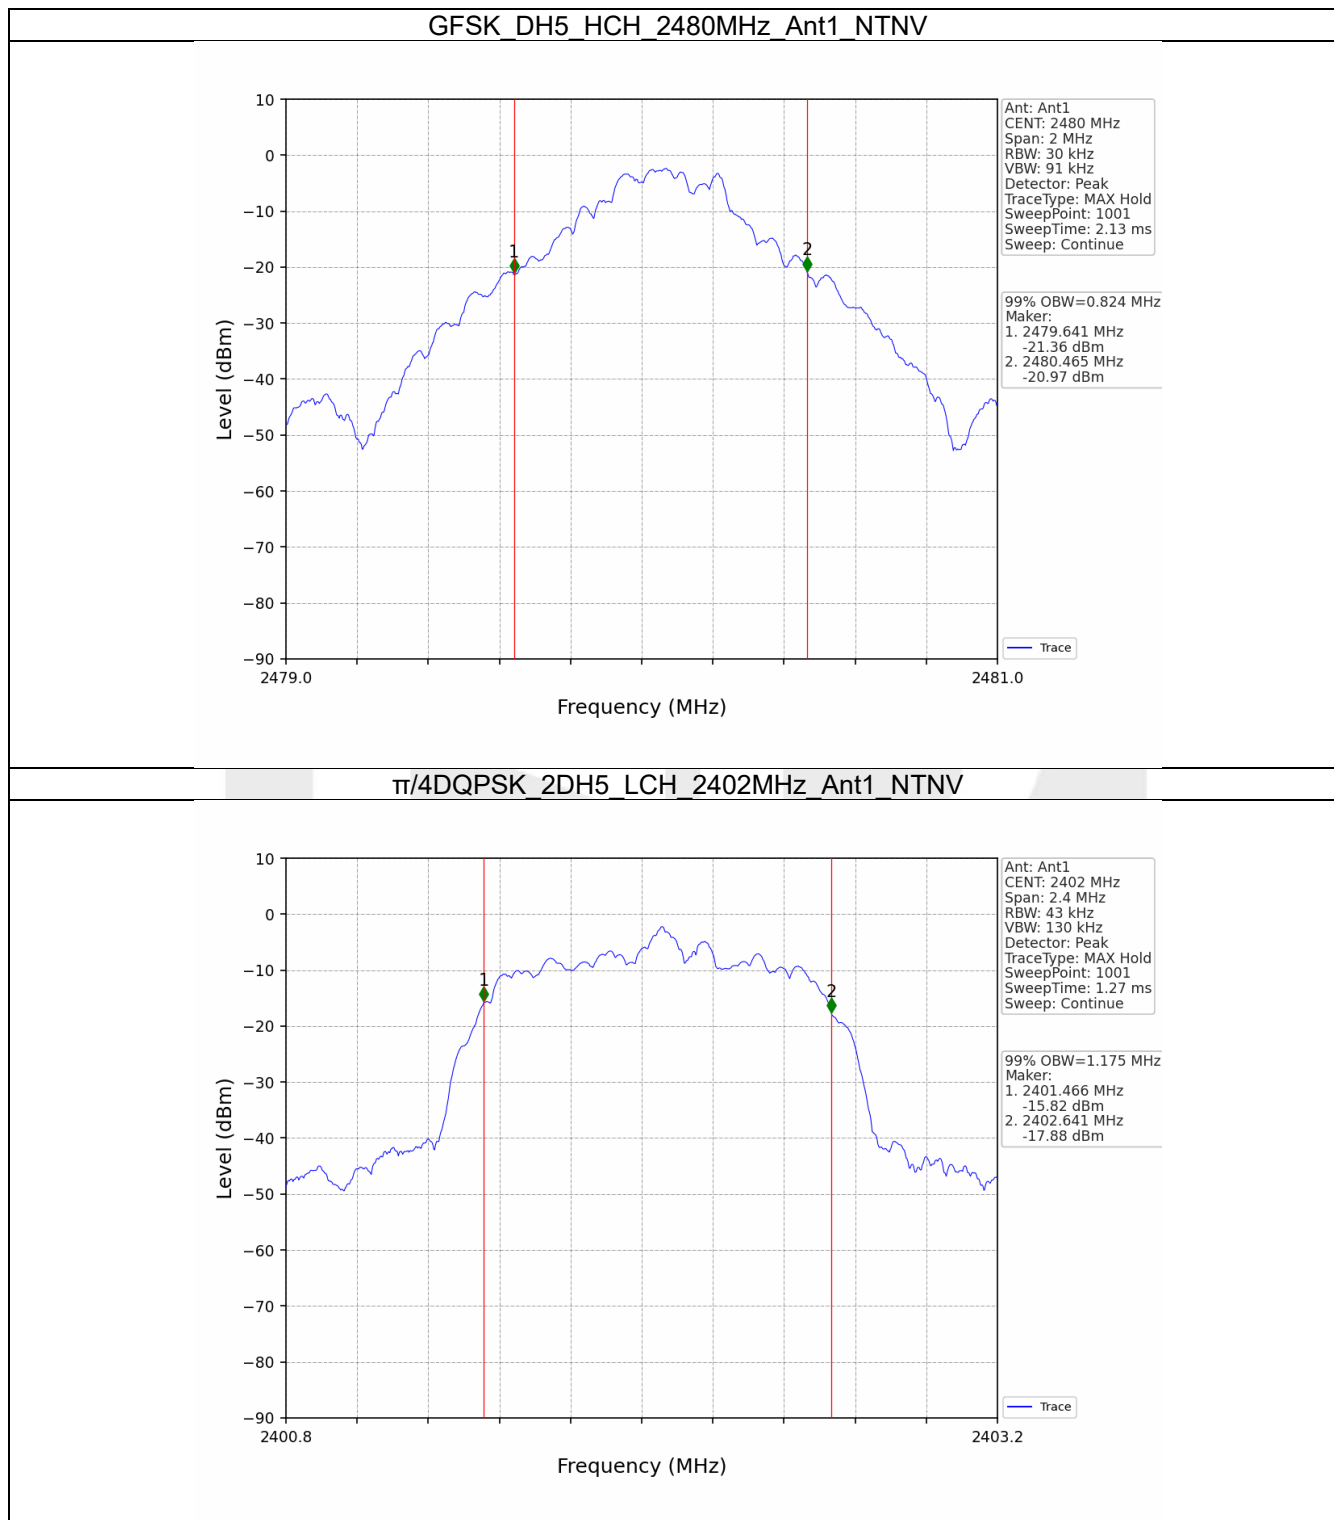

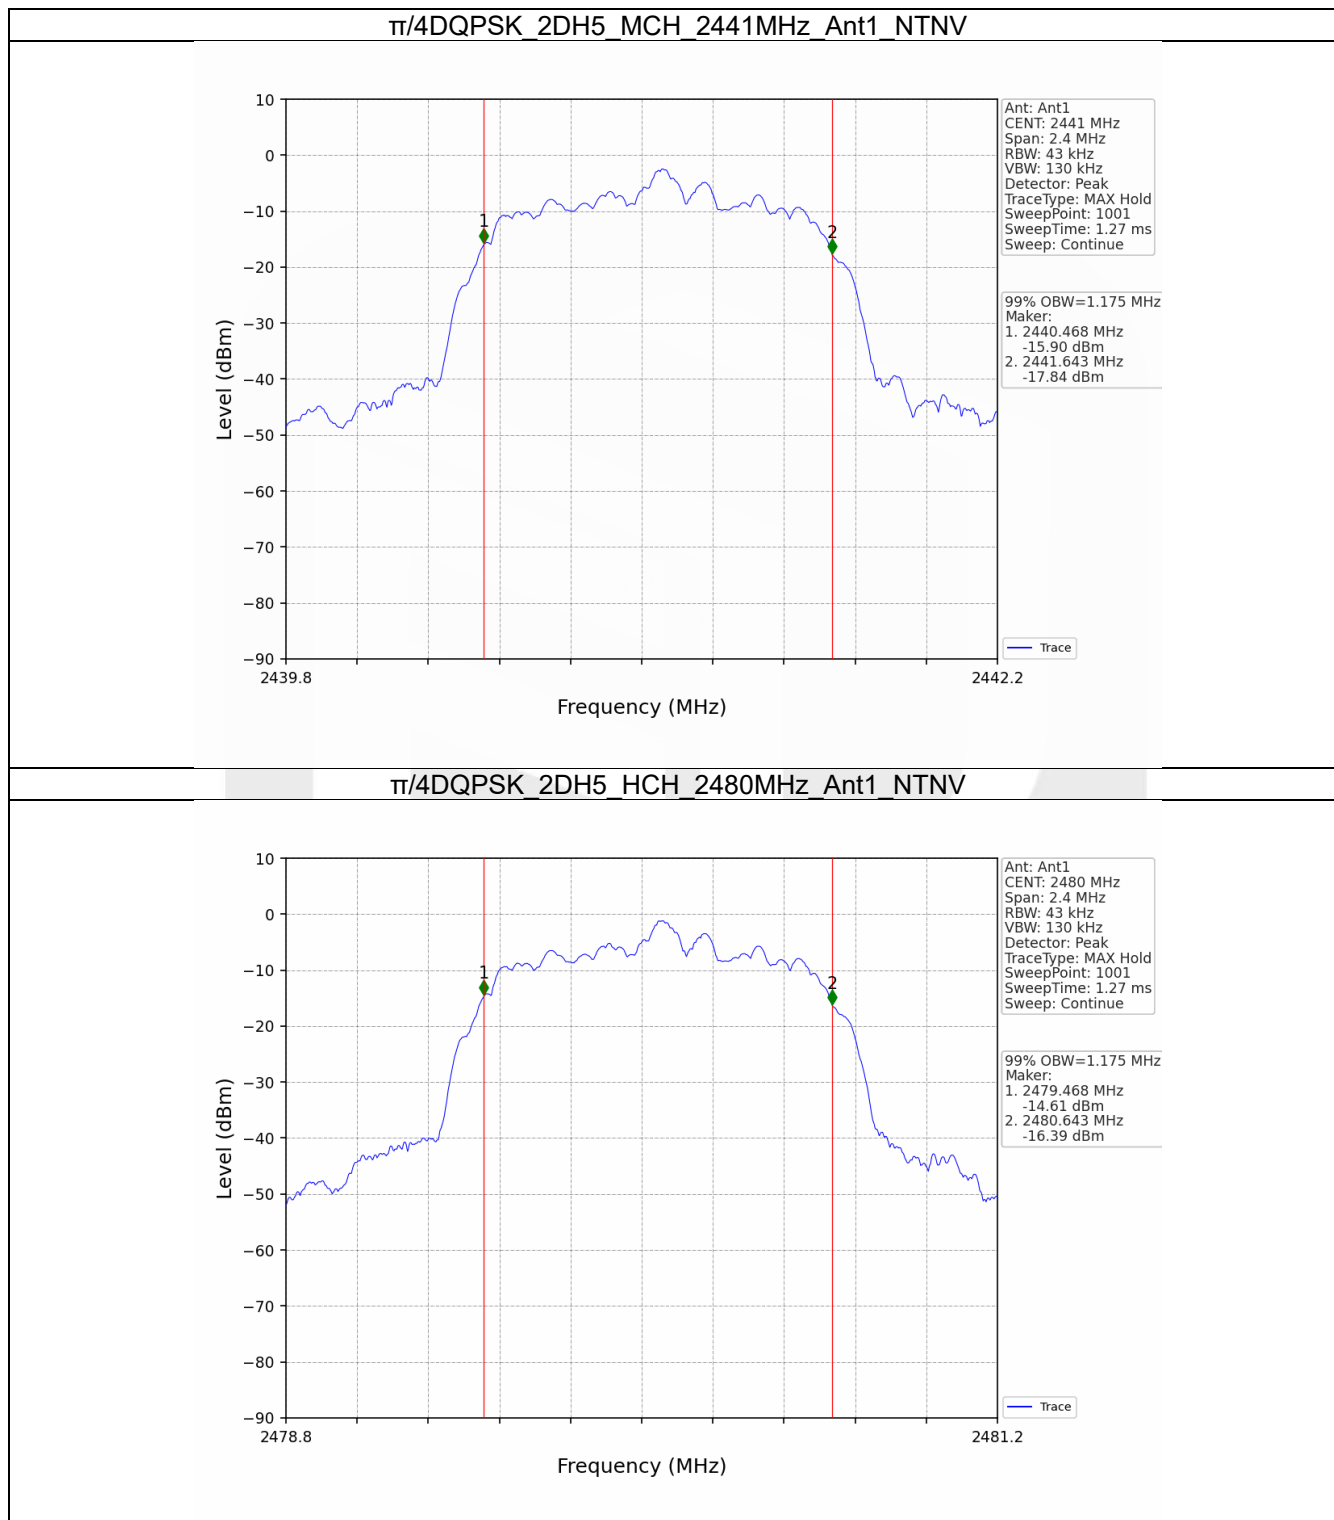

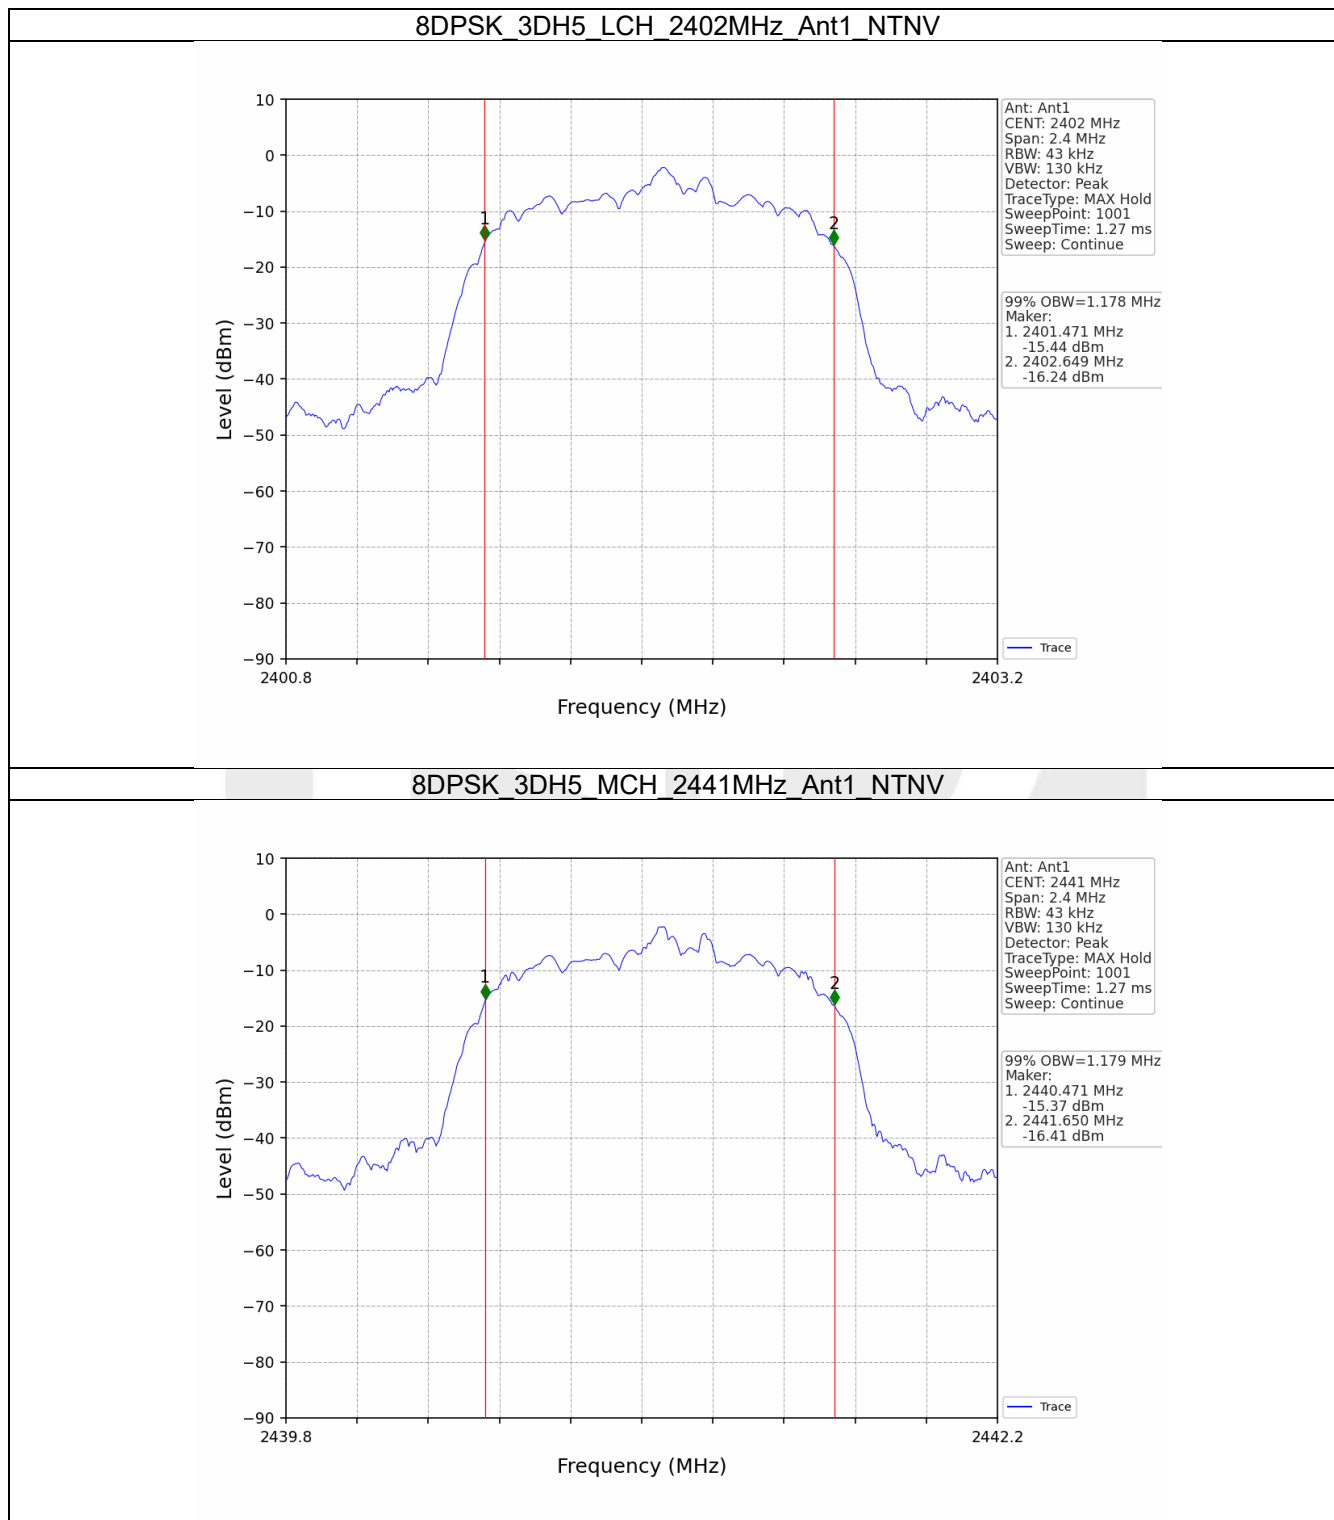

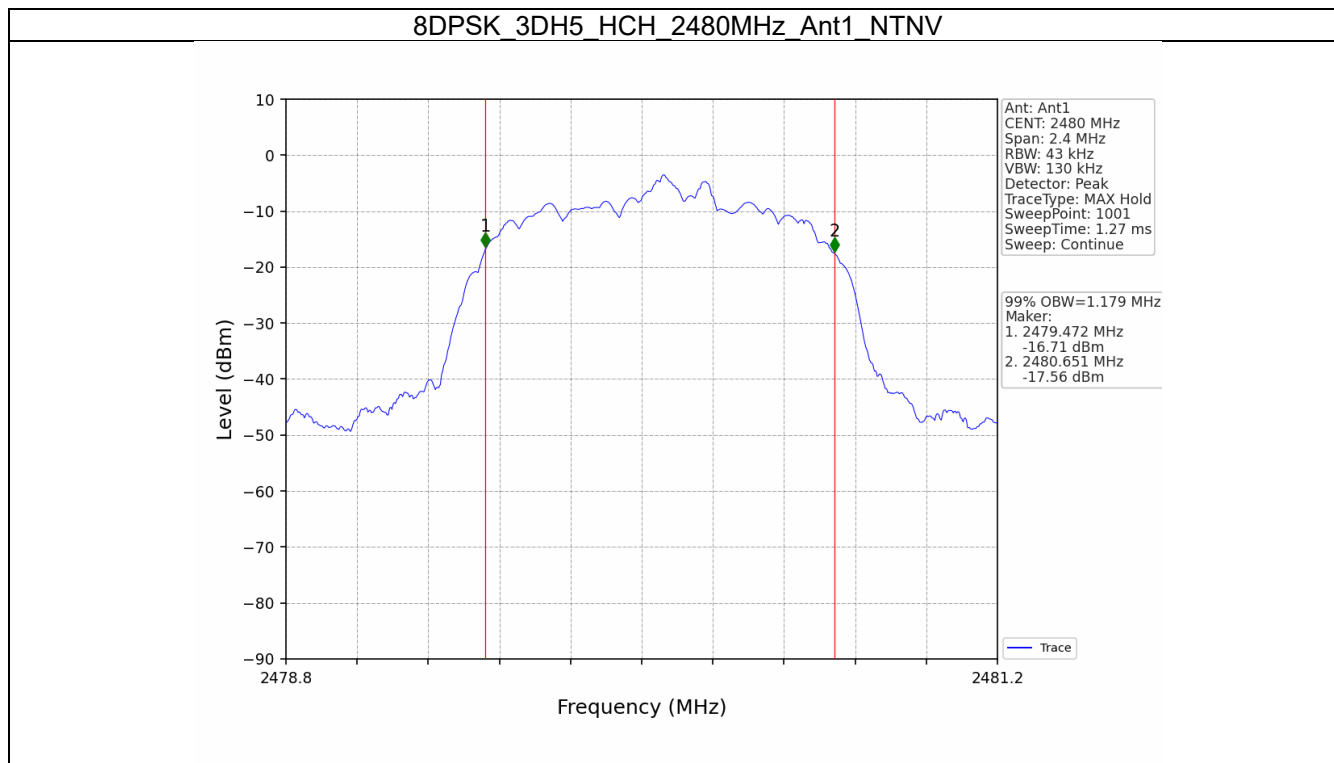



1.2 20dB BW


1.2.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.937	/	Pass
		2441	DH5	1	0.937	/	Pass
		2480	DH5	1	0.937	/	Pass
$\pi/4$ DQPSK	SISO	2402	2DH5	1	1.294	/	Pass
		2441	2DH5	1	1.296	/	Pass
		2480	2DH5	1	1.298	/	Pass
8DPSK	SISO	2402	3DH5	1	1.307	/	Pass
		2441	3DH5	1	1.306	/	Pass
		2480	3DH5	1	1.308	/	Pass


1.2.2 Test Graph

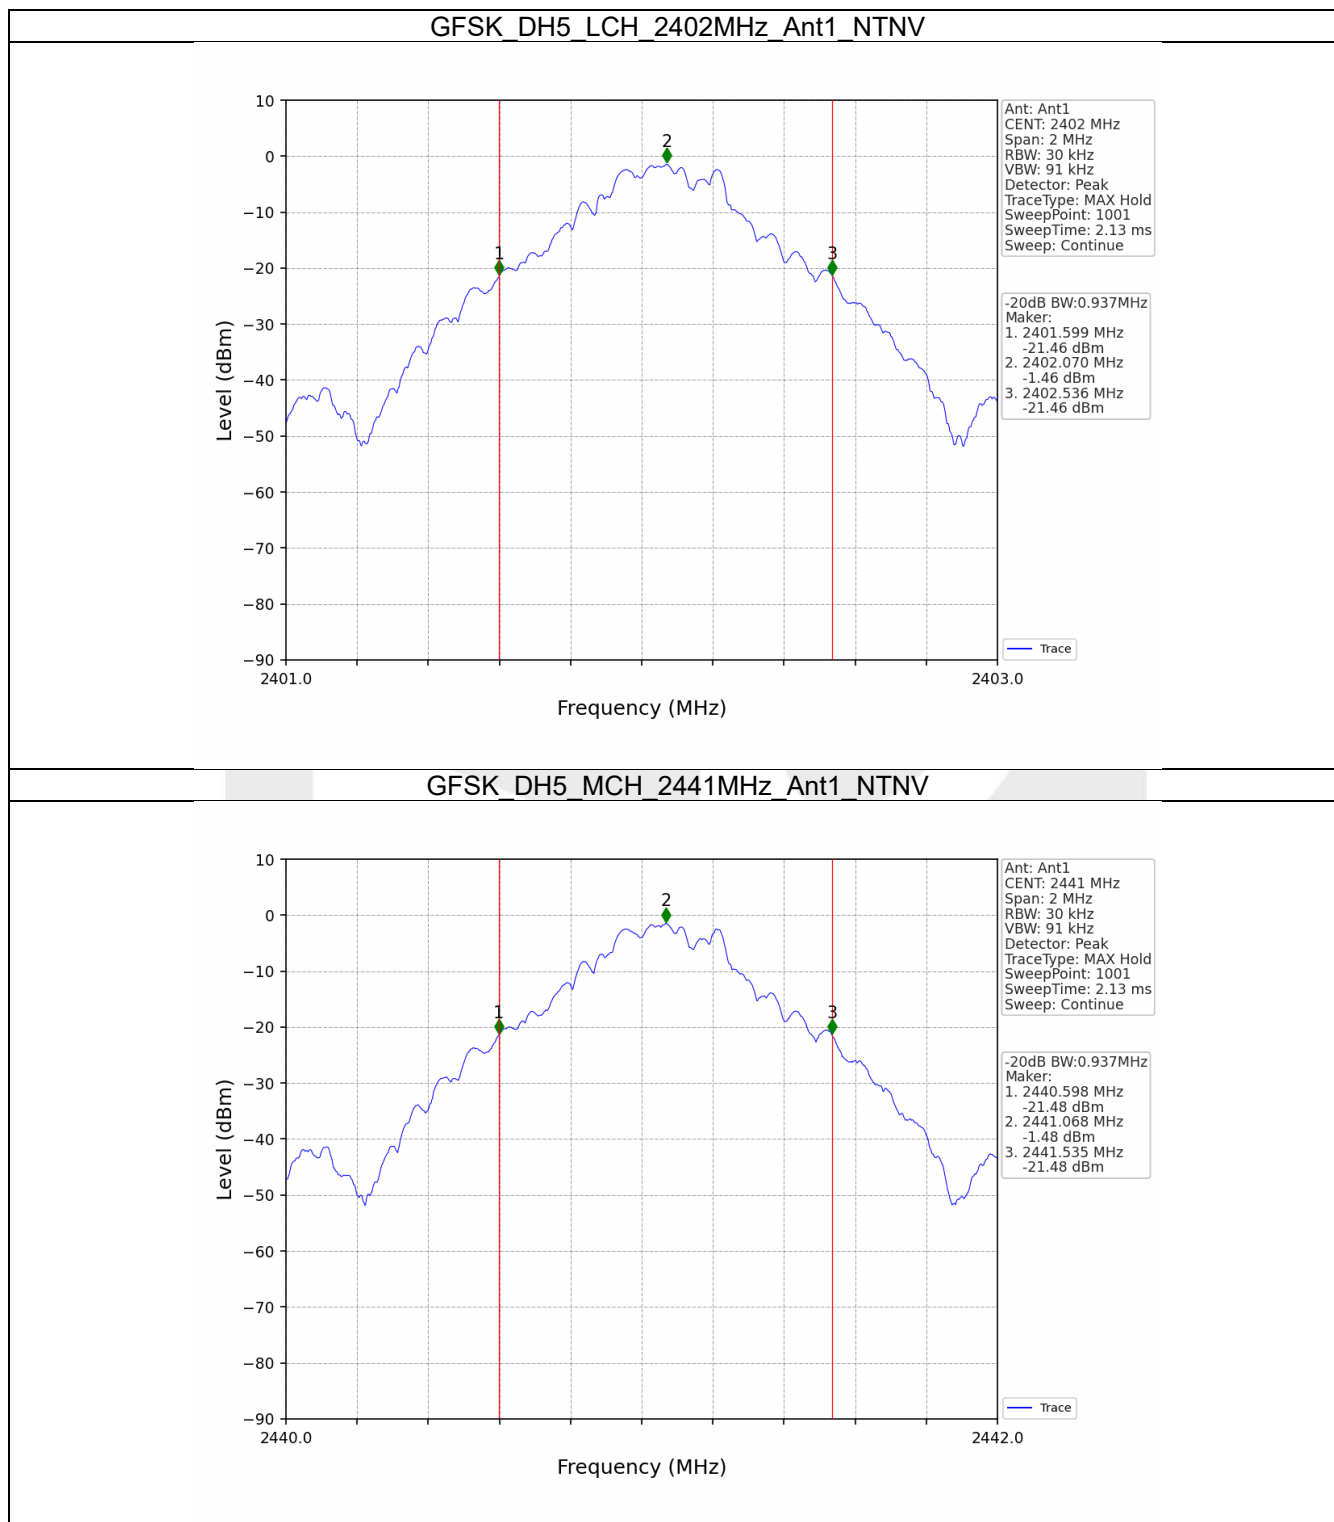

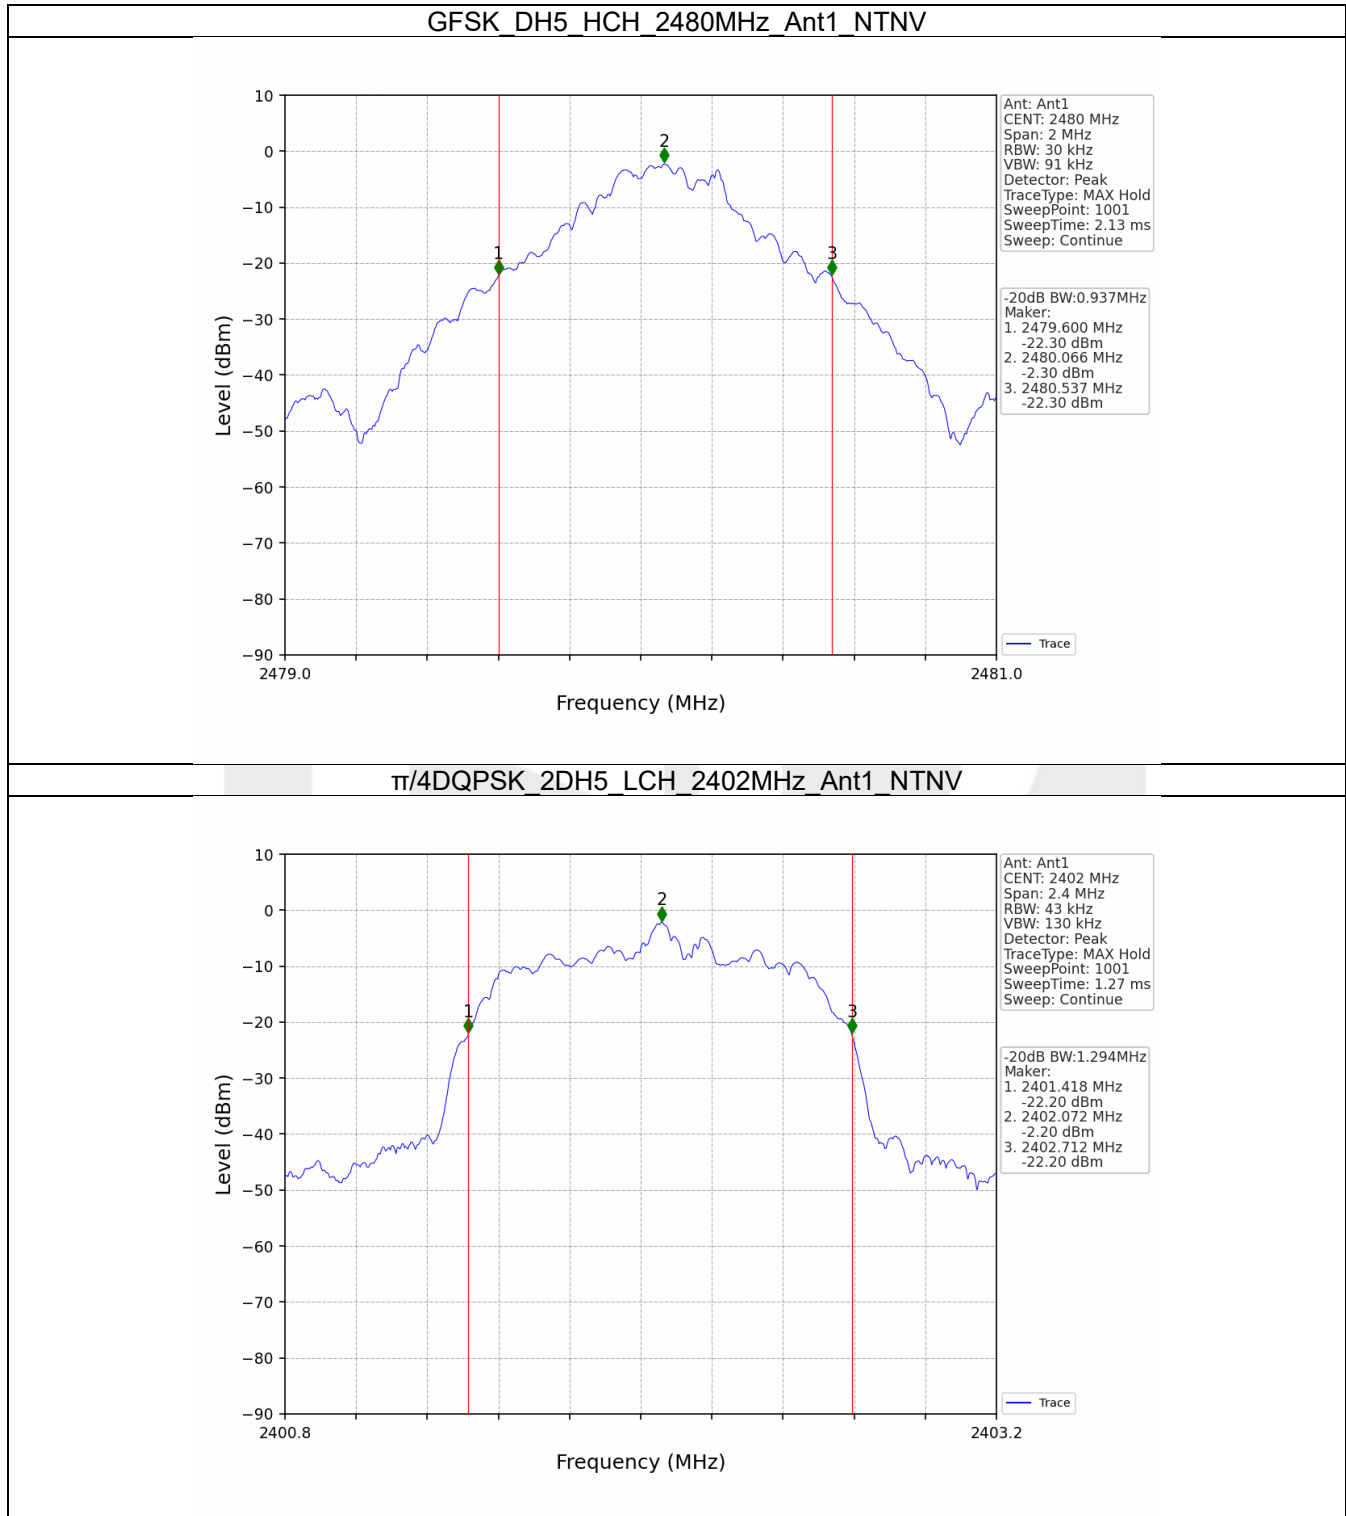

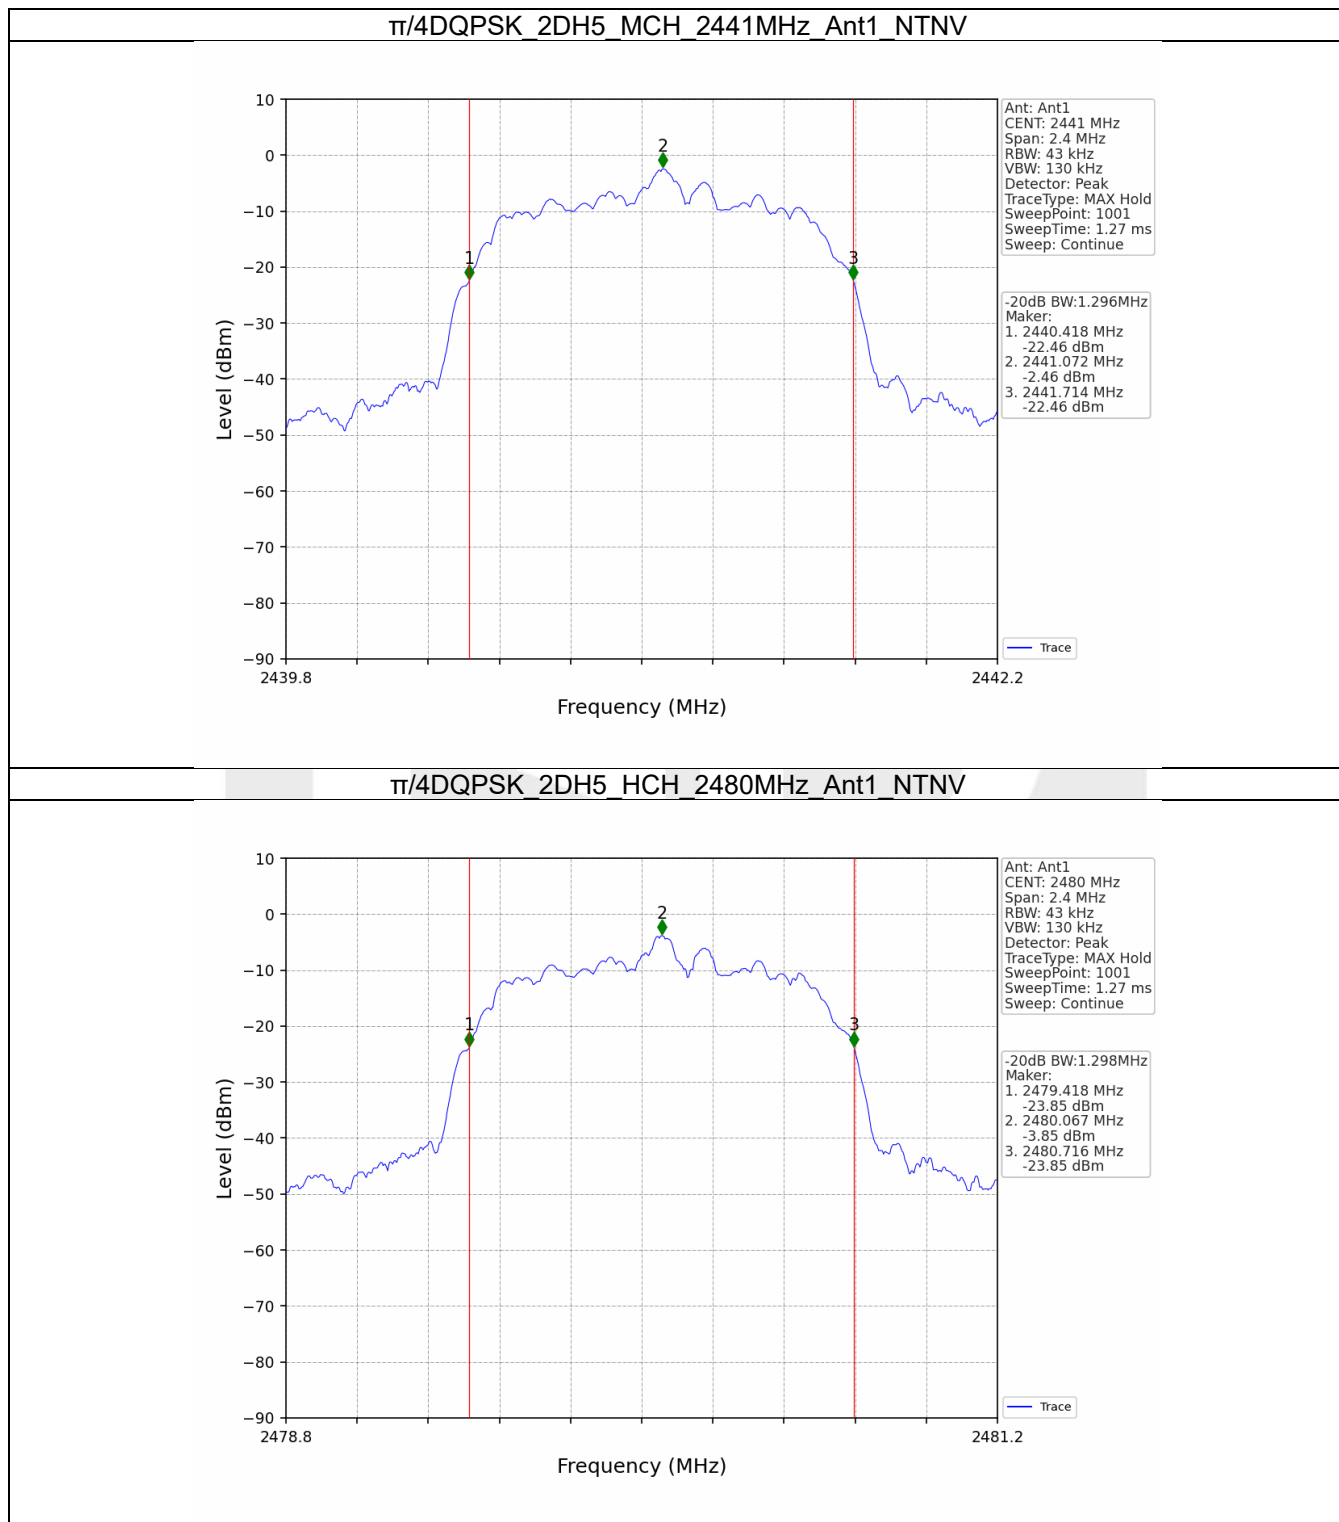

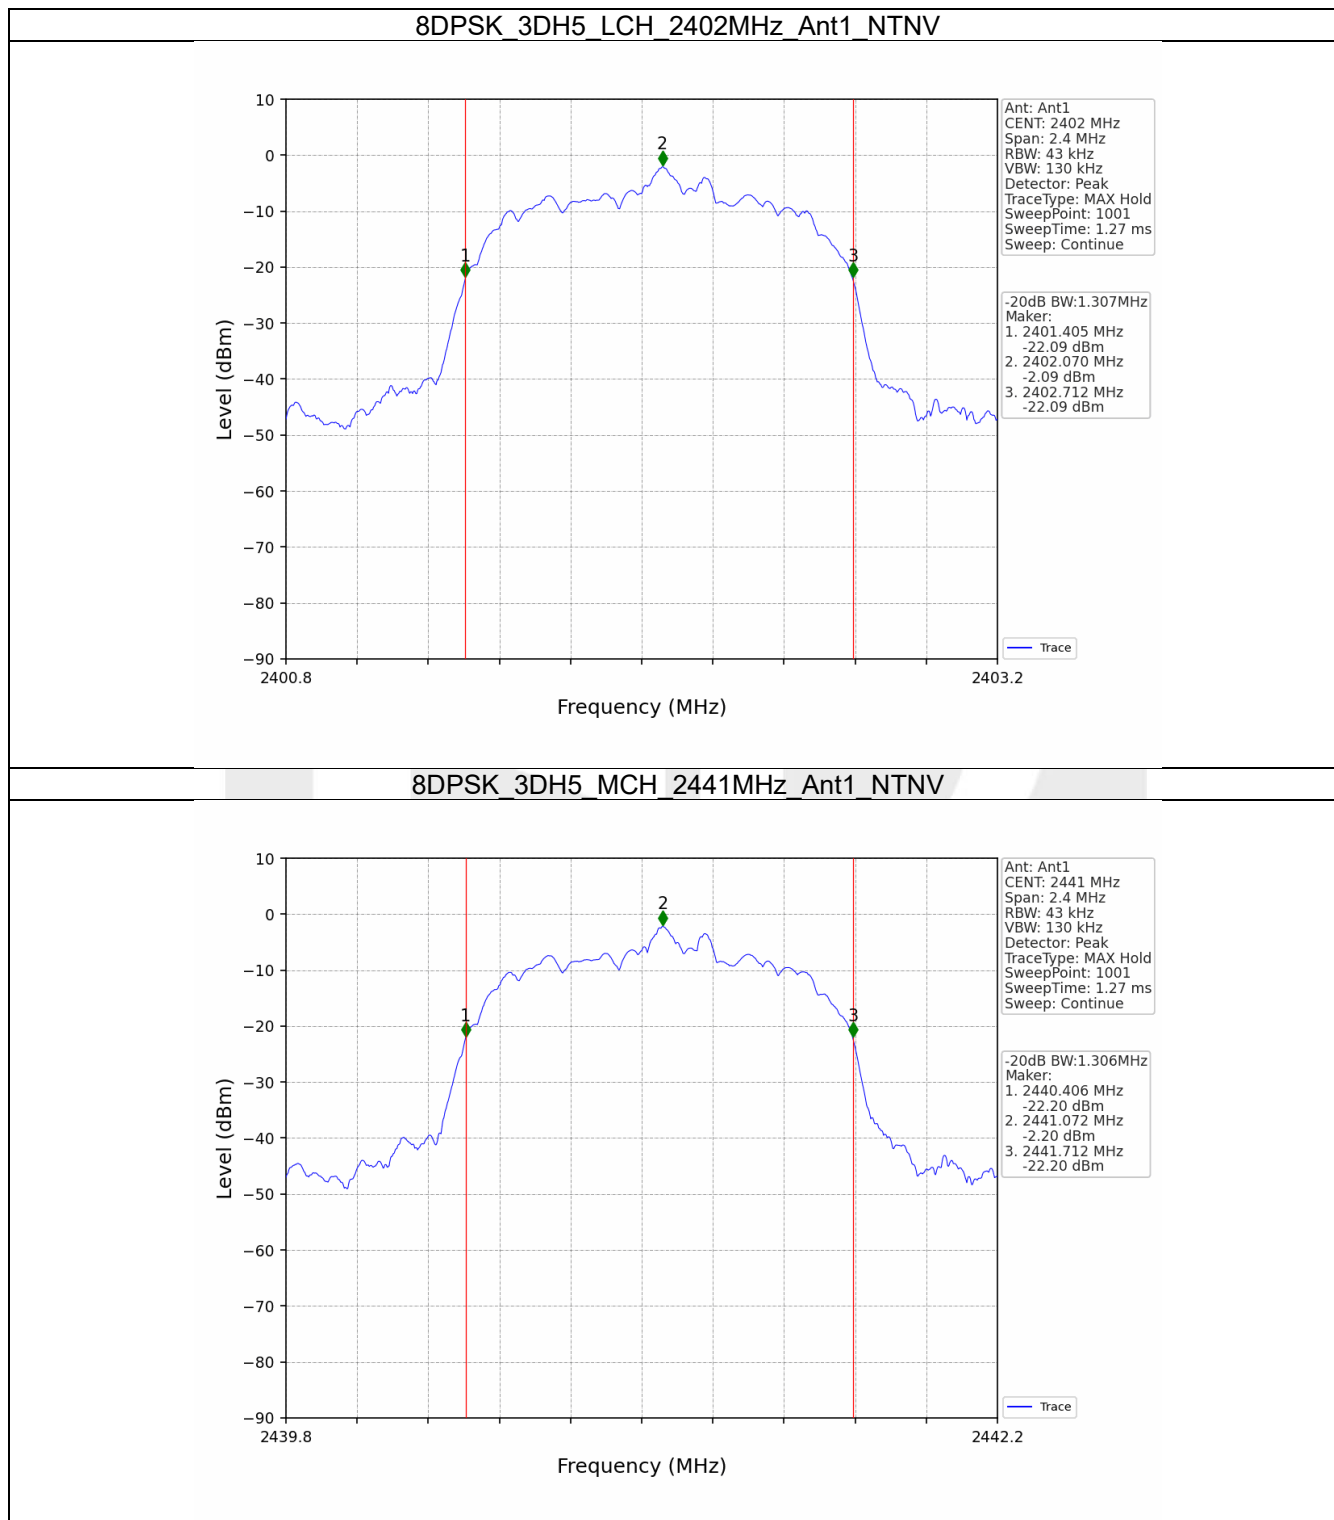

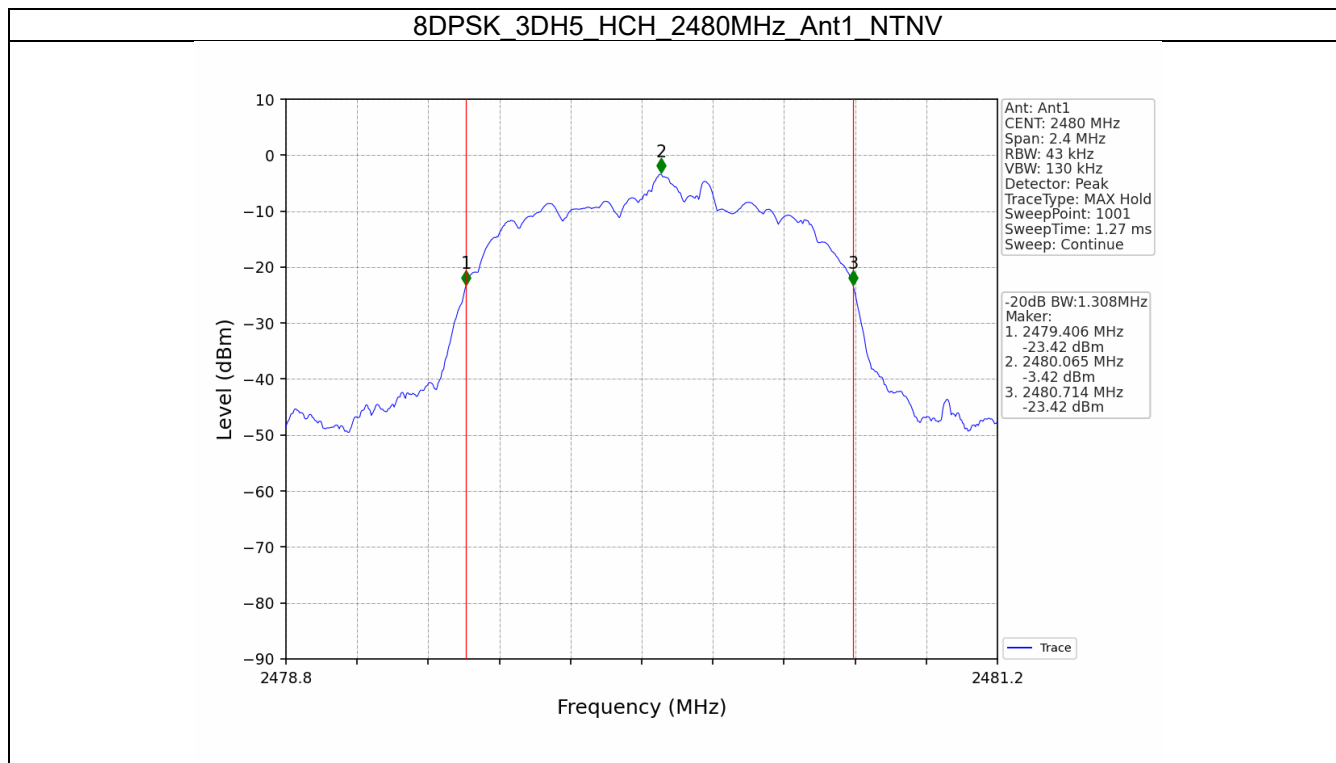


2. Maximum Conducted Output Power


2.1 Power


2.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	0.96	≤ 30	Pass
		2441	DH5	0.94	≤ 30	Pass
		2480	DH5	0.07	≤ 30	Pass
$\pi/4$ DQPSK	SISO	2402	2DH5	1.02	≤ 20.97	Pass
		2441	2DH5	1.00	≤ 20.97	Pass
		2480	2DH5	-0.15	≤ 20.97	Pass
8DPSK	SISO	2402	3DH5	1.66	≤ 20.97	Pass
		2441	3DH5	1.54	≤ 20.97	Pass
		2480	3DH5	0.30	≤ 20.97	Pass


2.1.2 Test Graph

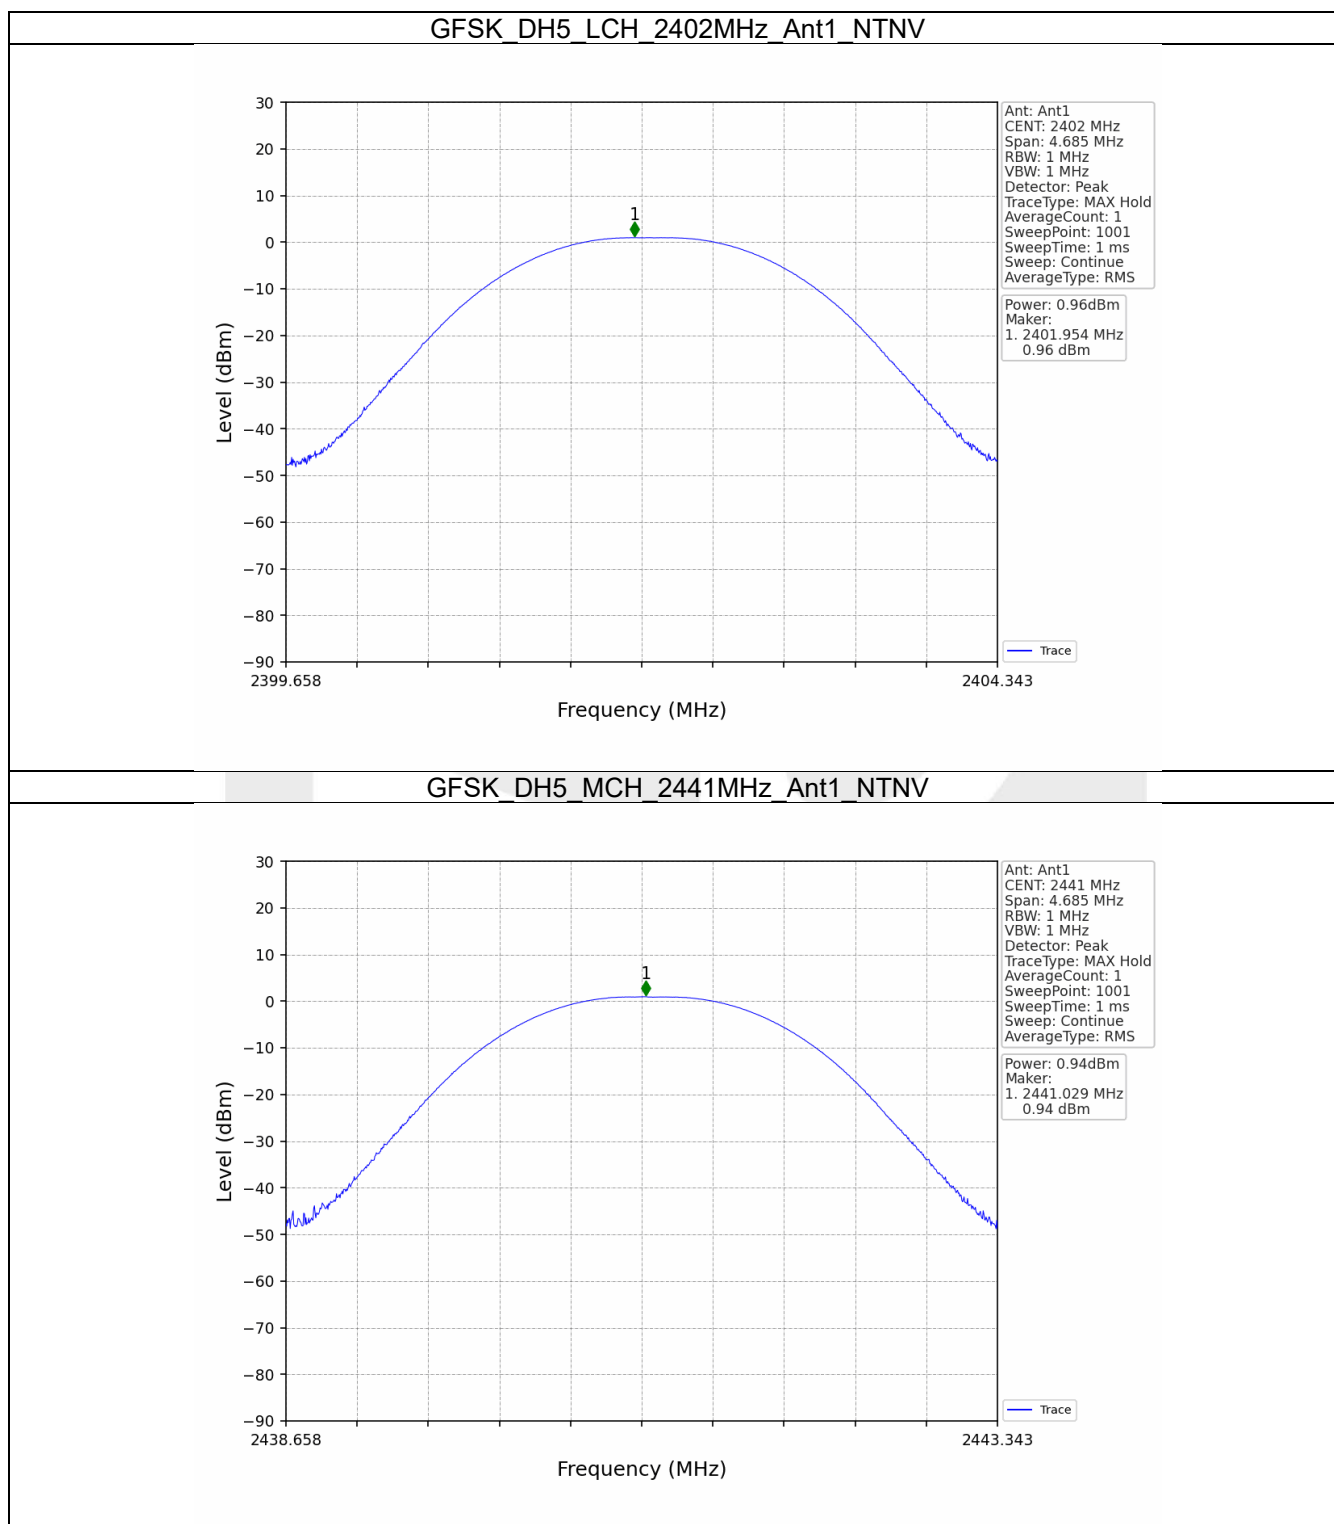

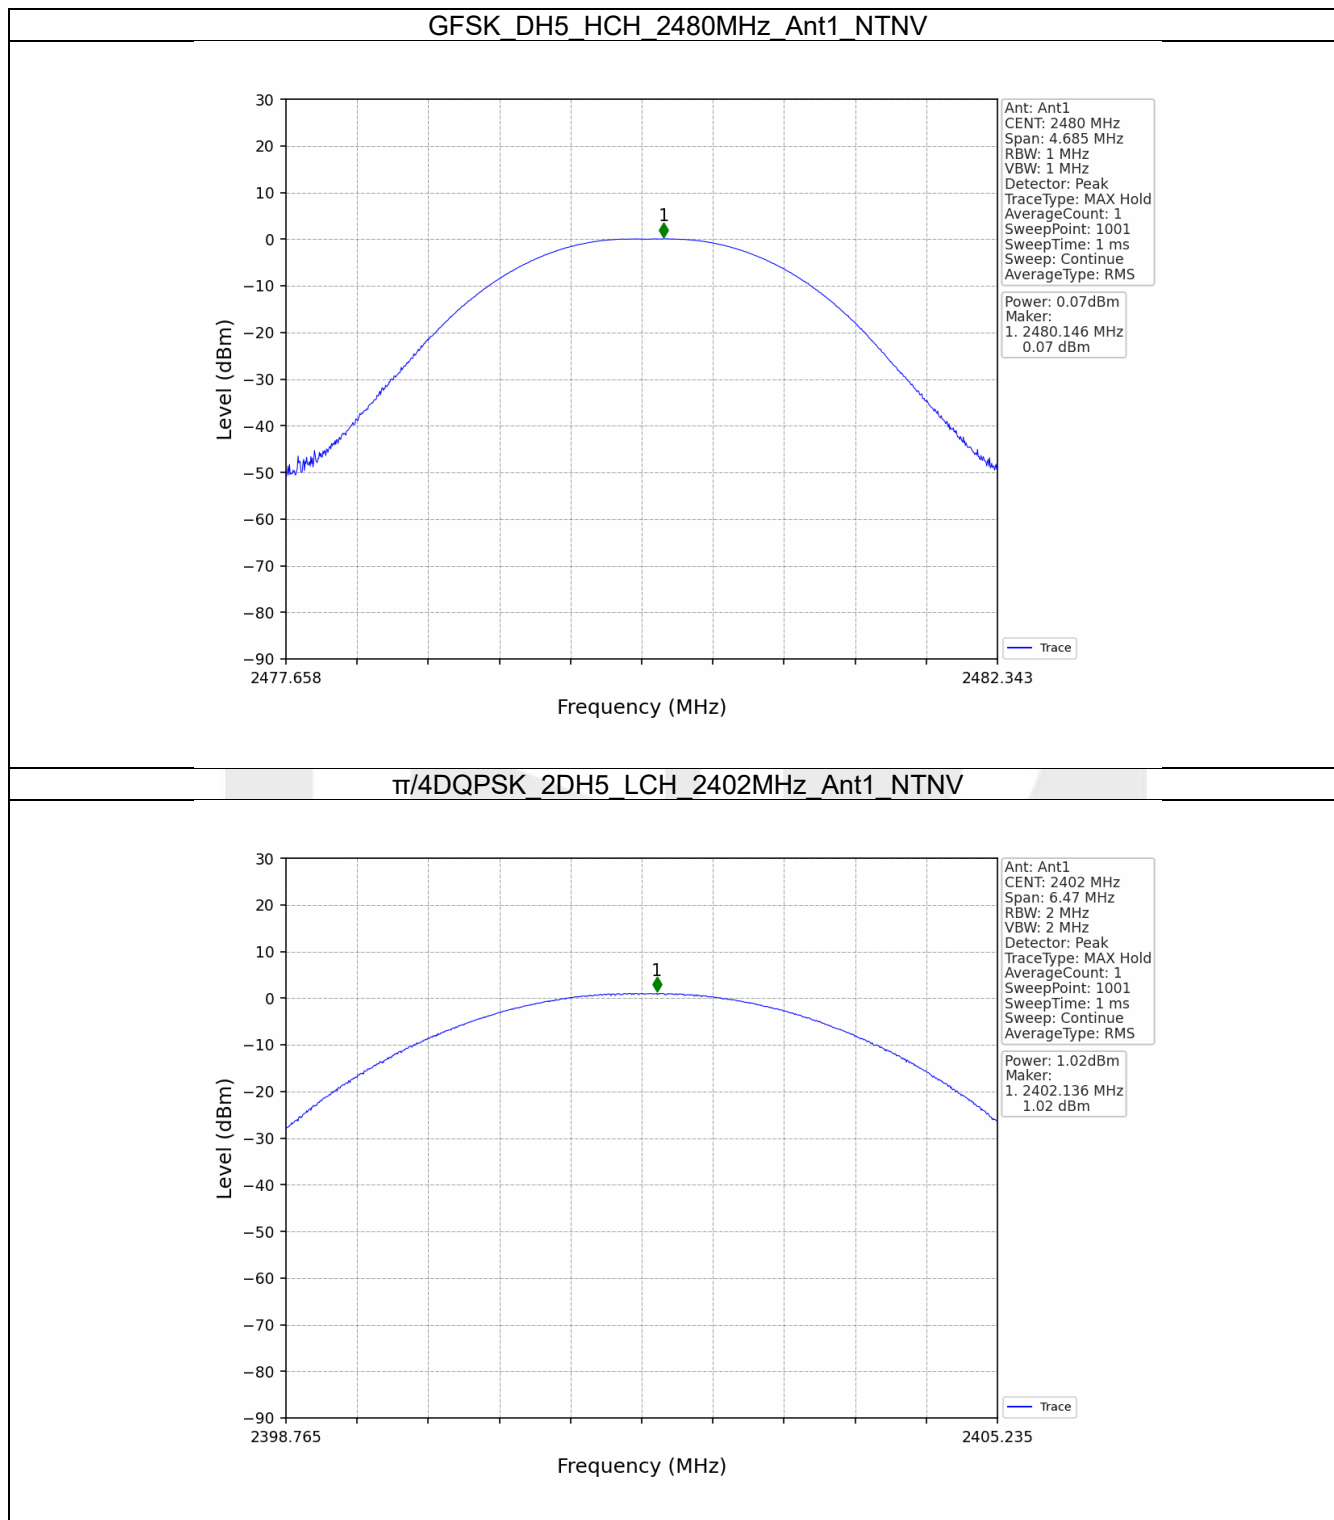

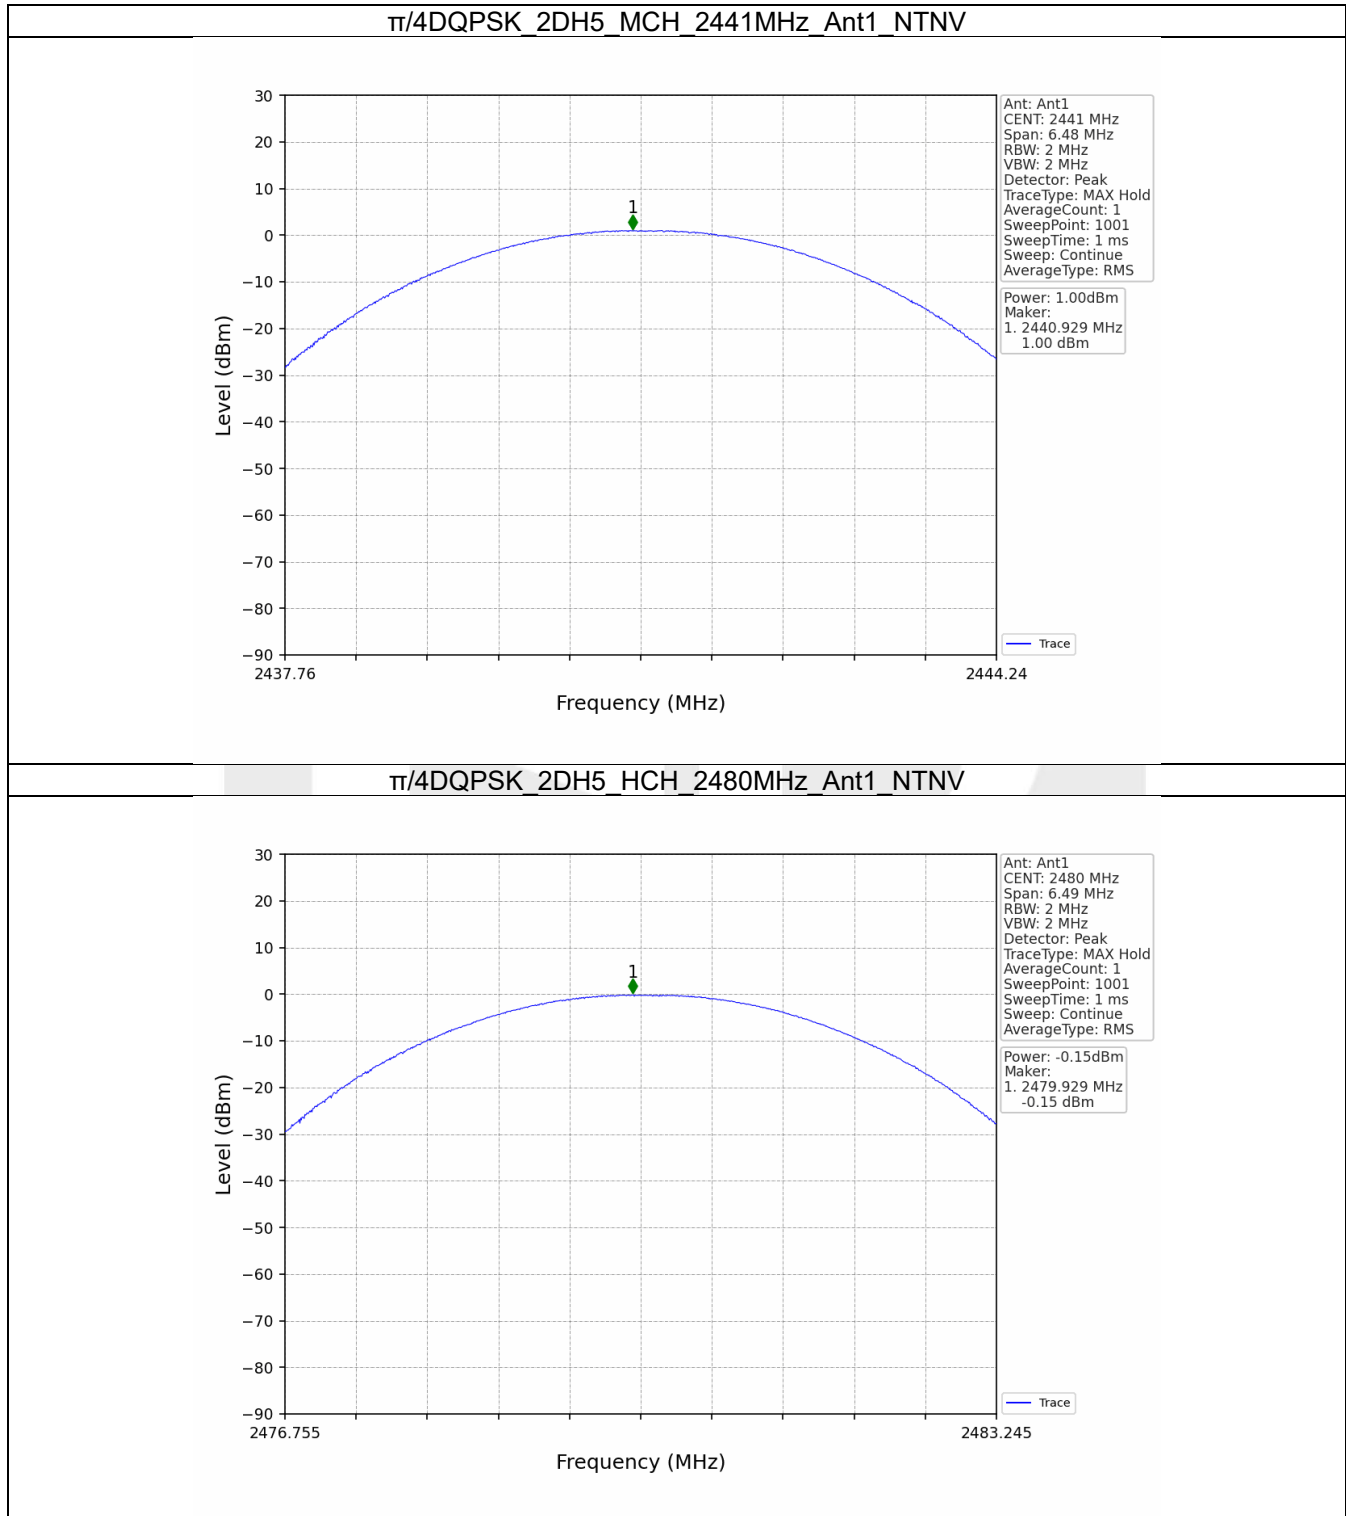

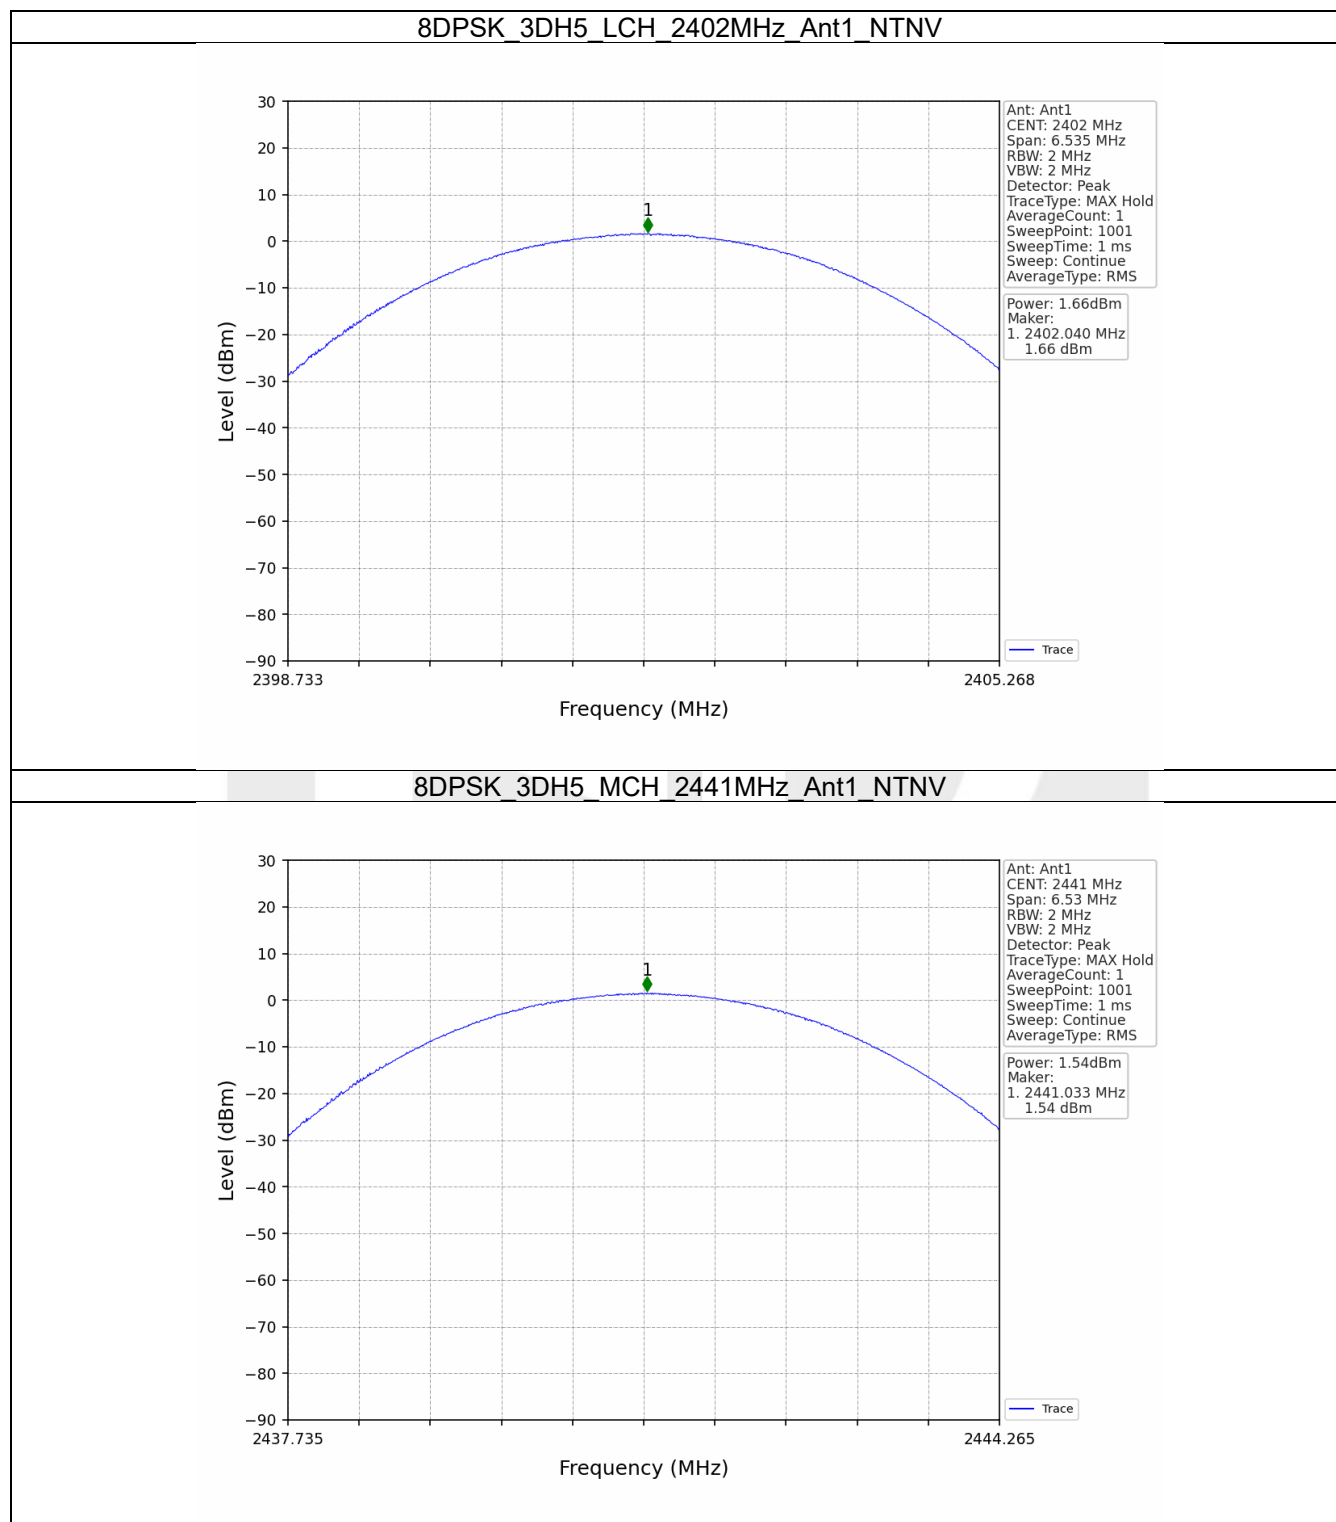

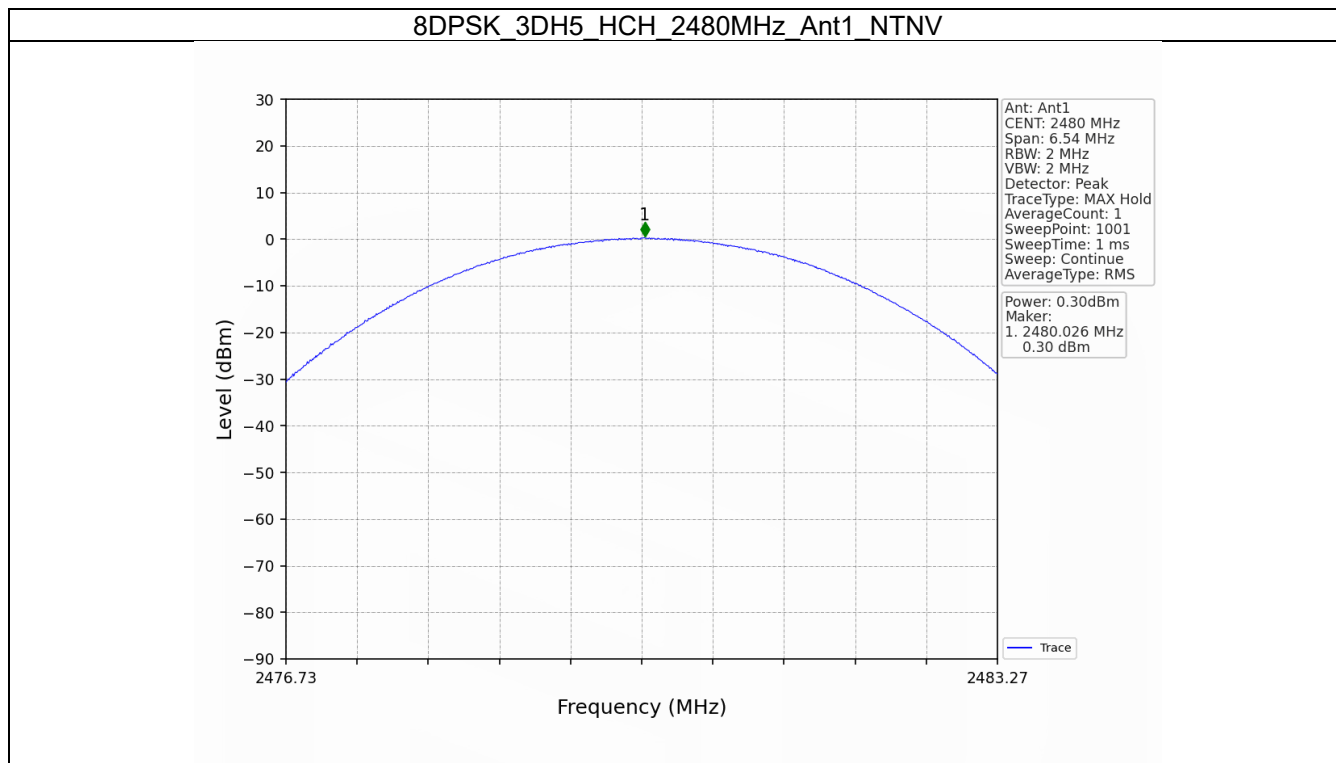


3. Carrier Frequency Separation


3.1 Ant1

3.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.008	0.937	≥ 0.937	Pass
$\pi/4$ DQPSK	SISO	HOPP	2DH5	1.001	1.298	≥ 0.865	Pass
8DPSK	SISO	HOPP	3DH5	1.001	1.308	≥ 0.872	Pass

3.1.2 Test Graph

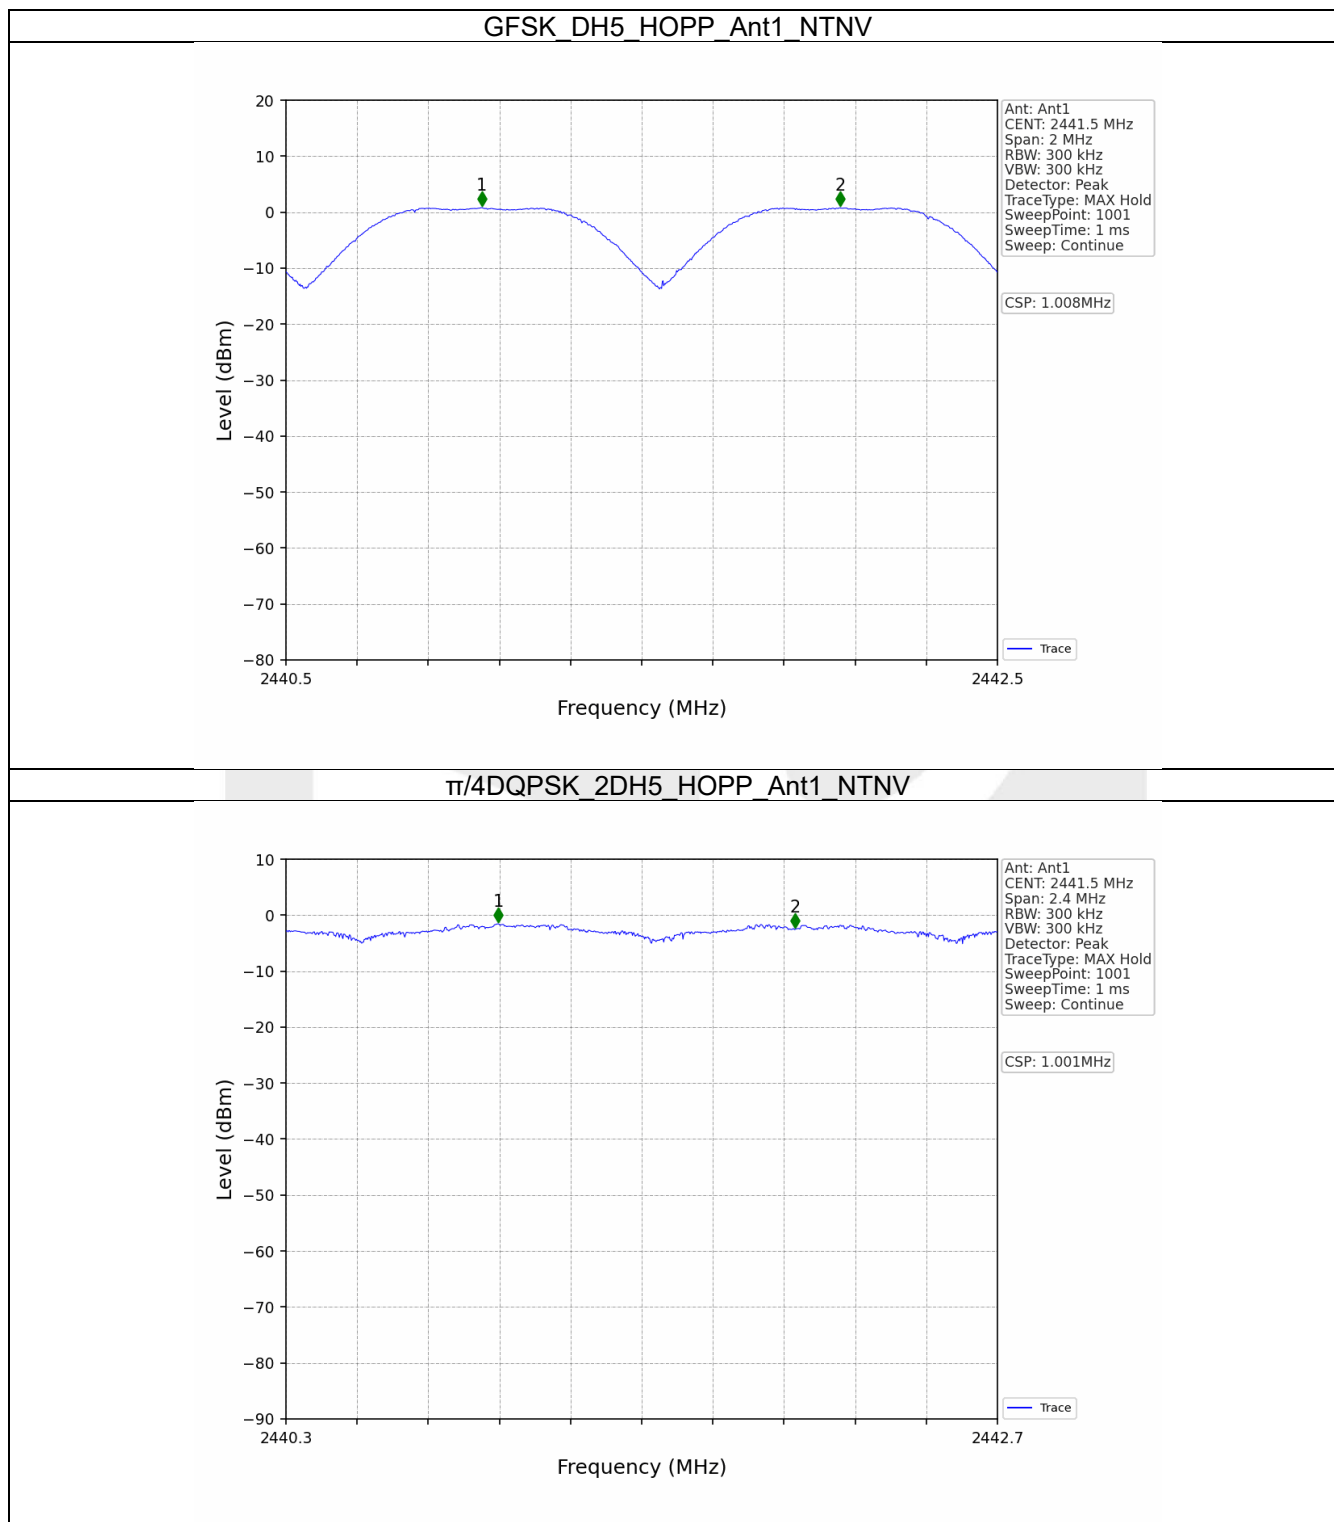

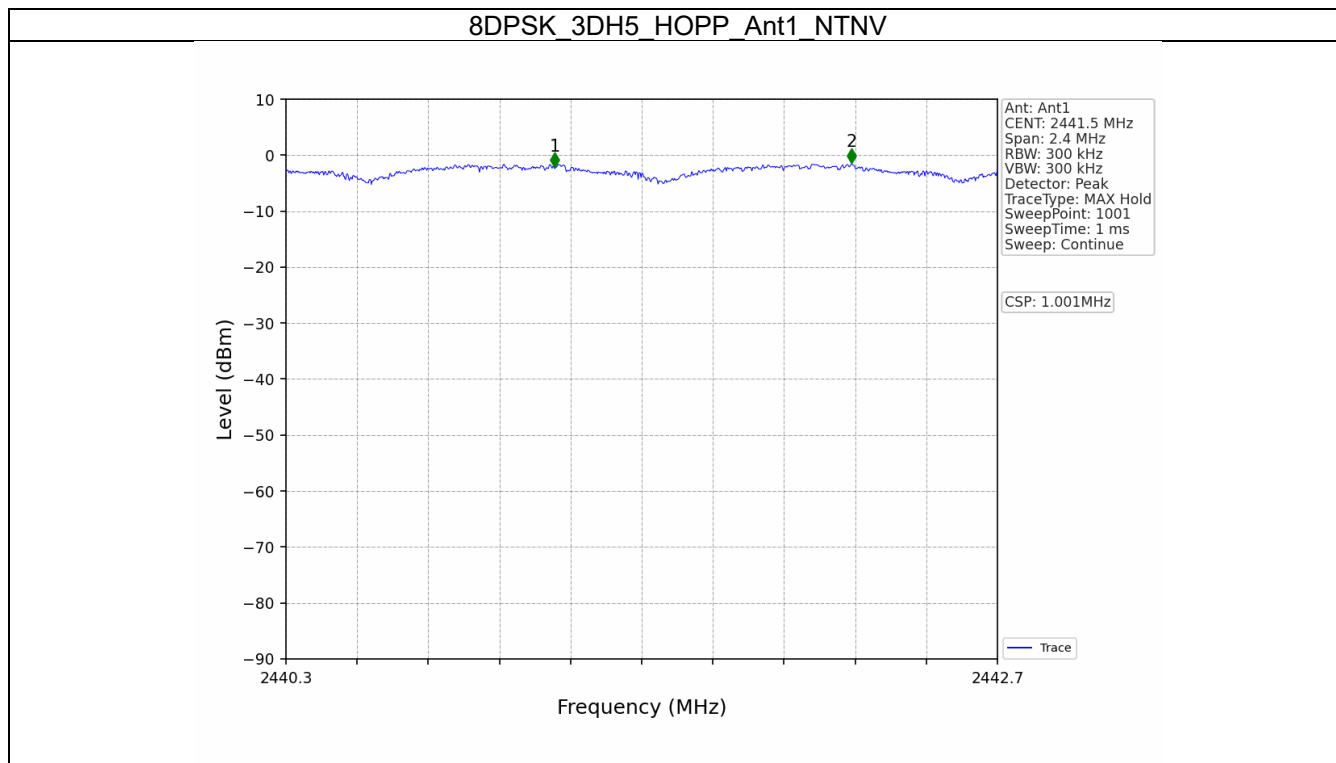


4. Number of Hopping Frequencies


4.1 HoppNum

4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
$\pi/4$ DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass

4.1.2 Test Graph

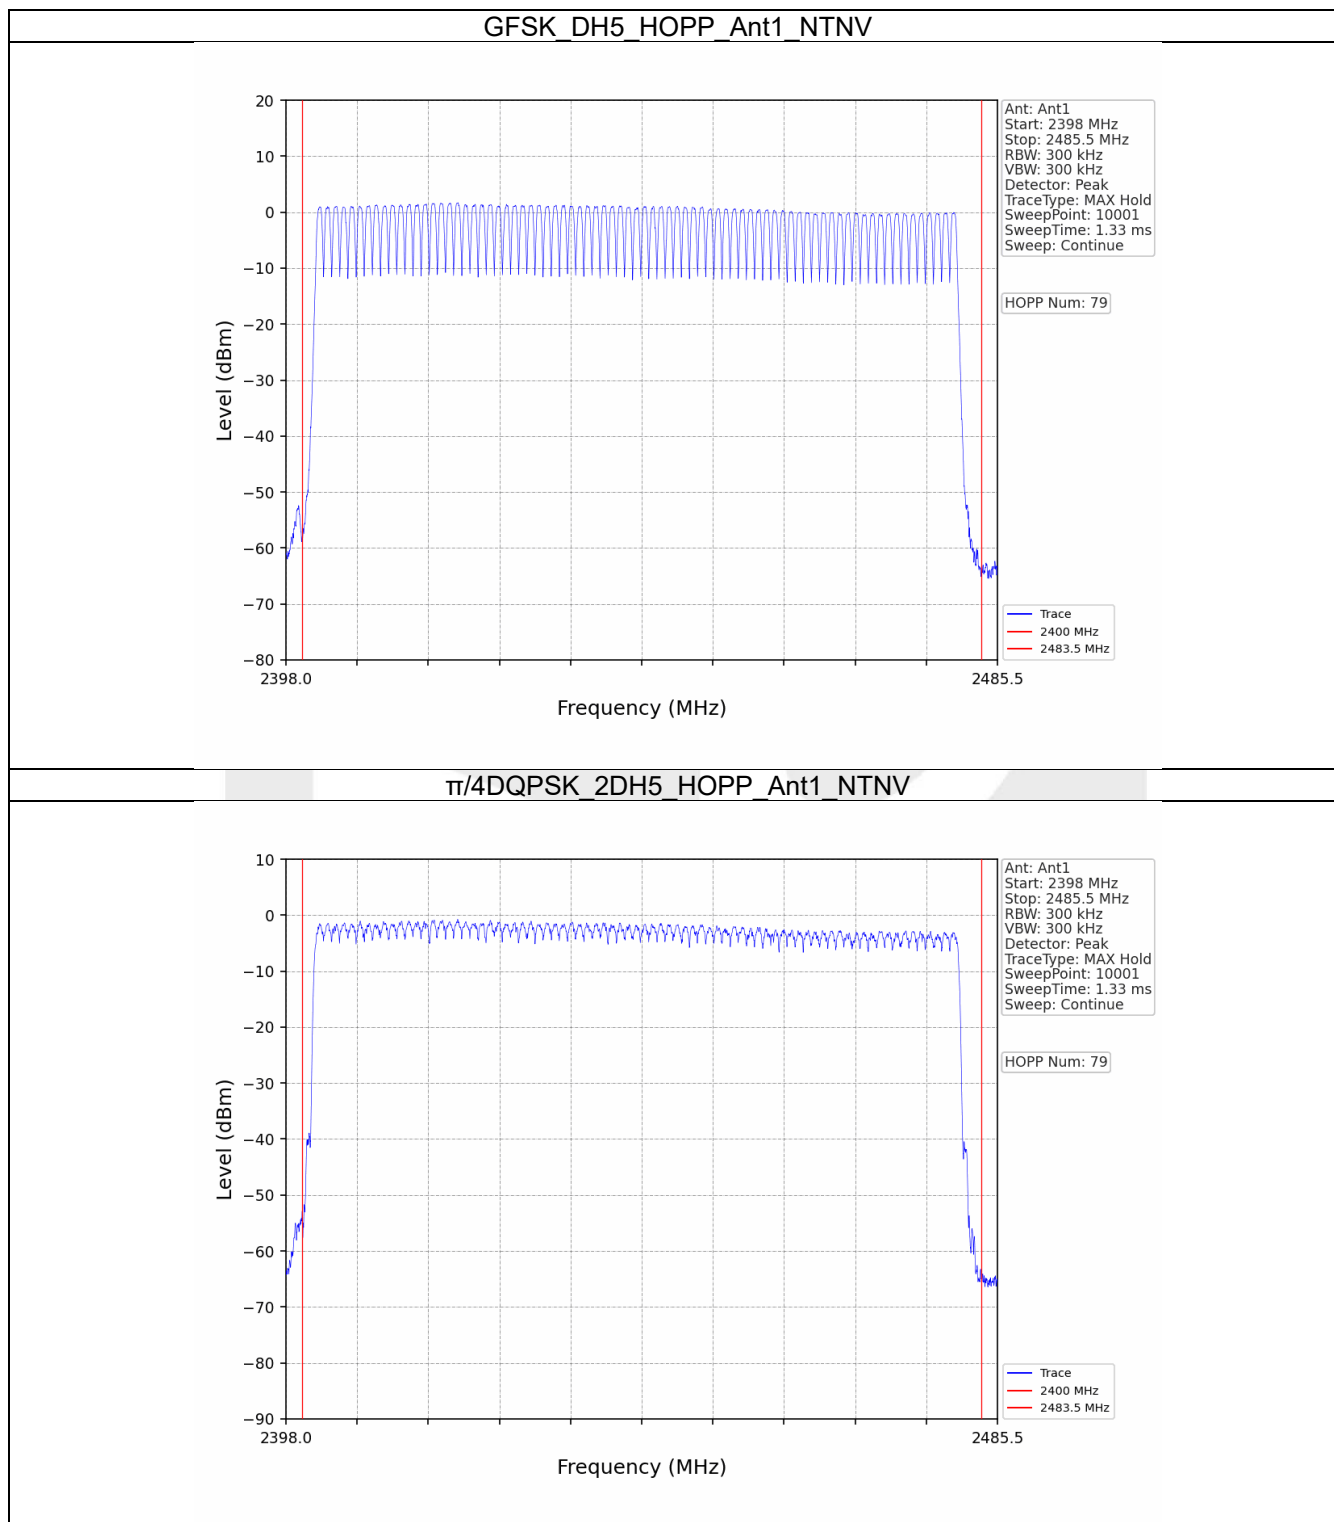

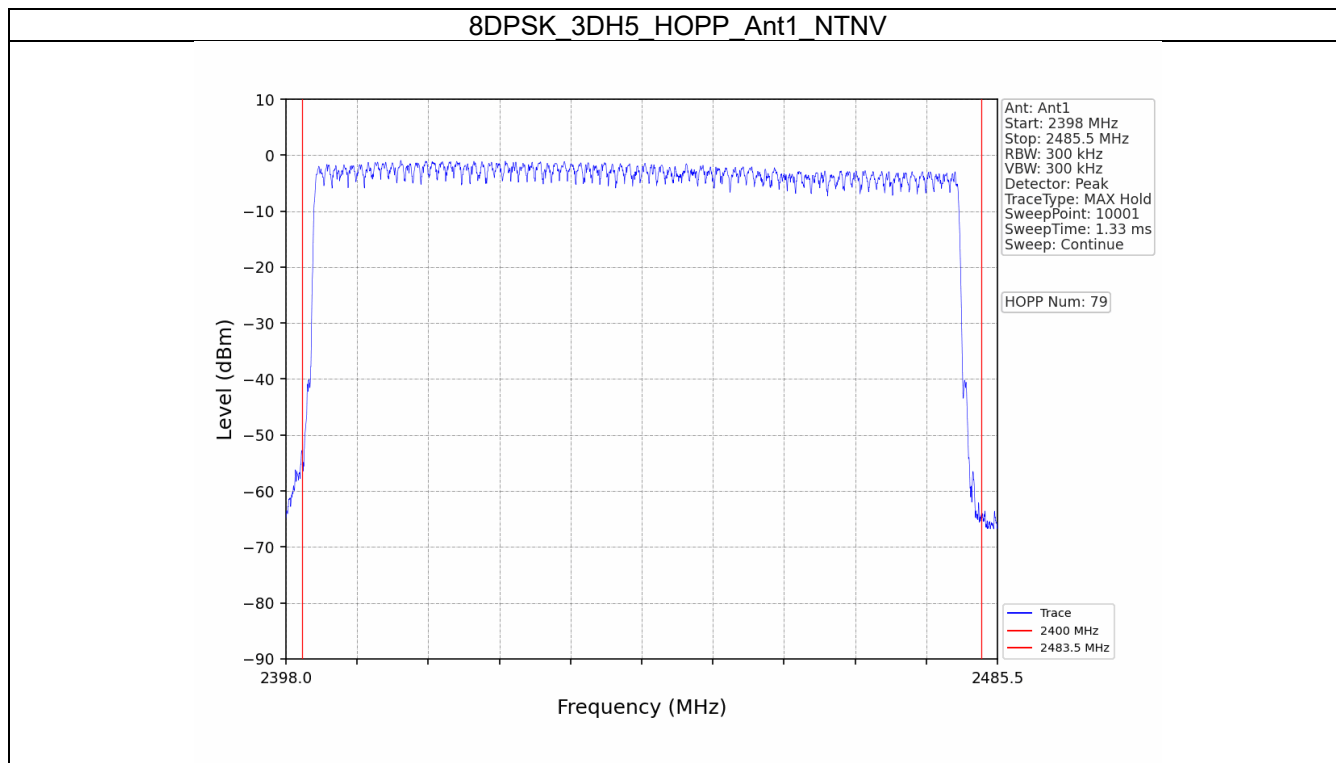


5. Time of Occupancy (Dwell Time)


5.1 Ant1


5.1.1 Test Result


Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.382	31.600	320	122.240	<=400	Pass
			DH3	1.640	31.600	150	246.000	<=400	Pass
			DH5	2.888	31.600	98	283.024	<=400	Pass
$\pi/4$ DQPSK	SISO	HOPP	2DH1	0.394	31.600	320	126.080	<=400	Pass
			2DH3	1.650	31.600	168	277.200	<=400	Pass
			2DH5	2.894	31.600	104	300.976	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.394	31.600	318	125.292	<=400	Pass
			3DH3	1.644	31.600	156	256.464	<=400	Pass
			3DH5	2.900	31.600	108	313.200	<=400	Pass


5.1.2 Test Graph

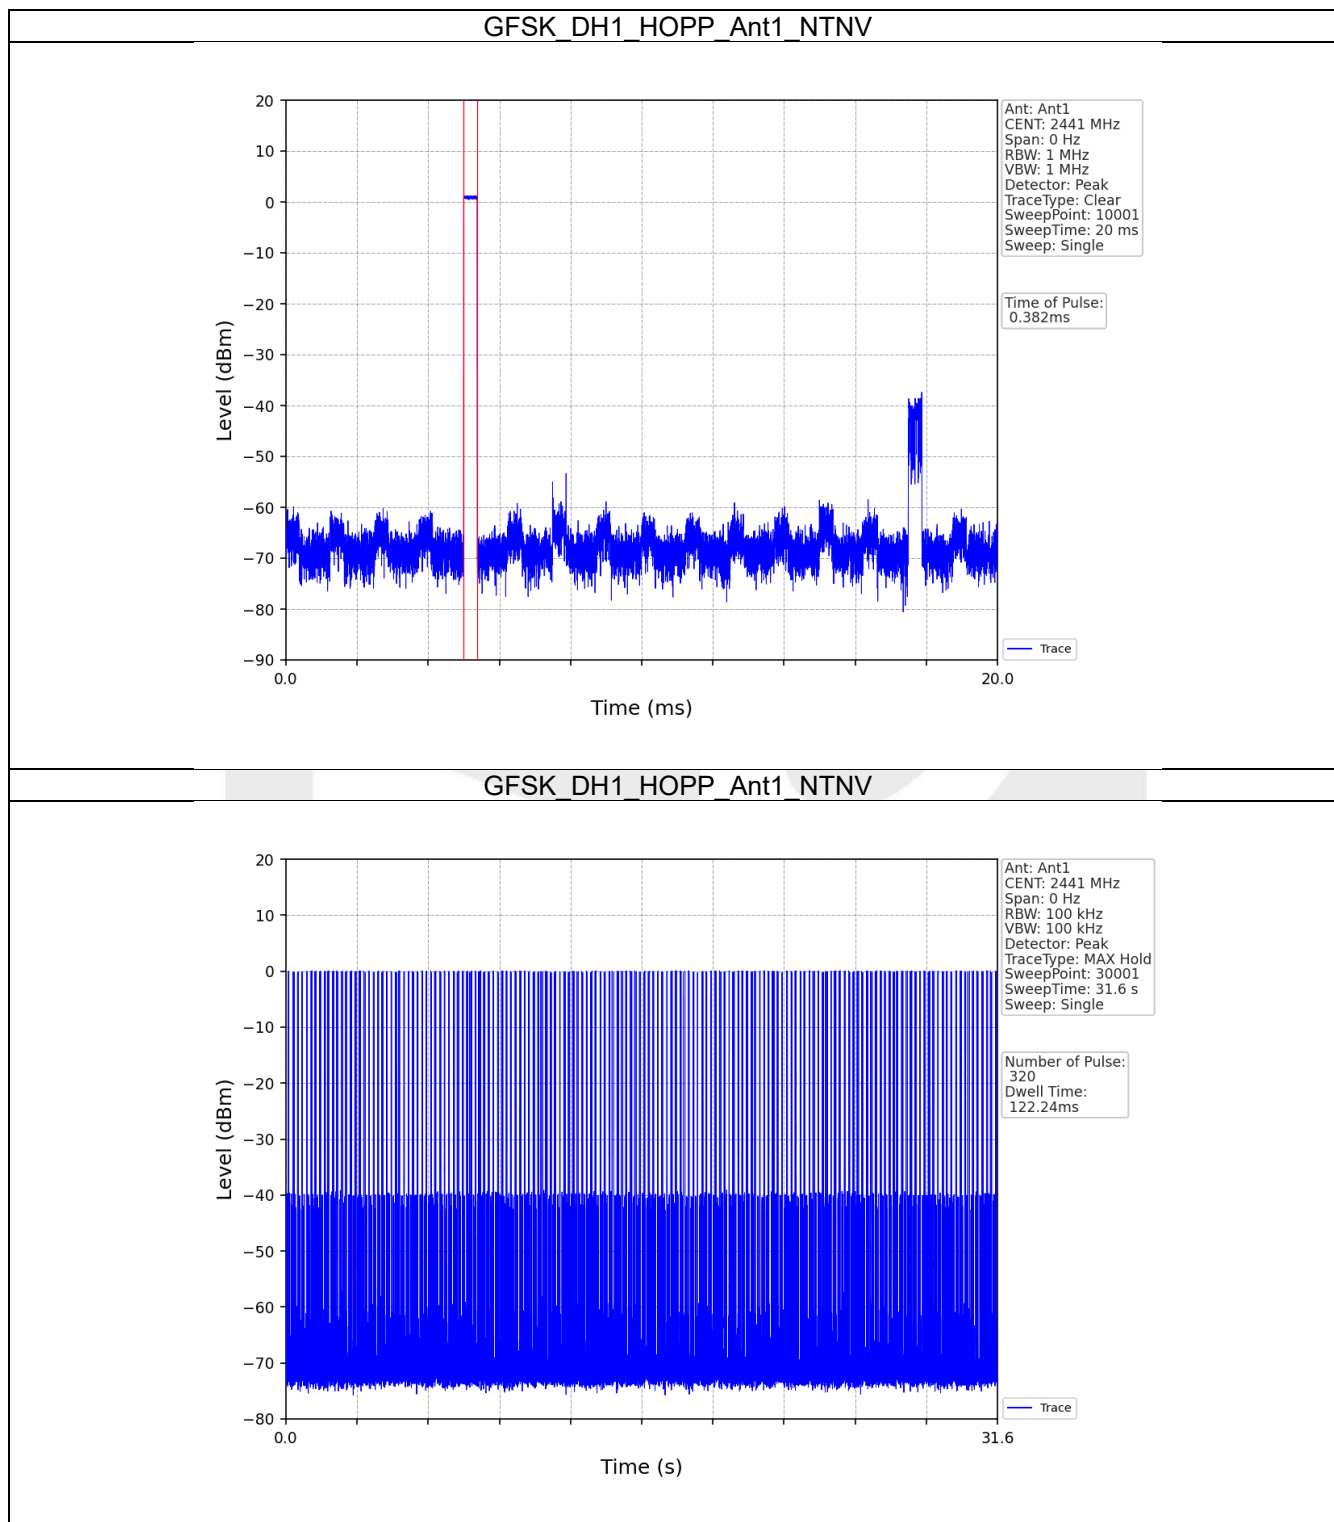


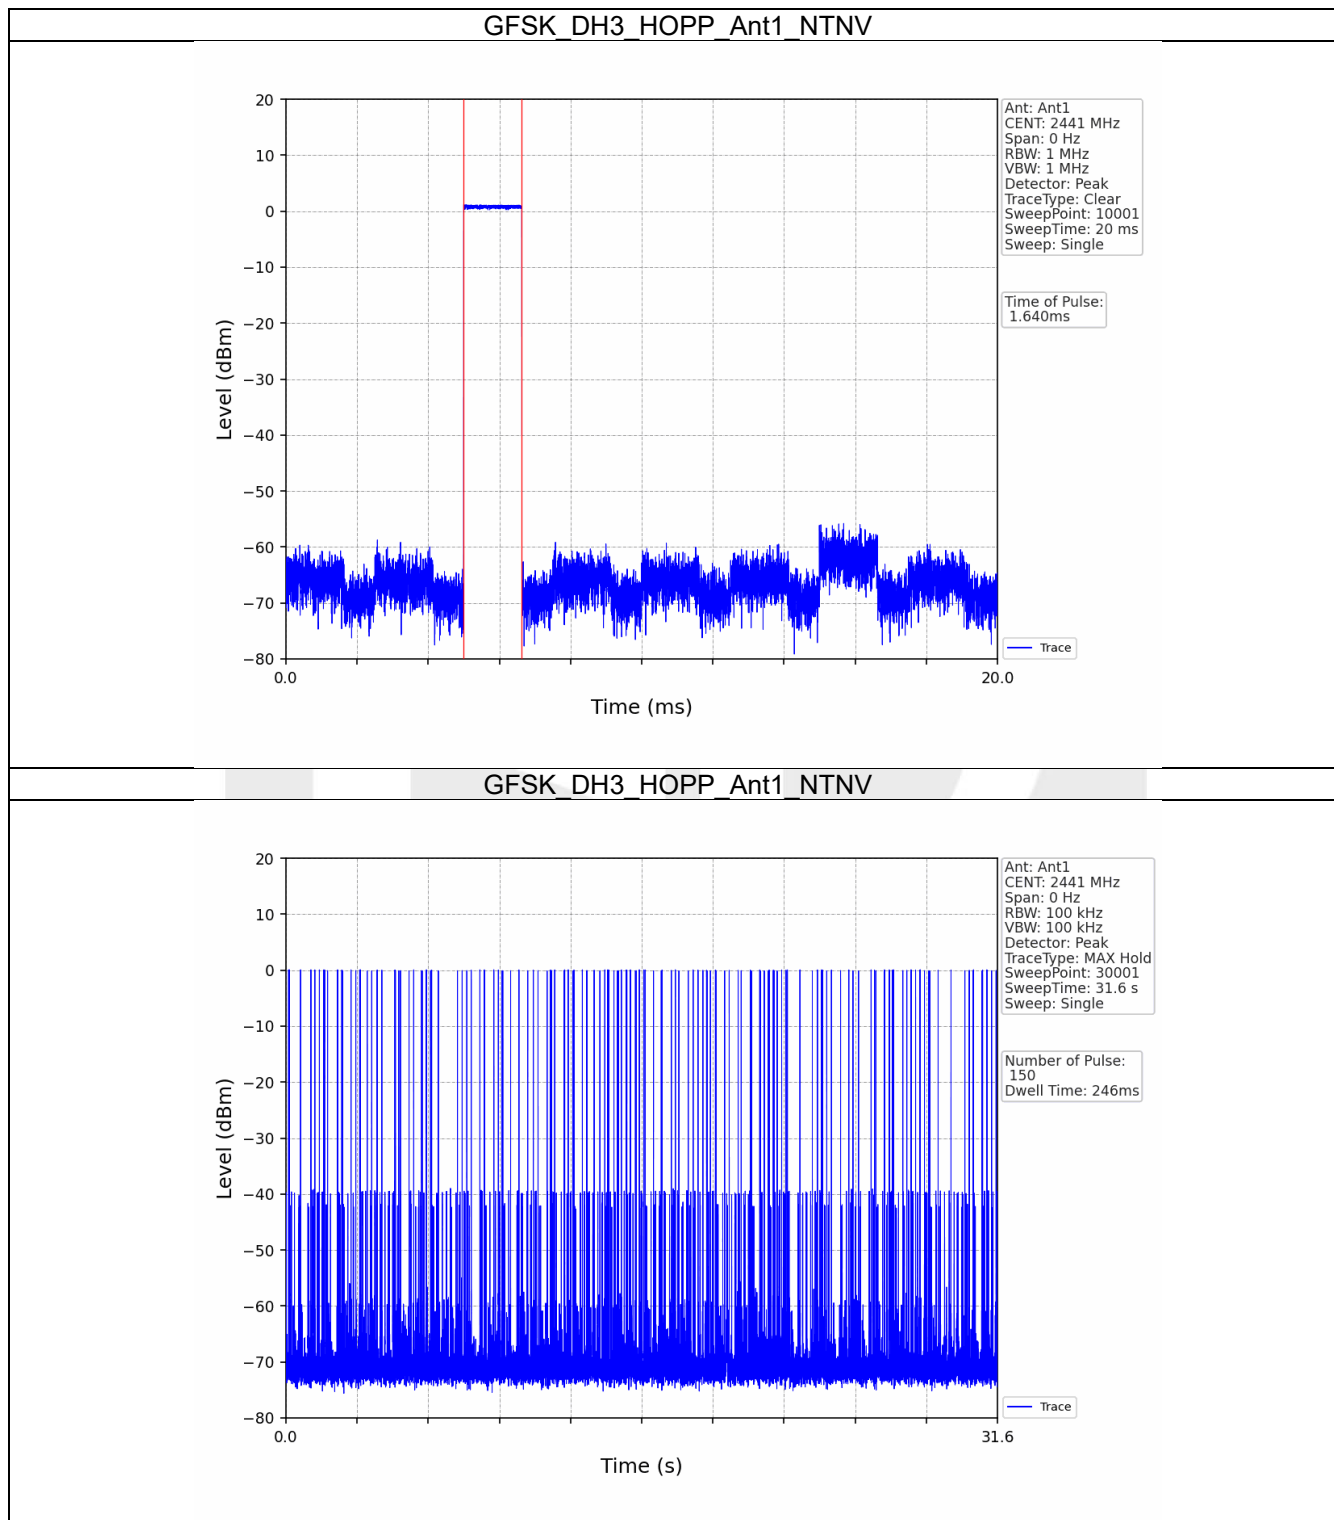


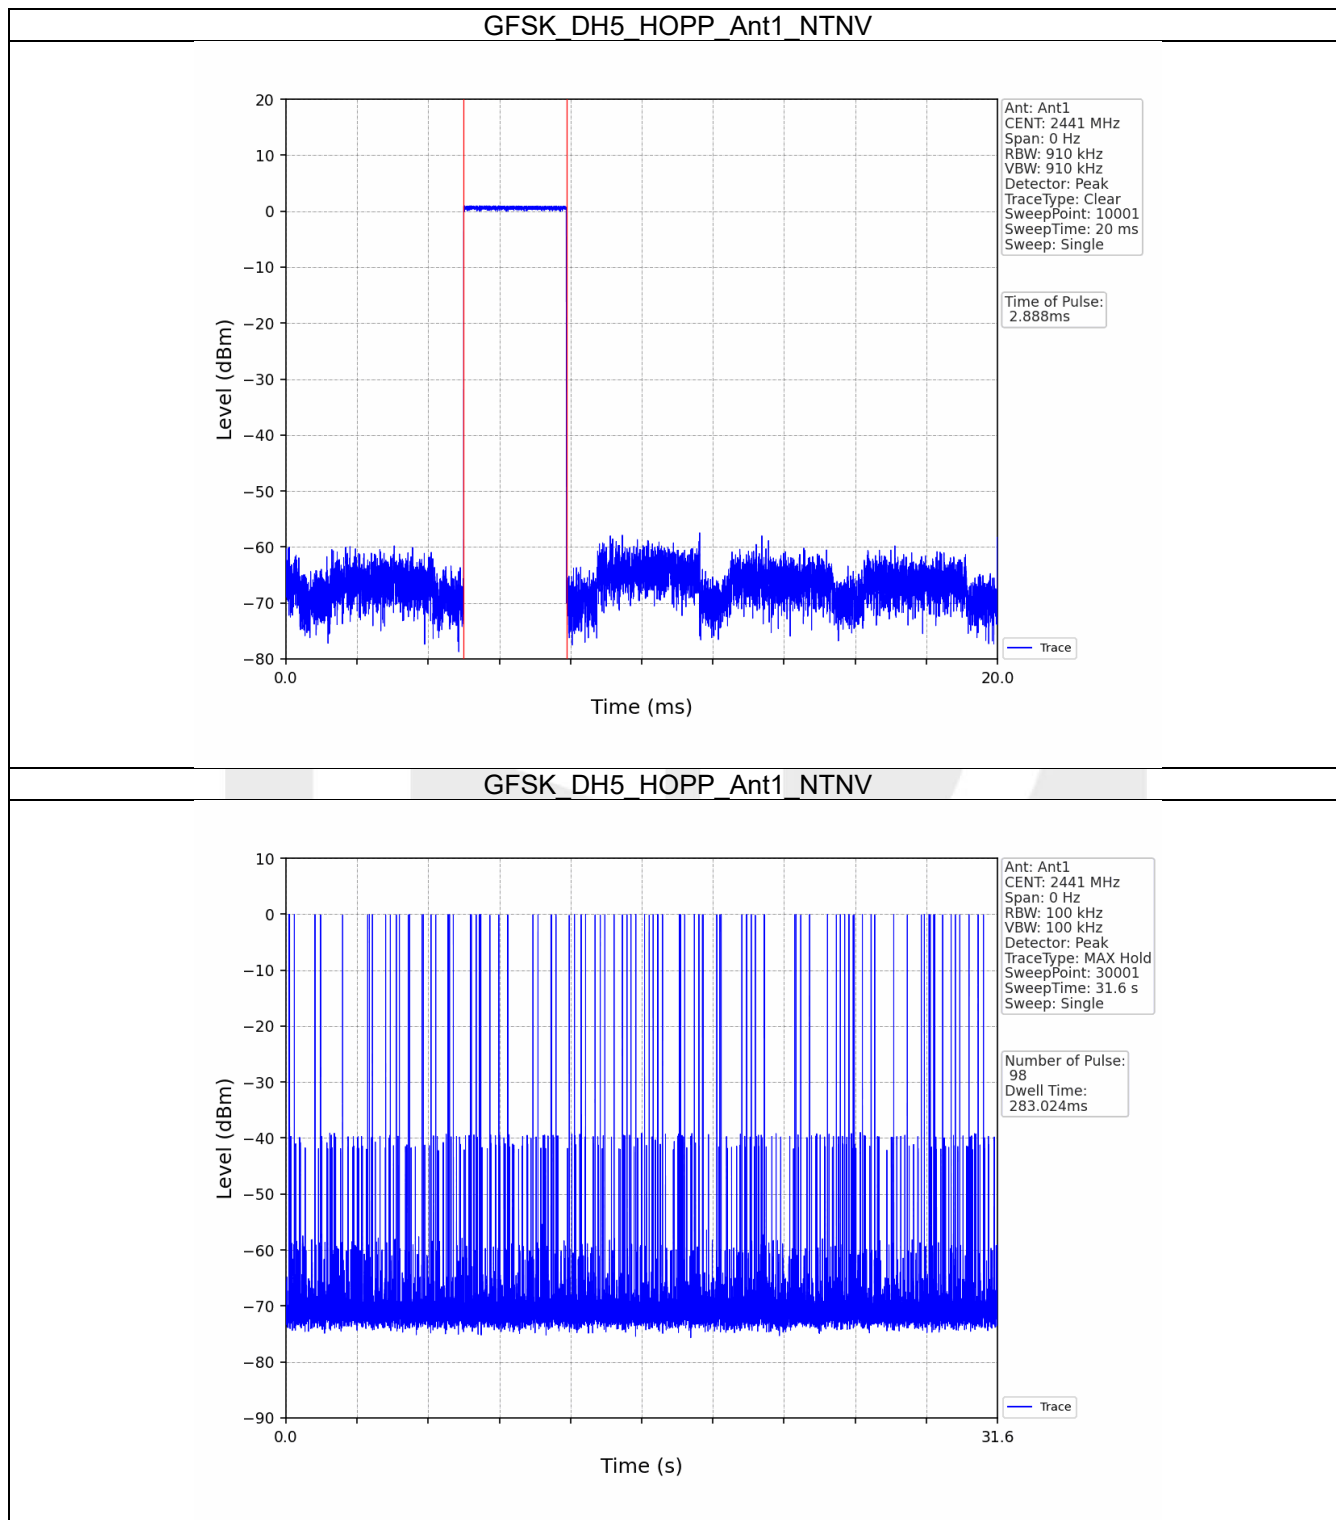


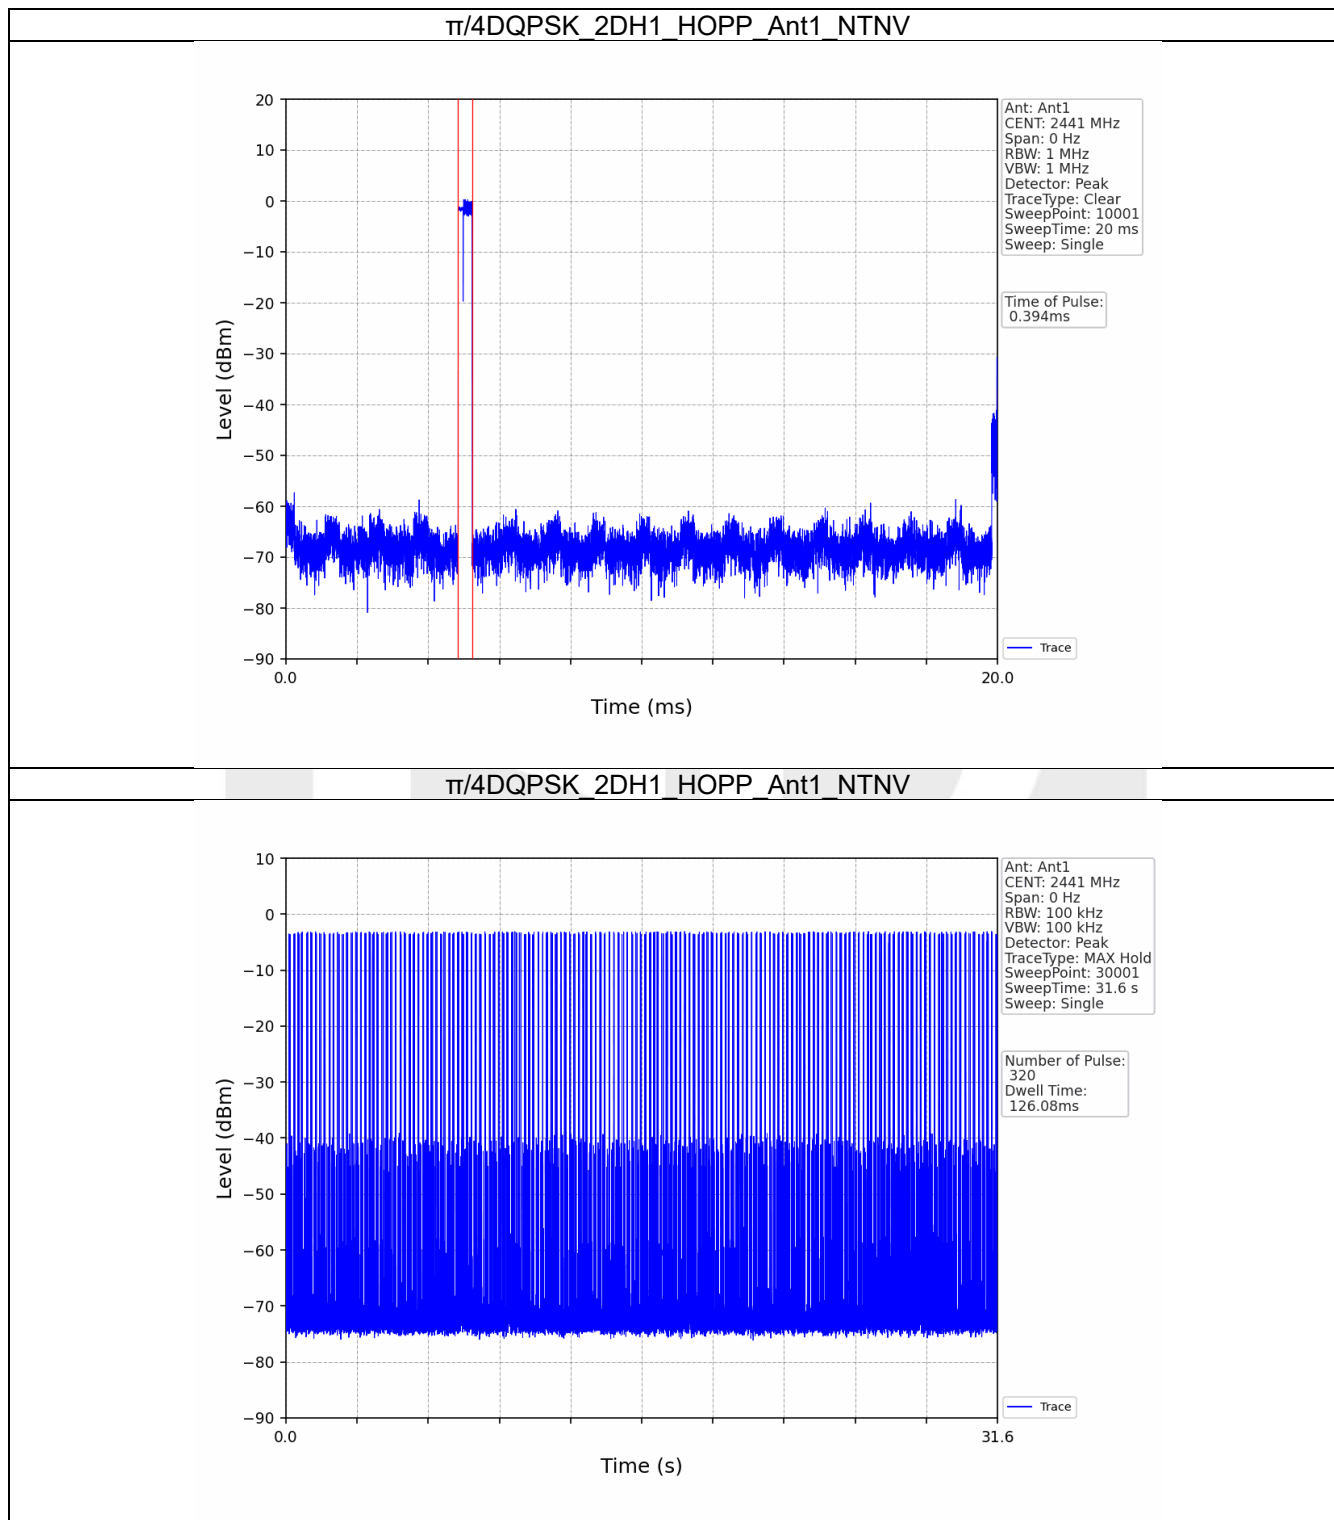


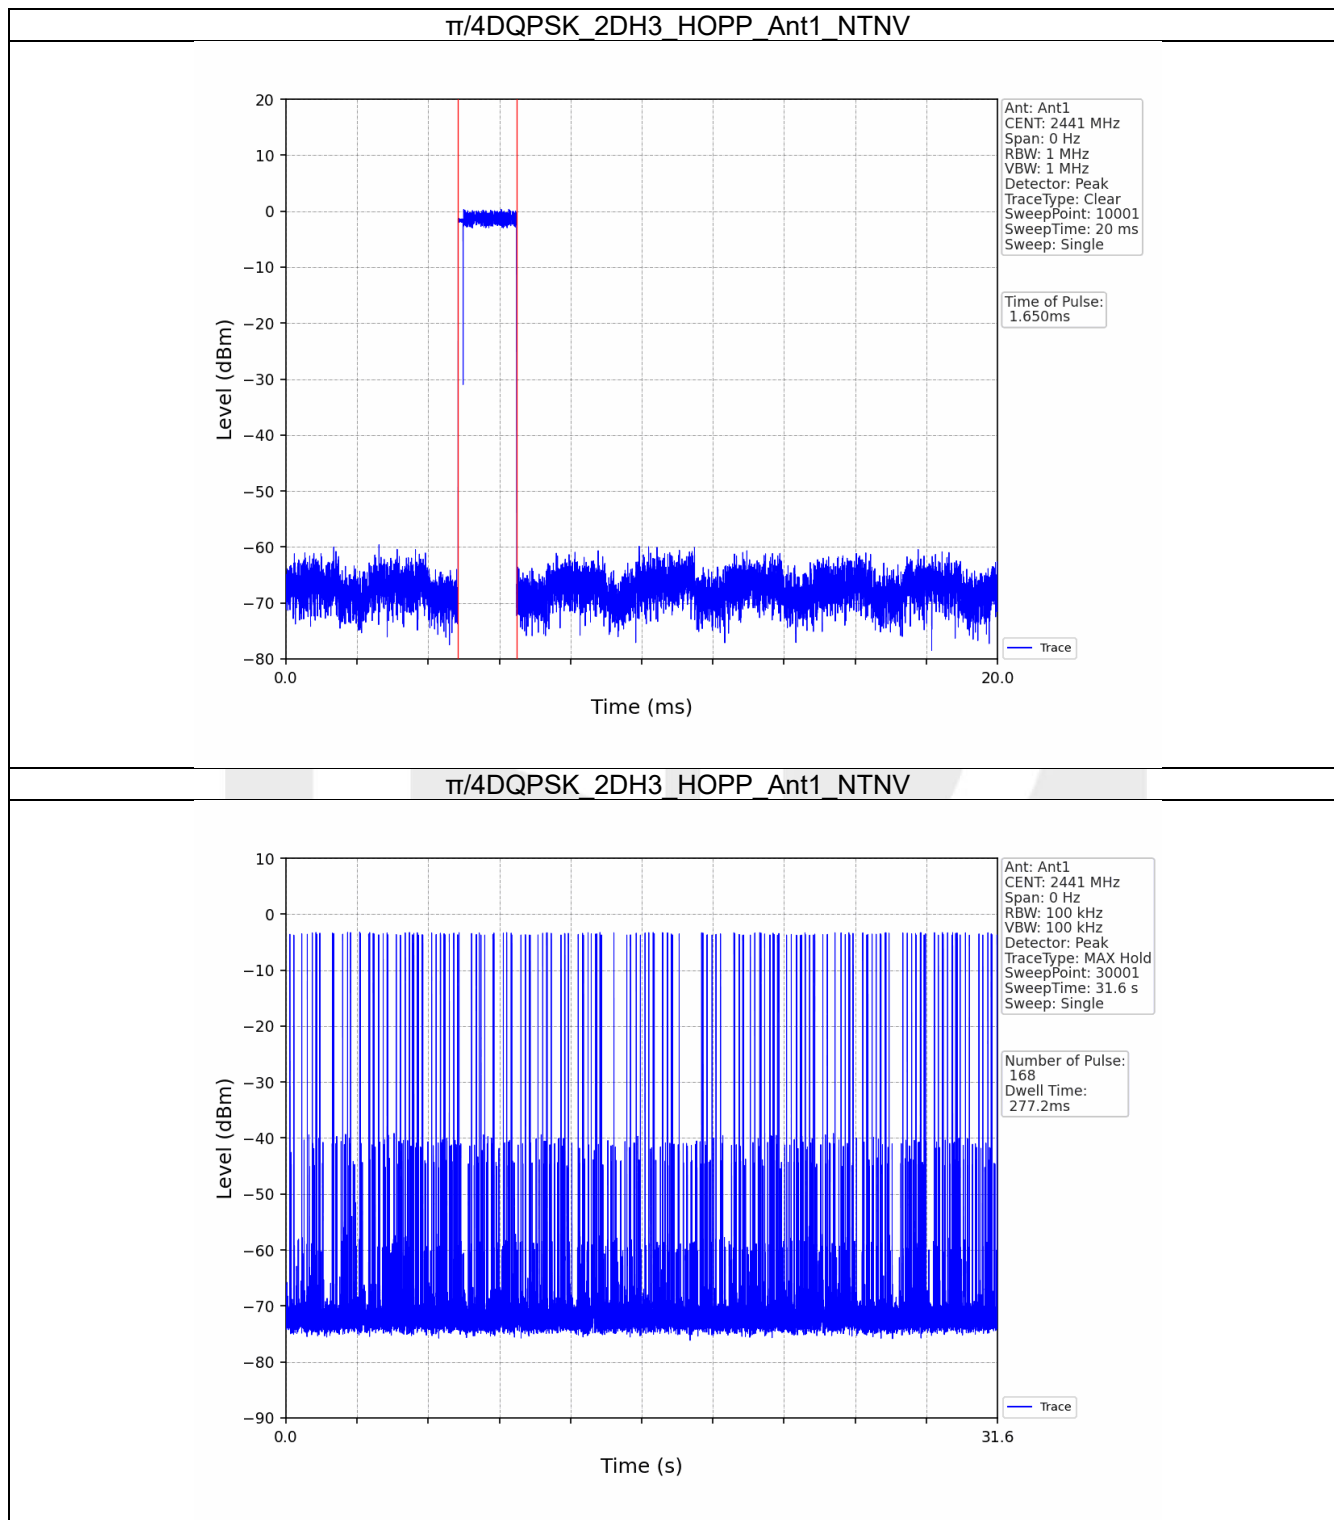

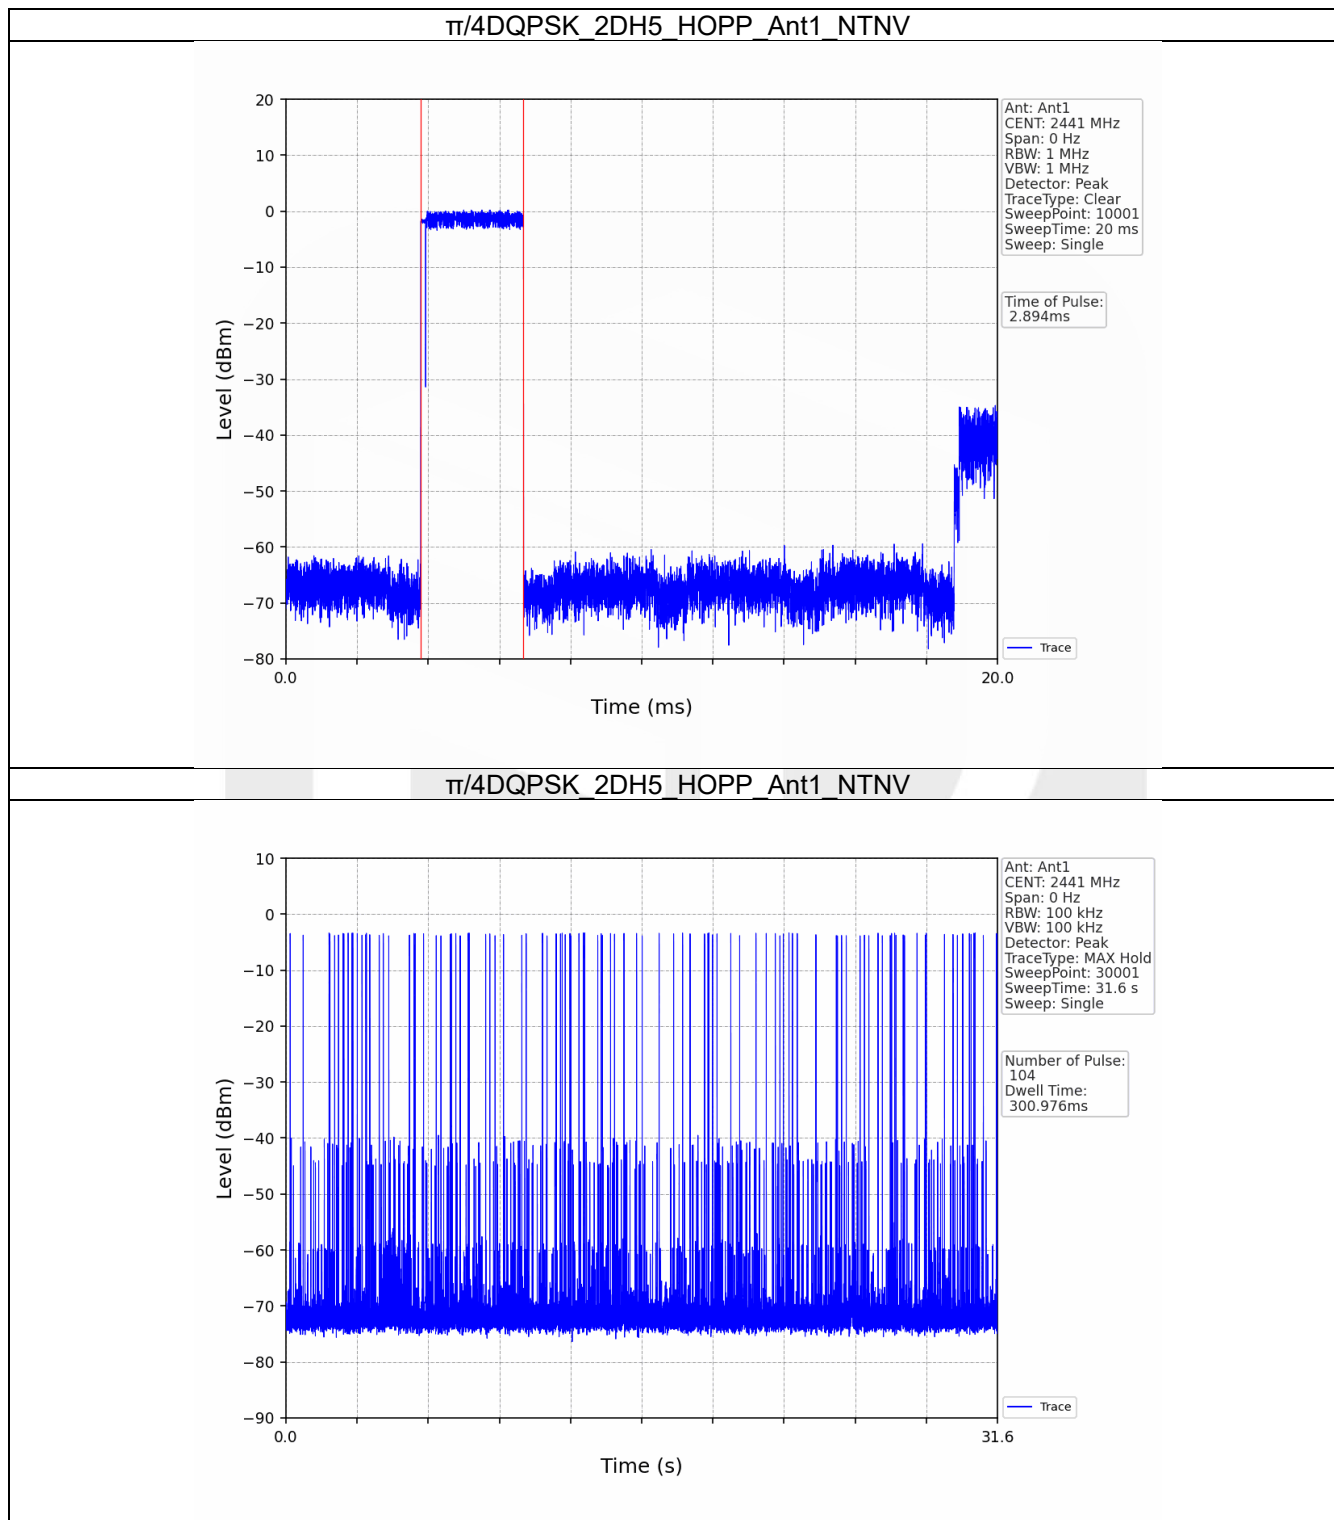

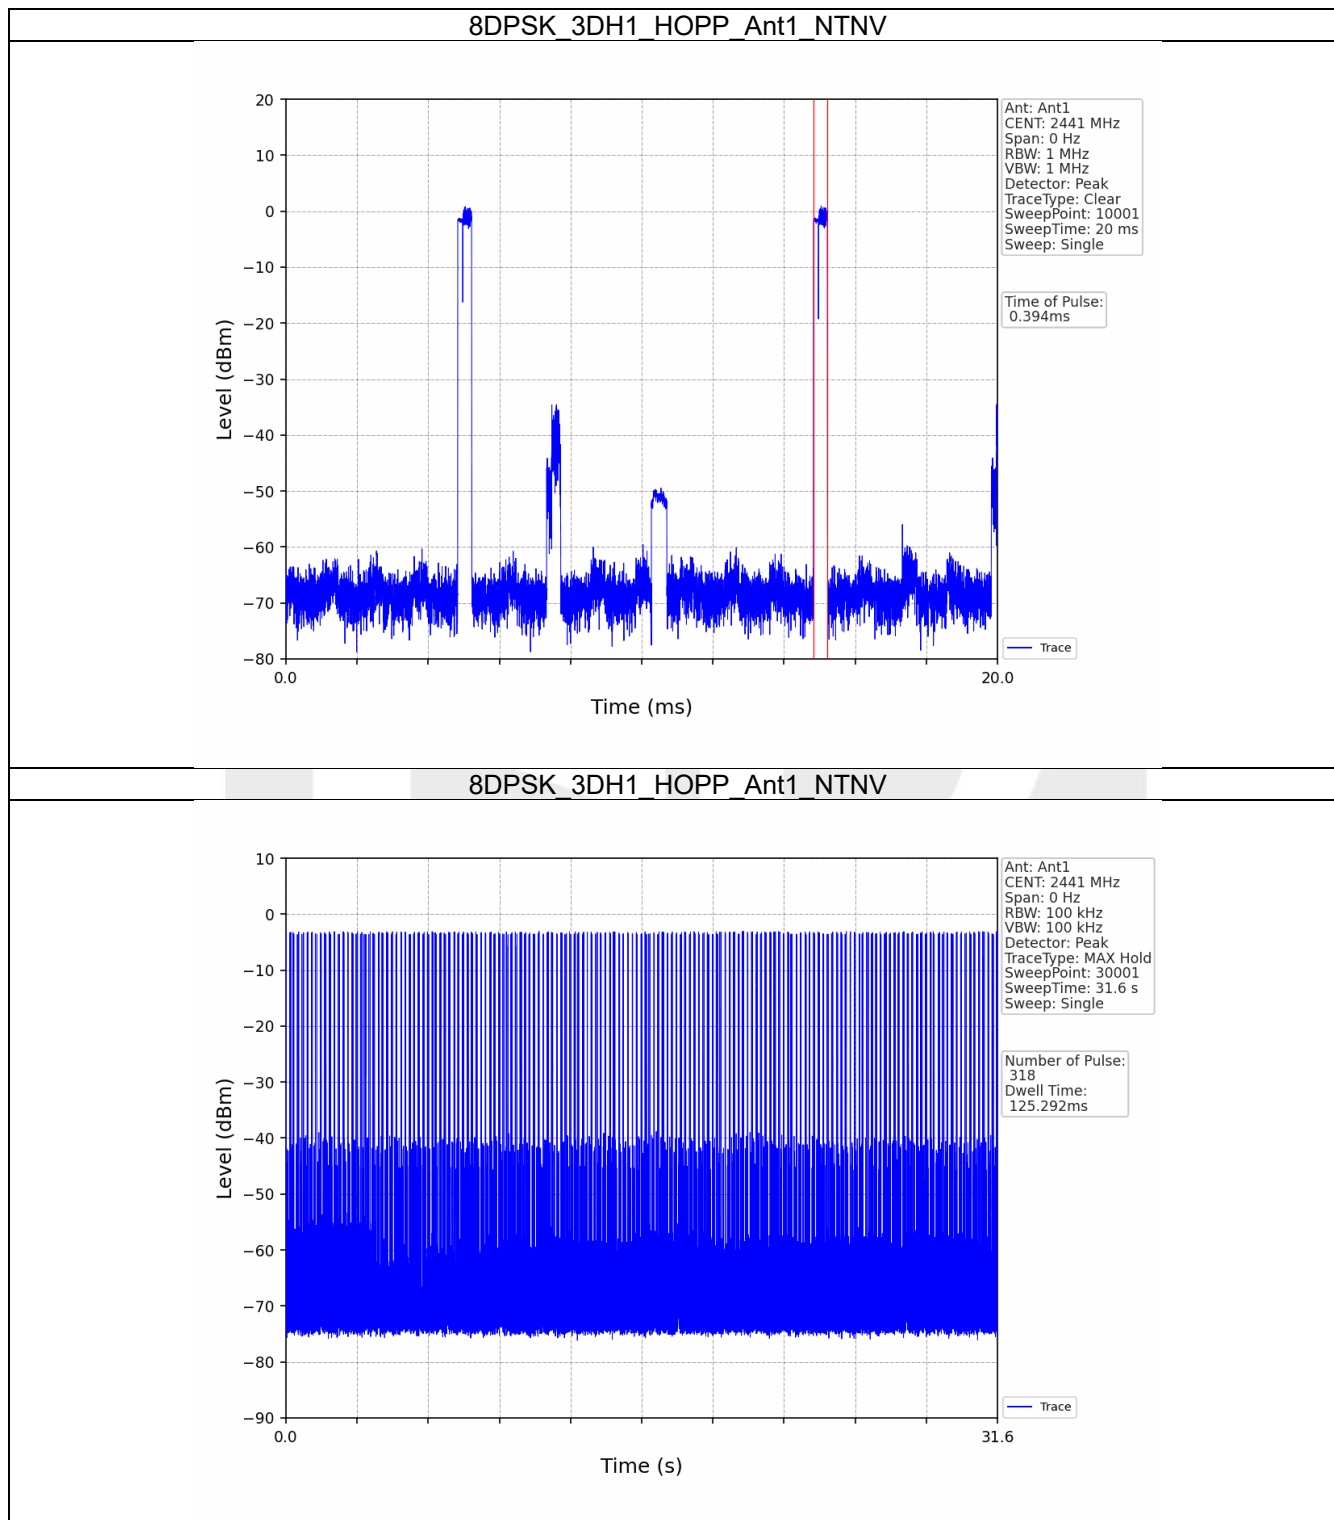

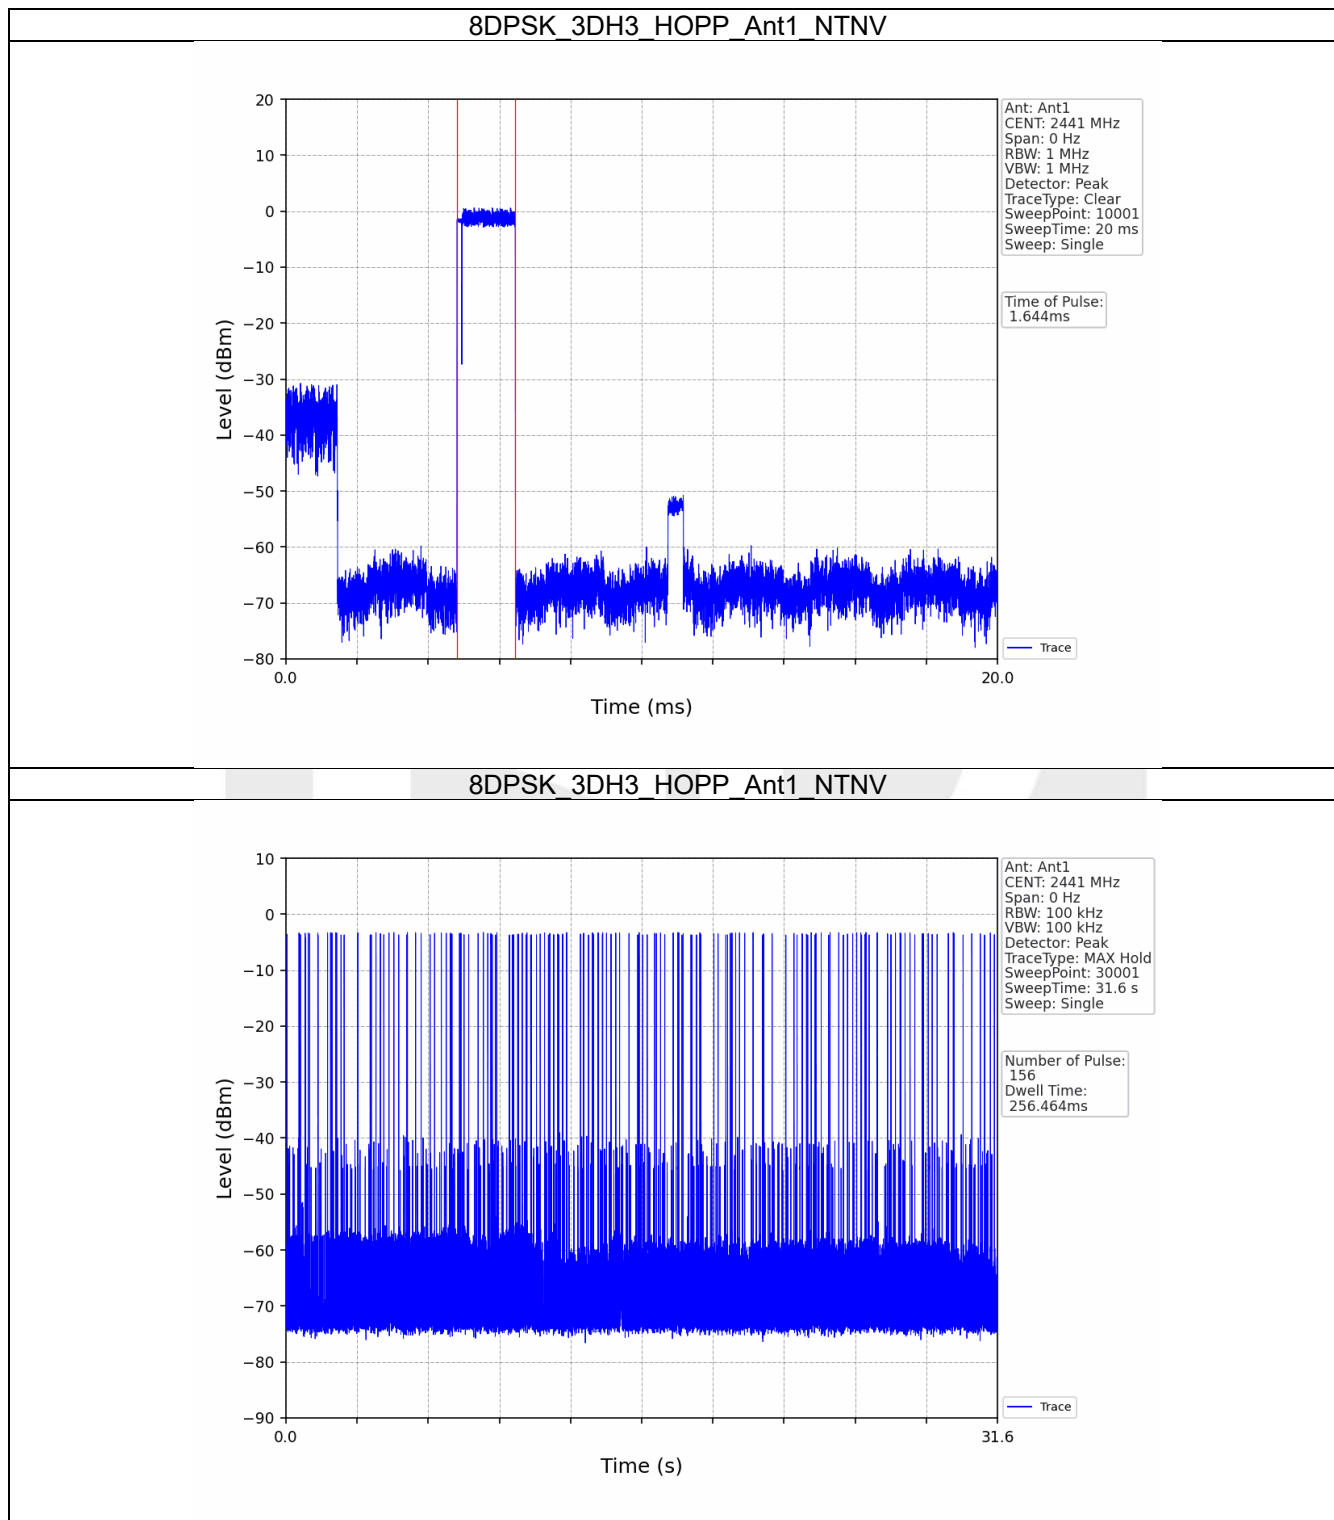

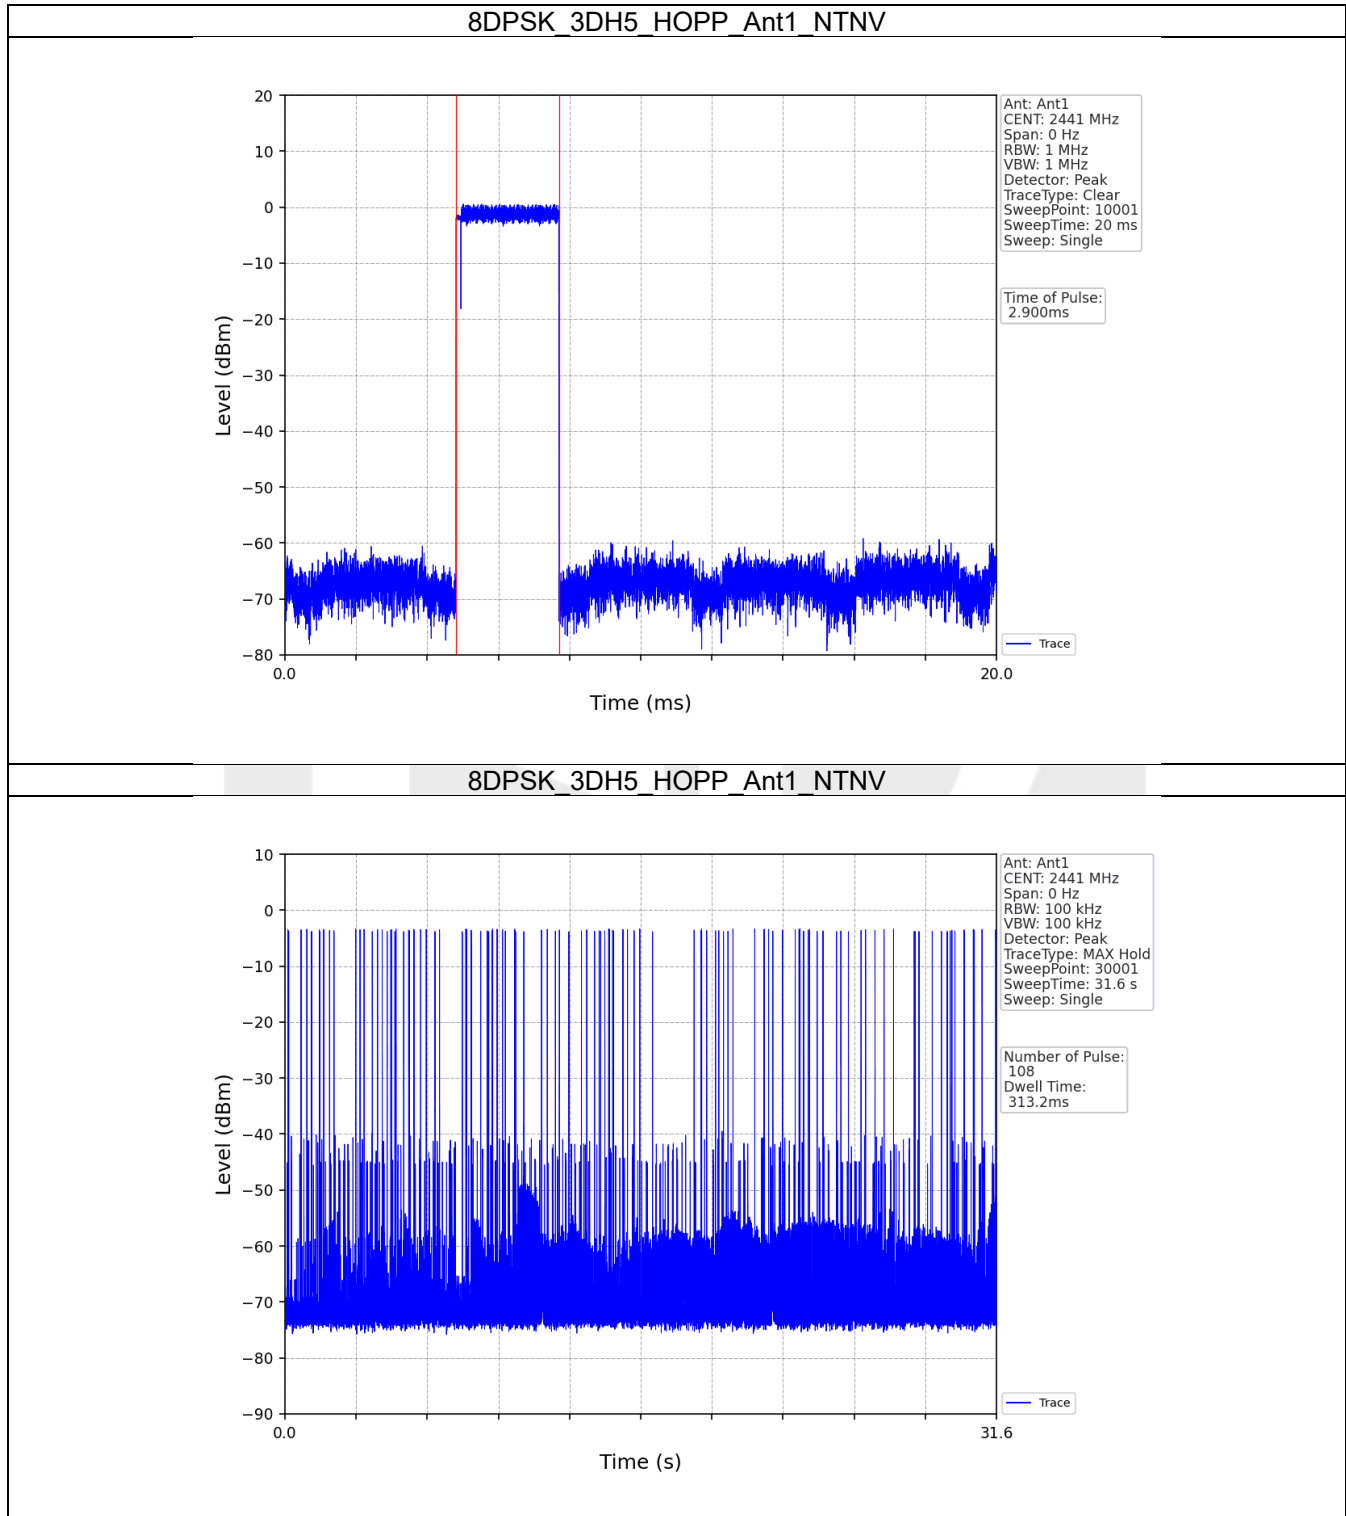

6. Unwanted Emissions In Non-restricted Frequency Bands


6.1 Ref


6.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	0.69
		2441	DH5	1	1.01
		2480	DH5	1	-0.14
$\pi/4$ DQPSK	SISO	2402	2DH5	1	-1.63
		2441	2DH5	1	-1.49
		2480	2DH5	1	-2.72
8DPSK	SISO	2402	3DH5	1	-1.36
		2441	3DH5	1	-1.50
		2480	3DH5	1	-2.69


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.


6.1.2 Test Graph

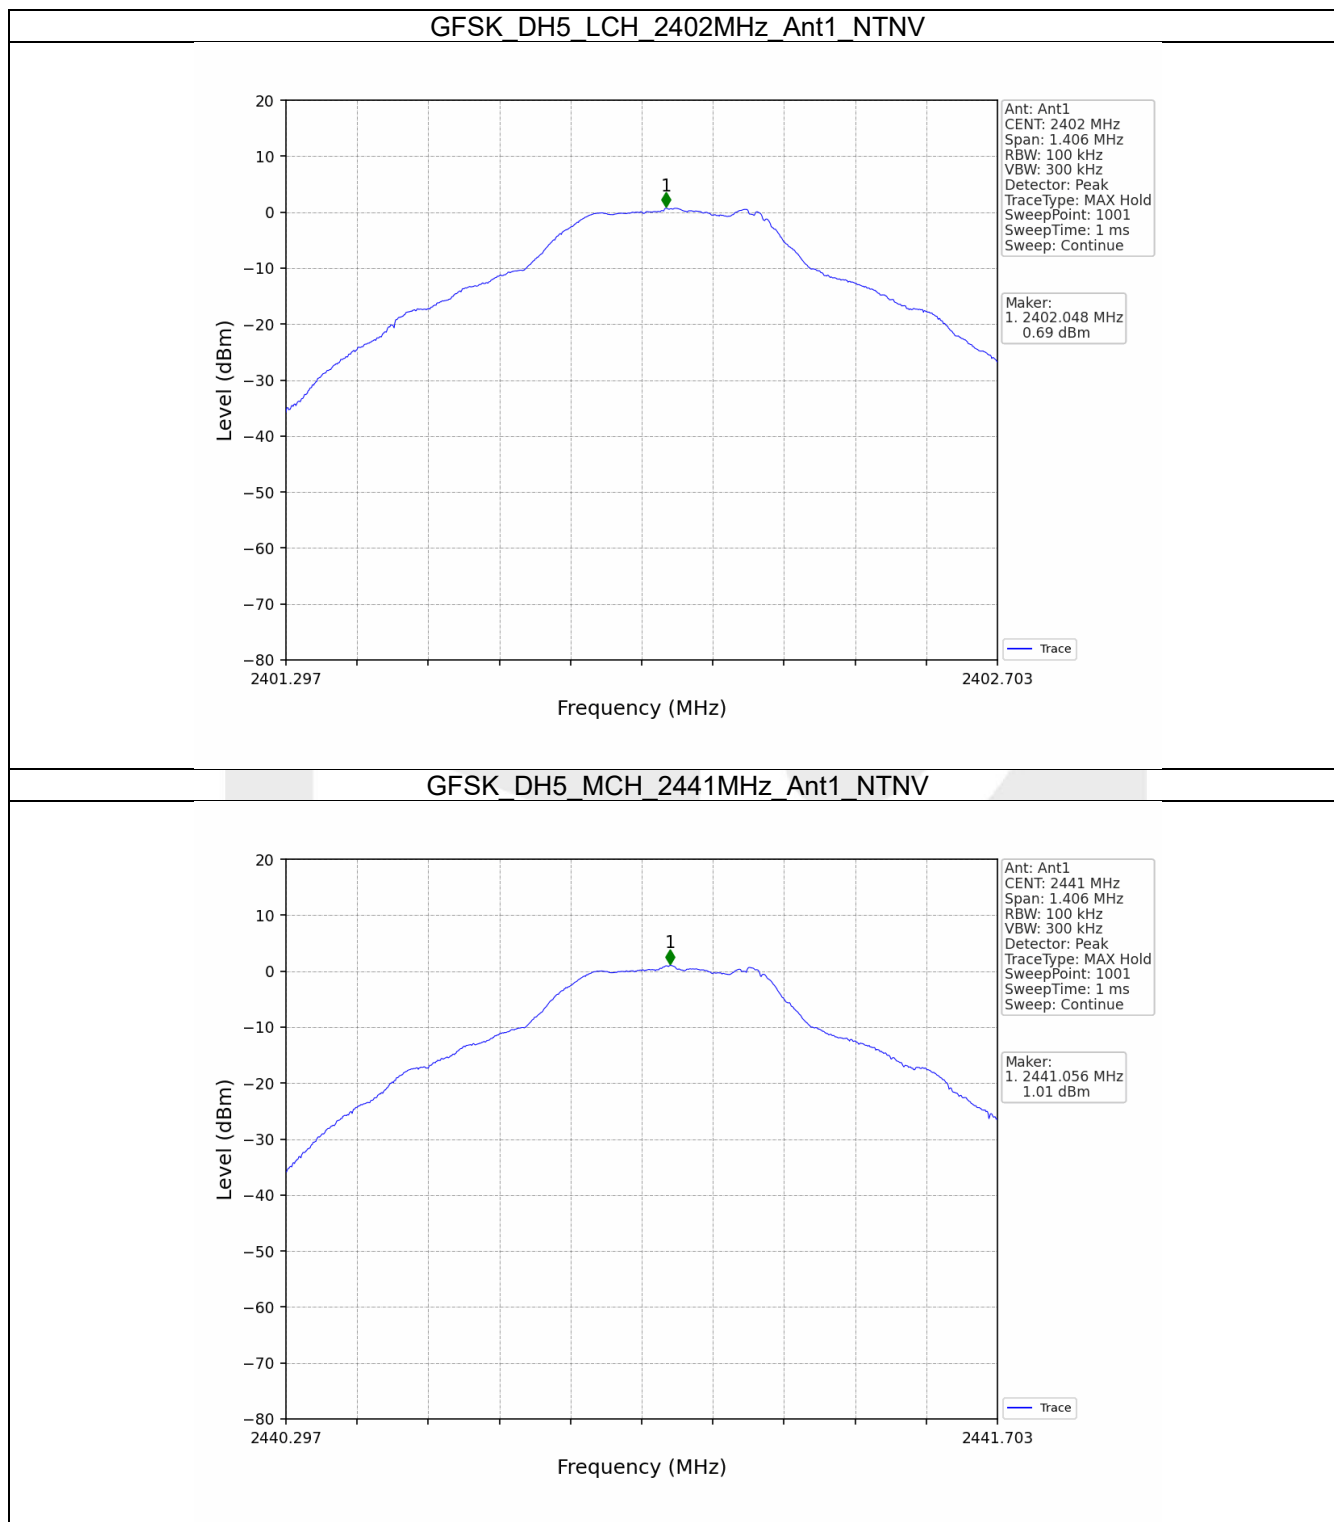

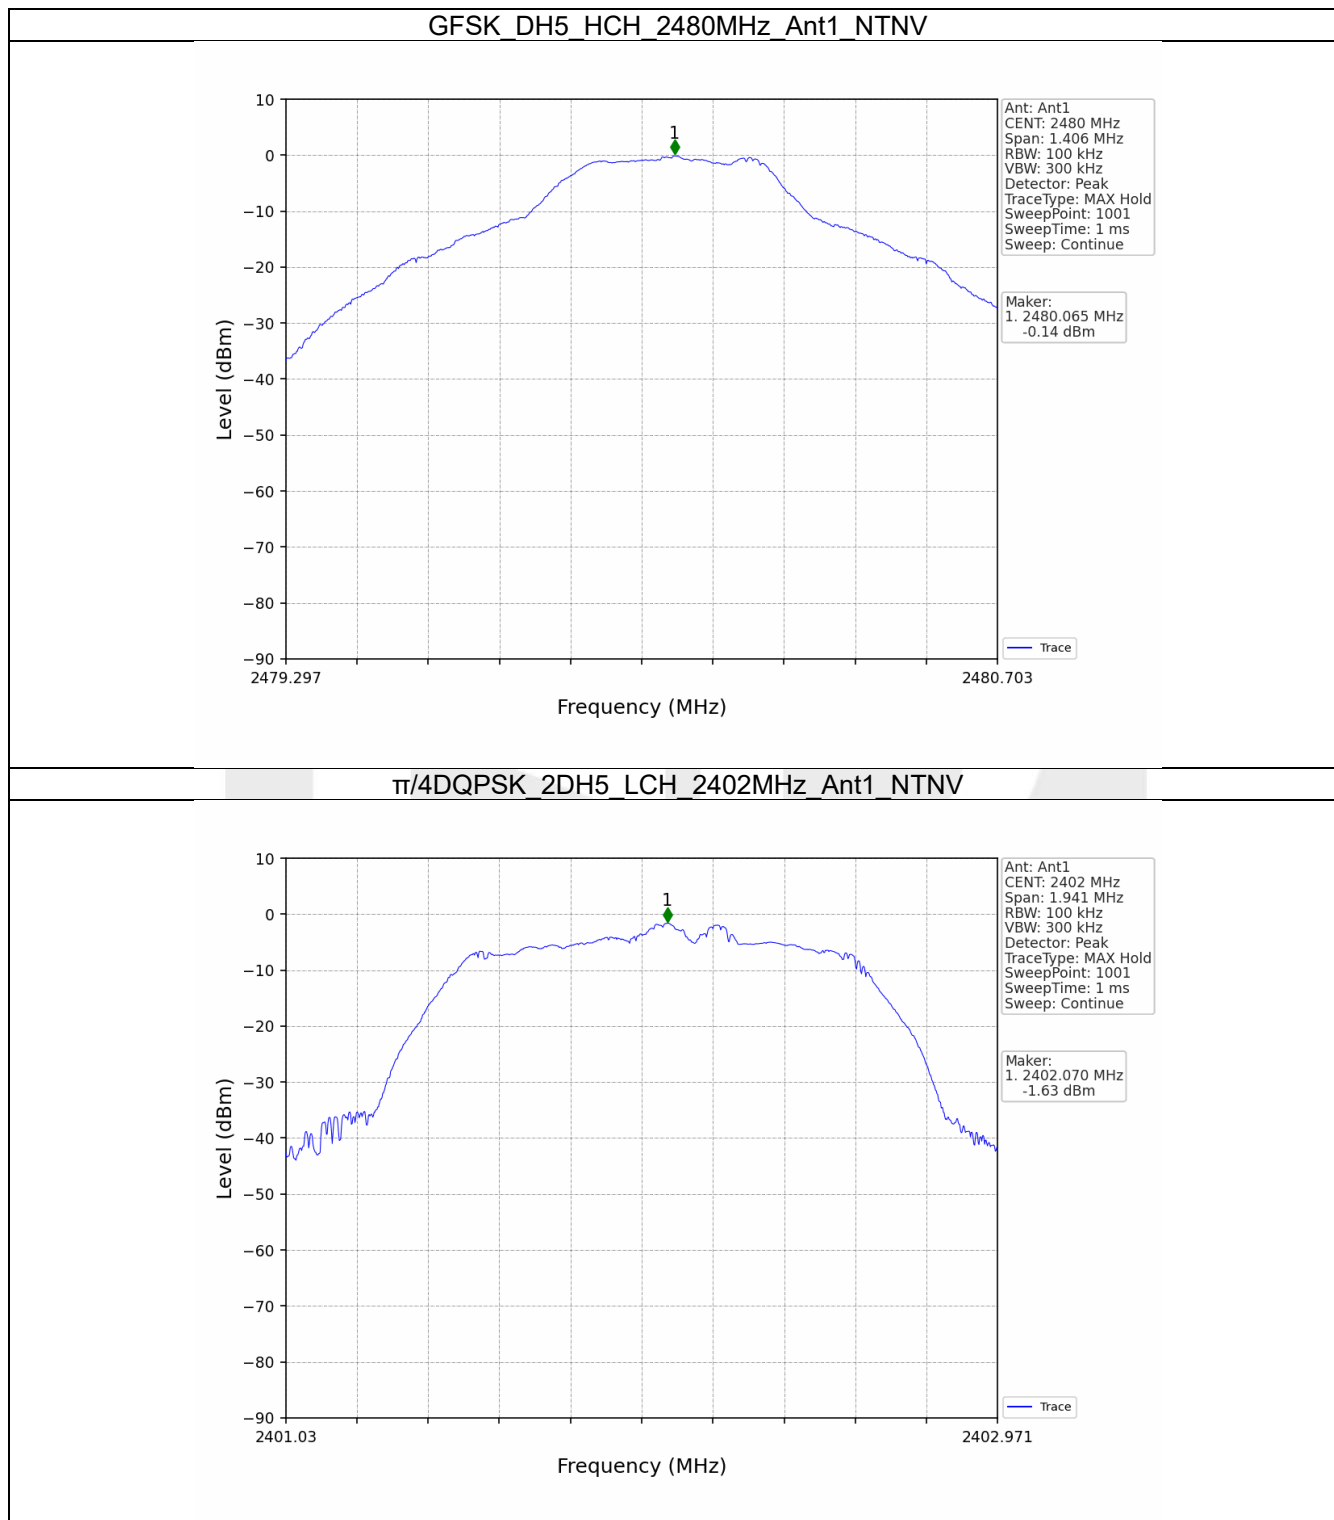

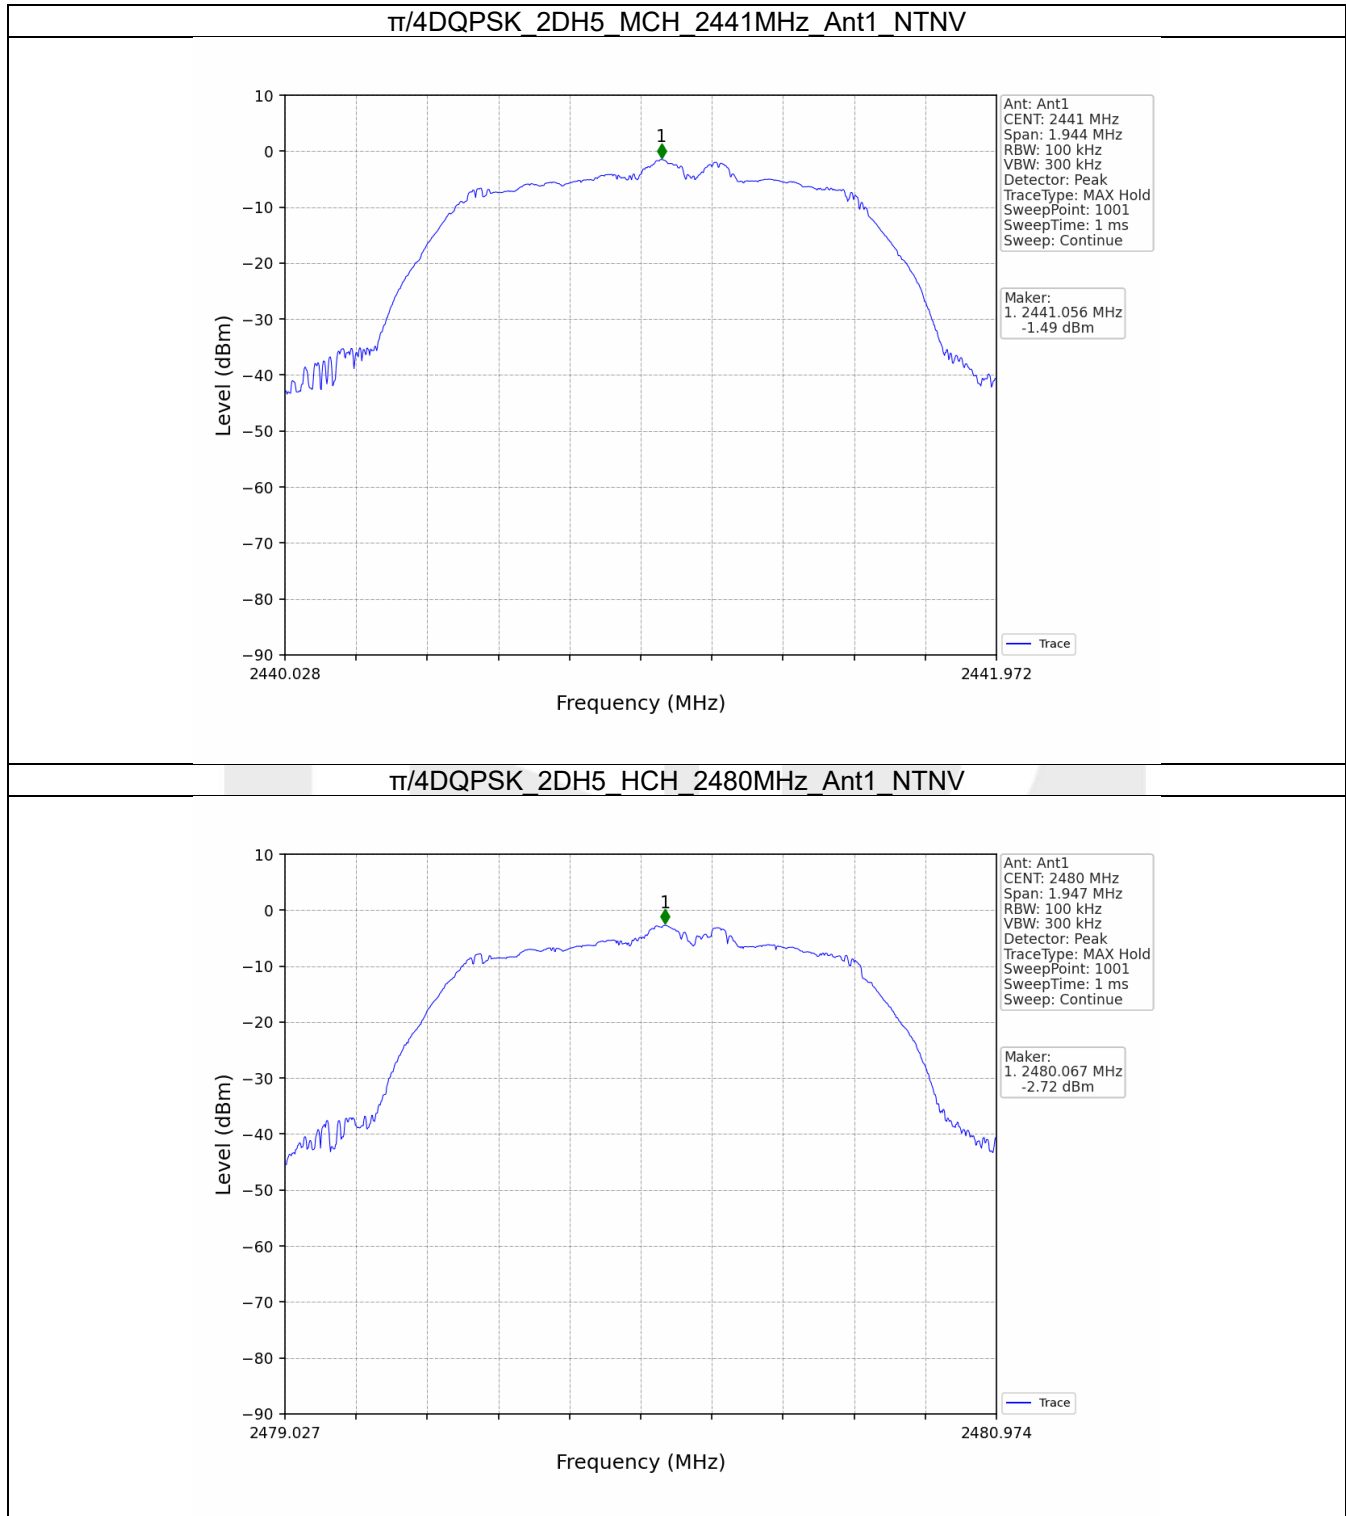

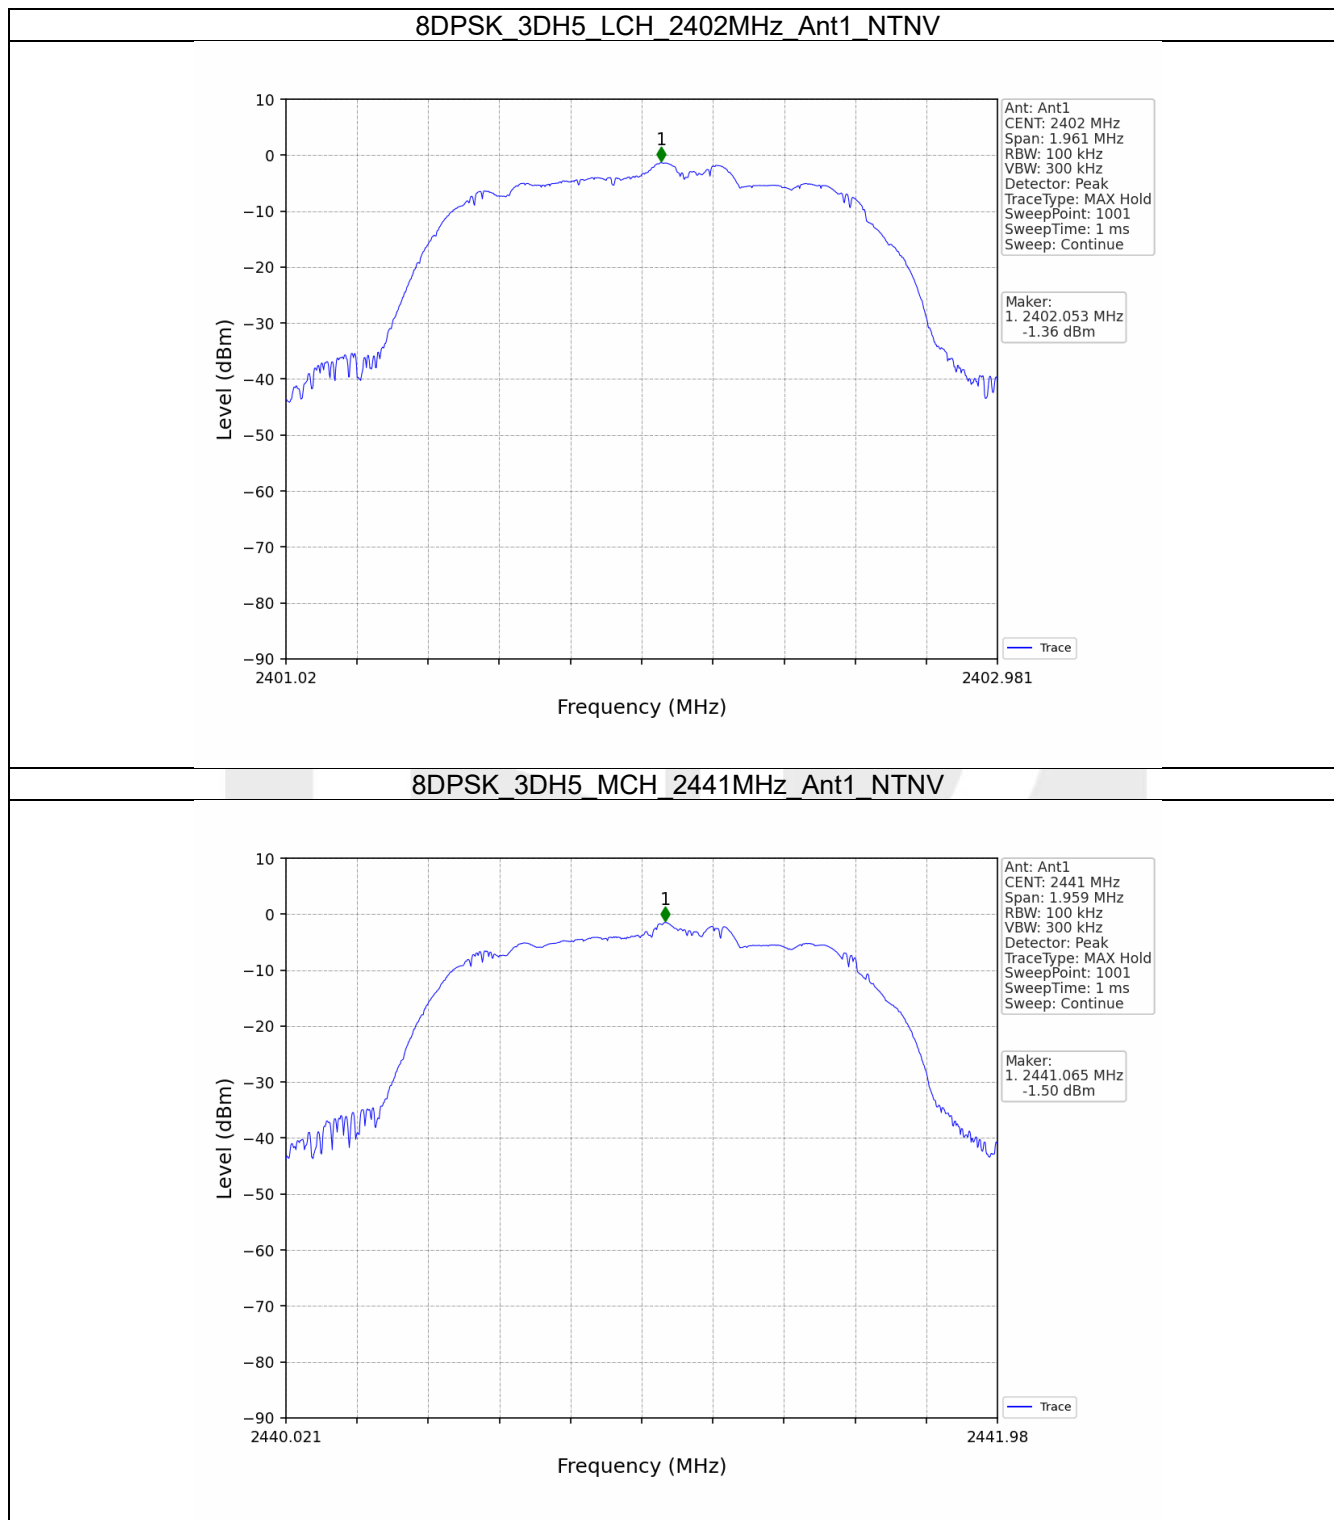

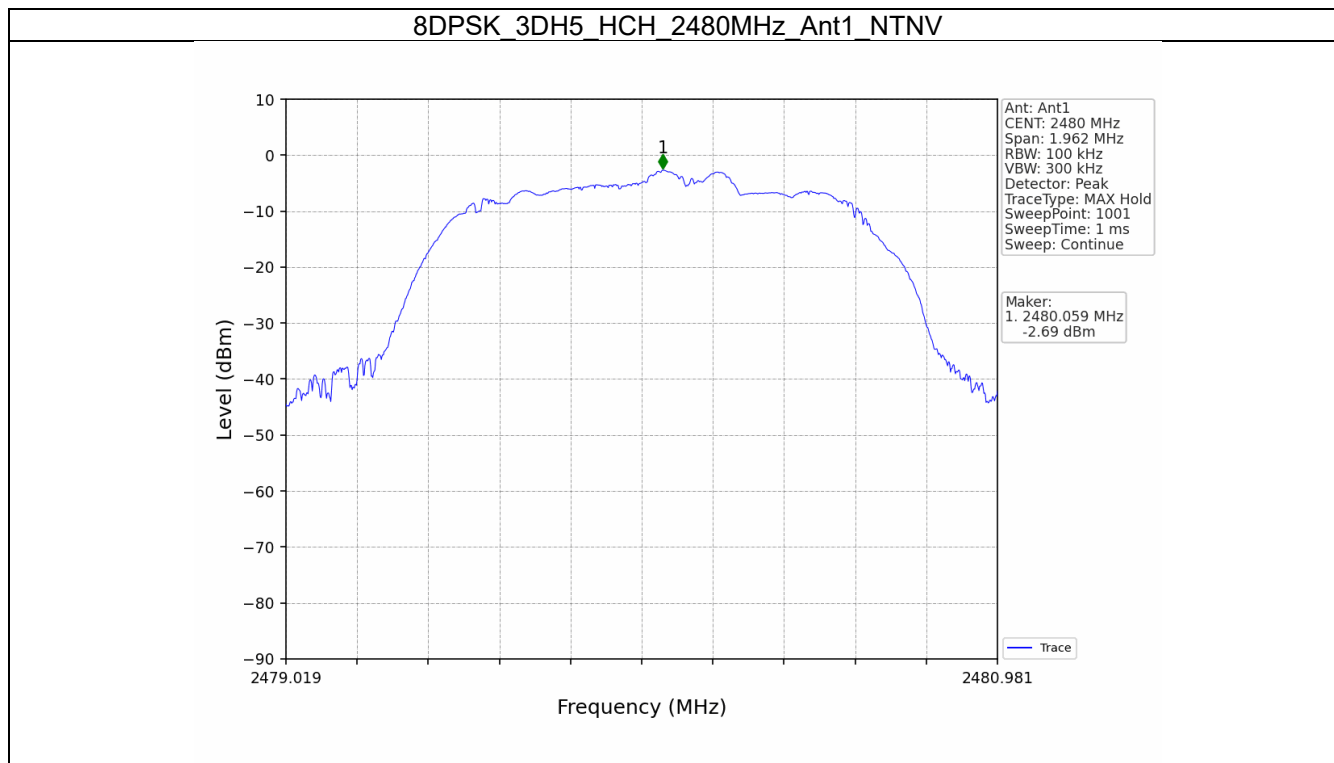



6.2 CSE


6.2.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	1.01	-18.99	Pass
		2441	DH5	1	1.01	-18.99	Pass
		2480	DH5	1	1.01	-18.99	Pass
		HOPP	DH5	1	1.01	-18.99	Pass
					1.01	-18.99	Pass
$\pi/4$ DQPSK	SISO	2402	2DH5	1	-1.49	-21.49	Pass
		2441	2DH5	1	-1.49	-21.49	Pass
		2480	2DH5	1	-1.49	-21.49	Pass
		HOPP	2DH5	1	-1.49	-21.49	Pass
					-1.49	-21.49	Pass
8DPSK	SISO	2402	3DH5	1	-1.36	-21.36	Pass
		2441	3DH5	1	-1.36	-21.36	Pass
		2480	3DH5	1	-1.36	-21.36	Pass
		HOPP	3DH5	1	-1.36	-21.36	Pass
					-1.36	-21.36	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.							


6.2.2 Test Graph

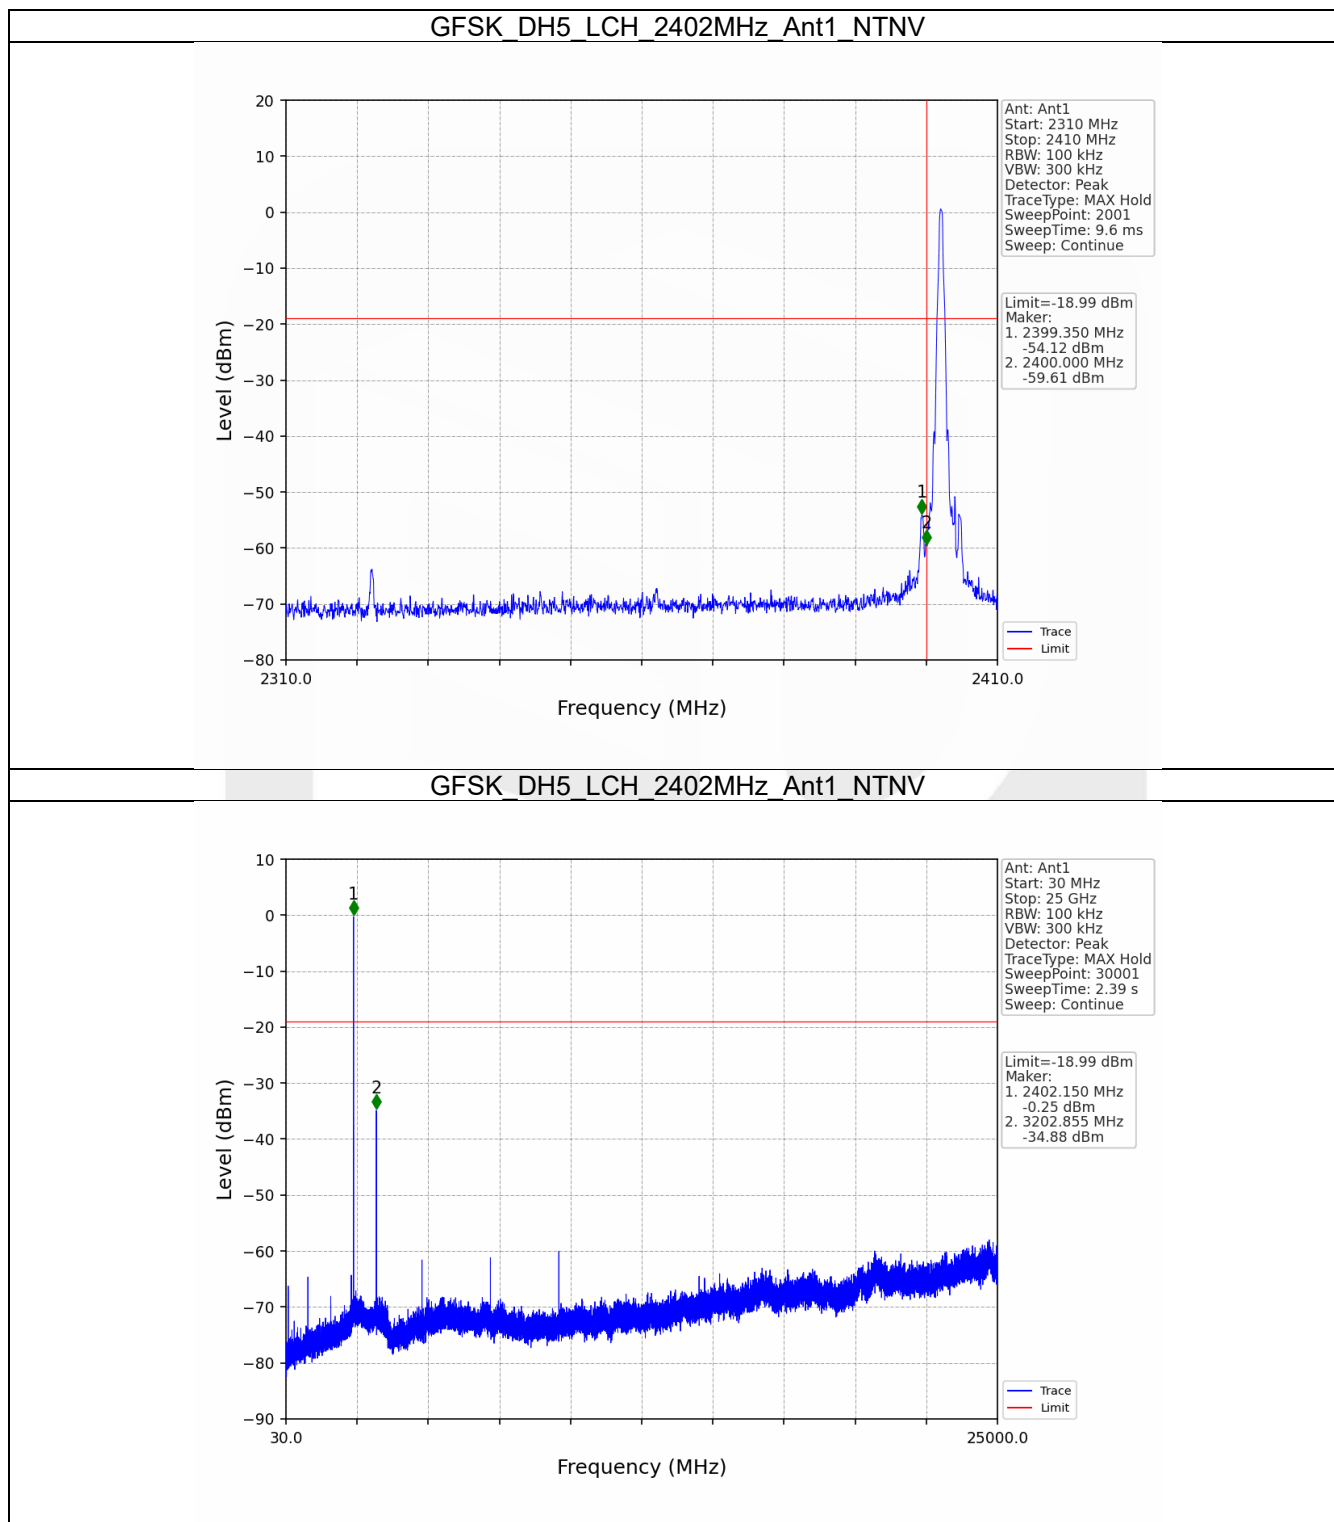


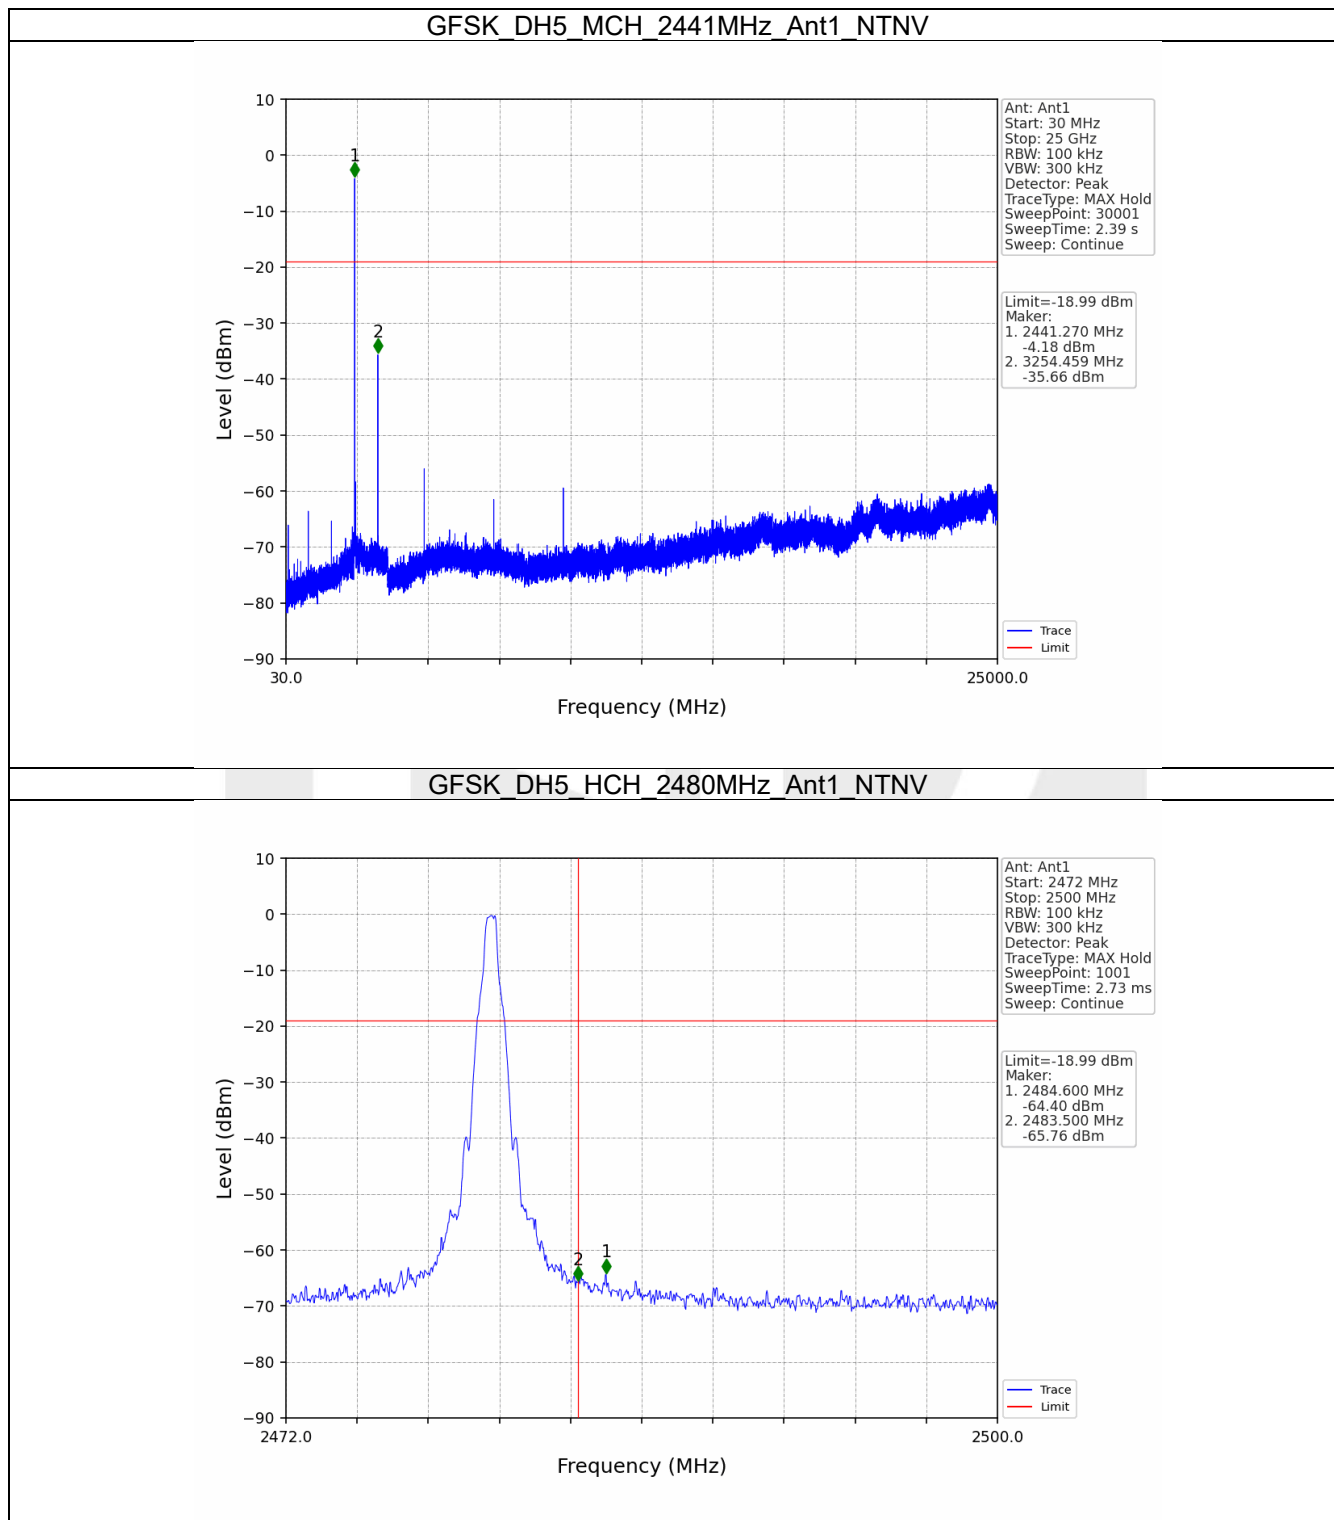


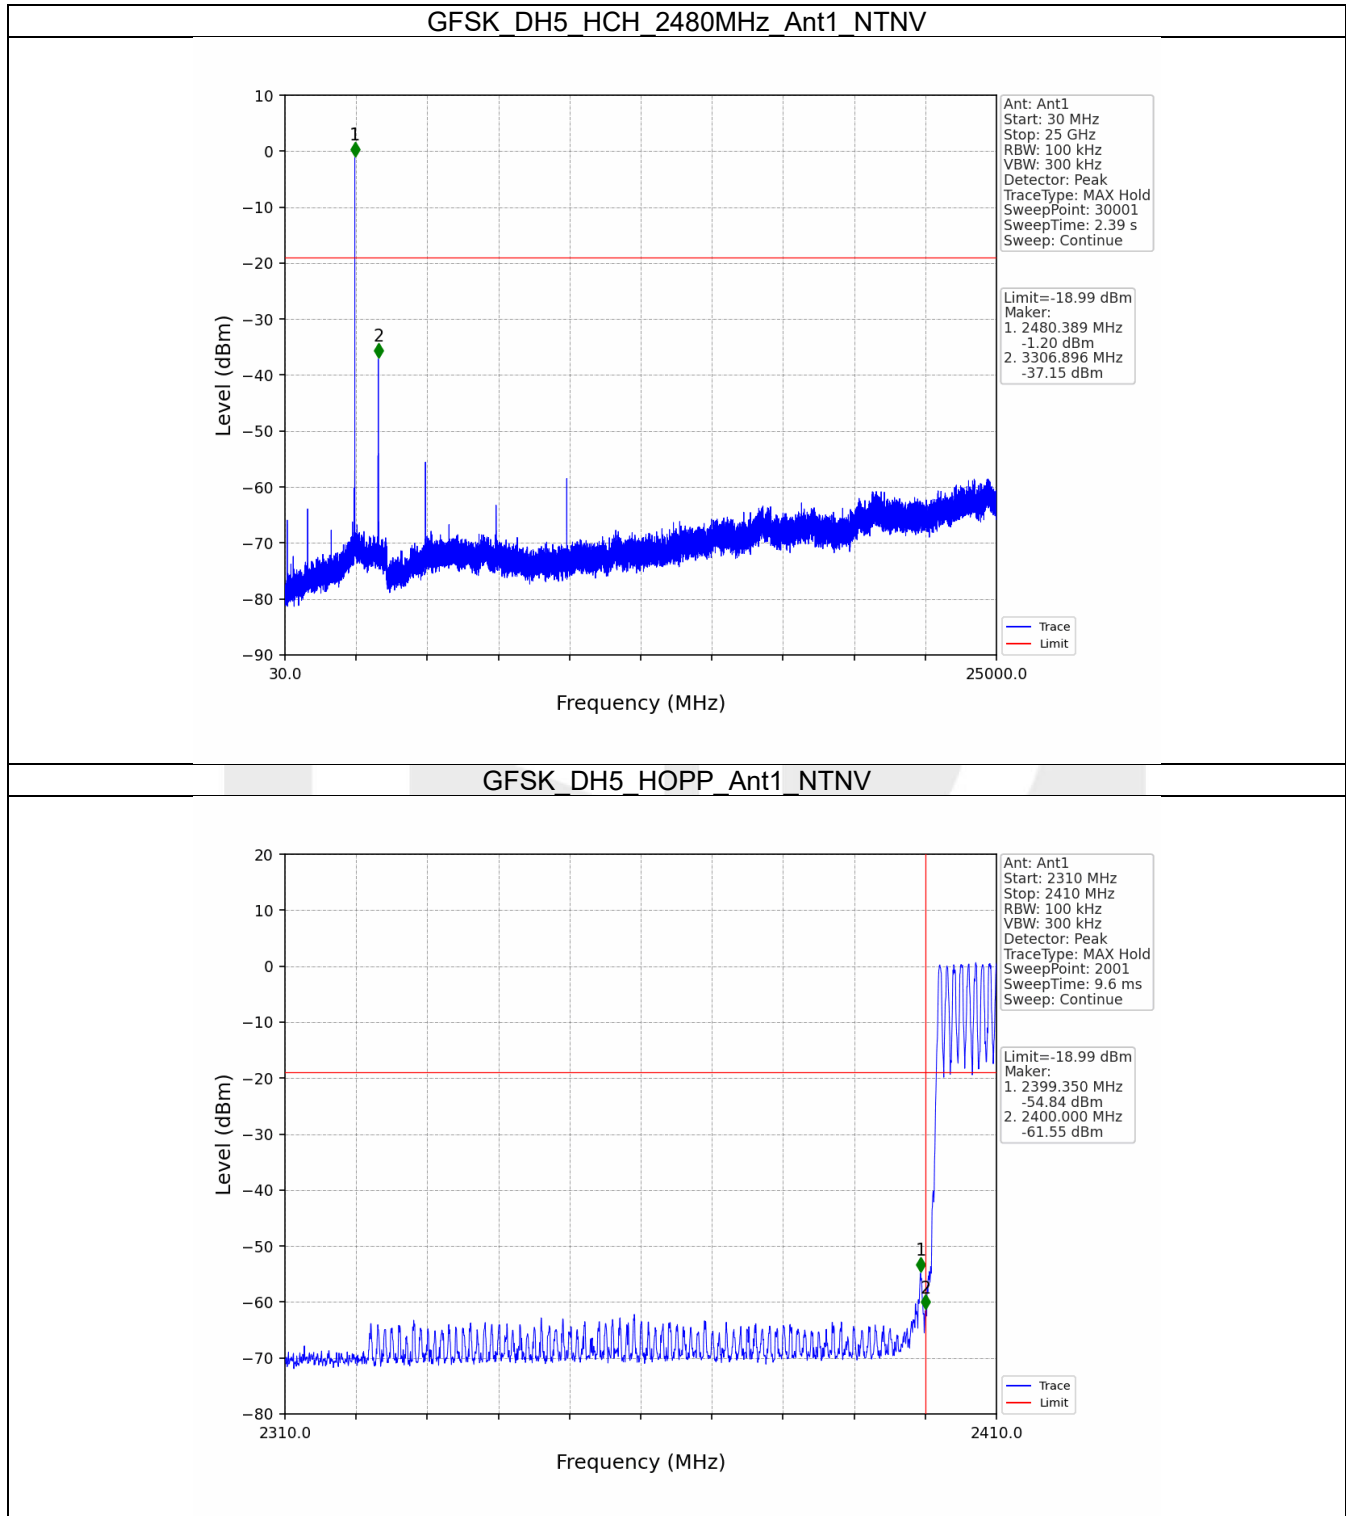


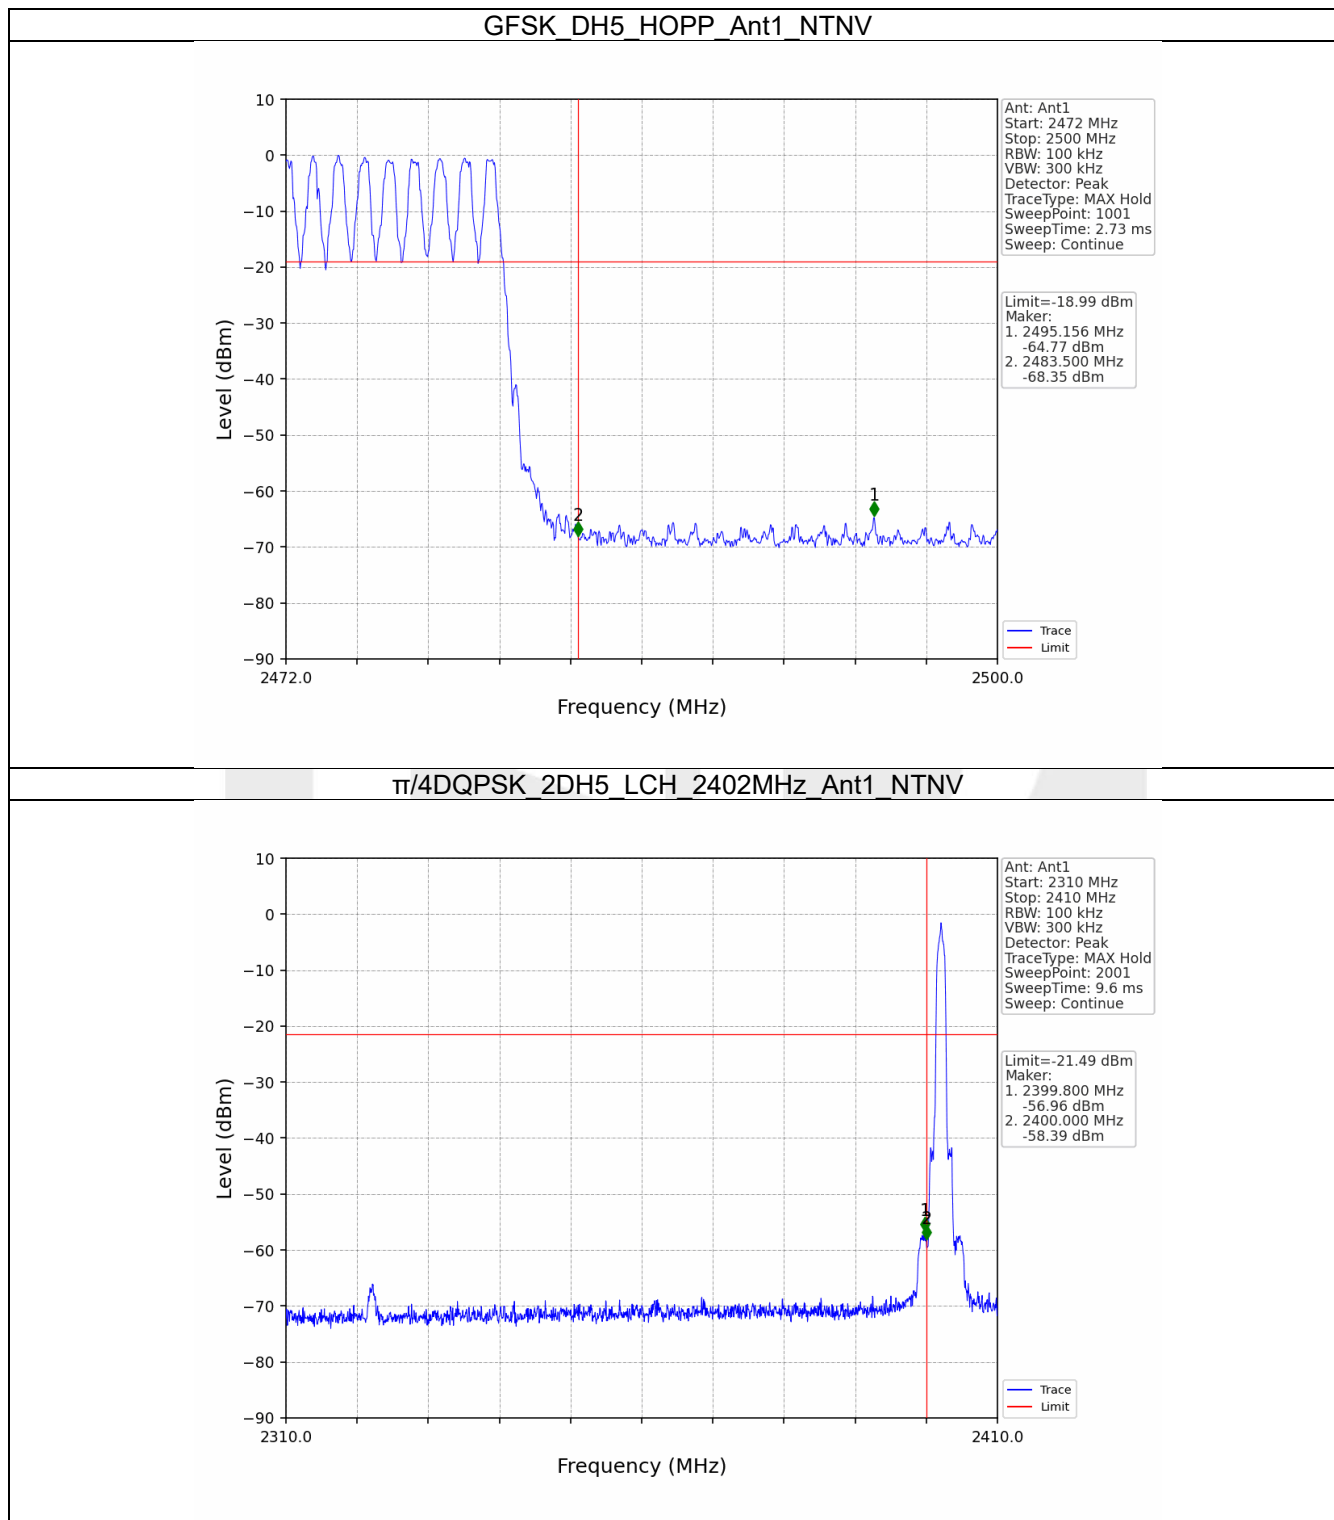


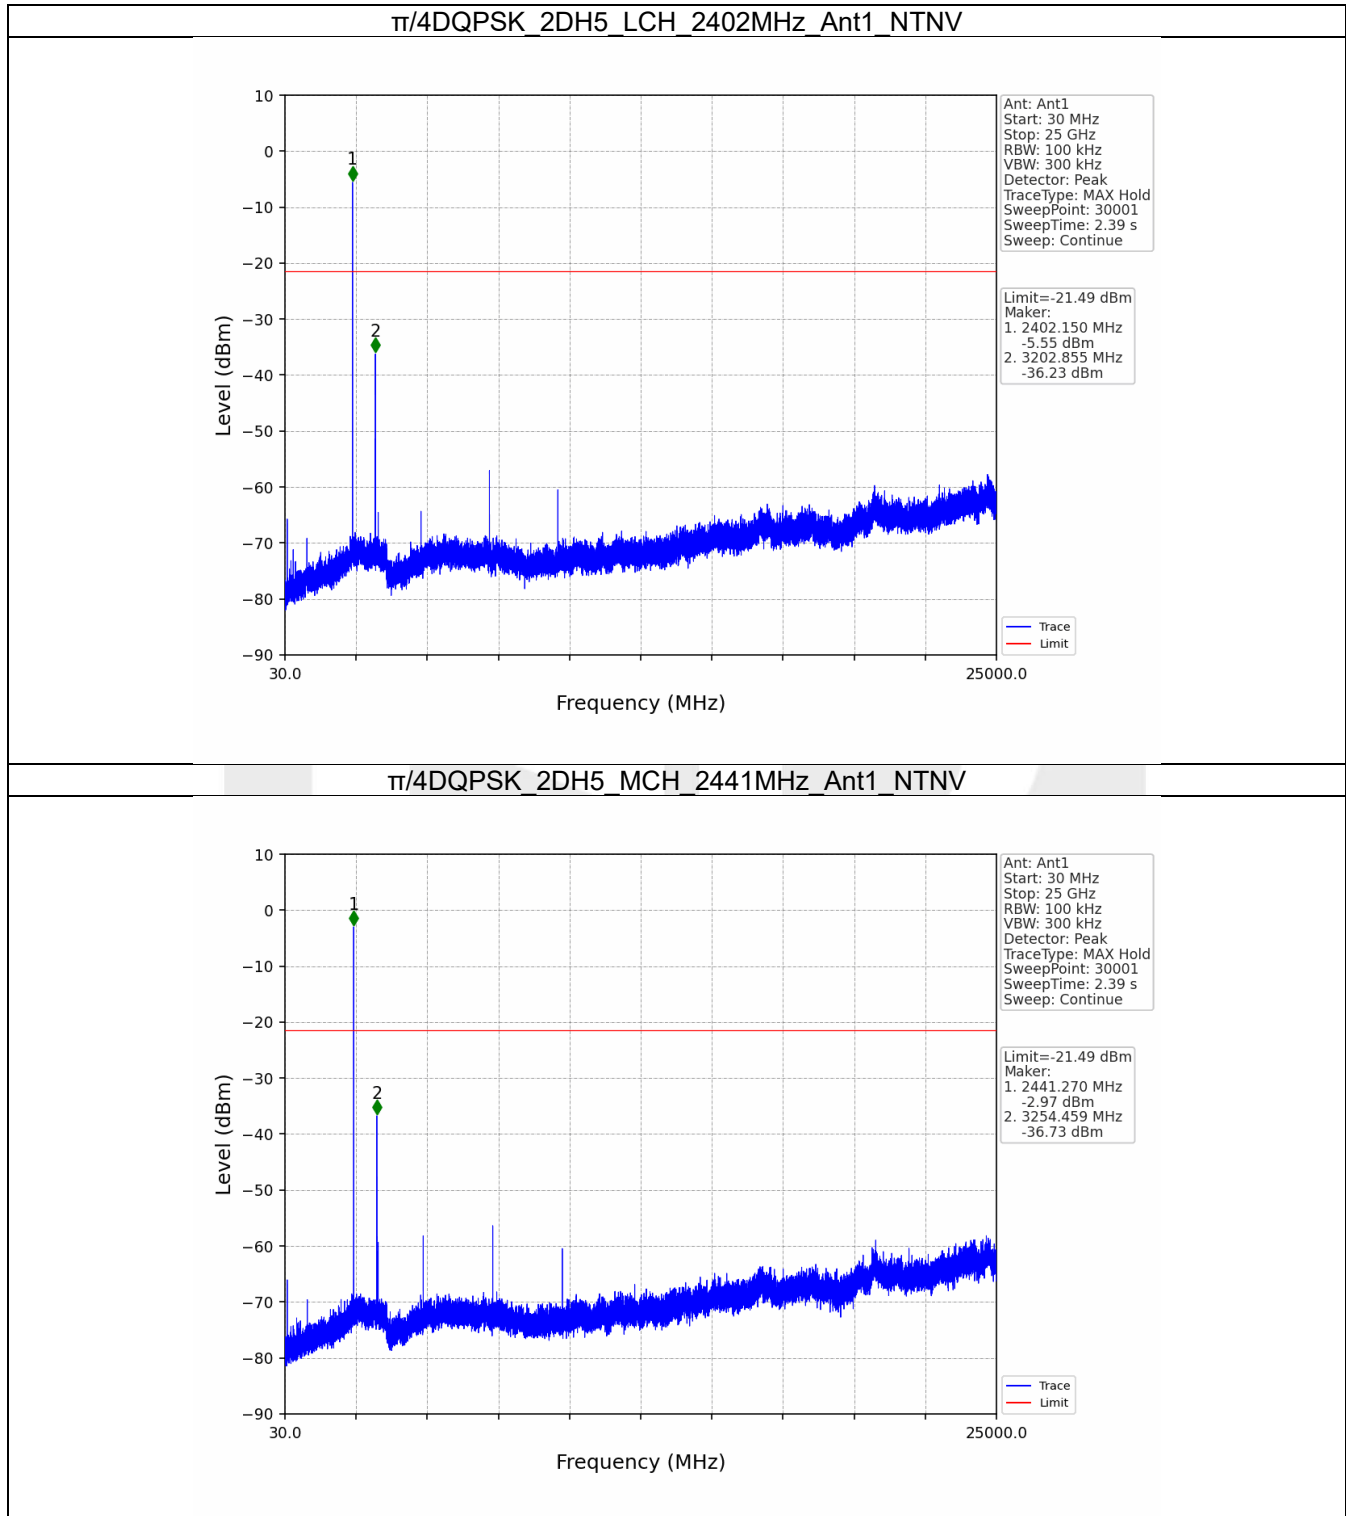


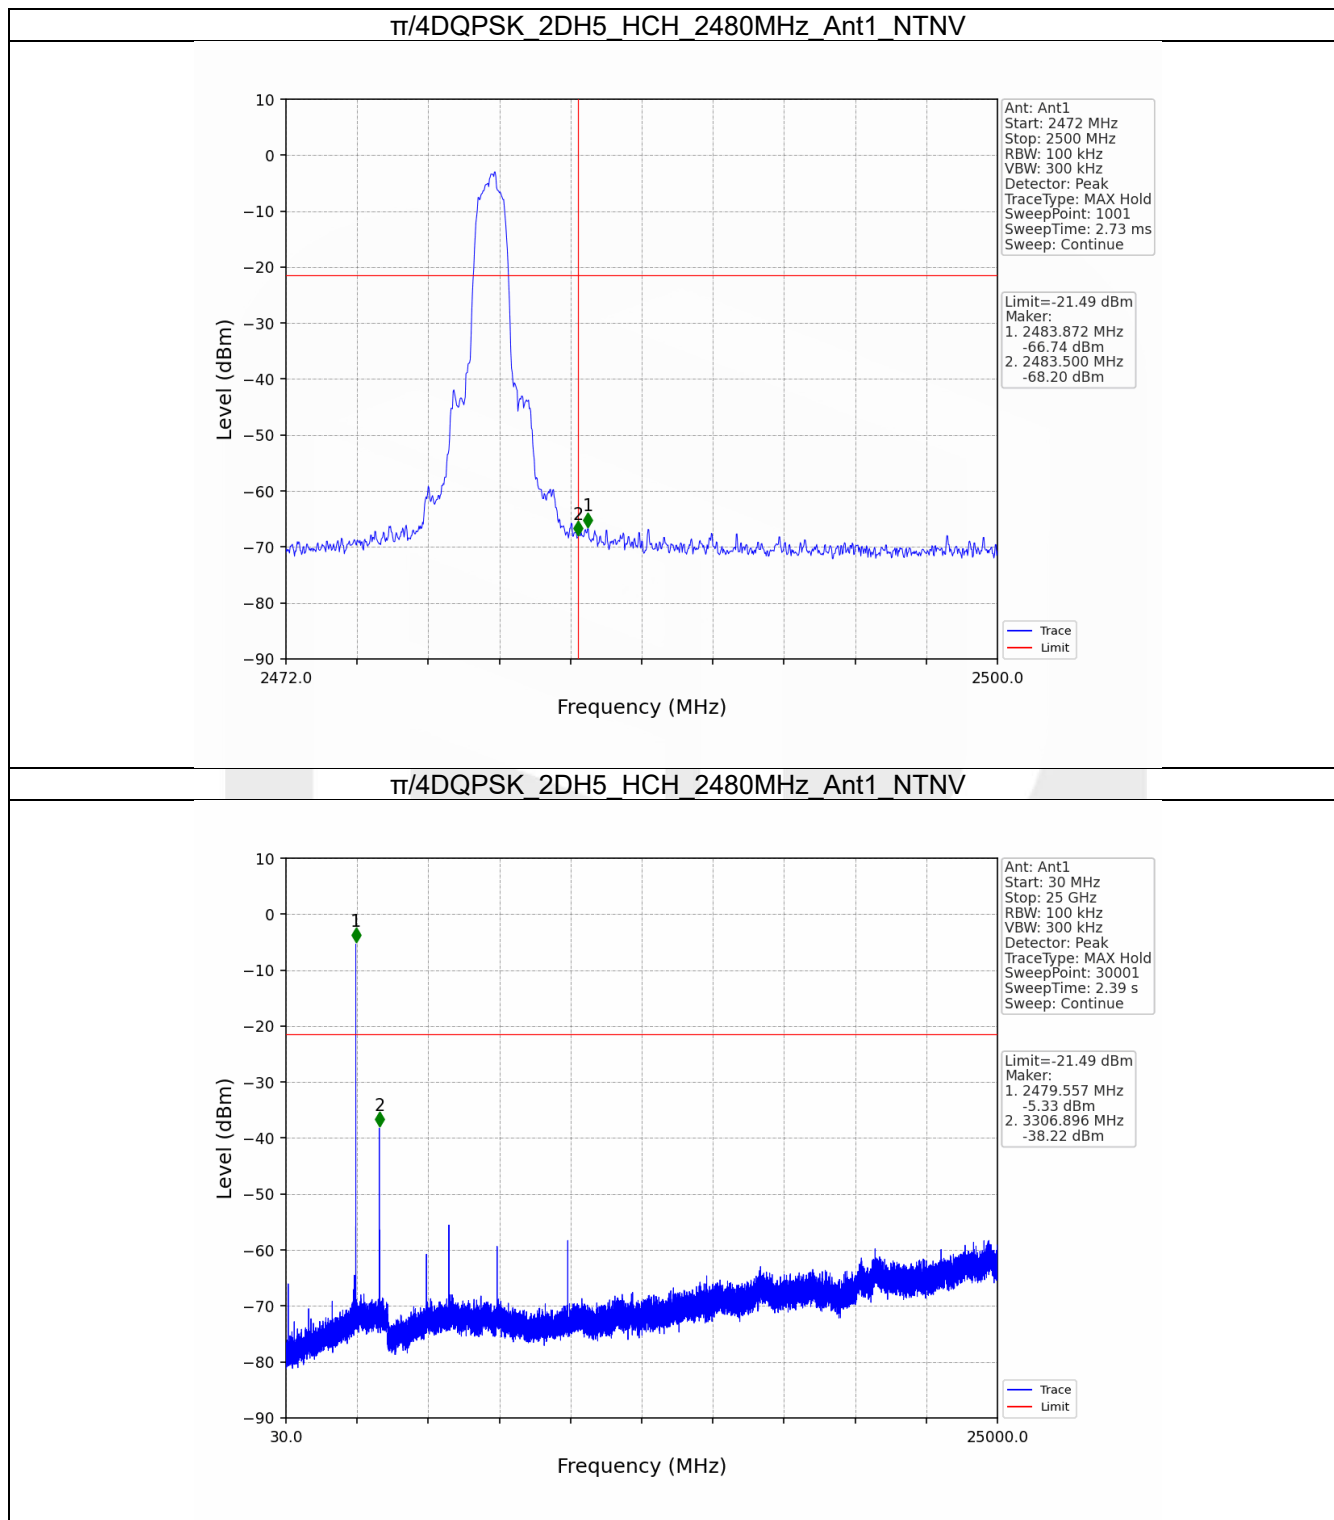


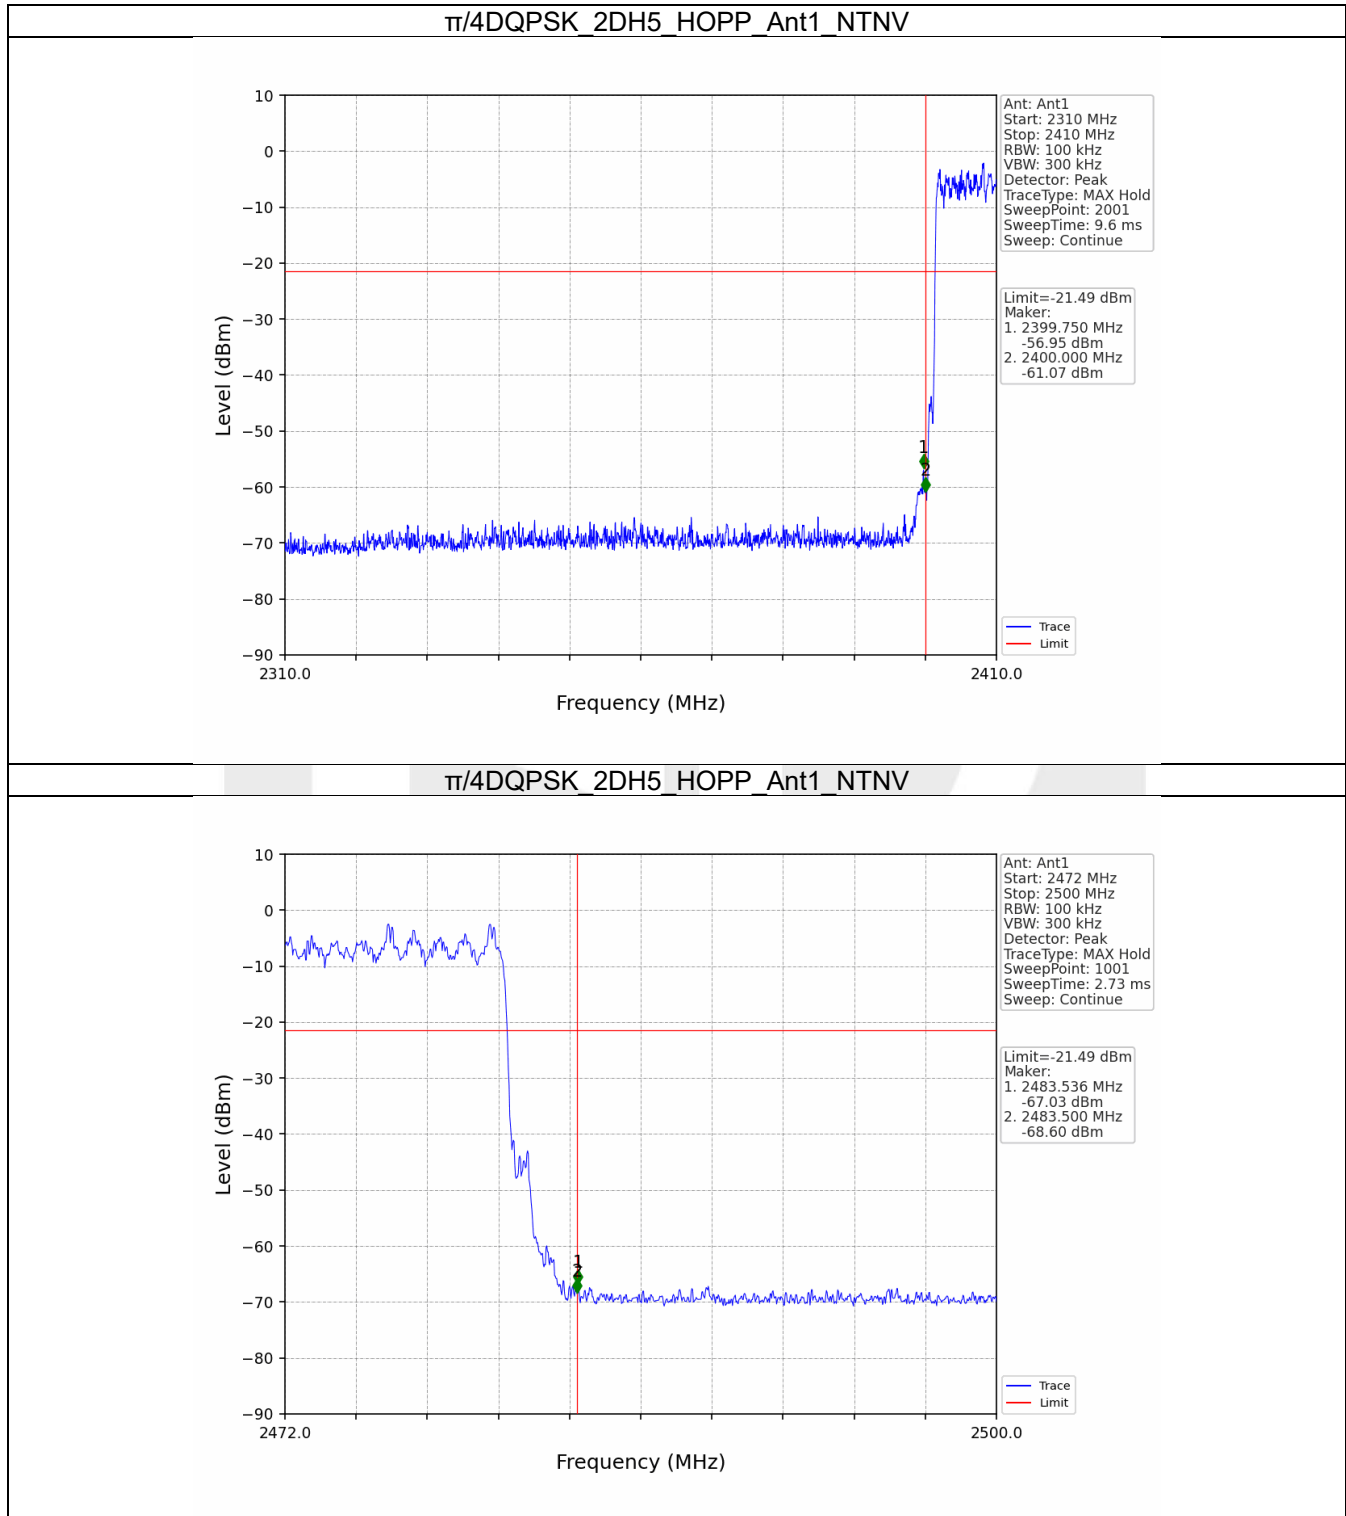

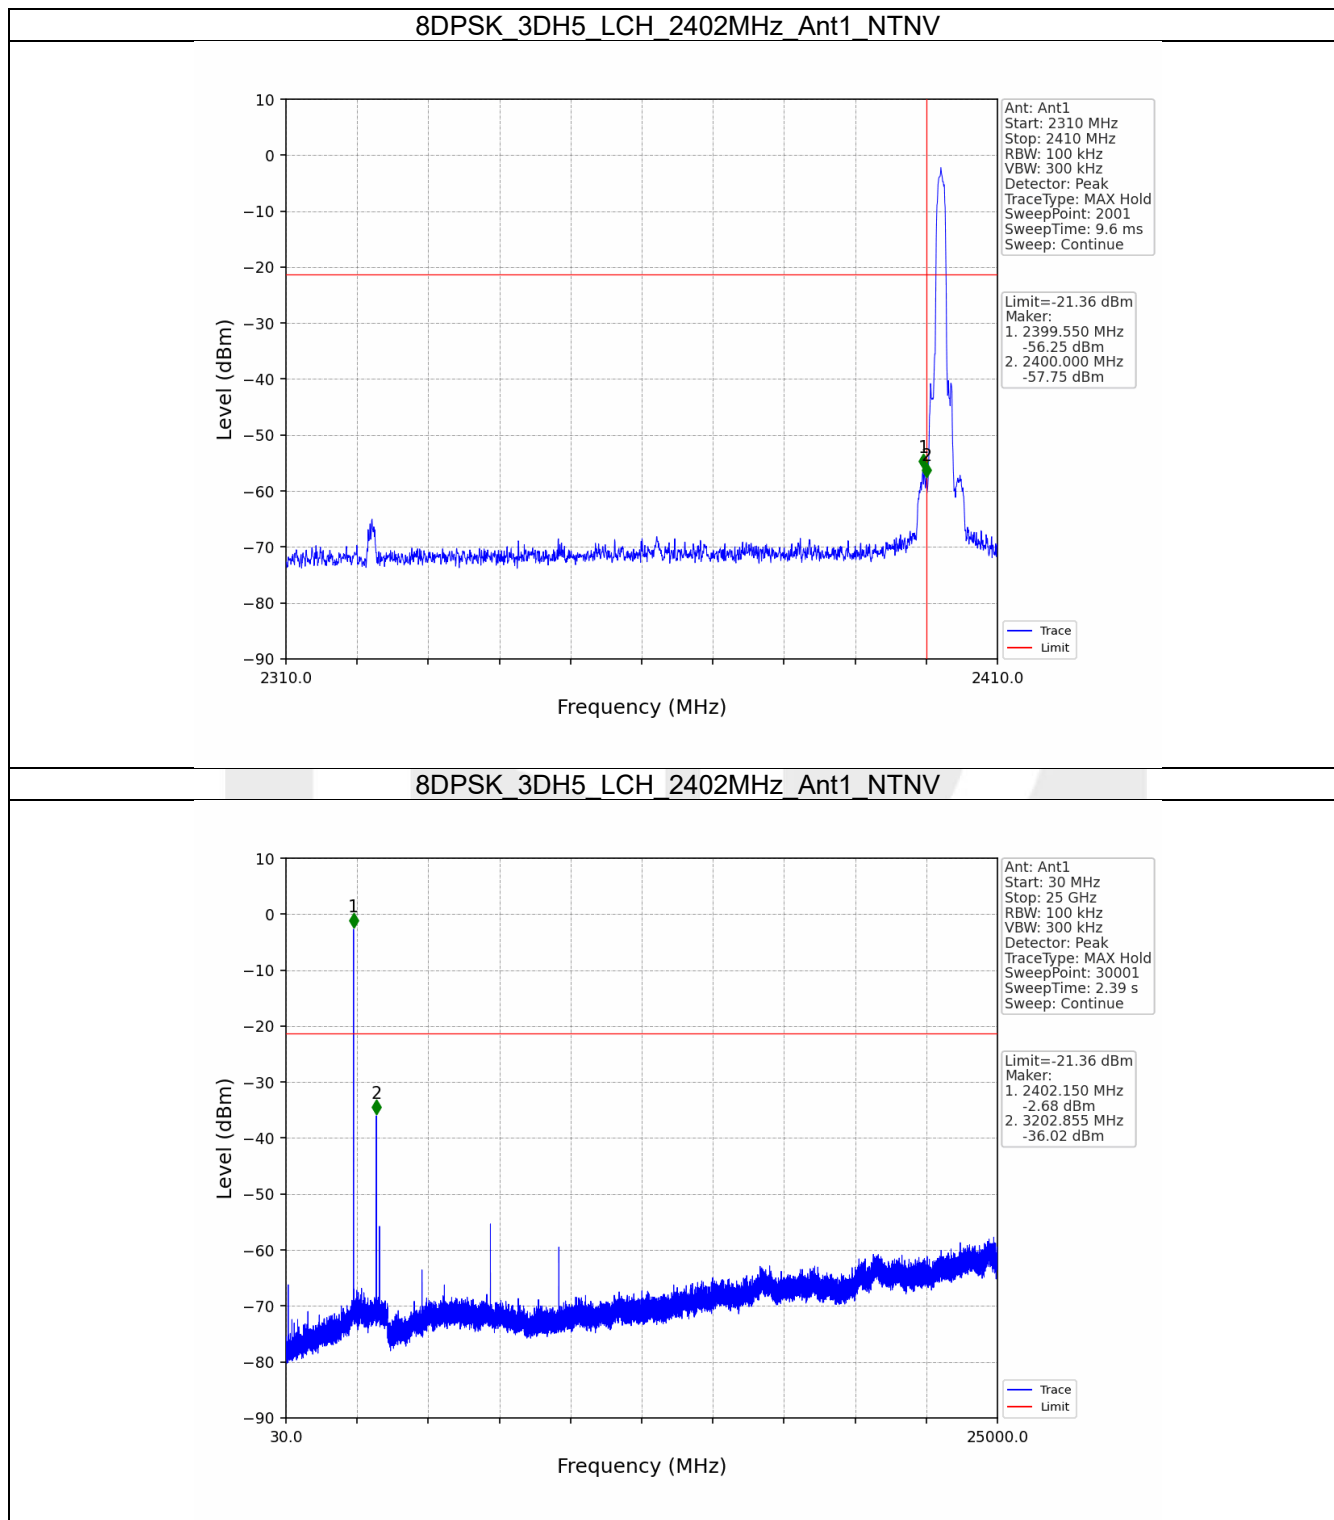

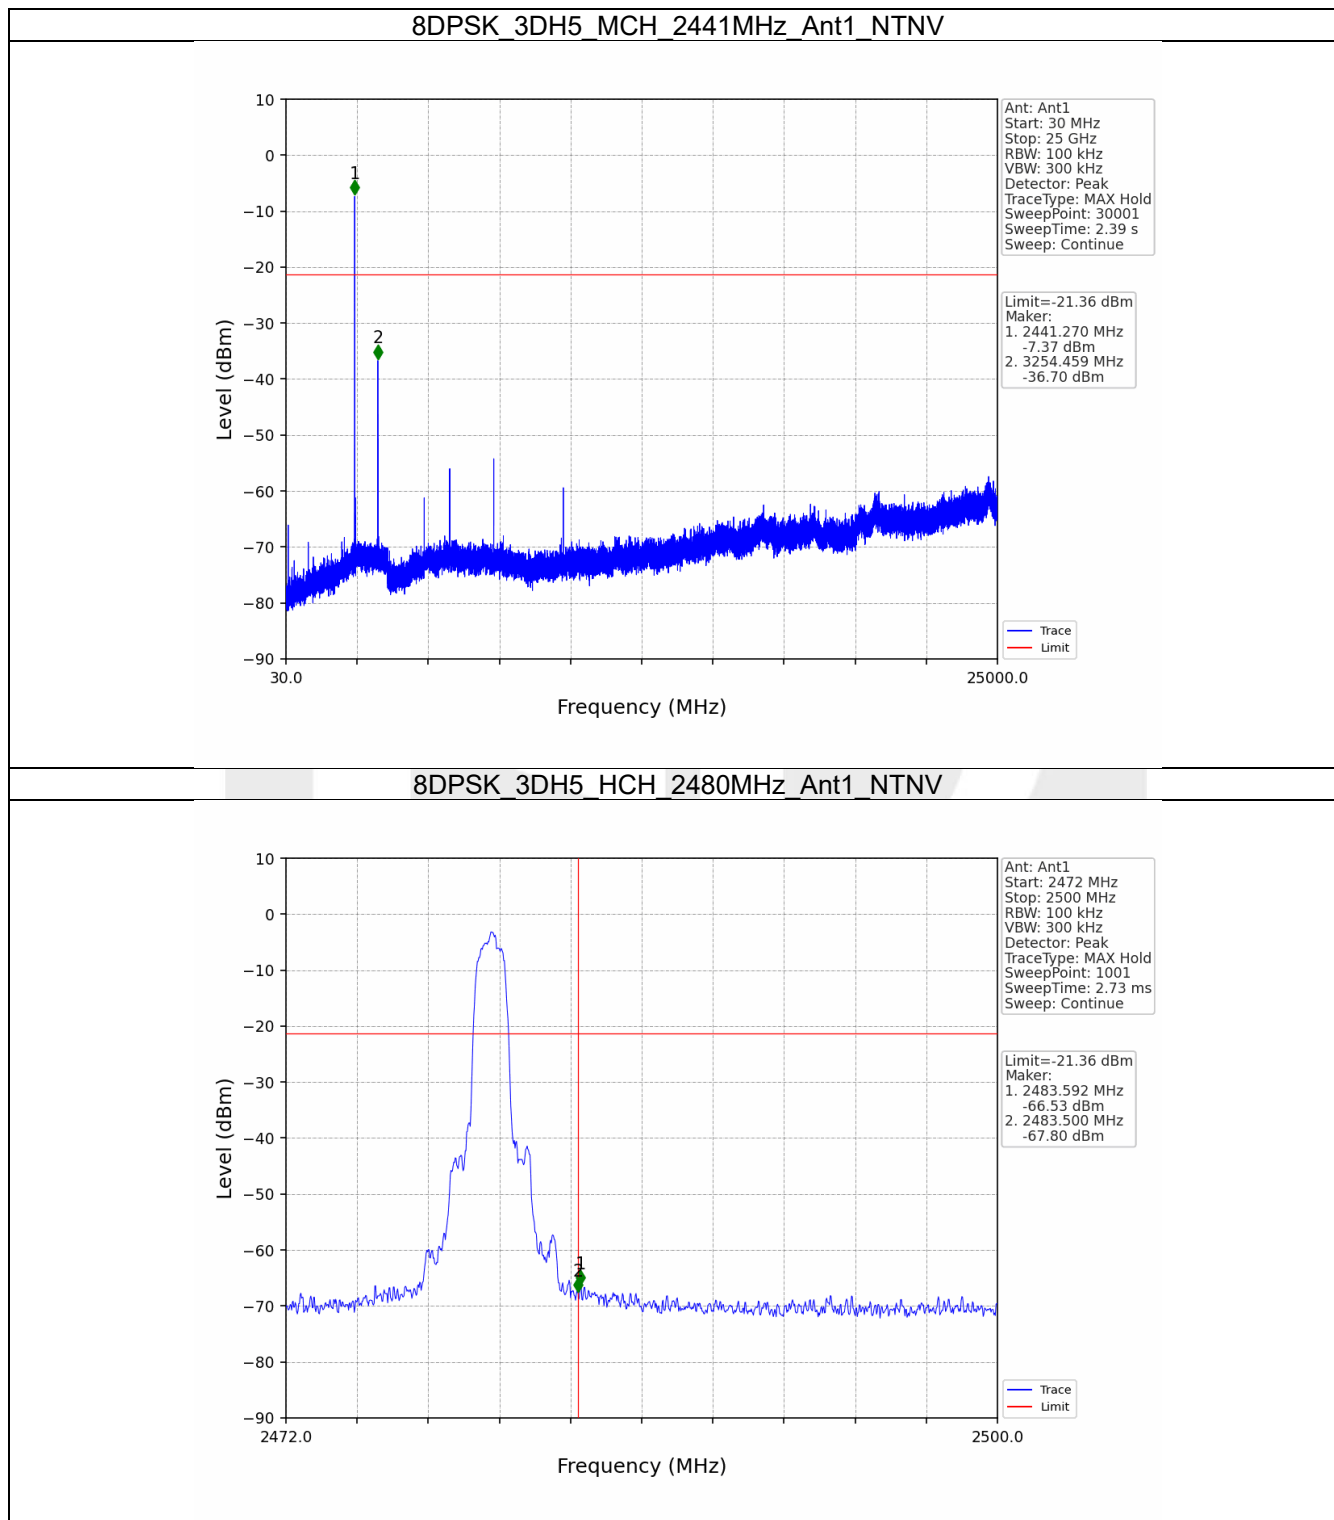

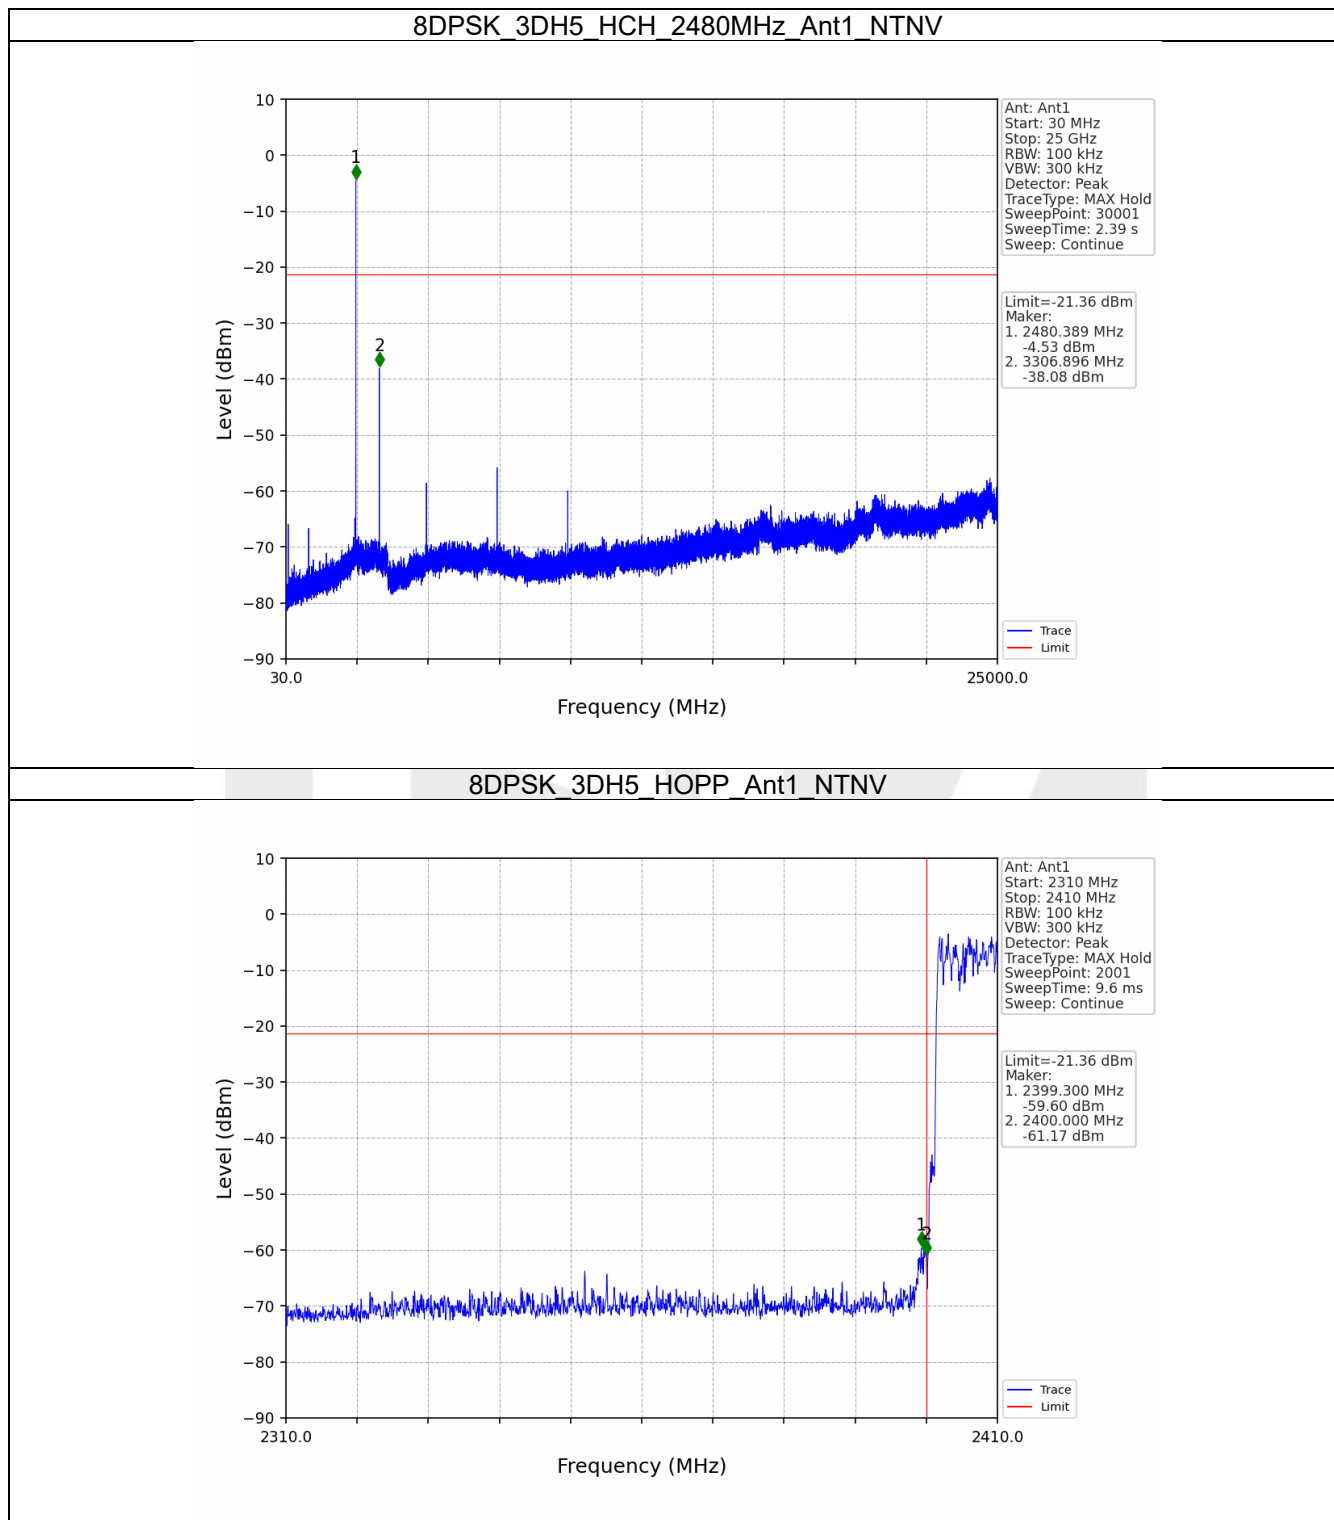

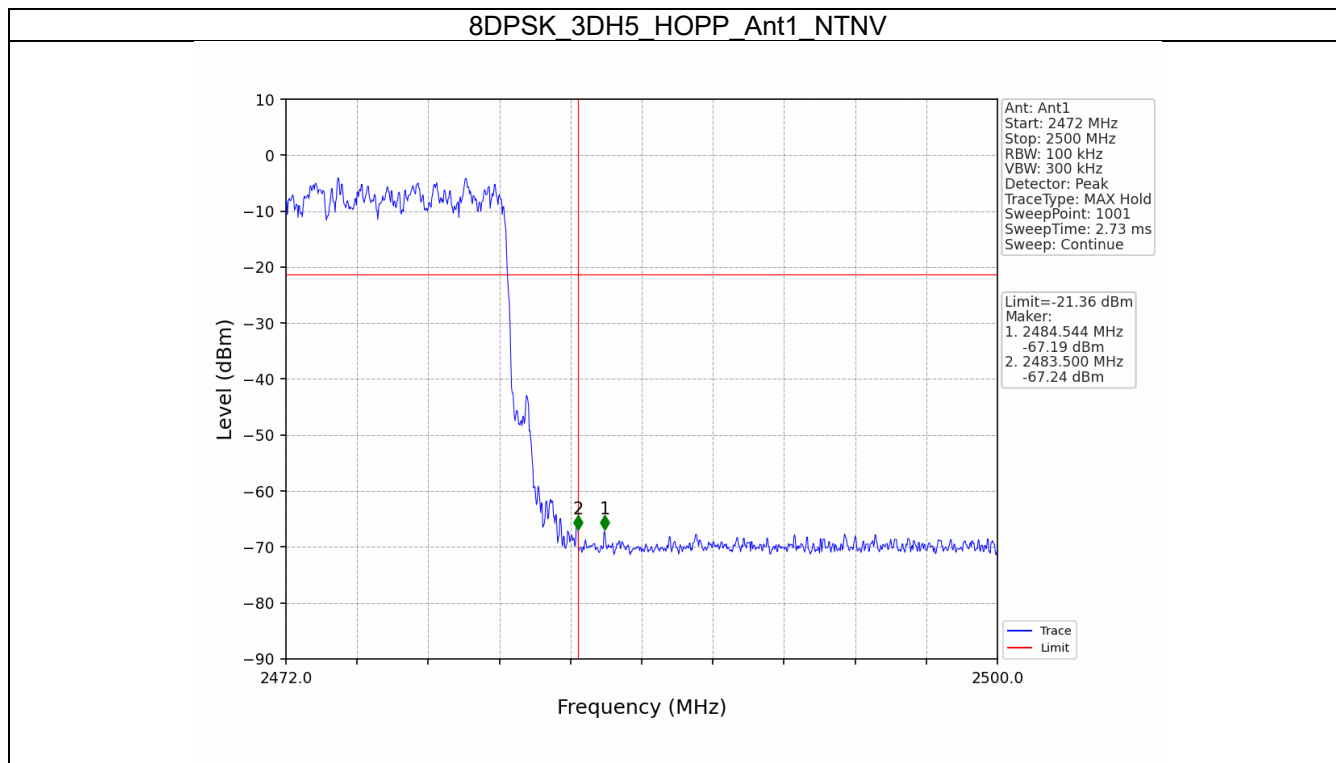

----- End of Report -----