



FCC Part 15C Test Report

FCC ID: 2BOMF-Q09

Applicant: Dongguan Runwei Electronics Co., Ltd

Address: No. 401, 4th Floor, Comprehensive Building, No.1 Senhu 2nd Road, Bihu Industrial Zone, Wulian Village, Fenggang Town, Dongguan, China

Manufacturer: Dongguan Runwei Electronics Co., Ltd

Address: No. 401, 4th Floor, Comprehensive Building, No.1 Senhu 2nd Road, Bihu Industrial Zone, Wulian Village, Fenggang Town, Dongguan, China

EUT: Bulb Camera

Trade Mark: N/A

Model Number: TV-XMC-Q09-5G-2MP

Date of Receipt: Mar. 21, 2025

Test Date: Mar. 21, 2025 - Apr. 12, 2025

Date of Report: Apr. 12, 2025

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 C 15.247
ANSI C63.10:2013

Test Result: Pass

Report Number: DLE-250410007R

Prepared by(Engineer): Ken Tan

Reviewer(Supervisor): Jack Bu

Approved(Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents

Page

1. SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	7
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	7
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3. EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.1.2 TEST PROCEDURE	10
3.1.3 DEVIATION FROM TEST STANDARD	10
3.1.4 TEST SETUP	11
3.1.5 EUT OPERATING CONDITIONS	11
3.1.6 TEST RESULTS	11
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 RADIATED EMISSION LIMITS	14
3.2.2 TEST PROCEDURE	15
3.2.3 DEVIATION FROM TEST STANDARD	15
3.2.4 TEST SETUP	15
3.2.5 EUT OPERATING CONDITIONS	16
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	17
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	18
3.2.8 TEST RESULTS (1GHZ~25GHZ)	20
3.3 RADIATED BAND EMISSION MEASUREMENT	21
3.3.1 TEST REQUIREMENT:	21
3.3.2 TEST PROCEDURE	21
3.3.3 DEVIATION FROM TEST STANDARD	21
3.3.4 TEST SETUP	22
3.3.5 EUT OPERATING CONDITIONS	22
3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	24
3.4.1 APPLICABLE STANDARD	24
3.4.2 TEST PROCEDURE	24



Table of Contents	Page
3.4.3 DEVIATION FROM STANDARD	24
3.4.4 TEST SETUP	24
3.4.5 EUT OPERATION CONDITIONS	24
3.4.6 TEST RESULTS	24
4 . AVERAGE OUTPUT POWER	25
4.1 APPLIED PROCEDURES / LIMIT	25
4.1.1 TEST PROCEDURE	25
4.1.2 DEVIATION FROM STANDARD	25
4.1.3 TEST SETUP	25
4.1.4 EUT OPERATION CONDITIONS	25
4.1.5 TEST RESULTS	25
5 . POWER SPECTRAL DENSITY TEST	26
5.1 APPLIED PROCEDURES / LIMIT	26
5.1.1 TEST PROCEDURE	26
5.1.2 DEVIATION FROM STANDARD	26
5.1.3 TEST SETUP	26
5.1.4 EUT OPERATION CONDITIONS	26
5.1.5 TEST RESULTS	26
6 . 6DB BANDWIDTH TEST	27
6.1 APPLIED PROCEDURES / LIMIT	27
6.1.1 TEST PROCEDURE	27
6.1.2 DEVIATION FROM STANDARD	27
6.1.3 TEST SETUP	27
6.1.4 EUT OPERATION CONDITIONS	27
6.1.5 TEST RESULTS	27
7 . ANTENNA REQUIREMENT	28
7.1 STANDARD REQUIREMENT	28
7.2 EUT ANTENNA	28
8 . TEST SETUP PHOTO	28
9 . EUT PHOTO	28



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.205, 15.209, 15.247(d)	Radiated Spurious Emission	PASS	
15.205, 15.247(d)	Band Edge Emission& Conducted Spurious Emissions	PASS	
15.247(b)	Peak Output Power	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing DL Testing Laboratory. The authenticity of this Test Report and its contents can be verified by

contacting the DL Testing, responsible for this Test Report.

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118



1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$
8	6dB Bandwidth	$\pm 0.2\text{MHz}$
9	Power Spectral Density	$\pm 0.42\text{dBm}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Bulb Camera
Trademark:	N/A
Model No.:	TV-XMC-Q09-5G-2MP
Model Difference:	N/A
Sample No.:	DLE-250410008-001#
Operation Frequency:	2412~2462 MHz for 802.11b/g/nHT20 2422~2452 MHz for 802.11nHT40
Channel numbers:	11 Channels for 802.11b/g/n(HT20) 7 channels for 802.11nHT40
Channel separation:	5MHz
Modulation technology:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n(20/40): OFDM(QPSK, BPSK, 16-QAM, 64-QAM)
Rate of Transmitter:	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 150Mbps
Antenna Type:	FPC Antenna
Antenna gain:	2.73 dBi
Power Supply:	AC 100-240V, 50/60Hz

Note:

1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.The EUT's all information provided by client.

2. Channel List(802.11b/g/nHT20)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
01	2.412	07	2.442
02	2.417	08	2.447
03	2.422	09	2.452
04	2.427	10	2.457
05	2.432	11	2.462
06	2.437		

Channel List(802.11nHT40)

Channel	Frequency (GHz)	Channel	Frequency (GHz)
03	2.422	07	2.442
04	2.427	08	2.447
05	2.432	09	2.452
06	2.437		



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11nHT20 CH1/ CH6/ CH11
Mode 4	802.11nHT40 CH3/ CH6/ CH09

Note: 1. The measurements are performed at the highest, middle, lowest available channels.

2. During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Power line conducted emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Bulb Camera	TV-XMC-Q09-5G-2MP	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting				
Test software Version	Test program: adb.exe			
Mode	802.11b	802.11g	802.11n HT20	802.11n HT40
Data Rate	1Mbps	6Mbps	MSC0	MSC0



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 01, 2024	Oct. 31, 2025
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 01, 2024	Oct. 31, 2025
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 01, 2024	Oct. 31, 2025
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 01, 2024	Oct. 31, 2025
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 01, 2024	Oct. 31, 2025
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 01, 2024	Oct. 31, 2025
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 01, 2024	Oct. 31, 2025
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 01, 2024	Oct. 31, 2025
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 01, 2024	Oct. 31, 2025
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 01, 2024	Oct. 31, 2025
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 01, 2024	Oct. 31, 2025
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 01, 2024	Oct. 31, 2025
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 01, 2024	Oct. 31, 2025
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 01, 2024	Oct. 31, 2025
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 01, 2024	Oct. 31, 2025
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 01, 2024	Oct. 31, 2025
17	Power Meter	Ceyear	2438PA/PB	/	Nov. 01, 2024	Oct. 31, 2025
18	Peak/continuous wave power probe	Ceyear	81702F	/	Nov. 01, 2024	Oct. 31, 2025

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Nov. 01, 2024	Oct. 31, 2025
3	LISN	R&S	ENV216	102417	Nov. 01, 2024	Oct. 31, 2025
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 01, 2024	Oct. 31, 2025

Peak Output Power Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Power Meter	Agilent	E4419B	230480	Nov. 01, 2024	Oct. 31, 2025
2	10dB Attenuator	Rosenberger	2AS102-K10S3	/	Nov. 01, 2024	Oct. 31, 2025

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ EMC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ EMC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits

(Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.50	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE


- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation



3.1.4 TEST SETUP

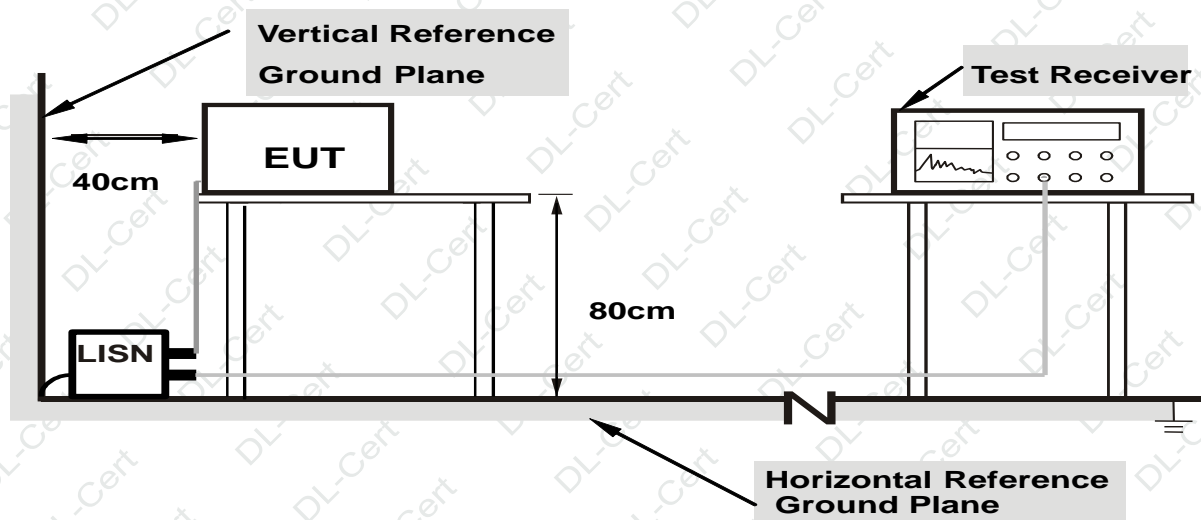

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.6 TEST RESULTS

All the modulation modes were tested the data of the worst mode (AC 120V/60Hz, 802.11b TX 2412MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

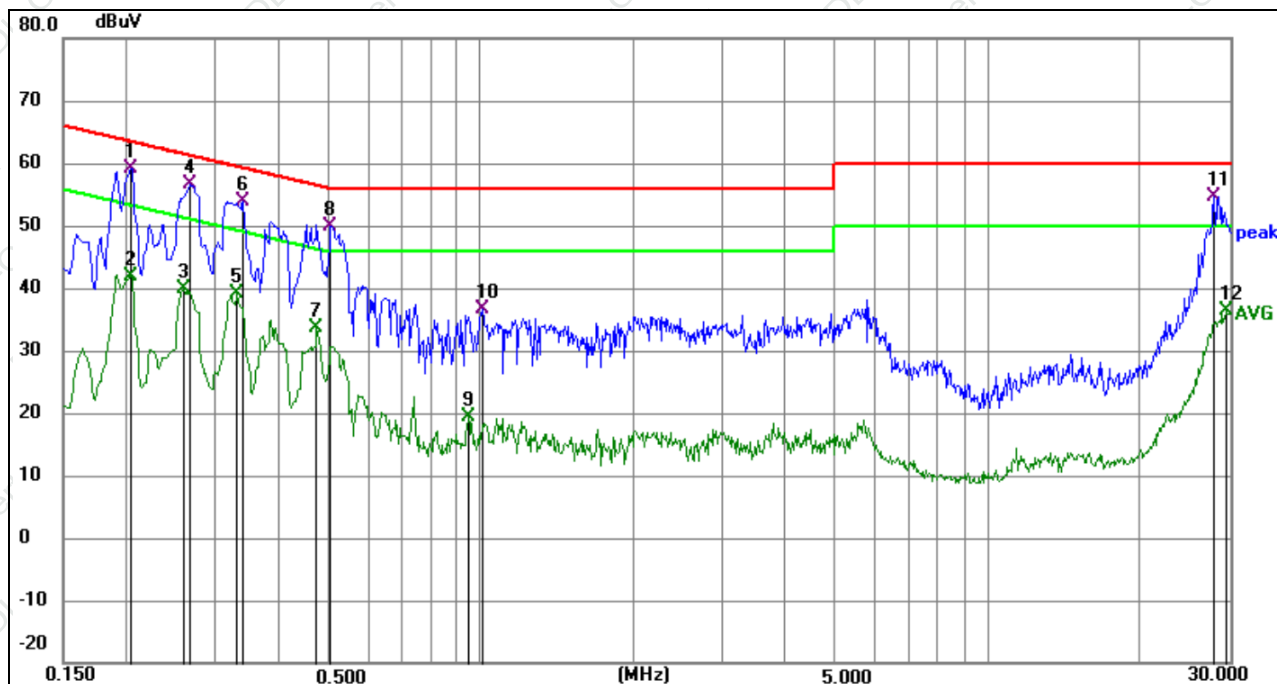


Remark:

Margin = Limit – Level, Correct Factor = Cable loss + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1 *	0.2040	48.57	10.56	59.13	63.45	-4.32	QP
2	0.2040	31.42	10.56	41.98	53.45	-11.47	AVG
3	0.2580	29.29	10.56	39.85	51.50	-11.65	AVG
4	0.2670	46.11	10.56	56.67	61.21	-4.54	QP
5	0.3300	28.44	10.57	39.01	49.45	-10.44	AVG
6	0.3390	43.23	10.57	53.80	59.23	-5.43	QP
7	0.4740	23.12	10.57	33.69	46.44	-12.75	AVG
8	0.5054	39.38	10.58	49.96	56.00	-6.04	QP
9	0.9465	8.69	10.67	19.36	46.00	-26.64	AVG
10	1.0050	26.05	10.66	36.71	56.00	-19.29	QP
11	27.9645	43.45	11.22	54.67	60.00	-5.33	QP
12	29.6250	25.12	11.22	36.34	50.00	-13.66	AVG



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

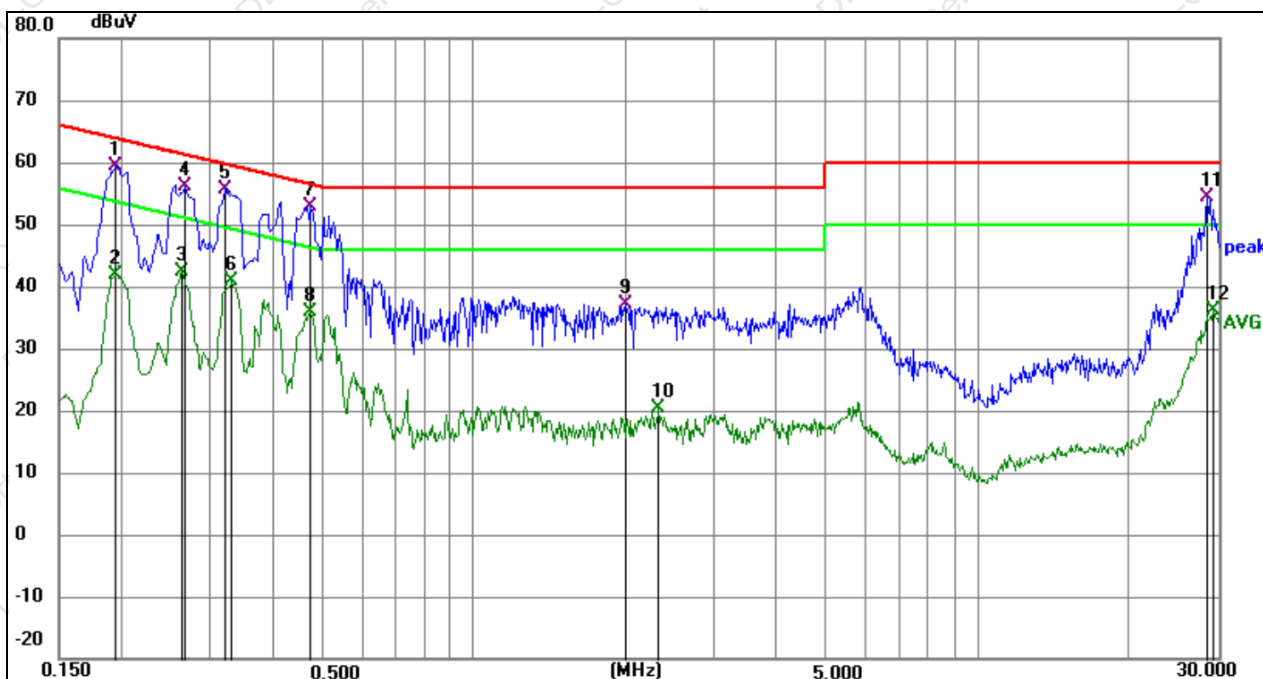

Remark:

Margin = Limit – Level, Correct Factor = Cable loss + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1949	48.91	10.55	59.46	63.83	-4.37	QP
2	0.1949	31.35	10.55	41.90	53.83	-11.93	AVG
3	0.2625	31.84	10.56	42.40	51.35	-8.95	AVG
4	0.2670	45.49	10.56	56.05	61.21	-5.16	QP
5	0.3209	45.18	10.57	55.75	59.68	-3.93	QP
6	0.3300	30.28	10.57	40.85	49.45	-8.60	AVG
7 *	0.4740	42.31	10.57	52.88	56.44	-3.56	QP
8	0.4740	25.40	10.57	35.97	46.44	-10.47	AVG
9	1.9995	26.47	10.68	37.15	56.00	-18.85	QP
10	2.3280	9.64	10.67	20.31	46.00	-25.69	AVG
11	28.5630	43.08	11.22	54.30	60.00	-5.70	QP
12	29.3190	24.97	11.22	36.19	50.00	-13.81	AVG



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	25GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre.
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

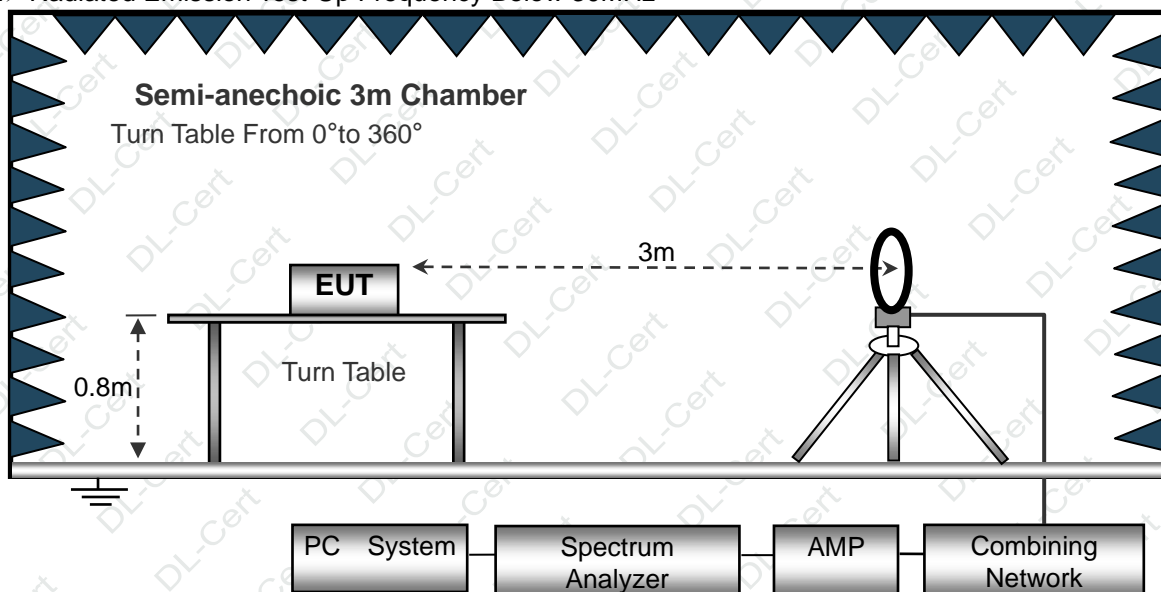

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

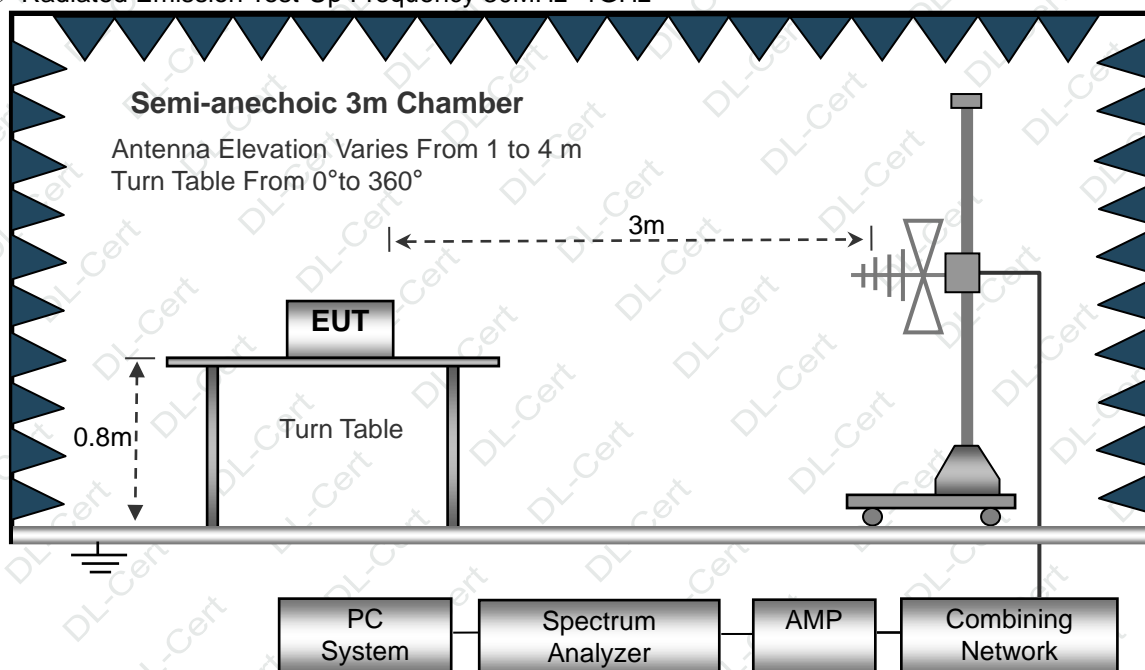

(C) Radiated Emission Test-Up Frequency Above 1GHz

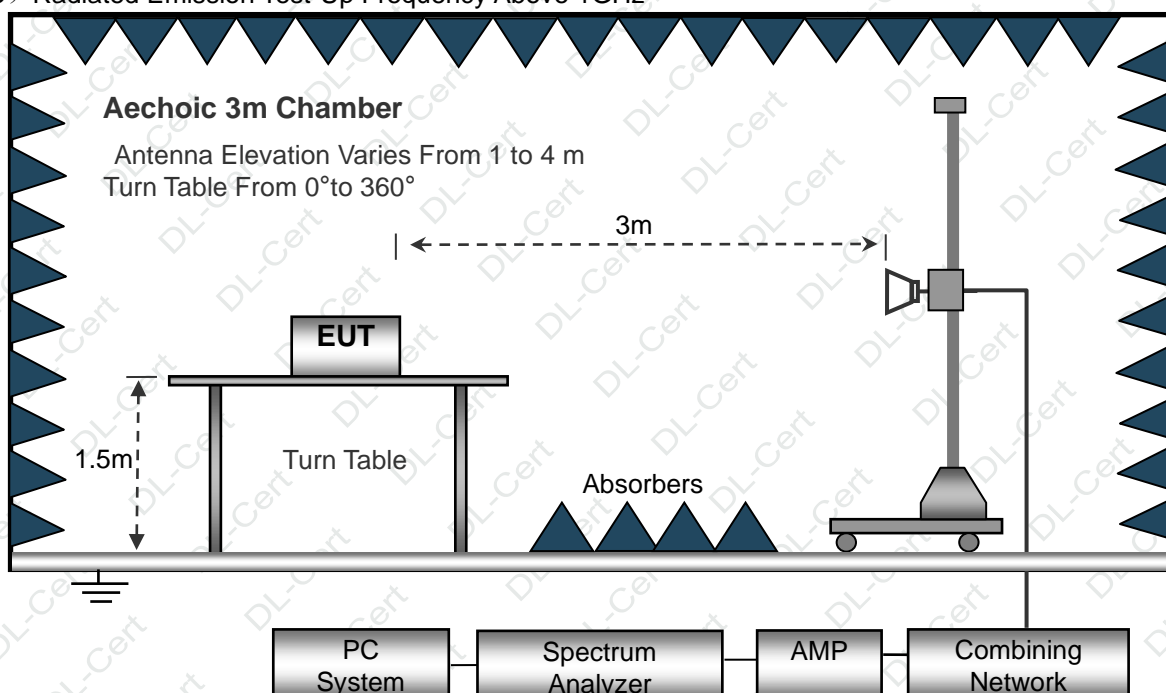

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

Temperature:	20°C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 1	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);


Limit line = specific limits(dBuV) + distance extrapolation factor.



3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

All the modulation modes were tested the data of the worst mode (AC 120V/60Hz, 802.11b TX 2412MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 5		

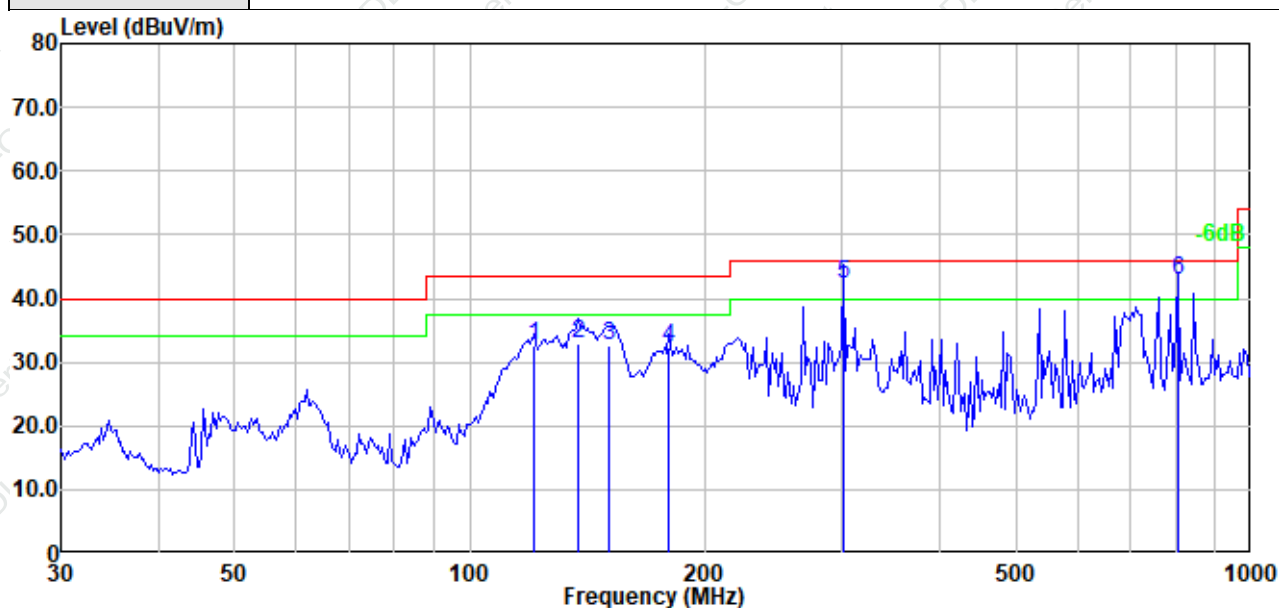

	Freq	Read Level	Level	Factor	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dBuV/m	dB/m	dBuV/m	dB		
1	120.612	53.65	32.49	-21.16	43.50	-11.01	Horizontal	QP
2	137.840	52.90	32.92	-19.98	43.50	-10.58	Horizontal	QP
3	151.025	51.78	32.68	-19.10	43.50	-10.82	Horizontal	QP
4	180.030	53.72	32.29	-21.43	43.50	-11.21	Horizontal	QP
5	300.699	60.37	42.24	-18.13	46.00	-3.76	Horizontal	QP
6	804.252	50.64	42.92	-7.72	46.00	-3.08	Horizontal	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26°C	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 5		

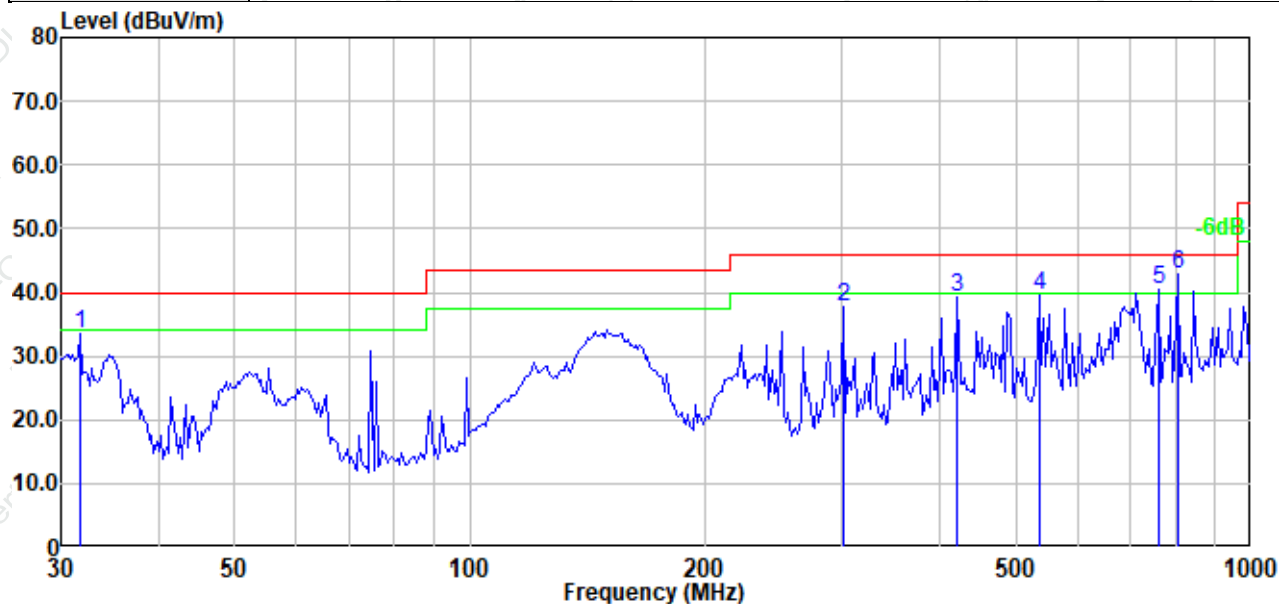

	Freq	Read Level	Level	Factor	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dBuV	dBuV/m	dB/m	dBuV/m	dB		
1	31.735	54.54	33.40	-21.14	40.00	-6.60	Vertical	QP
2	300.699	55.72	37.59	-18.13	46.00	-8.41	Vertical	QP
3	421.329	54.48	39.27	-15.21	46.00	-6.73	Vertical	QP
4	535.038	52.63	39.67	-12.96	46.00	-6.33	Vertical	QP
5	760.287	48.87	40.47	-8.40	46.00	-5.53	Vertical	QP
6	804.252	50.45	42.73	-7.72	46.00	-3.27	Vertical	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



3.2.8 TEST RESULTS (1GHZ~25GHZ)

During the test, pre-scan 802.11b, g, n (HT20), n (HT40) mode, and find that 802.11n (HT20) mode was worse. The report only records this mode.

802.11n HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	4824	66.32	50.65	6.88	31.29	53.84	74.00	-20.16	PK
V	4824	55.86	50.65	6.88	31.29	43.38	54.00	-10.62	AV
V	7236	66.31	49.98	7.16	36.63	60.12	74.00	-13.88	PK
V	7236	46.73	49.98	7.16	36.63	40.54	54.00	-13.46	AV
V	16087	46.34	51.53	11.34	41.52	47.67	74.00	-26.33	PK
H	4824	66.92	50.65	6.88	31.29	54.44	74.00	-19.56	PK
H	4824	55.71	50.65	6.88	31.29	43.23	54.00	-10.77	AV
H	7236	65.06	49.98	7.16	36.63	58.87	74.00	-15.13	PK
H	7236	47.84	49.98	7.16	36.63	41.65	54.00	-12.35	AV
H	16087	48.05	51.53	11.34	41.52	49.38	74.00	-24.62	PK
operation frequency:2437									
V	4874	66.70	50.67	6.89	31.38	54.30	74.00	-19.70	PK
V	4874	54.53	50.67	6.89	31.38	42.13	54.00	-11.87	AV
V	7311	65.65	50.02	7.24	36.63	59.50	74.00	-14.50	PK
V	7311	48.04	50.02	7.24	36.63	41.89	54.00	-12.11	AV
V	16087	47.32	51.53	11.34	41.52	48.65	74.00	-25.35	PK
H	4874	66.11	50.67	6.89	31.38	53.71	74.00	-20.29	PK
H	4874	54.02	50.67	6.89	31.38	41.62	54.00	-12.38	AV
H	7311	65.80	50.02	7.24	36.63	59.65	74.00	-14.35	PK
H	7311	47.06	50.02	7.24	36.63	40.91	54.00	-13.09	AV
H	16087	46.87	51.53	11.34	41.52	48.20	74.00	-25.80	PK
operation frequency:2462									
V	4924	67.42	50.79	6.83	31.36	54.82	74.00	-19.18	PK
V	4924	54.34	50.79	6.83	31.36	41.74	54.00	-12.26	AV
V	7386	65.03	50.11	7.25	36.58	58.75	74.00	-15.25	PK
V	7386	46.85	50.11	7.25	36.58	40.57	54.00	-13.43	AV
V	16087	48.34	51.53	11.34	41.52	49.67	74.00	-24.33	PK
H	4924	67.53	50.79	6.83	31.36	54.93	74.00	-19.07	PK
H	4924	54.66	50.79	6.83	31.36	42.06	54.00	-11.94	AV
H	7386	65.72	50.11	7.25	36.58	59.44	74.00	-14.56	PK
H	7386	47.41	50.11	7.25	36.58	41.13	54.00	-12.87	AV
H	16087	48.03	51.53	11.34	41.52	49.36	74.00	-24.64	PK

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.205

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
7. Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


3.3.3 DEVIATION FROM TEST STANDARD

No deviation



3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

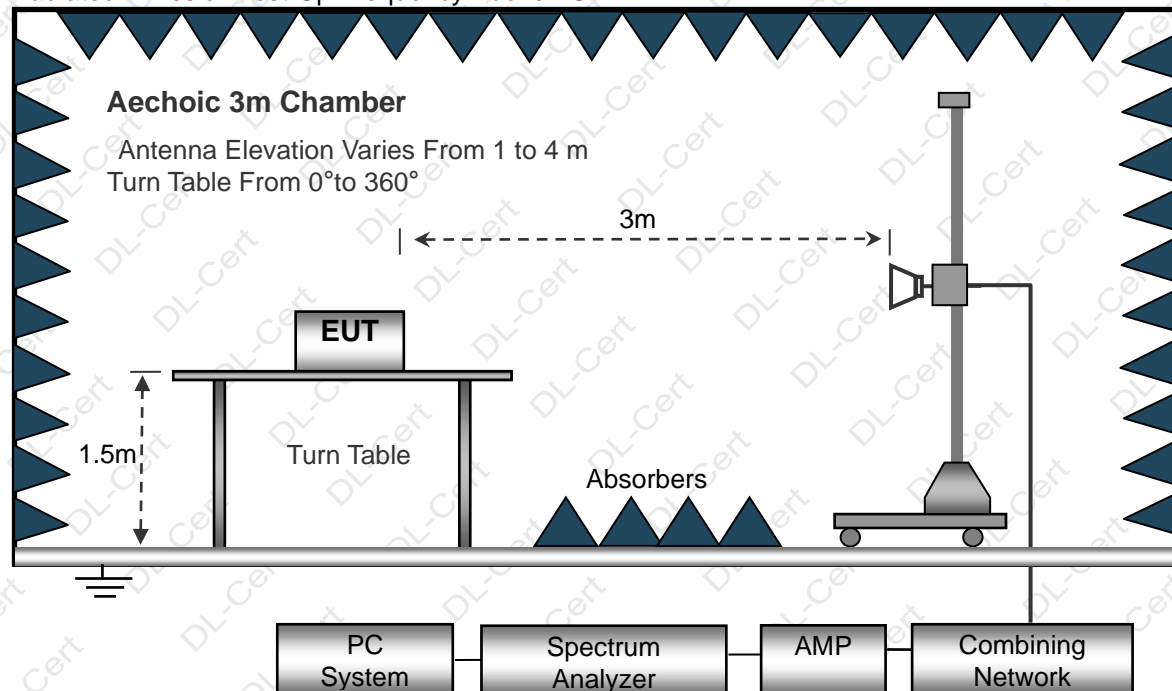

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



3.3.6 TEST RESULT

During the test, pre-scan 802.11b, g, n (HT20), n (HT40) mode, and find that 802.11n (HT20) mode was worse. The report only records this mode.

802.11n HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2412									
V	2390	76.83	52.12	2.73	27.38	54.82	74.00	-19.18	PK
V	2390	65.76	52.12	2.73	27.38	43.75	54.00	-10.25	AV
V	2400	77.54	52.16	2.78	27.41	55.57	74.00	-18.43	PK
V	2400	65.76	52.16	2.78	27.41	43.79	54.00	-10.21	AV
H	2390	77.76	52.12	2.73	27.38	55.75	74.00	-18.25	PK
H	2390	65.35	52.12	2.73	27.38	43.34	54.00	-10.66	AV
H	2400	76.48	52.16	2.78	27.41	54.51	74.00	-19.49	PK
H	2400	65.67	52.16	2.78	27.41	43.70	54.00	-10.30	AV

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:2462									
V	2483.5	77.72	52.23	2.86	27.44	55.79	74.00	-18.21	PK
V	2483.5	65.32	52.23	2.86	27.44	43.39	54.00	-10.61	AV
V	2500	76.83	52.26	2.88	27.49	54.94	74.00	-19.06	PK
V	2500	65.81	52.26	2.88	27.49	43.92	54.00	-10.08	AV
H	2483.5	77.78	52.23	2.86	27.44	55.85	74.00	-18.15	PK
H	2483.5	65.70	52.23	2.86	27.44	43.77	54.00	-10.23	AV
H	2500	76.54	52.26	2.88	27.49	54.65	74.00	-19.35	PK
H	2500	66.76	52.26	2.88	27.49	44.87	54.00	-9.13	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.4 CONDUCTED BAND EDGE EMISSION&CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	KDB558074 D0115.247 Meas Guidance v05r02

3.4.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

3.4.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

Set the RBW = 100KHz.

Set the VBW = 300KHz.

Sweep time = auto couple.

Detector function = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

3.4.3 DEVIATION FROM STANDARD

No deviation.

3.4.4 TEST SETUP



3.4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.4.6 TEST RESULTS

Please refer to Appendix Test Data.



4. PEAK OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(3)	Average Output Power	1 watt or 30dBm	2400-2483.5	PASS

4.1.1 TEST PROCEDURE


1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

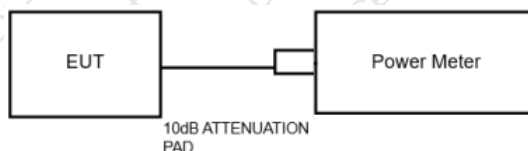

4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

Please refer to Appendix Test Data.



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW \geq 3kHz
VB	VBW \geq 3RBW
Detector	power averaging (rms) or sample detector (when rms not available).
Trace	rms/average
Sweep Time	Auto

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

Please refer to Appendix Test Data.



6. 6DB BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range(MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) \geq RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

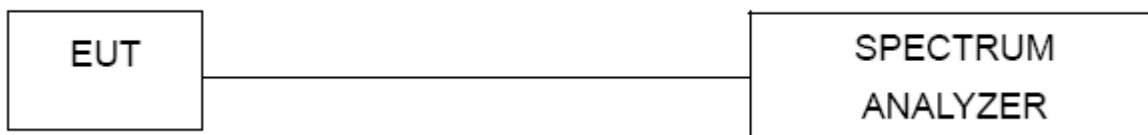

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

Please refer to Appendix Test Data.



7. ANTENNA REQUIREMENT

7.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

7.2 EUT ANTENNA

The EUT antenna is FPC Antenna, It comply with the standard requirement.

8. TEST SETUP PHOTO

Reference to the appendix I for details.

9. EUT PHOTO

Reference to the appendix II for details.

***** END OF REPORT *****