

# RF TEST REPORT

For

**SHENZHEN HAIJIXING TECHNOLOGY CO., LTD**

**Product Name: Digital Camera**

**Test Model(s).: WD08**

**Report Reference No.** : POCE240321007RL001

**FCC ID** : 2A6Q7-WD06

**Applicant's Name** : SHENZHEN HAIJIXING TECHNOLOGY CO., LTD

**Address** : 2/F, No. 97 of Tianwan Road, Tianliao Community, Guangming New District, Shenzhen, CN

**Testing Laboratory** : Shenzhen POCE Technology Co., Ltd.

**Address** : H1 Building 102, H Building 1/F, Hongfa Science & Technology Park, Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China

**Test Specification Standard** : 47 CFR Part 15.247

**Date of Receipt** : March 21, 2024

**Date of Test** : March 21, 2024 to March 27, 2024

**Date of Issue** : March 27, 2024

**Result** : Pass

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen POCE Technology Co., Ltd. This document may be altered or revised by Shenzhen POCE Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample

## Revision History Of Report

Version	Description	REPORT No.	Issue Date
V1.0	Original	POCE240321007RL001	March 27, 2024

**NOTE1:**

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

Compiled by:

*Ben Tang*

Ben Tang / Test Engineer

Supervised by:

*Tom Chen*

Tom Chen / Project Engineer

Approved by:

*Machael Mo*

Machael Mo / Manager

## CONTENTS

<b>1 TEST SUMMARY .....</b>	<b>5</b>
<b>1.1 TEST STANDARDS .....</b>	<b>5</b>
<b>1.2 SUMMARY OF TEST RESULT .....</b>	<b>5</b>
<b>2 GENERAL INFORMATION .....</b>	<b>6</b>
<b>2.1 CLIENT INFORMATION .....</b>	<b>6</b>
<b>2.2 DESCRIPTION OF DEVICE (EUT) .....</b>	<b>6</b>
<b>2.3 DESCRIPTION OF TEST MODES .....</b>	<b>7</b>
<b>2.4 DESCRIPTION OF SUPPORT UNITS .....</b>	<b>7</b>
<b>2.5 EQUIPMENTS USED DURING THE TEST .....</b>	<b>8</b>
<b>2.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY .....</b>	<b>10</b>
<b>2.7 IDENTIFICATION OF TESTING LABORATORY .....</b>	<b>10</b>
<b>2.8 ANNOUNCEMENT .....</b>	<b>10</b>
<b>3 EVALUATION RESULTS (EVALUATION) .....</b>	<b>11</b>
<b>3.1 ANTENNA REQUIREMENT .....</b>	<b>11</b>
3.1.1 Conclusion: .....	11
<b>4 RADIO SPECTRUM MATTER TEST RESULTS (RF) .....</b>	<b>12</b>
<b>4.1 CONDUCTED EMISSION AT AC POWER LINE .....</b>	<b>12</b>
4.1.1 E.U.T. Operation: .....	12
4.1.2 Test Setup Diagram: .....	12
4.1.3 Test Data: .....	13
<b>4.2 OCCUPIED BANDWIDTH .....</b>	<b>15</b>
4.2.1 E.U.T. Operation: .....	15
4.2.2 Test Setup Diagram: .....	15
4.2.3 Test Data: .....	15
<b>4.3 MAXIMUM CONDUCTED OUTPUT POWER .....</b>	<b>16</b>
4.3.1 E.U.T. Operation: .....	16
4.3.2 Test Setup Diagram: .....	17
4.3.3 Test Data: .....	17
<b>4.4 POWER SPECTRAL DENSITY .....</b>	<b>18</b>
4.4.1 E.U.T. Operation: .....	18
4.4.2 Test Setup Diagram: .....	18
4.4.3 Test Data: .....	18
<b>4.5 EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS .....</b>	<b>19</b>
4.5.1 E.U.T. Operation: .....	19
4.5.2 Test Setup Diagram: .....	19
4.5.3 Test Data: .....	19
<b>4.6 BAND EDGE EMISSIONS (RADIATED) .....</b>	<b>20</b>
4.6.1 E.U.T. Operation: .....	20
4.6.2 Test Setup Diagram: .....	20
4.6.3 Test Data: .....	21
<b>4.7 EMISSIONS IN FREQUENCY BANDS (BELOW 1GHz) .....</b>	<b>27</b>
4.7.1 E.U.T. Operation: .....	28
4.7.2 Test Data: .....	29
<b>4.8 EMISSIONS IN FREQUENCY BANDS (ABOVE 1GHz) .....</b>	<b>31</b>
4.8.1 E.U.T. Operation: .....	32

4.8.2 Test Data:	33
<b>5 TEST SETUP PHOTOS</b>	<b>36</b>
<b>6 PHOTOS OF THE EUT</b>	<b>38</b>
<b>APPENDIX</b>	<b>50</b>
1. -6dB BANDWIDTH	51
2. 99% OCCUPIED BANDWIDTH	56
3. DUTY CYCLE	61
4. MAX. OUTPUT POWER	66
5. POWER SPECTRAL DENSITY	71
6. BANDEdge	76
7. SPURIOUS EMISSION	82

## 1 TEST SUMMARY

### 1.1 Test Standards

The tests were performed according to following standards:

**47 CFR Part 15.247:** Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

### 1.2 Summary of Test Result

Item	Standard	Method	Requirement	Result
Antenna requirement	47 CFR Part 15.247		47 CFR 15.203	Pass
Conducted Emission at AC power line	47 CFR Part 15.247	ANSI C63.10-2013 section 6.2	47 CFR 15.207(a)	Pass
Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10-2013, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(a)(2)	Pass
Maximum Conducted Output Power	47 CFR Part 15.247	ANSI C63.10-2013, section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(b)(3)	Pass
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10-2013, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(e)	Pass
Emissions in non-restricted frequency bands	47 CFR Part 15.247	ANSI C63.10-2013 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Band edge emissions (Radiated)	47 CFR Part 15.247	ANSI C63.10-2013 section 6.10 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (below 1GHz)	47 CFR Part 15.247	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass
Emissions in frequency bands (above 1GHz)	47 CFR Part 15.247	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02	47 CFR 15.247(d), 15.209, 15.205	Pass

## 2 GENERAL INFORMATION

### 2.1 Client Information

**Applicant's Name** : SHENZHEN HAIJIXING TECHNOLOGY CO., LTD  
**Address** : 2/F, No. 97 of Tianwan Road, Tianliao Community, Guangming New District, Shenzhen, CN

**Manufacturer** : SHENZHEN HAIJIXING TECHNOLOGY CO., LTD  
**Address** : 2/F, No. 97 of Tianwan Road, Tianliao Community, Guangming New District, Shenzhen, CN

### 2.2 Description of Device (EUT)

Product Name:	Digital Camera
Model/Type reference:	WD08
Series Model:	WD02,WD05,WD06,WD07,WD09,WD10
Model Difference:	The product has many models, only the model name is different, and the other parts such as the circuit principle, pcb and electrical structure are the same.
Trade Mark:	N/A
Power Supply:	DC 5V/1A from adapter Battery:DC3.7V 1200mA
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz;
Number of Channels:	802.11b/g/n(HT20): 11 Channels;
Modulation Type:	802.11b: DSSS(CCK, DQPSK, DBPSK); 802.11g: OFDM(BPSK, QPSK, 16QAM, 64QAM); 802.11n(HT20: OFDM (BPSK, QPSK, 16QAM, 64QAM)
Antenna Type:	Internal
Antenna Gain:	0.68dBi
Hardware Version:	V1.0
Software Version:	V1.0

Remark: The Antenna Gain is supplied by the customer. POCE is not responsible for this data and the related calculations associated with it

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)
	802.11b/802.11g/802.11n(HT20)
Lowest channel	2412MHz
Middle channel	2437MHz
Highest channel	2462MHz

### 2.3 Description of Test Modes

No	Title	Description
TM1	802.11b mode	Keep the EUT in 802.11b transmitting mode.
TM2	802.11g mode	Keep the EUT in 802.11g transmitting mode.
TM3	802.11n(HT20) mode	Keep the EUT in 802.11n(HT20) transmitting mode.

Remark: Only the data of the worst mode would be recorded in this report.

### 2.4 Description of Support Units

Title	Manufacturer	Model No.	Serial No.
AC-DC adapter	HUAWEI TECHNOLOGY	HW100400C01	

## 2.5 Equipments Used During The Test

Conducted Emission at AC power line					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
loop antenna	EVERFINE	LLA-2	80900L-C	2024-02-19	2025-02-18
Power absorbing clamp	SCHWARZ BECK	MESS-ELEKTRONIK	/	2023-12-12	2024-12-11
Electric Network	SCHWARZ BECK	CAT5 8158	CAT5 8158#207	/	/
Cable	SCHWARZ BECK	/	/	2023-12-27	2024-12-26
Pulse Limiter	SCHWARZ BECK	VTSD 9561-F Pulse limiter 10dB Ateennator	561-G071	2023-12-12	2024-12-11
50ΩCoaxial Switch	Anritsu	MP59B	M20531	/	/
Test Receiver	Rohde & Schwarz	ESPI TEST RECEIVER	ID:1164.6607K 03-102109-MH	2023-06-13	2024-06-12
L.I.S.N	R&S	ESH3-Z5	831.5518.52	2023-12-12	2024-12-11

### Occupied Bandwidth

### Maximum Conducted Output Power

### Power Spectral Density

### Emissions in non-restricted frequency bands

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
RF Test Software	TACHOY	RTS-01	V2.0.0.0	/	/
High Pass filter	ZHINAN	OQHPF1-M1.5-18G-224	6210075	/	/
Power divider	MIDWEST	PWD-2533	SMA-79	2023-05-11	2026-05-10
DC power	HP	66311B	38444359	/	/
RF Sensor Unit	Tachoy Information Technology(shenzhen) Co.,Ltd.	TR1029-2	000001	/	/
Wideband radio communication tester	R&S	CMW500	113410	2023-06-13	2024-06-12
Vector signal generator	Keysight	N5181A	MY48180415	2023-11-09	2024-11-08
Signal generator	Keysight	N5182A	MY50143455	2023-11-09	2024-11-08
Spectrum Analyzer	Keysight	N9020A	MY53420323	2023-12-12	2024-12-11

**Band edge emissions (Radiated)****Emissions in frequency bands (below 1GHz)****Emissions in frequency bands (above 1GHz)**

Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test software	Farad	EZ -EMC	V1.1.42	/	/
Positioning Controller	/	MF-7802	/	/	/
High Pass filter	ZHINAN	OQHPF1-M1.5-18G-224	6210075	/	/
Amplifier(18-40G)	COM-POWER	AH-1840	10100008-1	2022-04-05	2025-04-04
Horn antenna	COM-POWER	AH-1840 (18-40G)	10100008	2023-04-05	2025-04-04
Loop antenna	ZHINAN	ZN30900C	ZN30900C	2021-07-05	2024-07-04
Cable(LF)#2	Schwarzbeck	/	/	2024-02-19	2025-02-18
Cable(LF)#1	Schwarzbeck	/	/	2024-02-19	2025-02-18
Cable(HF)#2	Schwarzbeck	AK9515E	96250	2024-02-19	2025-02-18
Cable(HF)#1	Schwarzbeck	SYV-50-3-1	/	2024-02-19	2025-02-18
Power amplifier(LF)	Schwarzbeck	BBV9743	9743-151	2023-06-13	2024-06-12
Power amplifier(HF)	Schwarzbeck	BBV9718	9718-282	2023-06-13	2024-06-12
Wideband radio communication tester	R&S	CMW500	113410	2023-06-13	2024-06-12
Spectrum Analyzer	R&S	FSP30	1321.3008K40-101729-jR	2023-06-14	2024-06-13
Horn Antenna	Sunol Sciences	DRH-118	A091114	2023-05-13	2025-05-12
Broadband Antenna	Sunol Sciences	JB6 Antenna	A090414	2023-05-21	2025-05-20
Test Receiver	R&S	ESCI	102109	2023-06-13	2024-06-12

## 2.6 Statement Of The Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Disturbance (0.15~30MHz)	±3.41dB
Occupied Bandwidth	±3.63%
RF conducted power	±0.733dB
RF power density	±0.234%
Conducted Spurious emissions	±1.98dB
Radiated Emission (Above 1GHz)	±5.46dB
Radiated Emission (Below 1GHz)	±5.79dB

Note: (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2.7 Identification of Testing Laboratory

Company Name:	Shenzhen POCE Technology Co., Ltd.
Address:	101-102 Building H5 & 1/F., Building H, Hongfa Science & Technology Park, Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252

### Identification of the Responsible Testing Location

Company Name:	Shenzhen POCE Technology Co., Ltd.
Address:	101-102 Building H5 & 1/F., Building H, Hongfa Science & Technology Park, Tangtou, Shiyan, Bao'an District, Shenzhen, Guangdong, China
Phone Number:	+86-13267178997
Fax Number:	86-755-29113252
FCC Registration Number:	0032847402
Designation Number:	CN1342
Test Firm Registration Number:	778666
A2LA Certificate Number:	6270.01

## 2.8 Announcement


- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by POCE and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

### 3 Evaluation Results (Evaluation)

#### 3.1 Antenna requirement

Test Requirement:	Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.
-------------------	---

##### 3.1.1 Conclusion:

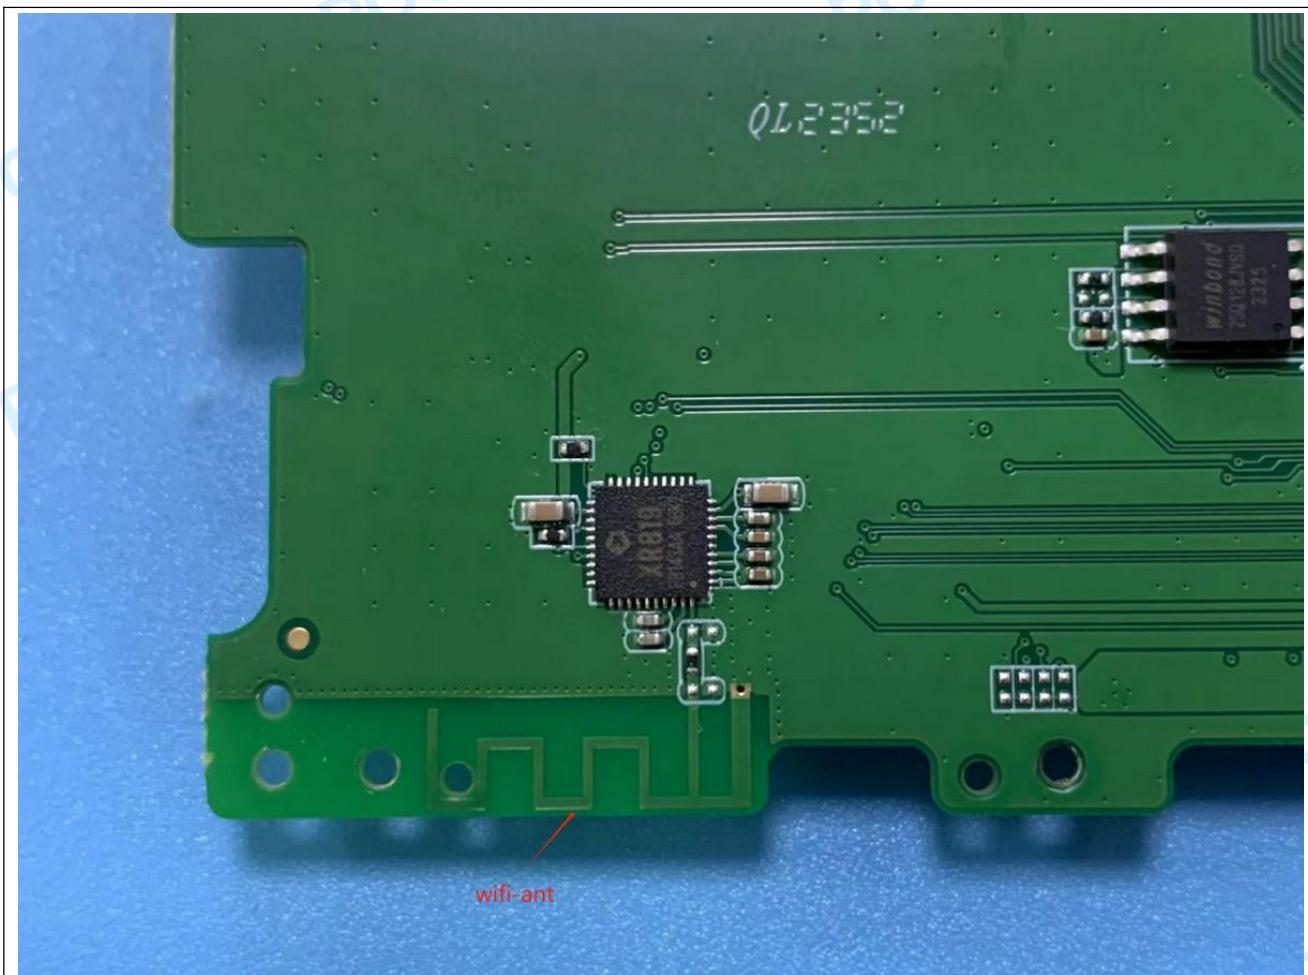

## 4 Radio Spectrum Matter Test Results (RF)

#### 4.1 Conducted Emission at AC power line


Test Requirement:	Refer to 47 CFR 15.207(a). Except as shown in paragraphs (b)and (c)of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN).																						
Test Limit:	<table border="1"> <thead> <tr> <th colspan="2">Frequency of emission (MHz)</th><th colspan="2">Conducted limit (dB<math>\mu</math>V)</th></tr> <tr> <th colspan="2"></th><th>Quasi-peak</th><th>Average</th></tr> </thead> <tbody> <tr> <td colspan="2">0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr> <tr> <td colspan="2">0.5-5</td><td>56</td><td>46</td></tr> <tr> <td colspan="2">5-30</td><td>60</td><td>50</td></tr> </tbody> </table>			Frequency of emission (MHz)		Conducted limit (dB $\mu$ V)				Quasi-peak	Average	0.15-0.5		66 to 56*	56 to 46*	0.5-5		56	46	5-30		60	50
Frequency of emission (MHz)		Conducted limit (dB $\mu$ V)																					
		Quasi-peak	Average																				
0.15-0.5		66 to 56*	56 to 46*																				
0.5-5		56	46																				
5-30		60	50																				
	*Decreases with the logarithm of the frequency.																						
Test Method:	ANSI C63.10-2013 section 6.2																						
Procedure:	Refer to ANSI C63.10-2013 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices																						

\*Decreases with the logarithm of the frequency.

#### 4.1.1 E.U.T. Operation:

Operating Environment:					
Temperature:	24 °C	Humidity:	49.5 %	Atmospheric Pressure:	101 kPa
Pretest mode:	TM1				
Final test mode:	TM1				


#### 4.1.2 Test Setup Diagram:

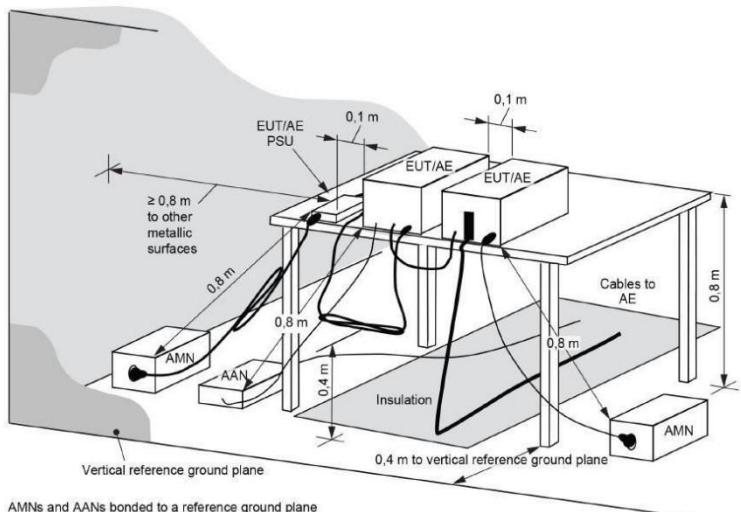

#### 4.1.3 Test Data:


TM1 is worse case and only reported

TM1 / Line / Band: 2400-2483.5 MHz / BW: 20 / CH: L  
Power: AC120V60Hz

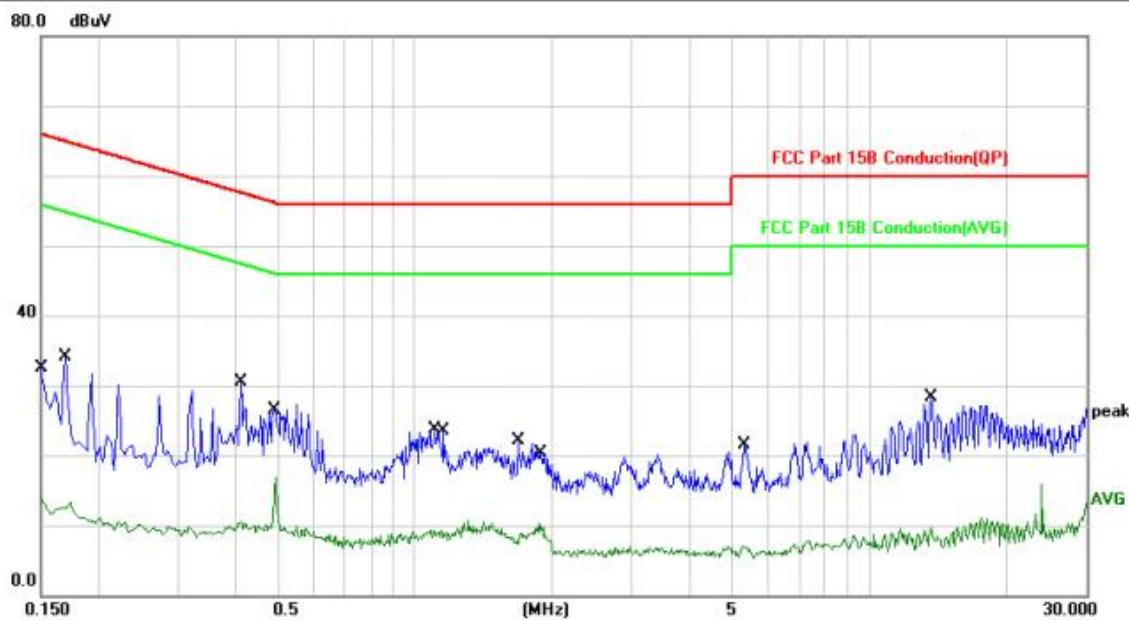

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Over Detector	Comment
1		0.1500	3.98	10.04	14.02	55.99	-41.97	AVG
2		0.1700	24.03	10.03	34.06	64.96	-30.90	QP
3 *		0.4140	20.42	9.99	30.41	57.57	-27.16	QP
4		0.4940	6.89	9.98	16.87	46.10	-29.23	AVG
5		1.1100	13.78	9.90	23.68	56.00	-32.32	QP
6		1.1420	-0.58	9.91	9.33	46.00	-36.67	AVG
7		1.6860	12.13	9.95	22.08	56.00	-33.92	QP
8		1.8860	0.25	9.96	10.21	46.00	-35.79	AVG
9		5.2740	-3.01	10.15	7.14	50.00	-42.86	AVG
10		5.2940	11.26	10.15	21.41	60.00	-38.59	QP
11		13.6660	17.86	10.46	28.32	60.00	-31.68	QP
12		13.6660	-0.79	10.46	9.67	50.00	-40.33	AVG

TM1 / Line: Neutral / Band: 2400-2483.5 MHz / BW: 20 / CH: L  
 Power: AC120V60Hz

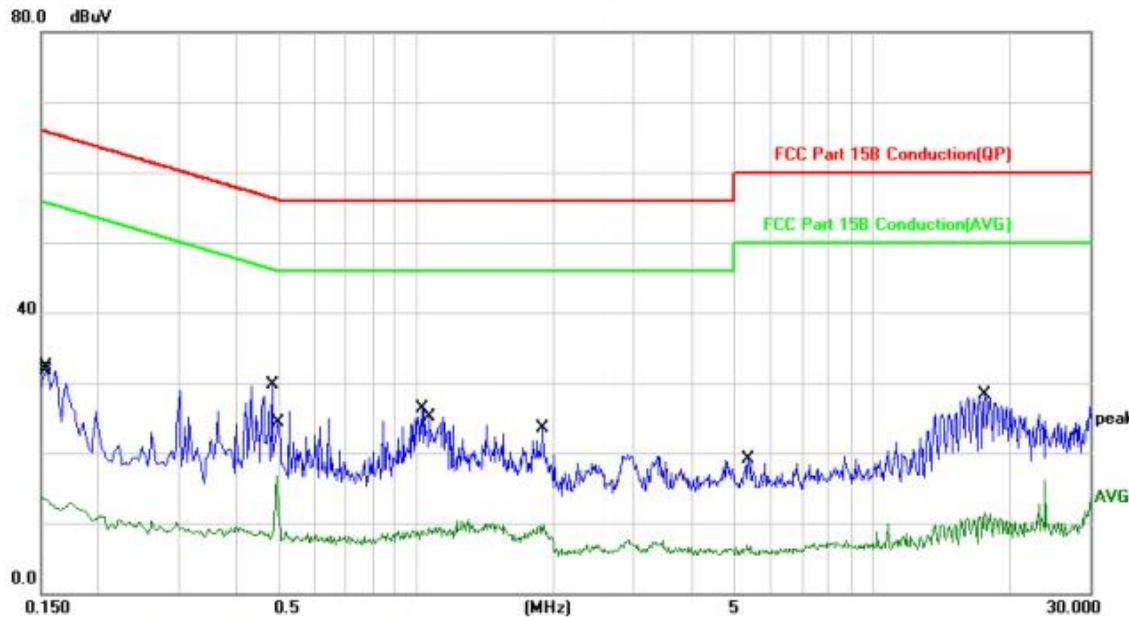

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	3.56	10.04	13.60	55.99	-42.39	AVG	
2		0.1539	22.24	10.04	32.28	65.78	-33.50	QP	
3 *		0.4820	19.75	9.98	29.73	56.30	-26.57	QP	
4		0.4940	6.74	9.98	16.72	46.10	-29.38	AVG	
5		1.0300	16.13	10.21	26.34	56.00	-29.66	QP	
6		1.0700	-0.65	10.03	9.38	46.00	-36.62	AVG	
7		1.8940	13.52	9.96	23.48	56.00	-32.52	QP	
8		1.9020	-0.25	9.96	9.71	46.00	-36.29	AVG	
9		5.3220	-3.20	10.15	6.95	50.00	-43.05	AVG	
10		5.3340	9.01	10.15	19.16	60.00	-40.84	QP	
11		17.5860	17.82	10.50	28.32	60.00	-31.68	QP	
12		17.5860	1.04	10.50	11.54	50.00	-38.46	AVG	


## 4.2 Occupied Bandwidth

Test Requirement:	47 CFR 15.247(a)(2)
Test Limit:	Refer to 47 CFR 15.247(a)(2), Systems using digital modulation techniques may operate in the 902-928 MHz, and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.
Test Method:	ANSI C63.10-2013, section 11.8 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	<p>a) Set RBW = 100 kHz.      b) Set the VBW <math>\geq [3 \times \text{RBW}]</math>.      c) Detector = peak.      d) Trace mode = max hold.      e) Sweep = auto couple.      f) Allow the trace to stabilize.      g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</p>

### 4.2.1 E.U.T. Operation:

Operating Environment:				
Temperature:	22.7 °C	Humidity:	55.8 %	Atmospheric Pressure: 101 kPa
Pretest mode:	TM1, TM2, TM3			
Final test mode:	TM1, TM2, TM3			

### 4.2.2 Test Setup Diagram:

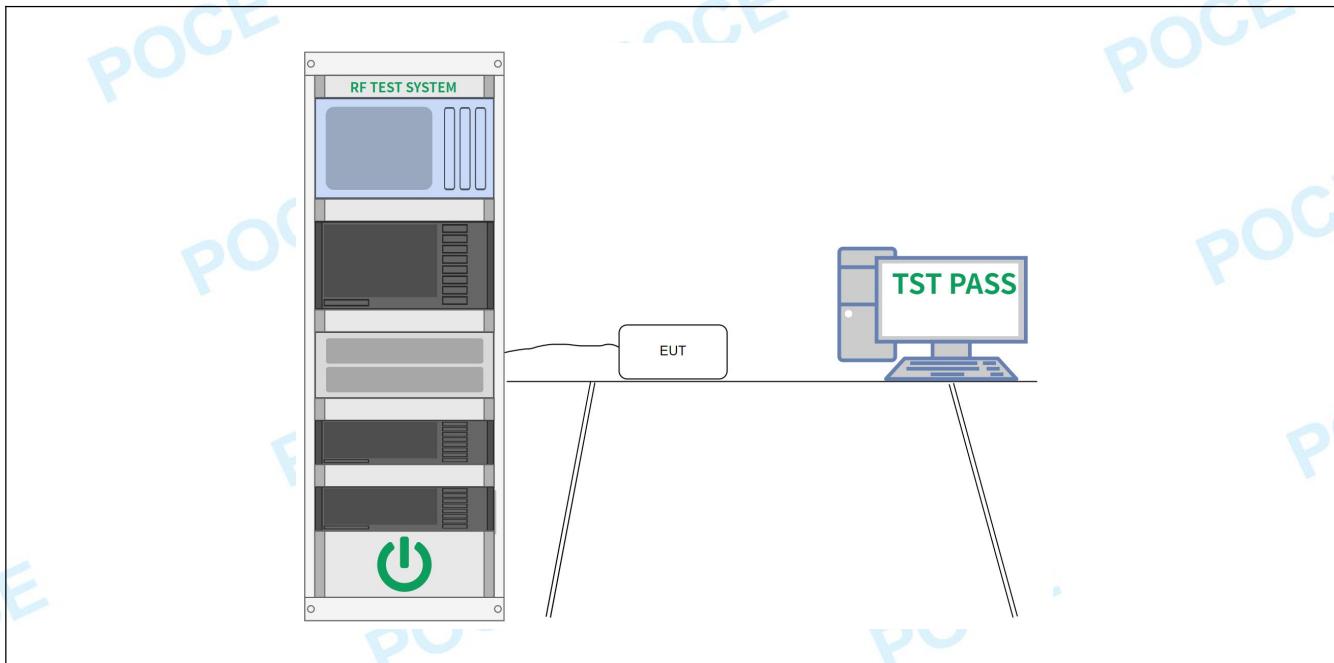

### 4.2.3 Test Data:

Please Refer to Appendix for Details.


### 4.3 Maximum Conducted Output Power

Test Requirement:	47 CFR 15.247(b)(3)
Test Limit:	Refer to 47 CFR 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.
Test Method:	ANSI C63.10-2013, section 11.9.1 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	<p>ANSI C63.10-2013, section 11.9.1 Maximum peak conducted output power</p> <p>Note: Per ANSI C63.10-2013, if there are two or more antnnas, the conducted powers at Core 0, Core 1,..., Core i were first measured separately, as shown in the section above(this product olny have one antenna). The measured values were then summed in linear power units then converted back to dBm.</p> <p>Per ANSI C63.10-2013 Section 14.4.3.2.3, the directional gain is calculated using the following formula, where GN is the gain of the nth antenna and NANT, the total number of antennas used.</p> <p>For correlated unequal antenna gain</p> $\text{Directional gain} = 10 \cdot \log[(10G1/20 + 10G2/20 + \dots + 10GN/20)^2 / NANT] \text{ dBi}$ <p>For completely uncorrelated unequal antenna gain</p> $\text{Directional gain} = 10 \cdot \log[(10G1/10 + 10G2/10 + \dots + 10GN/10) / NANT] \text{ dBi}$ <p>Sample Multiple antennas Calculation: Core 0 + Core 1 +...Core i. = MIMO/CDD (i is the number of antennas)</p> $(\#VALUE! \text{ mW} + \text{mW}) = \#VALUE! \text{ mW} = \text{dBm}$ <p>Sample e.i.r.p. Calculation:</p> $\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$

#### 4.3.1 E.U.T. Operation:

Operating Environment:					
Temperature:	22.7 °C	Humidity:	55.8 %	Atmospheric Pressure:	101 kPa
Pretest mode:	TM1, TM2, TM3				
Final test mode:	TM1, TM2, TM3				

#### 4.3.2 Test Setup Diagram:

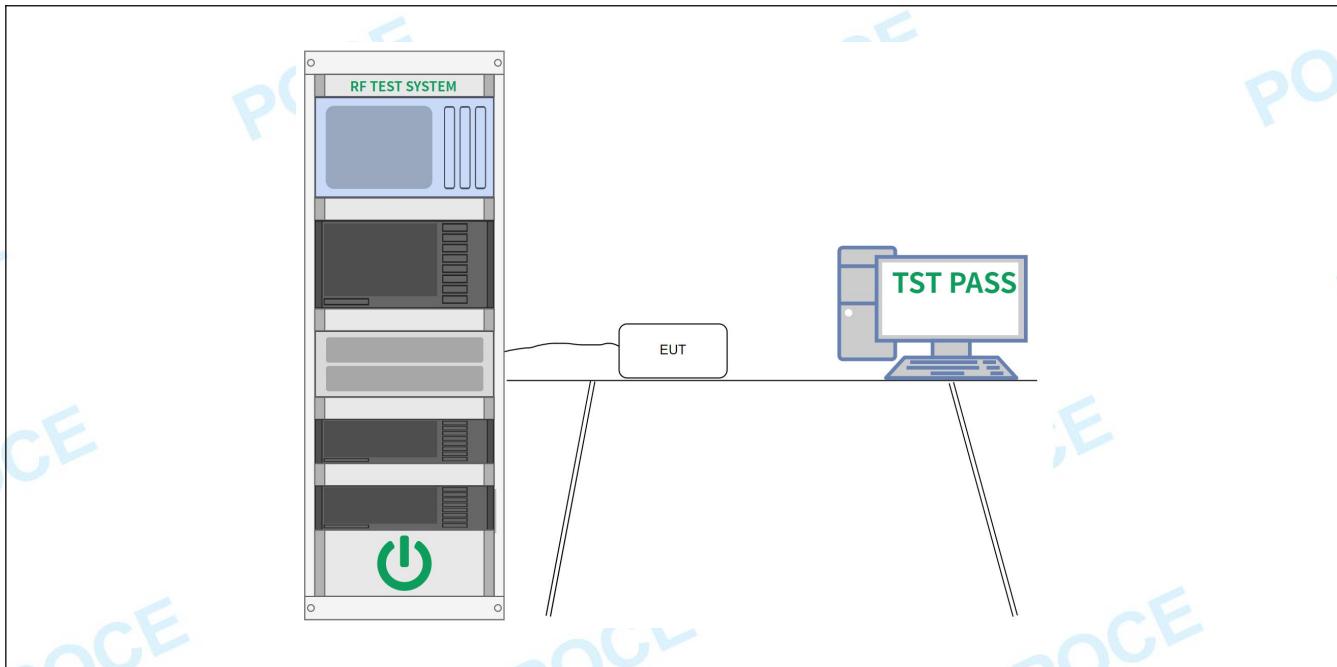

#### 4.3.3 Test Data:

Please Refer to Appendix for Details.


#### 4.4 Power Spectral Density

Test Requirement:	47 CFR 15.247(e)
Test Limit:	Refer to 47 CFR 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.
Test Method:	ANSI C63.10-2013, section 11.10 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013, section 11.10, Maximum power spectral density level in the fundamental emission

##### 4.4.1 E.U.T. Operation:

Operating Environment:				
Temperature:	22.7 °C	Humidity:	55.8 %	Atmospheric Pressure: 101 kPa
Pretest mode:	TM1, TM2, TM3			
Final test mode:	TM1, TM2, TM3			

##### 4.4.2 Test Setup Diagram:

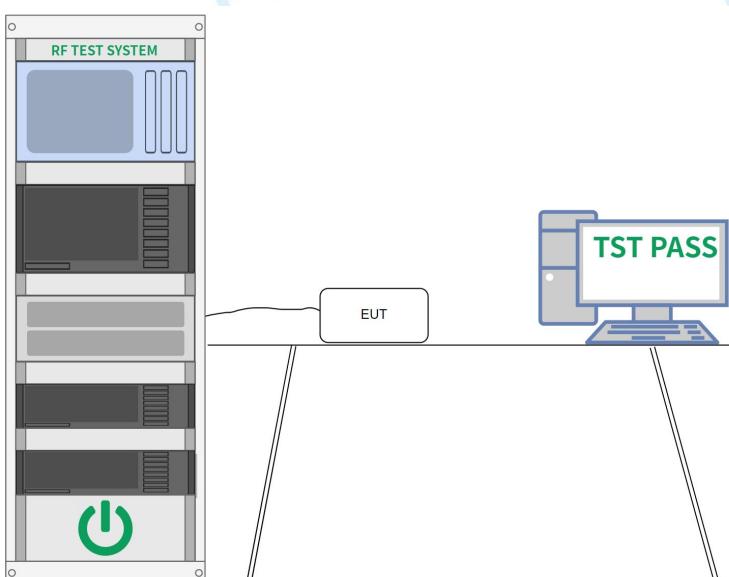

##### 4.4.3 Test Data:

Please Refer to Appendix for Details.


#### 4.5 Emissions in non-restricted frequency bands

Test Requirement:	47 CFR 15.247(d), 15.209, 15.205
Test Limit:	Refer to 47 CFR 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required.
Test Method:	ANSI C63.10-2013 section 11.11 KDB 558074 D01 15.247 Meas Guidance v05r02
Procedure:	ANSI C63.10-2013 Section 11.11.1, Section 11.11.2, Section 11.11.3

##### 4.5.1 E.U.T. Operation:

Operating Environment:				
Temperature:	22.7 °C	Humidity:	55.8 %	Atmospheric Pressure: 101 kPa
Pretest mode:	TM1, TM2, TM3			
Final test mode:	TM1, TM2, TM3			

##### 4.5.2 Test Setup Diagram:

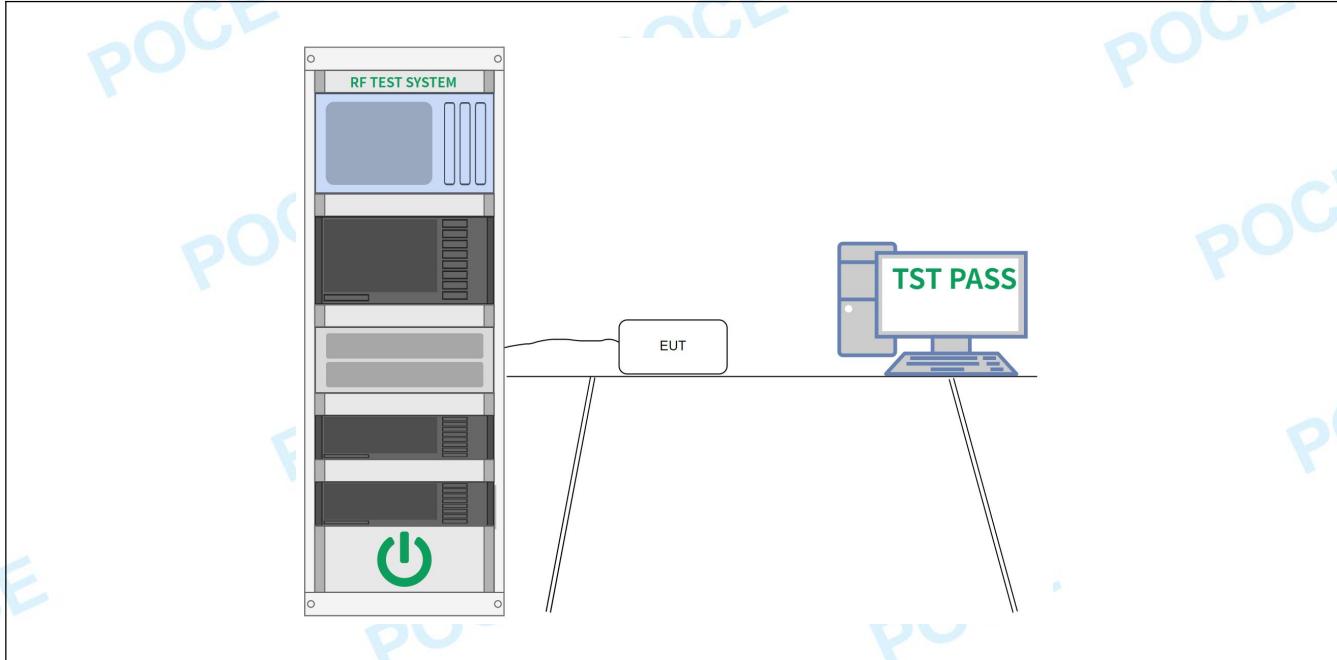

##### 4.5.3 Test Data:

Please Refer to Appendix for Details.

#### 4.6 Band edge emissions (Radiated)

Test Requirement:	Refer to 47 CFR 15.247(d). In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

In the emission table above, the tighter limit applies at the band edges.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

##### Test Method:

ANSI C63.10-2013 section 6.10  
KDB 558074 D01 15.247 Meas Guidance v05r02


##### Procedure:

ANSI C63.10-2013 section 6.10.5.2

##### 4.6.1 E.U.T. Operation:

Operating Environment:			
Temperature:	22.7 °C	Humidity:	55.8 %
Pretest mode:	TM1, TM2, TM3		
Final test mode:	TM1, TM2, TM3		


##### 4.6.2 Test Setup Diagram:

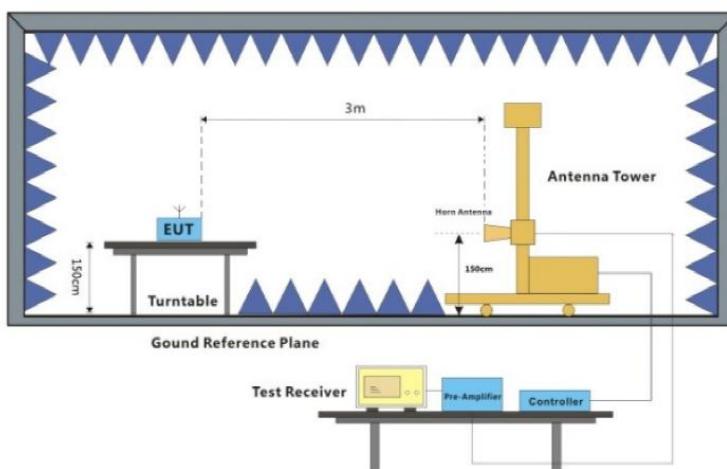

#### 4.6.3 Test Data:


Both Horizontal and Vertical directions were tested, and the report only reflects the worst Horizontal direction.

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

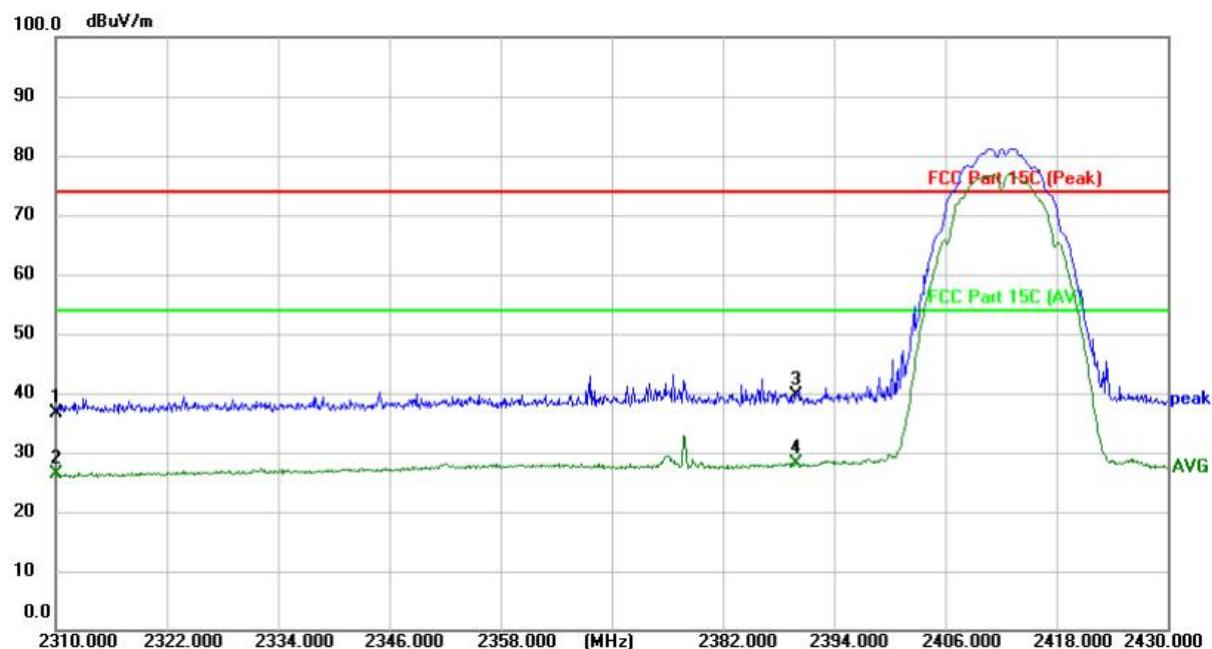


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	44.75	-8.23	36.52	74.00	-37.48	peak			P	
2	2310.000	34.49	-8.23	26.26	54.00	-27.74	AVG			P	
3	2390.000	47.48	-7.91	39.57	74.00	-34.43	peak			P	
4 *	2390.000	35.99	-7.91	28.08	54.00	-25.92	AVG			P	

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

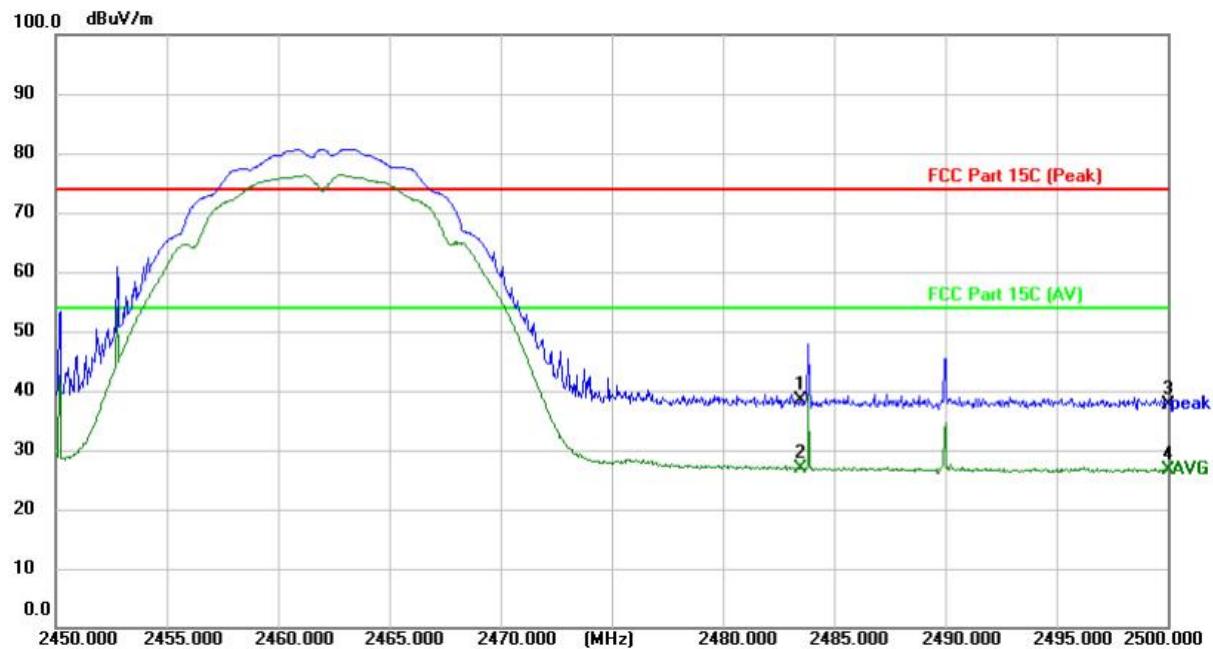


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	45.95	-7.54	38.41	74.00	-35.59	peak	100		P	
2 *	2483.500	34.33	-7.54	26.79	54.00	-27.21	AVG	100		P	
3	2500.000	45.14	-7.48	37.66	74.00	-36.34	peak	100		P	
4	2500.000	34.03	-7.48	26.55	54.00	-27.45	AVG	100		P	

TM2 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

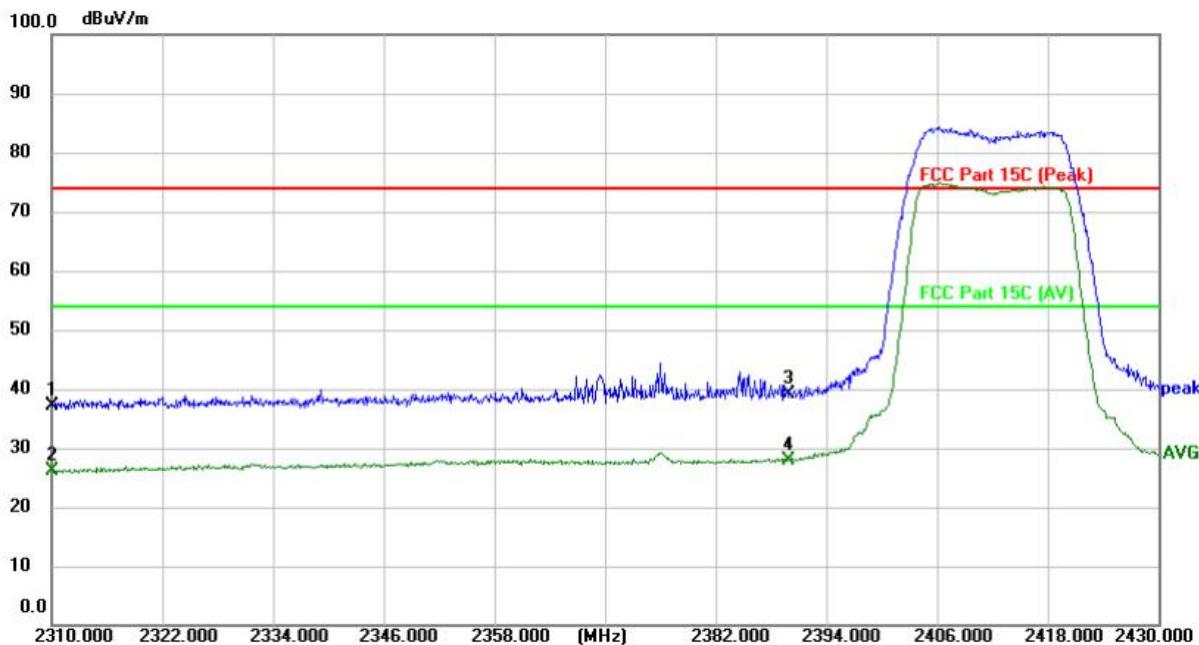


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	45.47	-8.23	37.24	74.00	-36.76	peak	100		P	
2	2310.000	34.28	-8.23	26.05	54.00	-27.95	AVG	100		P	
3	2390.000	46.98	-7.91	39.07	74.00	-34.93	peak	100		P	
4 *	2390.000	35.89	-7.91	27.98	54.00	-26.02	AVG	100		P	

TM2 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

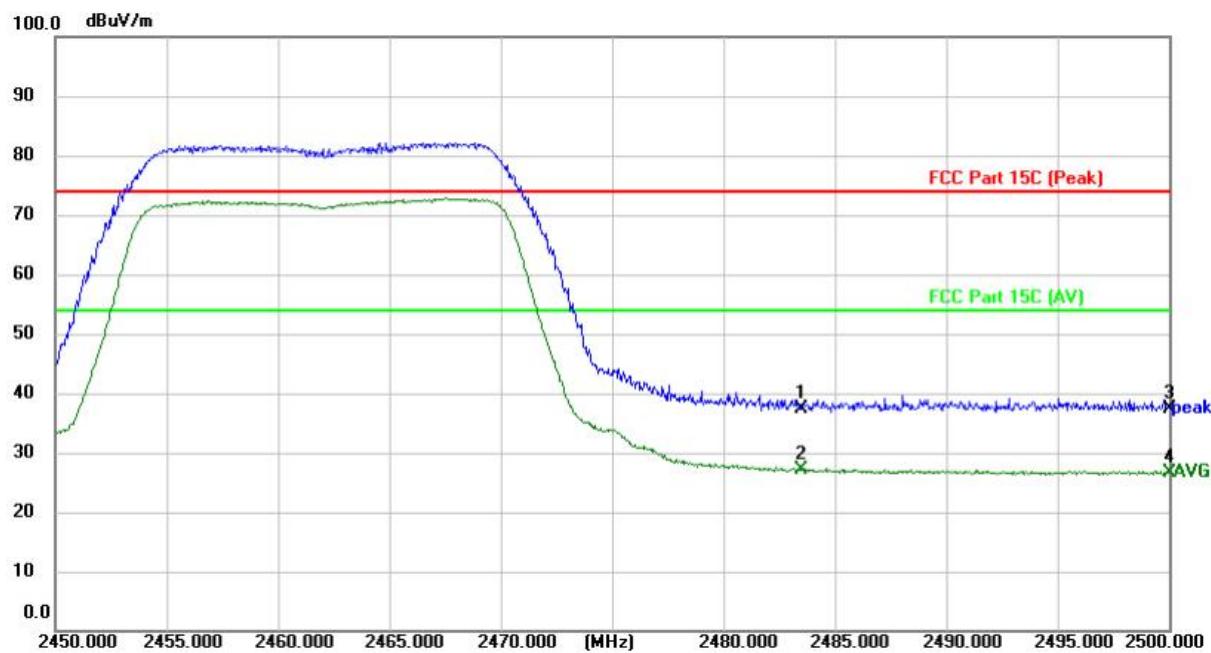


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	44.91	-7.54	37.37	74.00	-36.63	peak	100		P	
2 *	2483.500	34.63	-7.54	27.09	54.00	-26.91	AVG	100		P	
3	2500.000	44.85	-7.48	37.37	74.00	-36.63	peak	100		P	
4	2500.000	34.08	-7.48	26.60	54.00	-27.40	AVG	100		P	

TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

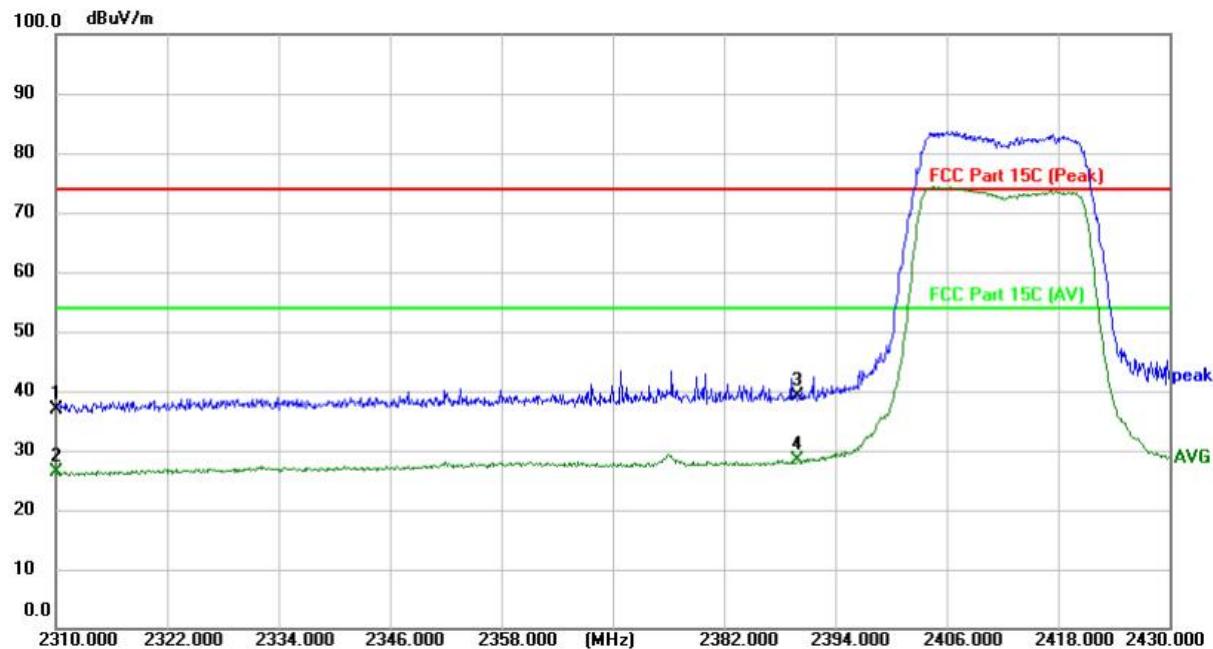

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2310.000	45.04	-8.23	36.81	74.00	-37.19	peak	100		P	
2	2310.000	34.50	-8.23	26.27	54.00	-27.73	AVG	100		P	
3	2390.000	46.97	-7.91	39.06	74.00	-34.94	peak	100		P	
4 *	2390.000	36.18	-7.91	28.27	54.00	-25.73	AVG	100		P	

TM3 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

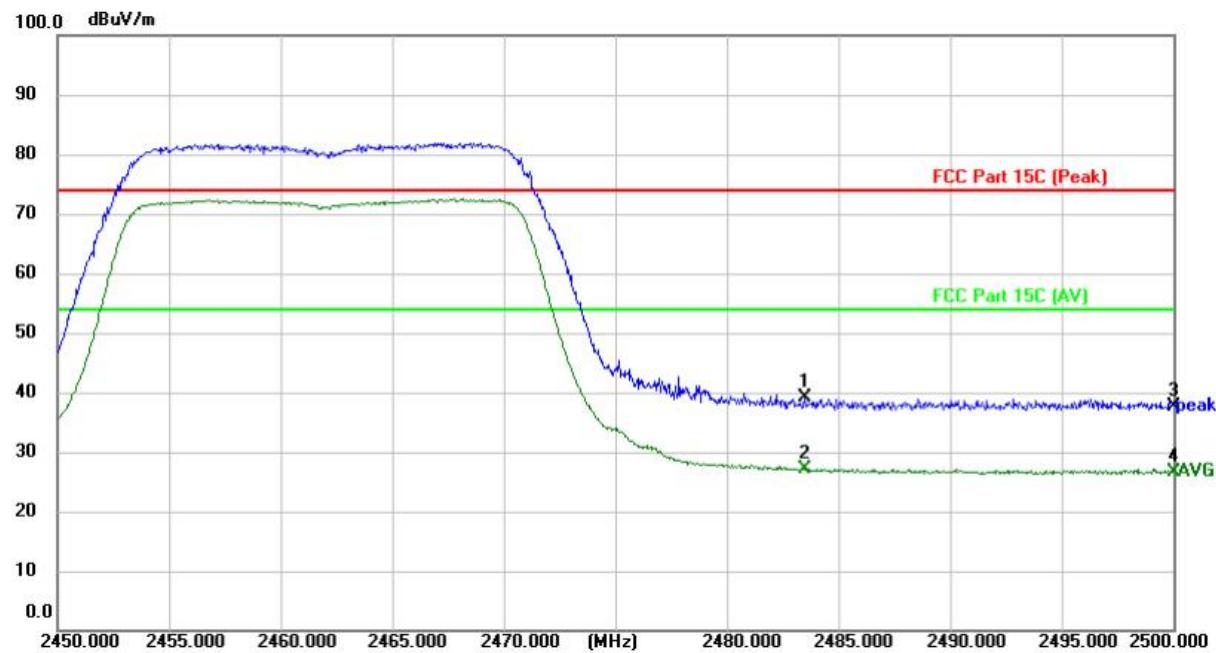

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	2483.500	46.73	-7.54	39.19	74.00	-34.81	peak	100		P	
2 *	2483.500	34.59	-7.54	27.05	54.00	-26.95	AVG	100		P	
3	2500.000	45.00	-7.48	37.52	74.00	-36.48	peak	100		P	
4	2500.000	34.21	-7.48	26.73	54.00	-27.27	AVG	100		P	

#### 4.7 Emissions in frequency bands (below 1GHz)

Test Requirement:	Refer to 47 CFR 15.247(d). In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
<p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges.</p> <p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>			
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		

Procedure:	<p>a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>h. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>
Remark:	<p>1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.</p> <p>2) The field strength is calculated by adding the Antenna Factor, Cable Factor &amp; Preamplifier. The basic equation with a sample calculation is as follows:  Final Test Level = Receiver Reading + Antenna Factor + Cable Factor "C  Preamplifier Factor</p> <p>3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.</p>


#### 4.7.1 E.U.T. Operation:

Operating Environment:				
Temperature:	22.7 °C	Humidity:	55.8 %	Atmospheric Pressure: 101 kPa
Pretest mode:	TM1			
Final test mode:	TM1			

#### 4.7.2 Test Data:


TM1 is worse case and only reported

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

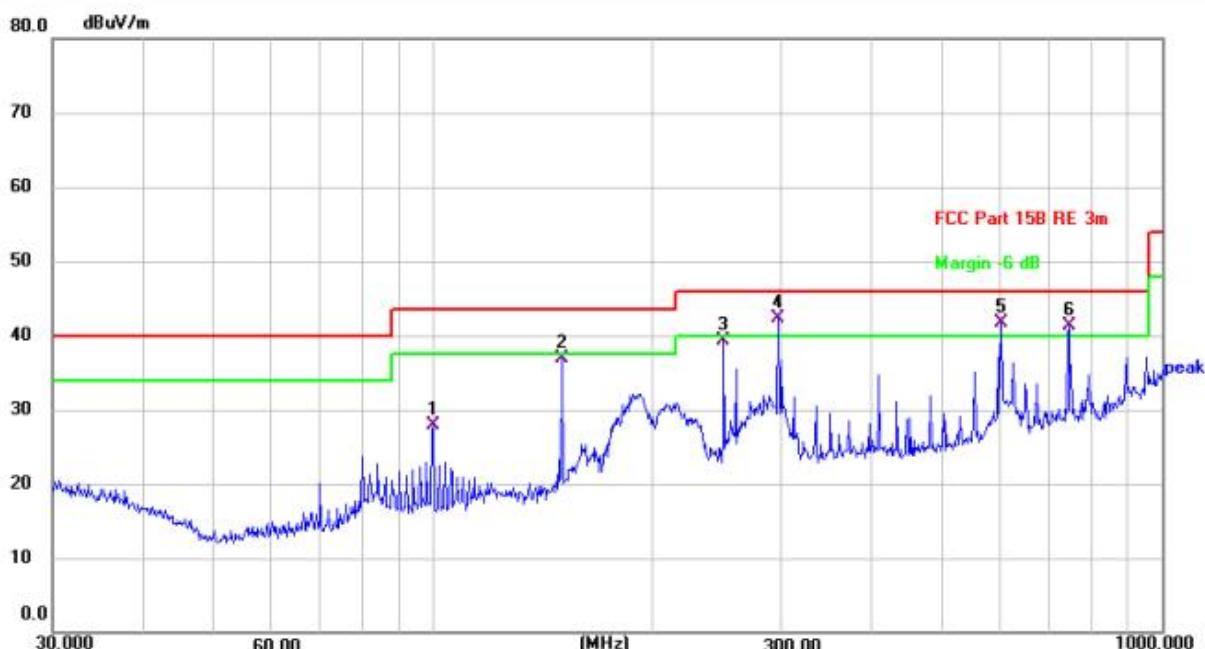

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	99.8777	33.50	-5.55	27.95	43.50	-15.55	QP	100		P	
2	150.0108	40.69	-3.73	36.96	43.50	-6.54	QP	100		P	
3	250.3012	41.44	-2.10	39.34	46.00	-6.66	QP	100		P	
4 *	297.2241	41.74	0.53	42.27	46.00	-3.73	QP	100		P	
5 !	601.4265	38.62	3.07	41.69	46.00	-4.31	QP	100		P	
6 !	744.8661	35.46	5.78	41.24	46.00	-4.76	QP	100		P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

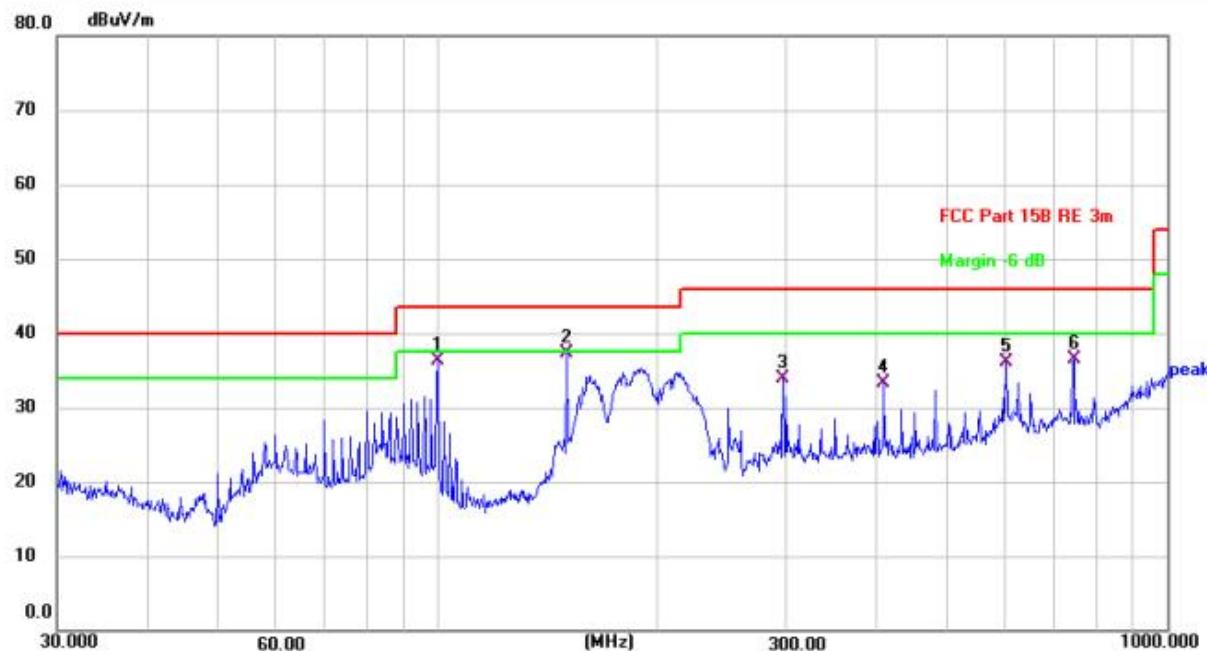

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	99.8777	41.93	-5.55	36.38	43.50	-7.12	QP			P	
2 *	150.0108	40.97	-3.73	37.24	43.50	-6.26	QP			P	
3	297.2240	34.03	-0.22	33.81	46.00	-12.19	QP			P	
4	408.9460	32.04	1.34	33.38	46.00	-12.62	QP			P	
5	601.4265	30.95	5.18	36.13	46.00	-9.87	QP			P	
6	744.8660	31.49	4.94	36.43	46.00	-9.57	QP			P	

#### 4.8 Emissions in frequency bands (above 1GHz)

Test Requirement:	In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)(see § 15.205(c)).`		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
<p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges.</p> <p>The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p>			
Test Method:	ANSI C63.10-2013 section 6.6.4 KDB 558074 D01 15.247 Meas Guidance v05r02		

Procedure:	<p>a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>h. Test the EUT in the lowest channel, the middle channel, the Highest channel.</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>
Remark:	<p>1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.</p> <p>2) The field strength is calculated by adding the Antenna Factor, Cable Factor &amp; Preamplifier. The basic equation with a sample calculation is as follows:  Final Test Level = Receiver Reading + Antenna Factor + Cable Factor "C  Preamplifier Factor</p> <p>3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.</p>

#### 4.8.1 E.U.T. Operation:

Operating Environment:				
Temperature:	22.7 °C	Humidity:	55.8 %	Atmospheric Pressure: 101 kPa
Pretest mode:	TM1, TM2, TM3			
Final test mode:	TM1			

#### 4.8.2 Test Data:

TM1 is worse case and only reported

TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4824.000	38.51	-0.84	37.67	74.00	-36.33	peak	100		P	
2	4824.000	27.72	-0.84	26.88	54.00	-27.12	AVG	100		P	
3	7236.000	35.77	4.17	39.94	74.00	-34.06	peak	100		P	
4	7236.000	25.15	4.17	29.32	54.00	-24.68	AVG	100		P	
5	9648.000	35.79	8.10	43.89	74.00	-30.11	peak	100		P	
6 *	9648.000	24.18	8.10	32.28	54.00	-21.72	AVG	100		P	

TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: L

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4824.000	38.64	-0.22	38.42	74.00	-35.58	peak			P	
2	4824.000	27.70	-0.22	27.48	54.00	-26.52	AVG			P	
3	7236.000	35.95	4.16	40.11	74.00	-33.89	peak			P	
4	7236.000	24.95	4.16	29.11	54.00	-24.89	AVG			P	
5	9648.000	34.18	8.05	42.23	74.00	-31.77	peak			P	
6 *	9648.000	24.09	8.05	32.14	54.00	-21.86	AVG			P	

## TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4874.000	38.29	-0.04	38.25	74.00	-35.75	peak			P	
2	4874.000	27.23	-0.04	27.19	54.00	-26.81	AVG			P	
3	7311.000	35.34	4.34	39.68	74.00	-34.32	peak			P	
4	7311.000	24.86	4.34	29.20	54.00	-24.80	AVG			P	
5	9748.000	35.79	8.12	43.91	74.00	-30.09	peak			P	
6 *	9748.000	24.35	8.12	32.47	54.00	-21.53	AVG			P	

## TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: M

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4874.000	37.67	-0.66	37.01	74.00	-36.99	peak			P	
2	4874.000	27.36	-0.66	26.70	54.00	-27.30	AVG			P	
3	7311.000	35.11	4.29	39.40	74.00	-34.60	peak			P	
4	7311.000	24.76	4.29	29.05	54.00	-24.95	AVG			P	
5	9748.000	33.92	8.10	42.02	74.00	-31.98	peak			P	
6 *	9748.000	24.66	8.10	32.76	54.00	-21.24	AVG			P	

## TM1 / Polarization: Horizontal / Band: 2400-2483.5 MHz / BW: 20 / CH: H

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4924.000	37.09	-0.50	36.59	74.00	-37.41	peak			P	
2	4924.000	26.86	-0.50	26.36	54.00	-27.64	AVG			P	
3	7386.000	35.83	4.41	40.24	74.00	-33.76	peak			P	
4	7386.000	24.87	4.41	29.28	54.00	-24.72	AVG			P	
5	9848.000	34.38	8.10	42.48	74.00	-31.52	peak			P	
6 *	9848.000	24.22	8.10	32.32	54.00	-21.68	AVG			P	

## TM1 / Polarization: Vertical / Band: 2400-2483.5 MHz / BW: 20 / CH: H


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	4924.000	36.69	0.11	36.80	74.00	-37.20	peak			P	
2	4924.000	26.96	0.11	27.07	54.00	-26.93	AVG			P	
3	7386.000	34.97	4.52	39.49	74.00	-34.51	peak			P	
4	7386.000	24.95	4.52	29.47	54.00	-24.53	AVG			P	
5	9848.000	34.25	8.19	42.44	74.00	-31.56	peak			P	
6 *	9848.000	24.43	8.19	32.62	54.00	-21.38	AVG			P	


## 5 TEST SETUP PHOTOS

Conducted Emission at AC power line



Emissions in frequency bands (below 1GHz)

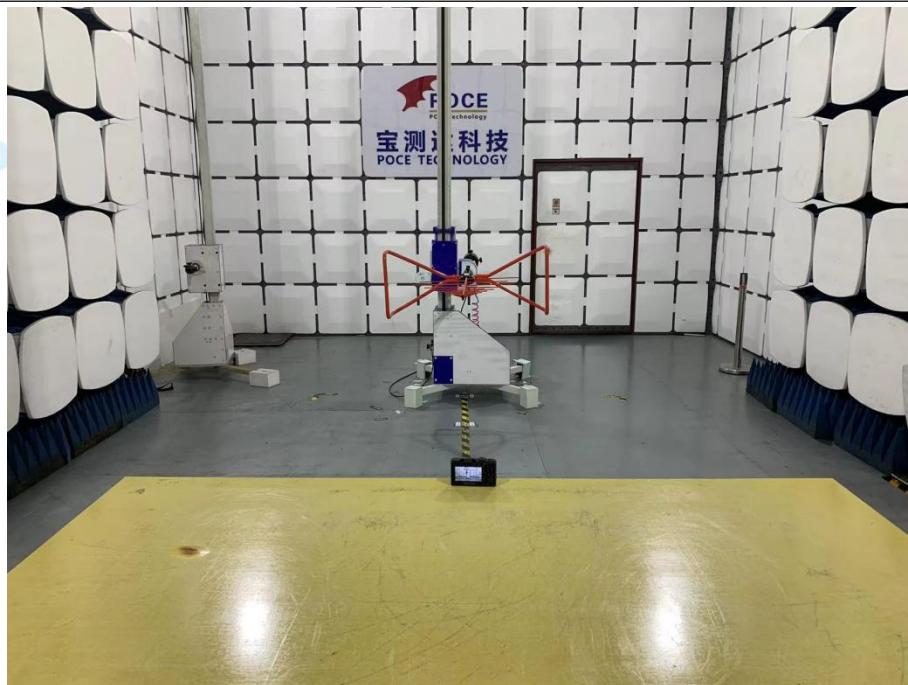

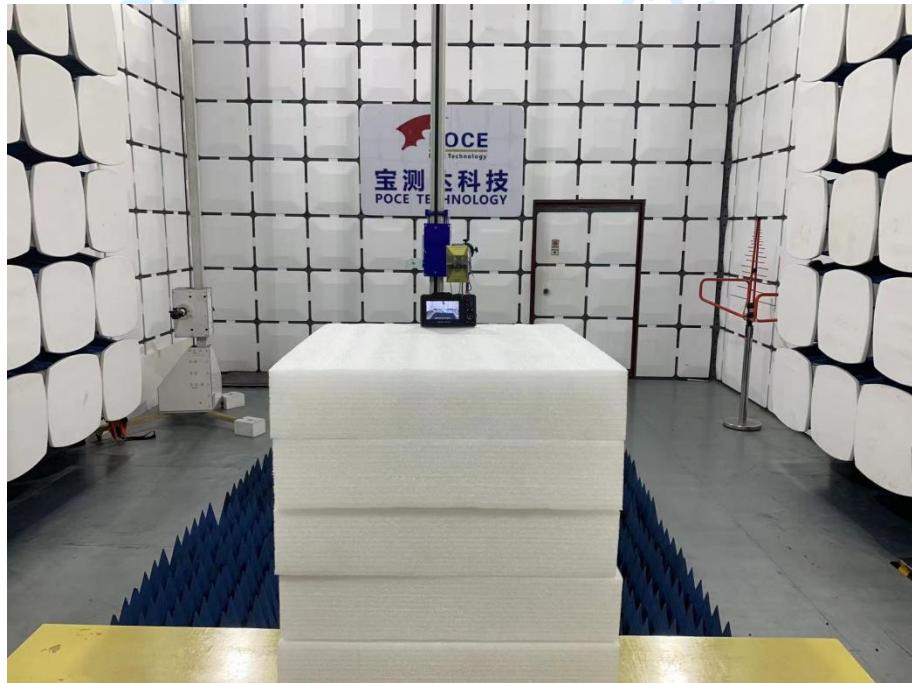**Emissions in frequency bands (above 1GHz)**

## 6 PHOTOS OF THE EUT

External











**Internal**