



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 1 of 153

# TEST REPORT

**Application No.:** KSCR2404000566AT  
**FCC ID:** VPYLBEE5HY2FY  
**IC:** 772C-LBEE5HY2FY  
**Applicant:** Murata Manufacturing Co., Ltd.  
**Address of Applicant:** 10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto, 617-8555 Japan  
**Manufacturer:** Murata Manufacturing Co., Ltd.  
**Address of Manufacturer:** 10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto, 617-8555 Japan  
**Equipment Under Test (EUT):**  
**EUT Name:** WLAN+Bluetooth Module  
**Model No.:** LBEE5HY2GY, LBEE5HY2FY ♣  
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.  
**Standard(s) :** 47 CFR Part 15, Subpart C 15.247  
RSS-247 Issue 3, August 2023  
RSS-Gen Issue 5 Amendment 2 (February 2021)  
**Date of Receipt:** 2024-04-03  
**Date of Test:** 2024-04-15 to 2025-01-13  
**Date of Issue:** 2025-03-12

<b>Test Result:</b>	<b>Pass*</b>
---------------------	--------------

\* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 2 of 153

Revision Record			
Version	Description	Date	Remark
00	Original	2025-03-12	/

Authorized for issue by:			
Tested By		<div>Tommie Tang</div>	
		<div>Tommie_Tang/Project Engineer</div>	
Approved By		<div>Terry Hou</div>	
		<div>Terry Hou /Reviewer</div>	

## 2 Test Summary

Radio Spectrum Technical Requirement				
Item	FCC Requirement	IC Requirement	Method	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	RSS-Gen Clause 6.8	N/A	Pass
Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence	47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)	RSS-247 Section 5.1(a)	N/A	Pass

N/A: Not applicable

Radio Spectrum Matter Part				
Item	FCC Requirement	IC Requirement	Method	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207	RSS-Gen Section 8.8	ANSI C63.10 (2013) Section 6.2	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247(b)(1)	RSS-247 Section 5.4(b)	ANSI C63.10 (2013) Section 7.8.5	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247(a)(1)	RSS-247 Section 5.1(a)	ANSI C63.10 (2013) Section 7.8.7	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247a(1)	RSS-247 Section 5.1(b)	ANSI C63.10 (2013) Section 7.8.2	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247a(1)(iii)	RSS-247 Section 5.1(d)	ANSI C63.10 (2013) Section 7.8.3	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247a(1)(iii)	RSS-247 Section 5.1(d)	ANSI C63.10 (2013) Section 7.8.4	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Section 5.5	ANSI C63.10 (2013) Section 7.8.6	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247(d)	RSS-247 Section 5.5	ANSI C63.10 (2013) Section 7.8.8	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.205 & 15.209	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.10.5	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.205 & 15.209	RSS-247 Section 3.3 & RSS-Gen Section 8.9	ANSI C63.10 (2013) Section 6.4,6.5,6.6	Pass
99% Bandwidth	-	RSS-Gen Section 6.7	ANSI C63.10 Section 6.9.3	Pass

Note: There are series models mentioned in this report, and they are identical in electrical and electronic characters. Only the model LBEE5HY2GY was tested since their differences are

Moel	RF functions
LBEE5HY2GY	WLAN 2.4GHz,5GHz+BT/BLE
LBEE5HY2FY	WLAN 2.4GHz,5GHz,6GHz+BT/BLE

## 3 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 Test Summary .....</b>	<b>3</b>
<b>3 Contents .....</b>	<b>4</b>
<b>4 General Information .....</b>	<b>5</b>
4.1 Details of E.U.T.....	5
4.2 Power level setting using in test: .....	5
4.3 Description of Support Units .....	5
4.4 Measurement Uncertainty.....	6
4.5 Test Location .....	7
4.6 Test Facility.....	7
4.7 Deviation from Standards .....	7
4.8 Abnormalities from Standard Conditions .....	7
<b>5 Equipment List.....</b>	<b>8</b>
<b>6 Radio Spectrum Technical Requirement .....</b>	<b>10</b>
6.1 Antenna Requirement .....	10
6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence .....	11
<b>7 Radio Spectrum Matter Test Results.....</b>	<b>12</b>
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz).....	12
7.2 Conducted Peak Output Power .....	16
7.3 20dB Bandwidth.....	18
7.4 Carrier Frequencies Separation.....	19
7.5 Hopping Channel Number .....	20
7.6 Dwell Time .....	21
7.7 Conducted Band Edges Measurement.....	22
7.8 Conducted Spurious Emissions .....	24
7.9 Radiated Emissions which fall in the restricted bands.....	25
7.10 Radiated Spurious Emissions Below 1GHz.....	57
7.11 Radiated Spurious Emissions Above 1GHz .....	61
7.12 99% Bandwidth .....	99
<b>8 Test Setup Photo .....</b>	<b>100</b>
<b>9 EUT Constructional Details (EUT Photos) .....</b>	<b>100</b>
<b>10 Appendix .....</b>	<b>101</b>

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	DC 3.3V
Operation Frequency:	2402MHz to 2480MHz
Bluetooth Version:	V5.3 Dual mode
Modulation Type:	GFSK, pi/4DQPSK, 8DPSK
Number of Channels:	79
Channel Spacing:	1MHz
Spectrum Spread Technology:	Frequency Hopping Spread Spectrum(FHSS)
Antenna Gain:	PCB Antenna: 2.8dBi (Provided by the manufacturer) Dipole Antenna: 3dBi (Provided by the manufacturer)

### 4.2 Power level setting using in test:

Channel	DH	2DH	3DH
	Ant 1	Ant 1	Ant 1
00	0x0	0x0	0x0
39	0x0	0x0	0x0
78	0x0	0x0	0x0

### 4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Notebook	LENOVO	K27	/
DC Power Supply	Agilent	E3632A	/
Host	/	/	/

## 4.4 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$8.4 \times 10^{-8}$
2	Timeout	2s
3	Duty Cycle	0.37%
4	Occupied Bandwidth	3%
5	RF Conducted Power	0.6dB
6	RF Power Density	2.9dB
7	Conducted Spurious Emissions	0.75dB
8	RF Radiated Power	5.2dB (Below 1GHz)
		5.9dB (Above 1GHz)
9	Radiated Spurious Emission Test	4.2dB (Below 30MHz)
		4.5dB (30MHz-1GHz)
		5.1dB (1GHz-18GHz)
		5.4dB (Above 18GHz)
10	Temperature Test	1°C
11	Humidity Test	3%
12	Supply Voltages	1.5%
13	Time	3%

Note: The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 7 of 153

### 4.5 Test Location

All tests were performed at:

Compliance Certification Services (Kunshan) Inc.

No.10 Weiye Rd, Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.

Tel: +86 512 5735 5888 Fax: +86 512 5737 0818

No tests were sub-contracted.

Note:

1. SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).
2. SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).
3. Sample source: sent by customer.

### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • A2LA

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

#### • FCC

Compliance Certification Services (Kunshan) Inc. has been recognized as an accredited testing laboratory. Designation Number: CN1172.

#### • ISED

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory. Company Number: 2324E

#### • VCCI

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-20134, R-11600, C-11707, T-11499, G-10216 respectively.

### 4.7 Deviation from Standards

None

### 4.8 Abnormalities from Standard Conditions

None

## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 8 of 153

### 5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
<b>Conducted Emission at Mains Terminals</b>						
1	EMI Test Receive	R&S	ESCI	KS301101	01/15/2024	01/14/2025
2	LISN	R&S	ENV216	KS301197	01/15/2024	01/14/2025
3	LISN	Schwarzbeck	NNLK 8129	KS301091	01/15/2024	01/14/2025
4	Pulse Limiter	R&S	ESH3-Z2	KUS1902E001	01/15/2024	01/14/2025
5	CE test Cable	Thermax	/	CZ301102	01/15/2024	01/14/2025
6	Test Software	Farad	EZ-EMC	/	N.C.R	N.C.R
<b>RF Conducted Test</b>						
1	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/24/2023	08/23/2024
	Spectrum Analyzer	Keysight	N9020A	KUS1911E004-2	08/01/2024	07/31/2025
2	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/24/2023	08/23/2024
	Spectrum Analyzer	Keysight	N9020A	KUS2001M001-2	08/01/2024	07/31/2025
3	Spectrum Analyzer	Keysight	N9030B	KSEM021-1	01/15/2024	01/13/2025
4	Signal Generator	R&S	SMBV100B	KSEM032	03/19/2024	03/18/2025
5	Signal Generator	R&S	SMW200A	KSEM020-1	08/24/2023	08/23/2024
	Signal Generator	R&S	SMW200A	KSEM020-1	08/02/2024	08/01/2025
6	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/24/2023	08/23/2024
	Signal Generator	Agilent	N5182A	KUS2001M001-1	08/01/2024	07/31/2025
7	Signal Generator	Agilent	E8257C	KS301066	08/24/2023	08/23/2024
	Signal Generator	Agilent	E8257C	KS301066	08/06/2024	08/05/2025
8	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/24/2023	08/23/2024
	Radio Communication Test Station	Anritsu	MT8000A	KSEM001-1	08/01/2024	07/31/2025
9	Radio Communication Analyzer	Anritsu	MT8821C	KSEM002-1	03/19/2024	03/18/2025
10	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/24/2023	08/23/2024
	Universal Radio Communication Tester	R&S	CMW500	KUS1911E004-1	08/12/2024	08/11/2025
11	Switcher	TST	FY562	KUS2001M001-4	01/15/2024	01/13/2025
12	Conducted Test Cable	Thermax	RF01-RF04	CZ301111-CZ301120	01/15/2024	01/13/2025
13	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	08/27/2023	08/26/2024
	Temp. / Humidity Chamber	TERCHY	MHK-120AK	KS301190	08/26/2024	08/25/2025
14	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-5	03/19/2024	03/18/2025
15	Software	BST	TST-PASS	/	NCR	NCR
<b>RF Radiated Test</b>						
1	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/24/2023	08/23/2024
	Spectrum Analyzer	R&S	FSV40	KUS1806E003	08/06/2024	08/05/2025
2	Universal Radio Communication Tester	R&S	CMW500	KSEM009-1	03/19/2024	03/18/2025
4	Loop Antenna	COM-POWER	AL-130R	KUS1806E001	03/18/2023	03/17/2025
5	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E005	06/29/2023	06/28/2025
6	Bilog Antenna	TESEQ	CBL 6112D	KUS1806E006	03/19/2024	03/18/2025
7	Horn-antenna(1-18GHz)	Schwarzbeck	BBHA9120D	KS301079	03/23/2024	08/22/2026
8	Horn-antenna(1-18GHz)	ETS-LINDGREN	3117	KS301186	04/07/2023	04/06/2025
9	Horn Antenna(18-40GHz)	Schwarzbeck	BBHA9170	CZ301058	01/07/2024	01/06/2026
10	Amplifier(30MHz~18GHz)	PANSHAN TECHNOLOGY	LNA:1~18G	KSEM010-1	01/15/2024	01/13/2025
11	Amplifier(18~40GHz)	PANSHAN	LNA180400G40	KSEM038	08/24/2023	08/23/2024





Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 9 of 153

		TECHNOLOGY				
	Amplifier(18~40GHz)	PANSHAN TECHNOLOGY	LNA180400G40	KSEM038	08/12/2024	08/11/2025
12	RE Test Cable	REBES MICROWAVE	/	CZ301097	08/24/2023	08/23/2024
	RE Test Cable	REBES MICROWAVE	/	CZ301097	08/12/2024	08/11/2025
13	Temperature & Humidity Recorder	Renke Control	RS-WS-N01-6J	KSEM024-4	03/21/2024	03/20/2025
14	Software	Faratronic	EZ_EMV-3A1	/	NCR	NCR
15	Software	ESE	E3_V 6.111221a	/	NCR	NCR

## **6 Radio Spectrum Technical Requirement**

### **6.1 Antenna Requirement**

#### **6.1.1 Test Requirement:**

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

#### **6.1.2 Conclusion**

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna complies with this requirement and no consideration of replacement. The best case gain of the PCB antenna is 2.8dBi, Dipole antenna is 3dBi.

Antenna location: Refer to internal photo.

## **6.2 Other requirements Frequency Hopping Spread Spectrum System Hopping Sequence**

### **6.2.1 Test Requirement:**

47 CFR Part 15, Subpart C 15.247(a)(1),(g),(h)

### **6.2.2 Conclusion**

Standard Requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

Compliance for section 15.247(a)(1):

According to Technical Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

> Number of shift register stages: 9

> Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits

> Longest sequence of zeros: 8 (non-inverted signal)

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

Each frequency used equally on the average by each transmitter.

According to Technical Specification, the receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any transmitters and shift frequencies in synchronization with the transmitted signals.

Compliance for section 15.247(g):

According to Technical Specification, the system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h):

According to Technical specification, the system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

The system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.5 °C


Humidity: 51.2 % RH

Atmospheric Pressure: 1010 mbar

#### 7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.1.3 Test Setup Diagram

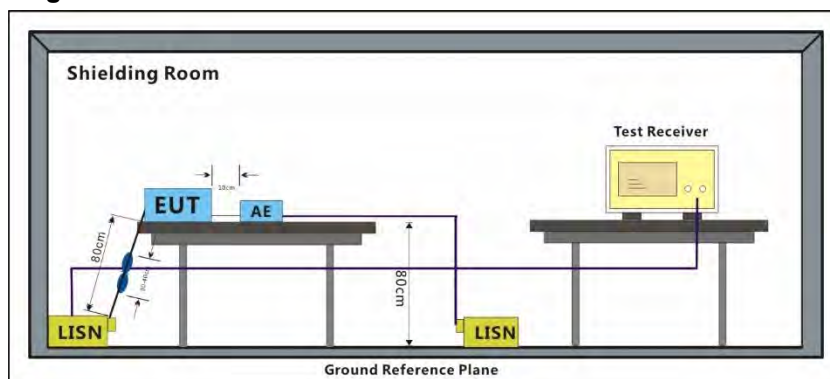

**7.1.4 Measurement Procedure and Data**

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 14 of 153

Test Mode: 05; Line: Live line; Modulation:GFSK; Antenna: Dipole; Channel:middle

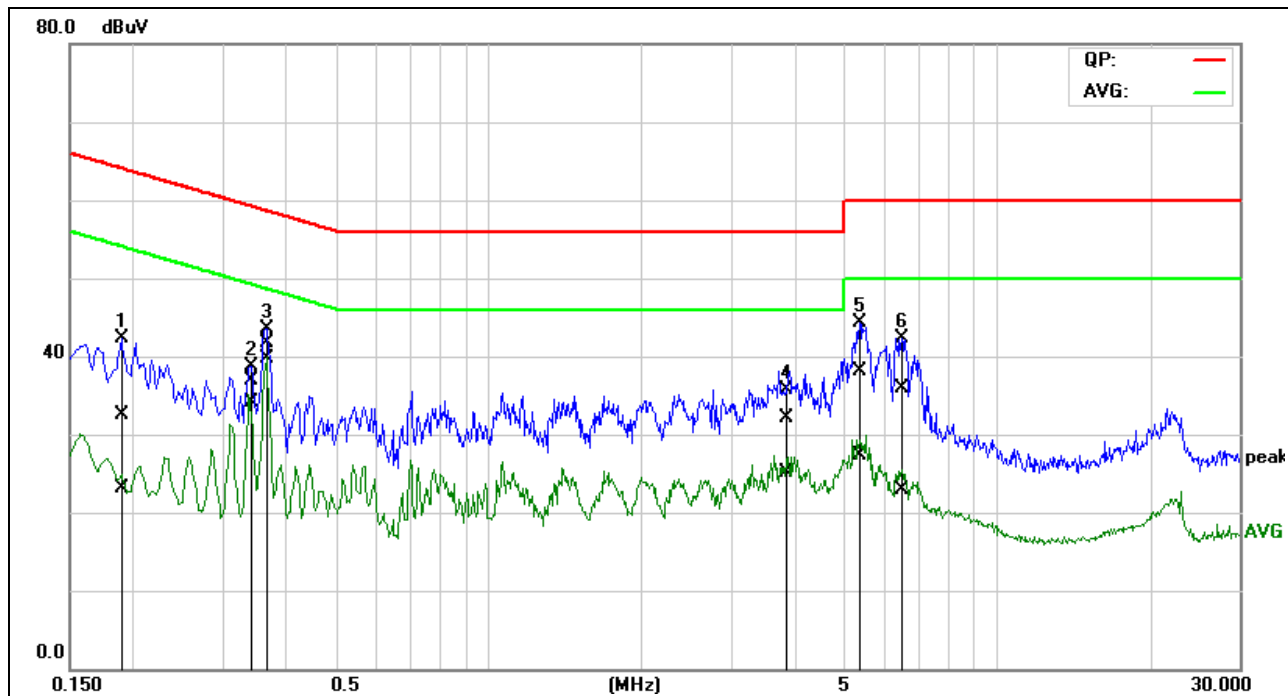

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1903	12.41	3.09	20.09	32.50	23.18	64.02	54.02	-31.52	-30.84	Pass
2	0.3401	16.91	14.08	20.07	36.98	34.15	59.20	49.20	-22.22	-15.05	Pass
3*	0.3654	21.63	19.67	20.07	41.70	39.74	58.60	48.60	-16.90	-8.86	Pass
4	3.7914	12.14	5.26	19.88	32.02	25.14	56.00	46.00	-23.98	-20.86	Pass
5	5.3562	18.20	7.30	19.91	38.11	27.21	60.00	50.00	-21.89	-22.79	Pass
6	6.4989	15.96	3.09	19.89	35.85	22.98	60.00	50.00	-24.15	-27.02	Pass


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 15 of 153

Test Mode: 05; Line: Neutral line; Modulation:GFSK; Antenna: Dipole; Channel:middle

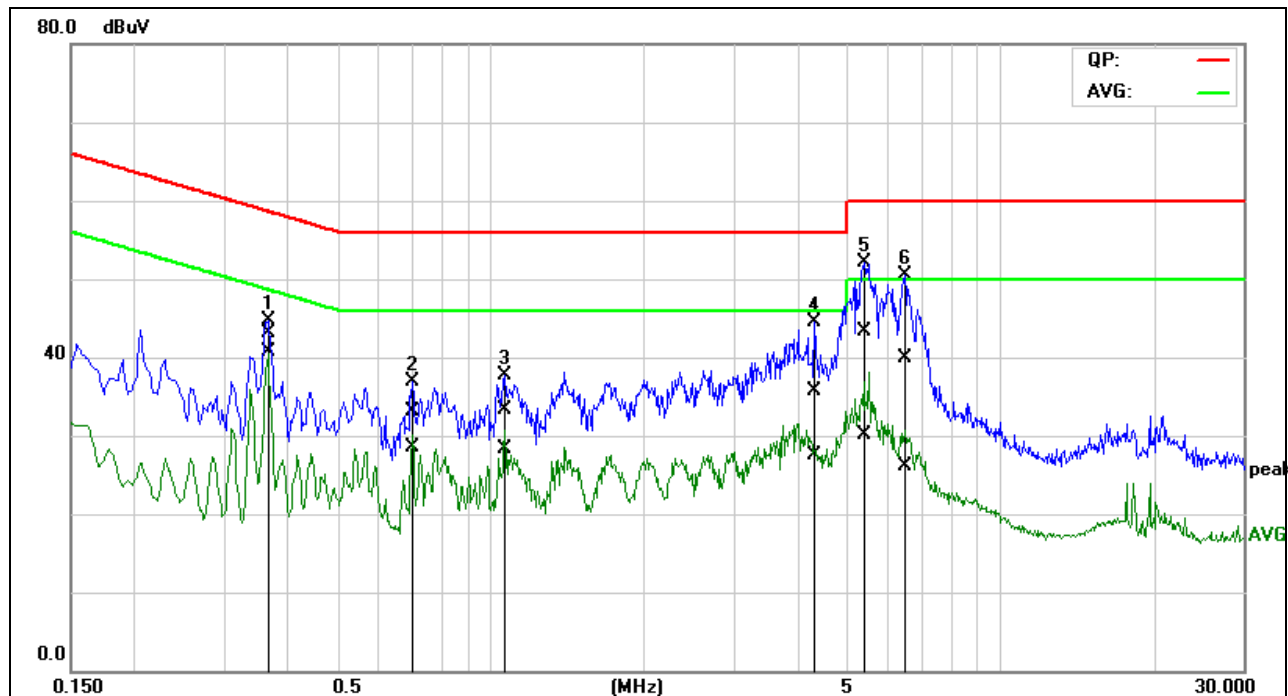

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.3646	23.08	20.66	20.10	43.18	40.76	58.62	48.62	-15.44	-7.86	Pass
2	0.6995	13.33	8.68	19.83	33.16	28.51	56.00	46.00	-22.84	-17.49	Pass
3	1.0705	13.41	8.46	19.90	33.31	28.36	56.00	46.00	-22.69	-17.64	Pass
4	4.3337	15.73	7.59	19.90	35.63	27.49	56.00	46.00	-20.37	-18.51	Pass
5	5.4515	23.38	10.32	19.88	43.26	30.20	60.00	50.00	-16.74	-19.80	Pass
6	6.5019	20.05	6.15	19.90	39.95	26.05	60.00	50.00	-20.05	-23.95	Pass

### 7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.5

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

#### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.2 % RH

Atmospheric Pressure: 1010 mbar

#### 7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.2.3 Test Setup Diagram

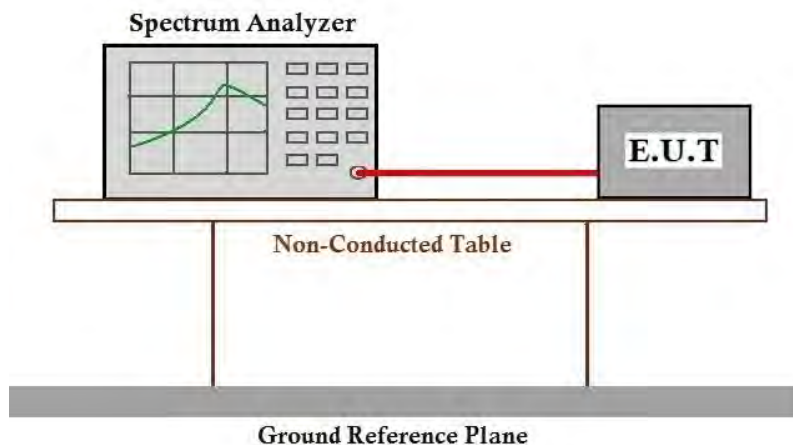





## **Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 17 of 153

### **7.2.4 Measurement Procedure and Data**

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

### 7.3 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247(a)(1)

Test Method: ANSI C63.10 (2013) Section 7.8.7

#### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.2 % RH

Atmospheric Pressure: 1010 mbar

#### 7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.3.3 Test Setup Diagram

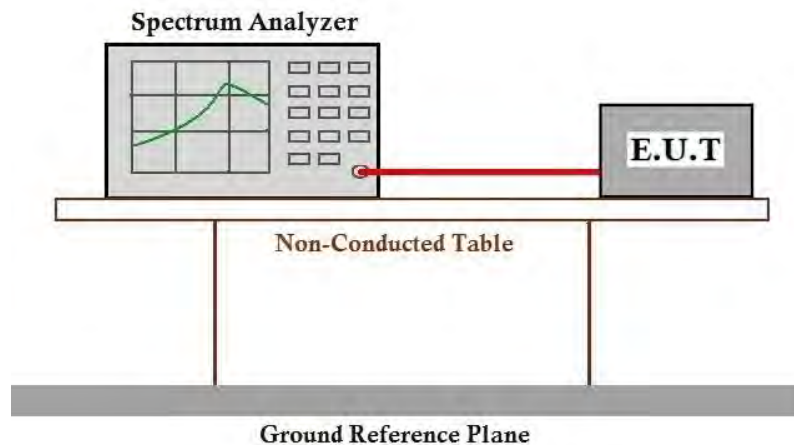

#### 7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details

## 7.4 Carrier Frequencies Separation

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)

Test Method: ANSI C63.10 (2013) Section 7.8.2

Limit:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.2 % RH

Atmospheric Pressure: 1010 mbar

### 7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.4.3 Test Setup Diagram

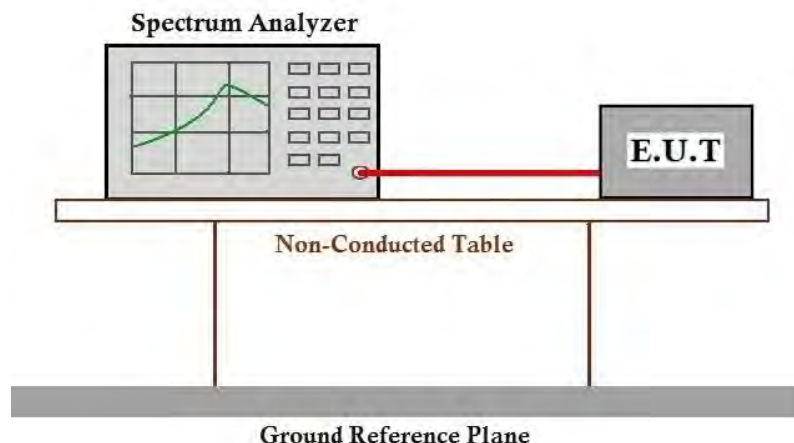

### 7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details

### 7.5 Hopping Channel Number

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.3

Limit:

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

#### 7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.2 % RH

Atmospheric Pressure: 1010 mbar

#### 7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.5.3 Test Setup Diagram

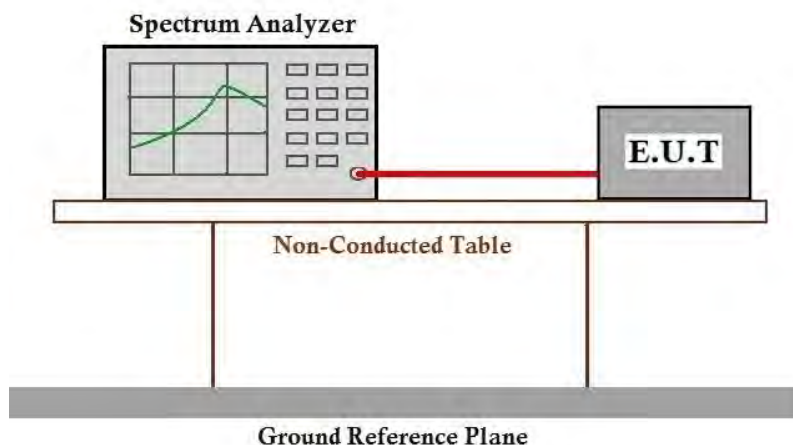

#### 7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

### 7.6 Dwell Time

Test Requirement 47 CFR Part 15, Subpart C 15.247a(1)(iii)

Test Method: ANSI C63.10 (2013) Section 7.8.4

Limit:

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

#### 7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.2 % RH

Atmospheric Pressure: 1010 mbar

#### 7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.6.3 Test Setup Diagram

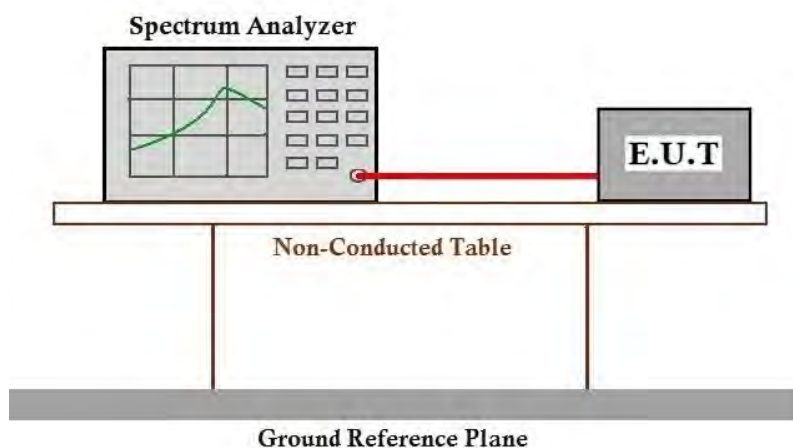

#### 7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

### 7.7 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.6

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.2 % RH

Atmospheric Pressure: 1010 mbar

#### 7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.
Final test	06	TX_Hop mode_Keep the EUT in frequency hopping mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.7.3 Test Setup Diagram

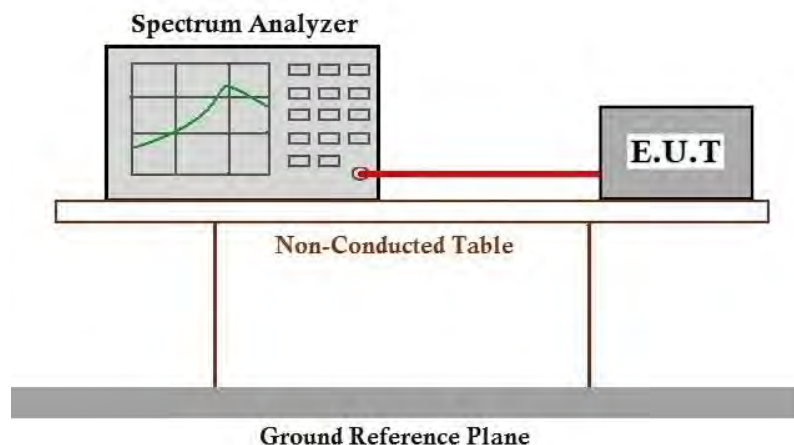



## **Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 23 of 153

### **7.7.4 Measurement Procedure and Data**

Please Refer to Appendix for Details

### 7.8 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 7.8.8

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 48.2 % RH

Atmospheric Pressure: 1010 mbar

#### 7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.8.3 Test Setup Diagram

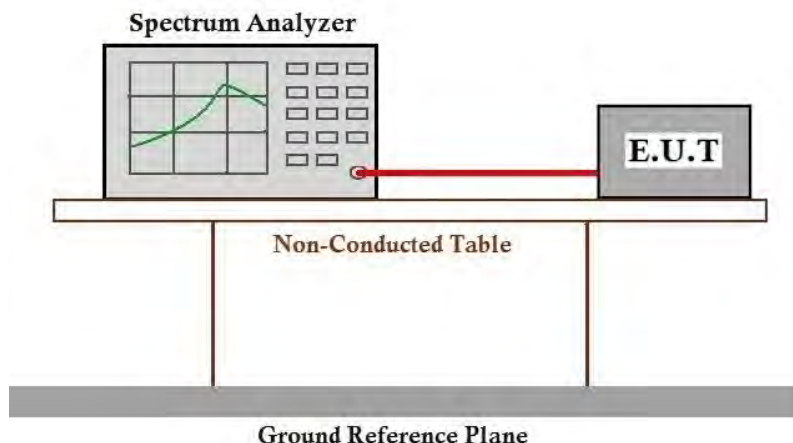

#### 7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details



## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 25 of 153

### 7.9 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

#### 7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C


Humidity: 50.5 % RH

Atmospheric Pressure: 1010 mbar

#### 7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.9.3 Test Setup Diagram

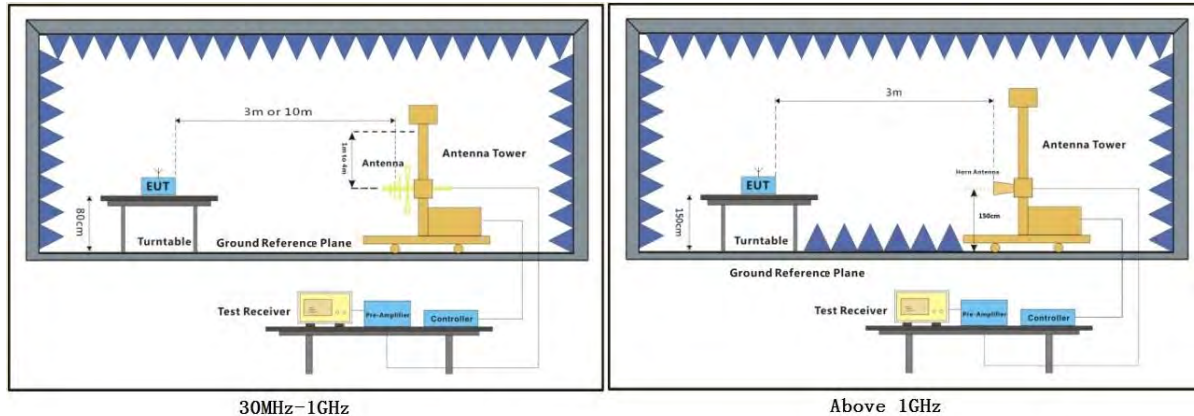

### 7.9.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

## Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 27 of 153

### Dipole Antenna

Test Mode: 05; Polarity: Horizontal; Modulation: GFSK; Channel: Low

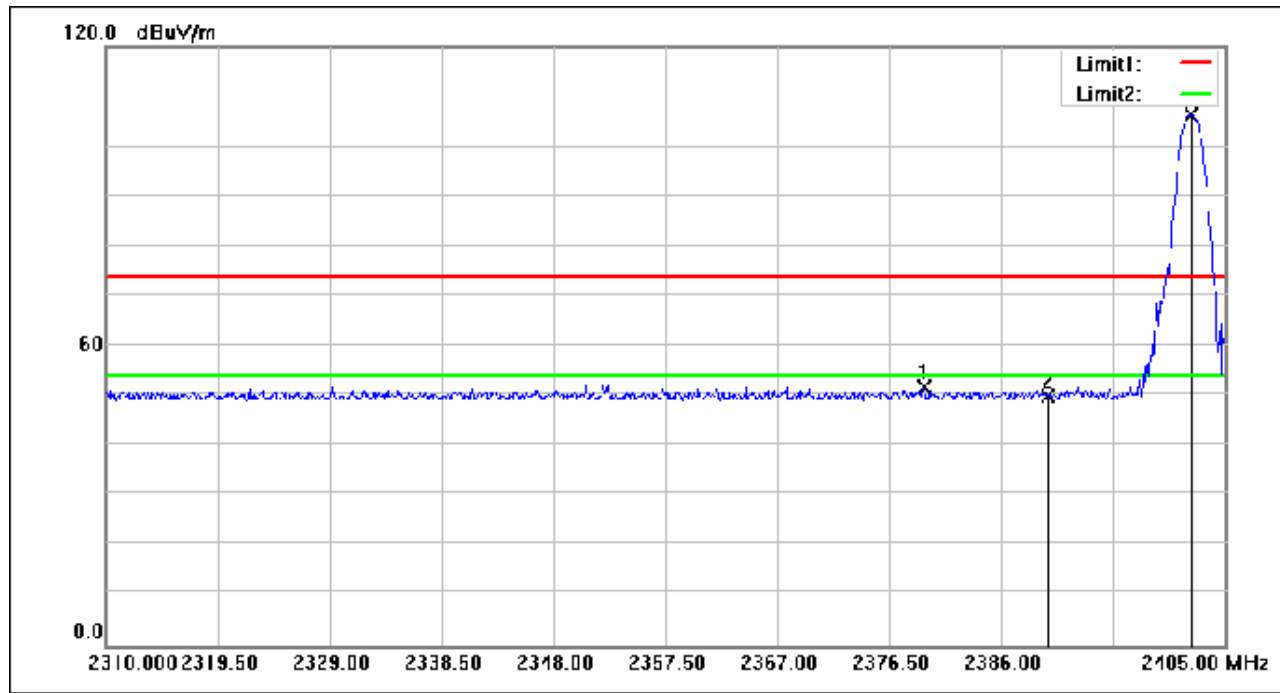

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.445	76.64	-24.75	51.89	74.00	-22.11	peak
2	2390.000	74.55	-24.71	49.84	74.00	-24.16	peak
3	2402.150	131.01	-24.65	106.36	74.00	32.36	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 28 of 153

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:Low

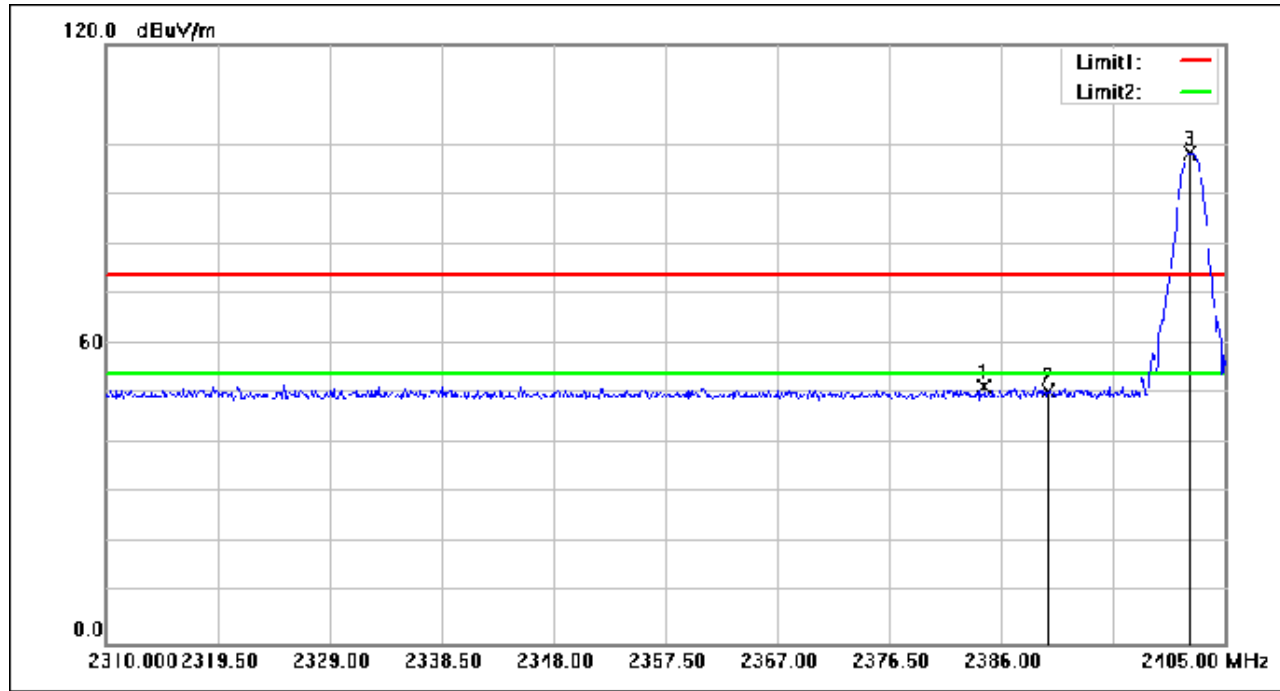

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.575	76.07	-24.73	51.34	74.00	-22.66	peak
2	2390.000	75.33	-24.71	50.62	74.00	-23.38	peak
3	2402.055	122.91	-24.65	98.26	74.00	24.26	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 29 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

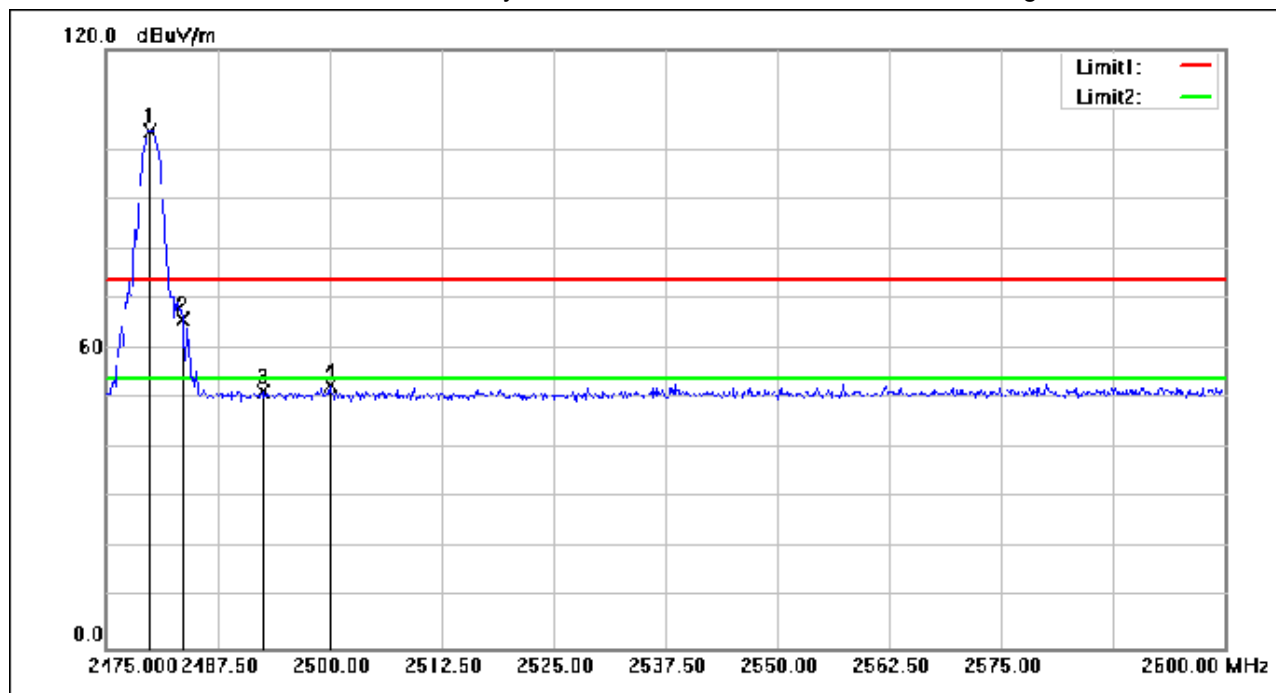

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.875	128.03	-24.28	103.75	74.00	29.75	peak
2	2483.500	90.07	-24.27	65.80	74.00	-8.20	peak
3	2492.500	75.78	-24.23	51.55	74.00	-22.45	peak
4	2500.000	76.76	-24.19	52.57	74.00	-21.43	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 30 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

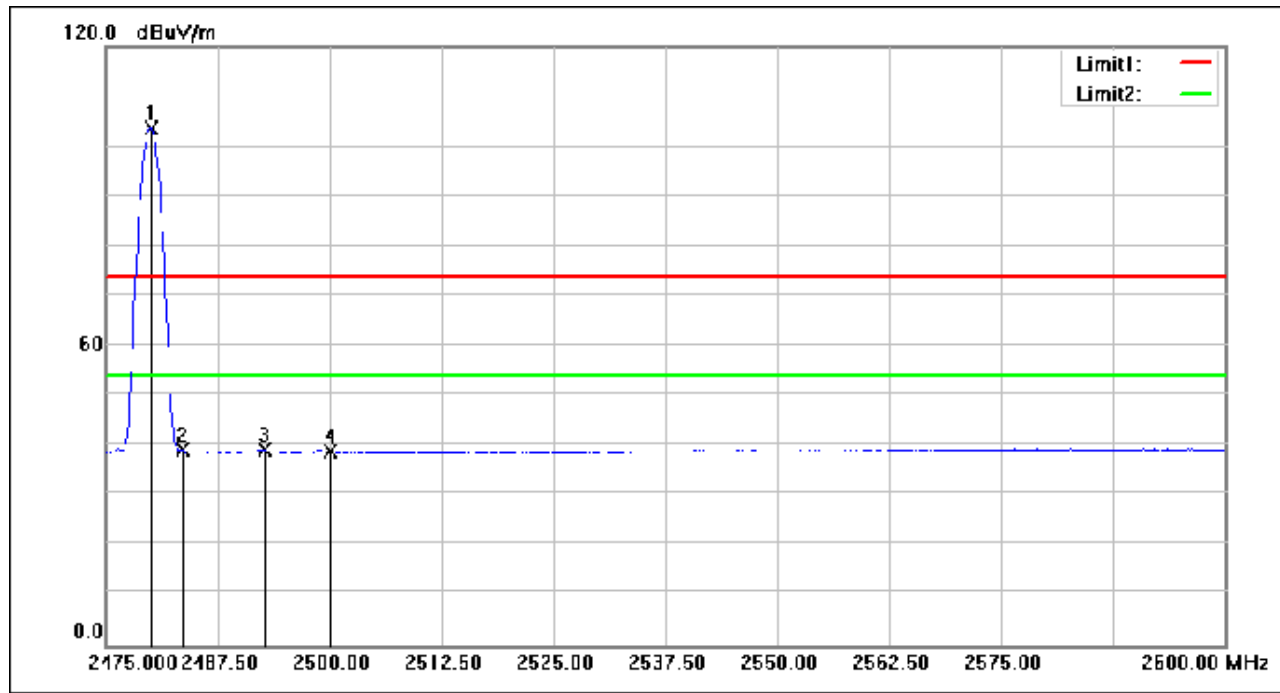

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	127.83	-24.28	103.55	54.00	49.55	AVG
2	2483.500	63.30	-24.27	39.03	54.00	-14.97	AVG
3	2492.750	63.36	-24.23	39.13	54.00	-14.87	AVG
4	2500.000	62.95	-24.19	38.76	54.00	-15.24	AVG


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 31 of 153

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:High

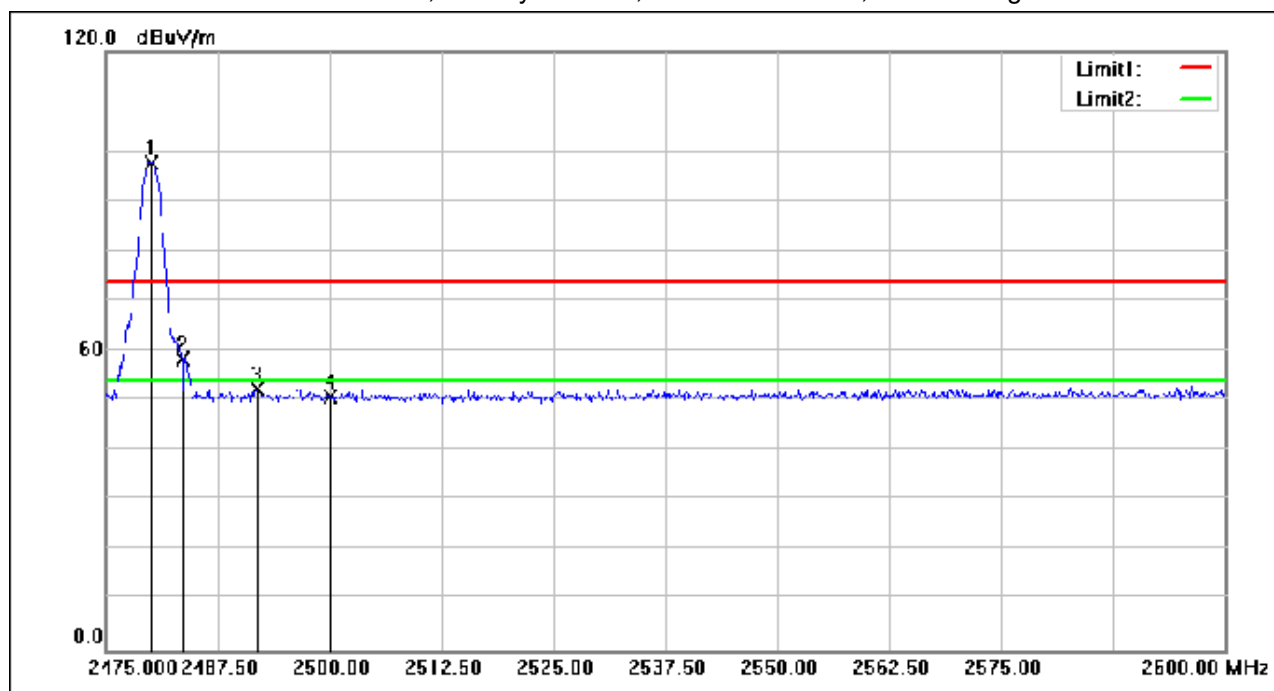

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.125	121.96	-24.28	97.68	74.00	23.68	peak
2	2483.500	82.59	-24.27	58.32	74.00	-15.68	peak
3	2491.875	76.65	-24.23	52.42	74.00	-21.58	peak
4	2500.000	75.12	-24.19	50.93	74.00	-23.07	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 32 of 153

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:High

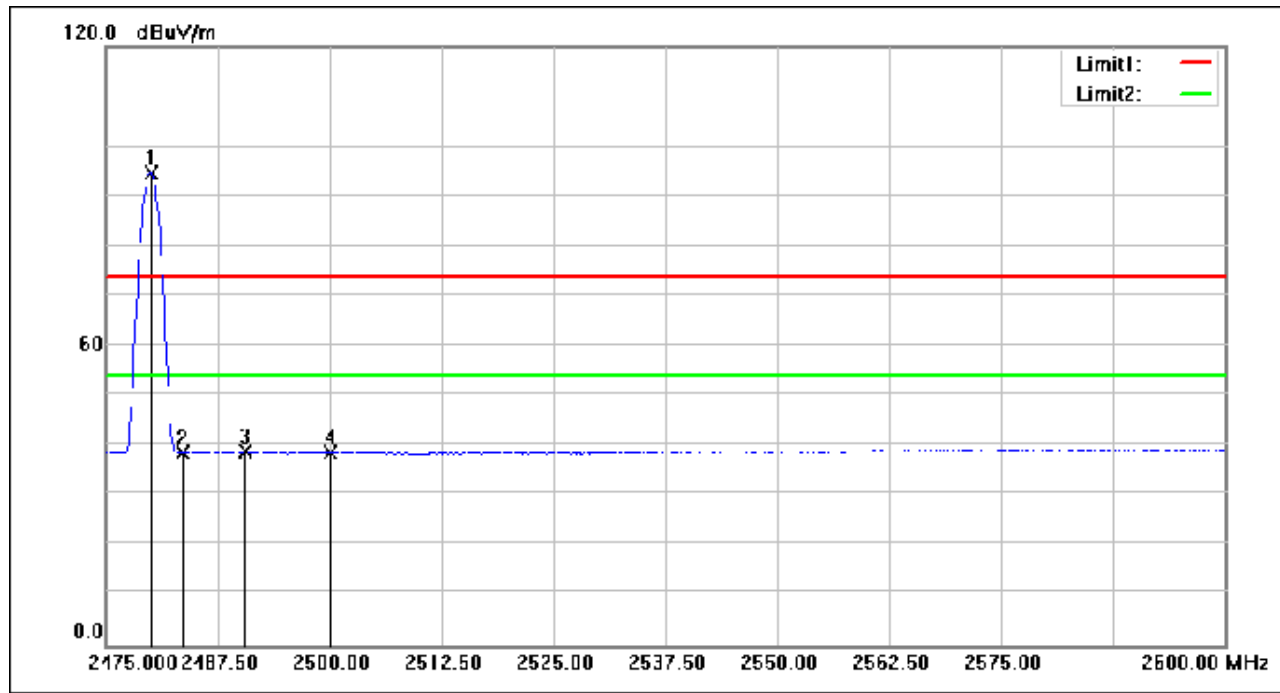

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	118.97	-24.28	94.69	54.00	40.69	AVG
2	2483.500	62.87	-24.27	38.60	54.00	-15.40	AVG
3	2490.500	63.09	-24.24	38.85	54.00	-15.15	AVG
4	2500.000	62.76	-24.19	38.57	54.00	-15.43	AVG




## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 33 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: Low

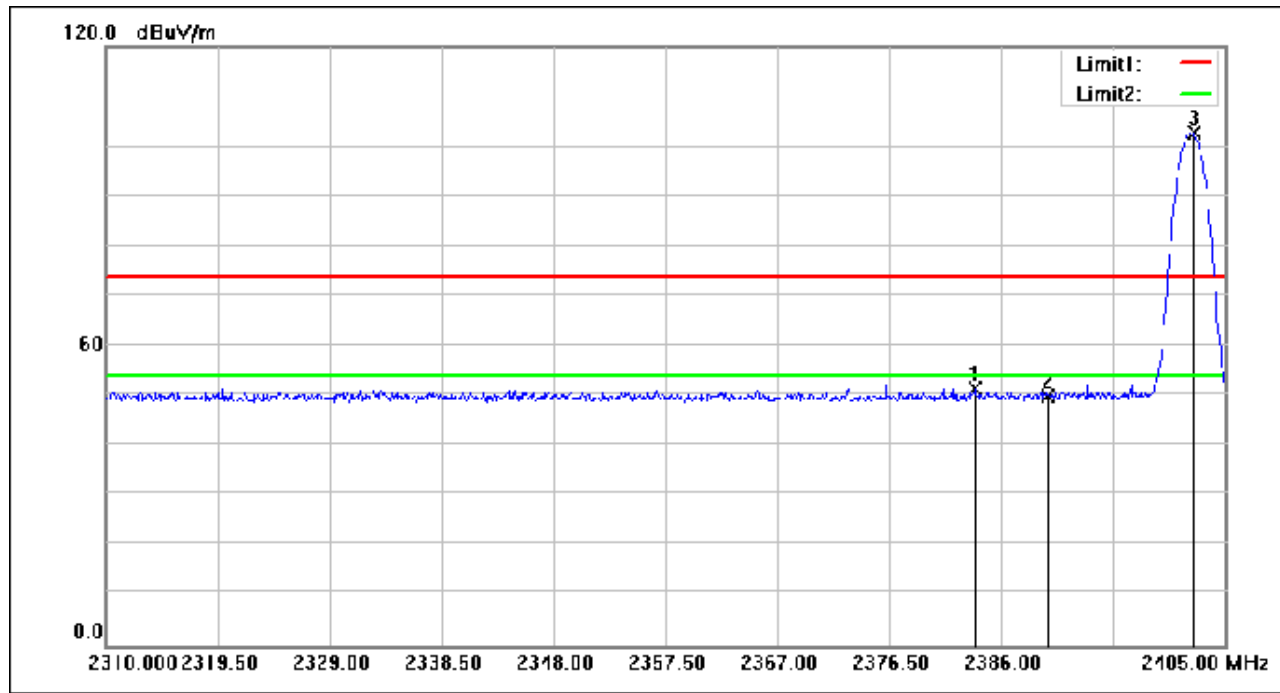

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.720	76.26	-24.73	51.53	74.00	-22.47	peak
2	2390.000	74.80	-24.71	50.09	74.00	-23.91	peak
3	2402.340	127.43	-24.65	102.78	74.00	28.78	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 34 of 153

Test Mode: 05; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: Low

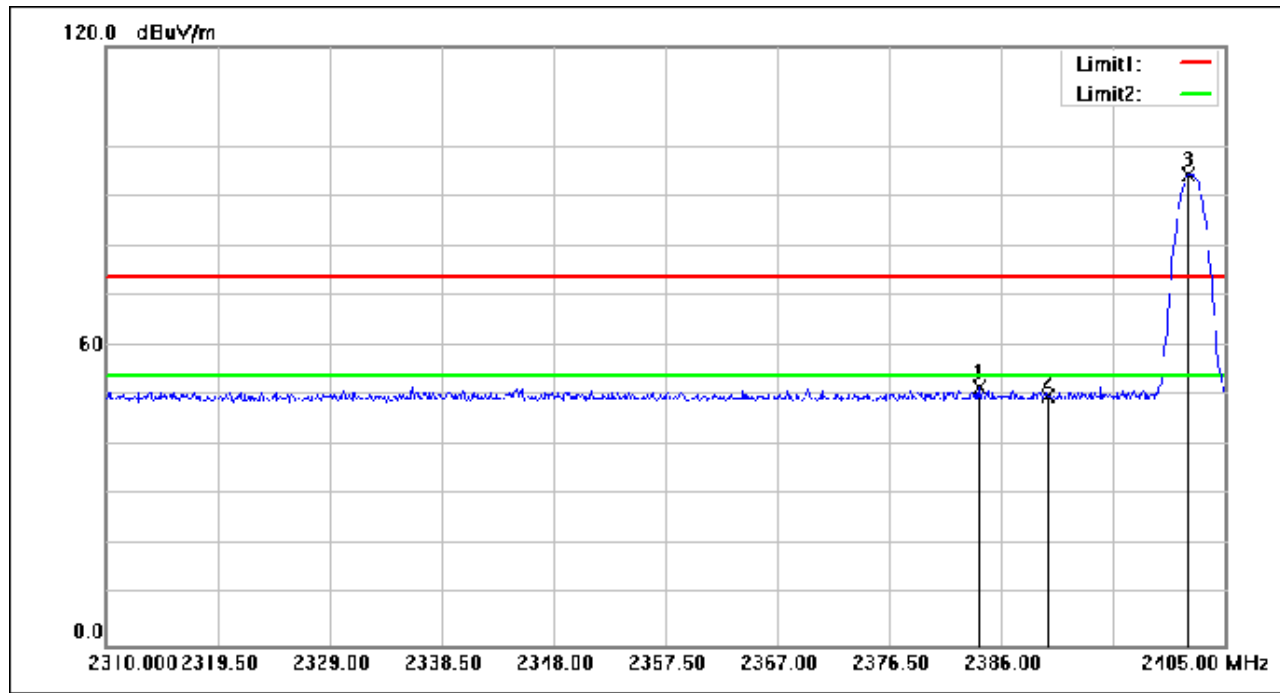

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.100	76.39	-24.73	51.66	74.00	-22.34	peak
2	2390.000	74.63	-24.71	49.92	74.00	-24.08	peak
3	2401.865	119.10	-24.65	94.45	74.00	20.45	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 35 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: High

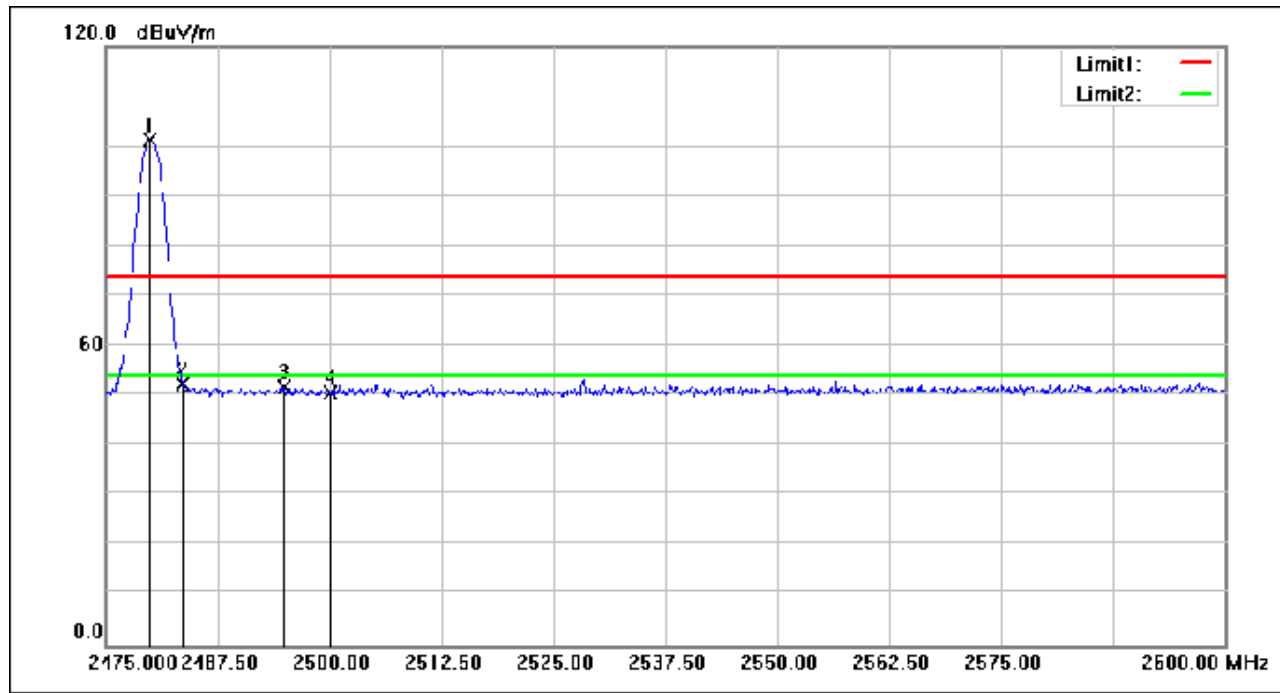

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.875	125.39	-24.28	101.11	74.00	27.11	peak
2	2483.500	76.68	-24.27	52.41	74.00	-21.59	peak
3	2494.875	75.87	-24.21	51.66	74.00	-22.34	peak
4	2500.000	74.75	-24.19	50.56	74.00	-23.44	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 36 of 153

Test Mode: 05; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: High

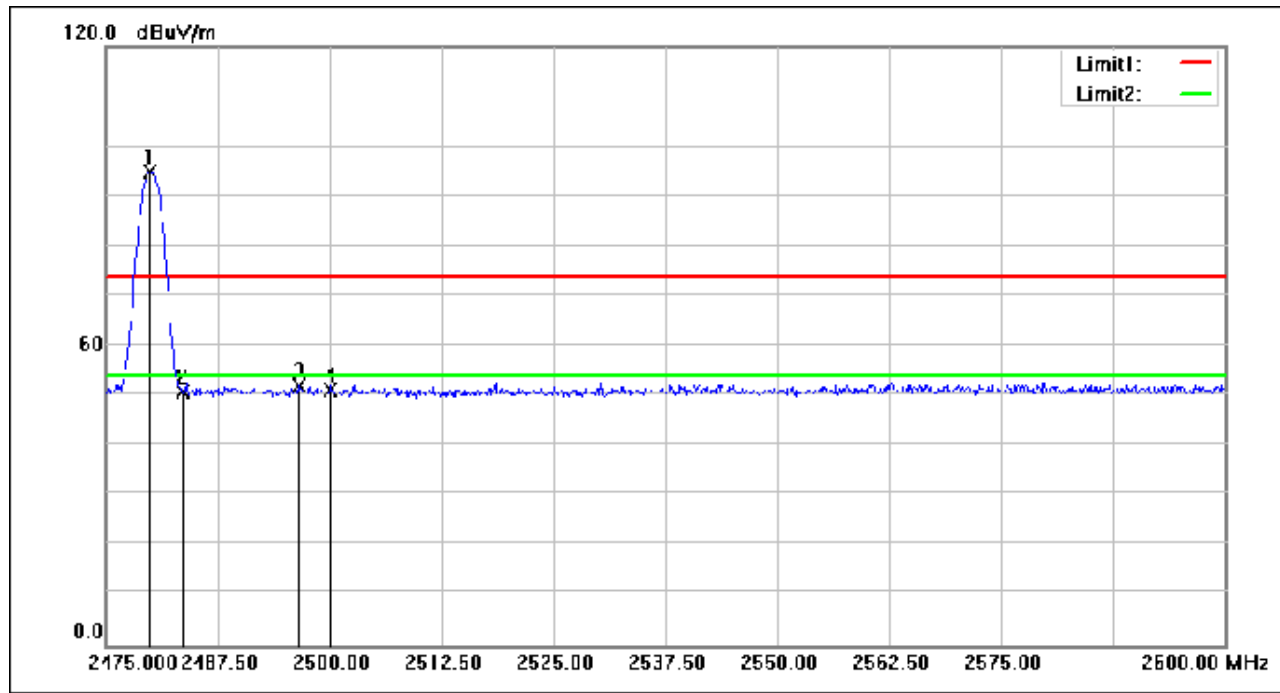

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.875	119.24	-24.28	94.96	74.00	20.96	peak
2	2483.500	75.13	-24.27	50.86	74.00	-23.14	peak
3	2496.500	76.11	-24.20	51.91	74.00	-22.09	peak
4	2500.000	75.34	-24.19	51.15	74.00	-22.85	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 37 of 153

Test Mode: 05; Polarity: Horizontal; Modulation: 8DPSK; Channel: Low

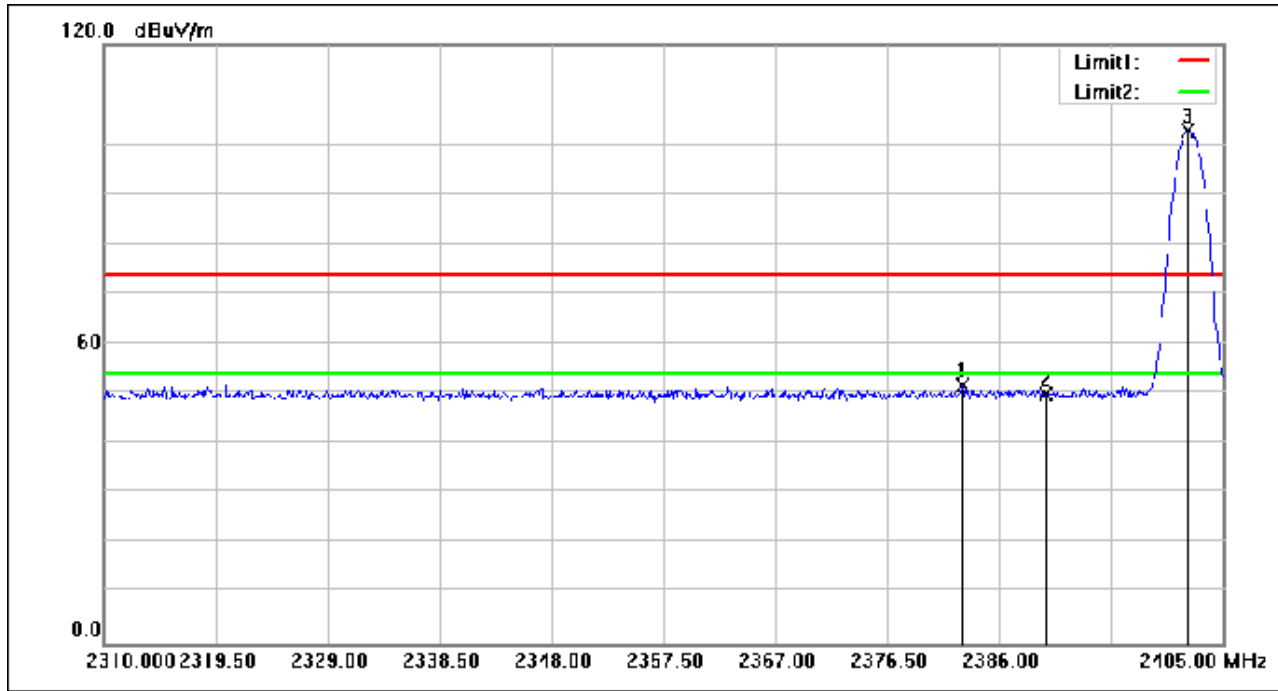

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.865	76.62	-24.74	51.88	74.00	-22.12	peak
2	2390.000	74.66	-24.71	49.95	74.00	-24.05	peak
3	2402.055	127.51	-24.65	102.86	74.00	28.86	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 38 of 153

Test Mode: 05; Polarity: Vertical; Modulation: 8DPSK; Channel: Low

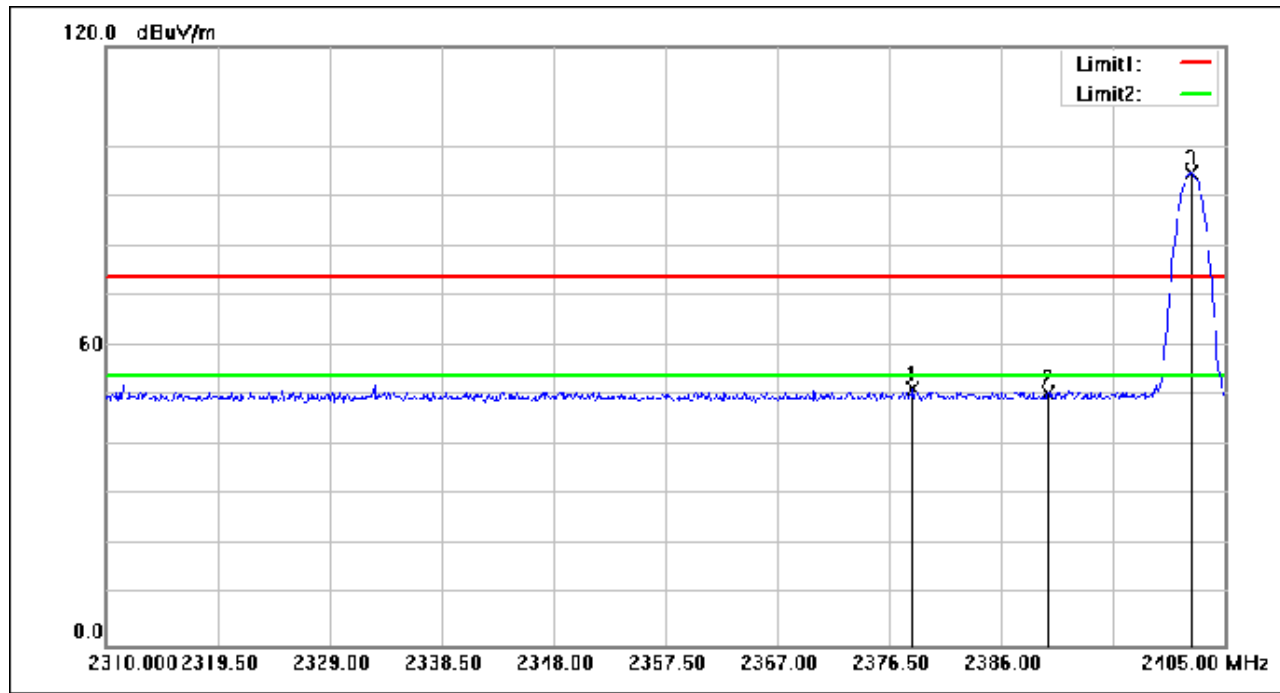

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.495	76.34	-24.76	51.58	74.00	-22.42	peak
2	2390.000	75.26	-24.71	50.55	74.00	-23.45	peak
3	2402.150	119.26	-24.65	94.61	74.00	20.61	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 39 of 153

Test Mode: 05; Polarity: Horizontal; Modulation: 8DPSK; Channel: High

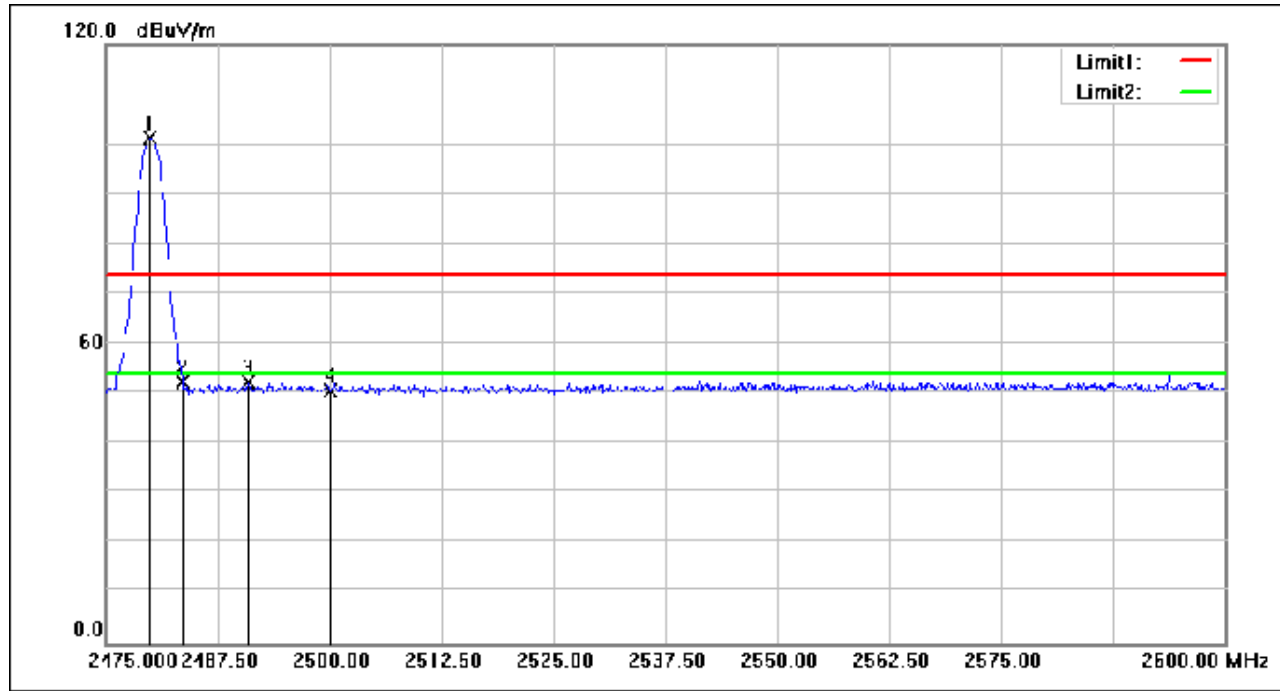

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.875	125.50	-24.28	101.22	74.00	27.22	peak
2	2483.500	76.77	-24.27	52.50	74.00	-21.50	peak
3	2490.875	76.71	-24.24	52.47	74.00	-21.53	peak
4	2500.000	74.88	-24.19	50.69	74.00	-23.31	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 40 of 153

Test Mode: 05; Polarity: Vertical; Modulation: 8DPSK; Channel: High

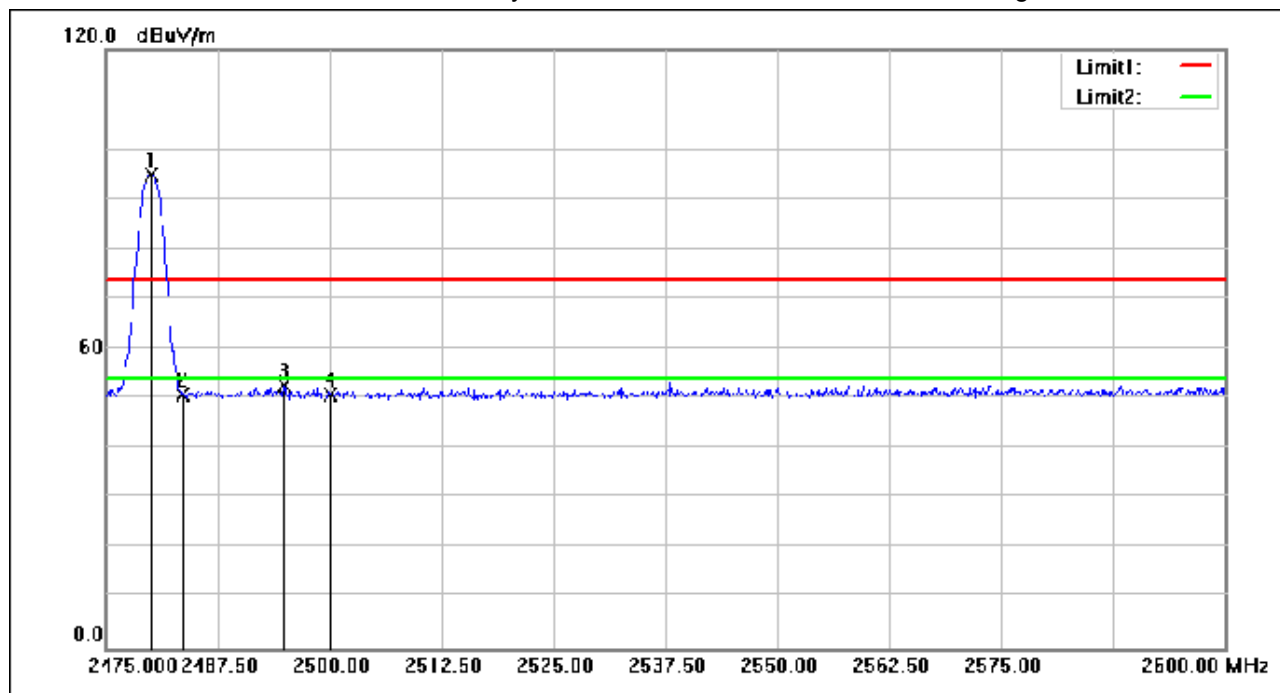

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	119.21	-24.28	94.93	74.00	20.93	peak
2	2483.500	75.21	-24.27	50.94	74.00	-23.06	peak
3	2494.875	76.76	-24.21	52.55	74.00	-21.45	peak
4	2500.000	75.06	-24.19	50.87	74.00	-23.13	peak



## Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 41 of 153

### PCB Antenna

Test Mode: 05; Polarity: Horizontal; Modulation: GFSK; Channel: Low

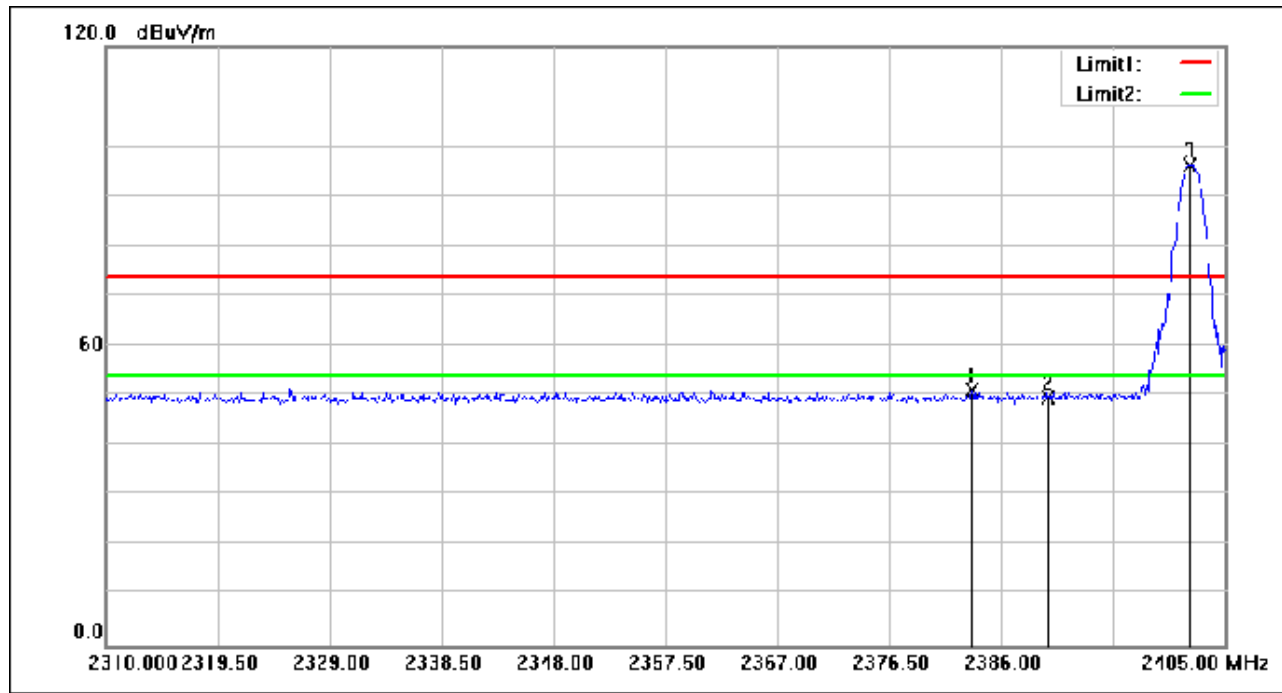

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.530	75.77	-24.73	51.04	74.00	-22.96	peak
2	2390.000	74.49	-24.71	49.78	74.00	-24.22	peak
3	2401.960	120.78	-24.65	96.13	74.00	22.13	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 42 of 153

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:Low

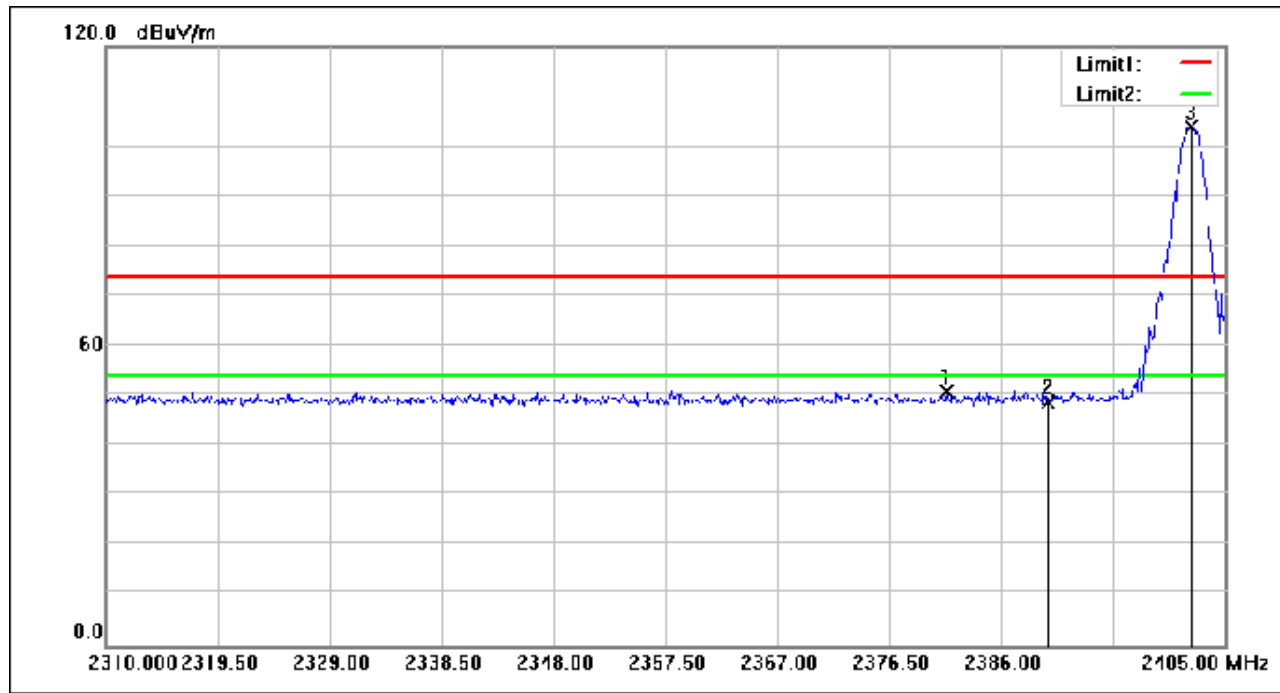

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2381.345	75.51	-24.74	50.77	74.00	-23.23	peak
2	2390.000	73.58	-24.71	48.87	74.00	-25.13	peak
3	2402.150	128.53	-24.65	103.88	74.00	29.88	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 43 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

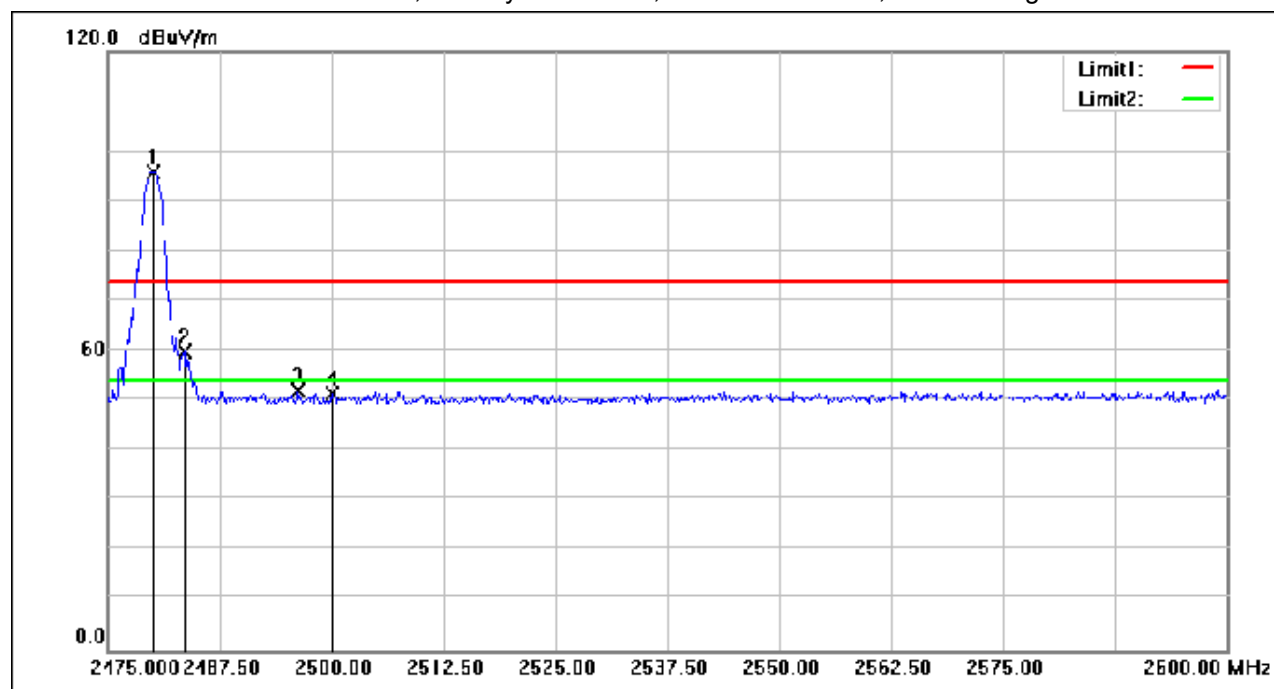

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.125	120.27	-24.28	95.99	74.00	21.99	peak
2	2483.500	84.17	-24.27	59.90	74.00	-14.10	peak
3	2496.250	76.12	-24.21	51.91	74.00	-22.09	peak
4	2500.000	75.52	-24.19	51.33	74.00	-22.67	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 44 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

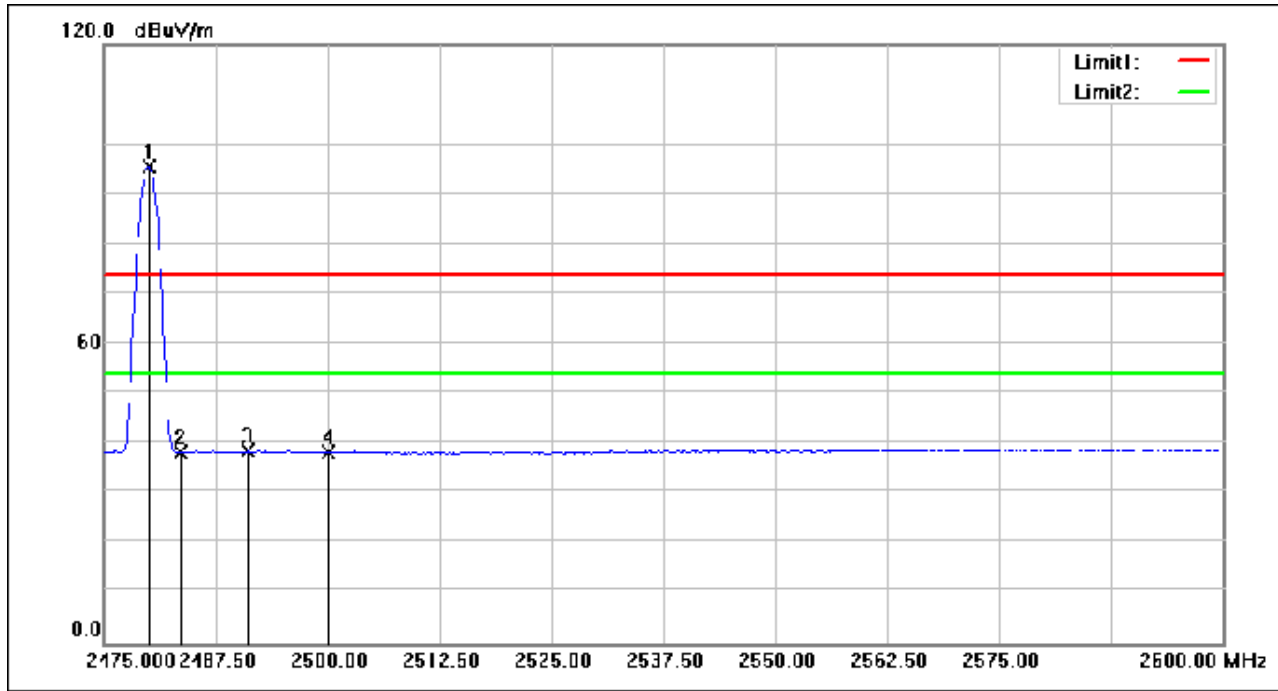

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	119.95	-24.28	95.67	54.00	41.67	AVG
2	2483.500	62.53	-24.27	38.26	54.00	-15.74	AVG
3	2491.125	62.82	-24.24	38.58	54.00	-15.42	AVG
4	2500.000	62.59	-24.19	38.40	54.00	-15.60	AVG


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 45 of 153

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:High

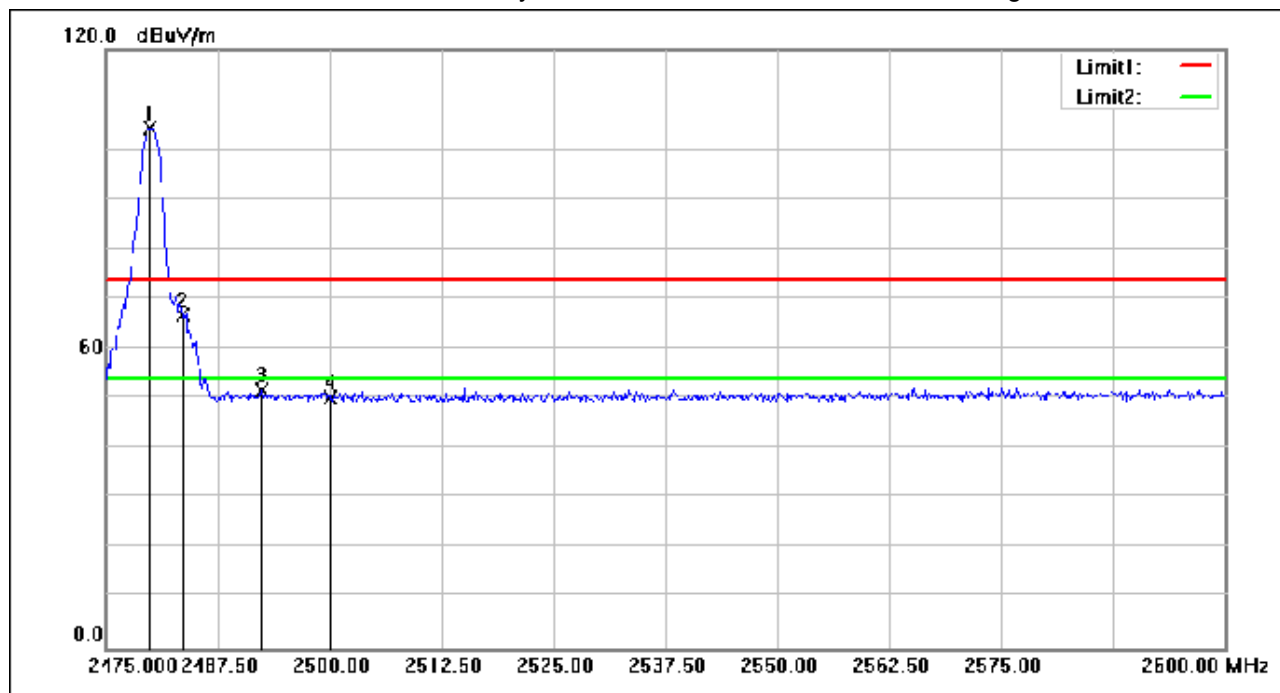

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.875	128.63	-24.28	104.35	74.00	30.35	peak
2	2483.500	90.97	-24.27	66.70	74.00	-7.30	peak
3	2492.375	76.11	-24.23	51.88	74.00	-22.12	peak
4	2500.000	74.51	-24.19	50.32	74.00	-23.68	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 46 of 153

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:High

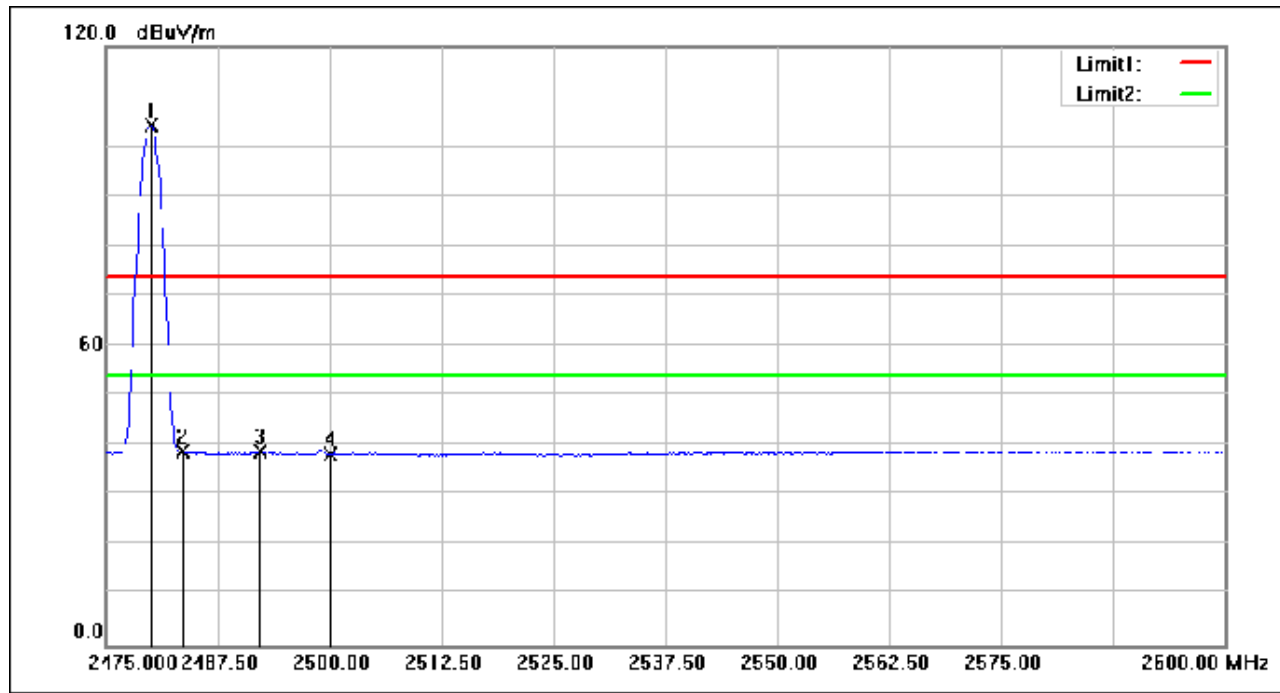

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	128.40	-24.28	104.12	54.00	50.12	AVG
2	2483.500	63.02	-24.27	38.75	54.00	-15.25	AVG
3	2492.250	63.08	-24.23	38.85	54.00	-15.15	AVG
4	2500.000	62.57	-24.19	38.38	54.00	-15.62	AVG


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 47 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: Low

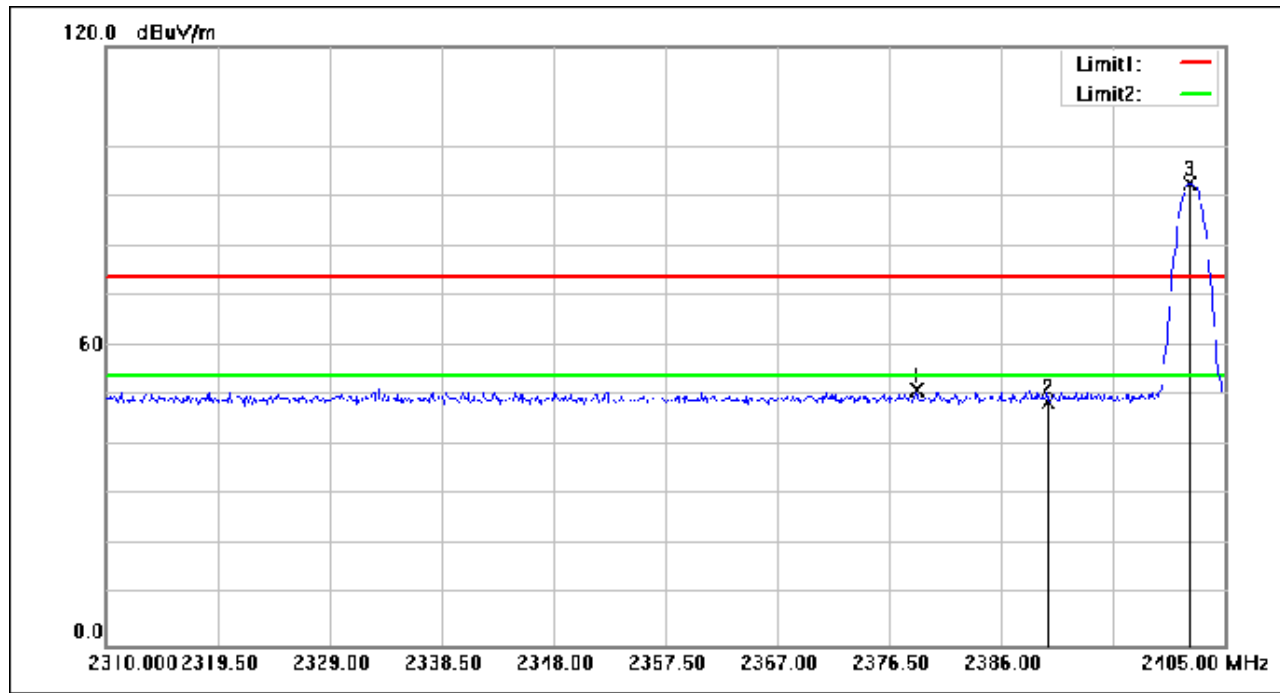

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.780	76.03	-24.75	51.28	74.00	-22.72	peak
2	2390.000	73.57	-24.71	48.86	74.00	-25.14	peak
3	2402.055	117.19	-24.65	92.54	74.00	18.54	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 48 of 153

Test Mode: 05; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: Low

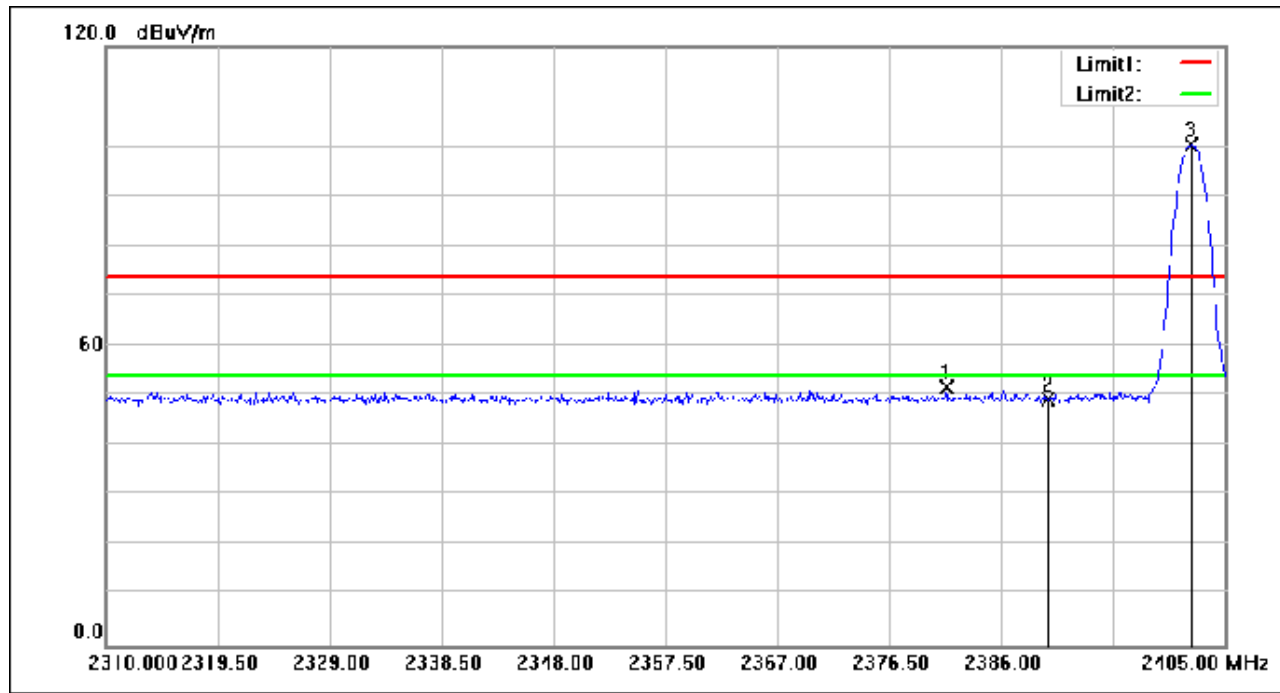

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2381.345	76.52	-24.74	51.78	74.00	-22.22	peak
2	2390.000	74.09	-24.71	49.38	74.00	-24.62	peak
3	2402.150	124.95	-24.65	100.30	74.00	26.30	peak




## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 49 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: High

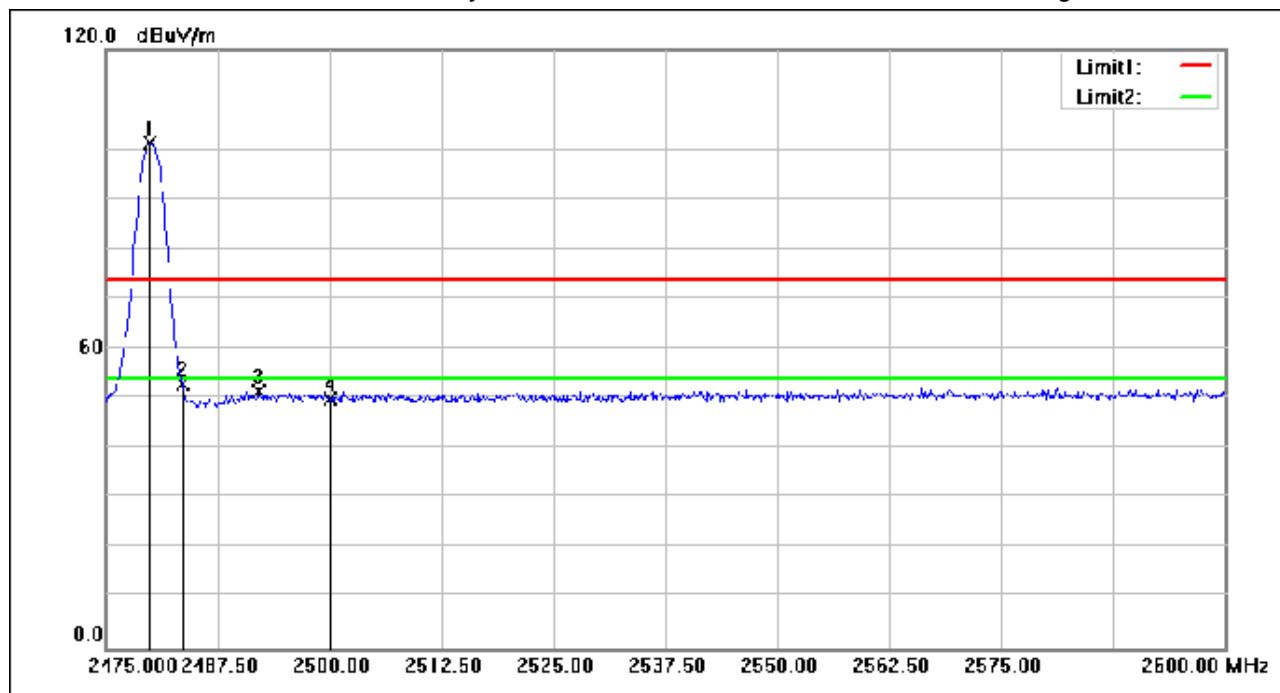

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.875	125.43	-24.28	101.15	74.00	27.15	peak
2	2483.500	77.30	-24.27	53.03	74.00	-20.97	peak
3	2492.125	75.76	-24.23	51.53	74.00	-22.47	peak
4	2500.000	74.18	-24.19	49.99	74.00	-24.01	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 50 of 153

Test Mode: 05; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: High

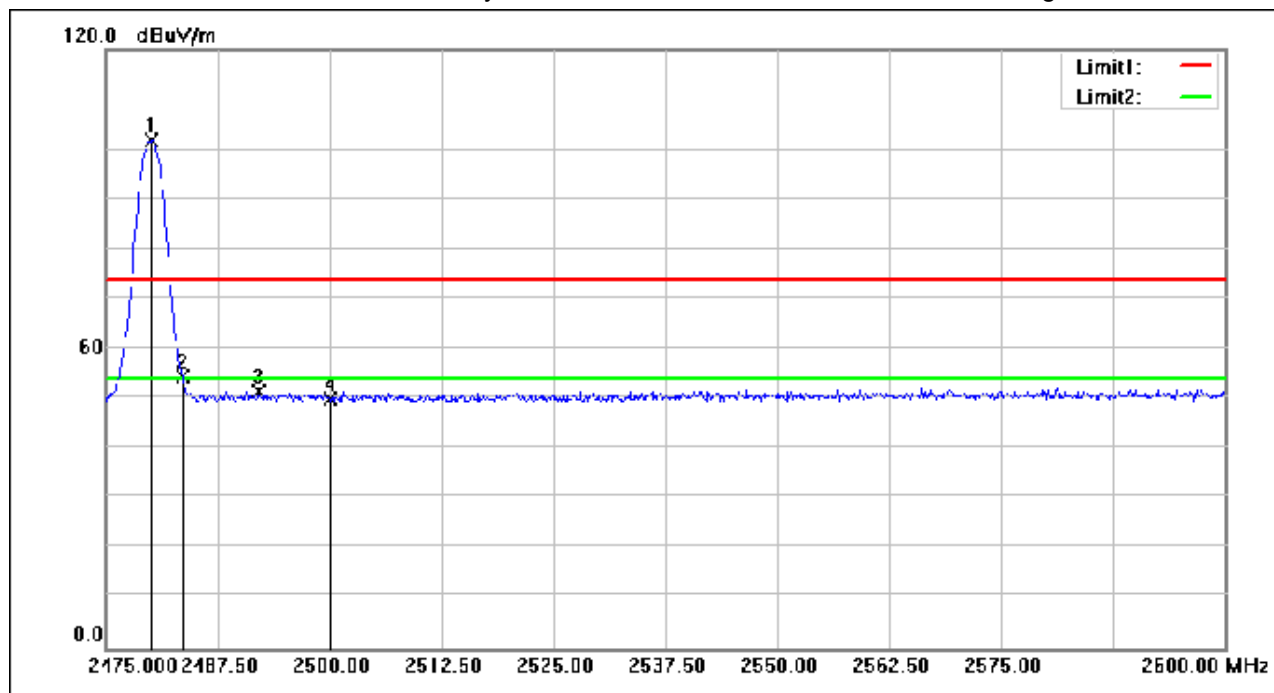

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.125	126.10	-24.28	101.82	74.00	27.82	peak
2	2483.500	78.80	-24.27	54.53	74.00	-19.47	peak
3	2492.125	75.76	-24.23	51.53	74.00	-22.47	peak
4	2500.000	74.18	-24.19	49.99	74.00	-24.01	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 51 of 153

Test Mode: 05; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: High

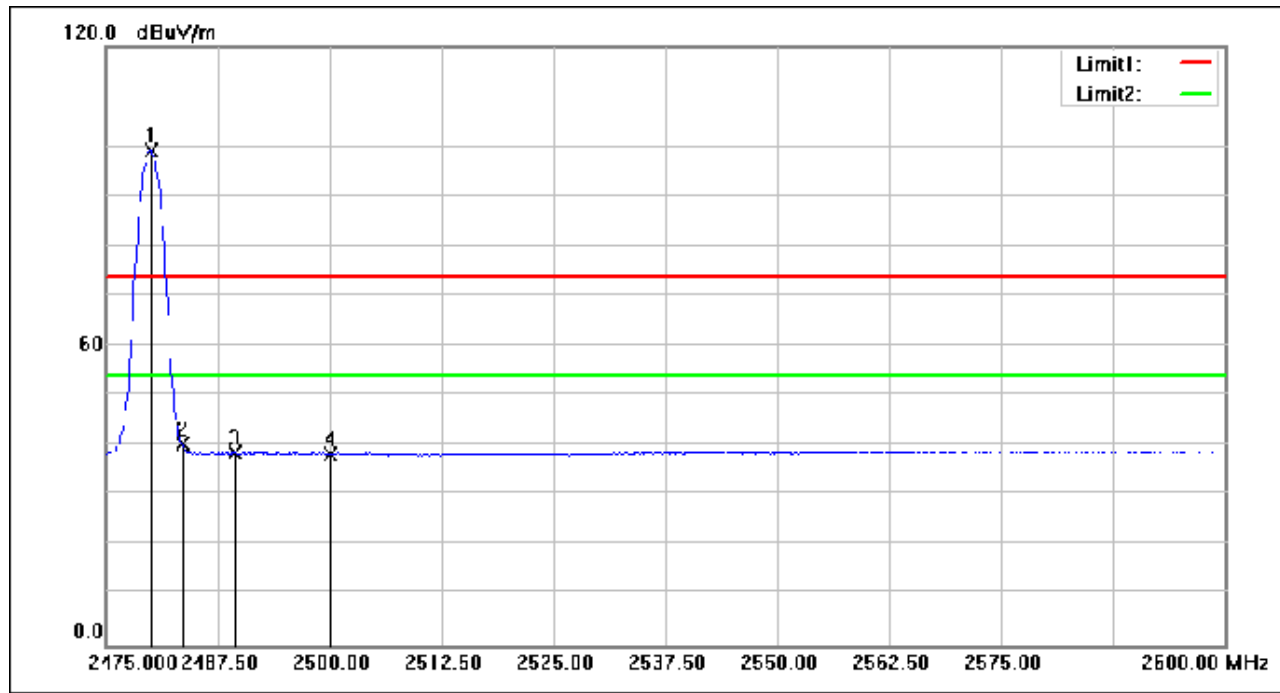

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	123.37	-24.28	99.09	54.00	45.09	AVG
2	2483.500	64.52	-24.27	40.25	54.00	-13.75	AVG
3	2489.375	62.88	-24.24	38.64	54.00	-15.36	AVG
4	2500.000	62.47	-24.19	38.28	54.00	-15.72	AVG


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 52 of 153

Test Mode: 05; Polarity: Horizontal; Modulation: 8DPSK; Channel: Low

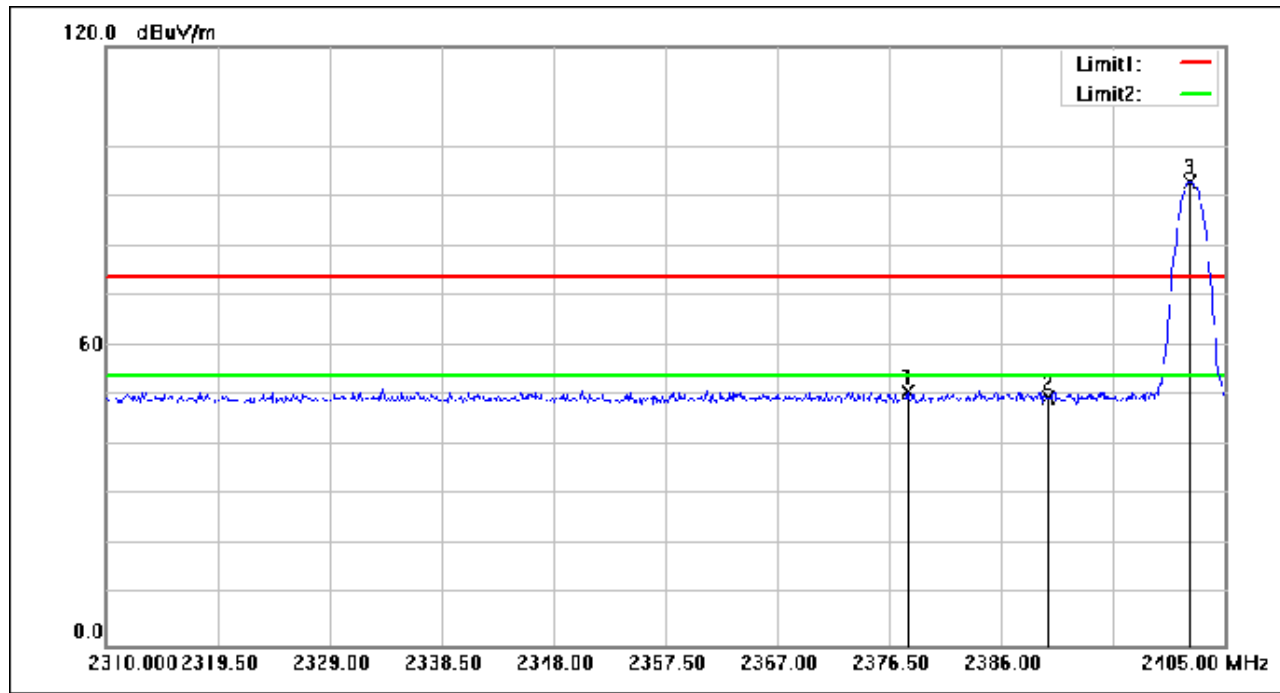

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.020	75.71	-24.77	50.94	74.00	-23.06	peak
2	2390.000	74.32	-24.71	49.61	74.00	-24.39	peak
3	2402.055	117.56	-24.65	92.91	74.00	18.91	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 53 of 153

Test Mode: 05; Polarity: Vertical; Modulation: 8DPSK; Channel: Low

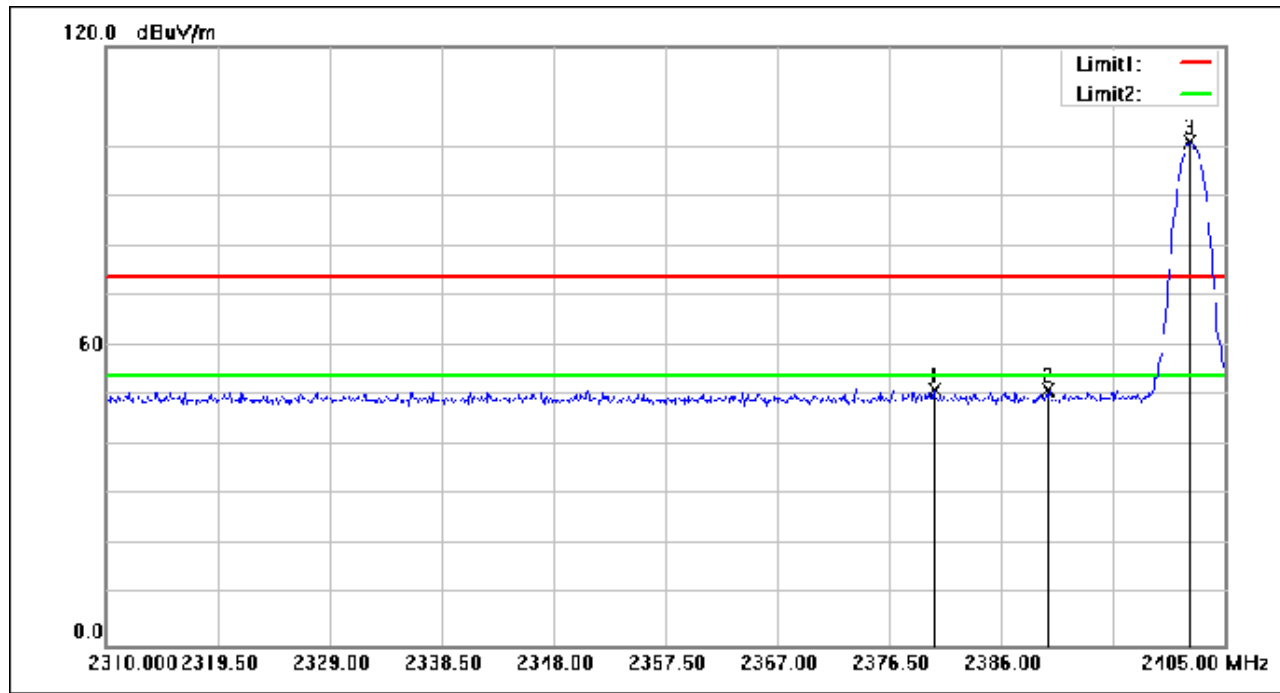

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2380.300	75.86	-24.75	51.11	74.00	-22.89	peak
2	2390.000	75.84	-24.71	51.13	74.00	-22.87	peak
3	2402.055	125.60	-24.65	100.95	74.00	26.95	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 54 of 153

Test Mode: 05; Polarity: Horizontal; Modulation: 8DPSK; Channel: High

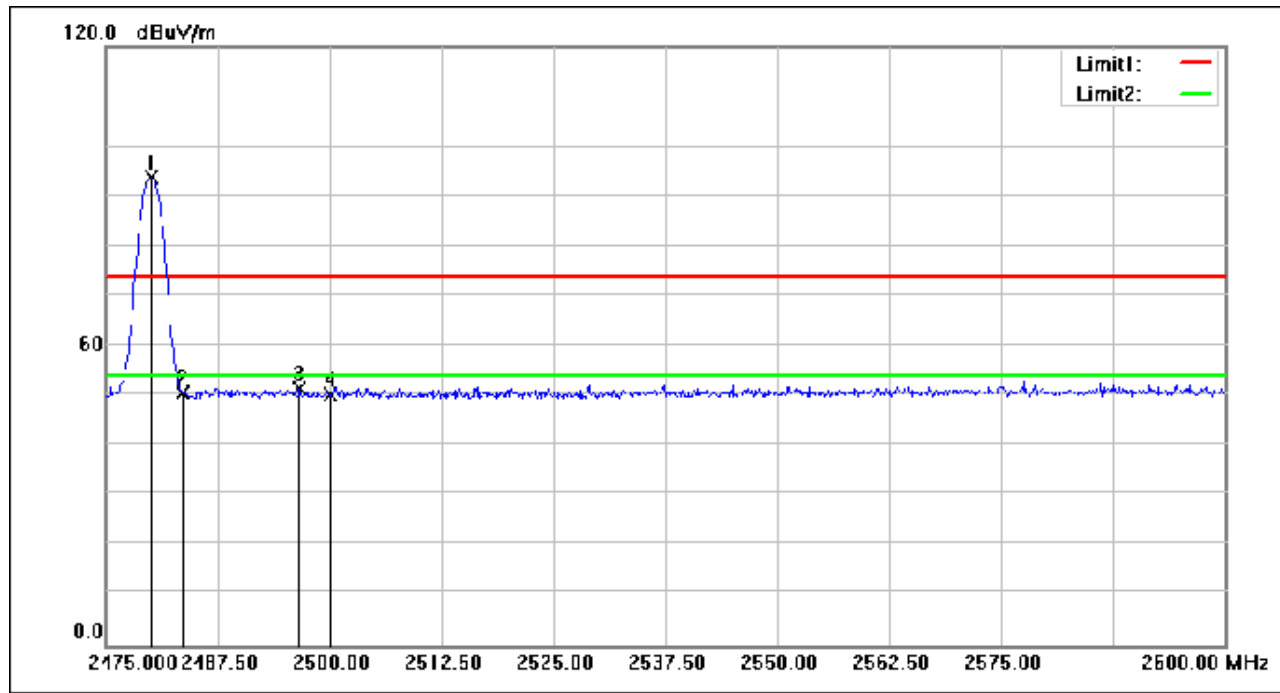

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	117.92	-24.28	93.64	74.00	19.64	peak
2	2483.500	74.89	-24.27	50.62	74.00	-23.38	peak
3	2496.625	75.59	-24.20	51.39	74.00	-22.61	peak
4	2500.000	74.44	-24.19	50.25	74.00	-23.75	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 55 of 153

Test Mode: 05; Polarity: Vertical; Modulation: 8DPSK; Channel: High

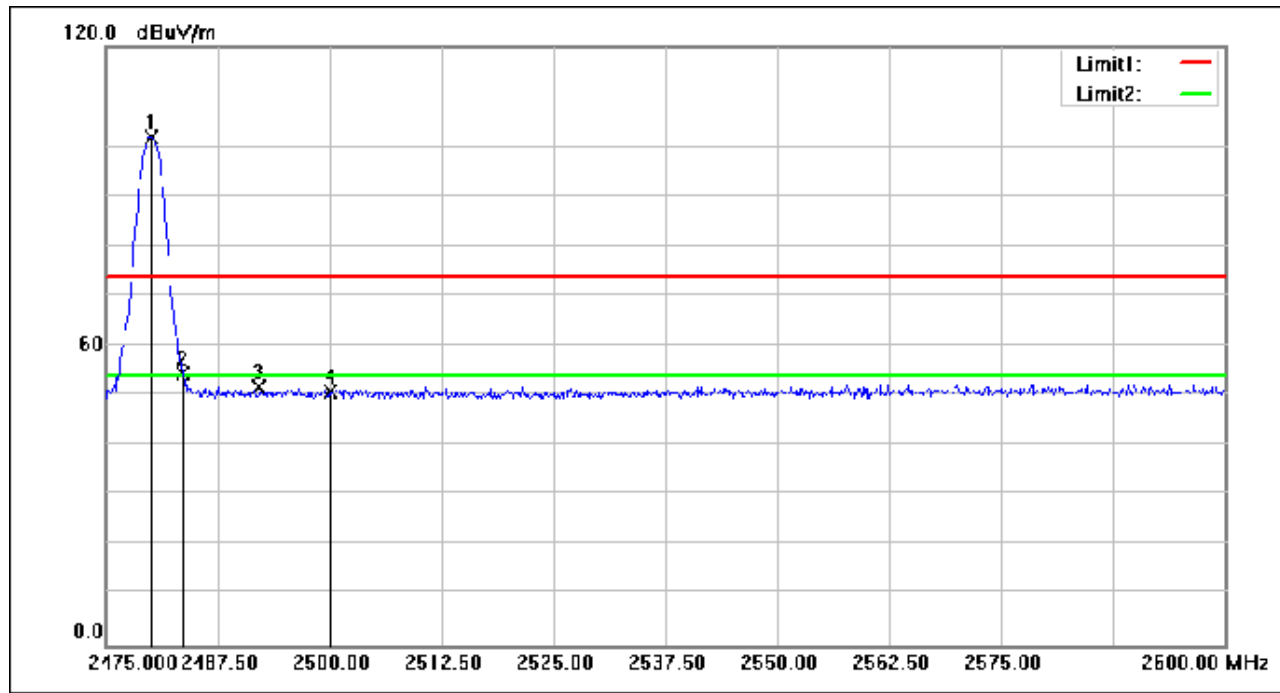

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	126.18	-24.28	101.90	74.00	27.90	peak
2	2483.500	78.60	-24.27	54.33	74.00	-19.67	peak
3	2492.125	75.97	-24.23	51.74	74.00	-22.26	peak
4	2500.000	74.98	-24.19	50.79	74.00	-23.21	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 56 of 153

Test Mode: 05; Polarity: Vertical; Modulation: 8DPSK; Channel: High

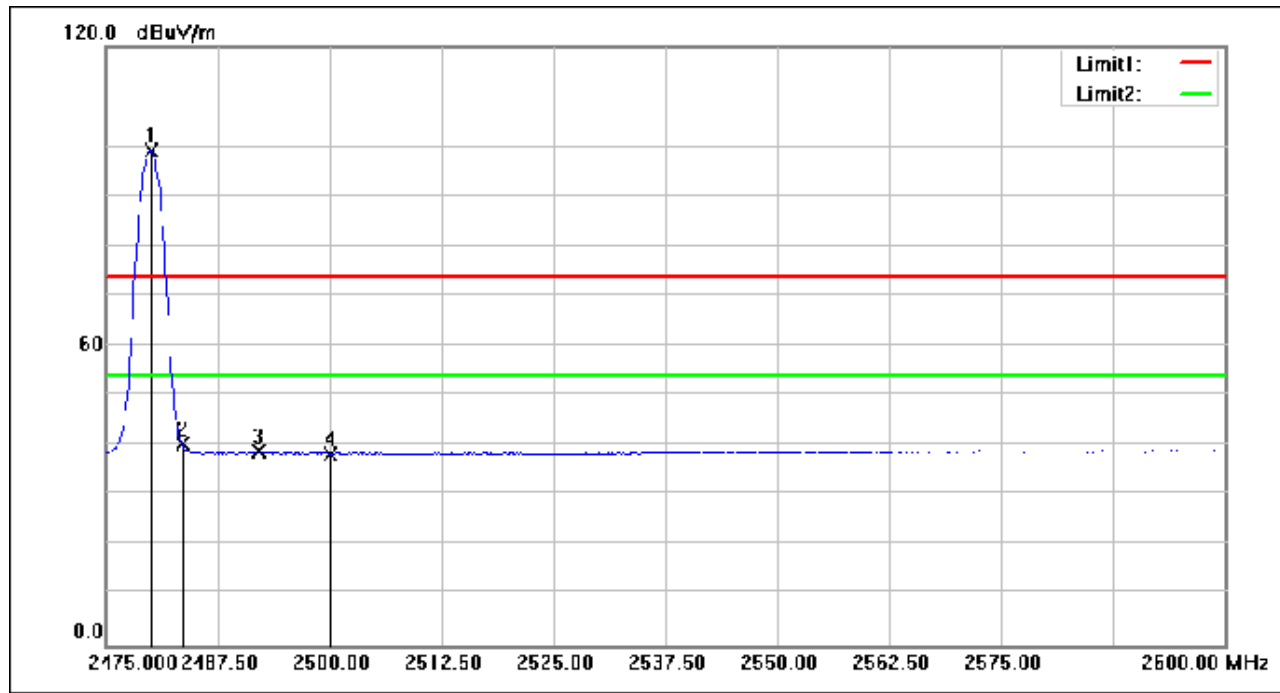

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	123.37	-24.28	99.09	54.00	45.09	AVG
2	2483.500	64.51	-24.27	40.24	54.00	-13.76	AVG
3	2492.125	63.14	-24.23	38.91	54.00	-15.09	AVG
4	2500.000	62.56	-24.19	38.37	54.00	-15.63	AVG



### 7.10 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

#### 7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C


Humidity: 50.5 % RH

Atmospheric Pressure: 1010 mbar

#### 7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.10.3 Test Setup Diagram

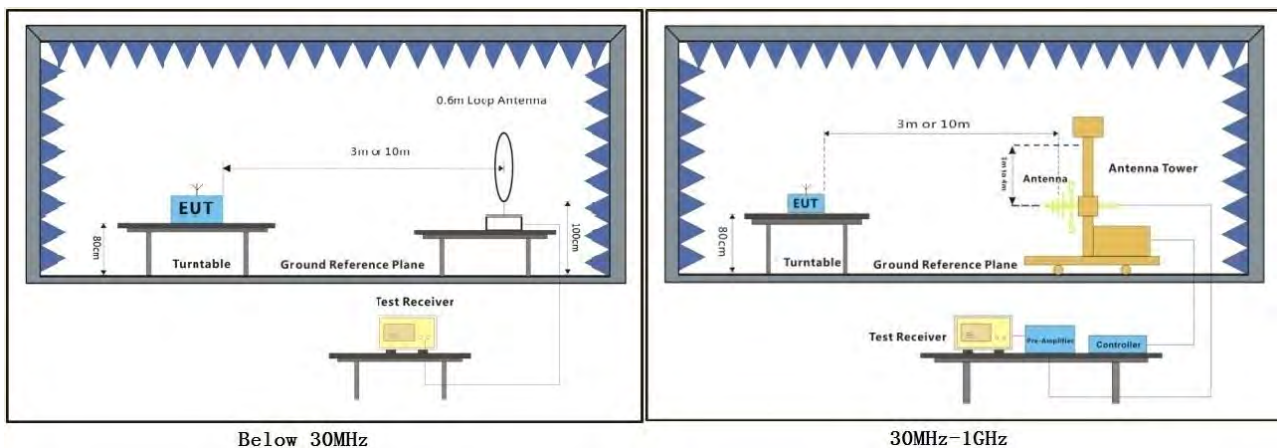

**7.10.4 Measurement Procedure and Data**

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1.  $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$
2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 59 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Antenna: Dipole; Channel:Middle

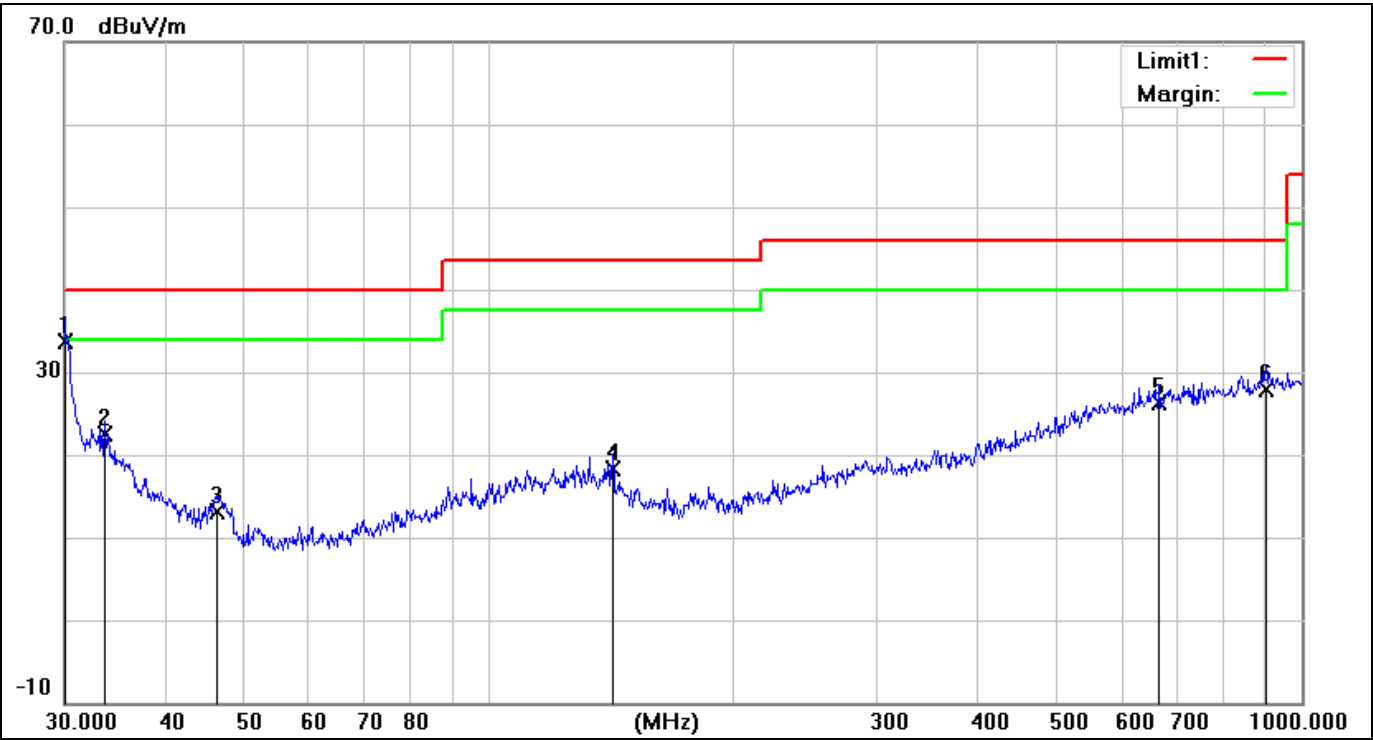

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	30.0000	14.27	19.42	33.69	40.00	-6.31	100	0	QP
2	33.5624	5.45	17.06	22.51	40.00	-17.49	100	318	QP
3	46.1780	4.90	8.19	13.09	40.00	-26.91	100	19	QP
4	141.8262	4.37	13.87	18.24	43.50	-25.26	100	0	QP
5	668.1423	2.68	23.66	26.34	46.00	-19.66	100	220	QP
6	903.3094	2.15	25.69	27.84	46.00	-18.16	200	5	QP


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 60 of 153

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Antenna: Dipole; Channel:Middle

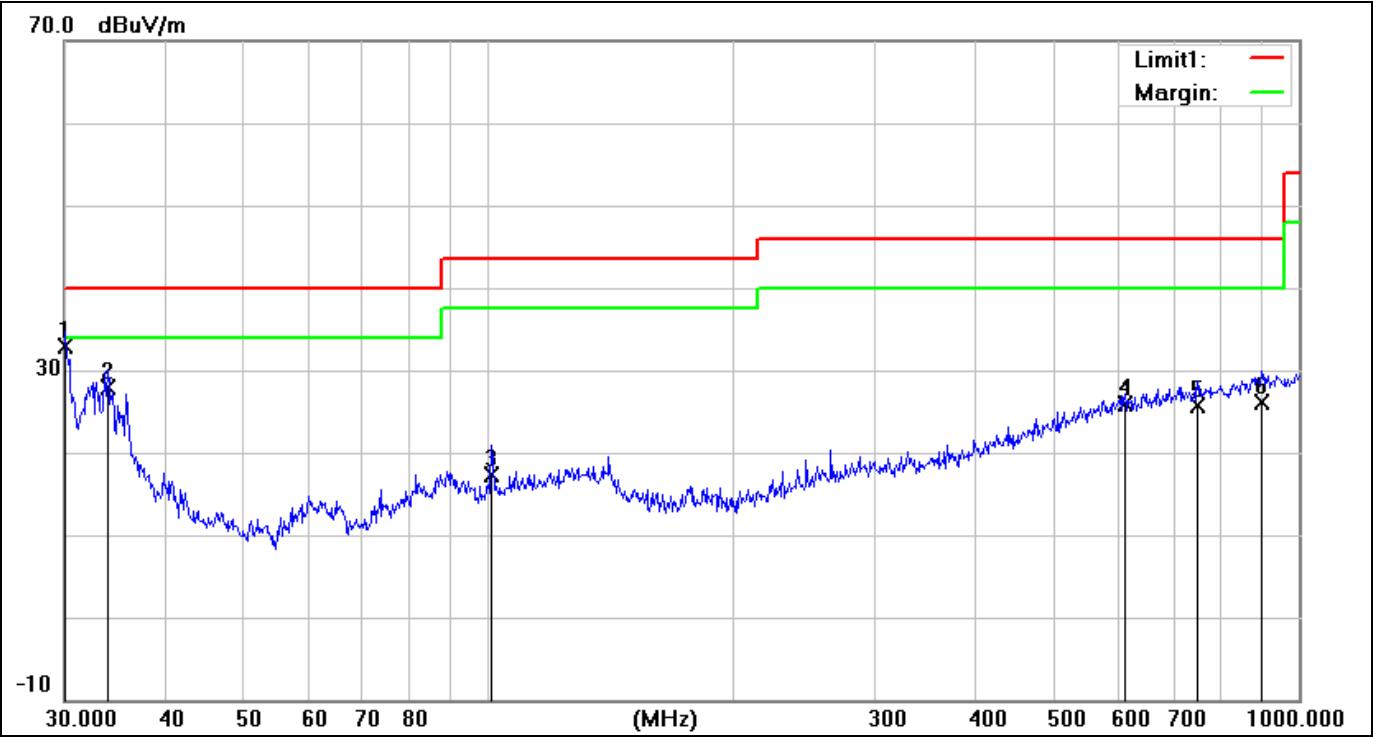

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	30.0000	13.44	19.42	32.86	40.00	-7.14	100	306	QP
2	33.9174	11.03	16.81	27.84	40.00	-12.16	100	0	QP
3	100.9340	4.59	12.77	17.36	43.50	-26.14	100	1	QP
4	609.9217	2.91	23.05	25.96	46.00	-20.04	100	168	QP
5	750.1083	1.34	24.29	25.63	46.00	-20.37	100	252	QP
6	900.1474	0.23	25.91	26.14	46.00	-19.86	200	60	QP

## 7.11 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

### 7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 20.5 °C


Humidity: 50.5 % RH

Atmospheric Pressure: 1010 mbar

### 7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

### 7.11.3 Test Setup Diagram

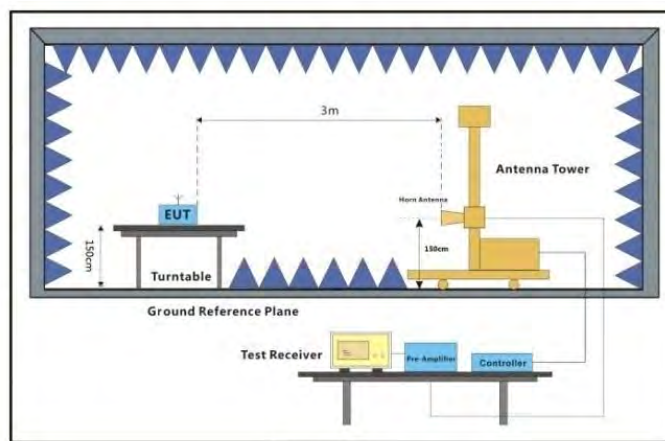

Above 1GHz

**7.11.4 Measurement Procedure and Data**

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1.  $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamplifier Factor}$
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

## Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 63 of 153

### Dipole Antenna

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:Low

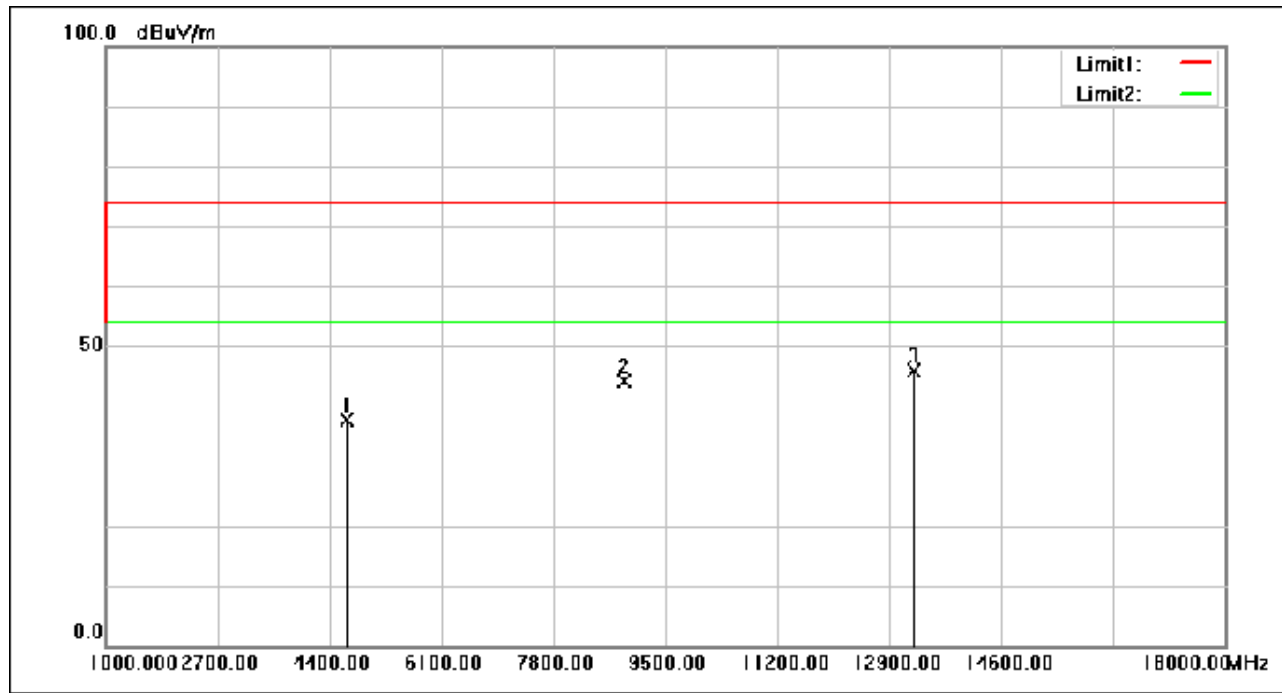

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4659.760	56.37	-18.65	37.72	74.00	-36.28	peak
2	8881.880	53.37	-9.13	44.24	74.00	-29.76	peak
3	13288.280	52.17	-6.30	45.87	74.00	-28.13	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 64 of 153

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:Low

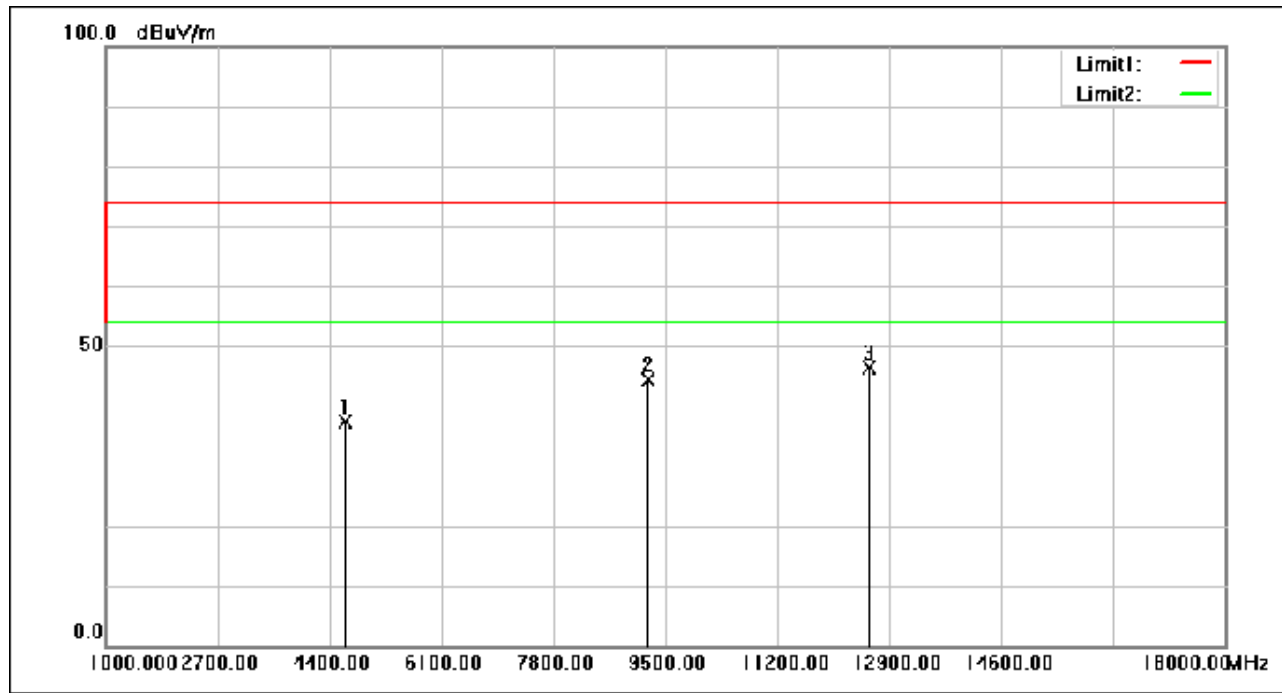

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4645.480	56.06	-18.66	37.40	74.00	-36.60	peak
2	9232.080	52.84	-8.46	44.38	74.00	-29.62	peak
3	12604.200	52.59	-6.16	46.43	74.00	-27.57	peak




## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 65 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:middle

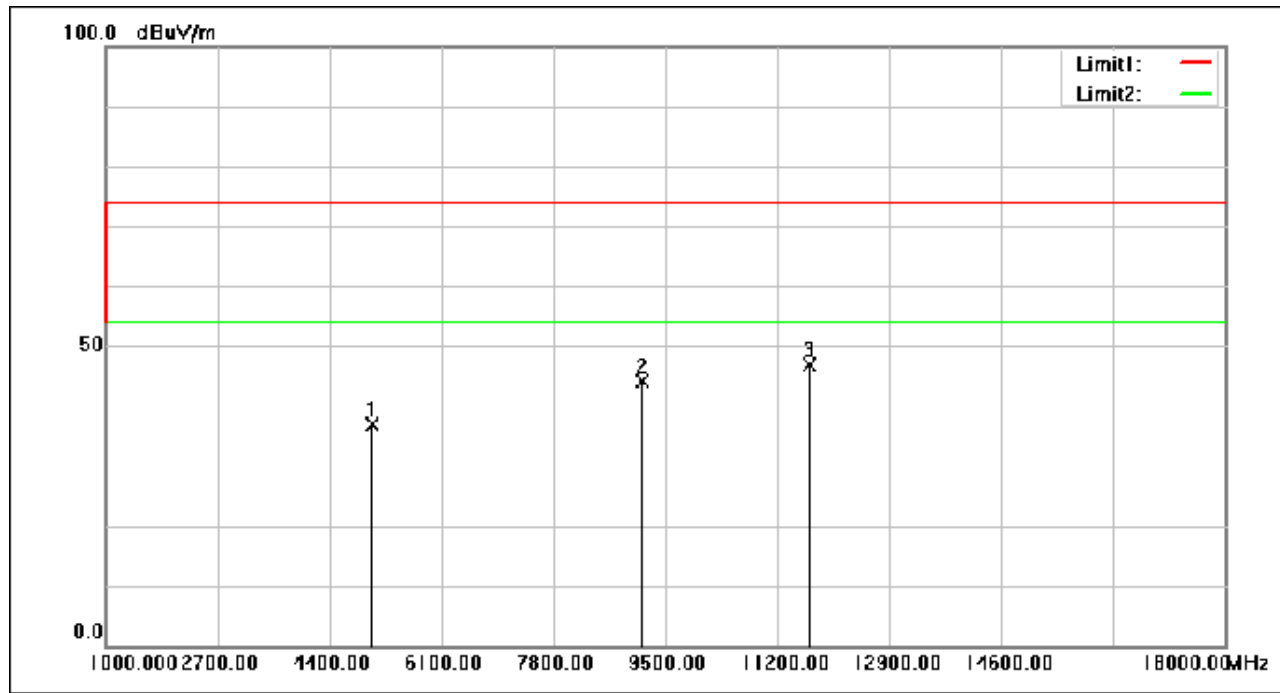

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5048.040	55.17	-18.37	36.80	74.00	-37.20	peak
2	9147.760	52.78	-8.61	44.17	74.00	-29.83	peak
3	11678.040	53.11	-6.21	46.90	74.00	-27.10	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 66 of 153

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:middle

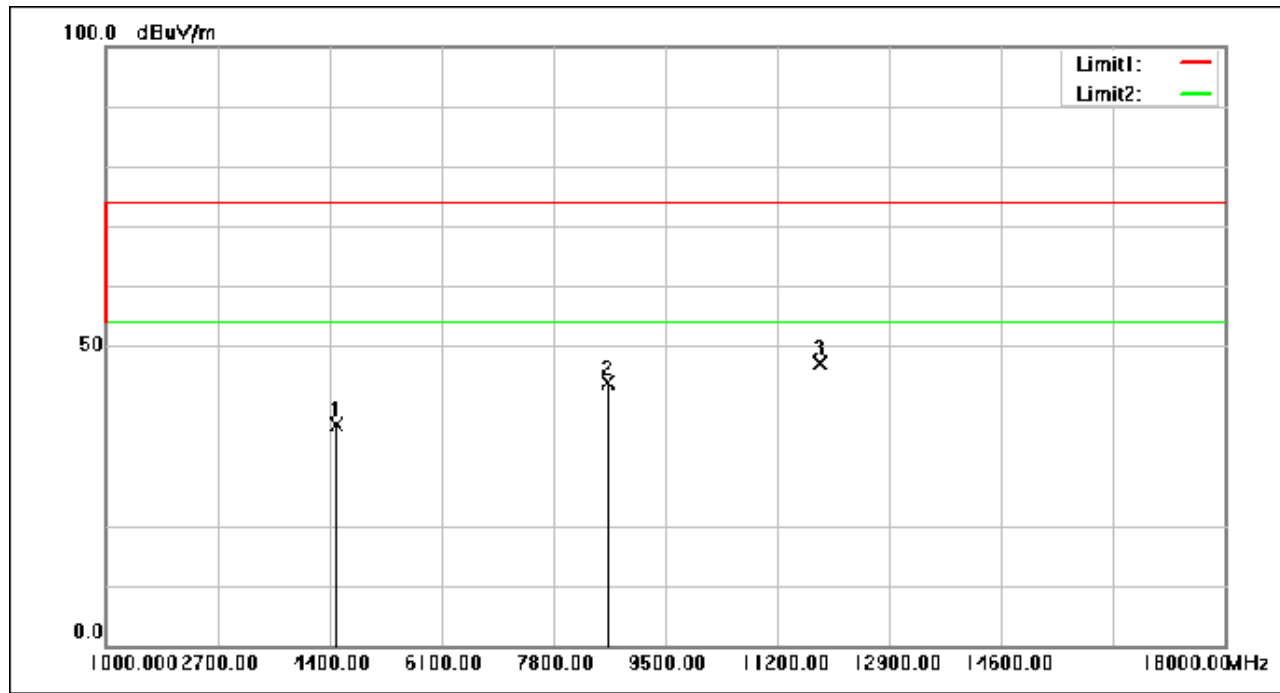

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4518.320	55.67	-18.91	36.76	74.00	-37.24	peak
2	8616.000	53.36	-9.57	43.79	74.00	-30.21	peak
3	11850.760	53.33	-6.08	47.25	74.00	-26.75	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 67 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

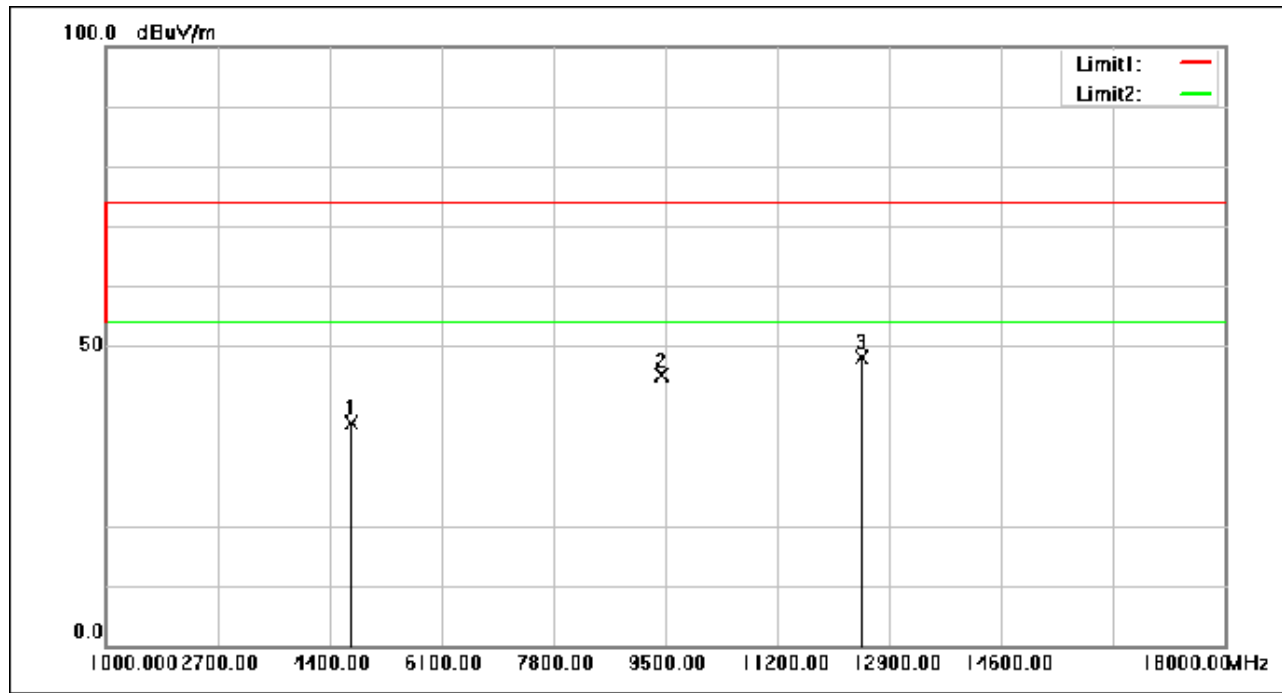

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4723.000	55.71	-18.61	37.10	74.00	-36.90	peak
2	9458.520	53.24	-8.04	45.20	74.00	-28.80	peak
3	12476.360	54.26	-6.10	48.16	74.00	-25.84	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 68 of 153

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:High

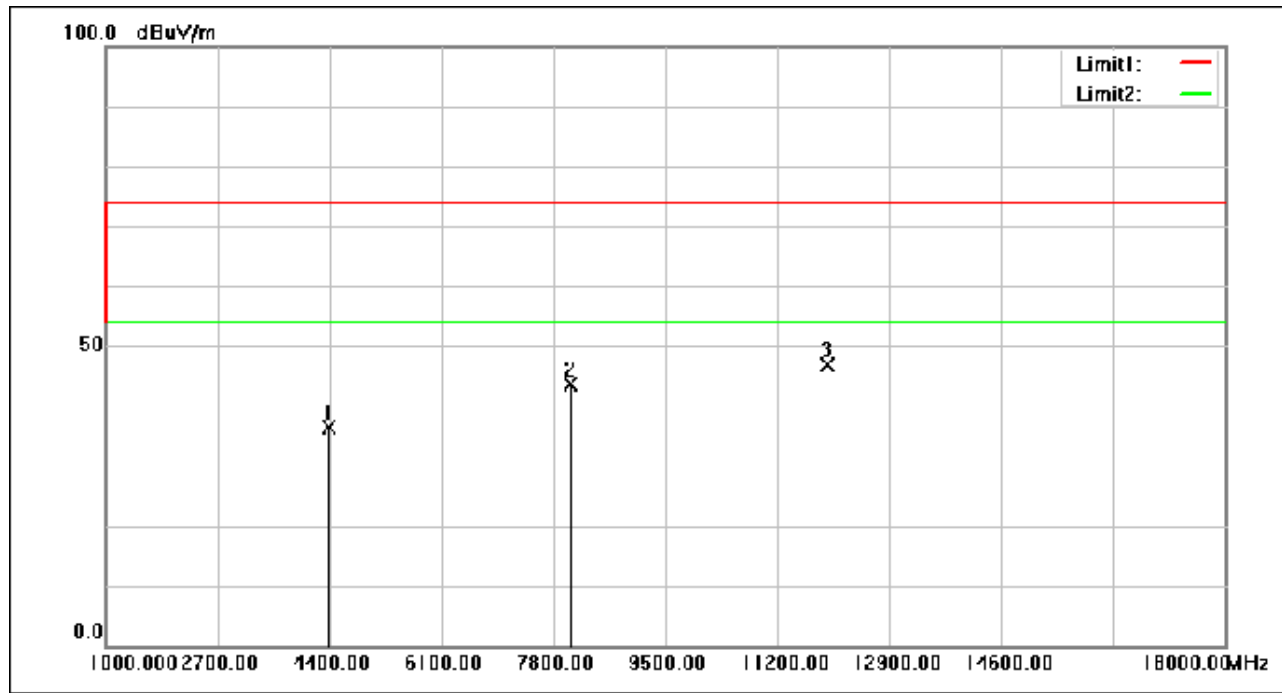

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4387.760	55.77	-19.29	36.48	74.00	-37.52	peak
2	8071.320	54.10	-10.47	43.63	74.00	-30.37	peak
3	11975.200	52.85	-5.92	46.93	74.00	-27.07	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 69 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: Low

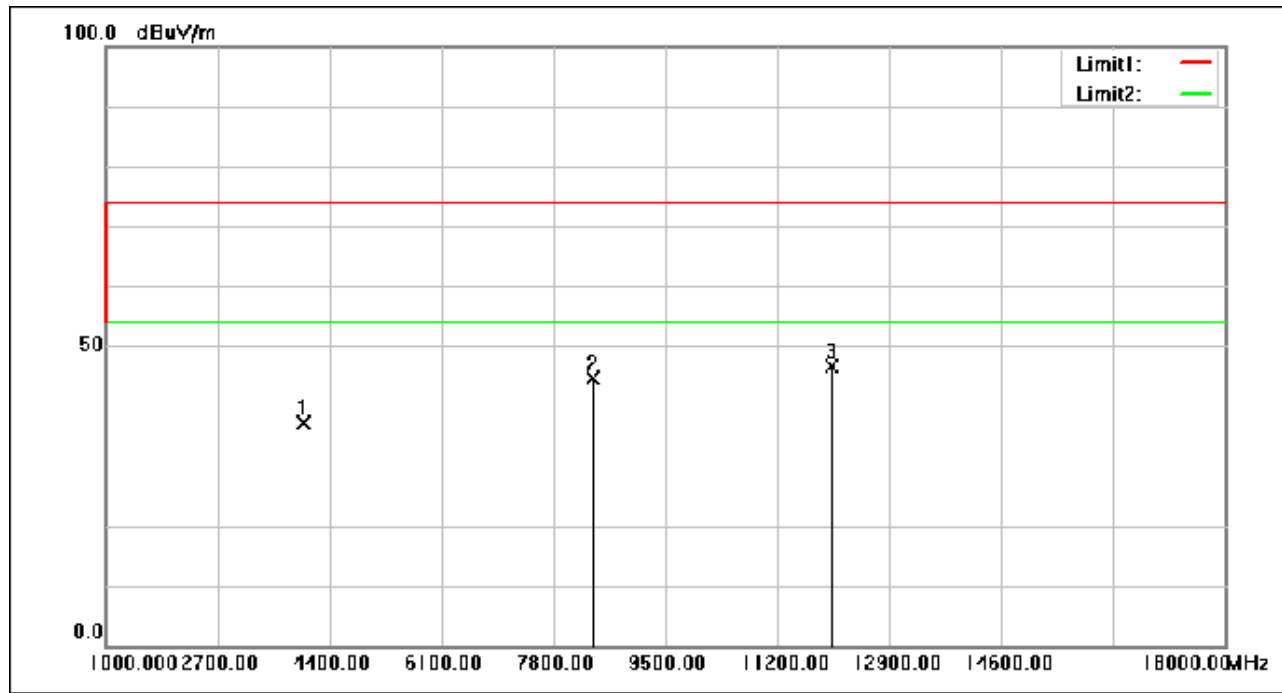

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3994.720	57.27	-20.24	37.03	74.00	-36.97	peak
2	8398.400	54.51	-9.92	44.59	74.00	-29.41	peak
3	12041.840	52.60	-5.91	46.69	74.00	-27.31	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 70 of 153

Test Mode: 05; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: Low

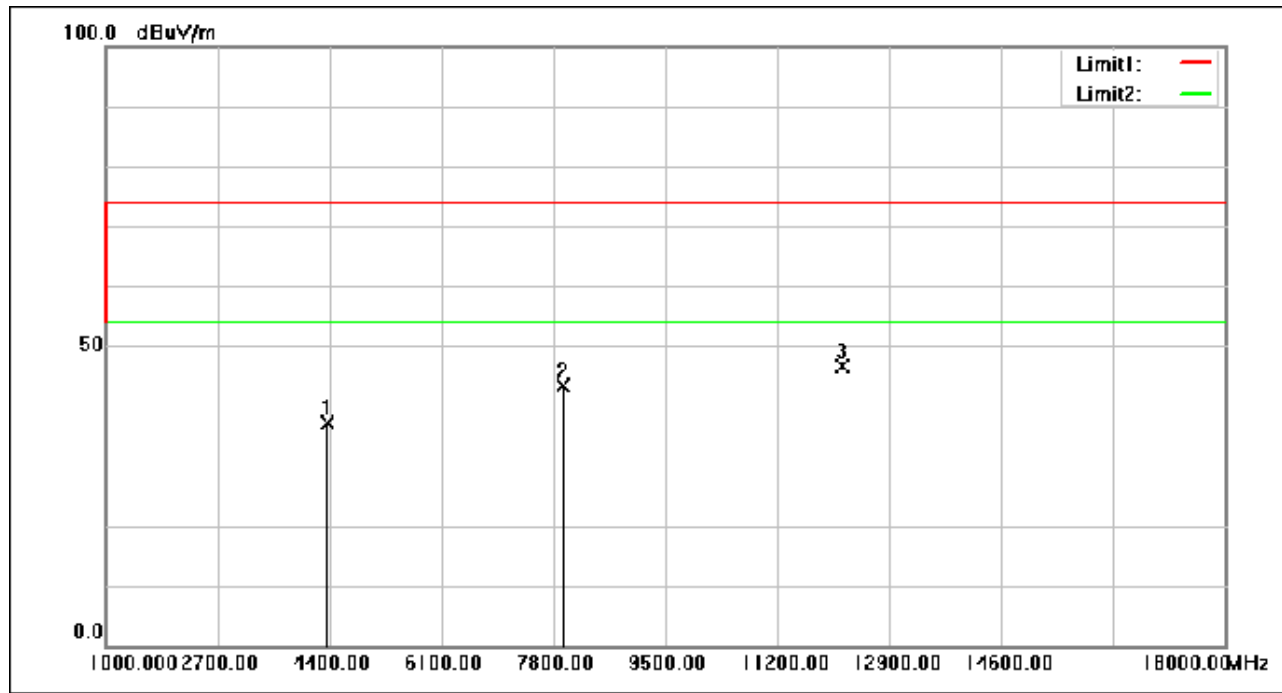

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4370.080	56.48	-19.34	37.14	74.00	-36.86	peak
2	7948.240	54.03	-10.67	43.36	74.00	-30.64	peak
3	12190.080	52.68	-5.97	46.71	74.00	-27.29	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 71 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: middle

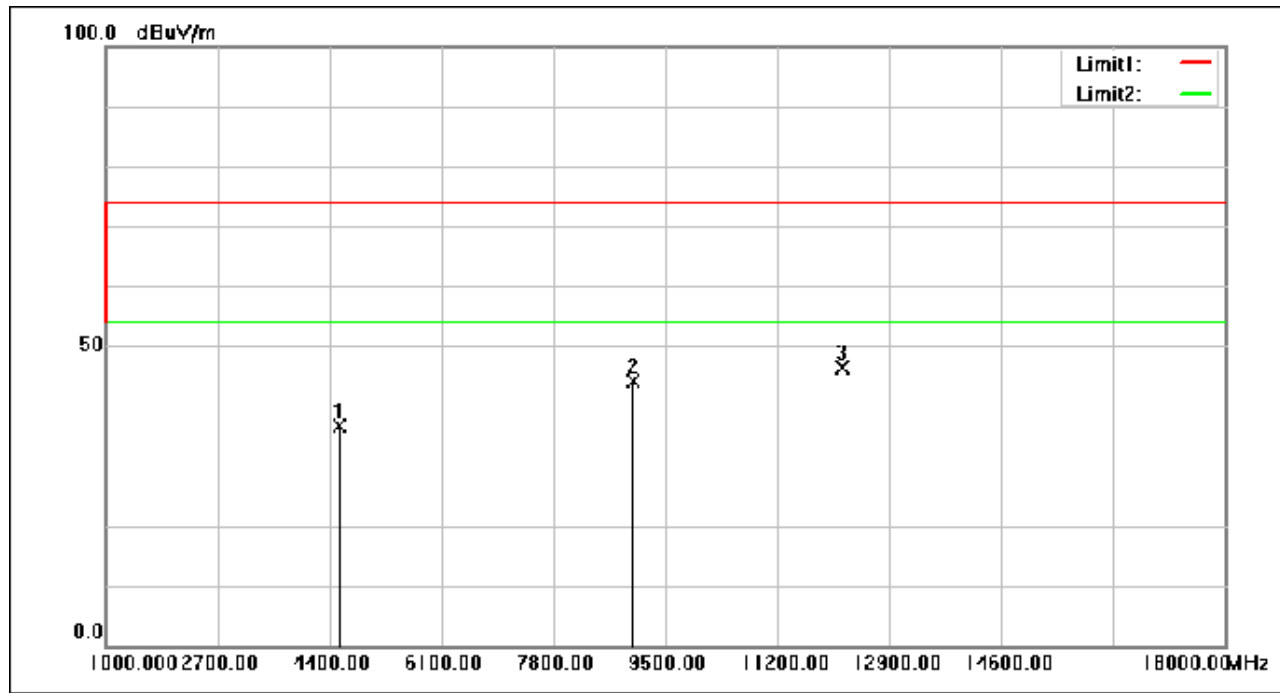

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4565.920	55.32	-18.77	36.55	74.00	-37.45	peak
2	9019.240	52.94	-8.86	44.08	74.00	-29.92	peak
3	12186.000	52.40	-5.97	46.43	74.00	-27.57	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 72 of 153

Test Mode: 05; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: middle

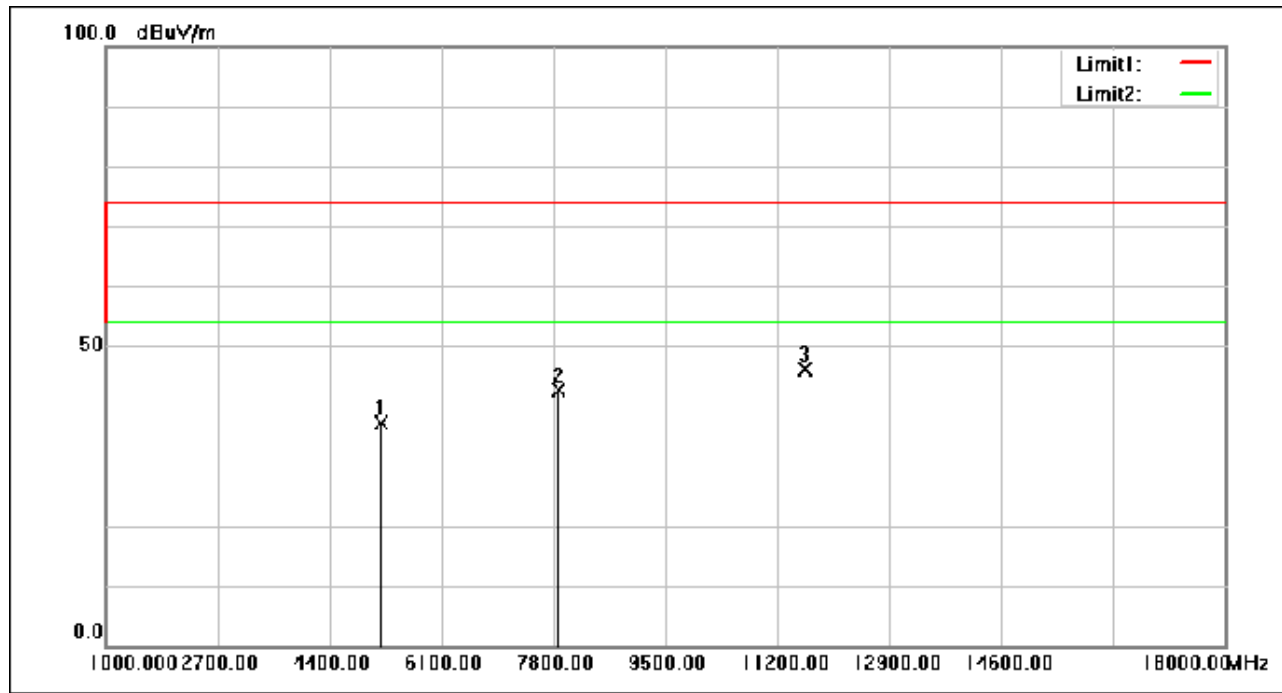

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5197.640	55.24	-18.14	37.10	74.00	-36.90	peak
2	7901.320	53.45	-10.73	42.72	74.00	-31.28	peak
3	11612.760	52.48	-6.27	46.21	74.00	-27.79	peak




## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 73 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: High

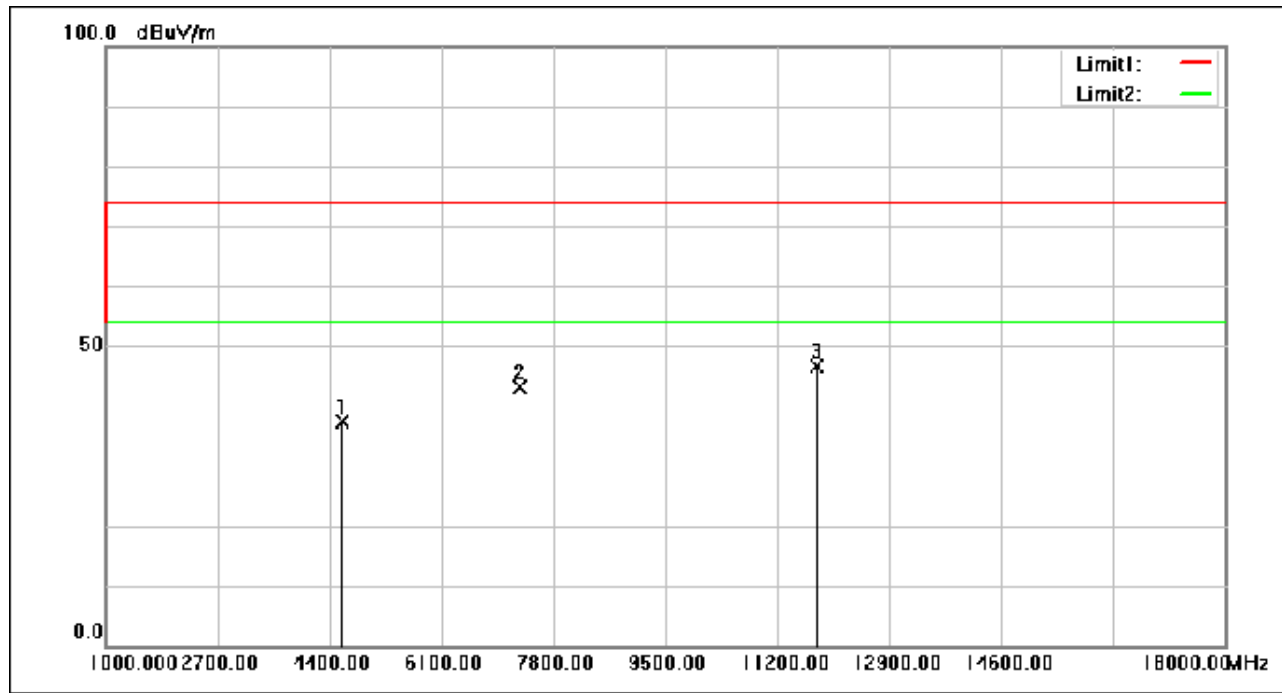

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4587.000	55.96	-18.70	37.26	74.00	-36.74	peak
2	7297.480	54.48	-11.44	43.04	74.00	-30.96	peak
3	11807.240	52.81	-6.11	46.70	74.00	-27.30	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 74 of 153

Test Mode: 05; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: High

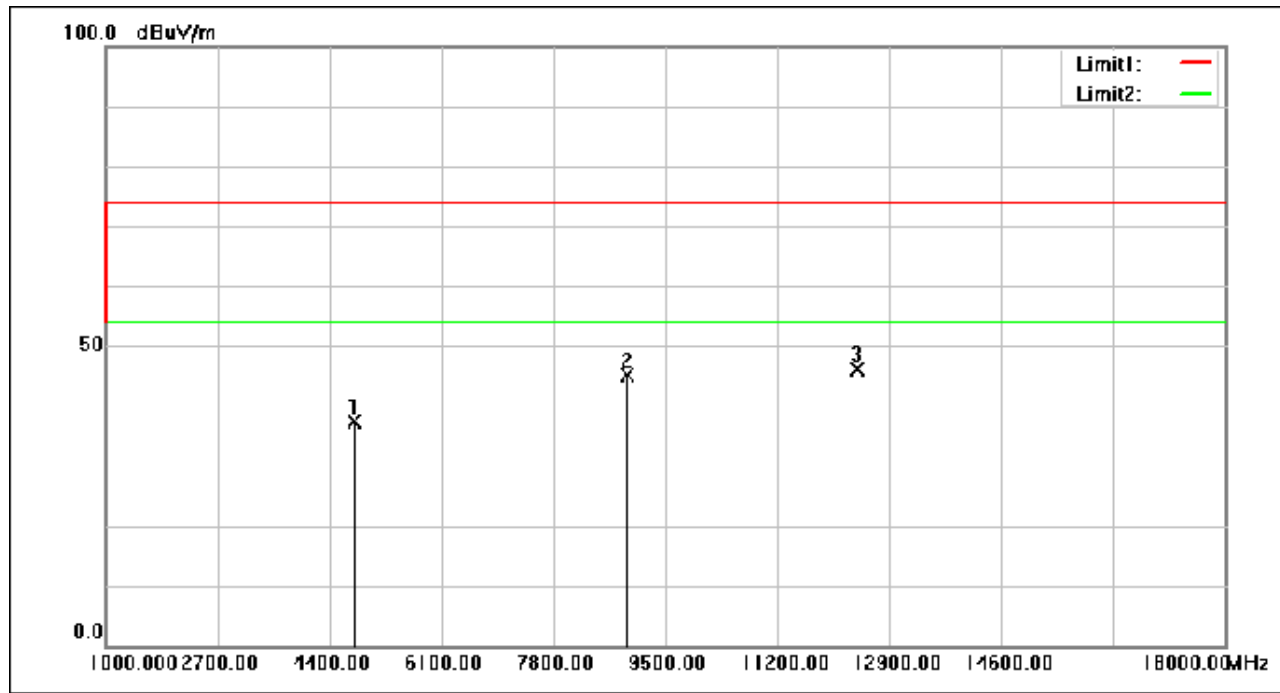

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4785.560	55.96	-18.57	37.39	74.00	-36.61	peak
2	8927.440	54.08	-9.05	45.03	74.00	-28.97	peak
3	12416.520	52.30	-6.08	46.22	74.00	-27.78	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 75 of 153

Test Mode: 05; Polarity: Horizontal; Modulation: 8DPSK; Channel: Low

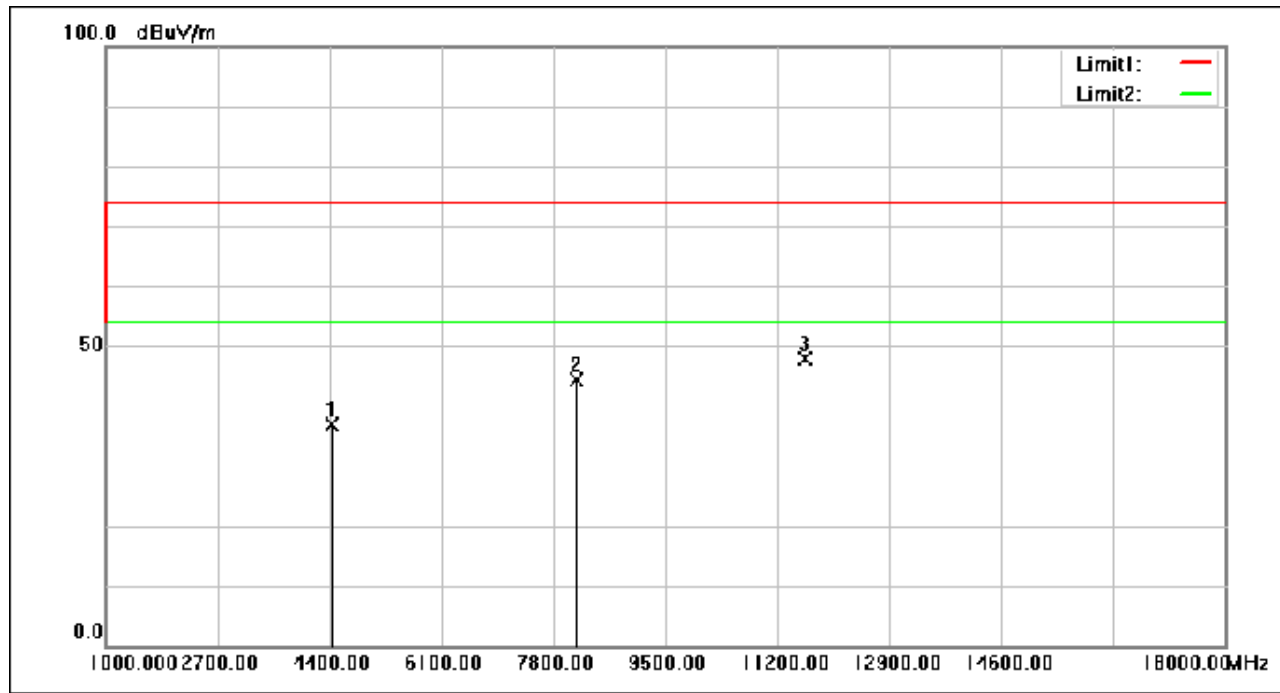

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4438.760	55.97	-19.14	36.83	74.00	-37.17	peak
2	8152.920	54.62	-10.32	44.30	74.00	-29.70	peak
3	11635.880	54.24	-6.25	47.99	74.00	-26.01	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 76 of 153

Test Mode: 05; Polarity: Vertical; Modulation: 8DPSK; Channel: Low

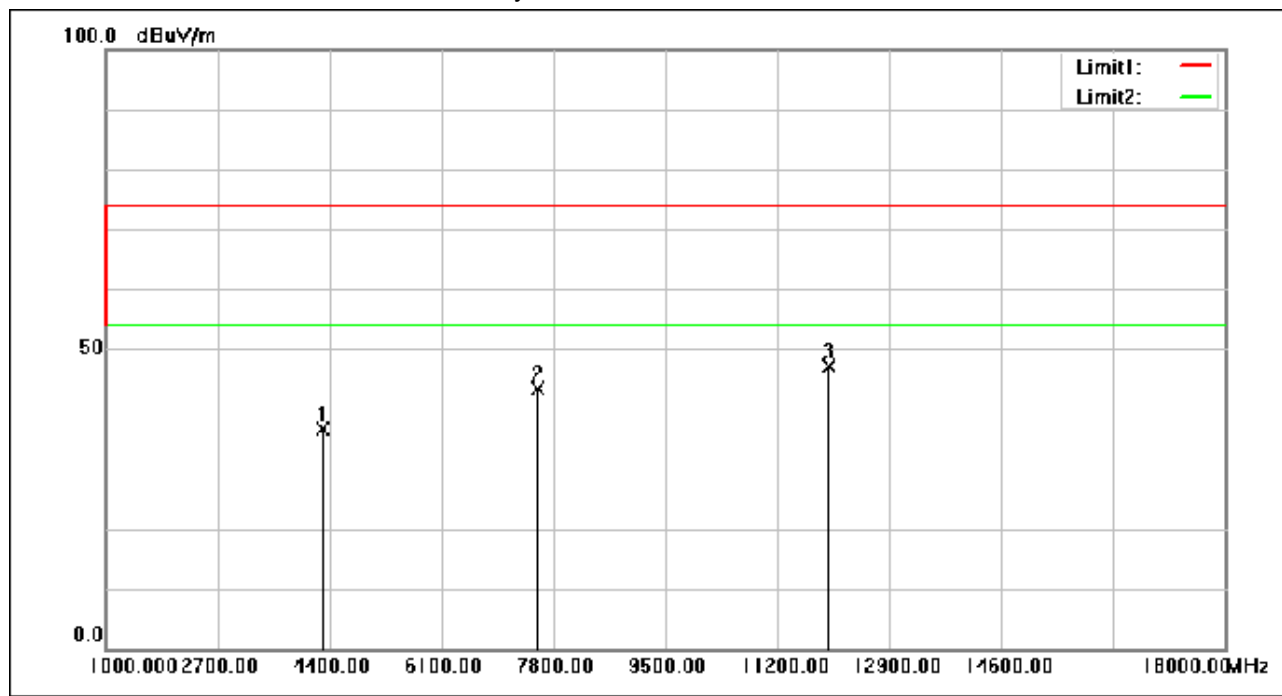

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4304.800	56.25	-19.53	36.72	74.00	-37.28	peak
2	7569.480	54.51	-11.16	43.35	74.00	-30.65	peak
3	11984.040	53.05	-5.92	47.13	74.00	-26.87	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 77 of 153

Test Mode: 05; Polarity: Horizontal; Modulation: 8DPSK; Channel: middle

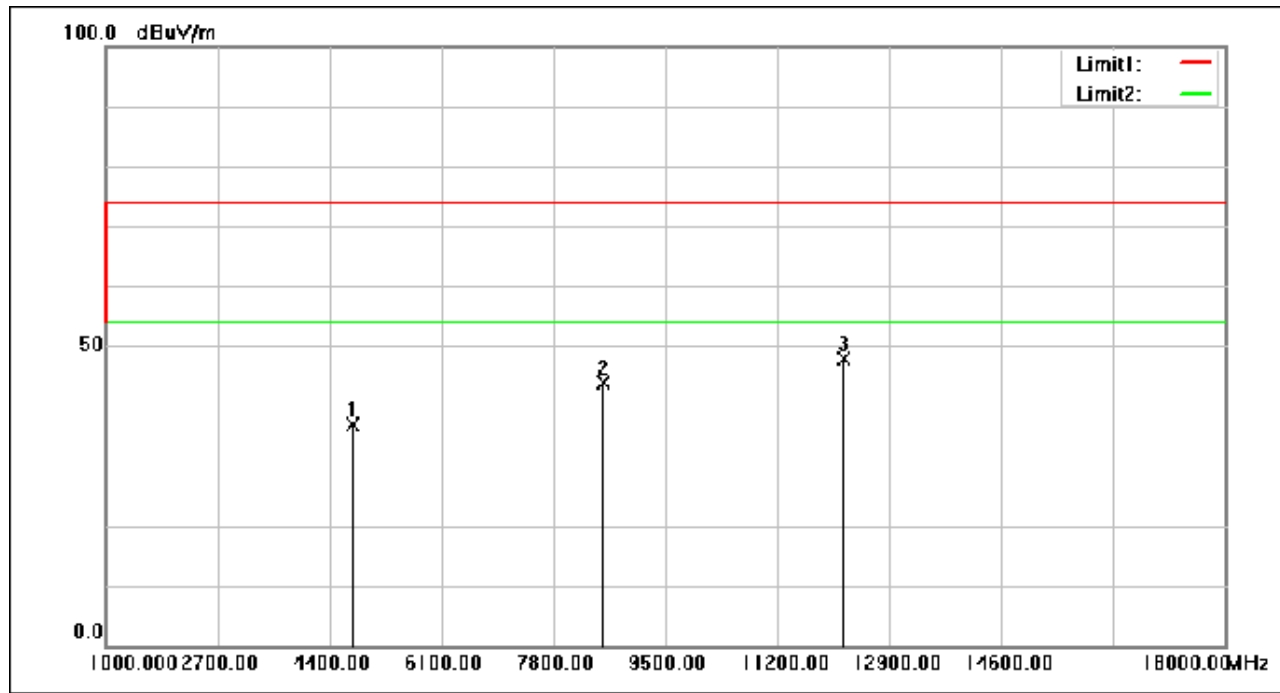

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4770.600	55.37	-18.58	36.79	74.00	-37.21	peak
2	8571.800	53.45	-9.64	43.81	74.00	-30.19	peak
3	12209.800	53.83	-5.98	47.85	74.00	-26.15	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 78 of 153

Test Mode: 05; Polarity: Vertical; Modulation: 8DPSK; Channel: middle

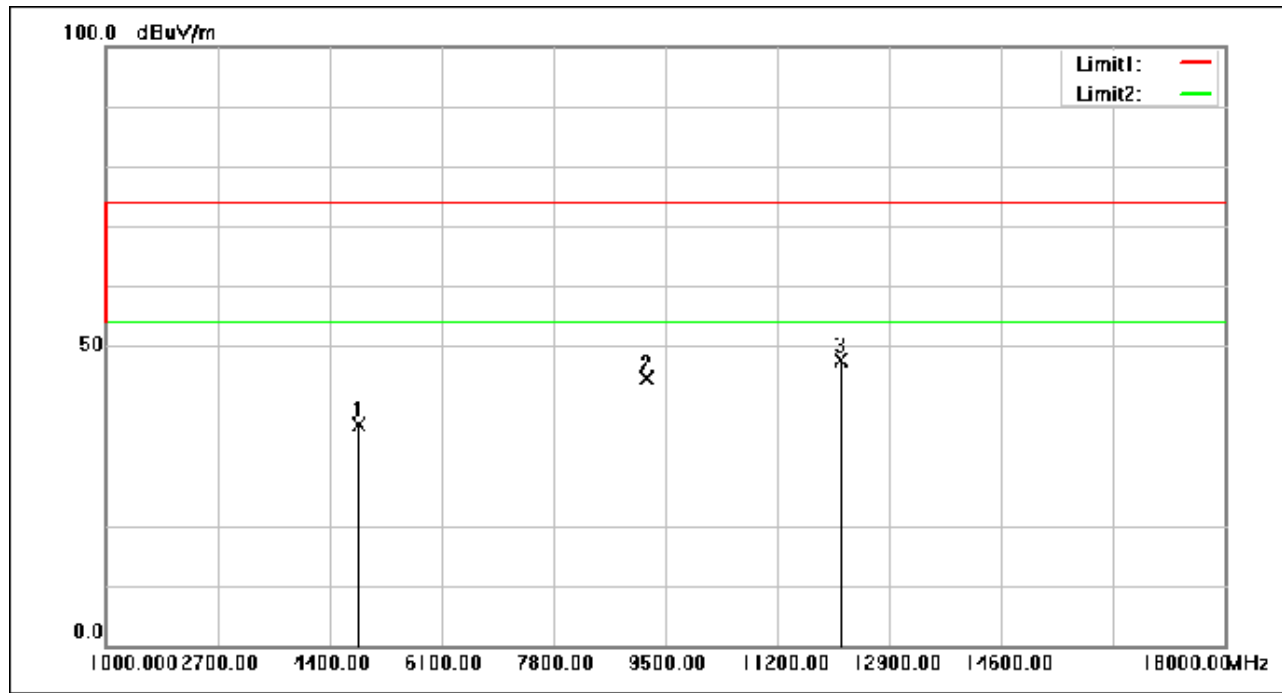

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.720	55.42	-18.54	36.88	74.00	-37.12	peak
2	9221.880	53.07	-8.48	44.59	74.00	-29.41	peak
3	12178.520	53.63	-5.97	47.66	74.00	-26.34	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 79 of 153

Test Mode: 05; Polarity: Horizontal; Modulation: 8DPSK; Channel: High

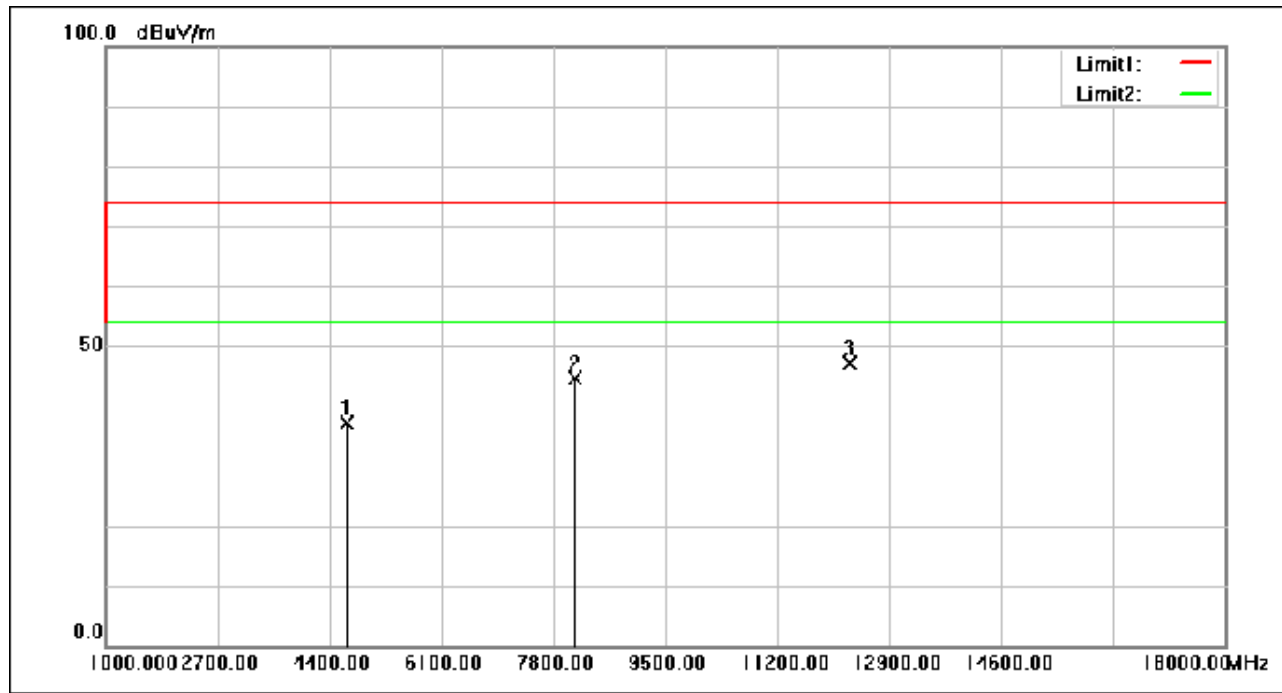

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4659.080	55.81	-18.65	37.16	74.00	-36.84	peak
2	8138.640	54.94	-10.35	44.59	74.00	-29.41	peak
3	12319.280	53.27	-6.03	47.24	74.00	-26.76	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 80 of 153

Test Mode: 05; Polarity: Vertical; Modulation:8DPSK; Channel:High

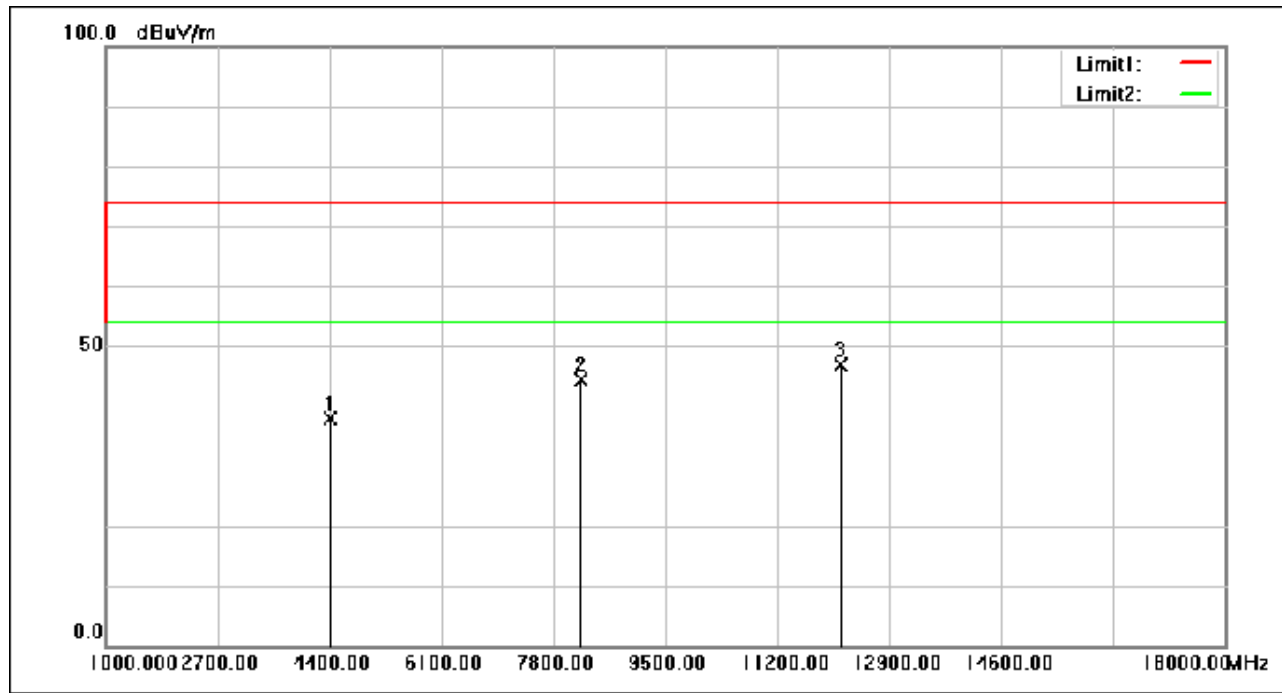

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4432.640	57.01	-19.16	37.85	74.00	-36.15	peak
2	8208.000	54.66	-10.24	44.42	74.00	-29.58	peak
3	12181.920	52.84	-5.97	46.87	74.00	-27.13	peak



## Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 81 of 153

### PCB Antenna

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:Low

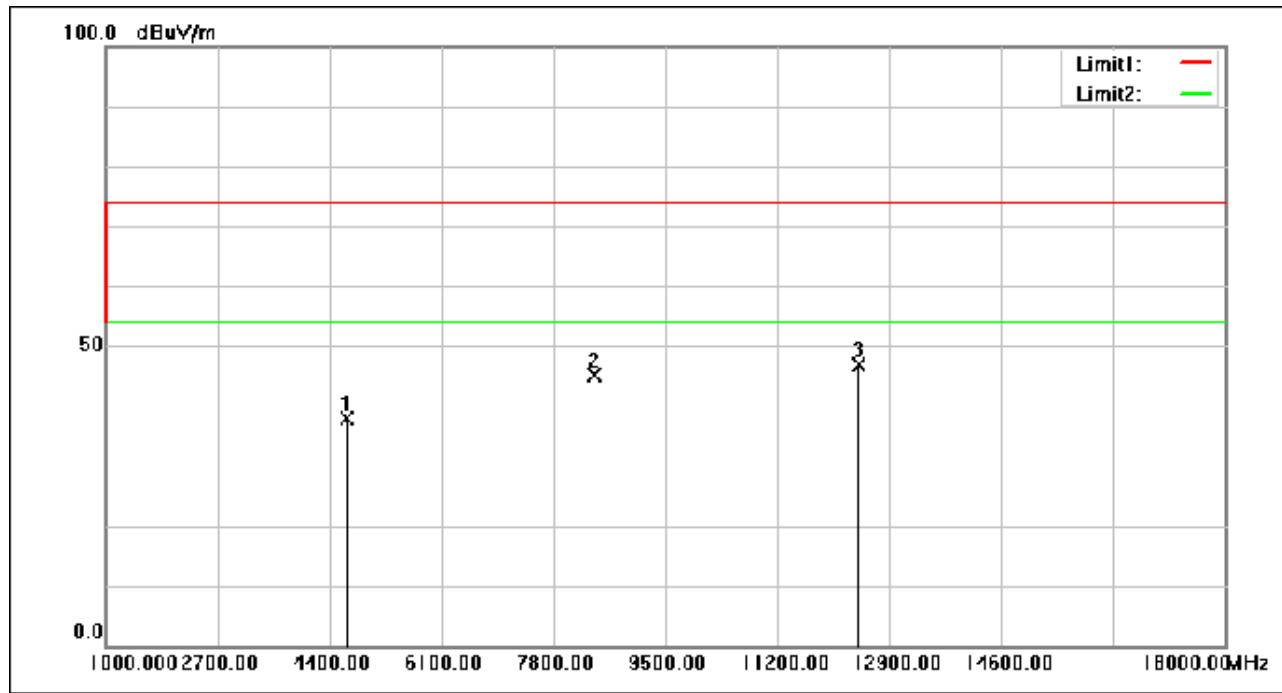

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4655.000	56.44	-18.65	37.79	74.00	-36.21	peak
2	8436.480	54.88	-9.86	45.02	74.00	-28.98	peak
3	12452.560	52.89	-6.09	46.80	74.00	-27.20	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 82 of 153

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:Low

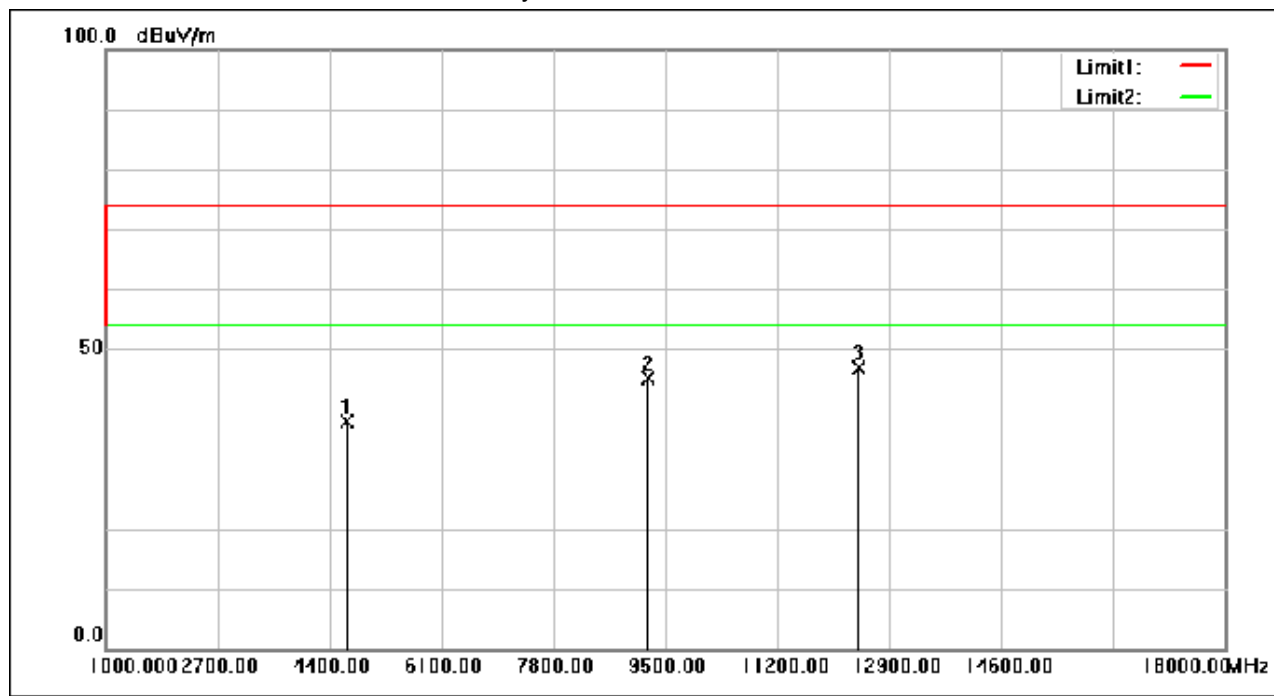

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4655.000	56.44	-18.65	37.79	74.00	-36.21	peak
2	9231.400	53.50	-8.46	45.04	74.00	-28.96	peak
3	12452.560	52.89	-6.09	46.80	74.00	-27.20	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 83 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:middle

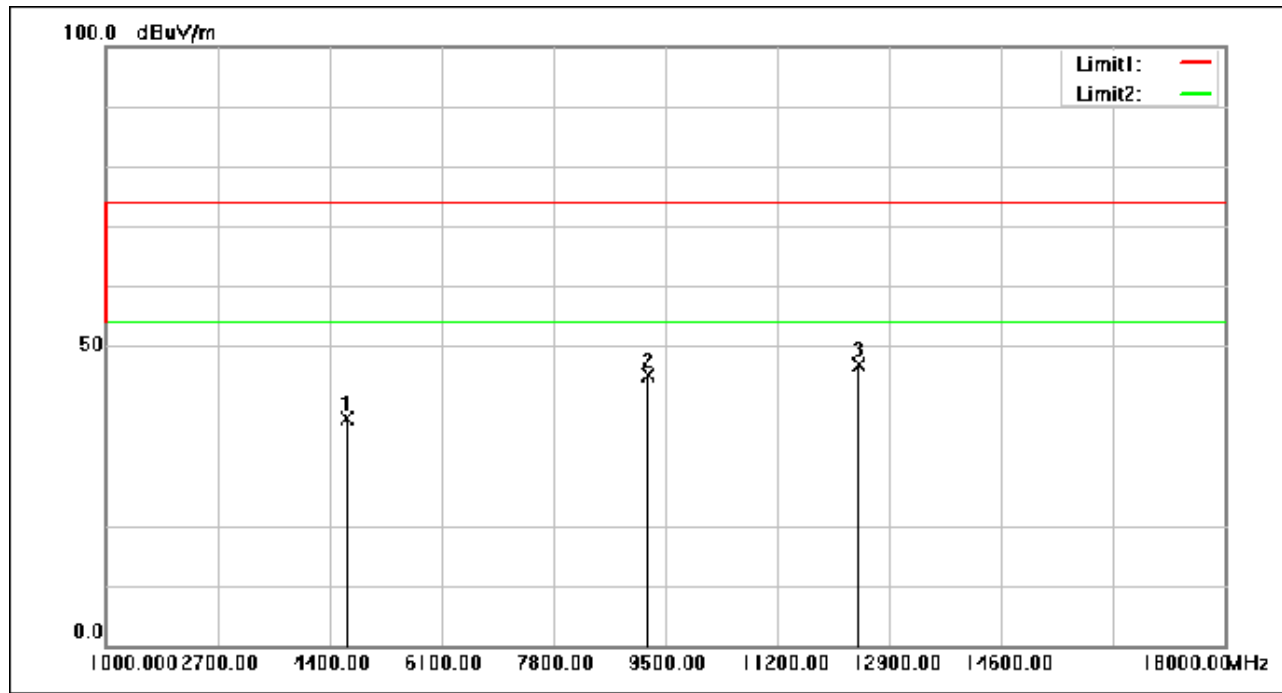

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4655.000	56.44	-18.65	37.79	74.00	-36.21	peak
2	9231.400	53.50	-8.46	45.04	74.00	-28.96	peak
3	12452.560	52.89	-6.09	46.80	74.00	-27.20	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 84 of 153

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:middle

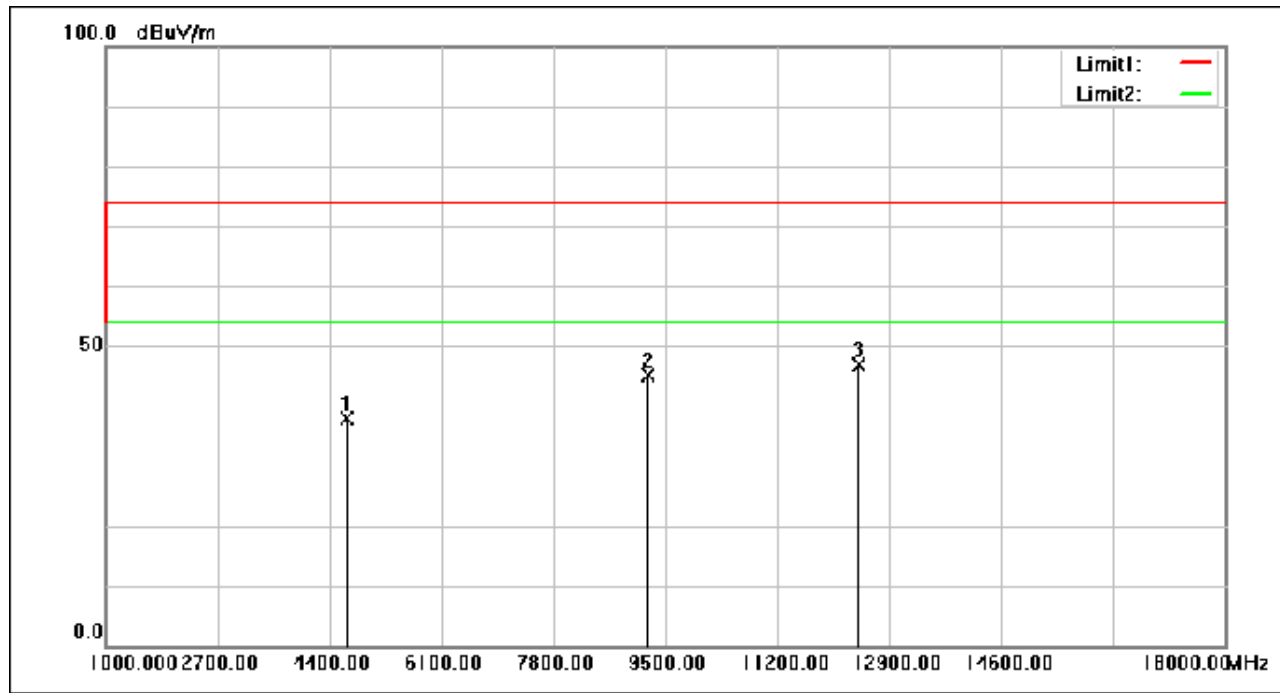

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4655.000	56.44	-18.65	37.79	74.00	-36.21	peak
2	9231.400	53.50	-8.46	45.04	74.00	-28.96	peak
3	12452.560	52.89	-6.09	46.80	74.00	-27.20	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 85 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:GFSK; Channel:High

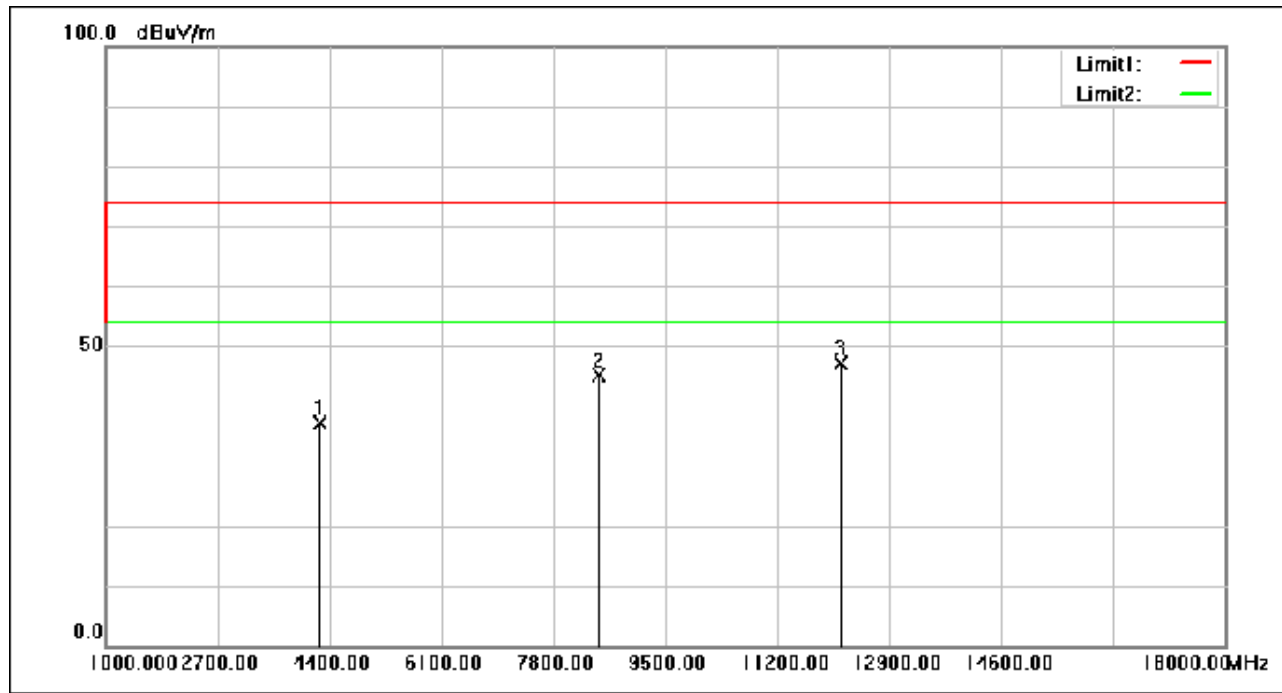

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4247.680	56.78	-19.70	37.08	74.00	-36.92	peak
2	8484.760	54.87	-9.77	45.10	74.00	-28.90	peak
3	12180.560	53.09	-5.97	47.12	74.00	-26.88	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 86 of 153

Test Mode: 05; Polarity: Vertical; Modulation:GFSK; Channel:High

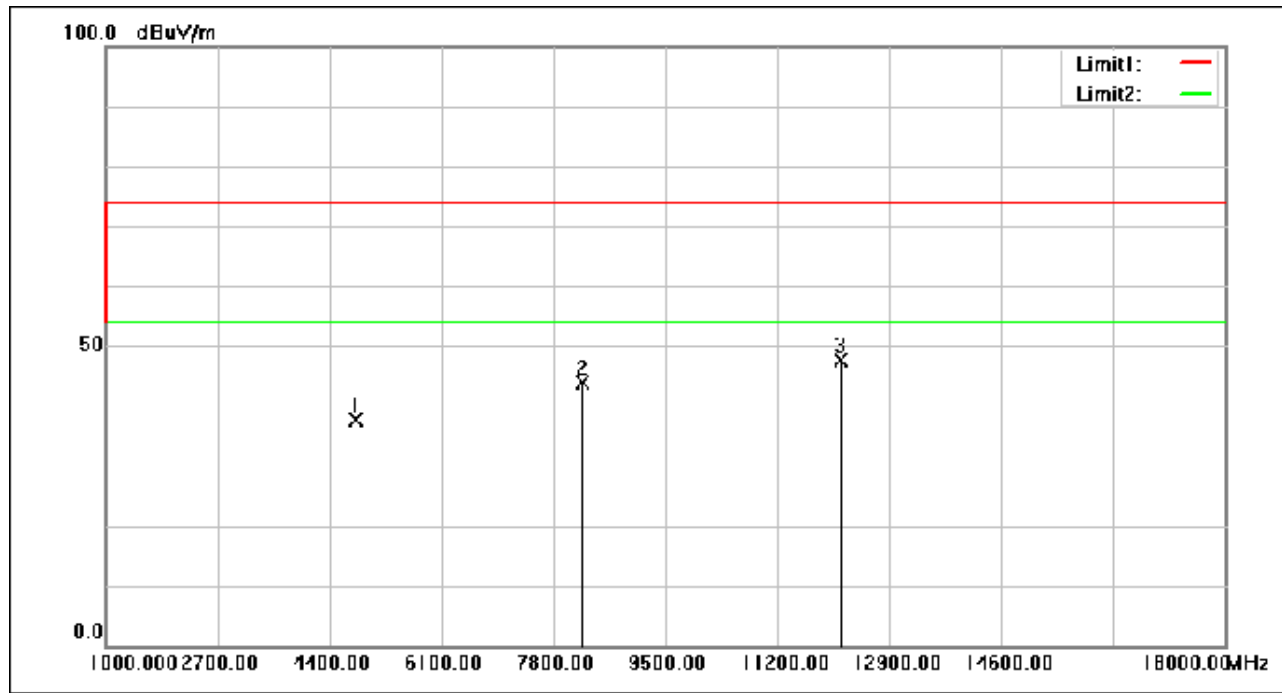

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4793.040	56.25	-18.57	37.68	74.00	-36.32	peak
2	8248.800	54.00	-10.17	43.83	74.00	-30.17	peak
3	12155.400	53.63	-5.96	47.67	74.00	-26.33	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 87 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: Low

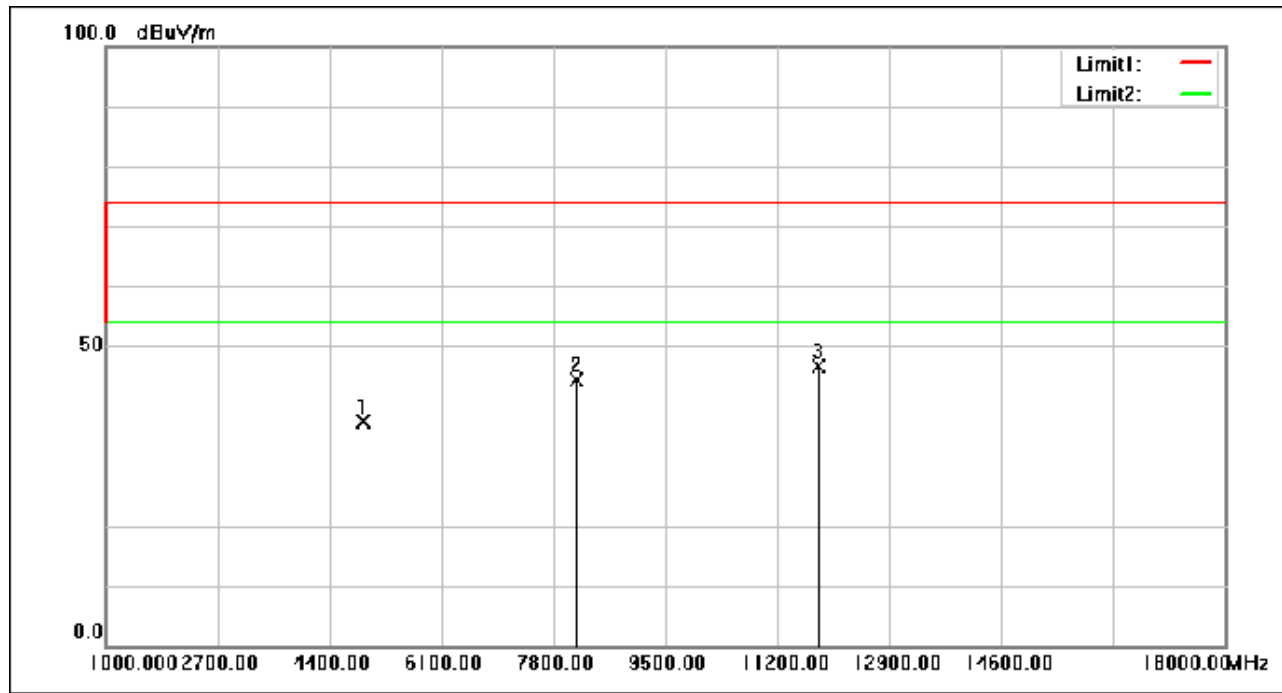

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4913.400	55.86	-18.50	37.36	74.00	-36.64	peak
2	8148.160	54.78	-10.34	44.44	74.00	-29.56	peak
3	11816.080	52.74	-6.10	46.64	74.00	-27.36	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 88 of 153

Test Mode: 05; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: Low

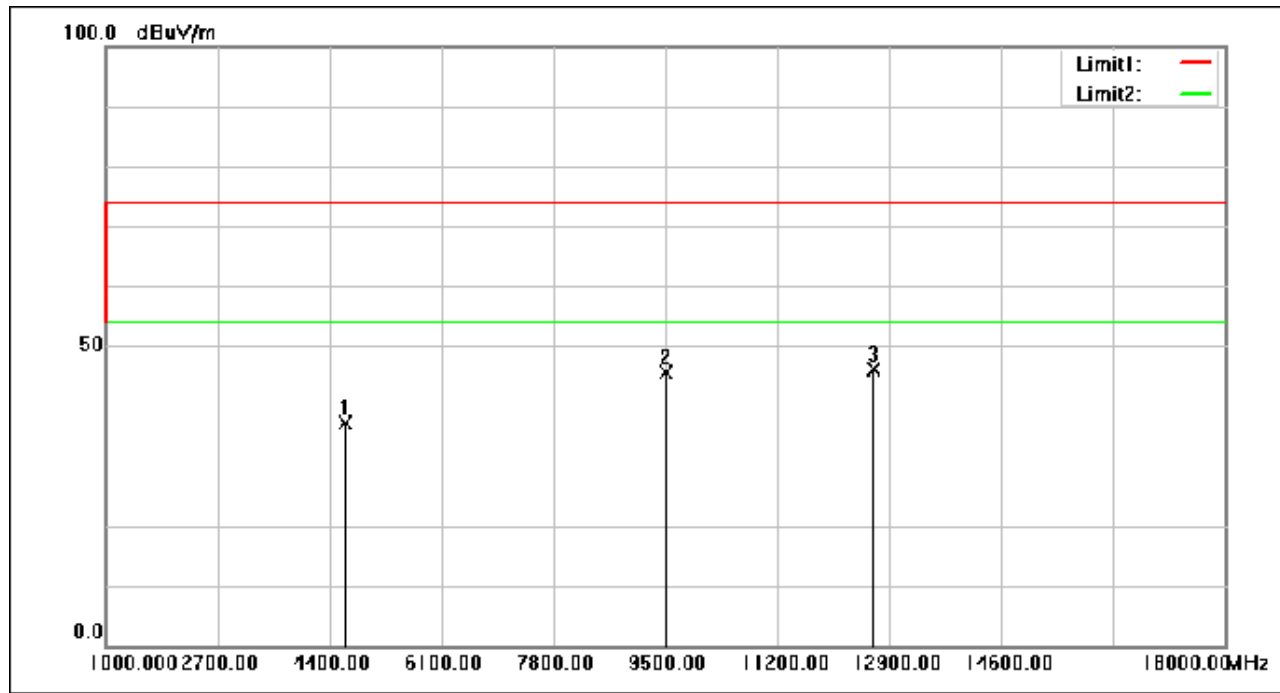

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4652.960	55.70	-18.65	37.05	74.00	-36.95	peak
2	9502.720	53.55	-7.95	45.60	74.00	-28.40	peak
3	12677.640	52.45	-6.20	46.25	74.00	-27.75	peak




## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 89 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: middle

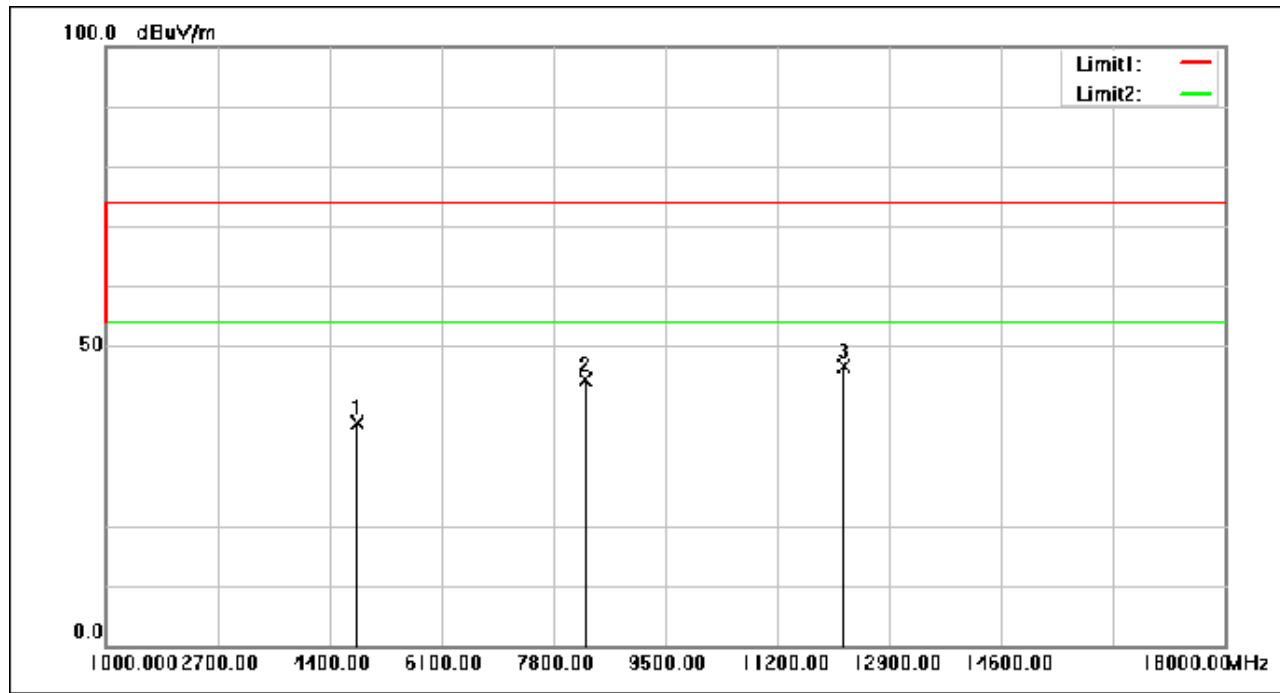

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4812.080	55.74	-18.56	37.18	74.00	-36.82	peak
2	8290.280	54.52	-10.10	44.42	74.00	-29.58	peak
3	12217.280	52.68	-5.99	46.69	74.00	-27.31	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 90 of 153

Test Mode: 05; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: middle

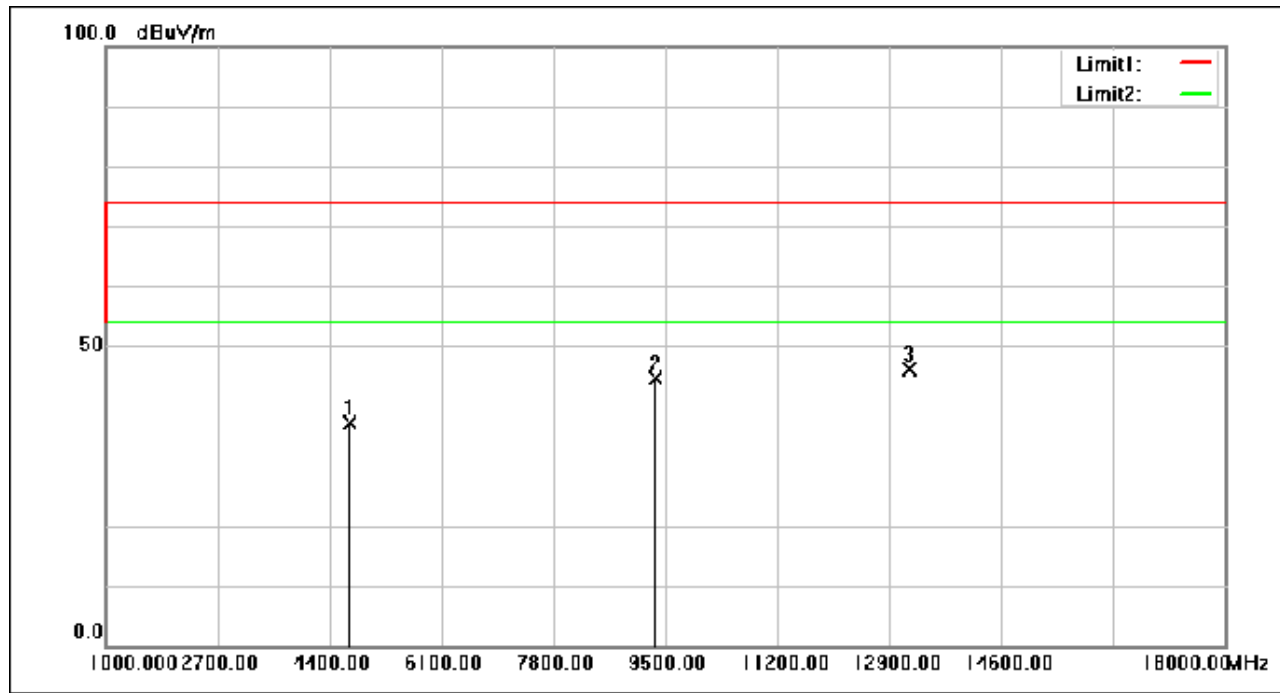

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4721.640	55.65	-18.61	37.04	74.00	-36.96	peak
2	9363.320	52.85	-8.22	44.63	74.00	-29.37	peak
3	13206.680	52.44	-6.29	46.15	74.00	-27.85	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 91 of 153

Test Mode: 05; Polarity: Horizontal; Modulation:  $\pi/4$  DQPSK; Channel: High

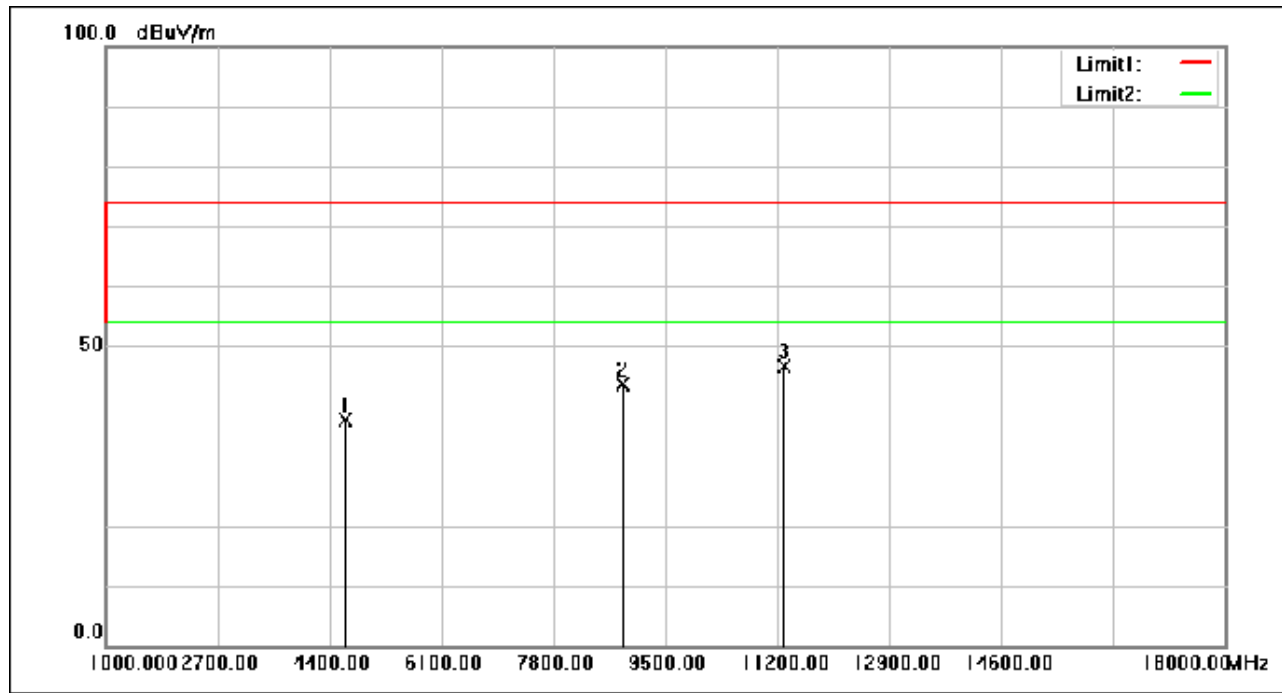

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4648.880	56.29	-18.65	37.64	74.00	-36.36	peak
2	8859.440	52.81	-9.16	43.65	74.00	-30.35	peak
3	11316.960	53.19	-6.50	46.69	74.00	-27.31	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 92 of 153

Test Mode: 05; Polarity: Vertical; Modulation:  $\pi/4$  DQPSK; Channel: High

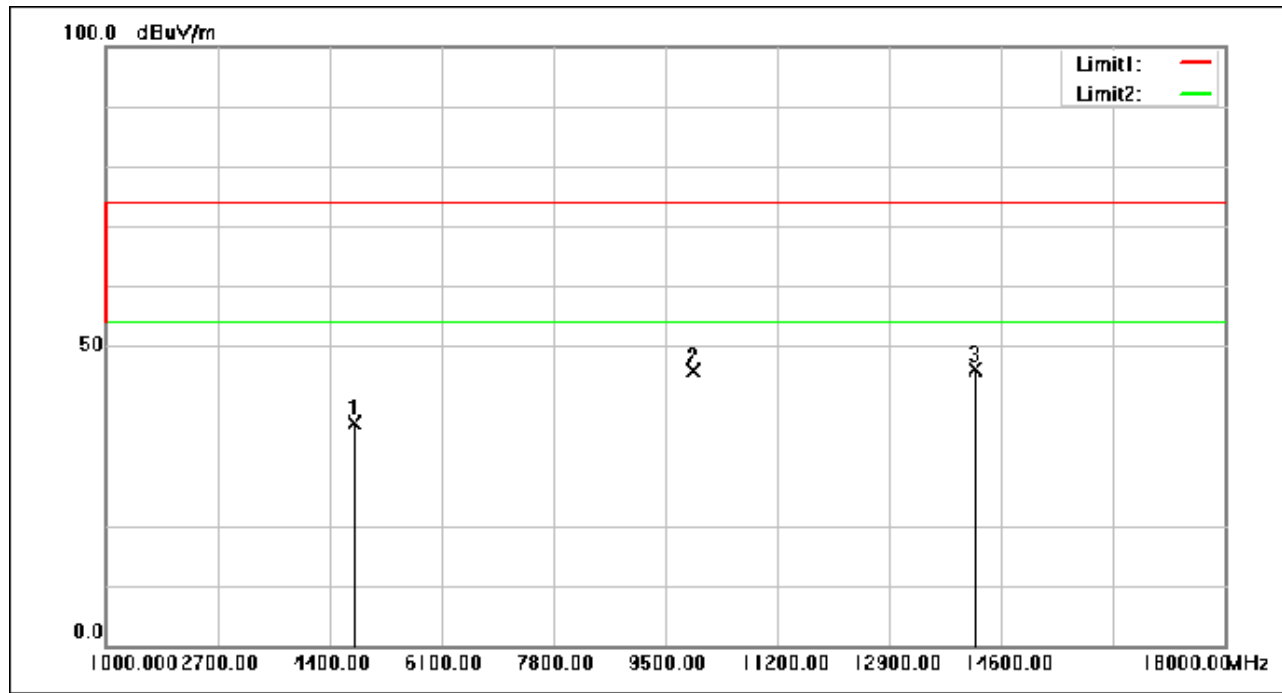

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4779.440	55.69	-18.58	37.11	74.00	-36.89	peak
2	9935.880	53.21	-7.31	45.90	74.00	-28.10	peak
3	14218.520	52.30	-6.24	46.06	74.00	-27.94	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 93 of 153

Test Mode: 05; Polarity: Horizontal; Modulation: 8DPSK; Channel: Low

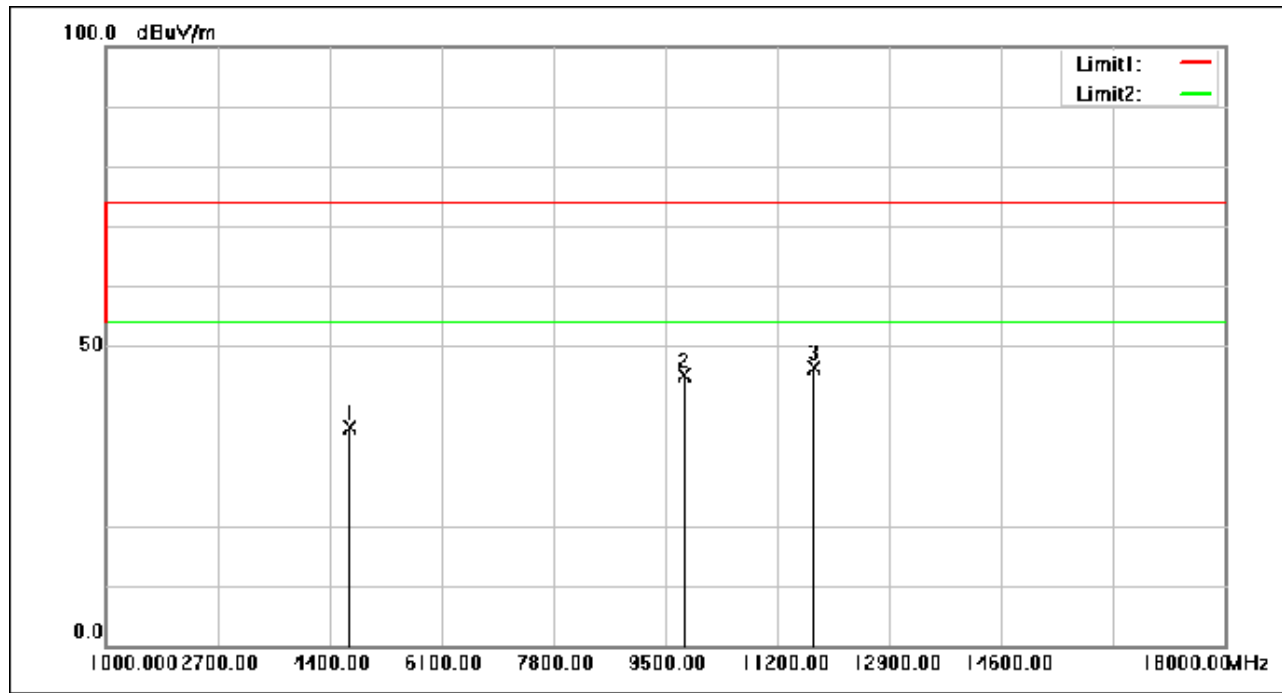

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4713.480	54.98	-18.62	36.36	74.00	-37.64	peak
2	9794.440	52.44	-7.40	45.04	74.00	-28.96	peak
3	11774.600	52.47	-6.14	46.33	74.00	-27.67	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 94 of 153

Test Mode: 05; Polarity: Vertical; Modulation: 8DPSK; Channel: Low

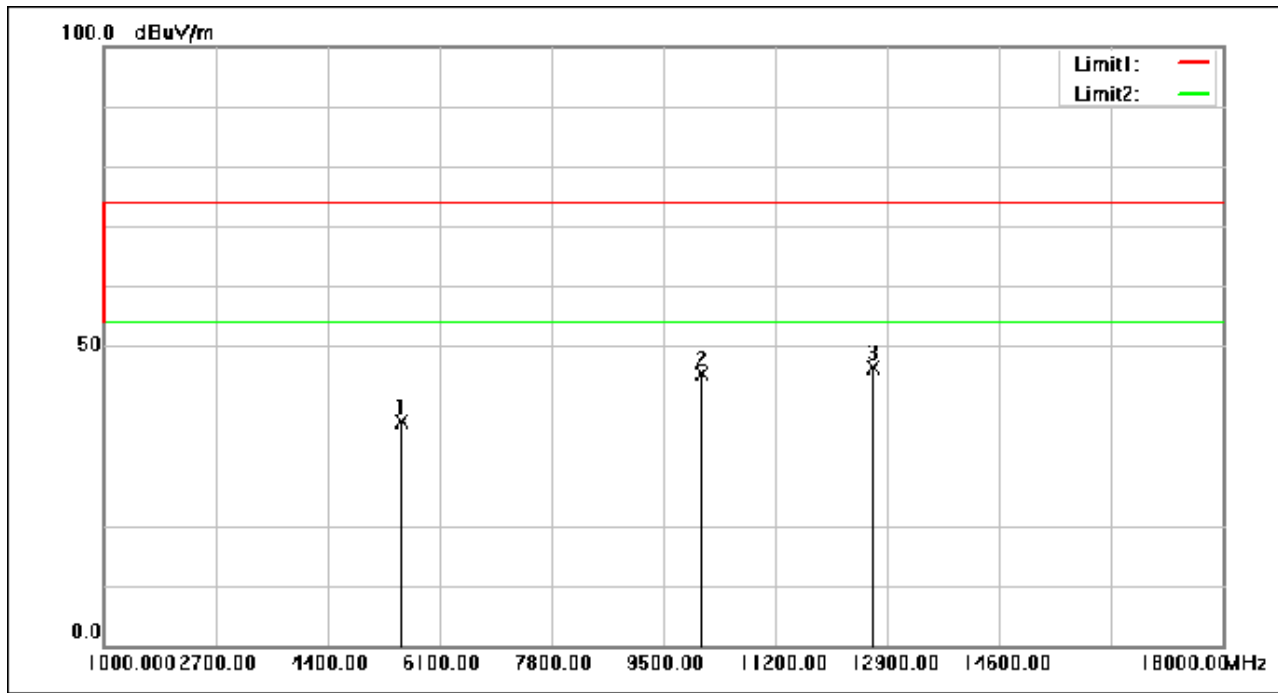

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5534.920	54.95	-17.64	37.31	74.00	-36.69	peak
2	10078.680	52.55	-7.28	45.27	74.00	-28.73	peak
3	12691.240	52.46	-6.20	46.26	74.00	-27.74	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 95 of 153

Test Mode: 05; Polarity: Horizontal; Modulation: 8DPSK; Channel: middle

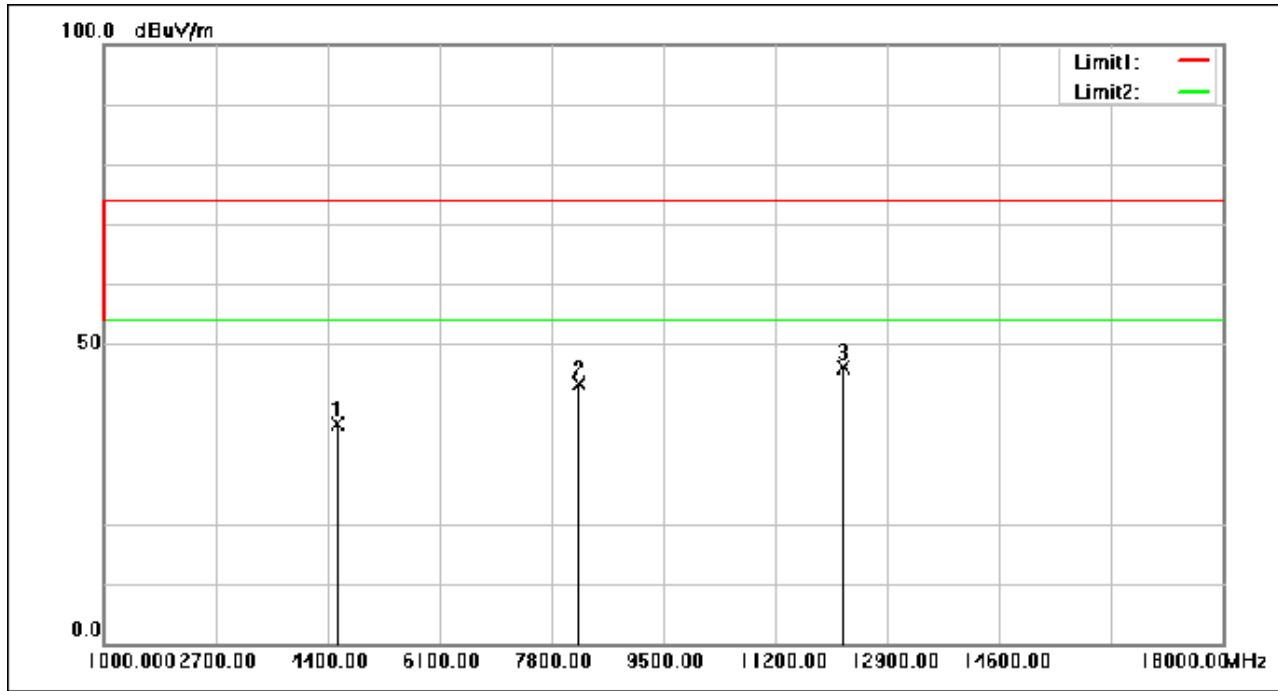

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4559.120	55.48	-18.79	36.69	74.00	-37.31	peak
2	8214.120	53.51	-10.23	43.28	74.00	-30.72	peak
3	12249.240	52.19	-6.00	46.19	74.00	-27.81	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 96 of 153

Test Mode: 05; Polarity: Vertical; Modulation: 8DPSK; Channel: middle

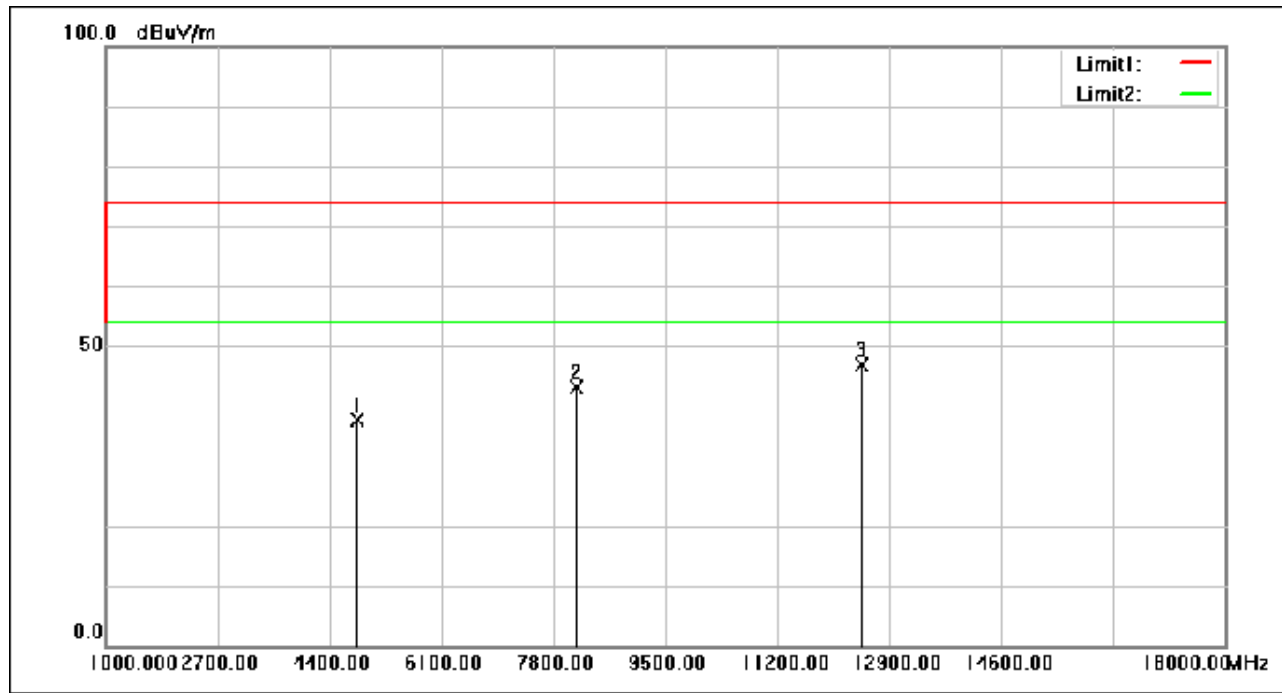

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4837.240	56.20	-18.54	37.66	74.00	-36.34	peak
2	8152.240	53.56	-10.32	43.24	74.00	-30.76	peak
3	12479.760	53.11	-6.11	47.00	74.00	-27.00	peak




## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 97 of 153

Test Mode: 05; Polarity: Horizontal; Modulation: 8DPSK; Channel: High

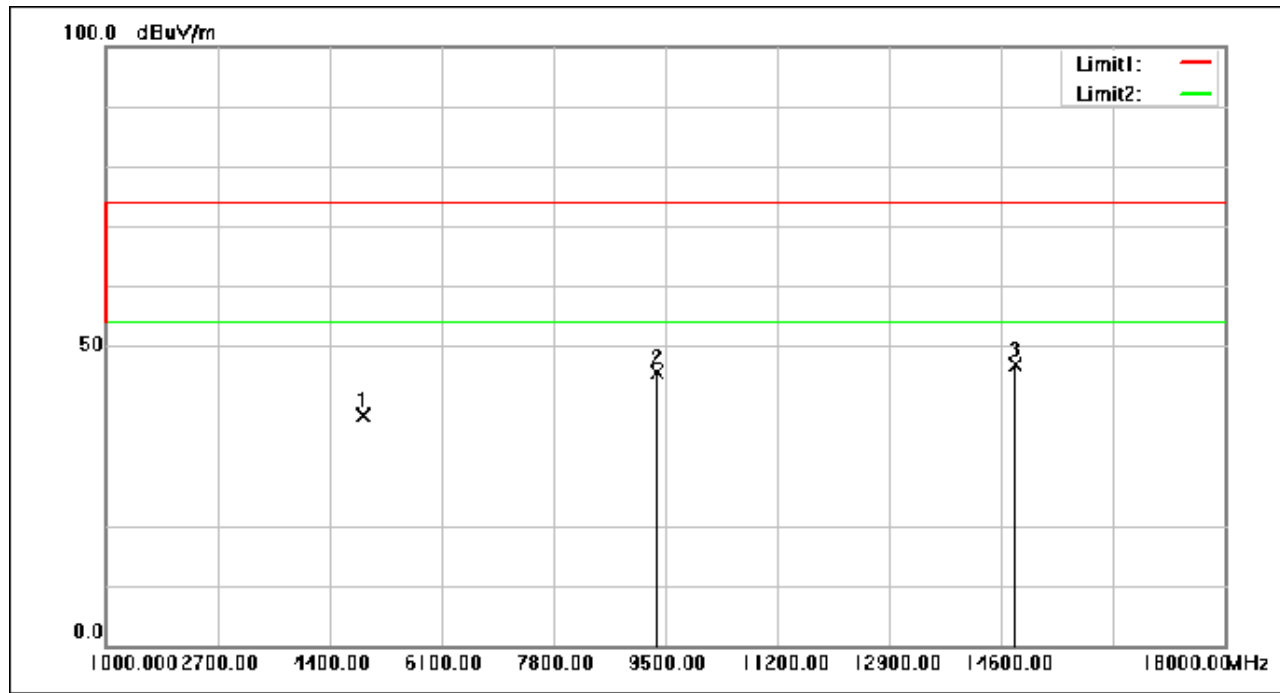

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4913.400	56.79	-18.50	38.29	74.00	-35.71	peak
2	9369.440	53.95	-8.20	45.75	74.00	-28.25	peak
3	14829.160	52.17	-5.39	46.78	74.00	-27.22	peak


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 98 of 153

Test Mode: 05; Polarity: Vertical; Modulation: 8DPSK; Channel: High

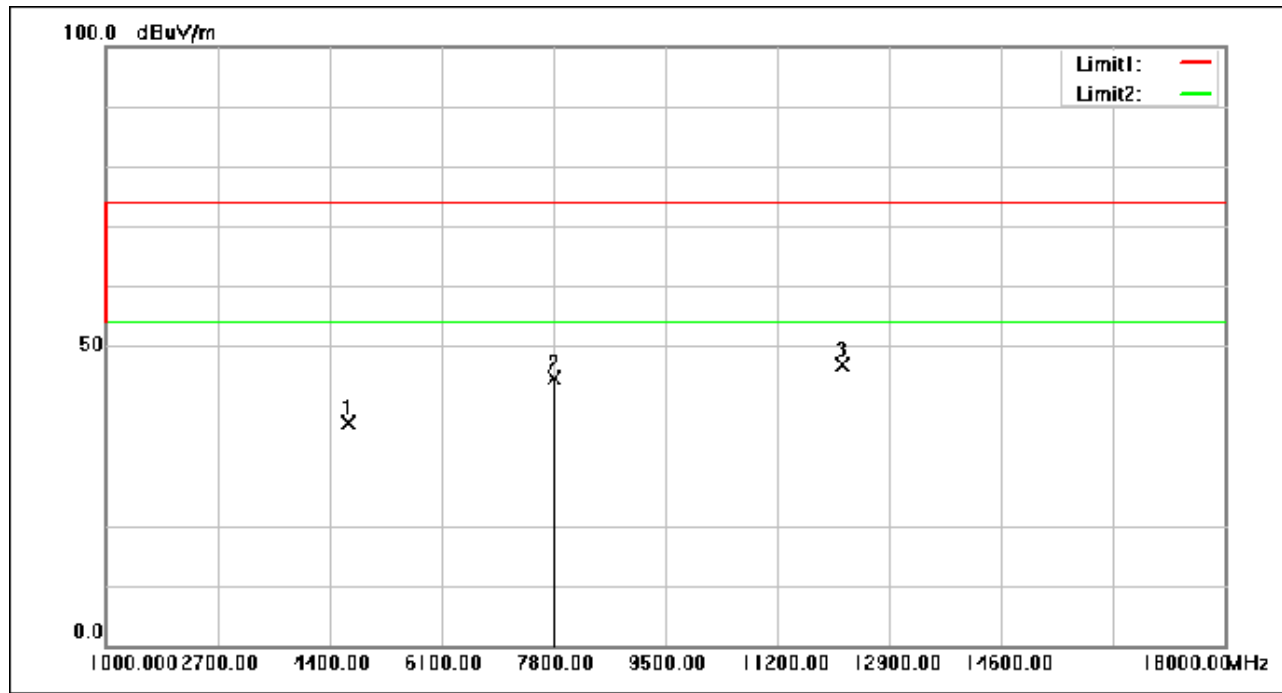

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4705.320	55.76	-18.62	37.14	74.00	-36.86	peak
2	7830.600	55.42	-10.83	44.59	74.00	-29.41	peak
3	12193.480	52.80	-5.97	46.83	74.00	-27.17	peak

### 7.12 99% Bandwidth

Test Requirement RSS-Gen Section 6.7  
Test Method: ANSI C63.10 (2013) Section 6.9.3


#### 7.12.1 E.U.T. Operation

Operating Environment:  
Temperature: 18.1 °C Humidity: 50.5 % RH Atmospheric Pressure: 1010 mbar

#### 7.12.1 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	05	TX_non-Hop mode_Keep the EUT in continuously transmitting mode with GFSK modulation, Pi/4DQPSK modulation, 8DPSK modulation. All modes have been tested and only the data of worst case is recorded in the report.

#### 7.12.2 Test Setup Diagram

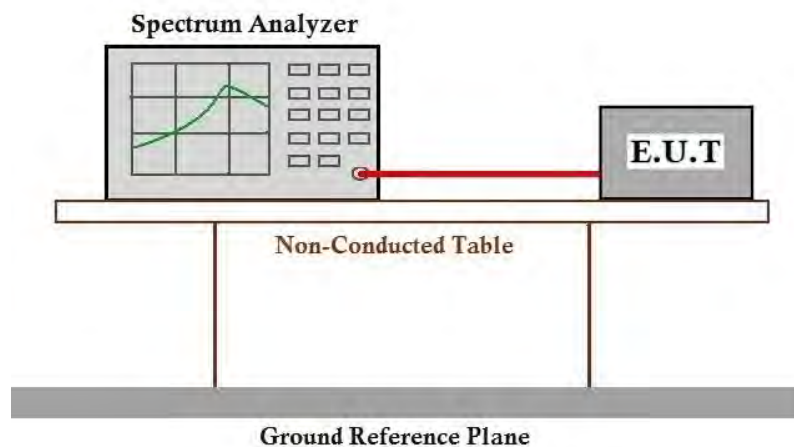

#### 7.12.3 Measurement Procedure and Data

Please Refer to Appendix for Details



## **Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 100 of 153

### **8 Test Setup Photo**

Refer to Appendix - Test Setup Photo for KSCR2404000566AT

### **9 EUT Constructional Details (EUT Photos)**

Refer to External and Internal Photos for KSCR2404000566AT

## 10 Appendix

### 1. Bandwidth

#### 1.1 Test Result

##### 1.1.1 OBW

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.845	/	Pass
		2441	DH5	1	0.853	/	Pass
		2480	DH5	1	0.859	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.204	/	Pass
		2441	2DH5	1	1.203	/	Pass
		2480	2DH5	1	1.204	/	Pass
8DPSK	SISO	2402	3DH5	1	1.194	/	Pass
		2441	3DH5	1	1.196	/	Pass
		2480	3DH5	1	1.204	/	Pass


##### 1.1.2 20dB BW

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.938	/	Pass
		2441	DH5	1	0.942	/	Pass
		2480	DH5	1	0.940	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.409	/	Pass
		2441	2DH5	1	1.409	/	Pass
		2480	2DH5	1	1.408	/	Pass
8DPSK	SISO	2402	3DH5	1	1.321	/	Pass
		2441	3DH5	1	1.322	/	Pass
		2480	3DH5	1	1.324	/	Pass


## 1.2 Test Graph

## 1.2.1 OBW


GFSK\_DH5\_LCH\_2402MHz\_Ant1\_NTNV

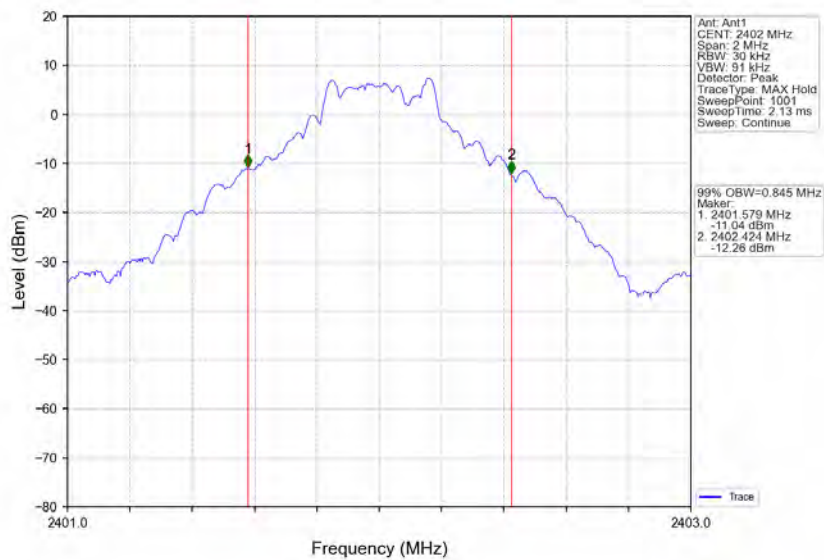


GFSK\_DH5\_MCH\_2441MHz\_Ant1\_NTNV

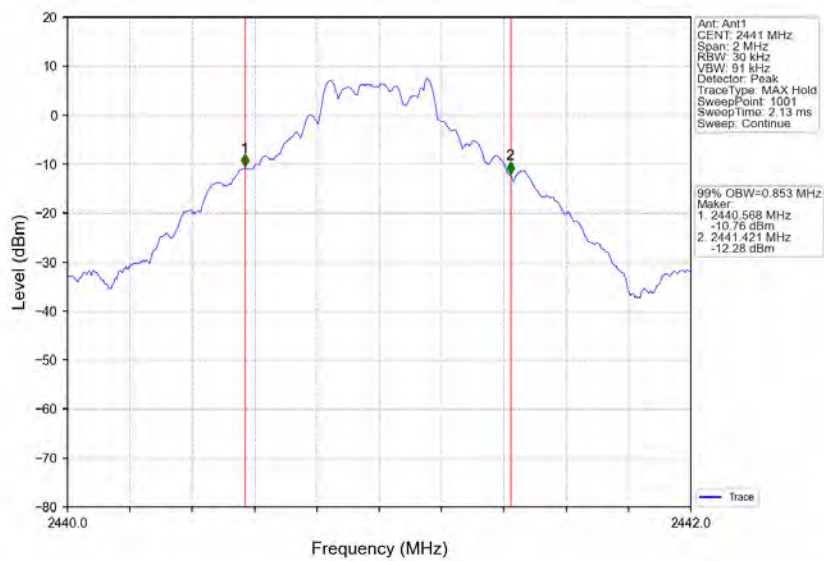

GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

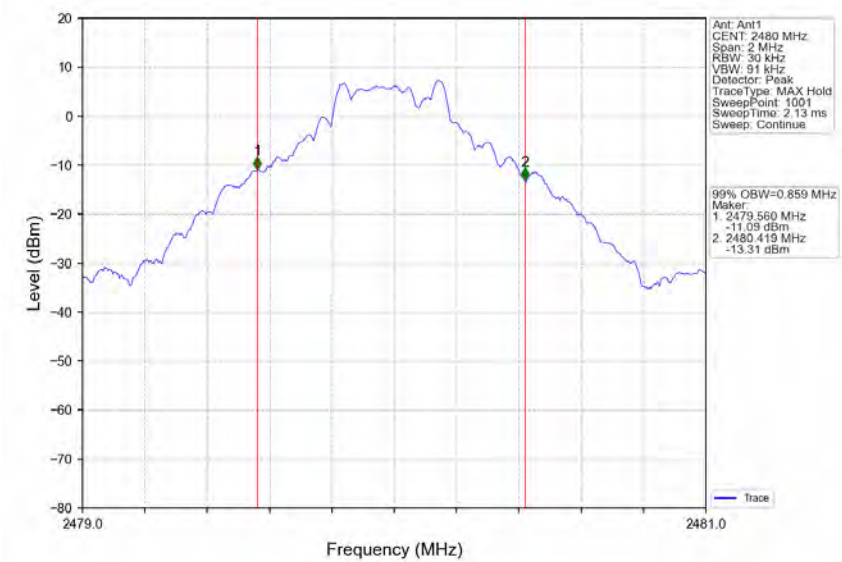

Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

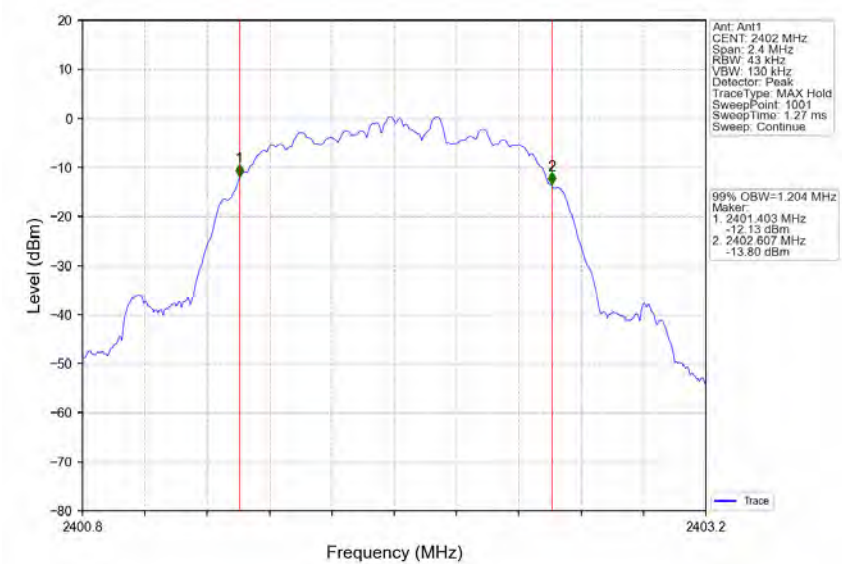


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240400056602

Page: 104 of 153

Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

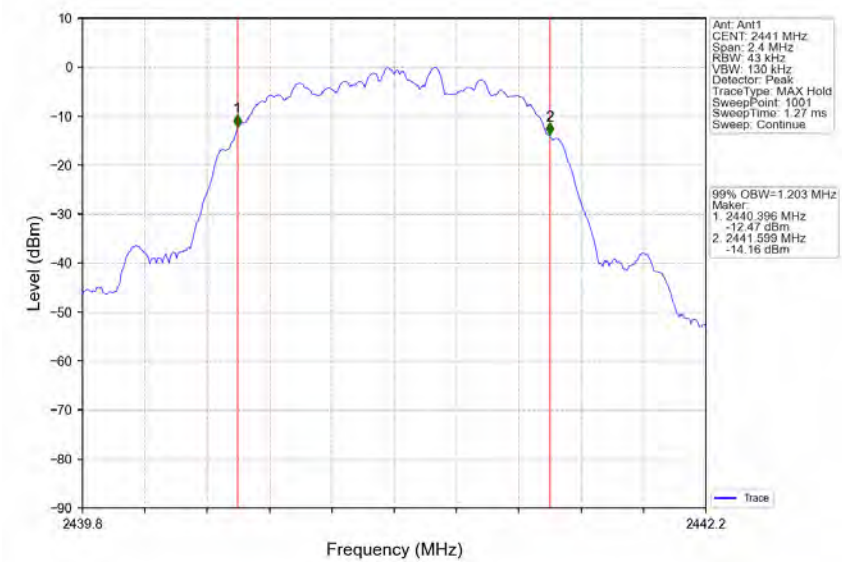

Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

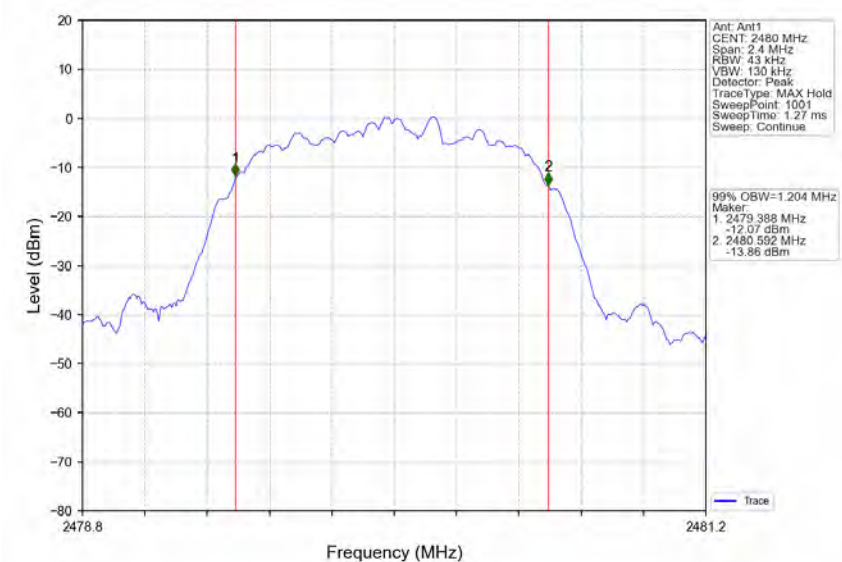




## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240400056602

Page: 105 of 153


8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

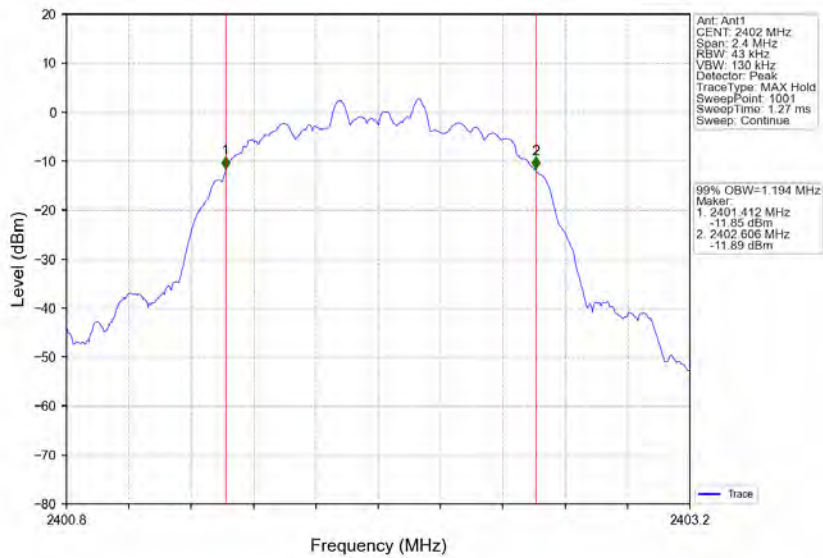

8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

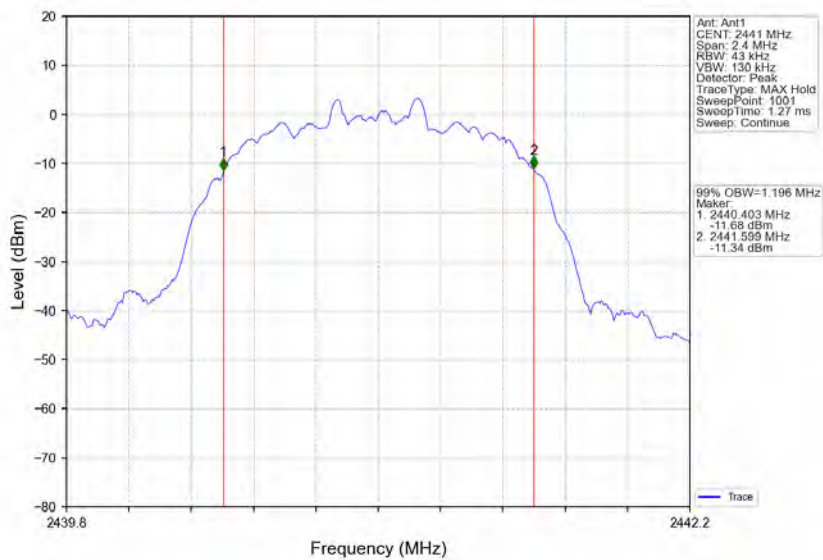


### 8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

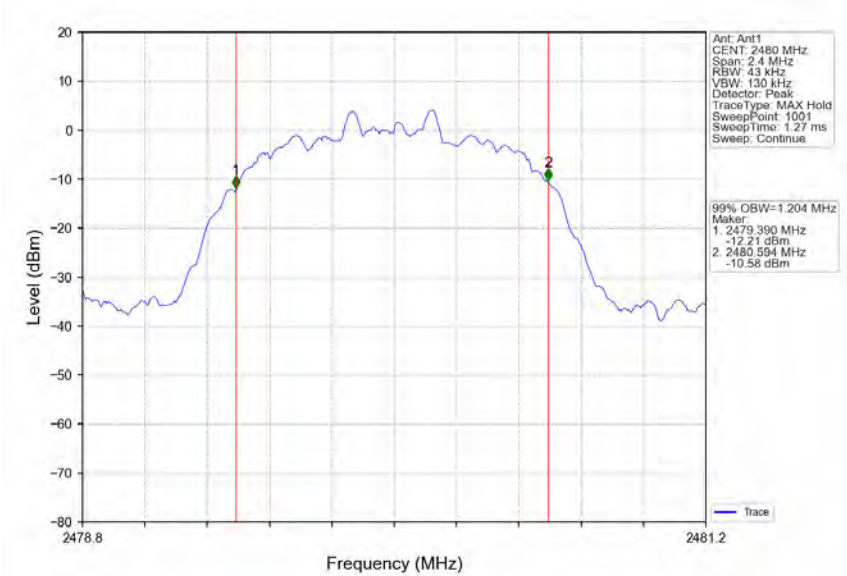


## 1.2.2 20dB BW


GFSK\_DH5\_LCH\_2402MHz\_Ant1\_NTNV

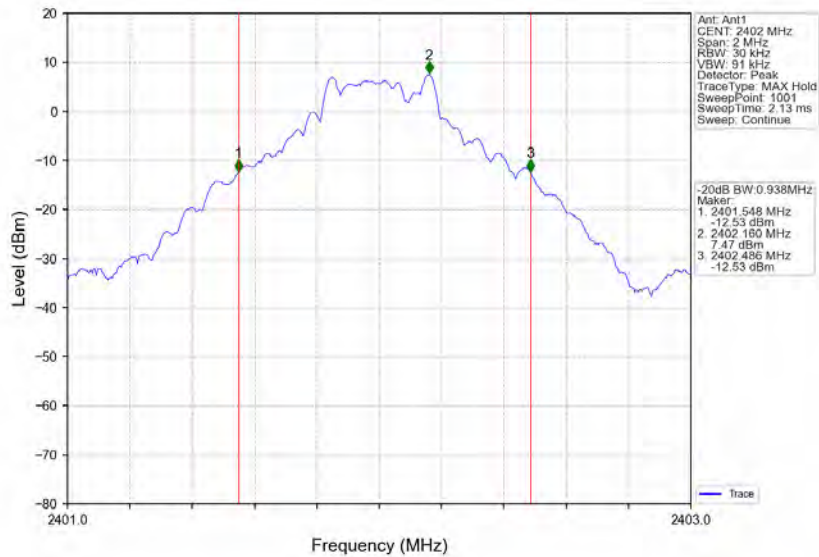


GFSK\_DH5\_MCH\_2441MHz\_Ant1\_NTNV

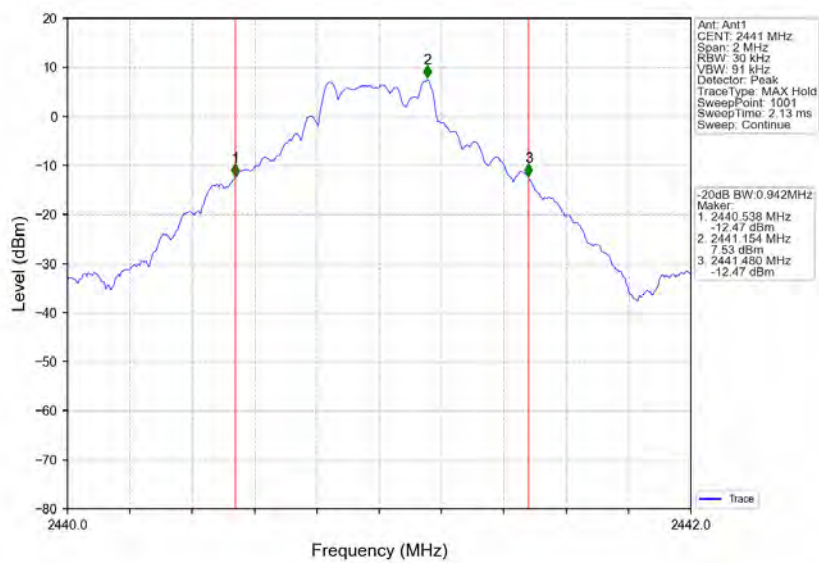


GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

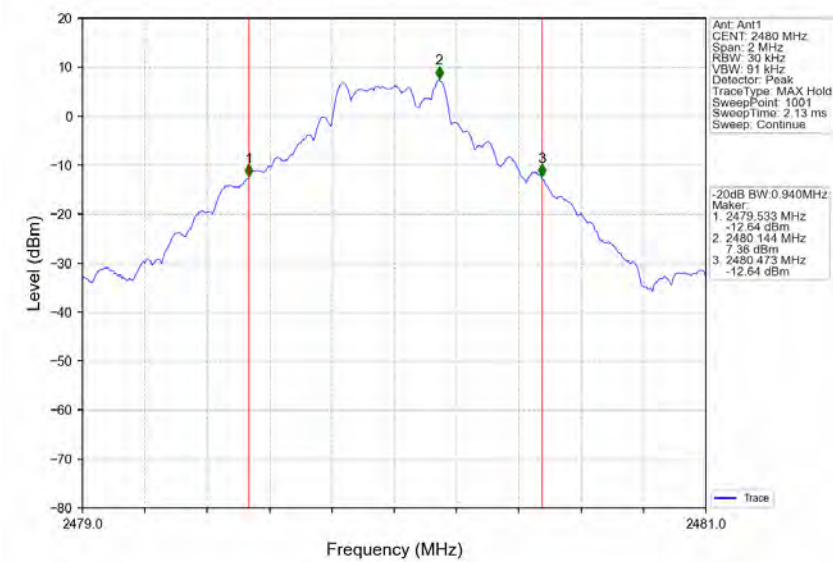


Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

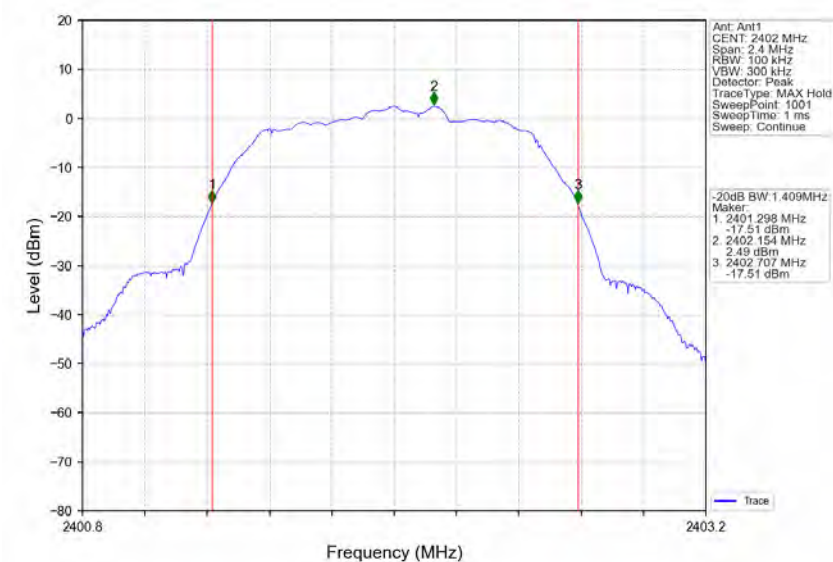


Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

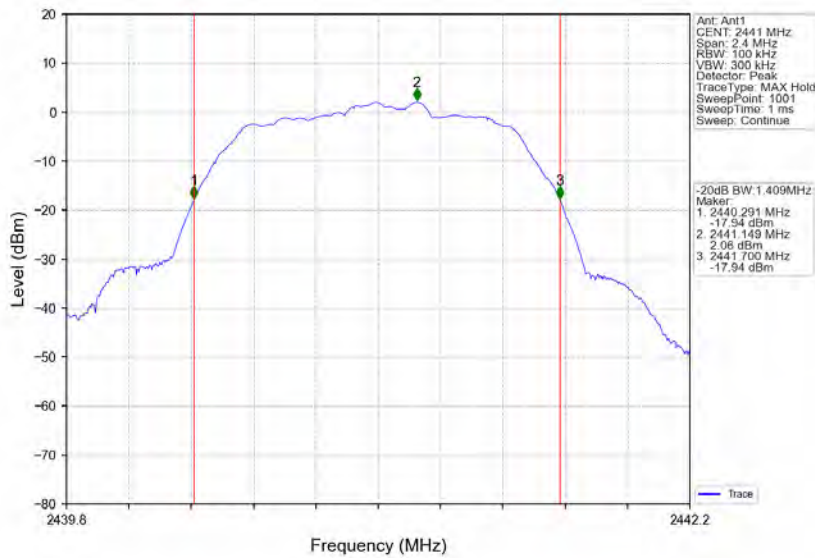


Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

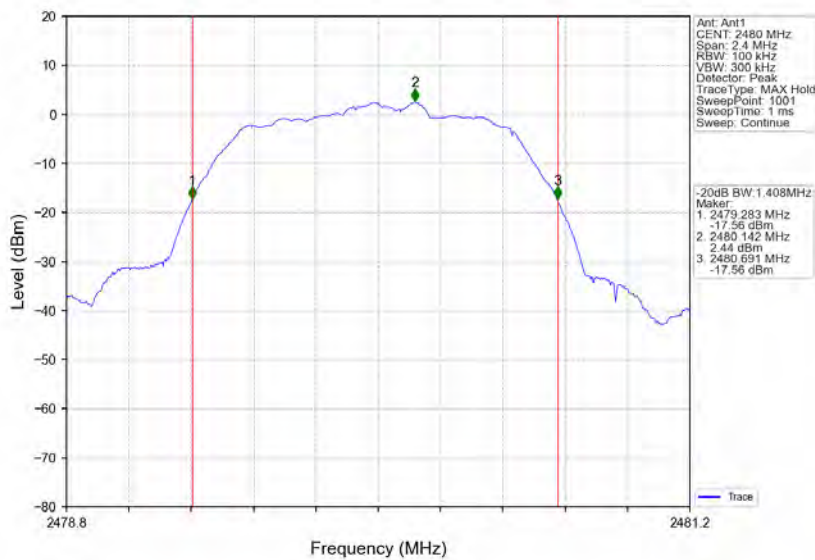

8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

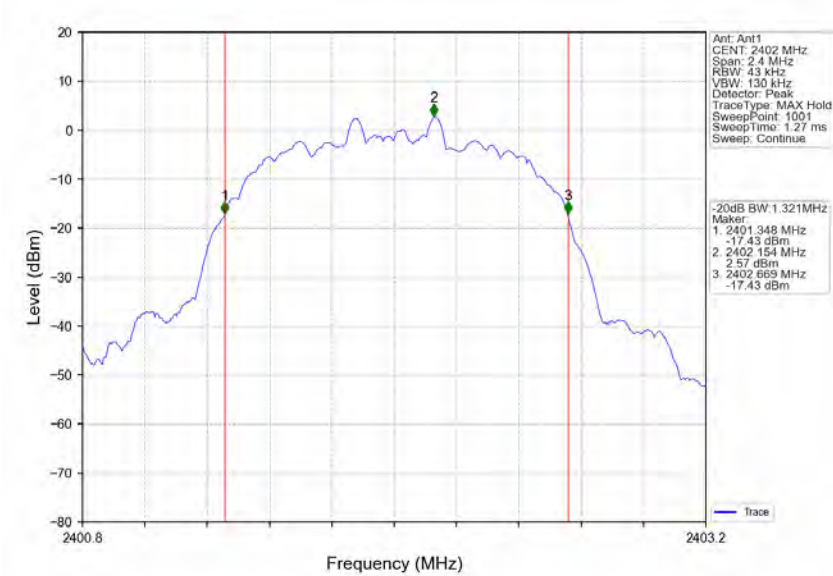

8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

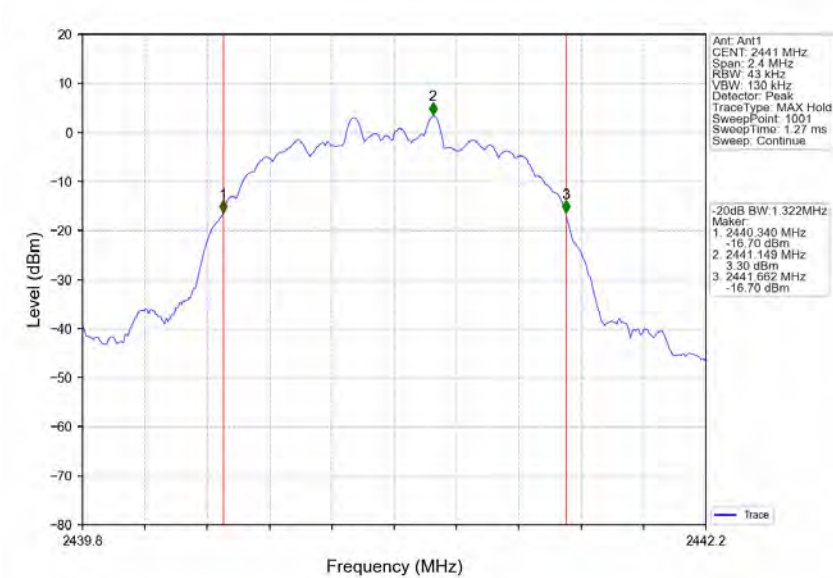




## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 111 of 153

8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

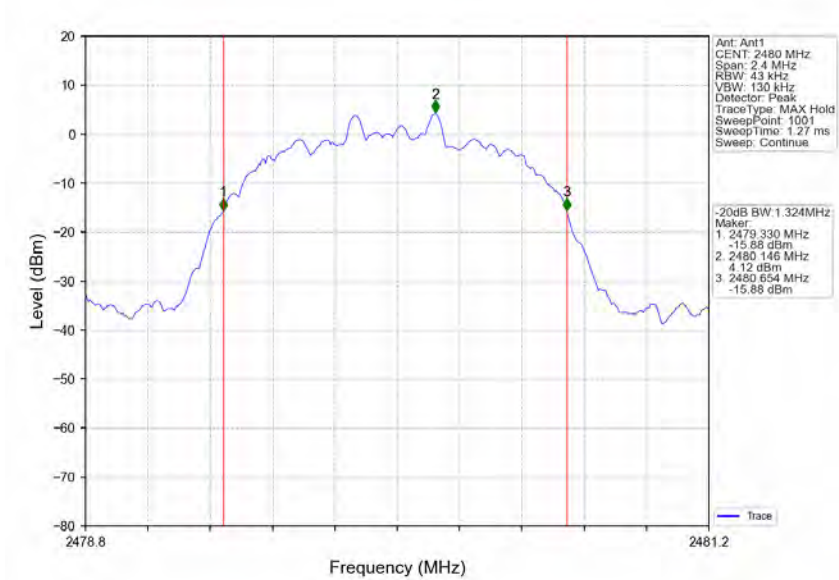

## 2. Maximum Conducted Output Power

### 2.1 Test Result

#### 2.1.1 Power

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	8.76	$\leq 30$	Pass
		2441	DH5	8.88	$\leq 30$	Pass
		2480	DH5	8.55	$\leq 30$	Pass
Pi/4DQPSK	SISO	2402	2DH5	5.39	$\leq 20.97$	Pass
		2441	2DH5	5.84	$\leq 20.97$	Pass
		2480	2DH5	6.06	$\leq 20.97$	Pass
8DPSK	SISO	2402	3DH5	5.78	$\leq 20.97$	Pass
		2441	3DH5	6.16	$\leq 20.97$	Pass
		2480	3DH5	6.24	$\leq 20.97$	Pass

#### 2.1.2 EIRP (Dipole antenna)

Mode	TX Type	Frequency (MHz)	Packet Type	E.I.R.P (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	11.76	$\leq 36.02$	Pass
		2441	DH5	11.88	$\leq 36.02$	Pass
		2480	DH5	11.55	$\leq 36.02$	Pass
Pi/4DQPSK	SISO	2402	2DH5	8.39	$\leq 36.02$	Pass
		2441	2DH5	8.84	$\leq 36.02$	Pass
		2480	2DH5	9.06	$\leq 36.02$	Pass
8DPSK	SISO	2402	3DH5	8.78	$\leq 36.02$	Pass
		2441	3DH5	9.16	$\leq 36.02$	Pass
		2480	3DH5	9.24	$\leq 36.02$	Pass

Note1: Dipole Antenna Gain: 3.00dBi;

Note2: E.I.R.P = Measured Power + Antenna Gain

#### 2.1.3 EIRP (PCB antenna)


Mode	TX Type	Frequency (MHz)	Packet Type	E.I.R.P (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	11.56	$\leq 36.02$	Pass
		2441	DH5	11.68	$\leq 36.02$	Pass
		2480	DH5	11.35	$\leq 36.02$	Pass
Pi/4DQPSK	SISO	2402	2DH5	8.19	$\leq 36.02$	Pass
		2441	2DH5	8.64	$\leq 36.02$	Pass




## Compliance Certification Services (Kunshan) Inc.

### 2.2 Test Graph


#### 2.2.1 Power

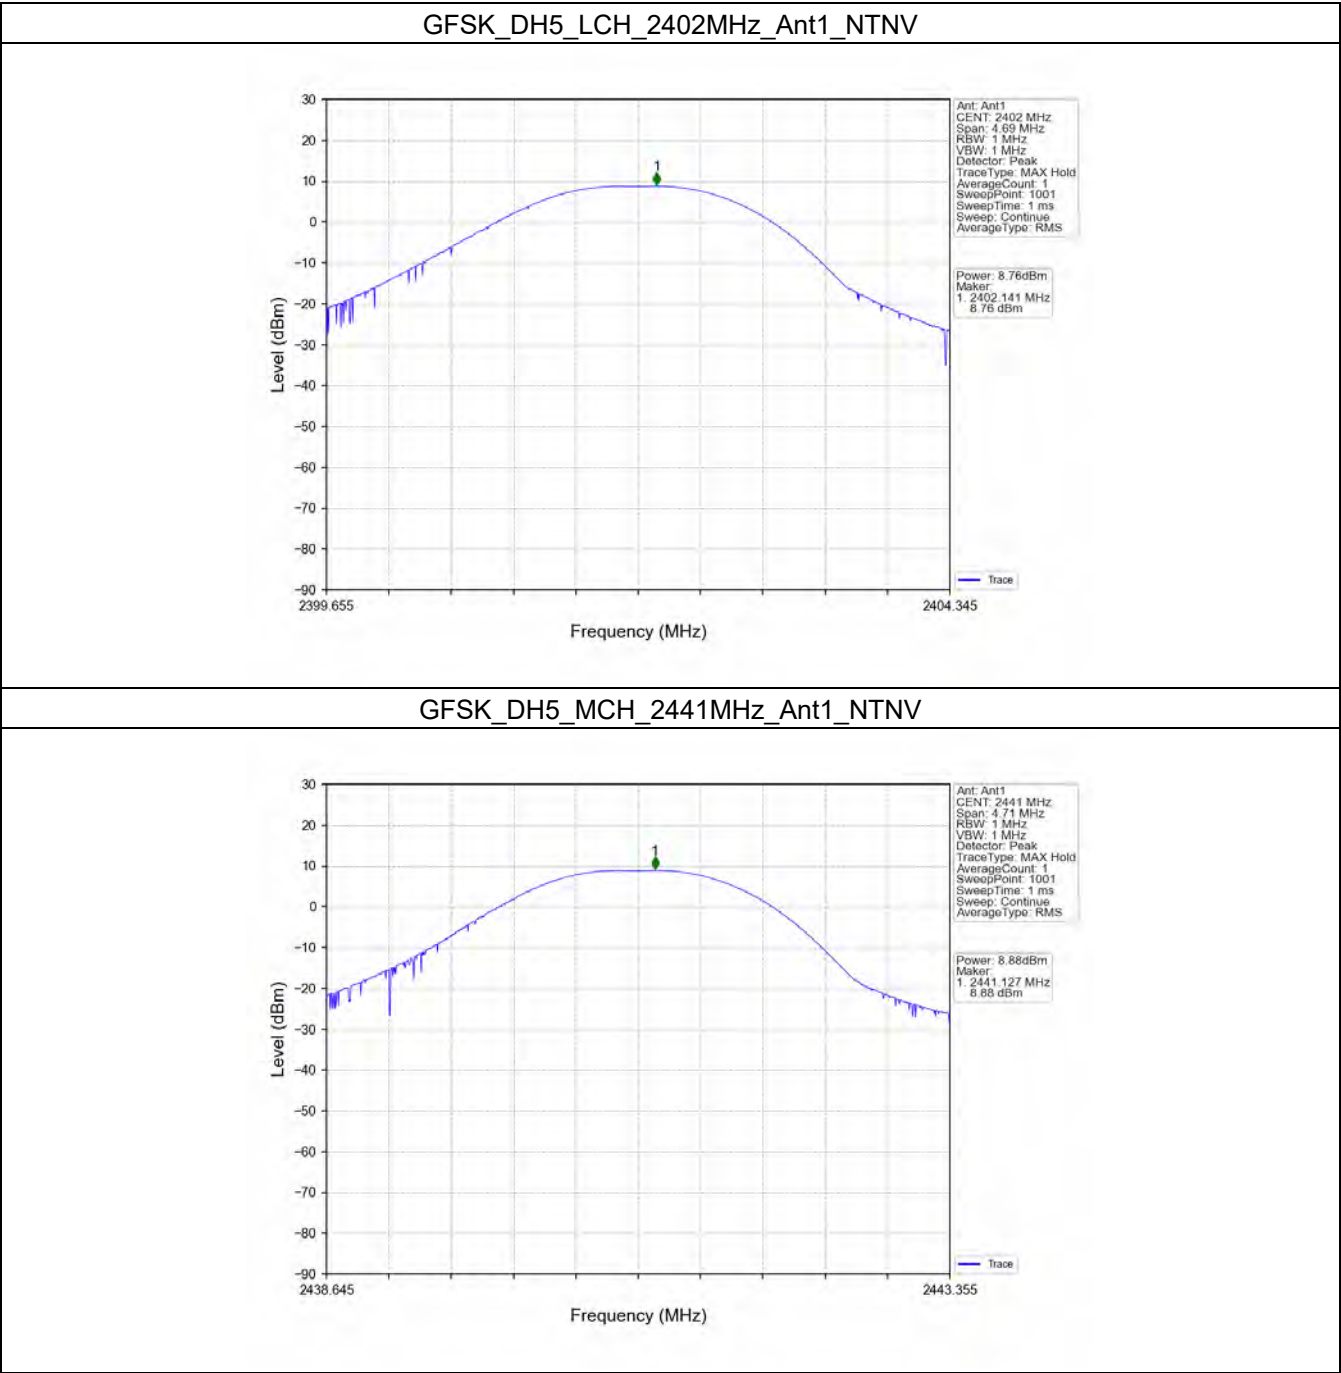


GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

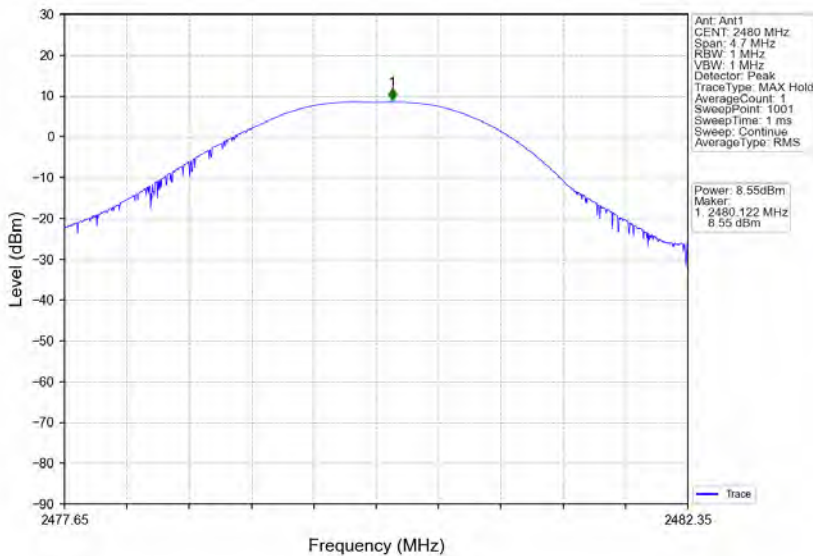


Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

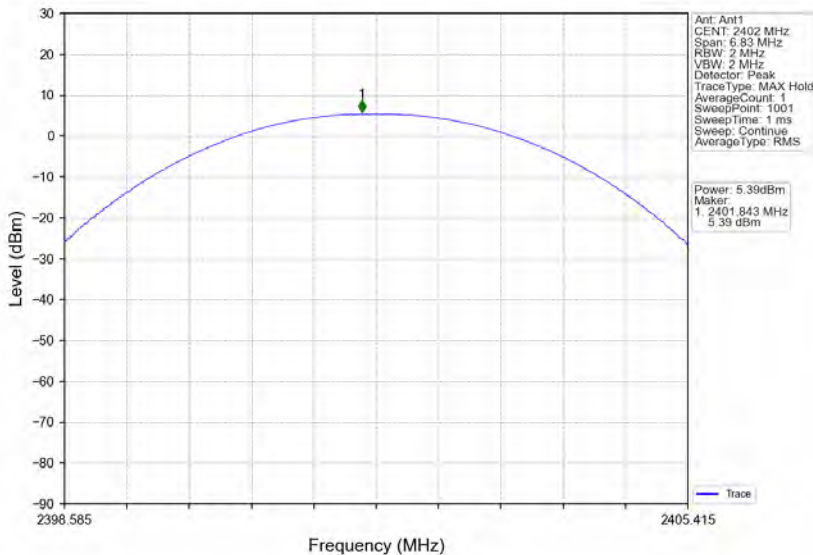


Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

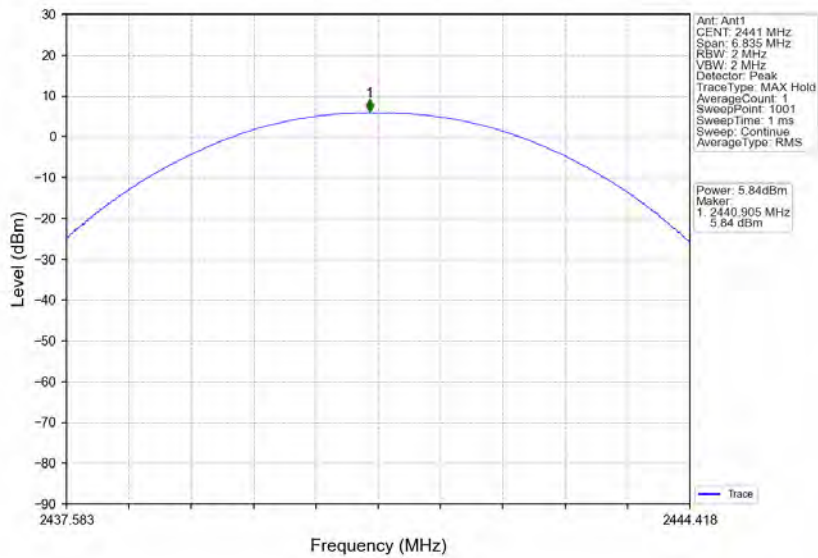


Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

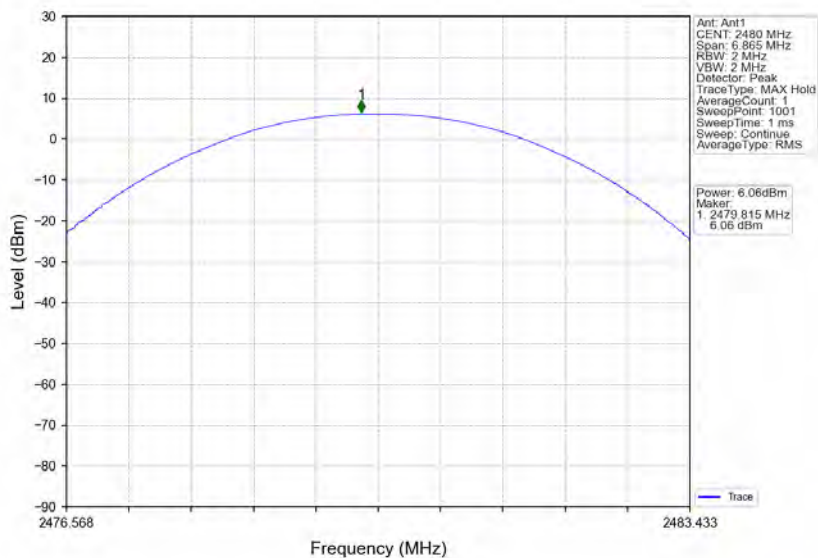

8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

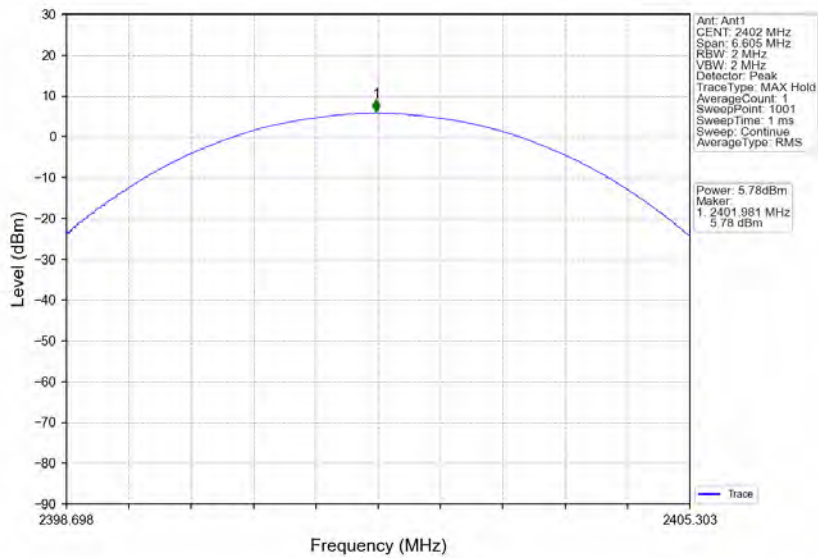

8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

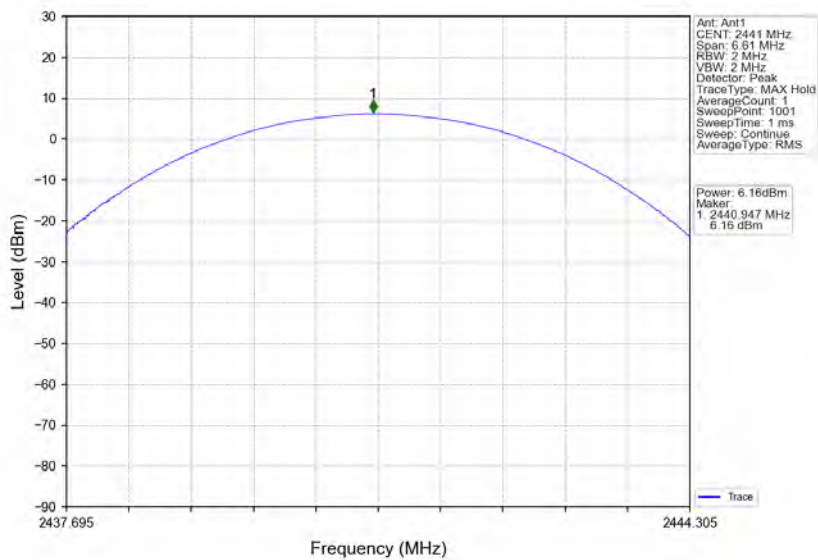


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 118 of 153

8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

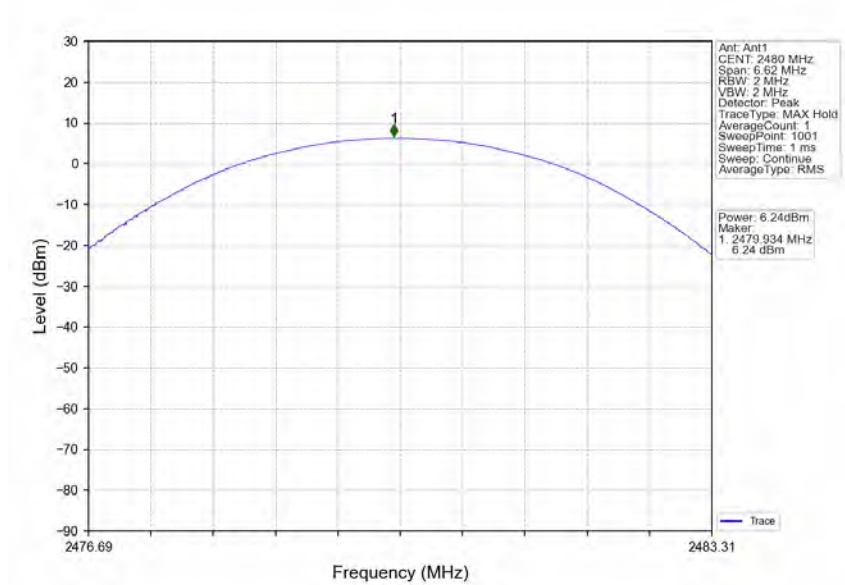

# Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 119 of 153

## 3. Carrier Frequency Separation


### 3.1 Test Result

#### 3.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	0.998	0.942	$\geq 0.942$	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.409	$\geq 0.939$	Pass
8DPSK	SISO	HOPP	3DH5	1.001	1.324	$\geq 0.883$	Pass

### 3.2 Test Graph

#### 3.2.1 Ant1

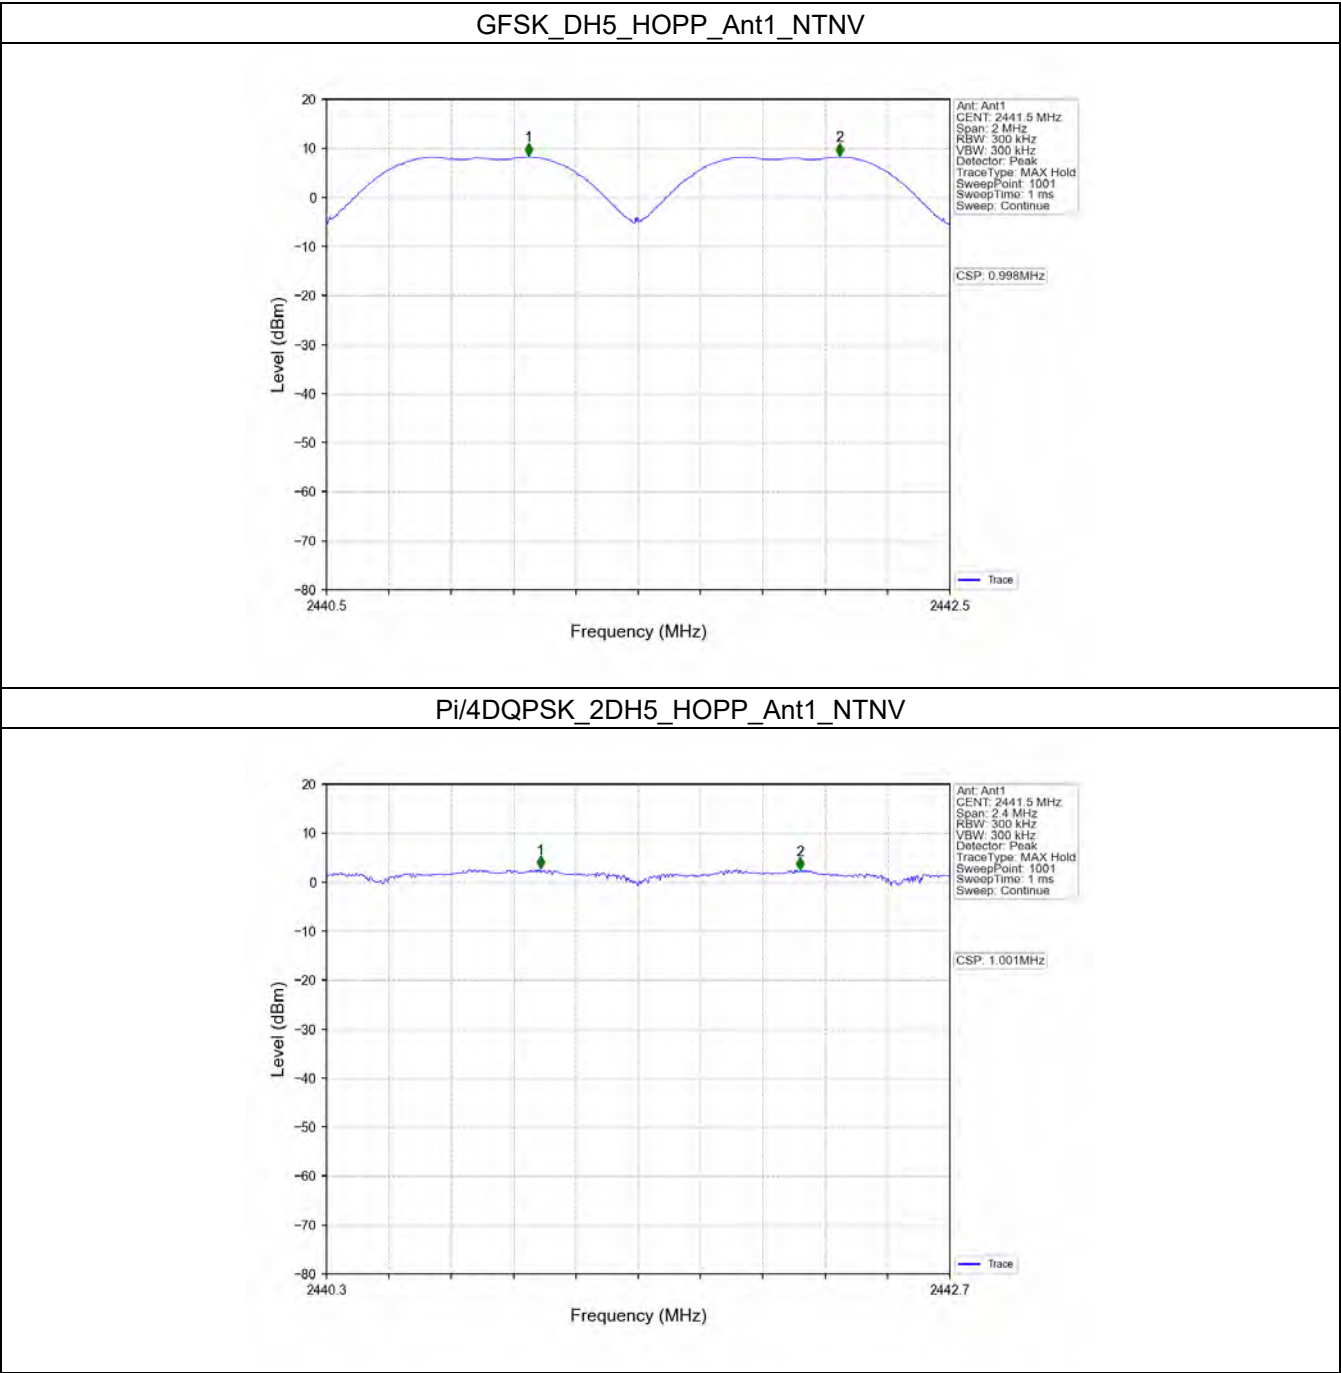




## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 121 of 153

8DPSK\_3DH5\_HOPP\_Ant1\_NTNV

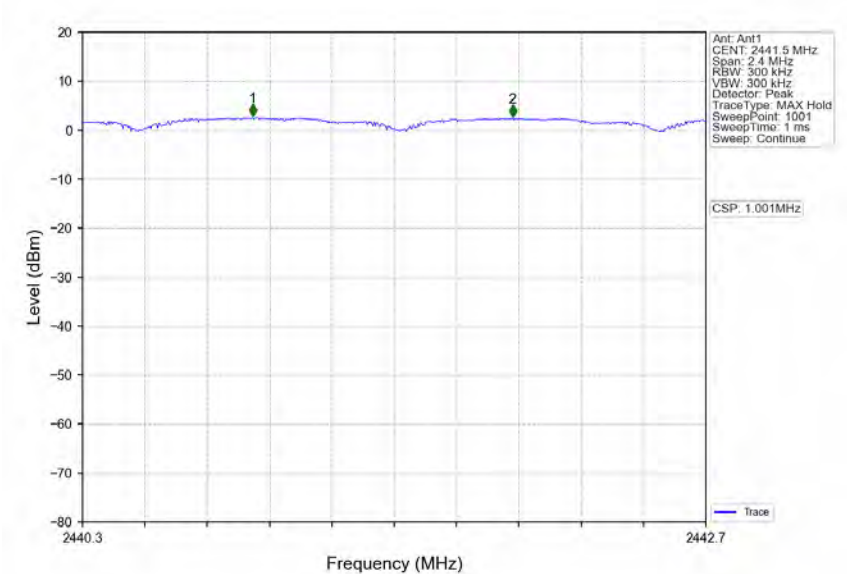



**Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 122 of 153

**4. Number of Hopping Frequencies**

**4.1 Test Result**

**4.1.1 HoppNum**

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	>=15	Pass
8DPSK	SISO	HOPP	3DH5	79	>=15	Pass

## Compliance Certification Services (Kunshan) Inc.


CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 123 of 153

### 4.2 Test Graph

#### 4.2.1 HoppNum

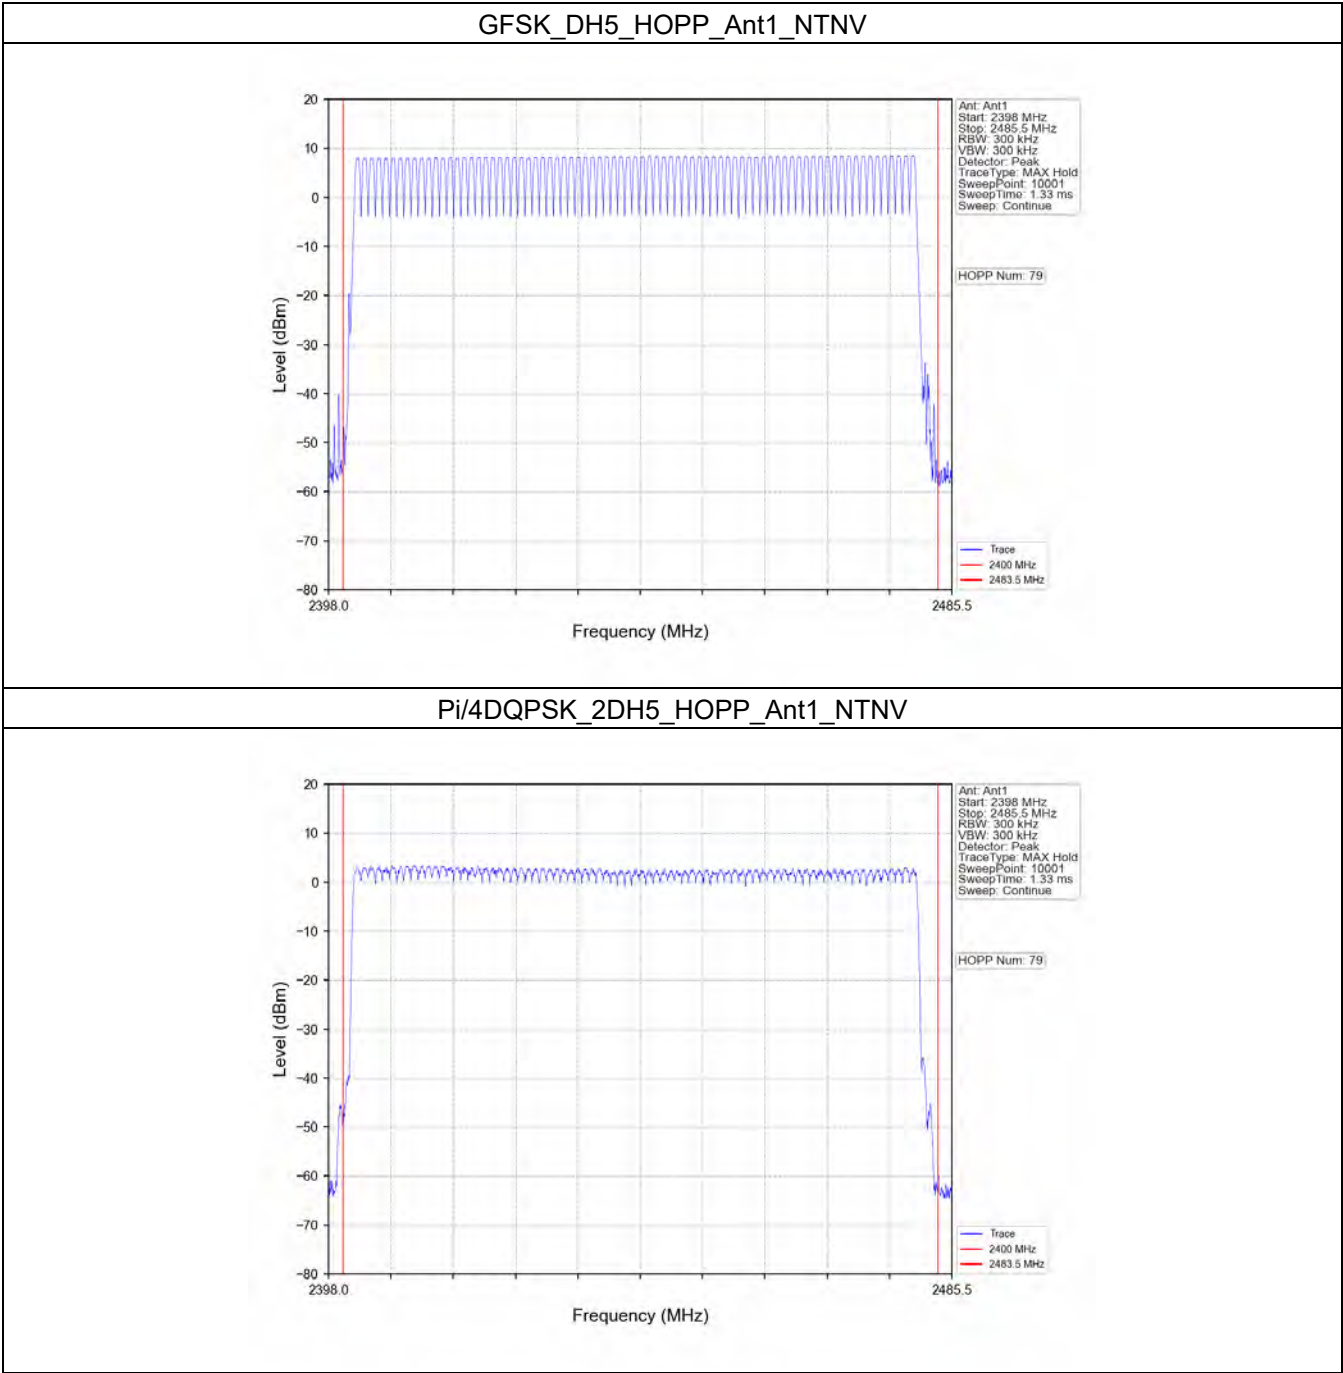


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 124 of 153

### 8DPSK\_3DH5\_HOPP\_Ant1\_NTNV

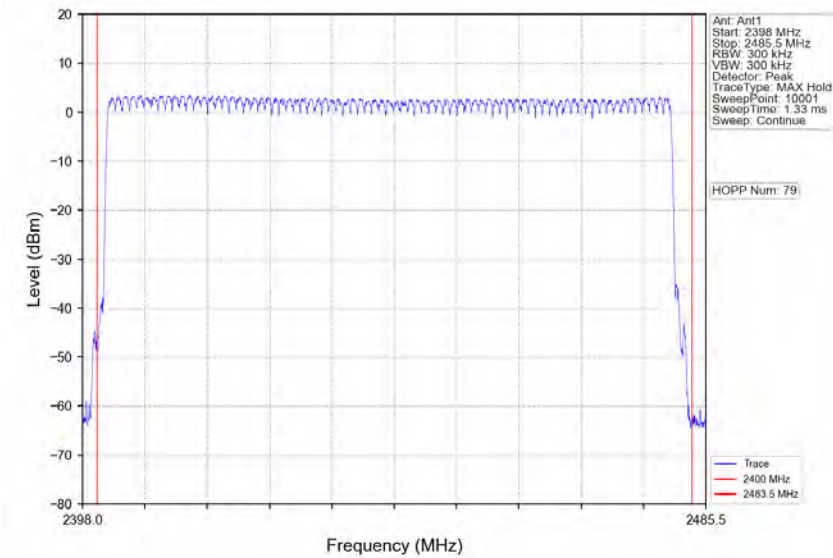

## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 125 of 153

### 5. Time of Occupancy (Dwell Time)


#### 5.1 Test Result

##### 5.1.1 Ant1

Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.382	31.600	320	122.240	<=400	Pass
			DH3	1.644	31.600	158	259.752	<=400	Pass
			DH5	2.892	31.600	112	323.904	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.394	31.600	320	126.080	<=400	Pass
			2DH3	1.640	31.600	142	232.880	<=400	Pass
			2DH5	2.894	31.600	94	272.036	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.384	31.600	320	122.880	<=400	Pass
			3DH3	1.640	31.600	172	282.080	<=400	Pass
			3DH5	2.896	31.600	105	304.080	<=400	Pass

### 5.2 Test Graph

#### 5.2.1 Ant1

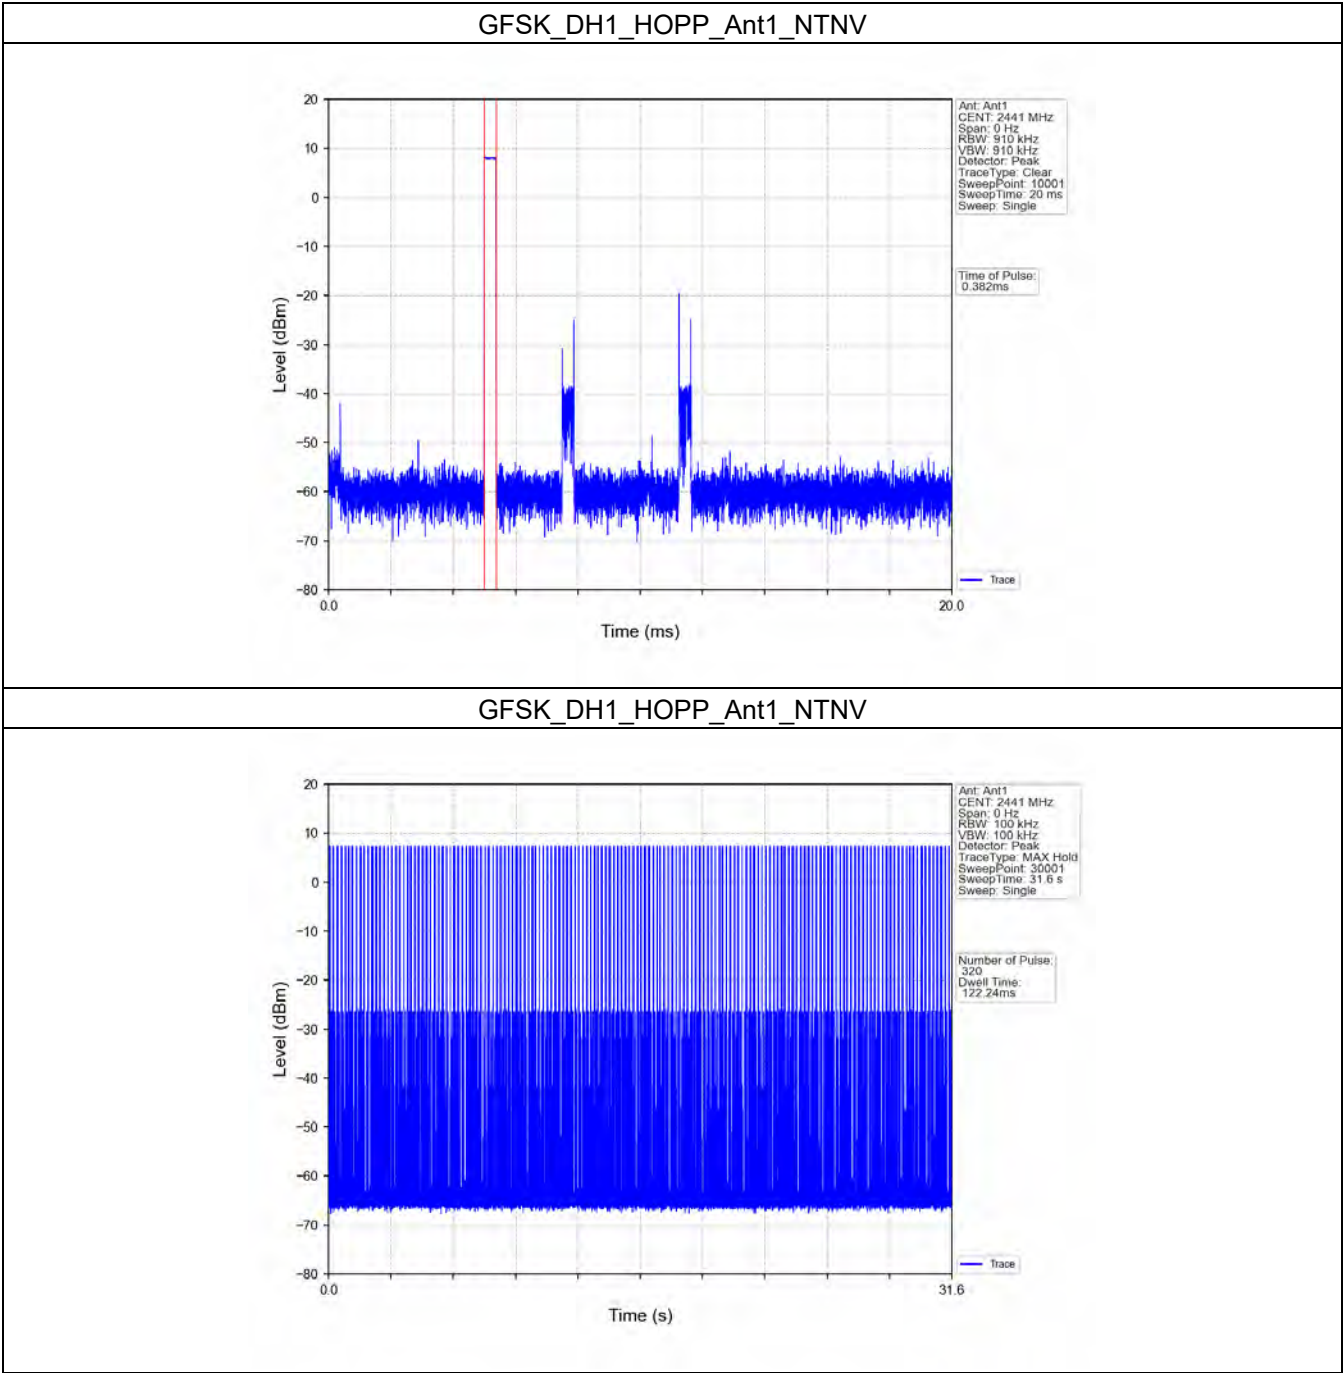


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240400056602

Page: 127 of 153

GFSK\_DH3\_HOPP\_Ant1\_NTNV

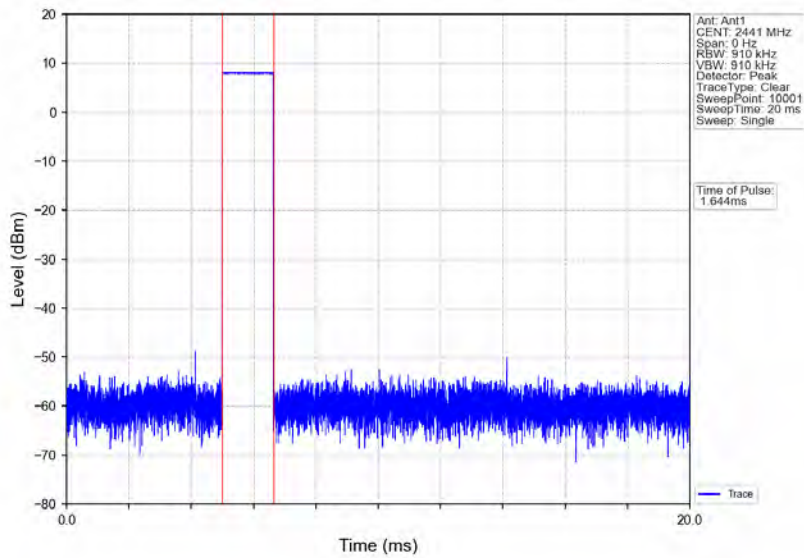


GFSK\_DH3\_HOPP\_Ant1\_NTNV

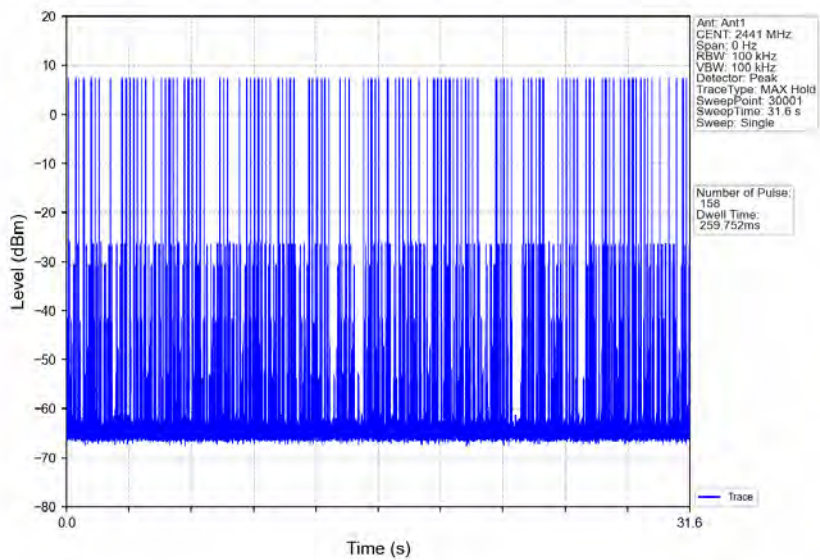




GFSK\_DH5\_HOPP\_Ant1\_NTNV

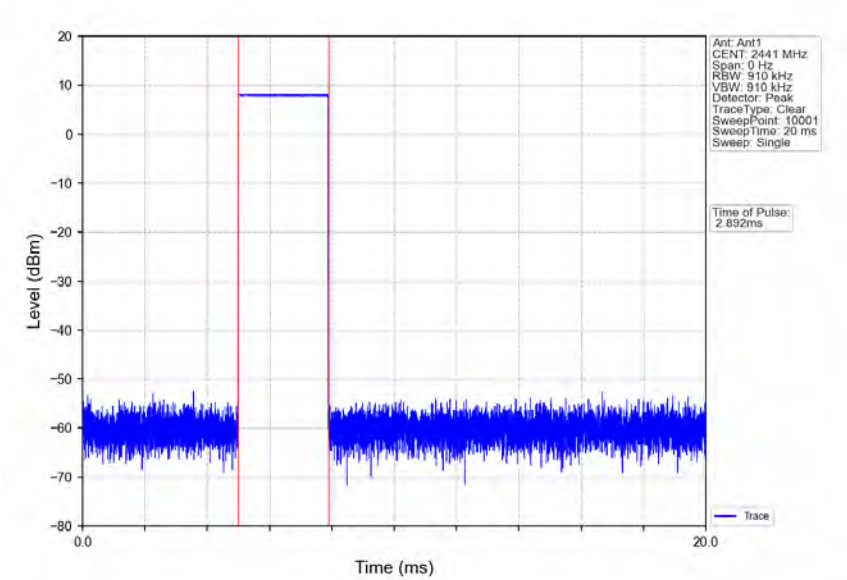


GFSK\_DH5\_HOPP\_Ant1\_NTNV

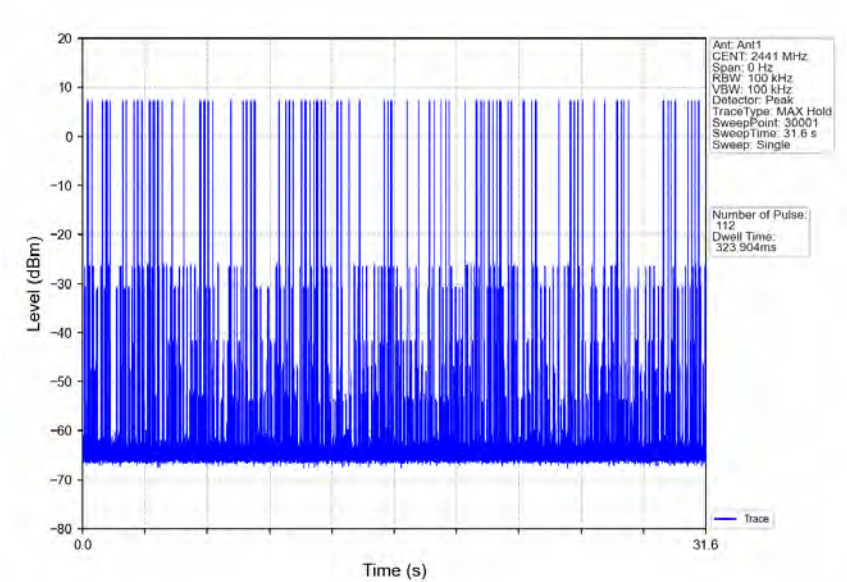





Pi/4DQPSK\_2DH1\_HOPP\_Ant1\_NTNV

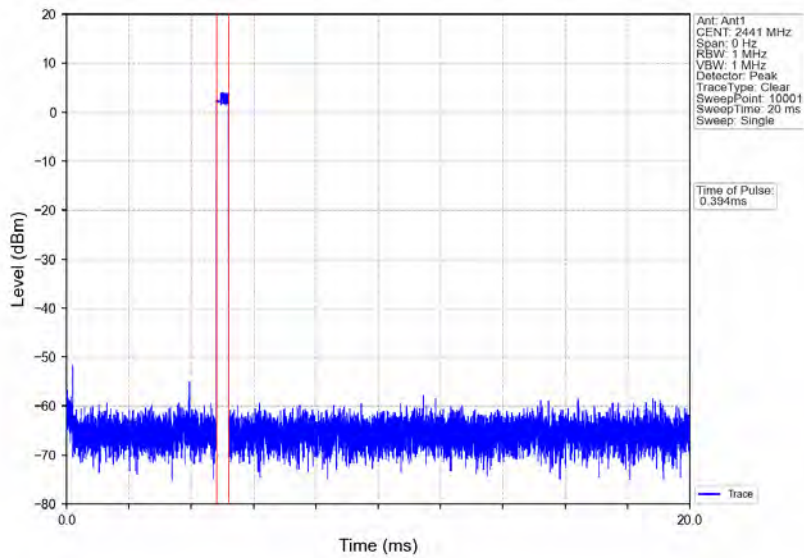


Pi/4DQPSK\_2DH1\_HOPP\_Ant1\_NTNV

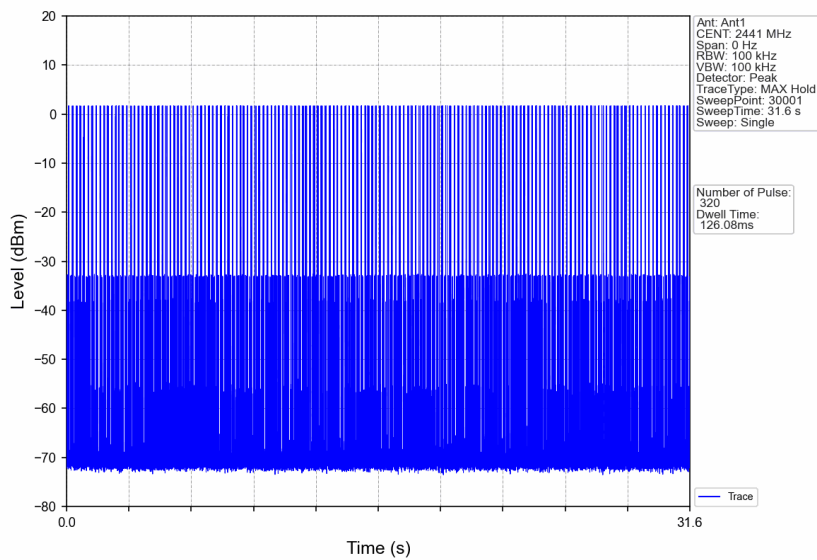


Pi/4DQPSK\_2DH3\_HOPP\_Ant1\_NTNV

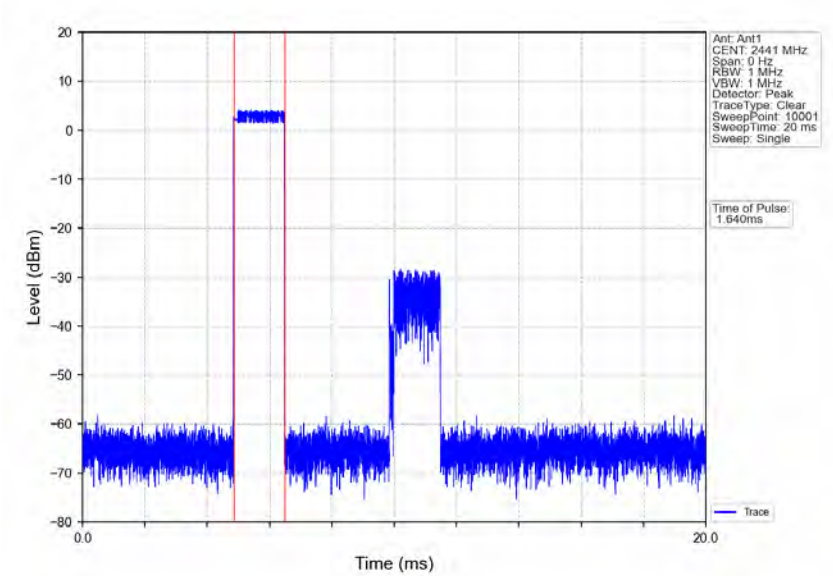


Pi/4DQPSK\_2DH3\_HOPP\_Ant1\_NTNV

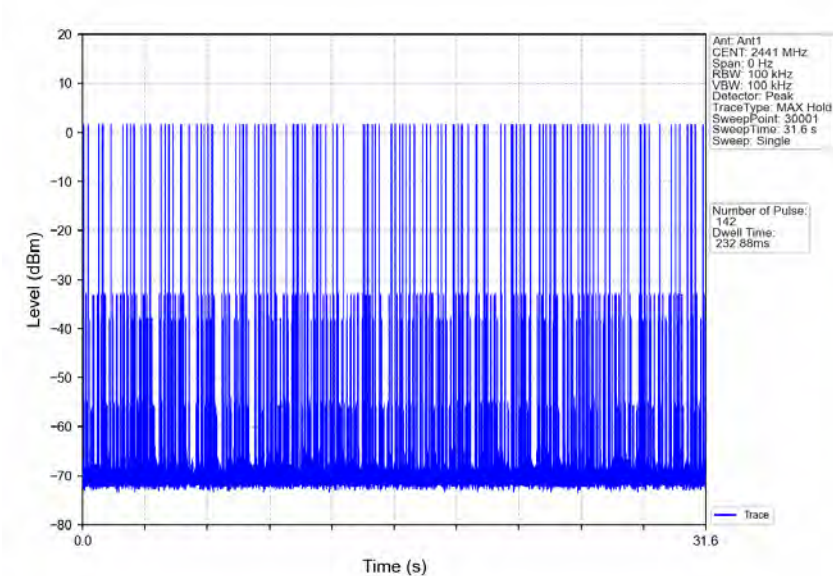

Pi/4DQPSK\_2DH5\_HOPP\_Ant1\_NTNV

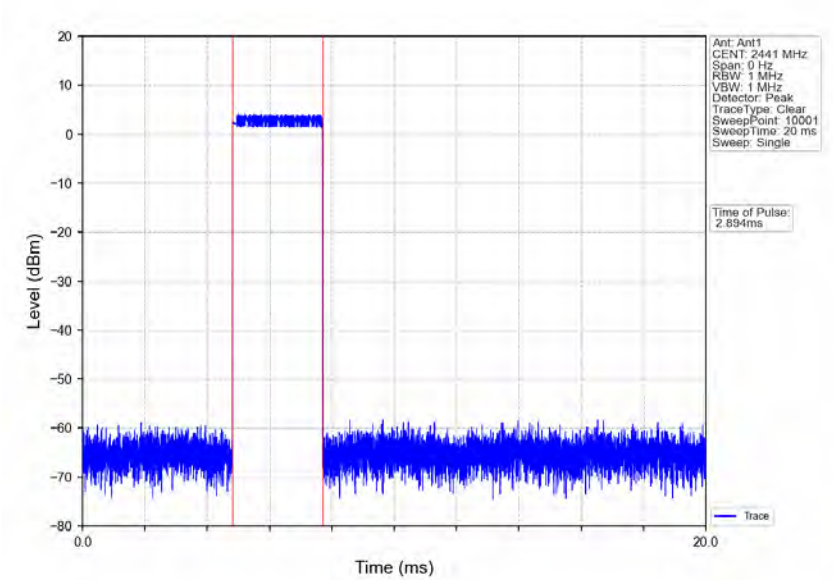

Pi/4DQPSK\_2DH5\_HOPP\_Ant1\_NTNV

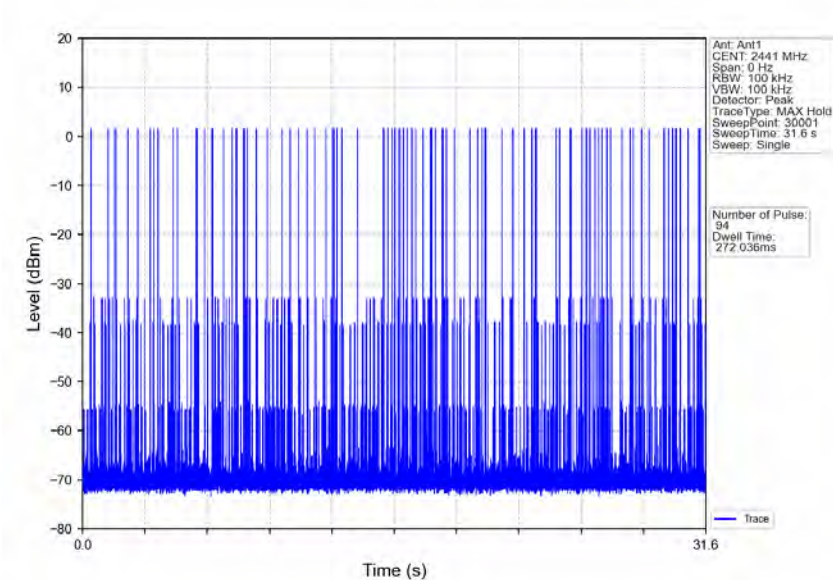


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240400056602

Page: 132 of 153


8DPSK\_3DH1\_HOPP\_Ant1\_NTNV

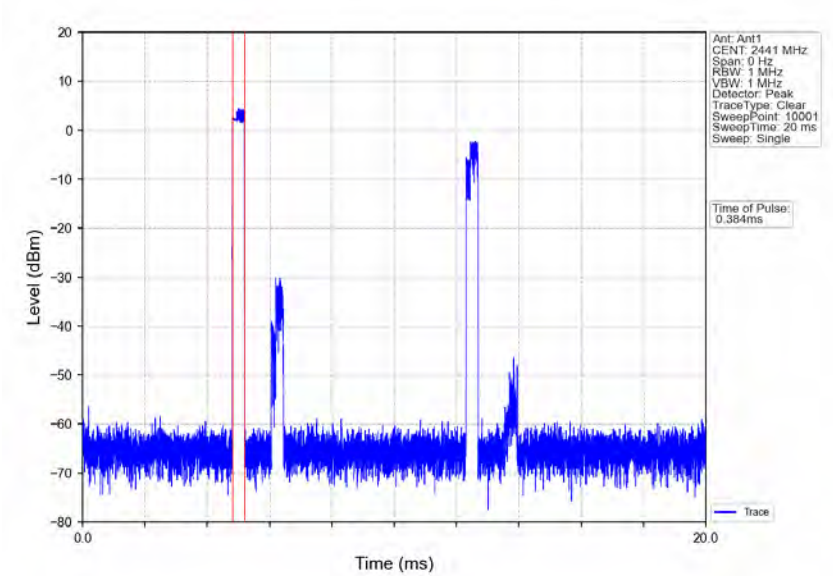


8DPSK\_3DH1\_HOPP\_Ant1\_NTNV

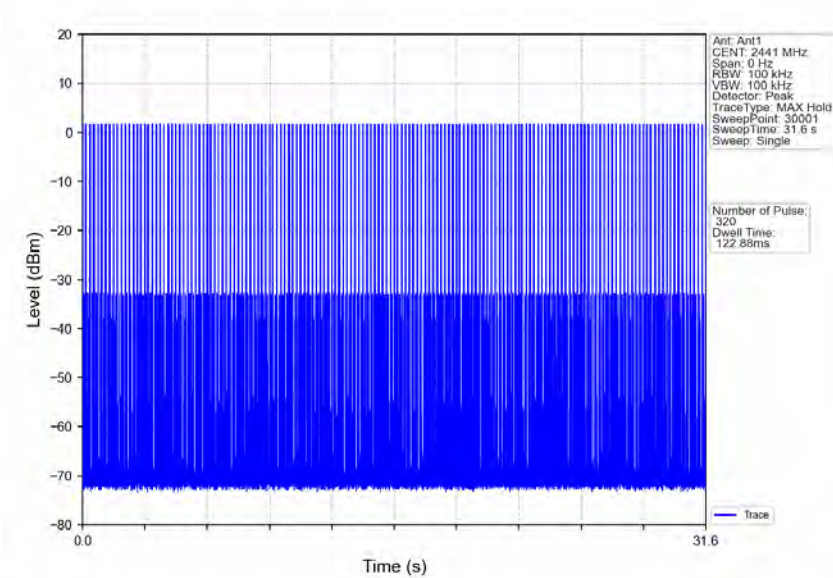

8DPSK\_3DH3\_HOPP\_Ant1\_NTNV

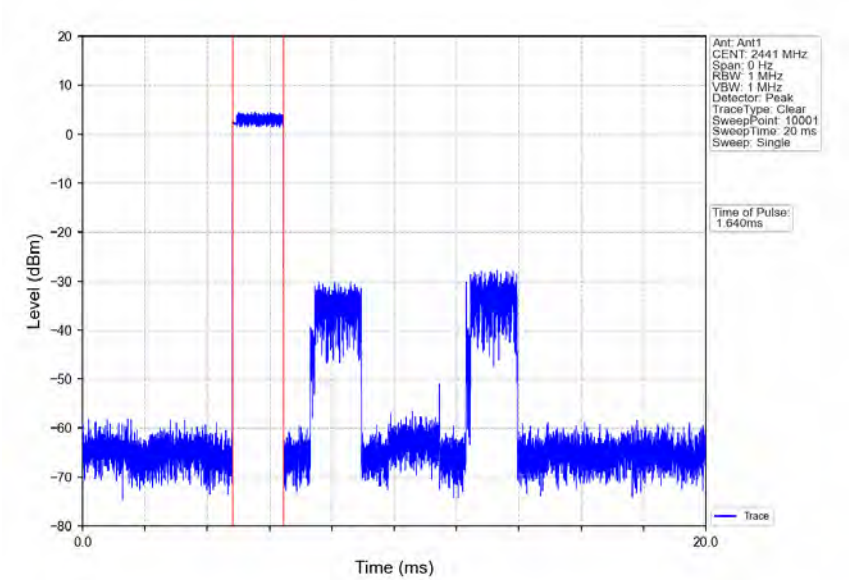


8DPSK\_3DH3\_HOPP\_Ant1\_NTNV

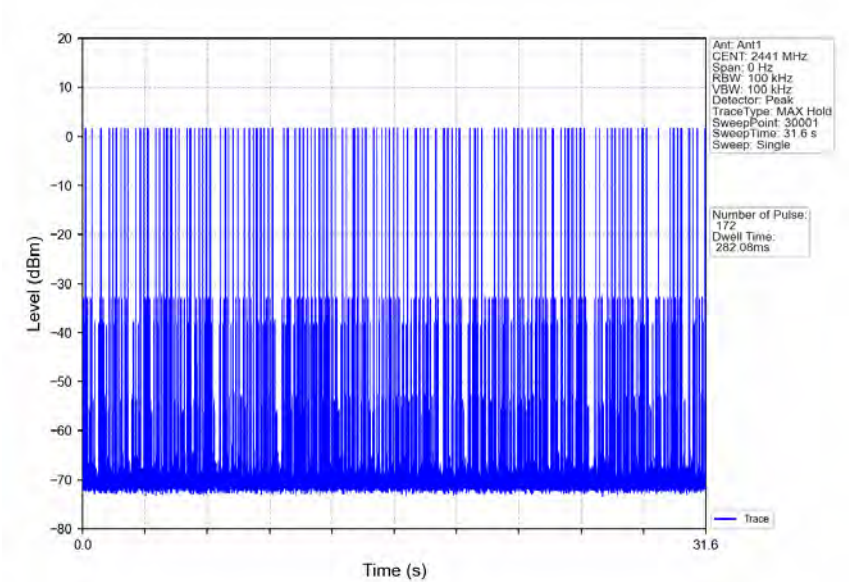




8DPSK\_3DH5\_HOPP\_Ant1\_NTNV

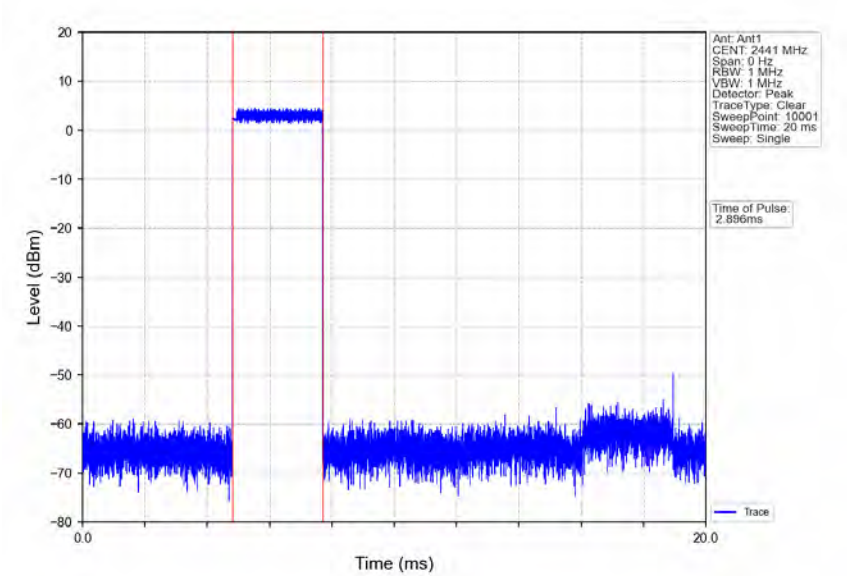

8DPSK\_3DH5\_HOPP\_Ant1\_NTNV

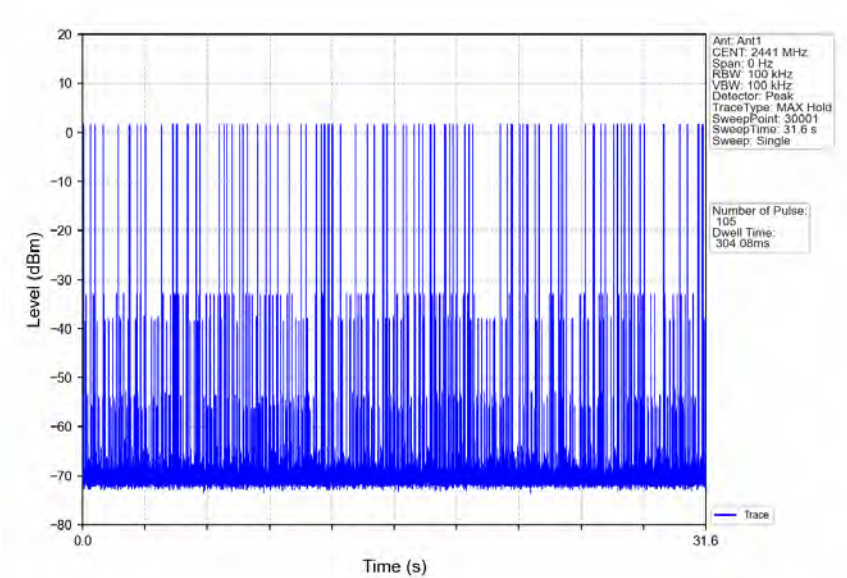

## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 135 of 153

### 6. Unwanted Emissions In Non-restricted Frequency Bands

#### 6.1 Test Result

##### 6.1.1 Ref

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	7.68
		2441	DH5	1	8.04
		2480	DH5	1	8.23
Pi/4DQPSK	SISO	2402	2DH5	1	2.45
		2441	2DH5	1	2.04
		2480	2DH5	1	2.44
8DPSK	SISO	2402	3DH5	1	2.63
		2441	3DH5	1	2.18
		2480	3DH5	1	2.64

Note1: Refer to RSS-247 Issue 2 section 5.5 and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


##### 6.1.2 CSE

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	8.23	-11.77	Pass
		2441	DH5	1	8.23	-11.77	Pass
		2480	DH5	1	8.23	-11.77	Pass
		HOPP	DH5	1	8.23	-11.77	Pass
					8.23	-11.77	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	2.45	-17.55	Pass
		2441	2DH5	1	2.45	-17.55	Pass
		2480	2DH5	1	2.45	-17.55	Pass
		HOPP	2DH5	1	2.45	-17.55	Pass
					2.45	-17.55	Pass
8DPSK	SISO	2402	3DH5	1	2.64	-17.36	Pass
		2441	3DH5	1	2.64	-17.36	Pass
		2480	3DH5	1	2.64	-17.36	Pass
		HOPP	3DH5	1	2.64	-17.36	Pass
					2.64	-17.36	Pass

Note1: Refer to RSS-247 Issue 2 section 5.5 and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


### 6.2 Test Graph

#### 6.2.1 Ref

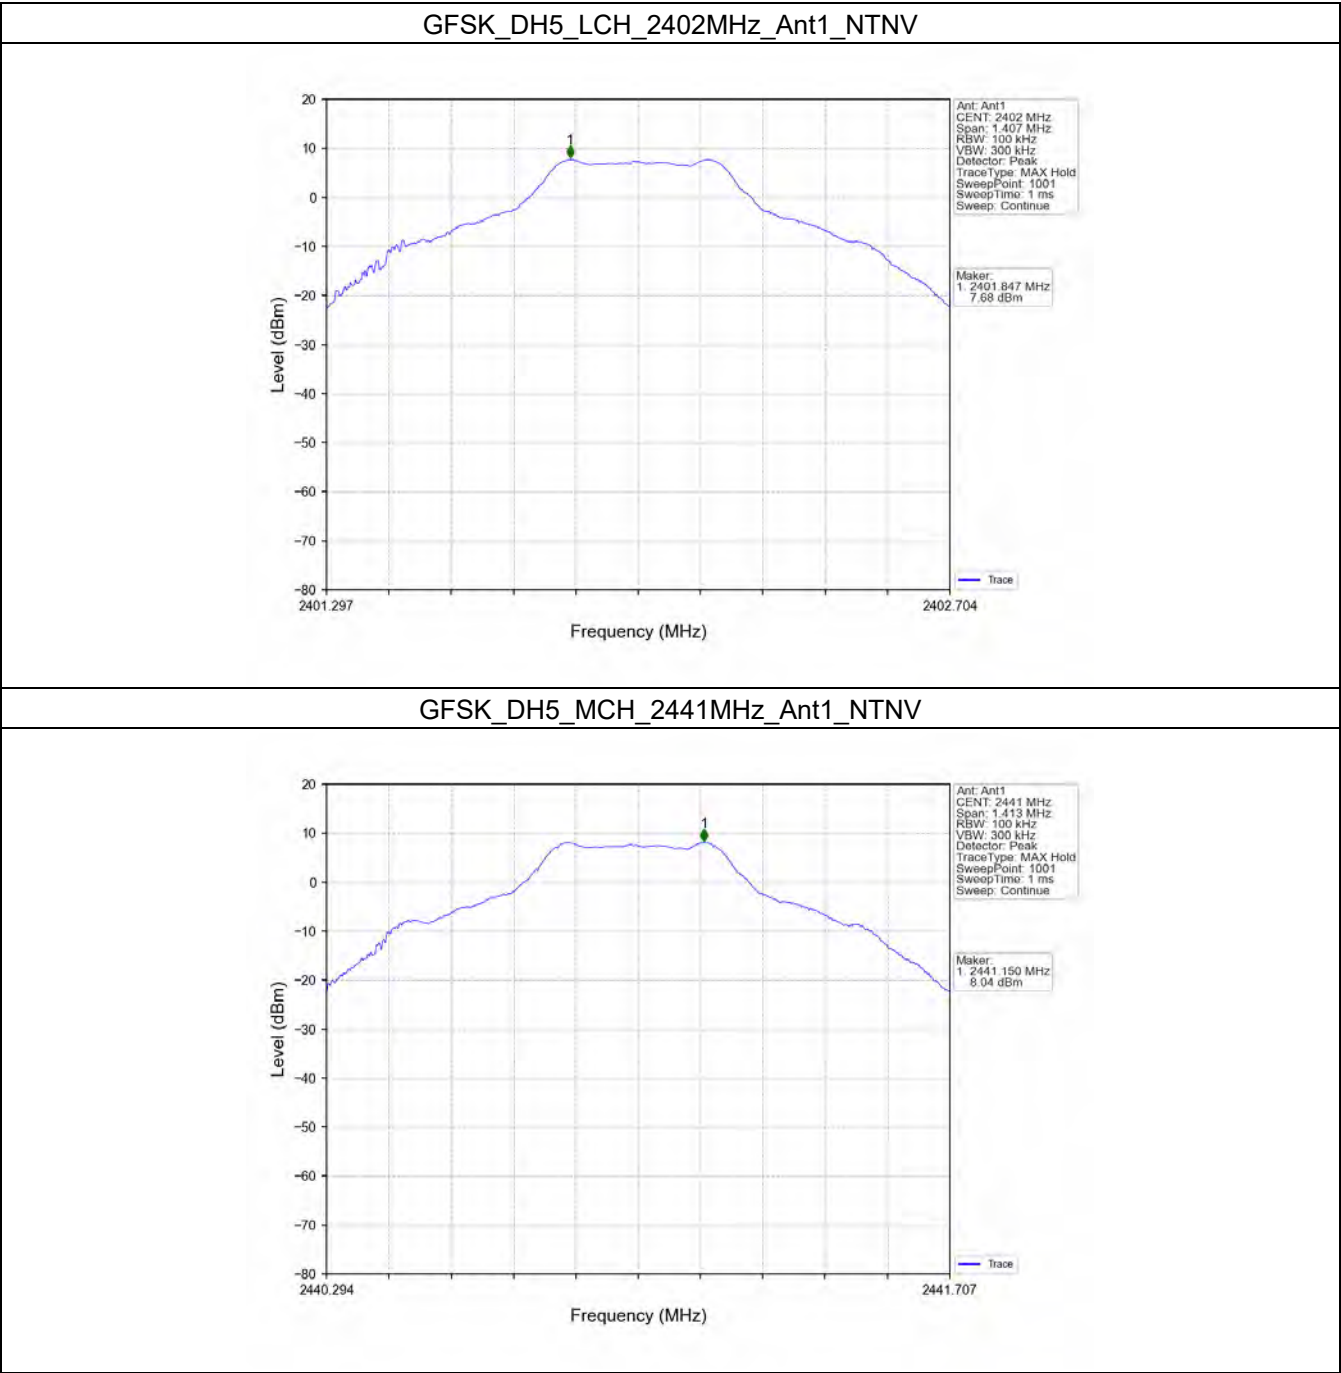





GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

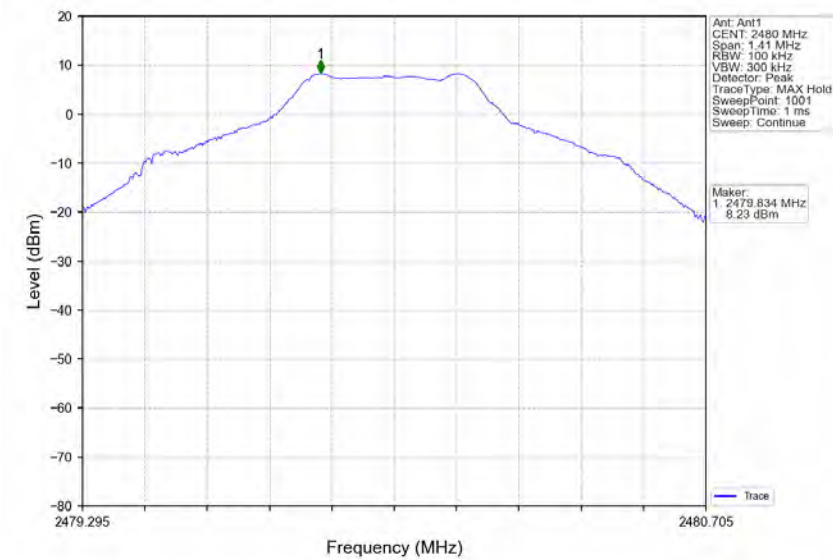


Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

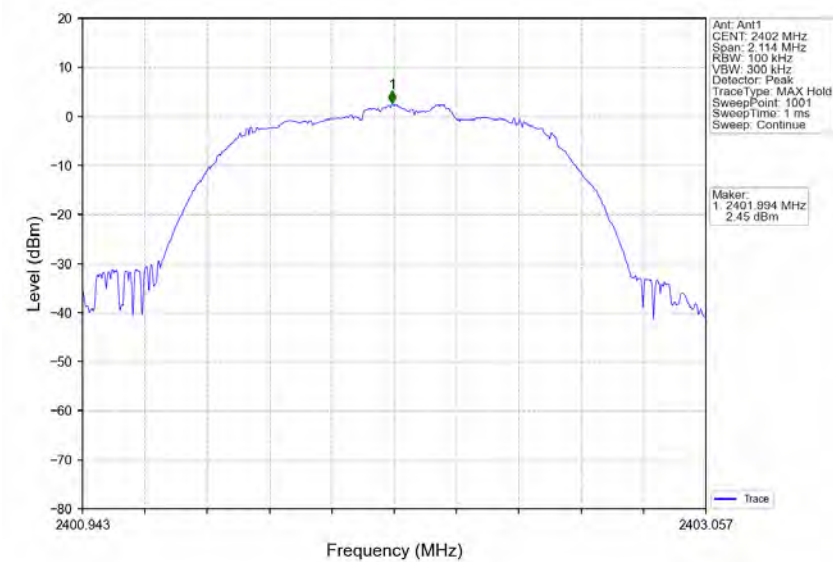

Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

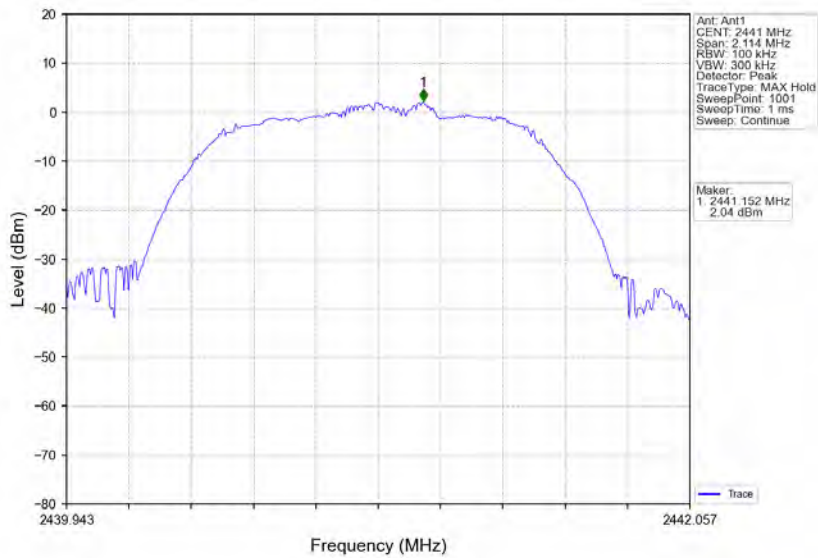

Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

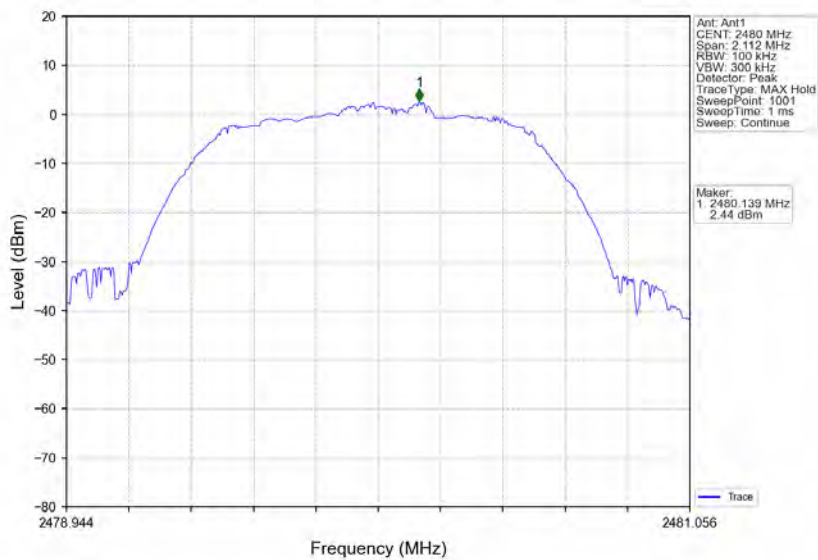


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240400056602

Page: 139 of 153

8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

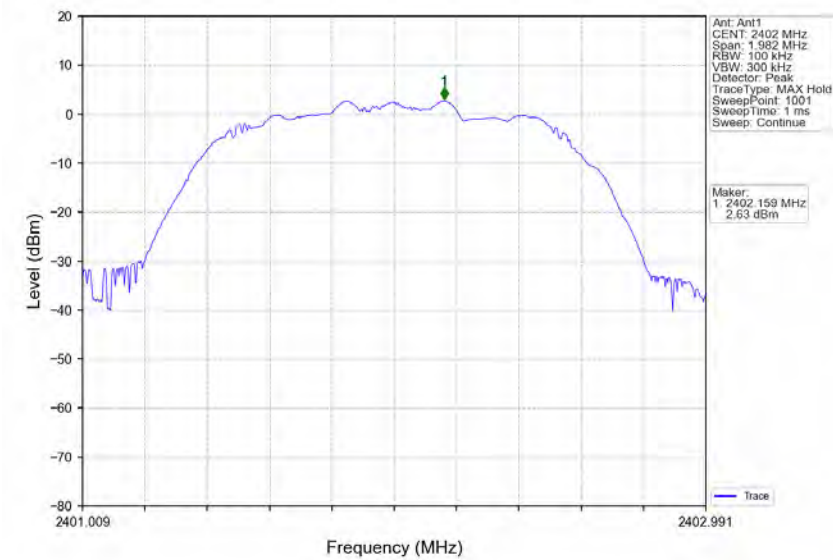

8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

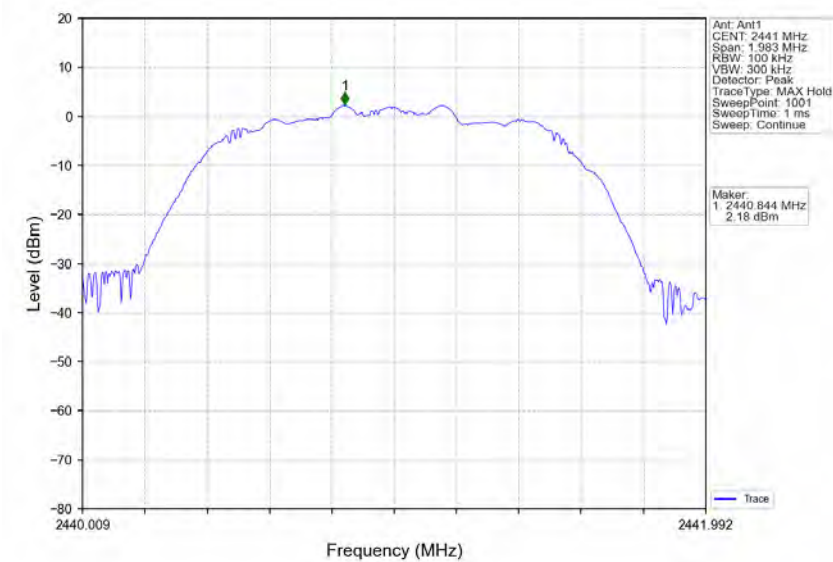


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023


Report No.: KSCR240400056602

Page: 140 of 153


8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

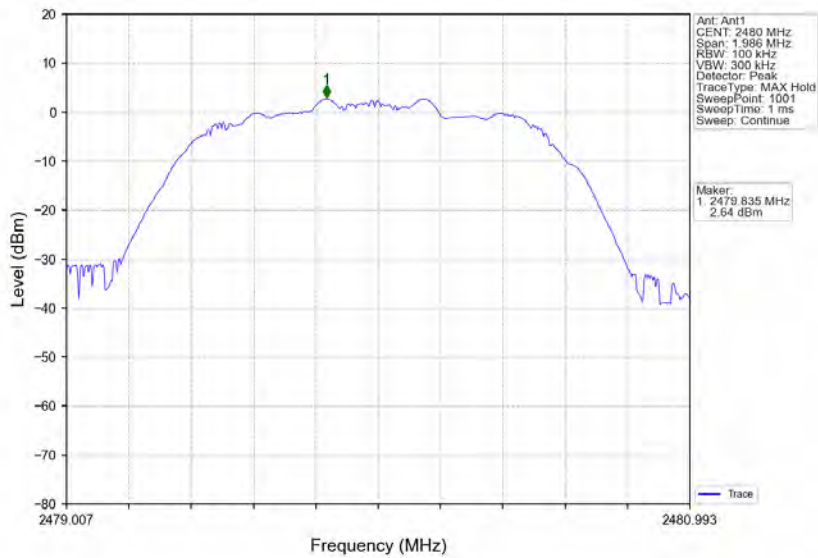


### 6.2.2 CSE

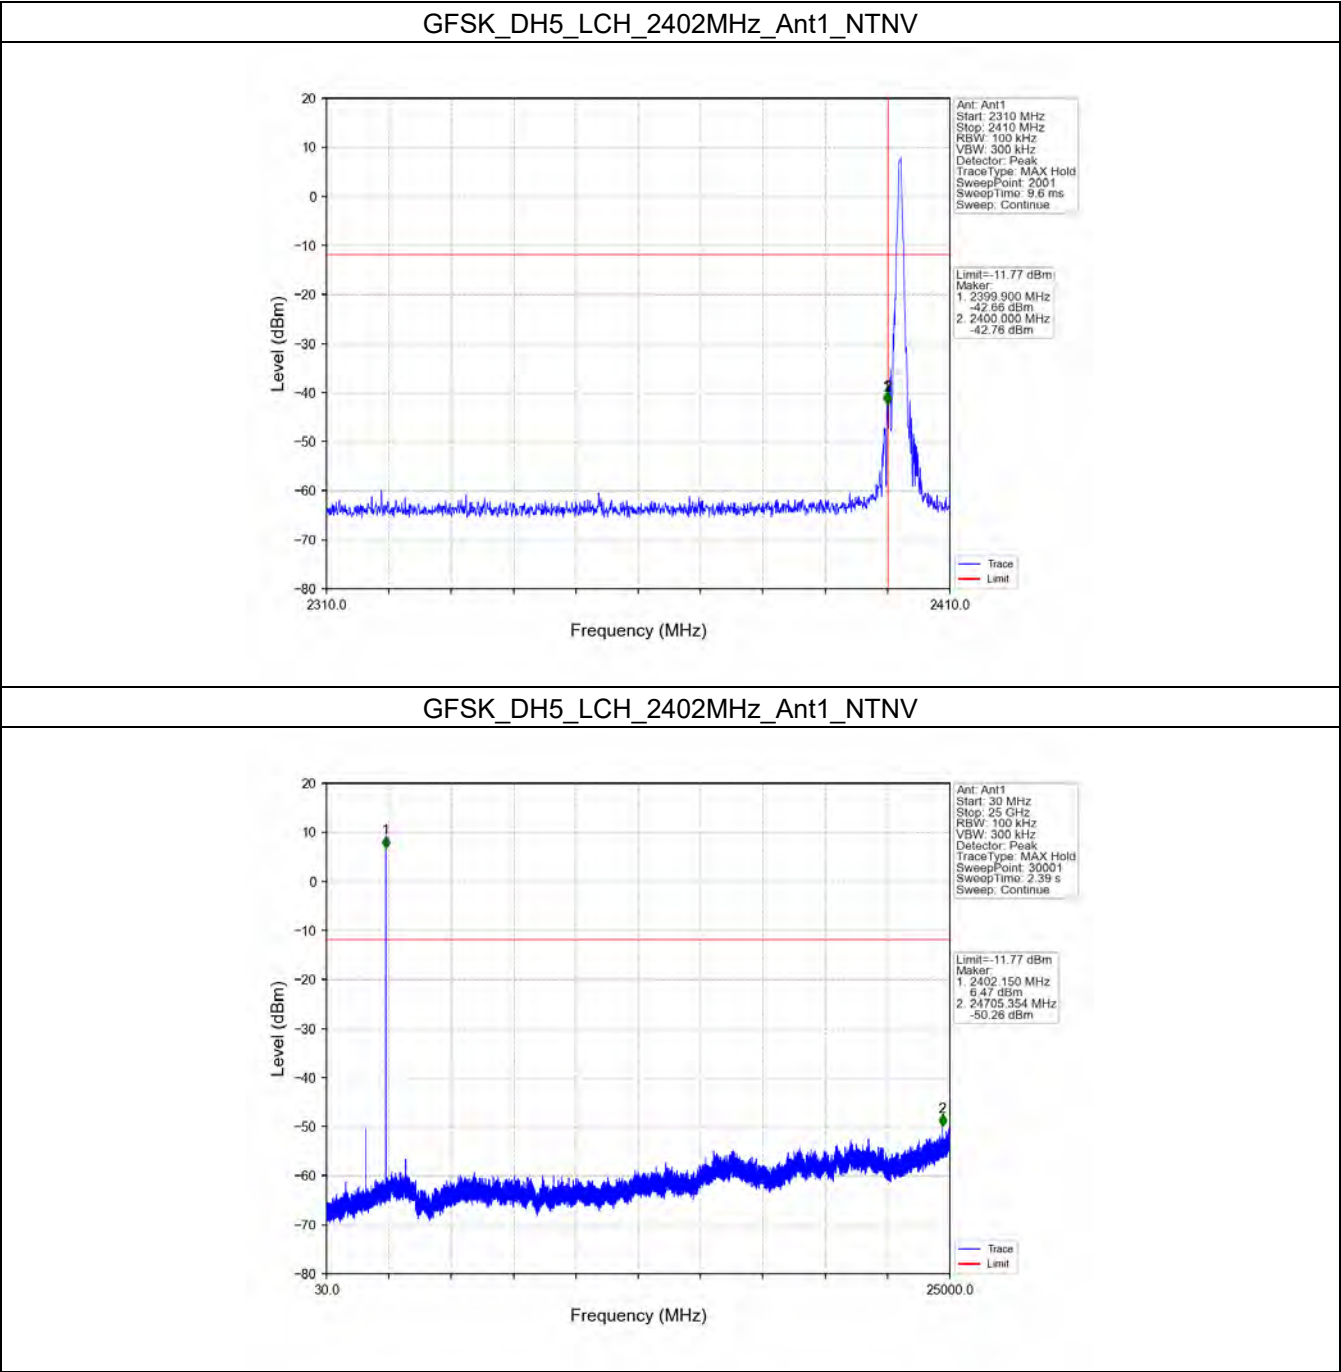

GFSK\_DH5\_MCH\_2441MHz\_Ant1\_NTNV

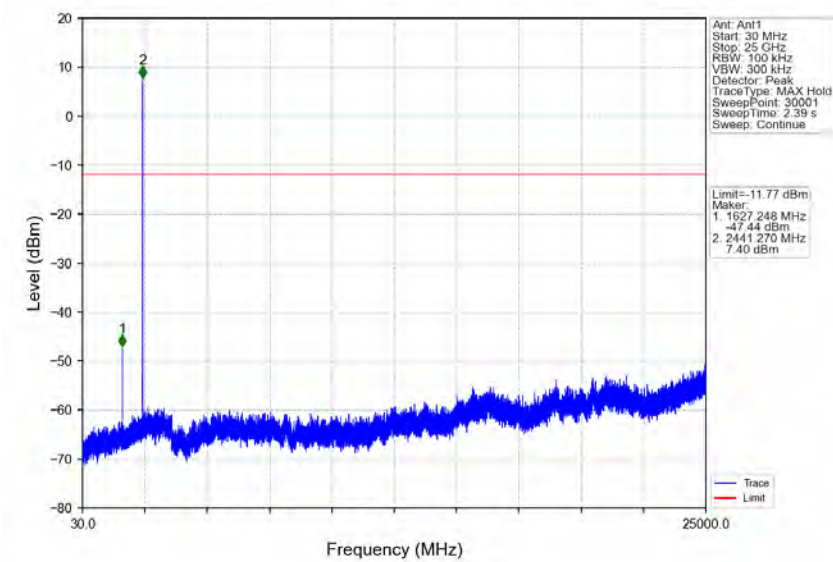


GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

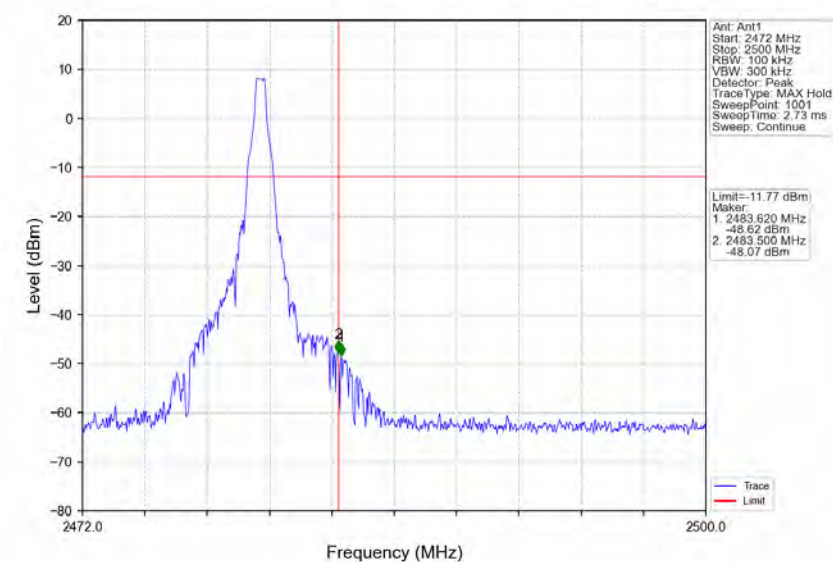





### GFSK\_DH5\_HCH\_2480MHz\_Ant1\_NTNV

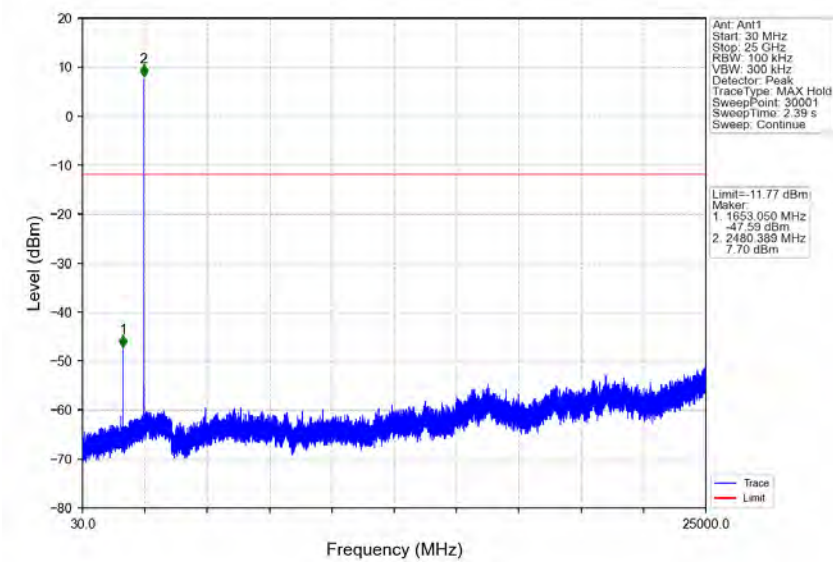


### GFSK\_DH5\_HOPP\_2410MHz\_Ant1\_NTNV

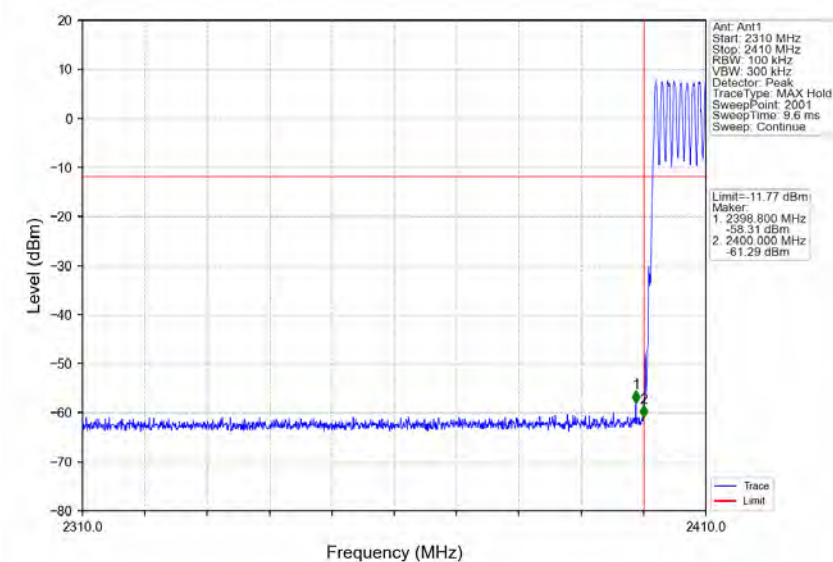

GFSK\_DH5\_HOPP\_Ant1\_NTNV

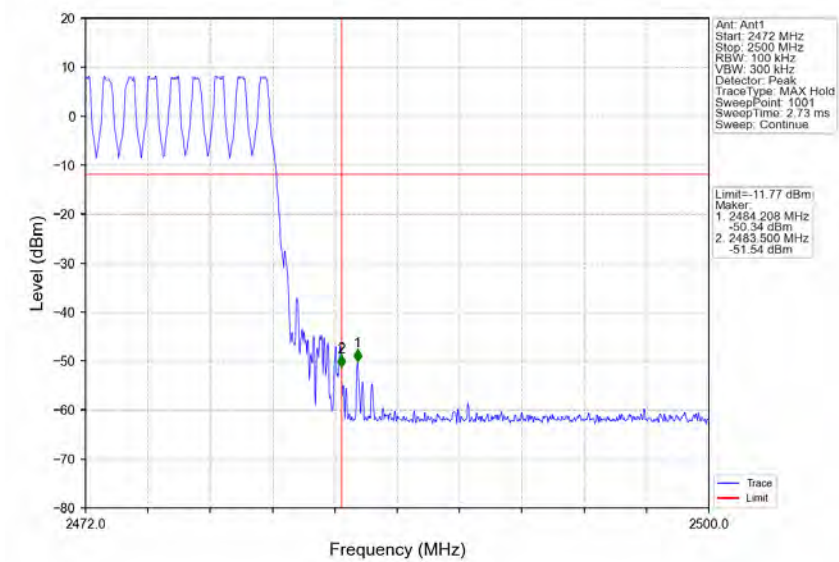


Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

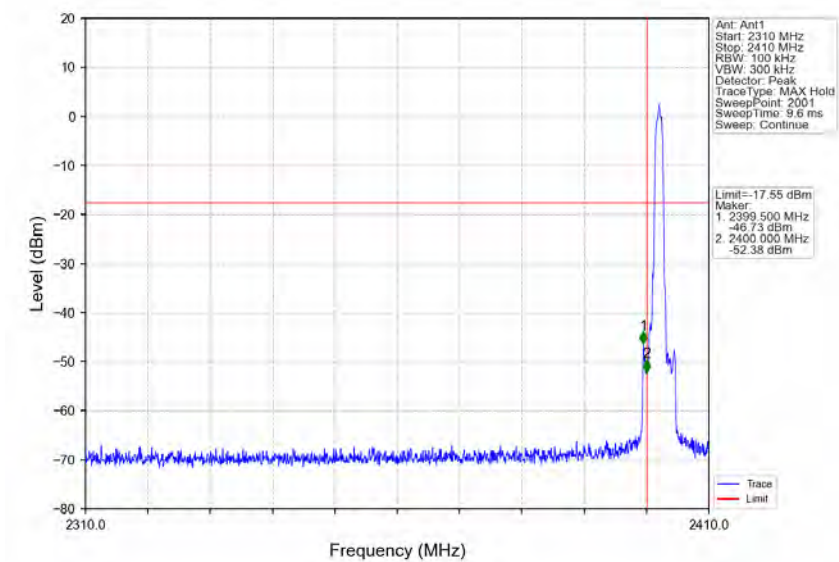





Pi/4DQPSK\_2DH5\_LCH\_2402MHz\_Ant1\_NTNV

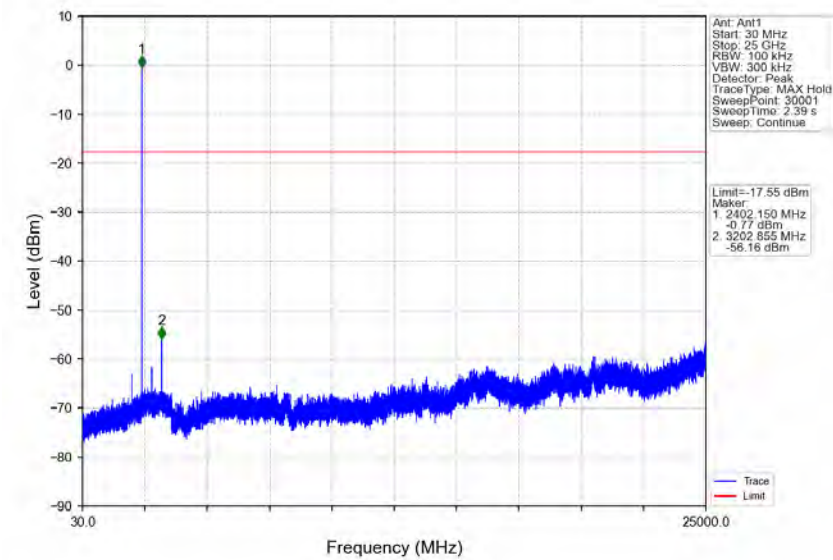


Pi/4DQPSK\_2DH5\_MCH\_2441MHz\_Ant1\_NTNV

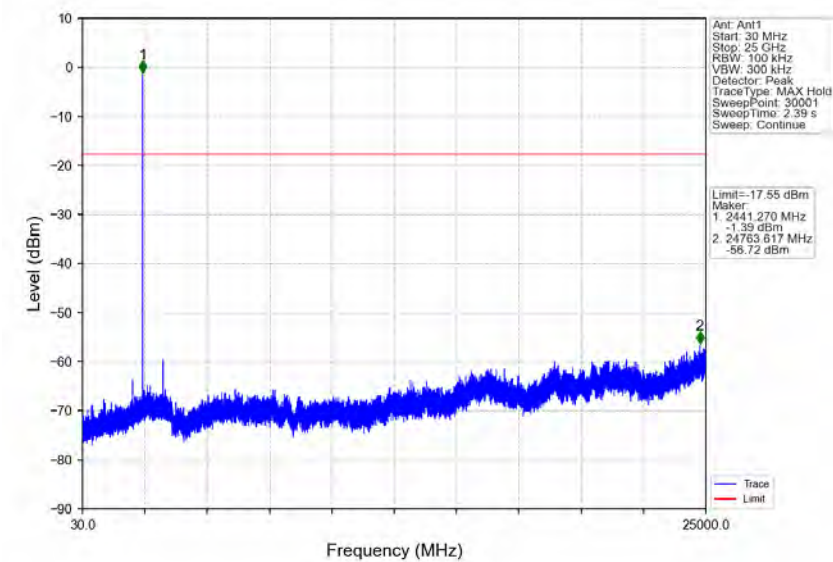


Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

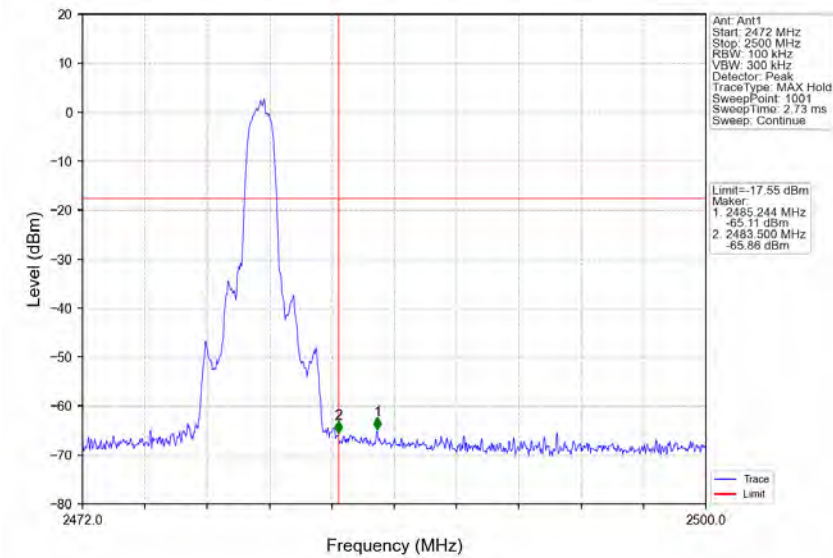


Pi/4DQPSK\_2DH5\_HCH\_2480MHz\_Ant1\_NTNV

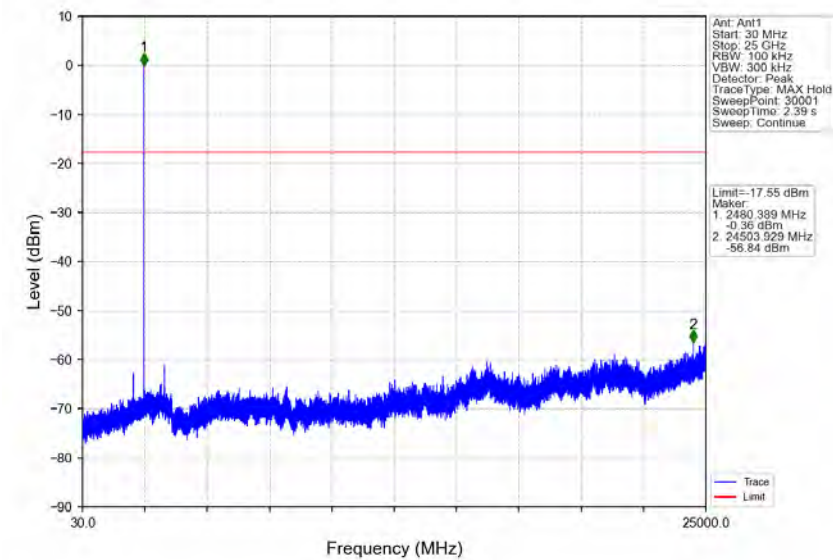


Pi/4DQPSK\_2DH5\_HOPP\_Ant1\_NTNV

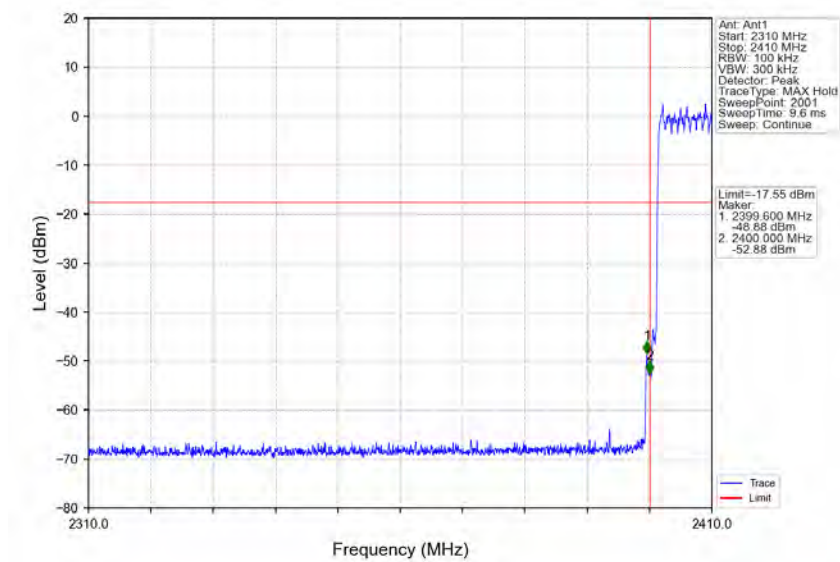


Pi/4DQPSK\_2DH5\_HOPP\_Ant1\_NTNV

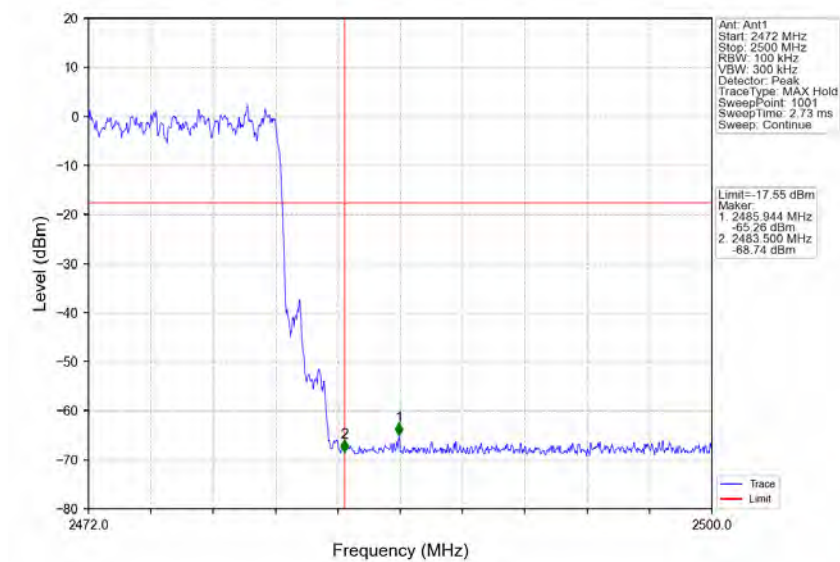


8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

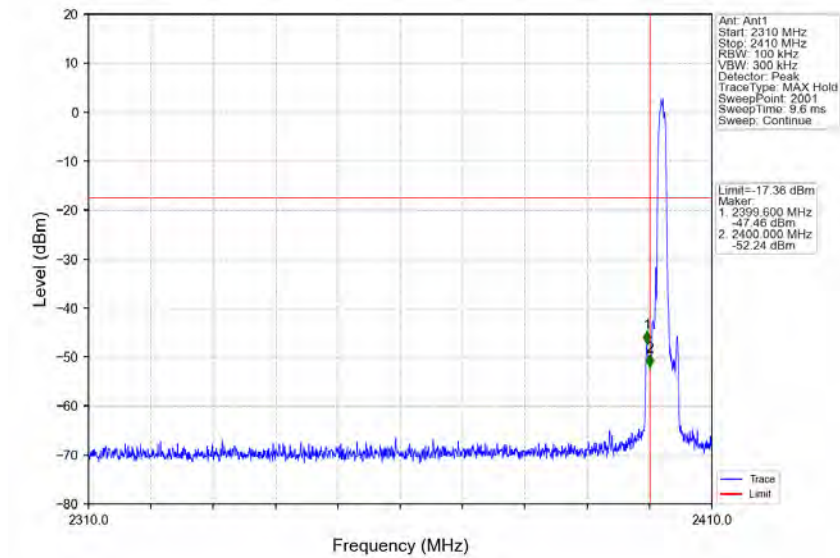


8DPSK\_3DH5\_LCH\_2402MHz\_Ant1\_NTNV

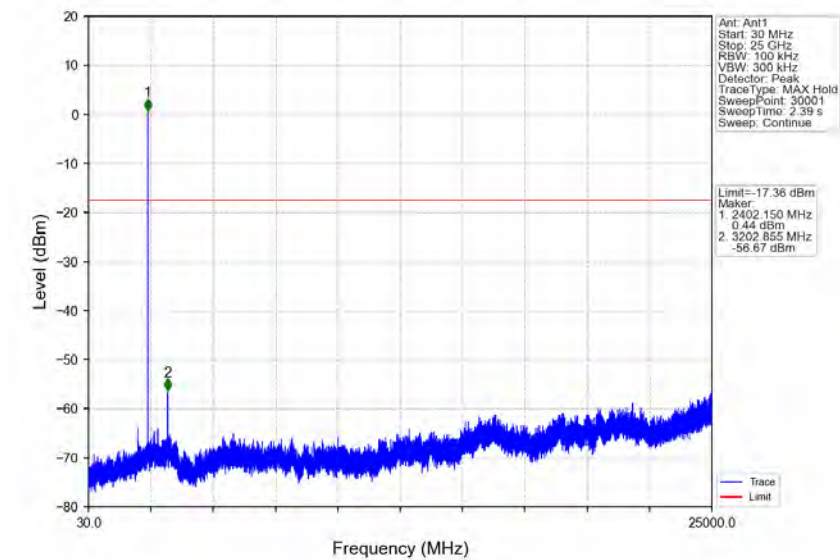

### 8DPSK\_3DH5\_MCH\_2441MHz\_Ant1\_NTNV

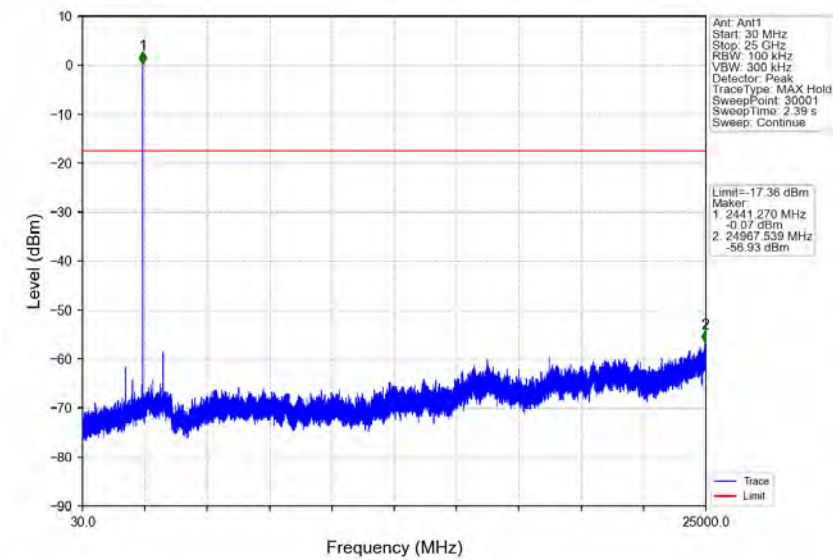


### 8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

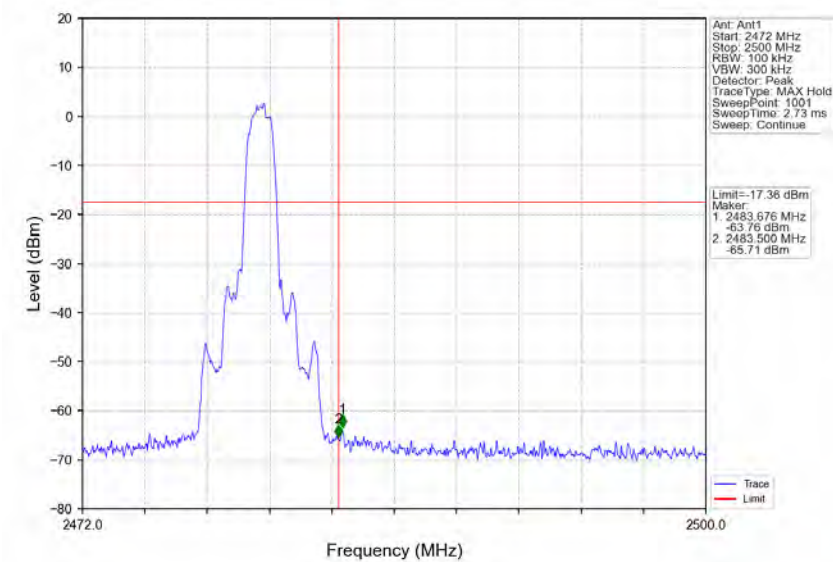




### 8DPSK\_3DH5\_HCH\_2480MHz\_Ant1\_NTNV

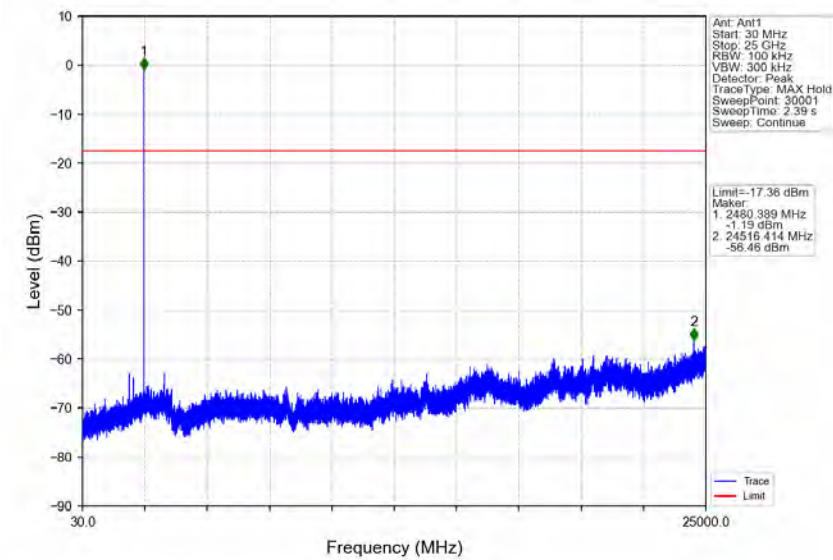

### 8DPSK\_3DH5\_HOPP\_Ant1\_NTNV

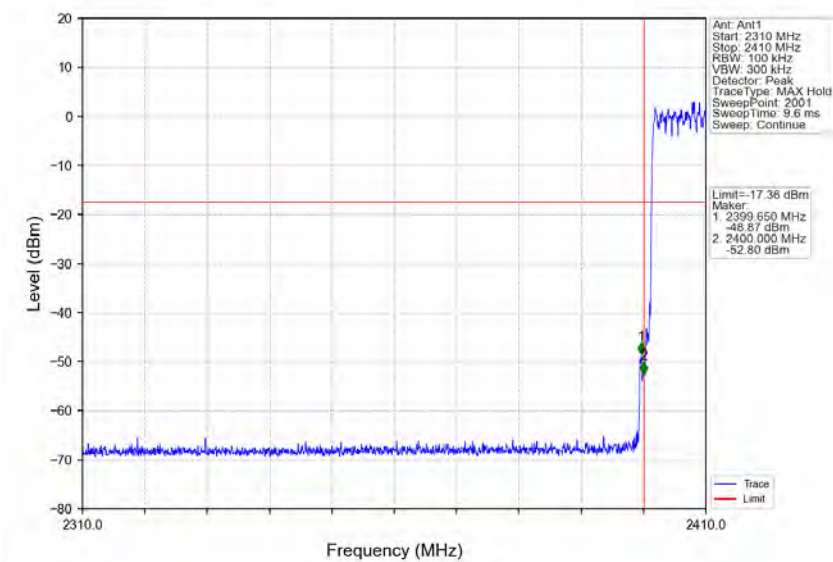


## Compliance Certification Services (Kunshan) Inc.

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 151 of 153

### 8DPSK\_3DH5\_HOPP\_Ant1\_NTNV

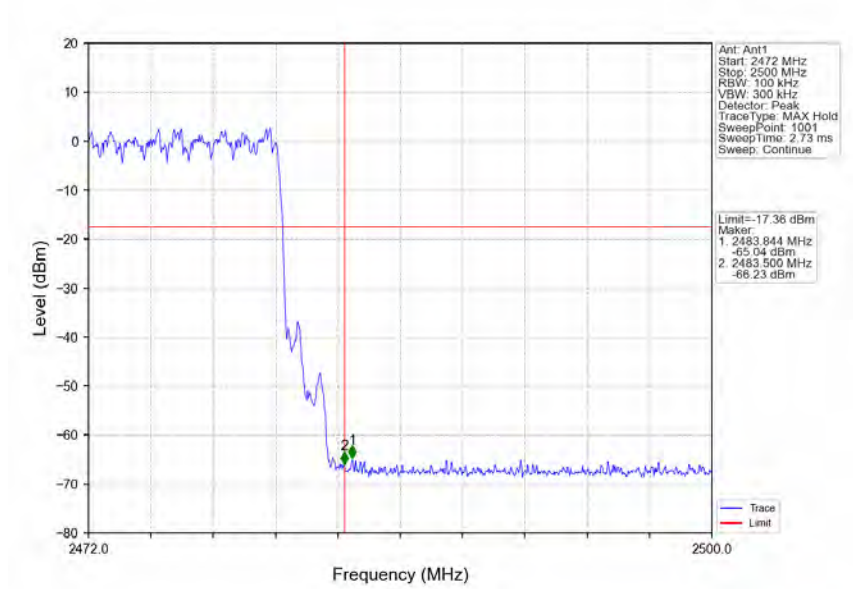

## 7. Frequency Error

### 7.1 Test Result

#### 7.1.1 Ant1

Ant1								
Mode	TX Type	Frequency (MHz)	Packet Type	Temperature (°C)	Voltage (VDC)	Measured Frequency (MHz)	Limit (MHz)	Verdict
GFSK	SISO	2402	DH5	20	2.805	2402.001	2401.662 to 2402.338	Pass
					3.300	2402.000	2401.662 to 2402.338	Pass
					3.795	2402.000	2401.662 to 2402.338	Pass
				-20	3.300	2402.001	2401.662 to 2402.338	Pass
				50	3.300	2402.001	2401.662 to 2402.338	Pass
		2441	DH5	20	2.805	2440.992	2440.659 to 2441.341	Pass
					3.300	2440.992	2440.659 to 2441.341	Pass
					3.795	2440.994	2440.659 to 2441.341	Pass
				-20	3.300	2440.992	2440.659 to 2441.341	Pass
				50	3.300	2440.992	2440.659 to 2441.341	Pass
		2480	DH5	20	2.805	2479.978	2479.656 to 2480.344	Pass
					3.300	2479.981	2479.656 to 2480.344	Pass
					3.795	2479.977	2479.656 to 2480.344	Pass
				-20	3.300	2479.977	2479.656 to 2480.344	Pass
				50	3.300	2479.978	2479.656 to 2480.344	Pass
Pi/4DQPSK	SISO	2402	2DH5	20	2.805	2402.001	2401.518 to 2402.482	Pass
					3.300	2402.001	2401.518 to 2402.482	Pass
					3.795	2402.001	2401.518 to 2402.482	Pass
				-20	3.300	2402.001	2401.518 to 2402.482	Pass
				50	3.300	2402.001	2401.518 to 2402.482	Pass
		2441	2DH5	20	2.805	2440.994	2440.519 to 2441.481	Pass
					3.300	2440.995	2440.519 to 2441.481	Pass
					3.795	2440.994	2440.519 to 2441.481	Pass
				-20	3.300	2440.994	2440.519 to 2441.481	Pass
				50	3.300	2440.995	2440.519 to 2441.481	Pass
		2480	2DH5	20	2.805	2479.988	2479.518 to 2480.482	Pass
					3.300	2479.988	2479.518 to 2480.482	Pass
					3.795	2479.988	2479.518 to 2480.482	Pass
				-20	3.300	2479.988	2479.518 to 2480.482	Pass
				50	3.300	2479.988	2479.518 to 2480.482	Pass
8DPSK	SISO	2402	3DH5	20	2.805	2401.996	2401.522 to 2402.478	Pass
					3.300	2401.999	2401.522 to 2402.478	Pass
					3.795	2401.996	2401.522 to 2402.478	Pass





**Compliance Certification Services (Kunshan) Inc.**

CCSEM-TRF-001 Rev. 02 Sep 01, 2023

Report No.: KSCR240400056602

Page: 153 of 153

				-20	3.300	2401.999	2401.522 to 2402.478	Pass
				50	3.300	2401.998	2401.522 to 2402.478	Pass
		2441	3DH5	20	2.805	2440.990	2440.522 to 2441.478	Pass
					3.300	2440.992	2440.522 to 2441.478	Pass
					3.795	2440.989	2440.522 to 2441.478	Pass
				-20	3.300	2440.988	2440.522 to 2441.478	Pass
				50	3.300	2440.990	2440.522 to 2441.478	Pass
		2480	3DH5	20	2.805	2479.984	2479.518 to 2480.482	Pass
					3.300	2479.982	2479.518 to 2480.482	Pass
					3.795	2479.982	2479.518 to 2480.482	Pass
				-20	3.300	2479.983	2479.518 to 2480.482	Pass
				50	3.300	2479.984	2479.518 to 2480.482	Pass

- End of the Report -