



# **EMI TEST REPORT**


**Test Report No. : 11990777H-B-R1**

**Applicant** : OMRON Automotive Electronics Co. Ltd.  
**Type of Equipment** : Immobilizer and Alarm system  
**Model No.** : K56R0  
**FCC ID** : OUCK56R0  
**Test regulation** : FCC Part 15 Subpart B: 2018  
**Test Result** : Complied


1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers EMC technical requirements. It does not cover administrative issues such as Manual or non-EMC test related Requirements. (if applicable)
7. This report is a revised version of 11990777H-B. 11990777H-B is replaced with this report.

**Date of test:** January 23, 2018

**Representative test engineer:**

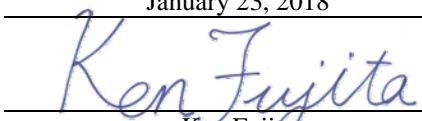  
Ken Fujita  
Engineer  
Consumer Technology Division

**Approved by:**

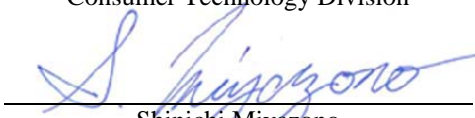  
Shinichi Miyazono  
Engineer  
Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

\*As for the range of Accreditation in NVLAP, you may refer to the WEB address,  
[http://japan.ul.com/resources/emc\\_accredited/](http://japan.ul.com/resources/emc_accredited/)

**UL Japan, Inc.**  
**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999  
Facsimile : +81 596 24 8124

13-EM-F0429

Facsimile : +81 596 24 8124

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information .....</b>	<b>4</b>
<b>SECTION 2: Equipment under test (E.U.T.) .....</b>	<b>4</b>
<b>SECTION 3: Test specification, procedures &amp; results .....</b>	<b>5</b>
<b>SECTION 4: Operation of E.U.T. during testing .....</b>	<b>7</b>
<b>SECTION 5: Radiated Emission .....</b>	<b>9</b>
<b>APPENDIX 1: Test data .....</b>	<b>10</b>
Radiated Emission .....	10
<b>APPENDIX 2: Test instruments .....</b>	<b>12</b>
<b>APPENDIX 3: Photographs of test setup.....</b>	<b>13</b>
Radiated Emission .....	13
Worst Case Position (Horizontal: X-axis / Vertical: X-axis) .....	15

## **SECTION 1: Customer information**

Company Name : OMRON Automotive Electronics Co. Ltd.  
Address : 6368 NENJOZAKA OKUSA KOMAKI AICHI, 485-0802 JAPAN  
Telephone Number : +81-568-78-6159  
Facsimile Number : +81-568-78-7659  
Contact Person : Takashi Betsui

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : Immobilizer and Alarm system  
Model No. : K56R0  
Serial No. : Refer to Section 4, Clause 4.2  
Rating : DC 12.0 V  
Receipt Date of Sample : October 5, 2017  
Country of Mass-production : Japan and India  
Condition of EUT : Production prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab

### **2.2 Product Description**

Model No: K56R0 (referred to as the EUT in this report) is the Immobilizer and Alarm system.

#### **General Specification**

Clock frequency(ies) in the system : 8 MHz (CPU)

#### **Radio Specification**

##### **[Transmitter part] \*1)**

Radio Type : Transceiver  
Frequency of Operation : 125 kHz  
Modulation : ASK  
Power Supply (inner) : DC 12 V (Typ), DC 36 V (Max)  
Antenna type : External Antenna

##### **[Receiver part]**

Equipment Type : Receiver  
Frequency of Operation : 433.92 MHz  
Local clock frequency : 21.948717 MHz  
Antenna Type : Pattern Antenna  
Type of Modulation : FSK  
Method of Frequency Generation : Crystal resonator

\*1) The test of transmitter part was performed separately from this test report, and the conformability is confirmed.

#### **FCC15.111(b)**

The receiving antenna (of this EUT) is installed inside the EUT and cannot be removed (permanently attached). Therefore, Radiated emission test was performed.

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## SECTION 3: Test specification, procedures & results

### 3.1 Test specification

Test specification : FCC Part 15 Subpart B  
FCC Part 15 final revised on January 2, 2018 and effective February 1, 2018

Title : FCC 47CFR Part15 Radio Frequency Device  
Subpart B Unintentional Radiators

\* The revision on January 2, 2018, does not affect the test specification applied to the EUT.

### 3.2 Procedures and results

Item	Test Procedure	Limits	Deviation	Worst margin	Result
Conducted emission	FCC: ANSI C63.4: 2014 7. AC power - line conducted emission measurements	FCC:Part 15 Subpart B 15.107(a)	N/A *1)	N/A	N/A
	IC: RSS-Gen 8.8	IC: RSS-Gen 8.8			
Radiated emission	FCC: ANSI C63.4: 2014 8. Radiated emission measurements	FCC: Part 15 Subpart B 15.109(a)	N/A	9.1 dB 43.891 MHz Vertical, QP	Complied
	IC: RSS-Gen 7	IC: RSS-Gen 7.1.2			
*Note: UL Japan, Inc’s EMI Work Procedure 13-EM-W0420.					
*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.					

### 3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

#### EMI

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k = 2$ .

Polarity	Radiated emission (Below 1 GHz)			
	(3 m*)(+/-)		(10 m*)(+/-)	
	30 MHz - 200 MHz	200 MHz - 1000 MHz	30 MHz - 200 MHz	200 MHz - 1000 MHz
Horizontal	5.0 dB	5.3 dB	5.0 dB	5.0 dB
Vertical	4.7 dB	5.9 dB	5.0 dB	5.1 dB

Radiated emission (Above 1 GHz)				
(3 m*)(+/-)		(1 m*)(+/-)		(10 m*)(+/-)
1 GHz - 6 GHz	6 GHz - 18 GHz	10 GHz - 26.5 GHz	26.5 GHz - 40 GHz	1 GHz -18 GHz
5.2 dB	5.4 dB	5.5 dB	5.5 dB	5.4 dB

\* Measurement distance

#### Radiated emission test (3 m)

The data listed in this test report has enough margin, more than the site margin.

## UL Japan, Inc.

### Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab.  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124  
NVLAP Lab. code: 200572-0 / FCC Test Firm Registration Number: 199967

Test site	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	-	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.6 shielded room	-	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	-	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	-	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	-	3.1 x 5.0 x 2.7	N/A	-	-
No.9 measurement room	-	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	-	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 m x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

## SECTION 4: Operation of E.U.T. during testing


### 4.1 Operating modes

Mode	Remarks
Receiving mode	-

\*The test signal level was confirmed to be sufficient to stabilize the local oscillator of the EUT.

\*It was confirmed by using checker that the EUT receives the signal from the transmitter (pair of EUT).

### 4.2 Configuration and peripherals

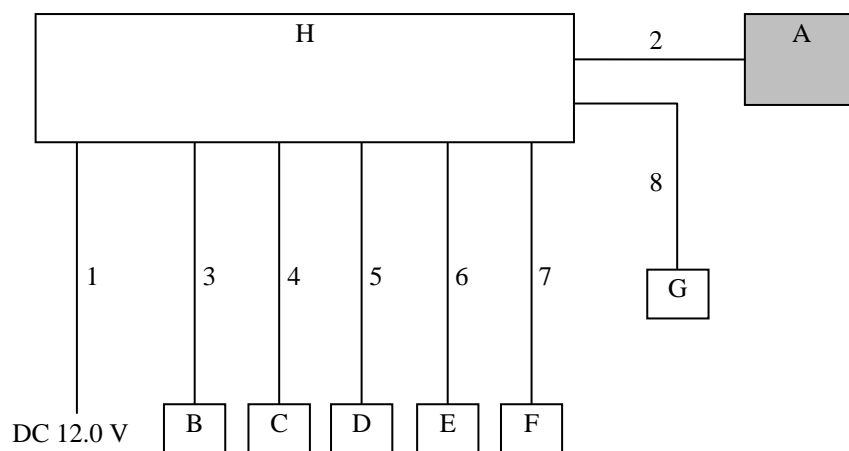

\* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

\*Item No. A is included in Receiver Antenna.

#### Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remark
A	Immobilizer and Alarm system	K56R0	-	OMRON Automotive Electronics Co. Ltd.	EUT
B	LF Antenna-1 (INF)	CGF-S002-D01	1	OMRON Automotive Electronics Co. Ltd.	-
C	LF Antenna-1 (INR)	CGF-S002-D01	2	OMRON Automotive Electronics Co. Ltd.	-
D	LF Antenna-1 (T/G)	CGF-S002-D01	3	OMRON Automotive Electronics Co. Ltd.	-
E	LF Antenna-2 (Dr)	CGF-S002-D02	261	OMRON Automotive Electronics Co. Ltd.	-
F	LF Antenna-2 (As)	CGF-S002-D02	267	OMRON Automotive Electronics Co. Ltd.	-
G	Push Start Switch	P55R0	No.013	OMRON Automotive Electronics Co. Ltd.	-
H	Switch BOX	RV494	No.002	OMRON Automotive Electronics Co. Ltd.	-

#### List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	DC Cable	2.0	Unshielded	Unshielded	-
2	Signal & DC Cable	2.0	Unshielded	Unshielded	-
3	Antenna Cable	2.4	Unshielded	Unshielded	-
4	Antenna Cable	2.4	Unshielded	Unshielded	-
5	Antenna Cable	2.4	Unshielded	Unshielded	-
6	Antenna Cable	2.4	Unshielded	Unshielded	-
7	Antenna Cable	2.4	Unshielded	Unshielded	-
8	Signal & DC Cable	2.0	Unshielded	Unshielded	-

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



## **SECTION 5: Radiated Emission**

### **5.1 Operating environment**

Test place : No.4 semi anechoic chamber  
Temperature : See data  
Humidity : See data

### **5.2 Test configuration**

EUT was placed on a urethane platform of nominal size, 1.0 m by 1.5 m, raised 0.8 m above the conducting ground plane.

The EUT was set on the center the tabletop.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Photographs of the set up are shown in Appendix 3.

### **5.3 Test conditions**

Frequency range : 30 MHz - 200 MHz (Biconical antenna) / 200 MHz - 1000 MHz (Logperiodic antenna)  
1000 MHz - 2000 MHz (Horn antenna)  
Test distance : 3 m  
EUT position : Table top  
EUT operation mode : See Clause 4.1

### **5.4 Test procedure**

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver.

The radiated emission measurements were made with the following detector function of the Test Receiver.

Frequency	Below 1GHz	Above 1GHz *1)
Instrument used	Test Receiver	Test Receiver
IF Bandwidth	QP: BW 120 kHz	PK: BW 1 MHz, CISPR AV: BW 1 MHz

\*1) The measurement data was adjusted to a 3 m distance using the following Distance Factor.

Distance Factor:  $20 \times \log (3.6 \text{ m} / 3 \text{ m}) = 1.59 \text{ dB}$

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

### **5.5 Test result**

Summary of the test results: Pass


Date: January 23, 2018

Test engineer: Ken Fujita



## Radiated Emission

Report No. 11990777H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date January 23, 2018  
Temperature / Humidity 22 deg. C / 36% RH  
Engineer Ken Fujita  
(Above 1GHz)  
Mode Rx

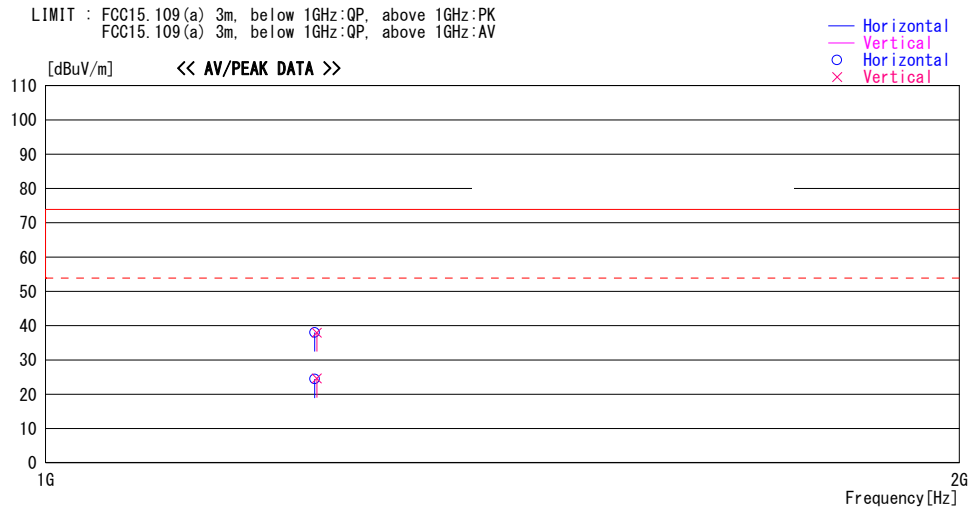

Frequency	Reading	DET	Antenna		Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Loss& Gain							
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
1226.455	46.5	PK	24.6	-33.1	38.0	0	100	Hori.	73.9	35.9	
1226.455	33.0	AV	24.6	-33.1	24.5	0	100	Hori.	53.9	29.4	
1228.459	46.5	PK	24.6	-33.1	38.0	0	100	Vert.	73.9	35.9	
1228.459	33.1	AV	24.6	-33.1	24.6	0	100	Vert.	53.9	29.3	

CHART: WITH FACTOR

ANT TYPE: - 30 MHz: LOOP, 30 MHz - 200 MHz: BICONICAL, 200 MHz - 1000 MHz: LOGPERIODIC, 1000 MHz -: HORN  
CALCULATION: RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE - GAIN(AMP) + D-factor)

\*The limit is rounded down to one decimal place.

\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **APPENDIX 2: Test instruments**

### **EMI test equipment**

<b>Control No.</b>	<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Serial No</b>	<b>Test Item</b>	<b>Calibration Date * Interval(month)</b>
MAEC-02	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	RE	2017/08/31 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	0003	RE	2017/12/21 * 12
MJM-14	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	100300	RE	2017/08/21 * 12
MHA-06	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	254	RE	2017/02/24 * 12
MCC-216	Microwave Cable	Junkosha	MWX221	1604S253(1 m) / 1608S087(5 m)	RE	2017/08/04 * 12
MPA-10	Pre Amplifier	Agilent	8449B	3008A02142	RE	2018/01/23 * 12
MMM-01	Digital Tester	Fluke	FLUKE 26-3	78030611	RE	2017/08/07 * 12
MBA-08	Biconical Antenna	Schwarzbeck	VHA9103B	08031	RE	2017/09/13 * 12
MLA-21	Logperiodic Antenna(200-1000MHz)	Schwarzbeck	VUSLP9111B	911B-190	RE	2017/12/10 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	-	RE	2017/02/24 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	BK7970	RE	2017/11/14 * 12
MPA-09	Pre Amplifier	Agilent	8447D	2944A10845	RE	2017/09/27 * 12

**The expiration date of the calibration is the end of the expired month.**

**All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.**

**As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.**

#### **Test Item:**

**RE: Radiated emission**

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124