



中国认可
国际互认
检测
TESTING
CNAS L7649

RADIO TEST REPORT

Report No.:STS2105157W10

Issued for

Chengdu XGIMI Technology Co., Ltd.

Building A4, No. 1129 Century City Road, New and High-tech
zones, Chengdu City, China

Product Name:	Projector
Brand Name:	XGIMI
Model Name:	XM03A
Series Model:	XM04A,XM05A,XM06A,XM07A,XM08A, XM09A,XM10A,XM11A,XM12A,XM13A, XM14A,XM15A,XM16A,XM17A,XM18A, XM19A,XM20A,XM21A,XM22A,XM23A, XM24A,XM25A,XM26A,XM27A,XM28A, XM29A,XM30A,XM31A,XM32A
FCC ID:	2AFENXM03A
Test Standard:	FCC Part 15.407

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.

Shenzhen STS Test Services Co., Ltd.
A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ,
Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com





TEST RESULT CERTIFICATION

Applicant's Name : Chengdu XGIMI Technology Co., Ltd.
Address : Building A4, No. 1129 Century City Road, New and High-tech zones,
Chengdu City, China
Manufacturer's Name : Chengdu XGIMI Technology Co., Ltd.
Address : Building A4, No. 1129 Century City Road, New and High-tech zones,
Chengdu City, China

Product Description

Product Name : Projector
Brand Name : XGIMI
Model Name : XM03A
Series Model : XM04A,XM05A,XM06A,XM07A,XM08A,XM09A,XM10A,XM11A,
XM12A,XM13A,XM14A,XM15A,XM16A,XM17A,XM18A,XM19A,
XM20A,XM21A,XM22A,XM23A,XM24A,XM25A,XM26A,XM27A,
XM28A,XM29A,XM30A,XM31A,XM32A

Test Standards : FCC Part15.407

Test Procedure ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test

Date of receipt of test item..... 28 May 2021

Date (s) of performance of tests..... 28 May 2021 ~ 23 June 2021

Date of Issue 23 June 2021

Test Result **Pass**

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sean she)

Authorized Signatory :

(Vita Li)





Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF TEST MODES	11
2.3 TEST SOFTWARE AND POWER LEVEL	12
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	14
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	15
3 . EMC EMISSION TEST	17
3.1 CONDUCTED EMISSION MEASUREMENT	17
3.2 RADIATED EMISSION AND (BANDEGE) MEASUREMENT	21
4. POWER SPECTRAL DENSITY TEST	65
4.1 LIMIT	65
4.2 TEST PROCEDURE	65
4.3 DEVIATION FROM STANDARD	66
4.4 TEST SETUP	66
4.5 EUT OPERATION CONDITIONS	66
4.6 TEST RESULTS	66
5. BANDWIDTH MEASUREMENT	70
5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	70
5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	73
5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	76
6. MAXIMUM CONDUCTED OUTPUT POWER	78
6.1 LIMIT	78
6.2 TEST PROCEDURE	78
6.3 DEVIATION FROM STANDARD	78
6.4 TEST SETUP	78
6.5 EUT OPERATION CONDITIONS	78
6.6 TEST RESULTS	79
7. AUTOMATICALLY DISCONTINUE TRANSMISSION	90
7.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	90
7.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	90



Table of Contents	Page
8. ANTENNA REQUIREMENT	91
8.1 STANDARD REQUIREMENT	91
8.2 EUT ANTENNA	91
APPENDIX - PHOTOS OF TEST SETUP	92



**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	23 June 2021	STS2105157W10	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

§ 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
15.407 (a) /15.407 (e)	26dB/6dB &99% Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(b)/15.205/15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(a)	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204	Antenna Requirement	PASS

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.84\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.39\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 5.10\text{dB}$
6	All emissions, radiated >6G	$\pm 5.48\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.79\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.80\text{dB}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Projector	
Trade Name	XGIMI	
Model Name	XM03A	
Series Model	XM04A,XM05A,XM06A,XM07A,XM08A,XM09A,XM10A,XM11A,XM12A,XM13A,XM14A,XM15A,XM16A,XM17A,XM18A,XM19A,XM20A,XM21A,XM22A,XM23A,XM24A,XM25A,XM26A,XM27A,XM28A,XM29A,XM30A,XM31A,XM32A	
Model Difference	Only the appearance color and model name are different, others are exactly the same.	
Product Description	The EUT is a Projector	
	Operation Frequency:	IEEE 802.11a/ n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80): 5.210GHz
		IEEE 802.11a/ n(HT20)/ac(VHT20): 5.260GHz-5.320GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.270GHz-5.310GHz IEEE 802.11ac(VHT80): 5.290GHz
		IEEE 802.11a/ n(HT20)/ac(VHT20): 5.500GHz-5.700GHz IEEE 802.11 n(HT40)/ac(VHT40): 5.510GHz-5.670GHz IEEE 802.11ac(VHT80): 5.530GHz-5.610GHz
		IEEE 802.11a/ n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/ n(HT40)/ac(VHT40): 5.755GHz-5.795GHz IEEE 802.11ac(VHT80): 5.775GHz
		Modulation Type: 802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM
	Antenna Designation:	Please refer to the Note 3.
	Max.Output Power(Conducted):	13.072 dBm
	More details of EUT technical specification, please refer to the User Manual.	
Test Channel	Please refer to the Note 2.	
Rating	Input: 100-240V~ 50/60Hz 3.5A	
Hardware version number	V03	
Software version number	V1.0.0	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.



2. Operation Frequency of channel

5.180GHz-5.240GHz		5.500GHz-5.720GHz	
Channel	Frequency	Channel	Frequency
36	5180	100	5500
38	5190	102	5510
40	5200	104	5520
42	5210	106	5530
44	5220	108	5540
46	5230	110	5550
48	5240	112	5560
		116	5580
		118	5590
5.260GHz-5.320GHz		120	5600
Channel	Frequency	122	5610
52	5260	124	5620
54	5270	126	5630
56	5280	128	5640
58	5290	132	5660
60	5300	134	5670
62	5310	136	5680
64	5320	140	5700
5.745GHz-5.825GHz			
Channel	Frequency		
149	5745		
151	5755		
153	5765		
157	5785		
159	5795		
161	5805		
165	5825		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

5GHz:

For 802.11a/n(HT20)/ac(VHT20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
36	5180	52	5260
40	5200	60	5300
48	5240	64	5320

For 802.11a/n(HT20)/ac(VHT20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
100	5500	149	5745
116	5580	157	5785
140	5700	165	5825



For 802.11 n(HT40)/ac(VHT40)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
38	5190	54	5270
46	5230	62	5310

For 802.11 n(HT40)/ac(VHT40)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
102	5510	151	5755
110	5550	159	5795
134	5670		

For 802.11ac (VHT80)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
42	5210	58	5290

For 802.11ac (VHT80)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
106	5530	155	5775
122	5610		

3. KDB 662911 D01 Multiple Transmitter Output v02r01

2) Directional Gain Calculations for In-Band Measurements

a) Basic methodology with NANT transmit antennas, each with the same directional gain G_{ANT} dBi, being driven by NANT transmitter outputs of equal power. Directional gain is to be computed as follows:

(i) If any transmit signals are correlated with each other,

Directional gain = $G_{ANT} + 10 \log(NANT)$ dBi

(ii) If all transmit signals are completely uncorrelated with each other,

Directional gain = G_{ANT}

Antenna number: 2

Antenna A gain : 6.99dBi

Antenna B gain : 6.99dBi

$G_{ANT} + 10 \log(NANT)$ dBi

MIMO technology Directional gain=10dBi

Ant	Brand	Model Name	Ant Type	Connector	Gain (dBi)	NOTE
A	XGIMI	ZTX-AX01-WIFI-1-V3.0	PIFA Antenna	IPEX	ANT A: 6.99 ANT B: 6.99 MIMO A+B: 10	WLAN Ant
B	XGIMI	ZTX-AX01-WIFI-2-V3.0				

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11a HT20 CH52&CH60&CH64	6 Mbps
Mode 3	TX IEEE 802.11a HT20 CH100&CH116&CH140	6 Mbps
Mode 4	TX IEEE 802.11a HT20 CH149&CH157&CH165	6 Mbps
Mode 5	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 6	TX IEEE 802.11ac HT20 CH36&CH40&CH48	NSS1 MCS0
Mode 7	TX IEEE 802.11n HT20 CH52&CH60&CH64	MCS 0
Mode 8	TX IEEE 802.11ac HT20 CH52&CH60&CH64	NSS1 MCS0
Mode 9	TX IEEE 802.11n HT20 CH100&CH116&CH140	MCS 0
Mode 10	TX IEEE 802.11ac HT20 CH100&CH116&CH140	NSS1 MCS0
Mode 11	TX IEEE 802.11n HT20 CH149&CH157&CH165	MCS 0
Mode 12	TX IEEE 802.11ac HT20 CH149&CH157&CH165	NSS1 MCS0
Mode 13	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 14	TX IEEE 802.11ac HT40 CH38&CH46	NSS1 MCS0
Mode 15	TX IEEE 802.11n HT40 CH54 &CH62	MCS 0
Mode 16	TX IEEE 802.11ac HT40 CH54 &CH62	NSS1 MCS0
Mode 17	TX IEEE 802.11n HT40 CH102&CH110&CH134	MCS 0
Mode 18	TX IEEE 802.11ac HT40 CH102&CH110&CH134	NSS1 MCS0
Mode 19	TX IEEE 802.11n HT40 CH151&CH159	MCS 0
Mode 20	TX IEEE 802.11ac HT40 CH151&CH159	NSS1 MCS0
Mode 21	TX IEEE 802.11ac HT80 CH42	NSS1 MCS0
Mode 22	TX IEEE 802.11ac HT80 CH58	NSS1 MCS0
Mode 23	TX IEEE 802.11ac HT80 CH106&122	NSS1 MCS0
Mode 24	TX IEEE 802.11ac HT80 CH155	NSS1 MCS0

- Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
(3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.
(4) The battery is fully-charged during the radiated and RF conducted test.



AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 25: Keeping TX + WLAN Link

2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	ANT_A Power Class	ANT_B Power Class	Software For Testing
WIFI(5G)	5G WIFI Band1 (5150MHz-5250MHz)	802.11a	ANT A: 6.99 ANT B: 6.99 MIMO A+B: 10	12	12	QATool_Dbg
		802.11n(HT20)		12	12	
		802.11n(HT40)		8	8	
		802.11ac(VHT20)		12	12	
		802.11ac(VHT40)		8	8	
		802.11ac(VHT80)		8	8	
RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	ANT_A Power Class	ANT_B Power Class	Software For Testing
WIFI(5G)	5G WIFI Band2 (5250MHz-5350MHz)	802.11a	ANT A: 6.99 ANT B: 6.99 MIMO A+B: 10	12	12	QATool_Dbg
		802.11n(HT20)		12	12	
		802.11n(HT40)		10	10	
		802.11ac(VHT20)		12	12	
		802.11ac(VHT40)		10	10	
		802.11ac(VHT80)		10	10	
RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	ANT_A Power Class	ANT_B Power Class	Software For Testing
WIFI(5G)	5G WIFI Band3 (5470MHz-5725MHz)	802.11a	ANT A: 6.99 ANT B: 6.99 MIMO A+B: 10	10	10	QATool_Dbg
		802.11n(HT20)		10	10	
		802.11n(HT40)		8	10	
		802.11ac(VHT20)		10	10	
		802.11ac(VHT40)		10	10	
		802.11ac(VHT80)		8	8	




RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	ANT_A Power Class	ANT_B Power Class	Software For Testing
WIFI(5G)	5G WIFI Band4 (5725MHz-5850MHz)	802.11a	ANT A: 6.99 ANT B: 6.99 MIMO A+B: 10	12	12	QATool_Dbg
		802.11n(HT20)		12	12	
		802.11n(HT40)		12	12	
		802.11ac(VHT20)		12	12	
		802.11ac(VHT40)		12	12	
		802.11ac(VHT80)		12	12	

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test

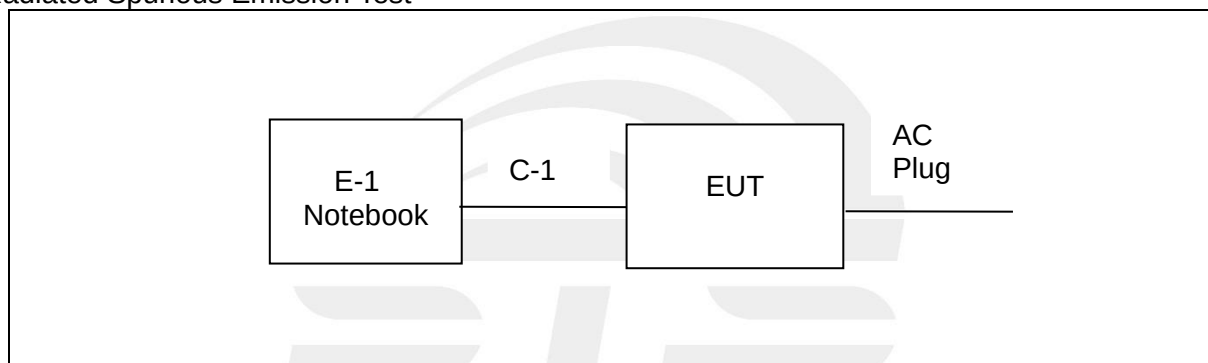

Conducted Emission Test

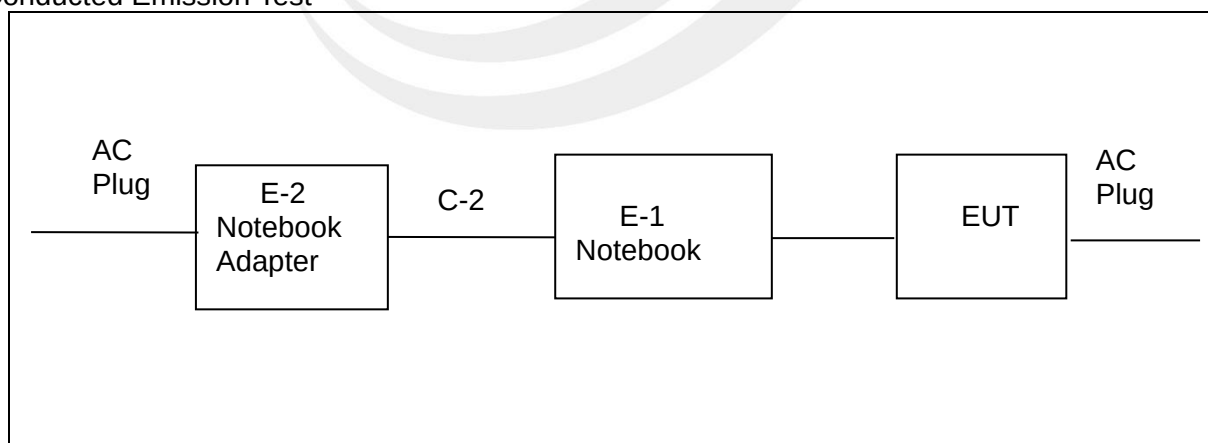



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
E-2	Notebook Adapter	LENOVO	ADLX45DLC3A	N/A	N/A
E-1	Notebook	LENOVO	ThinkPad E470	N/A	N/A
C-1	USB Cable	N/A	N/A	150cm	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2020.10.12	2021.10.11
Signal Analyzer	R&S	FSV 40-N	101823	2020.10.10	2021.10.09
Active loop Antenna	ZHINAN	ZN30900C	16035	2019.07.11	2021.07.10
Bilog Antenna	TESEQ	CBL6111D	34678	2020.10.12	2022.10.11
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2019.10.15	2021.10.14
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2020.10.12	2022.10.11
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2020.10.12	2021.10.11
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2020.10.12	2021.10.11
Pre-Amplifier (18G-40GHz)	SKET	LNPA-1840-50	SK2018101801	2020.10.10	2021.10.09
Temperature & Humidity	HH660	Mieo	N/A	2020.10.13	2021.10.12
Turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			

Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2020.10.12	2021.10.11
LISN	R&S	ENV216	101242	2020.10.12	2021.10.11
LISN	EMCO	3810/2NM	23625	2020.10.12	2021.10.11
Temperature & Humidity	HH660	Mieo	N/A	2020.10.13	2021.10.12
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 CE)			



RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
MIMO Power measurement test Set	Keysight	U2021XA	MY55520005	2020.10.10	2021.10.09
			MY55520006	2020.10.10	2021.10.09
			MY56120038	2020.10.10	2021.10.09
			MY56280002	2020.10.10	2021.10.09
Signal Analyzer	Agilent	N9020A	MY51110105	2021.03.04	2022.03.03
Temperature & Humidity	HH660	Mieo	N/A	2020.10.13	2021.10.12
Test SW	FARAD	LZ-RF /LzRf-3A3			





3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

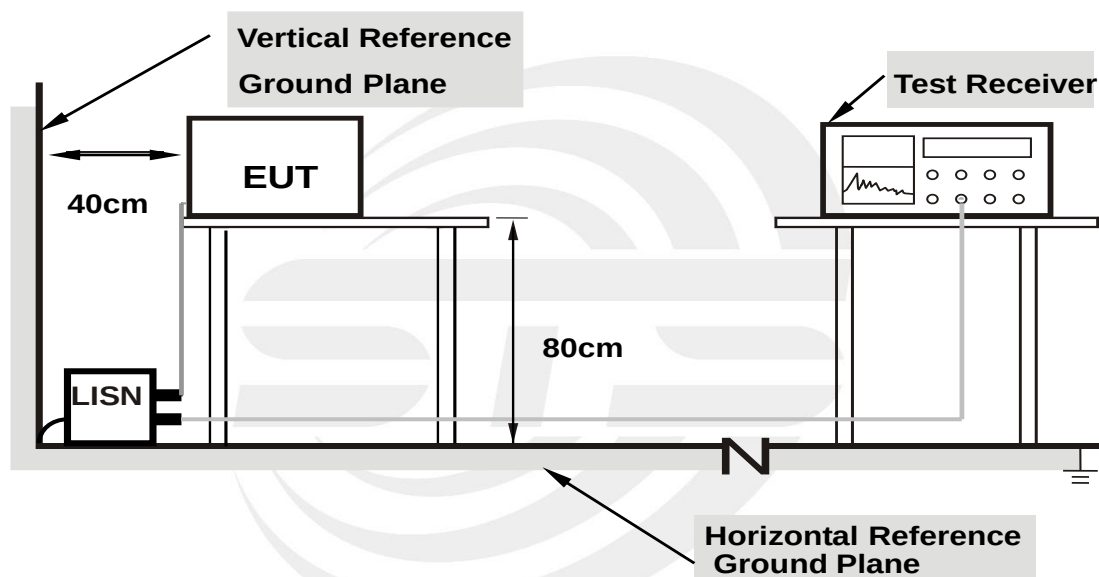

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.6 TEST RESULTS


Temperature:	26.0(C)	Relative Humidity:	59%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode :	Mode 25		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1748	26.22	20.33	46.55	64.73	-18.18	QP
2	0.1748	21.28	20.33	41.61	54.73	-13.12	AVG
3	0.3540	19.82	20.64	40.46	58.87	-18.41	QP
4	0.3540	12.85	20.64	33.49	48.87	-15.38	AVG
5	0.9820	16.93	20.30	37.23	56.00	-18.77	QP
6	0.9820	3.35	20.30	23.65	46.00	-22.35	AVG
7	3.2500	15.27	20.36	35.63	56.00	-20.37	QP
8	3.2500	0.20	20.36	20.56	46.00	-25.44	AVG
9	7.1940	11.15	20.62	31.77	60.00	-28.23	QP
10	7.1940	-0.81	20.62	19.81	50.00	-30.19	AVG
11	15.8100	30.92	21.92	52.84	60.00	-7.16	QP
12	15.8100	20.65	21.92	42.57	50.00	-7.43	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

100.0 dBuV

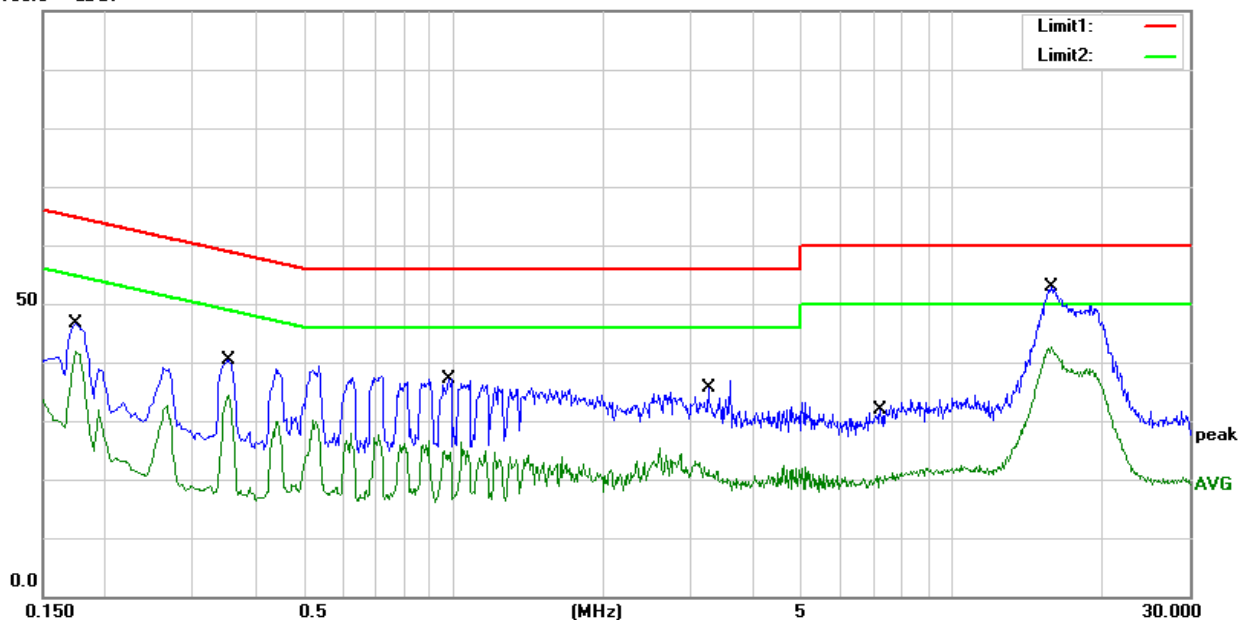




Temperature:	26.0(C)	Relative Humidity:	59%RH
Test Voltage	AC 120V/60Hz	Phase:	N
Test Mode	Mode 25		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1780	24.93	20.31	45.24	64.58	-19.34	QP
2	0.1780	19.65	20.31	39.96	54.58	-14.62	AVG
3	0.3620	18.70	20.62	39.32	58.68	-19.36	QP
4	0.3620	9.52	20.62	30.14	48.68	-18.54	AVG
5	0.7020	17.88	20.35	38.23	56.00	-17.77	QP
6	0.7020	6.45	20.35	26.80	46.00	-19.20	AVG
7	1.7940	13.75	20.30	34.05	56.00	-21.95	QP
8	1.7940	0.85	20.30	21.15	46.00	-24.85	AVG
9	4.8780	10.88	20.45	31.33	56.00	-24.67	QP
10	4.8780	0.34	20.45	20.79	46.00	-25.21	AVG
11	15.9380	30.29	21.95	52.24	60.00	-7.76	QP
12	15.9380	20.15	21.95	42.10	50.00	-7.90	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)

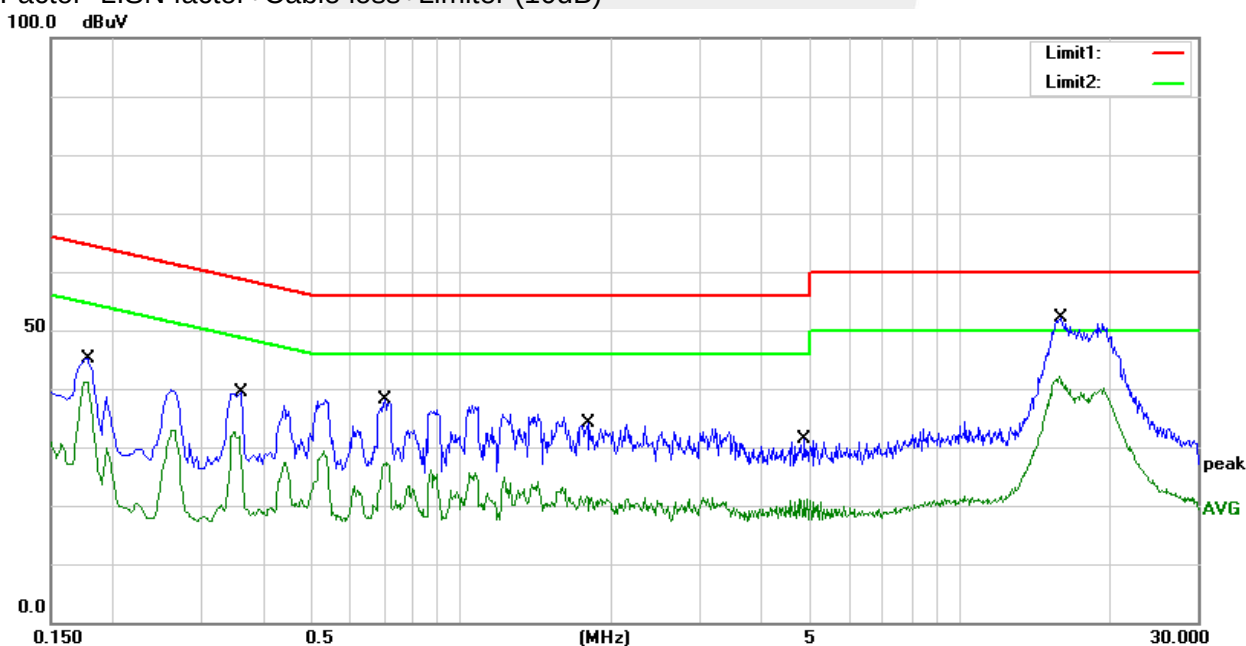



3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7&15.205/209(a), then the limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	68.2	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Note: In case the emission radiated emission above 1000MHz fall within the restricted band the restricted frequency bands, the peak limit is 74 dBuV/m.

**LIMITS OF EMISSIONS OUTSIDE OF THE FREQUENCY BANDS**

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note: dBuV/m(at 3M) = EIRP(dBm) + 95.2.

Peak Limit = -27dBm/MHz + 95.2 = 68.2 dBuV/m.

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

- a. The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- e. If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.


3.2.2 DEVIATION FROM TEST STANDARD

No deviation




3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

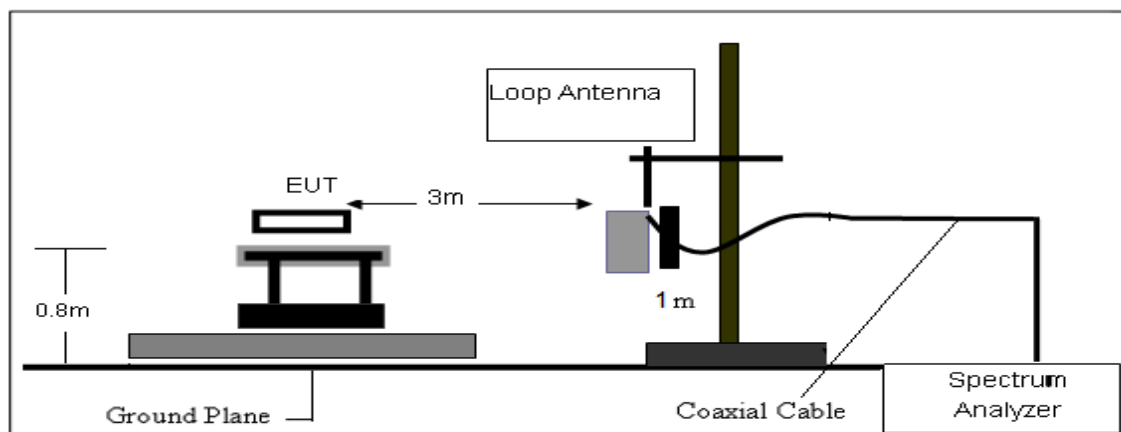

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

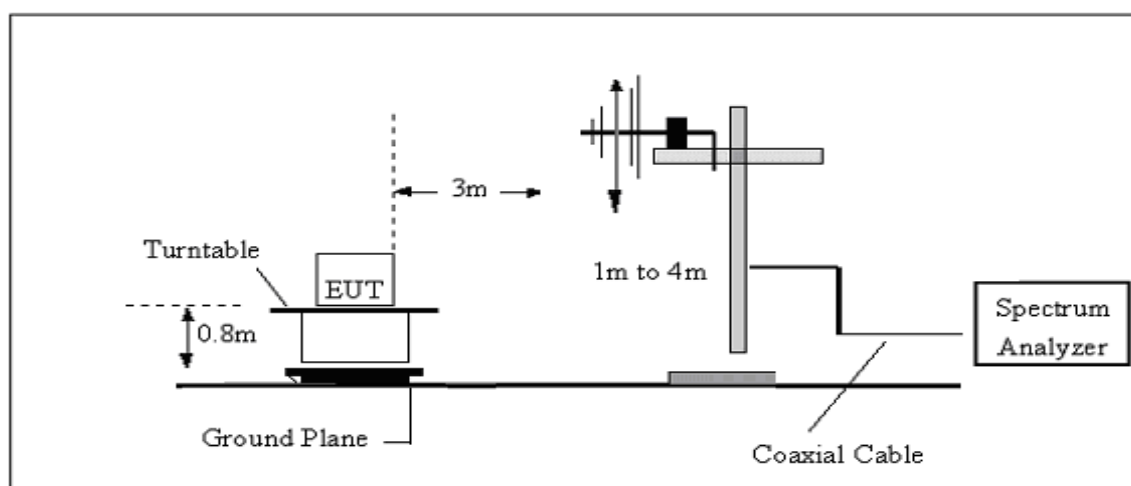

(C) Radiated Emission Test-Up Frequency Above 1GHz

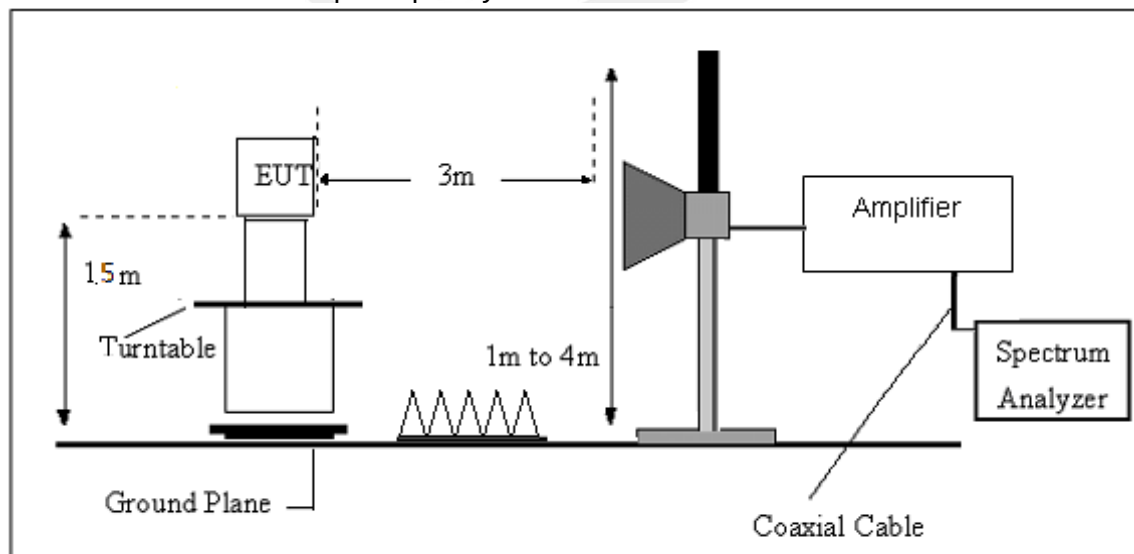



3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$

**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Polarization :	--
Test Mode:	TX Mode		


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuV) + distance extrapolation factor.

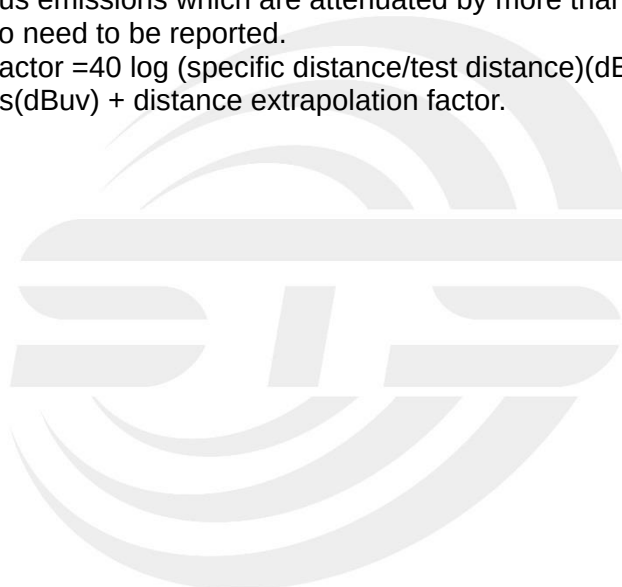


**3.2.7 TEST RESULTS (Between 30MHz – 1GHz)**

Temperature	23.1(C)	Relative Humidity:	60%RH
Test Voltage	AC 120V/60Hz	Polarization:	Horizontal
Test Mode	Mode 1~24(Mode 11 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	191.9900	31.45	-21.04	10.41	43.50	-33.09	QP
2	448.0700	32.24	-9.76	22.48	46.00	-23.52	QP
3	633.3400	26.80	-4.98	21.82	46.00	-24.18	QP
4	779.8100	26.91	-2.22	24.69	46.00	-21.31	QP
5	844.8000	26.61	-0.53	26.08	46.00	-19.92	QP
6	990.3000	27.29	2.05	29.34	54.00	-24.66	QP

Remark:

1. Margin = Result (Result = Reading + Factor) – Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain

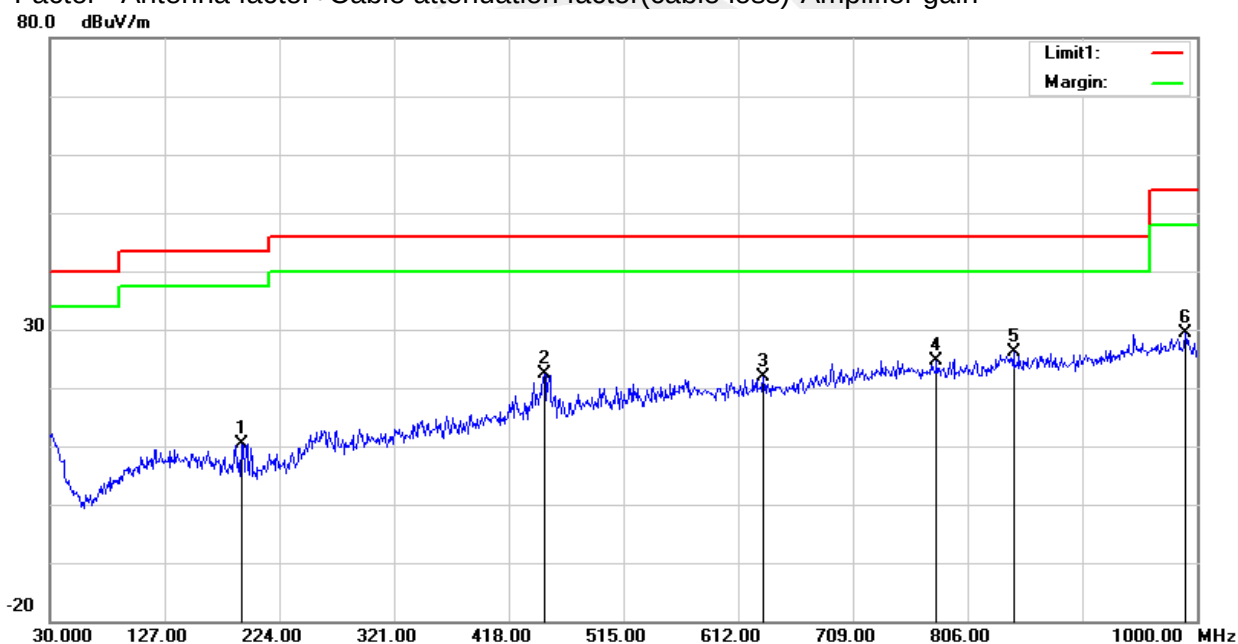




Temperature	23.1(C)	Relative Humidity:	60%RH
Test Voltage	AC 120V/60Hz	Polarization:	Vertical
Test Mode	Mode 1~24(Mode 11 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	138.6400	29.53	-18.05	11.48	43.50	-32.02	QP
2	263.7700	28.12	-14.75	13.37	46.00	-32.63	QP
3	476.2000	32.13	-8.78	23.35	46.00	-22.65	QP
4	686.6900	28.55	-4.32	24.23	46.00	-21.77	QP
5	867.1100	26.87	-0.50	26.37	46.00	-19.63	QP
6	959.2600	26.59	1.75	28.34	46.00	-17.66	QP

Remark:

1. Margin = Result (Result = Reading + Factor) - Limit
2. Factor = Antenna factor + Cable attenuation factor (cable loss) - Amplifier gain

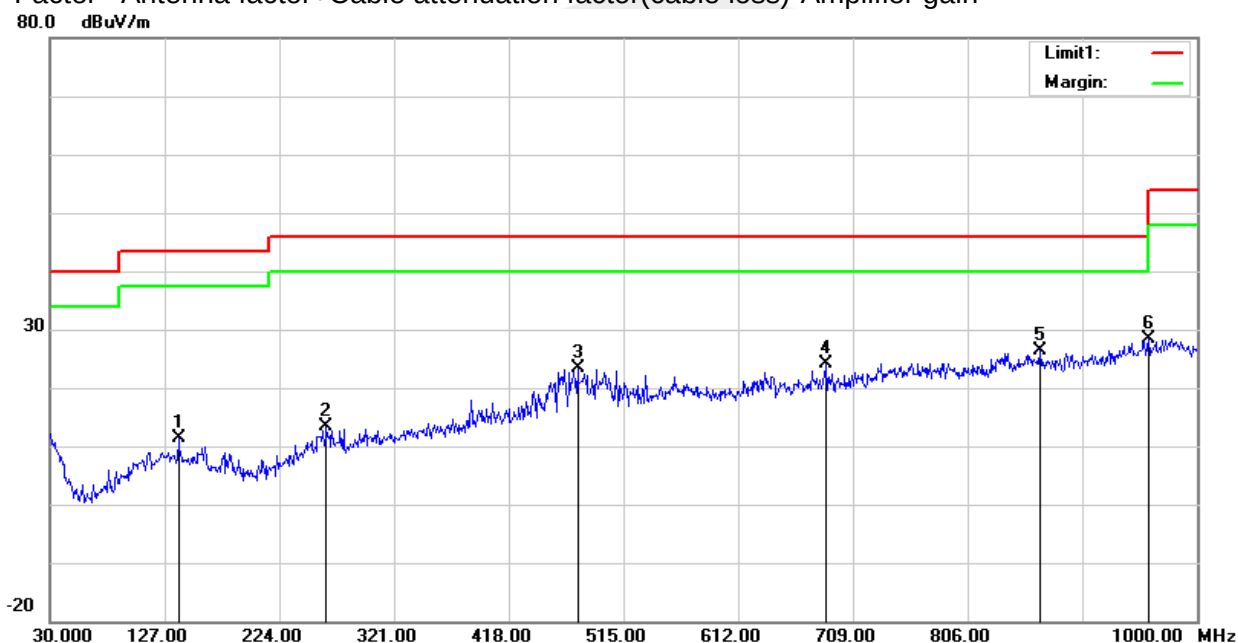



3.2.8 TEST RESULTS (Above 1000 MHz)

Band I 5150-5250MHz

Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11n(HT20)/ 5180 MHz)										
3262.93	43.83	44.70	6.70	28.20	-9.80	34.03	74.00	-39.97	Pk	Vertical
3262.93	41.73	44.70	6.70	28.20	-9.80	31.93	54.00	-22.07	AV	Vertical
3255.56	43.76	44.70	6.70	28.20	-9.80	33.96	68.20	-34.24	Pk	Horizontal
3255.56	40.84	44.70	6.70	28.20	-9.80	31.04	54.00	-22.96	AV	Horizontal
3994.44	39.59	44.20	7.90	29.70	-6.60	32.99	74.00	-41.01	Pk	Vertical
3994.44	36.22	44.20	7.90	29.70	-6.60	29.62	54.00	-24.38	AV	Vertical
3986.63	39.43	44.20	7.90	29.70	-6.60	32.83	74.00	-41.17	Pk	Horizontal
3986.63	35.85	44.20	7.90	29.70	-6.60	29.25	54.00	-24.75	AV	Horizontal
7220.74	36.67	43.50	11.40	35.50	3.40	40.07	68.20	-28.13	Pk	Vertical
7220.74	33.52	43.50	11.40	35.50	3.40	36.92	54.00	-17.08	AV	Vertical
7233.93	36.83	43.50	11.40	35.50	3.40	40.23	68.20	-27.97	Pk	Horizontal
7233.93	33.96	43.50	11.40	35.50	3.40	37.36	54.00	-16.64	AV	Horizontal
10360.15	40.17	44.50	13.80	38.80	8.10	48.27	68.20	-19.93	Pk	Vertical
10360.15	36.30	44.50	13.80	38.80	8.10	44.40	54.00	-9.60	AV	Vertical
10360.14	40.09	44.50	13.80	38.80	8.10	48.19	68.20	-20.01	Pk	Horizontal
10360.14	36.04	44.50	13.80	38.80	8.10	44.14	54.00	-9.86	AV	Horizontal
11035.30	34.13	43.60	14.30	39.50	10.20	44.33	74.00	-29.67	Pk	Vertical
11035.30	29.96	43.60	14.30	39.50	10.20	40.16	54.00	-13.84	AV	Vertical
11033.68	33.59	43.60	14.30	39.50	10.20	43.79	74.00	-30.21	Pk	Horizontal
11033.68	29.69	43.60	14.30	39.50	10.20	39.89	54.00	-14.11	AV	Horizontal
13285.96	32.55	42.60	15.90	38.90	12.20	44.75	74.00	-29.25	Pk	Vertical
13285.96	28.70	42.60	15.90	38.90	12.20	40.90	54.00	-13.10	AV	Vertical
13282.33	31.94	42.60	15.90	38.90	12.20	44.14	74.00	-29.86	Pk	Horizontal
13282.33	29.69	42.60	15.90	38.90	12.20	41.89	54.00	-12.11	AV	Horizontal
Mid Channel (802.11n(HT20)/ 5200 MHz)										
3259.40	44.32	44.70	6.70	28.20	-9.80	34.52	68.20	-33.68	Pk	Vertical
3259.40	40.92	44.70	6.70	28.20	-9.80	31.12	54.00	-22.88	AV	Vertical
3259.79	44.47	44.70	6.70	28.20	-9.80	34.67	68.20	-33.53	Pk	Horizontal
3259.79	42.22	44.70	6.70	28.20	-9.80	32.42	54.00	-21.58	AV	Horizontal
3984.86	39.64	44.20	7.90	29.70	-6.60	33.04	74.00	-40.96	Pk	Vertical
3984.86	36.80	44.20	7.90	29.70	-6.60	30.20	54.00	-23.80	AV	Vertical
3998.66	39.86	44.20	7.90	29.70	-6.60	33.26	74.00	-40.74	Pk	Horizontal
3998.66	36.17	44.20	7.90	29.70	-6.60	29.57	54.00	-24.43	AV	Horizontal
7224.22	36.76	43.50	11.40	35.50	3.40	40.16	68.20	-28.04	Pk	Vertical
7224.22	34.52	43.50	11.40	35.50	3.40	37.92	54.00	-16.08	AV	Vertical
7227.39	37.85	43.50	11.40	35.50	3.40	41.25	68.20	-26.95	Pk	Horizontal
7227.39	33.98	43.50	11.40	35.50	3.40	37.38	54.00	-16.62	AV	Horizontal
10400.30	40.17	44.50	13.80	38.80	8.10	48.27	68.20	-19.93	Pk	Vertical
10400.30	36.07	44.50	13.80	38.80	8.10	44.17	54.00	-9.83	AV	Vertical
10400.26	39.01	44.50	13.80	38.80	8.10	47.11	68.20	-21.09	Pk	Horizontal
10400.26	37.09	44.50	13.80	38.80	8.10	45.19	54.00	-8.81	AV	Horizontal
11021.25	33.48	43.60	14.30	39.50	10.20	43.68	74.00	-30.32	Pk	Vertical
11021.25	30.49	43.60	14.30	39.50	10.20	40.69	54.00	-13.31	AV	Vertical
11024.25	32.97	43.60	14.30	39.50	10.20	43.17	74.00	-30.83	Pk	Horizontal
11024.25	30.66	43.60	14.30	39.50	10.20	40.86	54.00	-13.14	AV	Horizontal
13291.40	32.43	42.60	15.90	38.90	12.20	44.63	74.00	-29.37	Pk	Vertical
13291.40	28.90	42.60	15.90	38.90	12.20	41.10	54.00	-12.90	AV	Vertical
13282.06	32.35	42.60	15.90	38.90	12.20	44.55	74.00	-29.45	Pk	Horizontal
13282.06	28.70	42.60	15.90	38.90	12.20	40.90	54.00	-13.10	AV	Horizontal



High Channel (802.11n (HT-20)/ 5240 MHz)										
3249.38	44.57	44.70	6.70	28.20	-9.80	34.77	68.20	-33.43	Pk	Vertical
3249.38	41.73	44.70	6.70	28.20	-9.80	31.93	54.00	-22.07	AV	Vertical
3252.48	44.84	44.70	6.70	28.20	-9.80	35.04	68.20	-33.16	Pk	Horizontal
3252.48	42.12	44.70	6.70	28.20	-9.80	32.32	54.00	-21.68	AV	Horizontal
3983.88	39.25	44.20	7.90	29.70	-6.60	32.65	74.00	-41.35	Pk	Vertical
3983.88	36.84	44.20	7.90	29.70	-6.60	30.24	54.00	-23.76	AV	Vertical
3998.51	39.43	44.20	7.90	29.70	-6.60	32.83	74.00	-41.17	Pk	Horizontal
3998.51	36.57	44.20	7.90	29.70	-6.60	29.97	54.00	-24.03	AV	Horizontal
7229.80	36.60	43.50	11.40	35.50	3.40	40.00	68.20	-28.20	Pk	Vertical
7229.80	33.84	43.50	11.40	35.50	3.40	37.24	54.00	-16.76	AV	Vertical
7227.58	36.72	43.50	11.40	35.50	3.40	40.12	68.20	-28.08	Pk	Horizontal
7227.58	34.15	43.50	11.40	35.50	3.40	37.55	54.00	-16.45	AV	Horizontal
10480.14	39.73	44.50	13.80	38.80	8.10	47.83	68.20	-20.37	Pk	Vertical
10480.14	36.23	44.50	13.80	38.80	8.10	44.33	54.00	-9.67	AV	Vertical
10480.28	39.54	44.50	13.80	38.80	8.10	47.64	68.20	-20.56	Pk	Horizontal
10480.28	37.12	44.50	13.80	38.80	8.10	45.22	54.00	-8.78	AV	Horizontal
11022.61	33.28	43.60	14.30	39.50	10.20	43.48	74.00	-30.52	Pk	Vertical
11022.61	30.99	43.60	14.30	39.50	10.20	41.19	54.00	-12.81	AV	Vertical
11028.00	33.46	43.60	14.30	39.50	10.20	43.66	74.00	-30.34	Pk	Horizontal
11028.00	30.20	43.60	14.30	39.50	10.20	40.40	54.00	-13.60	AV	Horizontal
13292.52	32.59	42.60	15.90	38.90	12.20	44.79	74.00	-29.21	Pk	Vertical
13292.52	29.56	42.60	15.90	38.90	12.20	41.76	54.00	-12.24	AV	Vertical
13290.77	32.89	42.60	15.90	38.90	12.20	45.09	74.00	-28.91	Pk	Horizontal
13290.77	29.89	42.60	15.90	38.90	12.20	42.09	54.00	-11.91	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.

2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11n (HT-20).

3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



Band II 5250-5350MHz

Frequency (MHz)	Reading	Amplifier	Loss	Antenna Factor	Orrected Factor	Emission Level	Limit (dBuV/m)	Margin	Detector	Comment
	(dBuV)	(dB)	(dB)	(dB/m)	(dB)	(dBμV/m)		(dB)		
Low Channel (802.11n(HT20)/ 5260 MHz)										
3261.64	43.84	44.70	6.70	28.20	-9.80	34.04	74.00	-39.96	Pk	Vertical
3261.64	41.25	44.70	6.70	28.20	-9.80	31.45	54.00	-22.55	AV	Vertical
3246.43	45.18	44.70	6.70	28.20	-9.80	35.38	68.20	-32.82	Pk	Horizontal
3246.43	41.39	44.70	6.70	28.20	-9.80	31.59	54.00	-22.41	AV	Horizontal
3985.36	38.92	44.20	7.90	29.70	-6.60	32.32	74.00	-41.68	Pk	Vertical
3985.36	35.71	44.20	7.90	29.70	-6.60	29.11	54.00	-24.89	AV	Vertical
3980.35	39.72	44.20	7.90	29.70	-6.60	33.12	74.00	-40.88	Pk	Horizontal
3980.35	36.94	44.20	7.90	29.70	-6.60	30.34	54.00	-23.66	AV	Horizontal
7233.84	37.84	43.50	11.40	35.50	3.40	41.24	68.20	-26.96	Pk	Vertical
7233.84	33.97	43.50	11.40	35.50	3.40	37.37	54.00	-16.63	AV	Vertical
7228.86	37.05	43.50	11.40	35.50	3.40	40.45	68.20	-27.75	Pk	Horizontal
7228.86	33.50	43.50	11.40	35.50	3.40	36.90	54.00	-17.10	AV	Horizontal
10360.41	40.05	44.50	13.80	38.80	8.10	48.15	68.20	-20.05	Pk	Vertical
10360.41	36.62	44.50	13.80	38.80	8.10	44.72	54.00	-9.28	AV	Vertical
10360.38	38.72	44.50	13.80	38.80	8.10	46.82	68.20	-21.38	Pk	Horizontal
10360.38	35.87	44.50	13.80	38.80	8.10	43.97	54.00	-10.03	AV	Horizontal
11030.44	33.50	43.60	14.30	39.50	10.20	43.70	74.00	-30.30	Pk	Vertical
11030.44	30.71	43.60	14.30	39.50	10.20	40.91	54.00	-13.09	AV	Vertical
11033.45	33.04	43.60	14.30	39.50	10.20	43.24	74.00	-30.76	Pk	Horizontal
11033.45	30.16	43.60	14.30	39.50	10.20	40.36	54.00	-13.64	AV	Horizontal
13293.55	32.52	42.60	15.90	38.90	12.20	44.72	74.00	-29.28	Pk	Vertical
13293.55	29.63	42.60	15.90	38.90	12.20	41.83	54.00	-12.17	AV	Vertical
13284.68	32.90	42.60	15.90	38.90	12.20	45.10	74.00	-28.90	Pk	Horizontal
13284.68	29.97	42.60	15.90	38.90	12.20	42.17	54.00	-11.83	AV	Horizontal
Mid Channel (802.11n(HT20)/ 5300 MHz)										
3247.55	44.69	44.70	6.70	28.20	-9.80	34.89	68.20	-33.31	Pk	Vertical
3247.55	41.67	44.70	6.70	28.20	-9.80	31.87	54.00	-22.13	AV	Vertical
3249.46	43.91	44.70	6.70	28.20	-9.80	34.11	68.20	-34.09	Pk	Horizontal
3249.46	41.30	44.70	6.70	28.20	-9.80	31.50	54.00	-22.50	AV	Horizontal
3984.71	39.80	44.20	7.90	29.70	-6.60	33.20	74.00	-40.80	Pk	Vertical
3984.71	36.84	44.20	7.90	29.70	-6.60	30.24	54.00	-23.76	AV	Vertical
3985.95	39.79	44.20	7.90	29.70	-6.60	33.19	74.00	-40.81	Pk	Horizontal
3985.95	36.54	44.20	7.90	29.70	-6.60	29.94	54.00	-24.06	AV	Horizontal
7217.90	37.78	43.50	11.40	35.50	3.40	41.18	68.20	-27.02	Pk	Vertical
7217.90	33.85	43.50	11.40	35.50	3.40	37.25	54.00	-16.75	AV	Vertical
7222.02	37.27	43.50	11.40	35.50	3.40	40.67	68.20	-27.53	Pk	Horizontal
7222.02	34.10	43.50	11.40	35.50	3.40	37.50	54.00	-16.50	AV	Horizontal
10400.00	39.42	44.50	13.80	38.80	8.10	47.52	68.20	-20.68	Pk	Vertical
10400.00	36.17	44.50	13.80	38.80	8.10	44.27	54.00	-9.73	AV	Vertical
10400.01	40.05	44.50	13.80	38.80	8.10	48.15	68.20	-20.05	Pk	Horizontal
10400.01	36.61	44.50	13.80	38.80	8.10	44.71	54.00	-9.29	AV	Horizontal
11035.30	32.73	43.60	14.30	39.50	10.20	42.93	74.00	-31.07	Pk	Vertical
11035.30	29.91	43.60	14.30	39.50	10.20	40.11	54.00	-13.89	AV	Vertical
11031.15	33.17	43.60	14.30	39.50	10.20	43.37	74.00	-30.63	Pk	Horizontal
11031.15	30.37	43.60	14.30	39.50	10.20	40.57	54.00	-13.43	AV	Horizontal
13293.36	32.49	42.60	15.90	38.90	12.20	44.69	74.00	-29.31	Pk	Vertical
13293.36	28.82	42.60	15.90	38.90	12.20	41.02	54.00	-12.98	AV	Vertical
13291.84	32.20	42.60	15.90	38.90	12.20	44.40	74.00	-29.60	Pk	Horizontal
13291.84	29.15	42.60	15.90	38.90	12.20	41.35	54.00	-12.65	AV	Horizontal



High Channel (802.11n(HT20)/ 5320 MHz)										
3245.37	44.43	44.70	6.70	28.20	-9.80	34.63	68.20	-33.57	Pk	Vertical
3245.37	41.45	44.70	6.70	28.20	-9.80	31.65	54.00	-22.35	AV	Vertical
3260.11	45.12	44.70	6.70	28.20	-9.80	35.32	74.00	-38.68	Pk	Horizontal
3260.11	40.99	44.70	6.70	28.20	-9.80	31.19	54.00	-22.81	AV	Horizontal
3999.33	39.67	44.20	7.90	29.70	-6.60	33.07	74.00	-40.93	Pk	Vertical
3999.33	36.41	44.20	7.90	29.70	-6.60	29.81	54.00	-24.19	AV	Vertical
3984.69	39.38	44.20	7.90	29.70	-6.60	32.78	74.00	-41.22	Pk	Horizontal
3984.69	36.18	44.20	7.90	29.70	-6.60	29.58	54.00	-24.42	AV	Horizontal
7218.12	37.71	43.50	11.40	35.50	3.40	41.11	68.20	-27.09	Pk	Vertical
7218.12	34.44	43.50	11.40	35.50	3.40	37.84	54.00	-16.16	AV	Vertical
7235.55	36.99	43.50	11.40	35.50	3.40	40.39	68.20	-27.81	Pk	Horizontal
7235.55	34.17	43.50	11.40	35.50	3.40	37.57	54.00	-16.43	AV	Horizontal
10480.43	38.95	44.50	13.80	38.80	8.10	47.05	68.20	-21.15	Pk	Vertical
10480.43	36.09	44.50	13.80	38.80	8.10	44.19	54.00	-9.81	AV	Vertical
10480.43	39.51	44.50	13.80	38.80	8.10	47.61	68.20	-20.59	Pk	Horizontal
10480.43	37.03	44.50	13.80	38.80	8.10	45.13	54.00	-8.87	AV	Horizontal
11027.77	32.81	43.60	14.30	39.50	10.20	43.01	74.00	-30.99	Pk	Vertical
11027.77	30.40	43.60	14.30	39.50	10.20	40.60	54.00	-13.40	AV	Vertical
11028.95	32.72	43.60	14.30	39.50	10.20	42.92	74.00	-31.08	Pk	Horizontal
11028.95	30.55	43.60	14.30	39.50	10.20	40.75	54.00	-13.25	AV	Horizontal
13292.64	32.54	42.60	15.90	38.90	12.20	44.74	74.00	-29.26	Pk	Vertical
13292.64	29.54	42.60	15.90	38.90	12.20	41.74	54.00	-12.26	AV	Vertical
13288.41	31.55	42.60	15.90	38.90	12.20	43.75	74.00	-30.25	Pk	Horizontal
13288.41	29.75	42.60	15.90	38.90	12.20	41.95	54.00	-12.05	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11n (HT-20).
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



Band III 5470-5725MHz

Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11n(HT20)/ 5500 MHz)										
3258.41	44.89	44.70	6.70	28.20	-9.80	35.09	68.20	-33.11	Pk	Vertical
3258.41	41.48	44.70	6.70	28.20	-9.80	31.68	54.00	-22.32	AV	Vertical
3264.33	44.80	44.70	6.70	28.20	-9.80	35.00	74.00	-39.00	Pk	Horizontal
3264.33	41.84	44.70	6.70	28.20	-9.80	32.04	54.00	-21.96	AV	Horizontal
3980.93	39.43	44.20	7.90	29.70	-6.60	32.83	74.00	-41.17	Pk	Vertical
3980.93	36.54	44.20	7.90	29.70	-6.60	29.94	54.00	-24.06	AV	Vertical
3982.59	38.82	44.20	7.90	29.70	-6.60	32.22	74.00	-41.78	Pk	Horizontal
3982.59	36.94	44.20	7.90	29.70	-6.60	30.34	54.00	-23.66	AV	Horizontal
7231.11	37.66	43.50	11.40	35.50	3.40	41.06	68.20	-27.14	Pk	Vertical
7231.11	33.65	43.50	11.40	35.50	3.40	37.05	54.00	-16.95	AV	Vertical
7233.91	37.72	43.50	11.40	35.50	3.40	41.12	68.20	-27.08	Pk	Horizontal
7233.91	34.90	43.50	11.40	35.50	3.40	38.30	54.00	-15.70	AV	Horizontal
10359.93	39.01	44.50	13.80	38.80	8.10	47.11	68.20	-21.09	Pk	Vertical
10359.93	35.80	44.50	13.80	38.80	8.10	43.90	54.00	-10.10	AV	Vertical
10360.00	39.47	44.50	13.80	38.80	8.10	47.57	68.20	-20.63	Pk	Horizontal
10360.00	35.89	44.50	13.80	38.80	8.10	43.99	54.00	-10.01	AV	Horizontal
11018.06	33.47	43.60	14.30	39.50	10.20	43.67	74.00	-30.33	Pk	Vertical
11018.06	31.00	43.60	14.30	39.50	10.20	41.20	54.00	-12.80	AV	Vertical
11017.50	32.85	43.60	14.30	39.50	10.20	43.05	74.00	-30.95	Pk	Horizontal
11017.50	30.15	43.60	14.30	39.50	10.20	40.35	54.00	-13.65	AV	Horizontal
13287.36	31.95	42.60	15.90	38.90	12.20	44.15	74.00	-29.85	Pk	Vertical
13287.36	29.71	42.60	15.90	38.90	12.20	41.91	54.00	-12.09	AV	Vertical
13286.00	31.93	42.60	15.90	38.90	12.20	44.13	74.00	-29.87	Pk	Horizontal
13286.00	28.96	42.60	15.90	38.90	12.20	41.16	54.00	-12.84	AV	Horizontal
Mid Channel (802.11n(HT20)/ 5580 MHz)										
3249.97	43.86	44.70	6.70	28.20	-9.80	34.06	68.20	-34.14	Pk	Vertical
3249.97	41.88	44.70	6.70	28.20	-9.80	32.08	54.00	-21.92	AV	Vertical
3251.24	45.18	44.70	6.70	28.20	-9.80	35.38	68.20	-32.82	Pk	Horizontal
3251.24	40.80	44.70	6.70	28.20	-9.80	31.00	54.00	-23.00	AV	Horizontal
3997.82	39.86	44.20	7.90	29.70	-6.60	33.26	74.00	-40.74	Pk	Vertical
3997.82	36.64	44.20	7.90	29.70	-6.60	30.04	54.00	-23.96	AV	Vertical
3997.28	40.04	44.20	7.90	29.70	-6.60	33.44	74.00	-40.56	Pk	Horizontal
3997.28	36.19	44.20	7.90	29.70	-6.60	29.59	54.00	-24.41	AV	Horizontal
7221.59	37.62	43.50	11.40	35.50	3.40	41.02	68.20	-27.18	Pk	Vertical
7221.59	34.91	43.50	11.40	35.50	3.40	38.31	54.00	-15.69	AV	Vertical
7226.55	36.96	43.50	11.40	35.50	3.40	40.36	68.20	-27.84	Pk	Horizontal
7226.55	34.78	43.50	11.40	35.50	3.40	38.18	54.00	-15.82	AV	Horizontal
10400.08	39.54	44.50	13.80	38.80	8.10	47.64	68.20	-20.56	Pk	Vertical
10400.08	35.82	44.50	13.80	38.80	8.10	43.92	54.00	-10.08	AV	Vertical
10399.98	39.61	44.50	13.80	38.80	8.10	47.71	68.20	-20.49	Pk	Horizontal
10399.98	36.33	44.50	13.80	38.80	8.10	44.43	54.00	-9.57	AV	Horizontal
11031.74	33.56	43.60	14.30	39.50	10.20	43.76	74.00	-30.24	Pk	Vertical
11031.74	30.03	43.60	14.30	39.50	10.20	40.23	54.00	-13.77	AV	Vertical
11026.09	33.76	43.60	14.30	39.50	10.20	43.96	74.00	-30.04	Pk	Horizontal
11026.09	29.81	43.60	14.30	39.50	10.20	40.01	54.00	-13.99	AV	Horizontal
13299.14	32.32	42.60	15.90	38.90	12.20	44.52	74.00	-29.48	Pk	Vertical
13299.14	28.64	42.60	15.90	38.90	12.20	40.84	54.00	-13.16	AV	Vertical
13287.53	32.51	42.60	15.90	38.90	12.20	44.71	74.00	-29.29	Pk	Horizontal
13287.53	29.16	42.60	15.90	38.90	12.20	41.36	54.00	-12.64	AV	Horizontal



High Channel (802.11n(HT20)/ 5700 MHz)										
3255.79	43.83	44.70	6.70	28.20	-9.80	34.03	68.20	-34.17	Pk	Vertical
3255.79	41.99	44.70	6.70	28.20	-9.80	32.19	54.00	-21.81	AV	Vertical
3250.92	43.90	44.70	6.70	28.20	-9.80	34.10	68.20	-34.10	Pk	Horizontal
3250.92	41.43	44.70	6.70	28.20	-9.80	31.63	54.00	-22.37	AV	Horizontal
3980.75	38.86	44.20	7.90	29.70	-6.60	32.26	74.00	-41.74	Pk	Vertical
3980.75	35.67	44.20	7.90	29.70	-6.60	29.07	54.00	-24.93	AV	Vertical
3990.78	39.09	44.20	7.90	29.70	-6.60	32.49	74.00	-41.51	Pk	Horizontal
3990.78	35.98	44.20	7.90	29.70	-6.60	29.38	54.00	-24.62	AV	Horizontal
7223.40	37.30	43.50	11.40	35.50	3.40	40.70	68.20	-27.50	Pk	Vertical
7223.40	33.46	43.50	11.40	35.50	3.40	36.86	54.00	-17.14	AV	Vertical
7236.12	36.67	43.50	11.40	35.50	3.40	40.07	68.20	-28.13	Pk	Horizontal
7236.12	34.89	43.50	11.40	35.50	3.40	38.29	54.00	-15.71	AV	Horizontal
10480.03	40.00	44.50	13.80	38.80	8.10	48.10	68.20	-20.10	Pk	Vertical
10480.03	36.10	44.50	13.80	38.80	8.10	44.20	54.00	-9.80	AV	Vertical
10480.21	39.24	44.50	13.80	38.80	8.10	47.34	68.20	-20.86	Pk	Horizontal
10480.21	36.33	44.50	13.80	38.80	8.10	44.43	54.00	-9.57	AV	Horizontal
11033.34	33.49	43.60	14.30	39.50	10.20	43.69	74.00	-30.31	Pk	Vertical
11033.34	29.92	43.60	14.30	39.50	10.20	40.12	54.00	-13.88	AV	Vertical
11026.96	33.92	43.60	14.30	39.50	10.20	44.12	74.00	-29.88	Pk	Horizontal
11026.96	30.93	43.60	14.30	39.50	10.20	41.13	54.00	-12.87	AV	Horizontal
13282.27	32.68	42.60	15.90	38.90	12.20	44.88	74.00	-29.12	Pk	Vertical
13282.27	29.82	42.60	15.90	38.90	12.20	42.02	54.00	-11.98	AV	Vertical
13288.64	32.14	42.60	15.90	38.90	12.20	44.34	74.00	-29.66	Pk	Horizontal
13288.64	29.50	42.60	15.90	38.90	12.20	41.70	54.00	-12.30	AV	Horizontal

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11n (HT-20).
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



Band IV(5.725-5.850) GHz

Frequency (MHz)	Reading (dBuV)	Amplifier (dB)	Loss (dB)	Antenna Factor (dB/m)	Orrected Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
Low Channel (802.11n(HT20)/ 5745 MHz)										
3259.03	44.42	44.70	6.70	28.20	-9.80	34.62	68.20	-33.58	Pk	Vertical
3259.03	41.58	44.70	6.70	28.20	-9.80	31.78	54.00	-22.22	AV	Vertical
3264.60	43.79	44.70	6.70	28.20	-9.80	33.99	74.00	-40.01	Pk	Horizontal
3264.60	40.95	44.70	6.70	28.20	-9.80	31.15	54.00	-22.85	AV	Horizontal
3983.97	39.95	44.20	7.90	29.70	-6.60	33.35	74.00	-40.65	Pk	Vertical
3983.97	36.08	44.20	7.90	29.70	-6.60	29.48	54.00	-24.52	AV	Vertical
3995.22	39.51	44.20	7.90	29.70	-6.60	32.91	74.00	-41.09	Pk	Horizontal
3995.22	36.41	44.20	7.90	29.70	-6.60	29.81	54.00	-24.19	AV	Horizontal
7236.22	36.54	43.50	11.40	35.50	3.40	39.94	68.20	-28.26	Pk	Vertical
7236.22	34.13	43.50	11.40	35.50	3.40	37.53	54.00	-16.47	AV	Vertical
7228.70	36.57	43.50	11.40	35.50	3.40	39.97	68.20	-28.23	Pk	Horizontal
7228.70	33.75	43.50	11.40	35.50	3.40	37.15	54.00	-16.85	AV	Horizontal
10360.15	39.28	44.50	13.80	38.80	8.10	47.38	68.20	-20.82	Pk	Vertical
10360.15	35.72	44.50	13.80	38.80	8.10	43.82	54.00	-10.18	AV	Vertical
10360.04	40.07	44.50	13.80	38.80	8.10	48.17	68.20	-20.03	Pk	Horizontal
10360.04	36.29	44.50	13.80	38.80	8.10	44.39	54.00	-9.61	AV	Horizontal
11035.31	32.98	43.60	14.30	39.50	10.20	43.18	74.00	-30.82	Pk	Vertical
11035.31	29.89	43.60	14.30	39.50	10.20	40.09	54.00	-13.91	AV	Vertical
11018.24	32.79	43.60	14.30	39.50	10.20	42.99	74.00	-31.01	Pk	Horizontal
11018.24	30.96	43.60	14.30	39.50	10.20	41.16	54.00	-12.84	AV	Horizontal
13293.97	32.92	42.60	15.90	38.90	12.20	45.12	74.00	-28.88	Pk	Vertical
13293.97	29.30	42.60	15.90	38.90	12.20	41.50	54.00	-12.50	AV	Vertical
13286.01	32.03	42.60	15.90	38.90	12.20	44.23	74.00	-29.77	Pk	Horizontal
13286.01	29.02	42.60	15.90	38.90	12.20	41.22	54.00	-12.78	AV	Horizontal
Mid Channel (802.11n(HT20)/ 5785MHz)										
3263.43	44.17	44.70	6.70	28.20	-9.80	34.37	74.00	-39.63	Pk	Vertical
3263.43	40.98	44.70	6.70	28.20	-9.80	31.18	54.00	-22.82	AV	Vertical
3257.58	44.10	44.70	6.70	28.20	-9.80	34.30	68.20	-33.90	Pk	Horizontal
3257.58	41.02	44.70	6.70	28.20	-9.80	31.22	54.00	-22.78	AV	Horizontal
3989.81	39.66	44.20	7.90	29.70	-6.60	33.06	74.00	-40.94	Pk	Vertical
3989.81	36.71	44.20	7.90	29.70	-6.60	30.11	54.00	-23.89	AV	Vertical
3984.60	39.40	44.20	7.90	29.70	-6.60	32.80	74.00	-41.20	Pk	Horizontal
3984.60	36.69	44.20	7.90	29.70	-6.60	30.09	54.00	-23.91	AV	Horizontal
7231.07	36.54	43.50	11.40	35.50	3.40	39.94	68.20	-28.26	Pk	Vertical
7231.07	34.84	43.50	11.40	35.50	3.40	38.24	54.00	-15.76	AV	Vertical
7216.42	37.09	43.50	11.40	35.50	3.40	40.49	68.20	-27.71	Pk	Horizontal
7216.42	33.84	43.50	11.40	35.50	3.40	37.24	54.00	-16.76	AV	Horizontal
10399.98	39.49	44.50	13.80	38.80	8.10	47.59	68.20	-20.61	Pk	Vertical
10399.98	36.82	44.50	13.80	38.80	8.10	44.92	54.00	-9.08	AV	Vertical
10400.35	39.00	44.50	13.80	38.80	8.10	47.10	68.20	-21.10	Pk	Horizontal
10400.35	36.14	44.50	13.80	38.80	8.10	44.24	54.00	-9.76	AV	Horizontal
11022.02	33.99	43.60	14.30	39.50	10.20	44.19	74.00	-29.81	Pk	Vertical
11022.02	29.80	43.60	14.30	39.50	10.20	40.00	54.00	-14.00	AV	Vertical
11029.01	33.23	43.60	14.30	39.50	10.20	43.43	74.00	-30.57	Pk	Horizontal
11029.01	30.01	43.60	14.30	39.50	10.20	40.21	54.00	-13.79	AV	Horizontal
13280.02	32.08	42.60	15.90	38.90	12.20	44.28	74.00	-29.72	Pk	Vertical
13280.02	29.64	42.60	15.90	38.90	12.20	41.84	54.00	-12.16	AV	Vertical
13290.92	33.02	42.60	15.90	38.90	12.20	45.22	74.00	-28.78	Pk	Horizontal
13290.92	29.04	42.60	15.90	38.90	12.20	41.24	54.00	-12.76	AV	Horizontal



High Channel (802.11n(HT20)/ 5825 MHz)										
3259.04	44.09	44.70	6.70	28.20	-9.80	34.29	68.20	-33.91	Pk	Vertical
3259.04	41.53	44.70	6.70	28.20	-9.80	31.73	54.00	-22.27	AV	Vertical
3252.01	44.36	44.70	6.70	28.20	-9.80	34.56	68.20	-33.64	Pk	Horizontal
3252.01	41.65	44.70	6.70	28.20	-9.80	31.85	54.00	-22.15	AV	Horizontal
3986.60	38.97	44.20	7.90	29.70	-6.60	32.37	74.00	-41.63	Pk	Vertical
3986.60	35.80	44.20	7.90	29.70	-6.60	29.20	54.00	-24.80	AV	Vertical
3994.28	40.01	44.20	7.90	29.70	-6.60	33.41	74.00	-40.59	Pk	Horizontal
3994.28	35.64	44.20	7.90	29.70	-6.60	29.04	54.00	-24.96	AV	Horizontal
7218.29	37.82	43.50	11.40	35.50	3.40	41.22	68.20	-26.98	Pk	Vertical
7218.29	33.66	43.50	11.40	35.50	3.40	37.06	54.00	-16.94	AV	Vertical
7232.78	37.25	43.50	11.40	35.50	3.40	40.65	68.20	-27.55	Pk	Horizontal
7232.78	34.20	43.50	11.40	35.50	3.40	37.60	54.00	-16.40	AV	Horizontal
10480.33	39.60	44.50	13.80	38.80	8.10	47.70	68.20	-20.50	Pk	Vertical
10480.33	36.91	44.50	13.80	38.80	8.10	45.01	54.00	-8.99	AV	Vertical
10480.31	39.54	44.50	13.80	38.80	8.10	47.64	68.20	-20.56	Pk	Horizontal
10480.31	36.07	44.50	13.80	38.80	8.10	44.17	54.00	-9.83	AV	Horizontal
11032.96	34.08	43.60	14.30	39.50	10.20	44.28	74.00	-29.72	Pk	Vertical
11032.96	30.68	43.60	14.30	39.50	10.20	40.88	54.00	-13.12	AV	Vertical
11027.38	33.77	43.60	14.30	39.50	10.20	43.97	74.00	-30.03	Pk	Horizontal
11027.38	30.87	43.60	14.30	39.50	10.20	41.07	54.00	-12.93	AV	Horizontal
13294.28	32.43	42.60	15.90	38.90	12.20	44.63	74.00	-29.37	Pk	Vertical
13294.28	29.55	42.60	15.90	38.90	12.20	41.75	54.00	-12.25	AV	Vertical
13286.07	32.85	42.60	15.90	38.90	12.20	45.05	74.00	-28.95	Pk	Horizontal
13286.07	29.62	42.60	15.90	38.90	12.20	41.82	54.00	-12.18	AV	Horizontal

Remark:


1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Scan with 802.11a, 802.11n (HT-20), 802.11n (HT-40), 802.11ac (VHT-20), 802.11ac (VHT-40), 802.11ac (VHT-80) the worst case is 802.11n (HT-20).
3. The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.



3.2.9 RESTRICTED FREQUENCY BANDS AND BAND EDGE


Band I 5150-5250MHz

802.11n20-L-H

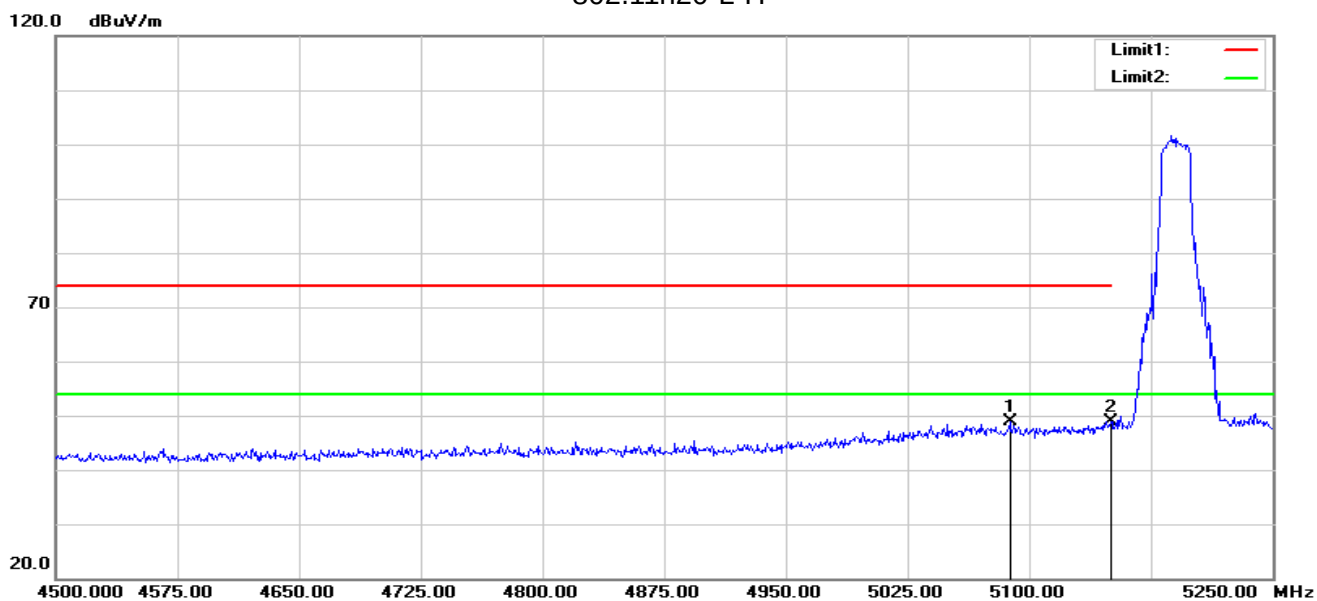

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5088.000	54.62	-5.79	48.83	74.00	-25.17	peak
2	5150.000	54.58	-5.73	48.85	74.00	-25.15	peak


802.11n20-L-V

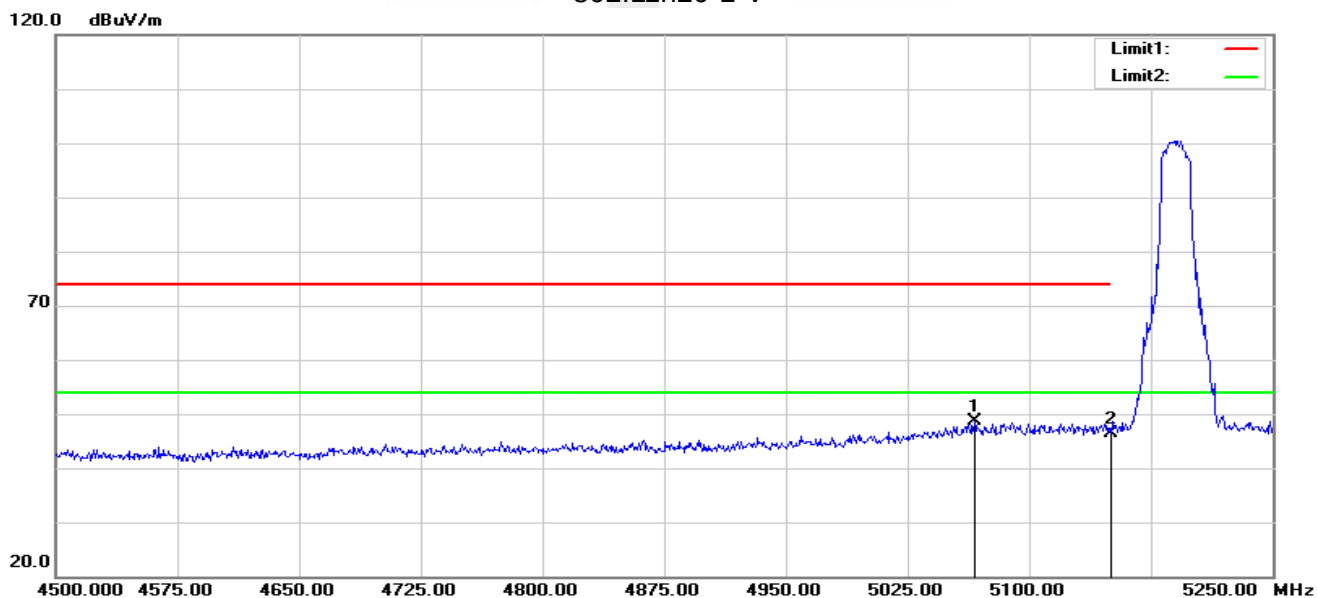

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5066.250	54.51	-5.89	48.62	74.00	-25.38	peak
2	5150.000	52.19	-5.73	46.46	74.00	-27.54	peak




802.11n20-H-H

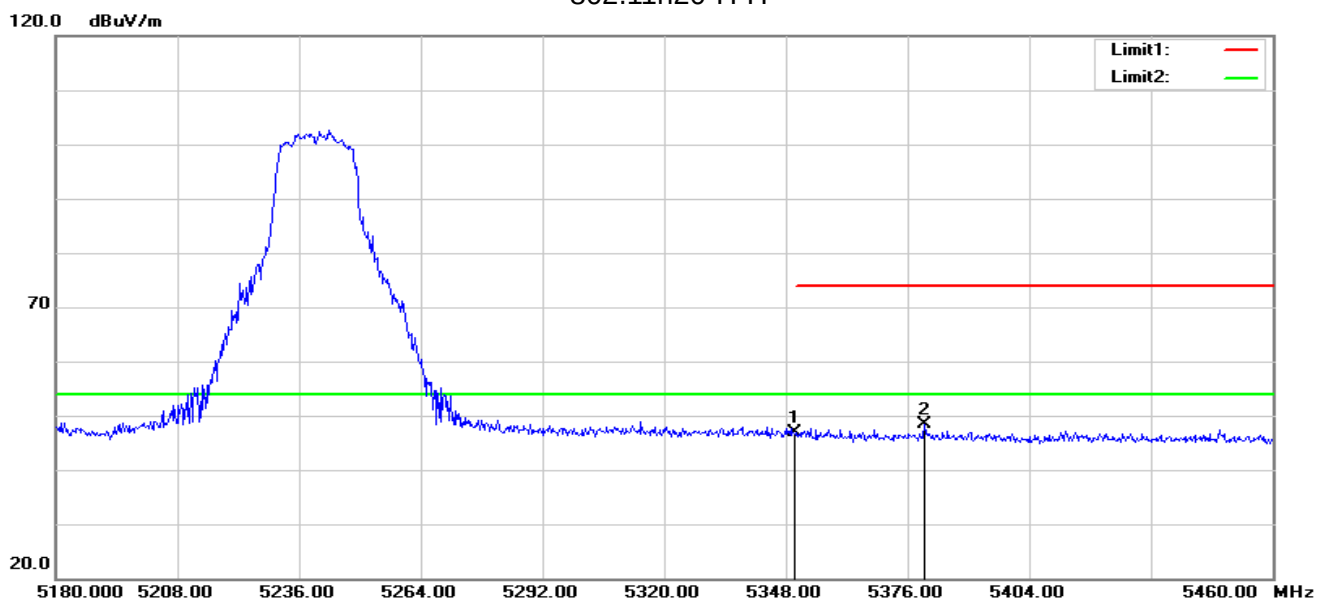

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	52.11	-5.23	46.88	74.00	-27.12	peak
2	5379.920	53.51	-5.25	48.26	74.00	-25.74	peak


802.11n20-H-V

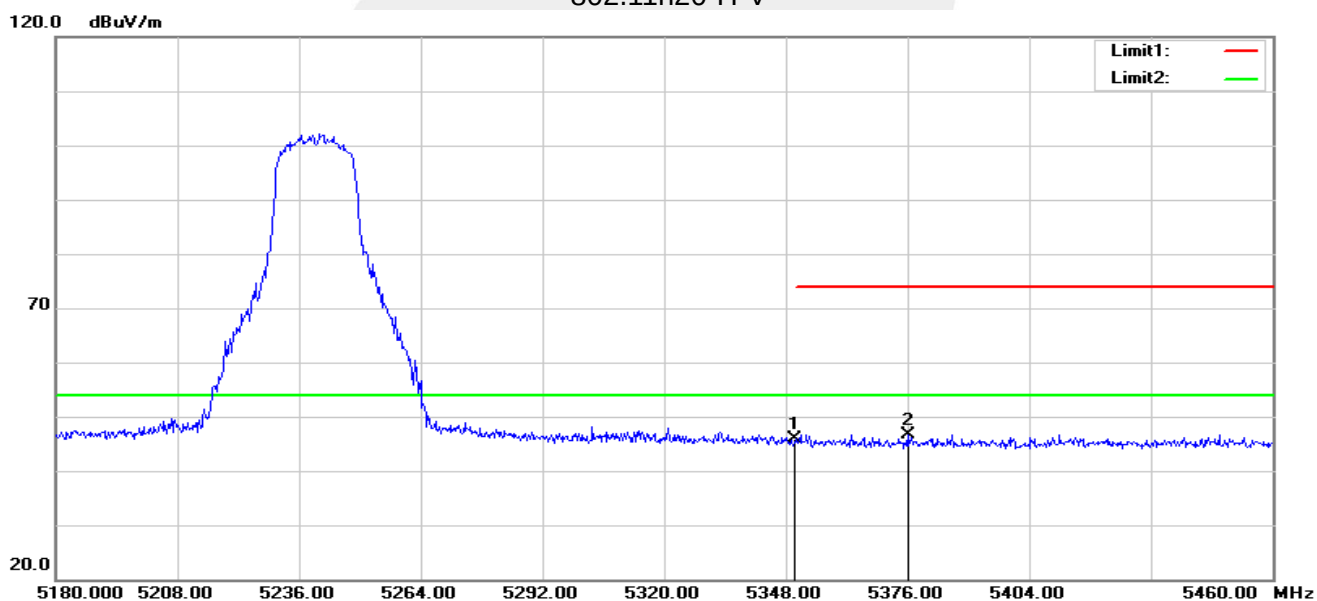

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	51.06	-5.23	45.83	74.00	-28.17	peak
2	5376.000	51.98	-5.24	46.74	74.00	-27.26	peak




802.11n40-L-H

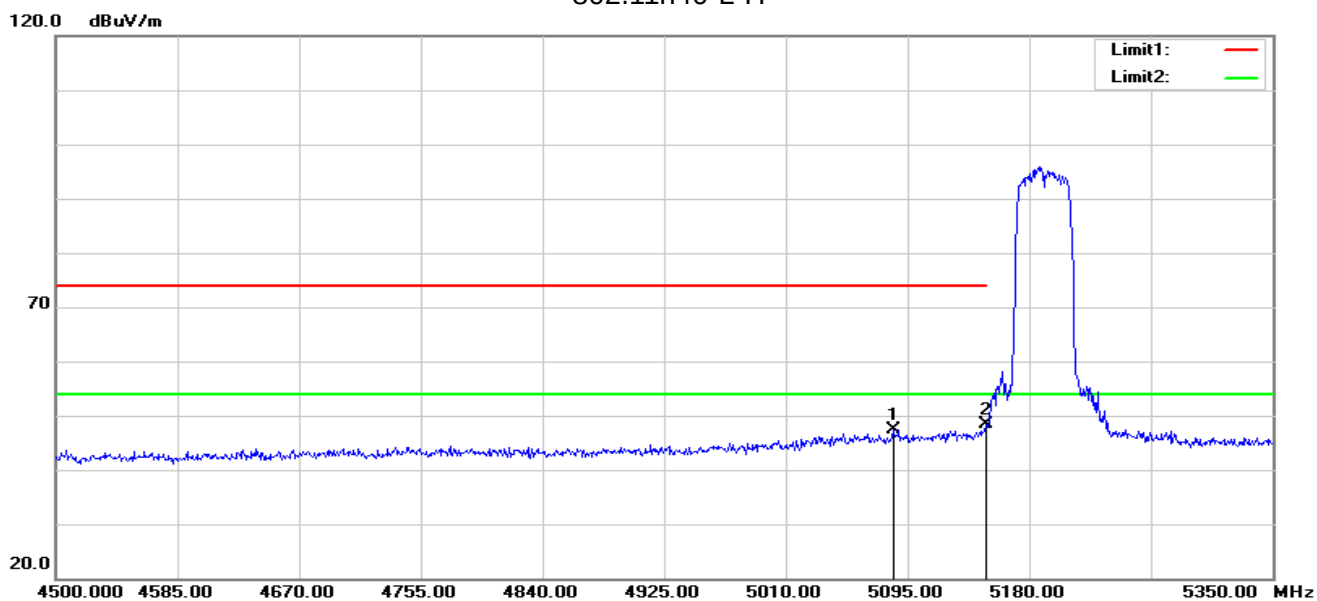

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5084.800	53.20	-5.81	47.39	74.00	-26.61	peak
2	5150.000	54.00	-5.73	48.27	74.00	-25.73	peak


802.11n40-L-V

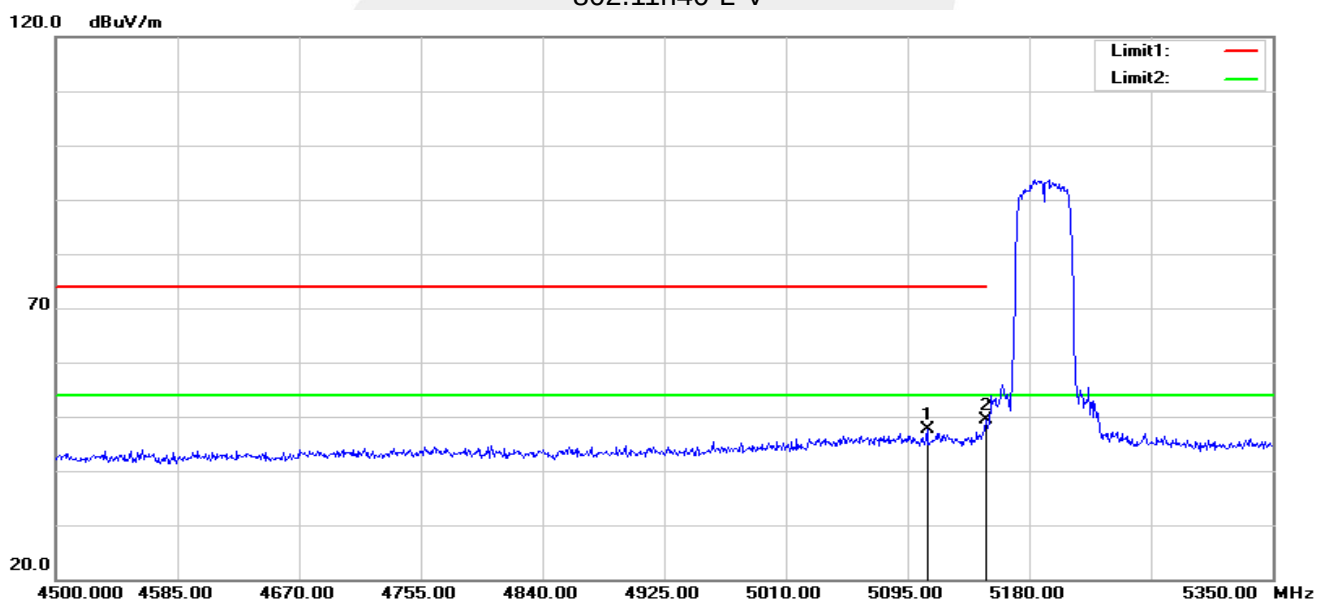

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5108.600	53.36	-5.74	47.62	74.00	-26.38	peak
2	5150.000	55.10	-5.73	49.37	74.00	-24.63	peak




802.11n40-H-H

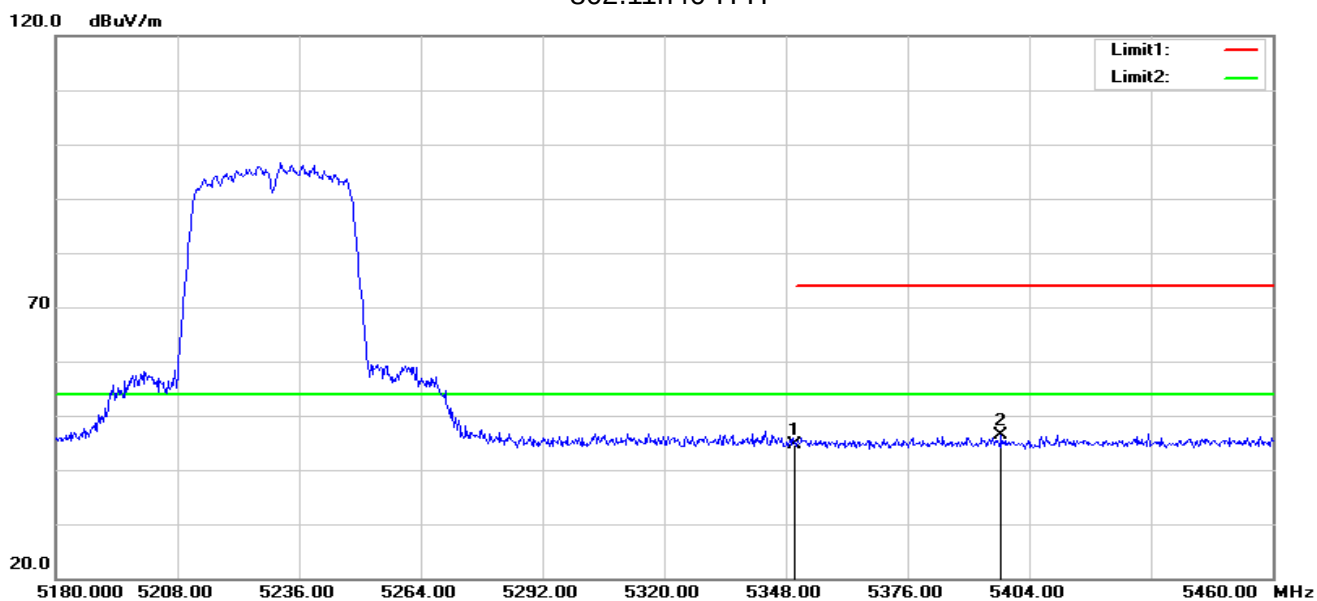

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	49.76	-5.23	44.53	74.00	-29.47	peak
2	5397.560	51.60	-5.25	46.35	74.00	-27.65	peak


802.11n40-H-V

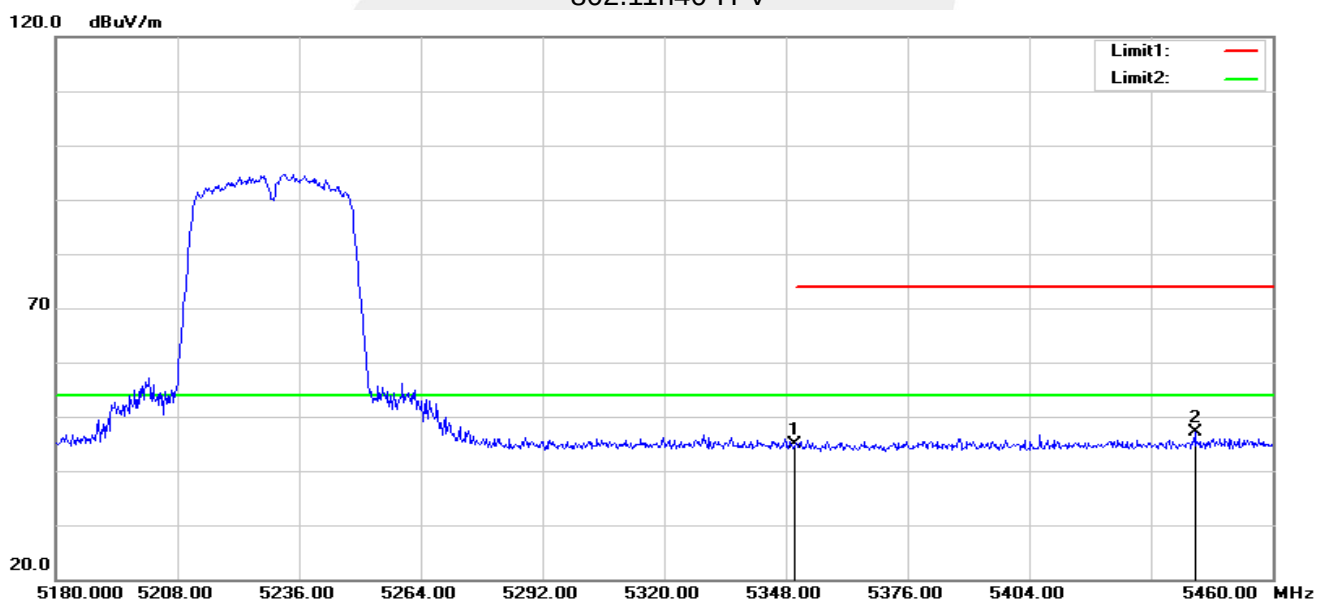

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	50.10	-5.23	44.87	74.00	-29.13	peak
2	5442.080	52.31	-5.16	47.15	74.00	-26.85	peak




802.11ac80-L-H

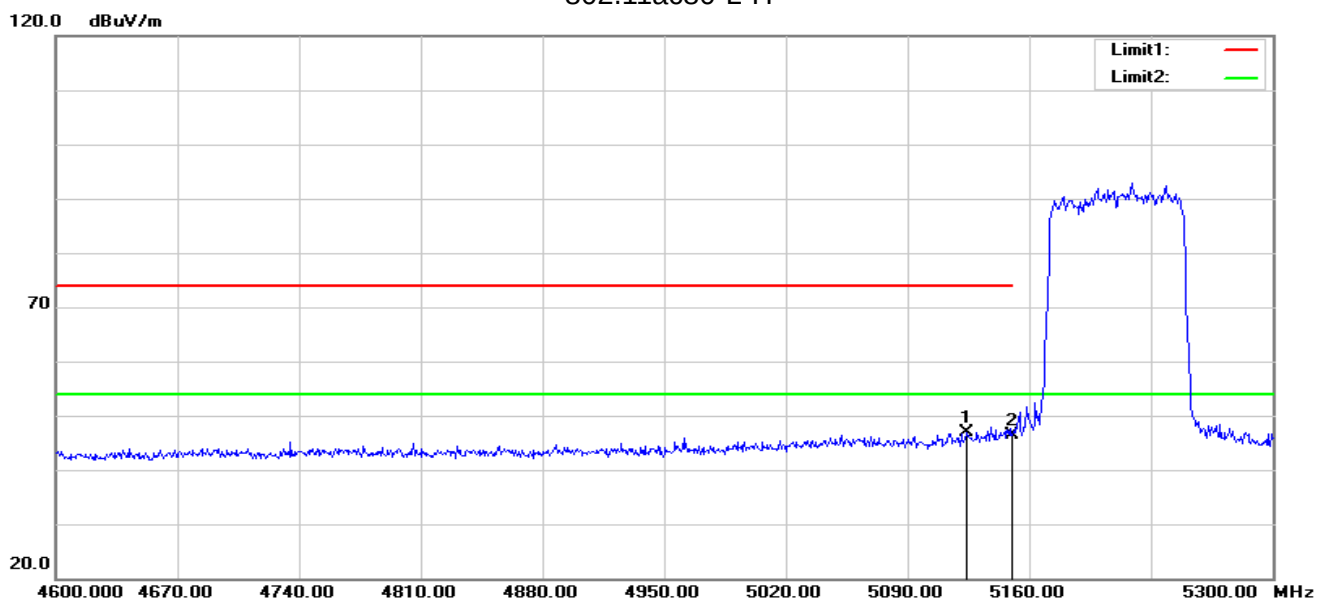

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5124.300	52.71	-5.74	46.97	74.00	-27.03	peak
2	5150.000	52.19	-5.73	46.46	74.00	-27.54	peak


802.11ac80-L-V

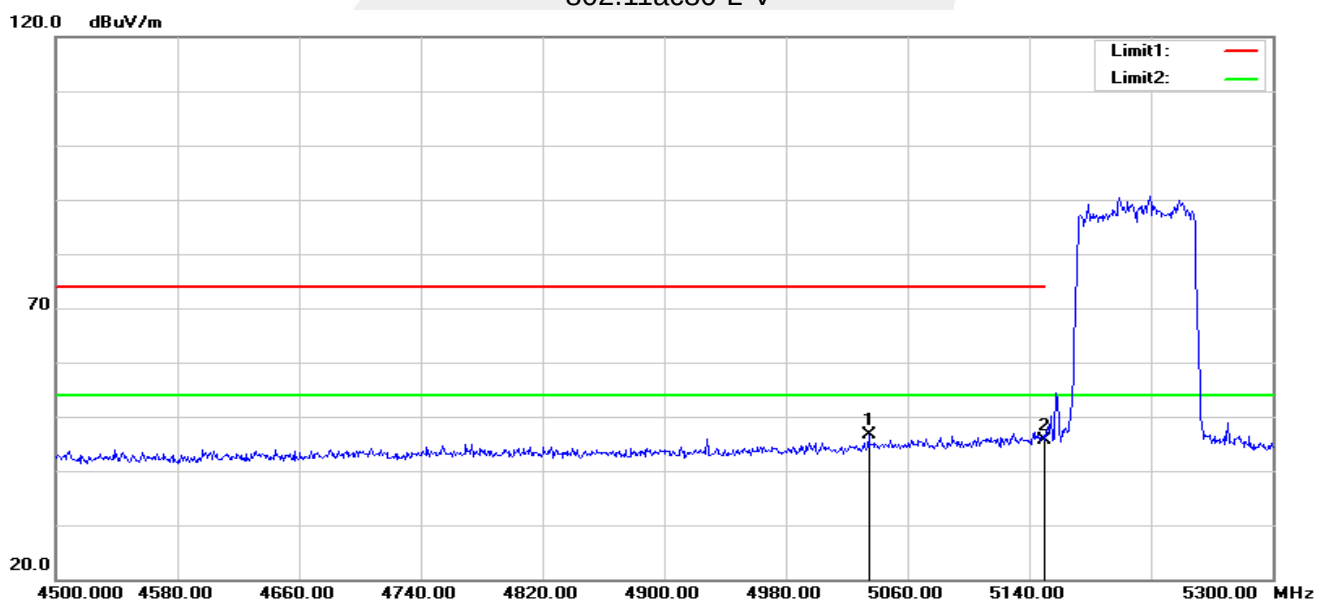

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5034.400	52.69	-6.03	46.66	74.00	-27.34	peak
2	5150.000	51.38	-5.73	45.65	74.00	-28.35	peak




802.11ac80-H-H

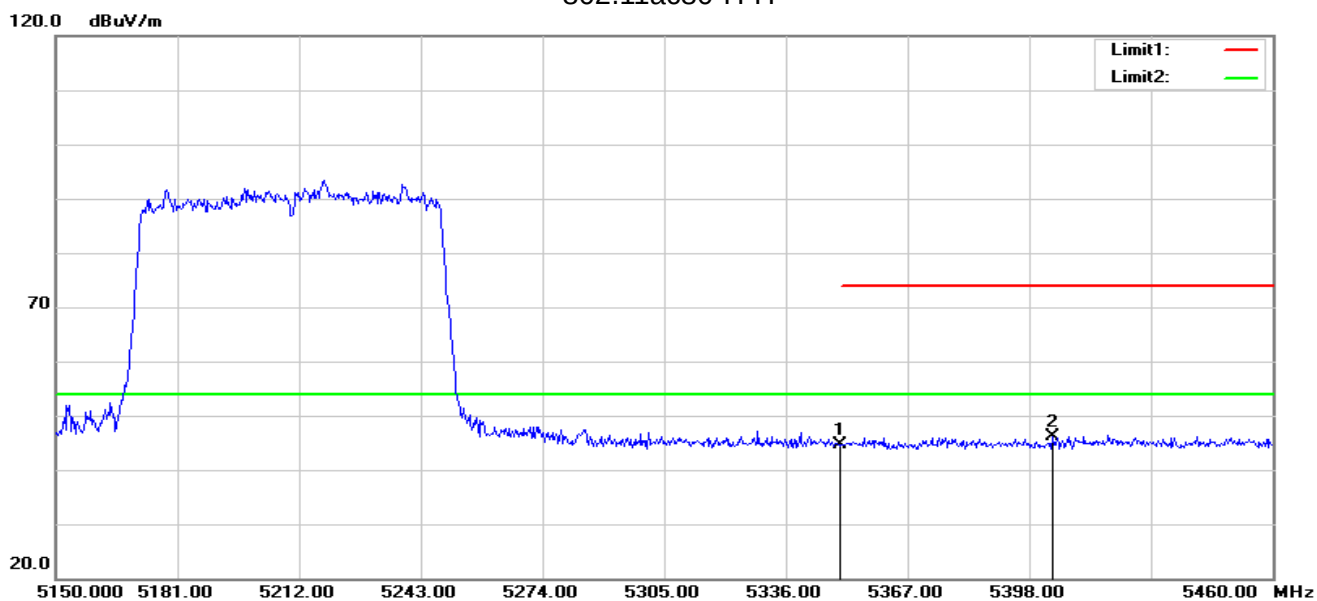

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	49.89	-5.23	44.66	74.00	-29.34	peak
2	5403.890	51.45	-5.24	46.21	74.00	-27.79	peak

802.11ac80-H-V

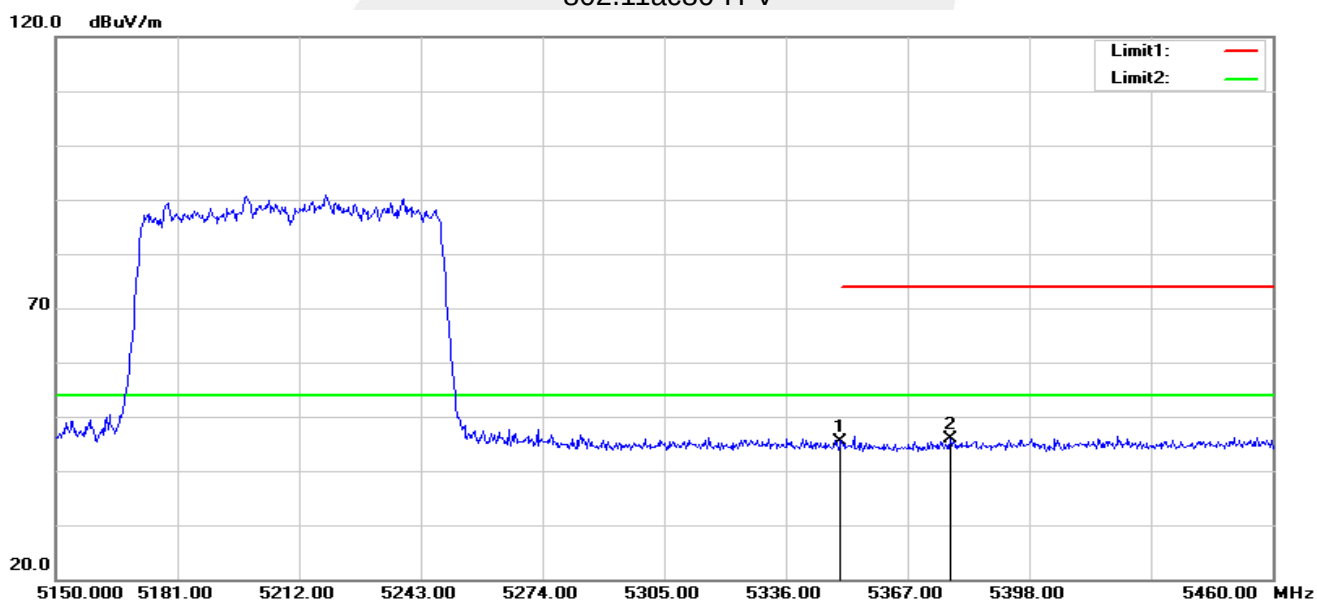


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	50.72	-5.23	45.49	74.00	-28.51	peak
2	5377.850	51.13	-5.24	45.89	74.00	-28.11	peak

Note: All modes have been tested. Only the worst mode shown in the report.




Band II 5250-5350MHz

802.11n20-L-H

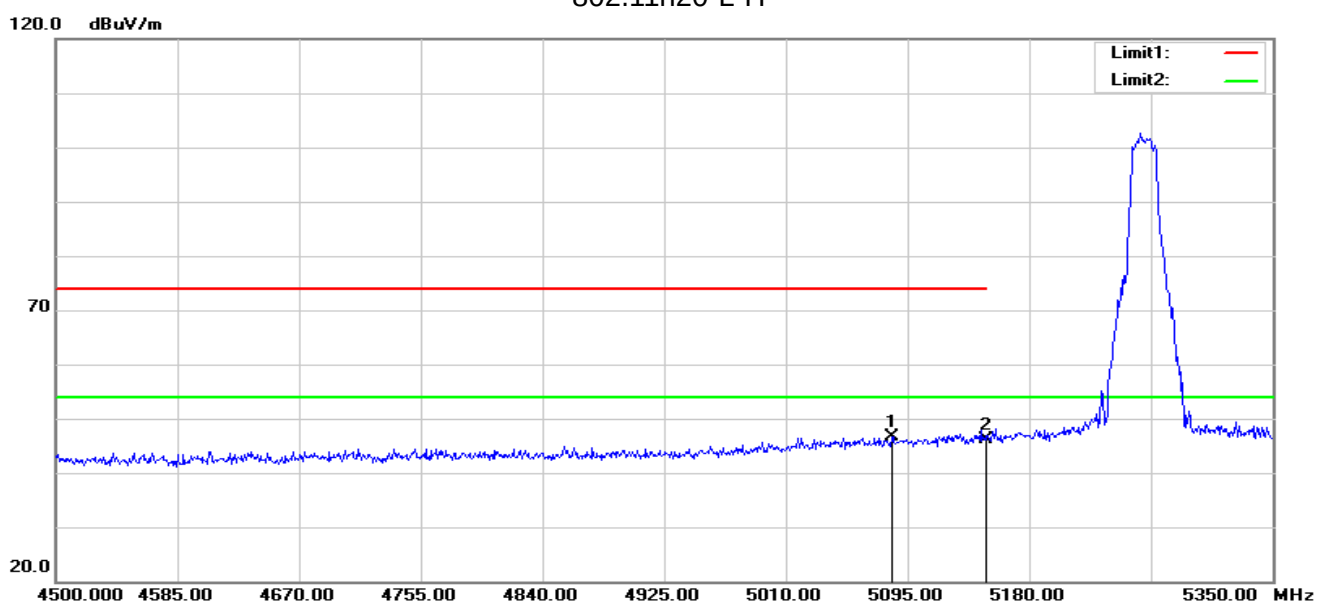

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5083.950	52.48	-5.81	46.67	74.00	-27.33	peak
2	5150.000	51.95	-5.73	46.22	74.00	-27.78	peak


802.11n20-L-V

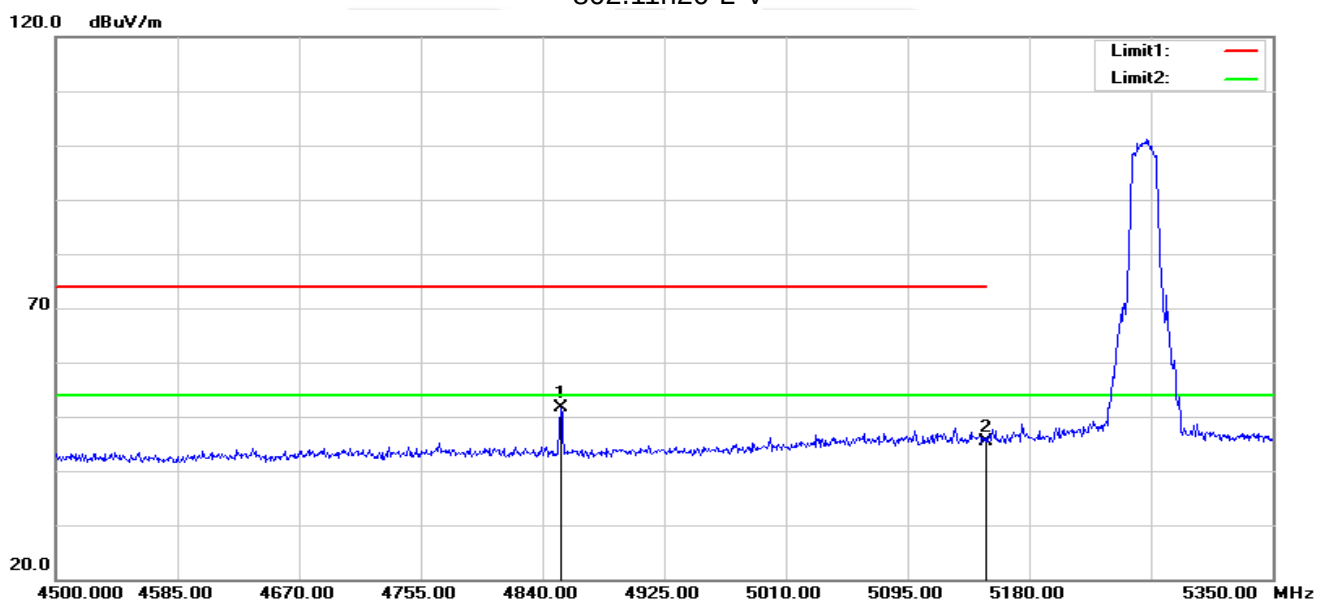

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4852.750	58.59	-7.02	51.57	74.00	-22.43	peak
2	5150.000	51.08	-5.73	45.35	74.00	-28.65	peak




802.11n20-H-H

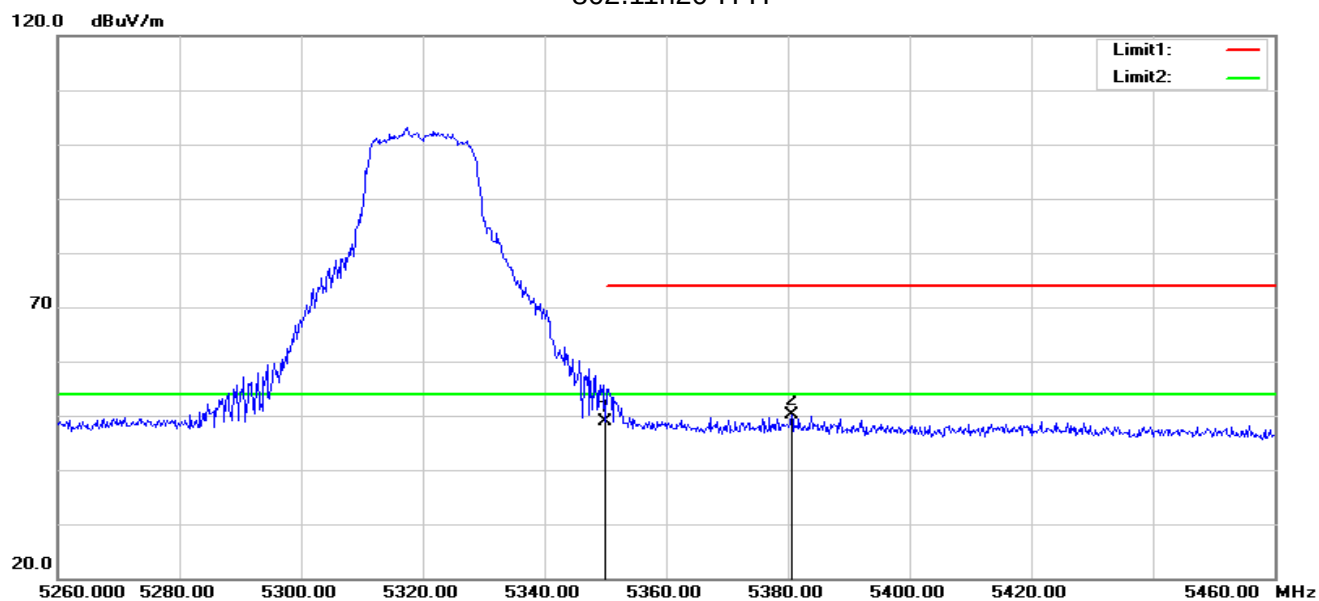

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	54.03	-5.23	48.80	74.00	-25.20	peak
2	5380.600	55.27	-5.25	50.02	74.00	-23.98	peak


802.11n20-H-V

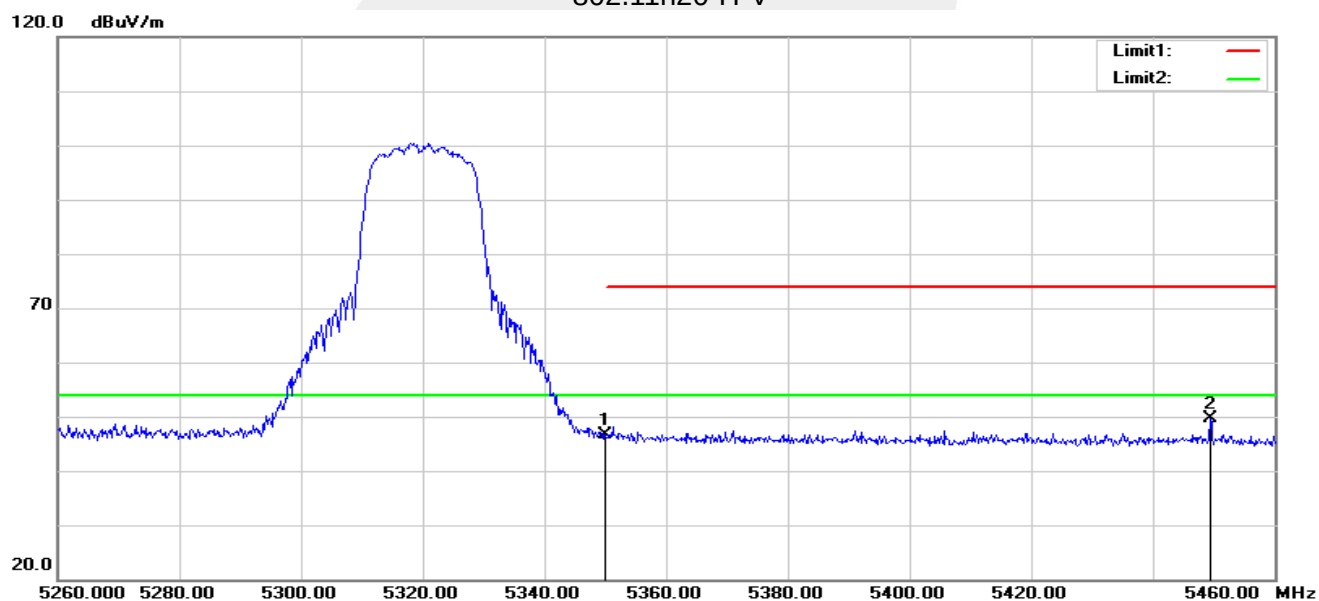

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	51.95	-5.23	46.72	74.00	-27.28	peak
2	5449.400	54.81	-5.14	49.67	74.00	-24.33	peak




802.11n40-L-H

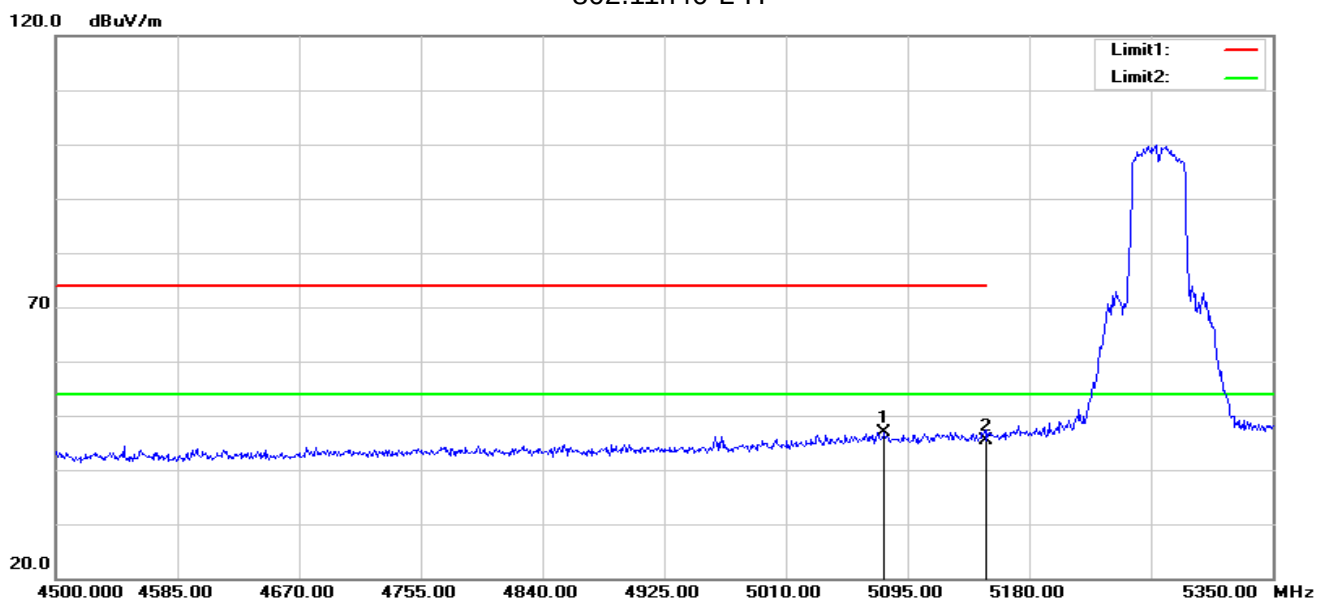

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5078.850	52.71	-5.84	46.87	74.00	-27.13	peak
2	5150.000	51.12	-5.73	45.39	74.00	-28.61	peak


802.11n40-L-V

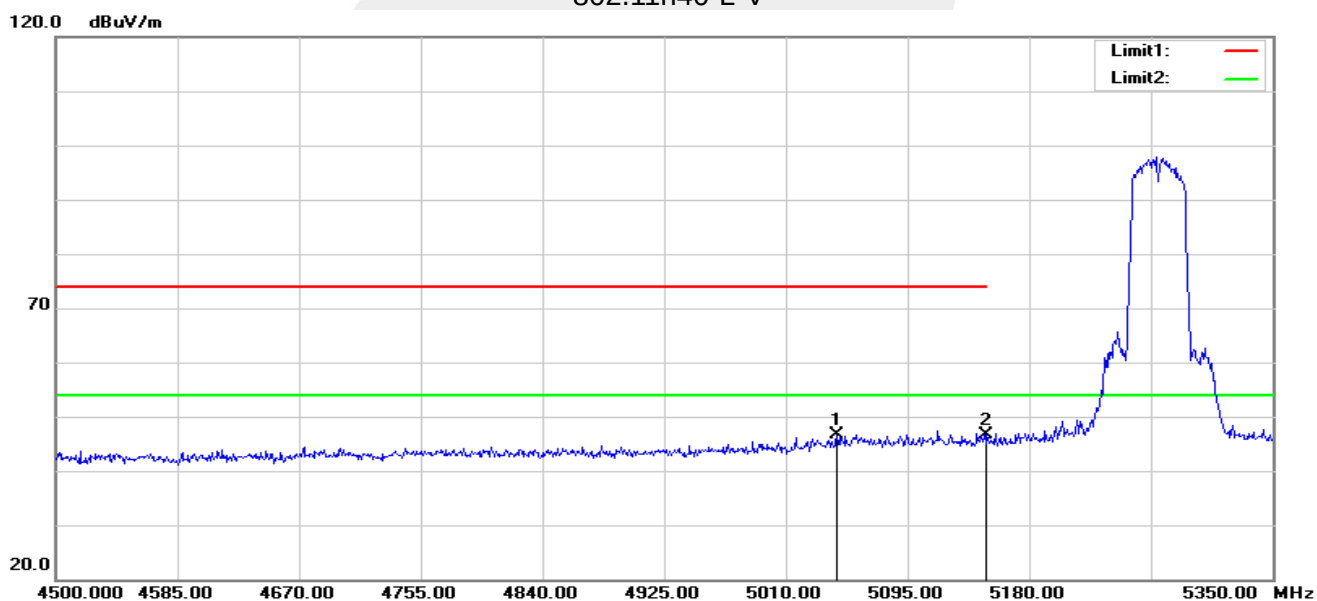

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5045.700	52.50	-5.98	46.52	74.00	-27.48	peak
2	5150.000	52.35	-5.73	46.62	74.00	-27.38	peak




802.11n40-H-H

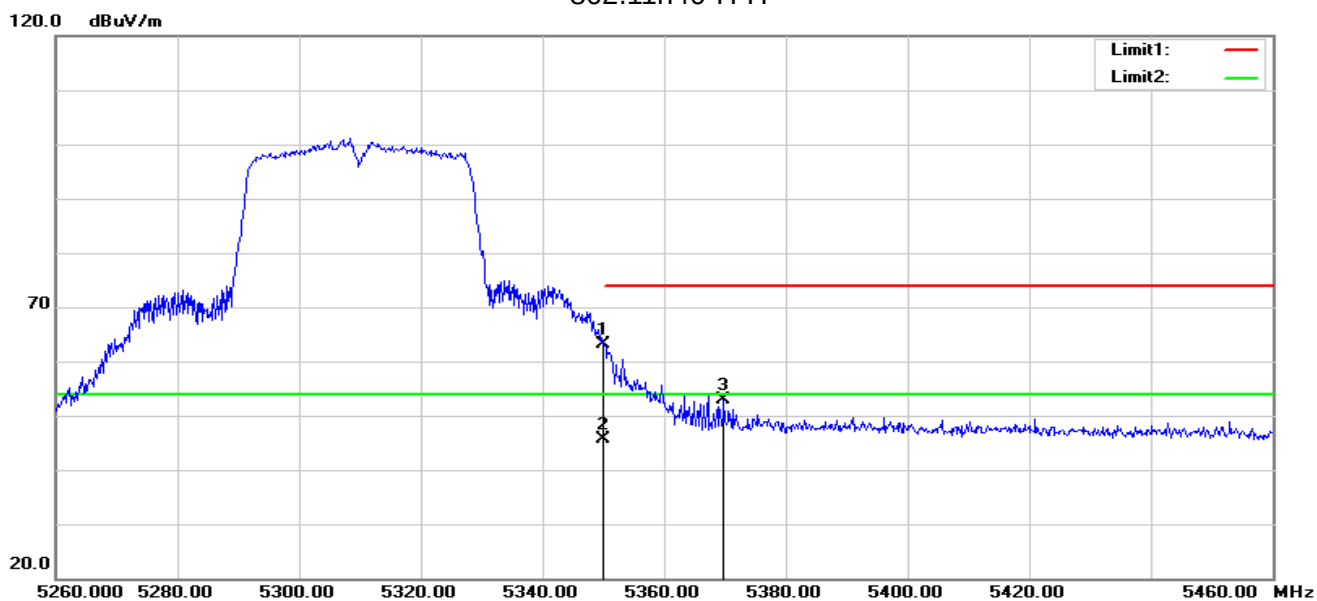

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	68.37	-5.23	63.14	74.00	-10.86	peak
2	5350.000	50.85	-5.23	45.62	54.00	-8.38	AVG
3	5369.800	58.03	-5.23	52.80	74.00	-21.20	peak


802.11n40-H-V

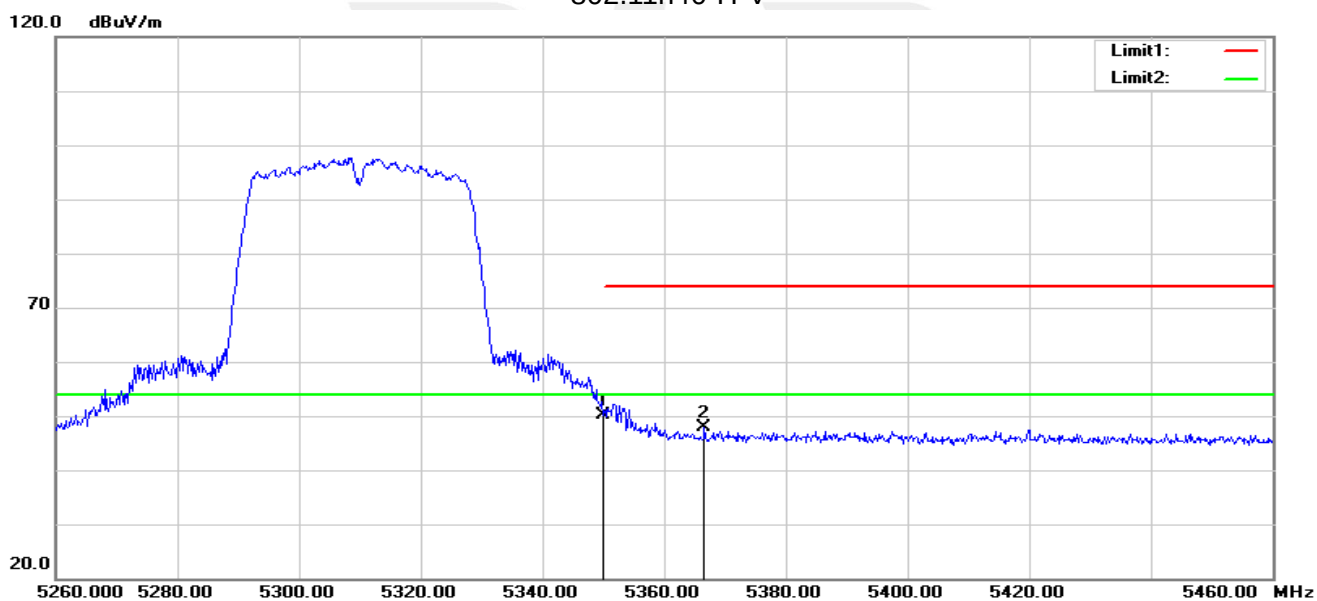

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	55.24	-5.23	50.01	74.00	-23.99	peak
2	5366.600	53.16	-5.24	47.92	74.00	-26.08	peak




802.11ac80-L-H

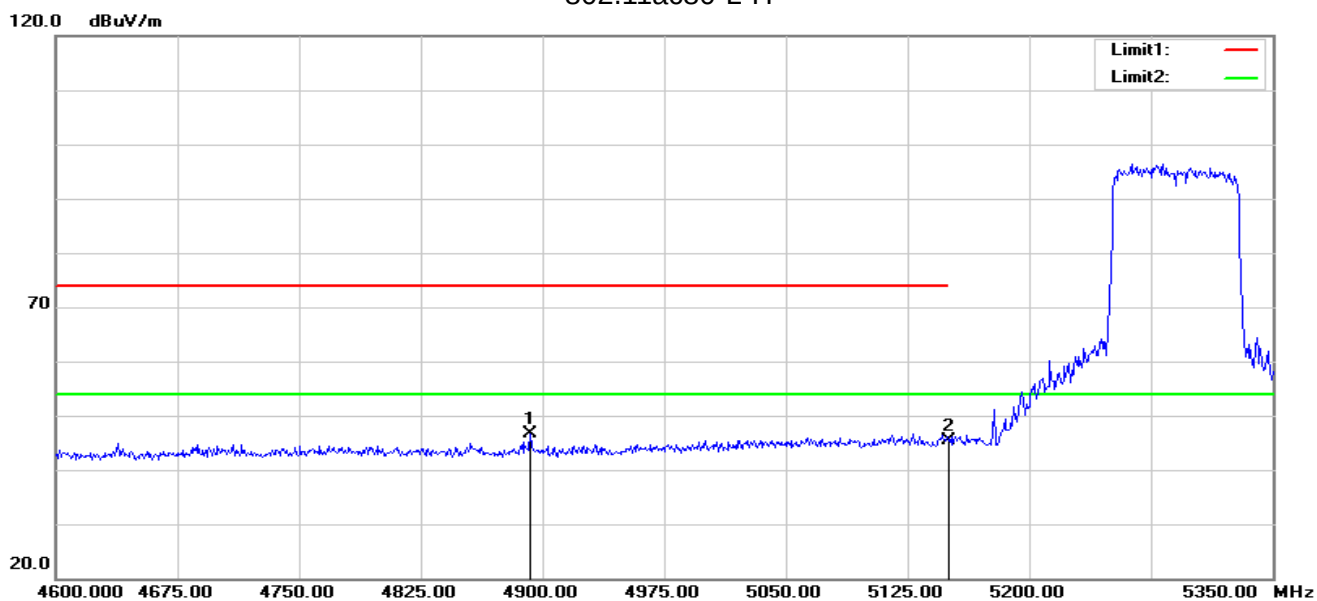

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4892.500	53.53	-6.86	46.67	74.00	-27.33	peak
2	5150.000	51.20	-5.73	45.47	74.00	-28.53	peak


802.11ac80-L-V

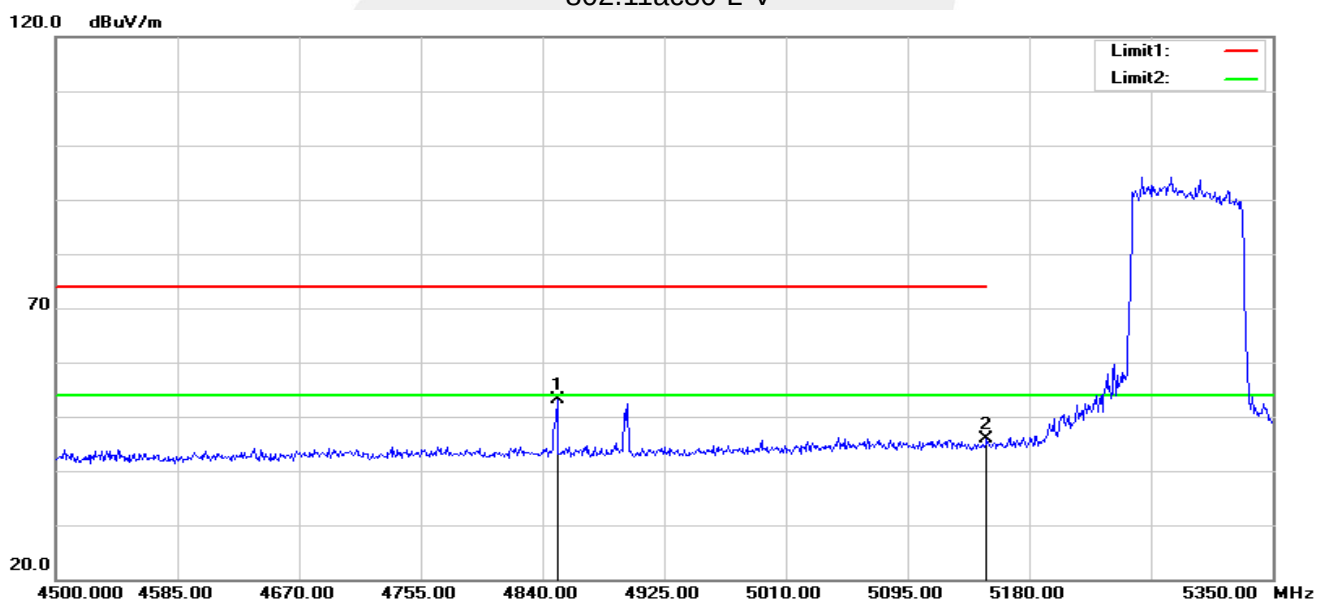

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4850.200	60.22	-7.03	53.19	74.00	-20.81	peak
2	5150.000	51.59	-5.73	45.86	74.00	-28.14	peak




802.11ac80-H-H

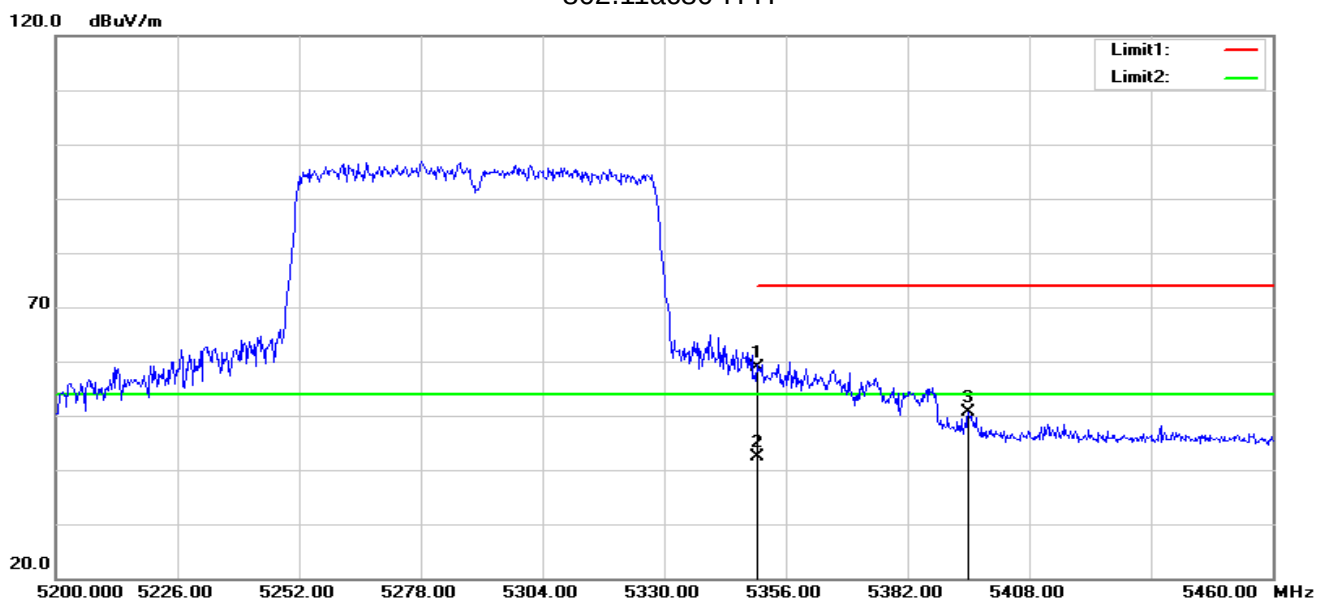

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	64.19	-5.23	58.96	74.00	-15.04	peak
2	5350.000	47.58	-5.23	42.35	54.00	-11.65	AVG
3	5395.000	55.88	-5.24	50.64	74.00	-23.36	peak

802.11ac80-H-V

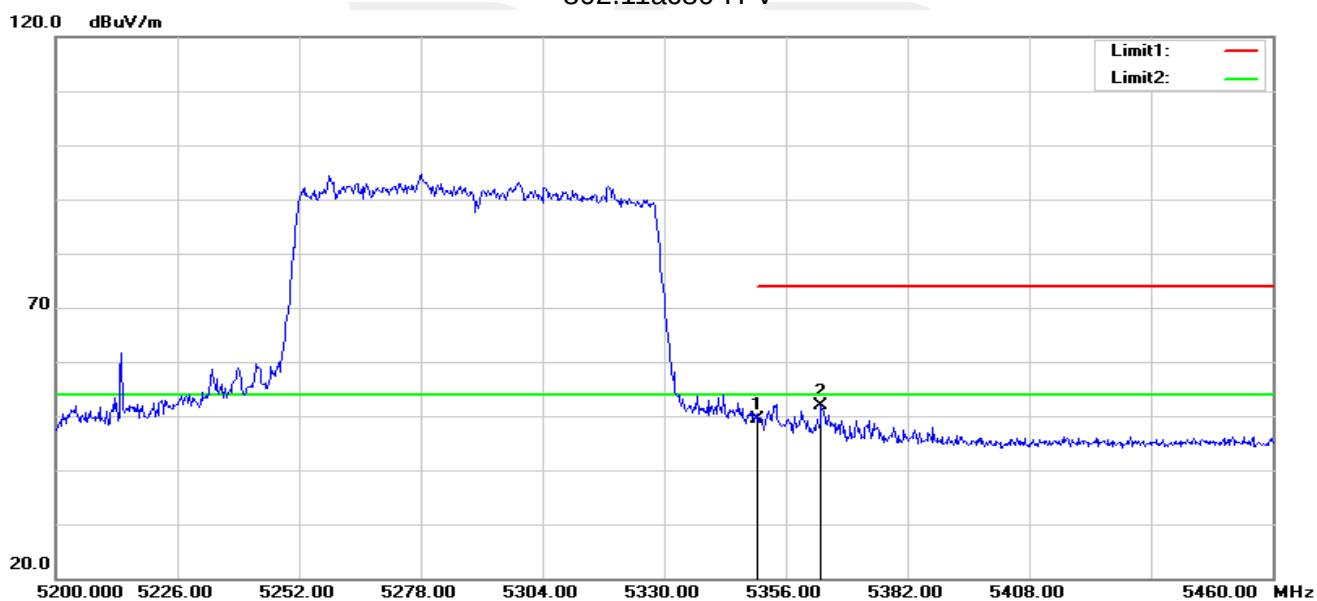


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	54.71	-5.23	49.48	74.00	-24.52	peak
2	5363.540	57.17	-5.24	51.93	74.00	-22.07	peak

Note: All modes have been tested. Only the worst mode shown in the report.




Band III 5470-5725MHz

802.11n20-L-H

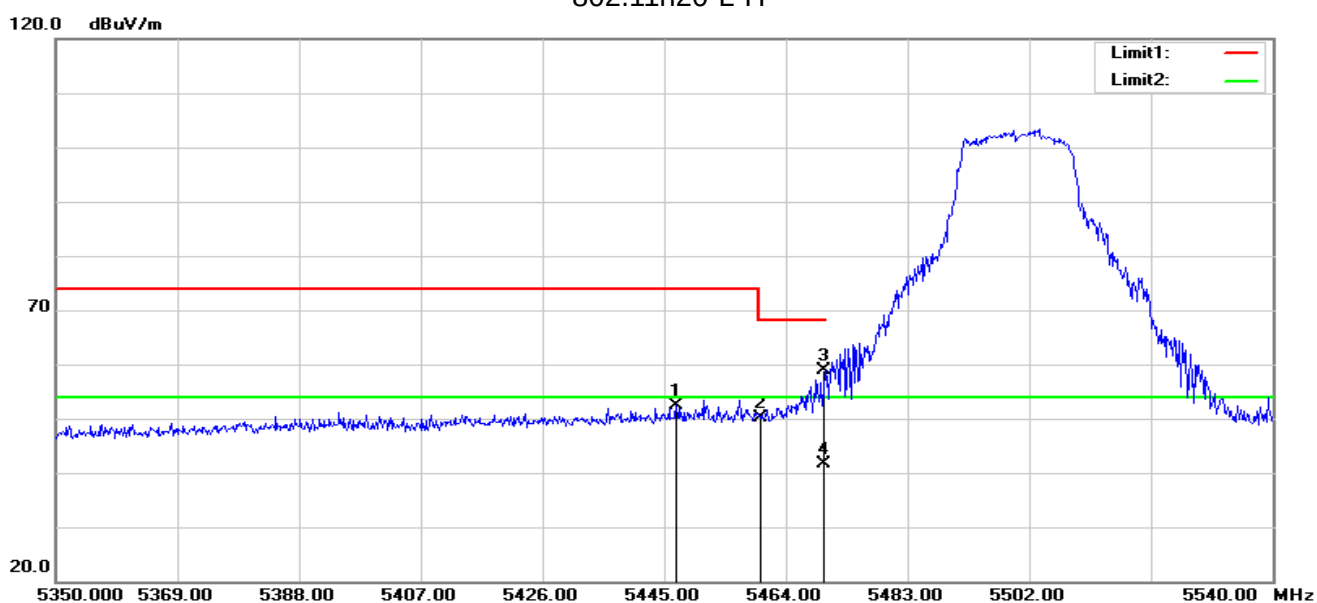

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5446.900	57.55	-5.14	52.41	74.00	-21.59	peak
2	5460.000	55.21	-5.11	50.10	68.20	-18.10	peak
3	5470.000	63.87	-5.09	58.78	68.20	-9.42	peak
4	5470.000	46.73	-5.09	41.64	54.00	-12.36	AVG


802.11n20-L-V

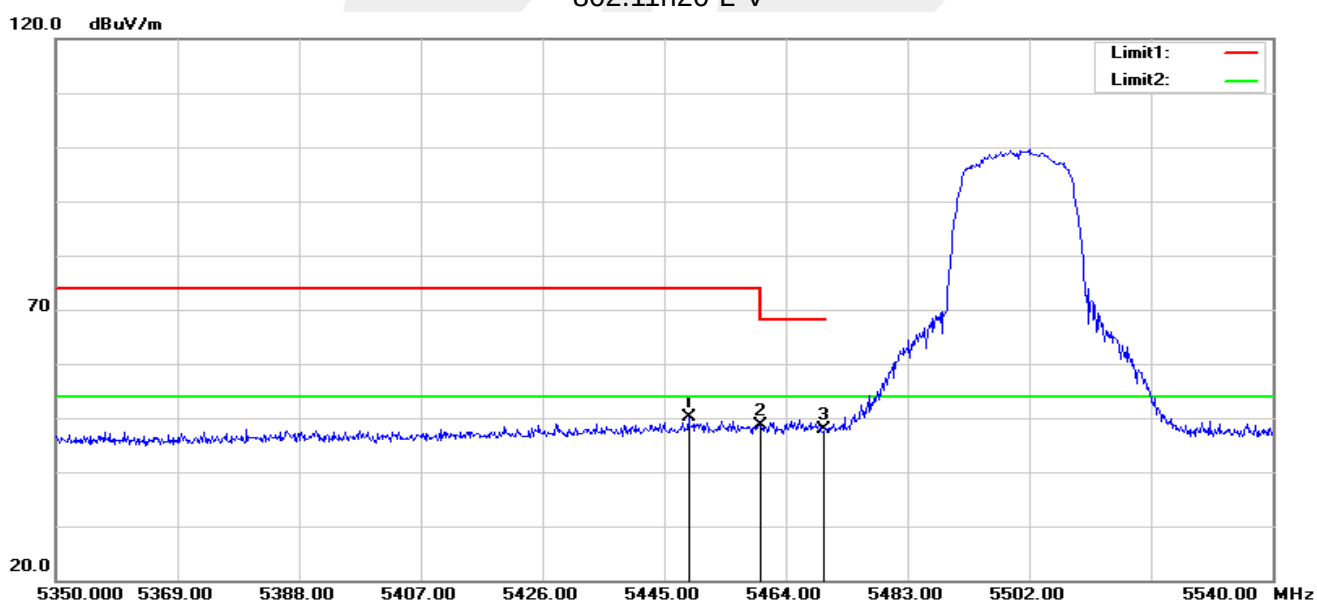

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5448.800	55.21	-5.14	50.07	74.00	-23.93	peak
2	5460.000	53.79	-5.11	48.68	68.20	-19.52	peak
3	5470.000	53.01	-5.09	47.92	68.20	-20.28	peak




802.11n20-H-H

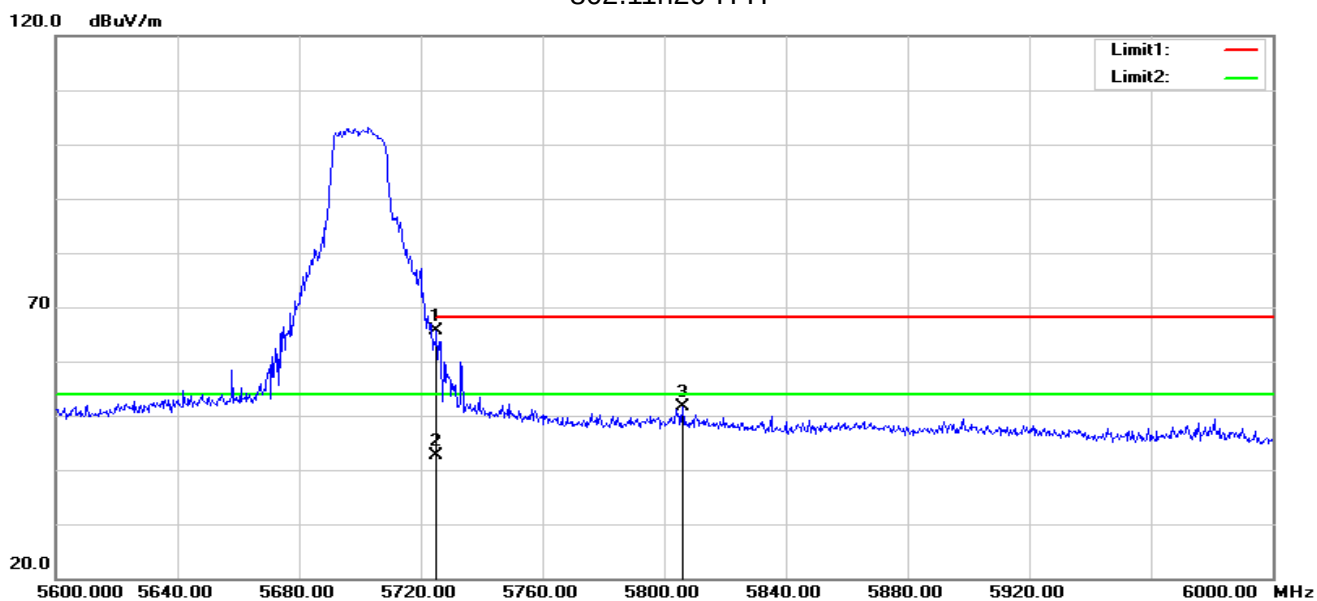

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	70.30	-4.57	65.73	68.20	-2.47	peak
2	5725.000	47.23	-4.57	42.66	54.00	-11.34	AVG
3	5806.000	56.03	-4.29	51.74	68.20	-16.46	peak


802.11n20-H-V

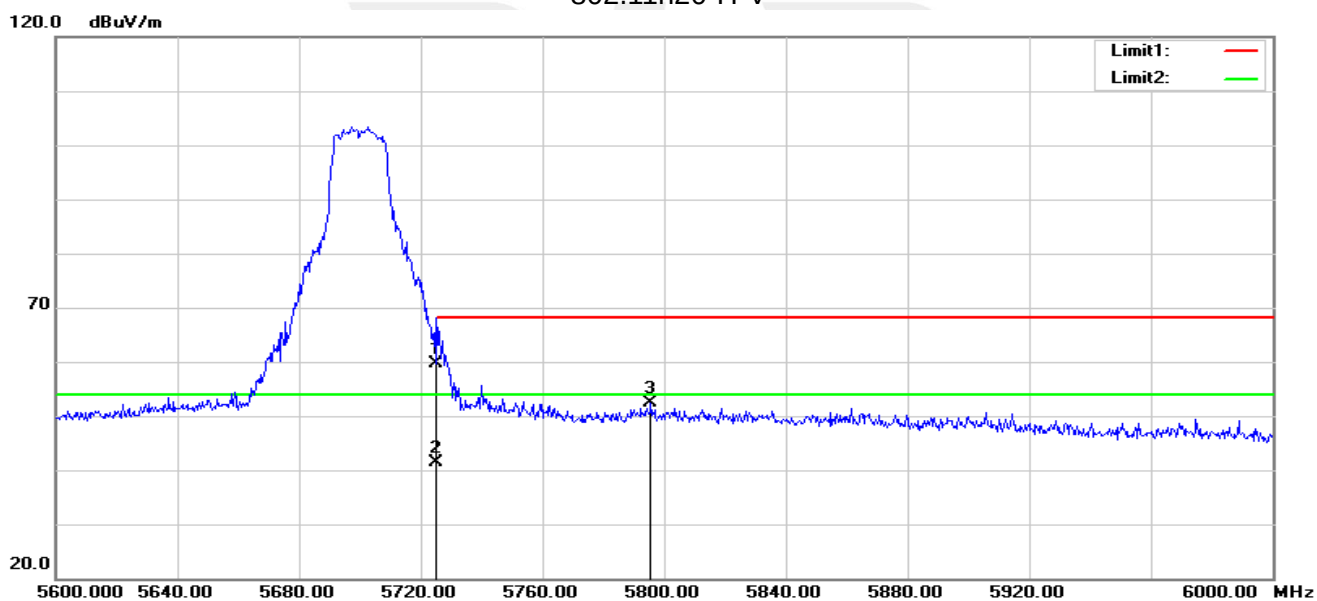

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	64.22	-4.57	59.65	68.20	-8.55	peak
2	5725.000	45.92	-4.57	41.35	54.00	-12.65	AVG
3	5795.600	56.64	-4.34	52.30	68.20	-15.90	peak




802.11n40-L-H

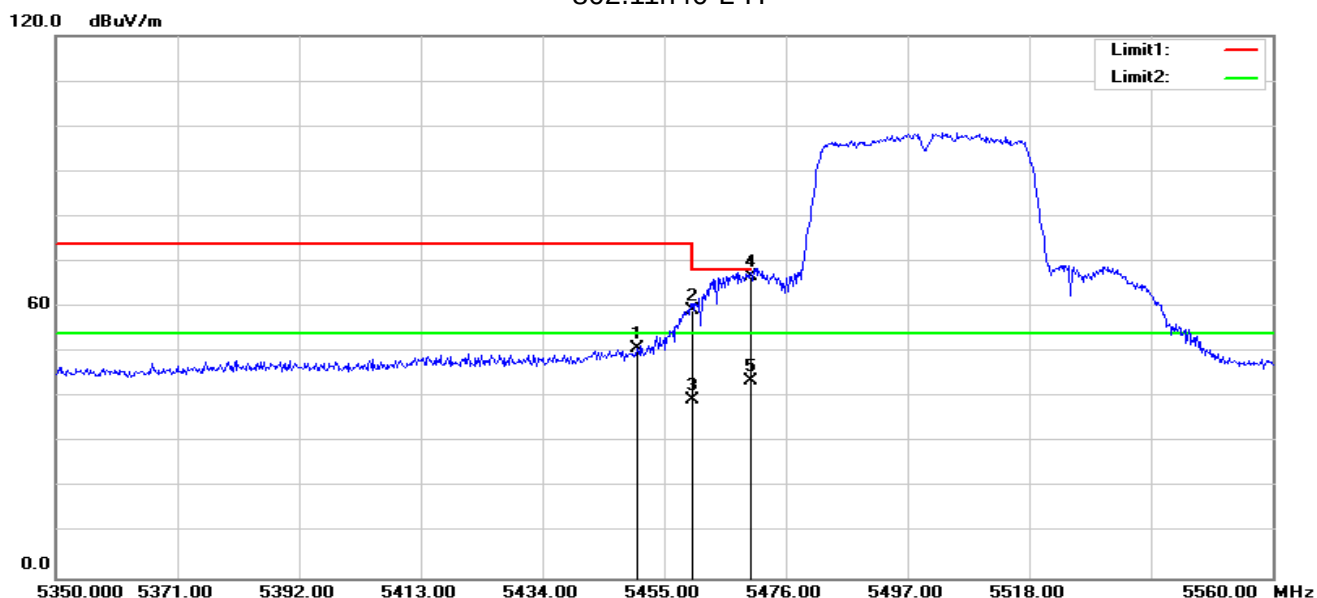

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.380	55.98	-5.13	50.85	74.00	-23.15	peak
2	5460.000	64.39	-5.11	59.28	68.20	-8.92	peak
3	5460.000	44.45	-5.11	39.34	54.00	-14.66	AVG
4	5470.000	71.95	-5.09	66.86	68.20	-1.34	peak
5	5470.000	48.63	-5.09	43.54	54.00	-10.46	AVG


802.11n40-L-V

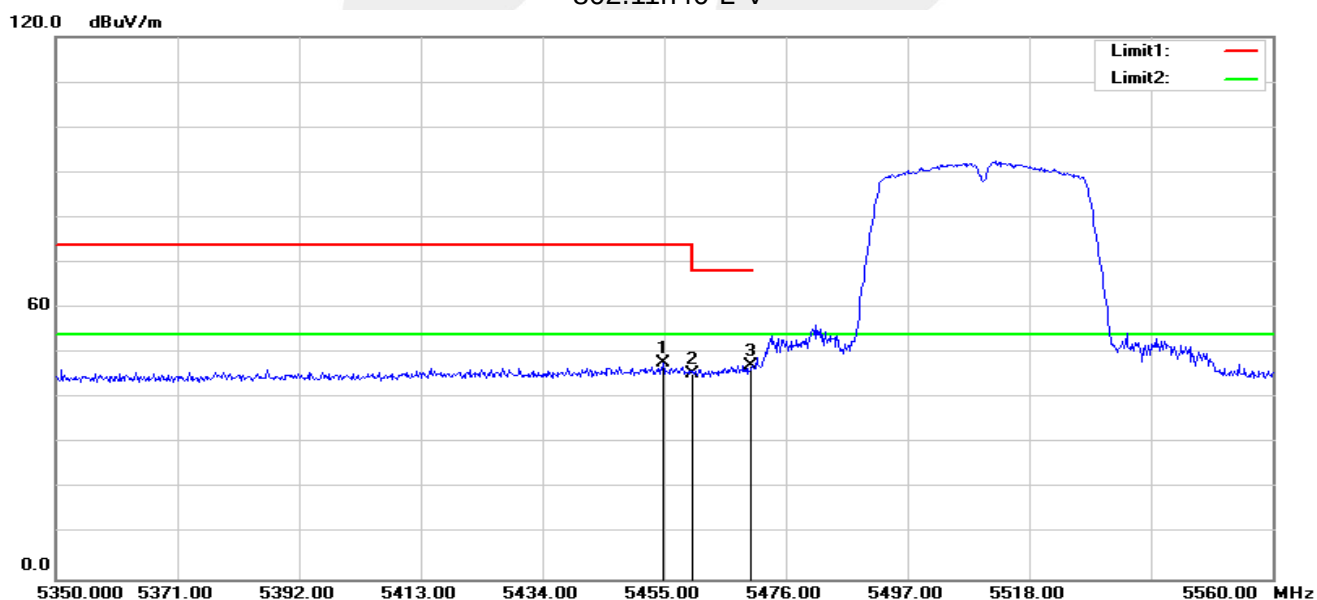

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.790	52.91	-5.13	47.78	74.00	-26.22	peak
2	5460.000	50.65	-5.11	45.54	68.20	-22.66	peak
3	5470.000	52.43	-5.09	47.34	68.20	-20.86	peak




802.11n40-H-H

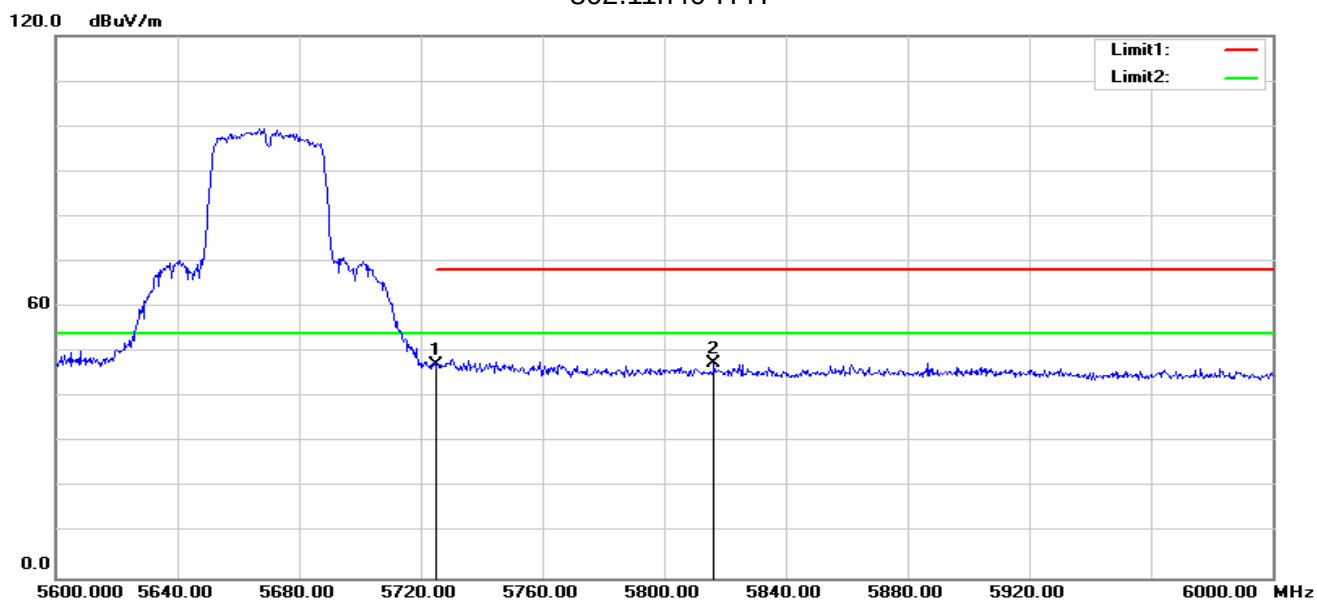

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	51.95	-4.57	47.38	68.20	-20.82	peak
2	5816.400	51.77	-4.24	47.53	68.20	-20.67	peak


802.11n40-H-V

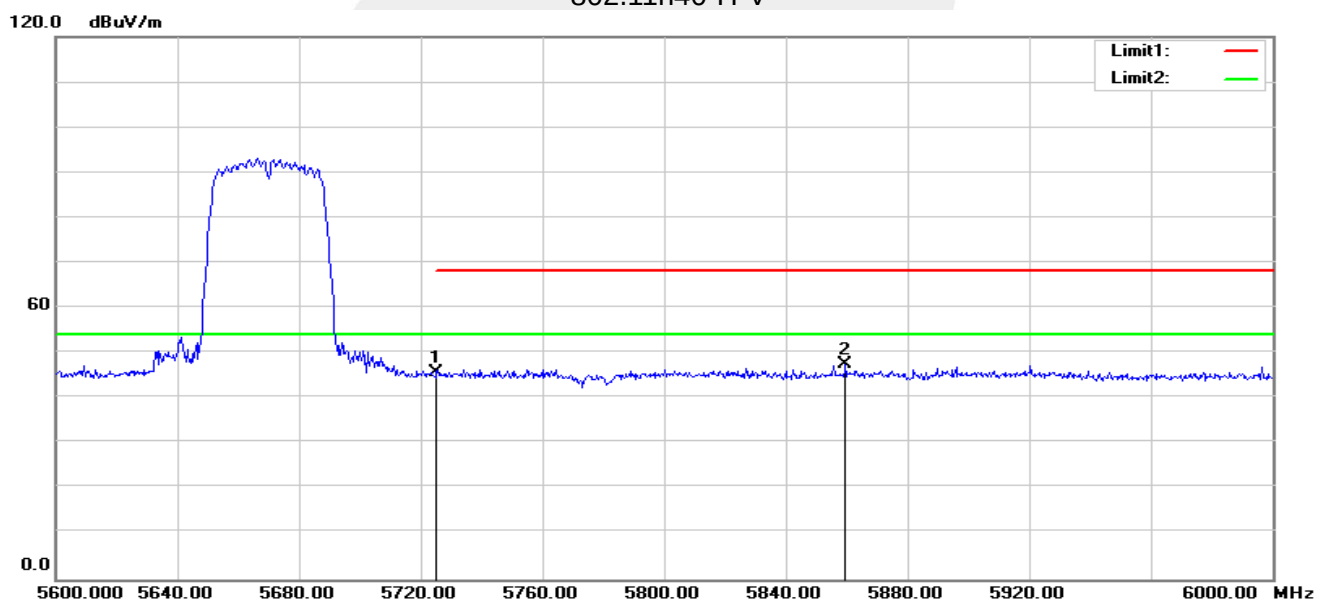

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	50.47	-4.57	45.90	68.20	-22.30	peak
2	5859.600	51.48	-4.05	47.43	68.20	-20.77	peak




802.11ac80-L-H

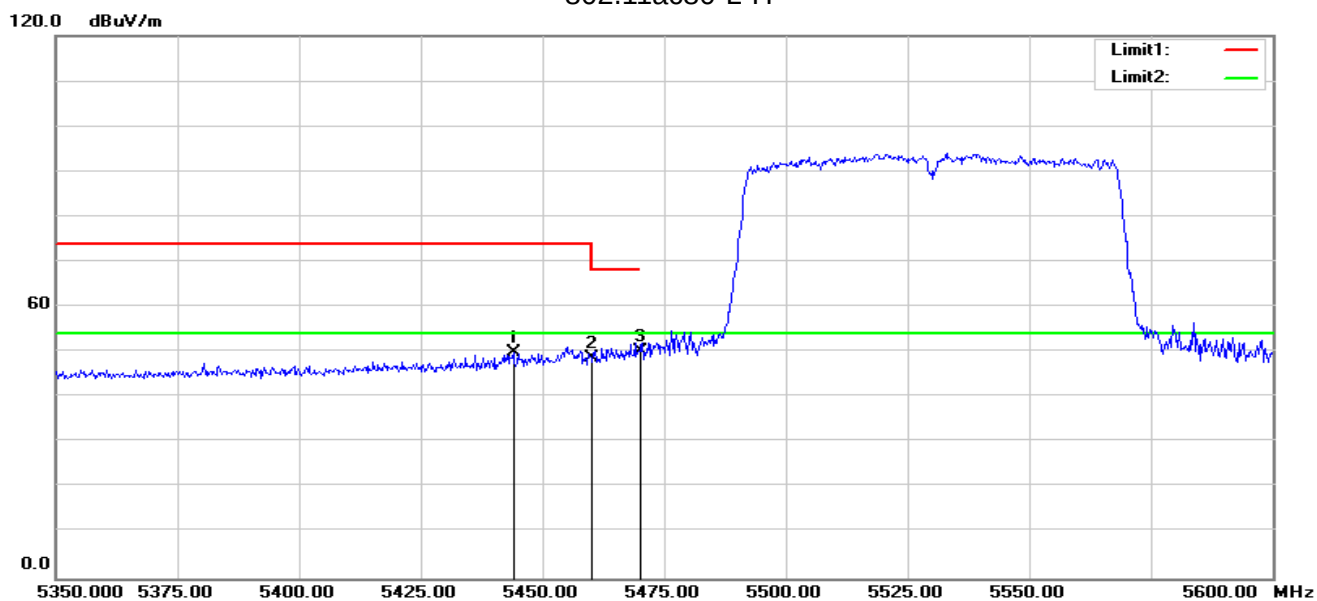

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5444.000	55.17	-5.14	50.03	74.00	-23.97	peak
2	5460.000	53.91	-5.11	48.80	68.20	-19.40	peak
3	5470.000	55.20	-5.09	50.11	68.20	-18.09	peak


802.11ac80-L-V

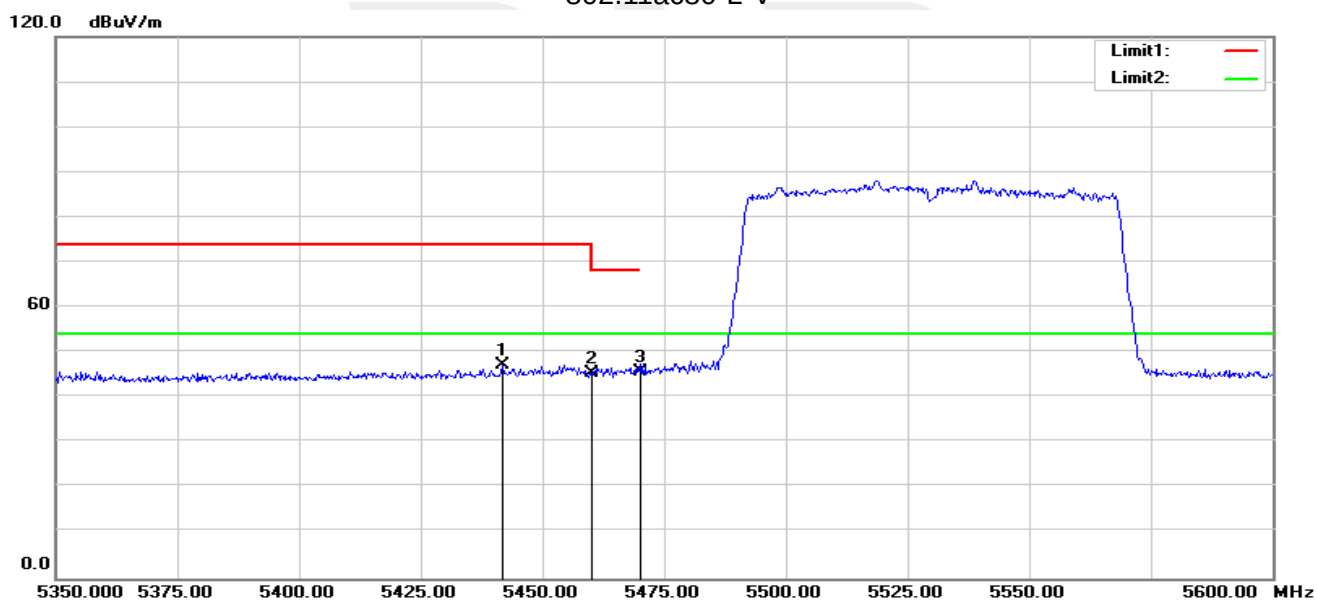

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5441.750	52.50	-5.16	47.34	74.00	-26.66	peak
2	5460.000	50.50	-5.11	45.39	68.20	-22.81	peak
3	5470.000	50.71	-5.09	45.62	68.20	-22.58	peak




802.11ac80-H-H

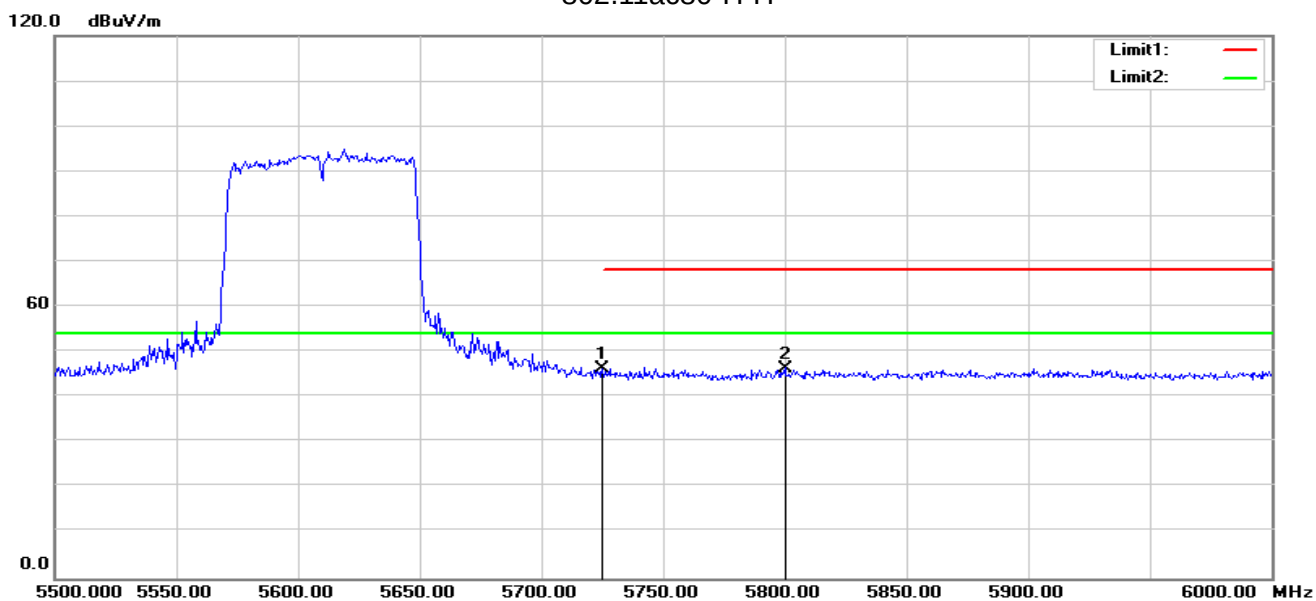

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	50.91	-4.57	46.34	68.20	-21.86	peak
2	5800.000	50.82	-4.32	46.50	68.20	-21.70	peak

802.11ac80-H-V

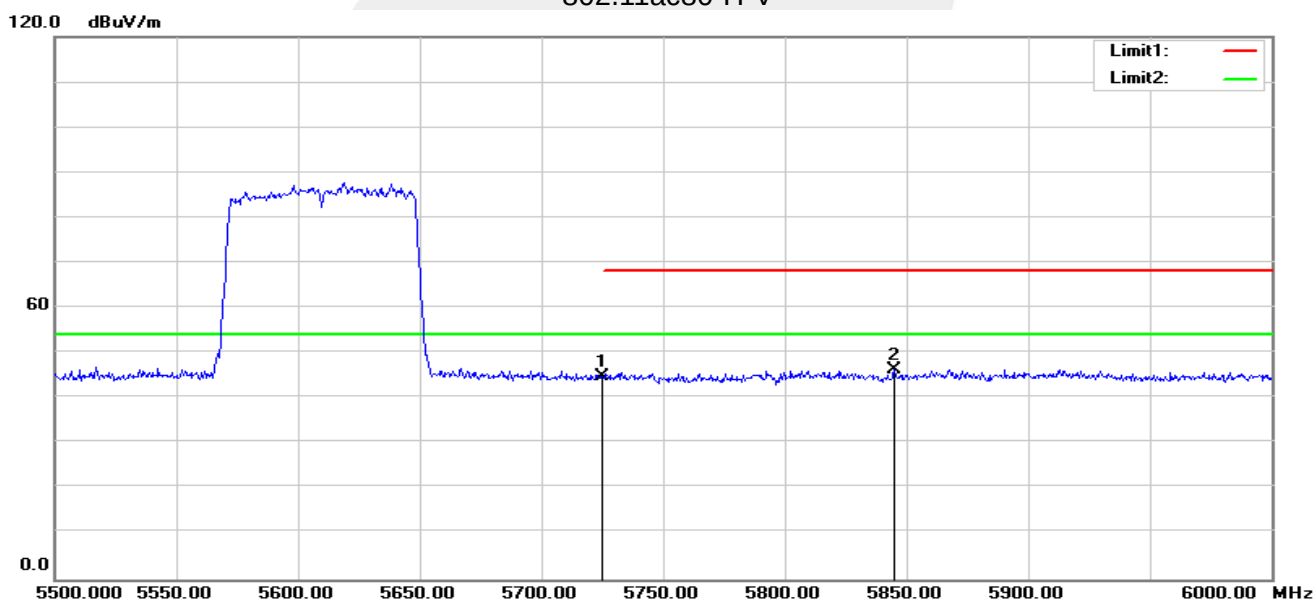


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	49.34	-4.57	44.77	68.20	-23.43	peak
2	5845.000	50.39	-4.12	46.27	68.20	-21.93	peak

Note: All modes have been tested. Only the worst mode shown in the report.



Band IV(5.725-5.85 GHz)


802.11n20-L-H

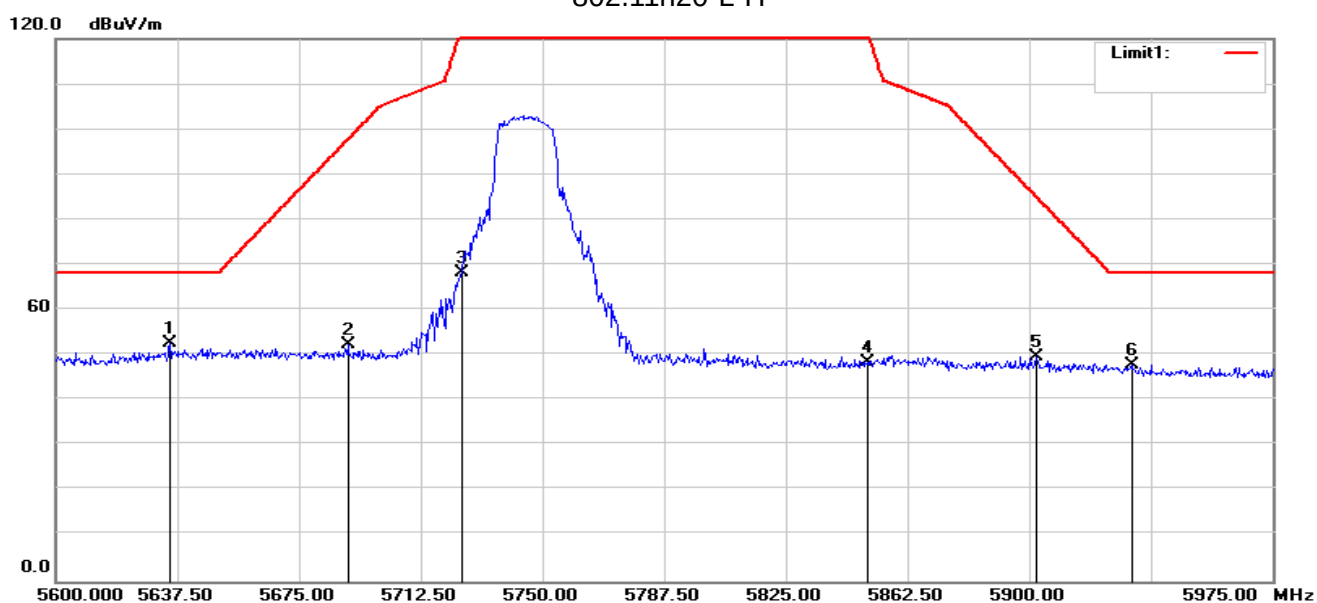

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5635.250	57.42	-4.68	52.74	68.20	-15.46	peak
2	5690.000	57.05	-4.67	52.38	97.80	-45.42	peak
3	5725.000	72.77	-4.57	68.20	122.20	-54.00	peak
4	5850.000	52.48	-4.10	48.38	122.20	-73.82	peak
5	5902.250	53.66	-3.89	49.77	85.03	-35.26	peak
6	5931.500	51.92	-3.93	47.99	68.20	-20.21	peak




802.11n20-L-V

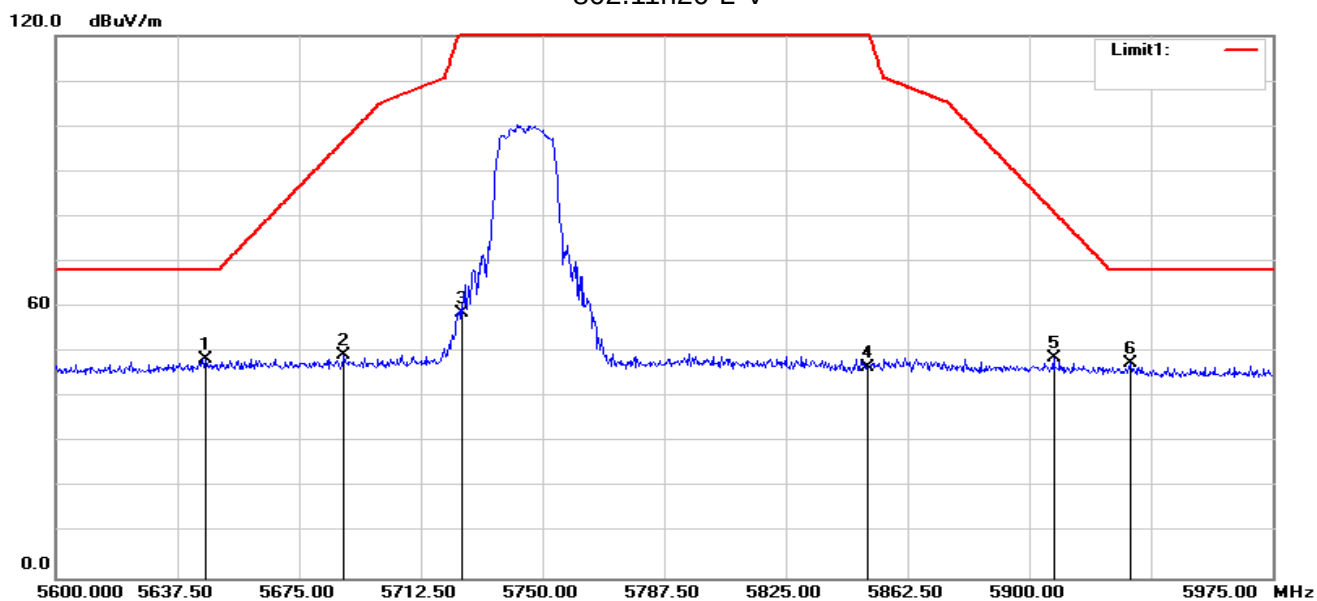

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5646.125	53.24	-4.69	48.55	68.20	-19.65	peak
2	5688.875	54.11	-4.67	49.44	96.97	-47.53	peak
3	5725.000	63.31	-4.57	58.74	122.20	-63.46	peak
4	5850.000	50.85	-4.10	46.75	122.20	-75.45	peak
5	5907.500	52.60	-3.89	48.71	81.15	-32.44	peak
6	5931.125	51.45	-3.93	47.52	68.20	-20.68	peak




802.11n20-H-H

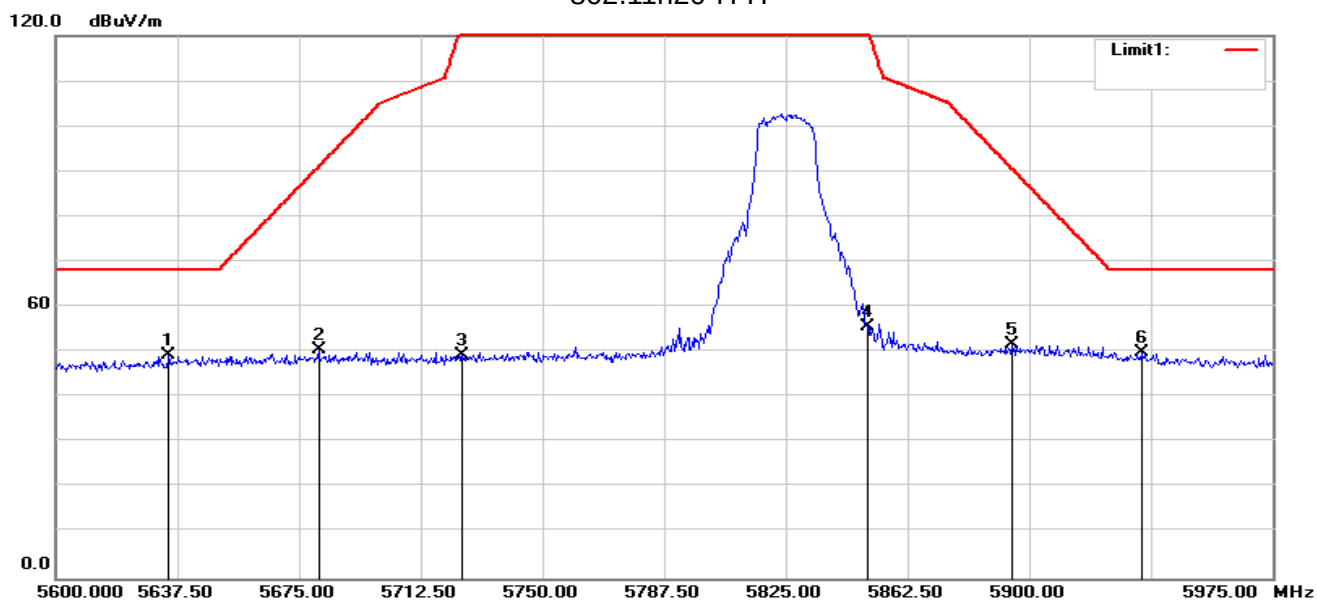

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5634.875	54.12	-4.68	49.44	68.20	-18.76	peak
2	5681.000	55.12	-4.67	50.45	91.14	-40.69	peak
3	5725.000	54.07	-4.57	49.50	122.20	-72.70	peak
4	5850.000	59.86	-4.10	55.76	122.20	-66.44	peak
5	5894.750	55.72	-3.90	51.82	90.59	-38.77	peak
6	5934.500	53.83	-3.93	49.90	68.20	-18.30	peak




802.11n20-H-V

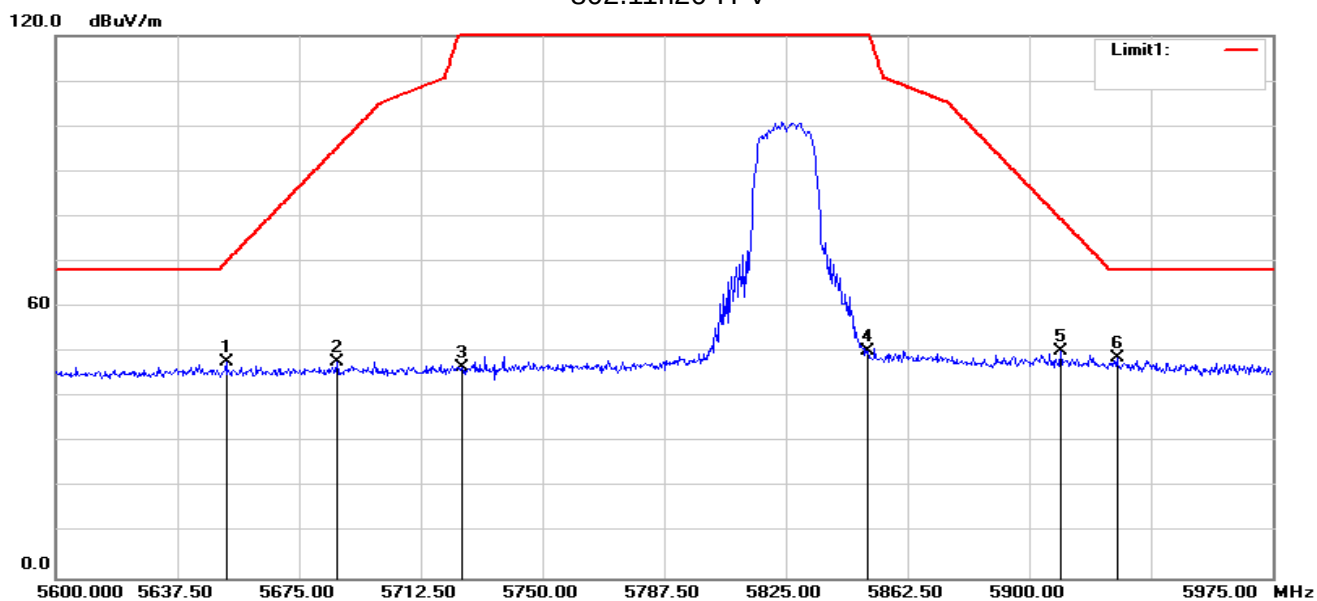

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5652.500	52.58	-4.68	47.90	70.05	-22.15	peak
2	5686.625	52.65	-4.66	47.99	95.30	-47.31	peak
3	5725.000	51.27	-4.57	46.70	122.20	-75.50	peak
4	5850.000	54.24	-4.10	50.14	122.20	-72.06	peak
5	5909.750	54.01	-3.89	50.12	79.48	-29.36	peak
6	5927.000	52.58	-3.93	48.65	68.20	-19.55	peak




802.11n40-L-H

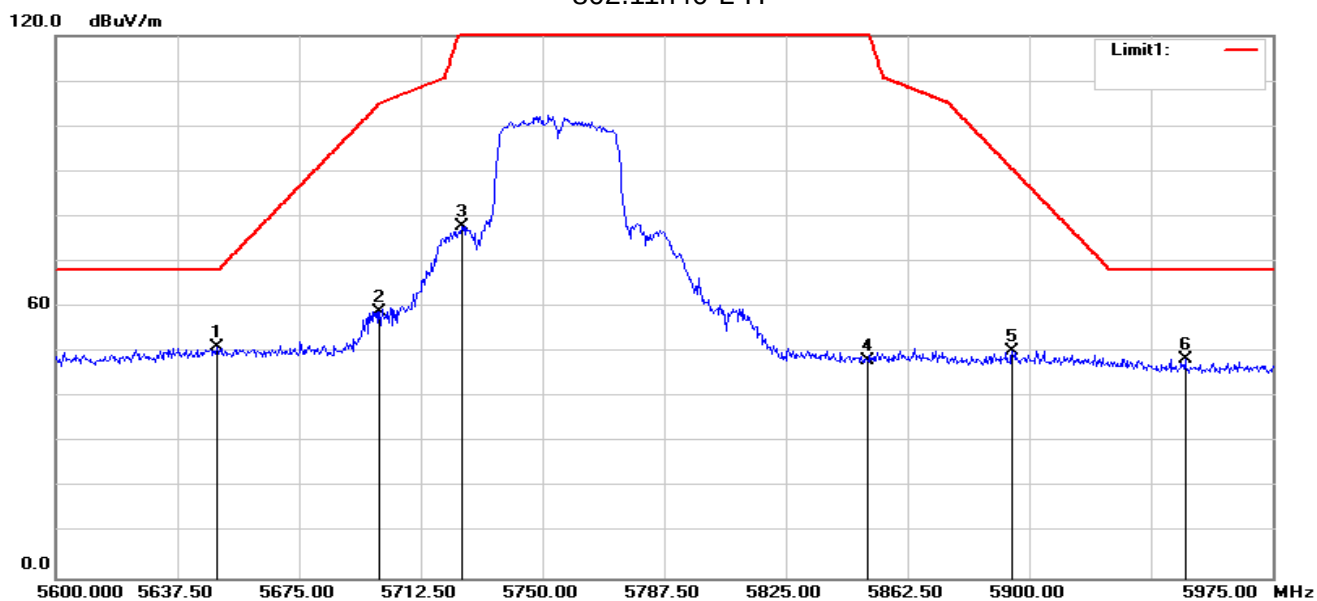

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5649.875	55.72	-4.68	51.04	68.20	-17.16	peak
2	5699.750	63.67	-4.66	59.01	105.02	-46.01	peak
3	5725.000	82.35	-4.57	77.78	122.20	-44.42	peak
4	5850.000	52.39	-4.10	48.29	122.20	-73.91	peak
5	5894.750	54.28	-3.90	50.38	90.59	-40.21	peak
6	5948.000	52.47	-3.96	48.51	68.20	-19.69	peak




802.11n40-L-V

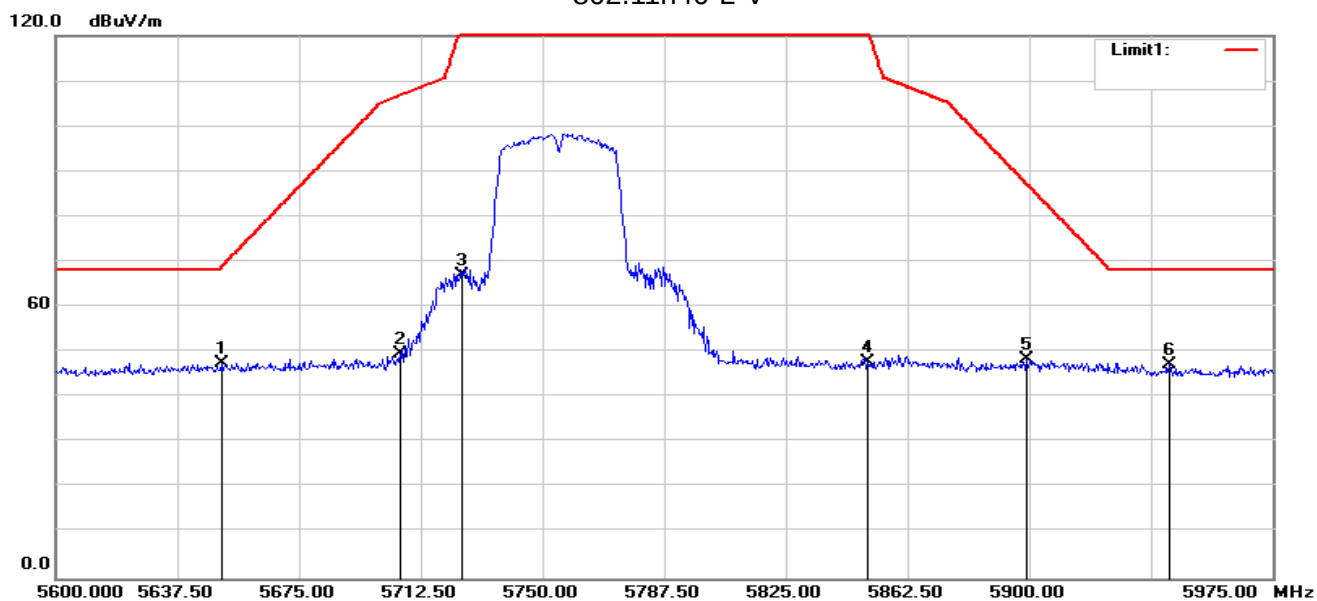

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5651.000	52.11	-4.68	47.43	68.94	-21.51	peak
2	5706.125	54.37	-4.64	49.73	106.92	-57.19	peak
3	5725.000	71.64	-4.57	67.07	122.20	-55.13	peak
4	5850.000	52.03	-4.10	47.93	122.20	-74.27	peak
5	5899.250	52.45	-3.88	48.57	87.26	-38.69	peak
6	5943.125	51.11	-3.95	47.16	68.20	-21.04	peak




802.11n40-H-H

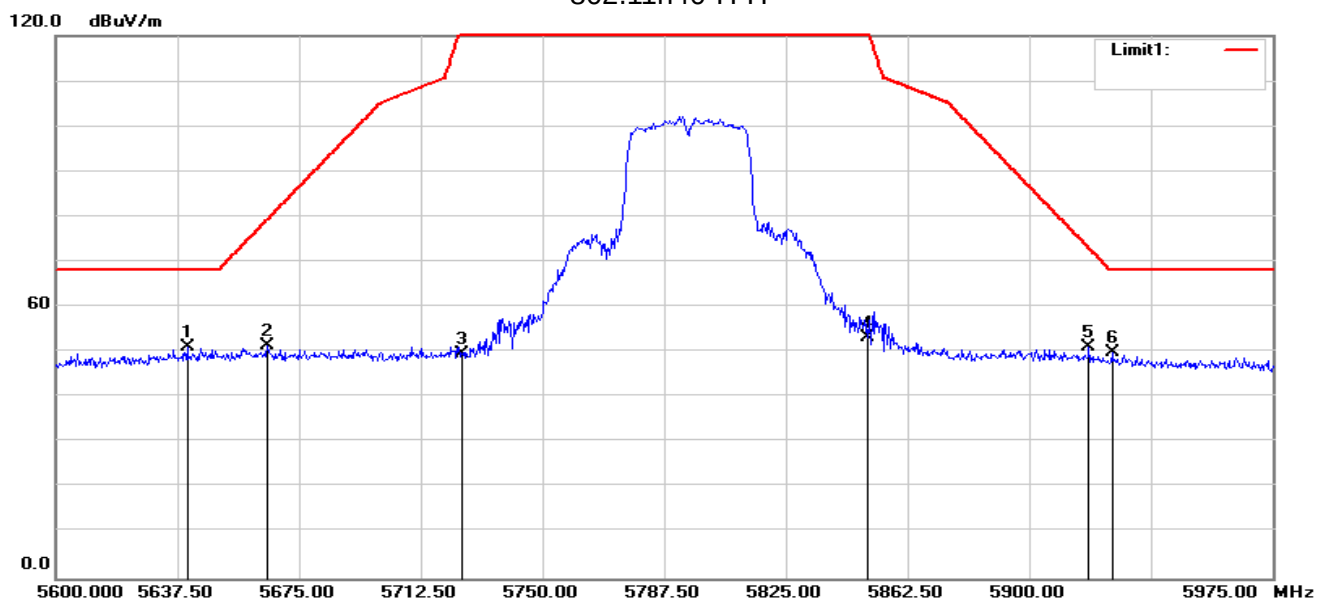

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.500	55.73	-4.69	51.04	68.20	-17.16	peak
2	5665.250	56.09	-4.68	51.41	79.48	-28.07	peak
3	5725.000	54.32	-4.57	49.75	122.20	-72.45	peak
4	5850.000	57.24	-4.10	53.14	122.20	-69.06	peak
5	5918.375	55.03	-3.91	51.12	73.10	-21.98	peak
6	5925.500	53.94	-3.92	50.02	68.20	-18.18	peak




802.11n40-H-V

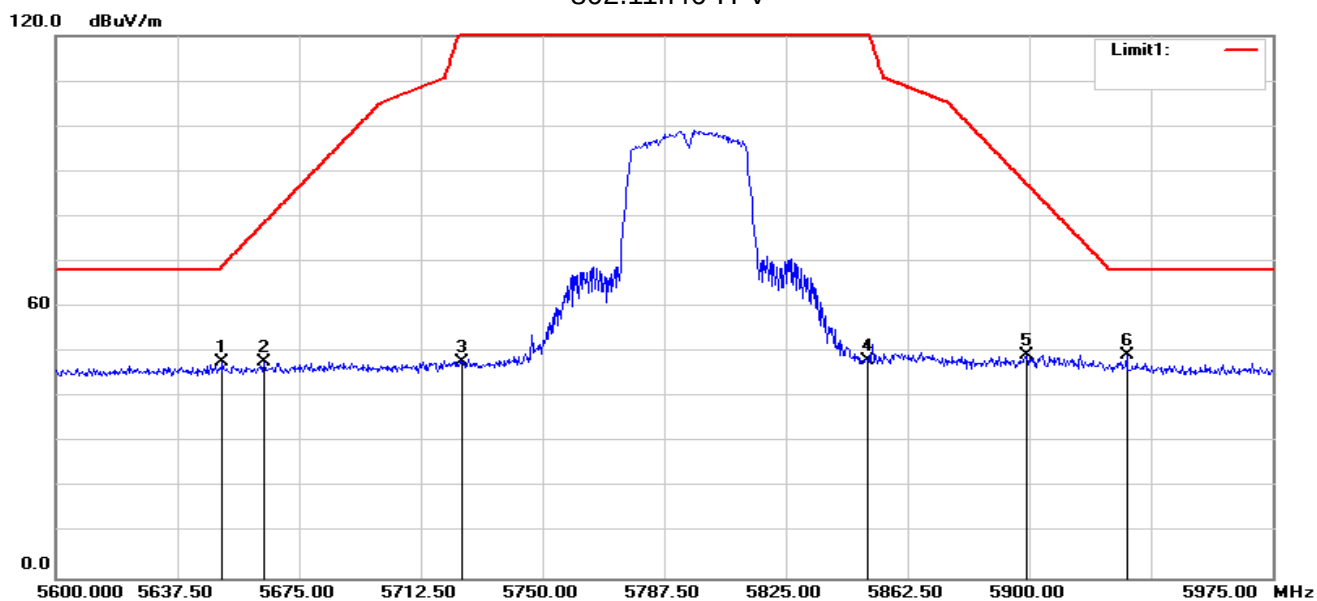

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5651.375	52.53	-4.68	47.85	69.22	-21.37	peak
2	5664.125	52.53	-4.68	47.85	78.65	-30.80	peak
3	5725.000	52.40	-4.57	47.83	122.20	-74.37	peak
4	5850.000	52.21	-4.10	48.11	122.20	-74.09	peak
5	5899.250	53.11	-3.88	49.23	87.26	-38.03	peak
6	5930.000	53.24	-3.93	49.31	68.20	-18.89	peak




802.11ac80-H

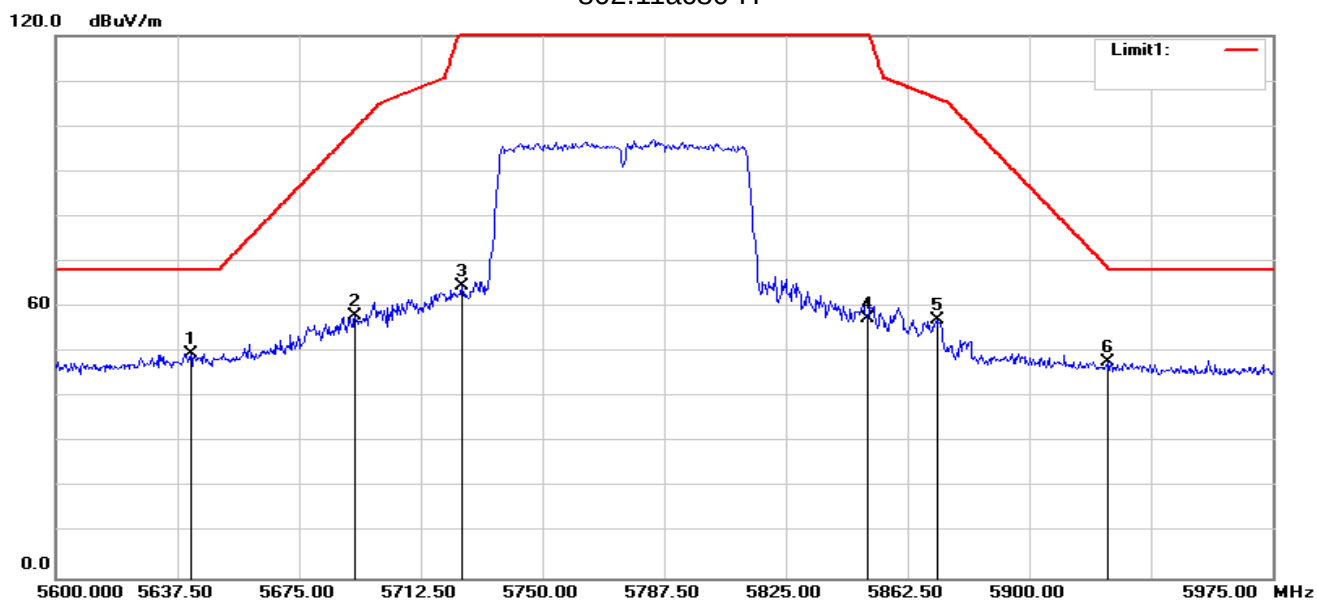

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5641.625	54.40	-4.68	49.72	68.20	-18.48	peak
2	5692.250	62.62	-4.66	57.96	99.47	-41.51	peak
3	5725.000	69.26	-4.57	64.69	122.20	-57.51	peak
4	5850.000	61.61	-4.10	57.51	122.20	-64.69	peak
5	5871.500	61.19	-4.01	57.18	106.18	-49.00	peak
6	5924.000	51.82	-3.92	47.90	68.94	-21.04	peak



802.11ac80-V

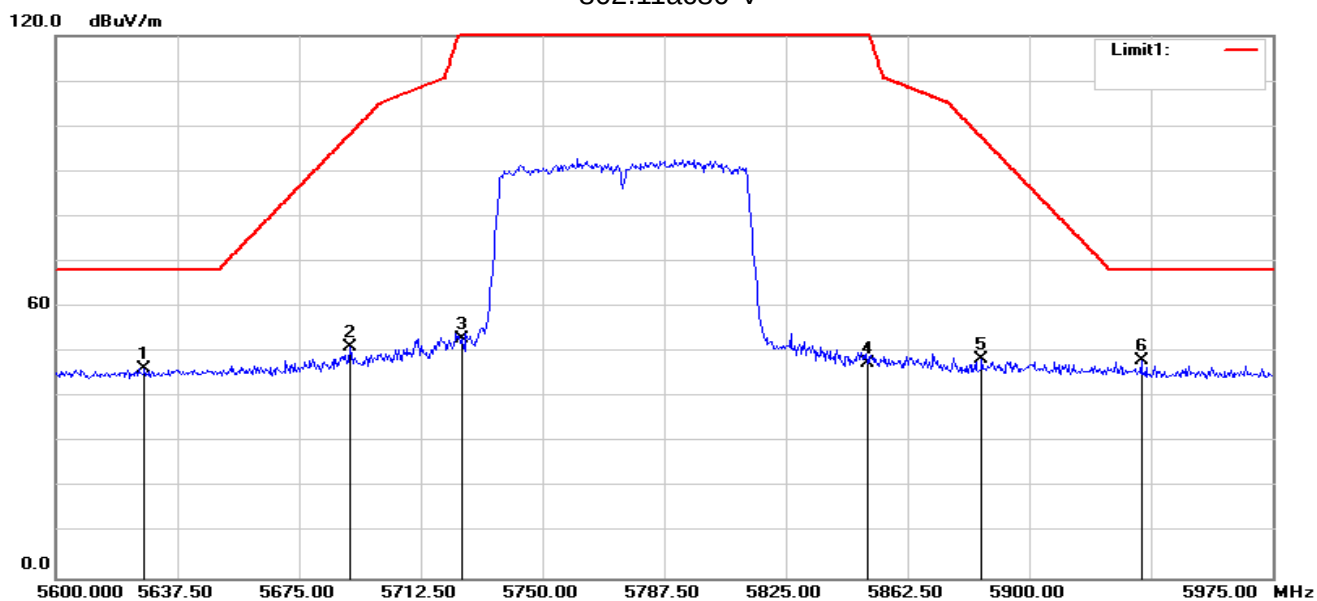

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5627.375	51.06	-4.69	46.37	68.20	-21.83	peak
2	5690.750	55.76	-4.66	51.10	98.36	-47.26	peak
3	5725.000	57.65	-4.57	53.08	122.20	-69.12	peak
4	5850.000	51.59	-4.10	47.49	122.20	-74.71	peak
5	5885.375	52.35	-3.94	48.41	97.52	-49.11	peak
6	5934.500	52.01	-3.93	48.08	68.20	-20.12	peak

Note: All modes have been tested. Only the worst mode shown in the report.



4. POWER SPECTRAL DENSITY TEST

4.1 LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHZ}$ is available on nearly all spectrum analyzers.



4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

5150-5250MHz								
Frequency	Direct measurement Ant_A Power Density (dBm)	Direct measurement Ant_B Power Density (dBm)	Duty cycle factor	Final Ant_A Power Density (dBm)	Final Ant_B Power Density (dBm)	Power Density Total (dBm)	Limit (dBm)	Result
802.11a								
5180	-0.177	0.212	0.074	-0.103	0.286	--	10.01	PASS
5200	-0.462	-0.183	0.074	-0.388	-0.109	--	10.01	PASS
5240	-0.136	-0.052	0.074	-0.062	0.022	--	10.01	PASS
802.11n20								
5180	-1.547	-1.426	0.069	-1.478	-1.357	1.593	7	PASS
5200	-1.637	-1.356	0.069	-1.568	-1.287	1.585	7	PASS
5240	-1.247	-1.120	0.069	-1.178	-1.051	1.896	7	PASS
802.11n40								
5190	-10.286	-5.413	0.156	-10.130	-5.257	-4.033	7	PASS
5230	-9.886	-5.004	0.156	-9.730	-4.848	-3.626	7	PASS
802.11ac20								
5180	-1.607	-1.133	0.186	-1.421	-0.947	1.833	7	PASS
5200	-1.648	-1.080	0.186	-1.462	-0.894	1.841	7	PASS
5240	-1.306	-1.093	0.186	-1.120	-0.907	1.998	7	PASS
802.11ac40								
5190	-10.998	-6.948	0.231	-10.767	-6.717	-5.276	7	PASS
5230	-10.608	-6.441	0.231	-10.377	-6.210	-4.801	7	PASS
802.11ac80								
5210	-16.780	-11.985	2.207	-14.573	-9.778	-8.534	7	PASS



5250-5350MHz								
Frequency	Direct measurement Ant_A Power Density (dBm)	Direct measurement Ant_B Power Density (dBm)	Ant_A Duty cycle factor	Final Ant_A Power Density (dBm)	Final Ant_B Power Density (dBm)	Power Density Total (dBm)	Limit (dBm)	Result
802.11a								
5260	0.214	0.675	0.074	0.288	0.749	--	10.01	PASS
5300	0.232	0.649	0.074	0.306	0.723	--	10.01	PASS
5320	0.220	0.869	0.074	0.294	0.943	--	10.01	PASS
802.11n20								
5260	-1.329	-0.203	0.089	-1.240	-0.114	2.369	7	PASS
5300	-1.096	-0.455	0.089	-1.007	-0.366	2.335	7	PASS
5320	-1.014	-0.277	0.089	-0.925	-0.188	2.469	7	PASS
802.11n40								
5270	-5.049	-4.807	0.103	-4.946	-4.704	-1.813	7	PASS
5310	-5.297	-4.530	0.103	-5.194	-4.427	-1.783	7	PASS
802.11ac20								
5260	-1.126	-0.639	0.148	-0.978	-0.491	2.283	7	PASS
5300	-1.055	-0.224	0.148	-0.907	-0.076	2.539	7	PASS
5320	-0.903	-0.290	0.148	-0.755	-0.142	2.573	7	PASS
802.11ac40								
5270	-7.072	-6.742	0.325	-6.747	-6.417	-3.568	7	PASS
5310	-6.899	-6.527	0.325	-6.574	-6.202	-3.373	7	PASS
802.11ac80								
5290	-12.232	-11.452	2.108	-10.124	-9.344	-6.707	7	PASS



5470-5725MHz								
Frequency	Direct measurement Ant_A Power Density (dBm)	Direct measurement Ant_B Power Density (dBm)	Ant_A Duty cycle factor	Final Ant_A Power Density (dBm)	Final Ant_B Power Density (dBm)	Power Density Total (dBm)	Limit (dBm)	Result
802.11a								
5500	-0.490	0.520	0.037	-0.453	0.557	--	10.01	PASS
5580	-1.452	0.221	0.037	-1.415	0.258	--	10.01	PASS
5700	-1.252	-0.204	0.037	-1.215	-0.167	--	10.01	PASS
802.11n20								
5500	-2.486	-0.312	0.079	-2.407	-0.233	1.825	7	PASS
5580	-2.547	-0.241	0.079	-2.468	-0.162	1.846	7	PASS
5700	-2.584	-0.920	0.079	-2.505	-0.841	1.416	7	PASS
802.11n40								
5510	-5.665	-3.791	0.157	-5.508	-3.634	-1.461	7	PASS
5550	-5.536	-3.526	0.157	-5.379	-3.369	-1.249	7	PASS
5670	-7.691	-4.885	0.157	-7.534	-4.728	-2.898	7	PASS
802.11ac20								
5500	-2.581	-0.471	0.161	-2.420	-0.310	1.772	7	PASS
5580	-2.577	-0.500	0.161	-2.416	-0.339	1.756	7	PASS
5700	-2.562	-1.110	0.161	-2.401	-0.949	1.396	7	PASS
802.11ac40								
5510	-7.317	-5.377	0.351	-6.966	-5.026	-2.878	7	PASS
5550	-7.173	-5.137	0.351	-6.822	-4.786	-2.675	7	PASS
5670	-9.172	-6.345	0.351	-8.821	-5.994	-4.171	7	PASS
802.11ac80								
5530	-15.771	-13.835	2.052	-13.719	-11.783	-9.633	7	PASS
5610	-16.658	-14.198	2.052	-14.606	-12.146	-10.193	7	PASS



5725-5850MHz										
Frequency	Use RBW 510KHz direct measurement Ant_A Power Density (dBm)	Use RBW 510KHz direct measurement Ant_B Power Density (dBm)	Convert to RBW 500KHz direct measurement Ant_A Power Density (dBm)	Convert to RBW 500KHz direct measurement Ant_B Power Density (dBm)	Duty cycle factor (dB)	Final Ant_A Power Density (dBm)	Final Ant_B Power Density (dBm)	Power Density Total (dBm)	Limit (dBm)	Result
802.11a										
5745	-3.003	-1.885	-3.089	-1.971	0.086	-3.003	-1.885	--	29.01	PASS
5785	-3.185	-2.028	-3.271	-2.114	0.086	-3.185	-2.028	--	29.01	PASS
5825	-3.747	-1.914	-3.833	-2.000	0.086	-3.747	-1.914	--	29.01	PASS
802.11n20										
5745	-4.185	-2.530	-4.271	-2.616	0.079	-4.192	-2.537	-0.276	26	PASS
5785	-4.484	-2.863	-4.570	-2.949	0.079	-4.491	-2.870	-0.595	26	PASS
5825	-5.007	-3.167	-5.093	-3.253	0.079	-5.014	-3.174	-0.987	26	PASS
802.11n40										
5755	-8.286	-6.102	-8.372	-6.188	0.168	-8.204	-6.020	-3.966	26	PASS
5795	-7.764	-6.306	-7.850	-6.392	0.168	-7.682	-6.224	-3.882	26	PASS
802.11ac20										
5745	-4.340	-2.860	-4.426	-2.946	0.186	-4.240	-2.760	-0.427	26	PASS
5785	-4.706	-3.169	-4.792	-3.255	0.186	-4.606	-3.069	-0.759	26	PASS
5825	-4.997	-2.853	-5.083	-2.939	0.186	-4.897	-2.753	-0.683	26	PASS
802.11ac40										
5755	-8.716	-7.230	-8.802	-7.316	0.316	-8.486	-7.000	-4.670	26	PASS
5795	-8.470	-7.724	-8.556	-7.810	0.316	-8.240	-7.494	-4.841	26	PASS
802.11ac80										
5775	-16.072	-12.570	-16.158	-12.656	2.153	-14.005	-10.503	-8.900	26	PASS

Note: 1. RB conversion formula: $10 \cdot \log(500\text{KHz}/\text{RBW})$

2. Test plots see Attachment A.

3. SISO antenna gain is 6.99dBi, MIMO antenna gain is 10dBi, both are greater than 6dBi, so the limit of SISO mode will be reduced by 0.99dBi, and the limit of MIMO mode will be reduced by 4dBi.

5. BANDWIDTH MEASUREMENT

5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

The following procedure shall be used for measuring 26 bandwidth.

5.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW $\geq$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.1.5 TEST RESULTS**

Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5180	19.57	Pass
5200	19.70	Pass
5240	19.68	Pass
802.11n(HT20)		
5180	19.94	Pass
5200	19.99	Pass
5240	19.91	Pass
802.11n(HT40)		
5190	39.87	Pass
5230	39.81	Pass
802.11ac(VHT20)		
5180	19.89	Pass
5200	19.97	Pass
5240	19.87	Pass
802.11ac(VHT40)		
5190	40.39	Pass
5230	39.88	Pass
802.11ac(VHT80)		
5210	79.76	Pass

Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5260	19.57	Pass
5300	19.66	Pass
5320	19.62	Pass
802.11n(HT20)		
5260	19.91	Pass
5300	19.83	Pass
5320	19.88	Pass
802.11n(HT40)		
5270	39.82	Pass
5310	39.74	Pass
802.11ac(VHT20)		
5260	19.86	Pass
5300	19.90	Pass
5320	19.82	Pass
802.11ac(VHT40)		
5270	39.99	Pass
5310	39.96	Pass
802.11ac(VHT80)		
5290	80.26	Pass



Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5500	19.63	Pass
5580	19.59	Pass
5700	19.50	Pass
802.11n(HT20)		
5500	19.78	Pass
5580	19.65	Pass
5700	19.87	Pass
802.11n(HT40)		
5510	39.87	Pass
5550	40.00	Pass
5670	40.02	Pass
802.11ac(VHT20)		
5500	19.94	Pass
5580	19.83	Pass
5700	19.90	Pass
802.11ac(VHT40)		
5510	39.82	Pass
5550	40.12	Pass
5670	39.96	Pass
802.11ac(VHT80)		
5530	79.63	Pass
5610	80.42	Pass

Frequency (MHz)	26dB Bandwidth (MHz)	Pass/Fail
802.11a		
5745	19.53	Pass
5785	19.62	Pass
5825	19.75	Pass
802.11n(HT20)		
5745	19.88	Pass
5785	19.75	Pass
5825	19.85	Pass
802.11n(HT40)		
5755	39.88	Pass
5795	39.79	Pass
802.11ac(VHT20)		
5745	19.72	Pass
5785	19.75	Pass
5825	19.78	Pass
802.11ac(VHT40)		
5755	39.92	Pass
5795	39.89	Pass
802.11ac(VHT80)		
5775	80.34	Pass

Note:

1. Antenna B Power > Antenna A Power, Both antenna A and B have been test, Only show the worst data of Antenna B.
2. Test plot see Attachment B.

5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth.

5.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

5.2.2 DEVIATION FROM STANDARD

No deviation.

5.2.3 TEST SETUP



5.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.2.5 TEST RESULTS**

Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5180	16.443	Pass
5200	16.432	Pass
5240	16.441	Pass
802.11n(HT20)		
5180	17.522	Pass
5200	17.533	Pass
5240	17.542	Pass
802.11n(HT40)		
5190	36.146	Pass
5230	36.139	Pass
802.11ac(VHT20)		
5180	17.501	Pass
5200	17.511	Pass
5240	17.503	Pass
802.11ac(VHT40)		
5190	36.053	Pass
5230	36.035	Pass
802.11ac(VHT80)		
5210	75.774	Pass

Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5260	16.448	Pass
5300	16.440	Pass
5320	16.436	Pass
802.11n(HT20)		
5260	17.502	Pass
5300	17.494	Pass
5320	17.496	Pass
802.11n(HT40)		
5270	36.130	Pass
5310	36.131	Pass
802.11ac(VHT20)		
5260	17.539	Pass
5300	17.547	Pass
5320	17.547	Pass
802.11ac(VHT40)		
5270	36.062	Pass
5310	36.069	Pass
802.11ac(VHT80)		
5290	75.723	Pass



Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5500	16.451	Pass
5580	16.453	Pass
5700	16.437	Pass
802.11n(HT20)		
5500	17.481	Pass
5580	17.500	Pass
5700	17.495	Pass
802.11n(HT40)		
5510	36.124	Pass
5550	36.097	Pass
5670	36.166	Pass
802.11ac(VHT20)		
5500	17.547	Pass
5580	17.540	Pass
5700	17.533	Pass
802.11ac(VHT40)		
5510	36.014	Pass
5550	36.012	Pass
5670	36.062	Pass
802.11ac(VHT80)		
5530	75.638	Pass
5610	75.855	Pass

Frequency (MHz)	99% Bandwidth (MHz)	Pass/Fail
802.11a		
5745	16.392	Pass
5785	16.439	Pass
5825	16.418	Pass
802.11n(HT20)		
5745	17.487	Pass
5785	17.494	Pass
5825	17.488	Pass
802.11n(HT40)		
5755	36.125	Pass
5795	36.124	Pass
802.11ac(VHT20)		
5745	17.535	Pass
5785	17.526	Pass
5825	17.537	Pass
802.11ac(VHT40)		
5755	36.020	Pass
5795	36.038	Pass
802.11ac(VHT80)		
5775	75.754	Pass

Note:

1. Antenna B Power > Antenna A Power, Both antenna A and B have been test, Only show the worst data of Antenna B.
2. Test plot see Attachment B.

5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth.

5.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.
 - a) Set RBW = 100 kHz.
 - b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - c) Detector = Peak.
 - d) Trace mode = max hold.
 - e) Sweep = auto couple.
 - f) Allow the trace to stabilize.
 - g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.2 DEVIATION FROM STANDARD

No deviation.

5.3.3 TEST SETUP



5.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.3.5 TEST RESULTS**

Frequency (MHz)	6dB Bandwidth (MHz)	Pass/Fail
802.11a		
5745	15.08	Pass
5785	15.10	Pass
5825	15.10	Pass
802.11n(HT20)		
5745	16.29	Pass
5785	16.31	Pass
5825	16.31	Pass
802.11n(HT40)		
5755	35.70	Pass
5795	35.70	Pass
802.11ac(VHT20)		
5745	15.12	Pass
5785	15.12	Pass
5825	15.12	Pass
802.11ac(VHT40)		
5755	35.13	Pass
5795	35.12	Pass
802.11ac(VHT80)		
5775	76.39	Pass

Note:

1. Antenna B Power > Antenna A Power, Both antenna A and B have been test, Only show the worst data of Antenna B.
2. Test plot see Attachment C

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Peak Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or 11 dBm + 10 log (26 dB emission bandwidth)	5250-5350 5470-5725	
15.407(a) (3)		1 watt	5725-5825	


6.2 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

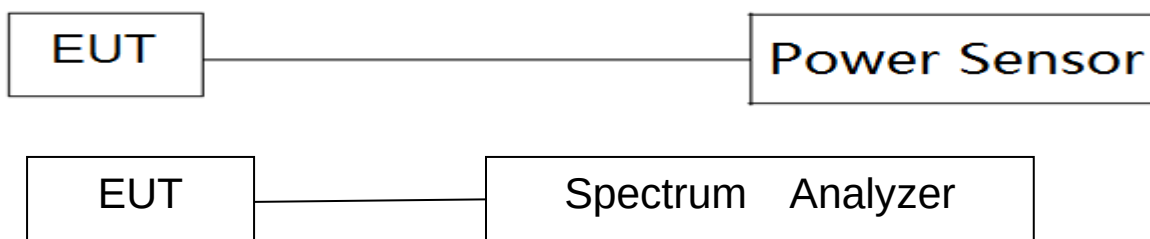

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.



6.6 TEST RESULTS

Band I (5.15-5.25GHz)								
Test Channel	Frequency (MHz)	Direct measurement Ant_A AV Power (dBm)	Direct measurement Ant B_AV Power (dBm)	Duty cycle factor (dB)	Final Ant_A AV Power (dBm)	Final Ant_B AV Power (dBm)	AV Power Total (dBm)	LIMIT (dBm)
802.11a								
36	5180	9.69	10.19	0.074	9.76	10.26	--	22.99
40	5200	9.67	10.30	0.074	9.74	10.37	--	22.99
48	5240	9.83	10.47	0.074	9.90	10.54	--	22.99
802.11n(HT20)								
36	5180	8.51	9.48	0.069	8.58	9.55	12.10	19.98
40	5200	8.61	9.57	0.069	8.68	9.64	12.20	19.98
48	5240	8.80	9.79	0.069	8.87	9.86	12.40	19.98
802.11n(HT40)								
38	5190	7.81	8.52	0.156	7.97	8.68	11.35	19.98
46	5230	7.97	8.56	0.156	8.13	8.72	11.44	19.98
802.11ac(VHT20)								
36	5180	8.53	9.31	0.186	8.72	9.50	12.13	19.98
40	5200	8.60	9.23	0.186	8.79	9.42	12.12	19.98
48	5240	8.70	9.53	0.186	8.89	9.72	12.33	19.98
802.11ac(VHT40)								
38	5190	6.21	6.95	0.231	6.44	7.18	9.84	19.98
46	5230	6.32	6.97	0.231	6.55	7.20	9.90	19.98
802.11ac(VHT80)								
42	5210	4.73	4.83	2.207	6.94	7.04	10.00	19.98




Band II(5.25-5.35GHz)								
Test Channel	Frequency (MHz)	Direct measurement Ant_A AV Power (dBm)	Direct measurement Ant_B_AV Power (dBm)	Duty cycle factor (dB)	Final Ant_A AV Power (dBm)	Final Ant_B AV Power (dBm)	AV Power Total (dBm)	LIMIT (dBm)
802.11a								
52	5260	10.00	10.88	0.074	10.07	10.95	--	22.93
60	5300	10.02	11.16	0.074	10.09	11.23	--	22.95
64	5320	10.08	11.13	0.074	10.15	11.20	--	22.94
802.11n(HT20)								
52	5260	8.84	10.12	0.089	8.93	10.21	12.63	19.98
60	5300	9.06	10.38	0.089	9.15	10.47	12.87	19.97
64	5320	9.01	10.42	0.089	9.10	10.51	12.87	19.98
802.11n(HT40)								
54	5270	8.14	9.12	0.103	8.24	9.22	11.77	19.98
62	5310	8.24	9.41	0.103	8.34	9.51	11.98	19.98
802.11ac(VHT20)								
52	5260	8.80	9.85	0.148	8.95	10.00	12.52	19.98
60	5300	8.95	10.09	0.148	9.10	10.24	12.72	19.98
64	5320	8.98	10.11	0.148	9.13	10.26	12.74	19.97
802.11ac(VHT40)								
54	5270	6.46	7.39	0.325	6.79	7.72	10.29	19.98
62	5310	6.52	7.74	0.325	6.85	8.07	10.51	19.98
802.11ac(VHT80)								
58	5290	5.22	5.42	2.108	7.33	7.53	10.44	19.98




Band III(5.47-5.725GHz)								
Test Channel	Frequency (MHz)	Direct measurement Ant_A AV Power (dBm)	Direct measurement Ant_B_AV Power (dBm)	Duty cycle factor (dB)	Final Ant_A AV Power (dBm)	Final Ant_B AV Power (dBm)	AV Power Total (dBm)	LIMIT (dBm)
802.11a								
100	5500	8.92	11.11	0.037	8.96	11.15	--	22.94
116	5580	8.65	10.90	0.037	8.69	10.94	--	22.93
140	5700	8.88	10.46	0.037	8.92	10.50	--	22.91
802.11n(HT20)								
100	5500	7.80	10.42	0.079	7.88	10.50	12.39	19.96
116	5580	7.67	9.71	0.079	7.75	9.79	11.90	19.93
140	5700	7.92	9.70	0.079	8.00	9.78	11.99	19.98
802.11n(HT40)								
102	5510	8.06	8.64	0.157	8.22	8.80	11.53	19.98
110	5550	8.16	9.30	0.157	8.32	9.46	11.93	19.98
134	5670	6.60	9.23	0.157	6.76	9.39	11.28	19.98
802.11ac(VHT20)								
100	5500	7.96	9.96	0.161	8.12	10.12	12.25	19.98
116	5580	7.63	9.82	0.161	7.79	9.98	12.03	19.97
140	5700	7.89	9.41	0.161	8.05	9.57	11.89	19.98
802.11ac(VHT40)								
102	5510	6.41	8.68	0.351	6.76	9.03	11.05	19.98
110	5550	6.55	8.46	0.351	6.90	8.81	10.97	19.98
134	5670	5.05	7.63	0.351	5.40	7.98	9.89	19.98
802.11ac(VHT80)								
106	5530	3.07	3.82	2.052	5.12	5.87	8.52	19.98
122	5610	1.97	2.96	2.052	4.02	5.01	7.56	19.98




Band IV (5.725-5.85GHz)								
Test Channel	Frequency (MHz)	Direct measurement Ant_A AV Power (dBm)	Direct measurement Ant_B_AV Power (dBm)	Duty cycle factor (dB)	Final Ant_A AV Power (dBm)	Final Ant_B AV Power (dBm)	AV Power Total (dBm)	LIMIT (dBm)
802.11a								
149	5745	10.06	11.53	0.086	10.15	11.62	--	29.01
157	5785	9.85	11.24	0.086	9.94	11.33	--	29.01
165	5825	9.33	11.17	0.086	9.42	11.26	--	29.01
802.11n(HT20)								
149	5745	9.08	10.73	0.079	9.16	10.81	13.072	26.00
157	5785	8.57	10.44	0.079	8.65	10.52	12.694	26.00
165	5825	8.32	10.54	0.079	8.40	10.62	12.659	26.00
802.11n(HT40)								
151	5755	9.09	10.45	0.168	9.26	10.62	13.002	26.00
159	5795	8.94	10.26	0.168	9.11	10.43	12.829	26.00
802.11ac(VHT20)								
149	5745	8.86	10.42	0.186	9.05	10.61	12.906	26.00
157	5785	8.66	10.16	0.186	8.85	10.35	12.671	26.00
165	5825	8.29	10.21	0.186	8.48	10.40	12.552	26.00
802.11ac(VHT40)								
151	5755	7.90	9.20	0.316	8.22	9.52	11.925	26.00
159	5795	7.71	9.03	0.316	8.03	9.35	11.746	26.00
802.11ac(VHT80)								
155	5775	4.84	5.63	2.153	6.99	7.78	10.416	26.00

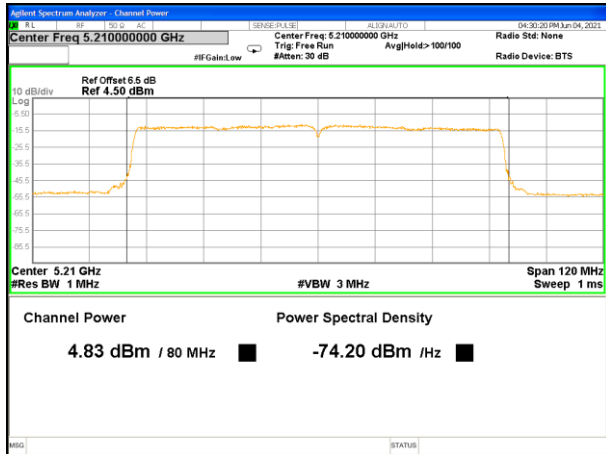


5210MHz_AV_Ant B

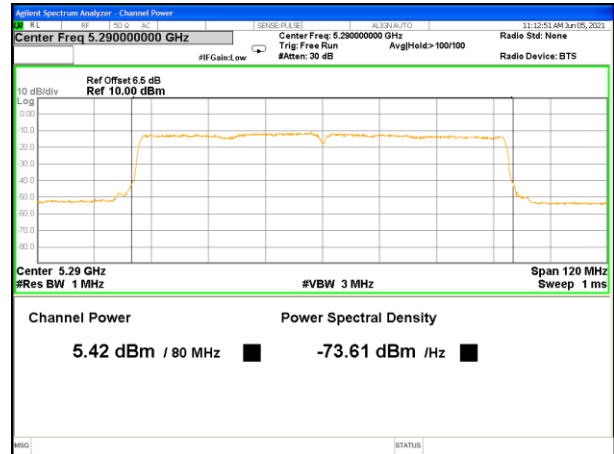


5290MHz_AV_Ant B

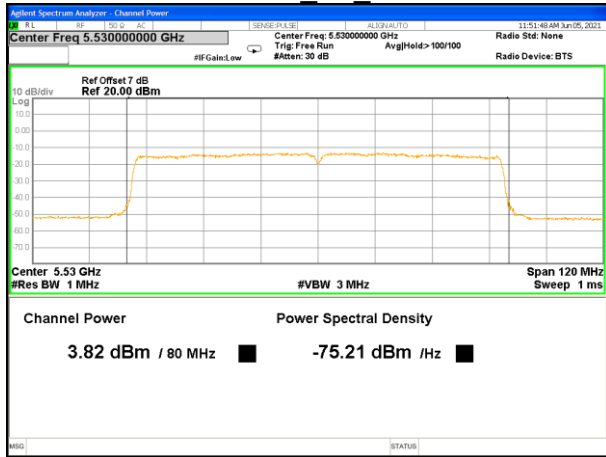


5530MHz_AV_Ant B

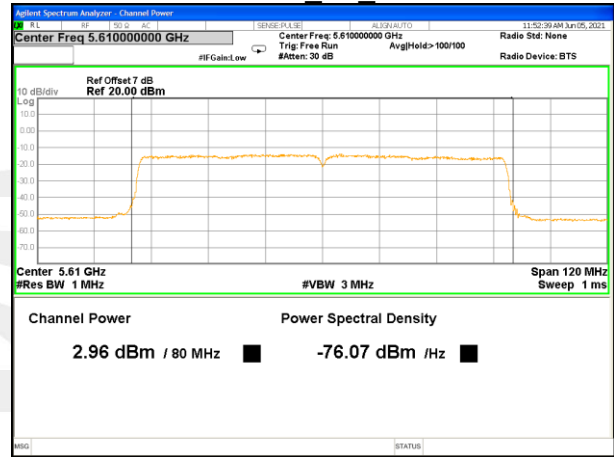


5610MHz_AV_Ant B

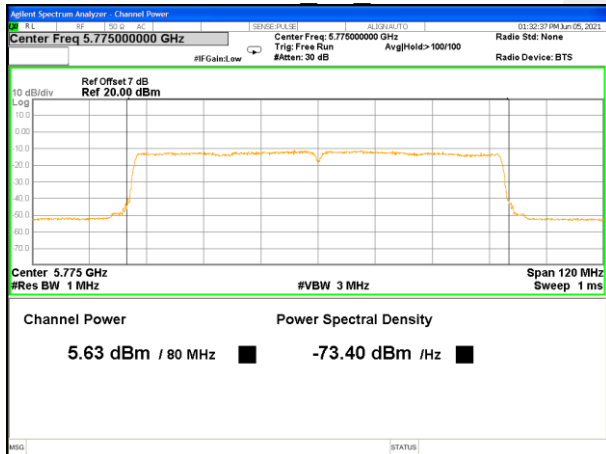


5775MHz_AV_Ant B

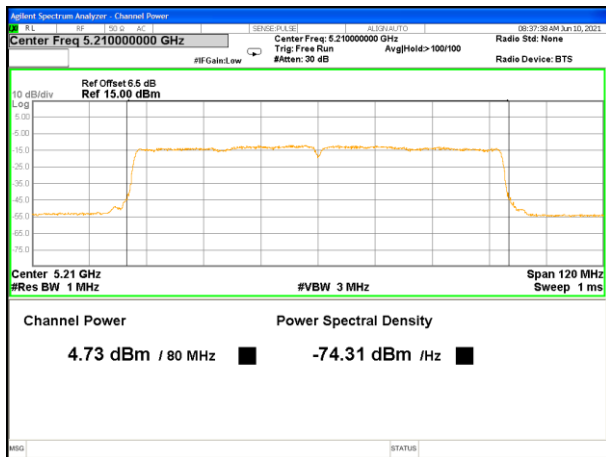


5210MHz_AV_Ant A

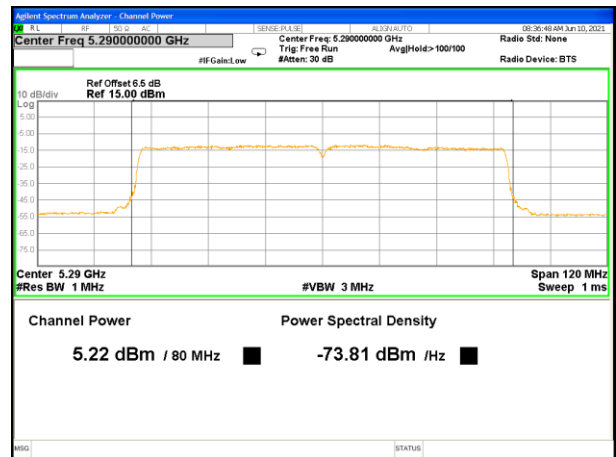


5290MHz_AV_Ant A

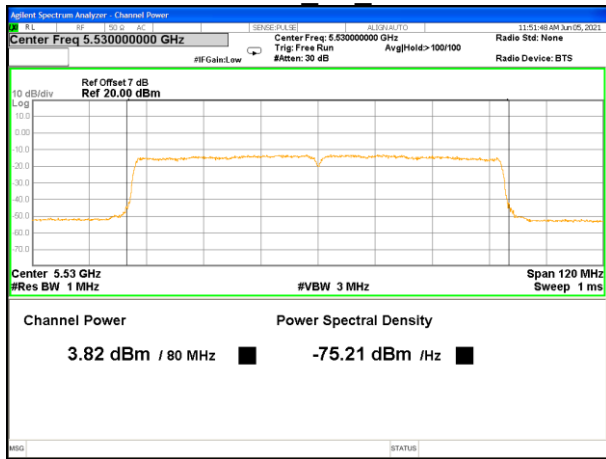

5530MHz_AV_Ant A

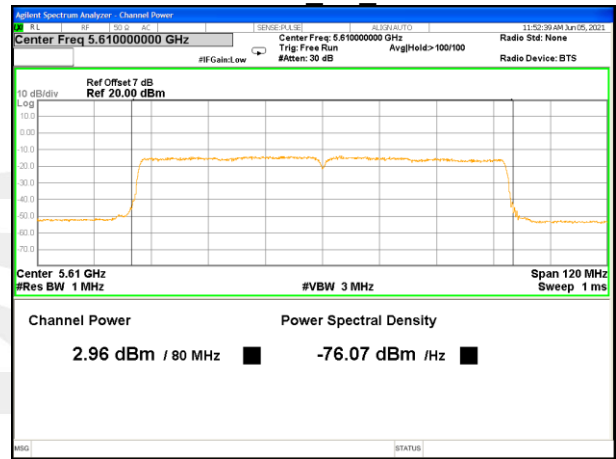

5610MHz_AV_Ant A

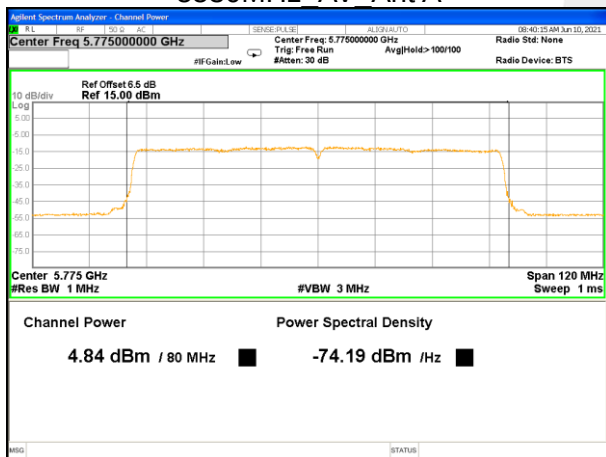


5775MHz_AV_Ant A




Duty cycle

Band1				
Mode	Ton(ms)	Tp(ms)	Duty cycle(%)	Duty factor(dB)
a	1.404	1.428	98.32%	0.074
n20	1.311	1.332	98.42%	0.069
n40	0.658	0.682	96.48%	0.156
ac20	0.686	0.716	95.81%	0.186
ac40	0.366	0.386	94.82%	0.231
ac80	0.963	1.600	60.16%	2.207
Band2				
Mode	Ton(ms)	Tp(ms)	Duty cycle(%)	Duty factor(dB)
a	1.400	1.424	98.31%	0.074
n20	1.311	1.338	97.98%	0.089
n40	0.666	0.682	97.65%	0.103
ac20	0.690	0.714	96.64%	0.148
ac40	0.360	0.388	92.78%	0.325
ac80	0.973	1.580	61.55%	2.108
Band3				
Mode	Ton(ms)	Tp(ms)	Duty cycle(%)	Duty factor(dB)
a	1.420	1.432	99.16%	0.037
n20	1.312	1.336	98.20%	0.079
n40	0.654	0.678	96.46%	0.157
ac20	0.688	0.714	96.36%	0.161
ac40	0.356	0.386	92.23%	0.351
ac80	0.970	1.556	62.34%	2.052
Band4				
Mode	Ton(ms)	Tp(ms)	Duty cycle(%)	Duty factor(dB)
a	1.404	1.432	98.04%	0.086
n20	1.312	1.336	98.20%	0.079
n40	0.658	0.684	96.20%	0.168
ac20	0.684	0.714	95.80%	0.186
ac40	0.358	0.385	92.99%	0.316
ac80	0.960	1.576	60.91%	2.153

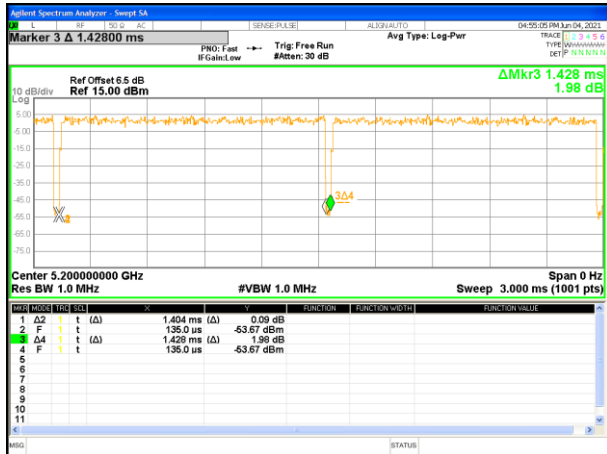

Band 1-a20

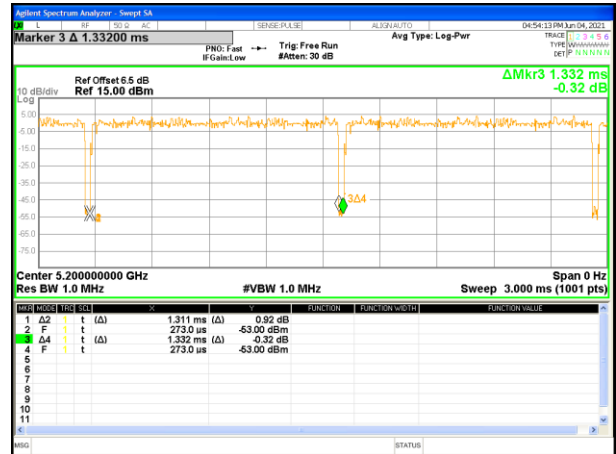

Band 1-n20



Band 1-n40




Band 1-ac20




Band 1-ac40



Band 1-ac80

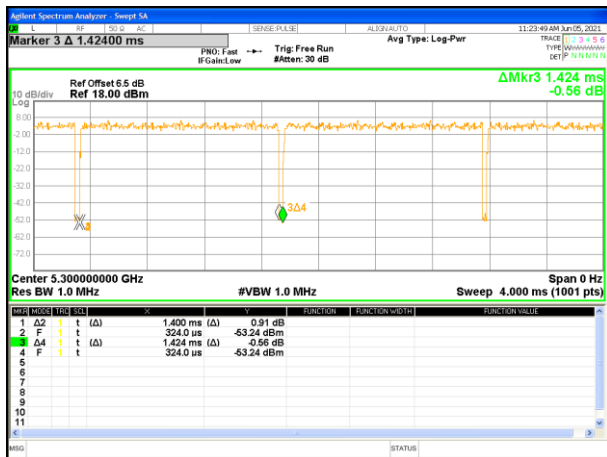

Band 2-a20

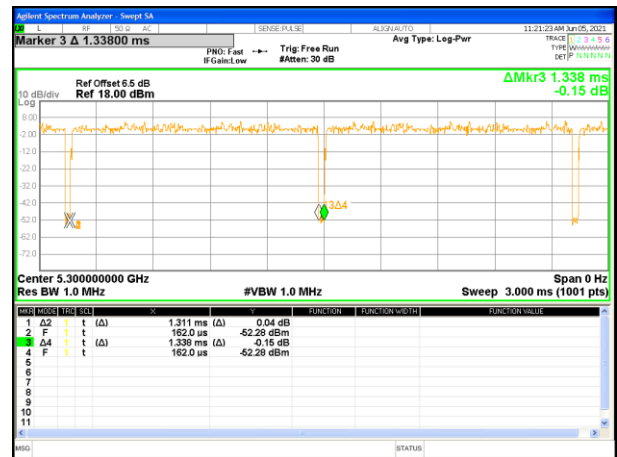

Band 2-n20




Band 2-n40



Band 2-ac20



Band 2-ac40

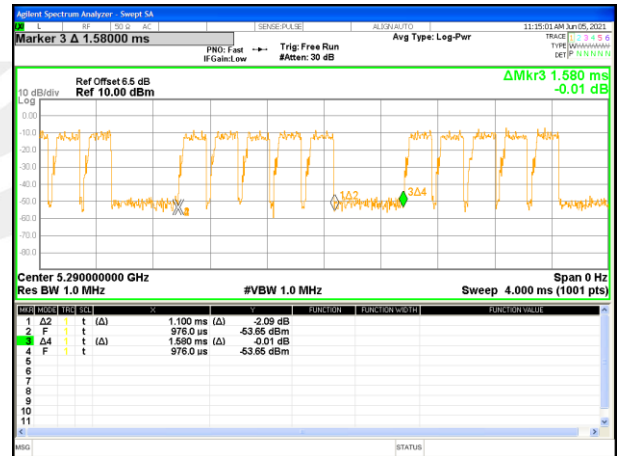

Band 2-ac80



Band 3-a20



Band 3-n20



Band 3-n40




Band 3-ac20



Band 3-ac40



Band 3-ac80

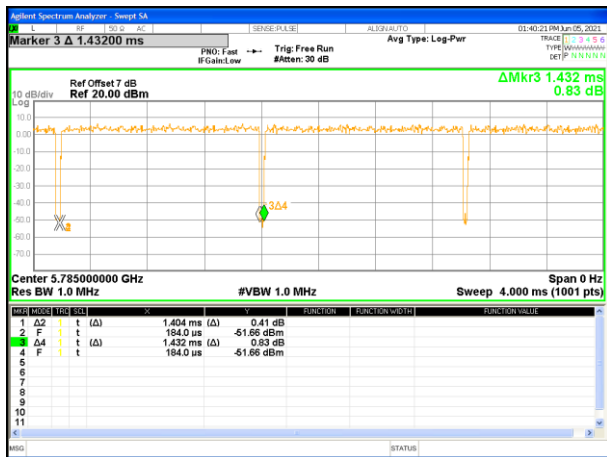


Band 4-a20



Band 4-n20




Band 4-n40

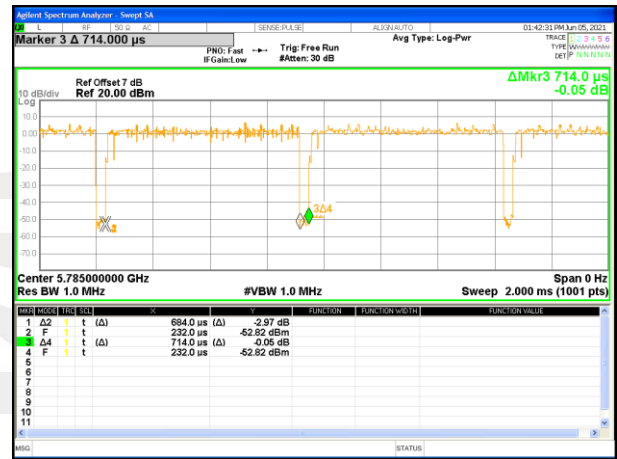

Band 4-ac20



Band 4-ac40

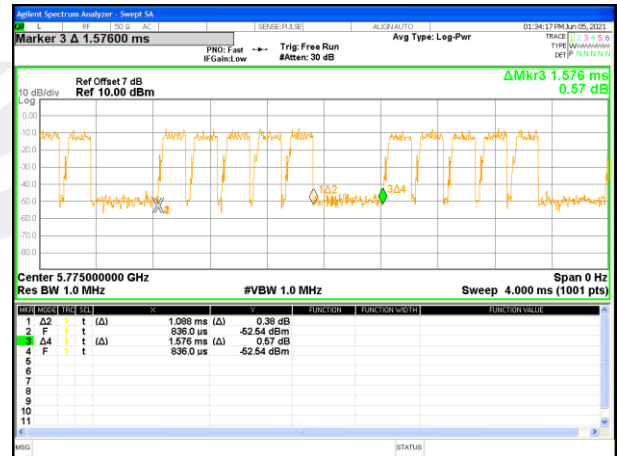

Band 4-ac80



7. AUTOMATICALLY DISCONTINUE TRANSMISSION

7.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

7.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission





8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is PIFA Antenna. It comply with the standard requirement.



**APPENDIX - PHOTOS OF TEST SETUP**

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

XXXXXXXXEND OF THE REPORTXXXXXXXX

