
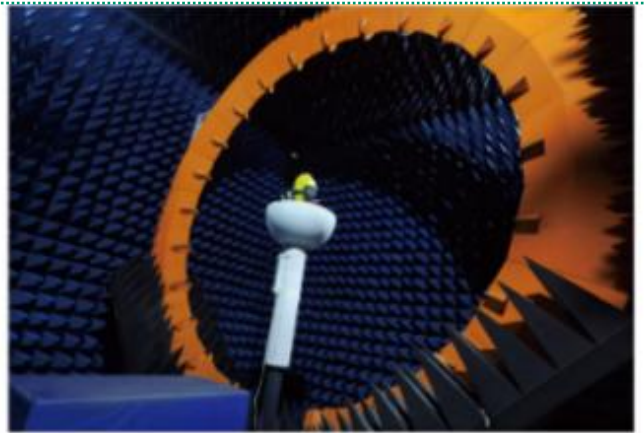


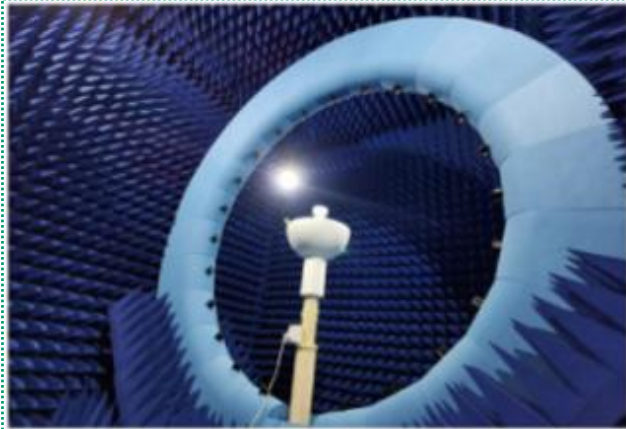


We have RF equipments as below

Anechoic Chambe

- r- Satimo 1ea
- SY24 1ea
- SAR 1ea
- KSS 2ea


Measurement

- 2G, 3G, 4G
- GPS
- Wifi
- Bluetooth(3.0) OTA
- NFC & WPC

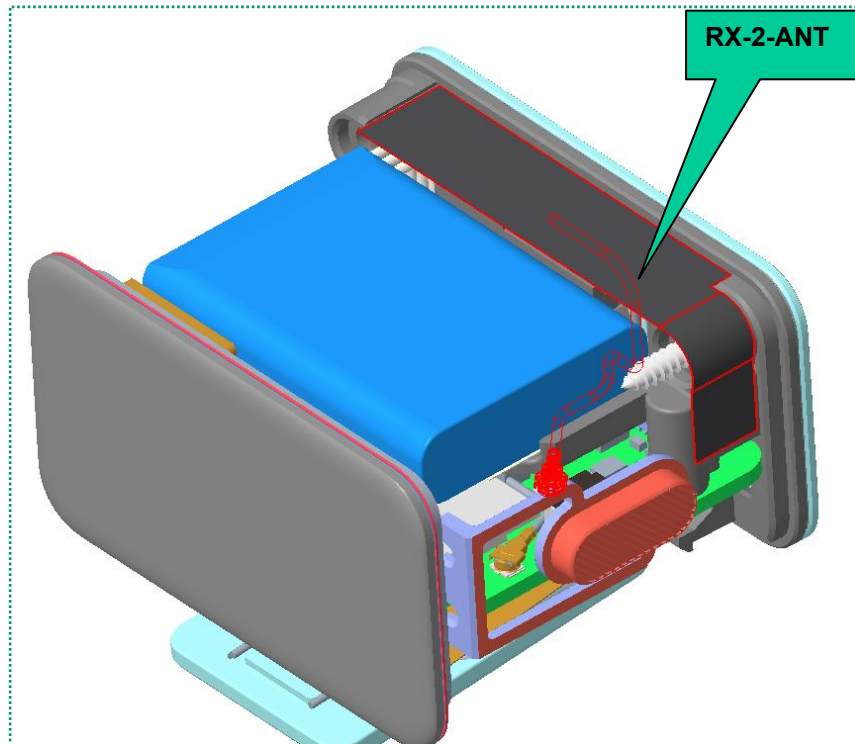

RX-2 Antenna S11

Customer	Anker	Written By	LNF	Orig. Date	2022.11.16
part Number	ATC1339-HY044B72RA	Revised By	SHIN	Revised Date	2022.11.16
Description	RX-2 ANT	Approved By	HJ	Approved Date	2022.11.16

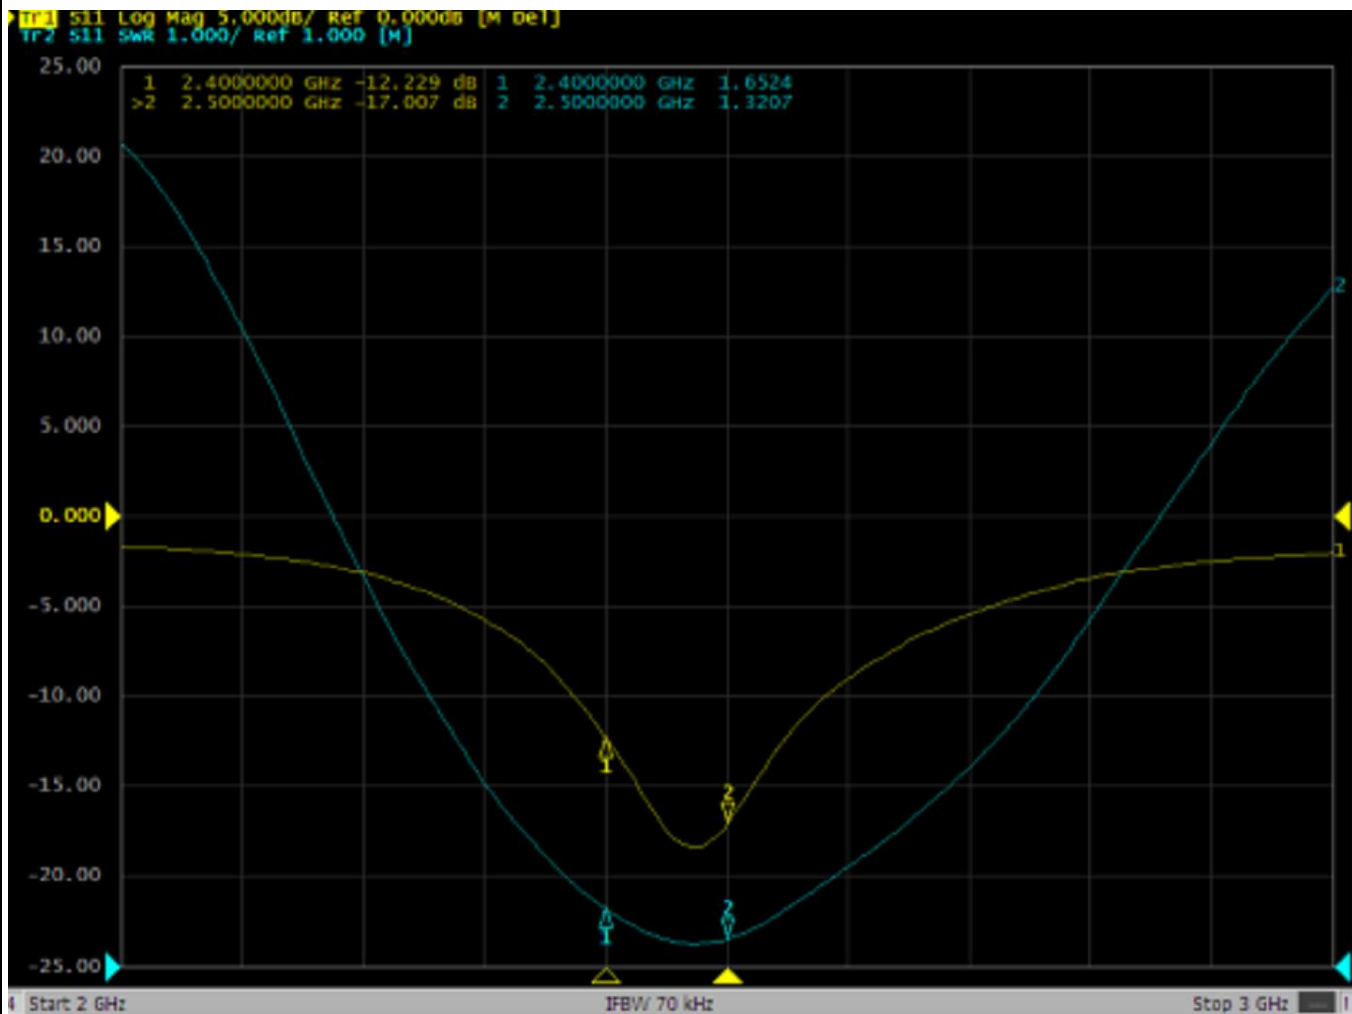

RX-2 Antenna *Efficiency

Customer	Anker	Written By	LNF	Orig. Date	2022.11.16
part Number	ATC1339-HY044B72RA	Revised By	SHIN	Revised Date	2022.11.16
Description	RX-2 ANT	Approved By	HJ	Approved Date	2022.11.16


Frequency	Efficiency/%	Gain. dBi
2400	48%	1.32
2410	50%	1.52
2420	51%	1.56
2430	51%	1.57
2440	51%	1.55
2450	52%	1.69
2460	52%	1.75
2470	53%	2.00
2480	52%	2.05
2490	51%	2.14
2500	52%	2.03

OTA TEST

Customer	Anker	Written By	LNF	Orig. Date	2022.11.16
part Number	ATC1339-HY044B72RA	Revised By	SHIN	Revised Date	2022.11.16
Description	RX-2 ANT	Approved By	HJ	Approved Date	2022.11.16

BT-LE	TRP	0	10.67
		19	10.59
		39	10.48
	TIS	0	-90.71
		19	-90.66
		39	-90.43

Customer	Anker	Written By	LNF	Orig. Date	2022.11.16
part Number	ATC1339-HY044B72RA	Revised By	SHIN	Revised Date	2022.11.16
Description	RX-2 ANT	Approved By	HJ	Approved Date	2022.11.16

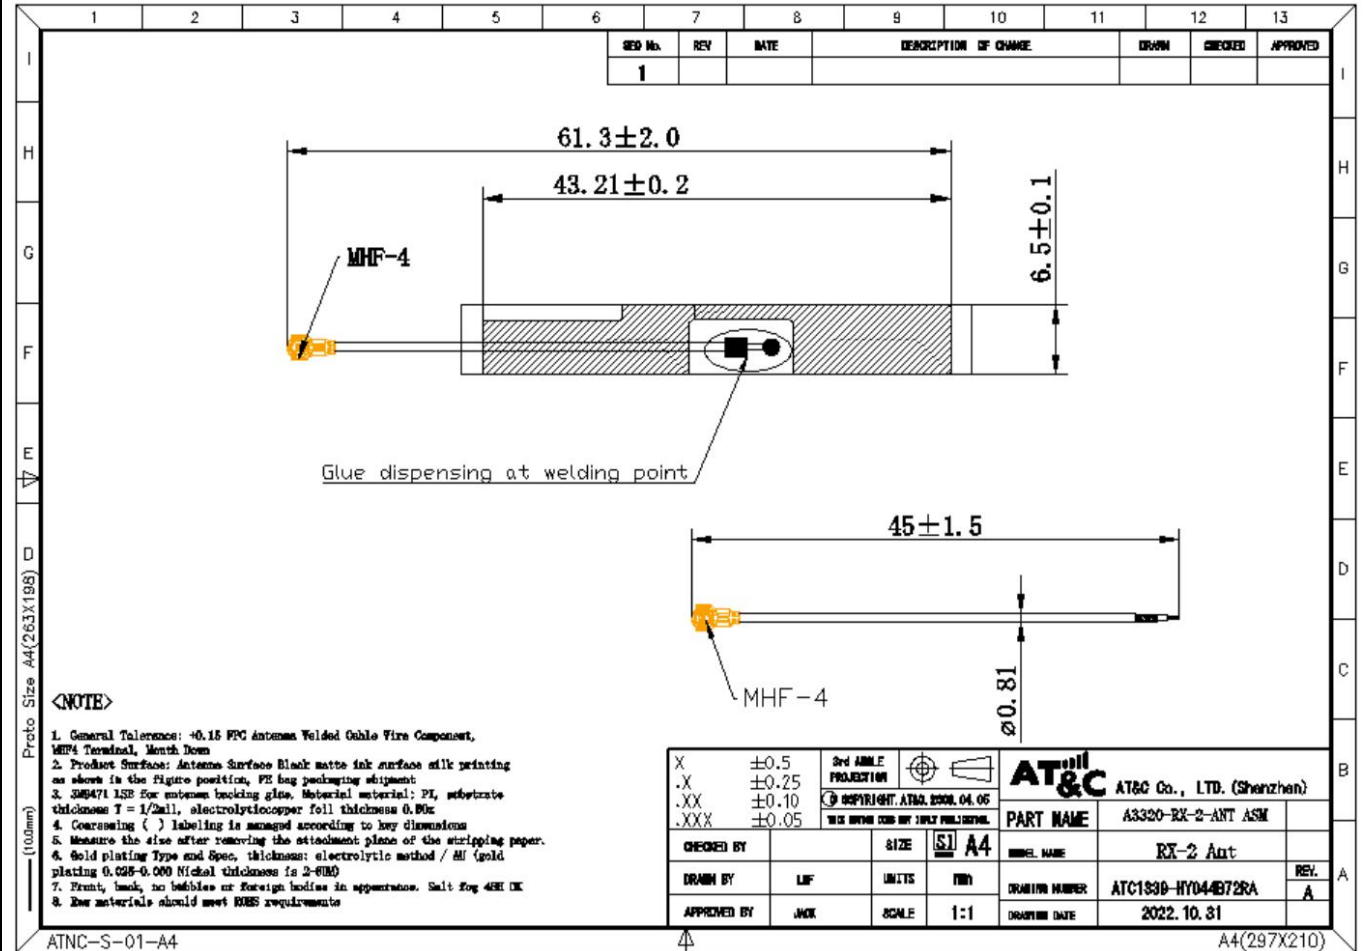

Size information					Measuring sample			% Tolerance		Handling opinions			
num ber	Dime nsion prop erty	Dimen sion	Lower to lerance	Upper t oleranc e	1	2	3	Upper	Lower	determi ne	Supplier r eview co mments	Custo mer re view co mments	Measuring tool
1	key p oint	61.3	-2.0	2.0	61.47	61.6	61.53			PASS			PJ
2	key p oint	43.21	-0.2	0.2	43.25	43.22	43.18			PASS			PJ
3	key p oint	6.5	-0.10	0.10	6.48	6.51	6.47			PASS			PJ