

FCC Sub6 REPORT

Certification

Applicant Name:

SAMSUNG Electronics Co., Ltd.

Date of Issue:

November 13, 2023

Location:
Address:

129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-RF-2311-FC031

FCC ID: A3LSMG556B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-G556B
EUT Type: Mobile phone
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §22

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
Sub6 n26 (5)	826.5 – 846.5	4M48G7D	PI/2 BPSK	0.068	18.31
		4M50G7D	QPSK	0.067	18.28
		4M50W7D	16QAM	0.054	17.29
		4M51W7D	64QAM	0.038	15.80
		4M50W7D	256QAM	0.024	13.78
Sub6 n26 (10)	829.0 – 844.0	8M96G7D	PI/2 BPSK	0.063	17.96
		8M95G7D	QPSK	0.062	17.93
		8M98W7D	16QAM	0.051	17.09
		8M98W7D	64QAM	0.036	15.51
		8M94W7D	256QAM	0.022	13.47
Sub6 n26 (15)	831.5 – 841.5	13M5G7D	PI/2 BPSK	0.064	18.09
		13M4G7D	QPSK	0.064	18.03
		13M4W7D	16QAM	0.052	17.12
		13M4W7D	64QAM	0.036	15.61
		13M4W7D	256QAM	0.023	13.56
Sub6 n26 (20)	834.0 – 839.0	17M9G7D	PI/2 BPSK	0.066	18.22
		18M0G7D	QPSK	0.065	18.15
		17M8W7D	16QAM	0.052	17.19
		17M8W7D	64QAM	0.037	15.70
		17M8W7D	256QAM	0.023	13.67

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.
HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2311-FC031

REVIEWED BY



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center



Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

Test Report Statement:

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2311-FC031	November 13, 2023	- First Approval Report

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT.....	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	11
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	12
3.7 BAND EDGE	13
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	14
3.9 WORST CASE(RADIATED TEST)	15
3.10 WORST CASE(CONDUCTED TEST)	16
4. LIST OF TEST EQUIPMENT	17
5. MEASUREMENT UNCERTAINTY	18
6. SUMMARY OF TEST RESULTS	19
7. SAMPLE CALCULATION	20
8. TEST DATA	22
8.1 EFFECTIVE RADIATED POWER.....	22
8.2 RADIATED SPURIOUS EMISSIONS	26
8.3 PEAK-TO-AVERAGE RATIO.....	27
8.4 OCCUPIED BANDWIDTH	28
8.5 CONDUCTED SPURIOUS EMISSIONS	29
8.6 BAND EDGE	29
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	30
9. TEST PLOTS.....	34
10. ANNEX A_ TEST SETUP PHOTO.....	111

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG556B
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§22
EUT Type:	Mobile phone
Model(s):	SM-G556B
SCS(kHz):	15
Bandwidth(MHz):	5, 10, 15, 20
Waveform:	CP-OFDM, DFT-S-OFDM
Modulation:	DFT-S-OFDM: PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM
Tx Frequency:	826.5 MHz – 846.5 MHz (Sub6 n 26 (5 MHz)) 829.0 MHz – 844.0 MHz (Sub6 n 26 (10 MHz)) 831.5 MHz – 841.5 MHz (Sub6 n 26 (15 MHz)) 834.0 MHz – 839.0 MHz (Sub6 n 26 (20 MHz))
Date(s) of Tests:	September 27, 2023 ~ November 13, 2023
Serial number:	Radiated: R3CW908NFEN Conducted: R3CW908NHWB

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac (20/40/80 MHz), Bluetooth, BT LE, NFC, AIT.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1MHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser
if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit)
and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.
The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = \text{Pg}_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: Pg is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15 \text{ dB}$$

3.4 PEAK- TO- AVERAGE RATIO

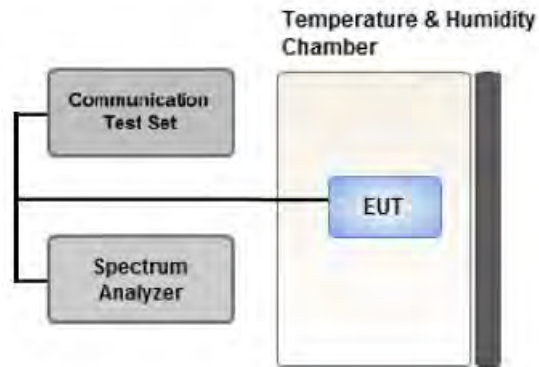


Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

3.5 OCCUPIED BANDWIDTH.

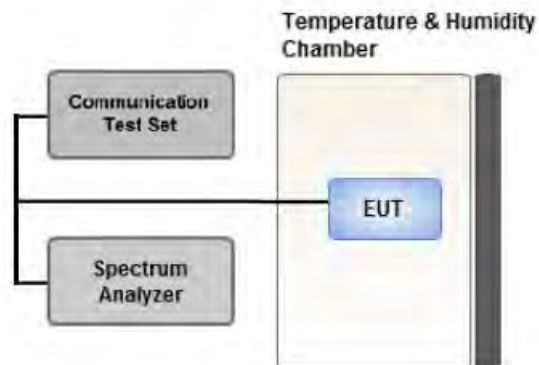

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

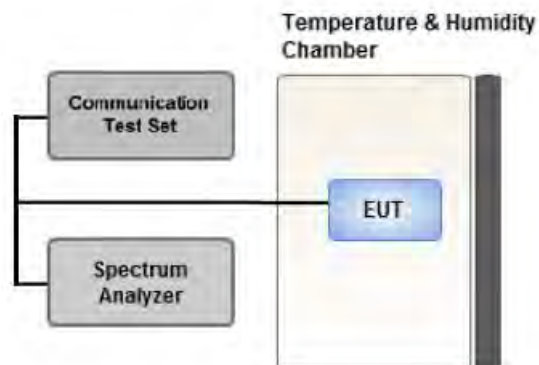

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep $\geq 2 \times \text{Span} / \text{RBW}$

3.7 BAND EDGE

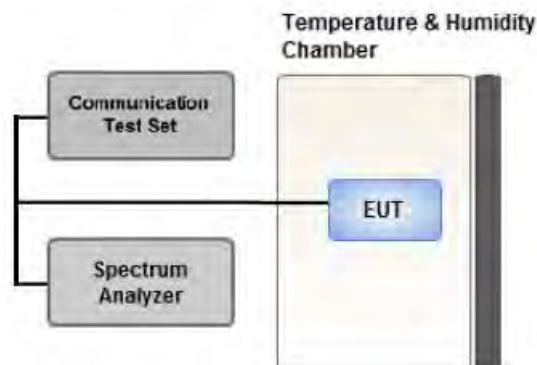

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz/ RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

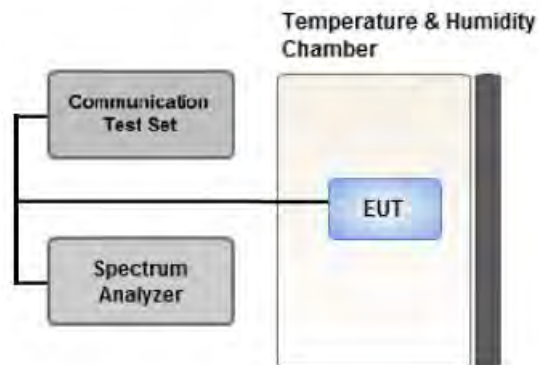

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).

2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
Mode: NSA, SA
Worst case: SA
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
Mode : Stand alone, Simultaneous transmission scenarios
Worst case : Stand alone
- Radiated Spurious emissions are measured while operating in EN-DC mode with Sub 6 NR carrier as well as an LTE carrier (anchor).
All EN-DC mode of operation (=anchor) were investigated and the test results were measured No Peak Found.
The test results which are attenuated more than 20 dB below the permissible value, so it was not reported.
- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.
Please refer to the table below.
- In the case of radiated spurious emissions, all bandwidth of operation was investigated and the worst case bandwidth results are reported. (Worst case : 5 MHz)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	Pi2/BPSK QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		X
Radiated Spurious and Harmonic Emissions	Pi2/BPSK	See Section 8.2		Y

3.10 WORST CASE(CONDUCTED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.

(Worst case: DFT-S-OFDM)

- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.

(Worst case: PI/2 BPSK)

- All modes of operation were investigated and the worst case configuration results are reported.

Mode: NSA, SA

Worst case: SA

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	Pi2/BPSK QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Peak-To-Average Ratio	Pi2/BPSK QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
Band-edge	Pi2/BPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
Band-edge	Pi2/BPSK	5, 10, 15, 20	Low, High	Full RB	0
		5, 10, 15, 20	Low, Mid, High	1	1
Spurious and Harmonic Emissions at Antenna Terminal	Pi2/BPSK	5, 10, 15, 20	Low, Mid, High	1	1

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
Precision Dipole Antenna	UHAP	Schwarzbeck	01273	03/27/2024	Biennial
Precision Dipole Antenna	UHAP	Schwarzbeck	01274	03/27/2024	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	02289	03/21/2024	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1299	04/27/2025	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Loop Antenna(9 kHz~30 MHz)	FMZB1513	Rohde & Schwarz	1513-175	01/16/2025	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/09/2025	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/24/2025	Biennial
RF Switching System	FBSR-06B (1G HPF + LNA)	T&M SYSTEM	F3L1	05/22/2024	Annual
RF Switching System	FBSR-06B (3G HPF + LNA)	T&M SYSTEM	F3L2	05/22/2024	Annual
RF Switching System	FBSR-06B (6G HPF + LNA)	T&M SYSTEM	F3L3	05/22/2024	Annual
RF Switching System	FBSR-06B (LNA)	T&M SYSTEM	F3L4	05/22/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/02/2024	Annual
DC Power Supply	E3632A	Hewlett Packard	MY40004427	08/25/2024	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	03/02/2024	Annual
Chamber	SU-642	ESPEC	93008124	02/22/2024	Annual
Signal Analyzer(10 Hz~26.5 GHz)	N9020A	Agilent	MY51110063	04/11/2024	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/19/2024	Annual
Spectrum Analyzer(10 Hz~40 GHz)	FSV40	REOHDE & SCHWARZ	101436	02/22/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287701	05/22/2024	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/23/2024	Annual
SIGNAL GENERATOR (100 kHz~40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz~40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/19/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.16 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.57 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a)	$< 43 + 10\log_{10} (P[\text{Watts}])$ at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§22.913(d)	$< 13 \text{ dB}$	PASS
Frequency stability / variation of ambient temperature	§2.1055, §22.355	$< 2.5 \text{ ppm}$	PASS

Note:

1. See SAR Report
2. Conducted test were tested using 5G Wireless Tester.

6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	$< 7 \text{ Watts max. ERP}$	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a)	$< 43 + 10\log_{10} (P[\text{Watts}])$ for all out-of band emissions	PASS

Note:

1. Radiated tests were tested using 5G Wireless Tester.

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
826.5	Sub6 n26 5 MHz [15 kHz]	PI/2 BPSK	-31.53	29.37	-10.05	1.39	H	< 7.00	0.062	17.93	1	1
		QPSK	-31.57	29.33	-10.05	1.39	H		0.062	17.89		
		16-QAM	-32.50	28.40	-10.05	1.39	H		0.050	16.96		
		64-QAM	-34.07	26.83	-10.05	1.39	H		0.035	15.39		
		256-QAM	-36.12	24.78	-10.05	1.39	H		0.022	13.34		
836.5		PI/2 BPSK	-31.54	29.75	-10.05	1.40	H		0.068	18.30	1	1
		QPSK	-31.69	29.60	-10.05	1.40	H		0.065	18.15		
		16-QAM	-32.55	28.74	-10.05	1.40	H		0.054	17.29		
		64-QAM	-34.15	27.14	-10.05	1.40	H		0.037	15.69		
		256-QAM	-36.19	25.10	-10.05	1.40	H		0.023	13.65		
846.5		PI/2 BPSK	-31.91	29.77	-10.05	1.41	H		0.068	18.31	1	12
		QPSK	-31.94	29.74	-10.05	1.41	H		0.067	18.28		
		16-QAM	-32.94	28.74	-10.05	1.41	H		0.053	17.28		
		64-QAM	-34.42	27.26	-10.05	1.41	H		0.038	15.80		
		256-QAM	-36.44	25.24	-10.05	1.41	H		0.024	13.78		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
829.0	Sub6 n26 10 MHz [15 kHz]	PI/2 BPSK	-31.64	29.38	-10.05	1.39	H	< 7.00	0.062	17.94	1	1
		QPSK	-31.70	29.32	-10.05	1.39	H		0.061	17.88		
		16-QAM	-32.63	28.39	-10.05	1.39	H		0.050	16.95		
		64-QAM	-34.17	26.85	-10.05	1.39	H		0.035	15.41		
		256-QAM	-36.22	24.80	-10.05	1.39	H		0.022	13.36		
836.5		PI/2 BPSK	-31.88	29.41	-10.05	1.40	H		0.063	17.96	1	1
		QPSK	-31.91	29.38	-10.05	1.40	H		0.062	17.93		
		16-QAM	-32.75	28.54	-10.05	1.40	H		0.051	17.09		
		64-QAM	-34.33	26.96	-10.05	1.40	H		0.036	15.51		
		256-QAM	-36.38	24.91	-10.05	1.40	H		0.022	13.46		
844.0		PI/2 BPSK	-32.06	29.42	-10.05	1.41	H		0.063	17.96	1	50
		QPSK	-32.13	29.35	-10.05	1.41	H		0.062	17.89		
		16-QAM	-33.04	28.44	-10.05	1.41	H		0.050	16.98		
		64-QAM	-34.54	26.94	-10.05	1.41	H		0.035	15.48		
		256-QAM	-36.55	24.93	-10.05	1.41	H		0.022	13.47		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
831.5	Sub6 n26 15 MHz [15 kHz]	PI/2 BPSK	-31.61	29.52	-10.05	1.39	H	< 7.00	0.064	18.08	1	1
		QPSK	-31.66	29.47	-10.05	1.39	H		0.064	18.03		
		16-QAM	-32.57	28.56	-10.05	1.39	H		0.052	17.12		
		64-QAM	-34.13	27.00	-10.05	1.39	H		0.036	15.56		
		256-QAM	-36.22	24.91	-10.05	1.39	H		0.022	13.47		
836.5		PI/2 BPSK	-31.75	29.54	-10.05	1.40	H		0.064	18.09	1	1
		QPSK	-31.81	29.48	-10.05	1.40	H		0.064	18.03		
		16-QAM	-32.75	28.54	-10.05	1.40	H		0.051	17.09		
		64-QAM	-34.23	27.06	-10.05	1.40	H		0.036	15.61		
		256-QAM	-36.28	25.01	-10.05	1.40	H		0.023	13.56		
841.5		PI/2 BPSK	-32.00	29.42	-10.05	1.41	H		0.063	17.96	1	77
		QPSK	-32.06	29.36	-10.05	1.41	H		0.062	17.90		
		16-QAM	-32.98	28.44	-10.05	1.41	H		0.050	16.98		
		64-QAM	-34.49	26.93	-10.05	1.41	H		0.035	15.47		
		256-QAM	-36.53	24.89	-10.05	1.41	H		0.022	13.43		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP		RB	
								W	W	dBm	Size	Offset
834.0	Sub6 n26 20 MHz [15 kHz]	PI/2 BPSK	-31.55	29.66	-10.05	1.39	H	< 7.00	0.066	18.22	1	1
		QPSK	-31.62	29.59	-10.05	1.39	H		0.065	18.15		
		16-QAM	-32.58	28.63	-10.05	1.39	H		0.052	17.19		
		64-QAM	-34.11	27.10	-10.05	1.39	H		0.037	15.66		
		256-QAM	-36.16	25.05	-10.05	1.39	H		0.023	13.61		
836.5		PI/2 BPSK	-31.68	29.61	-10.05	1.40	H		0.065	18.16	1	1
		QPSK	-31.71	29.58	-10.05	1.40	H		0.065	18.13		
		16-QAM	-32.70	28.59	-10.05	1.40	H		0.052	17.14		
		64-QAM	-34.14	27.15	-10.05	1.40	H		0.037	15.70		
		256-QAM	-36.17	25.12	-10.05	1.40	H		0.023	13.67		
839.0		PI/2 BPSK	-32.05	29.40	-10.05	1.40	H		0.062	17.95	1	104
		QPSK	-32.09	29.36	-10.05	1.40	H		0.062	17.91		
		16-QAM	-33.03	28.42	-10.05	1.40	H		0.050	16.97		
		64-QAM	-34.50	26.95	-10.05	1.40	H		0.035	15.50		
		256-QAM	-36.54	24.91	-10.05	1.40	H		0.022	13.46		

8.2 RADIATED SPURIOUS EMISSIONS

- NR Band: N26
- Bandwidth: 5 MHz
- Modulation: PI/2 BPSK
- Distance: 3 meters
- SCS: 15 kHz
- Limit: -13.00 dBm

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
165300 (826.5)	1 653.00	-57.07	9.20	-65.98	2.03	V	-58.81	-13.00	1	1
	2 479.50	-54.66	10.20	-57.91	2.45	V	-50.16	-13.00		
	3 306.00	-50.99	10.90	-53.03	2.92	H	-45.05	-13.00		
	4 132.50	-54.05	11.30	-53.90	3.25	V	-45.85	-13.00		
	4 959.00	-59.27	10.90	-54.98	3.58	H	-47.66	-13.00		
167300 (836.5)	1 673.00	-57.72	9.20	-66.90	2.03	H	-59.73	-13.00	1	1
	2 509.50	-58.47	10.30	-63.00	2.50	H	-55.20	-13.00		
	3 346.00	-49.77	10.95	-52.66	2.89	H	-44.60	-13.00		
	4 182.50	-52.17	11.30	-52.02	3.30	H	-44.02	-13.00		
	5 019.00	-60.29	10.70	-55.23	3.55	V	-48.08	-13.00		
169300 (846.5)	1 693.00	-57.00	9.40	-65.62	2.00	H	-58.22	-13.00	1	12
	2 539.50	-58.84	10.30	-63.67	2.52	V	-55.89	-13.00		
	3 386.00	-50.02	11.00	-52.50	2.94	H	-44.44	-13.00		
	4 232.50	-52.04	11.20	-51.12	3.28	V	-43.20	-13.00		
	5 079.00	-60.91	10.70	-55.75	3.61	H	-48.66	-13.00		

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
26	5 MHz	836.5	BPSK	25	0	4.57
			QPSK			5.90
			16QAM			6.39
			64QAM			6.91
			256QAM			7.18
	10 MHz		BPSK	50		4.59
			QPSK			5.78
			16QAM			6.55
			64QAM			6.63
			256QAM			6.74
	15 MHz		BPSK	75		4.57
			QPSK			5.70
			16QAM			6.56
			64QAM			6.93
			256QAM			6.86
	20 MHz		BPSK	100		5.01
			QPSK			5.70
			16QAM			6.47
			64QAM			6.71
			256-QAM			6.74

Note:

1. Plots of the EUT's Peak-to-Average Ratio are shown Page 55 ~ 74.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
26	5 MHz	836.5	BPSK	25	0	4.4829
			QPSK			4.4989
			16QAM			4.4962
			64QAM			4.5076
			256QAM			4.4989
	10 MHz		BPSK	50		8.9545
			QPSK			8.9533
			16QAM			8.9766
			64QAM			8.9774
			256QAM			8.9353
	15 MHz		BPSK	75		13.460
			QPSK			13.390
			16QAM			13.417
			64QAM			13.438
			256QAM			13.434
	20 MHz		BPSK	100		17.862
			QPSK			17.970
			16QAM			17.826
			64QAM			17.806
			256QAM			17.833

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 35 ~ 54.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	5	826.5	7.7189	30.815	-74.242	-43.427	-13.00
		836.5	4.0524	30.200	-74.034	-43.834	
		846.5	8.2852	30.815	-74.373	-43.558	
	10	829.0	5.0110	30.815	-74.582	-43.767	
		836.5	3.7922	30.200	-74.304	-44.104	
		844.0	3.7668	30.200	-74.334	-44.134	
	15	831.5	3.7473	30.200	-74.620	-44.420	
		836.5	8.8440	30.815	-74.070	-43.255	
		841.5	8.0185	30.815	-74.601	-43.786	
	20	834.0	8.9133	30.815	-74.549	-43.734	
		836.5	3.7982	30.200	-74.622	-44.422	
		839.0	8.2777	30.815	-74.279	-43.464	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 99 ~ 110.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.815
10 – 15	31.340
15 – 20	31.713
Above 20	32.355

8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 75 ~ 98.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ BandWidth: 5 MHz
- ▣ Voltage(100 %): 3.850 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ Deviation Limit: ± 0.000 25 % or 2.5 ppm

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
836.5	100 %	+20(Ref)	836 499 995	0.0	0.000 000	0.000
	100 %	-30	836 499 990	-4.8	-0.000 001	-0.006
	100 %	-20	836 499 992	-2.9	0.000 000	-0.003
	100 %	-10	836 499 991	-4.2	-0.000 001	-0.005
	100 %	0	836 499 990	-5.1	-0.000 001	-0.006
	100 %	+10	836 499 992	-3.0	0.000 000	-0.004
	100 %	+30	836 499 991	-3.6	0.000 000	-0.004
	100 %	+40	836 499 991	-4.3	-0.000 001	-0.005
	100 %	+50	836 499 990	-4.5	-0.000 001	-0.005
	Batt. Endpoint	+20	836 499 991	-3.5	0.000 000	-0.004

☐ BandWidth: 10 MHz
☐ Voltage(100 %): 3.850 VDC
☐ Batt. Endpoint: 3.400 VDC
☐ Deviation Limit: ± 0.000 25 % or 2.5 ppm

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
836.5	100 %	+20(Ref)	836 500 000	0.0	0.000 000	0.000
	100 %	-30	836 500 000	-0.2	0.000 000	0.000
	100 %	-20	836 499 999	-0.8	0.000 000	-0.001
	100 %	-10	836 499 998	-1.6	0.000 000	-0.002
	100 %	0	836 499 997	-3.3	0.000 000	-0.004
	100 %	+10	836 499 998	-2.2	0.000 000	-0.003
	100 %	+30	836 499 997	-3.0	0.000 000	-0.004
	100 %	+40	836 500 000	0.2	0.000 000	0.000
	100 %	+50	836 499 997	-2.8	0.000 000	-0.003
	Batt. Endpoint	+20	836 499 997	-2.6	0.000 000	-0.003

☐ BandWidth: 15 MHz
☐ Voltage(100 %): 3.850 VDC
☐ Batt. Endpoint: 3.400 VDC
☐ Deviation Limit: ± 0.000 25 % or 2.5 ppm

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
836.5	100 %	+20(Ref)	836 499 996	0.0	0.000 000	0.000
	100 %	-30	836 499 994	-1.7	0.000 000	-0.002
	100 %	-20	836 499 994	-2.2	0.000 000	-0.003
	100 %	-10	836 499 994	-2.0	0.000 000	-0.002
	100 %	0	836 499 994	-1.9	0.000 000	-0.002
	100 %	+10	836 499 993	-2.6	0.000 000	-0.003
	100 %	+30	836 499 995	-0.8	0.000 000	-0.001
	100 %	+40	836 499 995	-1.3	0.000 000	-0.002
	100 %	+50	836 499 994	-1.8	0.000 000	-0.002
	Batt. Endpoint	+20	836 499 993	-2.6	0.000 000	-0.003

☐ BandWidth: 20 MHz
☐ Voltage(100 %): 3.850 VDC
☐ Batt. Endpoint: 3.400 VDC
☐ Deviation Limit: ± 0.000 25 % or 2.5 ppm

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
836.5	100 %	+20(Ref)	836 499 996	0.0	0.000 000	0.000
	100 %	-30	836 499 993	-2.9	0.000 000	-0.004
	100 %	-20	836 499 992	-4.3	-0.000 001	-0.005
	100 %	-10	836 499 995	-1.5	0.000 000	-0.002
	100 %	0	836 499 993	-2.8	0.000 000	-0.003
	100 %	+10	836 499 993	-3.5	0.000 000	-0.004
	100 %	+30	836 499 994	-2.1	0.000 000	-0.002
	100 %	+40	836 499 993	-2.9	0.000 000	-0.003
	100 %	+50	836 499 992	-4.3	-0.000 001	-0.005
	Batt. Endpoint	+20	836 499 994	-2.0	0.000 000	-0.002

9. TEST PLOTS


Sub6 n26. Occupied Bandwidth Plot (5 M BW Ch.167300 BPSK_RB 25_0)



Sub6 n26. Occupied Bandwidth Plot (5 M BW Ch.167300 QPSK_RB 25_0)




Sub6 n26. Occupied Bandwidth Plot (5 M BW Ch.167300 16QAM_RB 25_0)

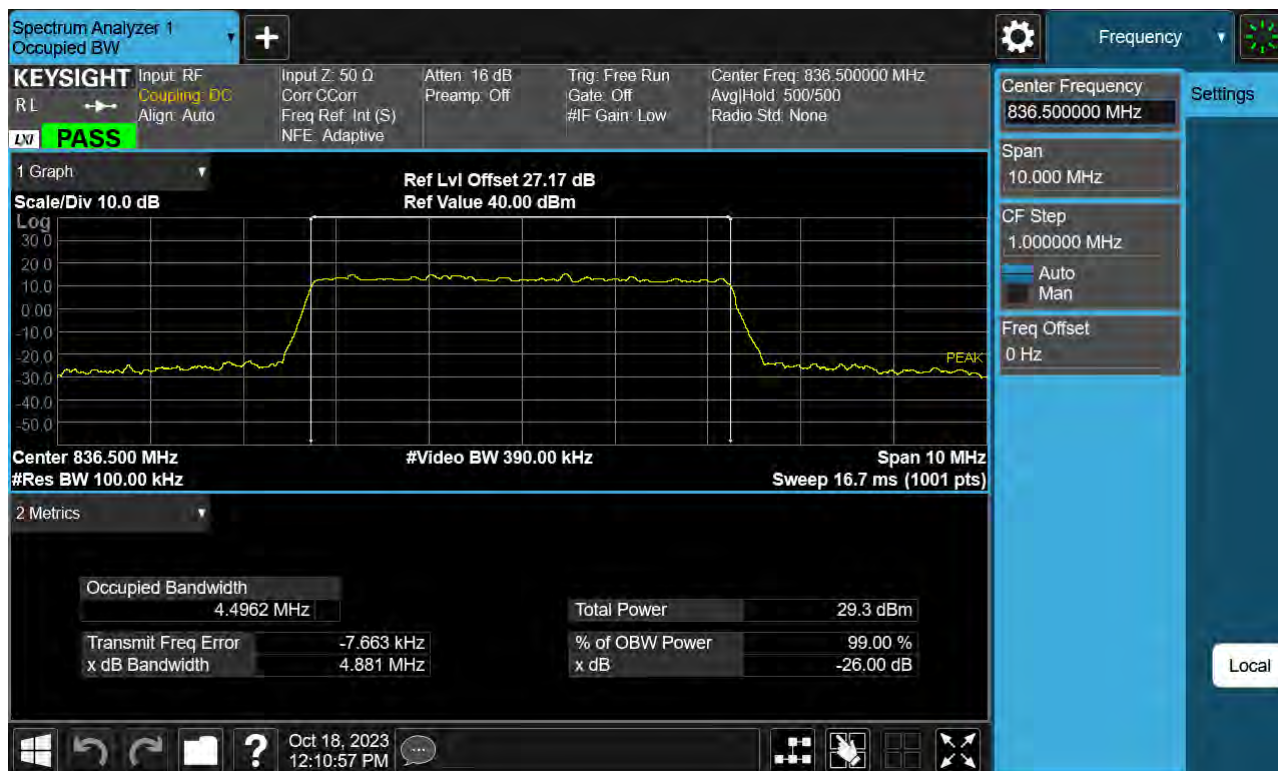

Sub6 n26. Occupied Bandwidth Plot (5 M BW Ch.167300 64QAM_RB 25_0)




Sub6 n26. Occupied Bandwidth Plot (5 M BW Ch.167300 256QAM_RB 25_0)

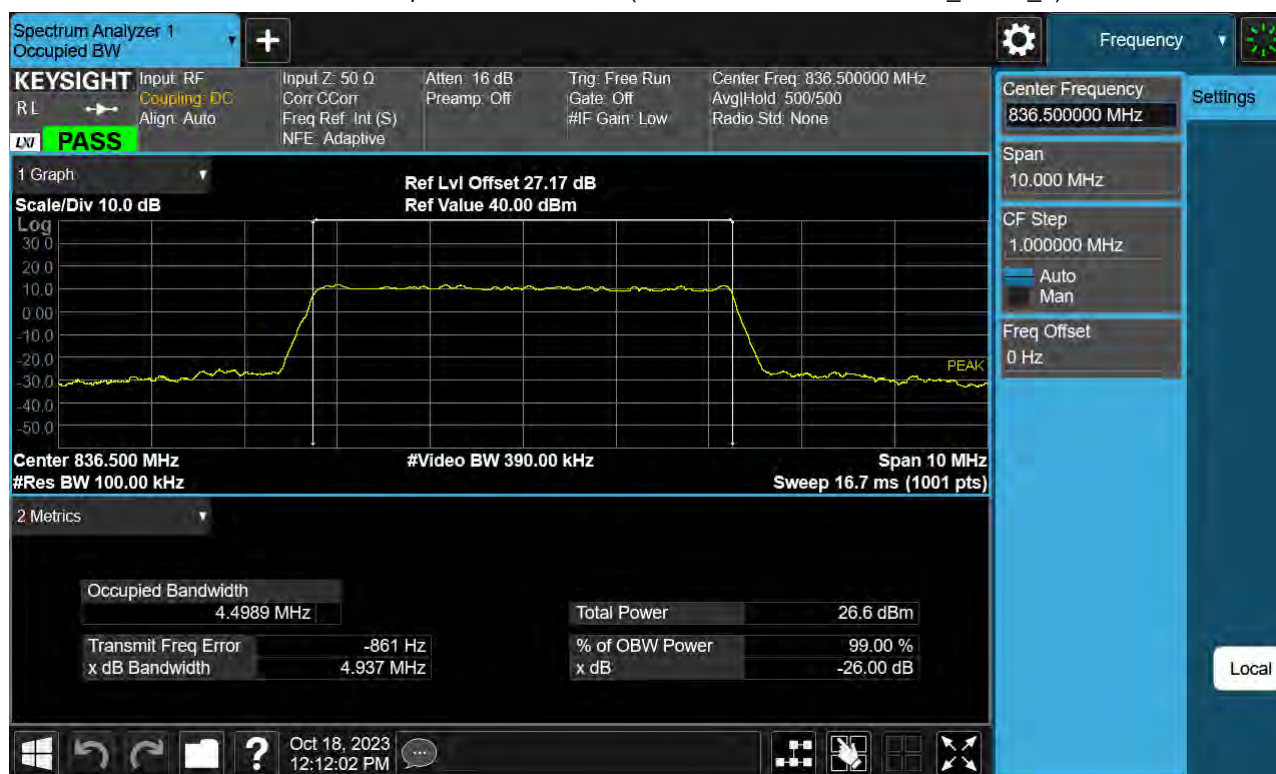


Sub6 n26. Occupied Bandwidth Plot (10 M BW Ch.167300 BPSK_RB 50_0)



Sub6 n26. Occupied Bandwidth Plot (10 M BW Ch.167300 QPSK_RB 50_0)

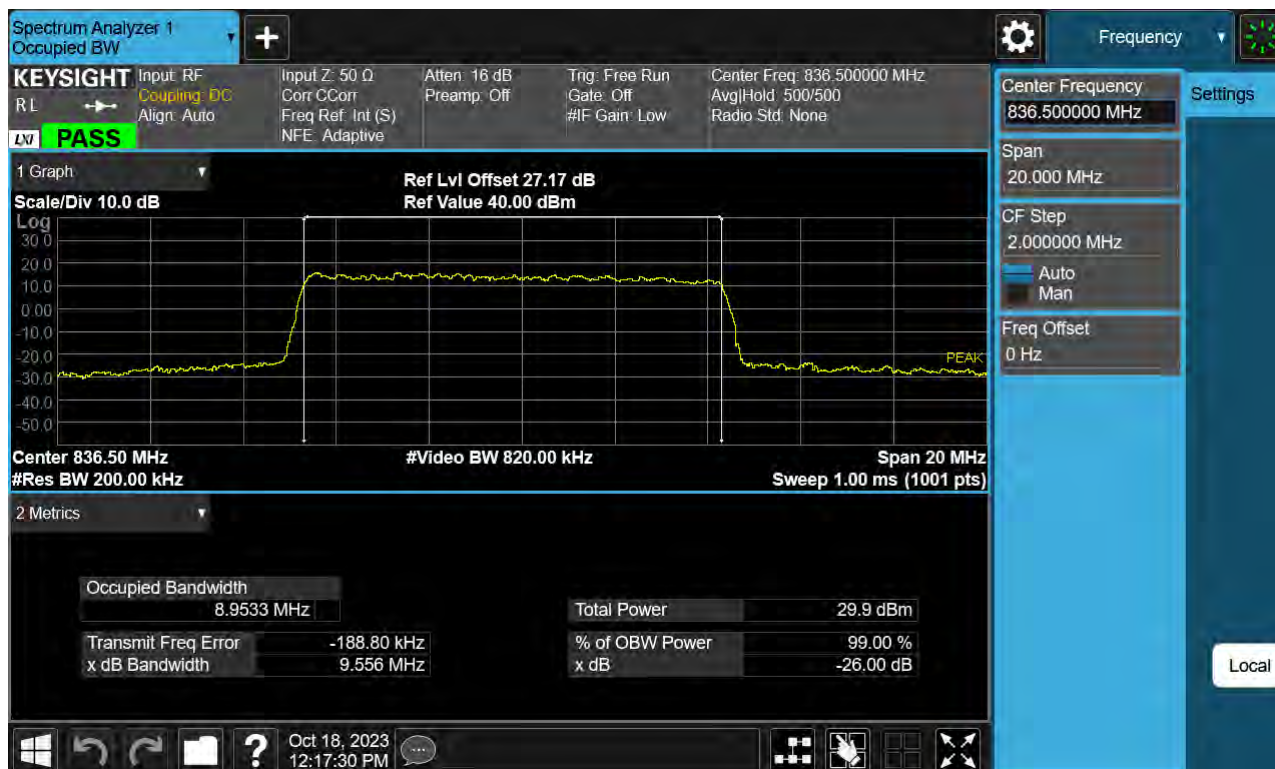


Sub6 n26. Occupied Bandwidth Plot (10 M BW Ch.167300 16QAM_RB 50_0)

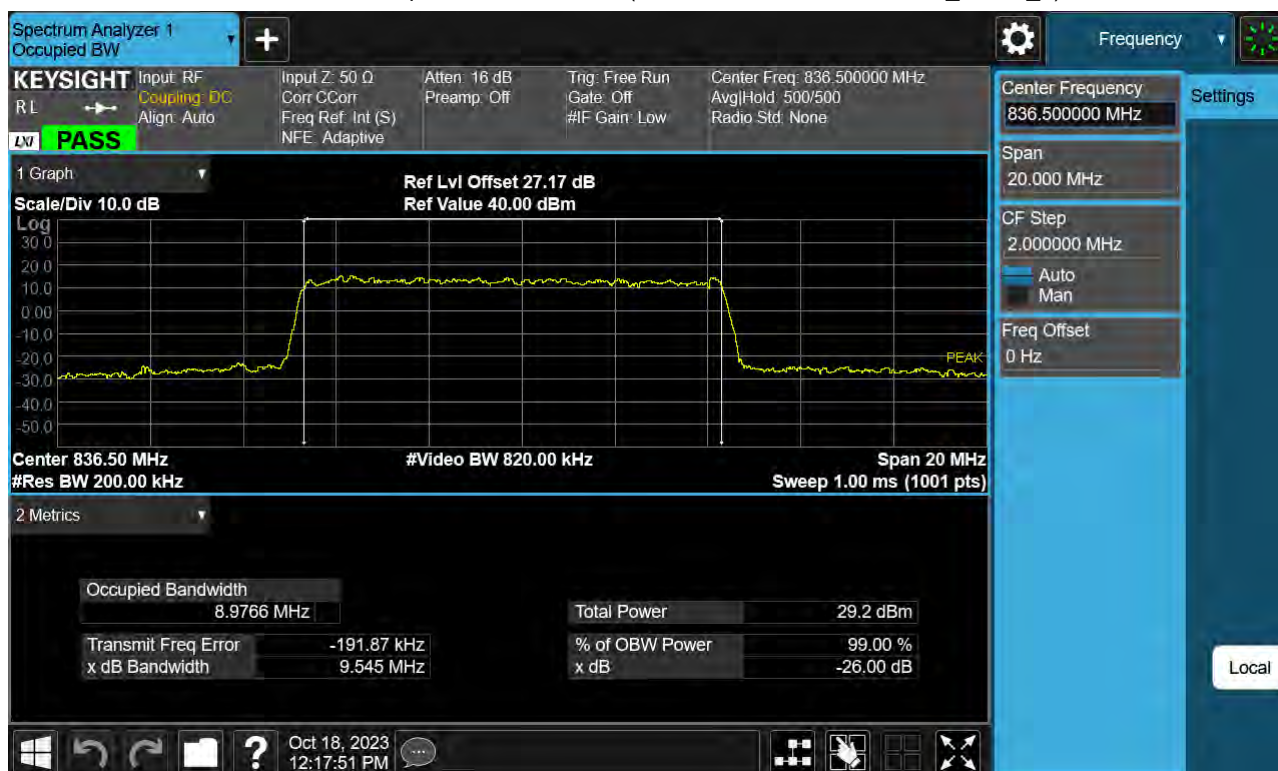

Sub6 n26. Occupied Bandwidth Plot (10 M BW Ch.167300 64QAM_RB 50_0)




Sub6 n26. Occupied Bandwidth Plot (10 M BW Ch.167300 256QAM_RB 50_0)

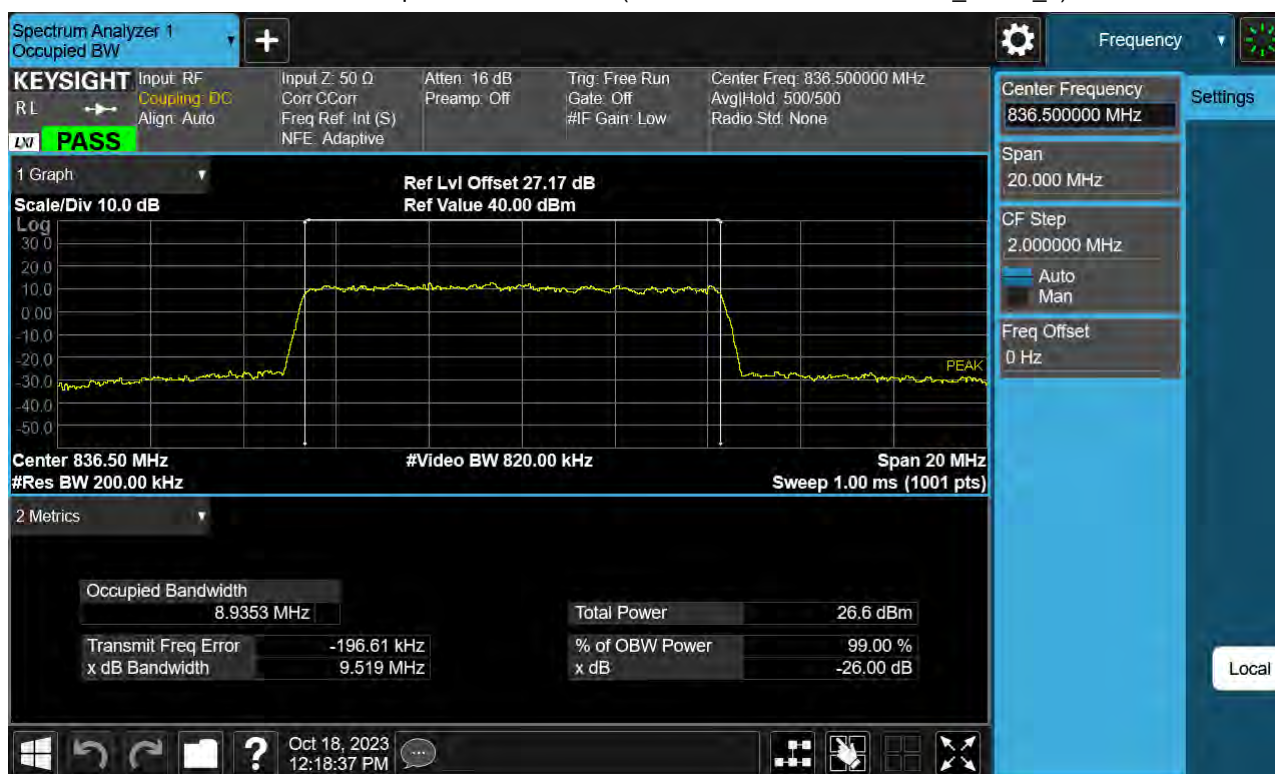


Sub6 n26. Occupied Bandwidth Plot (15 M BW Ch.167300 BPSK RB 75_0)




Sub6 n26. Occupied Bandwidth Plot (15 M BW Ch.167300 QPSK RB 75_0)

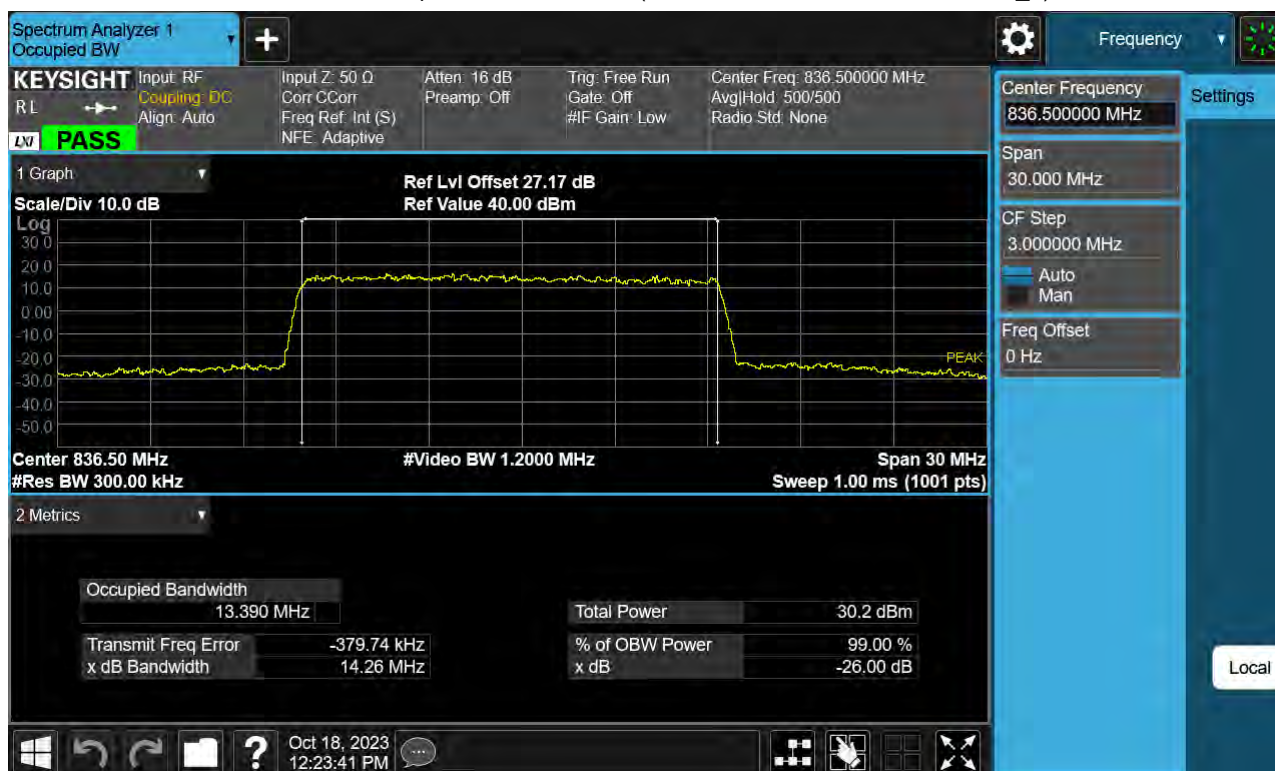

Sub6 n26. Occupied Bandwidth Plot (15 M BW Ch.167300 16QAM RB 75_0)

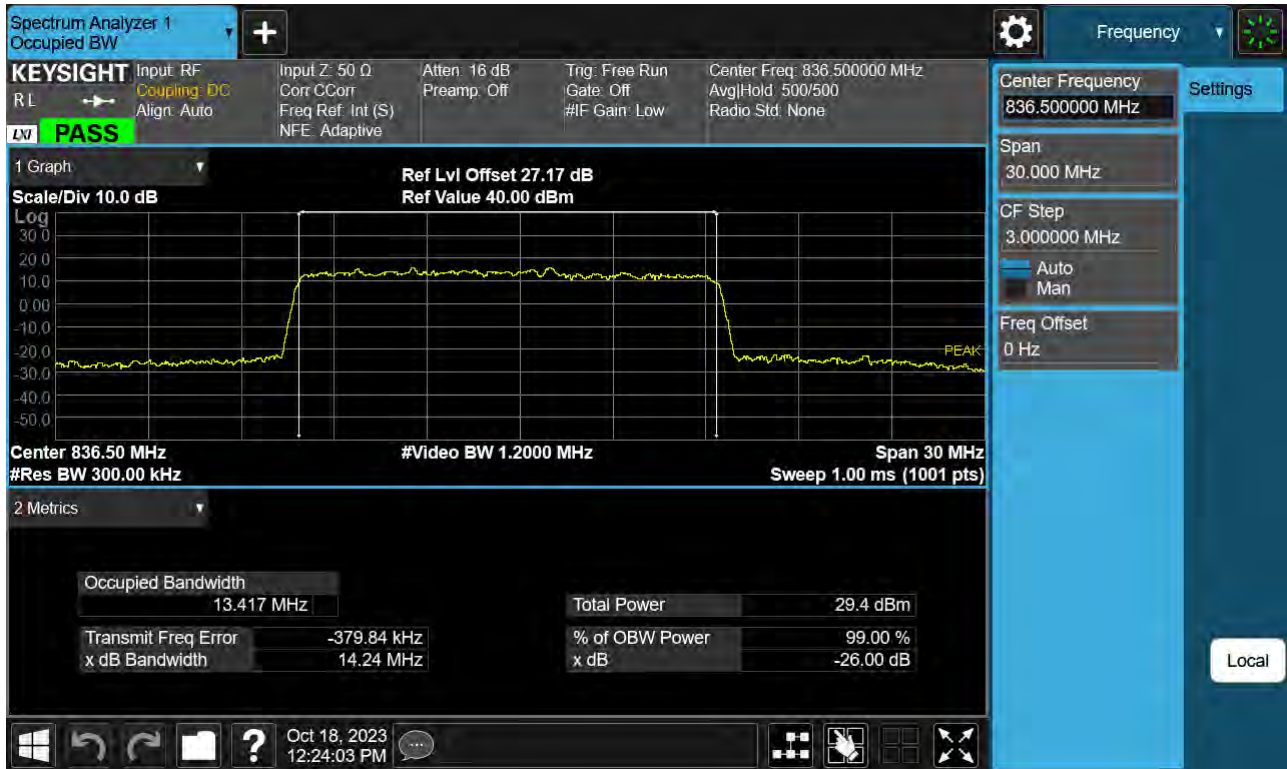

Sub6 n26. Occupied Bandwidth Plot (15 M BW Ch.167300 64QAM RB 75_0)

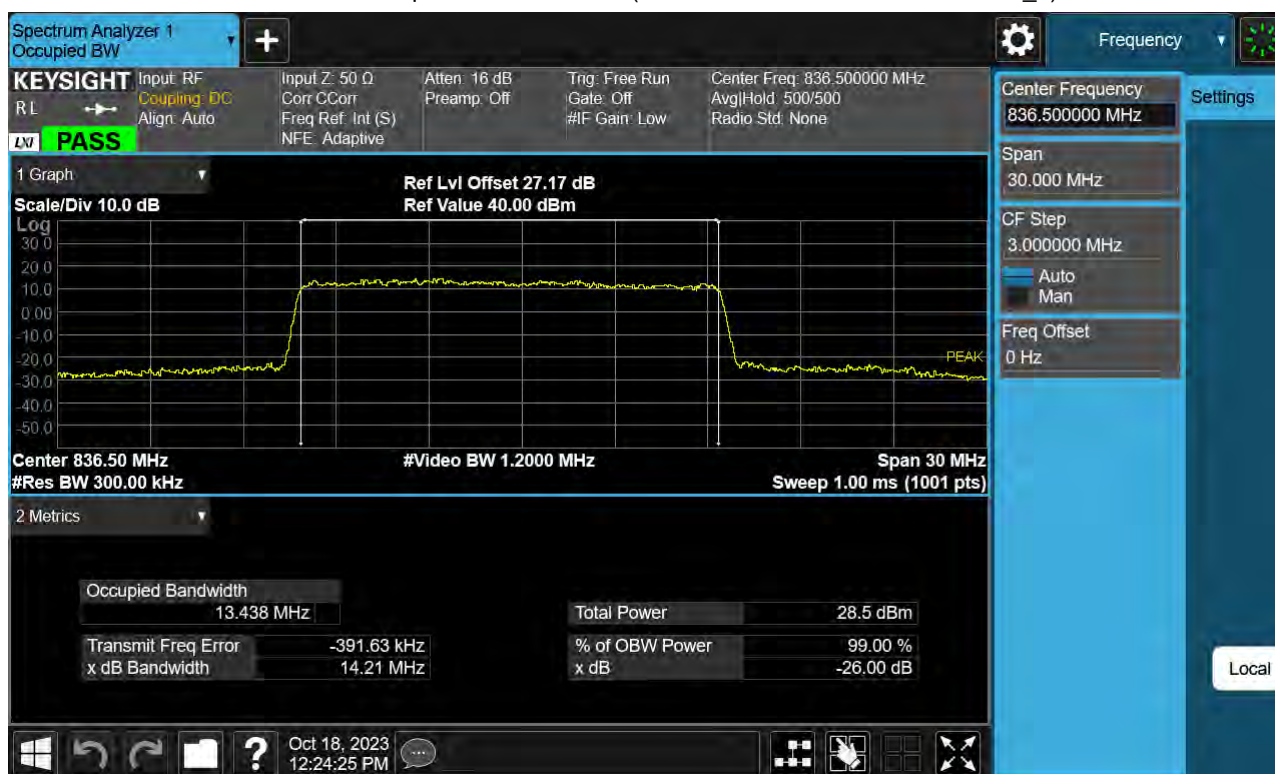

Spectrum Analyzer 1
Occupied BW

KEYSIGHT

Input RF
Coupling: DC
Align: Auto

Input Z: 50 Ω
Corr: CCorr
Freq Ref: Int (S)
NFE: Adaptive

Atten: 16 dB
Preamp: Off

Trig: Free Run
Gate: Off
#IF Gain: Low

Center Freq: 836.500000 MHz
Aval/Hold: 500/500
Radio Std: None

Center Frequency
836.500000 MHz

Settings

Span
30.000 MHz

CF Step
3.000000 MHz

Auto
Man

Freq Offset
0 Hz

1 Graph

Scale/Div 10.0 dB

Log

Ref Lvl Offset 27.17 dB
Ref Value 40.00 dBm

Center 836.50 MHz
#Res BW 300.00 kHz

#Video BW 1.2000 MHz

Span 30 MHz
Sweep 1.00 ms (1001 pts)

2 Metrics

Occupied Bandwidth
13.434 MHz

Transmit Freq Error
x dB Bandwidth

-378.35 kHz
14.21 MHz

Total Power
26.8 dBm

% of OBW Power
x dB

99.00 %
-26.00 dB

Local

The screenshot shows a Keysight Spectrum Analyzer interface. The main display area shows a signal trace with a peak at 836.50 MHz. The peak level is 27.17 dB offset from the reference value of 40.00 dBm. The signal is centered at 836.50 MHz with a span of 30 MHz. The resolution bandwidth (RBW) is 300.00 kHz and the video bandwidth (VBW) is 1.2000 MHz. The sweep time is 1.00 ms. The display is set to a logarithmic scale with a division of 10.0 dB. The signal is identified as 'PASS' in the top left corner. The right side of the screen shows a settings panel with various parameters like Center Frequency, Span, CF Step, and Freq Offset. The bottom of the screen shows a metrics panel with values for Occupied Bandwidth, Transmit Freq Error, Total Power, and % of OBW Power. The bottom status bar shows the date and time as Oct 18, 2023, 12:24:48 PM.

Sub6 n26. Occupied Bandwidth Plot (20 M BW Ch.167300 BPSK RB 100_0)



Sub6 n26. Occupied Bandwidth Plot (20 M BW Ch.167300 QPSK RB 100_0)



Sub6 n26. Occupied Bandwidth Plot (20 M BW Ch.167300 16QAM RB 100_0)



Sub6 n26. Occupied Bandwidth Plot (20 M BW Ch.167300 64QAM RB 100_0)



Sub6 n26. Occupied Bandwidth Plot (20 M BW Ch.167300 256QAM RB 100_0)



Sub6 n26. PAR Plot (5 M BW Ch.167300 BPSK_RB 25_0)



Sub6 n26. PAR Plot (5 M BW Ch.167300 QPSK_RB 25_0)



Sub6 n26. PAR Plot (5 M BW Ch.167300 16QAM_RB 25_0)



Sub6 n26. PAR Plot (5 M BW Ch.167300 64QAM_RB 25_0)



Sub6 n26. PAR Plot (5 M BW Ch.167300 256QAM_RB 25_0)




Sub6 n26. PAR Plot (10 M BW Ch.167300 BPSK_RB 50_0)



Sub6 n26. PAR Plot (10 M BW Ch.167300 QPSK_RB 50_0)




Sub6 n26. PAR Plot (10 M BW Ch.167300 16QAM_RB 50_0)

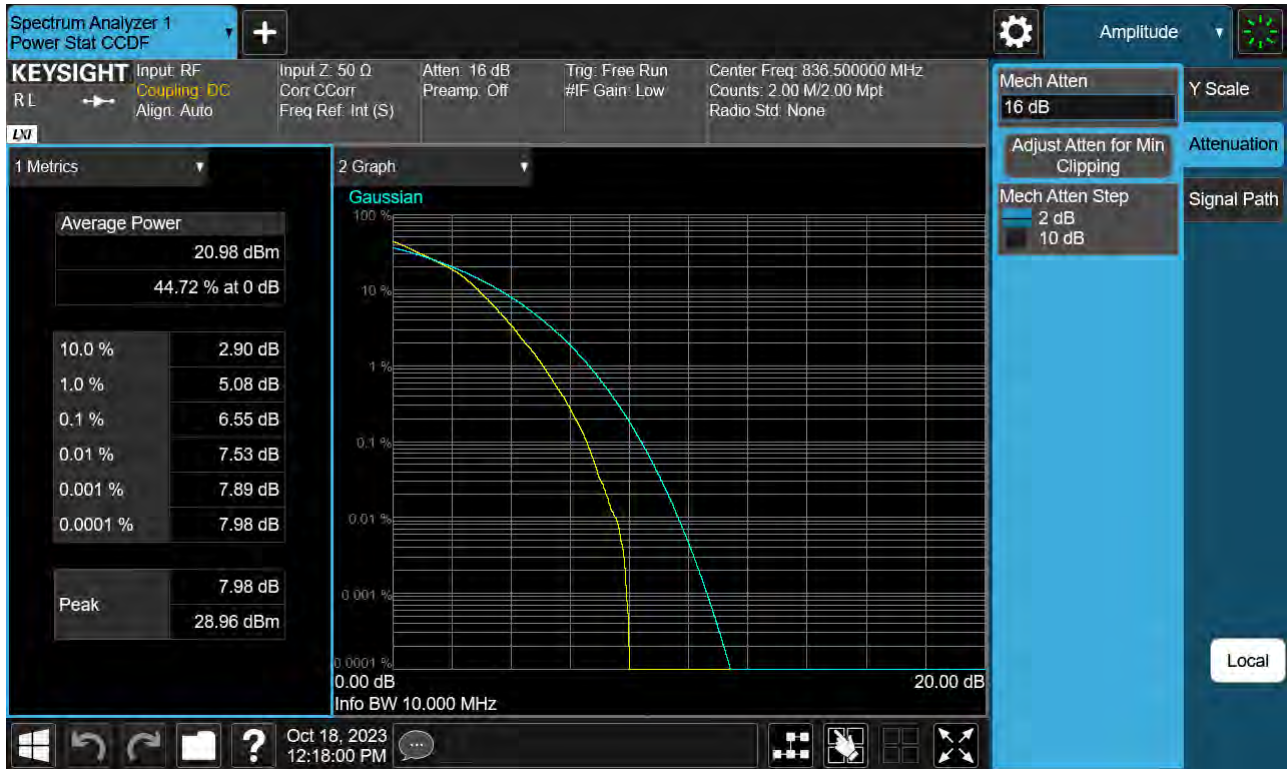


Sub6 n26. PAR Plot (10 M BW Ch.167300 64QAM_RB 50_0)



Sub6 n26. PAR Plot (10 M BW Ch.167300 256QAM_RB 50_0)

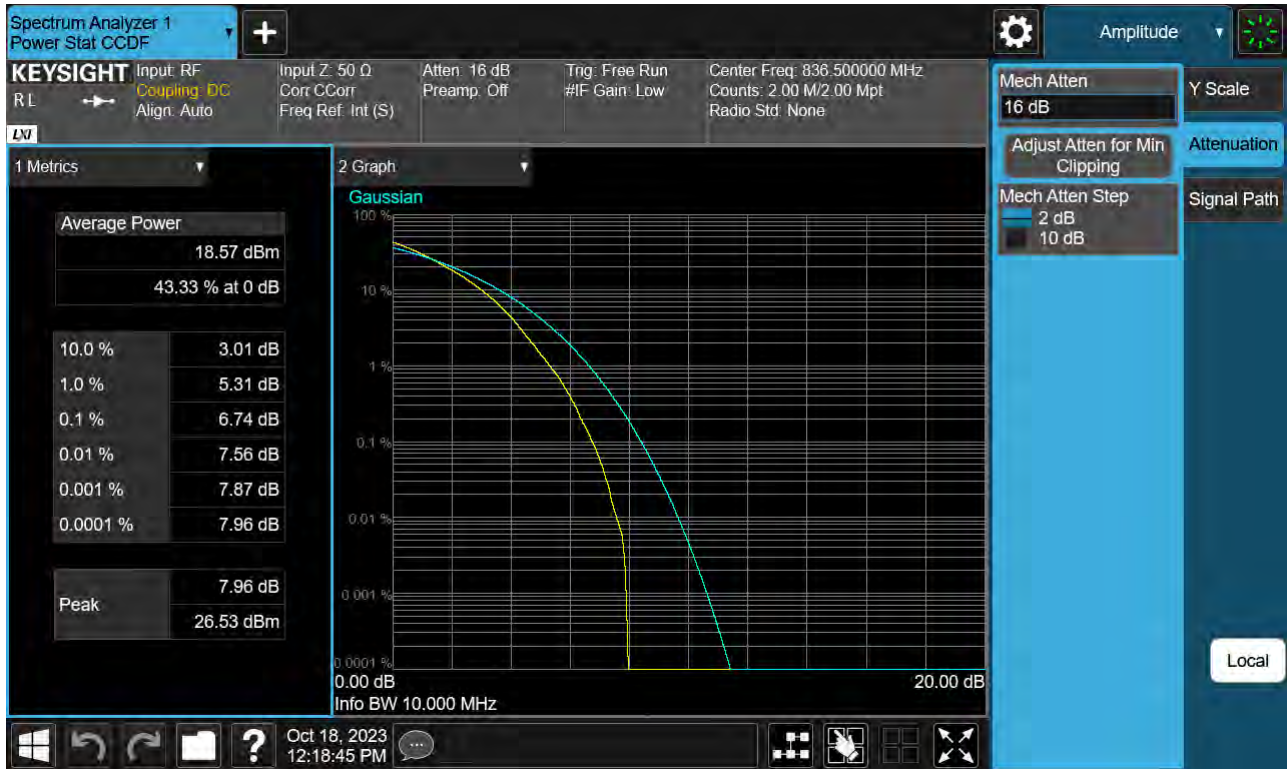


Sub6 n26. PAR Plot (15 M BW Ch.167300 BPSK RB 75_0)

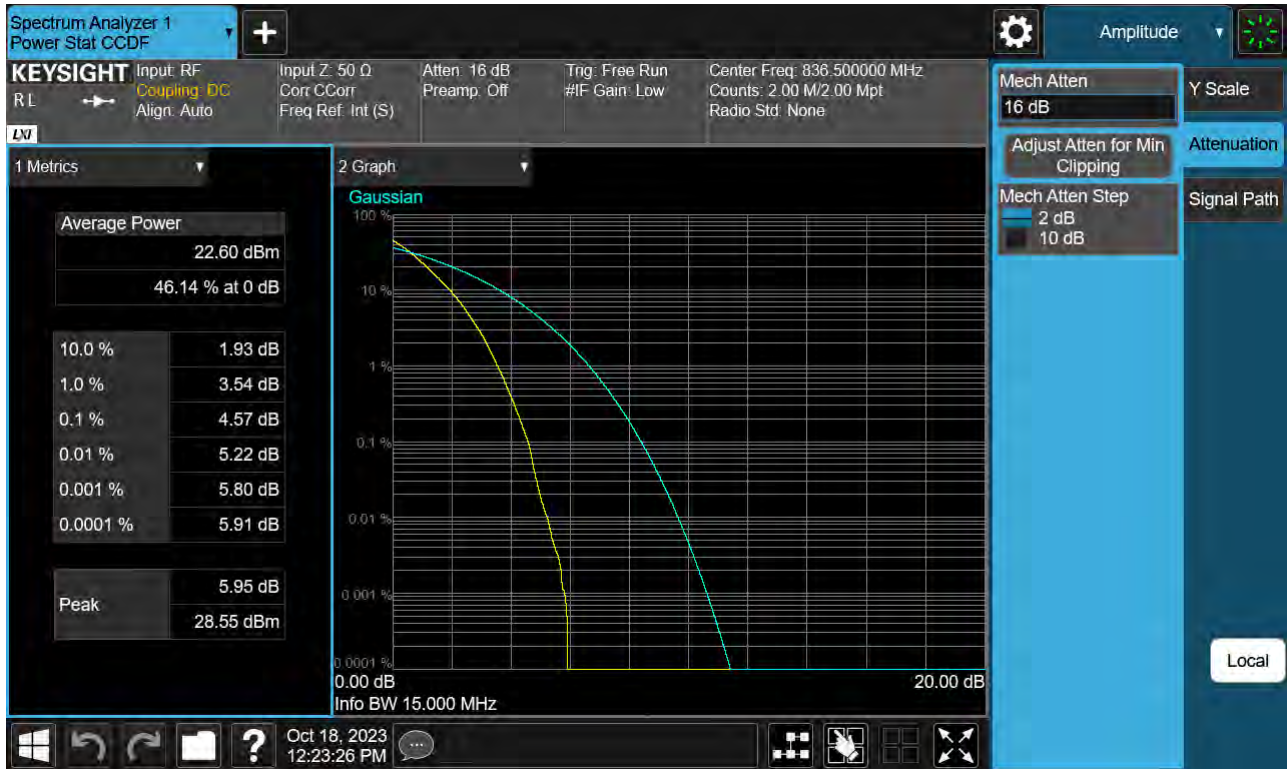


Sub6 n26. PAR Plot (15 M BW Ch.167300 QPSK RB 75_0)



Sub6 n26. PAR Plot (15 M BW Ch.167300 16QAM RB 75_0)

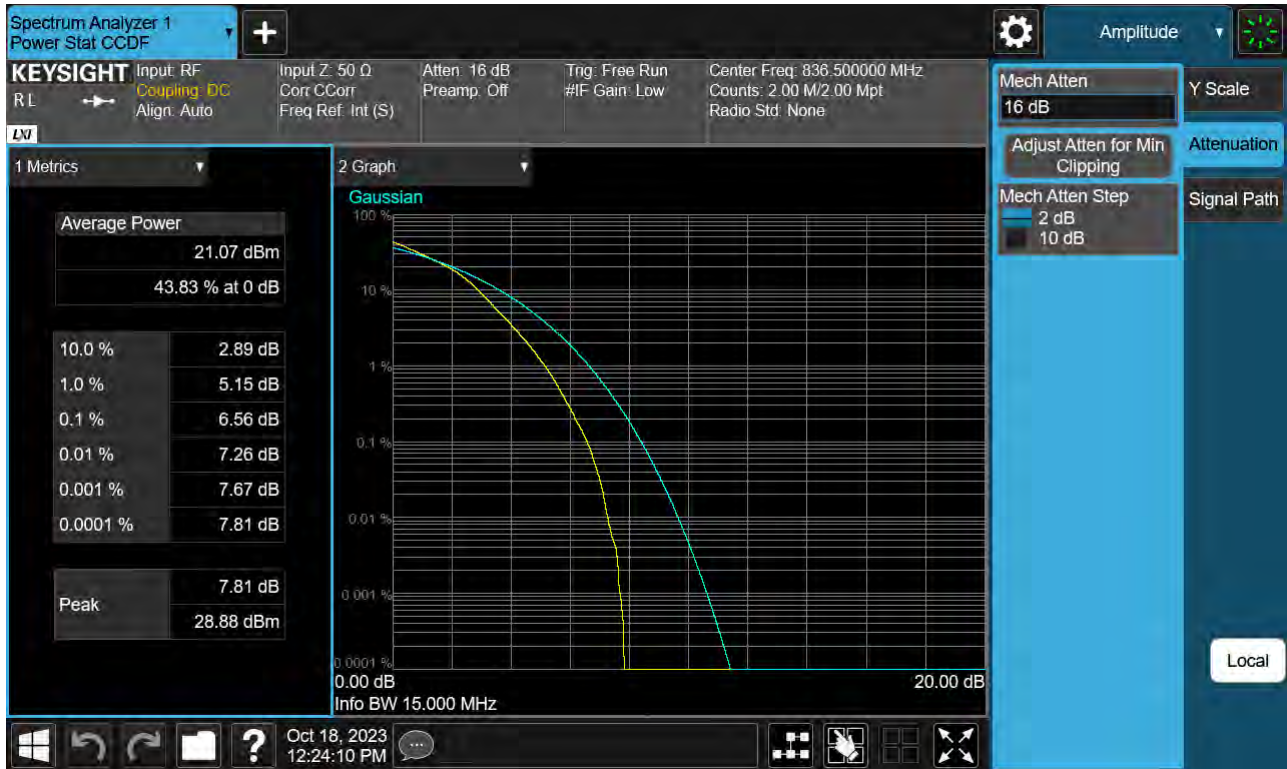

Sub6 n26. PAR Plot (15 M BW Ch.167300 64QAM RB 75_0)

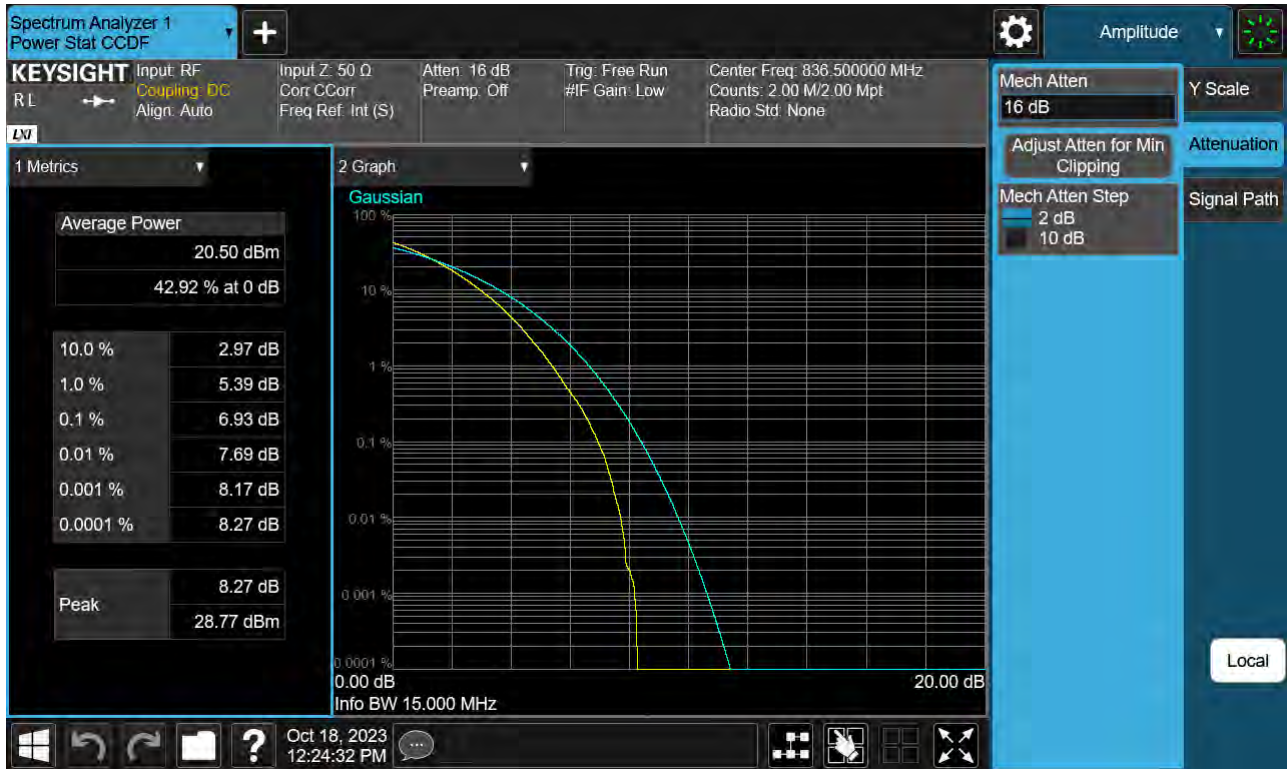


Sub6 n26. PAR Plot (15 M BW Ch.167300 256QAM RB 75_0)



Sub6 n26. PAR Plot (20 M BW Ch.167300 BPSK RB 100_0)



Sub6 n26. PAR Plot (20 M BW Ch.167300 QPSK RB 100_0)

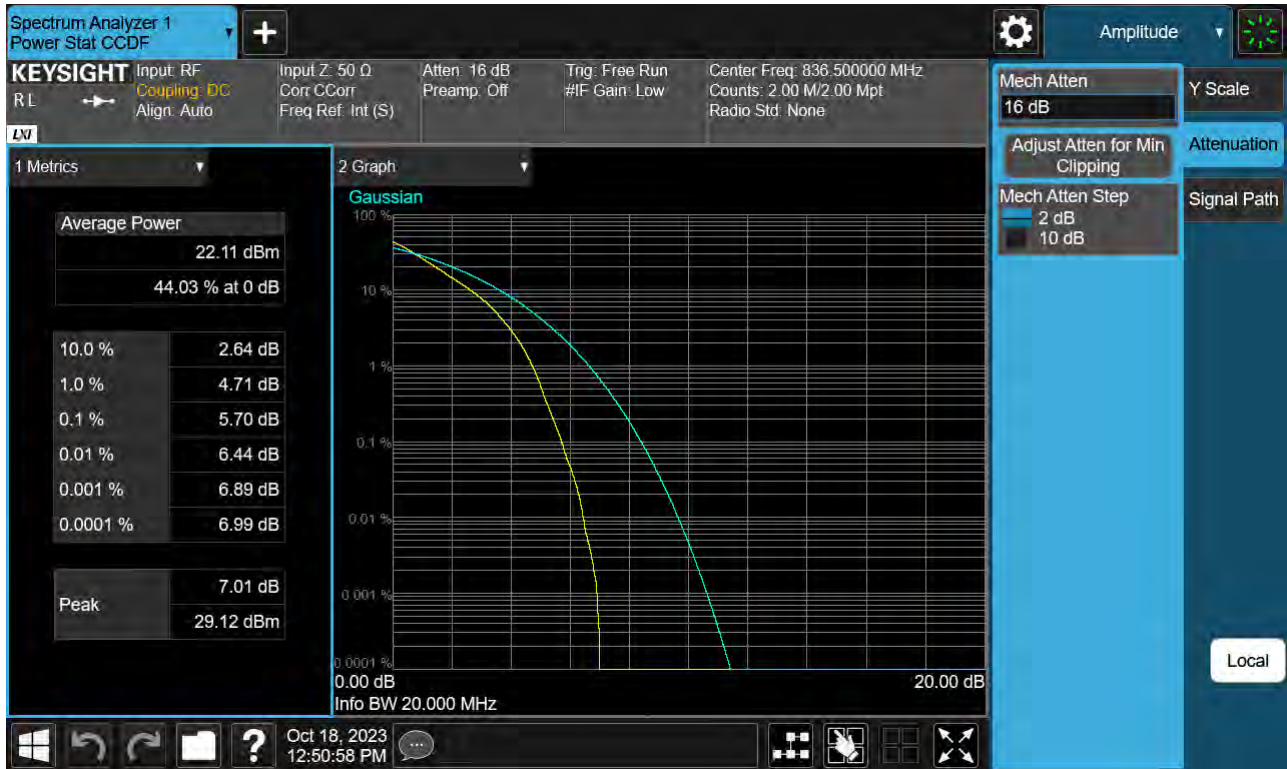

Sub6 n26. PAR Plot (20 M BW Ch.167300 16QAM RB 100_0)




Sub6 n26. PAR Plot (20 M BW Ch.167300 64QAM RB 100_0)



Sub6 n26. PAR Plot (20 M BW Ch.167300 256QAM RB 100_0)



Sub6 n26. Lower Band Edge Plot (5 M BW Ch.165300 BPSK_RB 1_Offset 0)

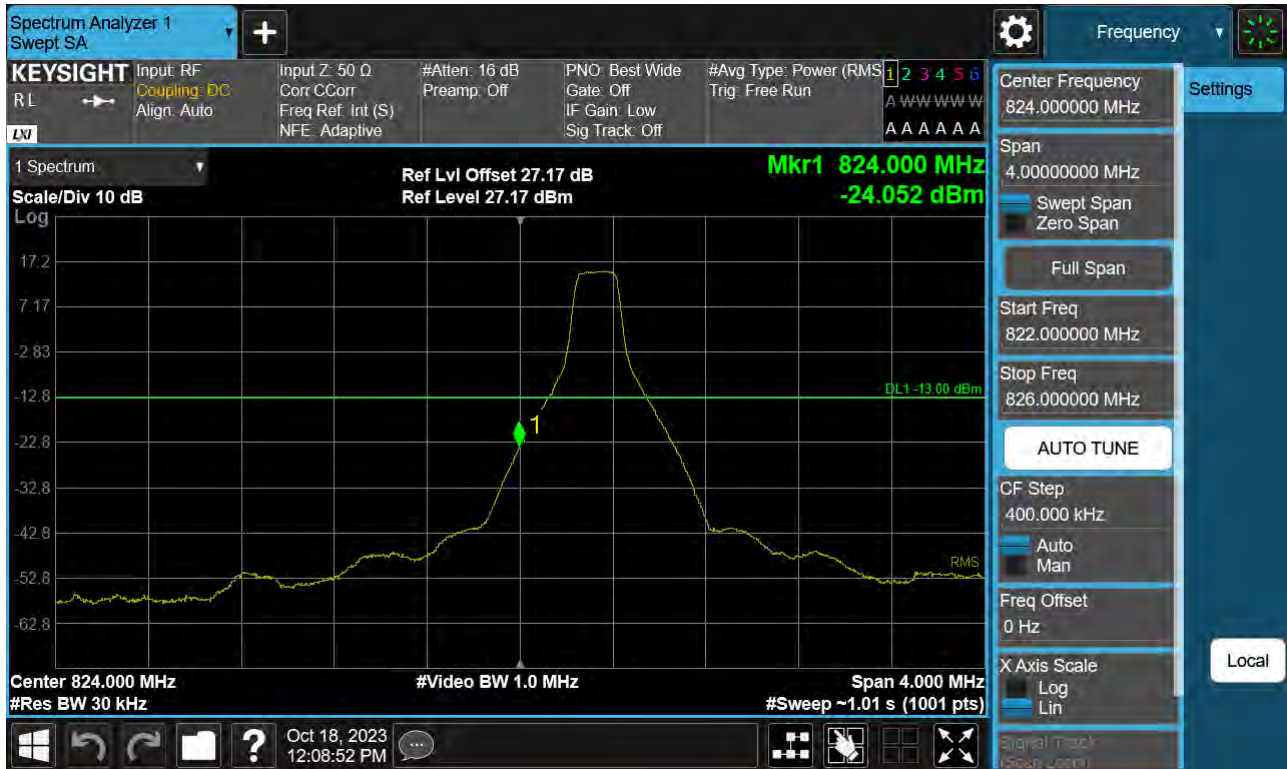


Sub6 n26. Lower Band Edge Plot (5 M BW Ch.165300 BPSK_RB 25_Offset 0)



Sub6 n26. Lower Extended Band Edge Plot (5 M BW Ch.165300 BPSK_RB 25_0)



Sub6 n26. Lower Band Edge Plot (10 M BW Ch.165800 BPSK_RB 1_Offset 0)

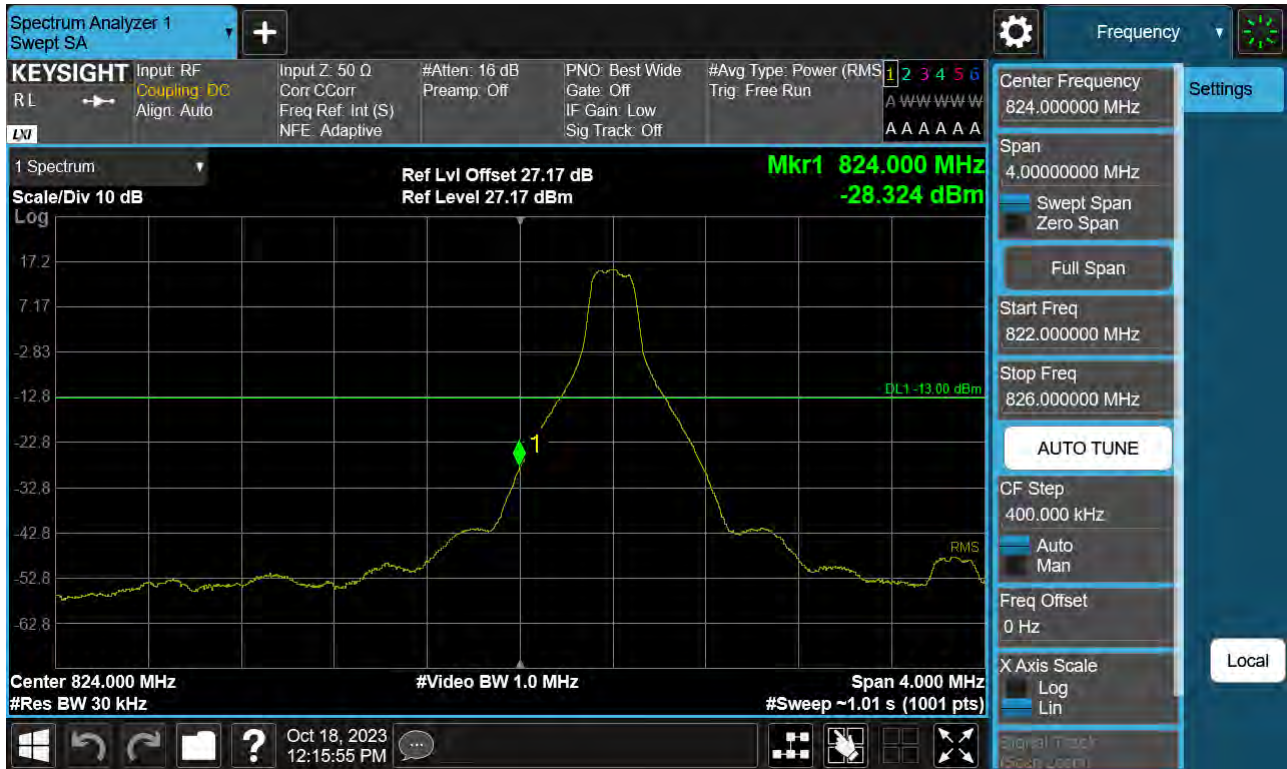


Sub6 n26. Lower Band Edge Plot (10 M BW Ch.165800 BPSK_RB 50_Offset 0)



Sub6 n26. Lower Extended Band Edge Plot (10 M BW Ch.165800 BPSK_RB 50_0)



Sub6 n26. Lower Band Edge Plot (15 M BW Ch.166300 BPSK_RB 1_Offset 0)

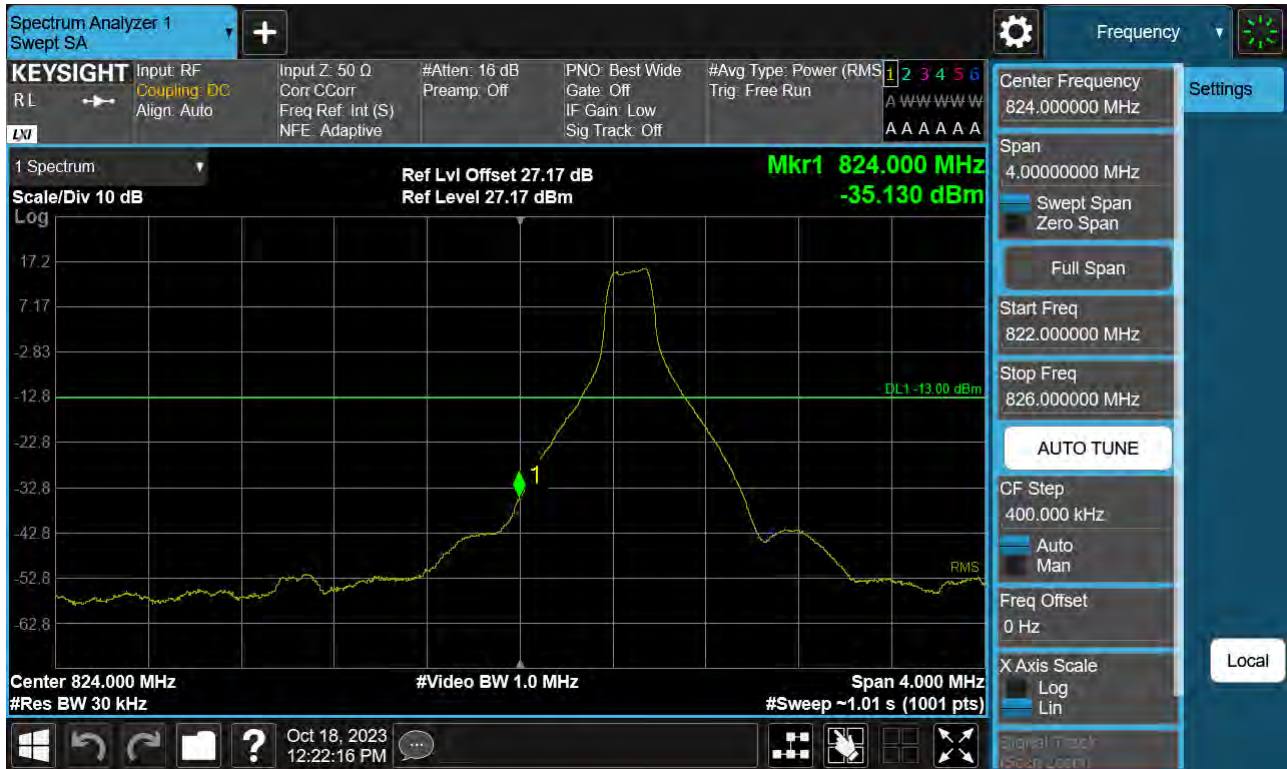

Sub6 n26. Lower Band Edge Plot (15 M BW Ch.166300 BPSK_RB 75_Offset 0)



Sub6 n26. Lower Extended Band Edge Plot (15 M BW Ch.166300 BPSK_RB 75_0)






Sub6 n26. Lower Band Edge Plot (20 M BW Ch.166800 BPSK_RB 100_Offset 0)



Sub6 n26. Lower Extended Band Edge Plot (20 M BW Ch.166800 BPSK_RB 100_0)



Sub6 n26. Upper Band Edge Plot (5 M BW Ch.169300 BPSK_RB 1_Offset 24)

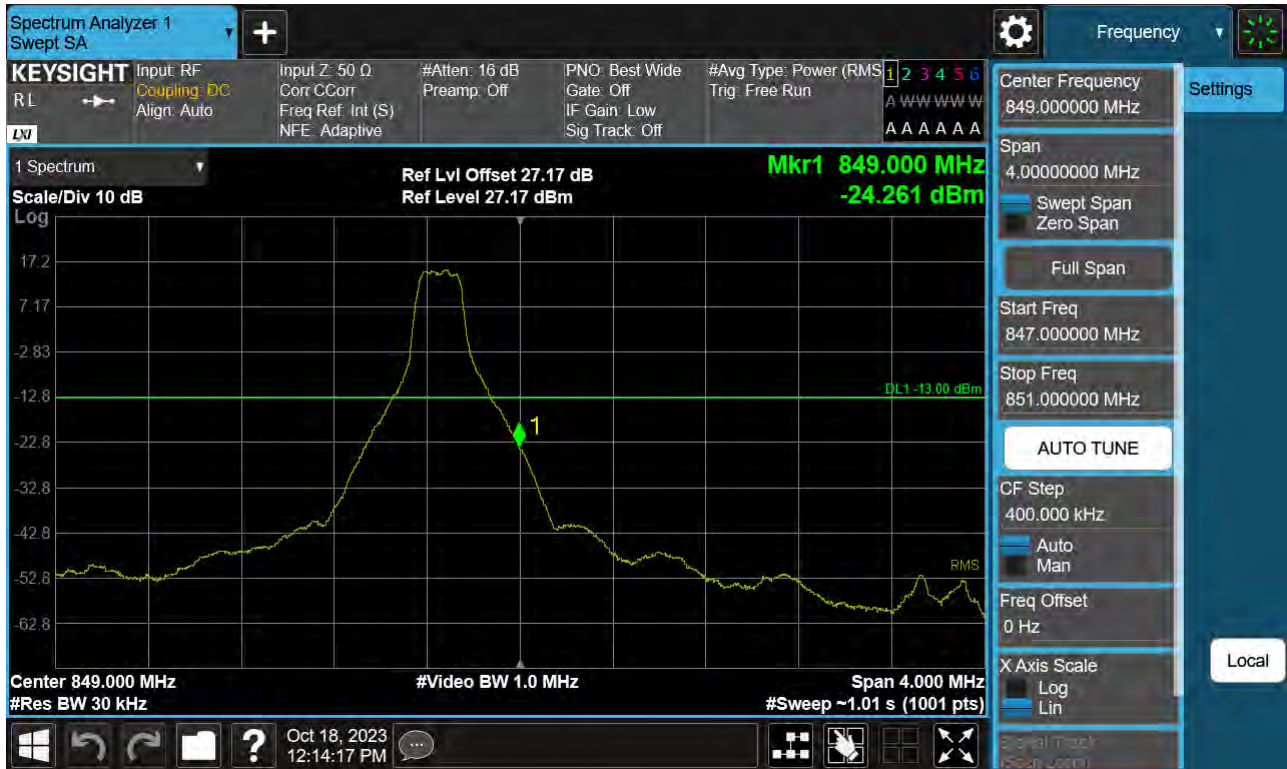

Sub6 n26. Upper Band Edge Plot (5 M BW Ch.169300 BPSK_RB 25_Offset 0)



Sub6 n26. Upper Extended Band Edge Plot (5 M BW Ch.169300 BPSK_RB 25_0)



Sub6 n26. Upper Band Edge Plot (10 M BW Ch.168800 BPSK_RB 1_Offset 49)



Sub6 n26. Upper Band Edge Plot (10 M BW Ch.168800 BPSK_RB 50_Offset 0)



Sub6 n26. Upper Extended Band Edge Plot (10 M BW Ch.168800 BPSK_RB 50_0)



Sub6 n26. Upper Band Edge Plot (15 M BW Ch.168300 BPSK_RB 1_Offset 74)



Sub6 n26. Upper Band Edge Plot (15 M BW Ch.168300 BPSK_RB 75_Offset 0)



Sub6 n26. Upper Extended Band Edge Plot (15 M BW Ch.168300 BPSK_RB 75_0)



Sub6 n26. Upper Band Edge Plot (20 M BW Ch.167800 BPSK_RB 1_Offset 99)




Sub6 n26. Upper Band Edge Plot (20 M BW Ch.167800 BPSK_RB 100_Offset 0)



Sub6 n26. Upper Extended Band Edge Plot (20 M BW Ch.167800 BPSK_RB 100_0)




Sub6 n26. Conducted Spurious Plot (165300ch_5 MHz_BPSK_RB 1_0)

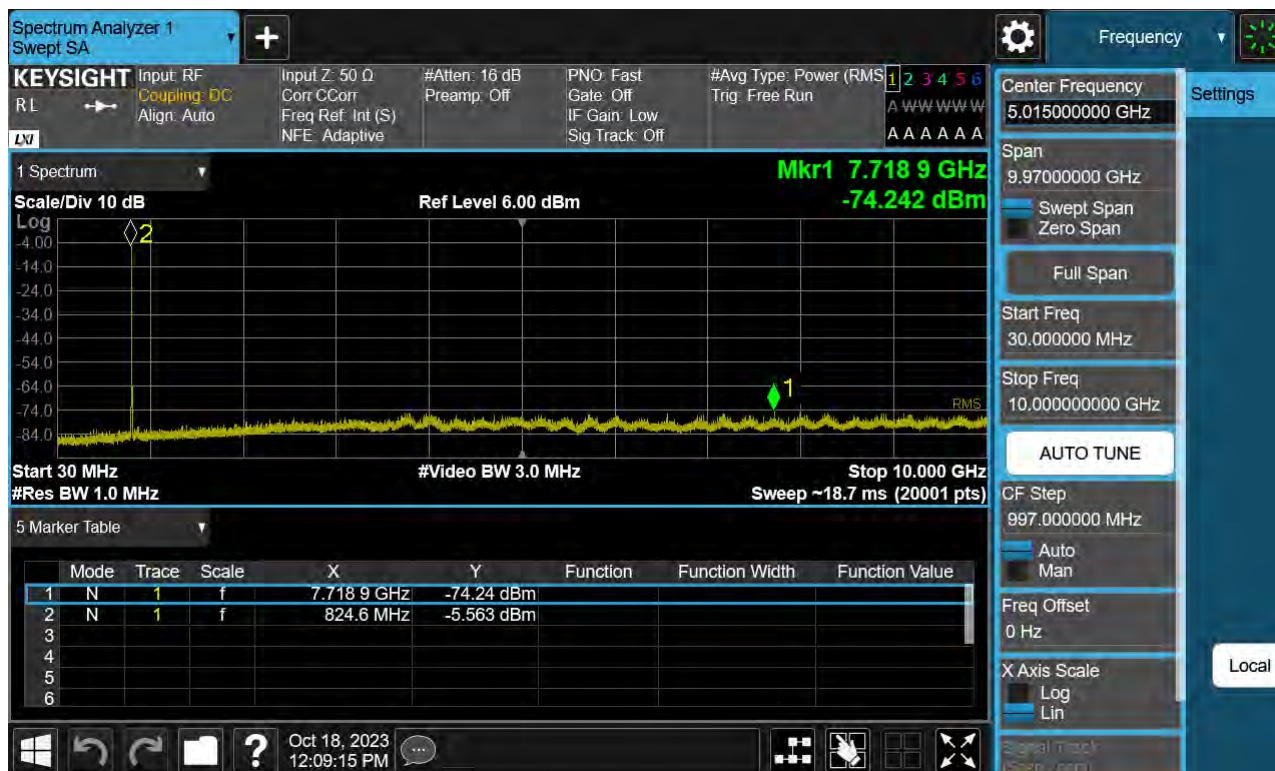


Sub6 n26. Conducted Spurious Plot (167300ch_5 MHz_BPSK_RB 1_0)




Sub6 n26. Conducted Spurious Plot (169300ch_5 MHz_BPSK_RB 1_0)

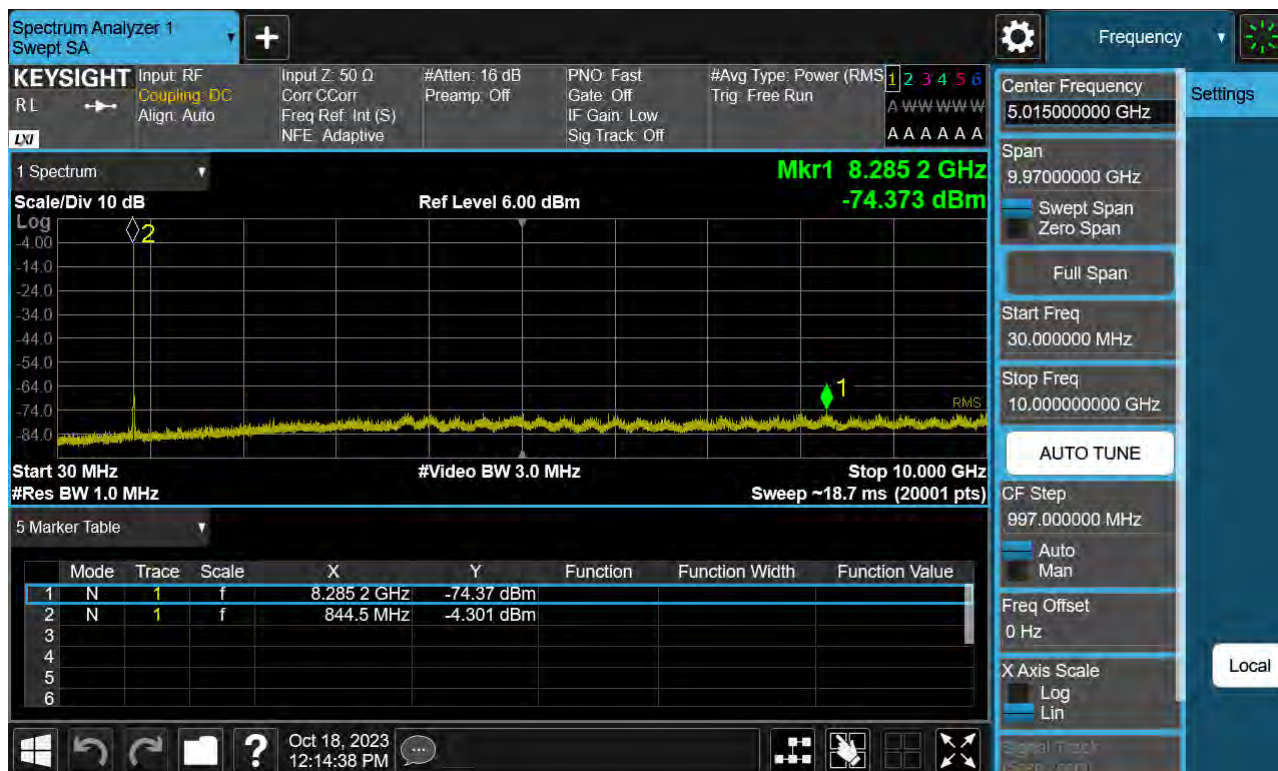


Sub6 n26. Conducted Spurious Plot (165800ch_10 MHz_BPSK_RB 1_0)

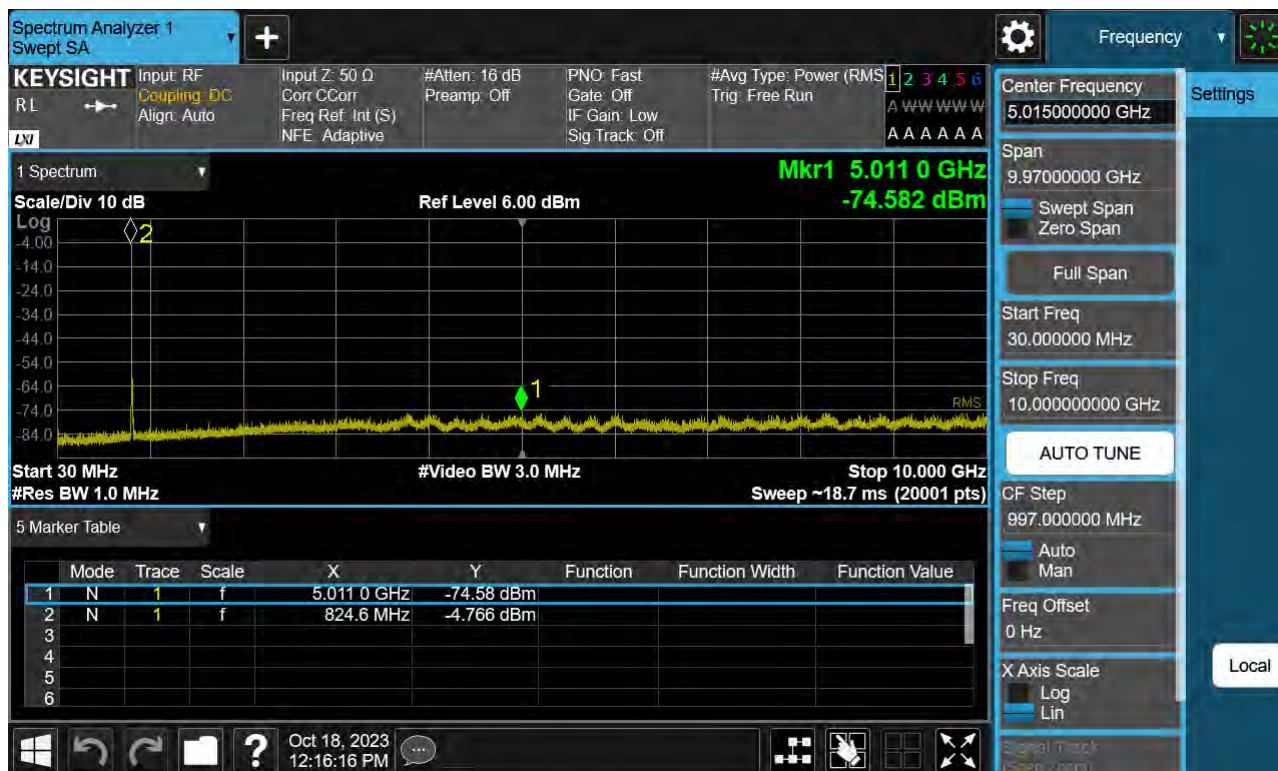


Sub6 n26. Conducted Spurious Plot (167300ch_10 MHz_BPSK_RB 1_0)

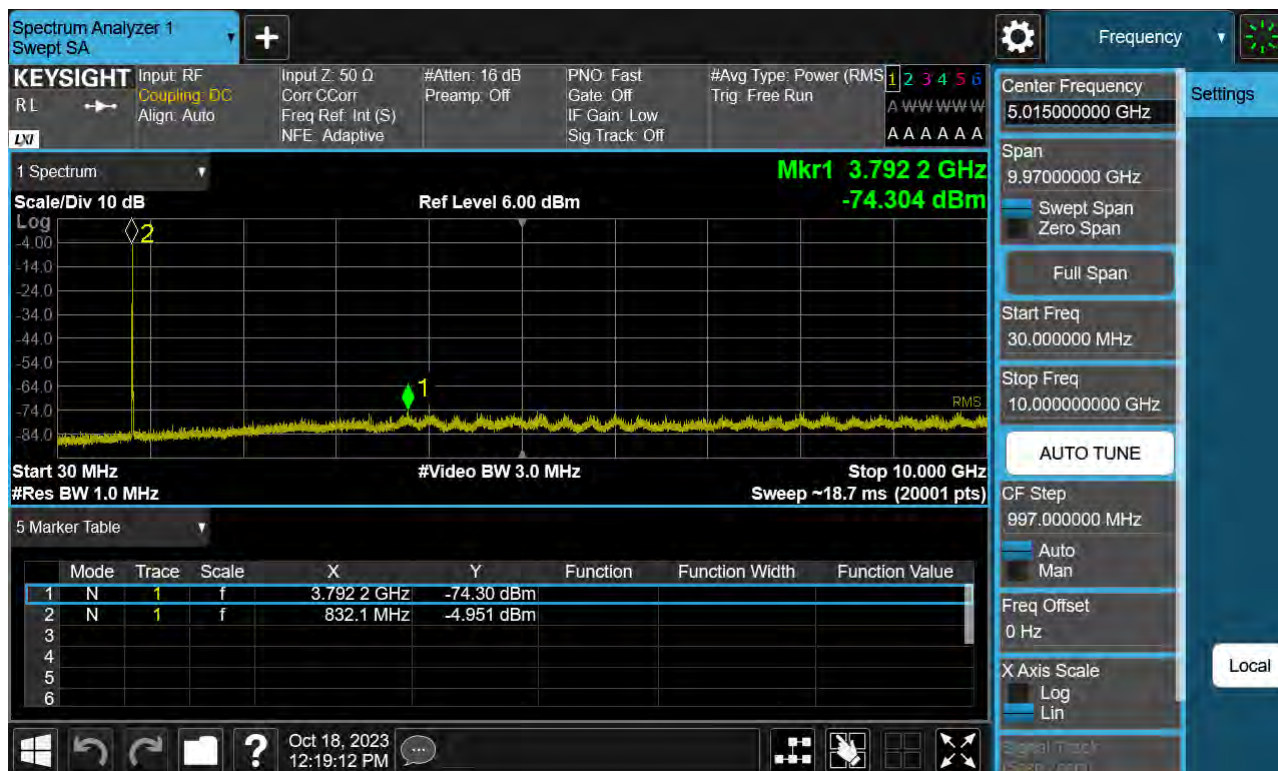


Sub6 n26. Conducted Spurious Plot (168800ch_10 MHz_BPSK_RB 1_0)

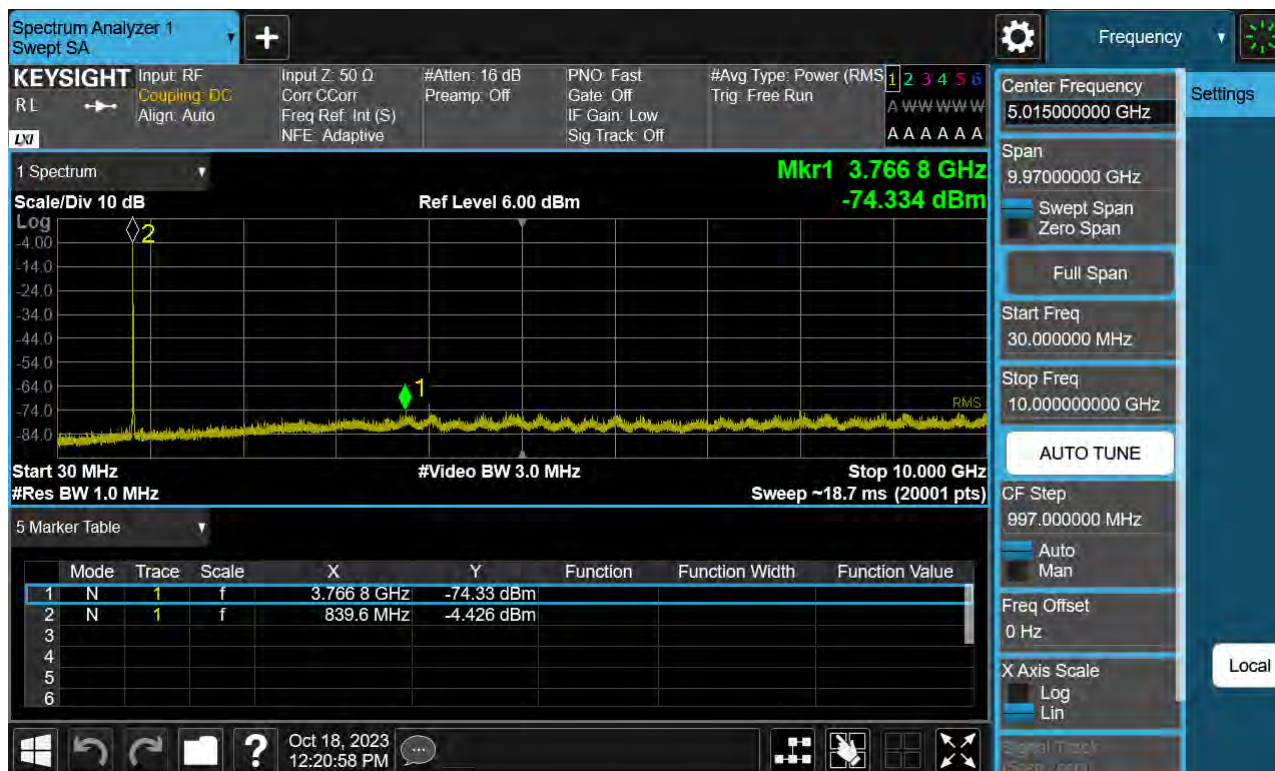


Sub6 n26. Conducted Spurious (166300ch_15 MHz_BPSK_RB 1_0)

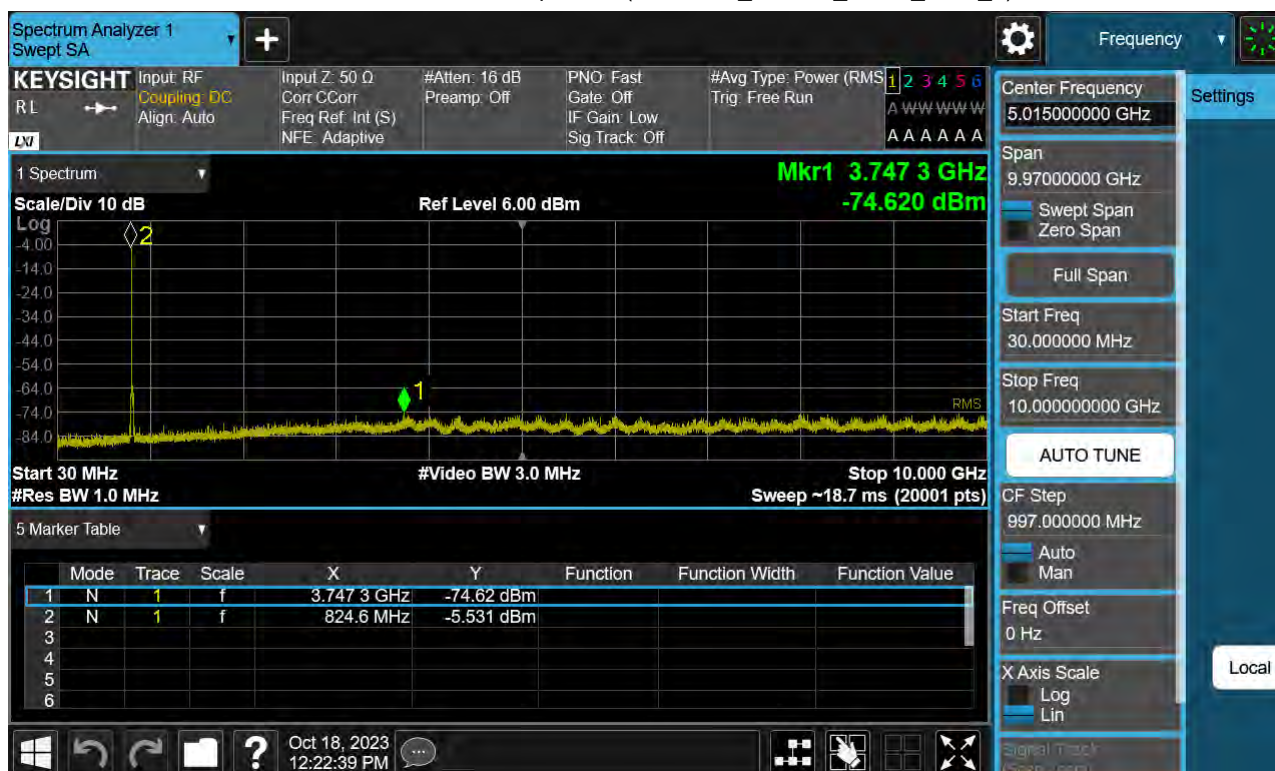

Sub6 n26. Conducted Spurious (167300ch_15 MHz_BPSK_RB 1_0)

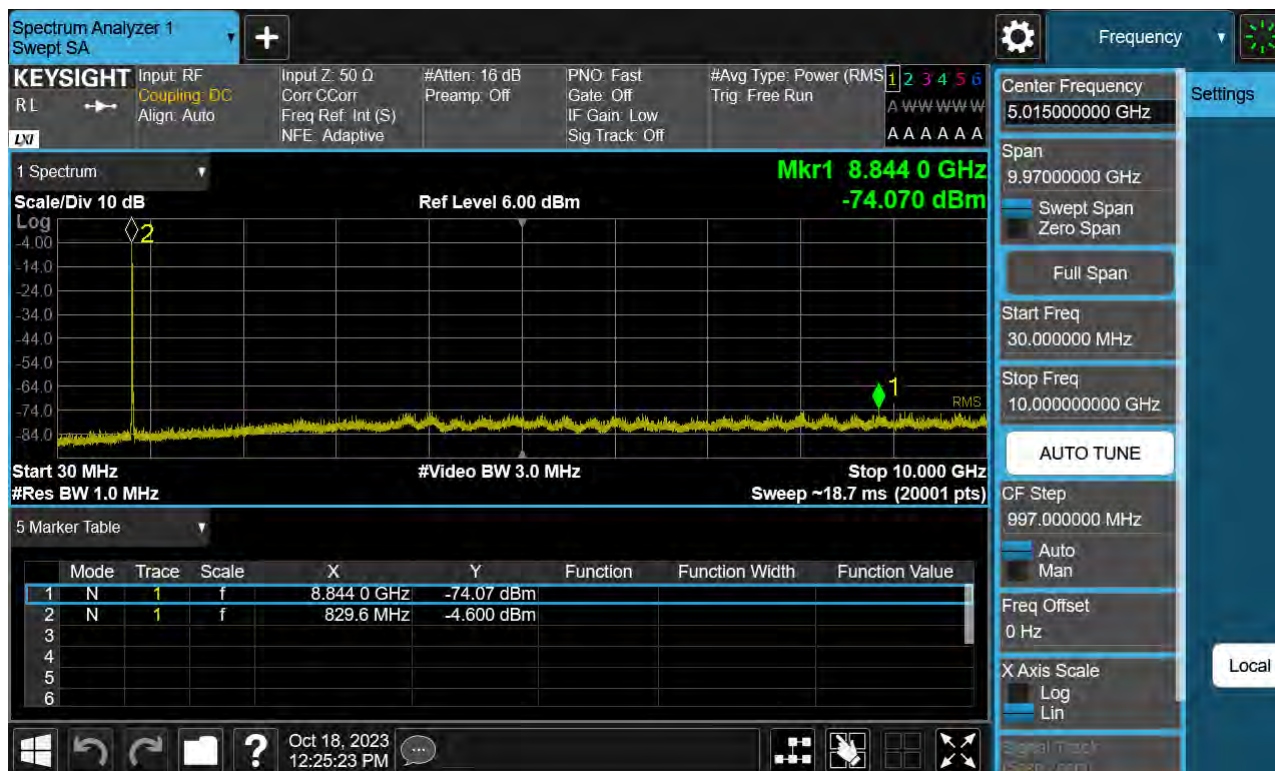


Sub6 n26. Conducted Spurious (168300ch_15 MHz_BPSK_RB 1_0)

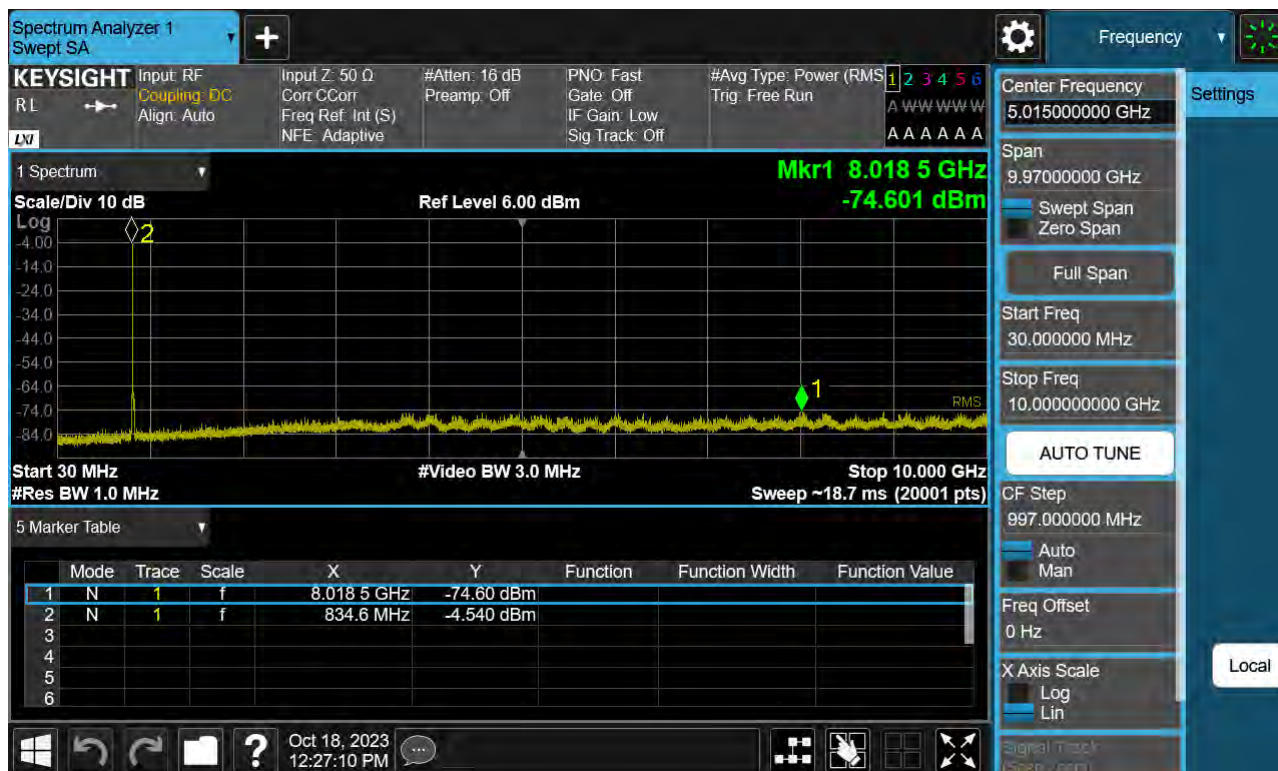


Sub6 n26. Conducted Spurious (166800ch_20 MHz_BPSK_RB 1_0)



Sub6 n26. Conducted Spurious (167300ch_20 MHz_BPSK_RB 1_0)

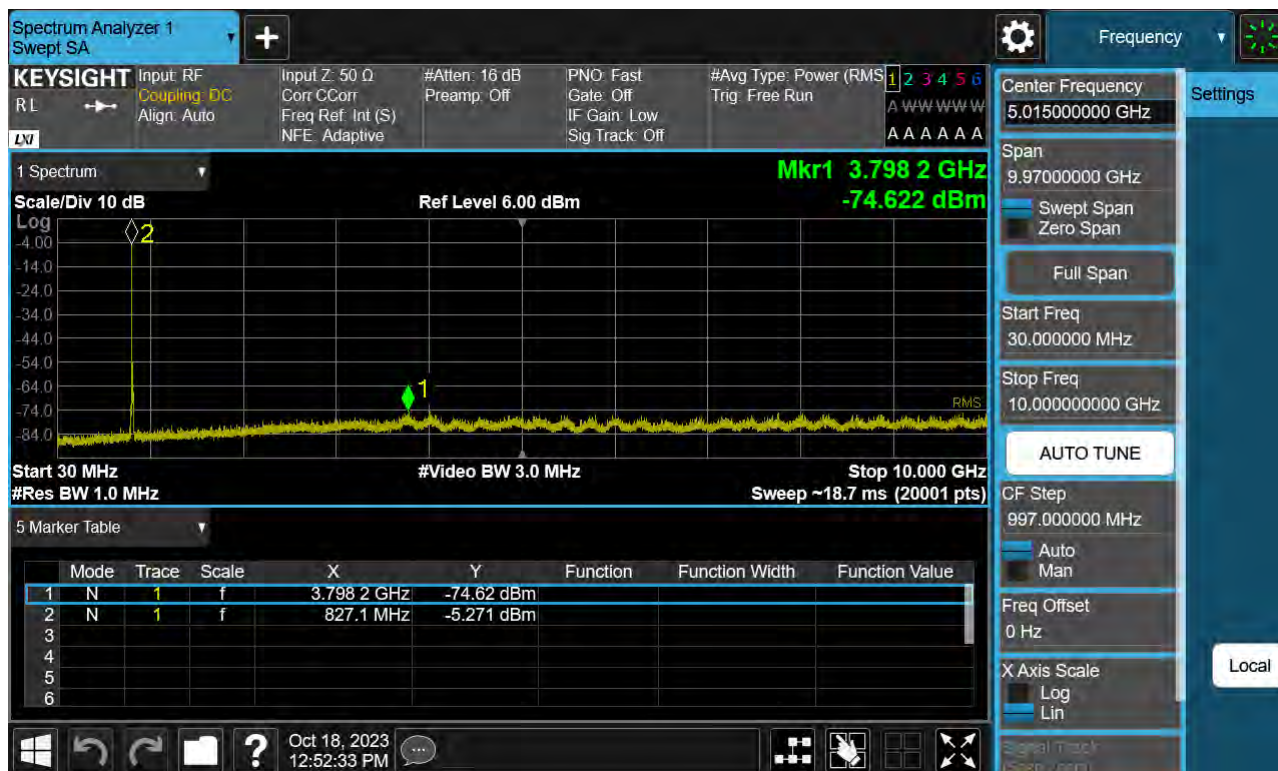

Sub6 n26. Conducted Spurious (167800ch_20 MHz_BPSK_RB 1_0)

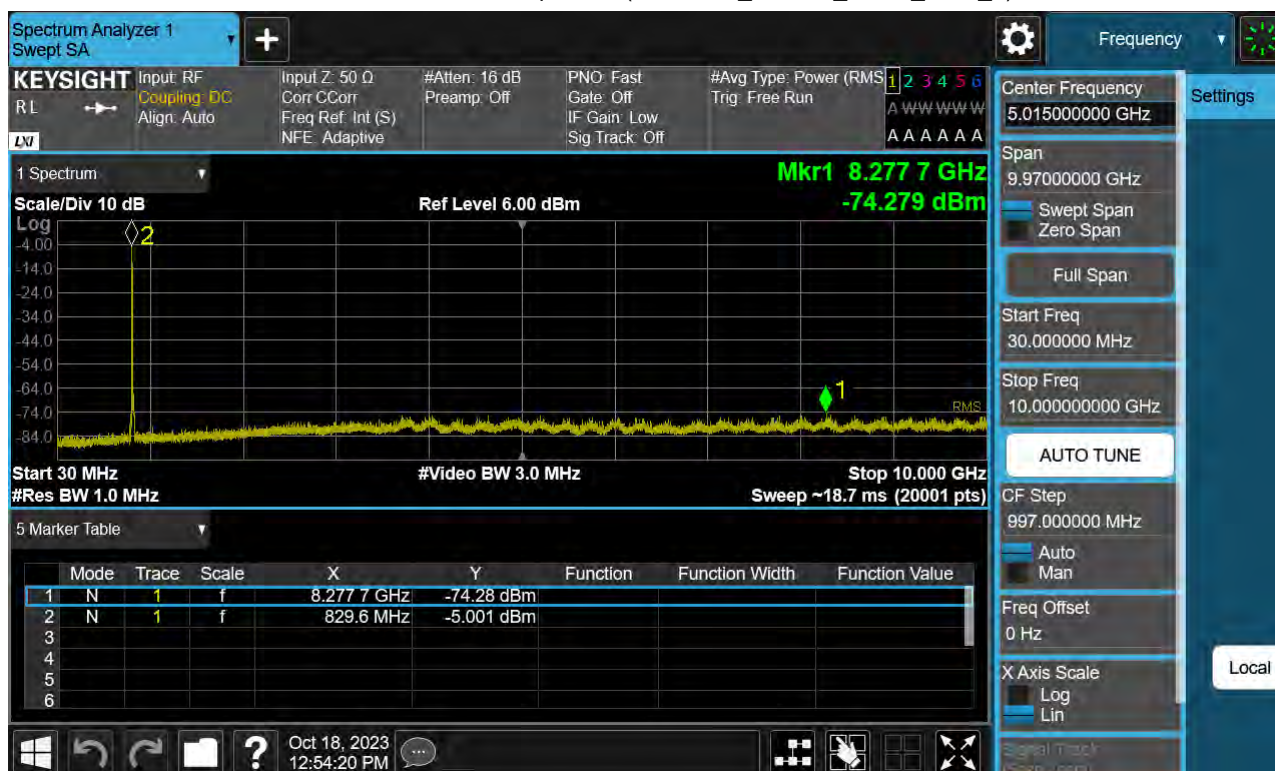

10. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2311-FC031-P