

---

# FCC Test Report

---

Report No.: AGC03729220802FE10

**FCC ID** : MMABR200A

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION** : Handheld UHF Transceiver

**BRAND NAME** : Midland

**MODEL NAME** : BR200

**APPLICANT** : Midland Radio Corporation

**DATE OF ISSUE** : Sep. 13, 2022

**STANDARD(S)** : FCC Part 90 Rules

**REPORT VERSION** : V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>



**REPORT REVISE RECORD**

| Report Version | Revise Time | Issued Date   | Valid Version | Notes           |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0           | /           | Sep. 13, 2022 | Valid         | Initial Release |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## TABLE OF CONTENTS

|  |           |
|--|-----------|
| <b>1. GENERAL INFORMATION .....</b>          | <b>5</b>  |
| <b>2. PRODUCT INFORMATION .....</b>          | <b>6</b>  |
| 2.1 PRODUCT TECHNICAL DESCRIPTION .....      | 6         |
| 2.2 TEST FREQUENCY LIST .....                | 7         |
| 2.3 RELATED SUBMITTAL(S) / GRANT (S) .....   | 8         |
| 2.4 TEST METHODOLOGY .....                   | 8         |
| 2.5 CALCULATION OF EMISSION INDICATORS ..... | 8         |
| 2.6 SPECIAL ACCESSORIES .....                | 8         |
| 2.7 EQUIPMENT MODIFICATIONS .....            | 8         |
| <b>3. TEST ENVIRONMENT .....</b>             | <b>9</b>  |
| 3.1 ADDRESS OF THE TEST LABORATORY .....     | 9         |
| 3.2 TEST FACILITY .....                      | 9         |
| 3.3 ENVIRONMENTAL CONDITIONS .....           | 10        |
| 3.4 MEASUREMENT UNCERTAINTY .....            | 10        |
| 3.5 LIST OF EQUIPMENTS USED .....            | 11        |
| <b>4.SYSTEM TEST CONFIGURATION .....</b>     | <b>12</b> |
| 4.1 EUT CONFIGURATION .....                  | 12        |
| 4.2 EUT EXERCISE .....                       | 12        |
| 4.3 CONFIGURATION OF TESTED SYSTEM .....     | 12        |
| 4.4 EQUIPMENT USED IN TESTED SYSTEM .....    | 12        |
| 4.5 SUMMARY OF TEST RESULTS .....            | 13        |
| <b>5.DESCRPTION OF TEST MODES .....</b>      | <b>14</b> |
| <b>6.FREQUENCY TOLERANCE .....</b>           | <b>15</b> |
| 6.1 PROVISIONS APPLICABLE .....              | 15        |
| 6.2 MEASUREMENT PROCEDURE .....              | 15        |
| 6.3 MEASUREMENT SETUP .....                  | 15        |
| 6.4 MEASUREMENT RESULTS .....                | 16        |
| <b>7. EMISSION BANDWIDTH .....</b>           | <b>17</b> |
| 7.1 PROVISIONS APPLICABLE .....              | 17        |
| 7.2 MEASUREMENT PROCEDURE .....              | 17        |
| 7.3 MEASUREMENT SETUP .....                  | 17        |
| 7.4 MEASUREMENT RESULTS .....                | 18        |
| <b>8. SPURIOUS RADIATED EMISSION .....</b>   | <b>19</b> |
| 8.1 PROVISIONS APPLICABLE .....              | 19        |
| 8.2 MEASUREMENT PROCEDURE .....              | 19        |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

|  |           |
|--|-----------|
| 8.3 MEASUREMENT SETUP .....                        | 20        |
| 8.4 MEASUREMENT RESULTS.....                       | 21        |
| 8.5 EMISSION MASK PLOT .....                       | 26        |
| <b>9.MODULATION CHARACTERISTICS .....</b>          | <b>28</b> |
| 9.1 PROVISIONS APPLICABLE.....                     | 28        |
| 9.2 MEASUREMENT METHOD .....                       | 28        |
| 9.3 MEASUREMENT SETUP .....                        | 28        |
| 9.4 MEASUREMENT RESULTS.....                       | 29        |
| <b>10. MAXIMUM TRANSMITTER POWER .....</b>         | <b>31</b> |
| 10.1 PROVISIONS APPLICABLE.....                    | 31        |
| 10.2 MEASUREMENT METHOD .....                      | 31        |
| 10.3 MEASUREMENT METHOD .....                      | 31        |
| 10.4 MEASUREMENT RESULTS .....                     | 33        |
| <b>11. SPURIOUS EMISSION ON ANTENNA PORT .....</b> | <b>34</b> |
| 11.1 PROVISIONS APPLICABLE .....                   | 34        |
| 11.2 MEASUREMENT METHOD.....                       | 34        |
| 11.3 MEASUREMENT SETUP .....                       | 34        |
| 11.4 MEASUREMENT RESULTS.....                      | 35        |
| <b>12.TRANSMITTER FREQUENCY BEHAVIOR.....</b>      | <b>37</b> |
| 12.1 PROVISIONS APPLICABLE.....                    | 37        |
| 12.2 MEASUREMENT SETUP .....                       | 37        |
| 12.3 MEASUREMENT METHOD .....                      | 38        |
| 12.4 MEASUREMENT RESULTS.....                      | 40        |
| <b>13. AUDIO LOW PASS FILTER RESPONSE .....</b>    | <b>41</b> |
| 13.1 PROVISIONS APPLICABLE.....                    | 41        |
| 13.2 MEASUREMENT METHOD .....                      | 42        |
| 13.3 MEASUREMENT SETUP .....                       | 42        |
| 13.4 MEASUREMENT RESULTS.....                      | 43        |
| <b>APPENDIX I: PHOTOGRAPHS OF TEST SETUP .....</b> | <b>44</b> |
| <b>APPENDIX II: PHOTOGRAPHS OF TEST EUT .....</b>  | <b>44</b> |




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 1. GENERAL INFORMATION

|                         |  |
|-------------------------|--|
| Applicant               | Midland Radio Corporation  |
| Address                 | 5900 Parretta Drive Kansas City, Missouri 64120-2134 United States   |
| Manufacturer            | Midland Radio Corporation  |
| Address                 | 5900 Parretta Drive Kansas City, Missouri 64120-2134 United States   |
| Factory                 | Shenzhen Allcomm Electronic Company Limited  |
| Address                 | Block A, 101A, 302, 401 of Block B, No. 272 Guangtian Road, Tangxiayong Village, Yanluo Subdistrict, Baoan District, Shenzhen City, Guangdong Province |
| Product Designation     | Handheld UHF Transceiver   |
| Brand Name              | Midland  |
| Test Model              | BR200  |
| Deviation from Standard | None   |
| Date of Receipt         | Aug. 23, 2022  |
| Date of Test            | Aug. 23, 2022~Sep. 13, 2022  |
| Test Result             | Pass   |

### WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 90. The test results of this report relate only to the tested sample identified in this report.

|             |  |
|-------------|--|
| Prepared By |    |
|             | <div style="display: flex; justify-content: space-between; border-top: 1px solid black; padding-top: 5px;"> <span>Bibo Zhang<br/>(Project Engineer)</span> <span>Sep. 13, 2022</span> </div> |
| Reviewed By |    |
|             | <div style="display: flex; justify-content: space-between; border-top: 1px solid black; padding-top: 5px;"> <span>Calvin Liu<br/>(Reviewer)</span> <span>Sep. 13, 2022</span> </div>         |
| Approved By |    |
|             | <div style="display: flex; justify-content: space-between; border-top: 1px solid black; padding-top: 5px;"> <span>Max Zhang<br/>Authorized Officer</span> <span>Sep. 13, 2022</span> </div>  |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 2. PRODUCT INFORMATION

### 2.1 PRODUCT TECHNICAL DESCRIPTION

|                           |   |          |
|---------------------------|---|----------|
| Hardware Version          | 1.0   |          |
| Software Version          | 1.0   |          |
| Power Supply              | DC 3.7V,1750mAh by battery, charging for DC4.2V                                   |          |
| Adapter Information       | Input: AC 110V, 50Hz, 0.2A<br>Output: DC 5V 1A                                    |          |
| Communication Type        | Voice / Tone only   |          |
| Operation Frequency Range | From 450MHz to 470MHz   |          |
| Modulation Type           | Analog Voice:   | FM       |
| Channel Separation        | Analog Voice:   | 12.5 kHz |
| Emission Designator       | Analog Voice:   | 11K0F3E  |
| Rated Output Power        | 2W(It was fixed by the manufacturer, any individual can't arbitrarily change it.) |          |
| Maximum Transmitter Power | 32.59dBm(2W-12.5kHz)  |          |
| Antenna Designation       | Detachable  |          |
| Antenna Gain              | 1.5dBi  |          |
| Frequency Tolerance       | 1.086ppm  |          |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## 2.2 TEST FREQUENCY LIST

| Operation mode | Channel Separation | Operation Frequency Range | Test channel | Test Frequency |
|----------------|--------------------|---------------------------|--------------|----------------|
| Analog         | 12.5 kHz           | 450-470MHz                | Bottom       | 451.1875 MHz   |
|                | 12.5 kHz           | 450-470MHz                | Middle       | 456.1875 MHz   |
|                | 12.5 kHz           | 450-470MHz                | Middle       | 461.0375 MHz   |
|                | 12.5 kHz           | 450-470MHz                | Top          | 469.5625 MHz   |

### Note:

In section KDB 634817 D01 Sections II) (f) (1) and (2):

Test at least one frequency in each band for each rule part applied under and ensure the device is capable of operating on the frequency under each rule part. This requirement may result in testing on multiple frequencies. Testing on one frequency may be acceptable if multiple listed bands for a rule part with a continuous frequency range are split to remove a conflict with other rules and the technical requirements in the split bands are the same. Additional requirements for RF exposure may apply.

## 2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: **MMABR200A** , filing to comply with Part 2, Part 90 of the Federal Communication Commission rules.

## 2.4 TEST METHODOLOGY

The tests were performed according to following standards:

| No. | Identity           | Document Title  |
|-----|--------------------|---|
| 1   | FCC 47 CFR Part 90 | Private Land Mobile Radio Services  |
| 2   | FCC 47 CFR Part 2  | Frequency allocations and radio treaty matters; general rules and regulations                     |
| 3   | ANSI/TIA-603-E     | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards               |
| 4   | ANSI C63.26-2015   | American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services |
| 5   | KDB 971168 D01     | KDB 971168 D01 Power Meas License Digital Systems v03r01  |
| 6   | KDB 579009 D03     | KDB 579009 D03 Applications Part 90 Refarming Bands v01   |
| 7   | KDB 634817 D01     | KDB 634817 D01 Freq Range Listing for Grants v04r01   |

## 2.5 CALCULATION OF EMISSION INDICATORS

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth

### For FM Mode (ChannelSpacing: 12.5kHz)

Emission Designator 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$

F3E portion of the designator represents an FM voice transmission.

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

## 2.6 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

## 2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



### 3. TEST ENVIRONMENT

#### 3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

##### **CNAS-Lab Code: L5488**

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

##### **A2LA-Lab Cert. No.: 5054.02**

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

##### **FCC-Registration No.: 975832**

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

##### **IC-Registration No.: 24842**

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

### 3.3 ENVIRONMENTAL CONDITIONS

|  | NORMAL CONDITIONS | EXTREME CONDITIONS      |
|--|-------------------|-------------------------|
| Temperature range (°C)   | 15 - 35           | -20 - 50                |
| Relative humidity range  | 20 % - 75 %       | 20 % - 75 %             |
| Pressure range (kPa)   | 86 - 106          | 86 - 106                |
| Power supply   | DC 3.7V           | LV:DC 3.15V/HV: DC 4.2V |
| Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer. |                   |                         |

### 3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95%.

| Test Items                              | Measurement Uncertainty |
|---|-------------------------|
| Frequency stability                     | $\pm 0.5\%$             |
| Transmitter power conducted             | $\pm 0.8\text{dB}$      |
| Transmitter power Radiated              | $\pm 1.3\text{dB}$      |
| Conducted spurious emission 9kHz-40 GHz | $\pm 2.7\text{dB}$      |
| Conducted Emission                      | $\pm 3.2\text{ dB}$     |
| Radiated Emission below 1GHz            | $\pm 3.9\text{ dB}$     |
| Radiated Emission above 1GHz            | $\pm 4.8\text{ dB}$     |
| Occupied Channel Bandwidth              | $\pm 2\%$               |
| FM deviation                            | $\pm 2\%$               |
| Audio level                             | $\pm 0.98\text{dB}$     |
| Low Pass Filter Response                | $\pm 0.65\text{dB}$     |
| Modulation Limiting                     | 0.42 %                  |
| Transient Frequency Behavior            | 6.8 %                   |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

### 3.5 LIST OF EQUIPMENTS USED

| Equipment                      | Manufacturer   | Model       | S/N          | Cal. Date     | Cal. Due      |
|--------------------------------|----------------|-------------|--------------|---------------|---------------|
| TEST RECEIVER                  | R&S            | ESCI        | 10096        | Mar. 28, 2022 | Mar. 27, 2023 |
| EXA Signal Analyzer            | Aglient        | N9020A      | MY53300860   | Jun. 08, 2022 | Jun. 07, 2023 |
| EXA Signal Analyzer            | Aglient        | N9020A      | MY52090123   | Aug. 04, 2022 | Aug. 03, 2023 |
| Horn antenna                   | SCHWARZBECK    | BBHA 9170   | #768         | Oct. 31, 2021 | Oct. 30, 2023 |
| preamplifier                   | ChengYi        | EMC184045SE | 980508       | Oct. 29, 2021 | Oct. 28, 2023 |
| Double-Ridged Waveguide Horn   | ETS LINDGREN   | 3117        | 00034609     | Apr. 23, 2021 | Apr. 22, 2023 |
| Broadband Preamplifier         | SCHWARZBECK    | BBV 9718    | 9718-205     | Jun. 08, 2022 | Jun. 07, 2023 |
| HORN ANTENNA                   | EM             | EM-AH-10180 | /            | Feb.24, 2022  | Feb.23, 2023  |
| SIGNAL GENERATOR               | AGILENT        | E4421B      | MY43351603   | Mar. 04, 2022 | Mar. 03, 2023 |
| SIGNAL GENERATOR               | R&S            | SMT03       | A0304261     | Jun. 05, 2022 | Jun. 04, 2023 |
| ANTENNA                        | SCHWARZBECK    | VULB9168    | VULB9168-494 | Jan. 08, 2021 | Jan. 07, 2023 |
| ANTENNA                        | SCHWARZBECK    | VULB9168    | D69250       | Apr. 28, 2021 | Apr. 27, 2023 |
| Active loop antenna (9K-30MHz) | ZHINAN         | ZN30900C    | 18051        | Mar, 12, 2022 | Mar, 11, 2023 |
| Modulation Domain Analyzer     | HP             | 53310A      | 3121A02467   | Jun. 08, 2022 | Jun. 07, 2024 |
| Small environmental tester     | ESPEC          | SH-242      | --           | Aug. 03, 2022 | Aug. 02, 2024 |
| RF Communication Test Set      | HP             | 8920B       | US35010161   | Aug. 03, 2022 | Aug. 02, 2023 |
| Attenuator                     | Weinachel Corp | 58-30-33    | ML030        | Oct. 24, 2021 | Oct. 23, 2022 |
| RF Cable                       | R&S            | 1#          | --           | Each time     | N/A           |
| RF Cable                       | R&S            | 2#          | --           | Each time     | N/A           |
| Fliter-UHF                     | Microwave      | N25155M2    | 498705       | May 07, 2022  | May 06, 2023  |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

## 4.SYSTEM TEST CONFIGURATION

### 4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 4.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

### 4.3 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

### 4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement:

- ☐ Test Accessories Come From The Laboratory  
☒ Test Accessories Come From The Manufacturer

| Item | Equipment                | Model No.        | Identifier   | Note        |
|------|--------------------------|------------------|--|-------------|
| 1    | Handheld UHF Transceiver | BR200            | FCC ID: MMABR200A                                    | EUT         |
| 2    | Battery                  | BR200            | DC 3.7V 1750mAh                                      | Accessories |
| 3    | Back clip                | N/A              | N/A  | Accessories |
| 4    | Adapter                  | AK06WG-0500100UW | Input: 100-240V, 50/60Hz, 0.2A<br>Output: DC 5.0V 1A | Accessories |
| 5    | Charger                  | BDC200           | Input: DC 5.0V 1A<br>Output: DC 4.2V 0.5A            | Accessories |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

#### 4.5 SUMMARY OF TEST RESULTS

| Item | FCC Rules       | Description Of Test               | Result |
|------|-----------------|-----------------------------------|--------|
| 1    | FCC PART 90     | Antenna Equipment                 | Pass   |
| 2    | §90.205& 2.1046 | Maximum Transmitter Power         | Pass   |
| 3    | §90.207& 2.1047 | Modulation Characteristic         | Pass   |
| 4    | §2.1047         | Audio Low Pass Filter Response    | Pass   |
| 5    | §90.209& 2.1049 | Occupied Bandwidth                | Pass   |
| 6    | §90.210& 2.1049 | Emission Mask                     | Pass   |
| 7    | §90.213& 2.1055 | Frequency Tolerance               | Pass   |
| 8    | §90.214         | Transmitter Frequency Behavior    | Pass   |
| 9    | §90.210& 2.1051 | Spurious Emission on Antenna Port | Pass   |
| 10   | §90.210& 2.1053 | Spurious Radiated Emission        | Pass   |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## 5.DESCRPTION OF TEST MODES

The EUT (**Handheld UHF Transceiver**) has been tested under normal operating condition. (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation.

| NO. | TEST MODE DESCRIPTION | CHANNEL SEPARATION |
|-----|-----------------------|--------------------|
| 1   | TX Bottom channel-UHF | 12.5 kHz           |
| 2   | TX Middle channel-UHF | 12.5 kHz           |
| 3   | TX Top channel-UHF    | 12.5 kHz           |

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. The battery is full-charged during the test.
3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
5. Manufacturers use computer PC programming software to switch and operate frequency points, refer to the instructions for details

## 6.FREQUENCY TOLERANCE

### 6.1 PROVISIONS APPLICABLE

- According to FCC §2.1055,§90.213, the frequency stability shall be measured with variation of ambient temperature from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  centigrade.
- According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5 kHz channel separation and 0.0001% for 6.25 kHz channel separation.

### 6.2 MEASUREMENT PROCEDURE


#### 6.2.1 Frequency stability versus environmental temperature

- Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1kHz and Video Resolution Bandwidth to 1kHz and Frequency Span to 50kHz.Record this frequency as reference frequency.
- Set the temperature of chamber to  $50^{\circ}\text{C}$ . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- Repeat step 2 with a  $10^{\circ}\text{C}$  decreased per stage until the lowest temperature  $-30^{\circ}\text{C}$  is measured, record all measured frequencies on each temperature step.

#### 6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within  $15^{\circ}\text{C}$  to  $25^{\circ}\text{C}$ . Otherwise, an environment chamber set for a temperature of  $20^{\circ}\text{C}$  shall be used. The EUT shall be powered by DC 3.7V.
- Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 kHz and Video Resolution Bandwidth to 1kHz. Record this frequency as reference frequency.
- Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

### 6.3 MEASUREMENT SETUP

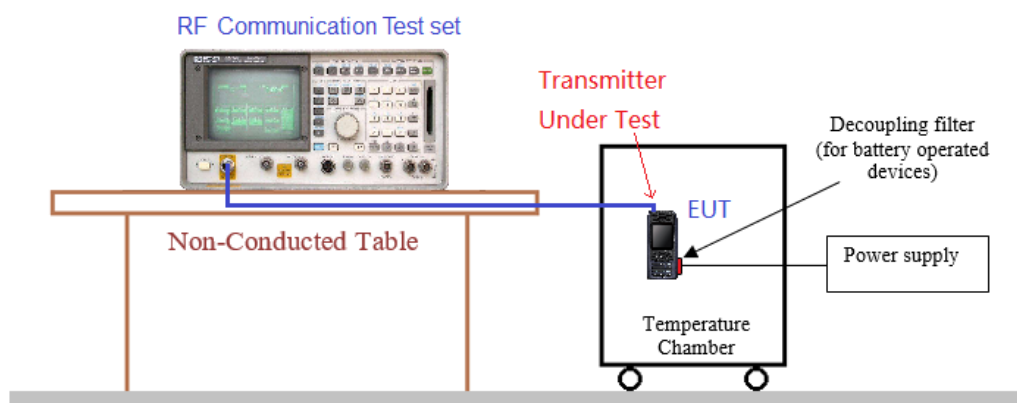

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>



#### 6.4 MEASUREMENT RESULTS

| 12.5 kHz Channel Separation, Analog modulation, Assigned Frequency For UHF-2W |             |                       |          |          |          |                |        |
|---|-------------|-----------------------|----------|----------|----------|----------------|--------|
| Test conditions   |             | Frequency error (ppm) |          |          |          | Limit<br>(ppm) | Result |
| Voltage<br>(V)  | Temp<br>(℃) | Test Frequency (MHz)  |          |          |          |                |        |
|   |             | 451.1875              | 456.1875 | 461.0375 | 469.5625 |                |        |
| 3.70  | -30         | 0.653                 | 0.917    | 0.324    | 0.594    | 2.5            | Pass   |
|   | -20         | 0.887                 | 1.038    | 0.369    | 0.322    |                |        |
|   | -10         | 0.685                 | 0.809    | 0.721    | 0.938    |                |        |
|   | 0           | 0.934                 | 1.043    | 0.987    | 0.392    |                |        |
|   | 10          | 0.915                 | 1.069    | 0.460    | 0.832    |                |        |
|   | 20          | 0.691                 | 0.689    | 0.930    | 0.663    |                |        |
|   | 30          | 0.827                 | 1.086    | 0.337    | 0.409    |                |        |
|   | 40          | 0.994                 | 1.078    | 0.374    | 0.496    |                |        |
|   | 50          | 0.514                 | 0.772    | 0.769    | 0.726    |                |        |
| 4.20  | 20          | 0.823                 | 0.511    | 0.569    | 0.493    |                |        |
| 3.15  | 20          | 0.959                 | 1.086    | 0.408    | 0.876    |                |        |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



## 7. EMISSION BANDWIDTH

### 7.1 PROVISIONS APPLICABLE

FCC Part 90.209 & FCC Part 2.1049:

The authorized bandwidth shall be 11.25 kHz for 12.5 kHz channel separation and 6 kHz for 6.25 kHz channel separation.

### 7.2 MEASUREMENT PROCEDURE

1.The EUT was modulated by 2.5kHz sine wave audio signal; the level of the audio signal employed is 16dB greater than that necessary to produce 50% of rated system deviation.

Rated system deviation is 2.5 kHz for 12.5kHz channel spacing).

2.Spectrum set as follow:


Centre frequency = fundamental frequency, span=50kHz for 12.5kHz channel spacing, RBW=100Hz, VBW=300Hz, Sweep = auto,

Detector function = peak, Trace = max hold

3.Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.

4.Measure and record the results in the test report.

### 7.3 MEASUREMENT SETUP

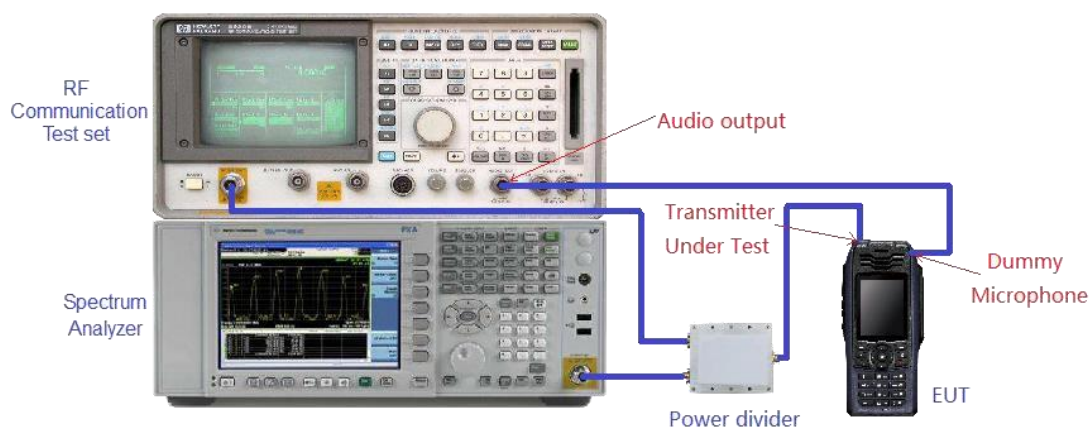

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd


Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## 7.4 MEASUREMENT RESULTS

| Measurement Result of UHF-Analog Modulation-2W |                             |                    |           |        |
|--|-----------------------------|--------------------|-----------|--------|
| Operating Frequency                            | 12.5 kHz Channel Separation |                    |           |        |
|  | Occupied Bandwidth          | Emission Bandwidth | Limits    | Result |
| 451.1875MHz                                    | 9.912 kHz                   | 10.15 kHz          | 11.25 kHz | Pass   |
| 456.1875MHz                                    | 9.915 kHz                   | 10.15 kHz          | 11.25 kHz | Pass   |
| 461.0375MHz                                    | 9.915 kHz                   | 10.15 kHz          | 11.25 kHz | Pass   |
| 469.5625MHz                                    | 9.914 kHz                   | 10.15 kHz          | 11.25 kHz | Pass   |

Test plot as follows:

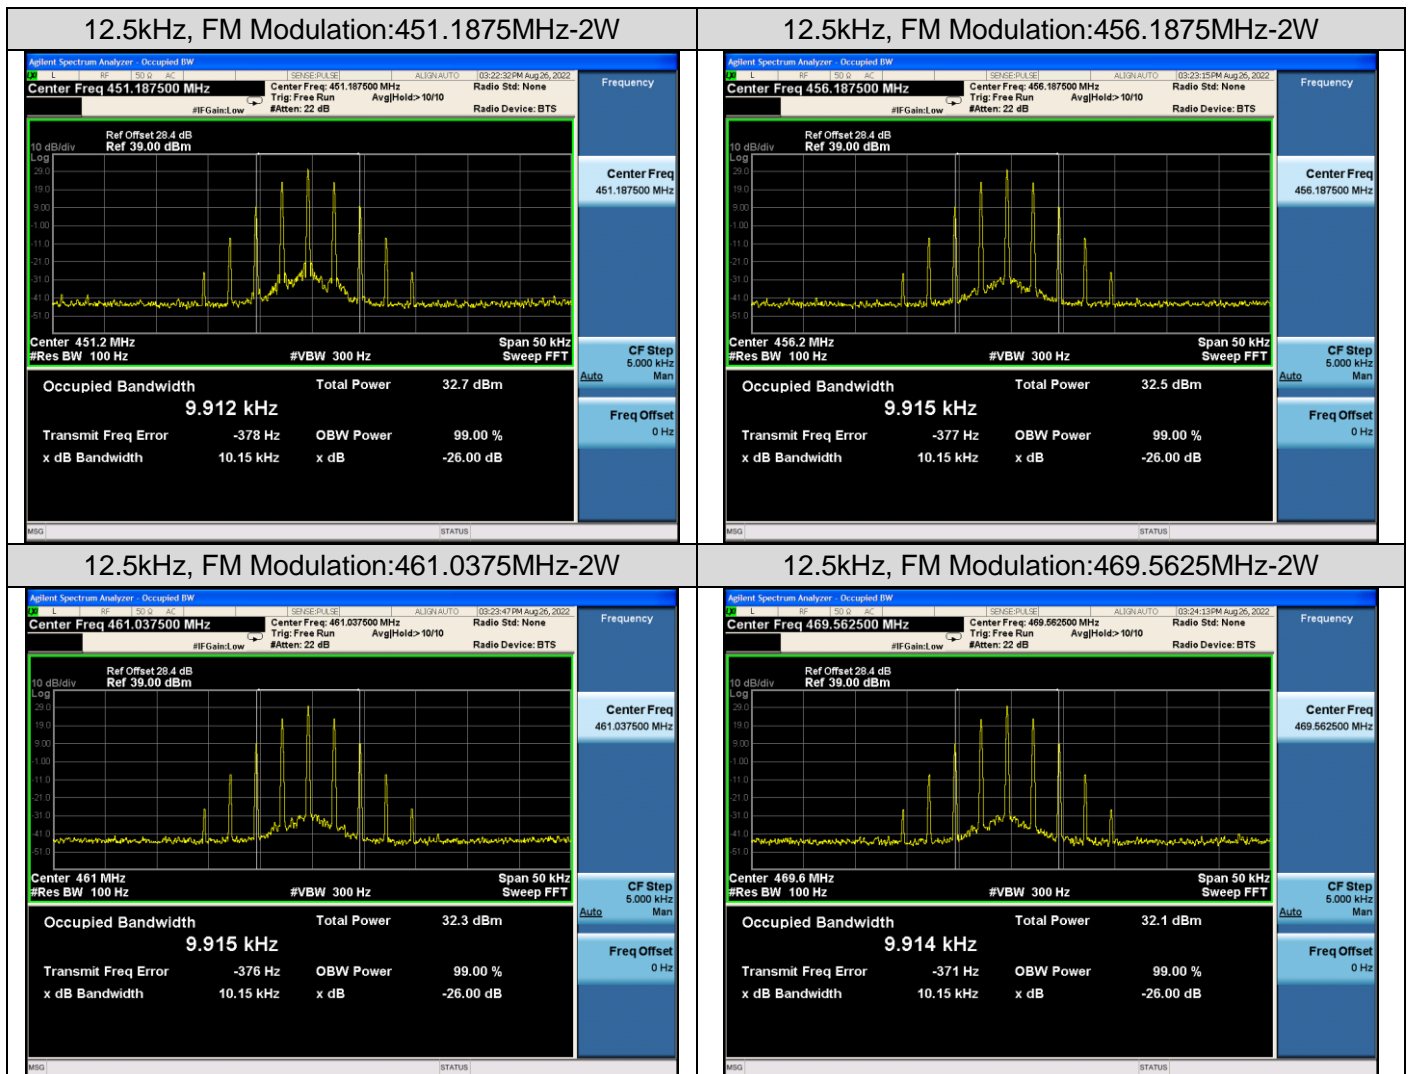

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## 8. SPURIOUS RADIATED EMISSION

### 8.1 PROVISIONS APPLICABLE

According to FCC §2.1053 and §90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with each channel separation.

Emission Mask D -for 12.5 kHz Channel Separation:

- (1) On any frequency removed from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement Frequency ( $f_d$  in kHz)  $f_0$  of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27(f_d - 2.88 \text{ kHz})$  dB
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement Frequency ( $f_d$  in kHz)  $f_0$  of more than 12.5 kHz: At least  $50 + 10 \log(P)$  dB or 70 dB, whichever is lesser attenuation.

### 8.2 MEASUREMENT PROCEDURE

- (1) On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).


Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>

### 8.3 MEASUREMENT SETUP

#### Radiated Emissions 30MHz to 1GHz Test setup

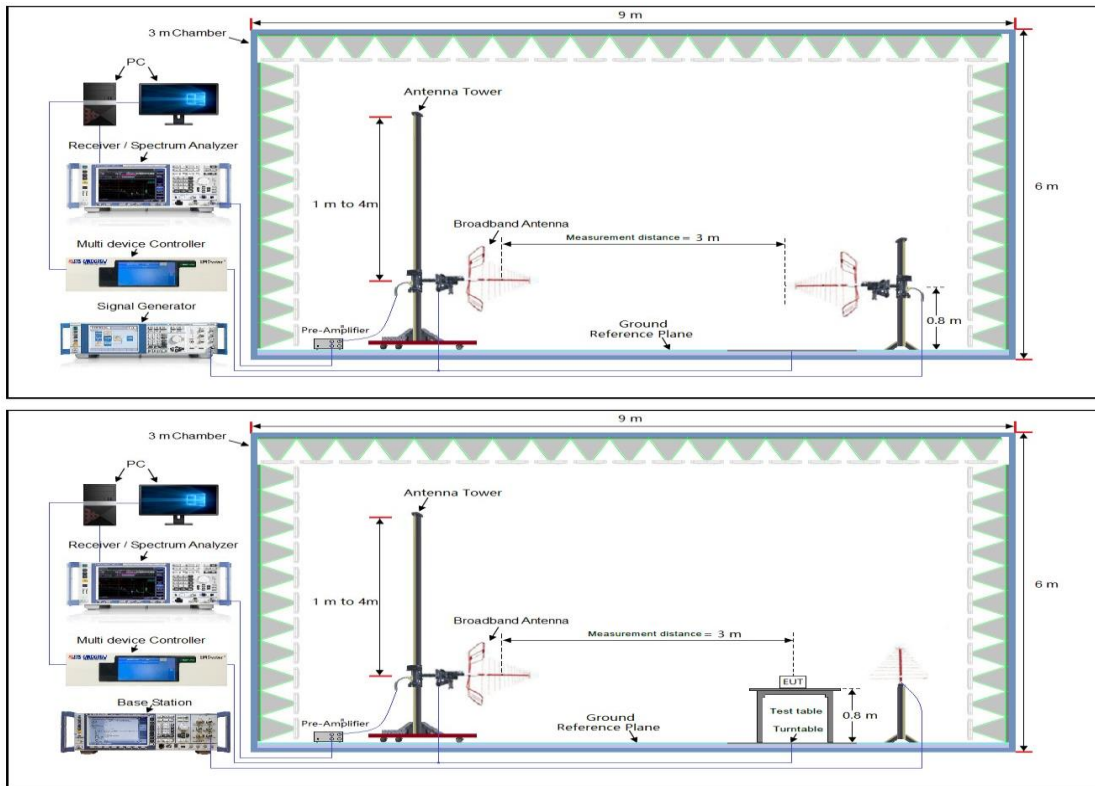

#### Radiated Emissions Above 1GHz Test setup

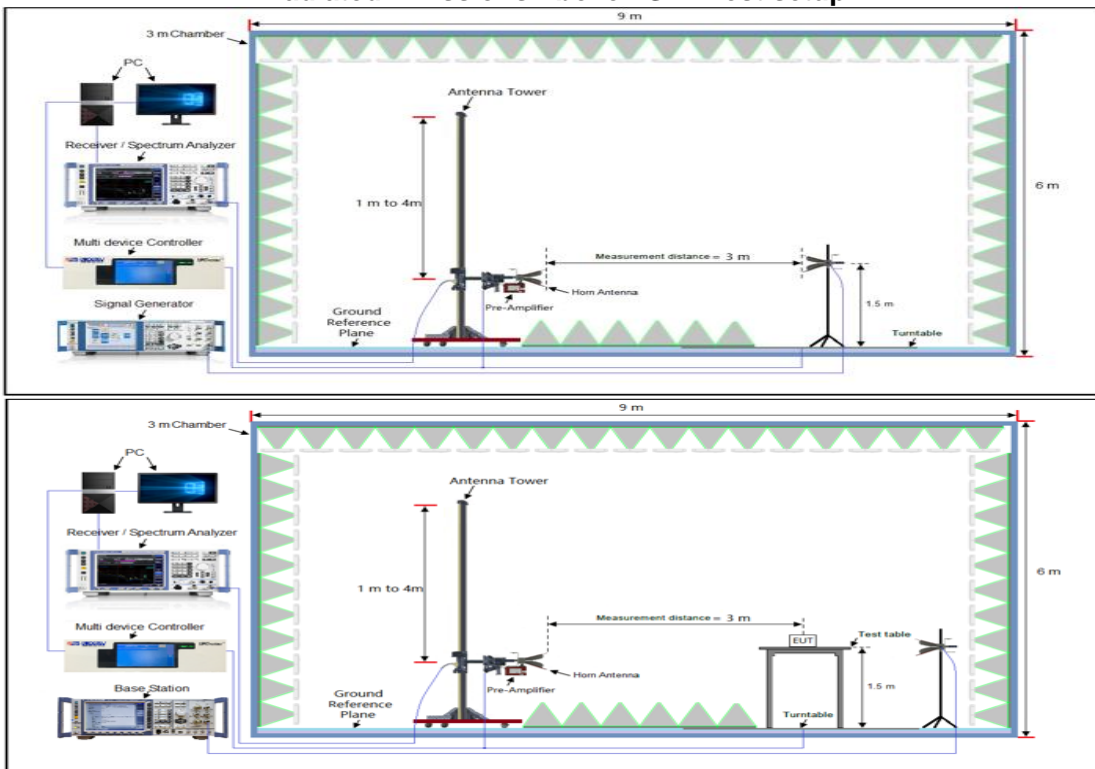

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 8.4 MEASUREMENT RESULTS

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10 harmonic.

In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value.

The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum. So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.

EIRP = "Read Value" + Measured substitution value + 2.15.


Test limit calculation:

| Preliminary calculation                                   | Final Result   |
|---|--|
| At least $50 + 10 \log(P) = 50 + 10 \log(2) = 53.01$ (dB) | Limit=P- Preliminary calculation=33.01-53.01=-20 dBm |

Note: The report only reflects high-power test data as the worst.




|            |                   |           |            |
|------------|-------------------|-----------|------------|
| Test Mode: | TX:451.1875MHz-FM | Polarity: | Horizontal |
|------------|-------------------|-----------|------------|

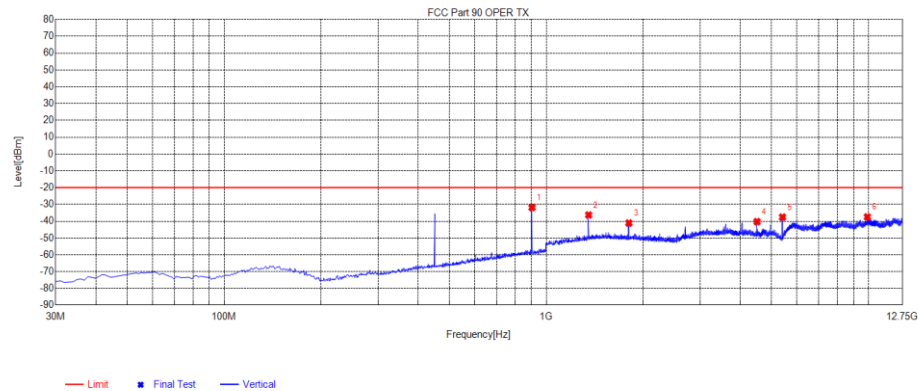

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity   |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|------------|
| 1   | 903         | -75.21        | -31.87      | -20.00      | 11.87       | 43.34       | 1         | Horizontal |
| 2   | 1353.7104   | -37.50        | -36.31      | -20.00      | 16.31       | 1.19        | 355       | Horizontal |
| 3   | 1804.9555   | -42.20        | -41.11      | -20.00      | 21.11       | 1.09        | 329       | Horizontal |
| 4   | 4512.4262   | -43.36        | -40.28      | -20.00      | 20.28       | 3.08        | 329       | Horizontal |
| 5   | 5413.7414   | -43.28        | -37.58      | -20.00      | 17.58       | 5.70        | 34        | Horizontal |
| 6   | 9927.3677   | -53.40        | -37.46      | -20.00      | 17.46       | 15.94       | 9         | Horizontal |


|            |                   |           |          |
|------------|-------------------|-----------|----------|
| Test Mode: | TX:451.1875MHz-FM | Polarity: | Vertical |
|------------|-------------------|-----------|----------|

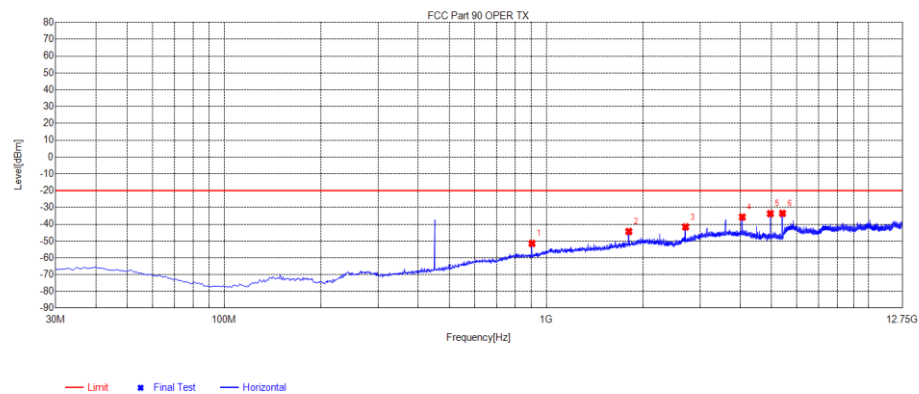

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|----------|
| 1   | 903         | -94.47        | -51.46      | -20.00      | 31.46       | 43.01       | 165       | Vertical |
| 2   | 1804.9555   | -43.42        | -44.35      | -20.00      | 24.35       | -0.93       | 350       | Vertical |
| 3   | 2707.4457   | -42.16        | -41.64      | -20.00      | 21.64       | 0.52        | 0         | Vertical |
| 4   | 4061.1811   | -40.36        | -35.77      | -20.00      | 15.77       | 4.59        | 42        | Vertical |
| 5   | 4963.6714   | -37.45        | -33.73      | -20.00      | 13.73       | 3.72        | 22        | Vertical |
| 6   | 5414.9165   | -41.61        | -33.57      | -20.00      | 13.57       | 8.04        | 22        | Vertical |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


|            |                   |           |            |
|------------|-------------------|-----------|------------|
| Test Mode: | TX:456.1875MHz-FM | Polarity: | Horizontal |
|------------|-------------------|-----------|------------|
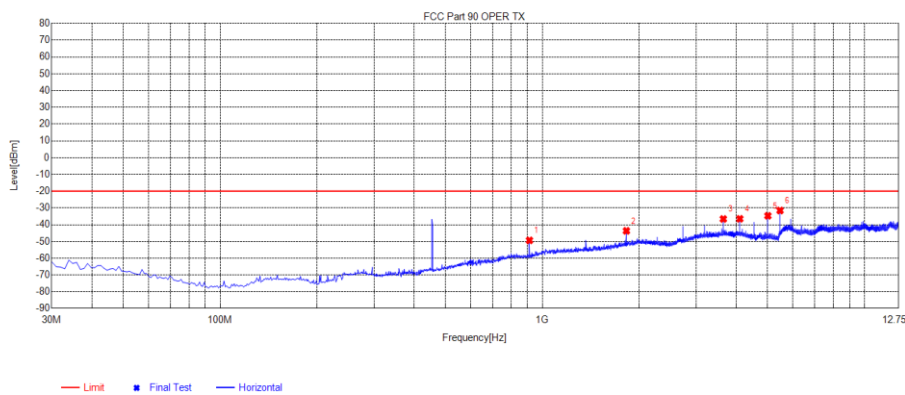
| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity   |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|------------|
| 1   | 912.7       | -92.58        | -49.36      | -20.00      | 29.36       | 43.22       | 154       | Horizontal |
| 2   | 1824.9325   | -42.91        | -43.69      | -20.00      | 23.69       | -0.78       | 29        | Horizontal |
| 3   | 3649.89     | -40.95        | -36.60      | -20.00      | 16.60       | 4.35        | 19        | Horizontal |
| 4   | 4105.8356   | -40.99        | -36.51      | -20.00      | 16.51       | 4.48        | 29        | Horizontal |
| 5   | 5018.9019   | -38.66        | -34.72      | -20.00      | 14.72       | 3.94        | 39        | Horizontal |
| 6   | 5474.8475   | -40.21        | -31.55      | -20.00      | 11.55       | 8.66        | 29        | Horizontal |

|            |                   |           |          |
|------------|-------------------|-----------|----------|
| Test Mode: | TX:456.1875MHz-FM | Polarity: | Vertical |
|------------|-------------------|-----------|----------|

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|----------|
| 1   | 912.7       | -75.76        | -32.32      | -20.00      | 12.32       | 43.44       | 351       | Vertical |
| 2   | 1368.9869   | -38.62        | -37.33      | -20.00      | 17.33       | 1.29        | 334       | Vertical |
| 3   | 1824.9325   | -42.92        | -41.90      | -20.00      | 21.90       | 1.02        | 351       | Vertical |
| 4   | 2736.8237   | -41.89        | -40.94      | -20.00      | 20.94       | 0.95        | 359       | Vertical |
| 5   | 4561.7812   | -42.77        | -39.61      | -20.00      | 19.61       | 3.16        | 316       | Vertical |
| 6   | 5930.7931   | -49.32        | -39.06      | -20.00      | 19.06       | 10.26       | 359       | Vertical |


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

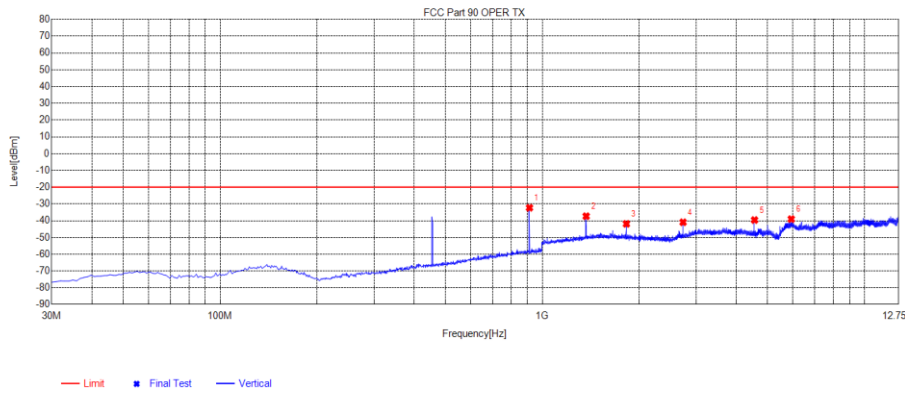Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

|            |                   |           |            |
|------------|-------------------|-----------|------------|
| Test Mode: | TX:461.0375MHz-FM | Polarity: | Horizontal |
|------------|-------------------|-----------|------------|

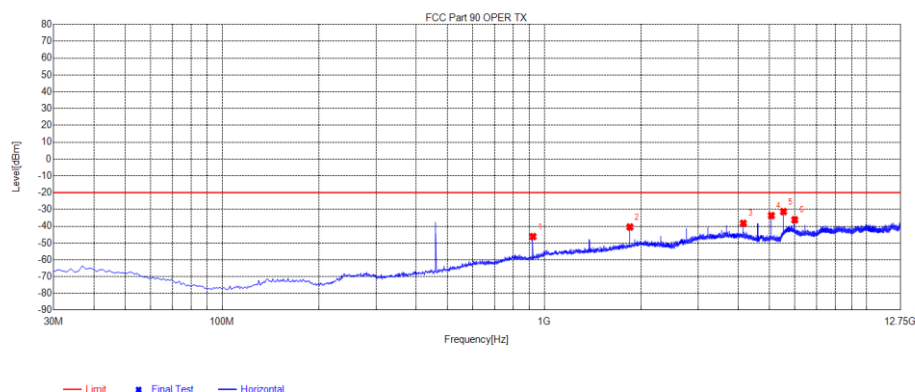

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity   |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|------------|
| 1   | 922.4       | -89.60        | -46.17      | -20.00      | 26.17       | 43.43       | 152       | Horizontal |
| 2   | 1844.9095   | -39.84        | -40.47      | -20.00      | 20.47       | -0.63       | 170       | Horizontal |
| 3   | 4149.3149   | -42.66        | -38.29      | -20.00      | 18.29       | 4.37        | 45        | Horizontal |
| 4   | 5071.7822   | -38.17        | -33.69      | -20.00      | 13.69       | 4.48        | 37        | Horizontal |
| 5   | 5532.4282   | -40.36        | -31.32      | -20.00      | 11.32       | 9.04        | 45        | Horizontal |
| 6   | 5993.0743   | -46.98        | -36.21      | -20.00      | 16.21       | 10.77       | 45        | Horizontal |

|            |                   |           |          |
|------------|-------------------|-----------|----------|
| Test Mode: | TX:461.0375MHz-FM | Polarity: | Vertical |
|------------|-------------------|-----------|----------|

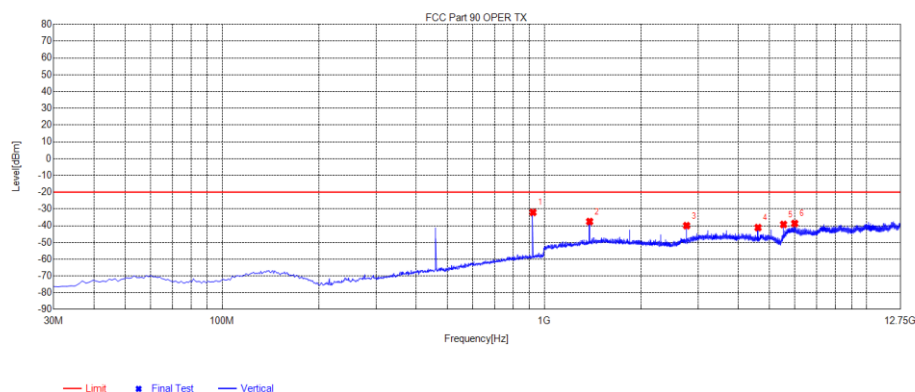

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|----------|
| 1   | 922.4       | -75.64        | -32.10      | -20.00      | 12.10       | 43.54       | 359       | Vertical |
| 2   | 1383.0883   | -38.91        | -37.53      | -20.00      | 17.53       | 1.38        | 351       | Vertical |
| 3   | 2766.2016   | -41.19        | -39.99      | -20.00      | 19.99       | 1.20        | 341       | Vertical |
| 4   | 4609.961    | -44.39        | -41.15      | -20.00      | 21.15       | 3.24        | 359       | Vertical |
| 5   | 5532.4282   | -45.67        | -39.28      | -20.00      | 19.28       | 6.39        | 351       | Vertical |
| 6   | 5993.0743   | -49.57        | -38.71      | -20.00      | 18.71       | 10.86       | 351       | Vertical |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




|            |                   |           |            |
|------------|-------------------|-----------|------------|
| Test Mode: | TX:469.5625MHz-FM | Polarity: | Horizontal |
|------------|-------------------|-----------|------------|

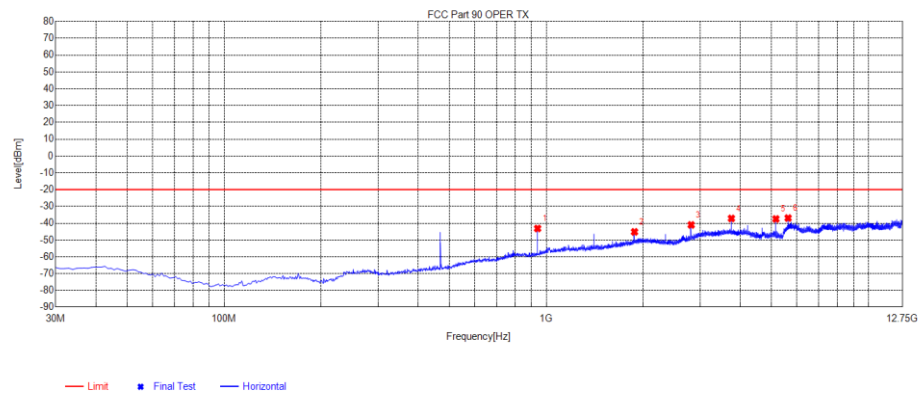

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity   |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|------------|
| 1   | 939.86      | -86.94        | -43.14      | -20.00      | 23.14       | 43.80       | 256       | Horizontal |
| 2   | 1878.9879   | -44.79        | -45.17      | -20.00      | 25.17       | -0.38       | 189       | Horizontal |
| 3   | 2817.9068   | -42.60        | -41.03      | -20.00      | 21.03       | 1.57        | 9         | Horizontal |
| 4   | 3756.8257   | -41.64        | -37.17      | -20.00      | 17.17       | 4.47        | 39        | Horizontal |
| 5   | 5165.7916   | -42.93        | -37.47      | -20.00      | 17.47       | 5.46        | 310       | Horizontal |
| 6   | 5634.6635   | -46.37        | -36.94      | -20.00      | 16.94       | 9.43        | 19        | Horizontal |

|            |                   |           |          |
|------------|-------------------|-----------|----------|
| Test Mode: | TX:469.5625MHz-FM | Polarity: | Vertical |
|------------|-------------------|-----------|----------|

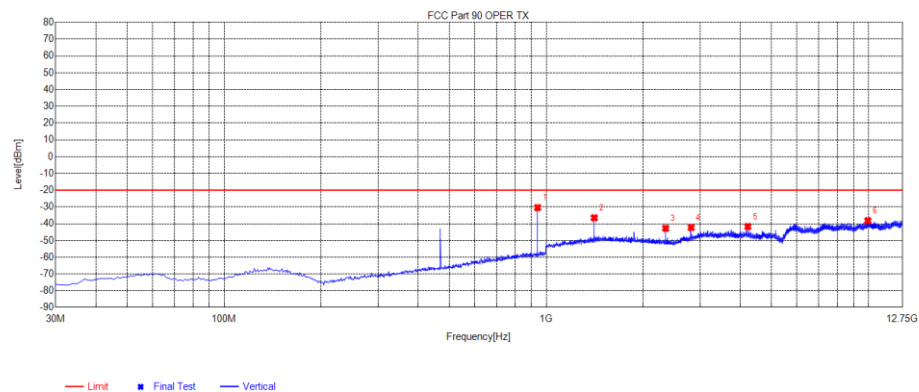

| NO. | Freq. [MHz] | Reading [dBm] | Level [dBm] | Limit [dBm] | Margin [dB] | Factor [dB] | Angle [°] | Polarity |
|-----|-------------|---------------|-------------|-------------|-------------|-------------|-----------|----------|
| 1   | 939.86      | -74.16        | -30.44      | -20.00      | 10.44       | 43.72       | 351       | Vertical |
| 2   | 1408.9409   | -38.07        | -36.51      | -20.00      | 16.51       | 1.56        | 351       | Vertical |
| 3   | 2347.8598   | -42.13        | -42.76      | -20.00      | 22.76       | -0.63       | 316       | Vertical |
| 4   | 2817.9068   | -43.93        | -42.29      | -20.00      | 22.29       | 1.64        | 351       | Vertical |
| 5   | 4226.8727   | -44.92        | -41.73      | -20.00      | 21.73       | 3.19        | 351       | Vertical |
| 6   | 9966.1466   | -54.29        | -38.25      | -20.00      | 18.25       | 16.04       | 230       | Vertical |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


## 8.5 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:

-Connect the equipment as illustrated.

-Spectrum set as follow:

1. Centre frequency = fundamental frequency, Span=50kHz for 12.5kHz and 25kHz channel spacing, RBW=100Hz, VBW=300Hz for 12.5kHz, RBW=300Hz, VBW=1000Hz for 25kHz, Sweep = auto, Detector function = peak, Trace = max hold
2. Key the transmitter, and set the level of the unmodulated carrier to a fullscale reference line. This is the 0dB reference for the measurement.
3. Modulate the transmitter with a 2500 Hz sine wave at an input level 16 dB greater than that necessary to produce 50% of rated system deviation (Rated system deviation is 2.5 kHz for 12.5kHz channel spacing). The input level shall be established at the frequency of maximum response of the audio modulating circuit.
4. Transmitters employing digital modulation techniques that bypass the limiter and the audio low-pass filter shall be modulated as specified by the manufacturer.
5. Measure and record the results in the test report.

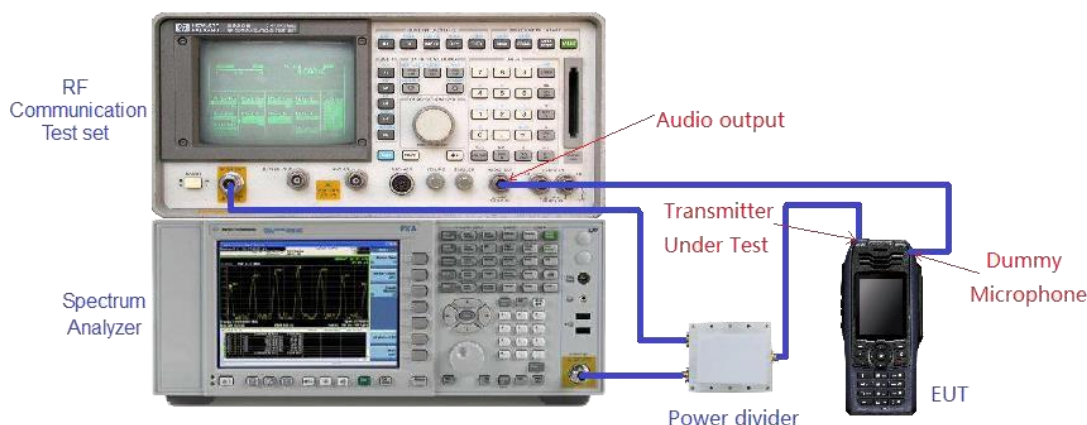


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Test plot as follows:

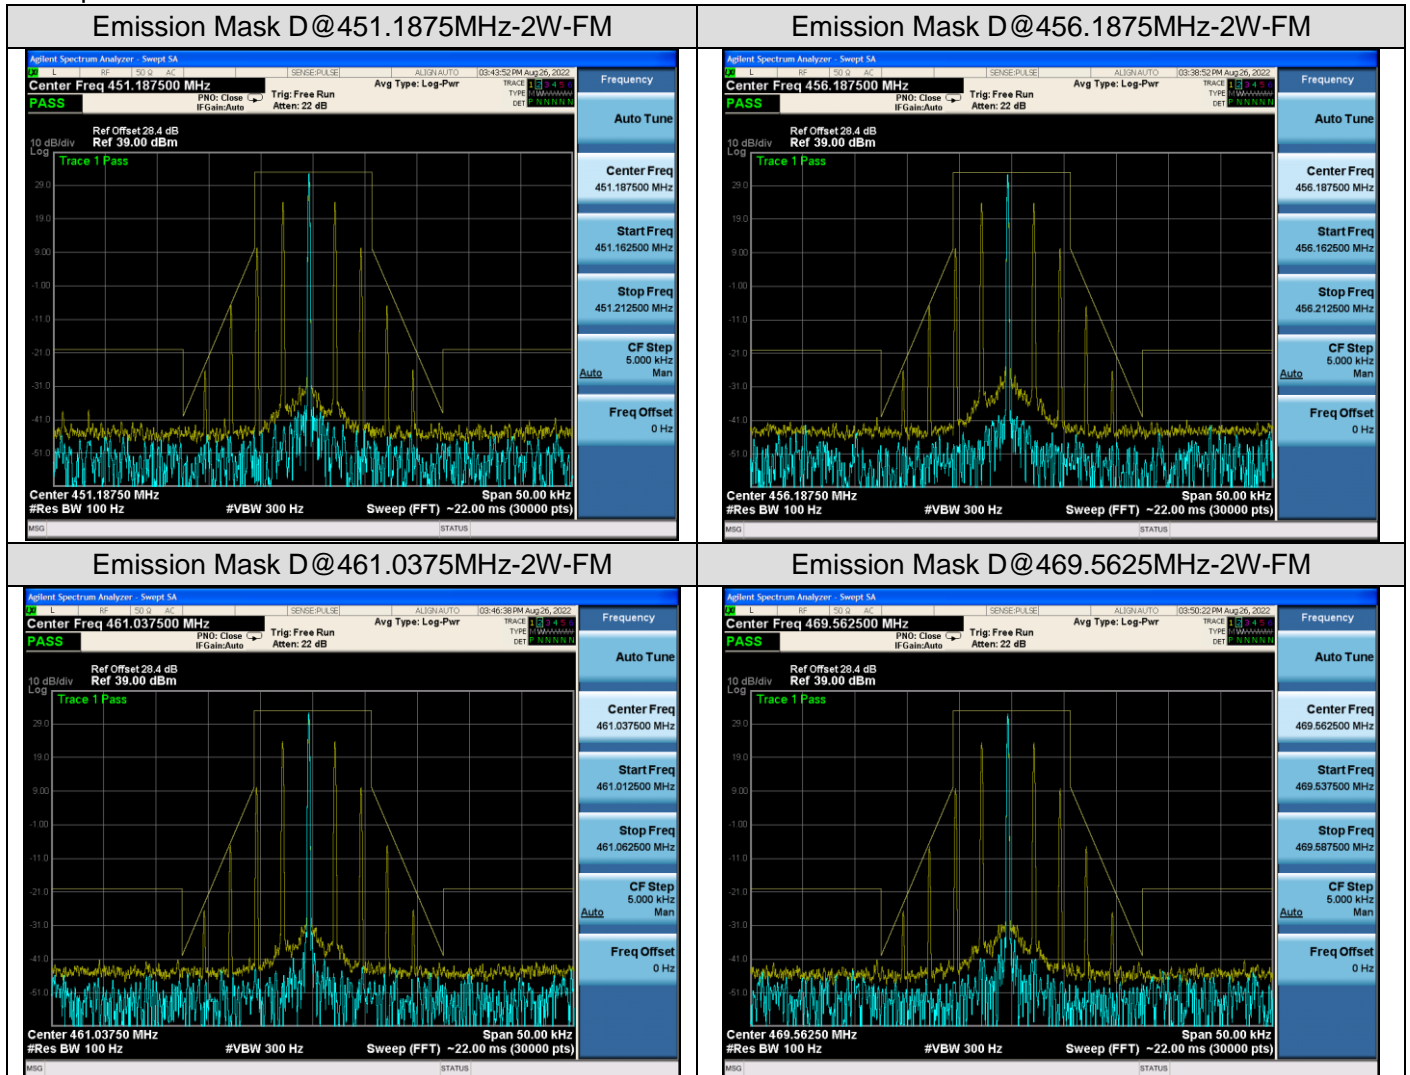

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 9. MODULATION CHARACTERISTICS

### 9.1 PROVISIONS APPLICABLE

According to FCC§2.1047 and §90.207, for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

### 9.2 MEASUREMENT METHOD


#### 9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1kHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

#### 9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 kHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 kHz and record the frequency deviation.
- (4). Audio Frequency Response =  $20\log_{10} (\text{Deviation of test frequency} / \text{Deviation of 1 kHz reference})$ .

### 9.3 MEASUREMENT SETUP

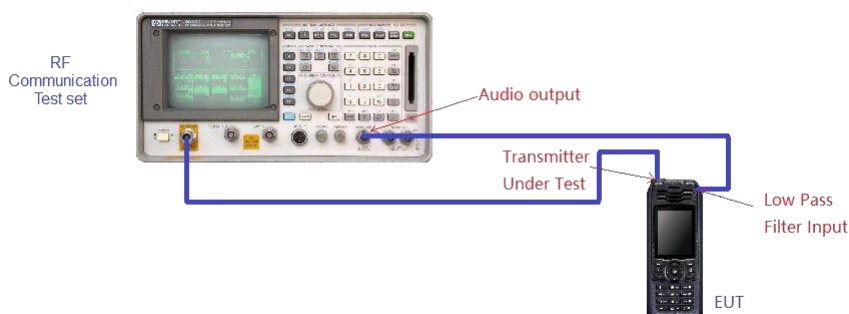


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 9.4 MEASUREMENT RESULTS

### (A). MODULATION LIMIT:

| 12.5kHz, Analog modulation, Assigned Frequency:451.1875MHz-2W |                                      |                                       |                                       |                                       |
|---|--------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Modulation Level (dB)   | Peak Freq. Deviation At 300 Hz (kHz) | Peak Freq. Deviation At 1000 Hz (kHz) | Peak Freq. Deviation At 1500 Hz (kHz) | Peak Freq. Deviation At 3000 Hz (kHz) |
| -20   | 0.11                                 | 0.28                                  | 0.52                                  | 0.71                                  |
| -15   | 0.36                                 | 0.55                                  | 0.76                                  | 0.88                                  |
| -10   | 0.39                                 | 0.71                                  | 0.89                                  | 1.13                                  |
| -5  | 0.47                                 | 0.82                                  | 0.99                                  | 1.22                                  |
| 0   | 0.69                                 | 1.03                                  | 1.23                                  | 1.38                                  |
| +5  | 0.71                                 | 1.09                                  | 1.29                                  | 1.42                                  |
| +10   | 0.82                                 | 1.12                                  | 1.32                                  | 1.51                                  |
| +15   | 1.03                                 | 1.25                                  | 1.41                                  | 1.66                                  |
| +20   | 1.05                                 | 1.22                                  | 1.39                                  | 1.62                                  |

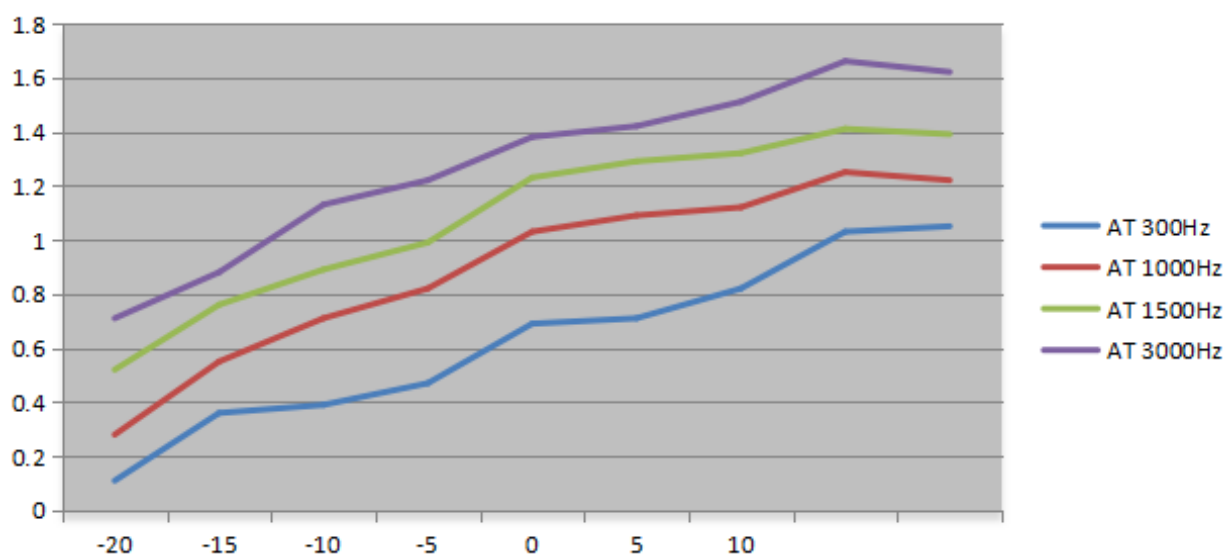


Note: All the modes had been tested, but only the worst data recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

### (B). AUDIO FREQUENCY RESPONSE:

| 12.5kHz, Analog modulation, Assigned Frequency:451.1875MHz-2W |                 |                              |
|---|-----------------|------------------------------|
| Frequency (Hz)  | Deviation (kHz) | Audio Frequency Response(dB) |
| 100   | --              | --                           |
| 200   | --              | --                           |
| 300   | 0.18            | -13.17                       |
| 400   | 0.29            | -9.03                        |
| 500   | 0.34            | -7.65                        |
| 600   | 0.46            | -5.02                        |
| 700   | 0.55            | -3.47                        |
| 800   | 0.61            | -2.57                        |
| 900   | 0.63            | -2.29                        |
| 1000  | <b>0.82</b>     | 0.00                         |
| 1200  | 0.89            | 0.71                         |
| 1400  | 0.98            | 1.55                         |
| 1600  | 1.12            | 2.71                         |
| 1800  | 1.25            | 3.66                         |
| 2000  | 1.34            | 4.27                         |
| 2400  | 1.46            | 5.01                         |
| 2500  | 1.66            | 6.13                         |
| 2800  | 1.78            | 6.73                         |
| 3000  | 1.94            | 7.48                         |

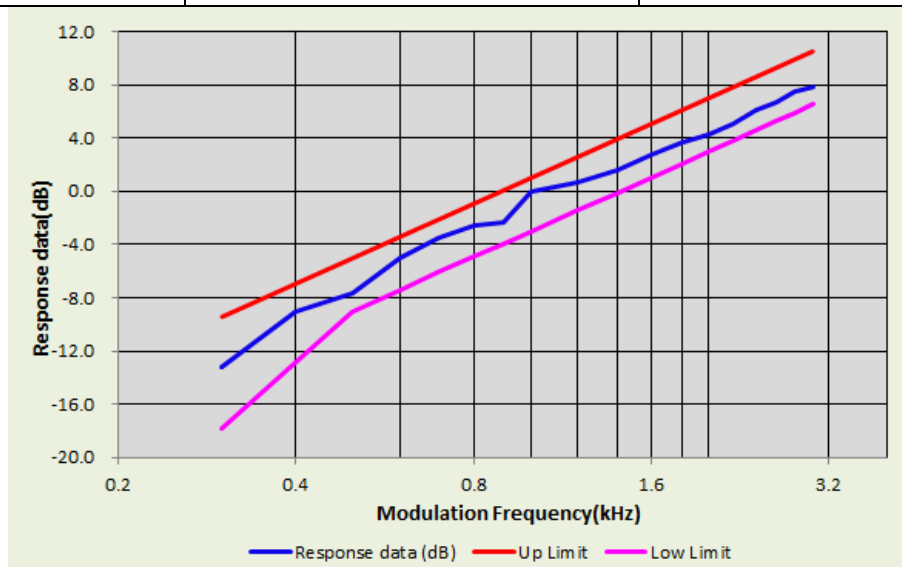

Note: All the modes had been tested, but only the worst data recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>



## 10. MAXIMUM TRANSMITTER POWER

### 10.1 PROVISIONS APPLICABLE

Per FCC §2.1046. § 90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area.


### 10.2 MEASUREMENT METHOD

The RF output of Two-way Radio was conducted to a spectrum analyzer through an appropriate attenuator. In the semi-anechoic chamber, setup as illustrated above the DUT placed on the 0.8m height of Turn Table, rotated the table 45 degree each interval to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power for each degree interval. The "Read Value" is the spectrum reading of maximum power value. The substitution antenna is substituted for DUT at the same position and signals generator (S.G) export the CW signal to the substitution antenna via a TX cable. The receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum radiation power. Record the power level of maximum radiation power from spectrum.

So, the Measured substitution value = Ref level of S.G + TX cables loss – Substituted Antenna Gain.  
EIRP = "Read Value" + Measured substitution value + 2.15.

### 10.3 MEASUREMENT METHOD

☒ Conducted Output Power:

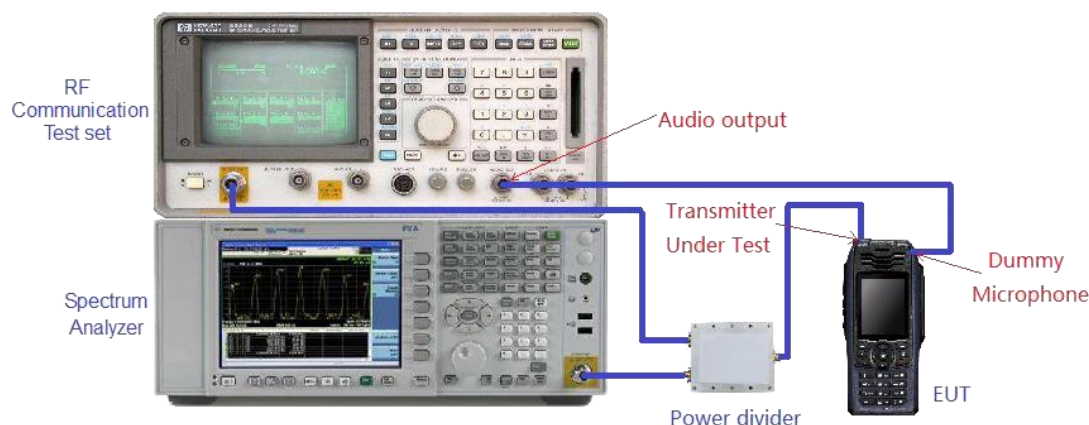

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd



Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

☒ Effective Radiated Power:

### Radiated Below 1GHz

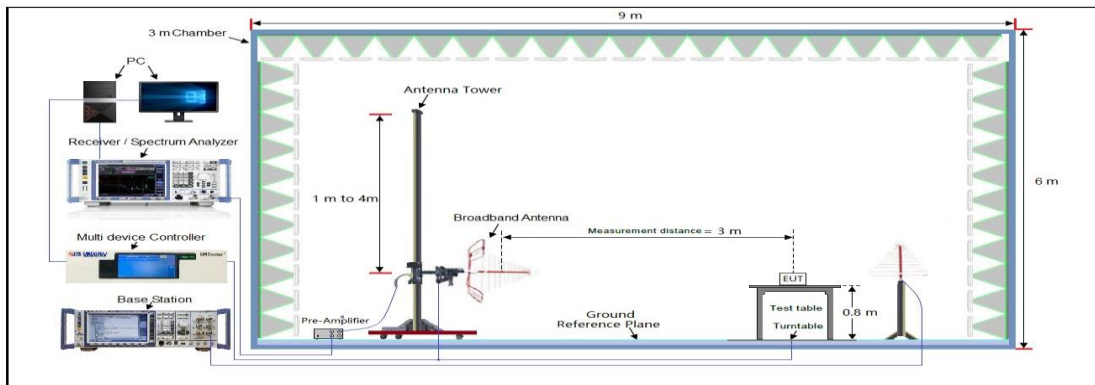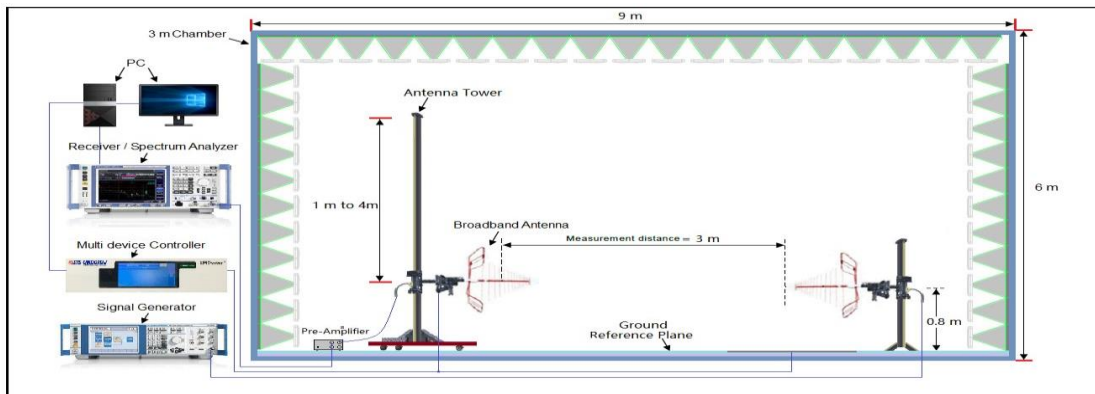

### Radiated Above 1 GHz

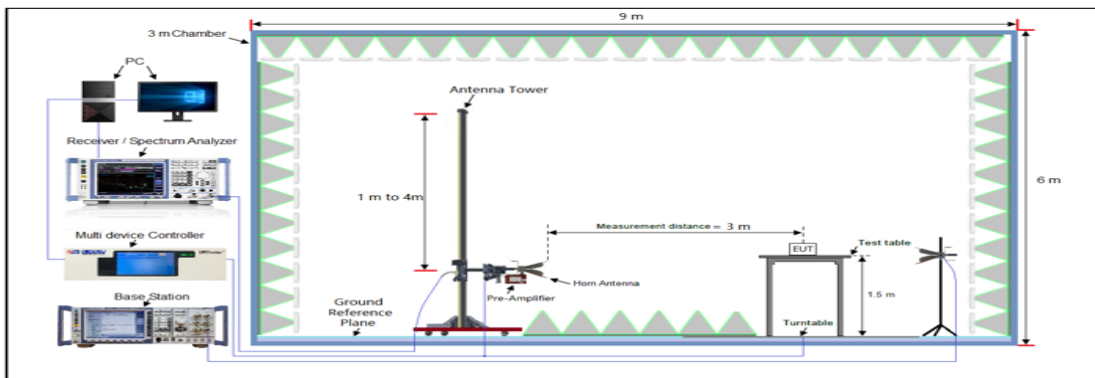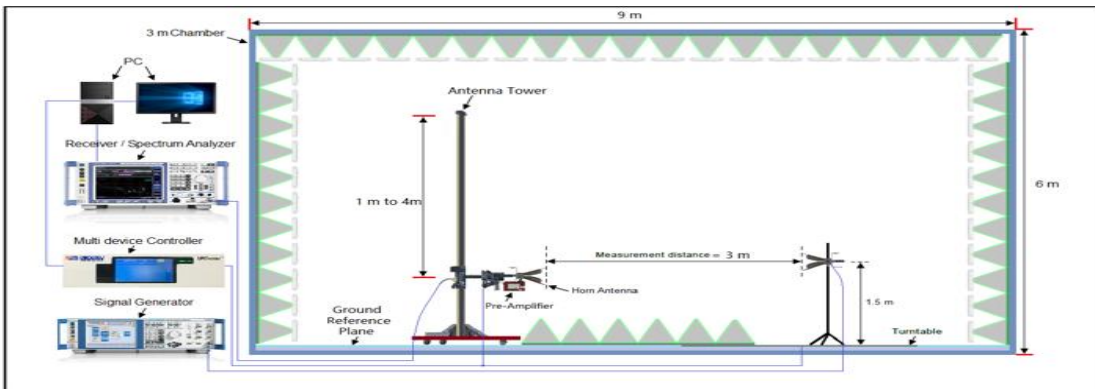

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



## 10.4 MEASUREMENT RESULTS

| Conducted Power Measurement Results |                    |                     |                          |
|-------------------------------------|--------------------|---------------------|--------------------------|
| Mode                                | Channel Separation | Test Channel        | Measurement Result (dBm) |
|                                     |                    |                     | For 33.01dBm(2W)         |
| Analog +Vioce                       | 12.5 kHz           | Bottom(451.1875MHz) | <b>32.59</b>             |
|                                     |                    | Middle(456.1875MHz) | 32.55                    |
|                                     |                    | Middle(461.0375MHz) | 32.49                    |
|                                     |                    | Top (469.5625MHz)   | 32.23                    |

| Radiated Power Measurement Results |                 |                        |                      |            |                 |                |                   |             |
|------------------------------------|-----------------|------------------------|----------------------|------------|-----------------|----------------|-------------------|-------------|
| Test Mode                          | Frequency (MHz) | Reading Level (dBuv/m) | Antenna Polarization | S.G. (dBm) | Cable Loss (dB) | Ant.Gain (dBi) | ERP Results (dBm) | Limit (dBm) |
| Analog +Vioce                      | 451.1875        | 101.64                 | V                    | 26.41      | 0.85            | 6.9            | 32.46             | 33.01       |
|                                    | 451.1875        | 101.62                 | H                    | 26.39      | 0.85            | 6.9            | 32.44             | 33.01       |
|                                    | 456.1875        | 101.67                 | V                    | 26.44      | 0.85            | 6.9            | 32.49             | 33.01       |
|                                    | 456.1875        | 101.64                 | H                    | 26.41      | 0.85            | 6.9            | 32.46             | 33.01       |
|                                    | 461.0375        | 101.63                 | V                    | 26.40      | 0.85            | 6.9            | 32.45             | 33.01       |
|                                    | 461.0375        | 101.59                 | H                    | 26.36      | 0.85            | 6.9            | 32.41             | 33.01       |
|                                    | 469.5625        | 101.37                 | V                    | 26.14      | 0.85            | 6.9            | 32.19             | 33.01       |
|                                    | 469.5625        | 101.33                 | H                    | 26.10      | 0.85            | 6.9            | 32.15             | 33.01       |

**Note:** Calculation Formula:  $CP = R + A + L$

- (1) CP: The final Conducted Power
- (2) R: The reading value from spectrum analyzer
- (3) A: The attenuation value of the used attenuator
- (4) L: The loss of all connection cables
- (5) Measurement Result=Peak Power (Max)

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

## 11.1 PROVISIONS APPLICABLE

Please refer to FCC 47 CFR 2.1051, 2.1057 & 90.210 for specification details.  
Emissions shall be attenuated below the mean output power of the transmitter as follows:


| FCC Rules | Attenuation Limit (dBc)        |
|-----------|--------------------------------|
| § 90.210  | At least $50 + 10 \log (P)$ dB |

$$\text{Limit (dBm)} = P(\text{ dBm}) - 50 - 10 \log(P_{\text{watts}}) = -20 \text{ dBm}$$

## 11.2 MEASUREMENT METHOD

1. The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation.
2. The resolution bandwidth of the spectrum analyzer was set to 100 kHz. Sufficient scans were taken to show any out of band emission up to 10th . Harmonic for the lower and the highest frequency range.
3. Set RBW 100 kHz, VBW 300 kHz in the frequency band 30MHz to 1GHz,while set RBW=1MHz.VBW=3MHz from the 1GHz to 10th Harmonic.
4. The audio input was set the unmodulated carrier, the resulting picture is print out for each channel separation.


### 11.3 MEASUREMENT SETUP

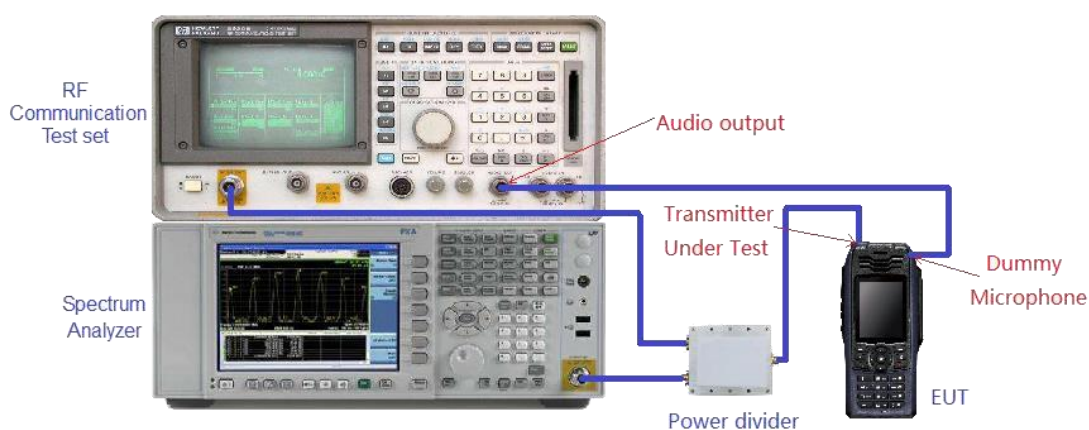


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [aqc01@aqccert.com](mailto:aqc01@aqccert.com).

## 11.4 MEASUREMENT RESULTS


### 12.5kHz, Analog modulation, Assigned Frequency:451.1875MHz, 2W

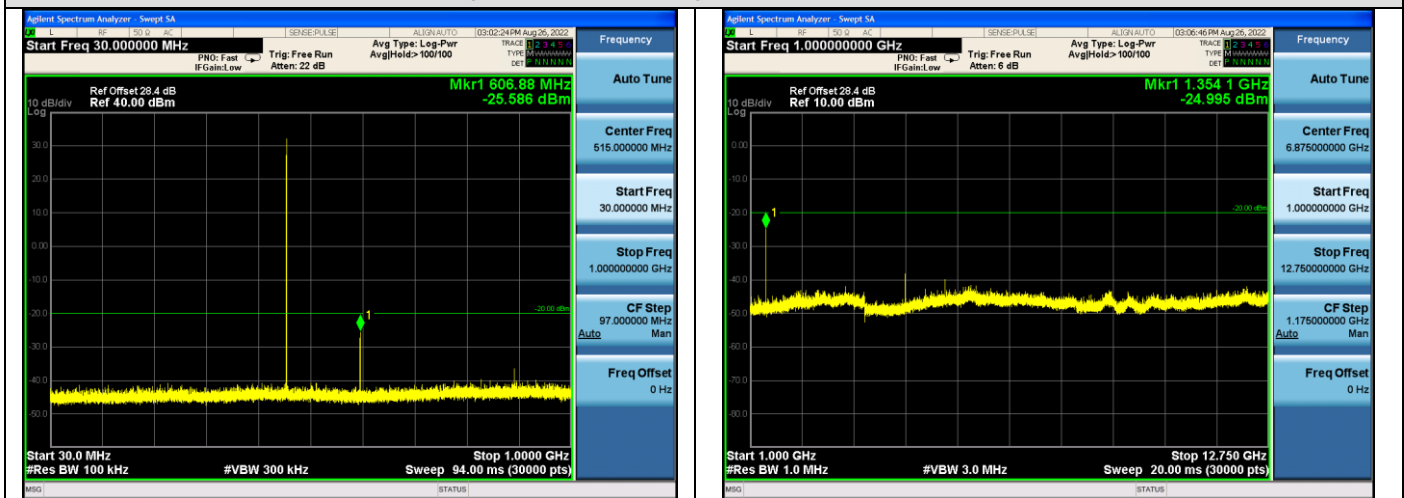

### 12.5kHz, Analog modulation, Assigned Frequency:456.1875MHz, 2W

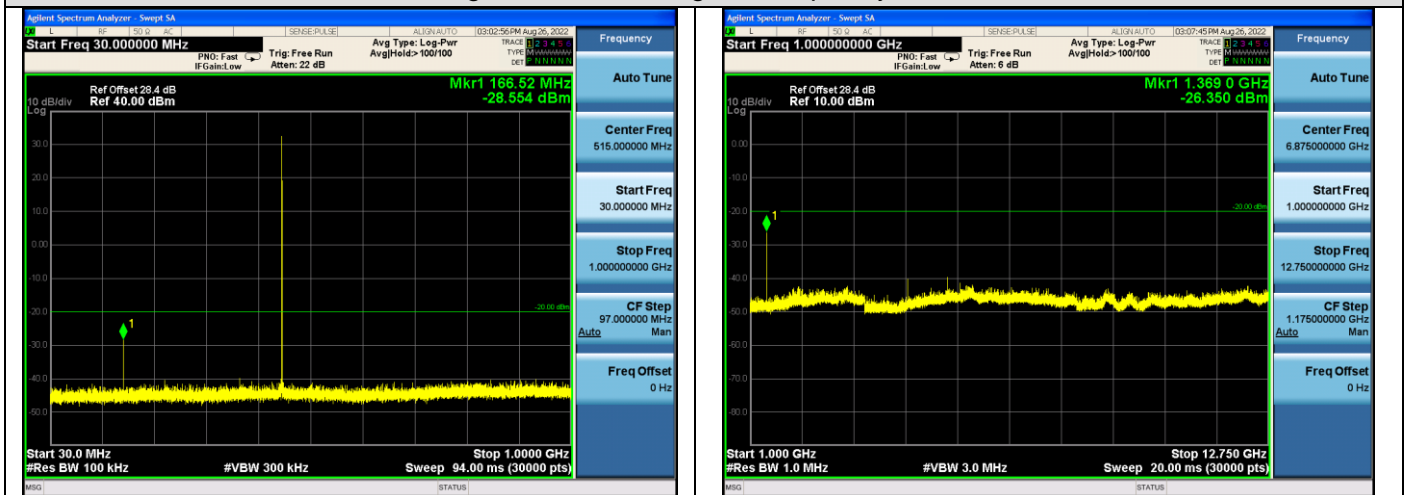


### 12.5kHz, Analog modulation, Assigned Frequency:461.0375MHz, 2W

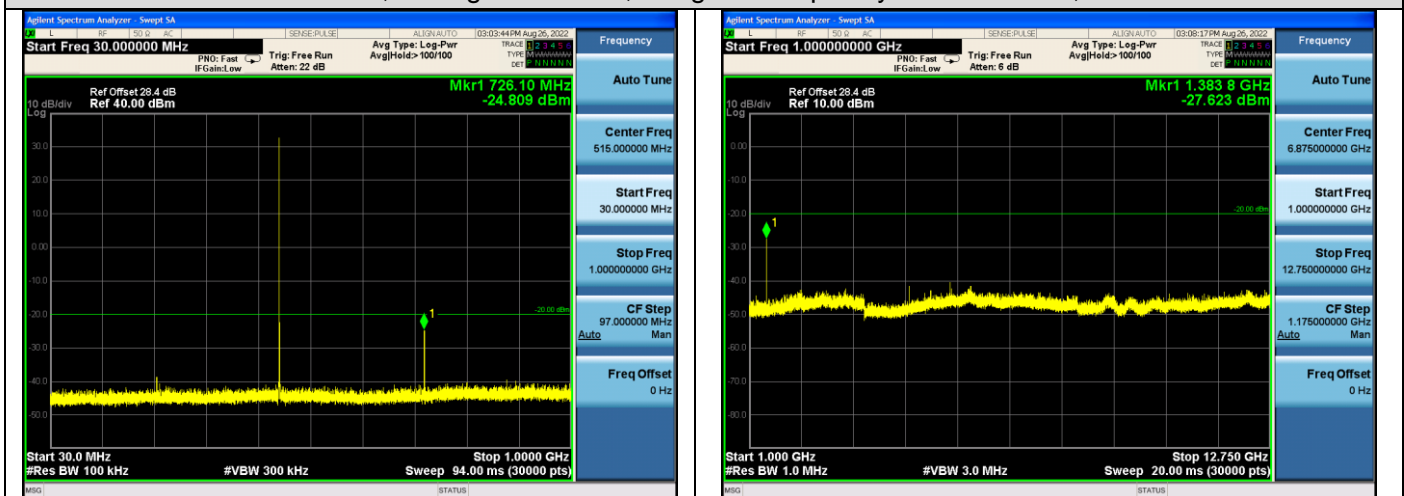

### 12.5kHz, Analog modulation, Assigned Frequency:469.5625MHz, 2W

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

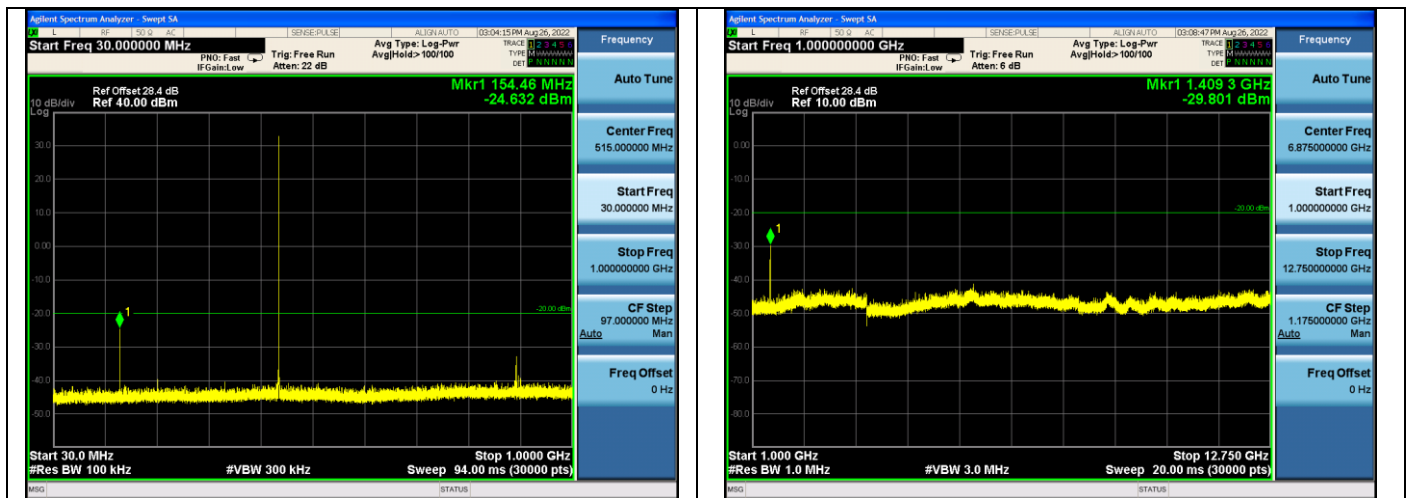

**Note:** 1. All the test frequencies was tested, but only the worst data be recorded in this part.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

## 12. TRANSMITTER FREQUENCY BEHAVIOR

### 12.1 PROVISIONS APPLICABLE

FCC §90.214

| Time intervals <sup>1, 2</sup>  | Maximum frequency difference <sup>3</sup> | All equipment  |                |
|---|---|----------------|----------------|
|   |   | 150 to 174 MHz | 421 to 512 MHz |
| Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels   |   |                |                |
| t <sub>1</sub> <sup>4</sup> .....   | ± 25.0 kHz                                | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub> .....  | ± 12.5 kHz                                | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup> .....   | ± 25.0 kHz                                | 5.0 ms         | 10.0 ms        |
| Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels |   |                |                |
| t <sub>1</sub> <sup>4</sup> .....   | ± 12.5 kHz                                | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub> .....  | ± 6.25 kHz                                | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup> .....   | ± 12.5 kHz                                | 5.0 ms         | 10.0 ms        |
| Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels |   |                |                |
| t <sub>1</sub> <sup>4</sup> .....   | ± 6.25 kHz                                | 5.0 ms         | 10.0 ms        |
| t <sub>2</sub> .....  | ± 3.125 kHz                               | 20.0 ms        | 25.0 ms        |
| t <sub>3</sub> <sup>4</sup> .....   | ± 6.25 kHz                                | 5.0 ms         | 10.0 ms        |

<sup>1</sup>  $t_{on}$  is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

$t_1$  is the time period immediately following  $t_{on}$ .

$t_2$  is the time period immediately following  $t_1$ .

$t_3$  is the time period from the instant when the transmitter is turned off until  $t_{off}$ .


$t_{off}$  is the instant when the 1 kHz test signal starts to rise.

<sup>2</sup> During the time from the end of  $t_2$  to the beginning of  $t_3$ , the frequency difference must not exceed the limits specified in §90.213.

<sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.

<sup>4</sup> If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

### 13.2 MEASUREMENT SETUP

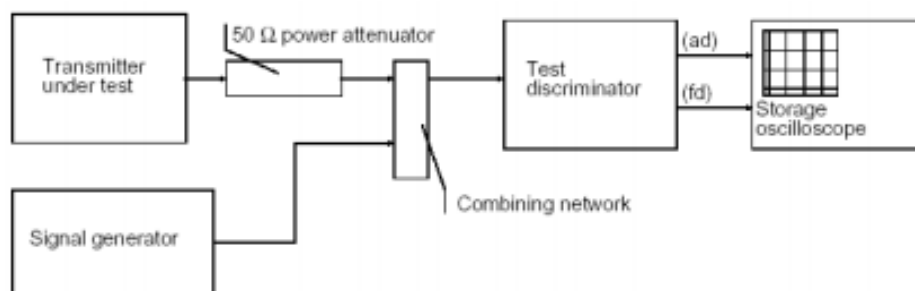

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>



### 12.3 MEASUREMENT METHOD

According to TIA/EIA-603 2.2.19 requirement, as for the product different from PTT, we use test steps as follows:

1. Connect DUT into Test discriminator and Storage Oscilloscope and keep DUT stats ON;
2. Input 1kHz signal into DUT;
3. Set the modulation domain analyzer to trigger on the rising edge of the waveform in order to capture a single-shot turn-on of the transmitter signals;
4. Keep DUT in OFF state and Key the PTT;
5. Observe the stored oscilloscope of modulation domain analyzer. The signal trace shall be maintained within the allowable limits during the periods t1 and t2, and shall also remain within limits following t2;
6. Adjust the modulation domain analyzer to trigger on the falling edge of the transmitter waveform in order to capture a single-shot turn-off transmitter of the transmitter signal.
7. Keep the digital portable radio in ON state and unkey the PTT;
8. Observe the stored oscilloscope of modulation domain analyzer, The signal trace shall be maintained within the allowable limits during the period t3.
9. Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at  $\pm 12.5$  kHz deviation and set its output level to -100dBm.
10. Turn on the transmitter.
11. Supply sufficient attenuation via the RF attenuator to provide an input level to the stored oscilloscope that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the stored oscilloscope as P0.
13. Turn off the transmitter.
14. Adjust the RF level of the signal generator to provide RF power equal to P0. This signal generator RF level shall be maintained throughout the rest of the measurement.
15. Remove the attenuation, so the input power to the stored oscilloscope is increased by 30 dB when the transmitter is turned on.
16. Adjust the vertical amplitude control of the stored oscilloscope to display the 1000 Hz at  $\pm 4$  divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
17. Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be ton. The trace should be maintained within the allowed divisions during the period t1 and t2.
18. Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer.
19. The trace should be maintained within the allowed divisions during the period t3.

### DESCRIBE LIMIT LINE OF TRANSMITTER FREQUENCY BEHAVIOR:


**ton:** The switch-on instant  $t_{on}$  of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the full output power (-30 dBc).

**t1:** period of time starting at  $t_{on}$  and finishing according to above 11.1

**t2:** period of time starting at the end of  $t_1$  and finishing according to above 11.1

**toff:** switch-off instant defined by the condition when the output power falls below 0,1 % of the full output power (-30 dBc).

**t3:** period of time that finishing at  $t_{off}$  and starting according to above 11.1

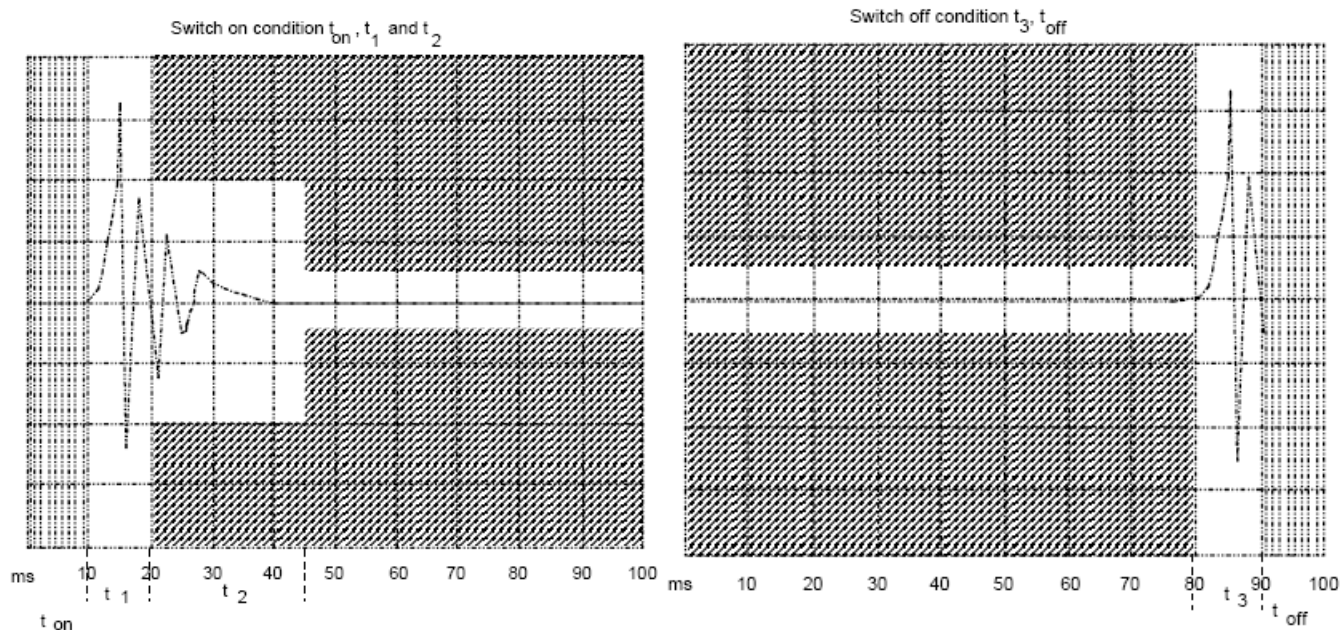

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).


Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>

## 12.4 MEASURET RESULTS

### 12.5 kHz Channel Separation, Analog modulation, Assigned Frequency:451.1875MHz-Turn On

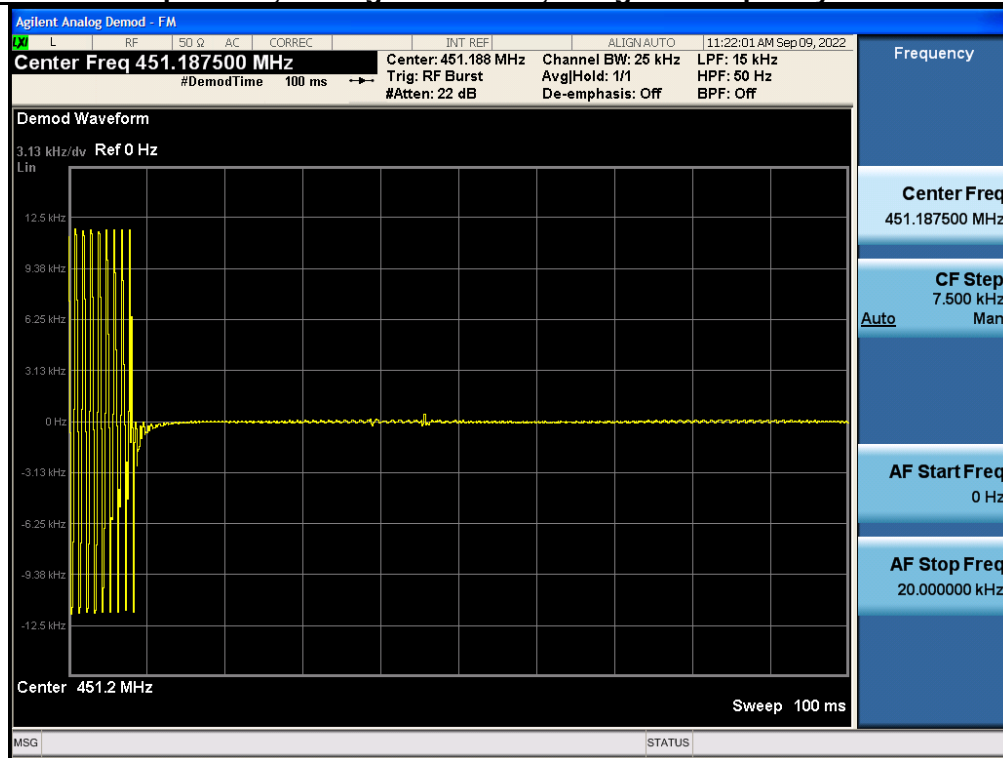

### 12.5 kHz Channel Separation, Analog modulation, Assigned Frequency: 451.1875MHz-Turn Off

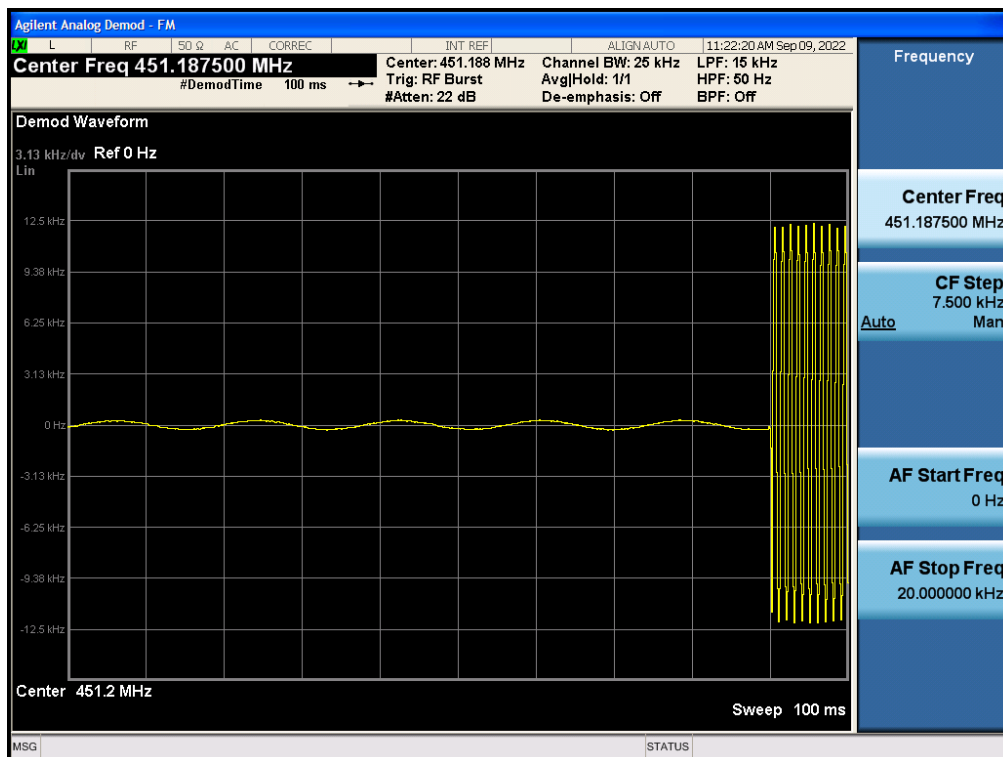

Note: All the test frequencies was tested, but only the worst data be recorded in this part.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




### 13. AUDIO LOW PASS FILTER RESPONSE

#### 13.1 PROVISIONS APPLICABLE

**2.1047(a):** Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

**ANSI TIA/EIA 603-E:2016 3.2.15:** Recommended audio filter attenuation characteristics are given below:

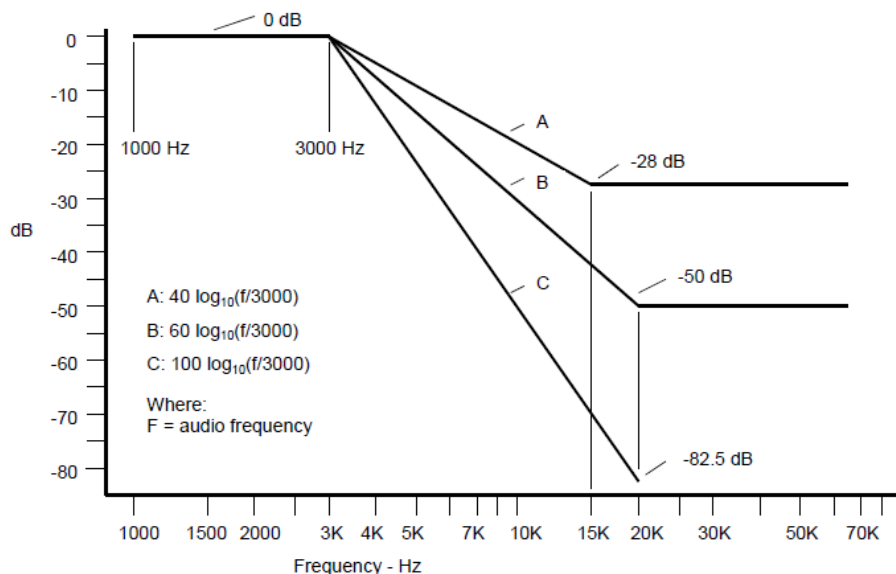


For audio frequencies above 3000 Hz, the audio response of the post limiter low-pass filter shall meet or exceed the following requirements:

- For equipment operating on 20, 25 or 30 kHz channel bandwidth in the 25 MHz to 174 MHz range:  
At frequencies from 3000 Hz through 15,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least:  $40 \log_{10}(f / 3000)$  dB where: f is the audio frequency in Hz.  
At frequencies above 15,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz, by at least: 28 dB.
- For equipment operating with 25 kHz bandwidth channels between 406 and 512 MHz through 896 MHz, and between 929 MHz through 930 MHz: At frequencies from 3000 Hz through 20,000 Hz, the attenuation shall be greater than the attenuation at 1000 Hz by at least:  $60 \log_{10}(f / 3000)$  dB where: f is the audio frequency in Hz.  
At frequencies above 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least: 50 dB.
- For equipment operating on channels between 896 MHz through 901 MHz, between 935 MHz through 940 MHz, and 12.5 or 15 kHz spaced channels in the frequency range 138-174 MHz and 406-512 MHz. At frequencies from 3000 Hz through 20,000 Hz the attenuation shall be greater than the attenuation at 1000 Hz by at least:  $100 \log_{10}(f / 3000)$  dB where: f is the audio frequency in Hz.

### 13.2 MEASUREMENT METHOD

The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 kHz.

### 13.3 MEASUREMENT SETUP

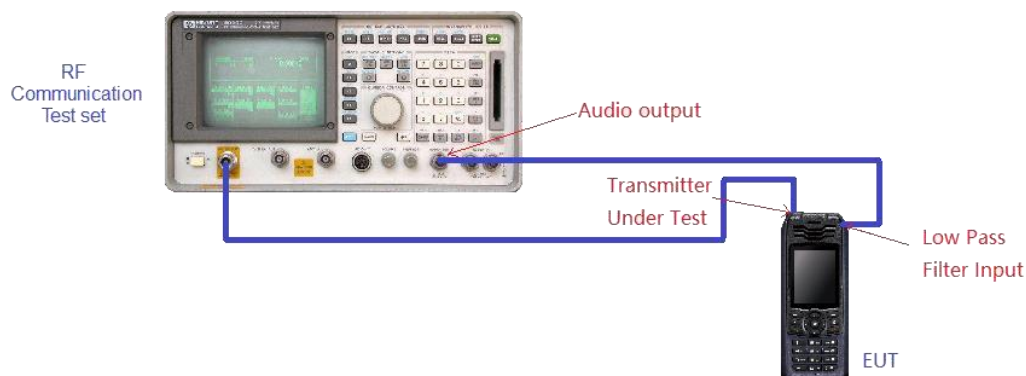


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

### 13.4 MEASURET RESULTS

| 12.5kHz, Analog modulation, Assigned Frequency:451.1875MHz-2W |                           |            |
|---|---------------------------|------------|
| Audio Frequency (kHz)   | Response Attenuation (dB) | Limit (dB) |
| 1   | 0                         | /          |
| 3   | -2.56                     | 0.00       |
| 4   | -9.26                     | -5.00      |
| 5   | -13.09                    | -8.87      |
| 6   | -17.40                    | -12.04     |
| 7   | -20.00                    | -14.72     |
| 8   | -23.16                    | -17.04     |
| 9   | -25.41                    | -19.08     |
| 10  | -28.07                    | -20.92     |
| 15  | -36.25                    | -28.00     |
| 20  | -36.24                    | -28.00     |
| 30  | -35.69                    | -28.00     |
| 50  | -34.24                    | -28.00     |
| 70  | -32.88                    | -28.00     |

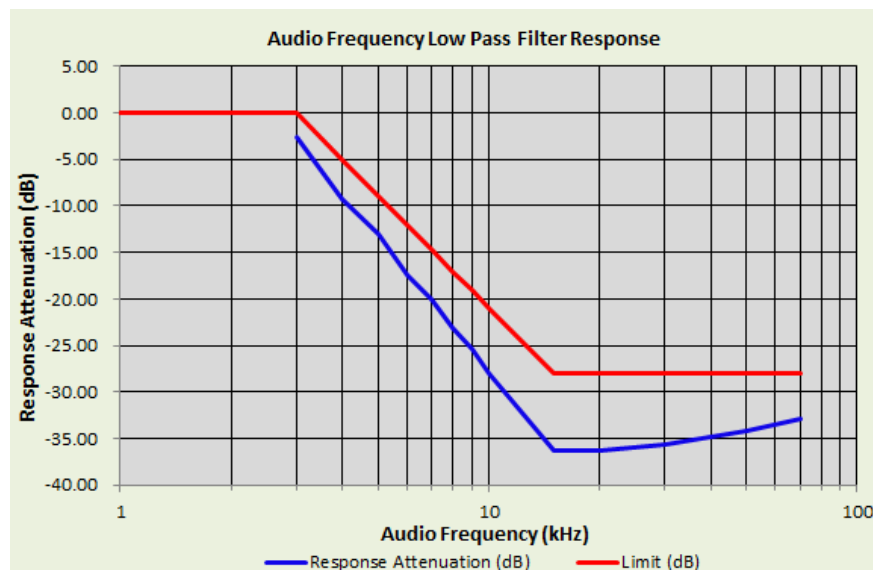

Note: All the test frequencies was tested, but only the worst data be recorded in this part.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd  
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd  
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

## **APPENDIX I: PHOTOGRAPHS OF TEST SETUP**

Refer to the Report No.: AGC03729220802AP01

## **APPENDIX II: PHOTOGRAPHS OF TEST EUT**

Refer to the Report No.: AGC03729220802AP02

**-----END OF REPORT-----**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>



## Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd. (the “Company”) solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the “Clients”).
2. Any report issued by Company as a result of this application for testing services (the “Report”) shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by [agc01@agccert.com](mailto:agc01@agccert.com).

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: [agc@agccert.com](mailto:agc@agccert.com) Web: <http://www.agccert.com/>