


## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.247

**Report Reference No.**.....: **MWR160100403**

**FCC ID**.....: **RQQHLT-E50UTM**


Compiled by  
( position+printed name+signature)..: File administrators Martin Ao



Supervised by  
( position+printed name+signature)..: Test Engineer Yuchao Wang



Approved by  
( position+printed name+signature)..: Manager Dixon Hao



Date of issue.....: Jan. 24, 2016

**Representative Laboratory Name** ..: **Maxwell International Co., Ltd.**

Address .....: Room 509, Hongfa center building, Baoan District, Shenzhen, Guangdong, China

**Testing Laboratory Name** .....: **Shenzhen CTL Testing Technology Co., Ltd.**

Address .....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

**Applicant's name**.....: **HYUNDAI CORPORATION**

Address .....: 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

**Test specification** .....

Standard .....: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Maxwell International Co., Ltd.

**Maxwell International Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Maxwell International Co., Ltd. as copyright owner and source of the material. Maxwell International Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....: Mobile Phone

Trade Mark .....: HYUNDAI

**Manufacturer**.....: **Shenzhen Rainbow Time Technology Co.,Ltd**

Model/Type reference.....: E545

Listed Models .....: /

Modulation Type .....: GFSK,8DPSK, $\pi$ /4DQPSK

Operation Frequency.....: From 2402MHz to 2480MHz

Rating .....: DC 3.80V

Hardware version .....: 14900\_MM1\_V03

Software version .....: HYUNDAI\_E545\_V5.1.1\_20160122

Result.....: **PASS**

**TEST REPORT**

<b>Test Report No. :</b> MWR160100403	Jan. 24, 2016
	Date of issue

Equipment under Test : Mobile Phone

Model /Type : E545

Listed Models : /

**Applicant** : **HYUNDAI CORPORATION**

Address : 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

**Manufacturer** : **Shenzhen Rainbow Time Technology Co.,Ltd**

Address : Room 905, ChangHong Technology Building, Science and Technology Park, Nanshan District, Shenzhen, China

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b><u>1</u></b>	<b><u>TEST STANDARDS .....</u></b>	<b><u>4</u></b>
<b><u>2</u></b>	<b><u>SUMMARY .....</u></b>	<b><u>5</u></b>
2.1	General Remarks	5
2.2	Product Description	5
2.3	Equipment Under Test	6
2.4	Short description of the Equipment under Test (EUT)	6
2.5	EUT operation mode	6
2.6	Internal Identification of AE used during the test	7
2.7	Related Submittal(s) / Grant (s)	7
2.8	Modifications	7
<b><u>3</u></b>	<b><u>TEST ENVIRONMENT .....</u></b>	<b><u>8</u></b>
3.1	Address of the test laboratory	8
3.2	Test Facility	8
3.3	Environmental conditions	8
3.4	Test Conditions	8
3.5	Summary of measurement results	9
3.6	Equipments Used during the Test	10
<b><u>4</u></b>	<b><u>TEST CONDITIONS AND RESULTS .....</u></b>	<b><u>11</u></b>
4.1	AC Power Conducted Emission	11
4.2	Radiated Emissions and Band Edge	14
4.3	Maximum Peak Output Power	22
4.4	20dB Bandwidth	23
4.5	Frequency Separation	27
4.6	Number of hopping frequency	29
4.7	Time of Occupancy (Dwell Time)	31
4.8	Spurious RF Conducted Emission	35
4.9	Pseudorandom Frequency Hopping Sequence	48
4.10	Antenna Requirement	49
<b><u>5</u></b>	<b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>	<b><u>50</u></b>
<b><u>6</u></b>	<b><u>EXTERNAL PHOTOS OF THE EUT .....</u></b>	<b><u>50</u></b>
<b><u>7</u></b>	<b><u>INTERNAL PHOTOS OF THE EUT .....</u></b>	<b><u>50</u></b>

# **1 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

## 2 SUMMARY

### 2.1 General Remarks

Date of receipt of test sample	:	Jan. 01, 2016
Testing commenced on	:	Jan. 12, 2016
Testing concluded on	:	Jan. 24, 2016

### 2.2 Product Description

The **HYUNDAI CORPORATION**'s Model: E545 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Mobile Phone
Model Number	E545
Modulation Type	GMSK for GSM/GPRS, 8-PSK for EDGE, QPSK for UMTS
Antenna Type	Internal
UMTS Operation Frequency Band	Device supported UMTS FDD Band II/V
WLAN FCC Operation frequency	IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz
BT FCC Operation frequency	2402MHz-2480MHz
HSDPA Release Version	Release 10
HSUPA Release Version	Release 6
DC-HSUPA Release Version	Not Supported
WCDMA Release Version	R99
WLAN FCC Modulation Type	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
BT Modulation Type	GFSK,8DPSK, $\pi$ /4DQPSK(BT 3.0+EDR)
Hardware version	14900 MM1 V03
Software version	HYUNDAI_E545_V5.1.1_20160122
Android version	Android 4.4.2
GPS function	Supported
WLAN	Supported 802.11b/802.11g/802.11n
Bluetooth	Supported BT 4.0/BT 3.0+EDR
GSM/EDGE/GPRS	Supported GSM/GPRS/EDGE
GSM/EDGE/GPRS Power Class	GSM850:Power Class 4/ PCS1900:Power Class 1
GSM/EDGE/GPRS Operation Frequency	GSM850 :824.2MHz-848.8MHz/PCS1900:1850.2MHz-1909.8MHz
GSM/EDGE/GPRS Operation Frequency Band	GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900
GSM Release Version	R99
GPRS/EDGE Multislot Class	GPRS/EDGE: Multi-slot Class 12
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.80VDC)
GPRS operation mode	Class B

## 2.3 Equipment Under Test

### Power supply system utilised

Power supply voltage	:	<input type="radio"/>	120V / 60 Hz	<input type="radio"/>	115V / 60Hz
		<input type="radio"/>	12 V DC	<input type="radio"/>	24 V DC
		<input checked="" type="radio"/>	Other (specified in blank below)		

DC 3.80V

## 2.4 Short description of the Equipment under Test (EUT)

### 2.4.1 General Description

E545 is subscriber equipment in the WCDMA/GSM system. The HSPA/UMTS frequency band is Band I, Band II, Band V and Band VIII; The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band II and Band V and GSM850 and PCS1900 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and SIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

## 2.5 EUT operation mode

The EUT has been tested under typical operating condition. There are EDR (Enhanced Data Rate) and BDR (Basic Data Rate) mode. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. There are 79 channels of EUT, and the test carried out at the lowest channel, middle channel and highest channel.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	40	2442
01	2403	41	2443
02	2404	42	2444
03	2405	43	2445
04	2406	44	2446
05	2407	45	2447
06	2408	46	2448
07	2409	47	2449
08	2410	48	2450
09	2411	49	2451
10	2412	50	2452
11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462
21	2423	61	2463
22	2424	62	2464
23	2425	63	2465
24	2426	64	2466
25	2427	65	2467

26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
38	2440	78	2480
39	2441		

## 2.6 Internal Identification of AE used during the test

AE ID*	Description
AE1	Charger

AE1

Model: 811B

INPUT: AC100-240V~ 50/60Hz 0.15A

OUTPUT: DC 5.0V 1500mA

\*AE ID: is used to identify the test sample in the lab internally.

## 2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: RQQHLT-E50UTM** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 2.8 Modifications

No modifications were implemented to meet testing criteria.

### 3 TEST ENVIRONMENT

#### 3.1 Address of the test laboratory

**Shenzhen CTL Testing Technology Co., Ltd.**

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4, CISPR 22/EN 55022 and CISPR16-4-1 SVSWR requirements.

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

##### IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

##### FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

#### 3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

#### 3.4 Test Conditions

Test Case	Test Conditions	
	Configuration	Description
20dB Emission Bandwidth (EBW)	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78, TM3_3DH5_Ch00, TM3_3DH5_Ch39, TM3_3DH5_Ch78,
Carrier Frequency Separation	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Hop, TM3_3DH5_Hop,
Number of Hopping Channel	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Hop, TM3_3DH5_Hop,
Time of Occupancy (Dwell Time)	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Ch39, TM3_3DH5_Ch39.
Maximum Peak Conducted Output Power	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH3_Ch00, TM1_DH3_Ch39, TM1_DH3_Ch78, TM2_2DH3_Ch00, TM2_2DH3_Ch39, TM2_2DH3_Ch78, TM3_3DH3_Ch00, TM3_3DH3_Ch39, TM3_3DH3_Ch78,
Bandedge spurious emission (Conducted)	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH3_Ch00, TM1_DH3_Ch78, TM3_3DH3_Ch00, TM3_3DH3_Ch78,



Conducted RF Spurious Emission	Meas. Method	ANSI C63.10:2013
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78, TM3_3DH5_Ch39, TM3_3DH5_Ch78.
Radiated Emissions in the Restricted Bands	Meas. Method	ANSI C63.10:2013 30 MHz to 1 GHz: Pre: RBW=100kHz; VBW=300kHz; Det. = Peak. Final: RBW=120kHz; Det. = CISPR Quasi-Peak. 1 GHz to 26.5GHz: Average: RBW=1 MHz; VBW= 10Hz; Det. = Peak; Sweep-time= Auto; Trace = Single. Peak: RBW=1 MHz; VBW= 3 MHz; Det. = Peak; Sweep-time= Auto; Trace≥ MaxHold * 100.
	Test Environment	NTNV
	EUT Conf.	30 MHz-1GHz TM1_DH5_Ch00 (Worst Conf.). 1-18 GHz: TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78, (Worst Conf.).

Test Case	Test Conditions	
	Configuration	Description
AC Power Line Conducted Emissions	Measurement Method	AC mains conducted.
	Test Environment	NTNV
	EUT Configuration	TM1_DH5_Ch39. (Worst Conf.).

## Note:

1. For Radiated Emissions, By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.
2. For  $\pi/4$  QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with the worse case 8-DPSK and GFSK.

### 3.5 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(e)	Power spectral density	-/-	-/-	-/-	-/-	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Not applicable for FHSS!
§15.247(a)(1)	Carrier Frequency separation	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Middle	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Number of Hopping channels	GFSK 8DPSK	<input checked="" type="checkbox"/> Full	GFSK 8DPSK	<input checked="" type="checkbox"/> Full	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Middle	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Spectrum bandwidth of a FHSS system 20dB bandwidth	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(b)(1)	Maximum output power	GFSK $\pi/4$ DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK $\pi/4$ DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	Band edge compliance conducted	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.205	Band edge compliance	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

	radiated									
§15.247(d)	TX spurious emissions conducted	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	TX spurious emissions radiated	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	GFSK	-/-	GFSK	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	GFSK	-/-	GFSK	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

## Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. We tested all test mode and recorded worst case in report


**3.6 Equipments Used during the Test**

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.12	2015/06/02	2016/06/01
LISN	R&S	ESH2-Z5	860014/010	2015/06/02	2016/06/01
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	N9030A	MY49430428	2015/05/21	2016/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2015/05/19	2016/05/18
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2015/05/20	2016/05/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2015/05/20	2016/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2015/06/02	2016/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2015/06/02	2016/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2015/06/02	2016/06/01
RF Cable	Megalon	RF-A303	N/A	2015/06/02	2016/06/01
Power Sensor	R&S	NRP-Z4	823.3618.03	2015.06.02	2016.06.01
Power Meter	R&S	NRVS	1020.1809.02	2015.06.02	2016.06.01

## 4 TEST CONDITIONS AND RESULTS

### 4.1 AC Power Conducted Emission

#### TEST CONFIGURATION

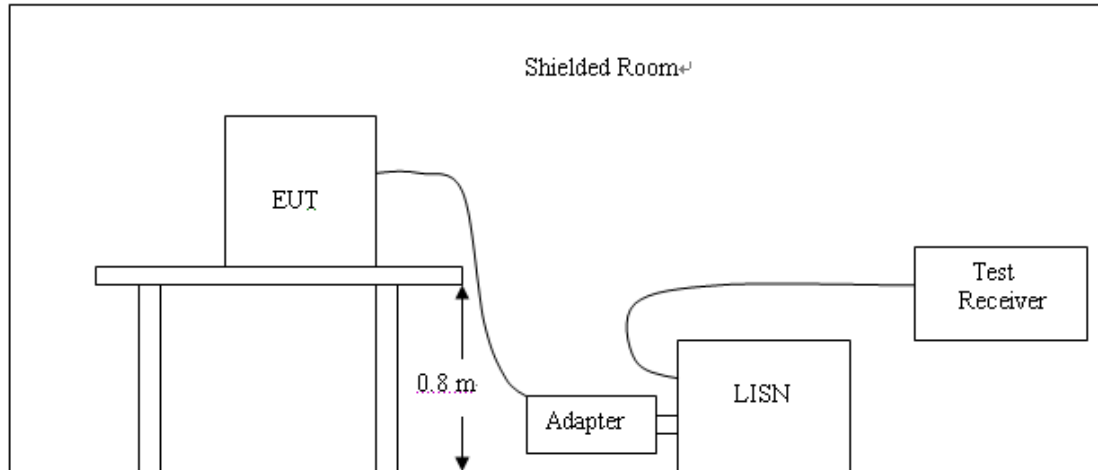

#### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
4. The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

\* Decreasing linearly with the logarithm of the frequency


#### TEST RESULTS

*Note:* We tested Conducted Emission of GFSK,  $\pi/4$  DQPSK and 8DPSK mode from 0.15 KHz to 30MHz (DH1, DH3 and DH5) and all channels (low, middle and high), recorded the worst case data at GFSK DH5 middle channel.

N

**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

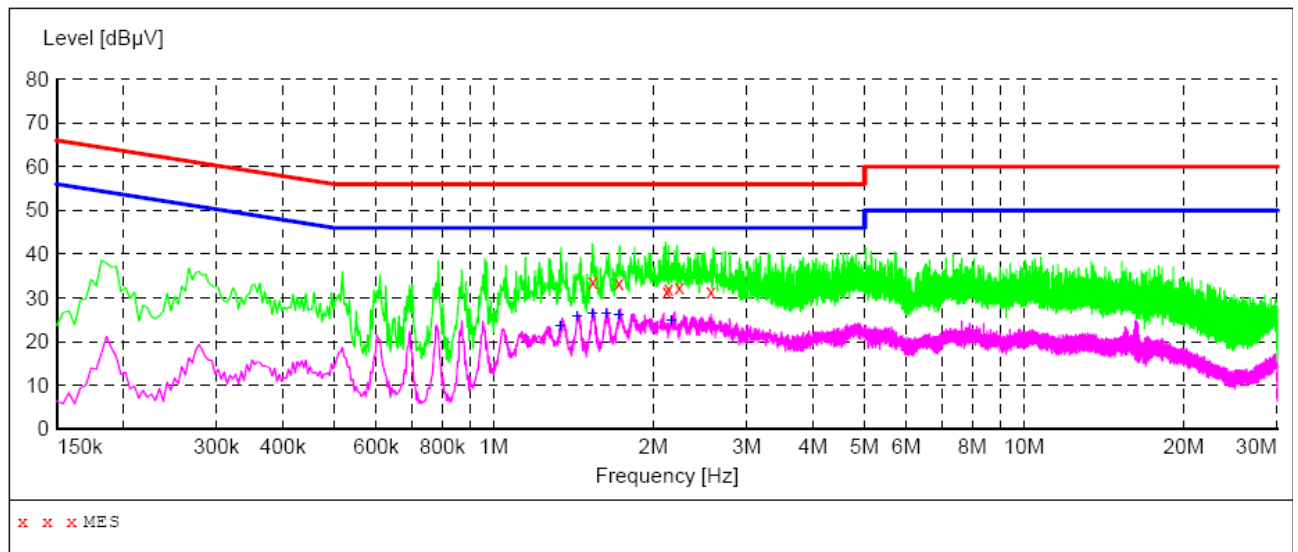**MEASUREMENT RESULT:**

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
1.538000	33.70	10.5	56	22.3	QP	N	GND
1.722000	33.40	10.5	56	22.6	QP	N	GND
2.118000	31.50	10.5	56	24.5	QP	N	GND
2.134000	32.20	10.5	56	23.8	QP	N	GND
2.238000	32.40	10.5	56	23.6	QP	N	GND
2.566000	31.60	10.5	56	24.4	QP	N	GND


**MEASUREMENT RESULT:**

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
1.334000	23.70	10.5	46	22.3	AV	N	GND
1.438000	25.70	10.5	46	20.3	AV	N	GND
1.534000	26.30	10.5	46	19.7	AV	N	GND
1.630000	26.40	10.5	46	19.6	AV	N	GND
1.722000	26.00	10.5	46	20.0	AV	N	GND
2.162000	24.70	10.5	46	21.3	AV	N	GND

L

**SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

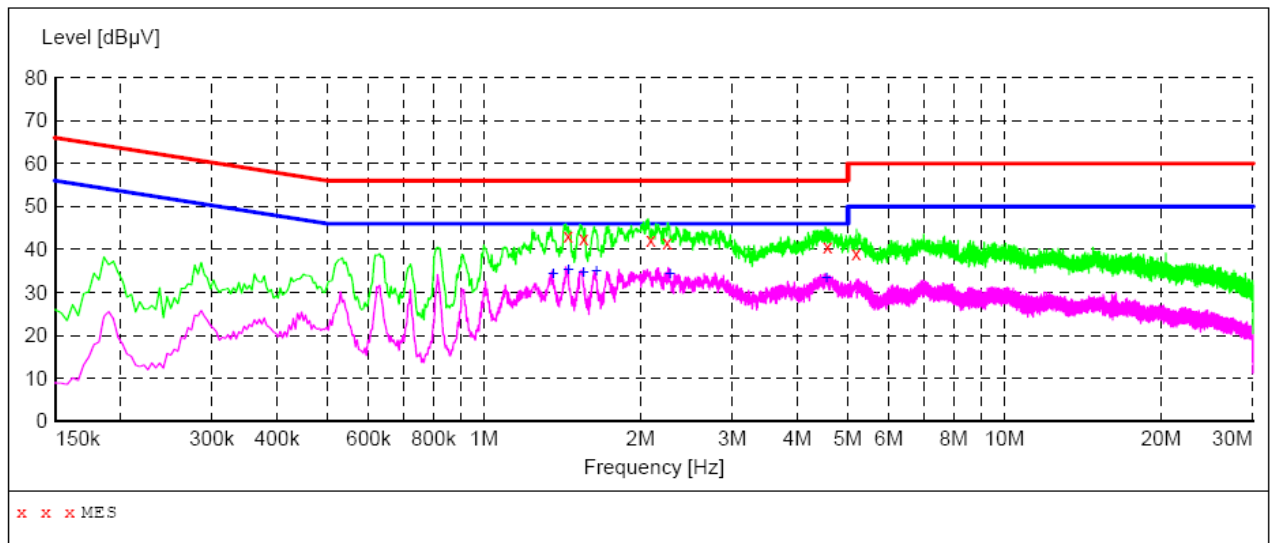**MEASUREMENT RESULT:**




Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
1.450000	43.20	10.5	56	12.8	QP	L1	GND
1.554000	42.60	10.5	56	13.4	QP	L1	GND
2.090000	42.10	10.5	56	13.9	QP	L1	GND
2.246000	41.60	10.5	56	14.4	QP	L1	GND
4.566000	40.60	10.5	56	15.4	QP	L1	GND
5.186000	39.10	10.6	60	20.9	QP	L1	GND

**MEASUREMENT RESULT:**

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
1.358000	34.40	10.5	46	11.6	AV	L1	GND
1.454000	35.40	10.5	46	10.6	AV	L1	GND
1.554000	34.70	10.5	46	11.3	AV	L1	GND
1.646000	35.00	10.5	46	11.0	AV	L1	GND
2.278000	34.40	10.5	46	11.6	AV	L1	GND
4.558000	33.20	10.5	46	12.8	AV	L1	GND

## 4.2 Radiated Emissions and Band Edge

### TEST CONFIGURATION

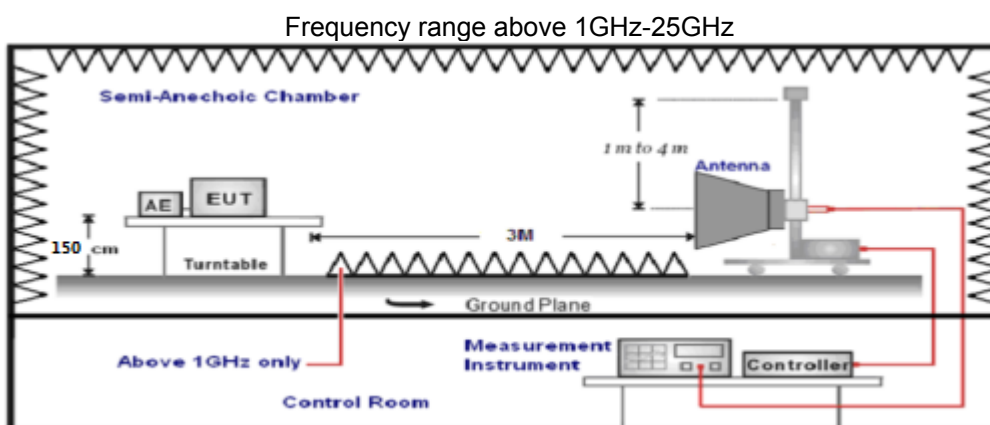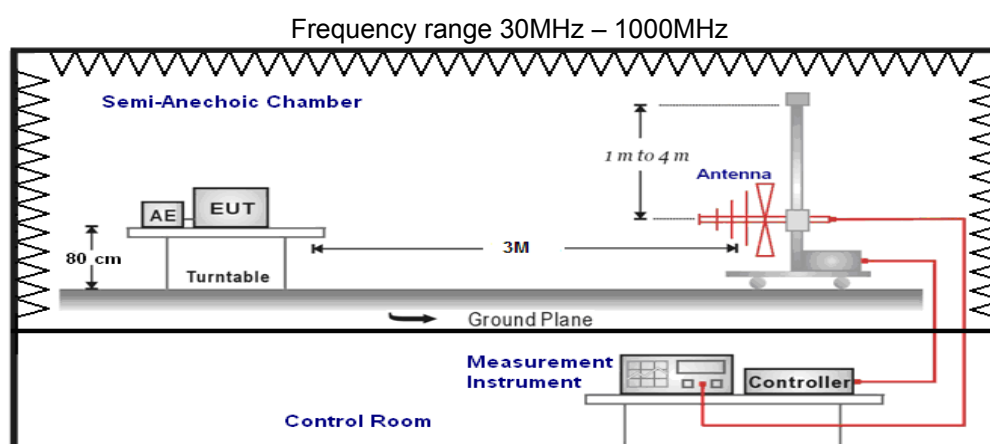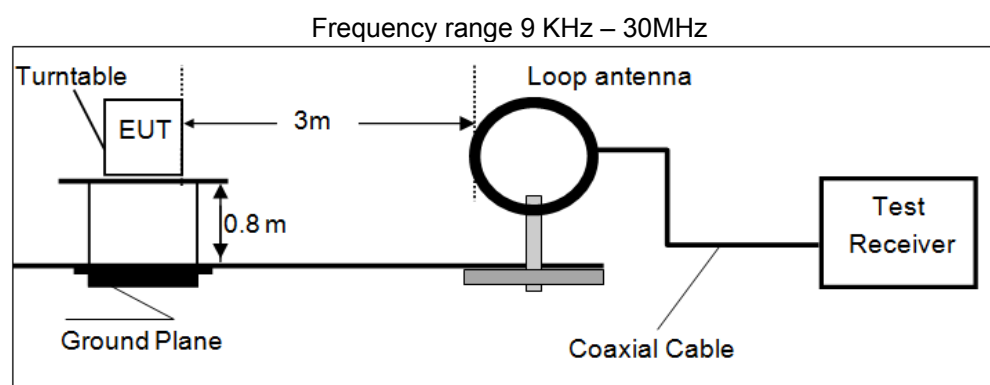

### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane for below 1GHz and 1.50m above ground plane for above 1GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768 KHz and maximum operation frequency was 2480MHz. so radiated emission test frequency band from 9 KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3

18GHz-25GHz	Horn Antennna	1
-------------	---------------	---

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto	Peak
	Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

More procudre as follows;

### 1) Sequence of testing 9 kHz to 30 MHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

#### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QP detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

### 2) Sequence of testing 30 MHz to 1 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 4 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.

--- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 4) Sequence of testing above 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

#### Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

#### Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$



Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

### **RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	300	$20\log(2400/F(\text{KHz}))+80$	$2400/F(\text{KHz})$
0.49-1.705	30	$20\log(24000/F(\text{KHz}))+40$	$24000/F(\text{KHz})$
1.705-30	30	$20\log(30)+40$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500


### **TEST RESULTS**

Remark:


1. The radiated measurement are performed the each channel (low/mid/high) at all Packet type (DH1, DH3 and DH5) also for difference modulation type (GFSK, 8DPSK), recorded worst case at GFSK\_DH5\_Low channel (Channel 00) for below 1GHz and GFSK\_DH5\_Low channel (Channel 00), GFSK\_DH5\_Middle channel (Channel 39), GFSK\_DH5\_High channel (Channel 78).
2. ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.
3. HORN ANTENNA for the radiation emission test above 1G.
4. We tested both battery powered and powered by adapter charging mode at three orientate ones, recorded worst case at powered by adapter charging mode.
5. "---" means not recorded as emission levels lower than limit.
6. Margin= Limit - Level

#### ***For 9KHz to 30MHz***

Frequency (MHz)	Corrected Reading (dB $\mu$ V/m)@3m	FCC Limit (dB $\mu$ V/m) @3m	Margin (dB)	Detector	Result
12.89	47.23	69.54	22.31	QP	PASS
20.34	42.87	69.54	26.67	QP	PASS

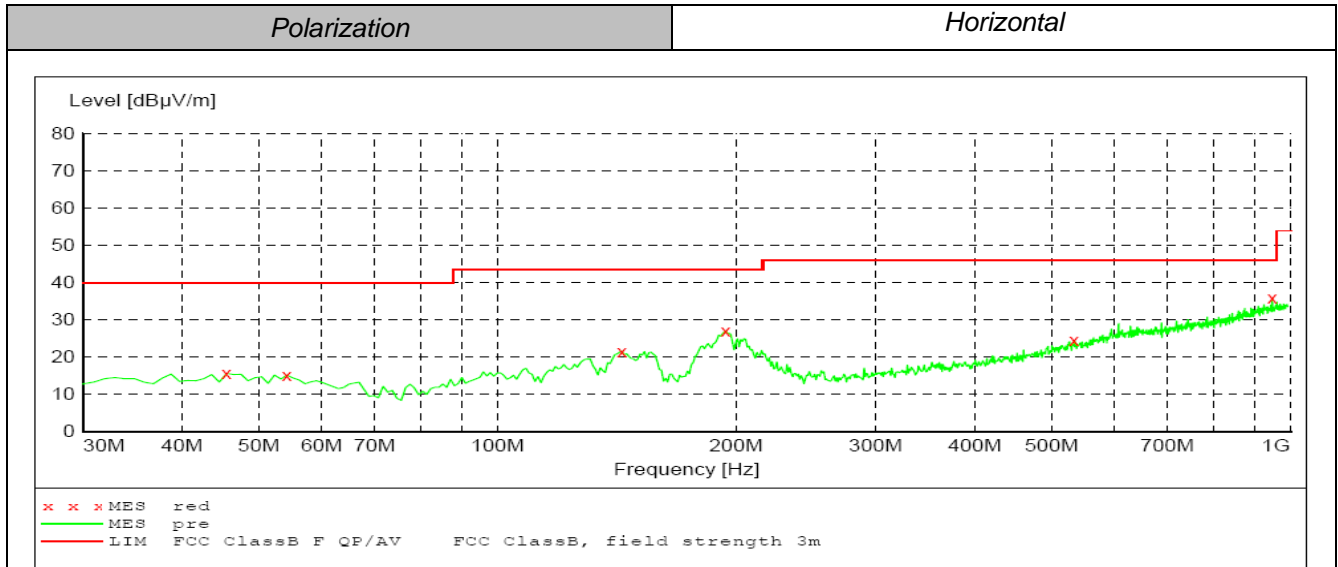**For 30MHz to 1000MHz****MEASUREMENT RESULT:**

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.520000	15.60	-15.0	40.0	24.4	PK	100.0	360.00	HORIZONTAL
54.250000	15.20	-15.4	40.0	24.8	PK	100.0	188.00	HORIZONTAL
143.490000	21.60	-18.4	43.5	21.9	PK	300.0	194.00	HORIZONTAL
193.930000	27.00	-14.6	43.5	16.5	PK	300.0	229.00	HORIZONTAL
533.430000	24.50	-5.9	46.0	21.5	PK	300.0	322.00	HORIZONTAL
948.590000	35.90	3.4	46.0	10.1	PK	100.0	270.00	HORIZONTAL

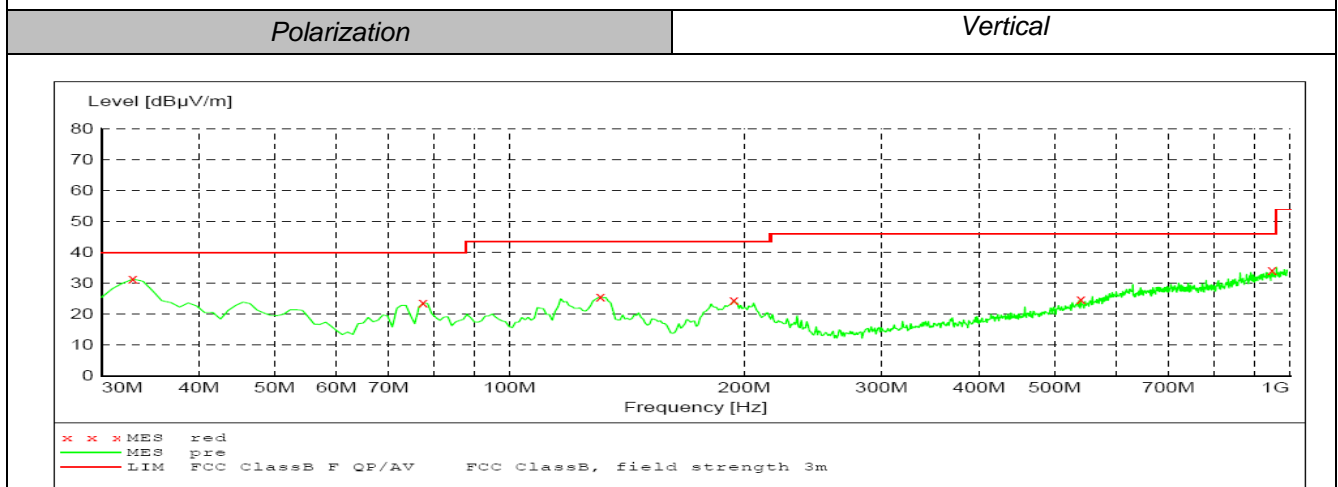**MEASUREMENT RESULT:**

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
32.910000	31.40	-16.3	40.0	8.6	Pk	100.0	207.00	VERTICAL
77.530000	23.60	-19.6	40.0	16.4	Pk	100.0	207.00	VERTICAL
130.880000	25.70	-17.9	43.5	17.8	Pk	100.0	127.00	VERTICAL
193.930000	24.40	-14.6	43.5	19.1	Pk	100.0	288.00	VERTICAL
540.220000	24.80	-5.6	46.0	21.2	Pk	100.0	222.00	VERTICAL
949.560000	34.30	3.4	46.0	11.7	Pk	100.0	142.00	VERTICAL

**For 1GHz to 25GHz**

Note: We tested GFSK Mode and 8DPSK, recorded the worst case at the GFSK (DH5) Mode.

Frequency(MHz):				2402		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	89.65	PK	--	--	56.25	28.78	4.61	0.00	33.4
1	2402.00	79.87	AV	--	--	46.47	28.78	4.61	0.00	33.4
2	2390.00	37.18	PK	74	--	3.86	28.72	4.6	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	38	PK	74	36	4.61	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4804.00	48.56	PK	74	25.44	44.05	33.49	6.91	35.89	4.51
4	4804.00	--	AV	54	--	--	--	--	--	--
5	5150.75	43.3	PK	74	30.7	36.03	34.44	7.12	34.28	7.27
5	5150.75	--	AV	54	--	--	--	--	--	--
6	7206.00	42.65	PK	74	31.35	31.54	36.95	9.18	35.03	11.11
6	7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2402		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	90.02	PK	--	--	56.62	28.78	4.61	0.00	33.4
1	2402.00	80.56	AV	--	--	47.16	28.78	4.61	0.00	33.4
2	2390.00	37.88	PK	74	36.12	4.56	28.72	4.6	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	36.86	PK	74	37.14	3.47	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4804.00	45.87	PK	74	28.13	41.36	33.49	6.91	35.89	4.51
4	4804.00	--	AV	54	--	--	--	--	--	--
5	5015.20	42.19	PK	74	31.81	35.35	34.03	7.04	34.24	6.84
5	5015.20	--	AV	54	--	--	--	--	--	--
6	7206.00	42.47	PK	74	31.53	31.36	36.95	9.18	35.03	11.11
6	7206.00	--	AV	54	--	--	--	--	--	--

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Frequency(MHz):				2441		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2441.00	88.96	PK	--	--	55.45	28.85	4.66	0.00	33.51
1	2441.00	79.56	AV	--	--	46.05	28.85	4.66	0.00	33.51
2	4458.50	39.26	PK	74	34.74	34.25	32.86	6.69	34.54	5.01
2	4458.50	--	AV	54	--	--	--	--	--	--
3	4882.00	45.19	PK	74	28.81	38.93	33.6	6.95	34.3	6.26
3	4882.00	--	AV	54	--	--	--	--	--	--
4	5150.50	40.15	PK	74	33.85	32.74	34.44	7.12	34.14	7.41
4	5150.50	--	AV	54	--	--	--	--	--	--
5	7323.00	43.66	PK	74	30.34	31.96	37.46	9.23	35	11.7
5	7323.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2441		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2441.00	89.93	PK	--	--	56.42	28.85	4.66	0.00	33.51
1	2441.00	80.35	AV	--	--	46.84	28.85	4.66	0.00	33.51
2	4235.70	39.81	PK	74	34.19	35.11	32.82	6.54	34.67	4.7
2	4235.70	--	AV	54	--	--	--	--	--	--
3	4882.00	45.35	PK	74	28.65	39.09	33.6	6.95	34.3	6.26
3	4882.00	--	AV	54	--	--	--	--	--	--
4	5150.75	40.15	PK	74	33.85	32.74	34.44	7.12	34.14	7.41
4	5150.75	--	AV	54	--	--	--	--	--	--
5	7323.00	43.96	PK	74	30.04	32.26	37.46	9.23	35	11.7
5	7323.00	--	AV	54	--	--	--	--	--	--

## REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Frequency(MHz):				2480		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	88.68	PK	--	--	55.06	28.92	4.7	0.00	33.62
1	2480.00	79.38	AV	--	--	45.76	28.92	4.7	0.00	33.62
2	2483.50	39.68	PK	74	34.32	6.05	28.93	4.7	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	37.29	PK	74	36.71	3.61	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4960.00	46.33	PK	74	27.67	41.41	33.84	7	35.92	4.92
4	4960.00	--	AV	54	--	--	--	--	--	--
5	5387.50	44.4	PK	74	29.6	36.79	34.73	7.25	34.37	7.61
5	5387.50	--	AV	54	--	--	--	--	--	--
6	7440.00	43.49	PK	74	30.51	31.54	37.64	9.28	34.97	11.95
6	7440.00	--	AV	54	--	--	--	--	--	--


Frequency(MHz):				2480		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	89.76	PK	--	--	56.14	28.92	4.7	0.00	33.62
1	2480.00	79.58	AV	--	--	45.96	28.92	4.7	0.00	33.62
2	2483.50	38.6	PK	74	35.4	4.97	28.93	4.7	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	37.36	PK	74	36.64	3.68	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4960.00	46.33	PK	74	27.67	41.41	33.84	7	35.92	4.92
4	4960.00	--	AV	54	--	--	--	--	--	--
5	5210.75	40.35	PK	74	33.65	32.96	34.55	7.15	34.31	7.39
5	5210.75	--	AV	54	--	--	--	--	--	--
6	7440.00	41.49	PK	74	32.51	29.54	37.64	9.28	34.97	11.95
6	7440.00	--	AV	54	--	--	--	--	--	--

## REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

### 4.3 Maximum Peak Output Power

#### TEST CONFIGURATION



#### TEST PROCEDURE

According to ANSI C63.10:2013 Maximum peak conducted output power: Connect antenna port into power meter and reading Peak values.

#### LIMIT

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

#### TEST RESULTS

*Remark: We test maximum peak output power at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5*

##### 4.3.1 GFSK Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
00	2402	4.79	30	PASS
39	2441	5.11	30	PASS
78	2480	4.69	30	PASS

Note:

1.The test results including the cable lose.

##### 4.3.2 $\pi/4$ DQPSK Test Mode

A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
00	2402	4.01	21	PASS
39	2441	4.29	21	PASS
78	2480	3.81	21	PASS

Note:

1.The test results including the cable lose.

##### 4.3.3 8DPSK Test Mode

A. Test Verdict


Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
00	2402	3.87	21	PASS
39	2441	4.03	21	PASS
78	2480	3.85	21	PASS

Note:

1.The test results including the cable lose.

## 4.4 20dB Bandwidth

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30KHz and VBW=100KHz. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### LIMIT

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

### TEST RESULTS


#### 4.4.1 GFSK Test Mode

##### A. Test Verdict


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot	Limits (MHz)	Verdict
00	2402	0.8259	Plot 4.4.1 A	/	PASS
39	2441	0.8230	Plot 4.4.1 B	/	PASS
78	2480	0.8178	Plot 4.4.1 C	/	PASS

Note: 1.The test results including the cable lose.


##### B. Test Plots

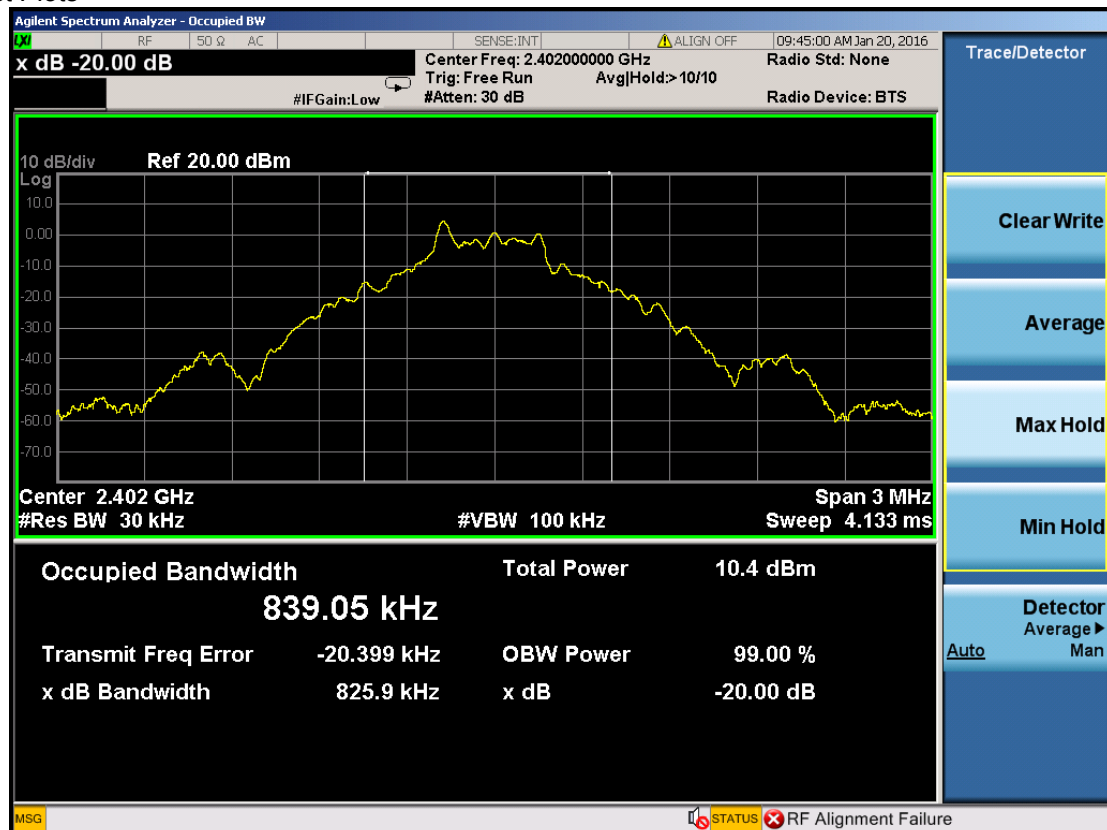

(Plot 4.4.1 A: Channel 00: 2402MHz @ GFSK)

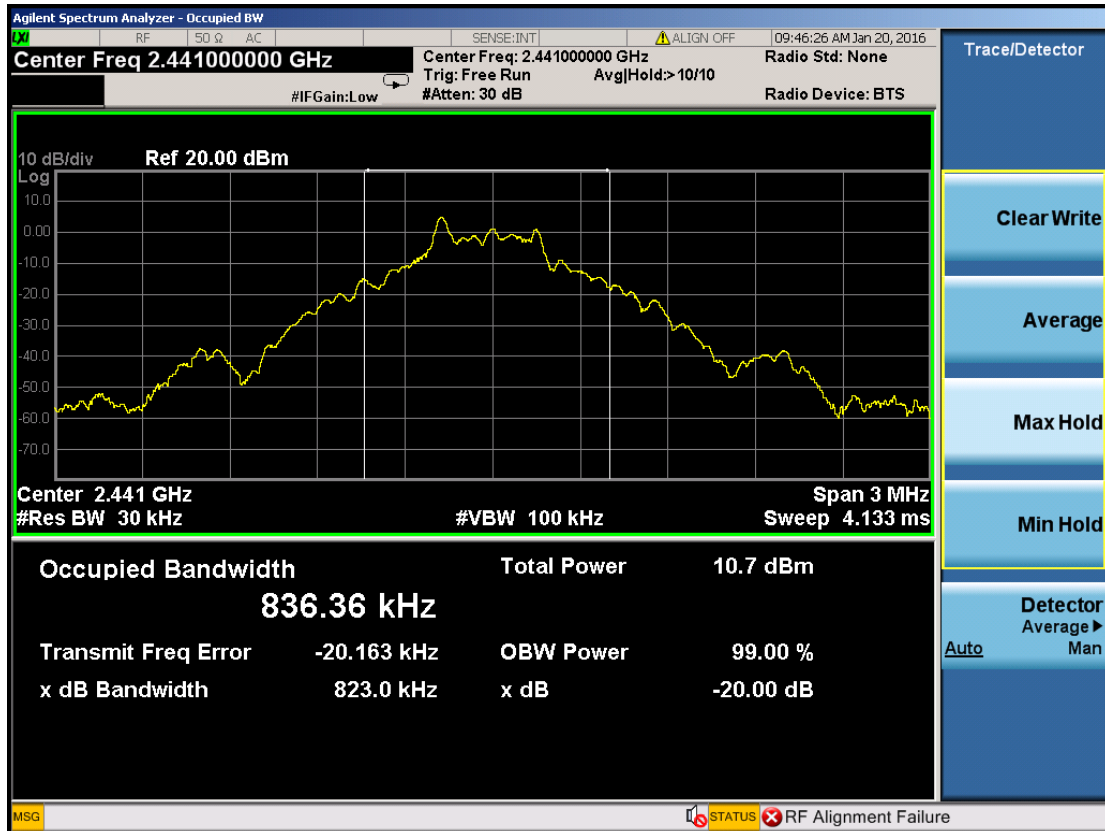

(Plot 4.4.1 B: Channel 39: 2441MHz @ GFSK)

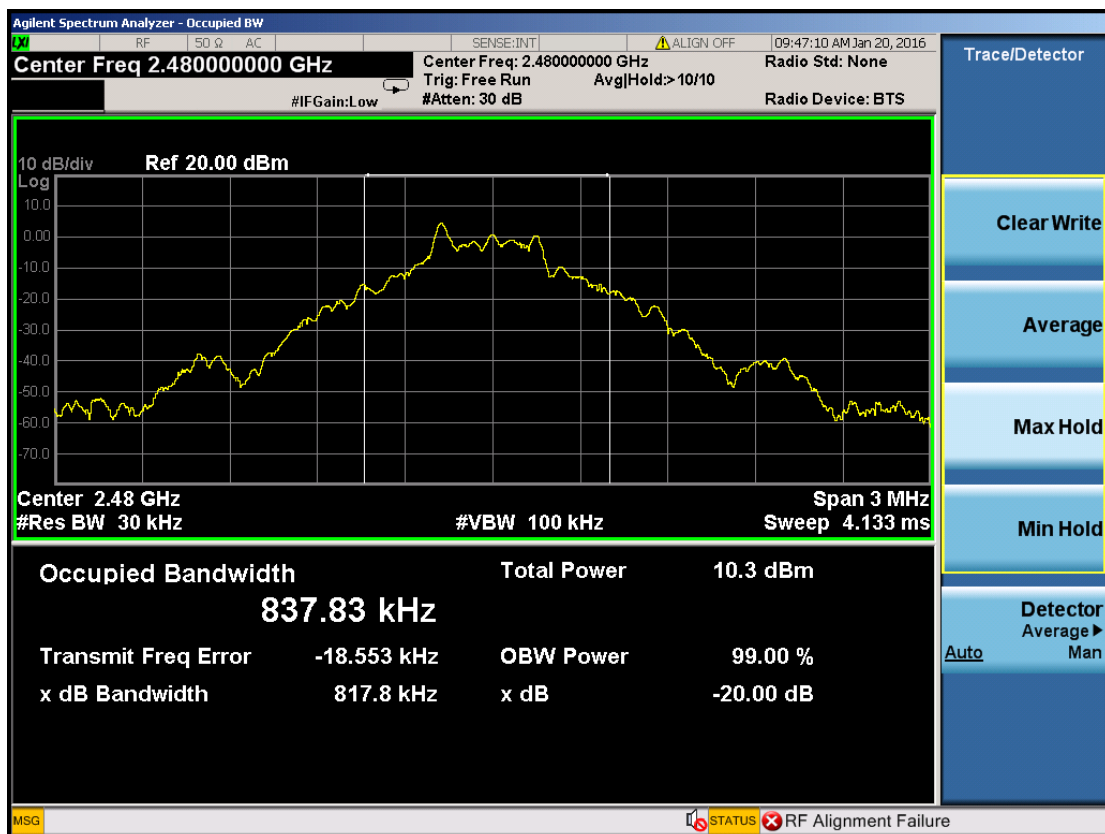

(Plot 4.4.1 C: Channel 78: 2480MHz @ GFSK)




#### 4.4.2 8DPSKTest Mode

##### A. Test Verdict


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot	Limits (MHz)	Verdict
00	2402	1.159	Plot 4.4.2 A	/	PASS
39	2441	1.156	Plot 4.4.2 B	/	PASS
78	2480	1.158	Plot 4.4.2 C	/	PASS

Note: 1.The test results including the cable lose.


##### B. Test Plots

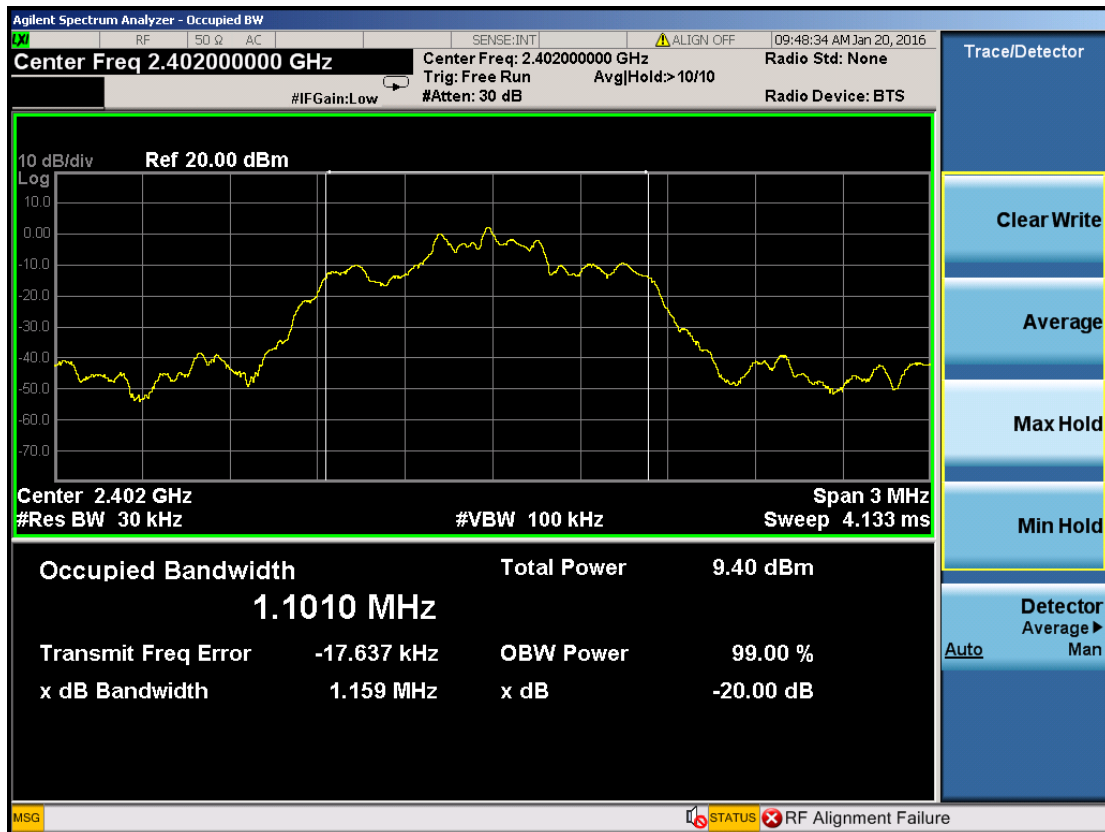

(Plot 4.4.2 A: Channel 00: 2402MHz @ 8DPSK)

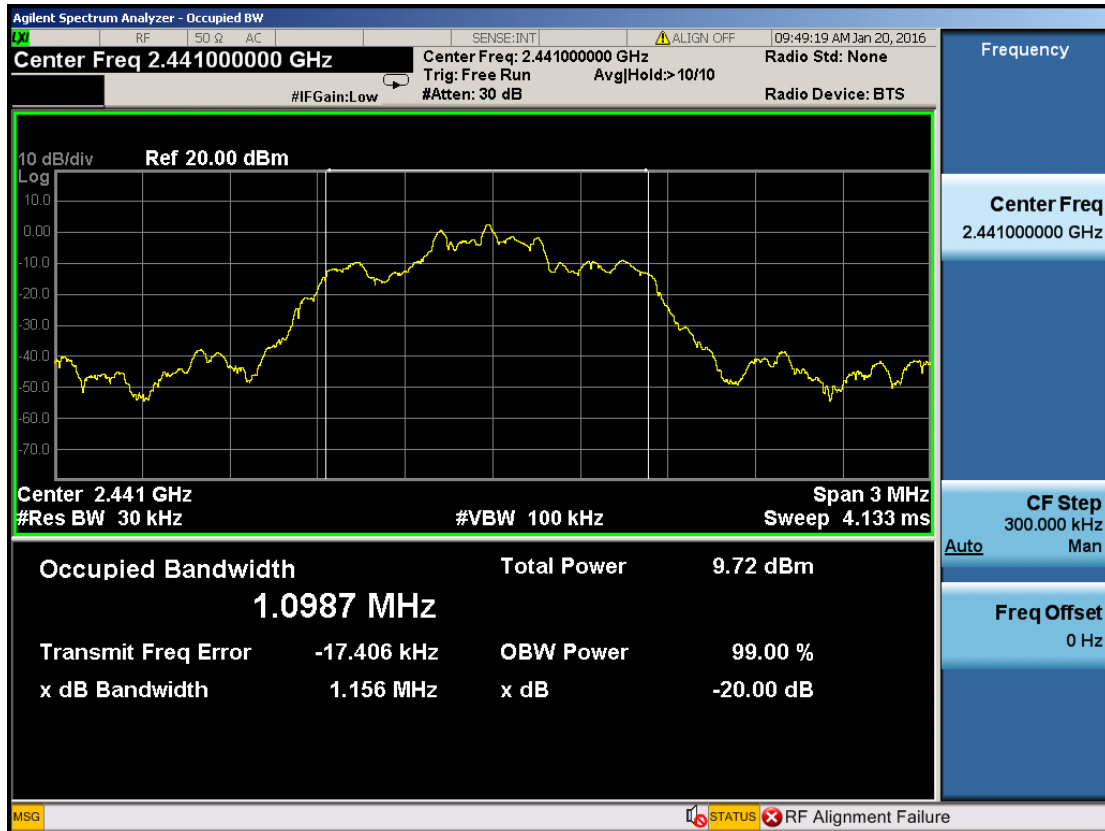


(Plot 4.4.2 B: Channel 39: 2441MHz @ 8DPSK)

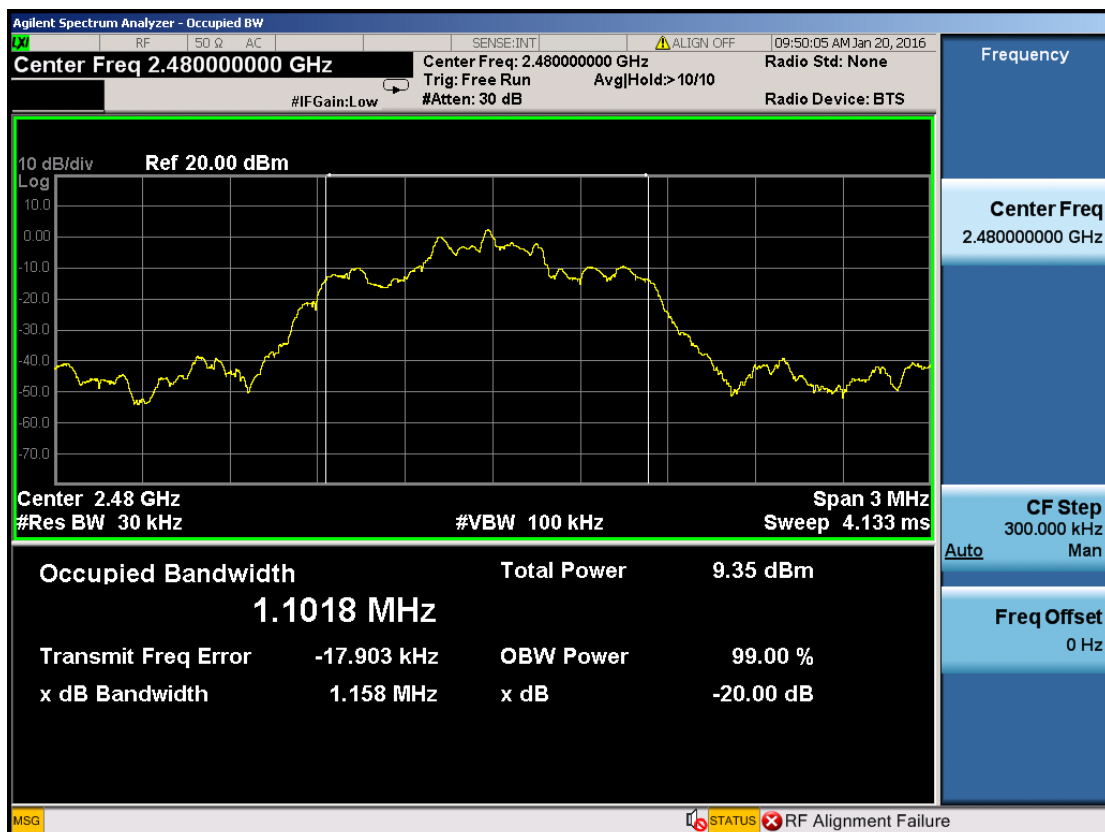

(Plot 4.4.2 C: Channel 78: 2480MHz @ 8DPSK)

## 4.5 Frequency Separation

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30KHz and VBW=100KHz.

### LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the  $2/3 \times 20\text{dB}$  bandwidth of the hopping channel, whichever is greater.

### TEST RESULTS

Remark: 1. We test Frequency Separation at difference Packet Type (DH1, DH3 and DH5) and all test channels, recorded worst case at DH5 and middle channel.

#### 4.5.1 GFSK Test Mode

##### A. Test Verdict

Channel	Frequency (MHz)	Channel Separation (MHz)	Refer to Plot	Limits (MHz)	Verdict
38	2440	1.002	Plot 4.6.1 A	25KHz or the $2/3 \times 20\text{dB}$ bandwidth	PASS
39	2441				

##### B. Test Plots



(Plot 4.6.1 A: Channel 39: 2441MHz @ GFSK)

## 4.5.2 8DPSK Test Mode

### A. Test Verdict

Channel	Frequency (MHz)	Channel Separation (MHz)	Refer to Plot	Limits (MHz)	Verdict
38	2440	0.999	Plot 4.6.2 A	25KHz or the 2/3*20dB bandwidth	PASS
39	2441				


### B. Test Plots



(Plot 4.6.2 A: Channel 39: 2441MHz @ 8DPSK)

## 4.6 Number of hopping frequency

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with RBW=100 KHz and VBW=300 KHz.

### LIMIT

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### TEST RESULTS


Remark: 1. We test Frequency Separation at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5.

#### 4.6.1 GFSK Test Mode

##### A. Test Verdict

Hopping Channel Frequency Range (MHz)	Number of Hopping Channel	Refer to Plot	Limit	Verdict
2400-2483.5	79	Plot 4.7.1 A1	≥15	PASS

##### B. Test Plots

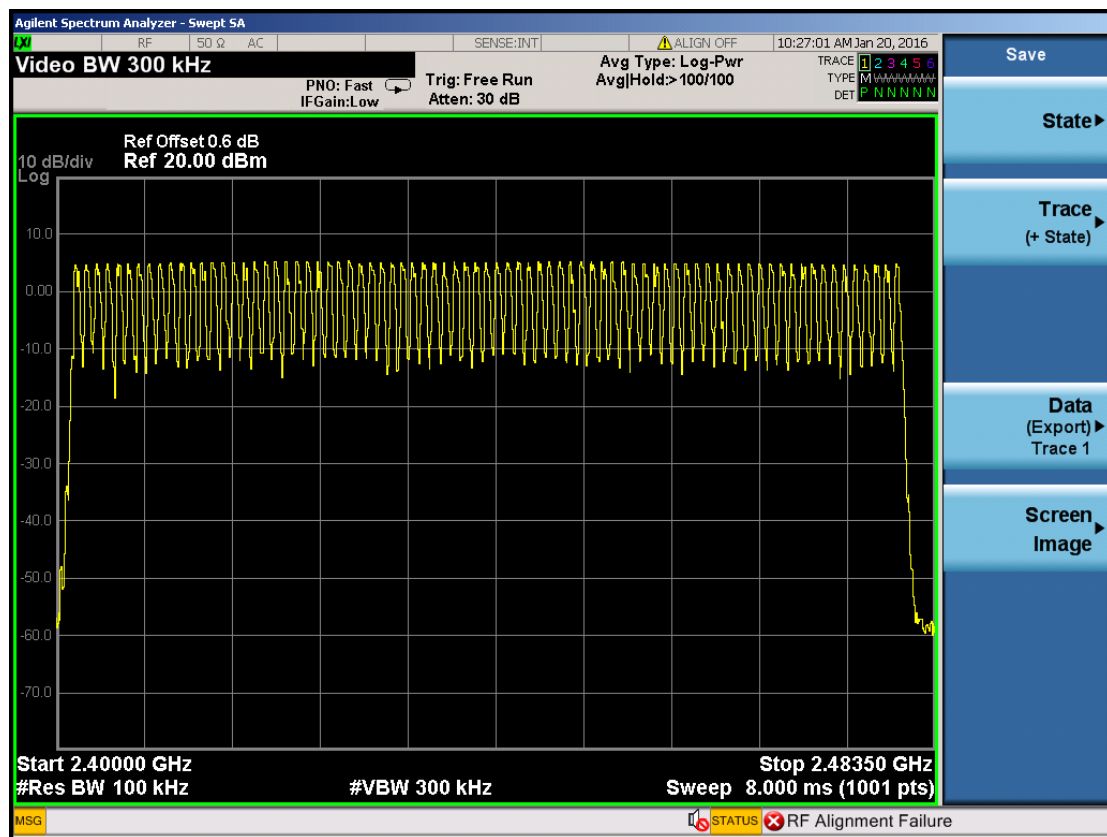


(Plot 4.7.1 A1: @ GFSK)



## 4.7 Time of Occupancy (Dwell Time)

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with RBW=1MHz and VBW=3MHz, Span=0Hz.

### LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST RESULTS

The Dwell Time=Burst Width\*Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation:  $0.4[s] \times \text{hopping number} = 0.4[s] \times 79[\text{ch}] = 31.6[s \times \text{ch}]$ ;

The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.

The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch\*hop/s] for all channels. So the final hopping rate for all channels is  $1600/6 = 266.67 [\text{ch} \times \text{hop/s}]$

The hops per second on one channel:  $266.67 [\text{ch} \times \text{hops/s}] / 79 [\text{ch}] = 3.38 [\text{hop/s}]$ ;

The total hops for all channels within the dwell time calculation duration:  $3.38 [\text{hop/s}] \times 31.6[s \times \text{ch}] = 106.67 [\text{hop} \times \text{ch}]$ ;

The dwell time for all channels hopping:  $106.67 [\text{hop} \times \text{ch}] \times \text{Burst Width} [\text{ms/hop/ch}]$ .

Remark: 1. We test Frequency Separation at all test channels, recorded worst case at middle channel.

A. Test Verdict


#### 4.7.1 GFSK Test Mode

Mode	Frequency (MHz)	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Refer to Plot	Verdict
DH1	2441	0.386	0.124	0.4	Plot 4.8.1 A	PASS
	<b>Note:</b> Dwell time=Pulse time (ms) $\times (1600 \div 2 \div 79) \times 31.6$ Second					
DH3	2441	1.647	0.264	0.4	Plot 4.8.1 B	PASS
	<b>Note:</b> Dwell time=Pulse time (ms) $\times (1600 \div 4 \div 79) \times 31.6$ Second					
DH5	2441	2.895	0.309	0.4	Plot 4.8.1 C	PASS
	<b>Note:</b> Dwell time=Pulse Time (ms) $\times (1600 \div 6 \div 79) \times 31.6$ Second					


#### 4.7.2 8DPSK Test Mode

Mode	Frequency (MHz)	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Refer to Plot	Verdict
DH1	2441	0.388	0.124	0.4	Plot 4.8.2 A	PASS
	<b>Note:</b> Dwell time=Pulse time (ms) $\times (1600 \div 2 \div 79) \times 31.6$ Second					
DH3	2441	1.656	0.265	0.4	Plot 4.8.2 B	PASS
	<b>Note:</b> Dwell time=Pulse time (ms) $\times (1600 \div 4 \div 79) \times 31.6$ Second					
DH5	2441	2.905	0.310	0.4	Plot 4.8.2 C	PASS
	<b>Note:</b> Dwell time=Pulse Time (ms) $\times (1600 \div 6 \div 79) \times 31.6$ Second					

B. Test Plots

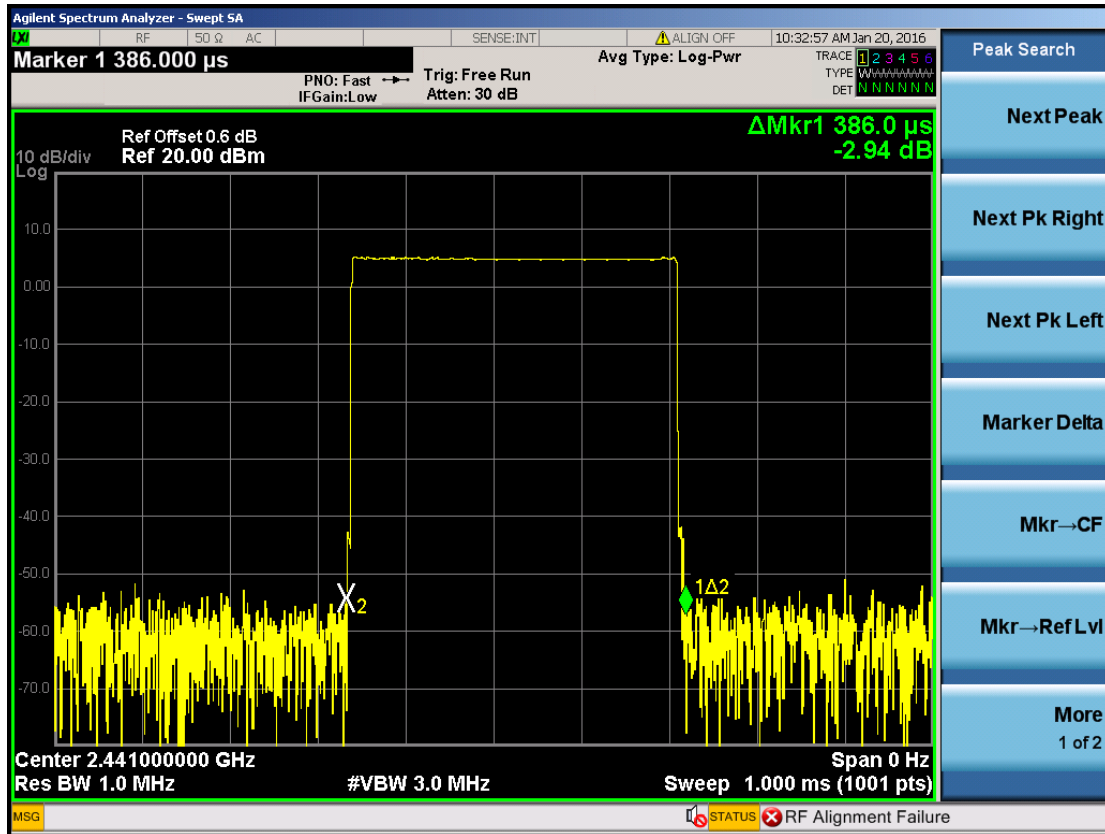


(Plot 4.8.1.A: Channel 39: 2441MHz @ GFSK @ DH1)

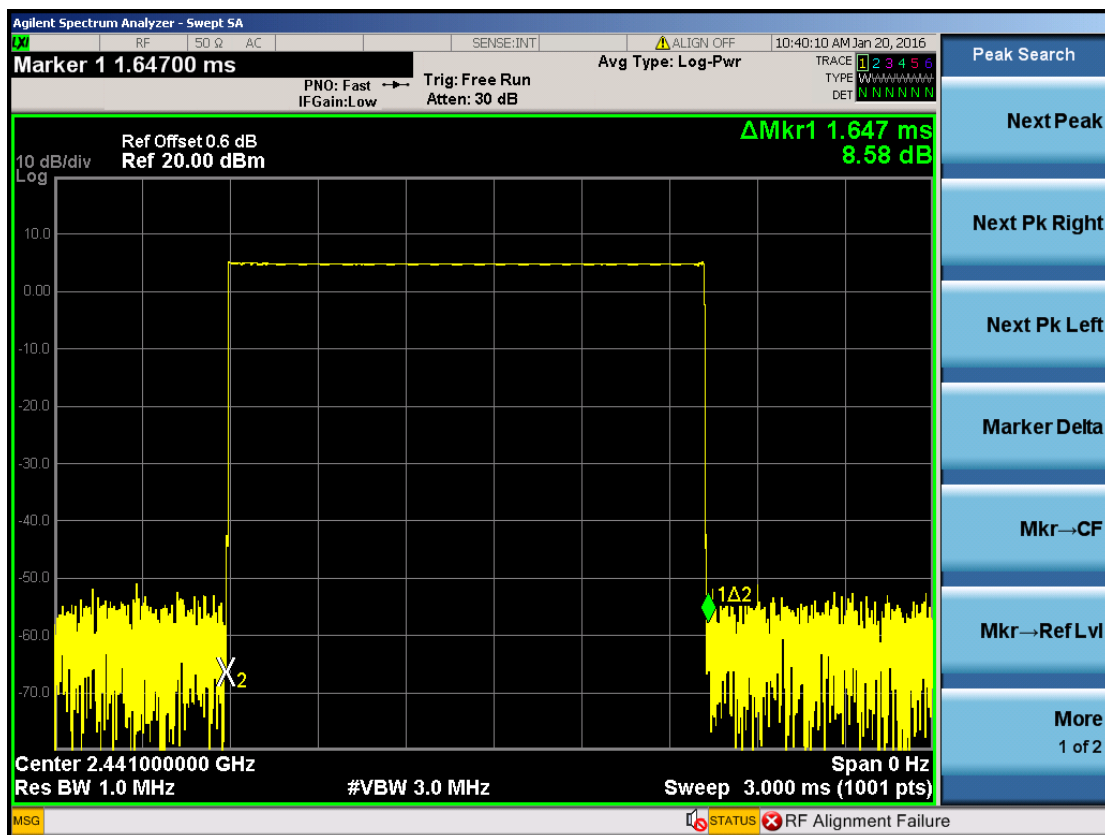


(Plot 4.8.1.B: Channel 39: 2441MHz @ GFSK @ DH3)




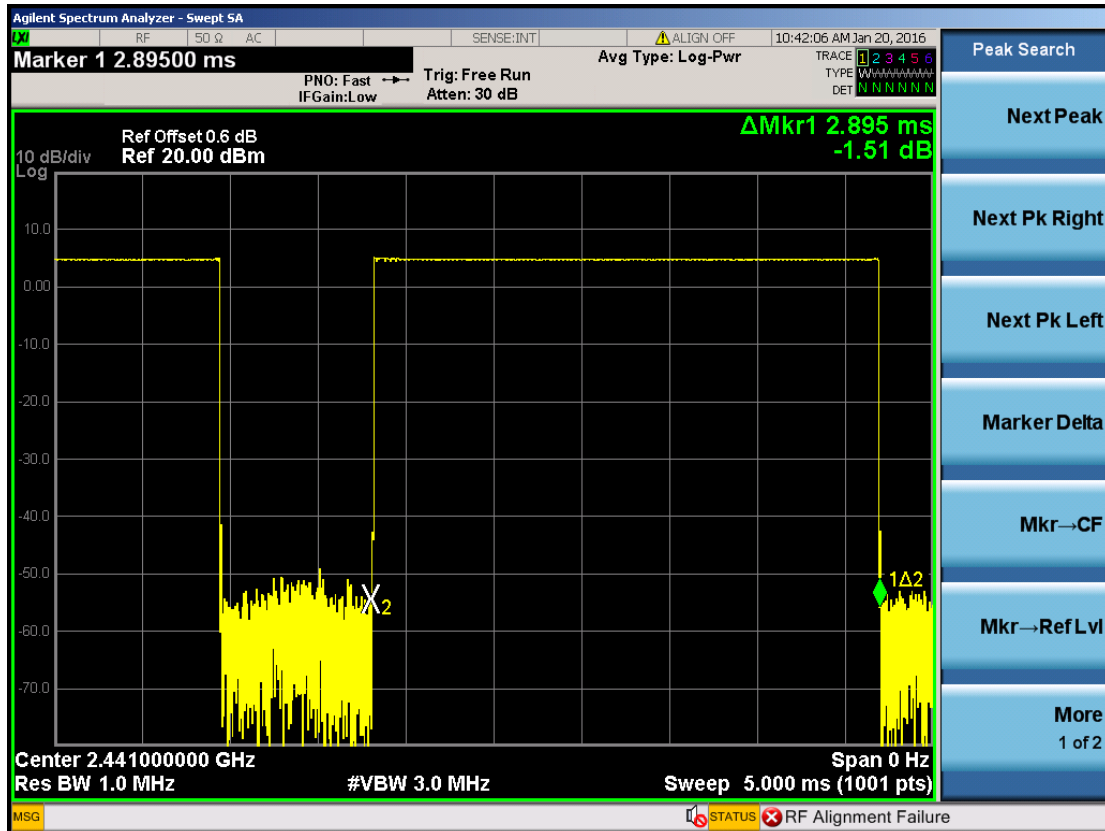


(Plot 4.8.1.C: Channel 39: 2441MHz @ GFSK @ DH5)

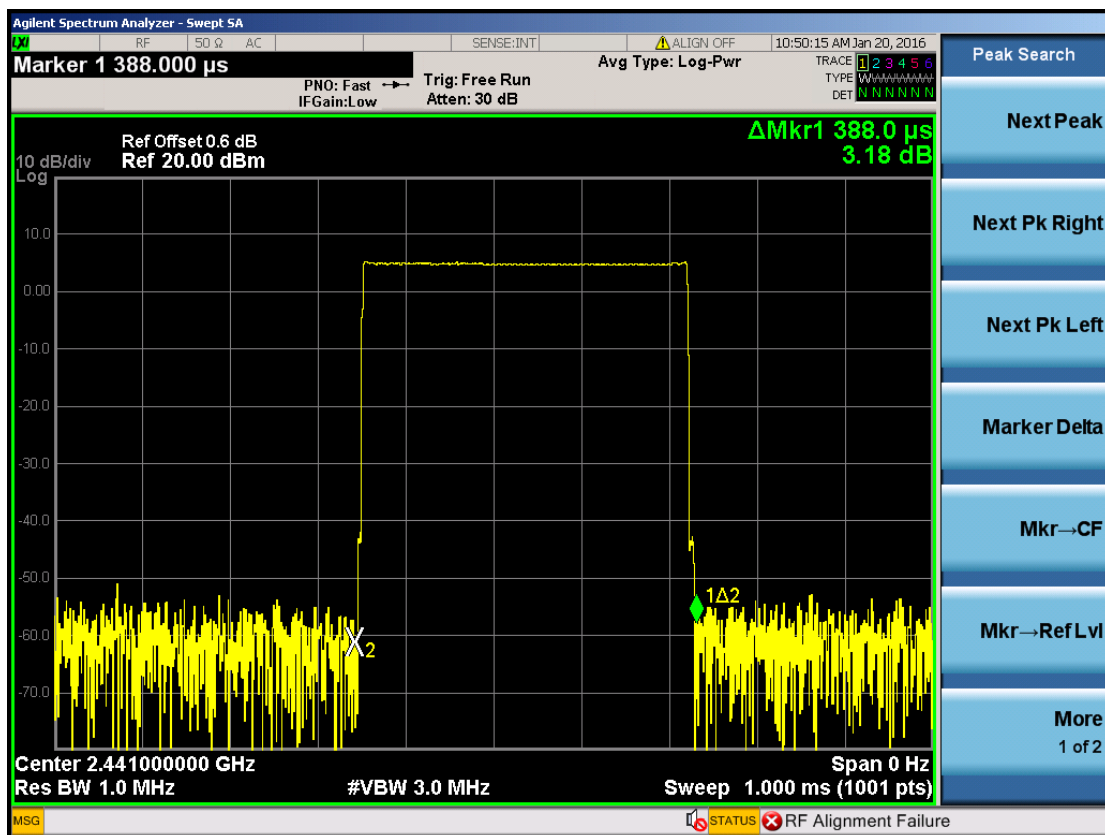

(Plot 4.8.2.A: Channel 39: 2441MHz @ 8DPSK @ DH1)

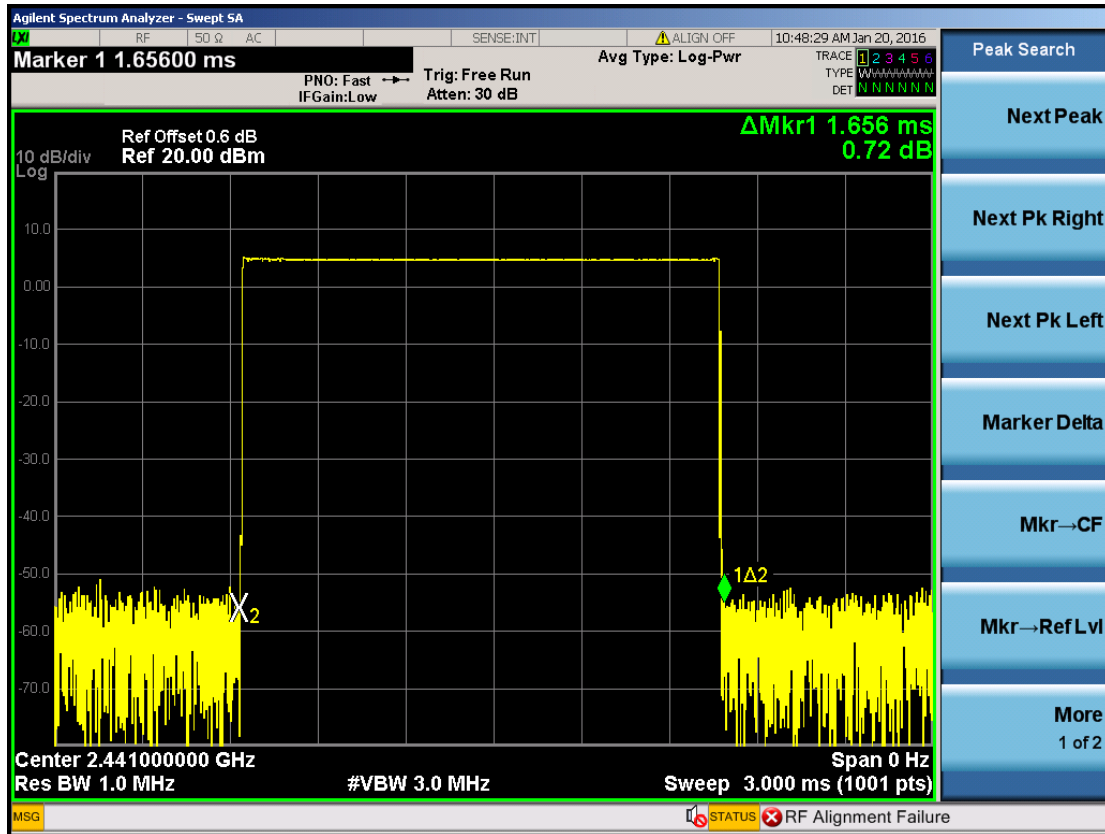


(Plot 4.8.2.B: Channel 39: 2441MHz @ 8DPSK @ DH3)

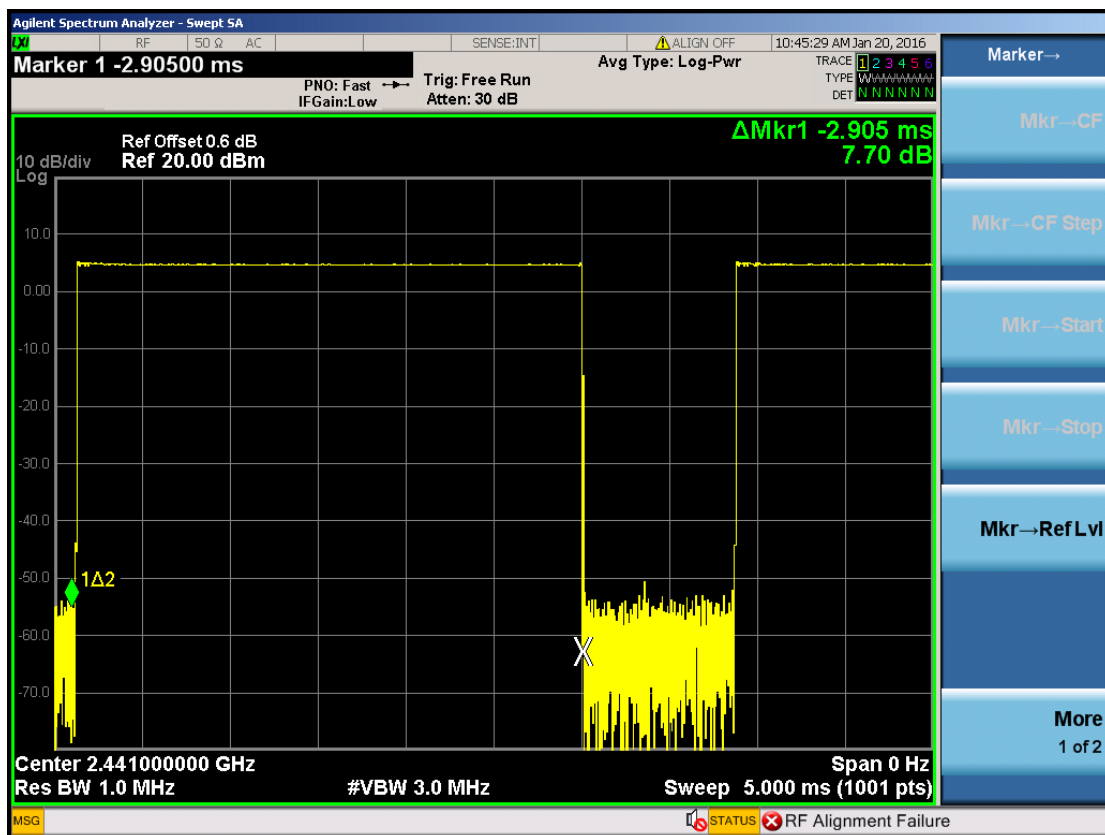

(Plot 4.8.2.C: Channel 39: 2441MHz @ 8DPSK @ DH5)

## 4.8 Spurious RF Conducted Emission

### TEST CONFIGURATION



### TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measurement frequency range from 9KHz to 26.5GHz.

### LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### TEST RESULTS

Remark:

1. We test Frequency Separation at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5.
2. For 9KHz -30MHz, Because there was only background, So We did not recorded data.

#### 4.8.1 GFSK Test Mode

##### A. Test Verdict


Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
00	2402	2.402 GHz	Plot 4.9.1 A1	---	PASS
		30MHz-3GHz	Plot 4.9.1 A2	-20	PASS
		3GHz-25GHz	Plot 4.9.1 A3	-20	PASS
39	2441	2.441 GHz	Plot 4.9.1 B1	---	PASS
		30MHz-3GHz	Plot 4.9.1 B2	-20	PASS
		3GHz-5GHz	Plot 4.9.1 B3	-20	PASS
78	2480	2.480 GHz	Plot 4.9.1 C1	---	PASS
		30MHz-3GHz	Plot 4.9.1 C2	-20	PASS
		3GHz-5GHz	Plot 4.9.1 C3	-20	PASS

Conducted bandedge	Left Band edge hopping on	Plot 4.9.1 D1	-20	PASS
	Right Band edge hopping on	Plot 4.9.1 D2	-20	PASS


Note:

1. The test results including the cable lose.
2. For Conducted bandedge. We tested hopping mode and non-hopping mode, and recorded the worst case at the hopping mode.

##### B. Test Plots

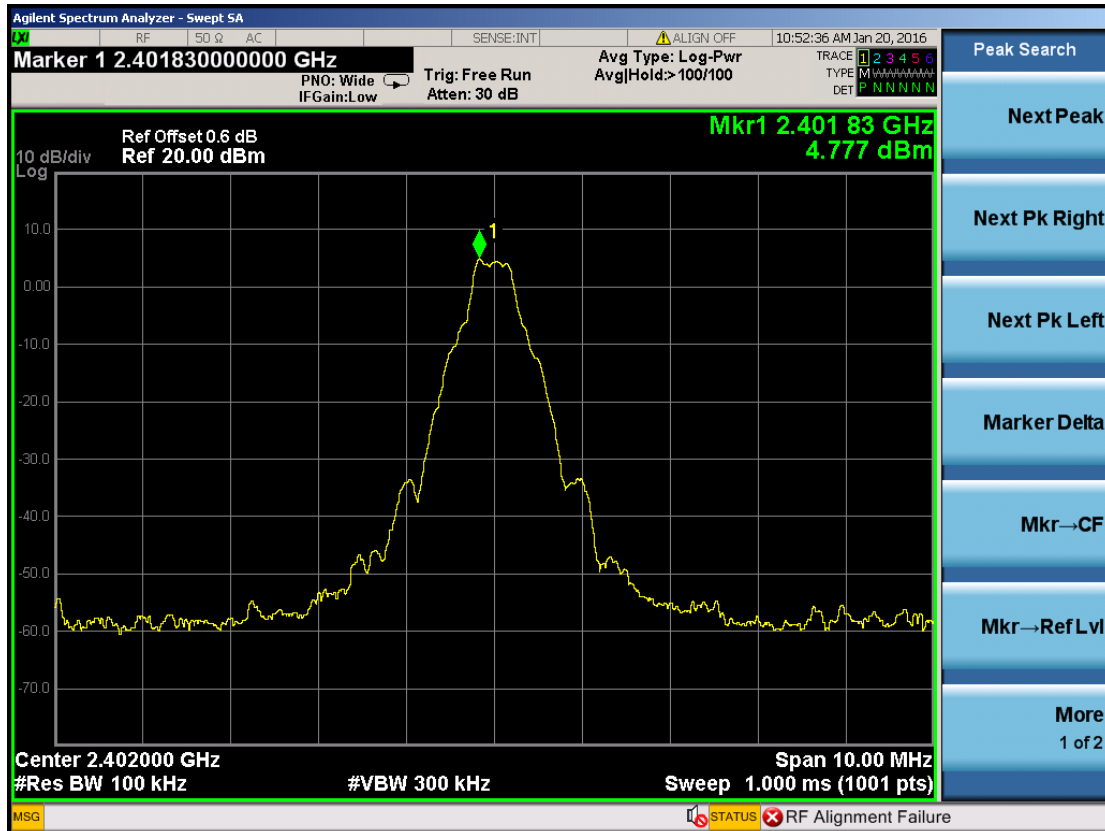


(Plot 4.9.1 A1: Channel 00: 2402MHz @ GFSK)

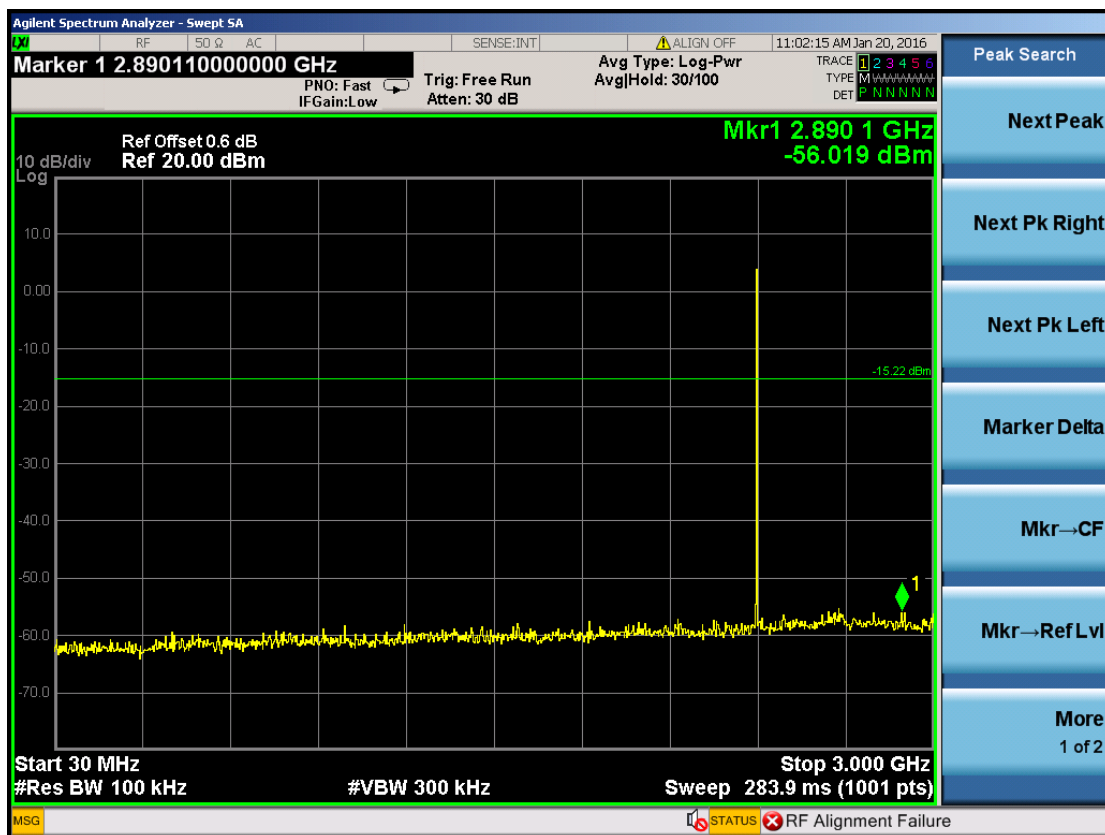


(Plot 4.9.1 A2: Channel 00: 2402MHz @ GFSK)



(Plot 4.9.1 A3: Channel 00: 2402MHz @ GFSK)

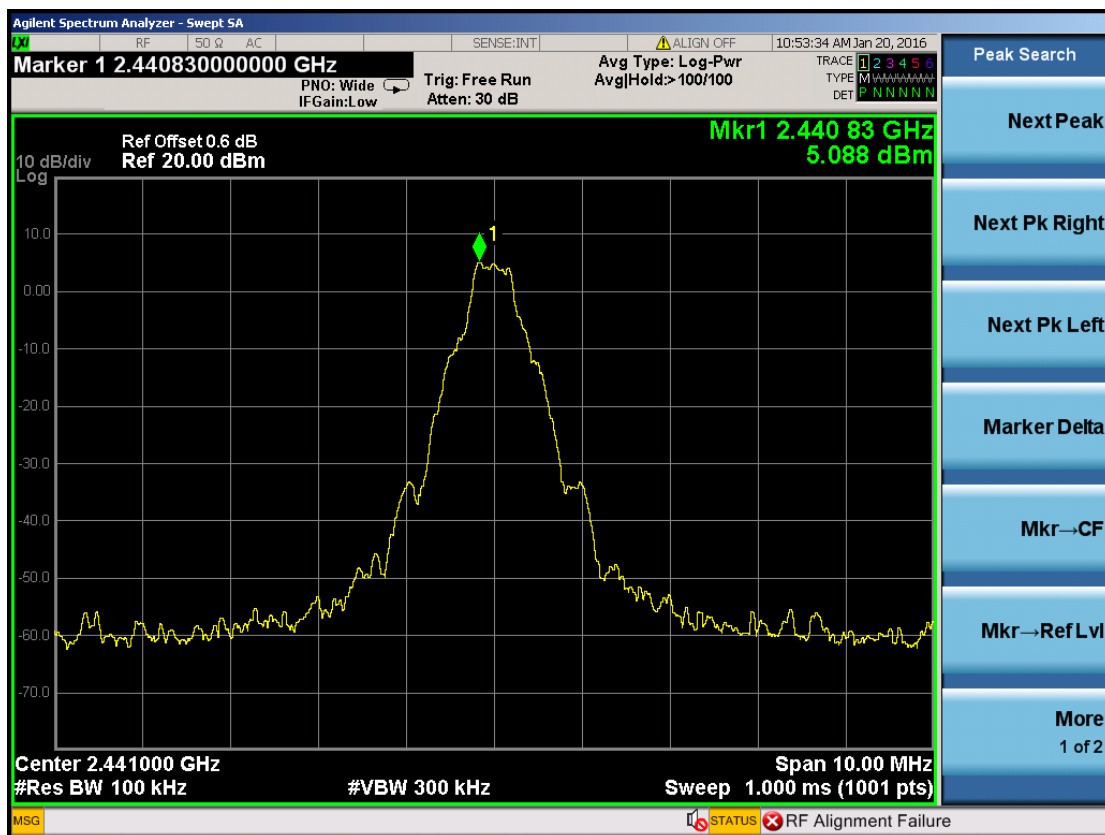


(Plot 4.9.1 B1: Channel 39: 2441MHz @ GFSK)

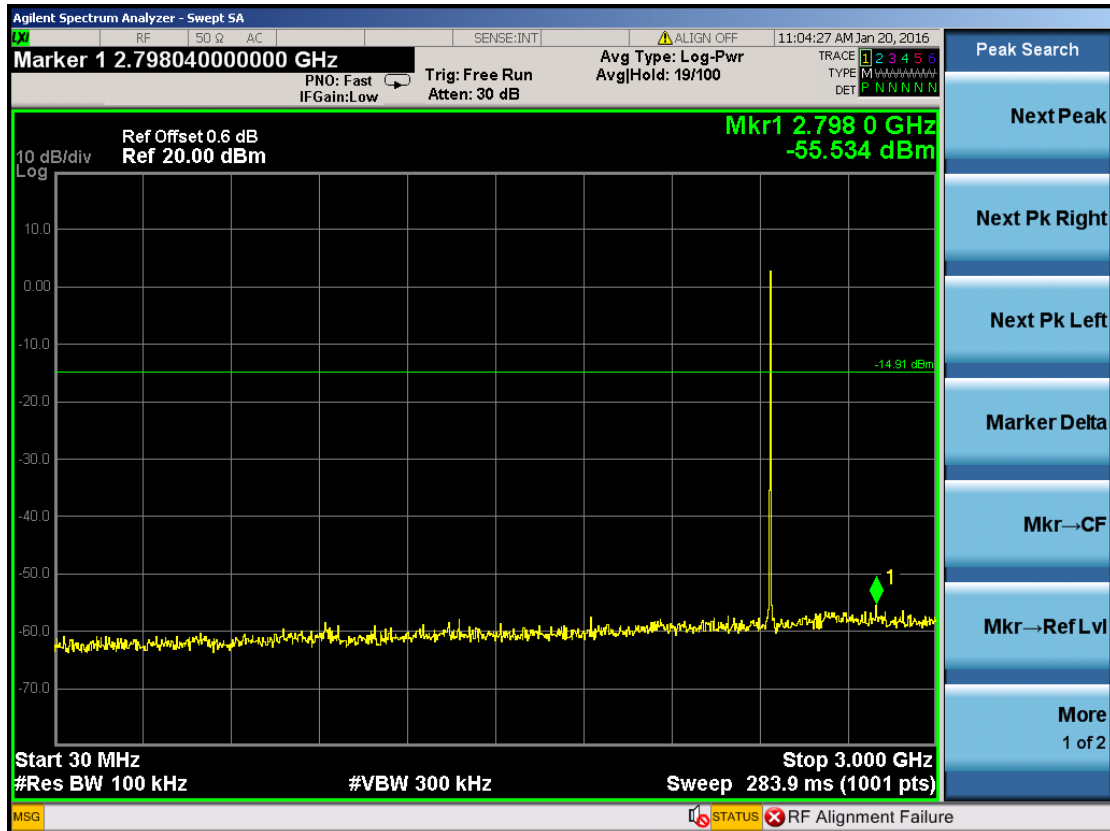


(Plot 4.9.1 B2: Channel 39: 2441MHz @ GFSK)



(Plot 4.9.1 B3: Channel 39: 2441MHz @ GFSK)

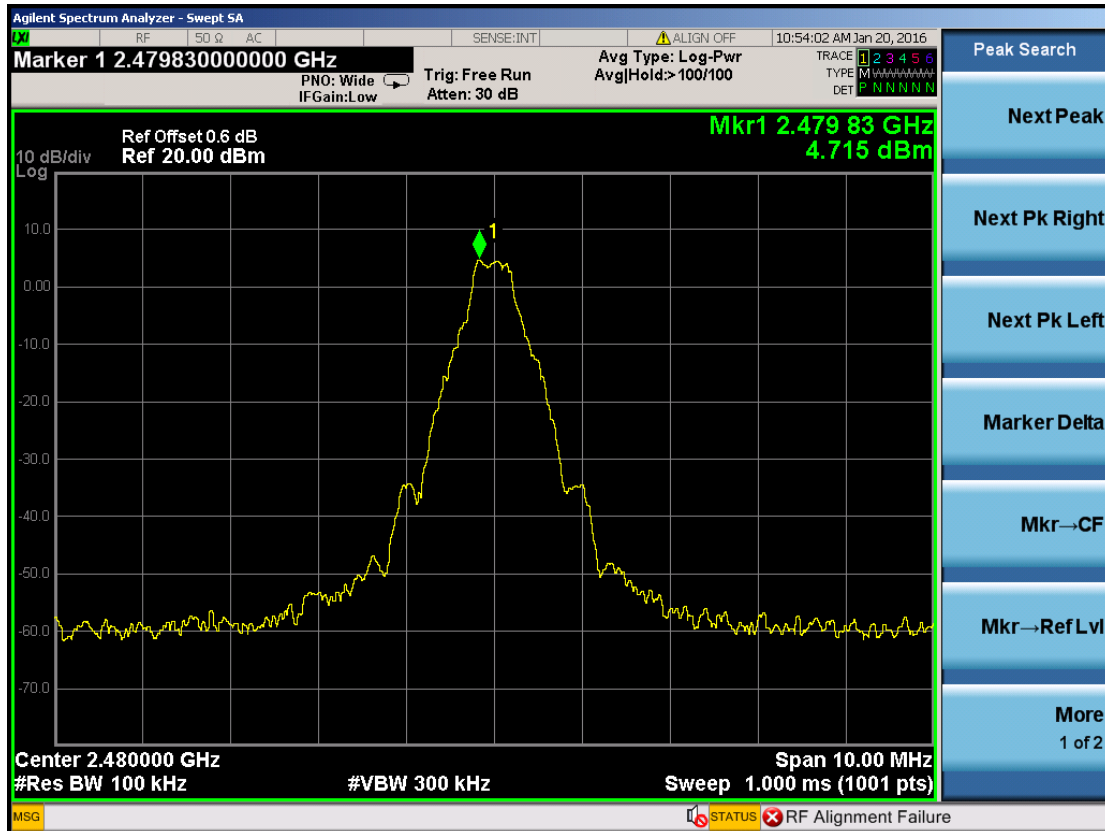


(Plot 4.9.1 C1: Channel 78: 2480MHz @ GFSK)

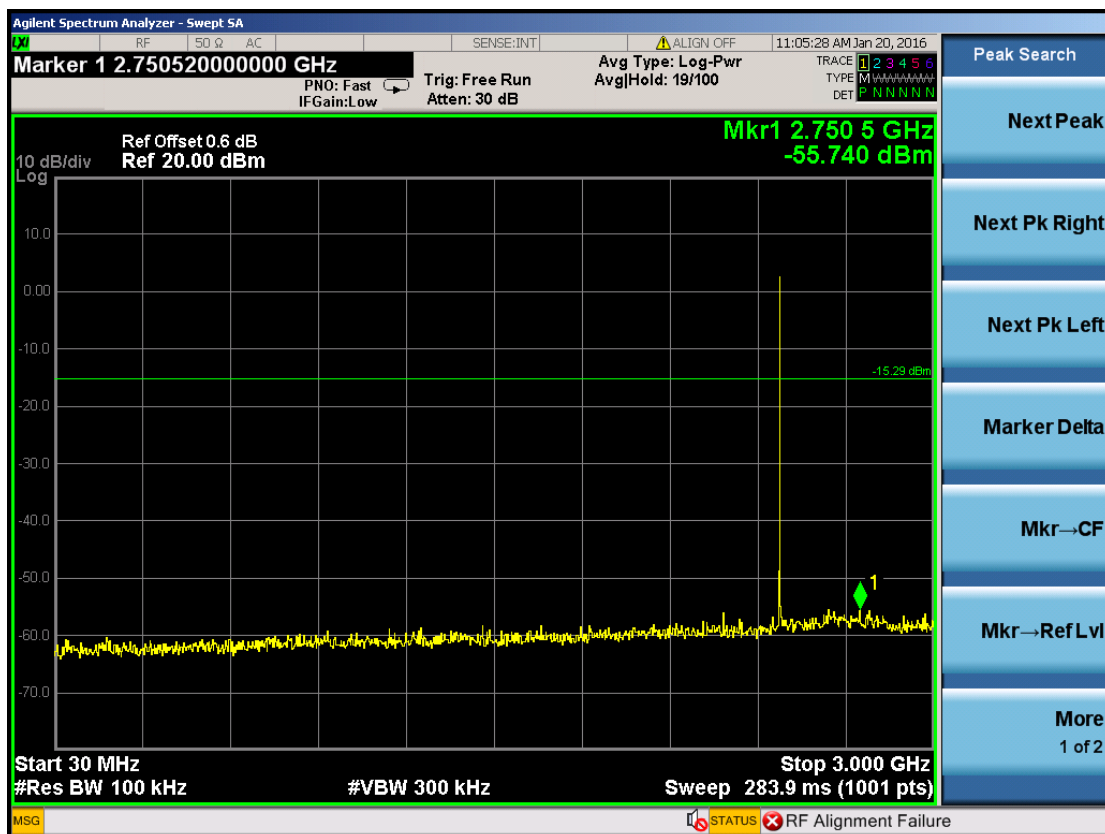

(Plot 4.9.1 C2: Channel 78: 2480MHz @ GFSK)




(Plot 4.9.1 C3: Channel 78: 2480MHz @ GFSK)

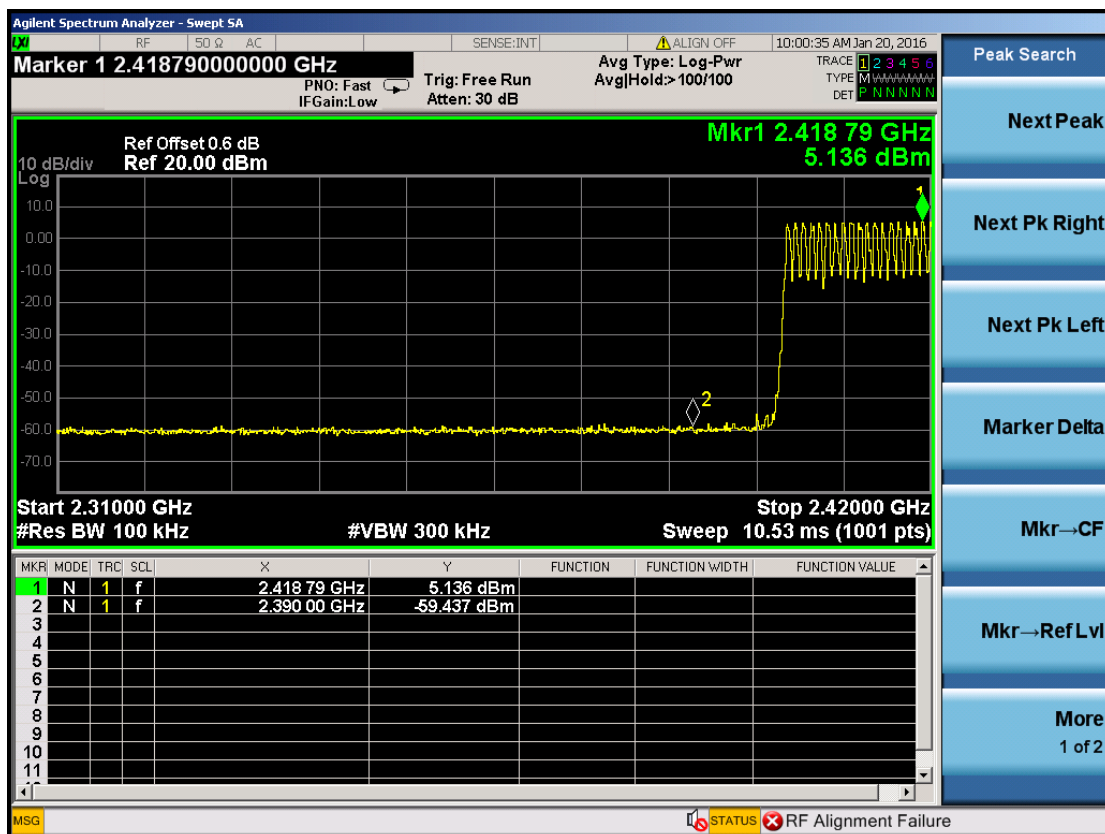

(Plot 4.9.1 D1: Left Band edge hopping off @ GFSK)



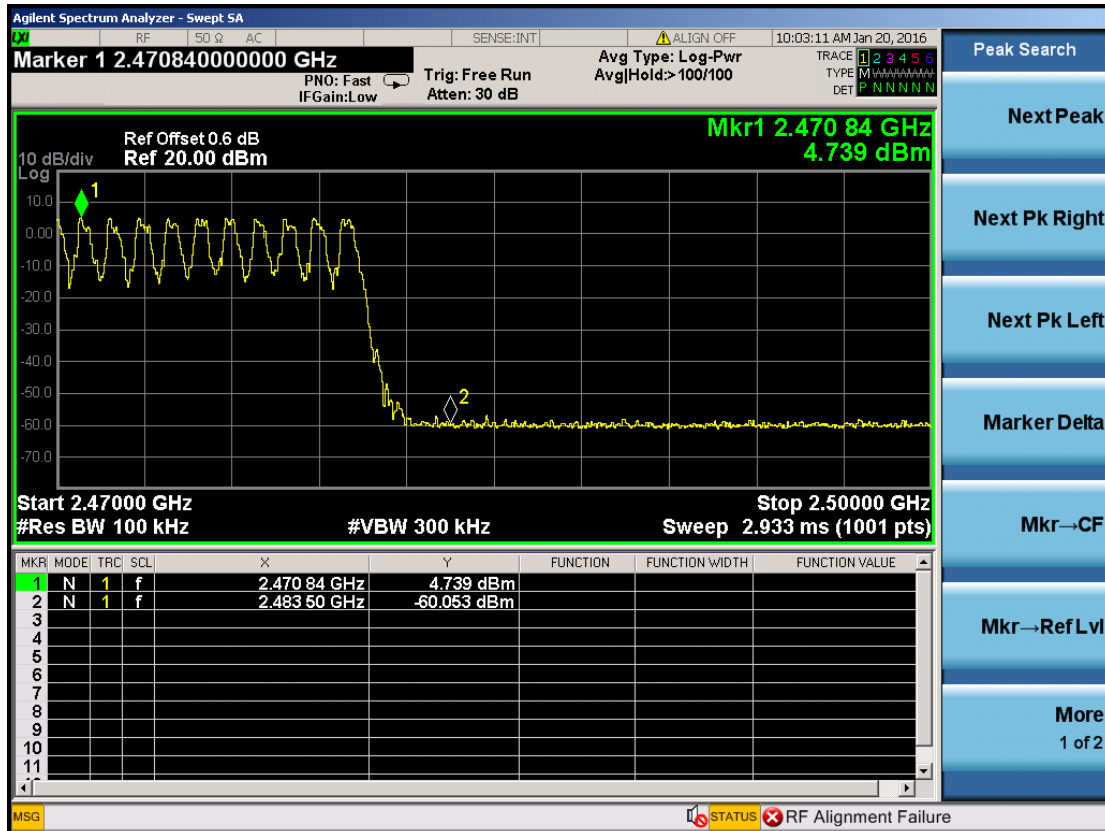

(Plot 4.9.1 D2: Right Band edge hopping off @ GFSK)

## 4.8.2 8DPSK Test Mode

### A. Test Verdict


Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
00	2402	2.402 GHz	Plot 4.9.2 A1	---	PASS
		30MHz-3GHz	Plot 4.9.2 A2	-20	PASS
		3GHz-25GHz	Plot 4.9.2 A3	-20	PASS
39	2441	2.402 GHz	Plot 4.9.2 B1	---	PASS
		30MHz-3GHz	Plot 4.9.2 B2	-20	PASS
		3GHz-25GHz	Plot 4.9.2 B3	-20	PASS
78	2480	2.402 GHz	Plot 4.9.2 C1	---	PASS
		30MHz-3GHz	Plot 4.9.2 C2	-20	PASS
		3GHz-25GHz	Plot 4.9.2 C3	-20	PASS

Conducted bandedge	Left Band edge hopping on	Plot 4.9.2 D1	-20	PASS
	Right Band edge hopping on	Plot 4.9.2 D2	-20	PASS


Note:

1. The test results including the cable loss.
2. For Conducted bandedge. We tested hopping mode and non-hopping mode, and recorded the worst case at the hopping mode.

### B. Test Plots

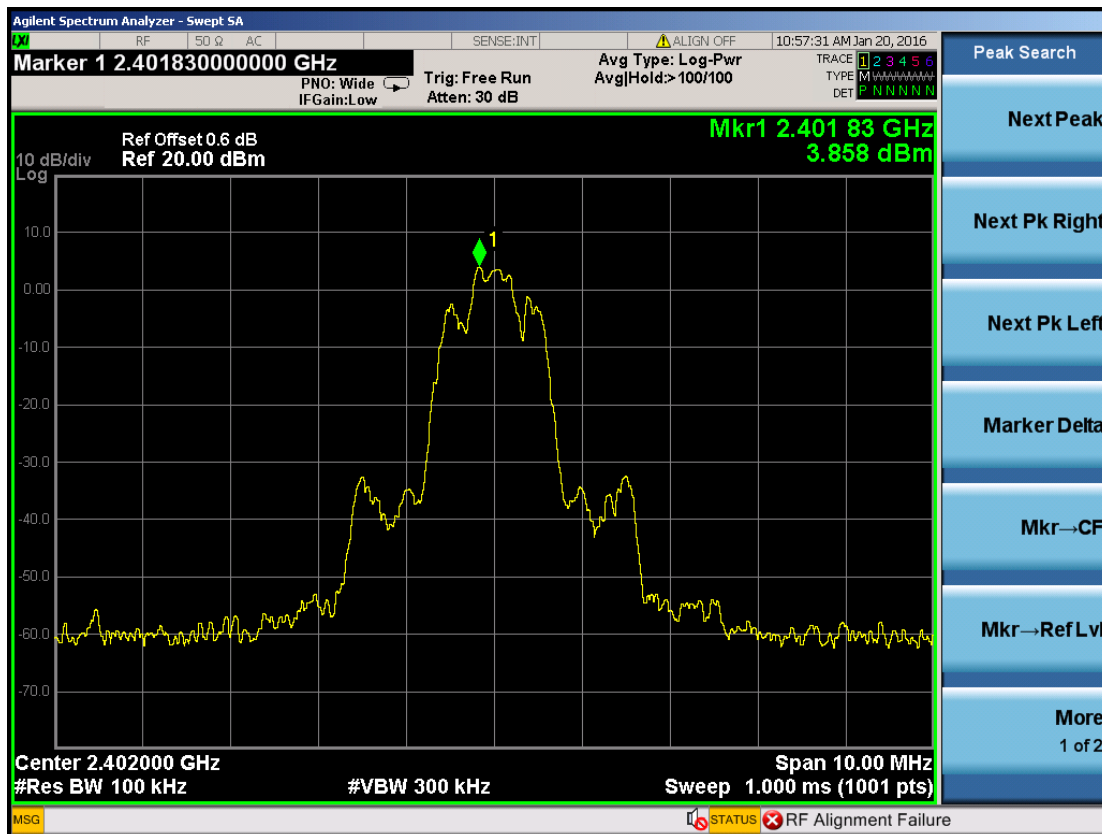


(Plot 4.9.2 A1: Channel 00: 2402MHz @ 8DPSK)

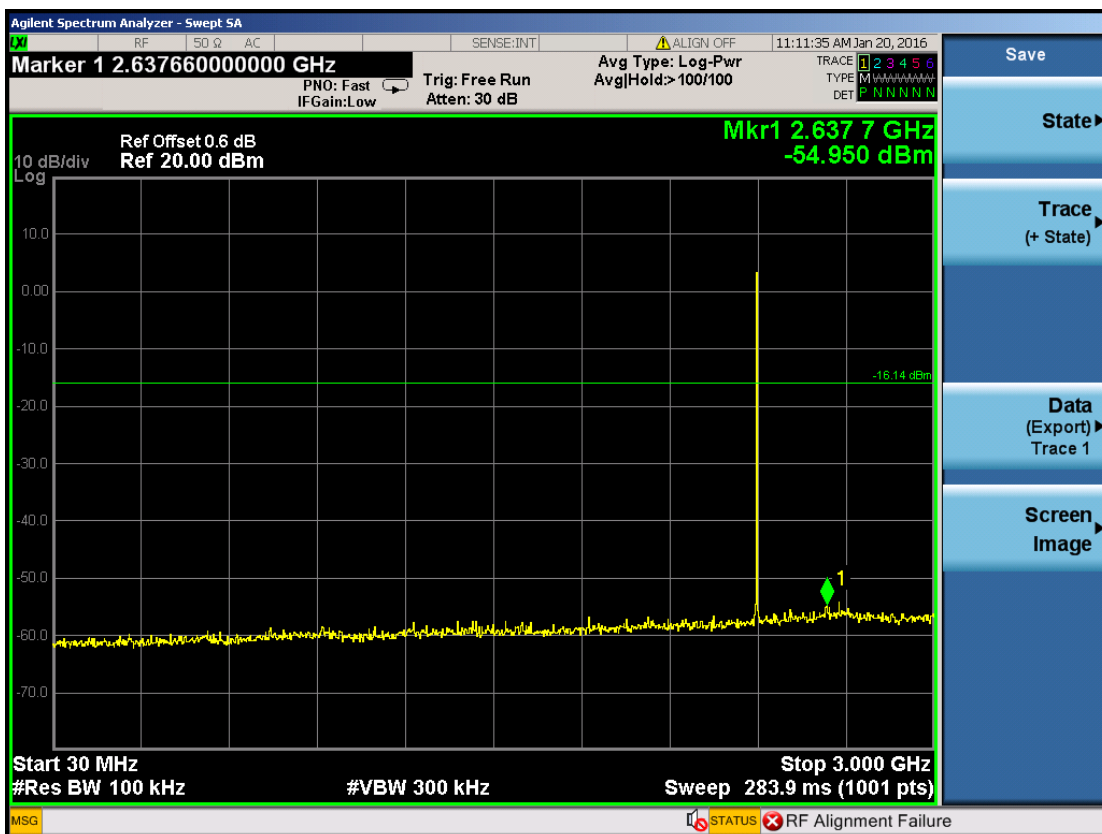


(Plot 4.9.2 A2: Channel 00: 2402MHz @ @ 8DPSK)



(Plot 4.9.2 A3: Channel 00: 2402MHz @ @ 8DPSK)

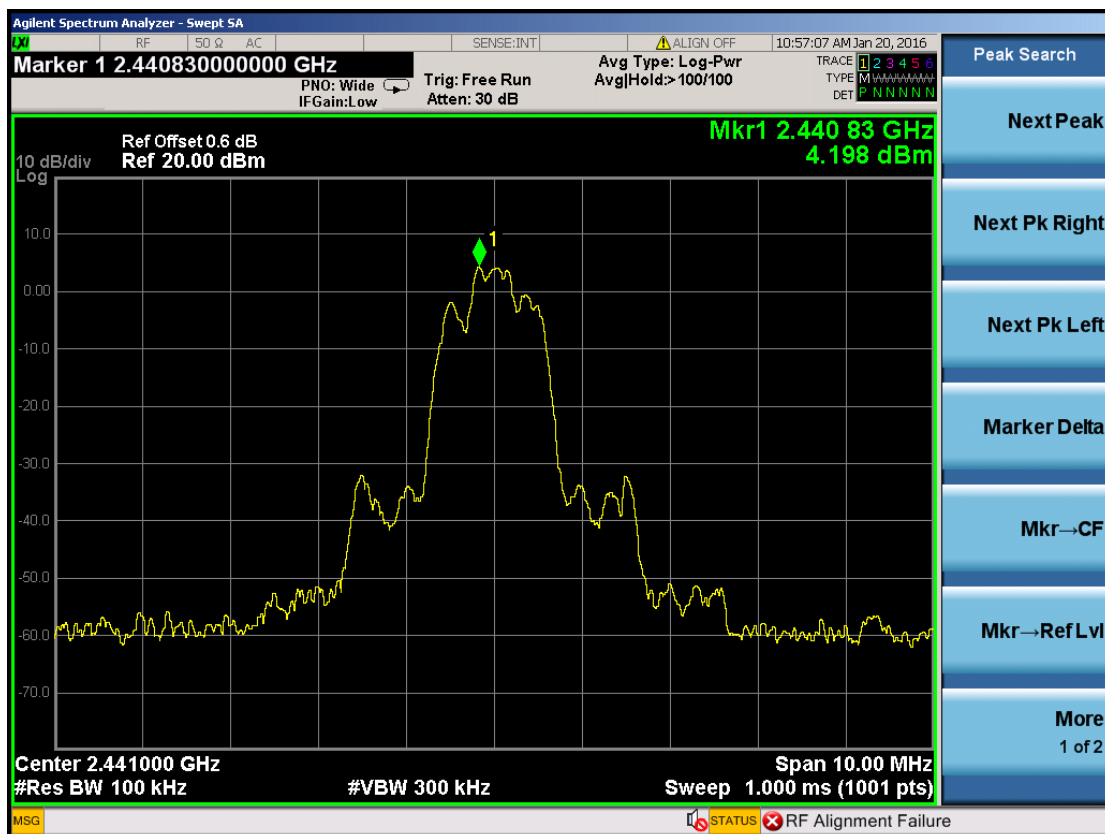

(Plot 4.9.2 B1: Channel 39: 2441MHz @ @ 8DPSK)

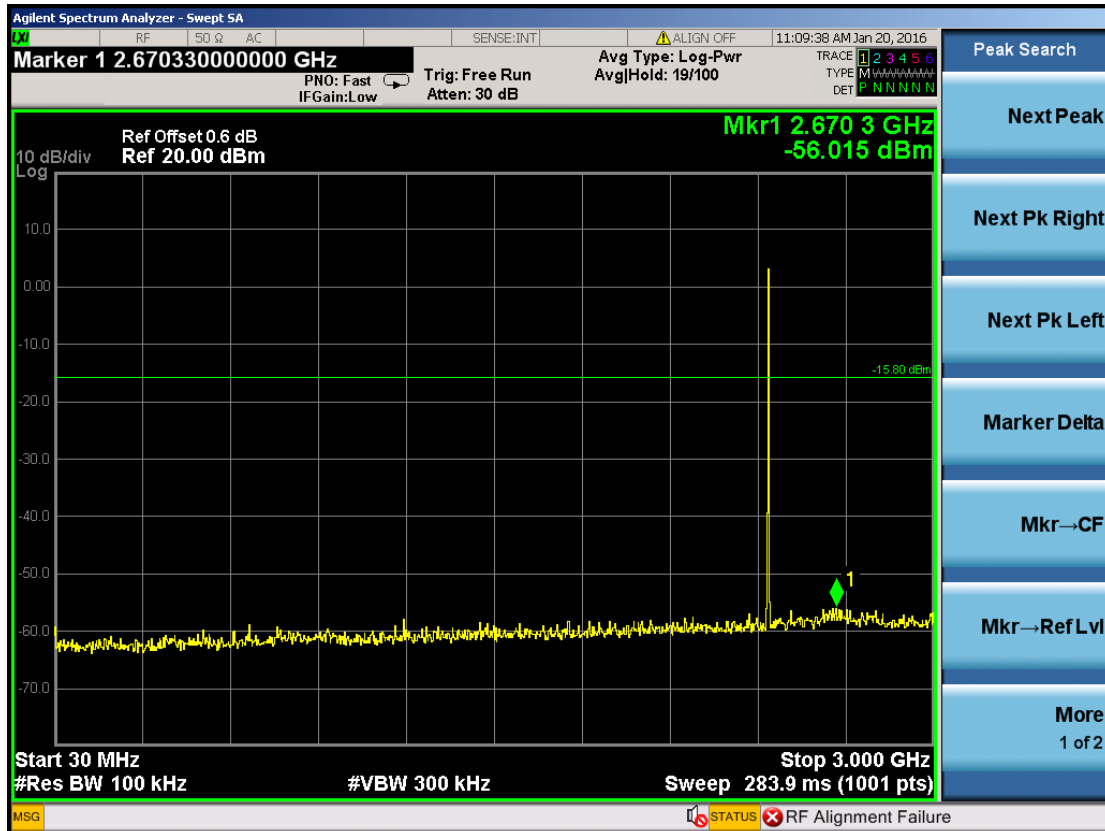


(Plot 4.9.2 B2: Channel 39: 2441MHz @ @ 8DPSK)



(Plot 4.9.2 B3: Channel 39: 2441MHz @ @ 8DPSK)




(Plot 4.9.2 C1: Channel 78: 2480MHz @ @ 8DPSK)

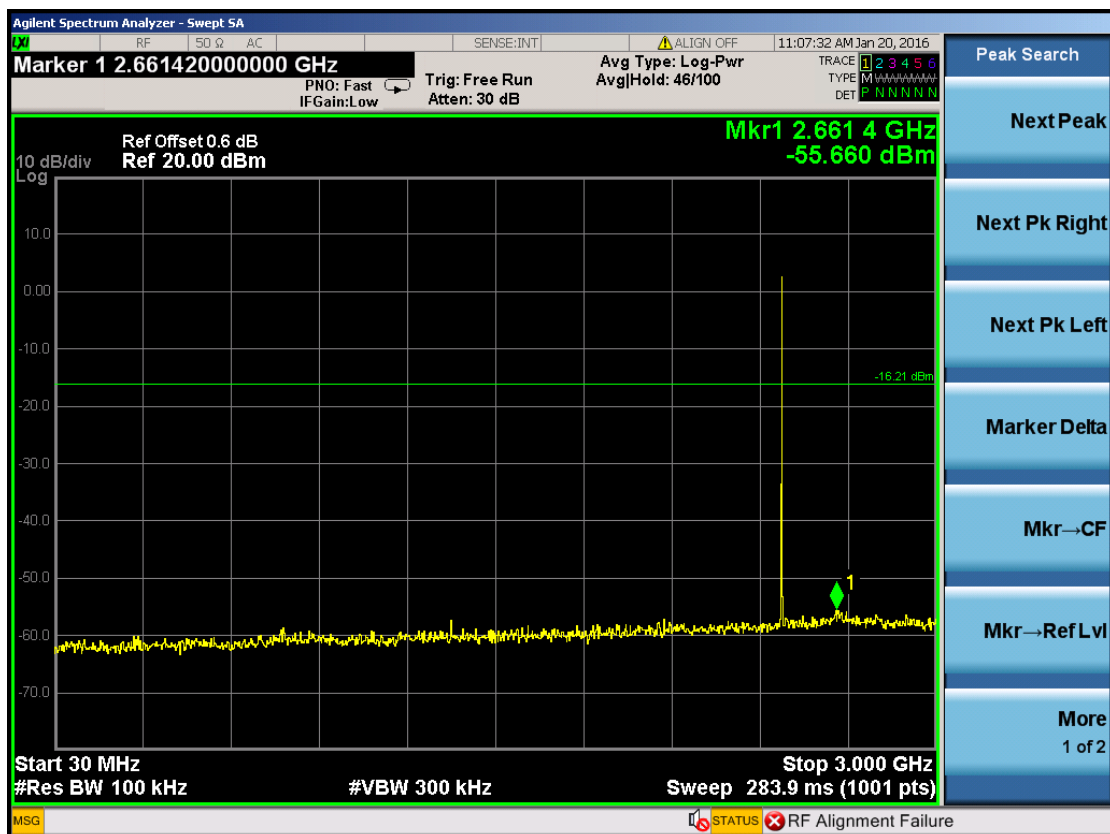


(Plot 4.9.2 C2: Channel 78: 2480MHz @ @ 8DPSK)



(Plot 4.9.2 C3: Channel 78: 2480MHz @ @ 8DPSK)

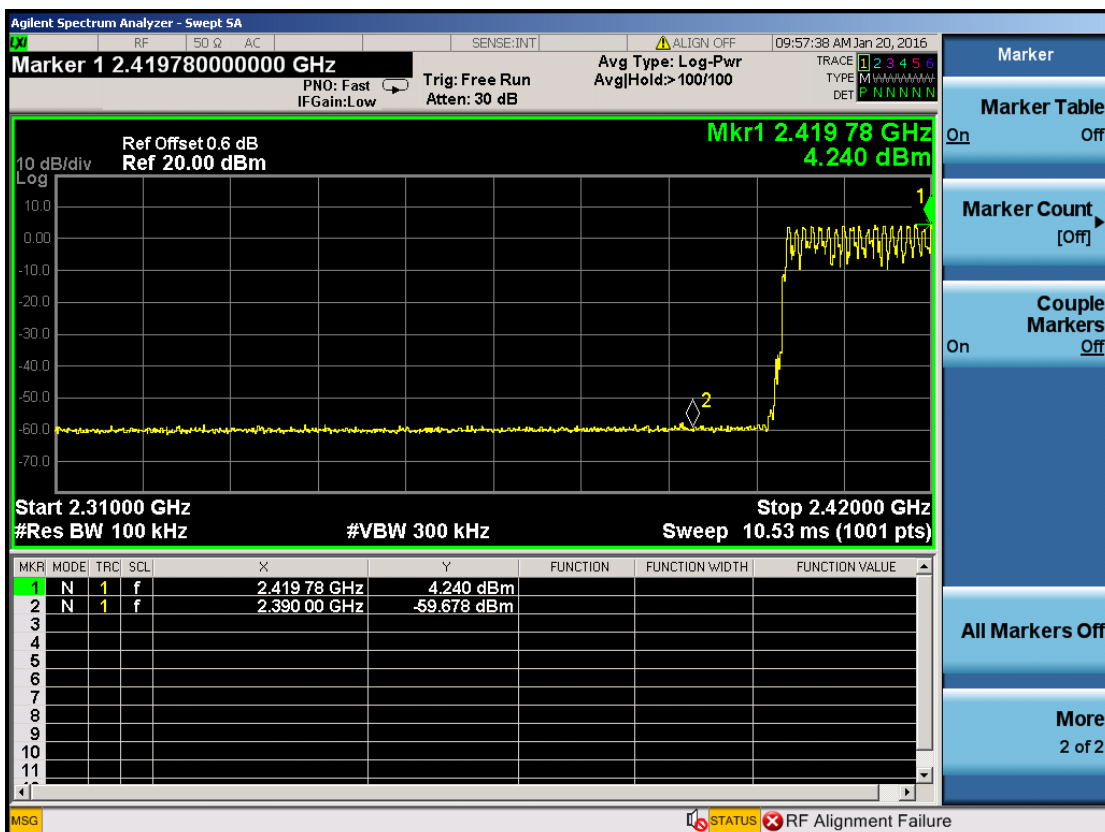

(Plot 4.9.2 D1: Left Band edge hopping on @ 8DPSK)

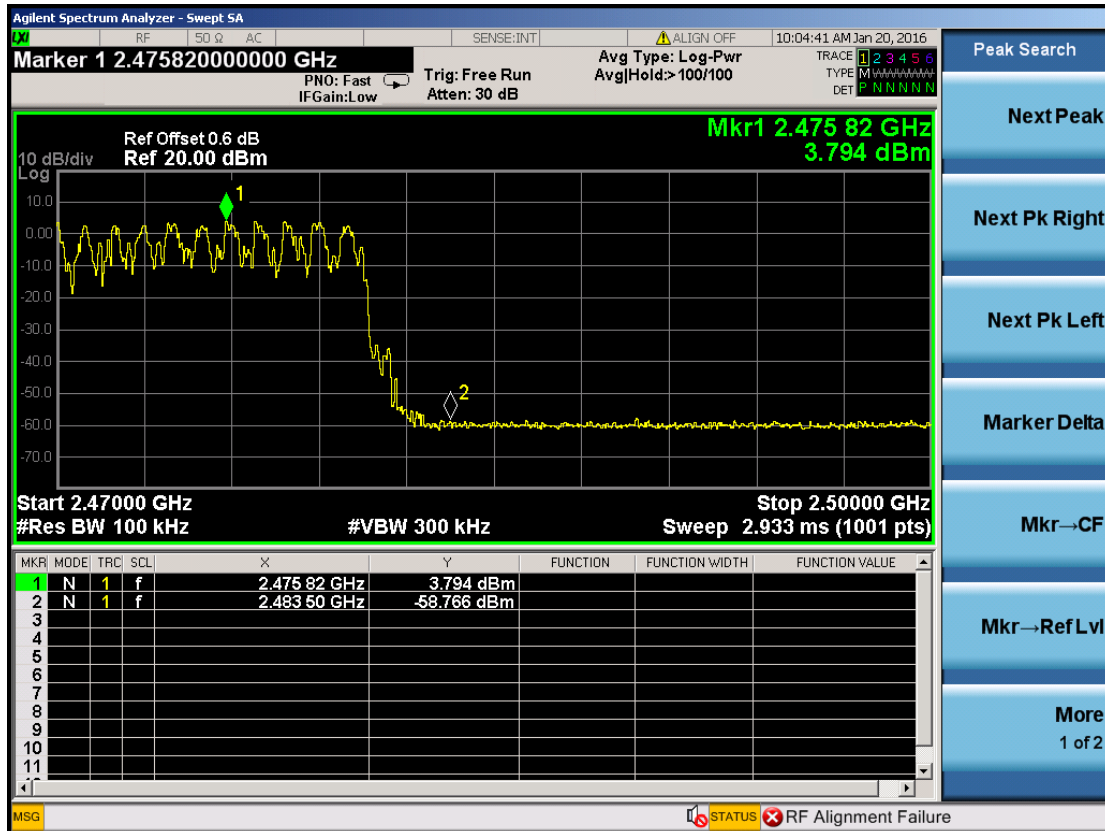

(Plot 4.9.2 D2: Right Band edge hopping on @ 8DPSK)

## 4.9 Pseudorandom Frequency Hopping Sequence

### TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a)(1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

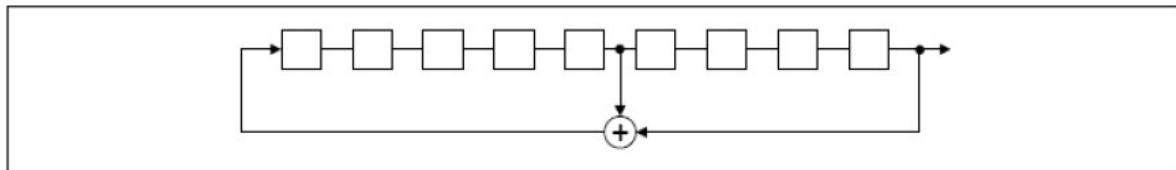

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

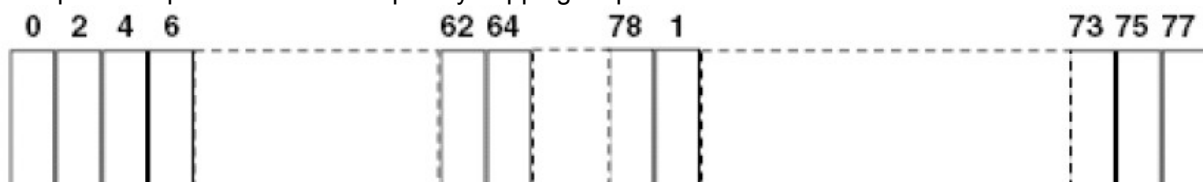

Each frequency used equally on the average by each transmitter.

The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shifts frequencies in synchronization with the transmitted signals.



## 4.10 Antenna Requirement

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal BT devices, the GFSK mode is used.

Conducted power refer ANSI C63.10 :2013 Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices

Radiated power refer to ANSI C63.10 :2013 Radiated emissions tests.

### Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

### Limits

FCC	IC
Antenna Gain	
6 dBi	

### Results

T <sub>nom</sub>	V <sub>nom</sub>	Lowest Channel 2402 MHz	Middle Channel 2441 MHz	Highest Channel 2480 MHz
Conducted power [dBm] Measured with GFSK modulation		4.79	5.11	4.69
Radiated power [dBm] Measured with GFSK modulation		5.68	6.08	5.53
Gain [dBi] Calculated		0.89	0.97	0.84
Measurement uncertainty		± 0.6 dB (cond.) / ± 2.56 dB (rad.)		

## **5 Test Setup Photos of the EUT**

Please refer to separated files for Test Setup Photos of the EUT.

## **6 External Photos of the EUT**

Please refer to separated files for External Photos of the EUT.

## **7 Internal Photos of the EUT**

Please refer to separated files for Internal Photos of the EUT.

.....**End of Report**.....