



FCC TEST REPORT
FCC ID: 2AP2N-UPTM

On Behalf of

Shenzhen Esorun Technology Co., LTD
5 in 1 Magnetic Wireless Power Bank Station
Model No.: StandUP TM10000, StandUP TM20000

Prepared for : Shenzhen Esorun Technology Co., LTD
Address : Room 226, Building A, B, C, Zone B, Yuanfen Industrial Zone, Taoyuan
Community, Dalang Street, Longhua District, Shenzhen

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District,
518103, Shenzhen, Guangdong, China

Report Number : A2307239-C03-R07
Date of Receipt : August 2, 2023
Date of Test : August 2, 2023-August 18, 2023
Date of Report : August 18, 2023
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Test Result Summary	5
2. General Information	6
2.1. DESCRIPTION OF DEVICE (EUT)	6
2.2. ACCESSORIES OF DEVICE (EUT)	7
2.3. TESTED SUPPORTING SYSTEM DETAILS	7
2.4. BLOCK DIAGRAM OF CONNECTION BETWEEN EUT AND SIMULATORS	7
2.5. DESCRIPTION OF TEST MODES	7
2.6. TEST CONDITIONS	7
2.7. TEST FACILITY	8
2.8. MEASUREMENT UNCERTAINTY	8
2.9. TEST EQUIPMENT LIST	9
3. Test Results and Measurement Data	10
3.1. CONDUCTED EMISSION	10
3.2. RADIATED SPURIOUS EMISSION MEASUREMENT	14
3.3. TEST SPECIFICATION	25
4. Photos of test setup	29
5. Photographs of EUT	31

TEST REPORT DECLARATION

Applicant : Shenzhen Esorun Technology Co., LTD
Address : Room 226, Building A, B, C, Zone B, Yuanfen Industrial Zone, Taoyuan
Community, Dalang Street, Longhua District, Shenzhen
Manufacturer : Shenzhen Esorun Technology Co., LTD
Address : Room 226, Building A, B, C, Zone B, Yuanfen Industrial Zone, Taoyuan
Community, Dalang Street, Longhua District, Shenzhen
EUT Description : 5 in 1 Magnetic Wireless Power Bank Station
(A) Model No. : StandUP TM10000, StandUP TM20000
(B) Trademark : ESORUN

Measurement Standard Used:

FCC CFR Title 47 Part 15 Subpart C Section 15.209

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the FCC CFR Title 47 Part 15 Subpart C Section 15.209 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.


Tested by (name + signature).....:

Lucas Pang
Project Engineer



Approved by (name + signature).....:

Reak Yang
Project Manager



Date of issue.....:

August 18, 2023

Revision History

Revision	Issue Date	Revisions	Revised By
V0	August 18, 2023	Initial released Issue	Lucas Pang

1. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209(a)(f)	PASS
Occupied Bandwidth	§15.215 (c)	PASS

Note:

1. *PASS: Test item meets the requirement.*
2. *Fail: Test item does not meet the requirement.*
3. *N/A: Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*
5. Decision rules for the conclusion of this test report: decision by actual test data without considering measurement uncertainty.

2. General Information

2.1. Description of Device (EUT)

EUT Name	:	5 in 1 Magnetic Wireless Power Bank Station
Model No.	:	StandUP TM10000, StandUP TM20000
DIFF.	:	There is no difference except the name of the model. All tests are made with the StandUP TM10000 model.
Power supply	:	DC 5V/9V from adapter with AC 120V/60Hz, DC 3.7V from battery Type-C Input: 5V $\overline{=}$ 2.6A, 9V $\overline{=}$ 2A Micro USB Input: 5V $\overline{=}$ 2A, 9V $\overline{=}$ 2A USB-A Output: 5V $\overline{=}$ 3A, 9V $\overline{=}$ 2A, 12V $\overline{=}$ 1.5A Type-C Output: 5V $\overline{=}$ 2.4A, 9V $\overline{=}$ 2.22A, 12V $\overline{=}$ 1.67A Wireless Output: 5W, 7.5W, 10W, 15W Airpods Output: 5W iWatch Output: 2W Simultaneous Output: 5V $\overline{=}$ 3A
Radio Technology	:	Wireless power transmission systems
Operation frequency	:	115-205KHz, 325KHz
Modulation	:	MSK
Antenna Type	:	Coil Antenna, Maximum Gain is 0dBi(This value is supplied by applicant).
Connector cable loss	:	0.5dB (This value is supplied by applicant).
Software version	:	V1.0
Hardware version	:	V1.0


2.2. Accessories of Device (EUT)

Accessories	:	USB Cable
Manufacturer	:	Shenzhen Esorun Technology Co., LTD
Model	:	1.5m
specifications	:	1.5m

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1	Adapter	XinSPower	BS-CH905	N/A	N/A
2	Wireless Load	N/A	N/A	N/A	N/A
3	Wireless Load	N/A	N/A	N/A	N/A
4	Wireless Load	N/A	N/A	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators

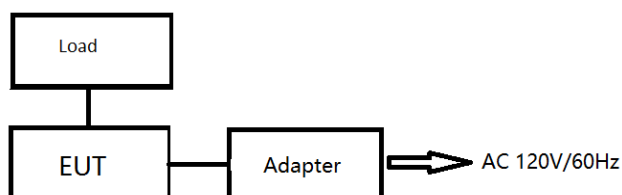

2.5. Description of Test Modes

Channel	Frequency (KHz)
1	128
2	132
3	325

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

July 15, 2019 Certificated by IC

Registration Number: 12135A

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.17	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2022.08.22	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2022.08.22	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2022.08.22	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2022.08.22	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2021.08.30	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2021.08.30	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00059	2021.08.30	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2022.08.22	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2022.08.22	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2022.08.22	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2022.08.22	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2022.08.22	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2022.08.22	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2022.08.23	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	/	00946	2021.08.30	2 Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2022.08.22	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2022.08.22	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2022.08.22	1 Year
Temp. & Humid. Chamber	Teelong	TL-HW408S	/	TL-20191205-01	2023.07.25	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2022.08.22	1 Year
Adjustable attenuator	MWRFTtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	Farad	Alpha-3A1
CE	EZ-EMC	Farad	Alpha-3A1
RF-CE	MTS 8310	MWRFTtest	2.0.0.0

3. Test Results and Measurement Data

3.1. Conducted Emission

3.1.1. Test Specification


Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10:2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane 40cm 80cm E.U.T Adapter LISN Filter AC power EMI Receiver Test table/Insulation plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Transmitting Mode														
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.														
Test Result:	PASS														

3.1.2. Test data

Please refer to following diagram for individual

Test Mode	: 128KHz
Test Results	: PASS
Note:	The test results are listed in next pages. All test modes has been tested, this report only reflected the worst mode. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector and quasi-peak detector need not be carried out. If the limits for the measurement with the average detector are met when using a receiver with a quasi-peak detector, the test unit shall be deemed to meet both limits and the measurement with the average detector need not be carried out.

EUT Description	5 in 1 Magnetic Wireless Power Bank Station	Model No.	StandUP TM10000
Temperature	24°C	Humidity	56%
Test Voltage	AC 120V/60Hz		
Pol	Line		

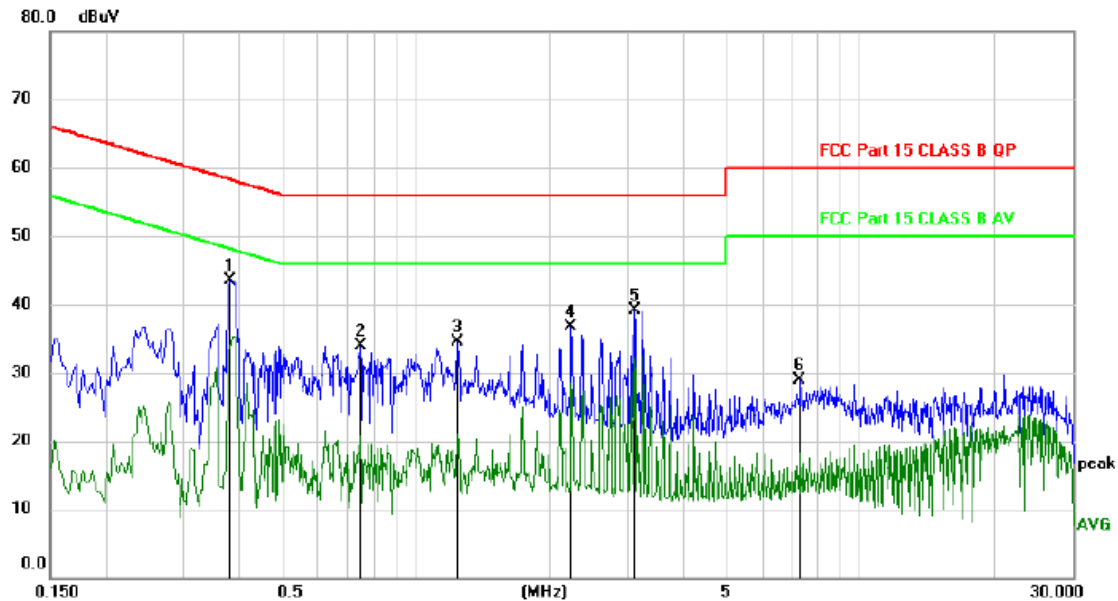


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.3810	33.67	9.83	43.50	58.26	-14.76	peak	
2		0.7470	24.02	9.84	33.86	56.00	-22.14	peak	
3		1.2420	24.63	9.82	34.45	56.00	-21.55	peak	
4		2.2320	26.88	9.77	36.65	56.00	-19.35	peak	
5		3.1020	29.31	9.81	39.12	56.00	-16.88	peak	
6		7.3260	19.00	9.93	28.93	60.00	-31.07	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Pol	Neutral
-----	---------

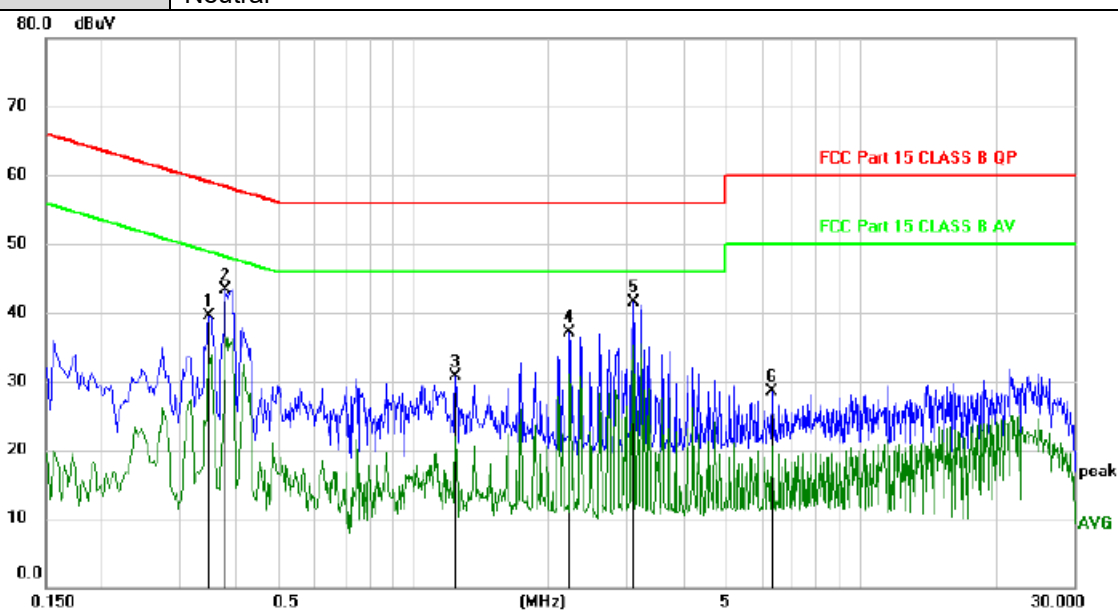

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.3480	29.74	9.83	39.57	59.01	-19.44	peak	
2		0.3780	33.52	9.83	43.35	58.32	-14.97	peak	
3		1.2420	20.95	9.82	30.77	56.00	-25.23	peak	
4		2.2349	27.42	9.77	37.19	56.00	-18.81	peak	
5	*	3.1020	31.68	9.81	41.49	56.00	-14.51	peak	
6		6.3360	18.51	9.91	28.42	60.00	-31.58	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)


Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable


*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable


3.2. Radiated Spurious Emission Measurement

3.2.1. Test Specification

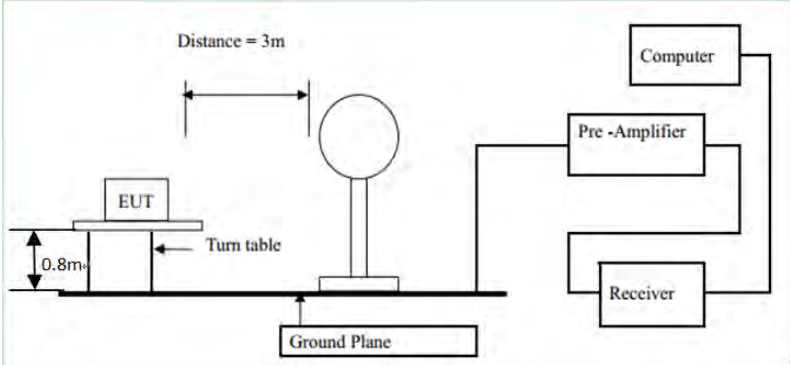Test Requirement:	FCC Part15 C Section 15.209			
Test Method:	ANSI C63.10: 2013			
Frequency Range:	9 kHz to 25 GHz			
Measurement Distance:	3 m			
Antenna Polarization:	Horizontal & Vertical			
Operation mode:	Refer to item 4.1			
Receiver Setup:	Frequency	Detector	RBW	VBW
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz
	30MHz-1GHz	Quasi-peak	100KHz	300KHz
	Above 1GHz	Peak	1MHz	3MHz
Limit:	Remark			
	Quasi-peak Value			
	Quasi-peak Value			
	Quasi-peak Value			
	Peak Value			
	Average Value			
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	
	0.009-0.490	2400/F(KHz)	300	
	0.490-1.705	24000/F(KHz)	30	
	1.705-30	30	30	
Test setup:	30-88	100	3	
	88-216	150	3	
	216-960	200	3	
	Above 960	500	3	
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector
	Above 1GHz	500	3	Average
		5000	3	Peak
Test setup:	For radiated emissions below 30MHz			
	 Distance = 3m 0.8m EUT Turn table Ground Plane Computer Pre -Amplifier Receiver			
	30MHz to 1GHz			

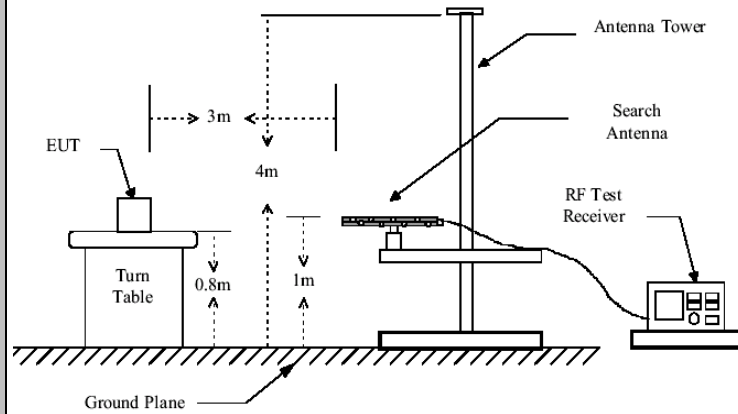

Above 1GHz

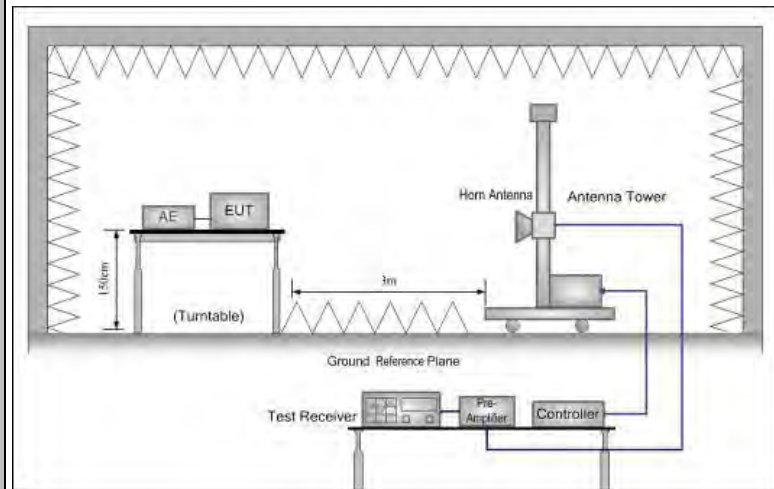**Test Procedure:****1. For the radiated emission test below 1GHz:**

The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.

For the radiated emission test above 1GHz:

Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.


2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported.

	Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported. 4. Use the following spectrum analyzer settings: (1) Span shall wide enough to fully capture the emission being measured; (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold; (3) Set RBW = 1 MHz, $VBW = 3$ MHz for $f \geq 1$ GHz for peak measurement. For average measurement: $VBW = 10$ Hz, when duty cycle is no less than 98 percent. $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Test mode:	Refer to section 4.1 for details
Test results:	PASS

3.2.2. Test Data

Please refer to following diagram for individual


Frequency Range	: 9KHz~30MHz
Test Mode	: TX: 128kHz, 132kHz, 325kHz
Test Results	: PASS
Note:	1. The test results are listed in next pages. 2. This mode is worst case mode, so this report only reflected the worst mode. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.

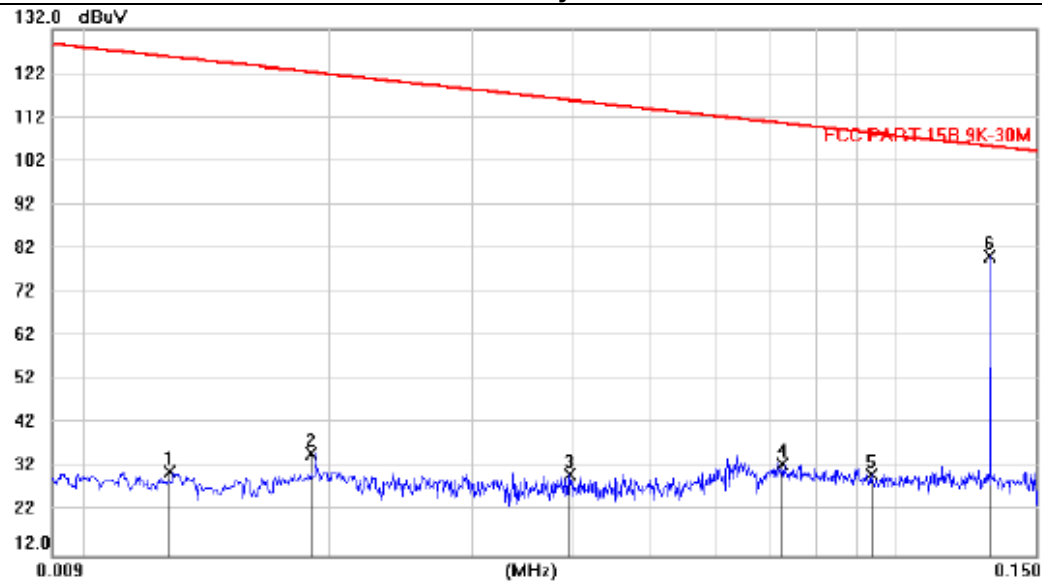For signal coil:**Polarity: X axis**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV	dBuV	dB	Detector	cm	degree
1		0.0126	9.54	21.43	30.97	125.6	-94.72	peak		
2		0.0189	13.90	21.27	35.17	122.1	-87.01	peak		
3		0.0395	10.02	20.47	30.49	115.8	-85.31	peak		
4		0.0728	12.67	20.16	32.83	110.5	-77.68	peak		
5		0.0937	10.67	19.86	30.53	108.3	-77.79	peak		
6	*	0.1317	60.30	19.93	80.23	105.3	-25.14	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.


2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

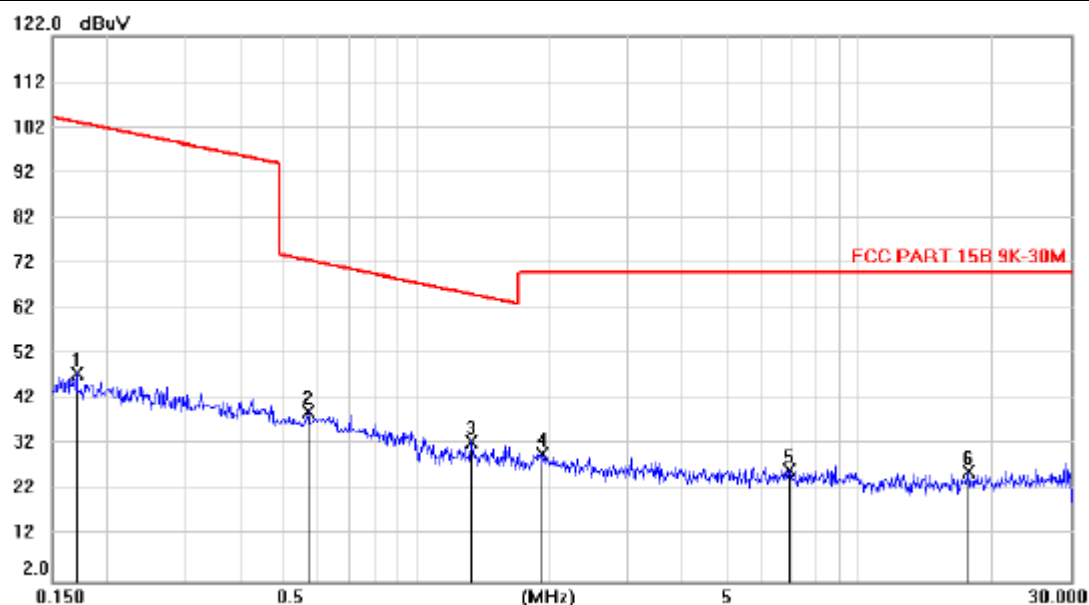

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1		0.1708	27.70	20.17	47.87	103.1	-55.25	peak		
2		0.5672	19.54	19.74	39.28	72.71	-33.43	peak		
3	*	1.3251	12.71	20.08	32.79	65.22	-32.43	peak		
4		1.9110	9.96	20.23	30.19	70.00	-39.81	peak		
5		6.9420	3.89	22.67	26.56	70.00	-43.44	peak		
6		17.6173	4.91	21.11	26.02	70.00	-43.98	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.


2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

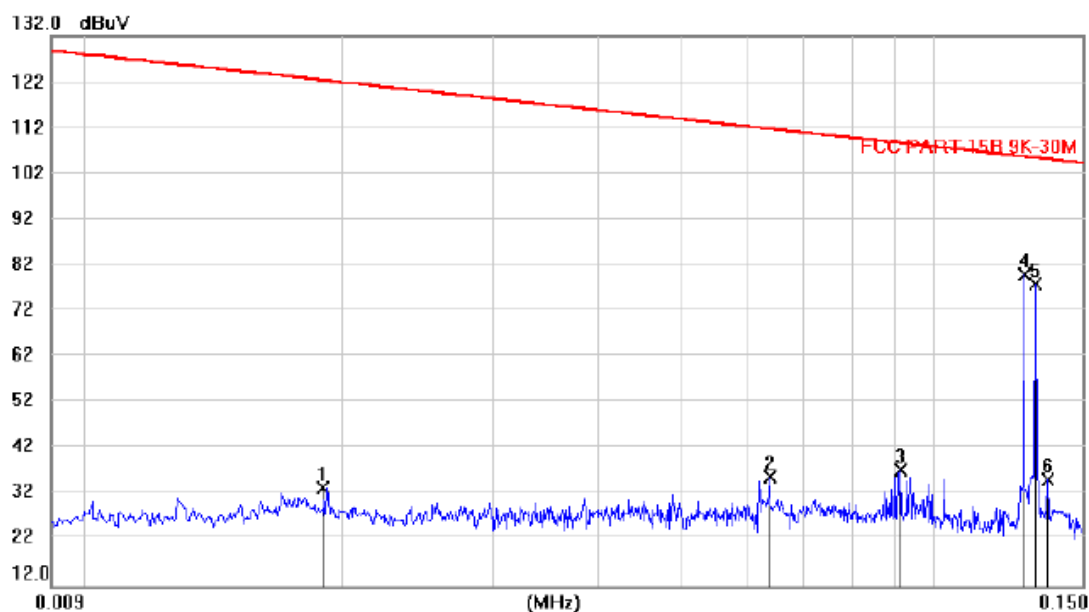For three coils:**Polarity: X axis**

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Antenna Height cm	Table Degree	Detector	Comment
1		0.0189	12.20	21.27	33.47	122.2	-88.79			peak	
2		0.0637	15.65	20.11	35.76	111.7	-75.95			peak	
3		0.0913	17.36	19.89	37.25	108.5	-71.34			peak	
4	*	0.1276	60.04	19.88	79.92	105.6	-25.76			peak	
5		0.1317	57.88	19.93	77.81	105.4	-27.60			peak	
6		0.1363	15.38	19.99	35.37	105.1	-69.74			peak	

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

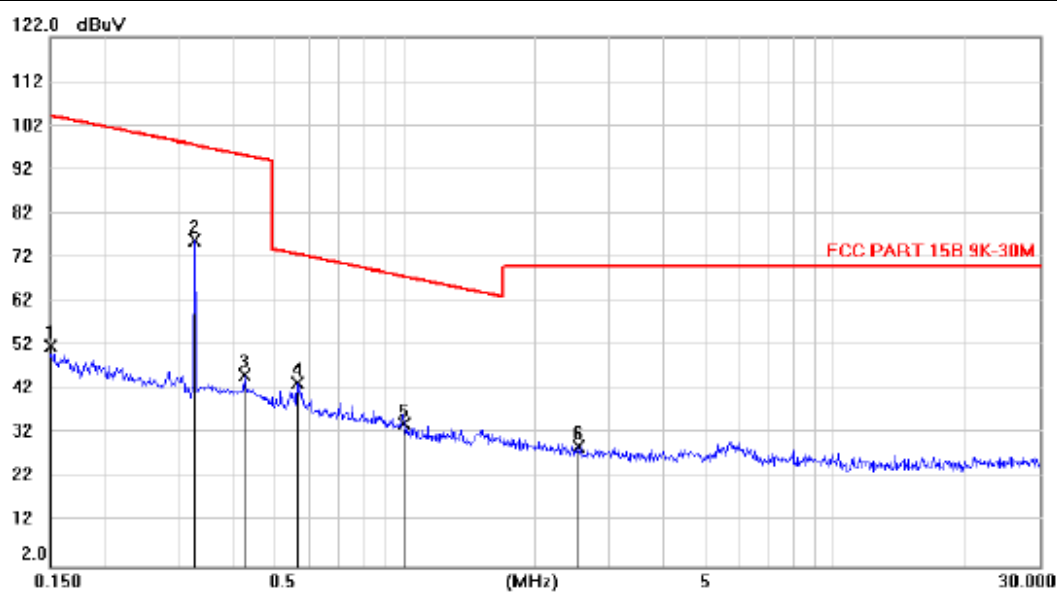

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV	dBuV	dB	cm	degree	Comment
1		0.1500	31.70	20.20	51.90	104.2	-52.35	peak		
2	*	0.3254	56.03	19.95	75.98	97.54	-21.56	peak		
3		0.4264	25.53	19.81	45.34	95.20	-49.86	peak		
4		0.5645	23.83	19.74	43.57	72.75	-29.18	peak		
5		0.9960	14.16	20.00	34.16	67.74	-33.58	peak		
6		2.5472	8.74	20.39	29.13	70.00	-40.87	peak		

Note: 1. *:Maximum data; x:Over limit; !:over margin.


2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Frequency Range	: 30MHz~1000MHz
Test Mode	: 128KHz, 132KHz, 325KHz
Test Results	: PASS
Note:	1. The test results are listed in next pages. 2. All test modes has been tested, this report only reflected the worst mode. 3. If the limits for the measurement with the average detector are met when using a receiver with a peak detector, the test unit shall be deemed to meet both limits and the measurement with the quasi-peak detector need not be carried out.

Frequency Range	:	Above 1GHz			
EUT	:	/	Test Date	:	/
M/N	:	/	Temperature	:	/
Test Engineer	:	/	Humidity	:	/
Test Mode	:	/			
Test Results	:	N/A			
Note:	1. The highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. So the frequency rang above 1GHz radiation test not applicable.				

30MHz-1GHz

EUT Description	5 in 1 Magnetic Wireless Power Bank Station	Model No.	StandUP TM10000
Temperature	24°C	Humidity	56%
Test Voltage	AC 120V/60Hz		
Pol	Vertical		

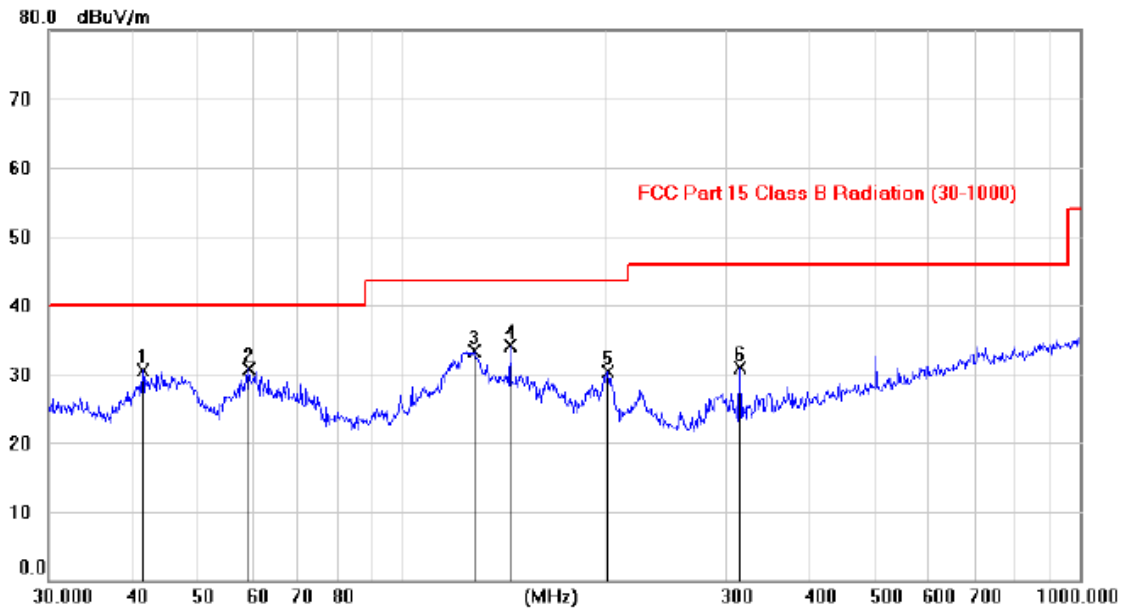


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		41.3200	16.12	14.34	30.46	40.00	-9.54	peak	
2	*	59.4058	17.55	13.25	30.80	40.00	-9.20	peak	
3		127.3069	19.90	13.44	33.34	43.50	-10.16	peak	
4		144.0146	19.42	14.61	34.03	43.50	-9.47	peak	
5		201.3224	19.30	10.92	30.22	43.50	-13.28	peak	
6		314.8913	16.39	14.48	30.87	46.00	-15.13	peak	

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Pol	Horizontal
-----	------------

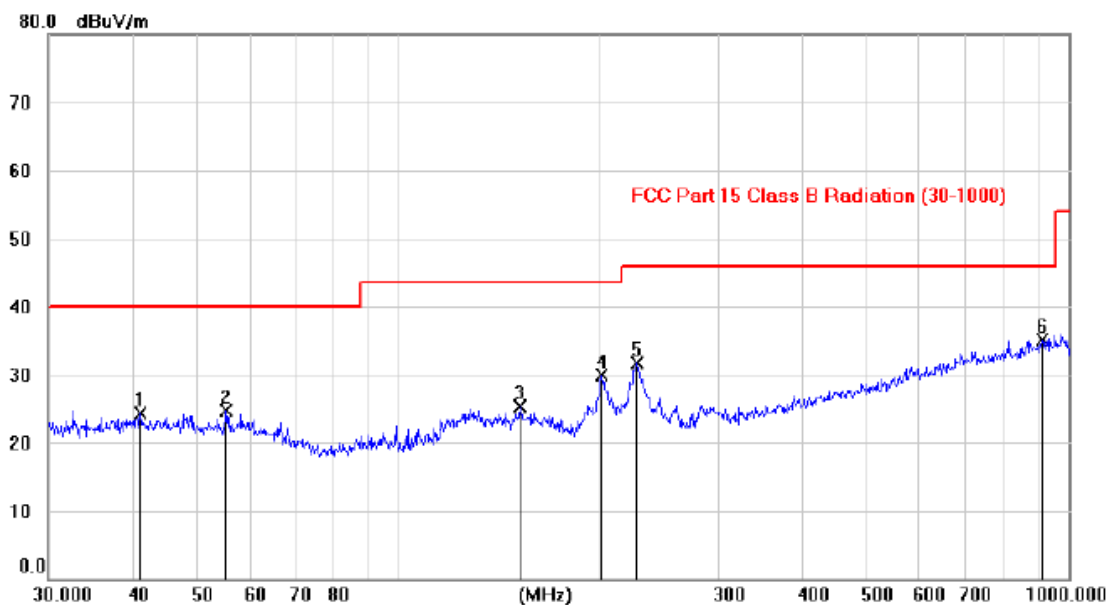

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		41.2572	10.00	14.34	24.34	40.00	-15.66	peak			
2		55.2336	11.09	13.57	24.66	40.00	-15.34	peak			
3		151.8632	10.34	15.06	25.40	43.50	-18.10	peak			
4		201.3695	19.07	10.92	29.99	43.50	-13.51	peak			
5		227.2918	19.54	12.16	31.70	46.00	-14.30	peak			
6	*	913.6093	10.86	24.22	35.08	46.00	-10.92	peak			

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

3.3. Test Specification


Test Requirement:	FCC Part15 C Section 15.215(c)
Test Method:	ANSI C63.10: 2013
Limit:	N/A
Test Procedure:	1. According to the follow Test-setup, keep the relative position between the artificial antenna and the EUT. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW$\geq$1% of the 20 dB bandwidth; VBW$\geq$RBW; Sweep = auto; Detector function = peak; Trace = max hold. 4. Measure and record the results in the test report.
Test setup:	 Spectrum Analyzer EUT
Test Mode:	Refer to section 4.1 for details
Test results:	PASS

3.3.1. Test data

For Watch:

Frequency(kHz)	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
325	0.284	---	Pass


Test plots as follows:

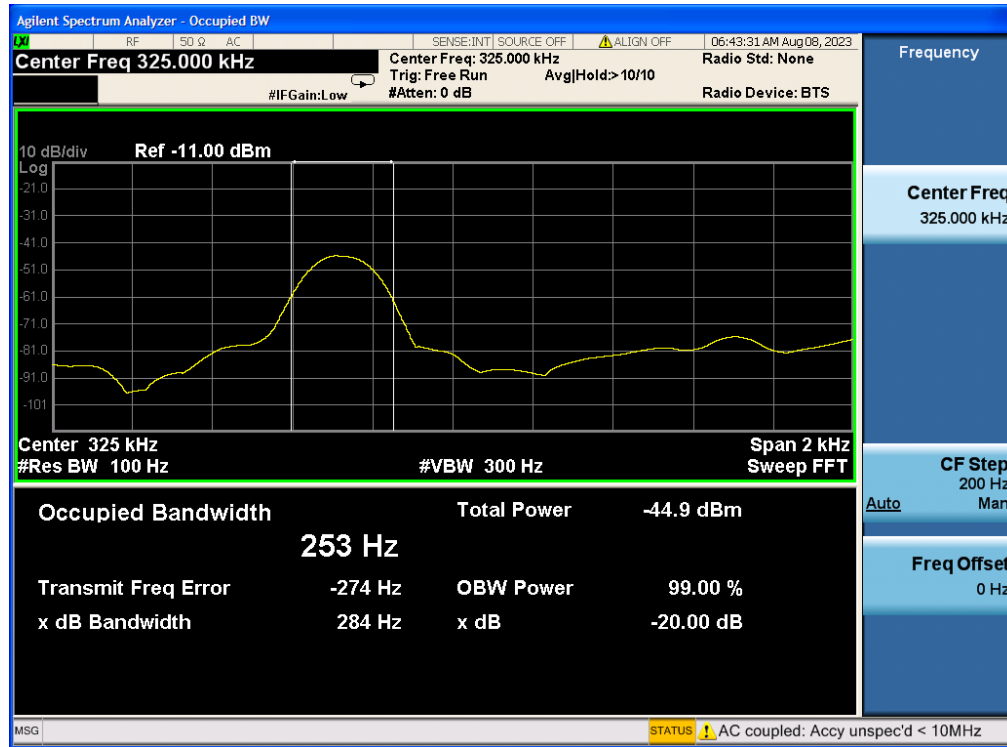

For AirPods:

Frequency(kHz)	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
132	0.235	---	Pass


Test plots as follows:

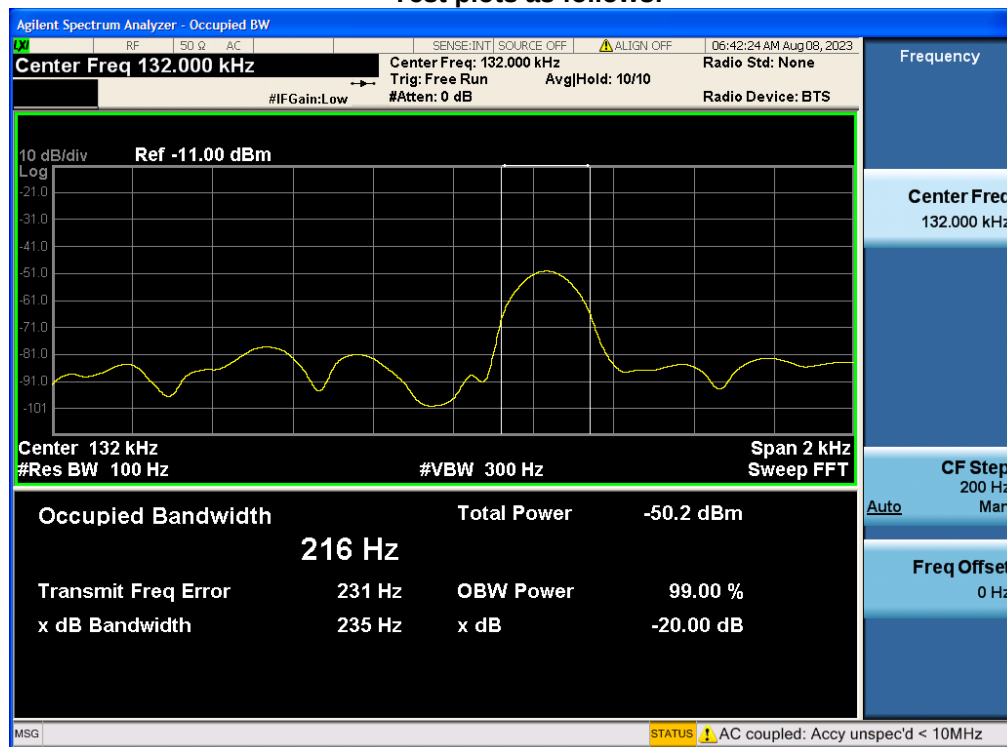

For Phone:



Frequency(kHz)	20dB Occupy Bandwidth (kHz)	Limit (kHz)	Conclusion
128	0.261	---	Pass

Test plots as follows:

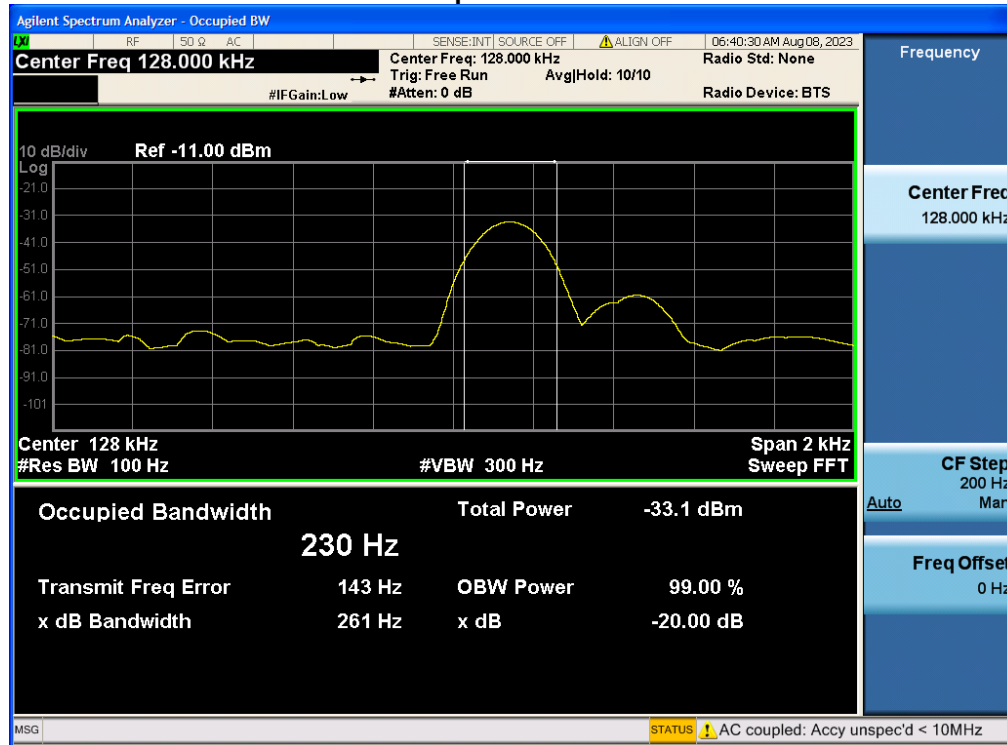


4. Photos of test setup

Radiated Emission

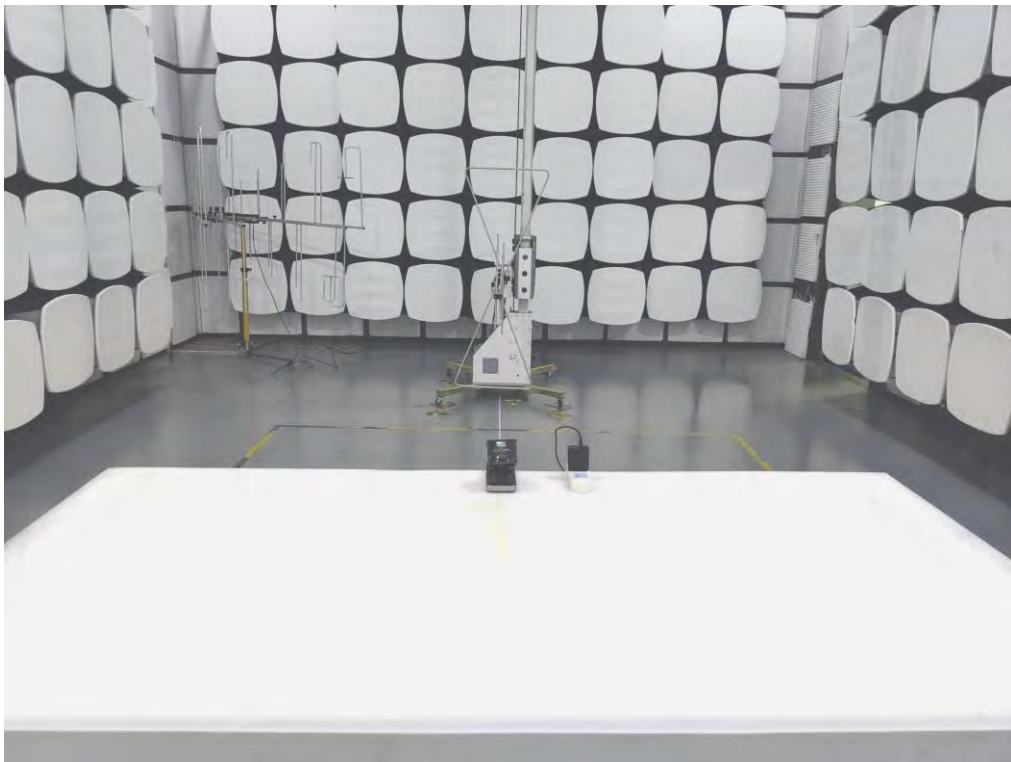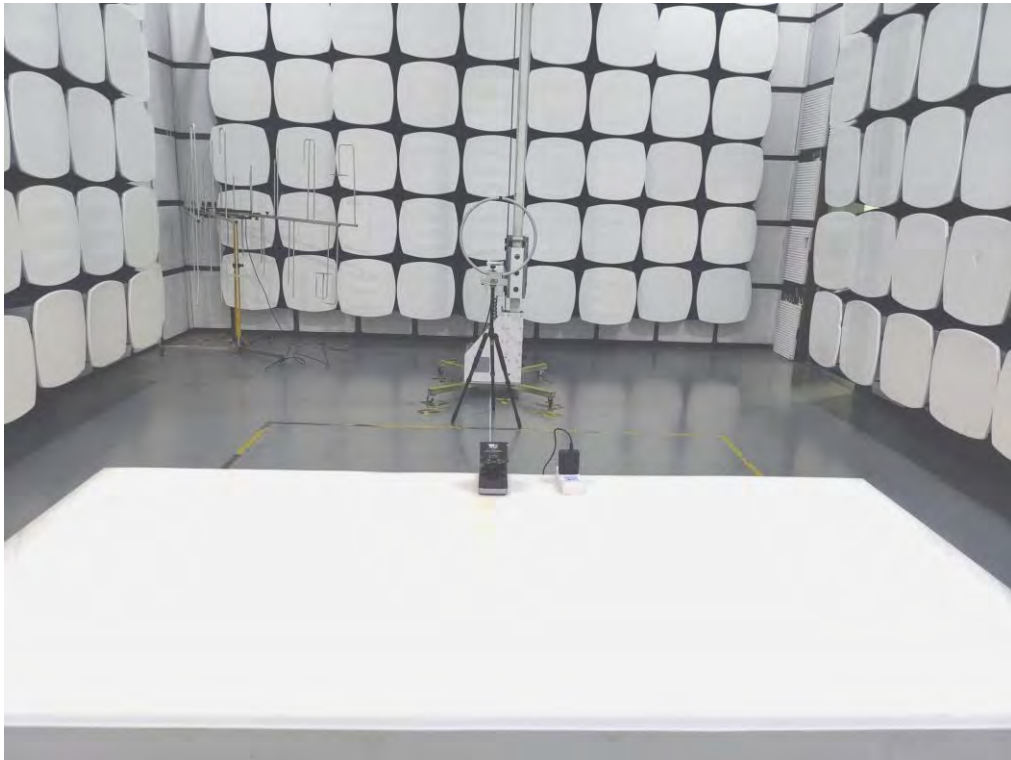


Conducted Emission

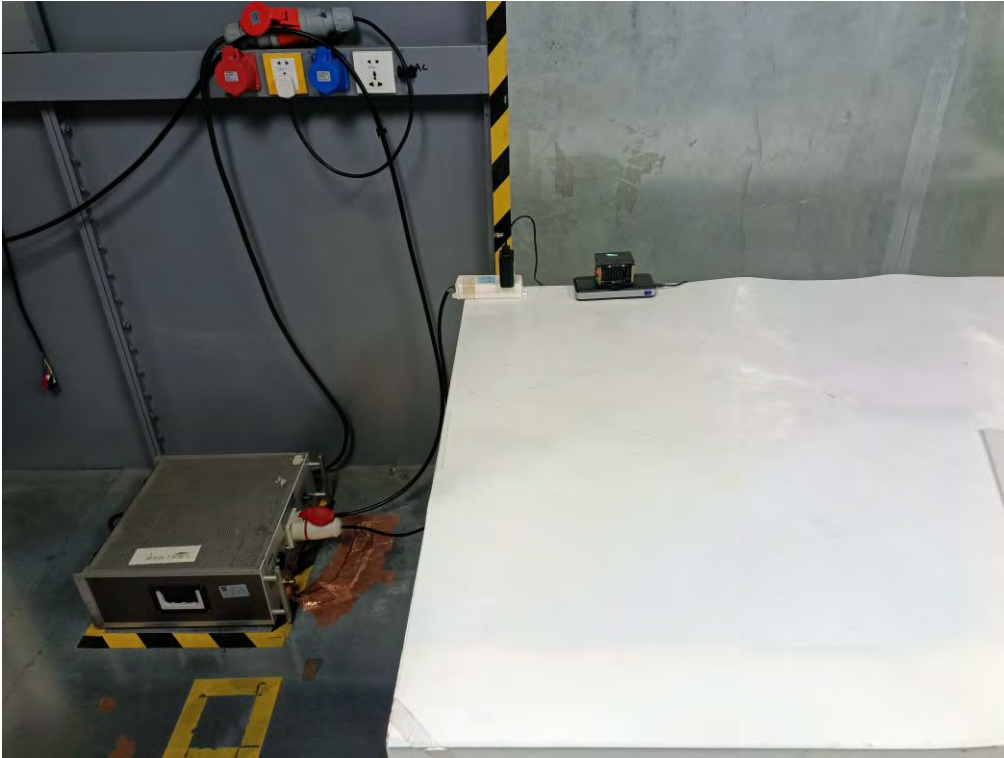


5. Photographs of EUT





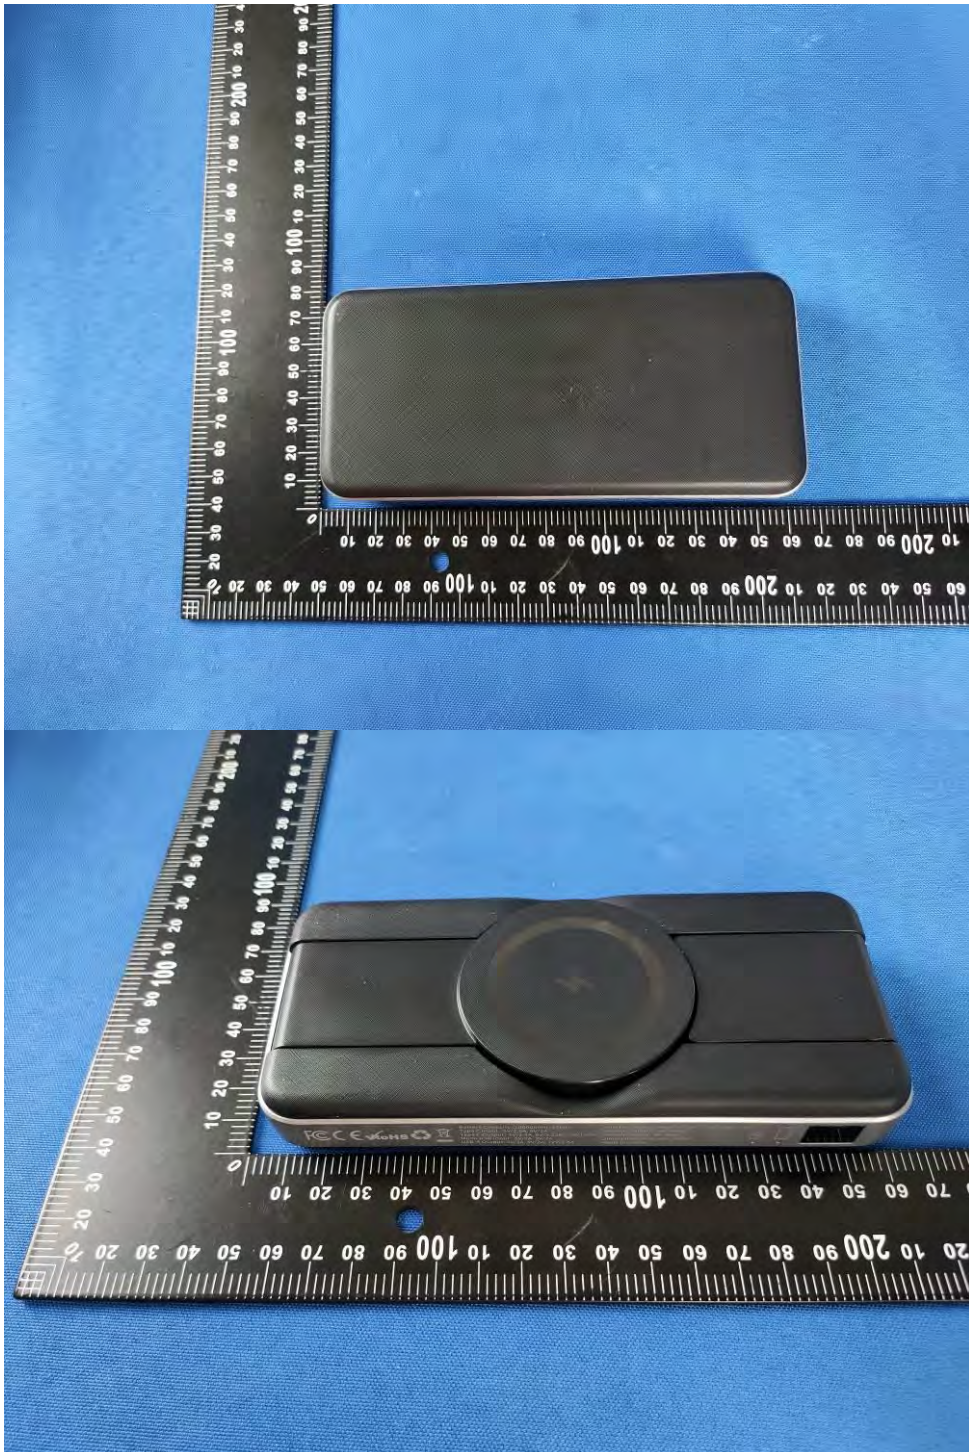






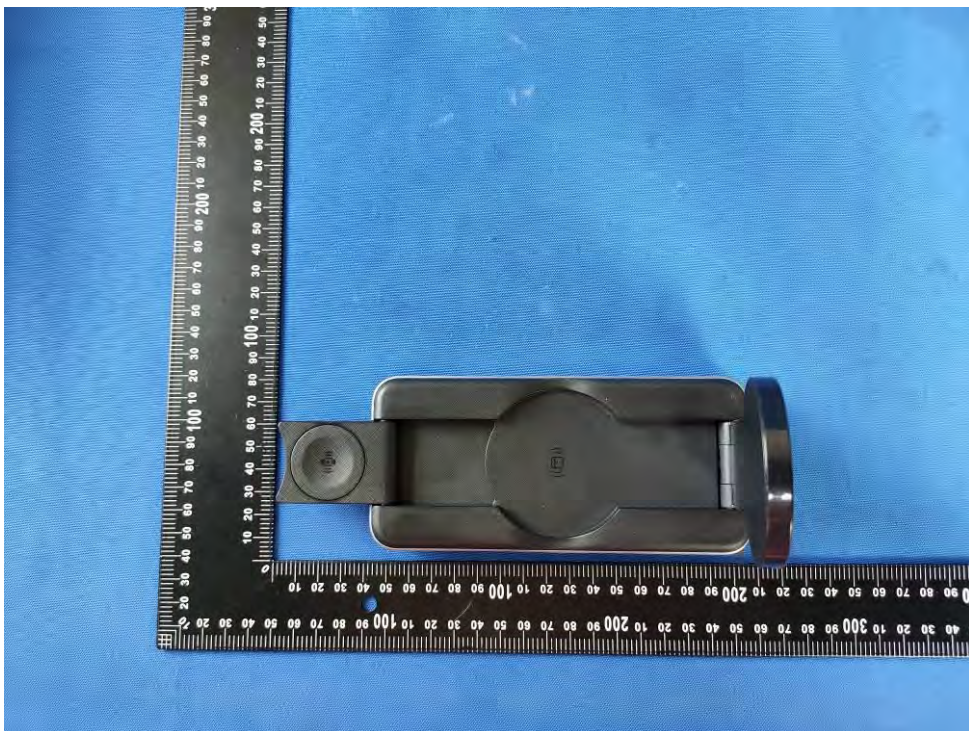







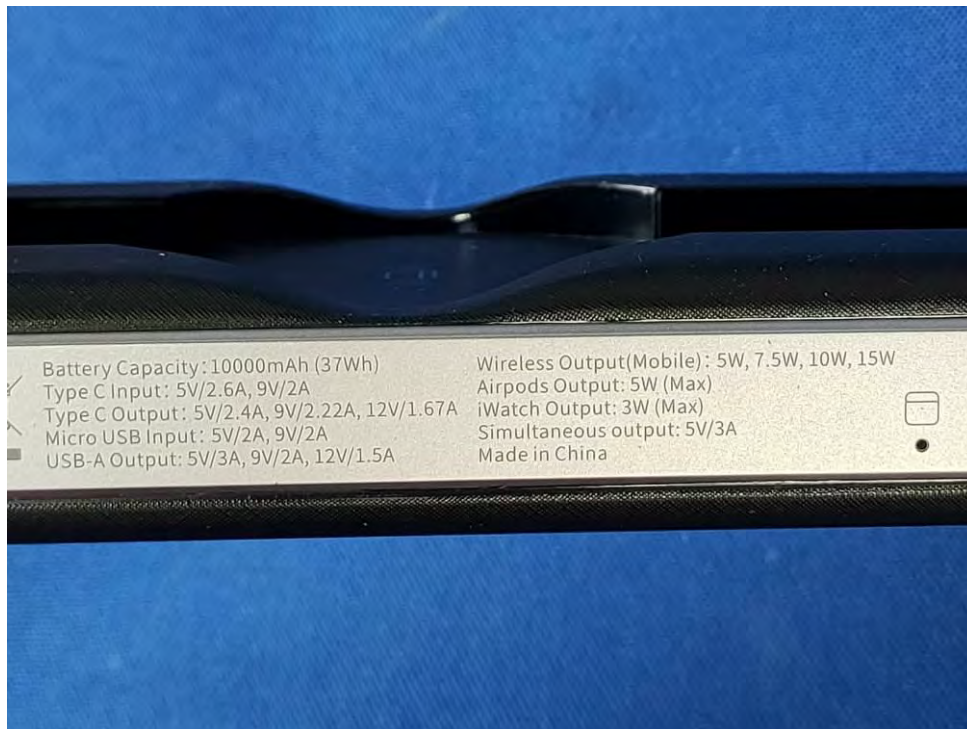


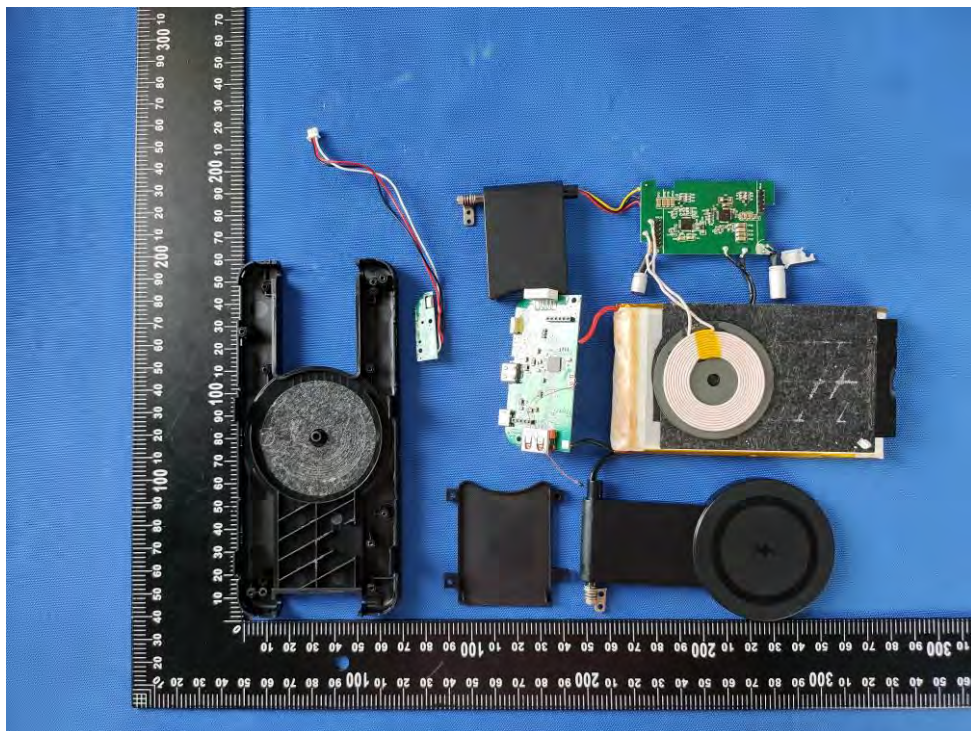
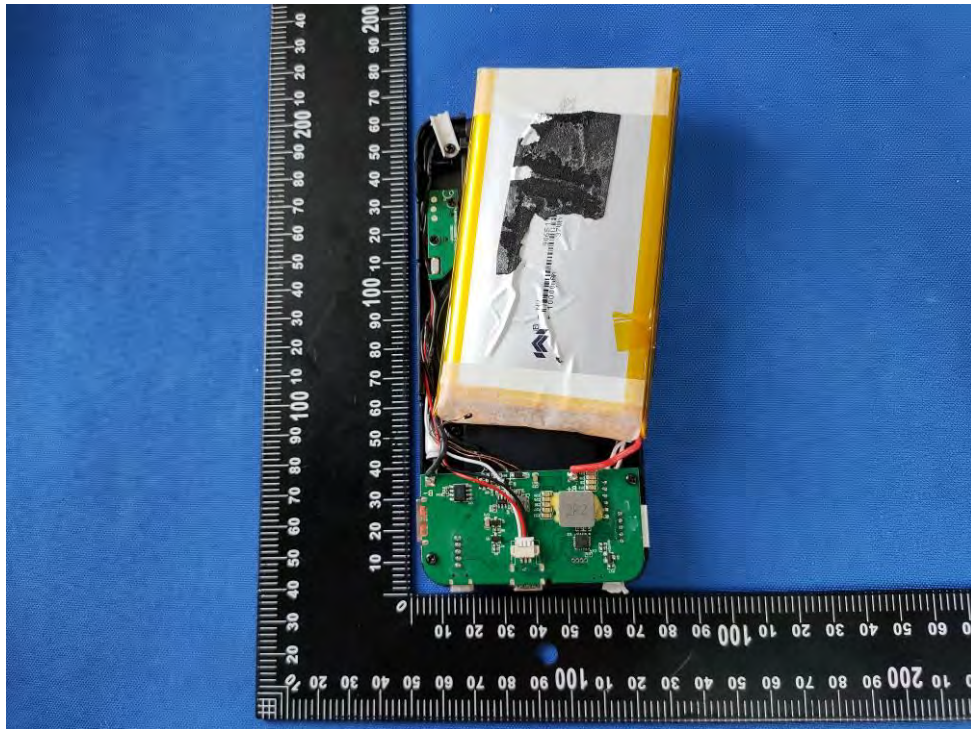



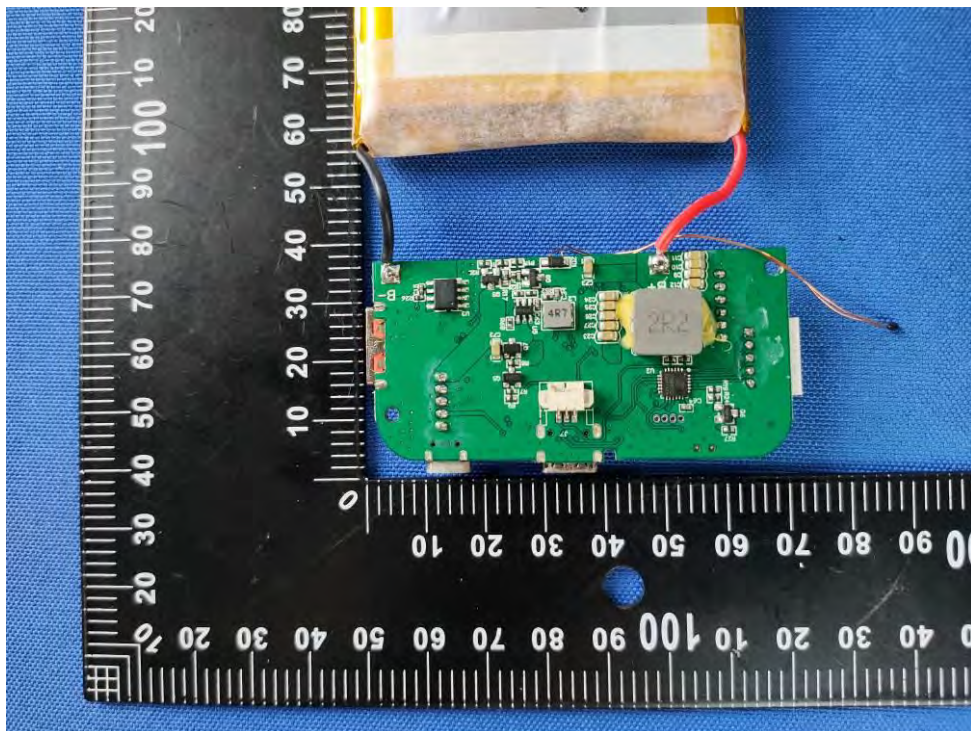


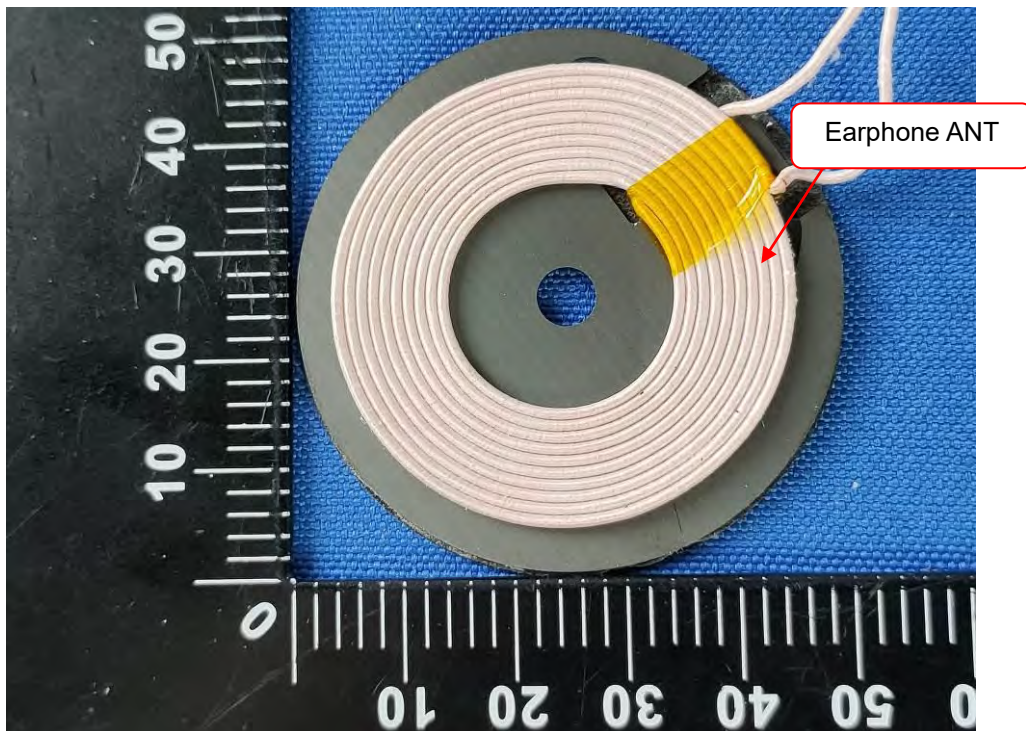
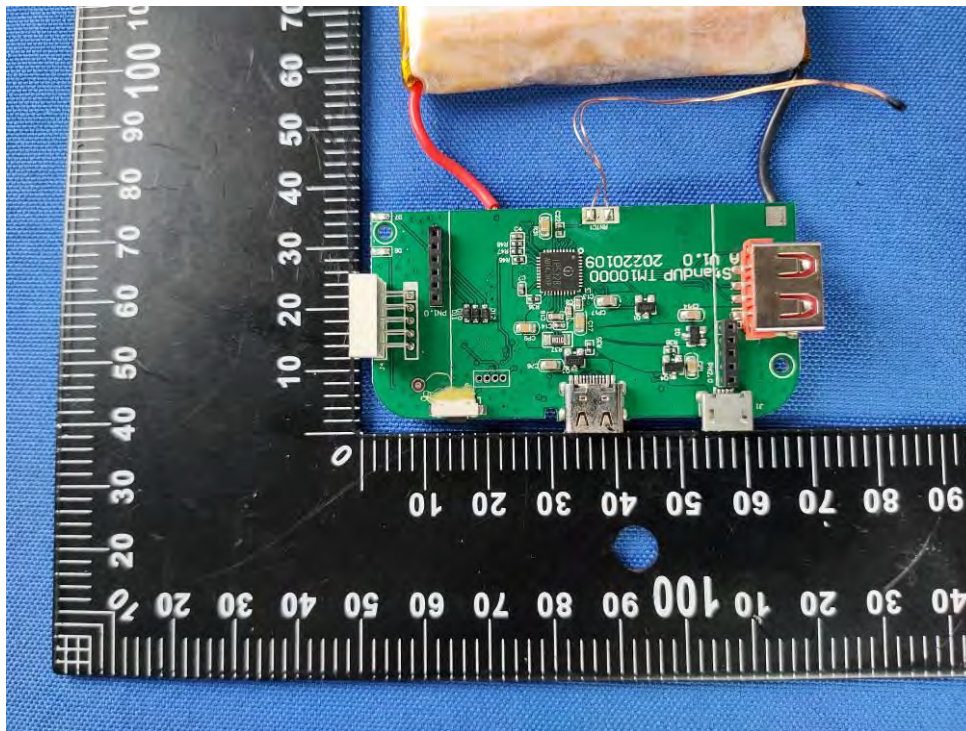


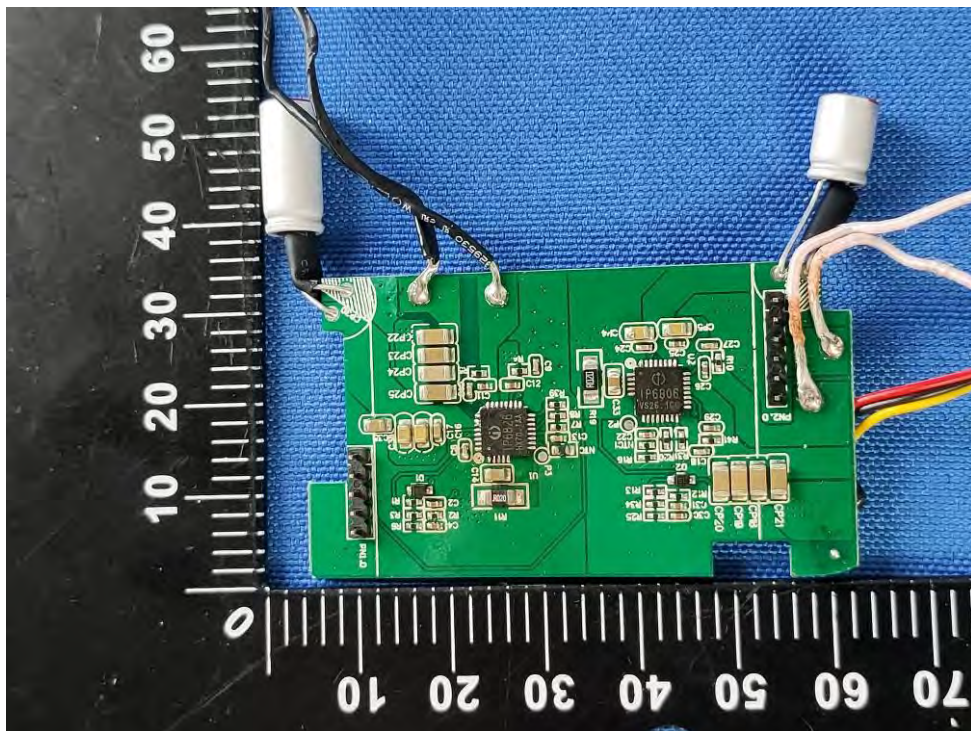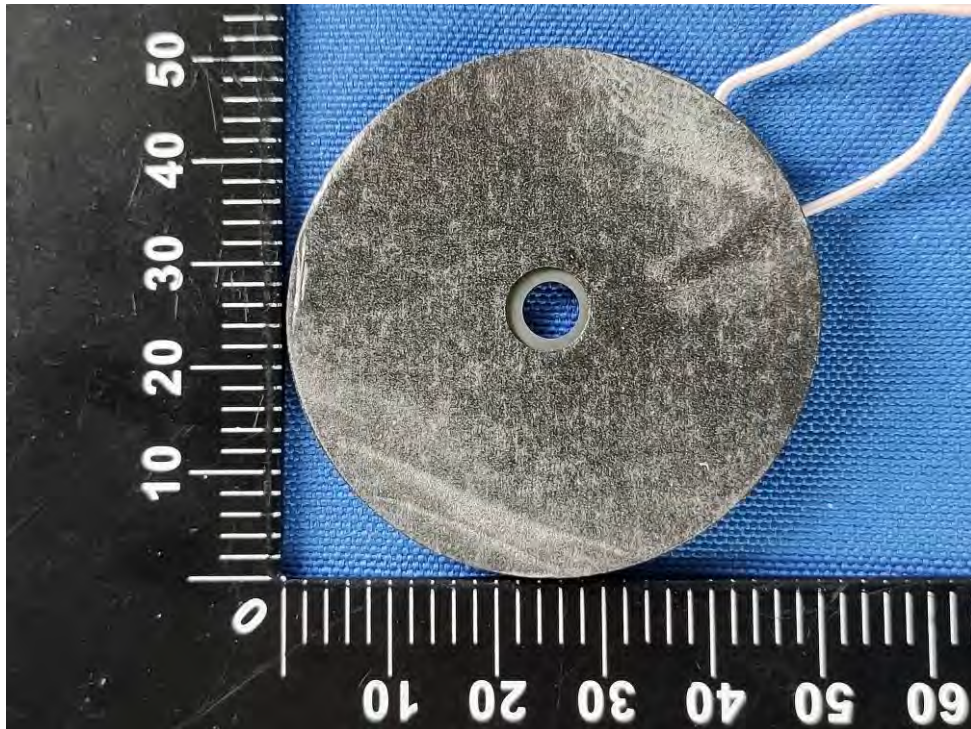

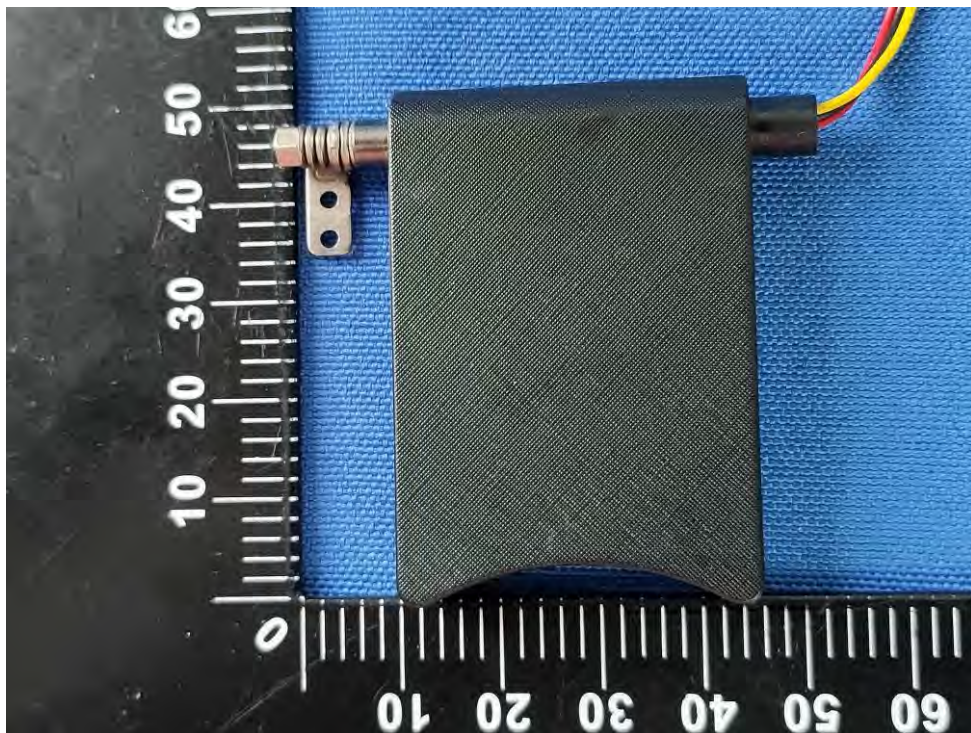
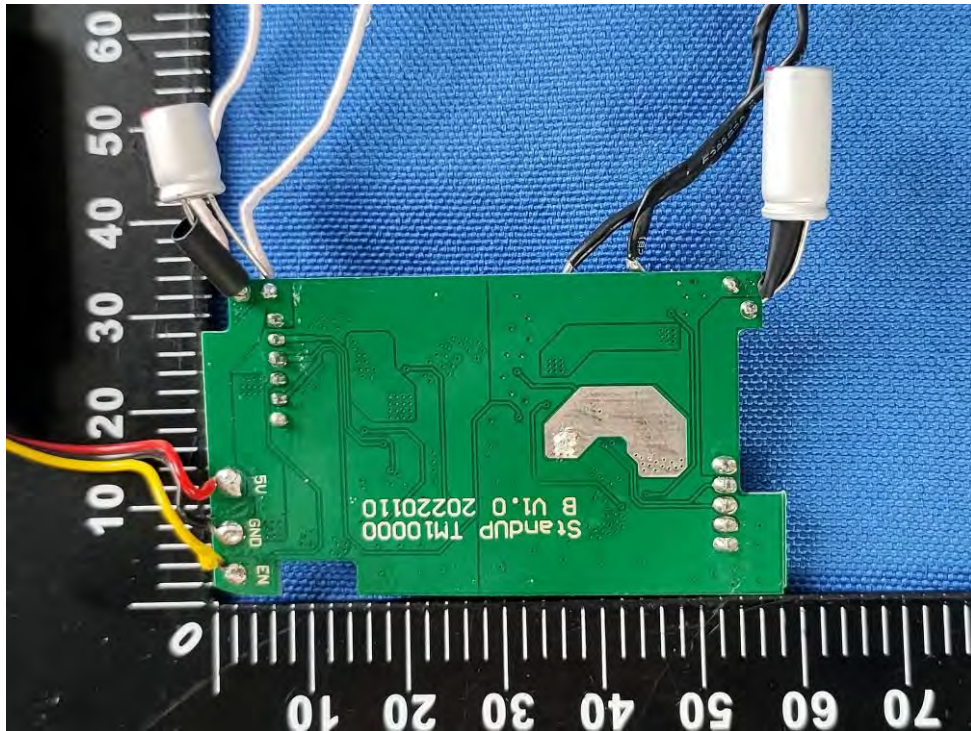


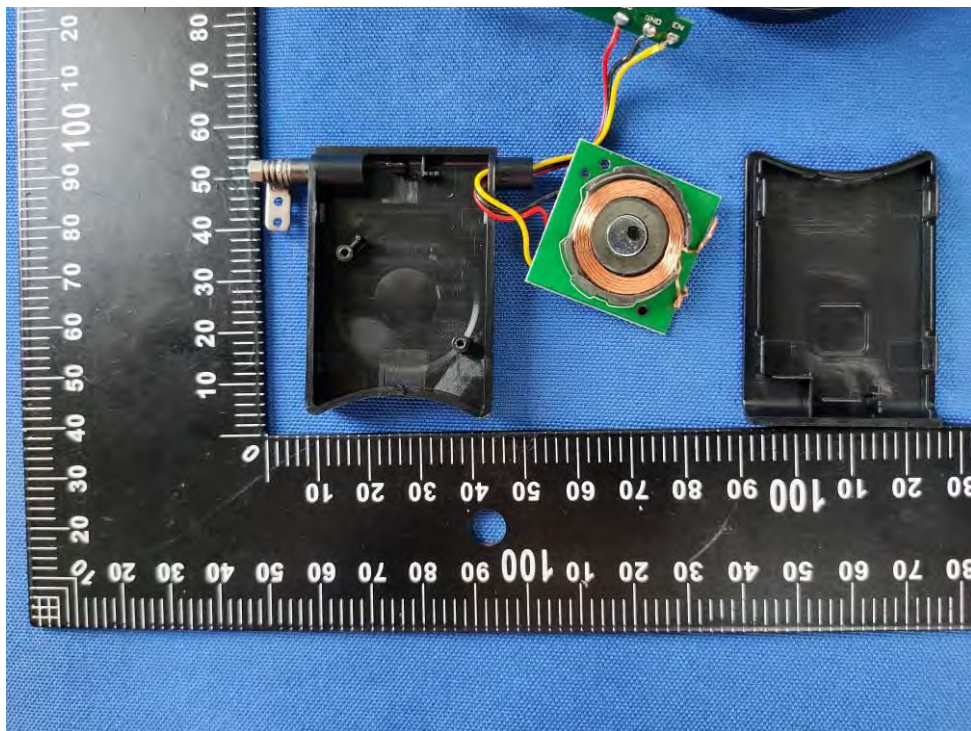
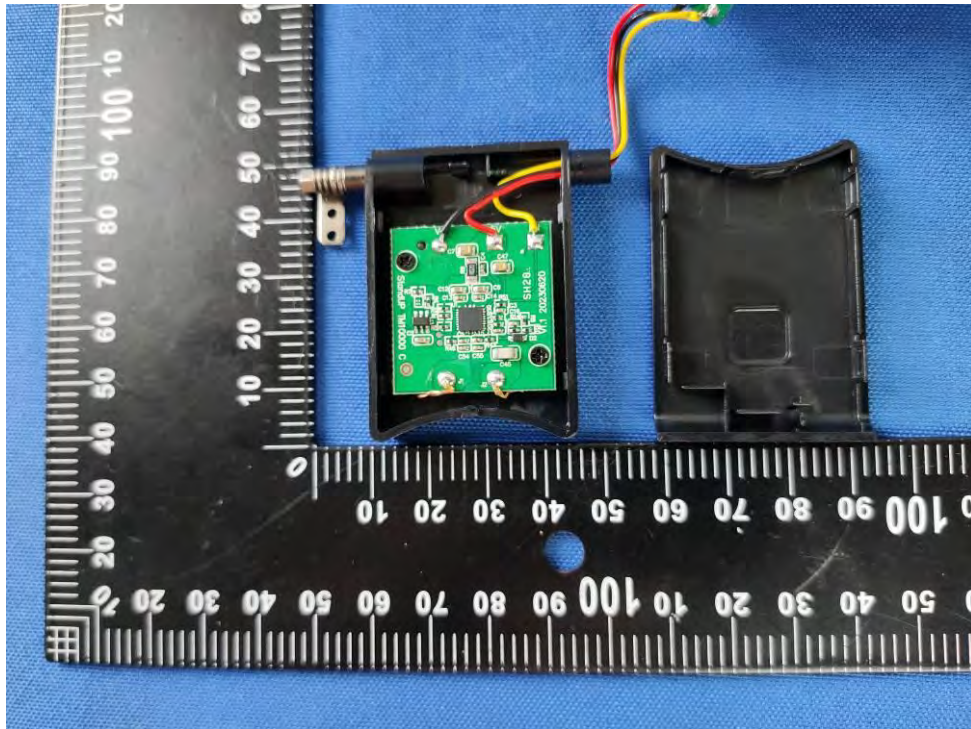


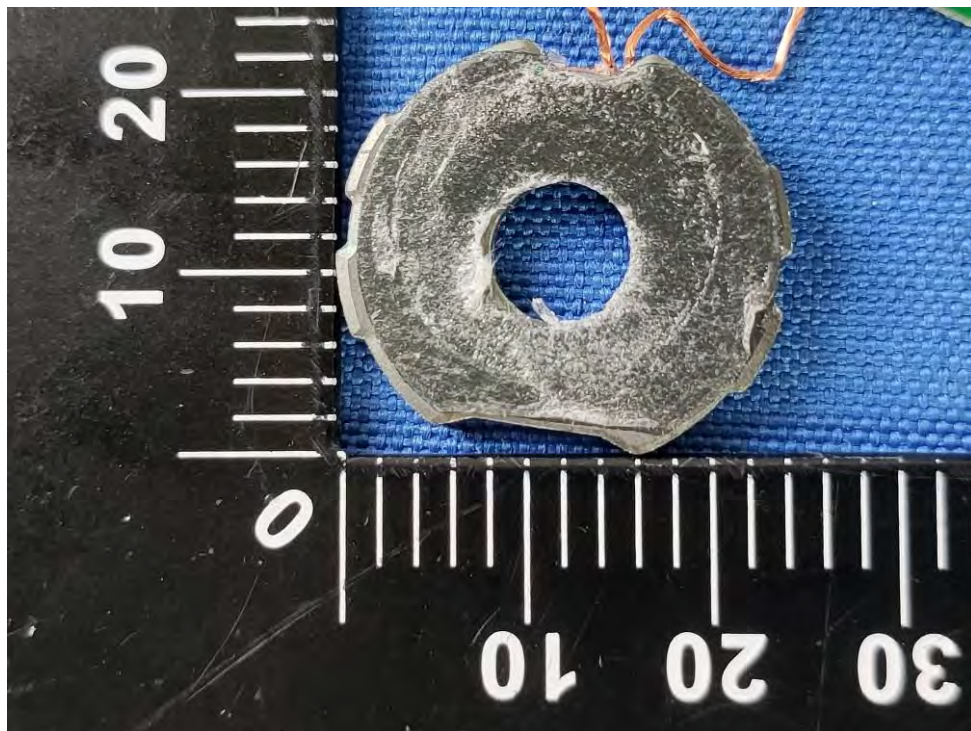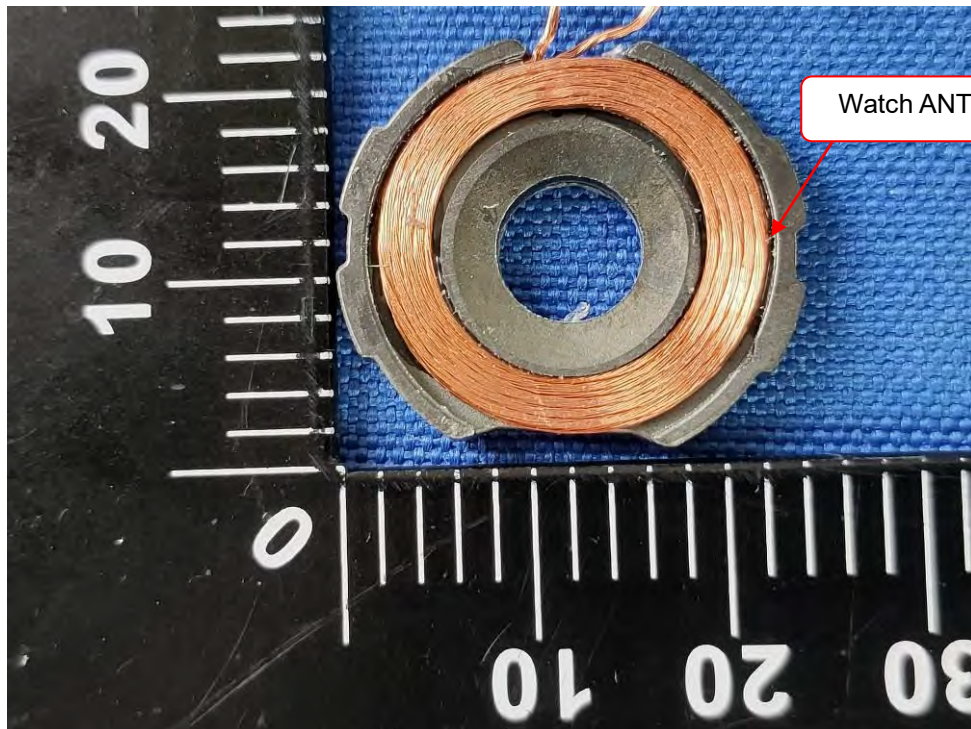

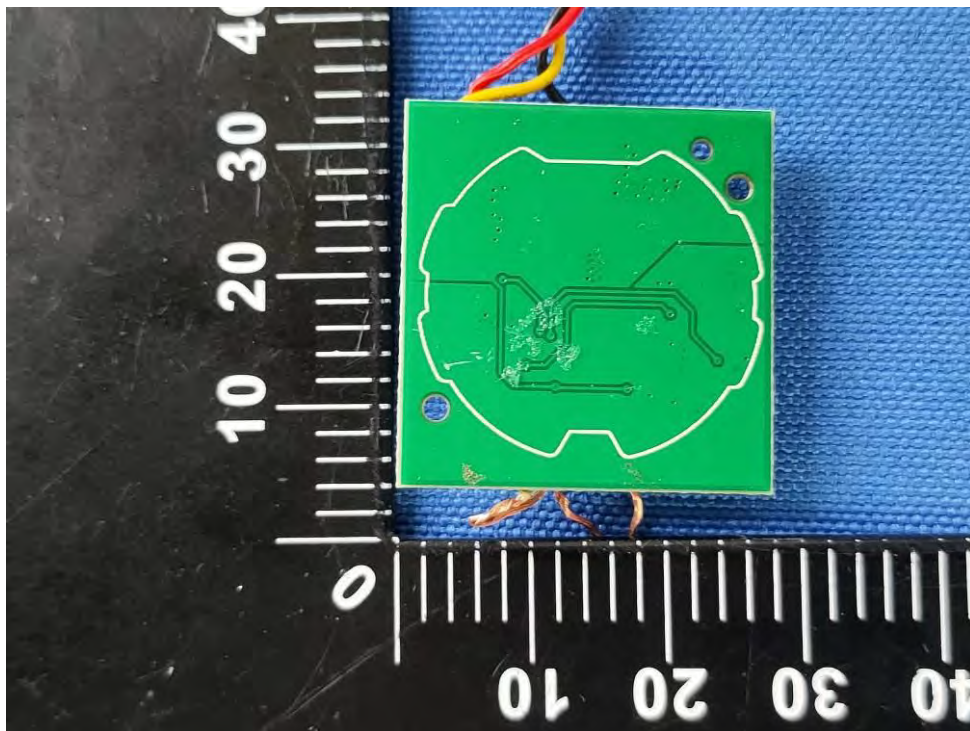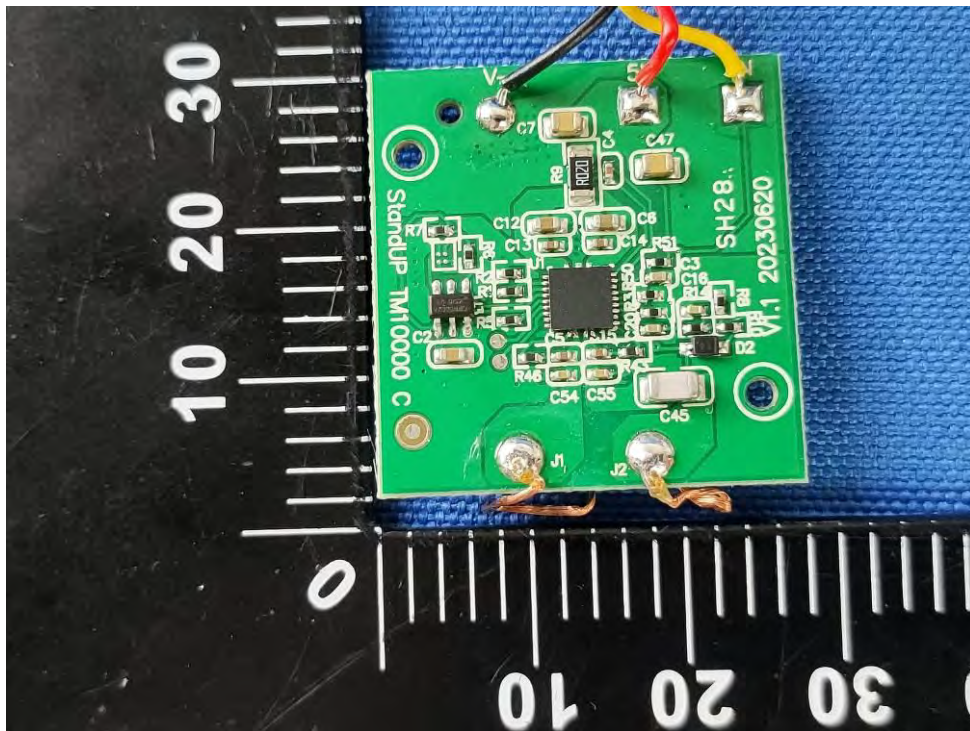



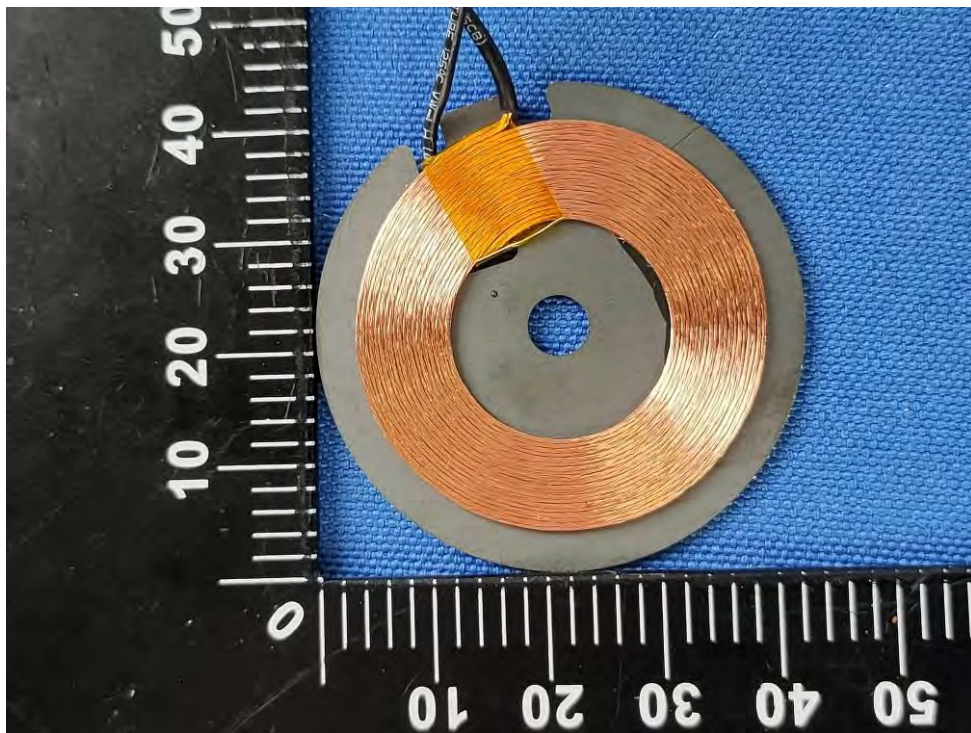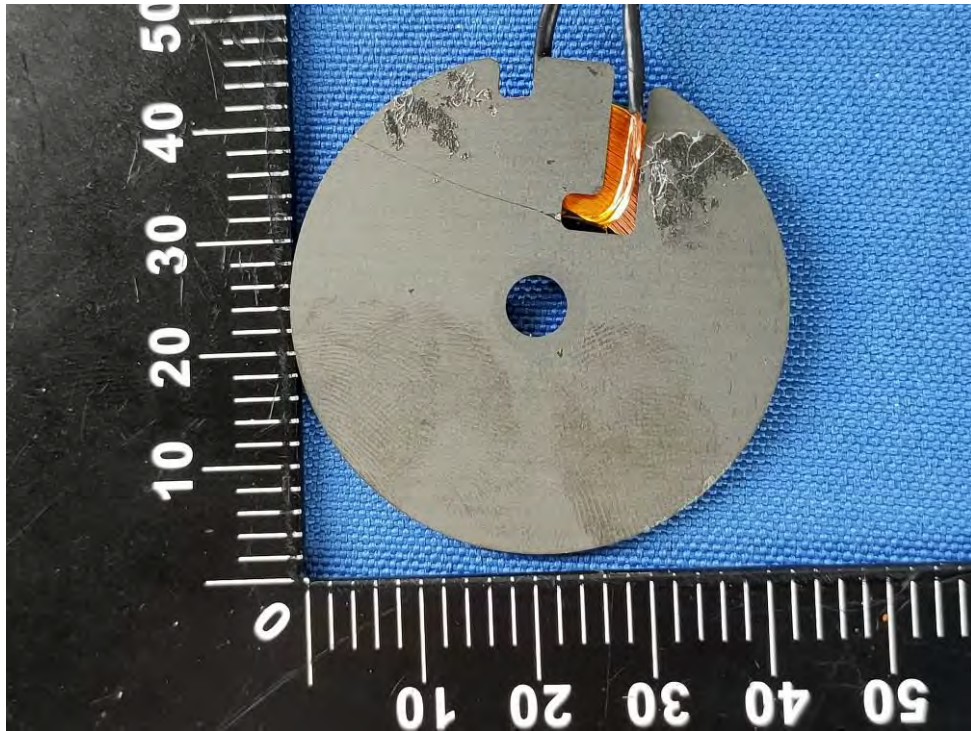

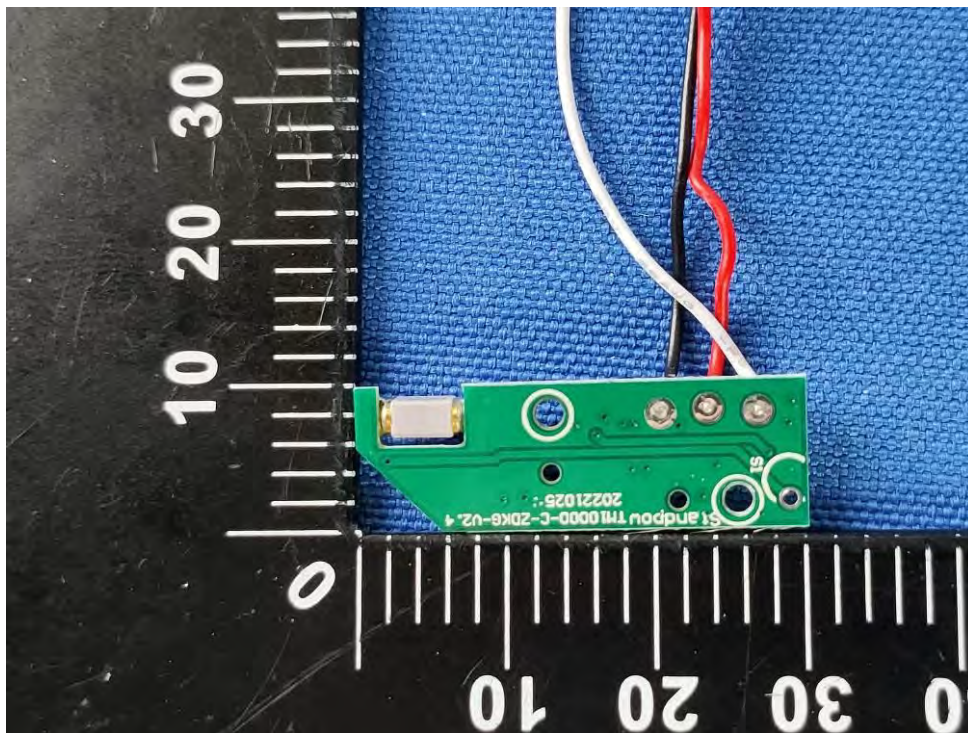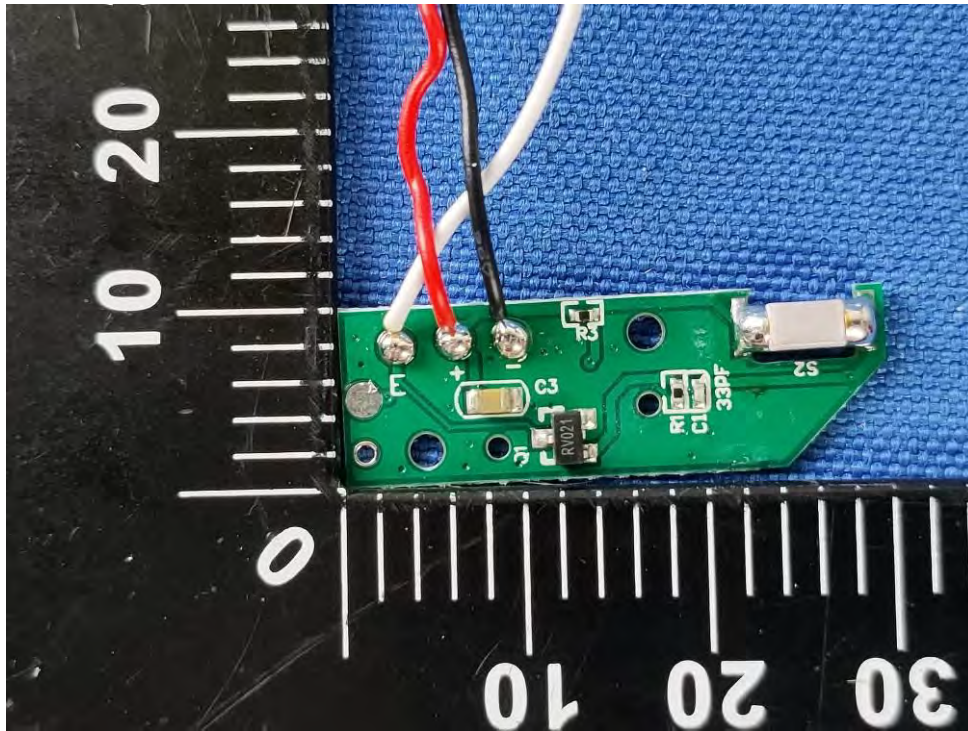

----- END OF REPORT-----