

FCC AND ISCED CERTIFICATION TEST REPORT

FOR

Applicant	:	Kingstate Electronics(Dongguan)Co.,Ltd
Address	:	Shi Chong Industrial Park, Shi Chong Avenue, Xiang Xi Village, Shi Pai Town, Dong Guan City, Guang Dong Province, China.
Equipment under Test	:	True Wireless Earbuds
Model No.	:	TW-E5B
Trade Mark	:	YAMAHA
FCC ID	:	2AKMBTW-E5B
IC	:	12522A-E5B
Manufacturer	:	Kingstate Electronics(Dongguan)Co.,Ltd
Address	:	Shi Chong Industrial Park, Shi Chong Avenue, Xiang Xi Village, Shi Pai Town, Dong Guan City, Guang Dong Province, China.

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park,
Dongguan City, Guangdong Province, China, 523808

Tel.: +86-0769-38826678, **E-mail:** ddt@dgddt.com, <http://www.dgddt.com>

REPORT

Table of Contents

	Test report declares.....	4
1.	Summary of Test Results.....	6
2.	General Test Information	7
2.1.	Description of EUT	7
2.2.	Accessories of EUT.....	8
2.3.	Assistant equipment used for test.....	8
2.4.	Block diagram of EUT configuration for test.....	8
2.5.	Deviations of test standard.....	8
2.6.	Test environment conditions	8
2.7.	Test laboratory	9
2.8.	Measurement uncertainty.....	9
3.	Equipment Used During Test.....	10
4.	Maximum Peak Output Power	12
4.1.	Block diagram of test setup.....	12
4.2.	Limits	12
4.3.	Test procedure	12
4.4.	Test result.....	12
4.5.	Original test data	13
5.	20 dB Bandwidth and 99% Bandwidth.....	20
5.1.	Block diagram of test setup.....	20
5.2.	Limits	20
5.3.	Test procedure	20
5.4.	Test result.....	20
5.5.	Original test data	21
6.	Carrier Frequency Separation.....	28
6.1.	Block diagram of test setup.....	28
6.2.	Limits	28
6.3.	Test procedure	28
6.4.	Test result.....	28
6.5.	Original test data	29
7.	Number of Hopping Channel	31
7.1.	Block diagram of test setup.....	31
7.2.	Limits	31
7.3.	Test procedure	31
7.4.	Test result.....	31
7.5.	Original test data	32
8.	Dwell Time.....	34

8.1.	Block diagram of test setup.....	34
8.2.	Limits	34
8.3.	Test procedure	34
8.4.	Test result.....	34
8.5.	Original test data	35
9.	Band Edge Compliance (Conducted Method)	48
9.1.	Block diagram of test setup.....	48
9.2.	Limit.....	48
9.3.	Test result.....	48
9.4.	Original test data	48
10.	Radiated Emission	57
10.1.	Block diagram of test setup.....	57
10.2.	Limit.....	58
10.3.	Test Procedure.....	59
10.4.	Test result.....	61
11.	RF Conducted Spurious Emissions	65
11.1.	Block diagram of test setup.....	65
11.2.	Limits	65
11.3.	Test procedure	65
11.4.	Test result.....	66
11.5.	Original test data	66
12.	Band Edge Compliance (Radiated Method)	85
12.1.	Block diagram of test setup.....	85
12.2.	Limit.....	85
12.3.	Test Procedure.....	85
12.4.	Test result.....	85
13.	Power Line Conducted Emission	98
13.1.	Block diagram of test setup.....	98
13.2.	Power line conducted emission limits	98
13.3.	Test procedure	98
13.4.	Test result.....	99
14.	Antenna Requirements	102
14.1.	Limit.....	102
14.2.	Result	102
15.	Test Setup Photograph	103
16.	Photos of the EUT	105

Test Report Declare

Applicant	:	Kingstate Electronics(Dongguan)Co.,Ltd
Address	:	Shi Chong Industrial Park, Shi Chong Avenue, Xiang Xi Village, Shi Pai Town, Dong Guan City, Guang Dong Province, China.
Equipment under Test	:	True Wireless Earbuds
Model No.	:	TW-E5B
Trade Mark	:	YAMAHA
Manufacturer	:	Kingstate Electronics(Dongguan)Co.,Ltd
Address	:	Shi Chong Industrial Park, Shi Chong Avenue, Xiang Xi Village, Shi Pai Town, Dong Guan City, Guang Dong Province, China.

Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 2 February 2017.

Test Procedure Used:

ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018.

We Declare:

The equipment described above is tested by Dongguan Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Dongguan Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC&ISED standards.

Report No.:	DDT-R21031818-4E01		
Date of Receipt:	Jun. 10, 2021	Date of Test:	Jun. 10, 2021~ Jul. 09, 2021

Prepared By:

Johnny Wang

Johnny Wang/Engineer

Approved By:



Damon Hu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Dongguan Dongdian Testing Service Co., Ltd.

Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	Jul. 09, 2021	

1. Summary of Test Results

Description of Test Item	Standard	Verdict
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10:2013 RSS-247 Issue 2	Pass
20 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.215 ANSI C63.10:2013 RSS-247 Issue 2	Pass
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Number of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10:2013 RSS-247 Issue 2	Pass
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10:2013 RSS-247 Issue 2 RSS-Gen Issue 5	Pass
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10:2013 RSS-Gen Issue 5	Pass
Antenna Requirement	FCC Part 15: 15.203 RSS-Gen Issue 5	Pass

2. General Test Information

2.1. Description of EUT

EUT* Name	: True Wireless Earbuds
Model Number	: TW-E5B
EUT Function Description	: Please reference user manual of this device
Power Supply	: CHARGING CASE: DC 5V/0.5A from external adapter EARBUDS: DC 5V/0.05A from external charging case CHARGING CASE: DC 3.7V, 520mA, 1.924W polymer Li-ion built-in battery EARBUDS: DC 3.7V, 55mA, 0.204W polymer Li-ion built-in battery
Radio Specification	: Bluetooth V5.2
Operation Frequency	: 2402 MHz - 2480 MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK
Data Rate	: 1 Mbps, 2 Mbps, 3 Mbps
Antenna Gain	: Left side: 0.68 dBi Right side: -0.85 dBi
Serial Number	: Z003931SU

Note: EUT is the ab. of equipment under test.

Channel information					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480

25	2427	52	2454	
26	2428	53	2455	

2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
USB cable	N/A	N/A	Length: 26cm, unshielded

2.3. Assistant equipment used for test

Assistant equipment	Manufacturer	Model number	EMC Compliance	SN
Adapter	SAMSUNG	EP-TA200	Input: 100-240~, 50/60Hz, 0.5A; Output: 9V/1.67A or 5V/2A	N/A

2.4. Block diagram of EUT configuration for test

EUT

Test software: BlueTest3

The test software was used to control EUT work in Continuous Tx mode, and select test channel, wireless mode as below table.

Tested mode, channel, information			
Mode	Setting Tx Power	Channel	Frequency (MHz)
GFSK hopping on Tx mode	6	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	6	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	6	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	6	CH0	2402
	6	CH39	2441
	6	CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	6	CH0	2402
	6	CH39	2441
	6	CH78	2480
8DPSK hopping off Tx mode	6	CH0	2402
	6	CH39	2441
	6	CH78	2480

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

2.7. Test laboratory

Dongguan Dongdian Testing Service Co., Ltd.

Add.: No. 17, Zongbu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: ddt@dgddt.com.

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, G-20118

2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz); 1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz); 1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 × 10 ⁻⁸ (Antenna couple method) 5.5 × 10 ⁻⁸ (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz); 1.40 dB (3.6 GHz ≤ f < 8 GHz) 1.66 dB (8 GHz ≤ f < 22 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3×10 ⁻⁸
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V) 4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz) 4.40 dB (6 GHz - 18 GHz) 3.54 dB (18 GHz - 26 GHz) 4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.32 dB (150 kHz - 30 MHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	


3. Equipment Used During Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
☐ RF Connected Test (Tonscend RF Measurement System 1#)					
Spectrum analyzer	R&S	FSU26	200071	Sep. 25, 2020	1 Year
Wideband Radio Communication tester	R&S	CMW500	117491	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	E8267D	US49060192	Sep. 24, 2020	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180737	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC0290	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
☒ RF Connected Test (Tonscend RF Measurement System 2#)					
Spectrum analyzer	R&S	FSU26	101472	Jun. 01, 2021	1 Year
Wideband Radio Communication tester	R&S	CMW500	120259	Jan. 19, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY19060405	Jun. 01, 2021	1 Year
Vector Signal Generator	Agilent	N5182A	MY48180912	Jun. 01, 2021	1 Year
RF Control Unit	Tonsend	JS0806-2	DDT-ZC01449	Jun. 01, 2021	1 Year
Temp&Humi Programmable	ZHIXIANG	ZXGDJS-150L	ZX170110-A	Jun. 01, 2021	1 Year
Test Software	JS Tonscend	JS1120-3	Ver.2.7	N/A	N/A
☐ Radiation 1#chamber					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	Nov. 13, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Nov. 13, 2020	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 07, 2021	1 Year
Pre-amplifier	A.H.	PAM-0118	360	Sep. 28, 2020	1 Year
RF Cable	HUBSER	CP-X2+ CP-X1	W11.03+ W12.02	Sep. 24, 2020	1 Year
RF Cable	N/A	5m+6m+1m	06270619	Sep. 30, 2020	1 Year
MI Cable	HUBSER	C10-01-01-1M	1091629	Sep. 30, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☒ Radiation 2#chamber					
EMI Test Receiver	R&S	ESCI	101364	Sep. 28, 2020	1 Year

Spectrum analyzer	Agilent	E4447A	MY50180031	Jun. 01, 2021	1 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-994	Nov. 13, 2020	1 Year
Active Loop antenna	Schwarzbeck	FMZB-1519	1519-038	Nov. 18, 2020	1 Year
Double Ridged Horn Antenna	Schwarzbeck	BBHA9120	02108	Jul. 11, 2020	1 Year
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	May 07, 2021	1 Year
Pre-amplifier	TERA-MW	TRLA-0040 G35	1013 03	Sep. 28, 2020	1 Year
RF Cable	N/A	14+1.5m	06270619	Sep. 28, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
□Power Line Conducted Emissions Test 1#					
EMI Test Receiver	R&S	ESU8	100316	Sep. 24, 2020	1 Year
LISN 1	R&S	ENV216	101109	Sep. 28, 2020	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	ESH3-Z2	101242	Sep. 24, 2020	1 Year
CE Cable 1	HUBSER	N/A	W10.01	Sep. 24, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A
☑Power Line Conducted Emissions Test 2#					
Test Receiver	R&S	ESPI	101761	Sep. 24, 2020	1 Year
LISN 1	R&S	ENV216	101170	Sep. 28, 2020	1 Year
LISN 2	R&S	ESH2-Z5	100309	Sep. 28, 2020	1 Year
Pulse Limiter	R&S	KH43101	43101180156 8-12#	Jun. 01, 2021	1 Year
CE Cable 2	HUBSER	N/A	W11.02	Sep. 24, 2020	1 Year
Test software	Audix	E3	V 6.11111b	N/A	N/A

4. Maximum Peak Output Power

4.1. Block diagram of test setup

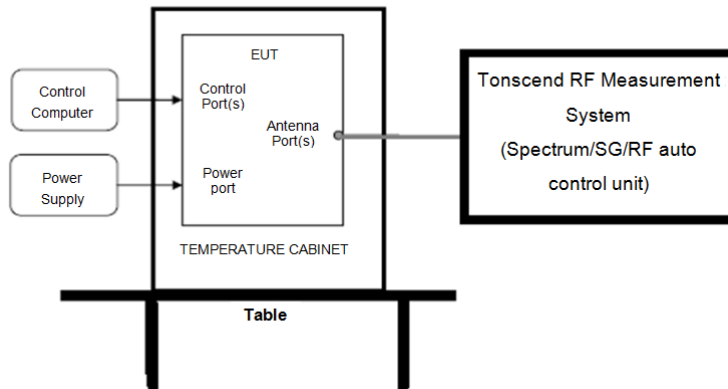

4.2. Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W.

4.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Measure the maximum output power of EUT by spectrum analyzer with PK detector and RBW=3 MHz (above 20 dB bandwidth of measured signal), VBW=10 MHz

Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

4.4. Test result

Left side:


Mode	Antenna	Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GFSK	ANT1	2402	4.40	21	Pass
	ANT1	2441	4.03	21	Pass
	ANT1	2480	4.20	21	Pass
$\pi/4$ -DQPSK	ANT1	2402	6.61	21	Pass
	ANT1	2441	6.23	21	Pass
	ANT1	2480	6.33	21	Pass
8DPSK	ANT1	2402	6.71	21	Pass
	ANT1	2441	6.33	21	Pass
	ANT1	2480	6.45	21	Pass


Right side:

Mode	Antenna	Freq. (MHz)	Result (dBm)	Limit (dBm)	Verdict
GFSK	ANT1	2402	6.09	21	Pass
	ANT1	2441	6.40	21	Pass
	ANT1	2480	3.79	21	Pass
$\pi/4$ -DQPSK	ANT1	2402	6.09	21	Pass
	ANT1	2441	6.37	21	Pass
	ANT1	2480	5.87	21	Pass
8DPSK	ANT1	2402	6.20	21	Pass
	ANT1	2441	6.48	21	Pass
	ANT1	2480	5.99	21	Pass

4.5. Original test data


Left side:

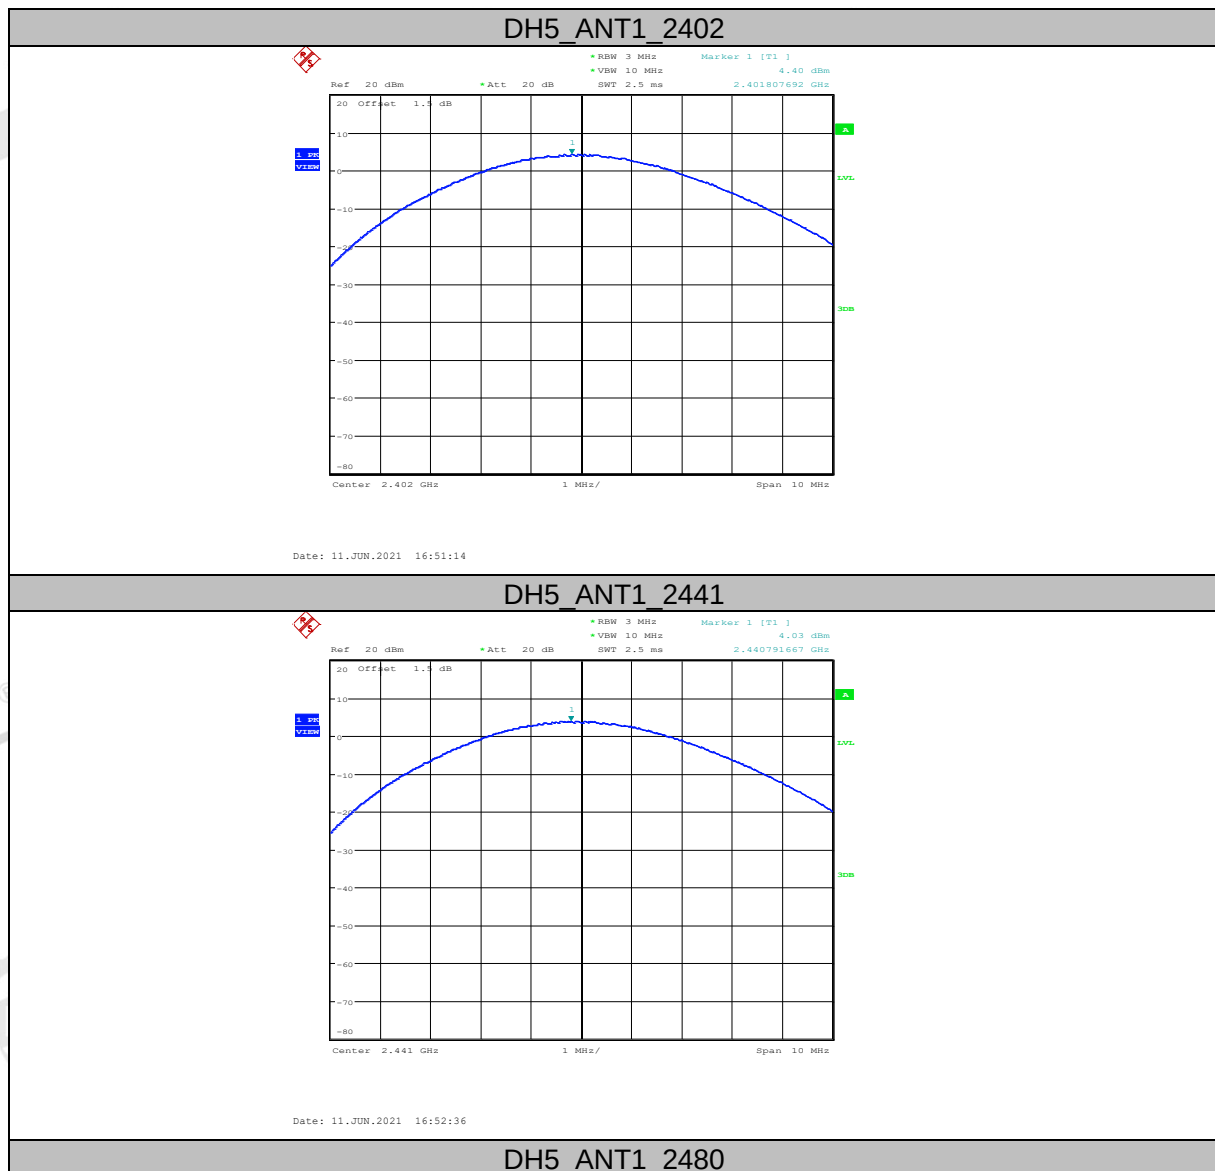

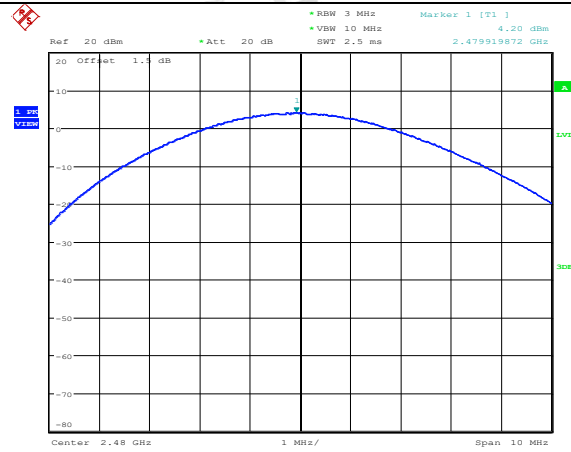


Date: 11.JUN.2021 16:53:43

2DH5 ANT1 2402

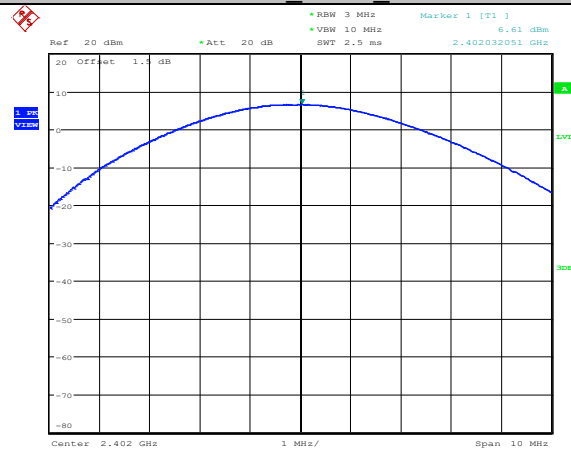


Date: 11.JUN.2021 16:55:47

2DH5 ANT1 2441

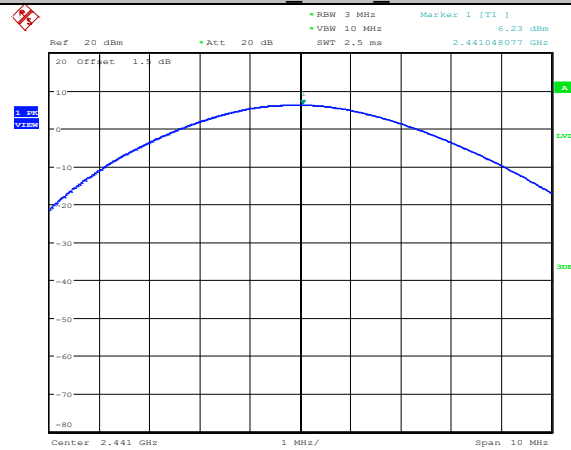


Date: 11.JUN.2021 16:57:25

2DH5 ANT1 2480

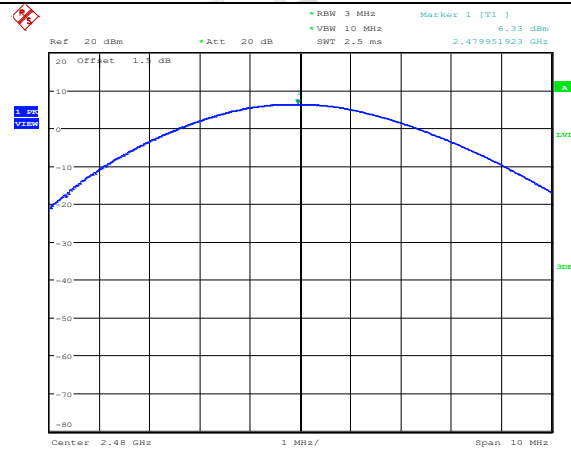


Date: 11.JUN.2021 16:59:20

3DH5 ANT1 2402

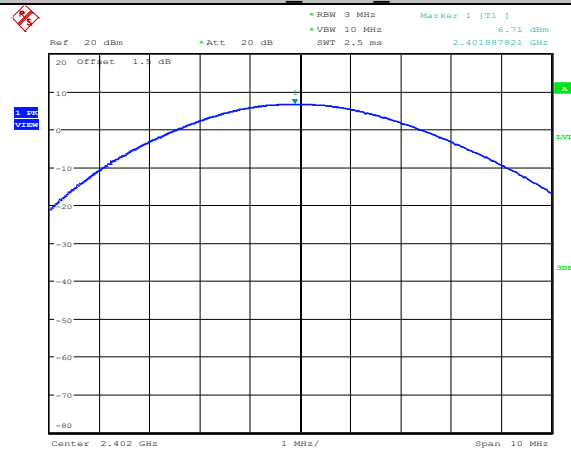


Date: 11.JUN.2021 17:01:07

3DH5 ANT1 2441


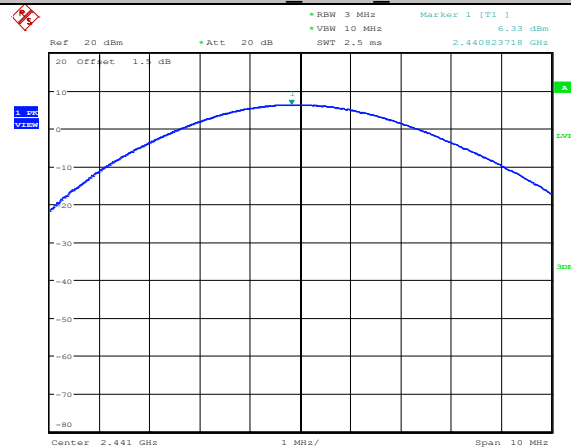



Date: 11.JUN.2021 17:02:32

3DH5 ANT1 2480

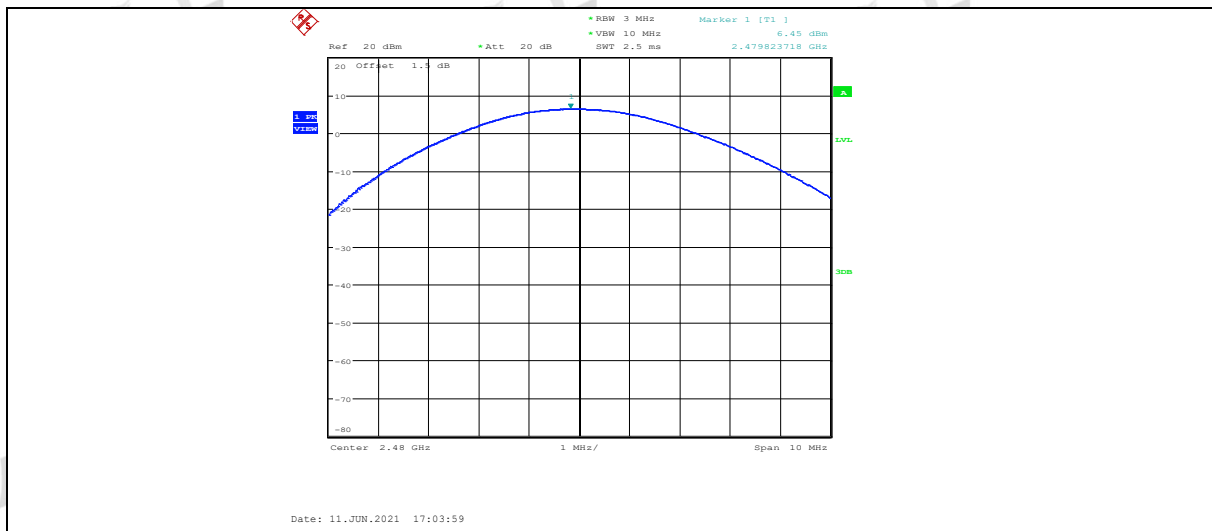


Right side:

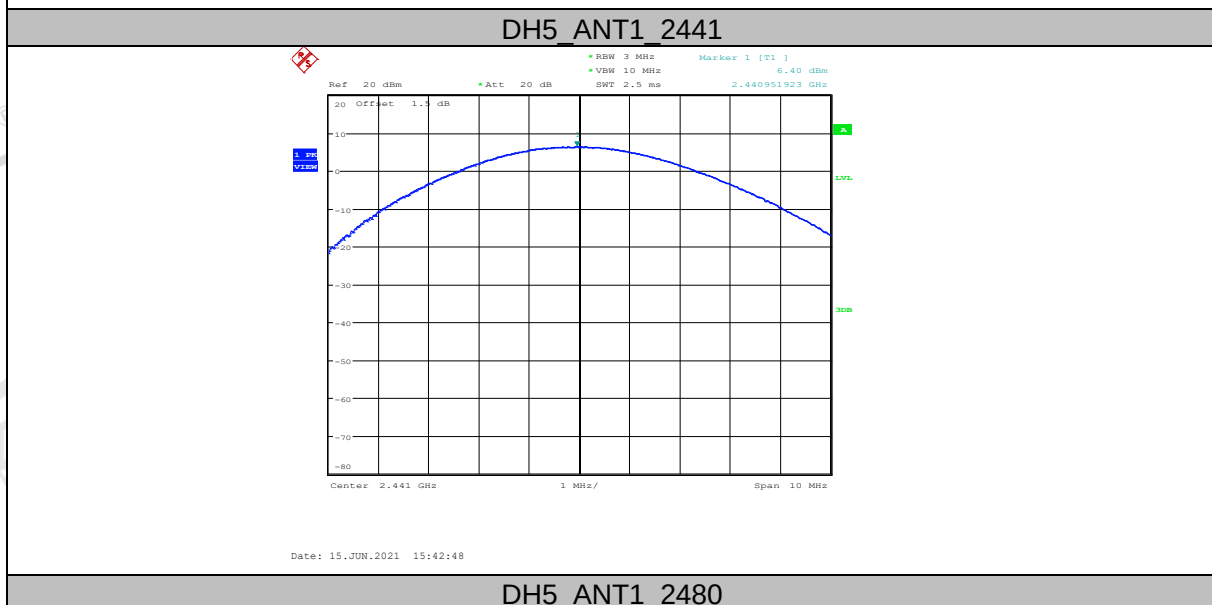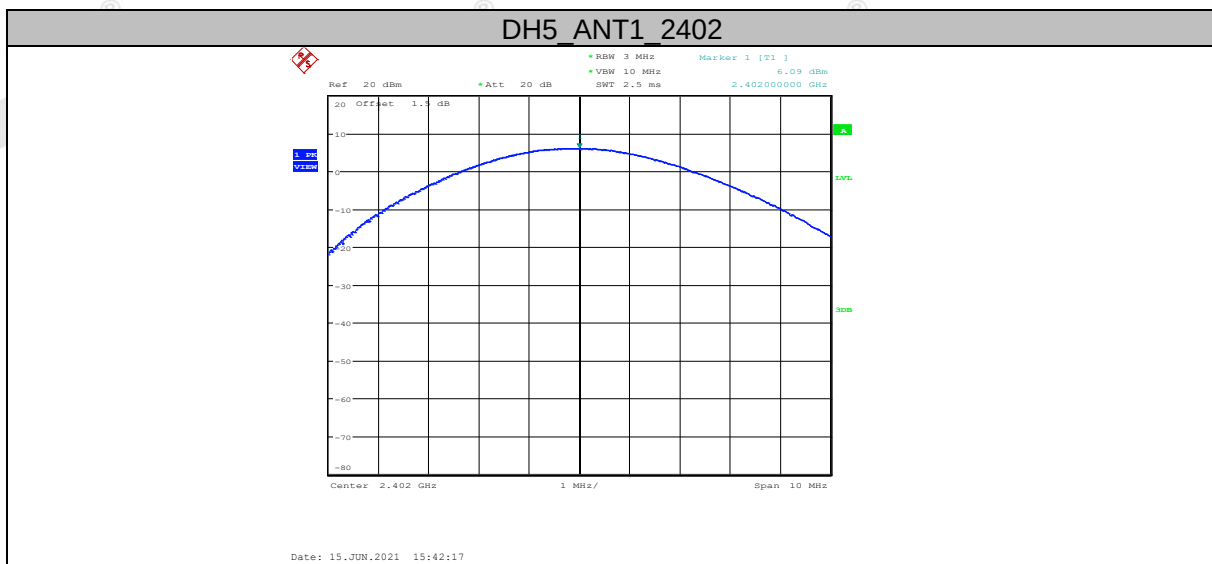


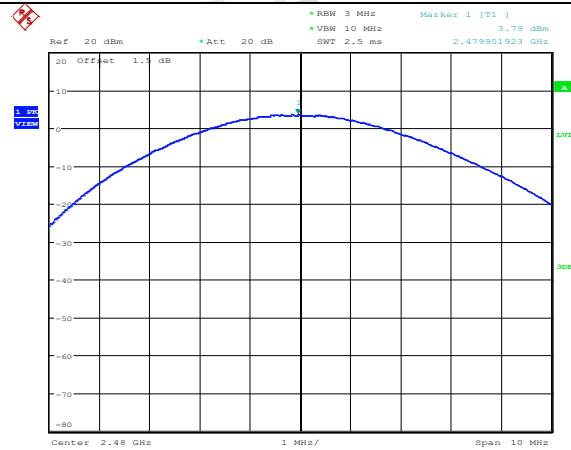


2DH5 ANT1 2402

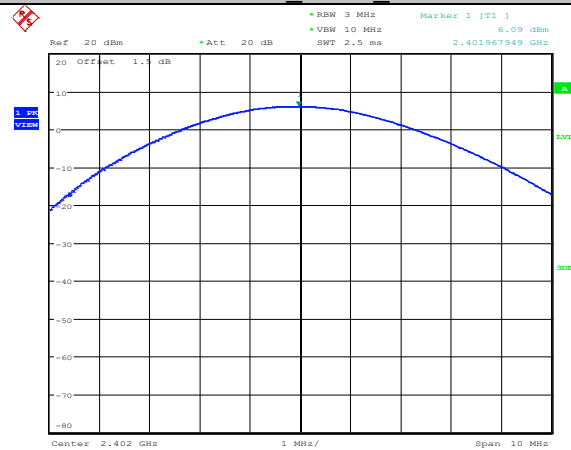

2DH5 ANT1 2441

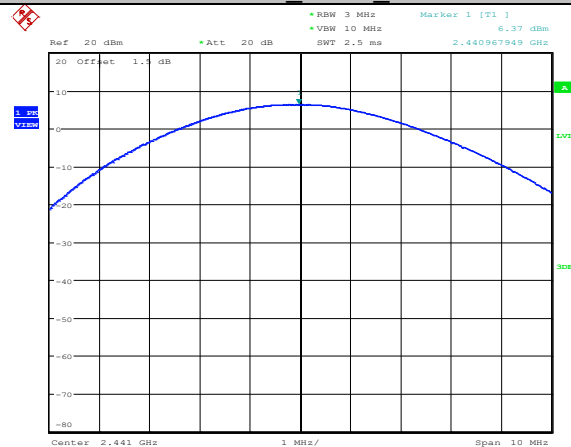


2DH5 ANT1 2480

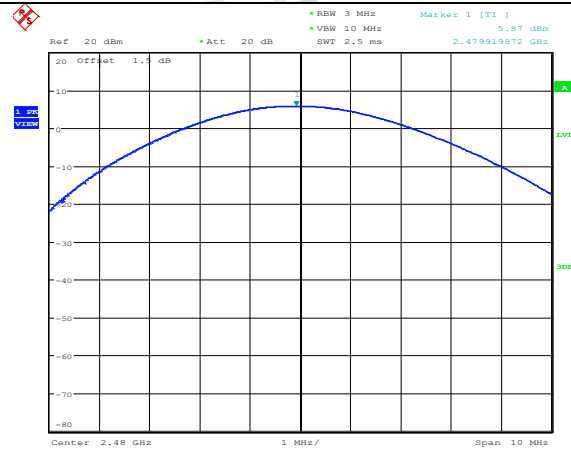


Date: 15 JUN. 2021 15:44:48

3DH5 ANT1 2402

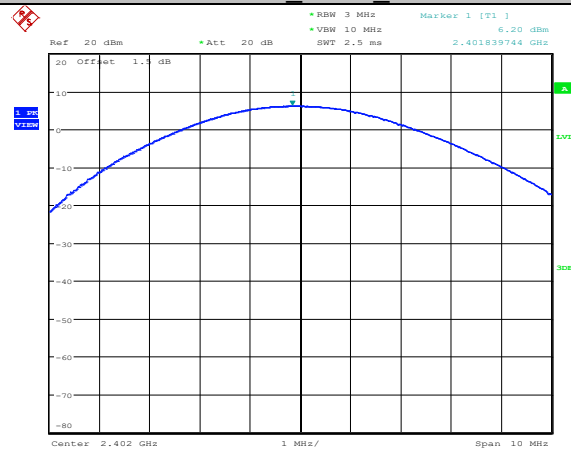


Date: 15 JUN. 2021 15:38:15

3DH5 ANT1 2441

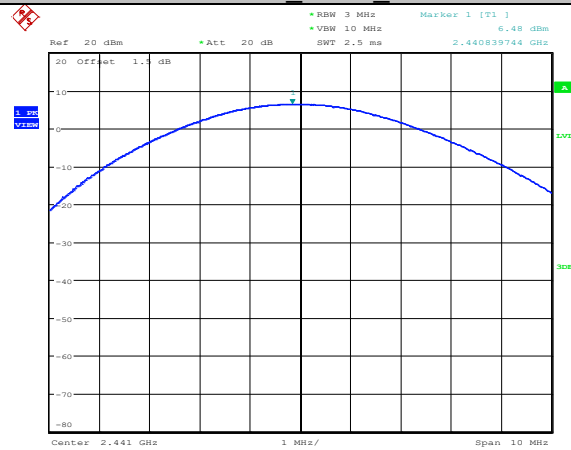

Date: 15 JUN. 2021 15:39:42

3DH5 ANT1 2480

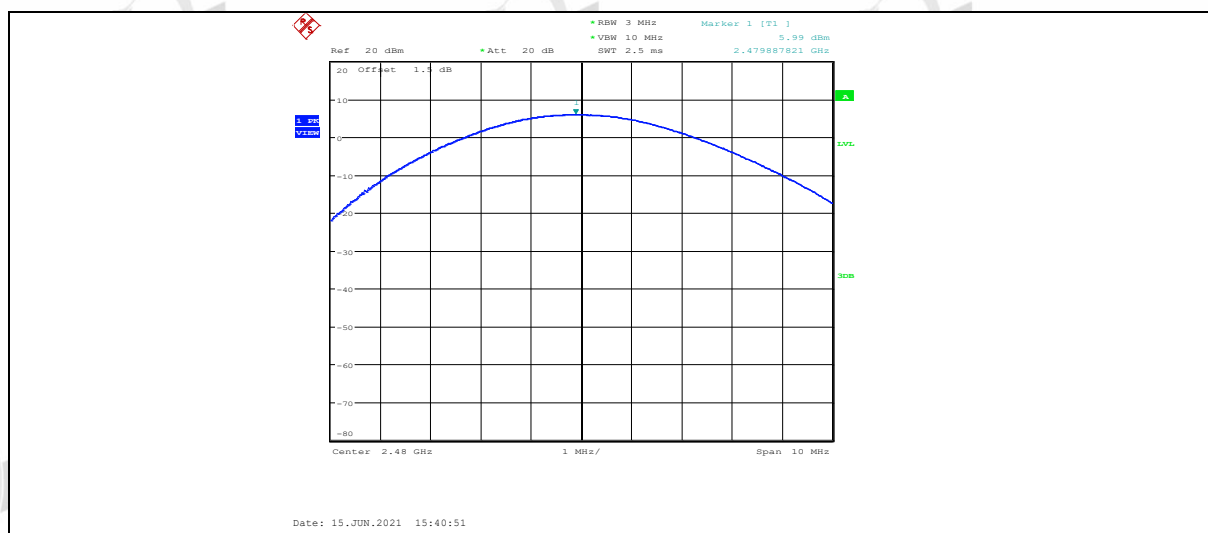

5. 20 dB Bandwidth and 99% Bandwidth

5.1. Block diagram of test setup

Same as section 4.1

5.2. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 kHz RBW and 100 kHz VBW. The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

5.4. Test result

Left side:

Mode	Freq. (MHz)	20 dB bandwidth Result (MHz)	99% bandwidth Result (MHz)	Verdict
GFSK	2402	0.960	0.874	Pass
	2441	0.960	0.880	Pass
	2480	0.958	0.876	Pass
$\pi/4$ -DQPSK	2402	1.342	1.194	Pass
	2441	1.342	1.196	Pass
	2480	1.342	1.192	Pass
8DPSK	2402	1.310	1.190	Pass
	2441	1.308	1.188	Pass
	2480	1.308	1.186	Pass


Right side:


Mode	Freq. (MHz)	20 dB bandwidth Result (MHz)	99% bandwidth Result (MHz)	Verdict
GFSK	2402	0.958	0.898	Pass
	2441	0.960	0.884	Pass
	2480	0.958	0.884	Pass
$\pi/4$ -DQPSK	2402	1.338	1.196	Pass
	2441	1.330	1.192	Pass
	2480	1.340	1.194	Pass
8DPSK	2402	1.308	1.194	Pass
	2441	1.312	1.192	Pass

	2480	1.304	1.190	Pass
--	------	-------	-------	------

5.5. Original test data


Left side:

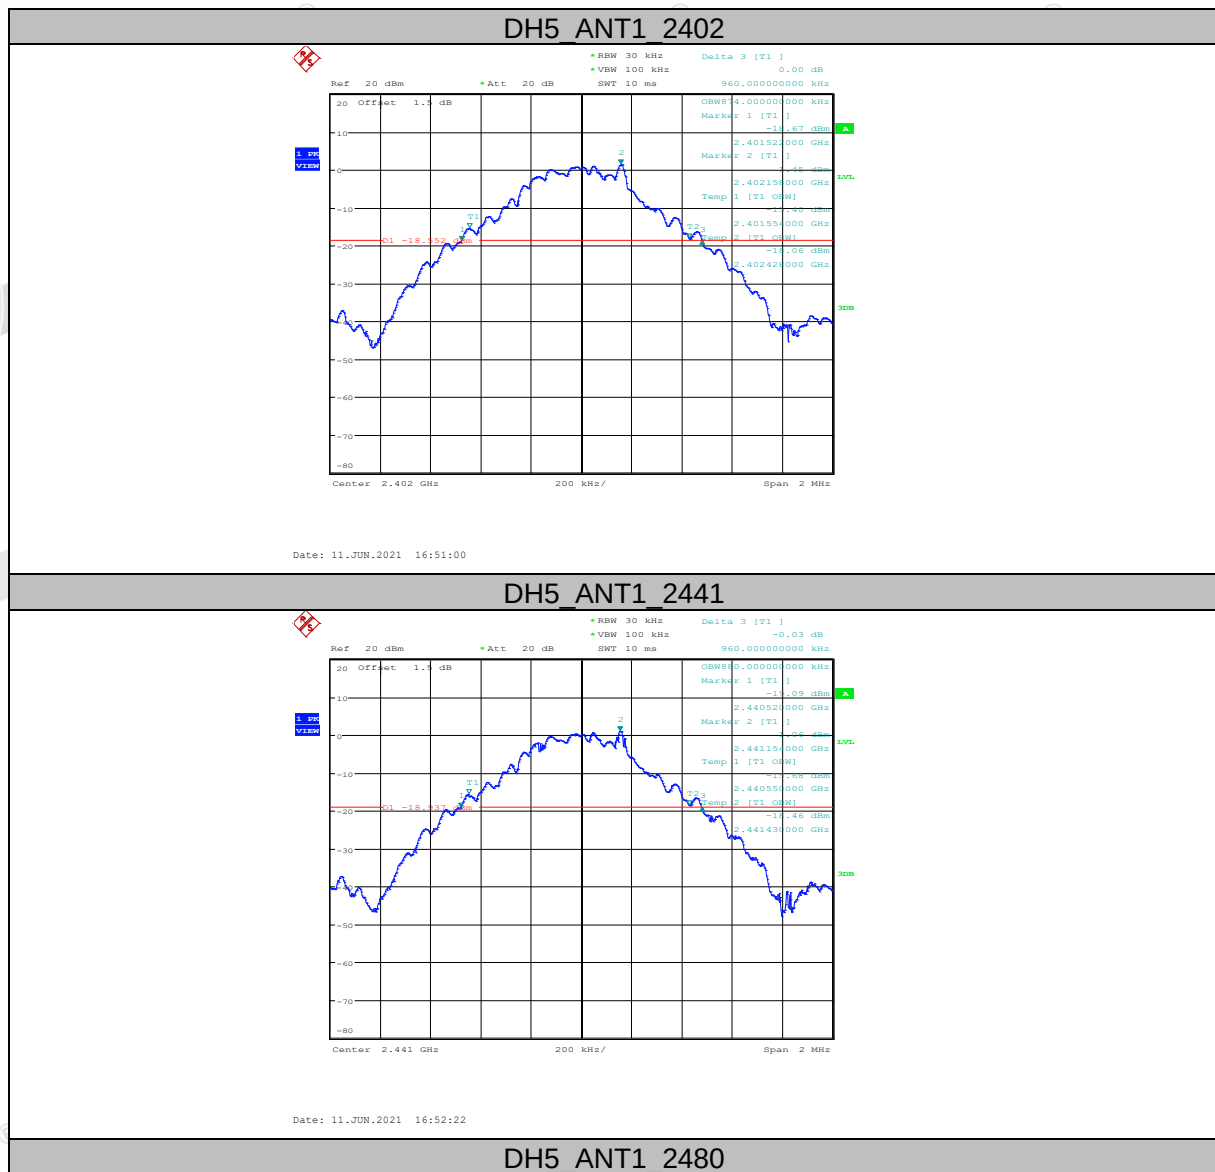

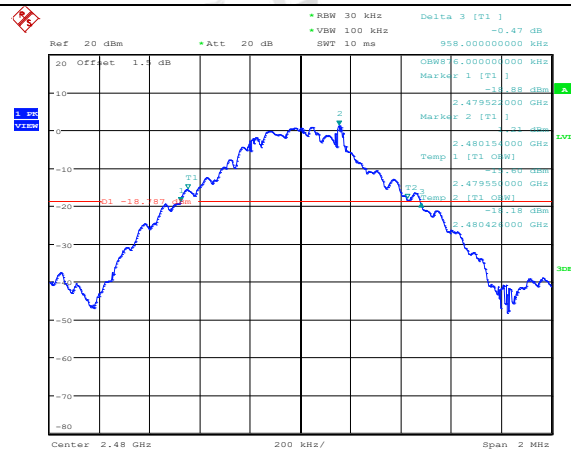


Date: 11.JUN.2021 16:53:29

2DH5 ANT1_2402

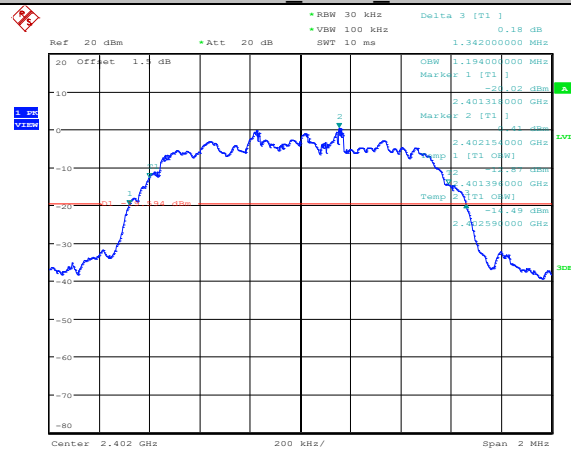


Date: 11.JUN.2021 16:55:26

2DH5 ANT1_2441

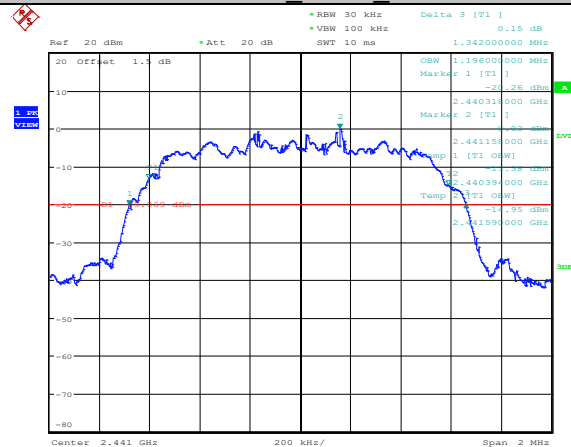


Date: 11.JUN.2021 16:57:10

2DH5 ANT1_2480

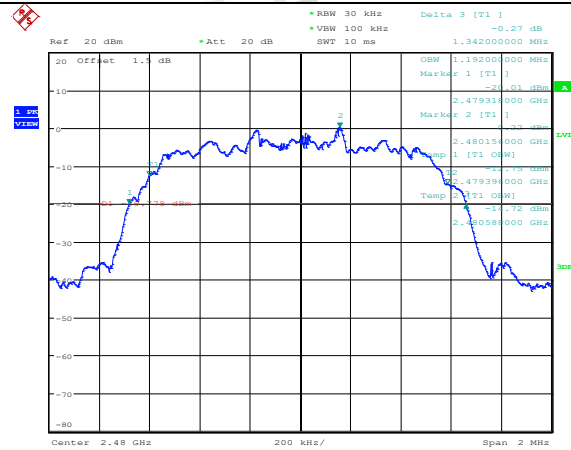


Date: 11.JUN.2021 16:58:59

3DH5 ANT1_2402

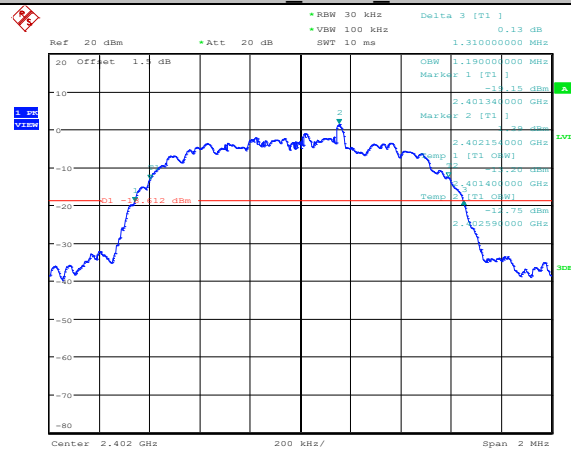


Date: 11.JUN.2021 17:00:53

3DH5 ANT1_2441


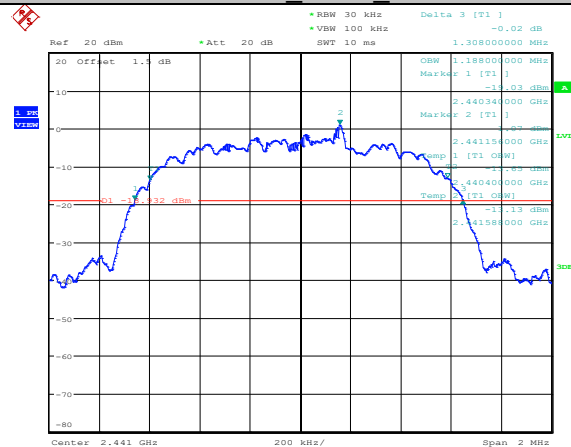



Date: 11.JUN.2021 17:02:18

3DH5 ANT1_2480

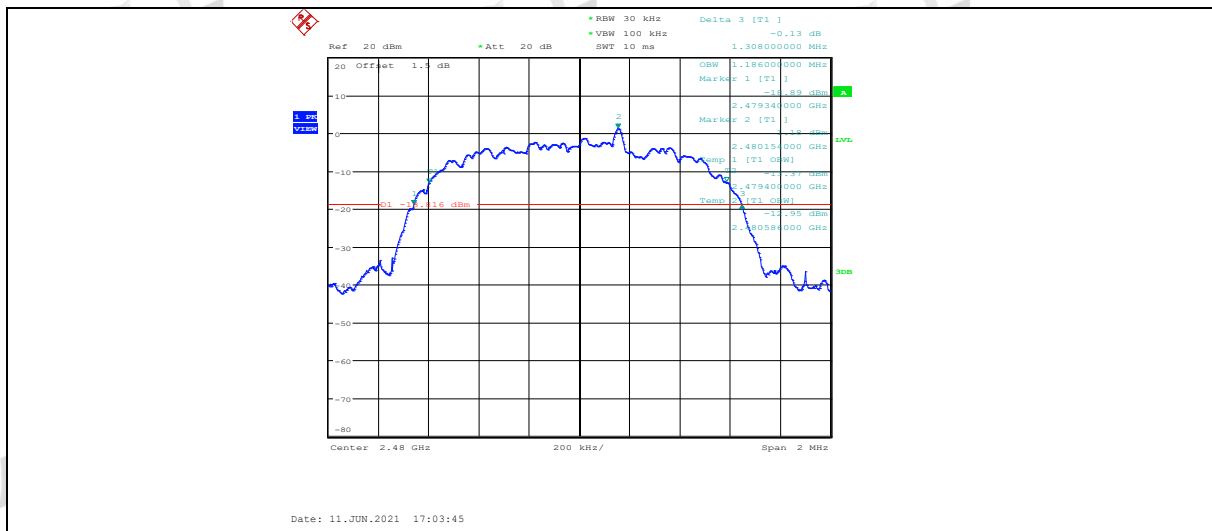


Right side:

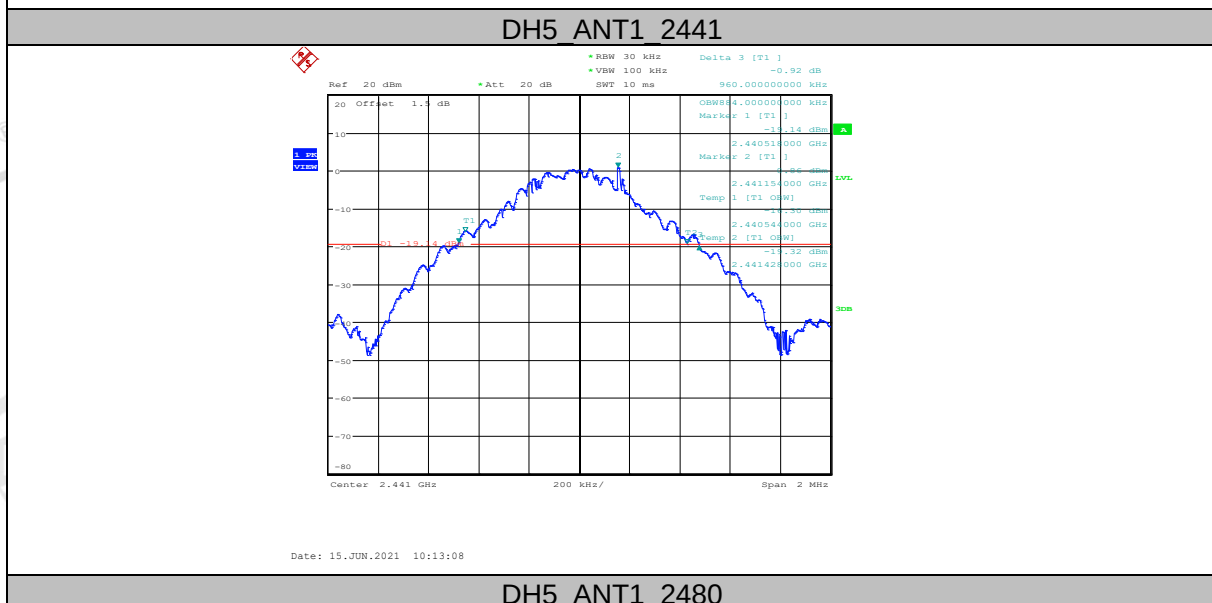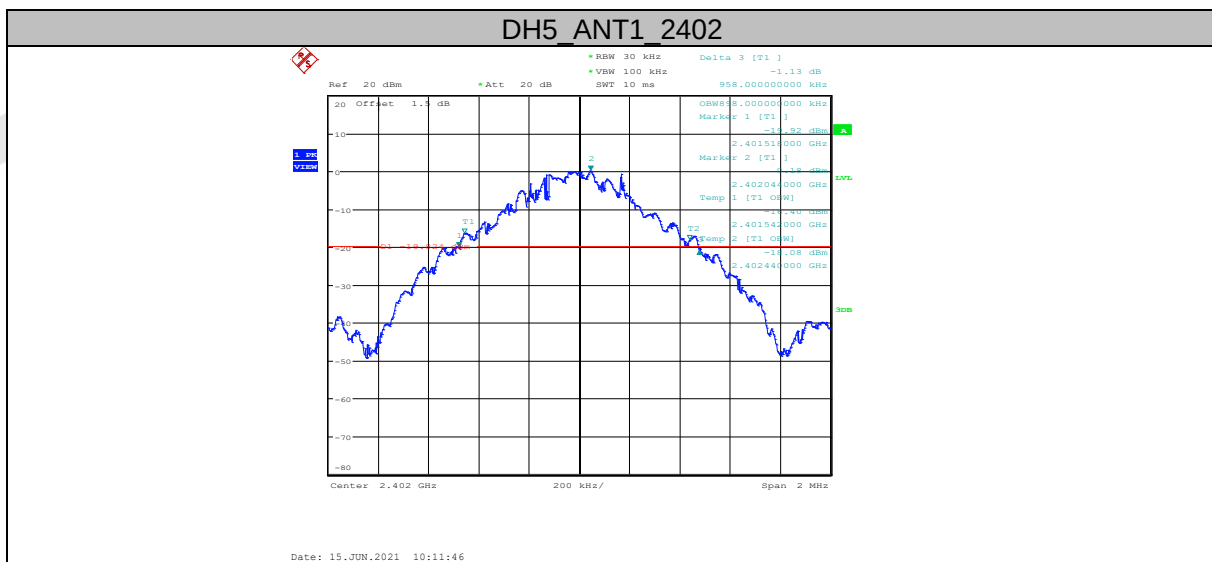

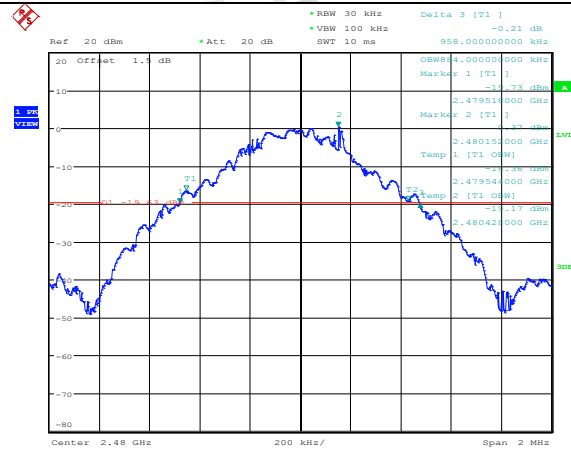


Date: 15.JUN.2021 10:14:11

2DH5 ANT1_2402

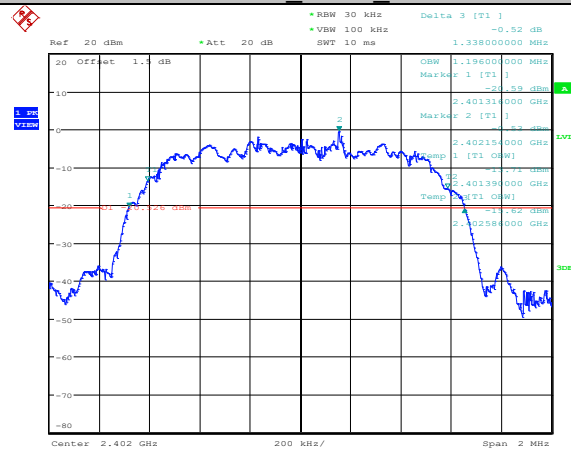


Date: 15.JUN.2021 10:15:35

2DH5 ANT1_2441

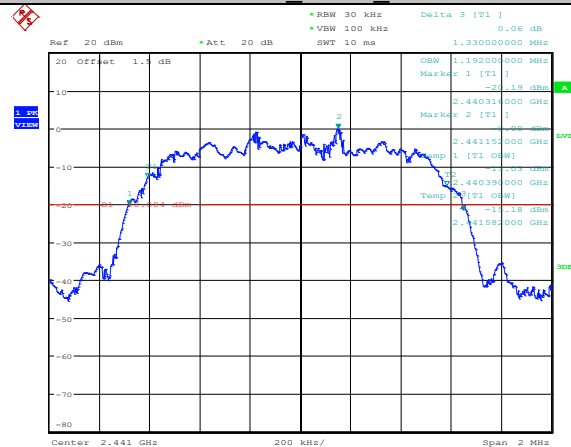


Date: 15.JUN.2021 10:16:51

2DH5 ANT1_2480

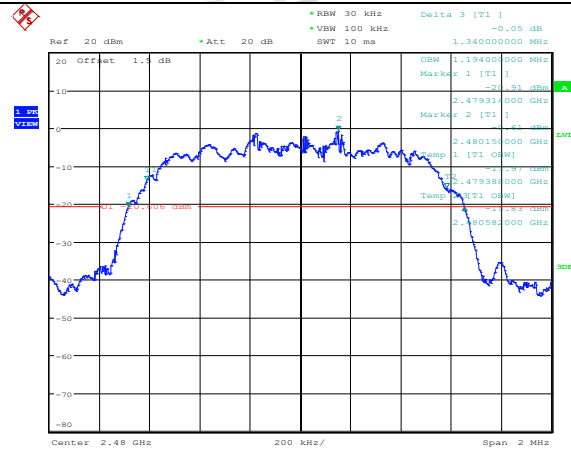


Date: 15.JUN.2021 10:18:19

3DH5 ANT1_2402

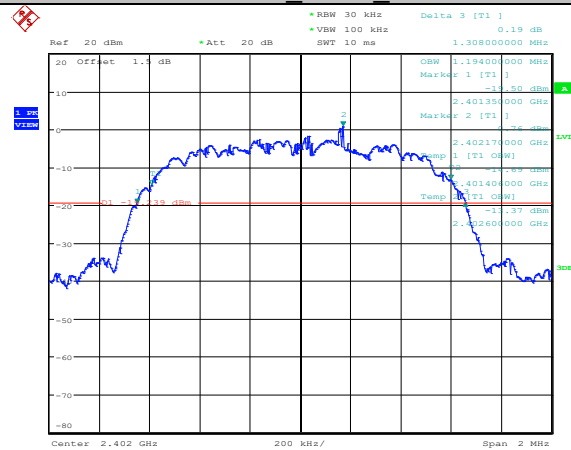


Date: 15.JUN.2021 15:38:01

3DH5 ANT1_2441

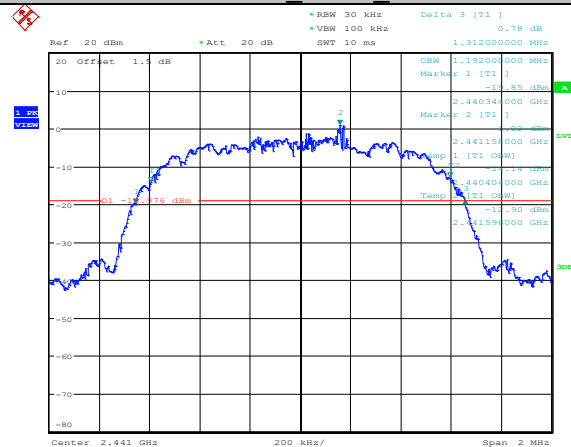

Date: 15.JUN.2021 15:39:29

3DH5 ANT1_2480

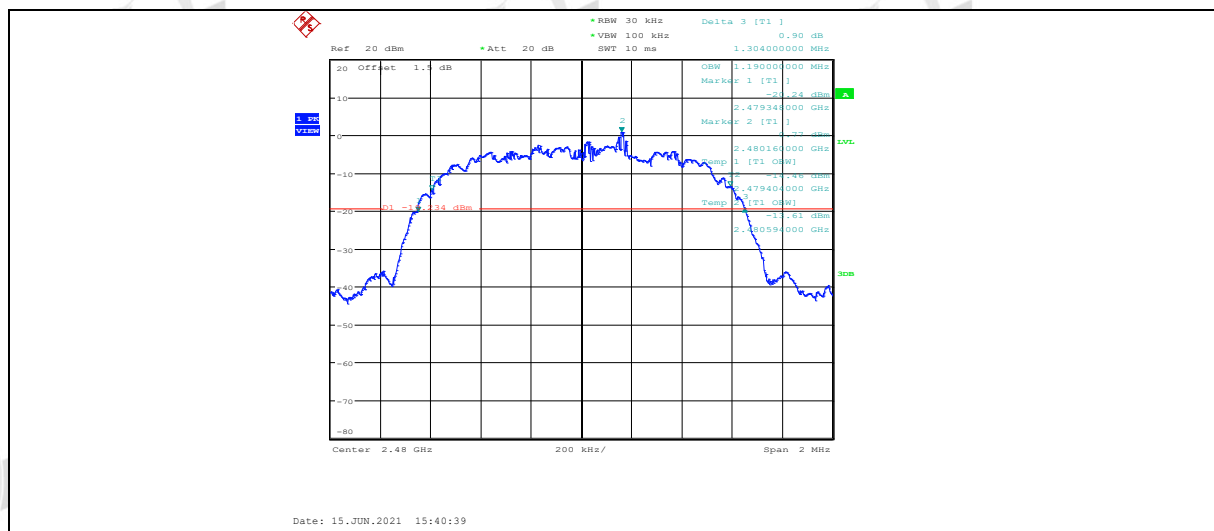

6. Carrier Frequency Separation

6.1. Block diagram of test setup

Same as section 4.1

6.2. Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

6.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The carrier frequency was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

6.4. Test result

Left side:


Mode	Channel separation (MHz)	20dB bandwidth (MHz) (worse case)	Limit (MHz) 2/3 of 20dB bandwidth	Verdict
GFSK	1.003	0.960	≥ 0.640	Pass
$\pi/4$ -DQPSK	1.003	1.342	≥ 0.895	Pass
8DPSK	1.006	1.310	≥ 0.873	Pass

Right side:


Mode	Channel separation (MHz)	20dB bandwidth (MHz) (worse case)	Limit (MHz) 2/3 of 20dB bandwidth	Verdict
GFSK	1.000	0.960	≥ 0.640	Pass
$\pi/4$ -DQPSK	1.000	1.340	≥ 0.893	Pass
8DPSK	1.003	1.312	≥ 0.875	Pass

6.5. Original test data

Left side:

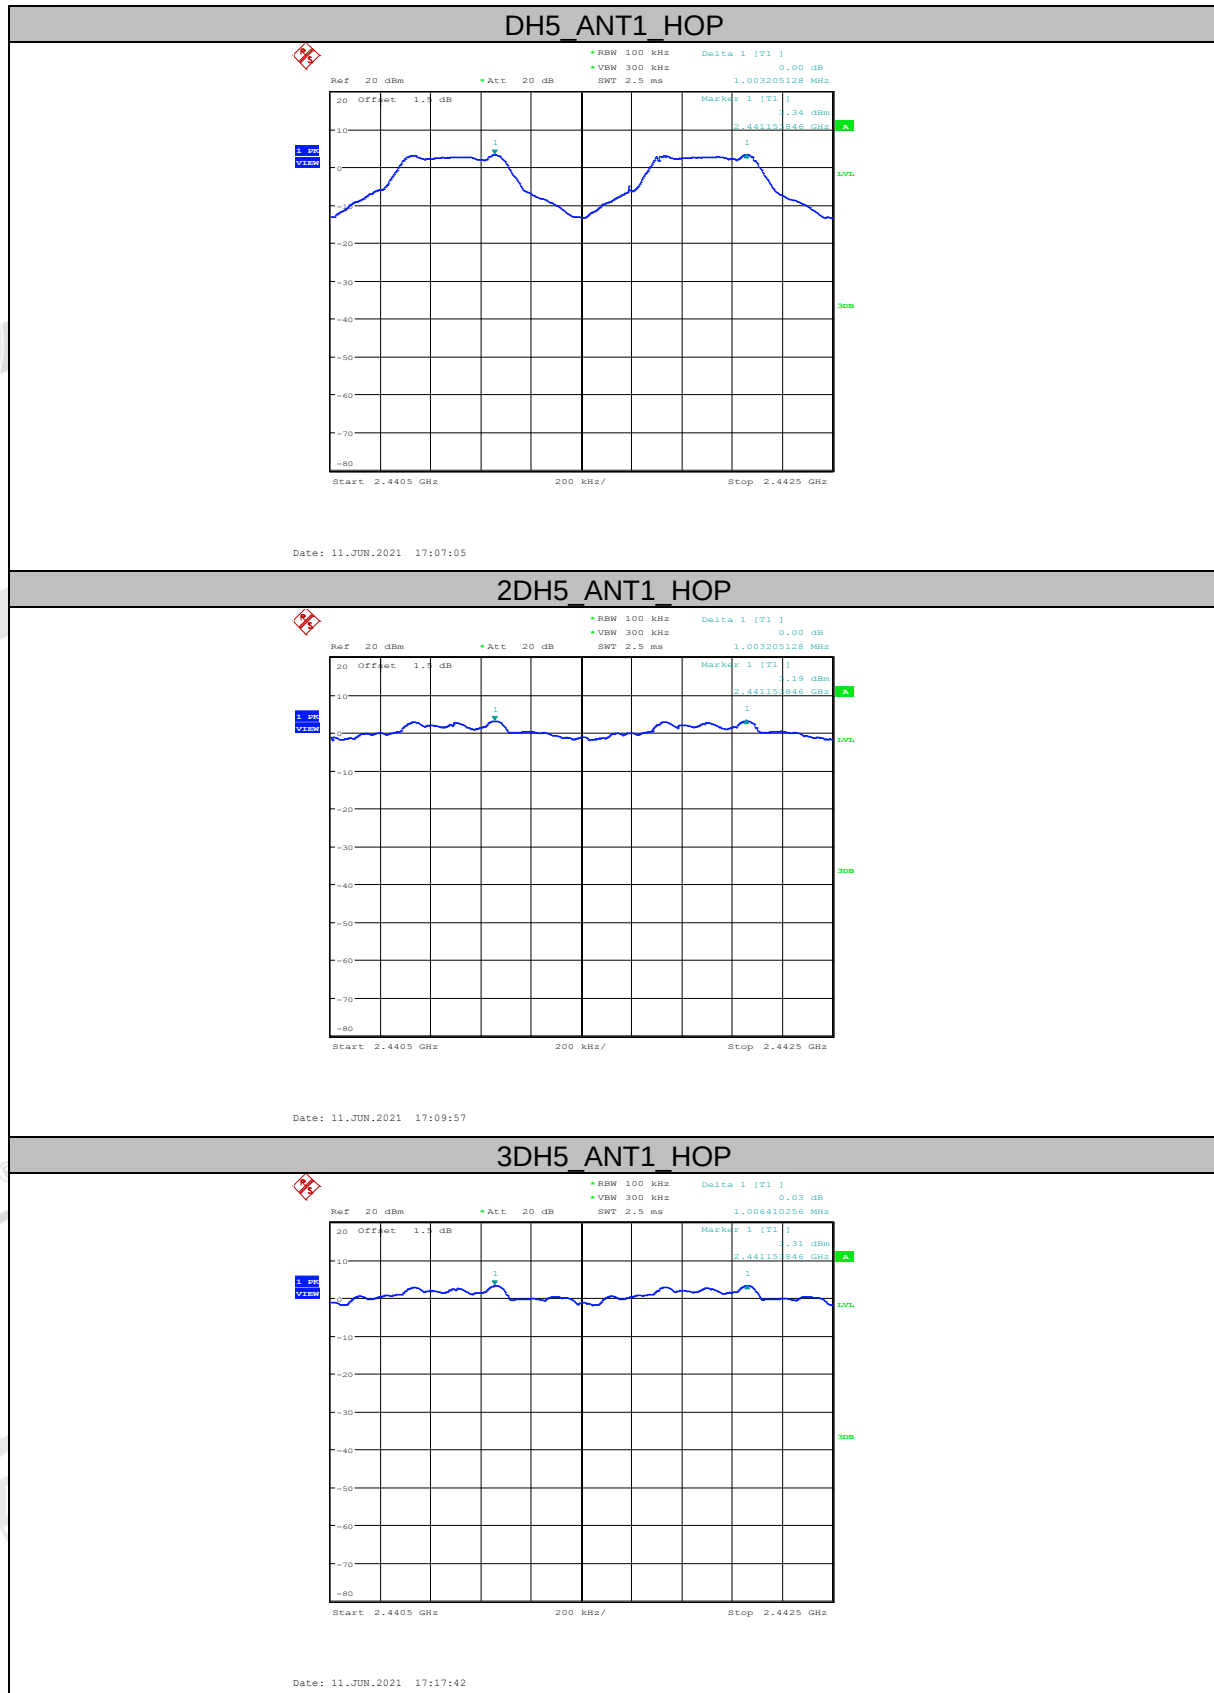

Right side:

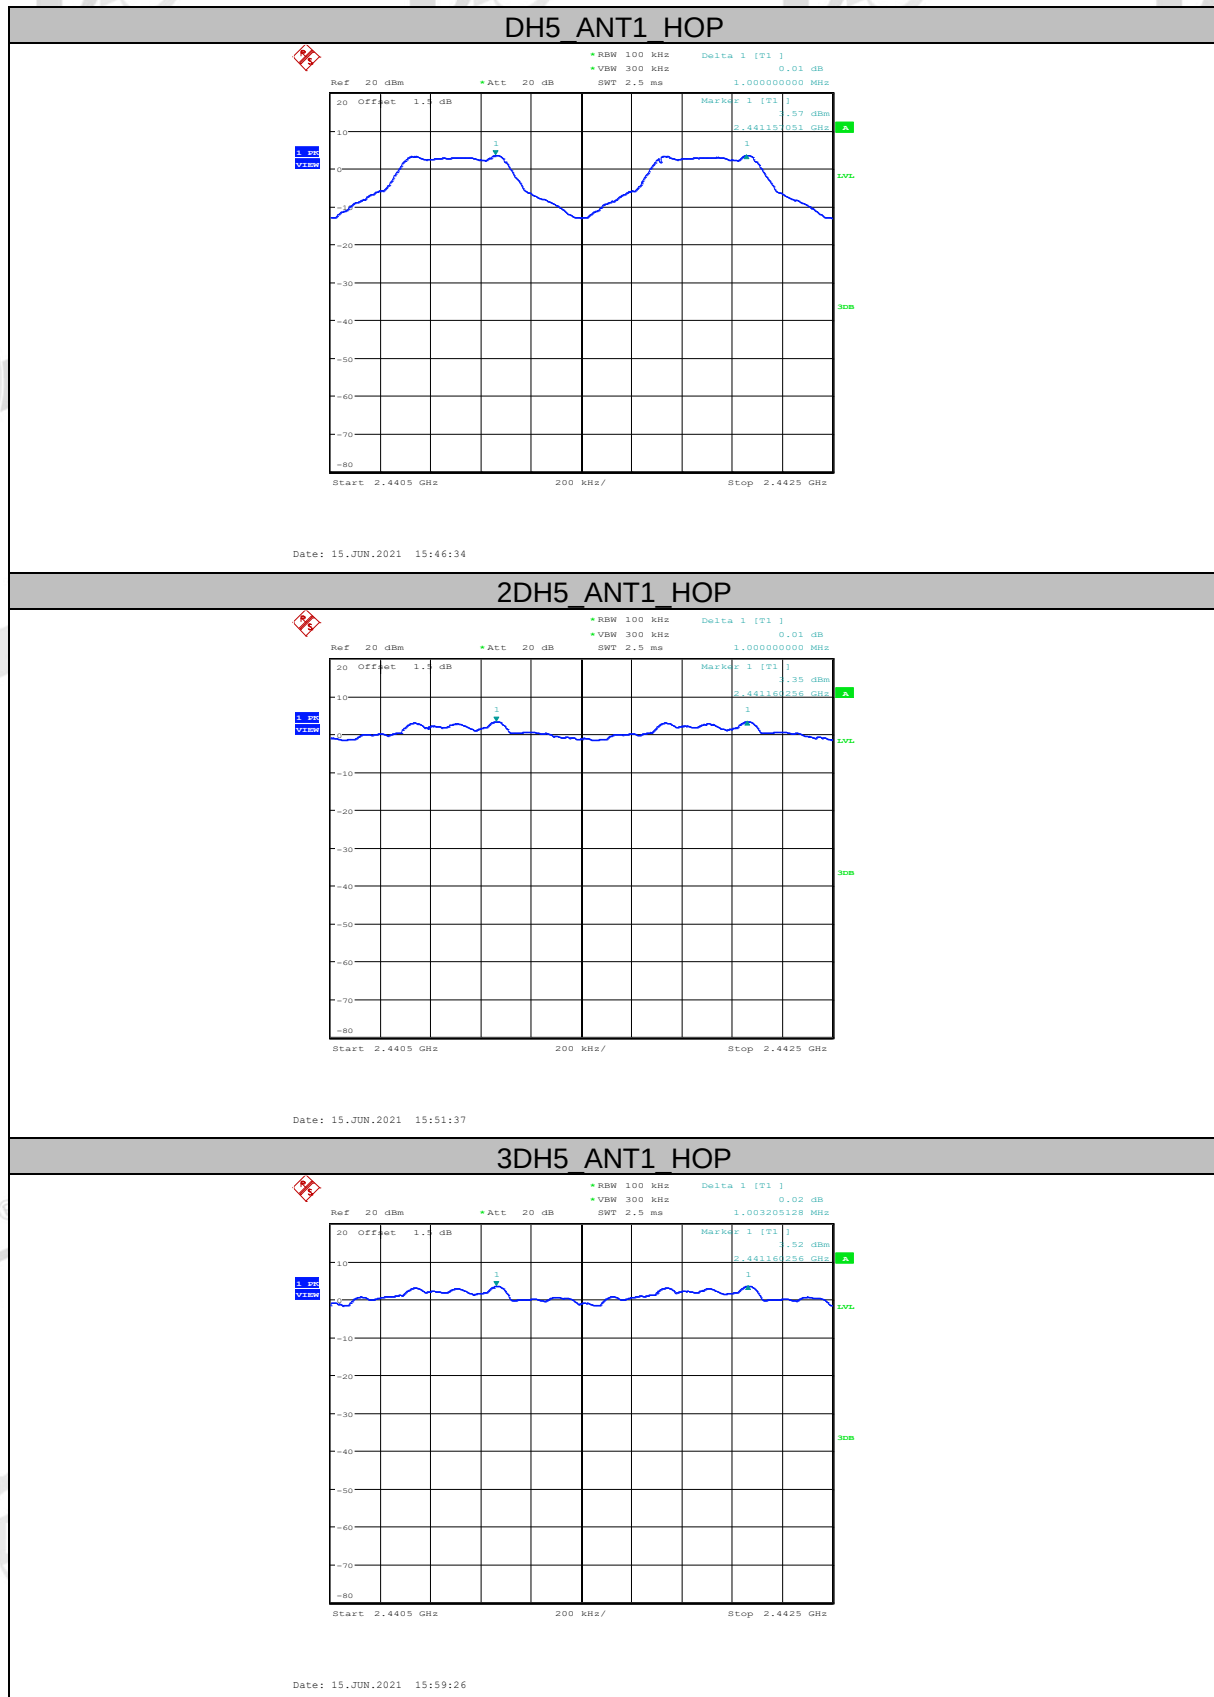

7. Number of Hopping Channel

7.1. Block diagram of test setup

Same as section 4.1

7.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

7.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The number of hopping channels was measured by spectrum analyzer with 100 kHz RBW and 300 kHz VBW.

7.4. Test result

Left side:

Mode	Number of hopping channels	Limit	Verdict
GFSK	79	>15	Pass
$\pi/4$ -DQPSK	79	>15	Pass
8DPSK	79	>15	Pass

Right side:


Mode	Number of hopping channels	Limit	Verdict
GFSK	79	>15	Pass
$\pi/4$ -DQPSK	79	>15	Pass
8DPSK	79	>15	Pass

7.5. Original test data

Left side:



Right side:

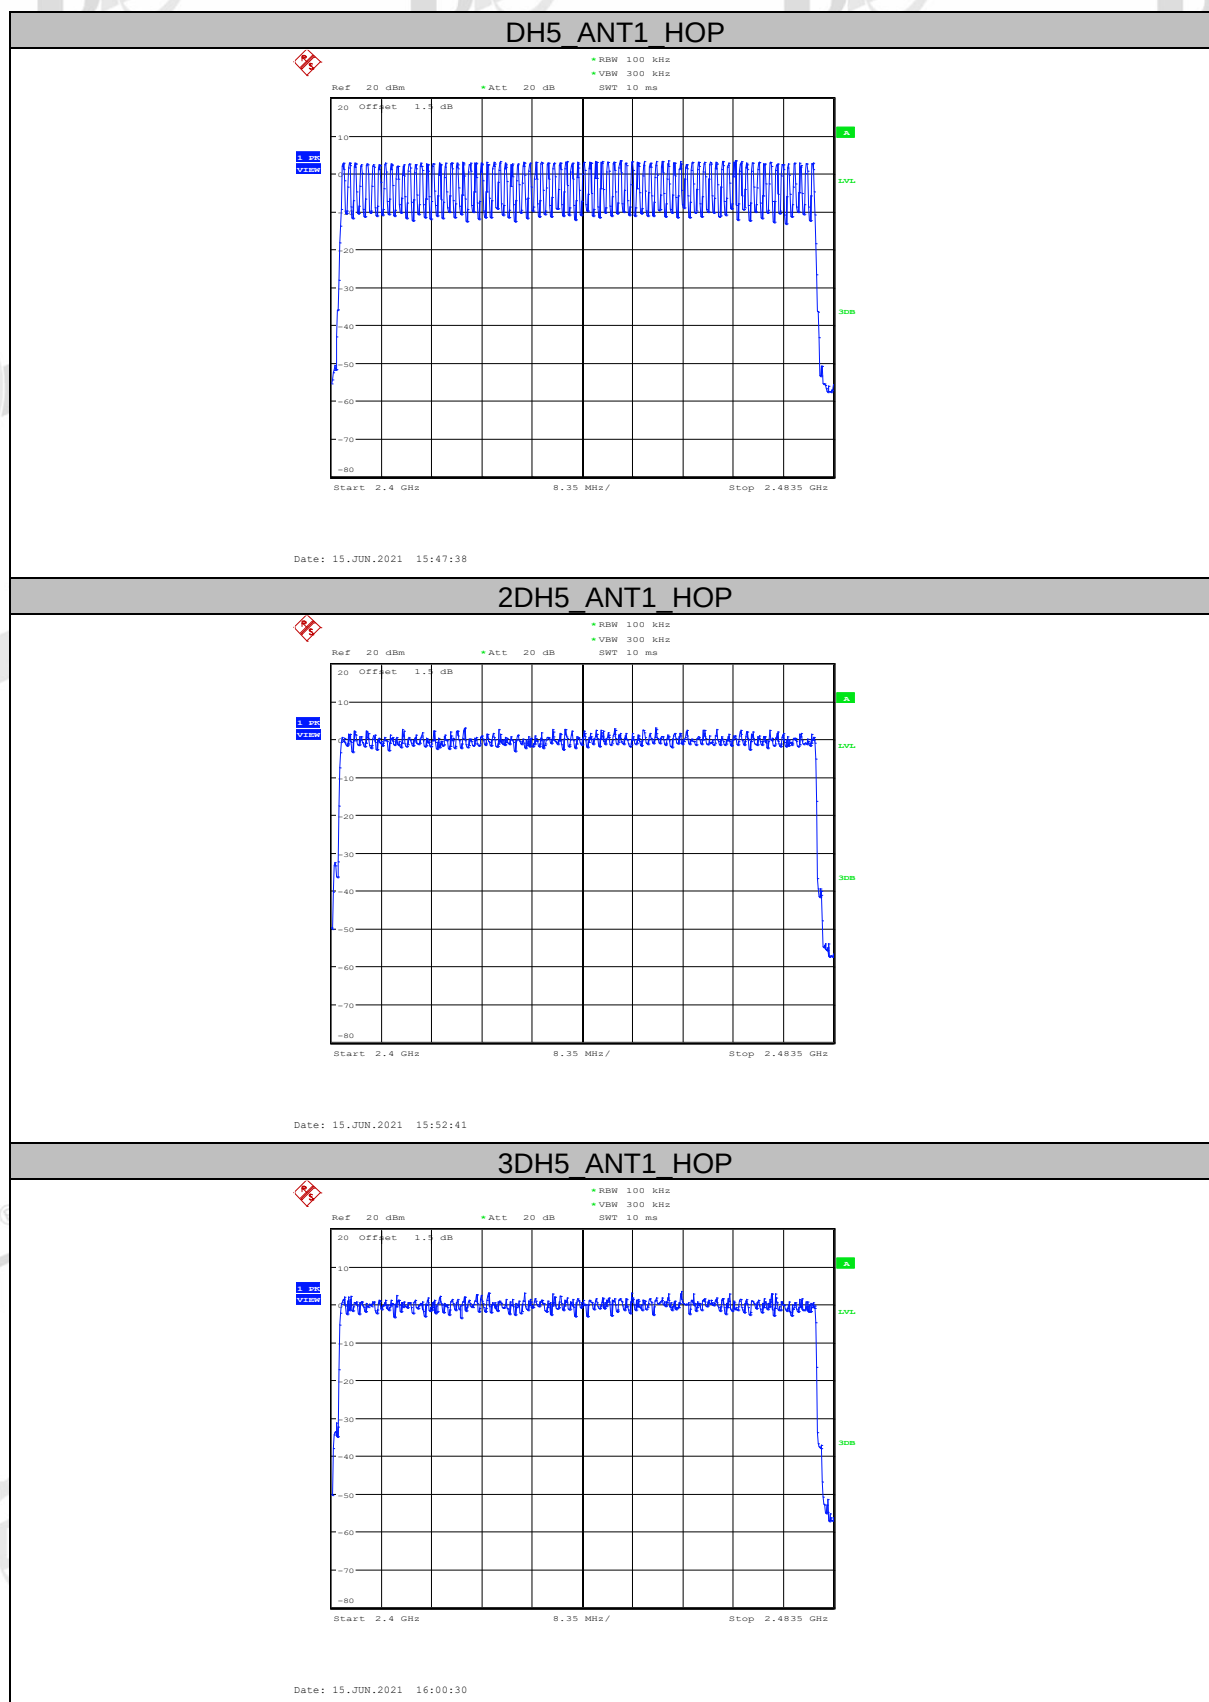

8. Dwell Time

8.1. Block diagram of test setup

Same as section 4.1

8.2. Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

8.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$
- (3) Measure the hopping number and on time of each pulse with spectrum analyzer in zero span set, and calculate dwell time with formula Dwell time = total hops * pulse's on time.

8.4. Test result

Left side:

Mode	Dwell time (s)	Pulse's on time (ms)	Total hops	Limit	Verdict
DH1	0.036	0.38	95	<400ms	Pass
DH3	0.173	1.62	107	<400ms	Pass
DH5	0.311	2.88	108	<400ms	Pass
2DH1	0.118	0.37	319	<400ms	Pass
2DH3	0.261	1.63	160	<400ms	Pass
2DH5	0.34	2.88	118	<400ms	Pass
3DH1	0.118	0.37	320	<400ms	Pass
3DH3	0.245	1.62	151	<400ms	Pass
3DH5	0.308	2.88	107	<400ms	Pass

Note: Dwell time = total hops * pulse's on time.

Right side:


Mode	Dwell time (s)	Pulse's on time (ms)	Total hops	Limit	Verdict
DH1	0.117	0.37	316	<400ms	Pass
DH3	0.253	1.63	155	<400ms	Pass
DH5	0.306	2.89	106	<400ms	Pass
2DH1	0.117	0.37	316	<400ms	Pass
2DH3	0.248	1.63	152	<400ms	Pass
2DH5	0.320	2.88	111	<400ms	Pass
3DH1	0.117	0.37	316	<400ms	Pass



3DH3	0.271	1.62	167	<400ms	Pass
3DH5	0.308	2.88	107	<400ms	Pass

Note: Dwell time = total hops * pulse's on time.


8.5. Original test data


Left side:

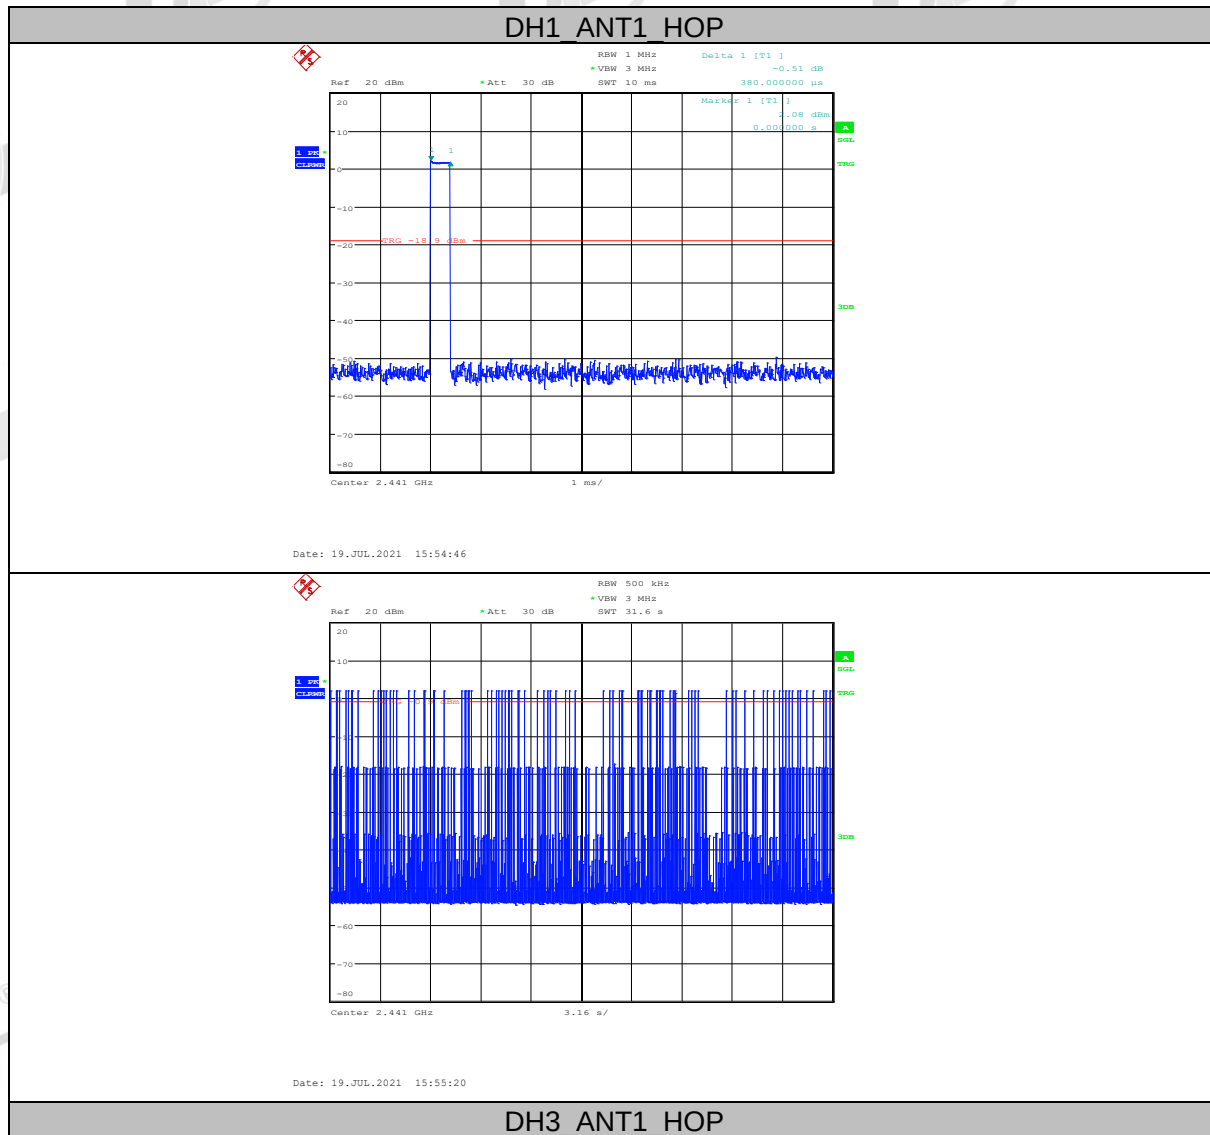

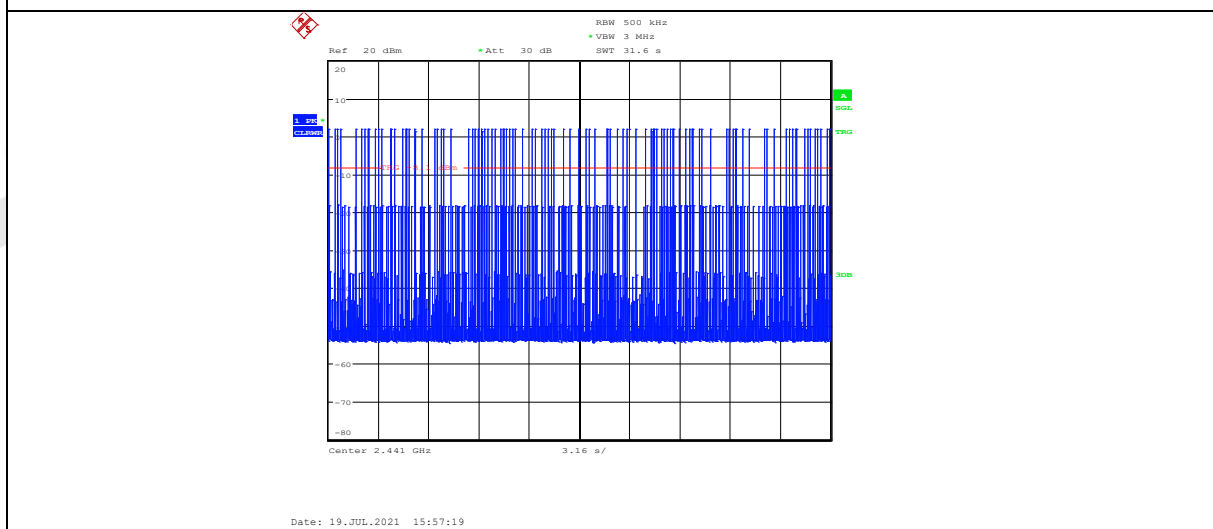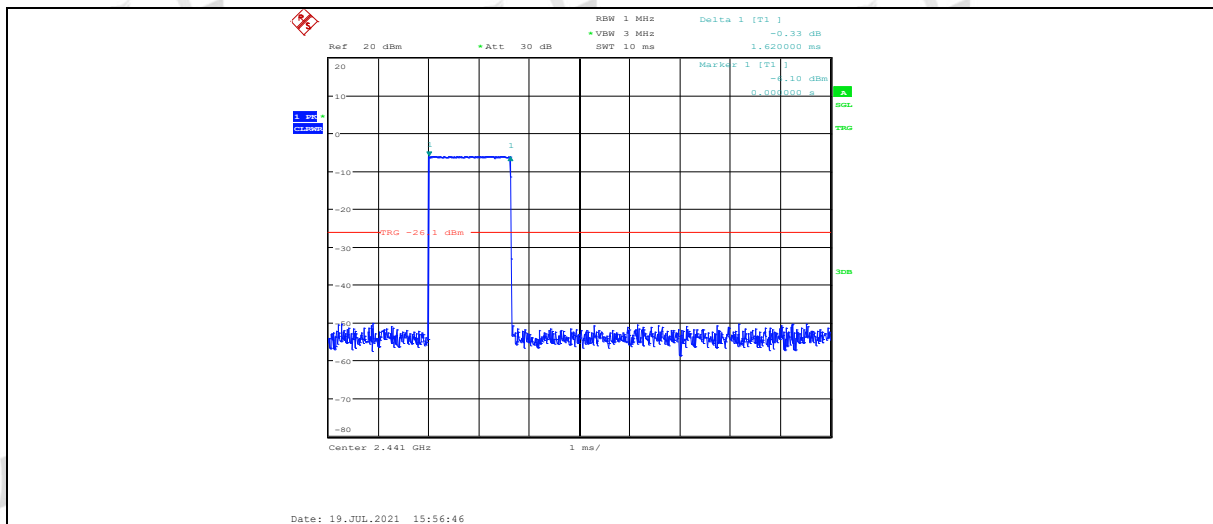


DH5_ANT1_HOP

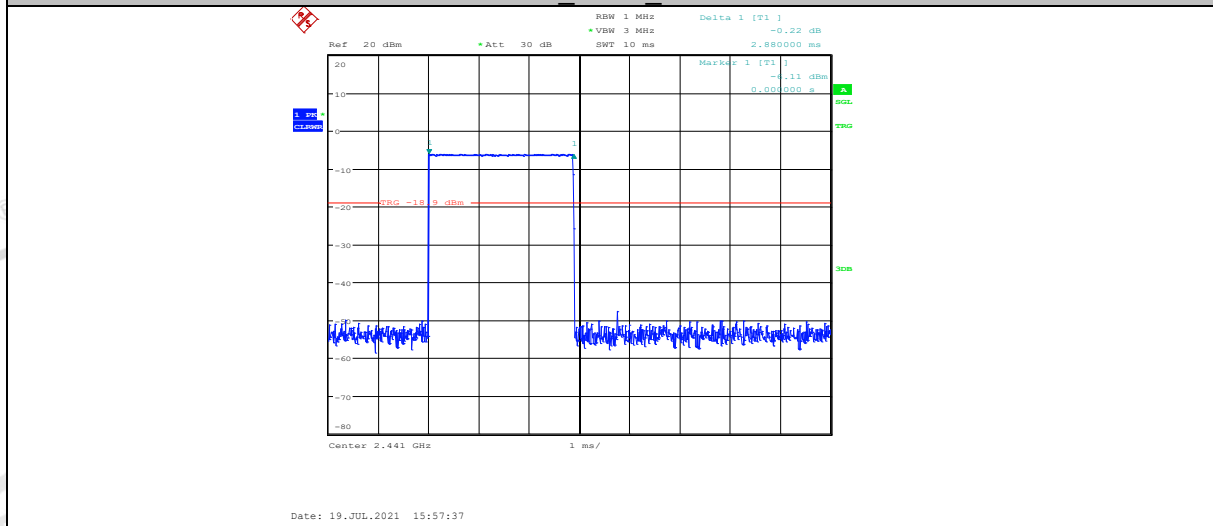

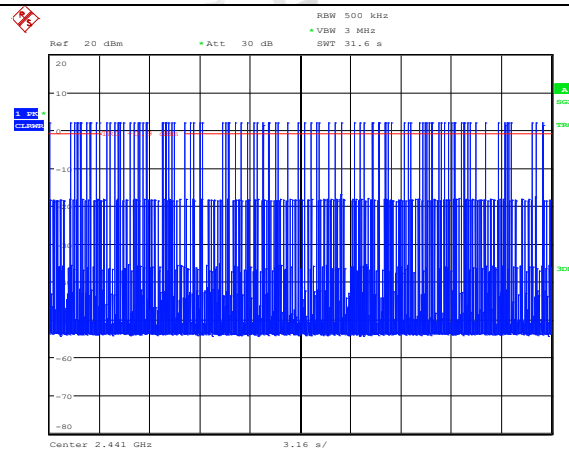


Date: 19.JUL.2021 15:58:11

2DH1_ANT1_HOP

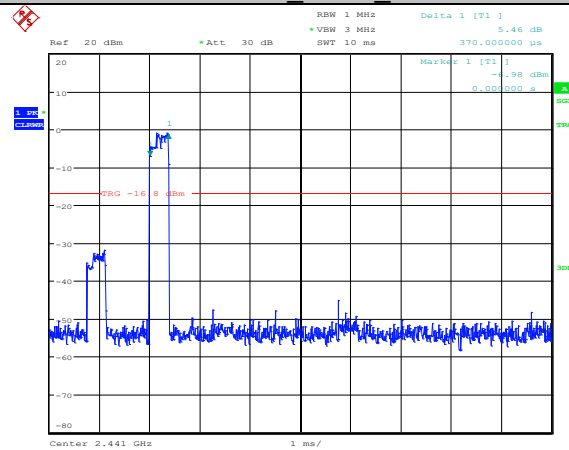


Date: 15.JUN.2021 09:51:06

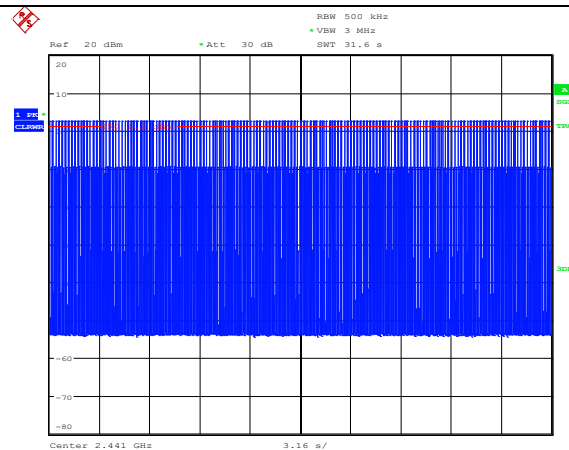


Date: 15.JUN.2021 09:51:40

2DH3_ANT1_HOP

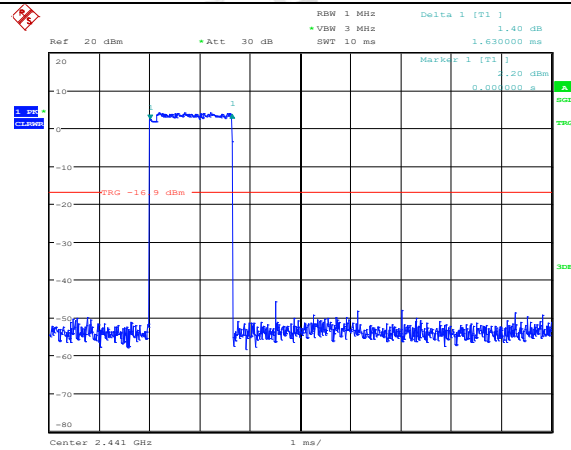


Date: 15.JUN.2021 10:26:06

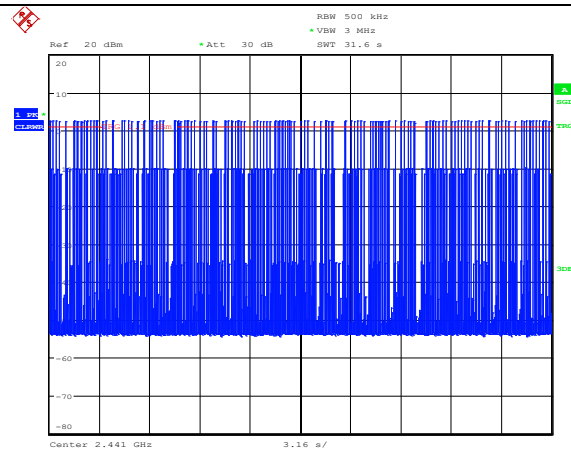


Date: 15.JUN.2021 10:29:47

2DH5 ANT1 HOP

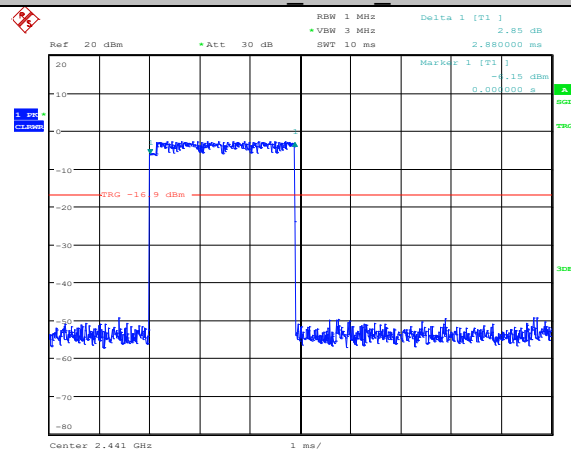


Date: 15.JUN.2021 09:53:43

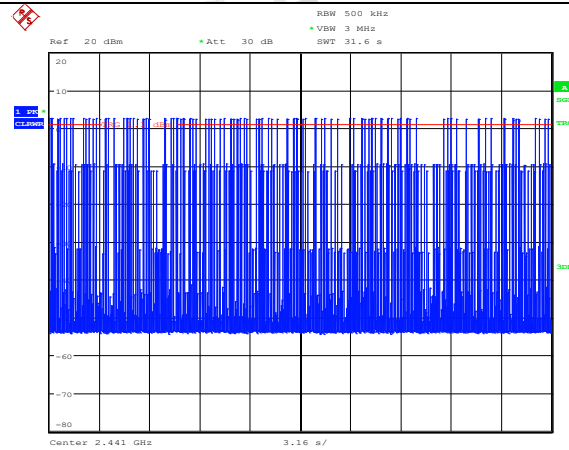


Date: 15.JUN.2021 09:54:16

3DH1_ANT1_HOP

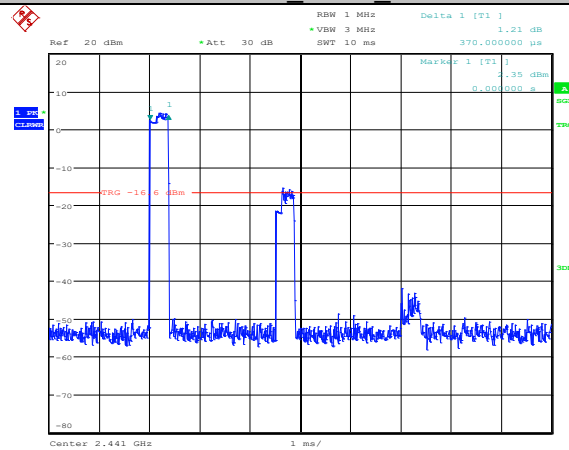


Date: 15.JUN.2021 09:55:05

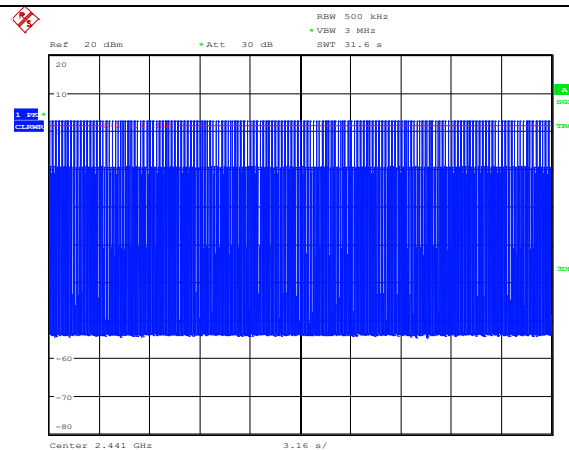


Date: 15.JUN.2021 09:55:38

3DH3_ANT1_HOP

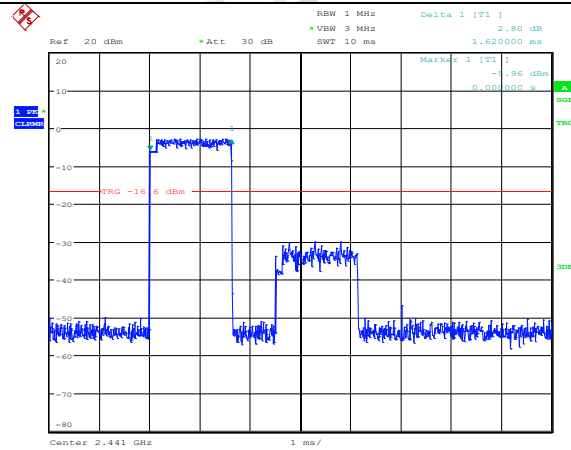


Date: 15.JUN.2021 09:56:13

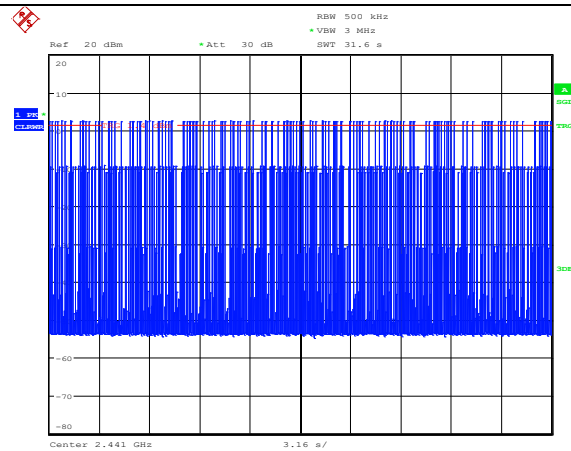


Date: 15.JUN.2021 09:56:46


3DH5 ANT1 HOP


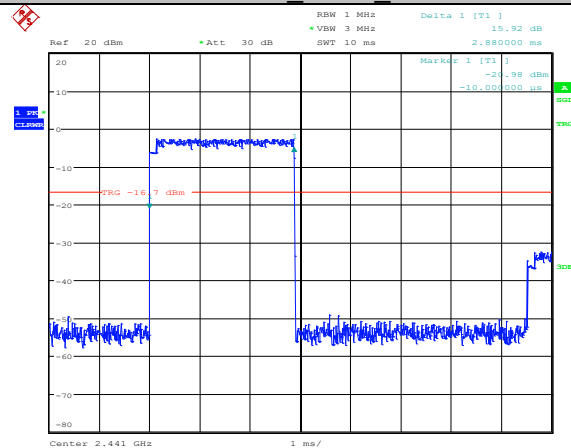


Date: 15.JUN.2021 10:30:14

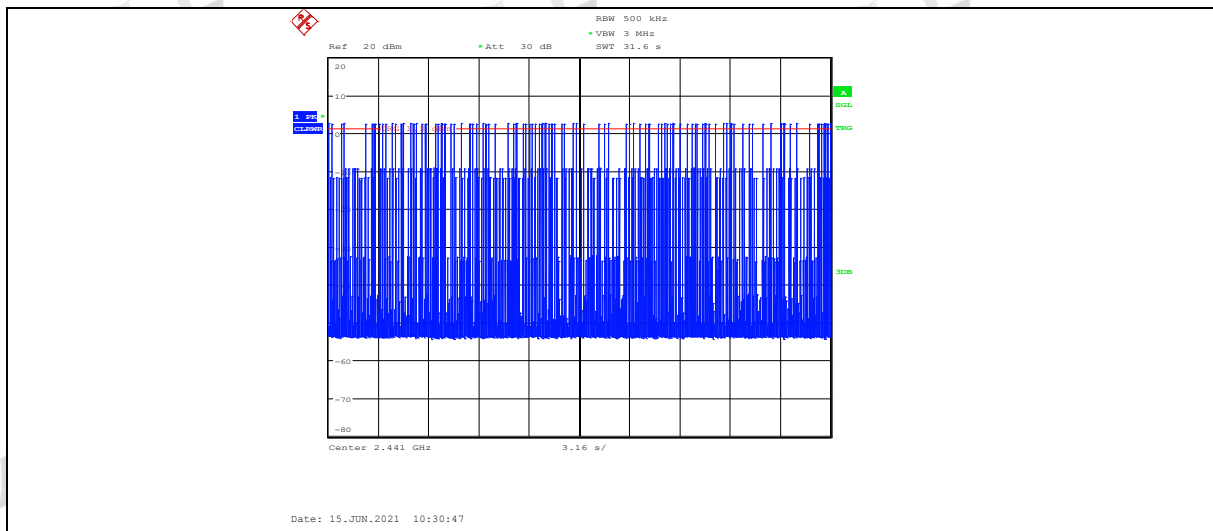



Right side:

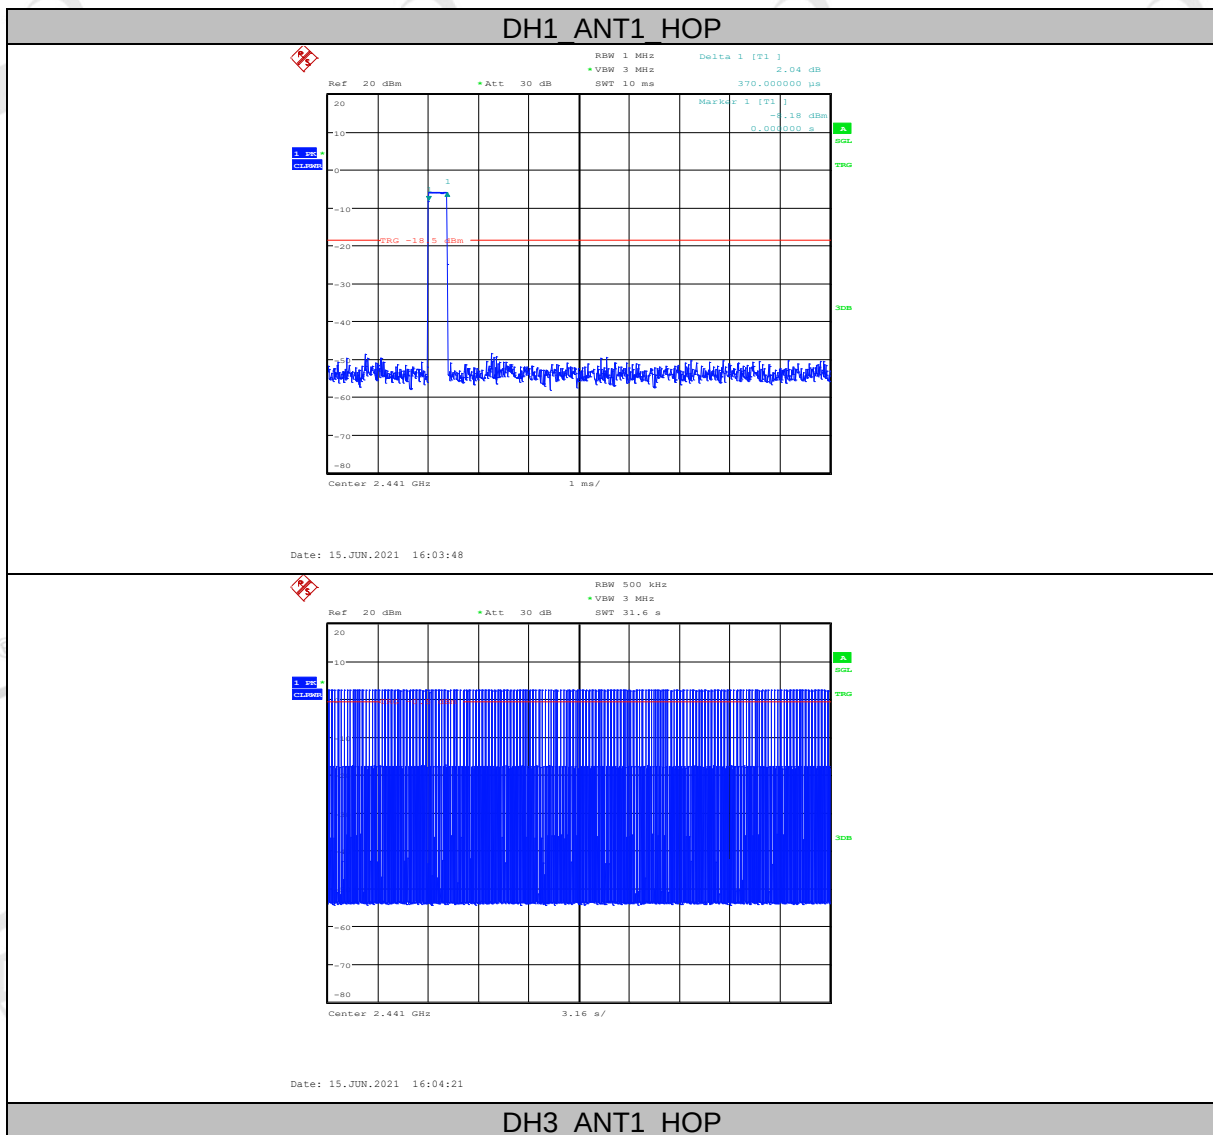

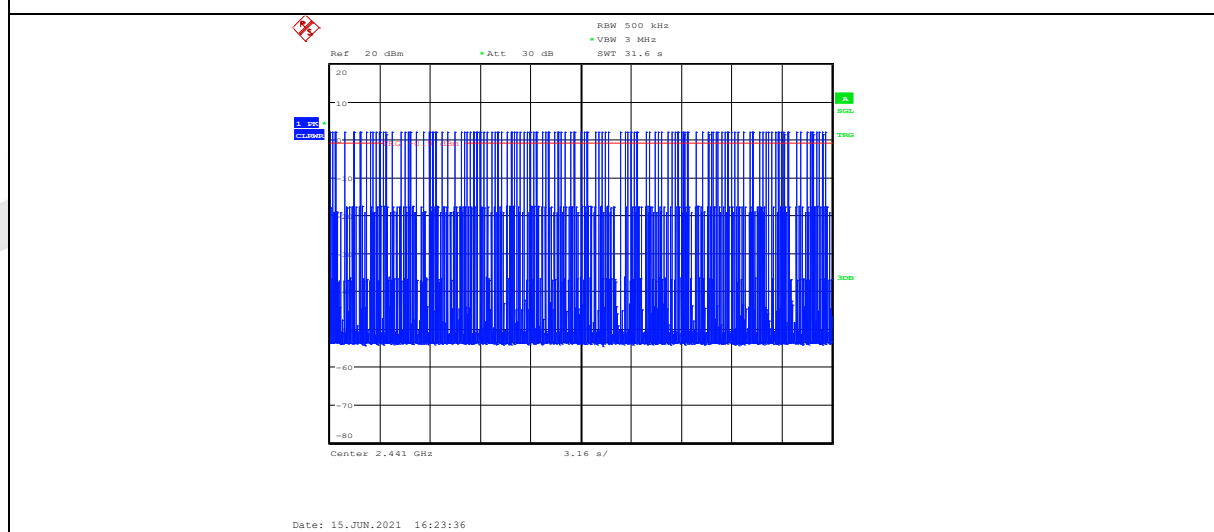
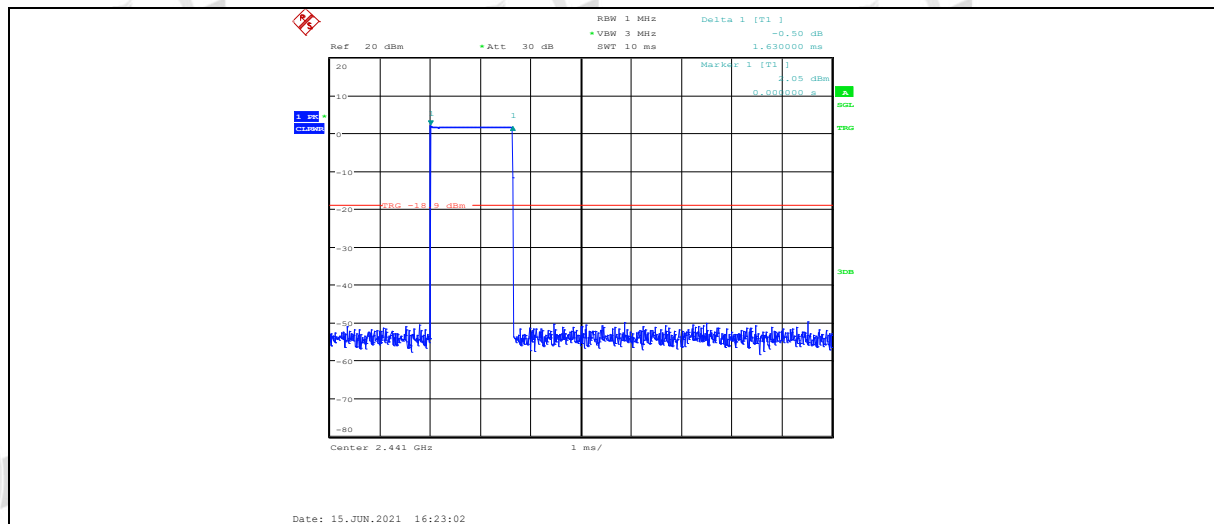


DH5_ANT1_HOP


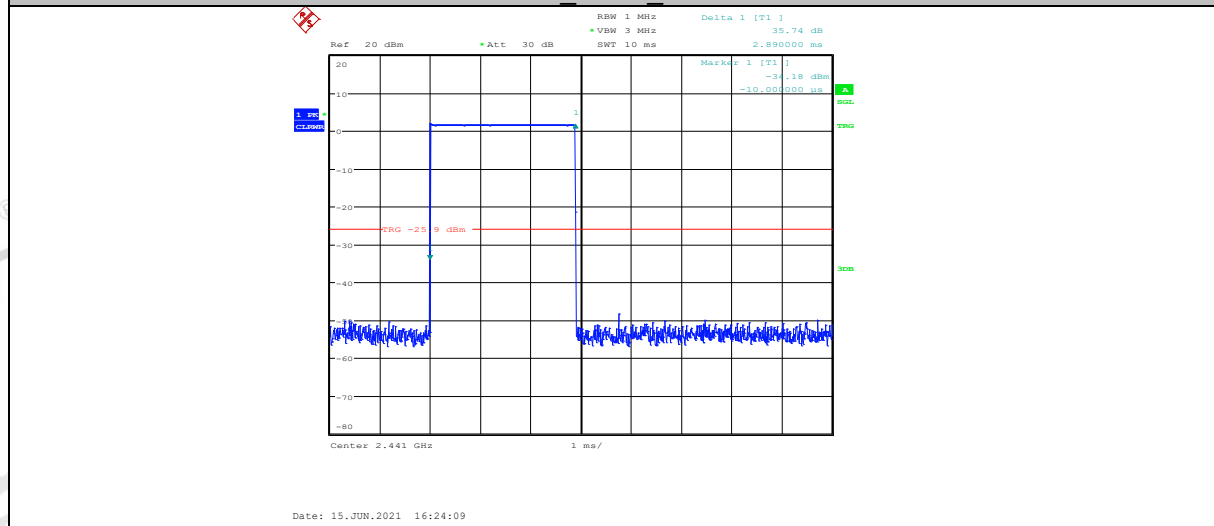


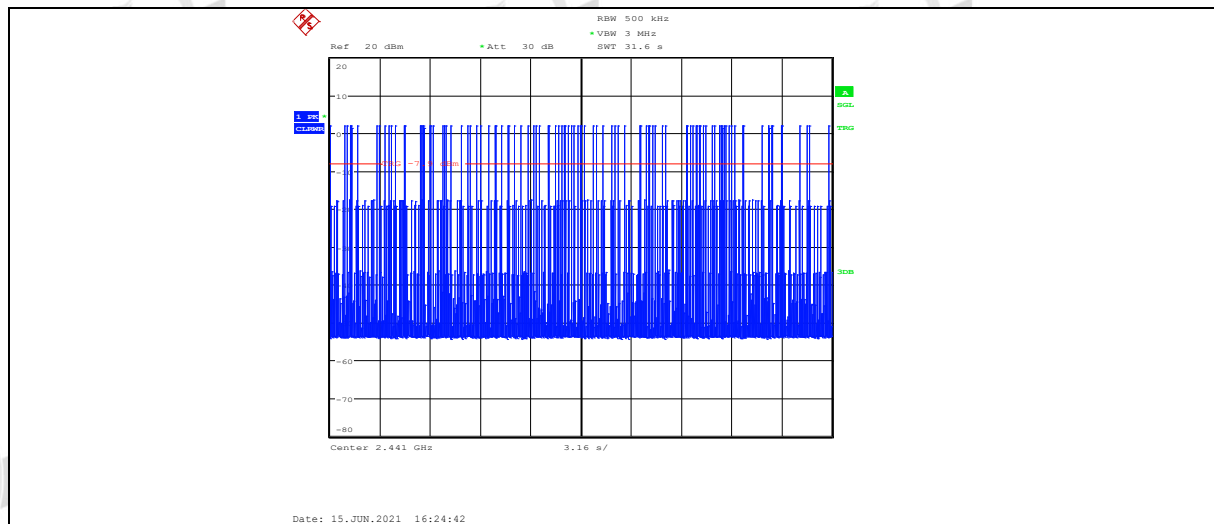


2DH1 ANT1 HOP

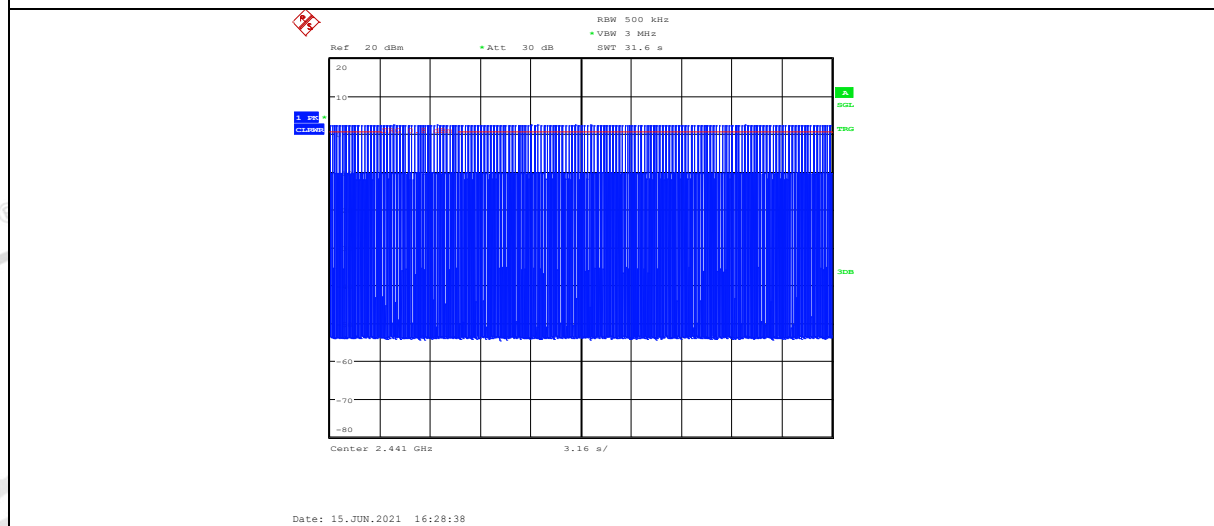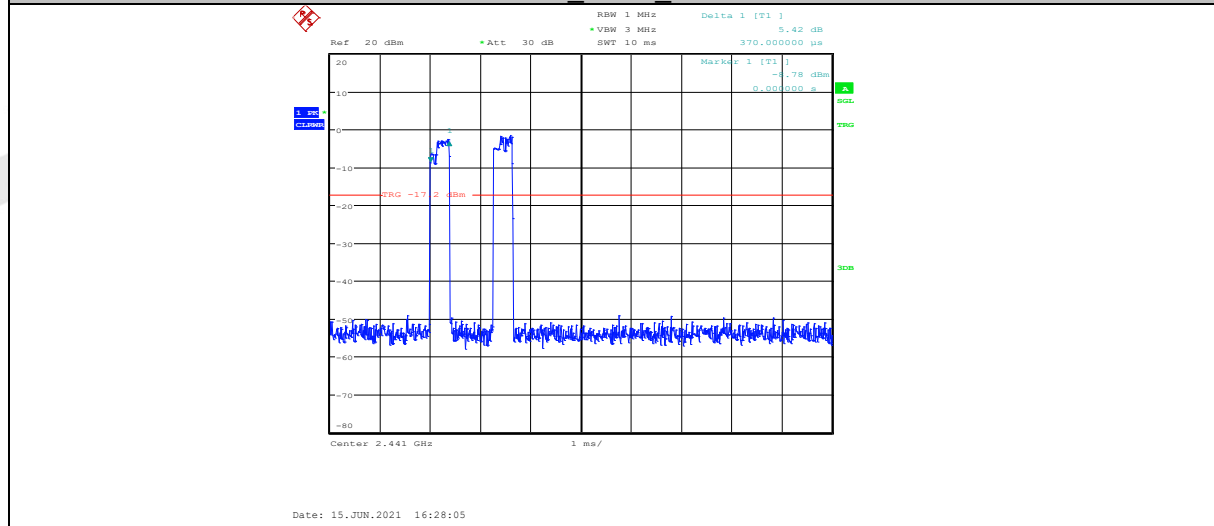


2DH3 ANT1 HOP

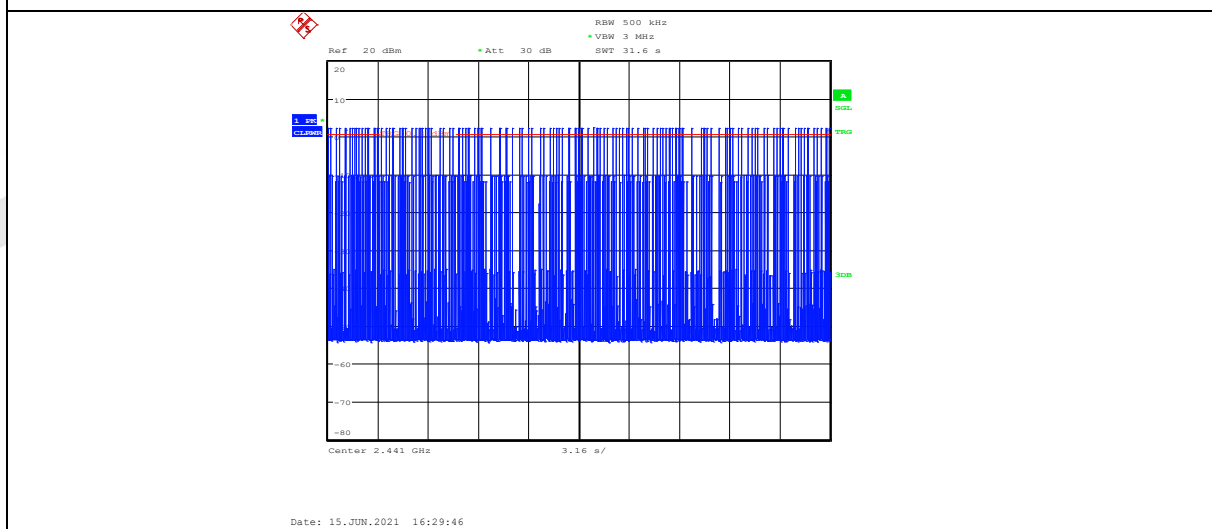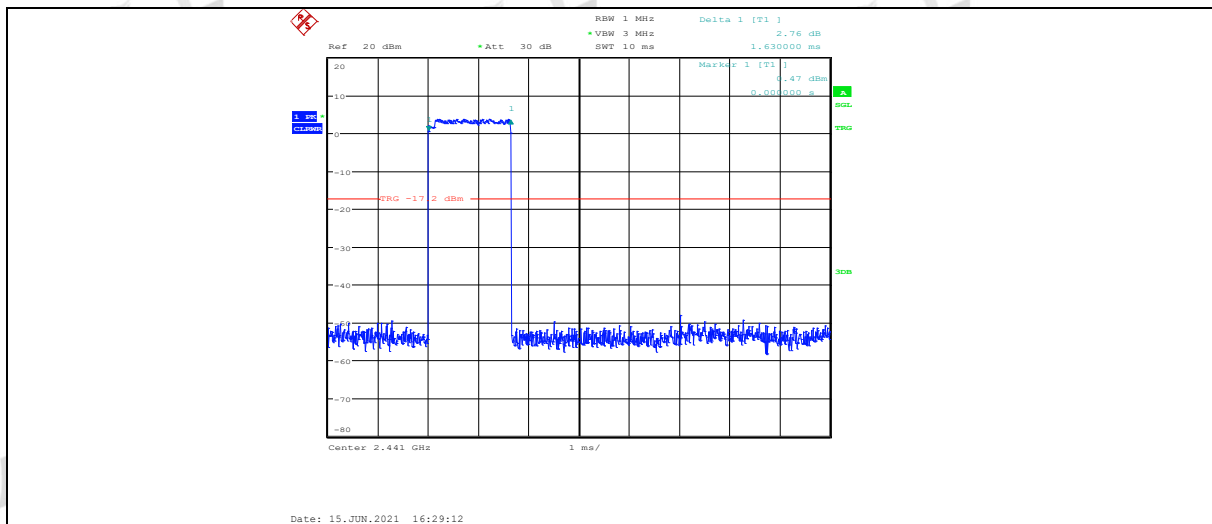


2DH5 ANT1 HOP

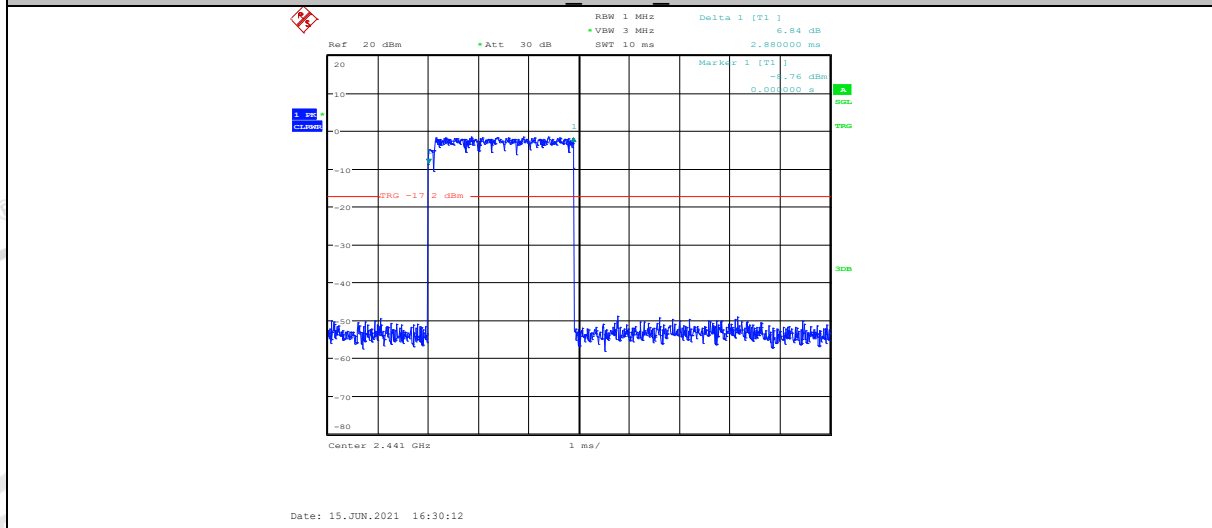

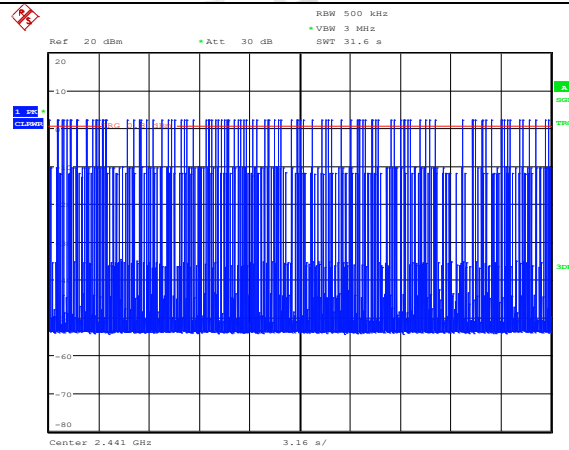


Date: 15.JUN.2021 16:30:45

3DH1_ANT1_HOP



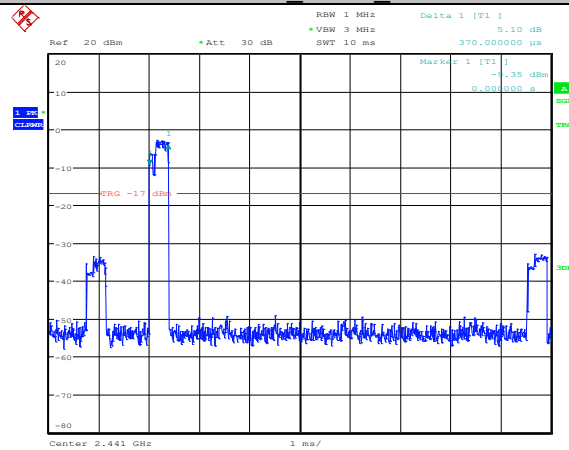



Date: 15.JUN.2021 16:31:28

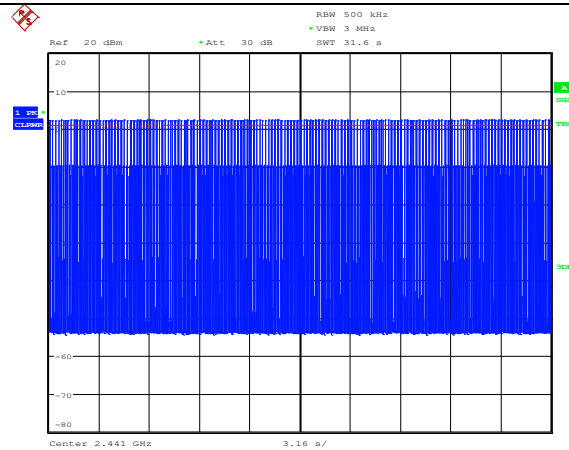

Date: 15.JUN.2021 16:32:01

3DH3_ANT1_HOP

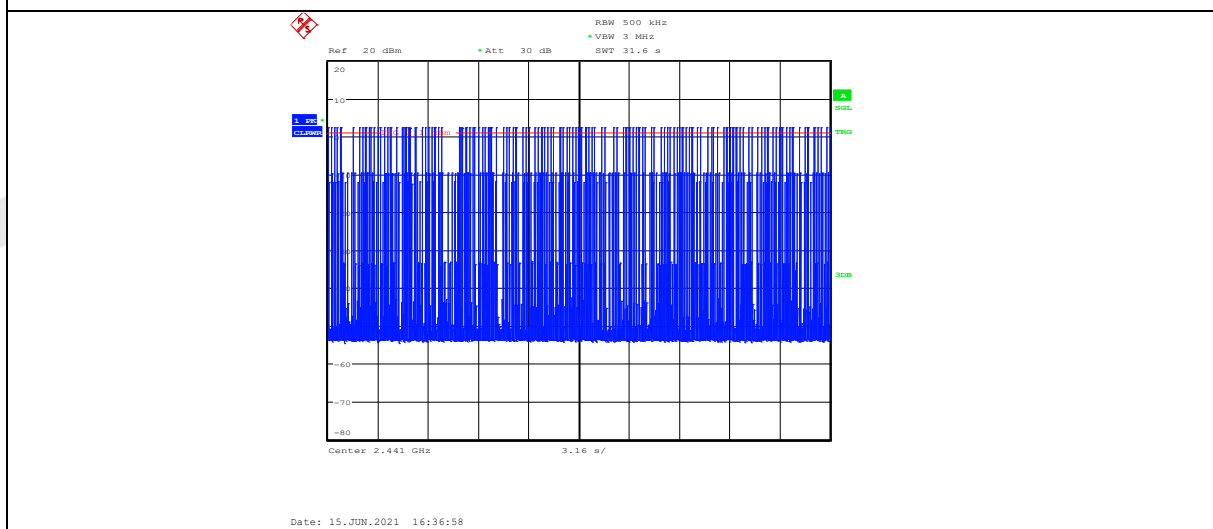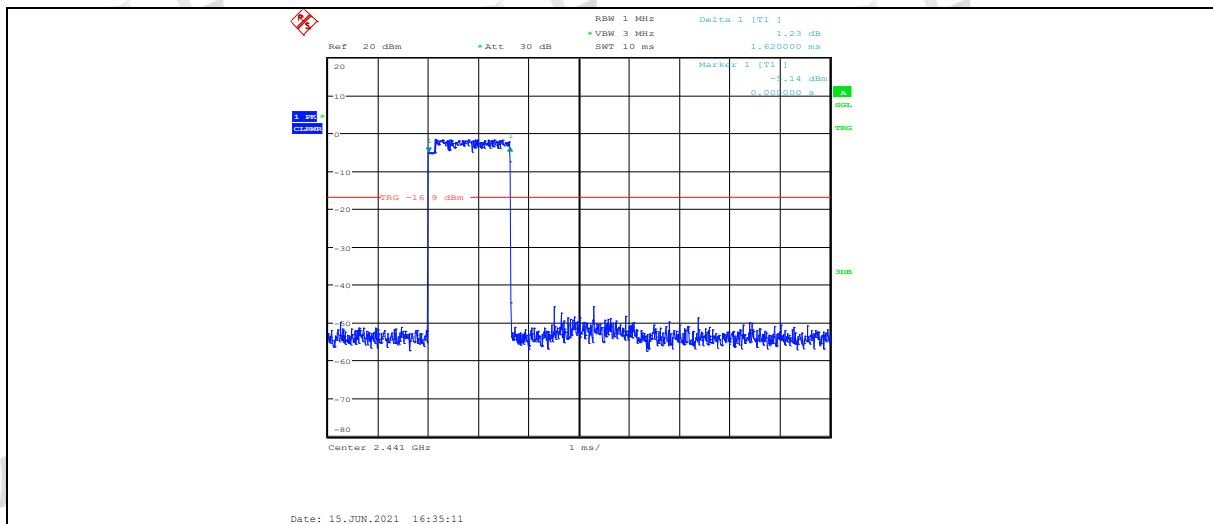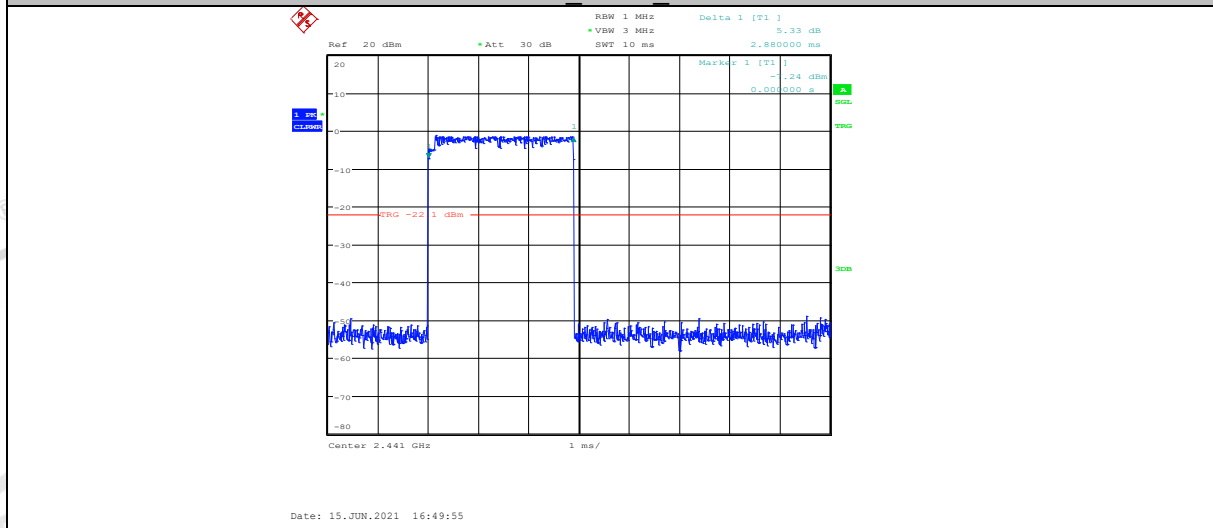**3DH5 ANT1 HOP**

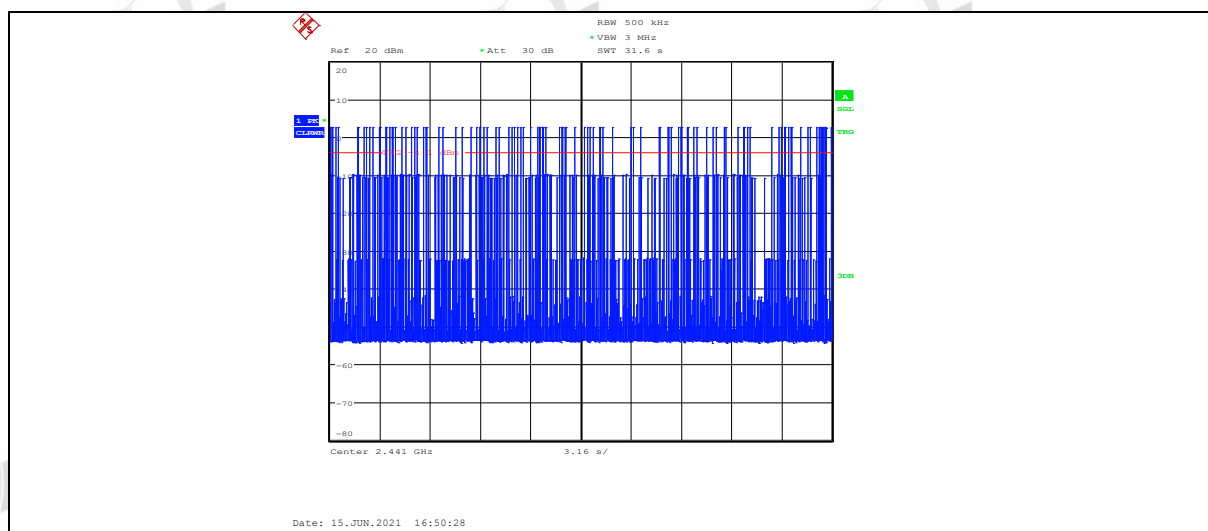

9. Band Edge Compliance (Conducted Method)

9.1. Block diagram of test setup

Same as section 4.1

9.2. Limit


All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.


9.3. Test result

Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass


9.4. Original test data

Left side:

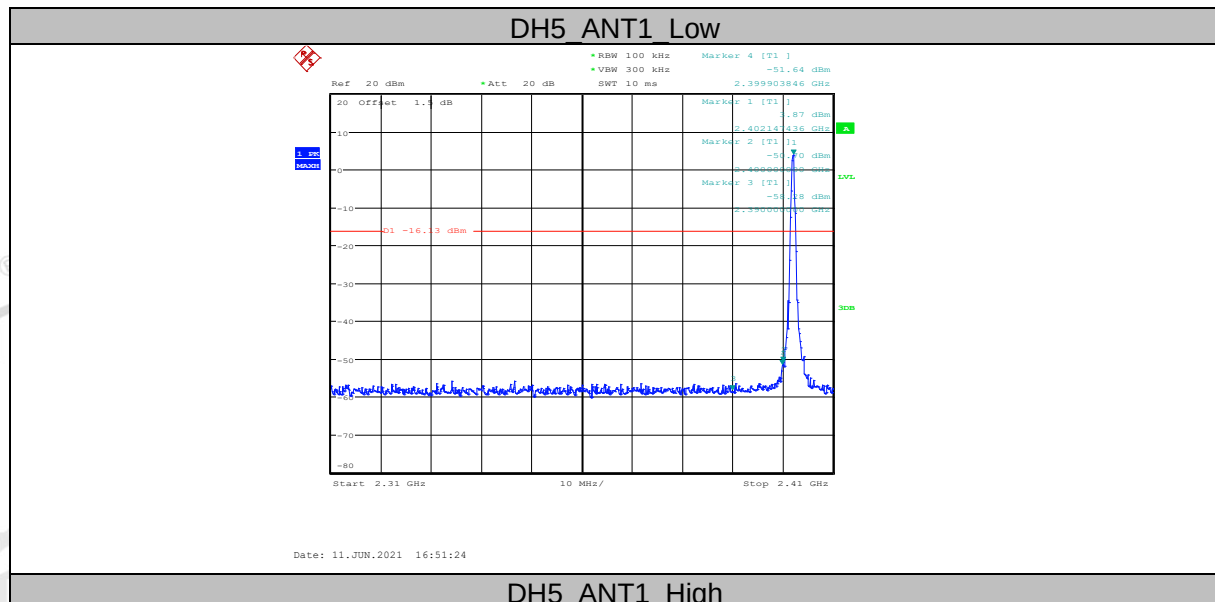


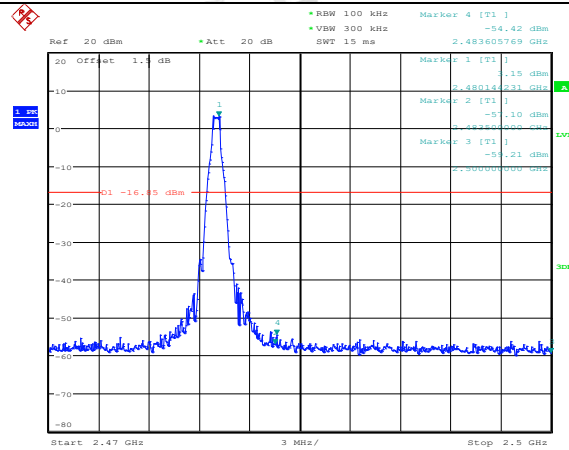


DH5_ANT1_Low

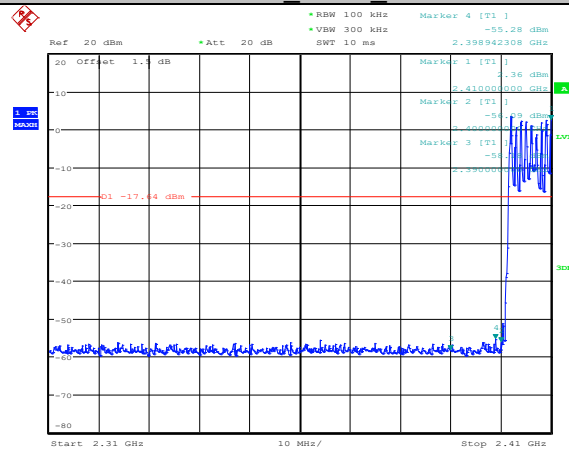


DH5_ANT1_High

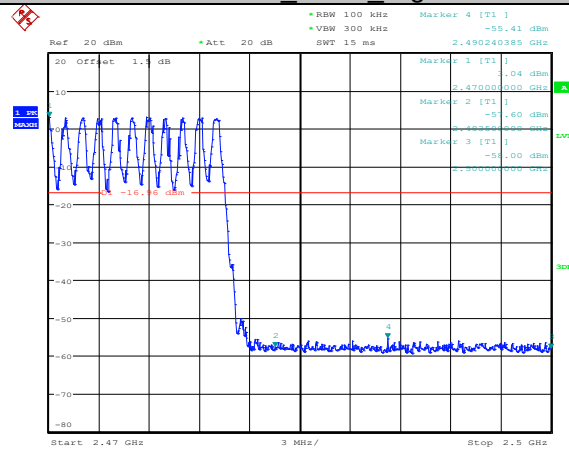


2DH5_ANT1_Low

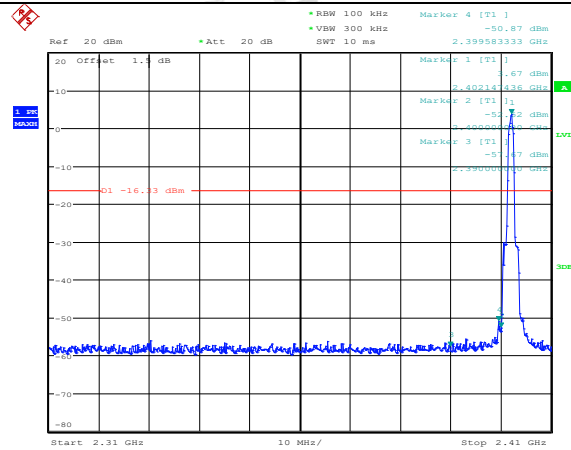


2DH5 ANT1 High

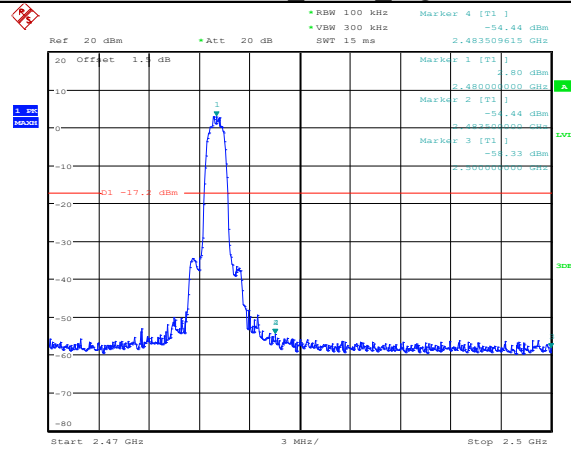

2DH5 ANT1 Low

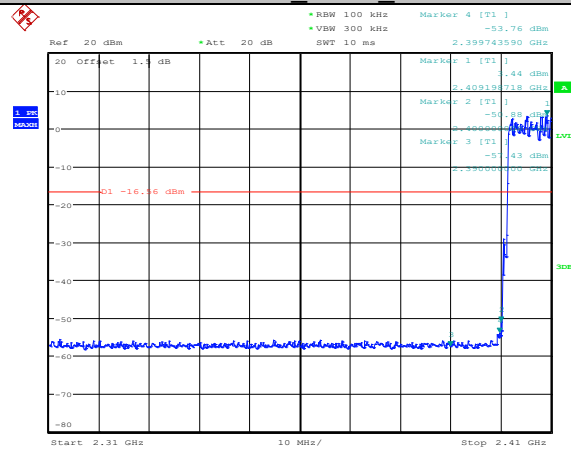


2DH5 ANT1 High

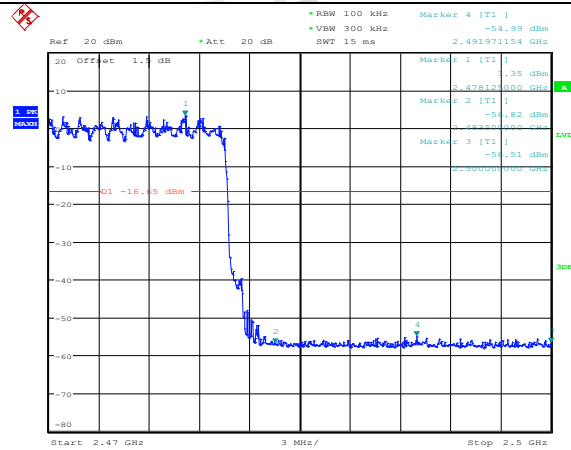


Date: 11.JUN.2021 17:14:04

3DH5 ANT1 Low

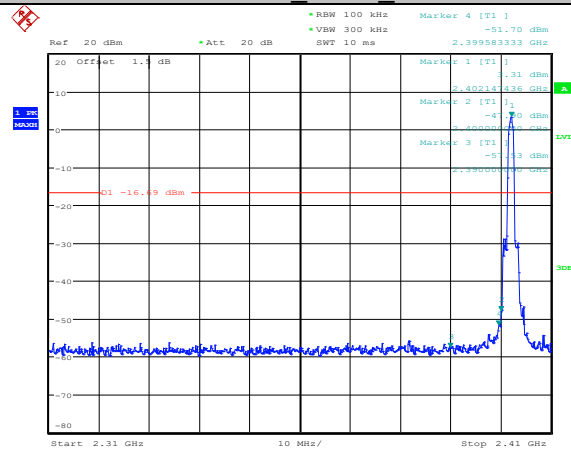


Date: 11.JUN.2021 17:01:17

3DH5 ANT1 High

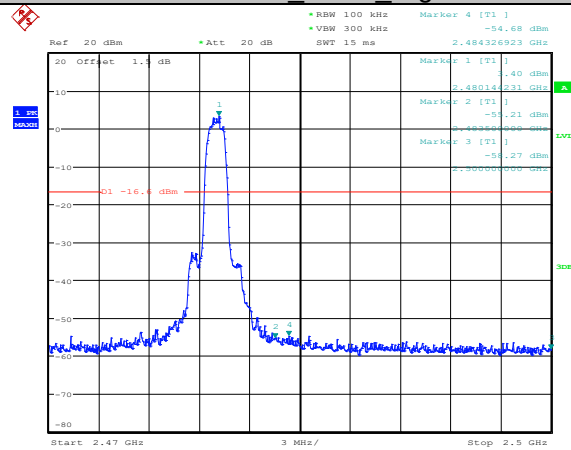


Date: 11.JUN.2021 17:04:09


3DH5 ANT1 Low

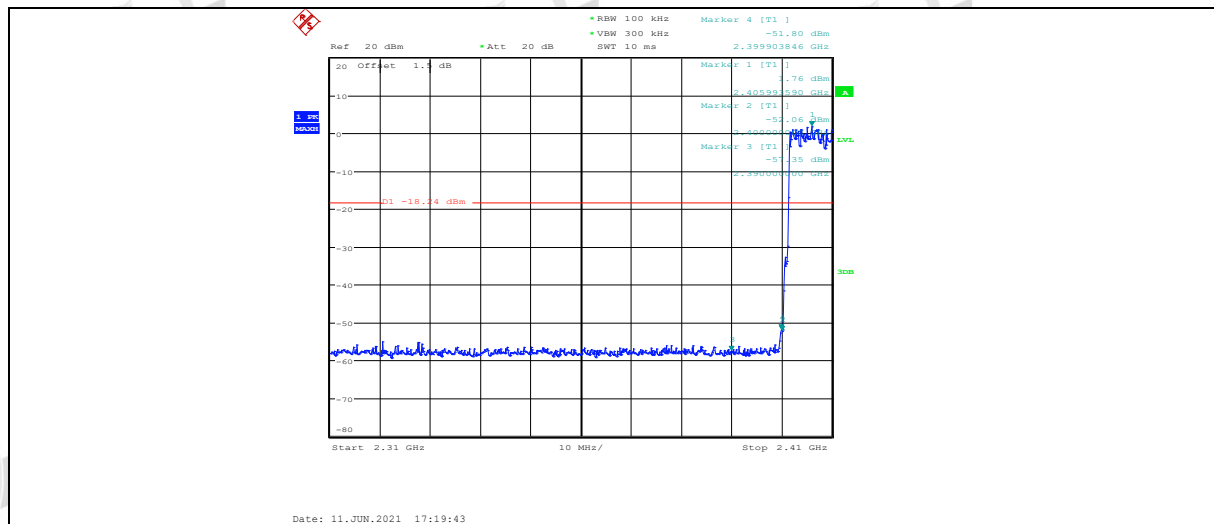


3DH5 ANT1_High

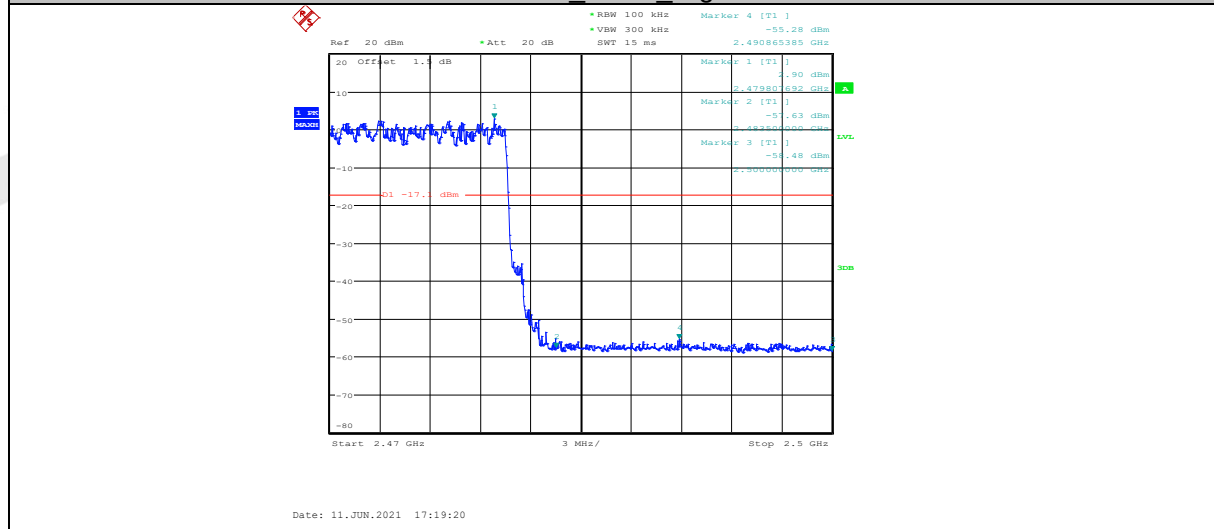


Right side:

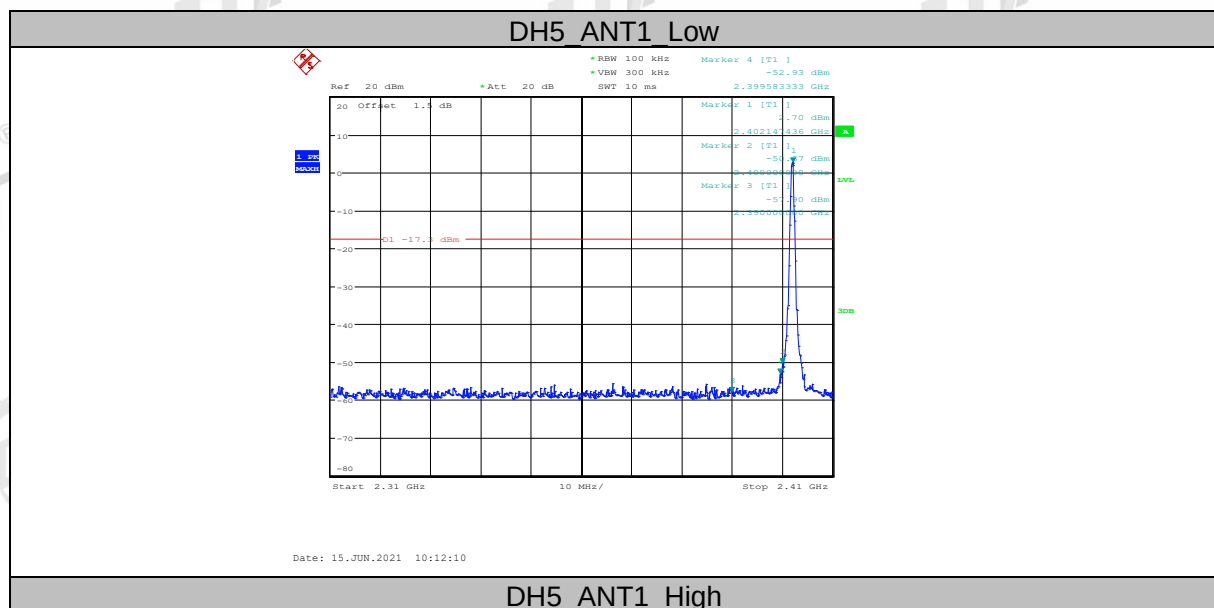


DH5 ANT1_High

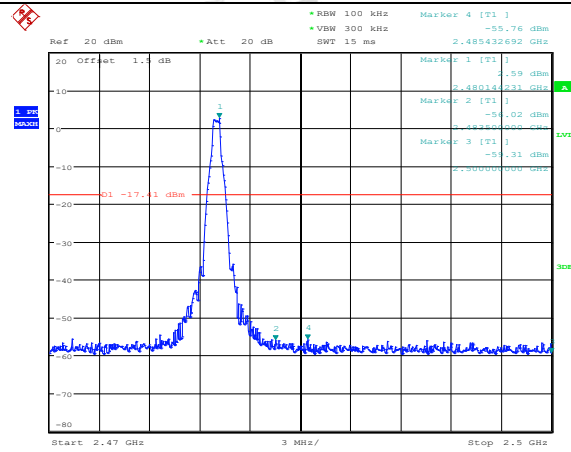


DH5_ANT1_Low

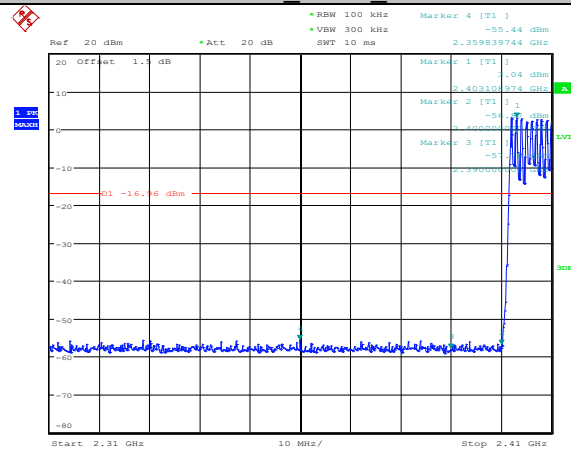

DH5_ANT1_High

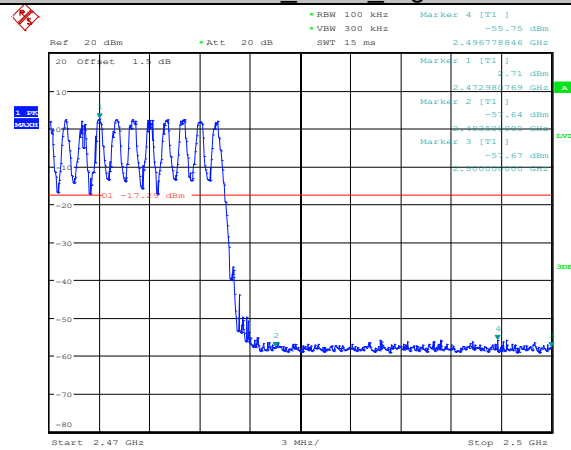


2DH5_ANT1_Low

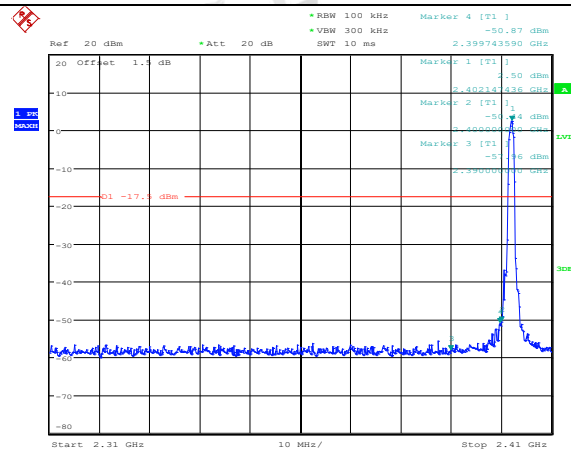


Date: 15.JUN.2021 10:15:58

2DH5 ANT1 High

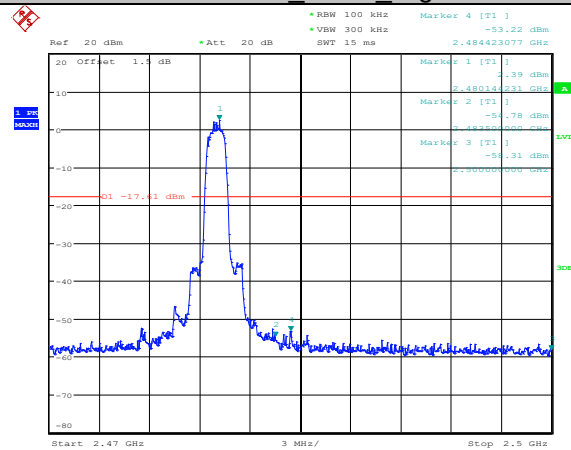


Date: 15.JUN.2021 10:18:43

2DH5 ANT1 Low

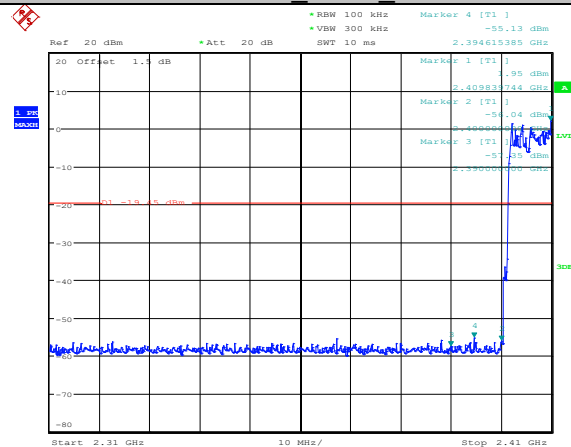


Date: 15.JUN.2021 15:53:01

2DH5 ANT1 High

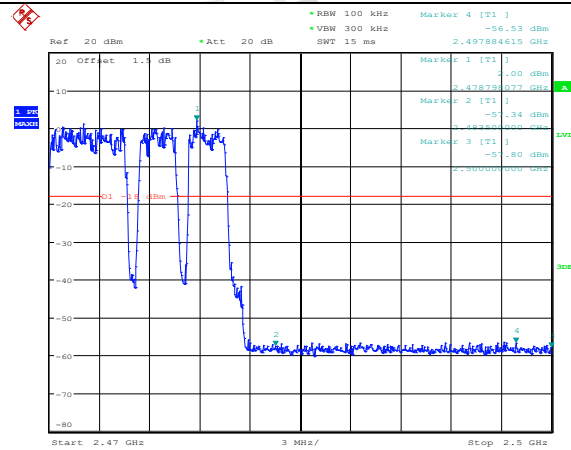


Date: 15.JUN.2021 15:52:51

3DH5_ANT1_Low

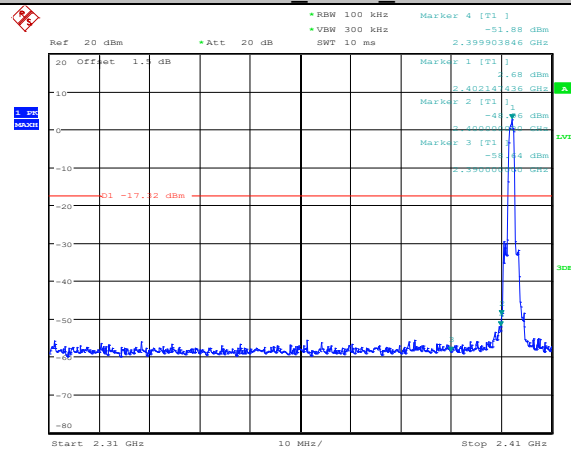


Date: 15.JUN.2021 15:38:24

3DH5_ANT1_High

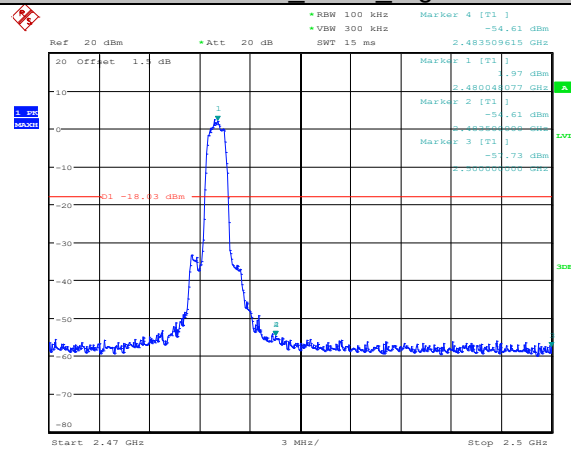


Date: 15.JUN.2021 15:41:01

3DH5_ANT1_Low

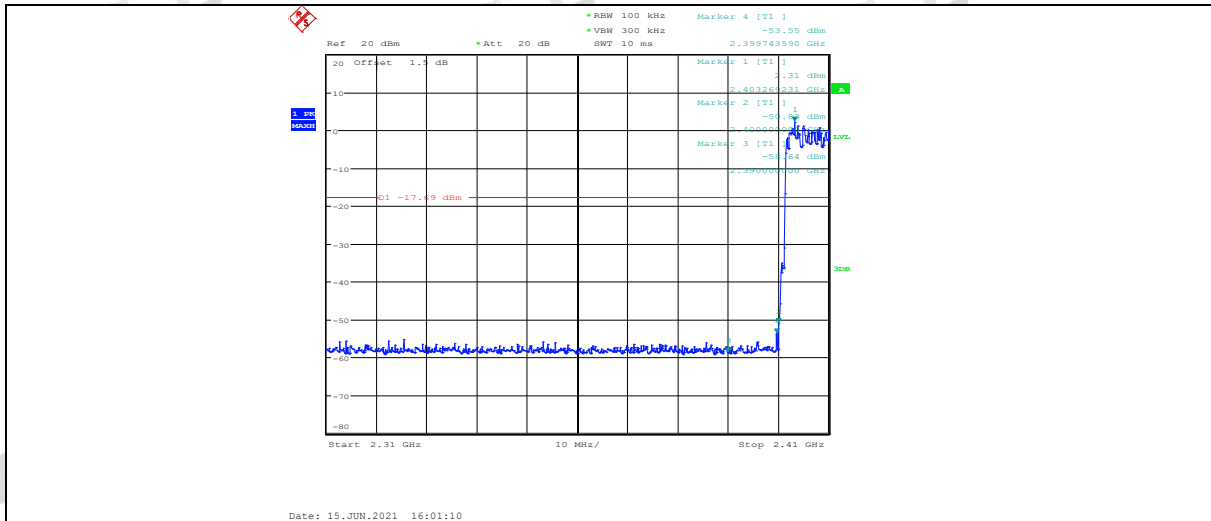


3DH5 ANT1 High

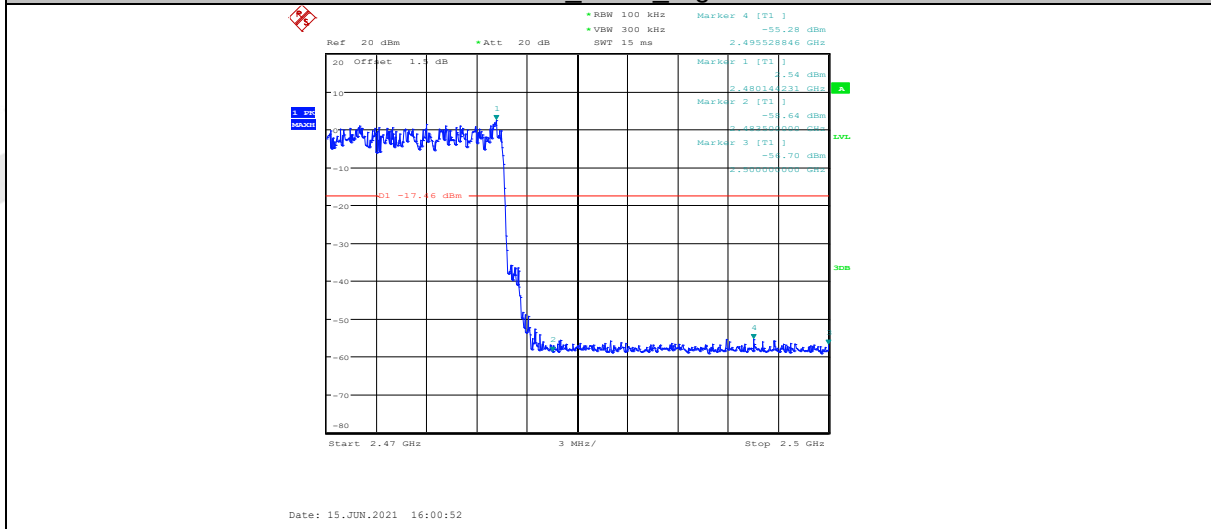


10. Radiated Emission

10.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

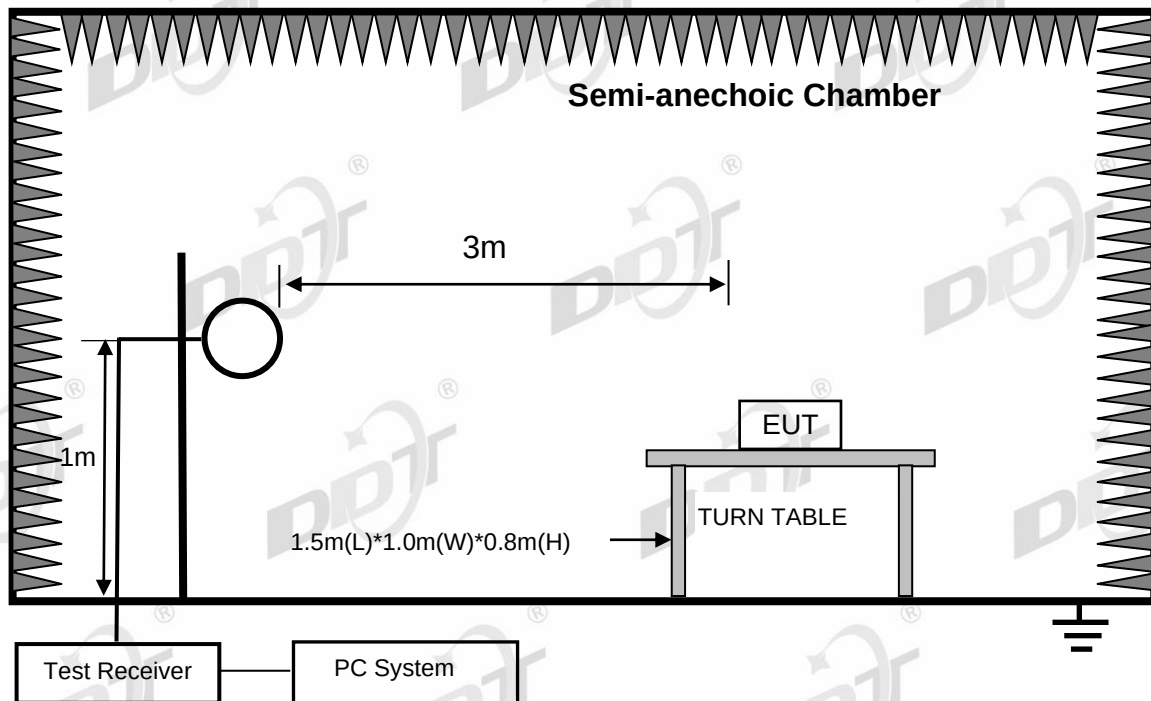

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

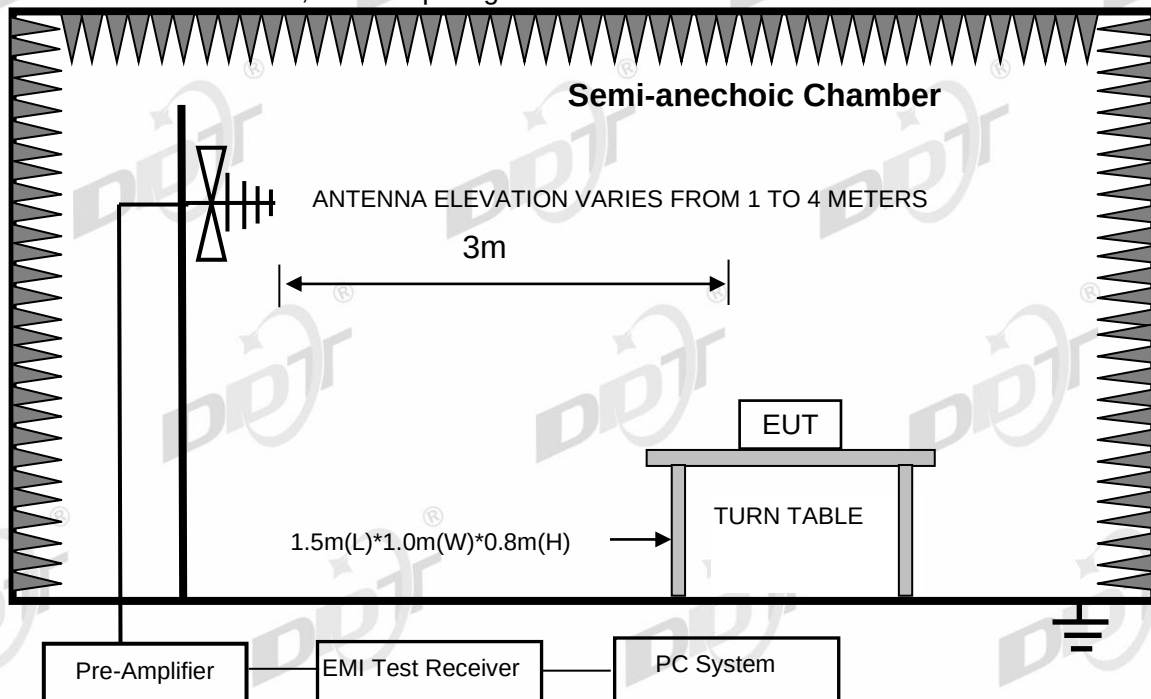

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

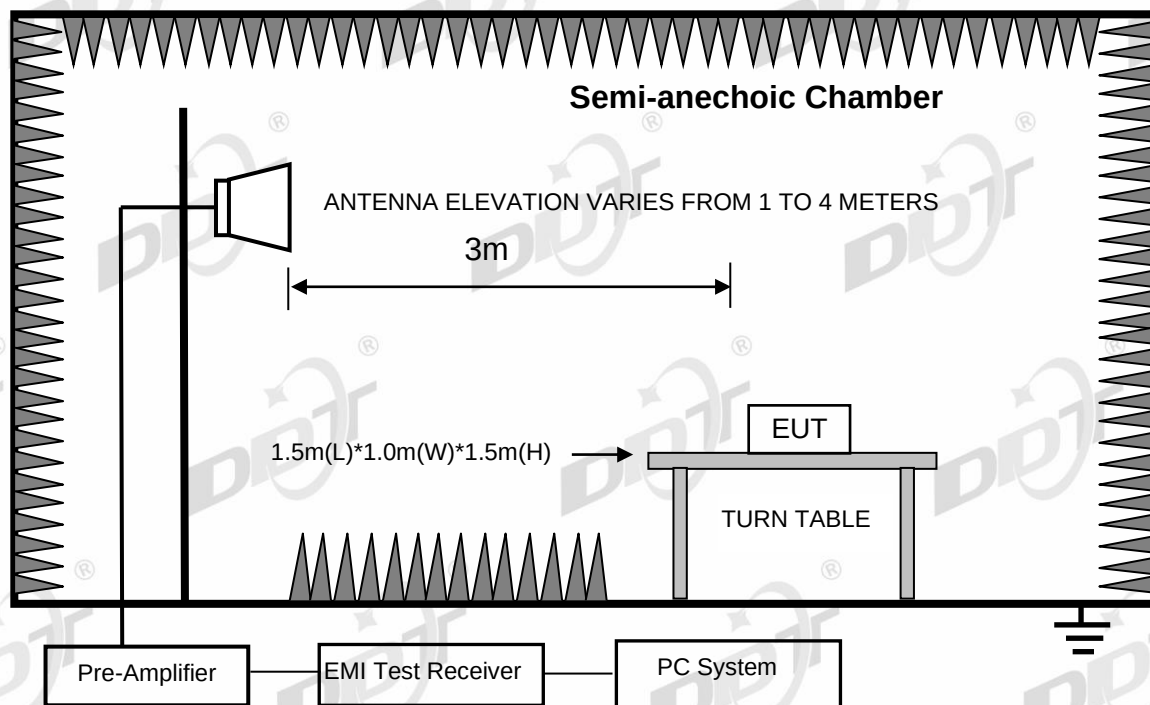

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

10.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

(2) FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

10.3. Test Procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna (1 GHz - 18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna (18 GHz - 40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also

is positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. For measurement above 30 MHz, the trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

10.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in left side 8DPSK, Tx 2402 MHz mode.

Note3: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission test (below 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21031818-4E\FCC
BELOW1G.EM6

Test Date : 2021-06-15

Tested By : Bairong

EUT : True Wireless Earbuds

Model Number : TW-E5B


Power Supply : BATTERY

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 VULB 9163 2#/3m/HORIZONTAL

Memo : BT

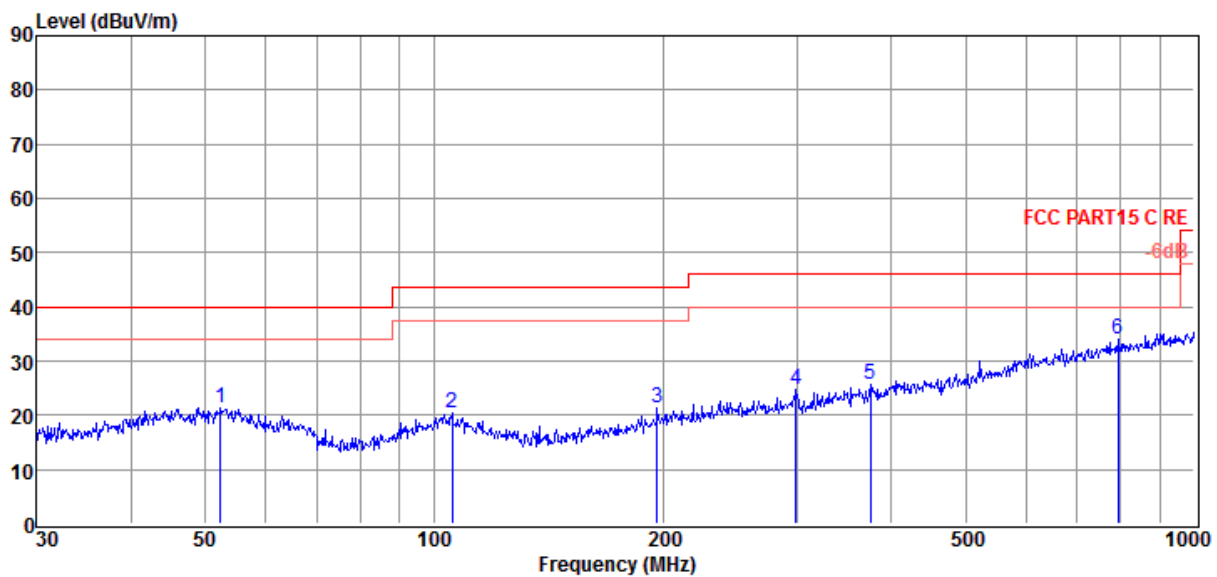

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	52.39	3.96	13.50	3.88	21.34	40.00	-18.66	Peak	HORIZONTAL
2	105.64	4.30	11.52	4.45	20.27	43.50	-23.23	Peak	HORIZONTAL
3	196.51	5.72	10.50	5.02	21.24	43.50	-22.26	Peak	HORIZONTAL
4	299.32	5.84	13.28	5.48	24.60	46.00	-21.40	Peak	HORIZONTAL
5	374.62	4.68	15.20	5.82	25.70	46.00	-20.30	Peak	HORIZONTAL
6	793.40	5.82	20.89	7.33	34.04	46.00	-11.96	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 2#

D:\2021 RE2# Report Data\Q21031818-4E\FCC
BELOW1G.EM6

Test Date : 2021-06-15

Tested By : Bairong

EUT : True Wireless Earbuds

Model Number : TW-E5B


Power Supply : BATTERY

Test Mode : Tx mode

Condition : Temp:24.5°C,Humi:55%,Press:100.1kPa

Antenna/Distance : 2020 VULB 9163 2#/3m/VERTICAL

Memo : BT

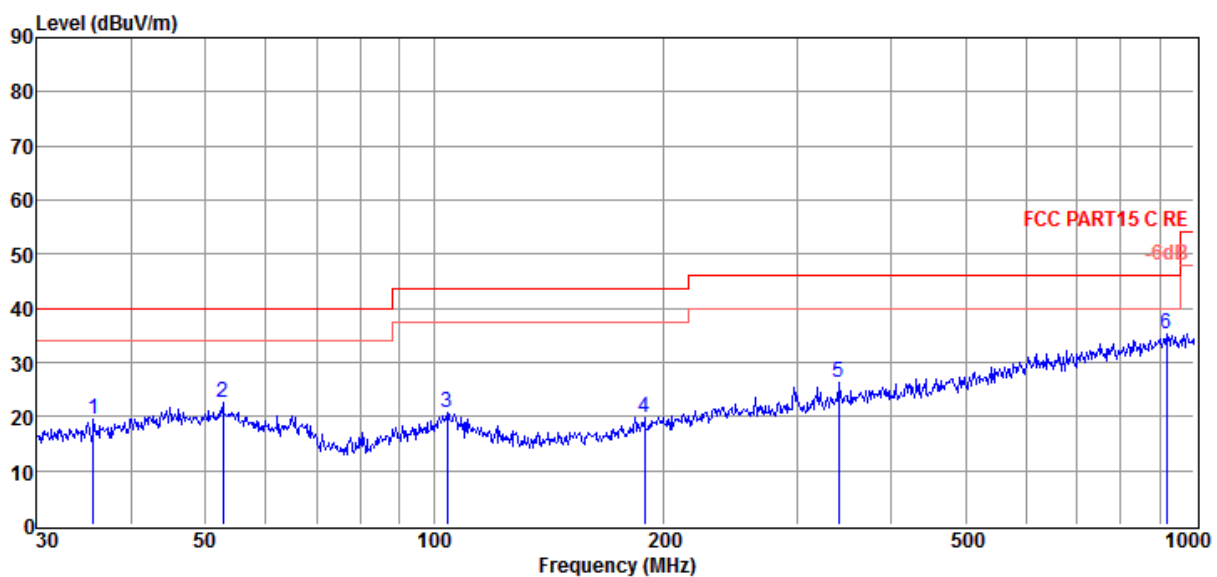

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	35.62	5.42	10.43	3.73	19.58	40.00	-20.42	Peak	VERTICAL
2	52.76	5.03	13.68	3.88	22.59	40.00	-17.41	Peak	VERTICAL
3	104.17	4.47	11.84	4.44	20.75	43.50	-22.75	Peak	VERTICAL
4	189.07	4.64	10.20	4.98	19.82	43.50	-23.68	Peak	VERTICAL
5	340.78	5.76	14.71	5.67	26.14	46.00	-19.86	Peak	VERTICAL
6	919.29	5.56	21.94	7.76	35.26	46.00	-10.74	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Radiated Emission test (above 1 GHz)

Freq. (MHz)	Read level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit (dBμV/ m)	Margin (dB)	Detector type	Polarization
Tx mode 2402 MHz									
4804.00	45.29	32.31	43.34	6.80	41.06	74.00	-32.94	Peak	HORIZONTAL
6559.00	46.93	35.24	43.21	7.83	46.79	74.00	-27.21	Peak	HORIZONTAL
8174.00	46.31	37.93	42.21	8.69	50.72	74.00	-23.28	Peak	HORIZONTAL
11115.00	44.02	39.80	42.72	10.70	51.80	74.00	-22.20	Peak	HORIZONTAL
12849.00	44.66	39.46	42.77	11.44	52.79	74.00	-21.21	Peak	HORIZONTAL
15875.00	43.01	39.15	42.23	12.58	52.51	74.00	-21.49	Peak	HORIZONTAL
4808.00	47.07	32.32	43.34	6.80	42.85	74.00	-31.15	Peak	VERTICAL
6100.00	47.05	33.82	43.45	7.48	44.90	74.00	-29.10	Peak	VERTICAL
6848.00	45.63	35.94	43.07	7.92	46.42	74.00	-27.58	Peak	VERTICAL
9449.00	45.46	38.75	41.98	9.65	51.88	74.00	-22.12	Peak	VERTICAL
11200.00	44.55	39.80	42.59	10.79	52.55	74.00	-21.45	Peak	VERTICAL
15705.00	43.30	39.35	42.13	12.49	53.01	74.00	-20.99	Peak	VERTICAL
Tx mode 2441 MHz									
4882.00	47.78	32.46	43.29	6.89	43.84	74.00	-30.16	Peak	HORIZONTAL
7375.00	47.18	36.90	42.73	8.63	49.98	74.00	-24.02	Peak	HORIZONTAL
9721.00	45.73	38.80	42.09	9.94	52.38	74.00	-21.62	Peak	HORIZONTAL
10911.00	45.02	39.76	42.84	10.53	52.47	74.00	-21.53	Peak	HORIZONTAL
12866.00	45.09	39.49	42.79	11.41	53.20	74.00	-20.80	Peak	HORIZONTAL
15841.00	43.63	39.19	42.21	12.57	53.18	74.00	-20.82	Peak	HORIZONTAL
4876.00	47.96	32.45	43.29	6.89	44.01	74.00	-29.99	Peak	VERTICAL
7749.00	46.45	37.50	42.47	8.73	50.21	74.00	-23.79	Peak	VERTICAL
10469.00	45.28	39.55	42.54	10.36	52.65	74.00	-21.35	Peak	VERTICAL
12781.00	44.97	39.35	42.66	11.57	53.23	74.00	-20.77	Peak	VERTICAL
15331.00	42.45	39.87	41.90	12.62	53.04	74.00	-20.96	Peak	VERTICAL
16096.00	42.90	39.40	42.29	12.75	52.76	74.00	-21.24	Peak	VERTICAL
Tx mode 2480 MHz									
4960.00	46.98	32.62	43.23	6.99	43.36	74.00	-30.64	Peak	HORIZONTAL
6916.00	46.52	36.10	43.04	7.94	47.52	74.00	-26.48	Peak	HORIZONTAL
8786.00	45.01	38.17	41.90	9.22	50.50	74.00	-23.50	Peak	HORIZONTAL
10044.00	45.58	38.87	42.23	10.29	52.51	74.00	-21.49	Peak	HORIZONTAL
12866.00	45.09	39.49	42.79	11.41	53.20	74.00	-20.80	Peak	HORIZONTAL
15841.00	43.63	39.19	42.21	12.57	53.18	74.00	-20.82	Peak	HORIZONTAL
4961.00	47.16	32.62	43.23	6.99	43.54	74.00	-30.46	Peak	VERTICAL
7426.00	46.57	36.98	42.69	8.71	49.57	74.00	-24.43	Peak	VERTICAL
9364.00	45.79	38.66	41.95	9.62	52.12	74.00	-21.88	Peak	VERTICAL
10469.00	45.28	39.55	42.54	10.36	52.65	74.00	-21.35	Peak	VERTICAL
12849.00	44.69	39.46	42.77	11.44	52.82	74.00	-21.18	Peak	VERTICAL
15705.00	43.30	39.35	42.13	12.49	53.01	74.00	-20.99	Peak	VERTICAL
Verdict: Pass									

Note: 1. 30 MHz ~ 25 GHz: (Scan with all side GFSK, $\pi/4$ -DQPSK, 8DPSK, the worst case is left side 8DPSK Mode)

2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

3. For emissions above 1GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

Same as section 4.1

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span/RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


11.4. Test result

Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass

11.5. Original test data


Left side:

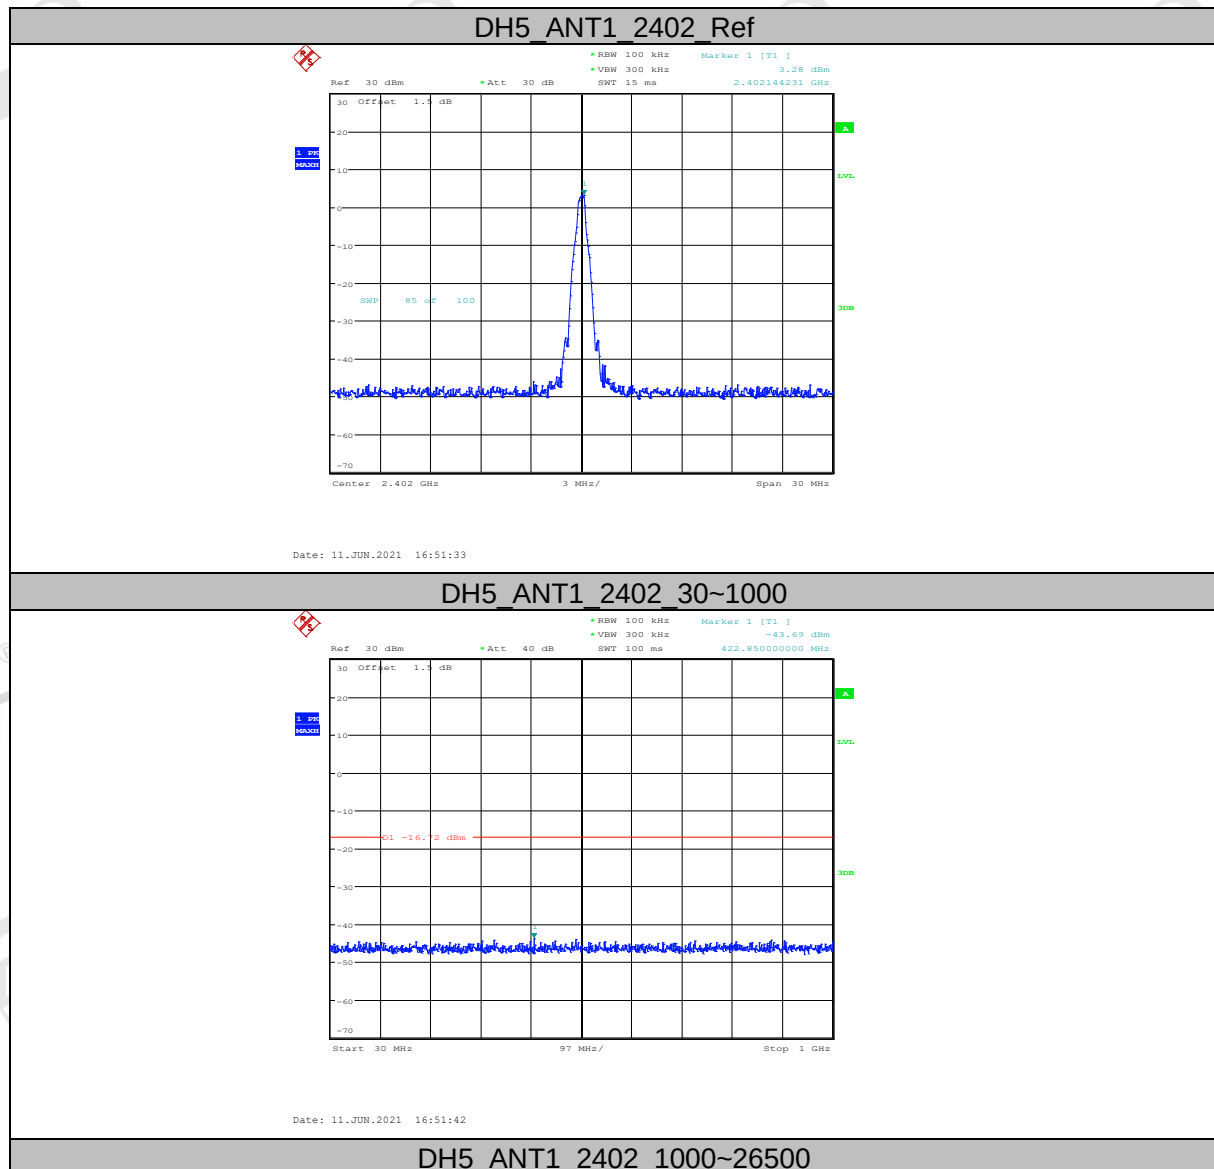

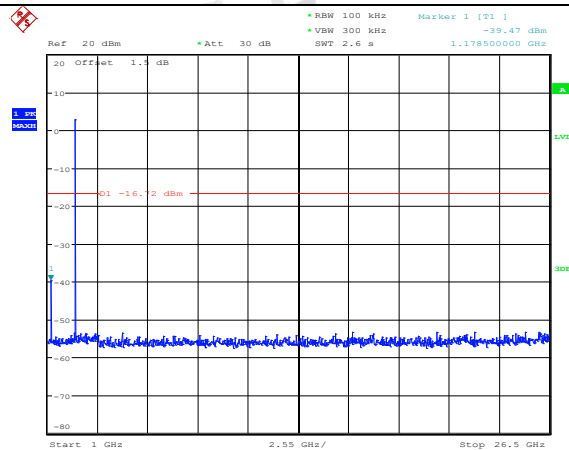


Date: 11.JUN.2021 16:51:53

DH5 ANT1 2441 Ref

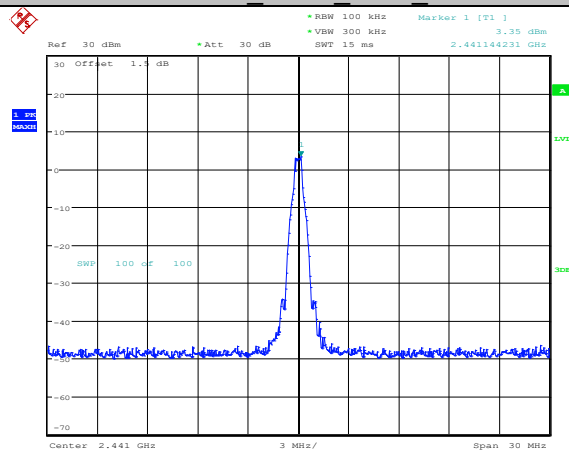


Date: 11.JUN.2021 16:52:45

DH5 ANT1 2441 30~1000

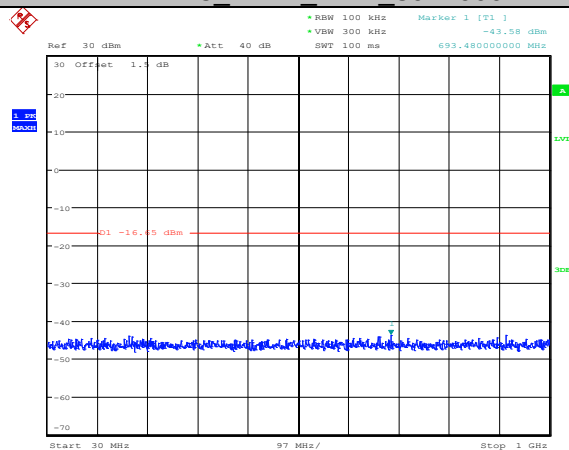


Date: 11.JUN.2021 16:52:53


DH5 ANT1 2441 1000~26500

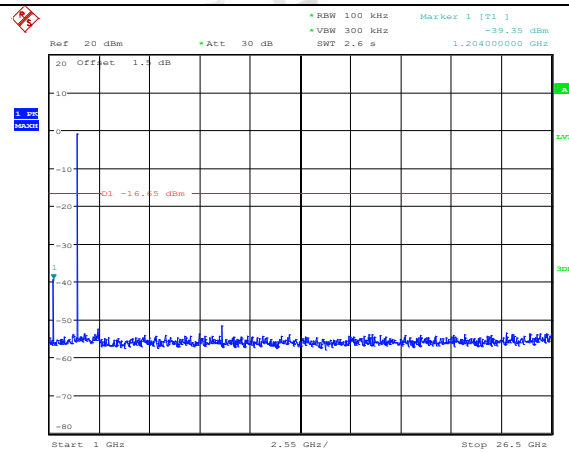


DH5 ANT1 2480 Ref

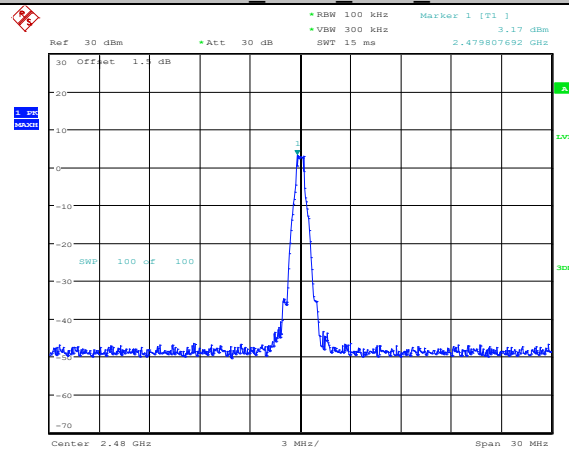

DH5 ANT1 2480 30~1000

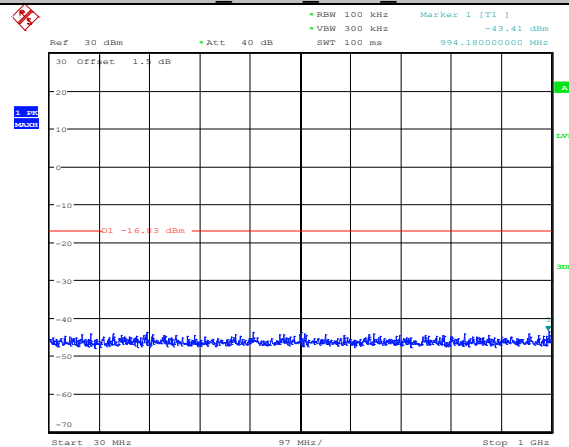


DH5 ANT1 2480 1000~26500

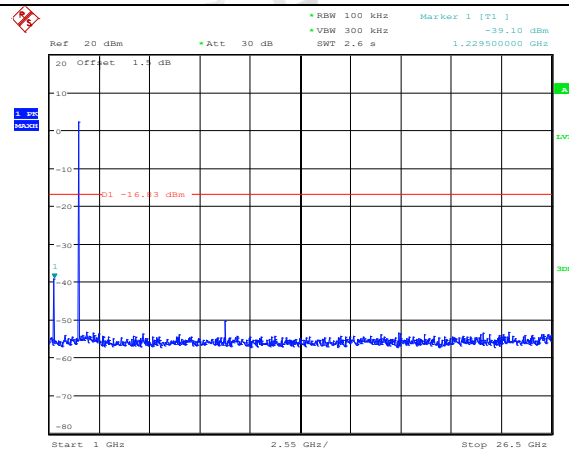


Date: 11.JUN.2021 16:54:22

2DH5_ANT1_2402_Ref

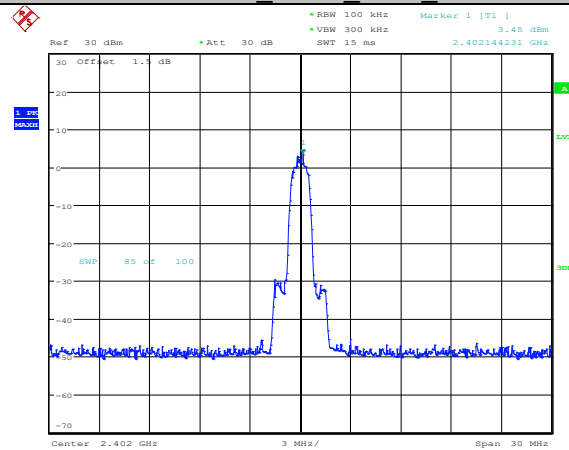


Date: 11.JUN.2021 16:56:06

2DH5_ANT1_2402_30~1000

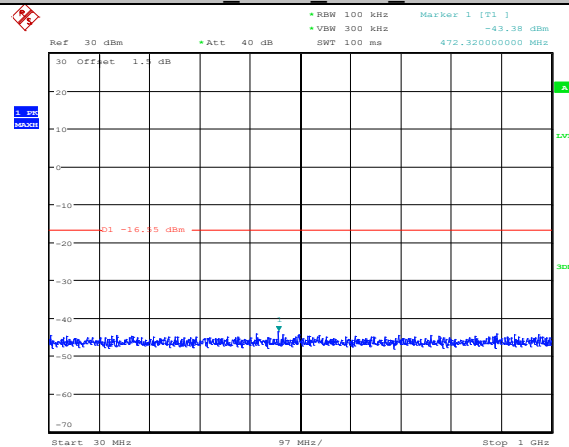


Date: 11.JUN.2021 16:56:14

2DH5 ANT1 2402 1000~26500

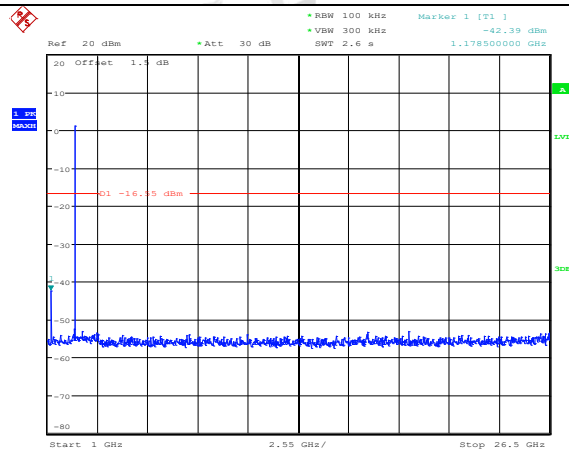


Date: 11.JUN.2021 16:56:25

2DH5 ANT1 2441 Ref

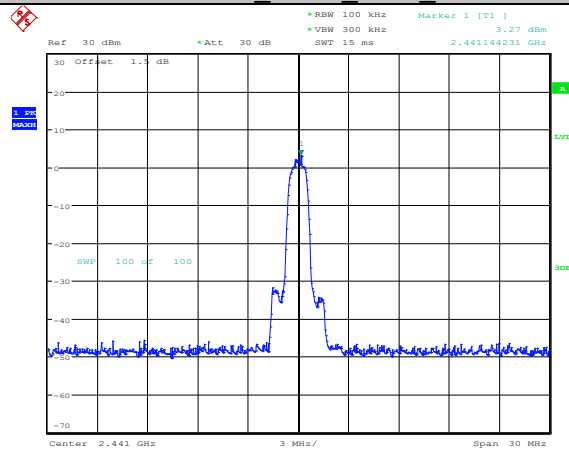


Date: 11.JUN.2021 16:57:34

2DH5 ANT1 2441 30~1000

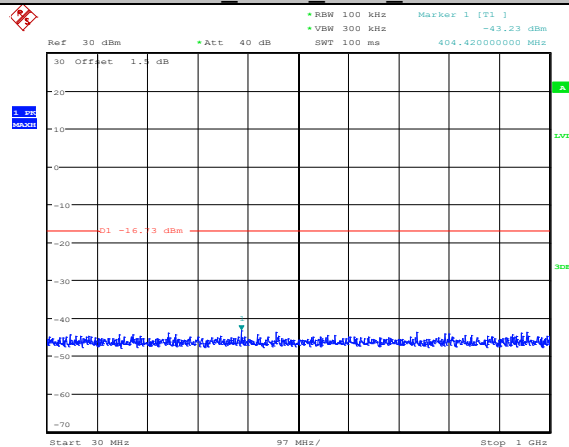


Date: 11.JUN.2021 16:57:42

2DH5 ANT1 2441 1000~26500

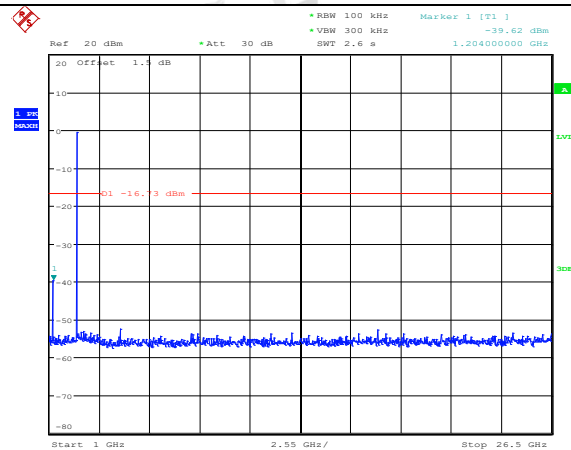


Date: 11.JUN.2021 16:57:53

2DH5 ANT1 2480 Ref

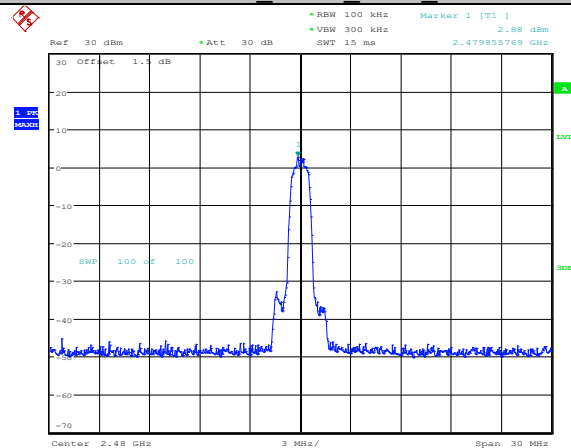


Date: 11.JUN.2021 16:59:39

2DH5 ANT1 2480 30~1000

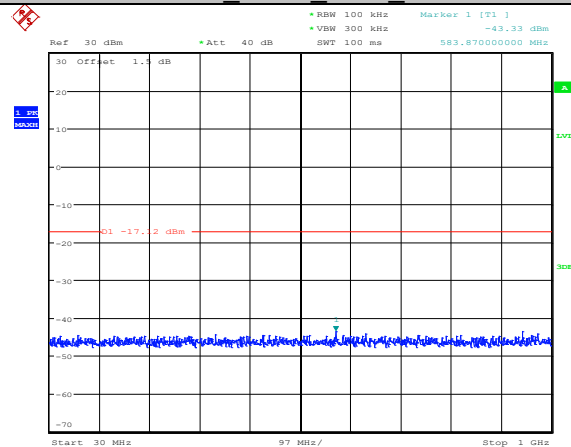


Date: 11.JUN.2021 16:59:48

2DH5 ANT1 2480 1000~26500

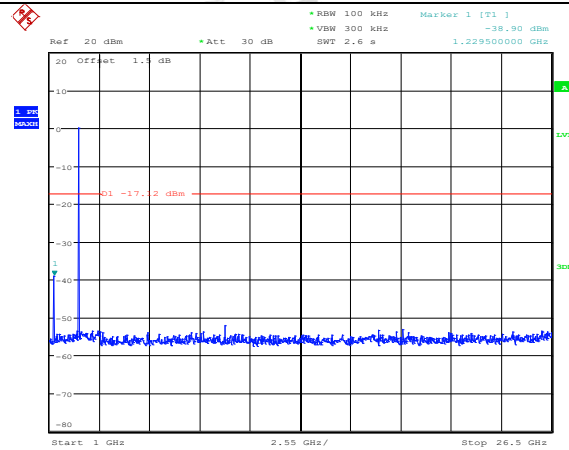


Date: 11.JUN.2021 16:59:59

3DH5_ANT1_2402_Ref

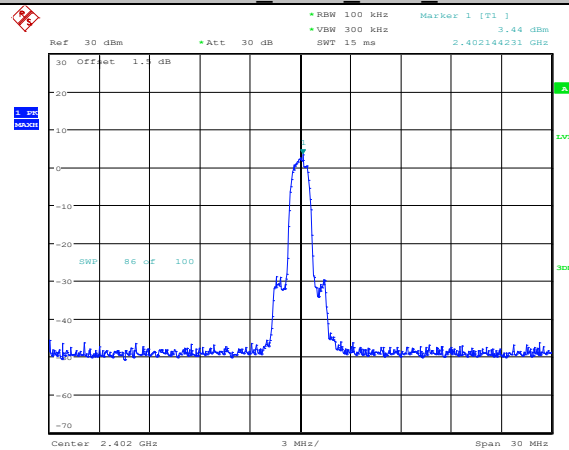


Date: 11.JUN.2021 17:01:26

3DH5_ANT1_2402_30~1000

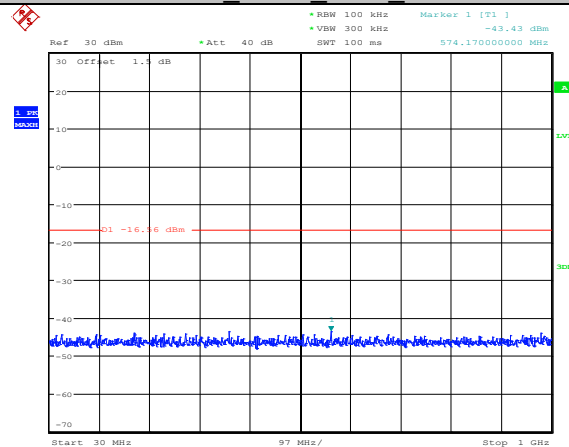


Date: 11.JUN.2021 17:01:35

3DH5_ANT1_2402_1000~26500

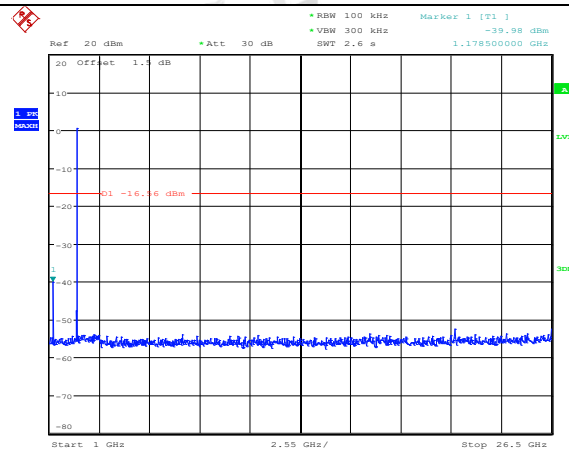


Date: 11.JUN.2021 17:01:46

3DH5 ANT1 2441 Ref

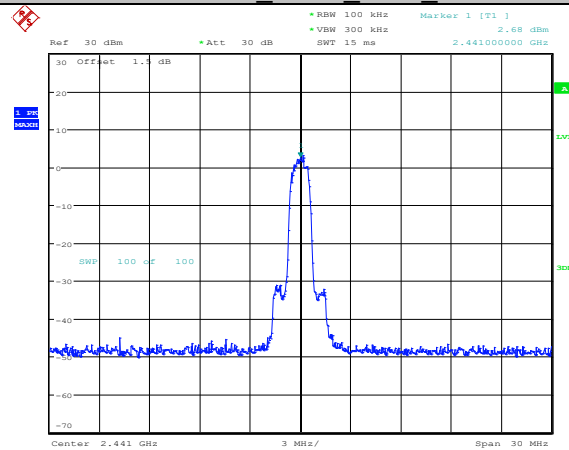


Date: 11.JUN.2021 17:02:40

3DH5 ANT1 2441 30~1000

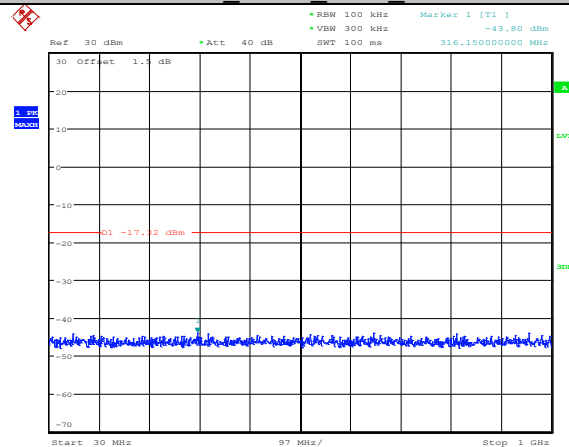


Date: 11.JUN.2021 17:02:49

3DH5 ANT1 2441 1000~26500

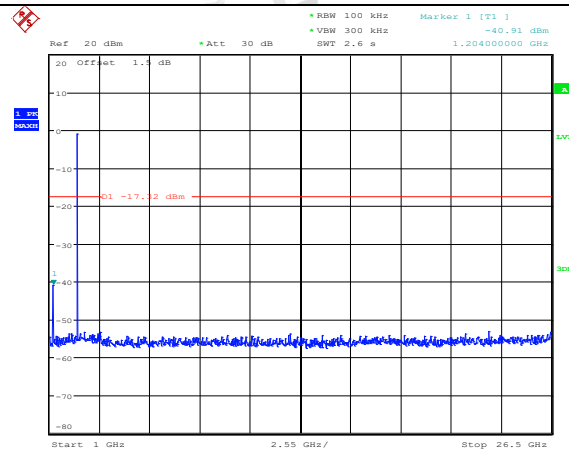


Date: 11.JUN.2021 17:03:00

3DH5 ANT1 2480 Ref

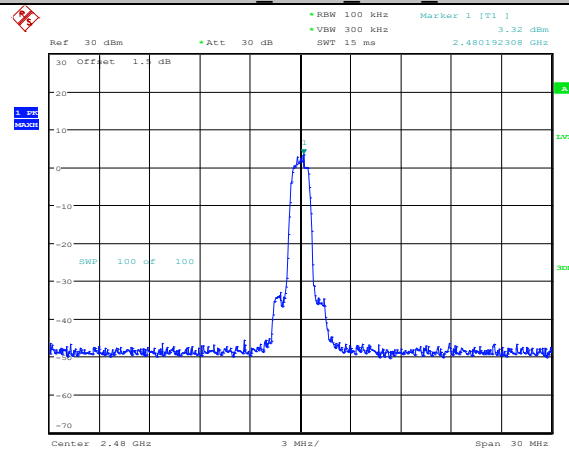


Date: 11.JUN.2021 17:04:18

3DH5 ANT1 2480 30~1000

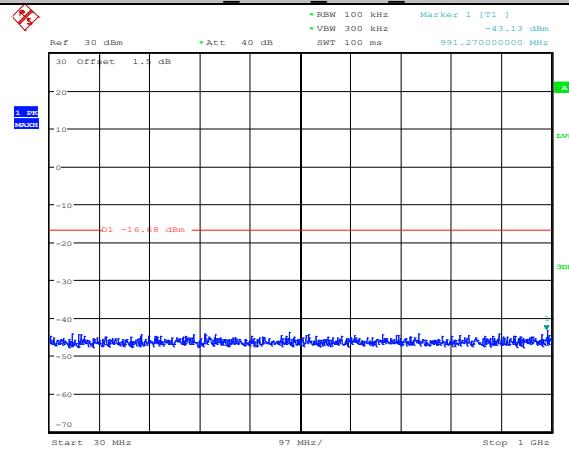



Date: 11.JUN.2021 17:04:27

3DH5 ANT1 2480 1000~26500

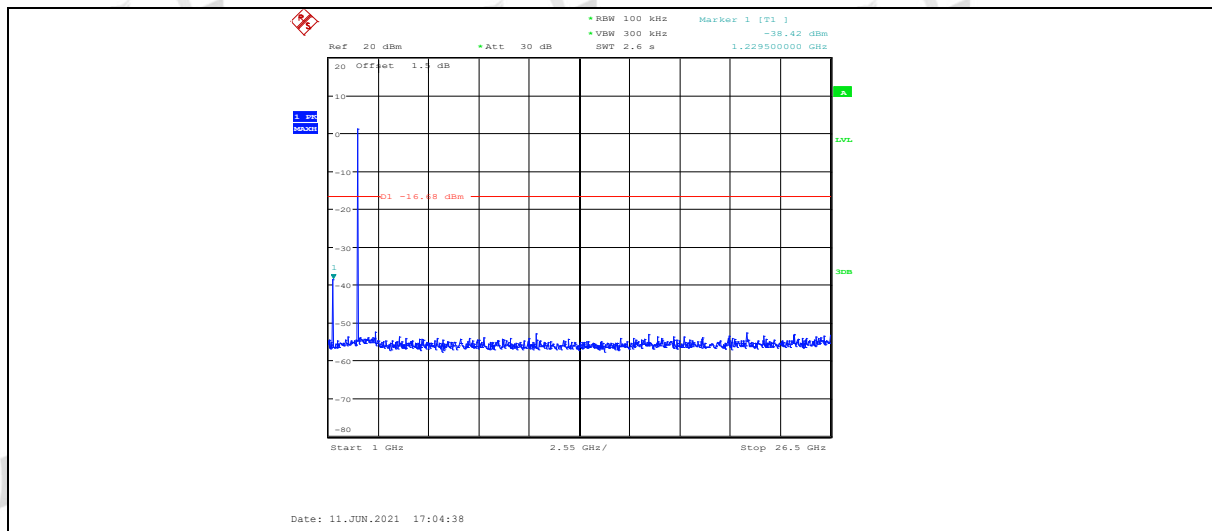


Right side:

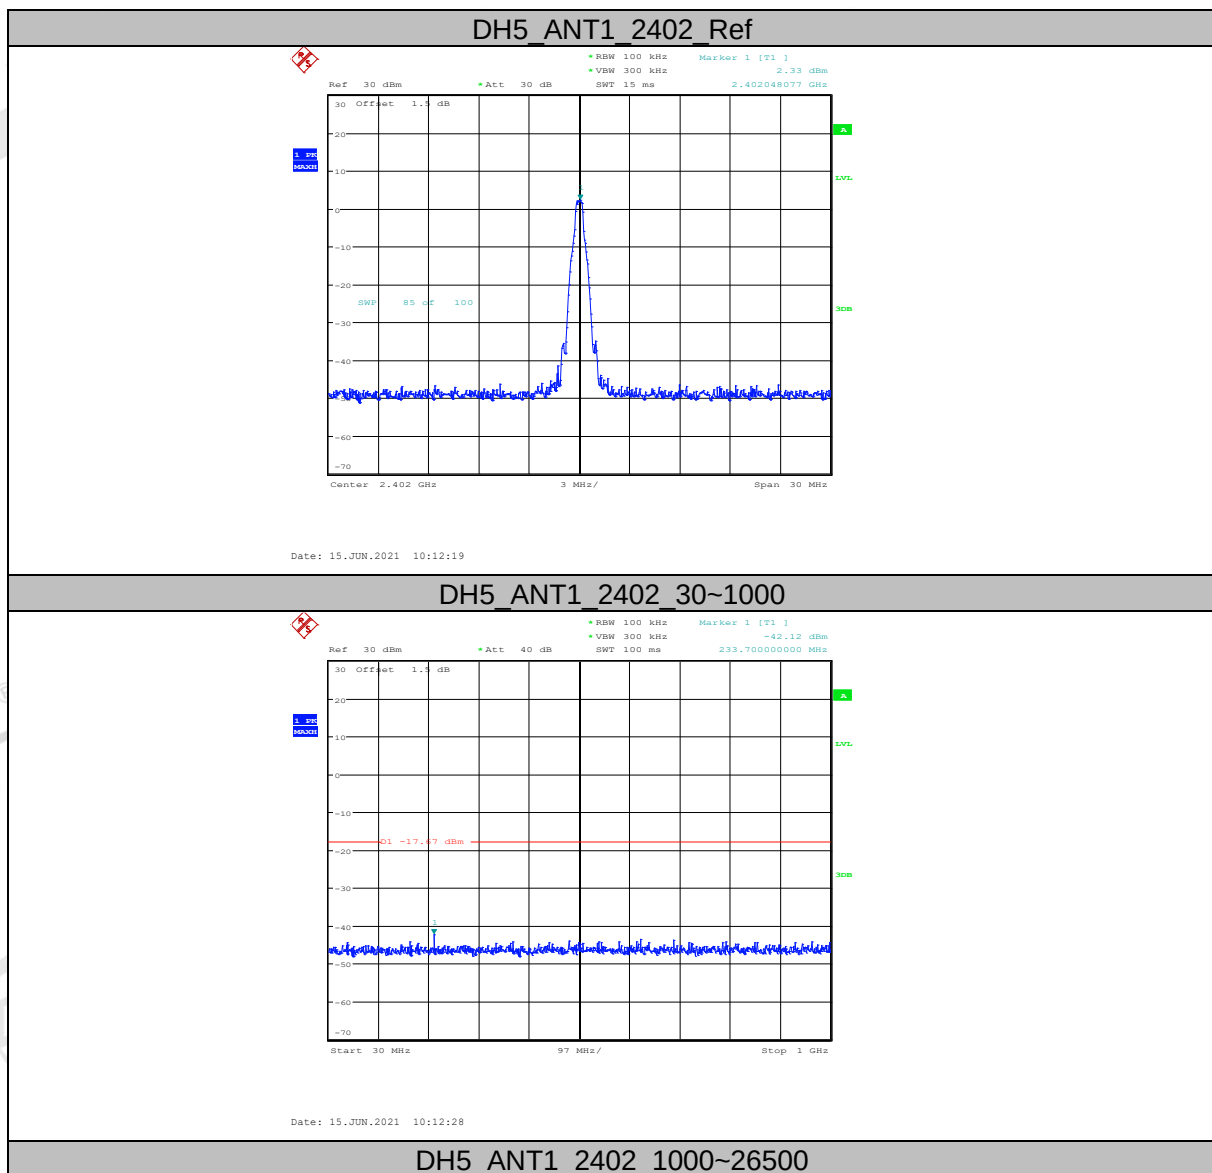

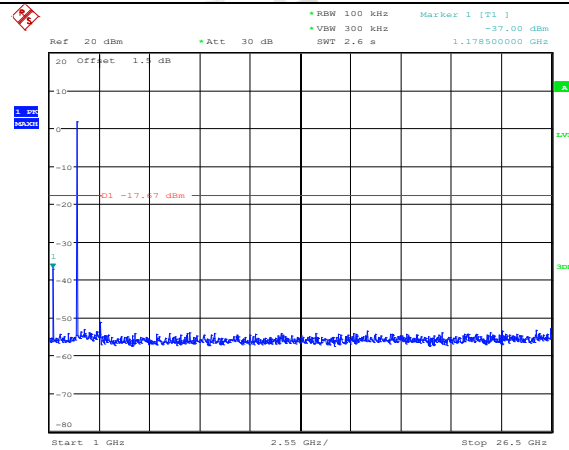


Date: 15.JUN.2021 10:12:39

DH5_ANT1_2441_Ref

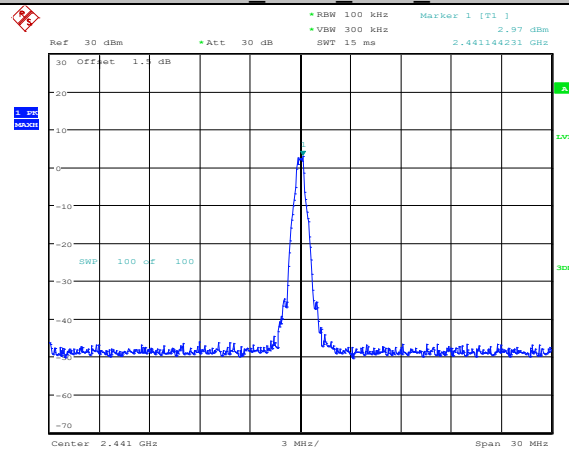


Date: 15.JUN.2021 10:13:29

DH5_ANT1_2441_30~1000

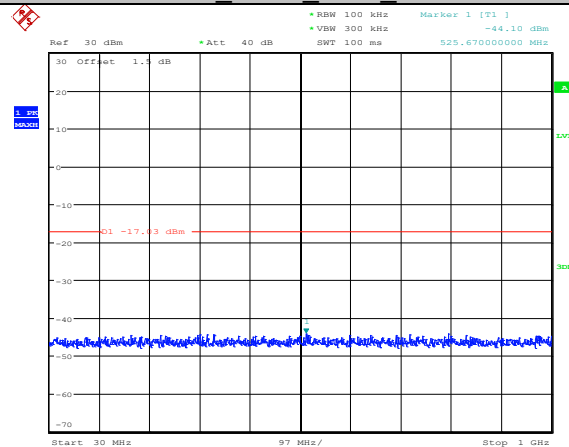


Date: 15.JUN.2021 10:13:38

DH5_ANT1_2441_1000~26500

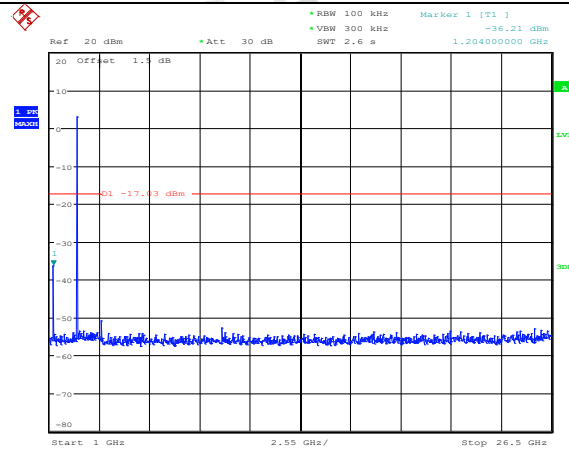


Date: 15.JUN.2021 10:13:49

DH5 ANT1 2480 Ref

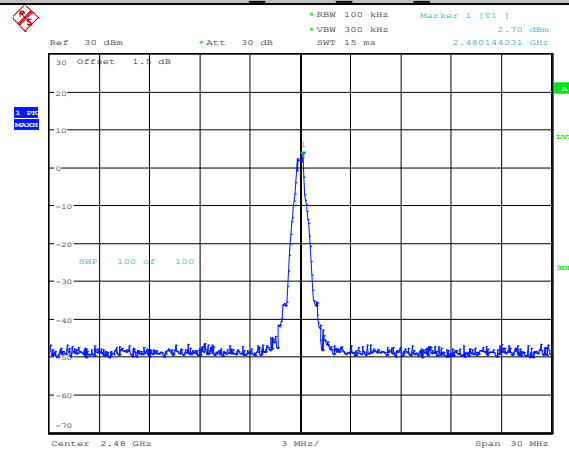


Date: 15.JUN.2021 10:14:43

DH5 ANT1 2480 30~1000

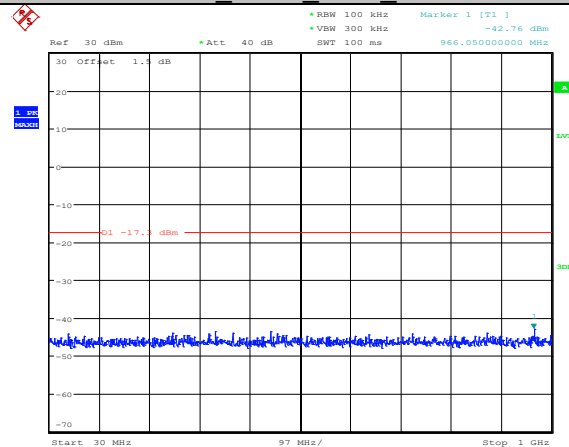


Date: 15.JUN.2021 10:14:52

DH5 ANT1 2480 1000~26500

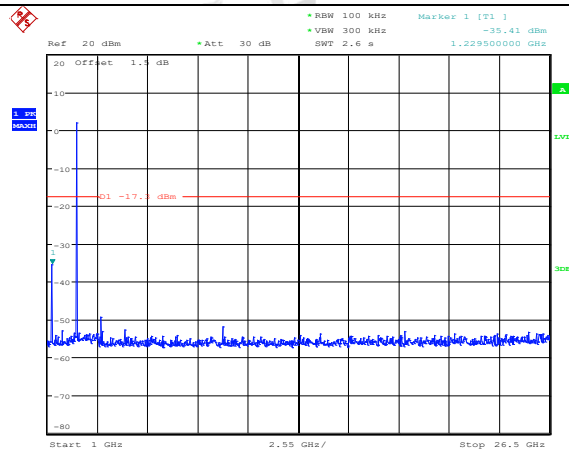


Date: 15.JUN.2021 10:15:03

2DH5_ANT1_2402_Ref

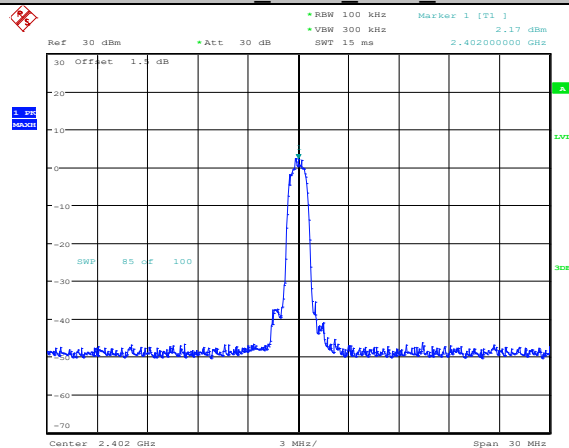


Date: 15.JUN.2021 10:16:07

2DH5_ANT1_2402_30~1000

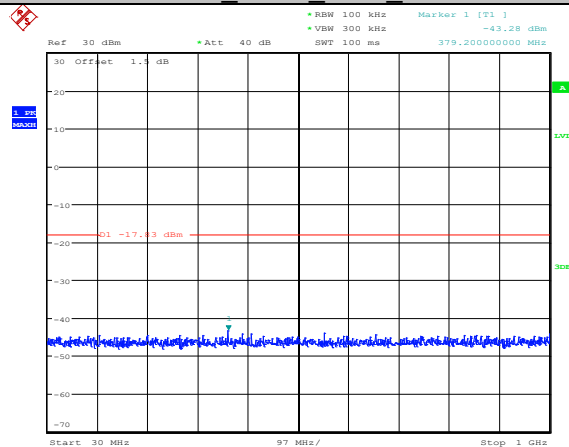


Date: 15.JUN.2021 10:16:15

2DH5_ANT1_2402_1000~26500

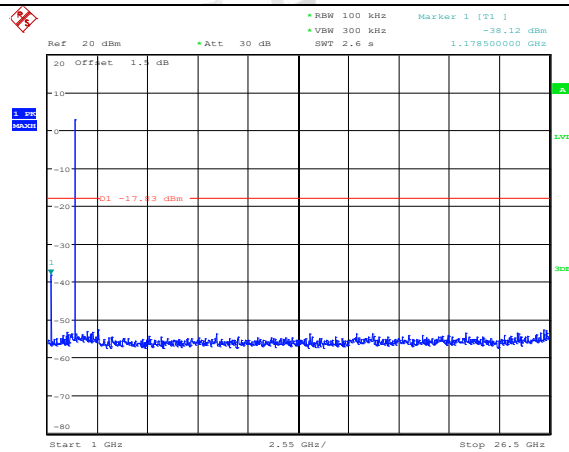


Date: 15.JUN.2021 10:16:27

2DH5 ANT1 2441 Ref

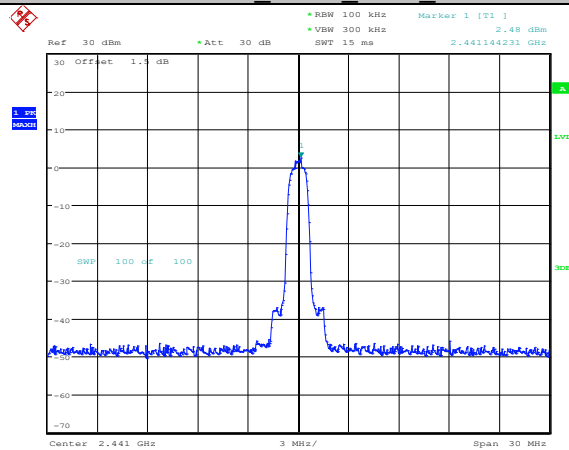


Date: 15.JUN.2021 10:17:13

2DH5 ANT1 2441 30~1000

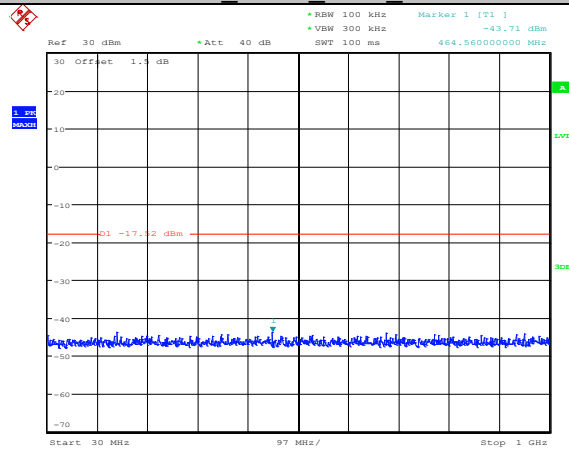


Date: 15.JUN.2021 10:17:22

2DH5 ANT1 2441 1000~26500

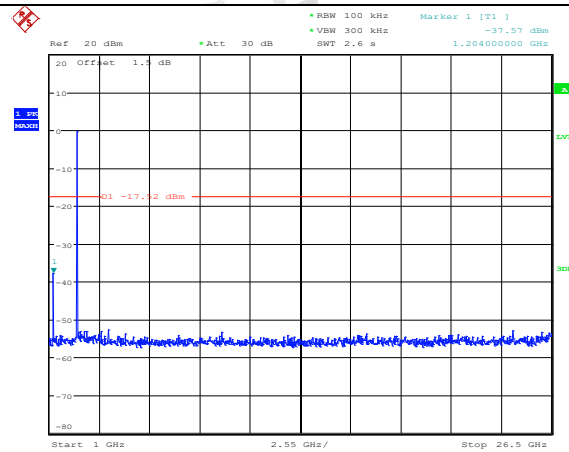


Date: 15.JUN.2021 10:17:34

2DH5 ANT1 2480 Ref

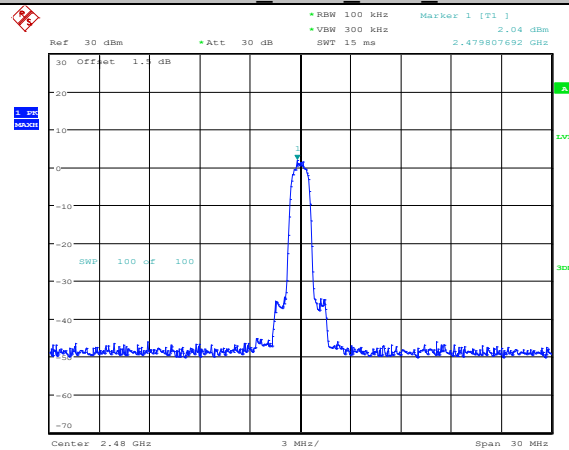

Date: 15.JUN.2021 10:18:52

2DH5 ANT1 2480 30~1000

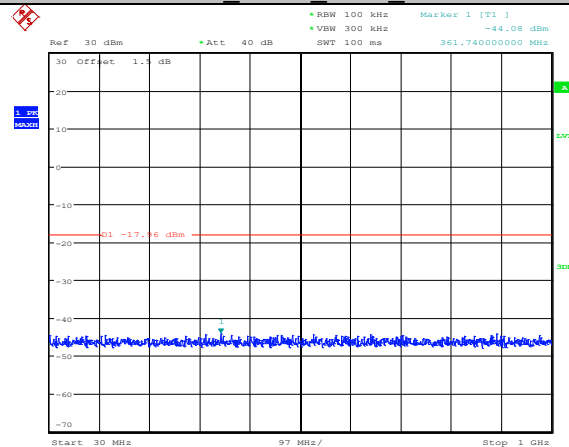

Date: 15.JUN.2021 10:19:00

2DH5 ANT1 2480 1000~26500