



FCC TEST REPORT

**Test report
On Behalf of
Shen Zhen Lian Zhong Xin Electronic Co., Ltd.
For
DVR
Model No.: DVR519F
FCC ID: 2A3U8-DVR519F**

Prepared For : Shen Zhen Lian Zhong Xin Electronic Co., Ltd.
Room 615, Block A, Zhihui Innovation Center, Taoyuanju South, NO.2 Qianjin Road, BaoAn District, Shenzhen, China

Prepared By : Shenzhen HUAK Testing Technology Co., Ltd.
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Date of Test: Oct. 08, 2021 ~Dec. 06, 2021

Date of Report: Dec. 06, 2021

Report Number: HK2110083719-E



TEST RESULT CERTIFICATION

Applicant's name: Shen Zhen Lian Zhong Xin Electronic Co., Ltd.
Address: Room 615, Block A, Zhihui Innovation Center, Taoyuanju South,
 NO.2 Qianjin Road, BaoAn District, Shenzhen, China
Manufacture's Name.....: Shen Zhen Lian Zhong Xin Electronic Co., Ltd.
Address: Room 615, Block A, Zhihui Innovation Center, Taoyuanju South,
 NO.2 Qianjin Road, BaoAn District, Shenzhen, China

Product description

Trade Mark: N/A
Product name.....: DVR
Model and/or type reference : DVR519F

Standards: FCC Rules and Regulations Part 15 Subpart C Section 15.247
 ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test:
Date (s) of performance of tests: Oct. 08, 2021 ~Dec. 06, 2021
Date of Issue.....: Dec. 06, 2021
Test Result.....: **Pass**

Testing Engineer : *Gary Qian*
 (Gary Qian)

Technical Manager : *Eden Hu*
 (Eden Hu)

Authorized Signatory : *Jason Zhou*
 (Jason Zhou)

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



TABLE OF CONTENTS

- 1. TEST RESULT SUMMARY 5**
 - 1.1. TEST PROCEDURES AND RESULTS..... 5
 - 1.2. INFORMATION OF THE TEST LABORATORY 5
 - 1.3. MEASUREMENT UNCERTAINTY 6
- 2. EUT DESCRIPTION 7**
 - 2.1. GENERAL DESCRIPTION OF EUT 7
 - 2.2. CARRIER FREQUENCY OF CHANNELS..... 8
 - 2.3. OPERATION OF EUT DURING TESTING..... 8
 - 2.4. DESCRIPTION OF TEST SETUP 9
- 3. ENERA INFORMATION 10**
 - 3.1. TEST ENVIRONMENT AND MODE 10
 - 3.2. DESCRIPTION OF SUPPORT UNITS 11
- 4. TEST RESULTS AND MEASUREMENT DATA 12**
 - 4.1. CONDUCTED EMISSION 12
 - 4.2. TEST RESULT 14
 - 4.3. MAXIMUM CONDUCTED OUTPUT POWER..... 16
 - 4.4. EMISSION BANDWIDTH..... 18
 - 4.5. POWER SPECTRAL DENSITY 24
 - 4.6. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT 31
 - 4.7. RADIATED SPURIOUS EMISSION MEASUREMENT 41
 - 4.8. ANTENNA REQUIREMENT 67
- 5. PHOTOGRAPH OF TEST 68**
- 6. PHOTOS OF THE EUT 70**



**** Modified History ****

| Revision | Description | Issued Data | Remark |
|--------------|-----------------------------|---------------|------------|
| Revision 1.0 | Initial Test Report Release | Dec. 06, 2021 | Jason Zhou |
| | | | |
| | | | |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

HUAK Testing Lab TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



1. TEST RESULT SUMMARY

1.1. TEST PROCEDURES AND RESULTS

| Requirement | CFR 47 Section | Result |
|----------------------------------|-----------------------|--------|
| Antenna requirement | §15.203/§15.247(b)(4) | PASS |
| AC Power Line Conducted Emission | §15.207 | PASS |
| Conducted Peak Output Power | §15.247(b)(3) | PASS |
| 6dB Emission Bandwidth | §15.247(a)(2) | PASS |
| Power Spectral Density | §15.247(e) | PASS |
| Band Edge | §15.247(d) | PASS |
| Spurious Emission | §15.205/§15.209 | PASS |

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. INFORMATION OF THE TEST LABORATORY

Shenzhen HUAK Testing Technology Co., Ltd.
 Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization :

A2LA Accreditation Code is 4781.01.
 FCC Designation Number is CN1229.
 Canada IC CAB identifier is CN0045.
 CNAS Registration Number is L9589.



1.3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

| No. | Item | MU |
|-----|-------------------------------|-------------------------|
| 1 | Conducted Emission | $\pm 2.71\text{dB}$ |
| 2 | RF power, conducted | $\pm 0.37\text{dB}$ |
| 3 | Spurious emissions, conducted | $\pm 0.11\text{dB}$ |
| 4 | All emissions, radiated(<1G) | $\pm 3.90\text{dB}$ |
| 5 | All emissions, radiated(>1G) | $\pm 4.28\text{dB}$ |
| 6 | Temperature | $\pm 0.1^\circ\text{C}$ |
| 7 | Humidity | $\pm 1.0\%$ |



2. EUT DESCRIPTION

2.1. GENERAL DESCRIPTION OF EUT

| | |
|----------------------|--|
| Equipment: | DVR |
| Model Name: | DVR519F |
| Series Model: | N/A |
| Model Difference: | N/A |
| FCC ID: | 2A3U8-DVR519F |
| Antenna Type: | Internal Antenna |
| Antenna Gain: | 1dBi |
| Operation frequency: | 802.11b/g/n 20:2412~2462 MHz 802.11n 40: 2422~2452MHz |
| Number of Channels: | 802.11b/g/n20: 11CH 802.11n 40: 7CH |
| Modulation Type: | CCK/OFDM/DBPSK/DAPSK |
| Power Source: | DC 3.7V from battery or DC 5V from USB |
| Power Rating: | DC 3.7V from battery or DC 5V from USB |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



2.2. CARRIER FREQUENCY OF CHANNELS

| Channel List For 802.11b/802.11g/802.11n (HT20) | | | | | | | |
|---|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01 | 2412 | 04 | 2427 | 07 | 2442 | 10 | 2457 |
| 02 | 2417 | 05 | 2432 | 08 | 2447 | 11 | 2462 |
| 03 | 2422 | 06 | 2437 | 09 | 2452 | -- | -- |

| Channel List For 802.11n (HT40) | | | | | | | |
|---------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| -- | -- | 04 | 2427 | 07 | 2442 | -- | -- |
| -- | -- | 05 | 2432 | 08 | 2447 | -- | -- |
| 03 | 2422 | 06 | 2437 | 09 | 2452 | -- | -- |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. OPERATION OF EUT DURING TESTING

Operating Mode

The mode is used: **Transmitting mode for 802.11b/802.11g/802.11n (HT20)**

- Low Channel: 2412MHz
- Middle Channel: 2437MHz
- High Channel: 2462MHz


The mode is used: **Transmitting mode for 802.11n (HT40)**

- Low Channel: 2422MHz
- Middle Channel: 2437MHz
- High Channel: 2452MHz



2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted and radiation below 1GHz testing:



Operation of EUT during radiation above 1GHz testing:



Adapter information

Model: HW-100225C00

Input: 100-240V, 50-60Hz, 0.75A

Output: 5V, 2A/9V, 2A/10V, 2.25A MAX

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is Z position.



3. ENERA INFORMATION

3.1. TEST ENVIRONMENT AND MODE

| Operating Environment: | |
|--|--|
| Temperature: | 25.0 °C |
| Humidity: | 56 % RH |
| Atmospheric Pressure: | 1010 mbar |
| Test Mode: | |
| Engineering mode: | Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%) |
| <p>The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. For the full battery state and The output power to the maximum state.</p> | |

| <p>We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:</p> | |
|--|---|
| Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case. | |
| Mode | Data rate |
| 802.11b | 1Mbps |
| 802.11g | 6Mbps |
| 802.11n(H20) | 6.5Mbps |
| 802.11n(H40) | 13.5Mbps |
| Final Test Mode: | |
| Operation mode: | Keep the EUT in continuous transmitting with modulation |
| <p>1. For WIFI function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.</p> <p>2. According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20), 13.5Mbps for 802.11(H40). Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations.</p> | |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



3.2. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Equipment | Model No. | Serial No. | FCC ID | Trade Name |
|-----------|-----------|------------|--------|------------|
| / | / | / | / | / |

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



4. TEST RESULTS AND MEASUREMENT DATA

4.1. CONDUCTED EMISSION

Test Specification

| Test Requirement: | FCC Part15 C Section 15.207 | | | | | | | | | | | | | | |
|--------------------------|---|-----------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| Test Method: | ANSI C63.10:2013 | | | | | | | | | | | | | | |
| Frequency Range: | 150 kHz to 30 MHz | | | | | | | | | | | | | | |
| Receiver setup: | RBW=9 kHz, VBW=30 kHz, Sweep time=auto | | | | | | | | | | | | | | |
| Limits: | <table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> | Frequency range (MHz) | Limit (dBuV) | | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dBuV) | | | | | | | | | | | | | | |
| | Quasi-peak | Average | | | | | | | | | | | | | |
| 0.15-0.5 | 66 to 56* | 56 to 46* | | | | | | | | | | | | | |
| 0.5-5 | 56 | 46 | | | | | | | | | | | | | |
| 5-30 | 60 | 50 | | | | | | | | | | | | | |
| Test Setup: | <p>Reference Plane</p> <p>40cm 80cm</p> <p>E.U.T AC power LISN Filter AC power EMI Receiver</p> <p>Test table/Insulation plane</p> <p>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p> | | | | | | | | | | | | | | |
| Test Mode: | Charging + transmitting with modulation | | | | | | | | | | | | | | |
| Test Procedure: | <ol style="list-style-type: none"> 1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. | | | | | | | | | | | | | | |
| Test Result: | PASS | | | | | | | | | | | | | | |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



Test Instruments


| Conducted Emission Shielding Room Test Site (843) | | | | | |
|---|--------------|-----------------|---------------|------------------|-----------------|
| Equipment | Manufacturer | Model | Serial Number | Calibration Date | Calibration Due |
| Receiver | R&S | ESCI 7 | HKE-010 | Dec. 10, 2020 | Dec. 09, 2021 |
| LISN | R&S | ENV216 | HKE-002 | Dec. 10, 2020 | Dec. 09, 2021 |
| Coax cable (9KHz-30MHz) | Times | 381806-002 | N/A | Dec. 10, 2020 | Dec. 09, 2021 |
| Conducted test software | Tonscend | TS+ Rev 2.5.0.0 | HKE-081 | N/A | N/A |

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.2. TEST RESULT

Test Specification: Line

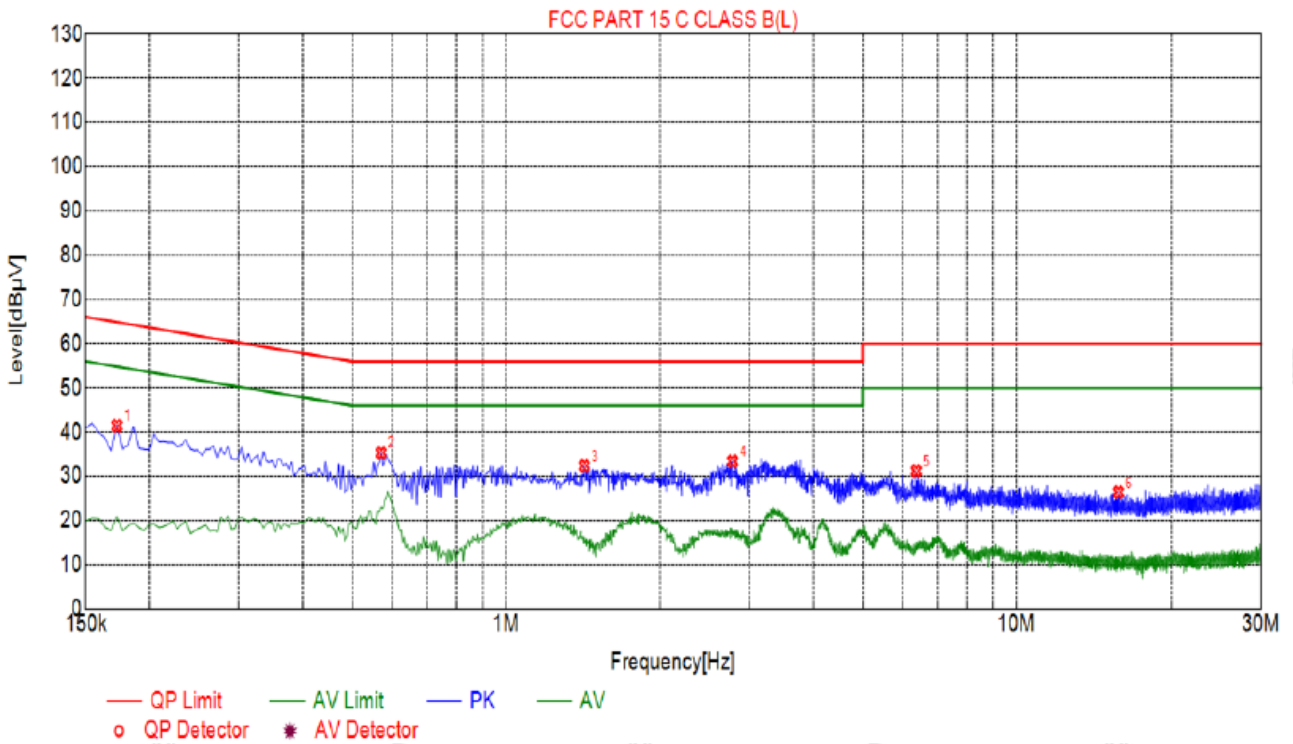


| Suspected List | | | | | | | | |
|----------------|-------------|--------------|-------------|--------------|-------------|----------------|----------|------|
| NO. | Freq. [MHz] | Level [dBµV] | Factor [dB] | Limit [dBµV] | Margin [dB] | Reading [dBµV] | Detector | Type |
| 1 | 0.1725 | 41.46 | 20.04 | 64.84 | 23.38 | 21.42 | PK | L |
| 2 | 0.5685 | 35.27 | 20.05 | 56.00 | 20.73 | 15.22 | PK | L |
| 3 | 1.4235 | 32.34 | 20.11 | 56.00 | 23.66 | 12.23 | PK | L |
| 4 | 2.7780 | 33.36 | 20.21 | 56.00 | 22.64 | 13.15 | PK | L |
| 5 | 6.3690 | 31.21 | 20.22 | 60.00 | 28.79 | 10.99 | PK | L |
| 6 | 15.7560 | 26.36 | 19.97 | 60.00 | 33.64 | 6.39 | PK | L |

Remark: Margin = Limit – Level
 Correction factor = Cable lose + LISN insertion loss
 Level=Test receiver reading + correction factor

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



Test Specification: Neutral

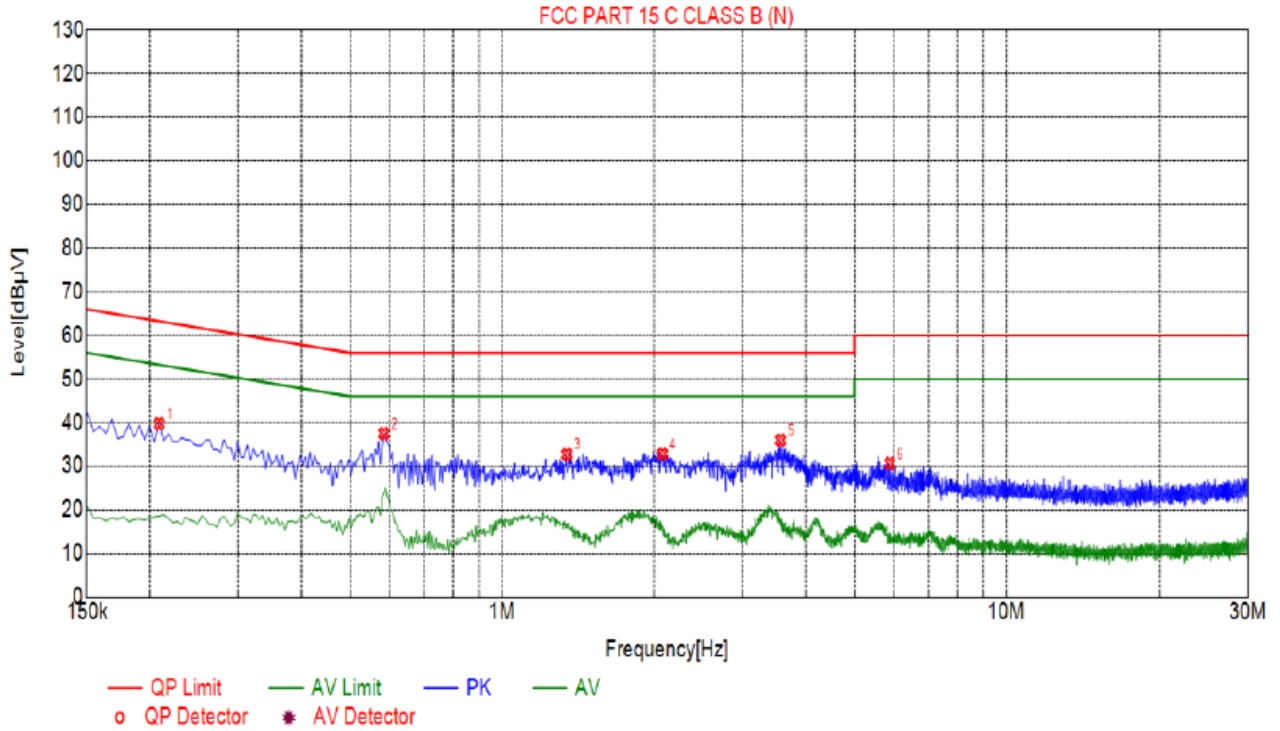

| Suspected List | | | | | | | | |
|----------------|-------------|--------------|-------------|--------------|-------------|----------------|----------|------|
| NO. | Freq. [MHz] | Level [dBµV] | Factor [dB] | Limit [dBµV] | Margin [dB] | Reading [dBµV] | Detector | Type |
| 1 | 0.2085 | 39.76 | 20.04 | 63.26 | 23.50 | 19.72 | PK | N |
| 2 | 0.5820 | 37.49 | 20.05 | 56.00 | 18.51 | 17.44 | PK | N |
| 3 | 1.3425 | 32.70 | 20.10 | 56.00 | 23.30 | 12.60 | PK | N |
| 4 | 2.0805 | 32.81 | 20.15 | 56.00 | 23.19 | 12.66 | PK | N |
| 5 | 3.5655 | 35.96 | 20.25 | 56.00 | 20.04 | 15.71 | PK | N |
| 6 | 5.8785 | 30.61 | 20.24 | 60.00 | 29.39 | 10.37 | PK | N |

Remark: Margin = Limit – Level
 Correction factor = Cable lose + LISN insertion loss
 Level=Test receiver reading + correction factor

4.3. MAXIMUM CONDUCTED OUTPUT POWER

Test Specification

| | |
|--------------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (b)(3) |
| Test Method: | KDB 558074 |
| Limit: | 30dBm |
| Test Setup: | <p>The diagram illustrates the test setup. On the left is a green box labeled 'Power meter'. A cable connects it to a small white box labeled 'Attenuator'. Another cable connects the attenuator to a yellow box labeled 'EUT' (Equipment Under Test).</p> |
| Test Mode: | Transmitting mode with modulation |
| Test Procedure: | <ol style="list-style-type: none"> 1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 15.247 Meas Guidance v05r02. 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Measure the Peak output power and record the results in the test report. |
| Test Result: | PASS |

Test Instruments

| RF Test Room | | | | | |
|---------------------------|--------------|----------|---------------|------------------|-----------------|
| Equipment | Manufacturer | Model | Serial Number | Calibration Date | Calibration Due |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Dec. 10, 2020 | Dec. 09, 2021 |
| Power meter | Agilent | E4419B | HKE-085 | Dec. 10, 2020 | Dec. 09, 2021 |
| Power Sensor | Agilent | E9300A | HKE-086 | Dec. 10, 2020 | Dec. 09, 2021 |
| RF cable | Times | 1-40G | HKE-034 | Dec. 10, 2020 | Dec. 09, 2021 |
| RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Dec. 10, 2020 | Dec. 09, 2021 |

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



Test Data

| TX 802.11b Mode | | | |
|--------------------------|-----------|-------------------------------------|-------|
| Test Channel | Frequency | Maximum Peak Conducted Output Power | LIMIT |
| | (MHz) | (dBm) | dBm |
| CH01 | 2412 | 13.34 | 30 |
| CH06 | 2437 | 13.98 | 30 |
| CH11 | 2462 | 14.68 | 30 |
| TX 802.11g Mode | | | |
| CH01 | 2412 | 13.29 | 30 |
| CH06 | 2437 | 12.58 | 30 |
| CH11 | 2462 | 13.48 | 30 |
| TX 802.11n20 Mode | | | |
| CH01 | 2412 | 11.71 | 30 |
| CH06 | 2437 | 12.00 | 30 |
| CH11 | 2462 | 12.96 | 30 |
| TX 802.11n40 Mode | | | |
| CH03 | 2422 | 11.74 | 30 |
| CH06 | 2437 | 13.77 | 30 |
| CH09 | 2452 | 12.38 | 30 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



Test data

| Test channel | 6dB Emission Bandwidth (MHz) | | | |
|--------------|------------------------------|---------|--------------|--------------|
| | 802.11b | 802.11g | 802.11n(H20) | 802.11n(H40) |
| Lowest | 10.00 | 16.44 | 17.52 | 35.04 |
| Middle | 10.04 | 16.32 | 17.56 | 35.76 |
| Highest | 9.52 | 16.36 | 17.32 | 36.08 |
| Limit: | >500k | | | |
| Test Result: | PASS | | | |

Test plots as follows:



802.11b Modulation

Lowest channel



Middle channel



Highest channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11g Modulation

Lowest channel



Middle channel



Highest channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.



802.11n (HT20) Modulation

Lowest channel



Middle channel



Highest channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




802.11n (HT40) Modulation

Lowest channel



Middle channel

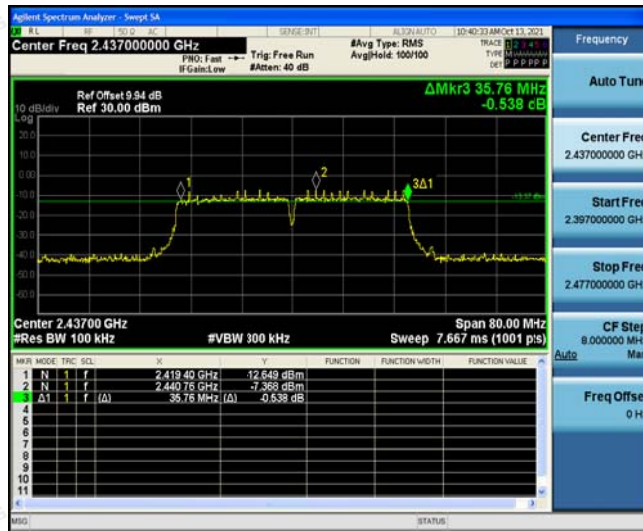


Highest channel



The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

4.5. POWER SPECTRAL DENSITY

Test Specification

| | |
|--------------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (e) |
| Test Method: | KDB 558074 |
| Limit: | The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission. |
| Test Setup: |  <p style="text-align: center;">Spectrum Analyzer EUT</p> |
| Test Mode: | Transmitting mode with modulation |
| Test Procedure: | <ol style="list-style-type: none"> 1. The testing follows Measurement procedure 10.2 method PKPSD of FCC KDB Publication 558074 D01 15.247 Meas Guidance v05r02. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. Video bandwidth $\text{VBW} \geq 3 \times \text{RBW}$. Set the span to at least 1.5 times the OBW. 5. Detector = Peak, Sweep time = auto couple. 6. Employ trace averaging (Peak) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level. 7. Measure and record the results in the test report. |
| Test Result: | PASS |



Test Instruments

| RF Test Room | | | | | |
|---------------------------|--------------|----------------------|---------------|------------------|-----------------|
| Equipment | Manufacturer | Model | Serial Number | Calibration Date | Calibration Due |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Dec. 10, 2020 | Dec. 09, 2021 |
| RF Cable (9KHz-26.5GHz) | Tonscend | 170660 | N/A | Dec. 10, 2020 | Dec. 09, 2021 |
| RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Dec. 10, 2020 | Dec. 09, 2021 |
| RF test software | Tonscend | JS1120-B Version 2.6 | HKE-083 | N/A | N/A |

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



Test data

| EUT Set Mode | Channel | Result (dBm/30kHz) | Result (dBm/3kHz) |
|--|---------|--------------------|-------------------|
| 802.11b | Lowest | -3.51 | -13.51 |
| | Middle | -3.07 | -13.07 |
| | Highest | -2.35 | -12.35 |
| 802.11g | Lowest | -10.73 | -20.73 |
| | Middle | -10.27 | -20.27 |
| | Highest | -9.72 | -19.72 |
| 802.11n(H20) | Lowest | -12.35 | -22.35 |
| | Middle | -8.32 | -18.32 |
| | Highest | -10.26 | -20.26 |
| 802.11n(H40) | Lowest | -10.89 | -20.89 |
| | Middle | -12.68 | -22.68 |
| | Highest | -11.55 | -21.55 |
| PSD test result (dBm/3kHz)= PSD test result (dBm/30kHz)-10 | | | |
| Limit: 8dBm/3kHz | | | |
| Test Result: | PASS | | |

Test plots as follows:



802.11b Modulation

Lowest channel



Middle channel



Highest channel




The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




802.11g Modulation


Lowest channel

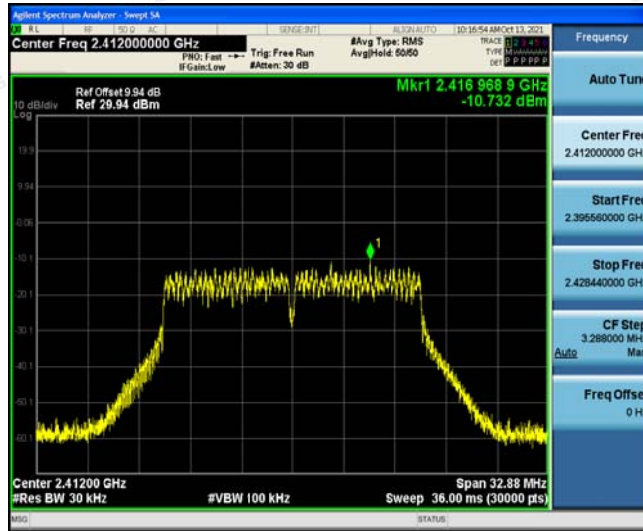

Middle channel

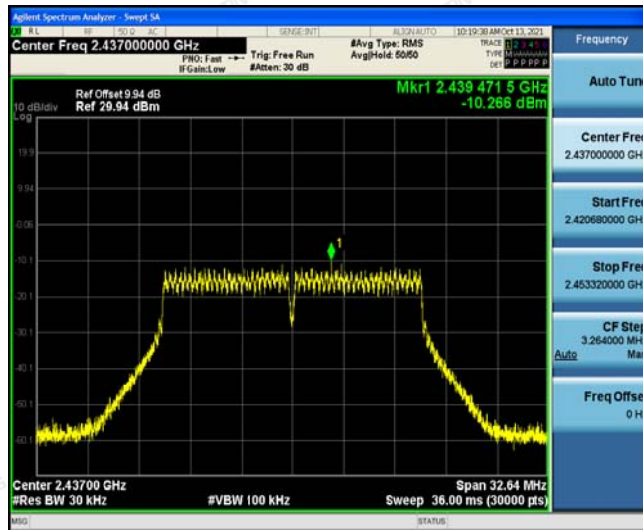

Highest channel

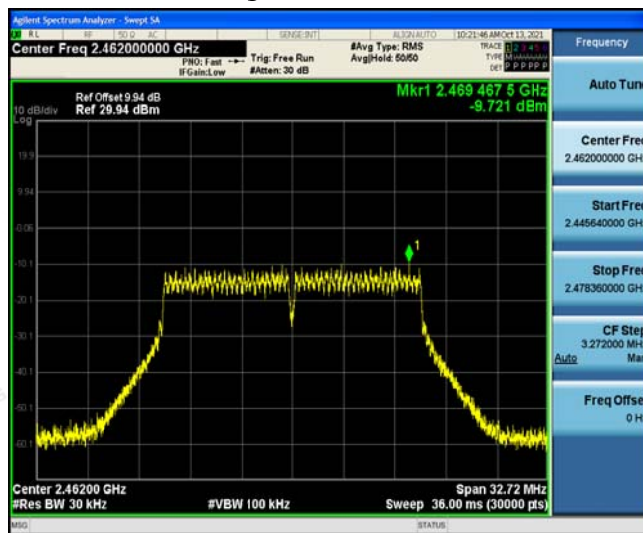


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




802.11n (HT20) Modulation


Lowest channel

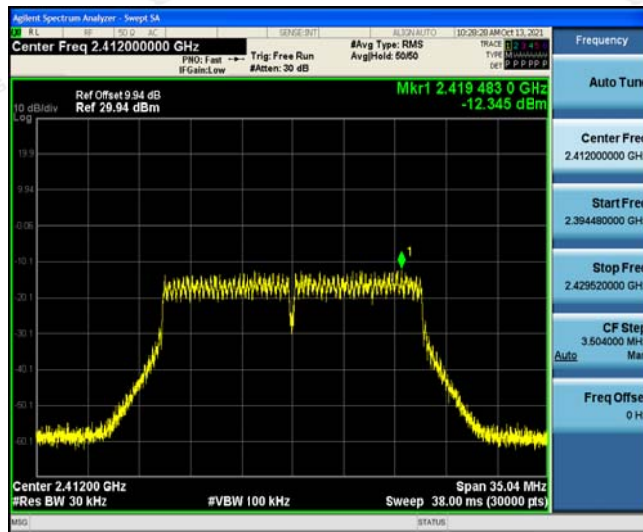

Middle channel

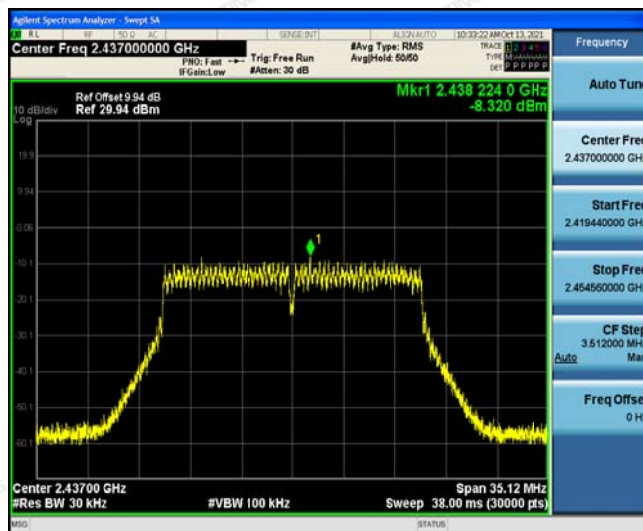

Highest channel

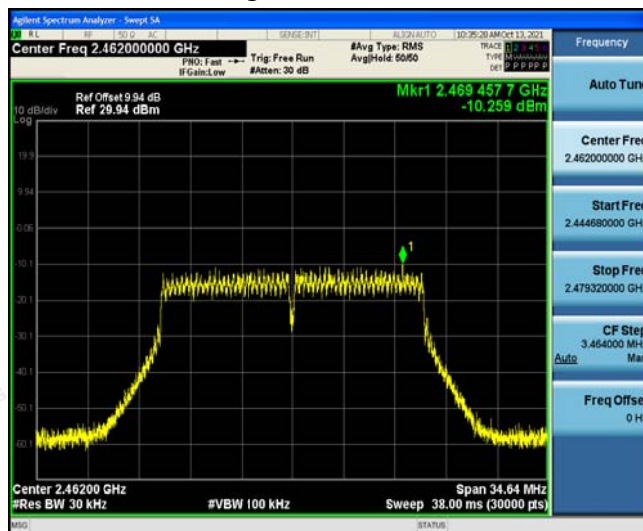


The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.




802.11n (HT40) Modulation


Lowest channel

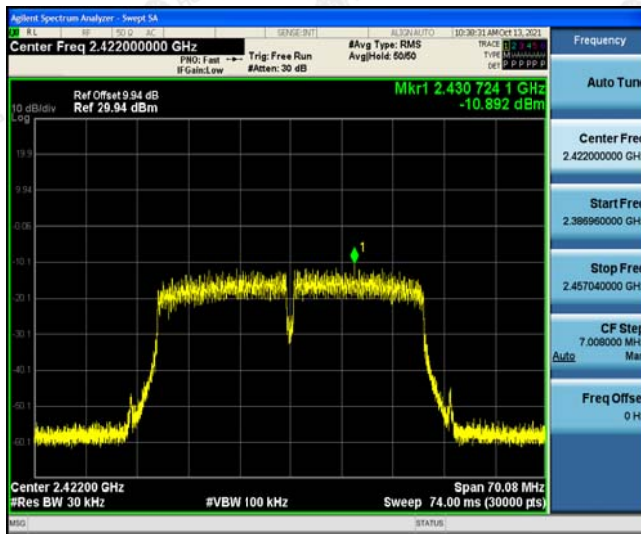

Middle channel

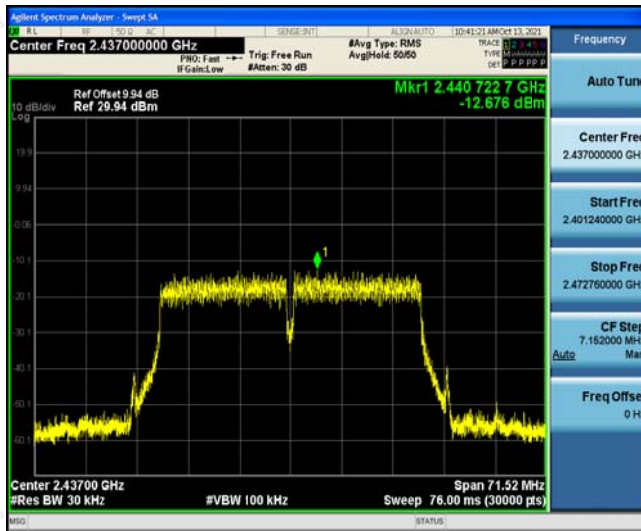

Highest channel

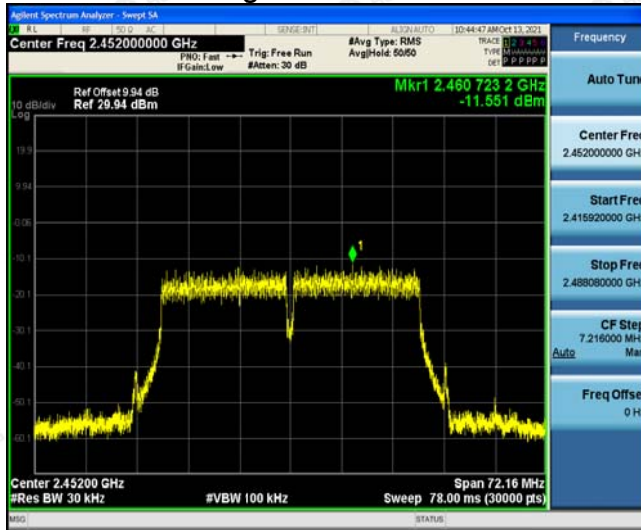

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the results are retained for 30 days only. The document is issued by HUAJ, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.