

## TEST REPORT

**Report Number: 22041395HKG-001**

Application for Original Grant of 47 CFR Part 15 Certification  
New Family of RSS-247 Issue 2 Equipment

**FCC ID: EW780-9388-00A**

**IC: 1135B-80938800A**

**Prepared and Checked by:**

**Approved by:**

Signed On File  
Wong Cheuk Ho, Herbert  
Lead Engineer

---

Wong Kwok Yeung, Kenneth  
Assistant Supervisor  
Date: June 30, 2022

---

Intertek's standard Terms and Conditions can be obtained at our website <http://www.intertek.com/terms/>.

The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

© 2017 Intertek

## TEST REPORT

### GENERAL INFORMATION

<b>Applicant Name:</b>	VTech Telecommunications Ltd.
<b>Applicant Address:</b>	23/F., Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road, Tai Po, Hong Kong.
<b>Manufacturer Name:</b>	VTech (Dongguan) Telecommunications Limited.
<b>Manufacturer Address:</b>	VTech Science Park, Xia Ling Bei Management Zone, Liaobu, Dongguan, Guangdong, China.
<b>FCC Specification Standard:</b>	FCC Part 15, October 1, 2020 Edition
<b>FCC ID:</b>	EW780-9388-00A
<b>FCC Model(s):</b>	DM111 BU DM111-2 BU, DM112 BU, DM112-2 BU
<b>IC Specification Standard:</b>	RSS-247 Issue 2, February 2017 RSS-Gen Issue 5 Amendment 2, February 2021
<b>IC:</b>	1135B-80938800A
<b>HVIN:</b>	35-201958BU
<b>VTech Model(s):</b>	DM111 BU, DM111-2 BU, DM112 BU, DM112-2 BU
<b>PMN:</b>	DM111 BU, DM111-2 BU, DM112 BU, DM112-2 BU
<b>Type of EUT:</b>	Spread Spectrum Transmitter
<b>Description of EUT:</b>	Audio Baby Monitor - Baby Unit
<b>Sample Receipt Date:</b>	April 27, 2022
<b>Date of Test:</b>	April 27, 2022 to June 19, 2022
<b>Report Date:</b>	June 30, 2022
<b>Environmental Conditions:</b>	Temperature: +10 to 40°C Humidity: 10 to 90%
<b>Conclusion:</b>	Test was conducted by client submitted sample. The submitted sample as received complied with the 47 CFR Part 15 / RSS-247 Issue 2 Certification.

## TEST REPORT

### TABLE OF CONTENTS

<b>1.0</b>	<b>TEST RESULTS SUMMARY &amp; STATEMENT OF COMPLIANCE .....</b>	<b>4</b>
1.1	Summary of Test Results.....	4
1.2	Statement of Compliance.....	4
<b>2.0</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
2.1	Product Description.....	5
2.2	Test Methodology .....	5
2.3	Test Facility .....	5
<b>3.0</b>	<b>SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
3.1	Justification .....	6
3.2	EUT Exercising Software .....	7
3.3	Details of EUT and Description of Accessories.....	8
3.4	Measurement Uncertainty .....	8
<b>4.0</b>	<b>TEST RESULTS.....</b>	<b>9</b>
4.1	Maximum Conducted Output Power at Antenna Terminals .....	9
4.2	Maximum 20 dB RF Bandwidth .....	12
4.3	Minimum Number of Hopping Frequencies.....	15
4.4	Minimum Hopping Channel Carrier Frequency Separation .....	17
4.5	Average Channel Occupancy Time .....	19
4.6	Out of Band Conducted Emissions .....	21
4.7	Field Strength Calculation.....	26
4.8	Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions.....	27
4.8.1	Radiated Emission Configuration Photograph .....	28
4.8.2	Radiated Emission Data .....	28
4.8.3	Radiated Emission Test Setup.....	29
4.9	AC Power Line Conducted Emission .....	34
4.9.1	AC Power Line Conducted Emission Configuration Photograph .....	34
4.9.2	AC Power Line Conducted Emission Data .....	34
4.9.3	AC Line Conducted Emission Test Setup.....	36
<b>5.0</b>	<b>EQUIPMENT LIST .....</b>	<b>37</b>

## TEST REPORT

### 1.0 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

#### 1.1 Summary of Test Results

Test Items	FCC Part 15 Section	RSS-247/ RSS-Gen# Section	Results	Details See Section
Antenna Requirement	15.203	6.8 <sup>#</sup>	Pass	2.1
Max. Conducted Output Power	15.247(b)(2) & (4)	5.4(a)	Pass	4.1
Max. 20dB RF Bandwidth	15.247(a)(1)(i)	5.1(c)	N/A	4.2
Min. No. of Hopping Frequencies	15.247(a)(1)(i)	5.1(c)	Pass	4.3
Min. Hopping Channel Carrier Frequency Separation	15.247(a)(1)	5.1(c)	Pass	4.4
Average Time of Occupancy	15.247(a)(1)(i)	5.1(c)	Pass	4.5
Out of Band Antenna Conducted Emission	15.247(d)	5.5	Pass	4.6
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d)	8.10 <sup>#</sup>	Pass	4.8
AC Power Line Conducted Emission	15.207 & 15.107	8.8 <sup>#</sup>	Pass	4.9

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

#### 1.2 Statement of Compliance

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2020 Edition  
RSS-247 Issue 2, February 2017  
RSS-Gen Issue 5 Amendment 2, February 2021

## TEST REPORT

### 2.0 GENERAL DESCRIPTION

#### 2.1 Product Description

The DM111 BU (35-201958BU) is a Audio Baby Monitor - Baby Unit.

The Equipment Under Test (EUT) operates at frequency range of 902.7MHz-927.1MHz. There are totally 62 non-overlapping channels with 400kHz channel separation and 25 active channels out of the 62 channels.

The EUT is powered by an AC adaptor (Model: VT05UUS06040, Input 100-120VAC 60Hz 0.15A, Output 6VDC 0.4A).

The antenna used in the EUT is integral, and the test sample is a prototype.

For FCC, the Model(s): DM111-2 BU, DM112 BU and DM112-2 BU are the same as the Model: DM111 BU in electronics/electrical designs including software & firmware, PCB layout and construction design/physical design/enclosure as declared by client. The only differences between these models are color and model number to be sold for marketing purpose as declared by client.

The circuit description and frequency hopping algorithm are attached in the Appendix and saved with filename: descri.pdf.

#### 2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013). All other measurements were made in accordance with the procedures in 47 CFR Part 2.

#### 2.3 Test Facility

The radiated emission test site, AC power line conducted measurement facility and antenna port conducted measurement facility used to collect the radiated data, AC Power Line conducted data, and conductive data are at Intertek Testing Services Hong Kong Ltd., which is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong SAR, China. This test facility and site measurement data have been fully placed on file with FCC and Industry Canada No. 2042H, CABID is "HKAP01".

## TEST REPORT

### 3.0 SYSTEM TEST CONFIGURATION

#### 3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by 120VAC.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable at 0.8m height from the ground plane for emission testing at or below 1GHz and 1.5m for emission measurements above 1GHz. If the baby unit attached to peripherals, they were connected and operational (as typical as possible). The parent unit was remotely located as far from the antenna and the baby as possible to ensure full power transmission from the parent unit. Else, the base was wired to transmit full power with modulation.

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

For transmitter radiated measurement, the spectrum analyzer resolution bandwidth was 100 kHz for frequencies below 1000 MHz. The resolution bandwidth was 1 MHz for frequencies above 1000 MHz.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. Receiver was performed from 30MHz to the fifth harmonic of the highest frequency or 40GHz, whichever is lower.

## TEST REPORT

### 3.1 Justification - Cont'd

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitry used to control additional functions other than the operation of the transmitter is subject to FCC Part Section 15.109 Limits.

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.3.4.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.3.4. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes have been tested, and the worst case data is included in this report.

### 3.2 EUT Exercising Software

The EUT exercise program (ComTestSerial Version 3.0.0.108) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

## TEST REPORT

### 3.3 Details of EUT and Description of Accessories

#### Details of EUT:

An AC adaptor (provided with the unit) was used to power the device. Their descriptions are listed below.

- (1) An AC adaptor (Model: VT05UUS06040, Input 100-120VAC 60Hz 0.15A, Output 6VDC 0.4A).  
(Brand VTPL)  
(Provided by Client)

#### Description of Accessories:

- (1) Parent Unit: Model: DM111 PU (FCC ID: EW780-9388-01A) (Provided by Client)

### 3.4 Measurement Uncertainty

Decision Rule for compliance: For FCC/IC standard, the measured value must be within the limits of applicable standard without accounting for the measurement uncertainty. For EN/IEC/HKTA/HKTC standard, conformity rules will be used as per standard directly excepted EN/IEC 61000-3-2, EN/IEC 61000-3-3, HKTA1004, HKCA1008, HKTA1019, HKTA1020, HKTA1041 and HKTA1044. For these excepted or not mentioned standards, Cl 4.2.2 of ILAC-G8:09/2019 decision rules will be reference and guard band will be equal to our measurement uncertainty with 95% confidence level ( $k=2$ ). In case, the measured value is within guard band region, undetermined decision will be used. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are  $\pm 5.3\text{dB}$  and  $\pm 0.99\text{dB}$  respectively. The value of the Measurement uncertainty for conducted emission test is  $\pm 4.2\text{dB}$ .

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.




## TEST REPORT

### 4.0 TEST RESULTS

RF Conducted measurement Test Setup by a Spectrum Analyzer.

The figure below shows the test setup, which is utilized to make these measurements.



#### 4.1 Maximum Conducted (peak) Output Power at Antenna Terminals

- ☐ The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.
- ☒ The antenna port of the EUT was connected to the input of a spectrum analyzer. The analyzer was set for RBW>20dB bandwidth and power was read directly in dBm. External attenuation and cable loss were compensated for using the OFFSET function of the analyzer.

(Baby Unit) Antenna Gain = 0 dBi

Frequency (MHz)		Output in dBm	Output in mWatt
Lowest Channel:	902.7	17.7	58.9
Middle Channel:	915.1	17.6	57.5
Highest Channel:	927.1	17.6	57.5

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation: ☒ included in OFFSET function  
☐ added to SA raw reading

dBm max. output level = 17.7 dBm

Limits:


- ☒ 0.25W (23.98dBm) for antennas with gains of 6dBi or less
- ☐ 0.25W (24dBm) for antennas with gains of 6dBi or less
- ☐ 1W (30dBm) for antennas with gains of 6dBi or less
- ☐ \_\_\_W (\_\_\_dBm) for antennas with gains more than 6dBi

The plots of conducted output power are saved as below.


## TEST REPORT

### PLOTS OF CONDUCTED OUTPUT POWER

Lowest Channel

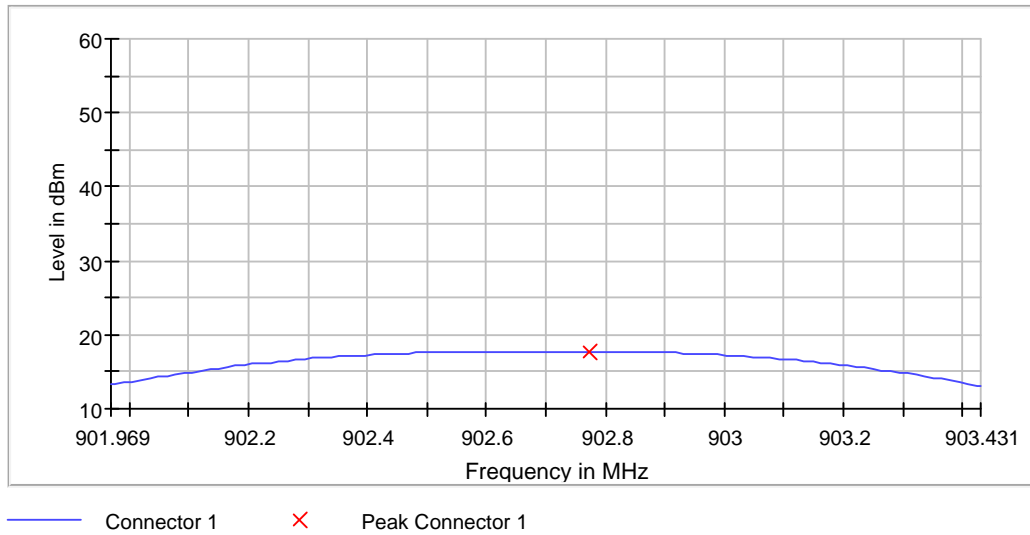


Middle Channel

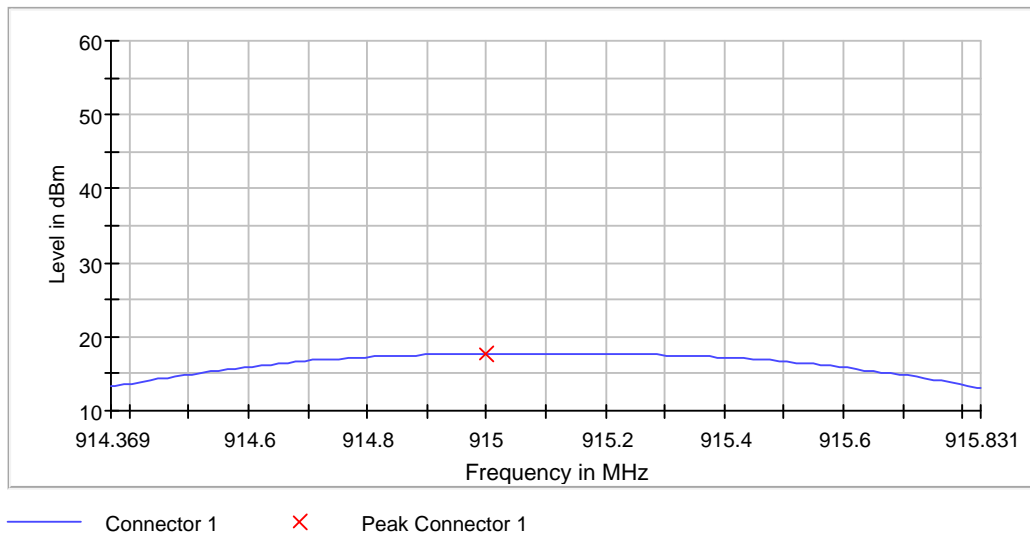

## TEST REPORT

### PLOTS OF CONDUCTED OUTPUT POWER

Highest Channel

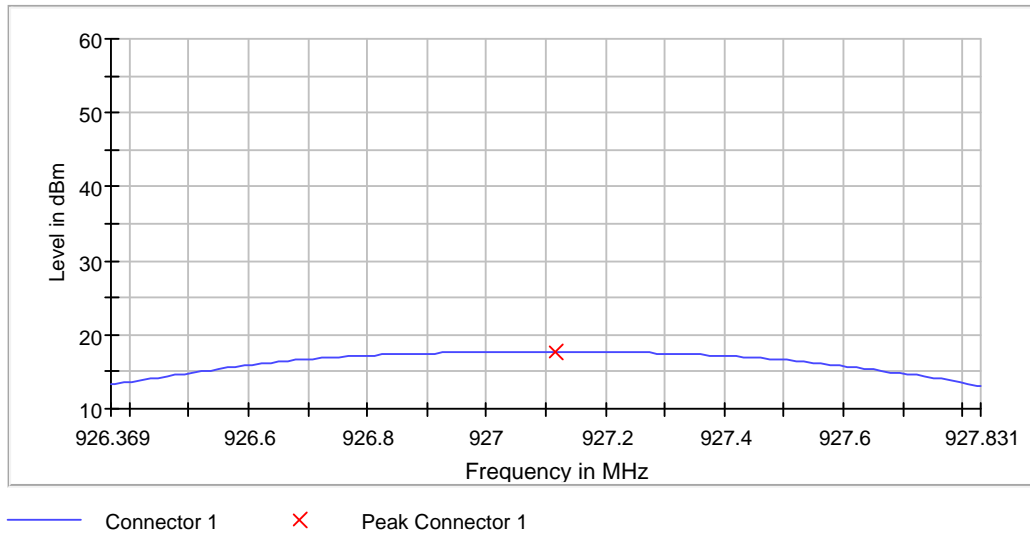

### Measurement

Setting	Instrument Value	Target Value
Span	1.462 MHz	1.462 MHz
RBW	1.000 MHz	$\geq 584.708$ kHz
VBW	3.000 MHz	$\geq 3.000$ MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	2.00 dB	2.00 dB

## TEST REPORT

### 4.2 Maximum 20 dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 20 dB lower than PEAK level. The 20 dB bandwidth was determined from where the channel output spectrum intersected the display line.

#### Baby Unit

	Frequency (MHz)	20 dB Bandwidth (kHz)
Low Channel:	902.7	292.4
Middle Channel:	915.1	292.4
High Channel:	927.1	292.4

#### Limits


- ☒ ≤500kHz for 902-928MHz
- ☐ N/A for 2400-2483.5MHz
- ☐ ≤1MHz for 5725-5850MHz

The plots of 20dB RF bandwidth are saved as below.


## TEST REPORT

### PLOTS OF 20dB RF BANDWIDTH

Lowest Channel

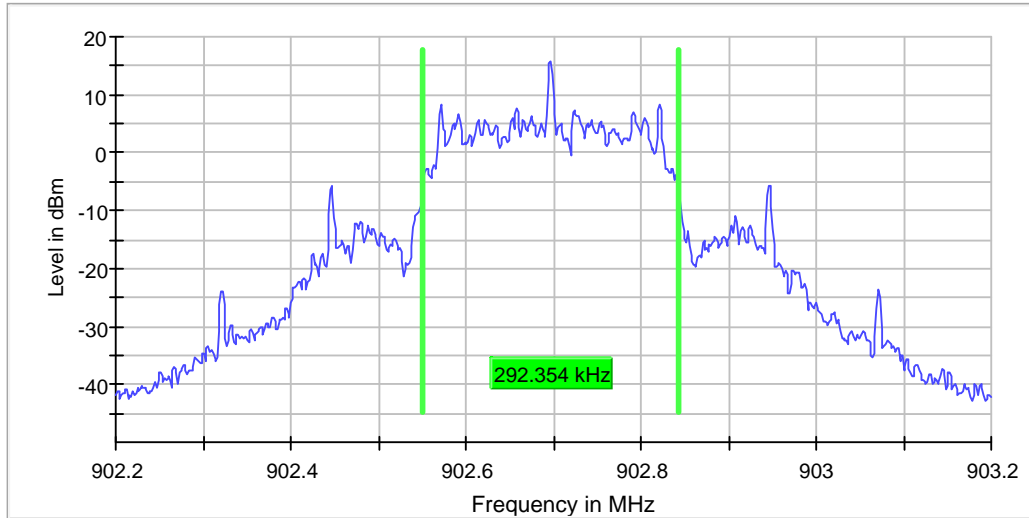


Middle Channel

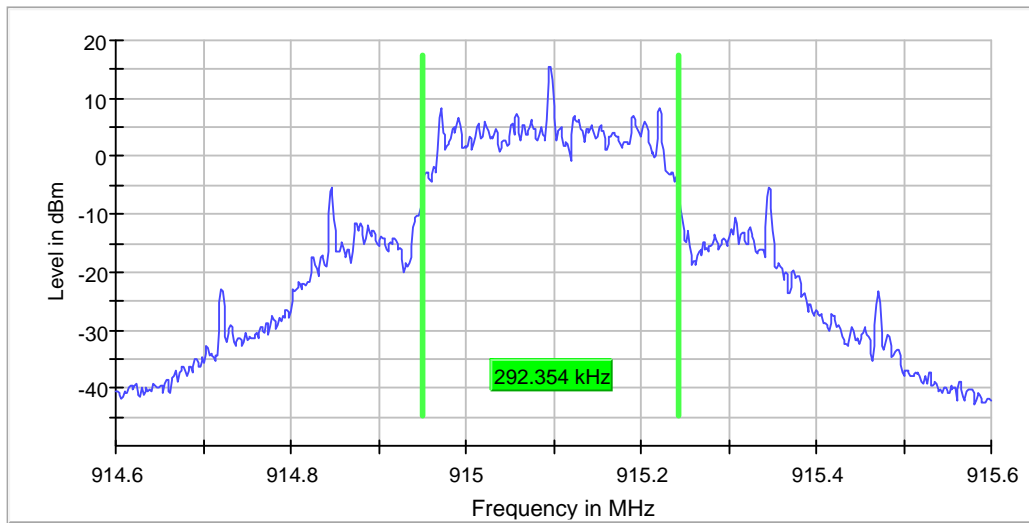

## TEST REPORT

### PLOTS OF 20dB RF BANDWIDTH

Highest Channel

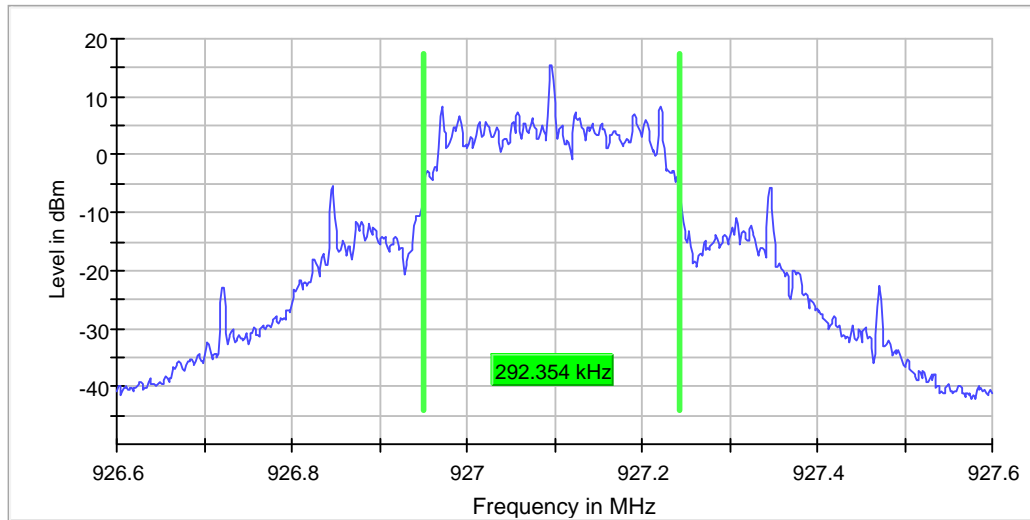

## Measurement

Setting	Instrument Value	Target Value
Span	1.000 MHz	1.000 MHz
RBW	3.000 kHz	~ 3.000 kHz
VBW	10.000 kHz	>= 9.000 kHz
SweepPoints	667	~ 667
SweepTime	631.826 $\mu$ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	2.00 dB	2.00 dB

## TEST REPORT

### 4.3 Minimum Number of Hopping Frequencies

With the analyzer set to MAX HOLD readings were taken for 2-3 minutes in each band. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

Baby Unit	
No. of Hopping Channels	25


Minimum Requirements:

- ☐ at least 50 hopping channels for 902MHz-928MHz (20 dB bandwidth of hopping channel < 250kHz)
- ☒ at least 25 hopping channels for 902MHz-928MHz (20 dB bandwidth of hopping channel  $\geq$  250kHz)
- ☐ at least 15 hopping channels for 2400MHz-2483.5MHz.
- ☐ at least 75 hopping channels for 5725MHz-5850MHz.

The plots of number of hopping frequencies are saved as below.

## TEST REPORT

### PLOTS OF NUMBER OF HOPPING FREQUENCIES

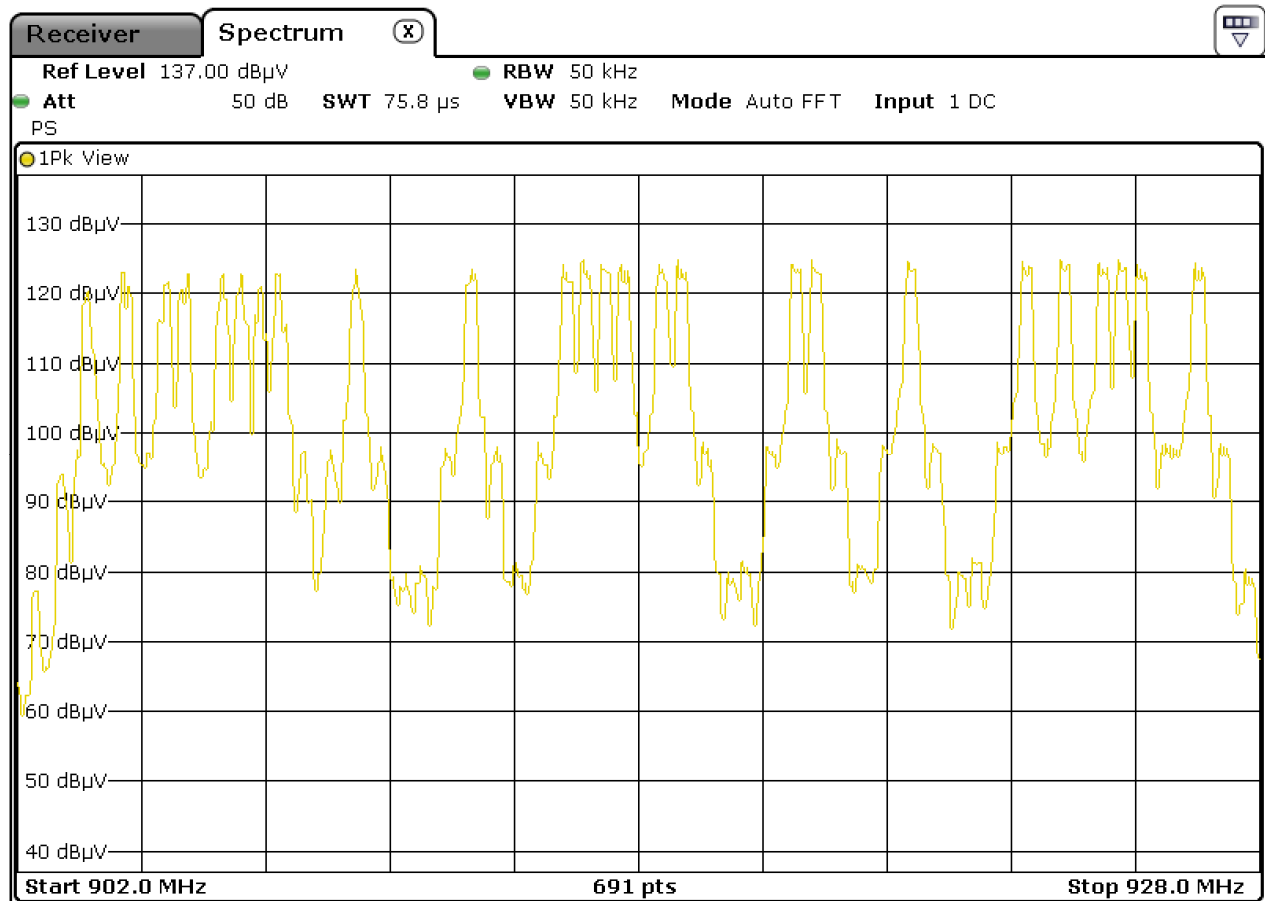



## TEST REPORT

### 4.4 Minimum Hopping Channel Carrier Frequency Separation

Using the DELTA MARKER function of the analyzer, the frequency separation between two adjacent channels was measured and met the requirement.

	Baby Unit
Channel Separation (Channel 1 and Channel 2)	405.9kHz

Limits:

The channel separation must be larger than:

☒ 25 kHz


☐ 20 dB bandwidth of hopping channel: \_\_\_\_ Hz

☐ 2/3 of 20dB bandwidth of hopping channel: 292.4 kHz

The plot(s) of hopping channel carrier frequency separation is saved as below.

## TEST REPORT

### PLOTS OF HOPPING CHANNEL CARRIER FREQUENCY SEPARATION

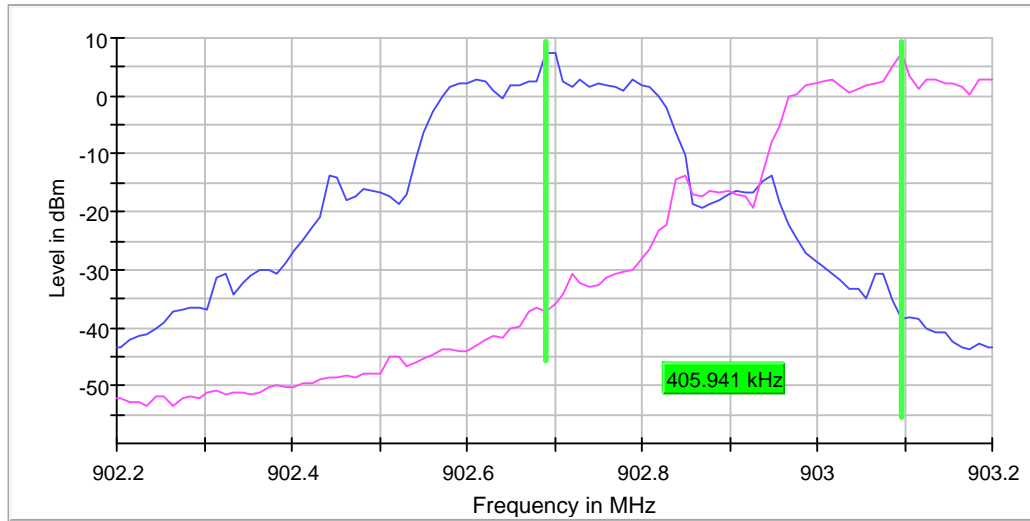

### Measurement 1

Setting	Instrument Value	Target Value
Span	1.000 MHz	1.000 MHz
RBW	10.000 kHz	$\leq 10.000$ kHz
VBW	10.000 kHz	$\geq 10.000$ kHz
SweepPoints	101	~ 100
SweepTime	1.000 ms	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB

## TEST REPORT

### 4.5 Average Channel Occupancy Time

The spectrum analyzer center frequency was set to one of the known hopping channels. The SWEEP was set to 1ms, the SPAN was set to ZERO SPAN, and the TRIGGER was set to VIDEO. The time duration of the transmission so captured was measured with the MARKER DELTA function.

The SWEEP was then set to the time required by the regulation (20 seconds for 902-928 MHz devices, if the 20dB bandwidth is less than 250kHz, 10 seconds for 902-928 MHz if the 20dB bandwidth is or greater than 250kHz, "0.4 seconds x Number of hopping channels employed" seconds for 2400-2483.5 MHz, 30 seconds for 5725-5850 MHz). The analyzer was set to SINGLE SWEEP, the total ON time was added and compared against the limit (0.4 seconds).

#### Baby Unit (worst-case: 1 parent unit operation)

Average Occupancy Time (Traffic – in a clear RF environment) =	224.7ms
-------------------------------------------------------------------	---------

Limits:

Average 0.4 seconds maximum occupancy in:


- ☐ 6.4 seconds (0.4 sec. x 16) for 2400MHz-2483.5MHz  
(Traffic – in a clear RF environment)
- ☐ 20 seconds for 902MHz-928MHz  $\geq$  50 hopping channels
- ☒ 10 seconds for 902MHz-928MHz  $\geq$  25 hopping channels
- ☐ 30 seconds for 5725-5850MHz

The plots of average channel occupancy time are saved as below.

## TEST REPORT

### PLOTS AVERAGE CHANNEL OCCUPANCY TIME

Plot A

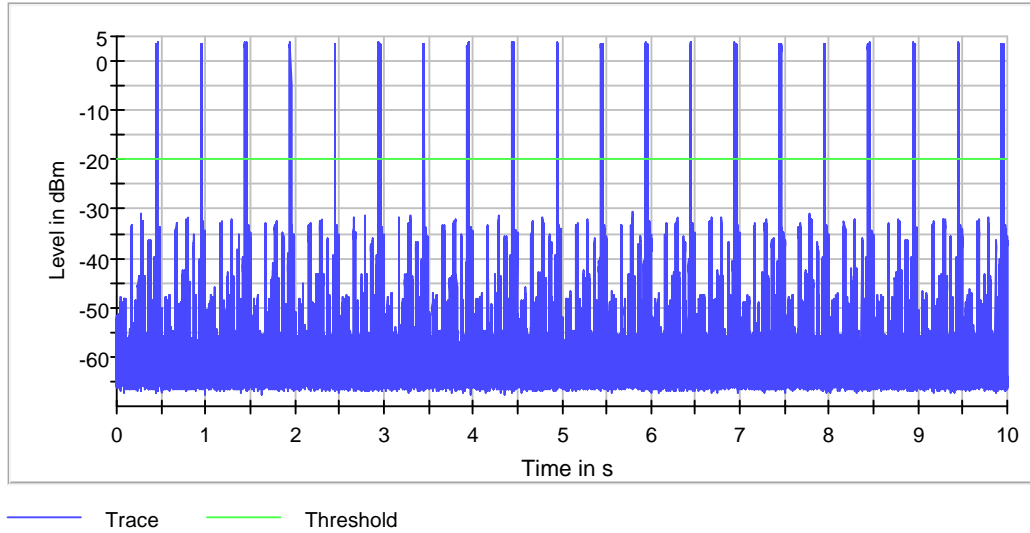

Setting	Instrument Value	Target Value
Center Frequency	927.10000 MHz	927.10000 MHz
Span	ZeroSpan	ZeroSpan
RBW	500.000 kHz	~ 500.000 kHz
VBW	1.000 MHz	~ 1.500 MHz
SweepPoints	30001	~ 30001
SweepTime	10.000 s	10.000 s
Reference Level	0.000 dBm	-10.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

## TEST REPORT

### 4.6 Out of Band Conducted Emissions

In any 100 kHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission.

The plot(s) of bandedge compliance is shown the worst-case which has been already considered between enable and disable the hopping function of the EUT.

#### Limits:


All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

The plots of out of band conducted emissions are saved as below.

## TEST REPORT

### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS


Lowest Channel, Plot 1

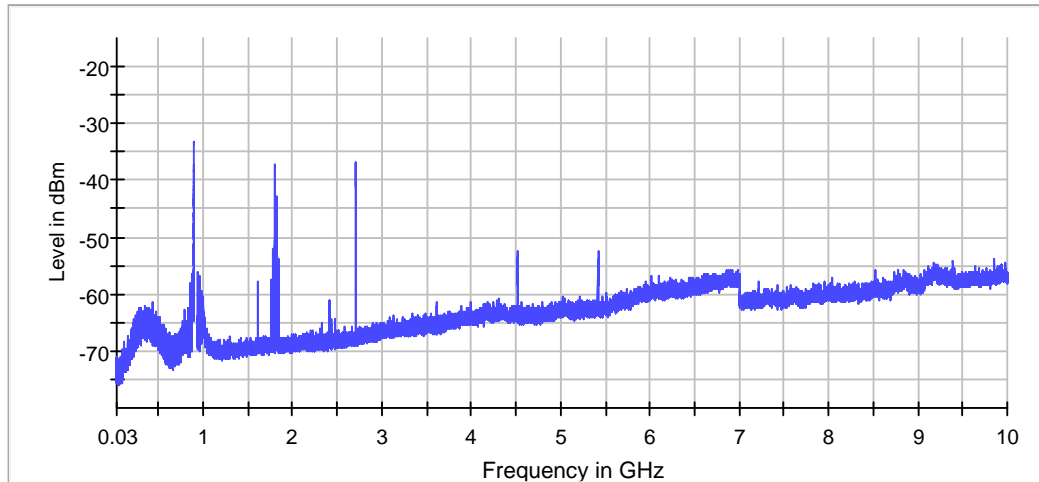

— Limit — Sum Level — Threshold × Critical × Final Critical

**Limit = 17.2dBm-20dB=-2.8dBm**

Middle Channel, Plot 1

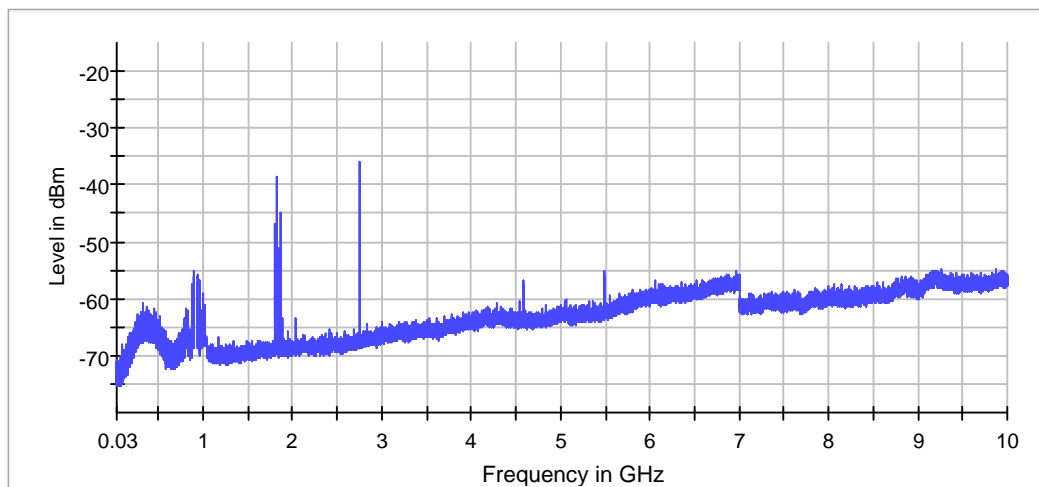


— Limit — Sum Level — Threshold × Critical × Final Critical

**Limit=17.1dBm-20dB=-2.9dBm**

## TEST REPORT

### PLOTS OF OUT OF BAND CONDUCTED EMISSIONS

Highest Channel, Plot 1

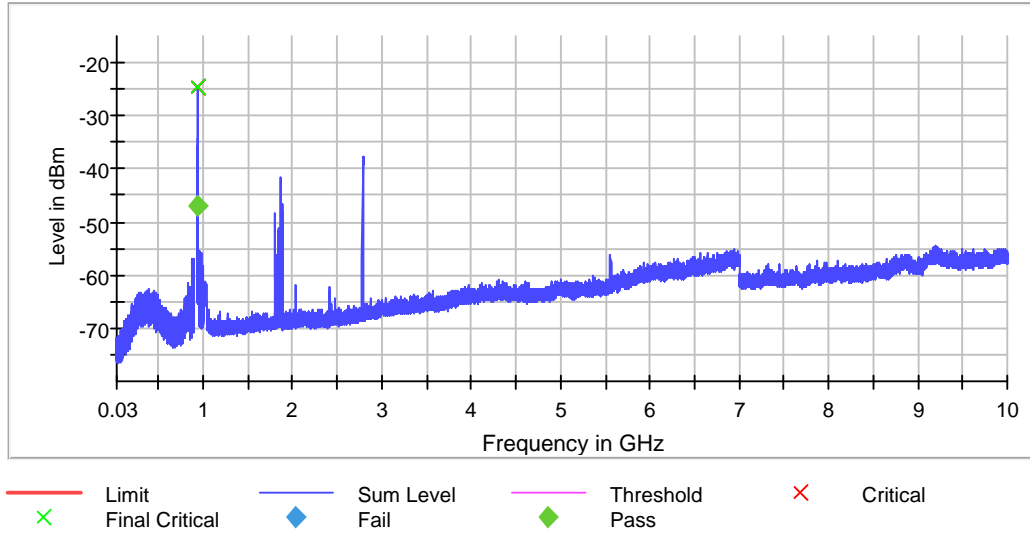


Limit = 16.8dBm-20dB=-3.2dBm

### Final measurements

Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Result
931.925000	-24.4	-46.9	-3.2	PASS

## TEST REPORT

### Normal FHSS, Plot 1

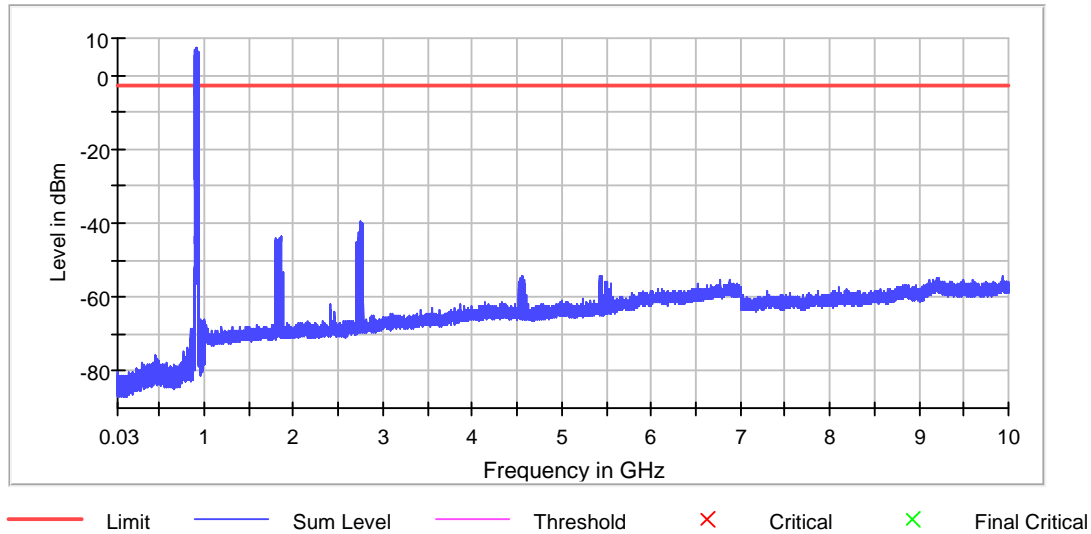

Limit = 16.8dBm-20dB=-3.2dBm

### Measurement

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	17440	~ 17440
SweepTime	17.500 ms	AUTO
Reference Level	-20.000 dBm	-30.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	30	30
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	2.00 dB	2.00 dB
Run	4 / max. 10	max. 10



## TEST REPORT

### PLOTS OF BANDEGE

Refer to out of band conducted emission

## TEST REPORT

### 4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

#### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

RA = 62.0 dB $\mu$ V  
 AF = 7.4 dB  
 CF = 1.6 dB  
 AG = 29 dB  
 PD = 0 dB  
 AV = -10 dB  
 $FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m}$

Level in  $\mu$ V/m = Common Antilogarithm [(32 dB $\mu$ V/m)/20] = 39.8  $\mu$ V/m

## TEST REPORT

### 4.8 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

## TEST REPORT

### 4.8.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission  
at

Baby Unit: 2745.3 MHz

The worst case radiated emission configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

### 4.8.2 Radiated Emission Data

The data in tables 1-4 list the significant emission frequencies, the limit and the margin of compliance.


Judgement -

Baby Unit: Passed by 2.6 dB margin


## TEST REPORT

### 4.8.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

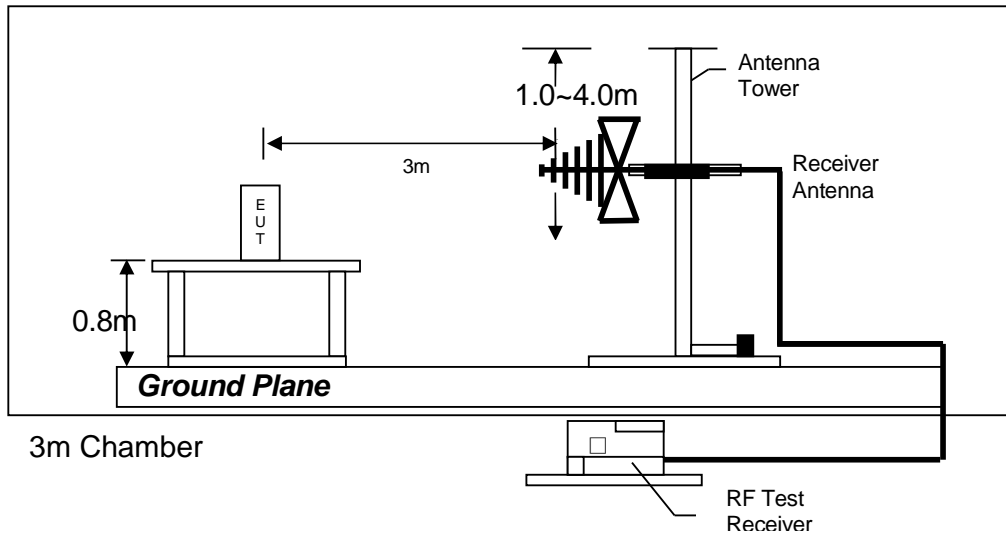

Test setup of radiated emissions up to 1GHz

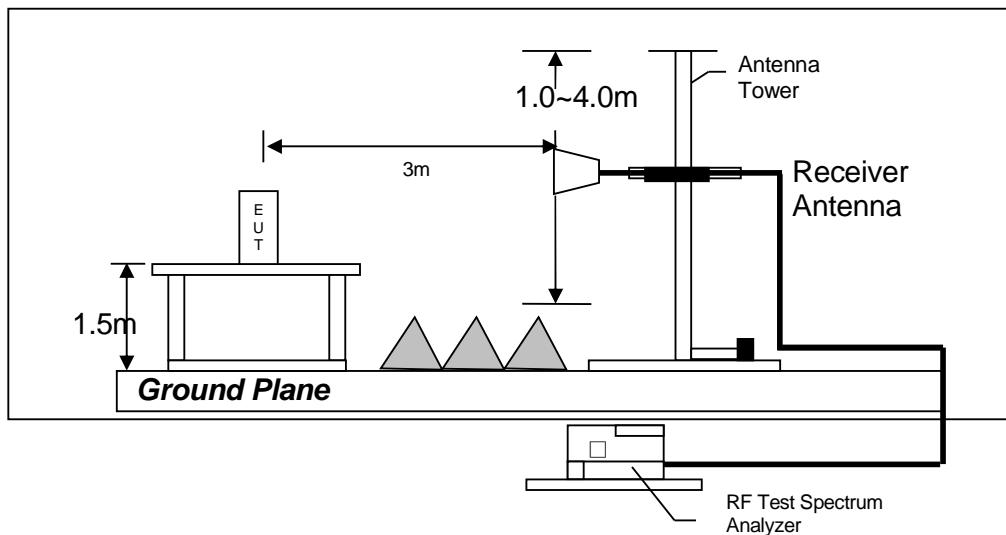

Test setup of radiated emissions above 1GHz

## TEST REPORT

### RADIATED EMISSION DATA

Mode: TX Lowest Channel

Table 1, Baby Unit

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2708.100	53.8	33	30.4	51.2	54.0	-2.8
H	3610.800	45.5	33	33.3	45.8	54.0	-8.2
H	4513.500	41.7	33	34.9	43.6	54.0	-10.4
H	5416.200	46.8	33	35.7	49.5	54.0	-4.5
H	8124.300	28.6	33	39.0	34.6	54.0	-19.4
H	9027.000	27.0	33	40.4	34.4	54.0	-19.6

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2708.100	61.2	33	30.4	58.6	74.0	-15.4
H	3610.800	54.0	33	33.3	54.3	74.0	-19.7
H	4513.500	54.2	33	34.9	56.1	74.0	-17.9
H	5416.200	57.0	33	35.7	59.7	74.0	-14.3
H	8124.300	41.4	33	39.0	47.4	74.0	-26.6
H	9027.000	39.2	33	40.4	46.6	74.0	-27.4

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

## TEST REPORT

Mode: TX Middle Channel

Table 2, Baby Unit

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2745.300	54.0	33	30.4	51.4	54.0	-2.6
H	3660.400	45.1	33	33.3	45.4	54.0	-8.6
H	4575.500	41.8	33	34.9	43.7	54.0	-10.3
V	7320.800	31.8	33	37.9	36.7	54.0	-17.3
H	8235.900	28.3	33	39.0	34.3	54.0	-19.7
H	9151.000	27.4	33	40.4	34.8	54.0	-19.2

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2745.300	61.0	33	30.4	58.4	74.0	-15.6
H	3660.400	54.2	33	33.3	54.5	74.0	-19.5
H	4575.500	54.5	33	34.9	56.4	74.0	-17.6
V	7320.800	45.4	33	37.9	50.3	74.0	-23.7
H	8235.900	41.8	33	39.0	47.8	74.0	-26.2
H	9151.000	38.8	33	40.4	46.2	74.0	-27.8

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

## TEST REPORT

Mode: TX Highest Channel

Table 3, Baby Unit

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Average (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
H	2781.300	53.7	33	30.4	51.1	54.0	-2.9
H	3708.400	45.4	33	33.3	45.7	54.0	-8.3
H	4635.500	41.5	33	34.9	43.4	54.0	-10.6
V	7416.800	31.3	33	37.9	36.2	54.0	-17.8
H	8343.900	28.0	33	39.0	34.0	54.0	-20.0


Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
H	2781.300	61.4	33	30.4	58.8	74.0	-15.2
H	3708.400	54.5	33	33.3	54.8	74.0	-19.2
H	4635.500	54.8	33	34.9	56.7	74.0	-17.3
V	7416.800	45.2	33	37.9	50.1	74.0	-23.9
H	8343.900	41.2	33	39.0	47.2	74.0	-26.8

- NOTES:
1. Peak detector is used for the emission measurement.
  2. Average detector is used for the emission measurement.
  3. All measurements were made at 3 meters.
  4. Negative value in the margin column shows emission below limit.
  5. Horn antenna is used for the emission over 1000MHz.
  6. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.



Mode: On Mode

Table 4, Baby Unit

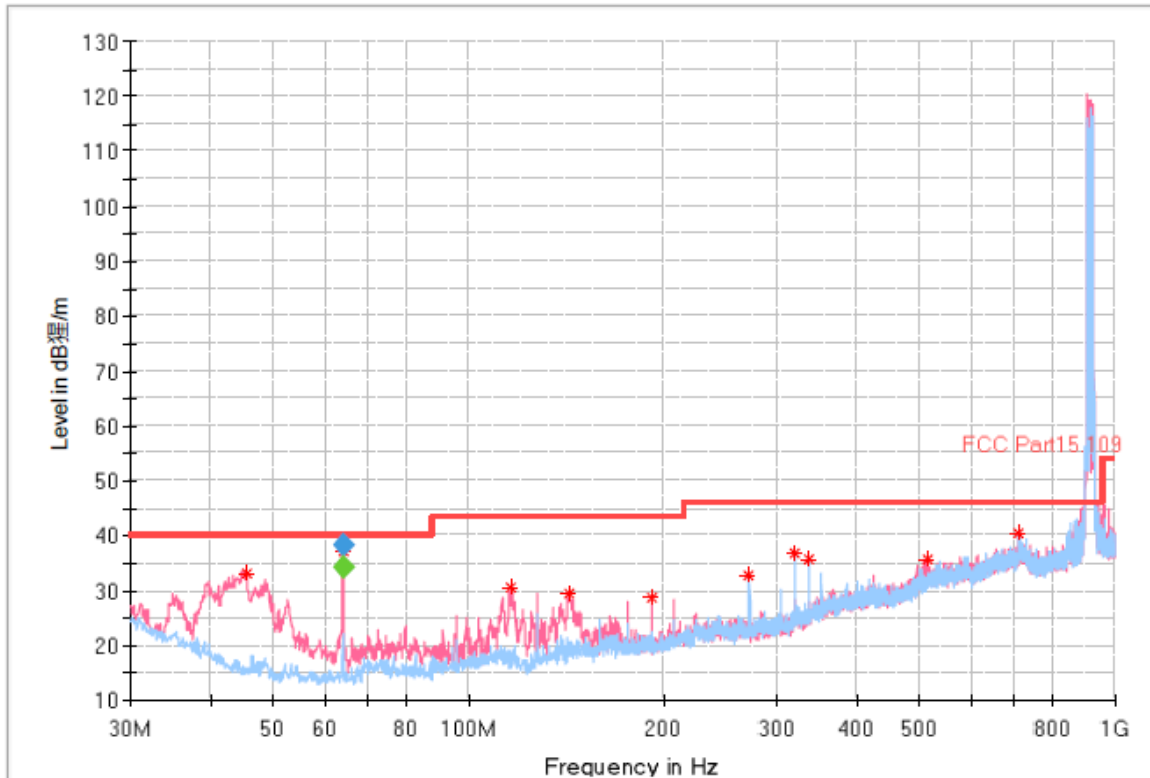

Frequency (MHz)	MaxPeak (dBμV/m)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
63.950000	---	34.26	40.00	5.74	5000.0	120.000	200.0	V
63.950000	38.43	---	40.00	1.57	5000.0	120.000	200.0	V

- NOTES:
1. Quasi-Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters.
  3. Negative value in the margin column shows emission below limit.
  4. Emission within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.

## TEST REPORT

### 4.9 AC Power Line Conducted Emission

- ☐ Not applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

#### 4.9.1 AC Power Line Conducted Emission Configuration Photograph

##### Worst Case Line-Conducted Configuration

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

#### 4.9.2 AC Power Line Conducted Emission Data


The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 16.48 dB margin

## TEST REPORT

### AC POWER LINE CONDUCTED EMISSION


Worst Case: On Mode

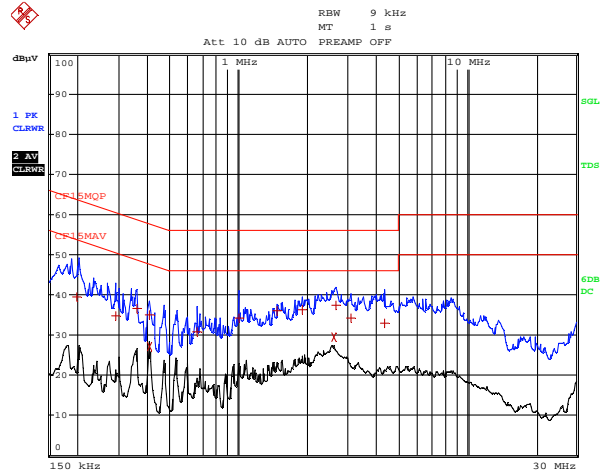

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV		DELTA LIMIT dB
1 Quasi Peak	199.5 kHz	39.40	N	-24.22
1 Quasi Peak	289.5 kHz	34.71	N	-25.82
1 Quasi Peak	357 kHz	36.72	N	-22.07
1 Quasi Peak	406.5 kHz	35.01	N	-22.70
2 CISPR Average	406.5 kHz	27.15	N	-20.56
1 Quasi Peak	654 kHz	30.91	N	-25.08
1 Quasi Peak	1.005 MHz	34.31	N	-21.68
1 Quasi Peak	1.4775 MHz	36.05	N	-19.94
1 Quasi Peak	1.896 MHz	36.47	N	-19.52
2 CISPR Average	2.6205 MHz	29.51	N	-16.48
1 Quasi Peak	2.661 MHz	37.27	N	-18.72
1 Quasi Peak	3.102 MHz	34.37	N	-21.62
1 Quasi Peak	4.344 MHz	33.03	L1	-22.97

## TEST REPORT

### 4.9.3 AC Line Conducted Emission Test Setup

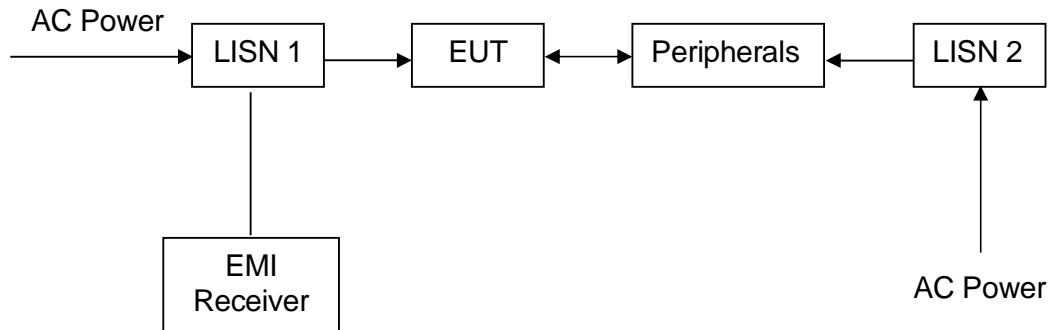

The EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

## TEST REPORT

### 5.0 EQUIPMENT LIST

#### 1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer	BiConiLog Antenna (26MHz to 6000MHz)
Registration No.	EW-3481	EW-2466	EW-3061
Manufacturer	ROHDESCHWARZ	ROHDESCHWARZ	EMCO
Model No.	ESR7	FSP30	3142E
Calibration Date	December 21, 2021	August 18, 2021	February 02, 2021
Calibration Due Date	December 21, 2022	August 18, 2022	August 02, 2022

Equipment	Double Ridged Guide Antenna	Active Loop H-field (9kHz to 30MHz)
Registration No.	EW-1133	EW-3302
Manufacturer	EMCO	EMCO
Model No.	3115	6502
Calibration Date	May 26, 2021	July 26, 2021
Calibration Due Date	November 26, 2022	July 26, 2022

Equipment	RF Preamplifier	14m Double Shield RF Cable
Registration No.	EW-3229	EW-2074
Manufacturer	BONN ELEKTRO	RADIALL
Model No.	BLMA0118-5G	N(m)-RG142-BNC(m) L=14M
Calibration Date	December 13, 2021	December 10, 2021
Calibration Due Date	December 13, 2022	December 10, 2022

Equipment	Double Ridged Guide Antenna	Pyramidal Horn Antenna
Registration No.	EW-1133	EW-0905
Manufacturer	EMCO	EMCO
Model No.	3115	3160-09
Calibration Date	May 26, 2021	July 20, 2021
Calibration Due Date	November 26, 2022	July 20, 2023

## TEST REPORT

### 2) Conducted Emissions Test

Equipment	RF Cable 240cm (RG142) (9kHz to 30MHz)	Artificial Mains Network	EMI Test Receiver
Registration No.	EW-2454	EW-2501	EW-3481
Manufacturer	RADIALL	ROHDESCHWARZ	ROHDESCHWARZ
Model No.	Bnc m st / 142 / bnc mra 240cm	ENV-216	ESR7
Calibration Date	January 26, 2022	September 11, 2021	December 21, 2021
Calibration Due Date	January 26, 2023	September 11, 2022	December 21, 2022

### 3) Conductive Measurement Test

Equipment	RF Cable SMA-SMA 18GHz 1.0m length	Signal and Spectrum Analyzer (10Hz to 40GHz)
Registration No.	EW-3272	EW-2107
Manufacturer	GREATBILLION	ROHDESCHWARZ
Model No.	SMA m /blue cable/SMAM 18G 1m	FSV40
Calibration Date	November 24, 2021	October 29, 2021
Calibration Due Date	November 24, 2022	October 29, 2022

### 4) Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDESCHWARZ
Software version	10.50.40 & 10.40.10

**END OF TEST REPORT**