

2.422000000 GHz Start Fred 2.395731250 GHz Stop Freq 2.448268750 GHz **CF Step** 5.253750 MHz <u>Auto</u> Mar Freq Offset 0 Hz Scale Type Center 2.42200 GHz #Res BW 20 kHz Span 52.54 MHz Sweep 125.3 ms (1000 pts) Log #VBW 62 kHz Test_Graph_802.11n40_ANT1_2422_MCS0_PSD

4.885950 MHz

Freq Offset 0 Hz

Scale Type


Mar

<u>Auto</u>

Log

Span 48.86 MHz Sweep 116.5 ms (1000 pts)



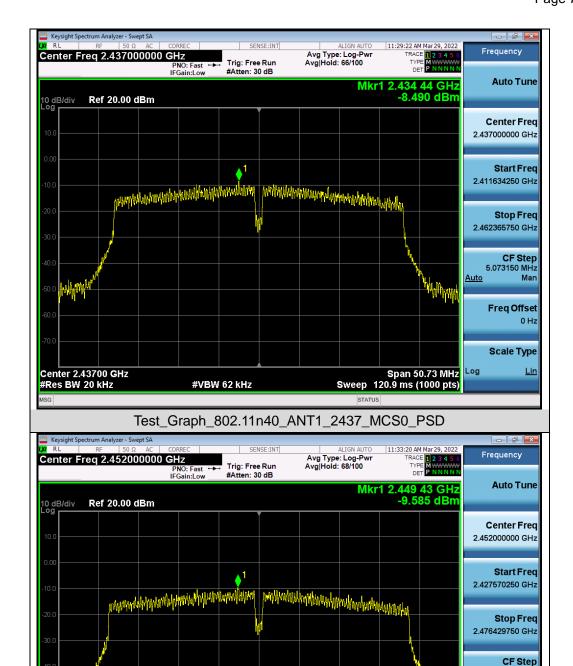

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11n40_ANT1_2452_MCS0_PSD

#VBW 62 kHz

Center 2.45200 GHz #Res BW 20 kHz

1.247550 MHz

Freq Offset 0 Hz

Scale Type


Mar

<u>Auto</u>

Log

Span 12.48 MHz Sweep 29.77 ms (1000 pts)



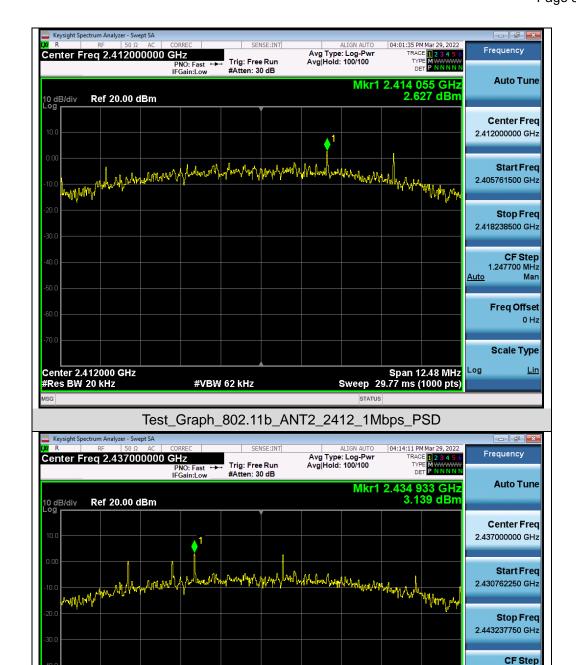


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11b_ANT2_2437_1Mbps_PSD

#VBW 62 kHz

Center 2.437000 GHz #Res BW 20 kHz



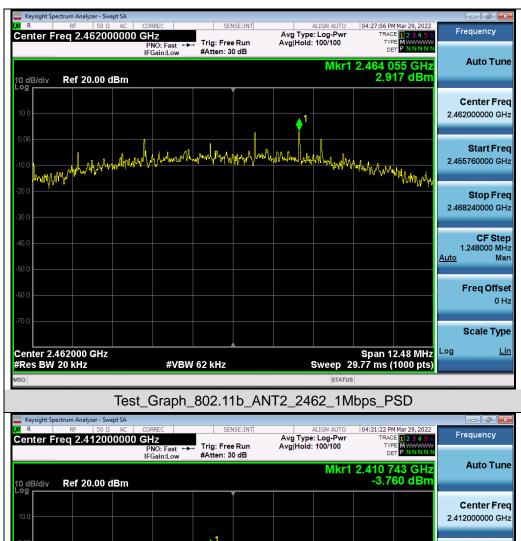

2.412000000 GHz

Start Freq
2.400682500 GHz

Stop Freq
2.423317500 GHz

Stop Freq
2.423317500 GHz

Auto

Freq Offset
0 Hz

Center 2.41200 GHz
#Res BW 20 kHz
#VBW 62 kHz
Sweep 54.01 ms (1000 pts)

Test_Graph_802.11g_ANT2_2412_6Mbps_PSD

CF Step 2.306550 MHz

Freq Offset

Scale Type


Mar

<u>Auto</u>

Log

Span 23.07 MHz Sweep 55.01 ms (1000 pts)



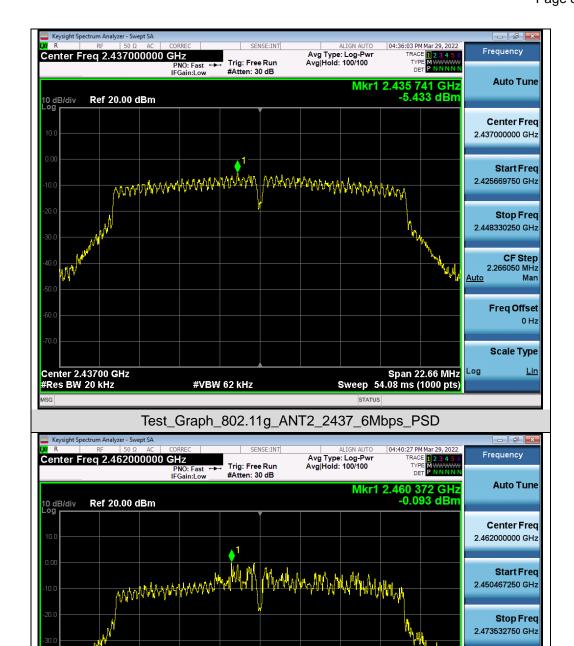


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT2_2462_6Mbps_PSD

#VBW 62 kHz

Center 2.46200 GHz #Res BW 20 kHz




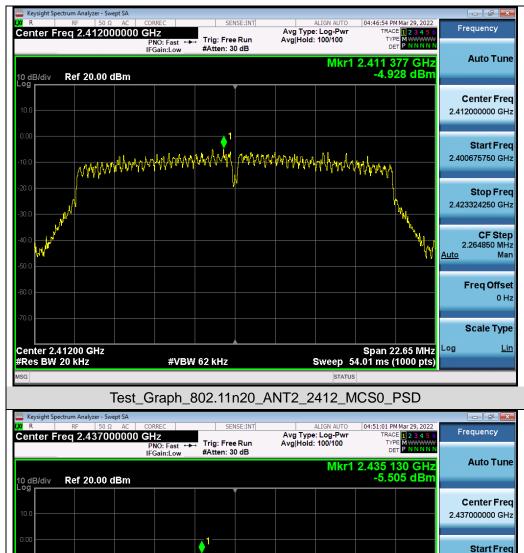


| Center Freq | 2.437000000 GHz | Start Freq | 2.425681000 GHz | Stop Freq | 2.425681000 GHz | S






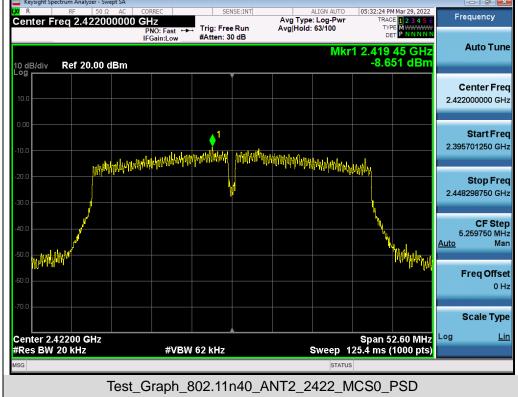



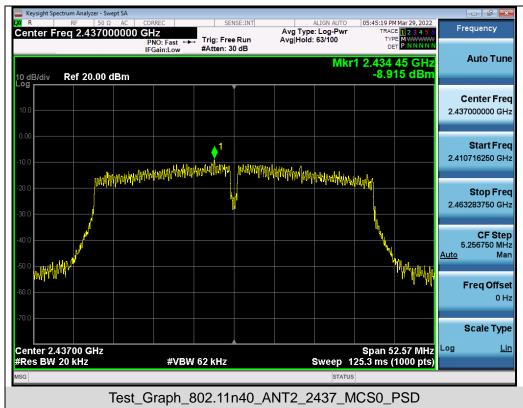

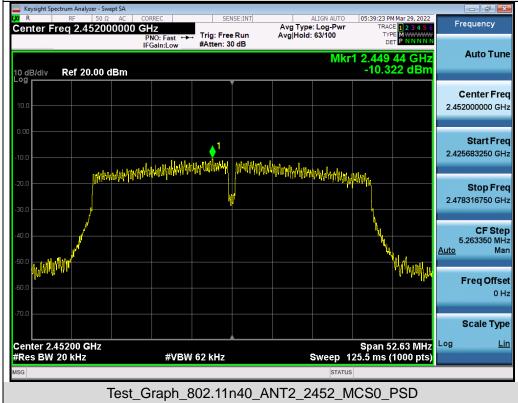



Report No.: AGC05877220313FE05 Page 86 of 130

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

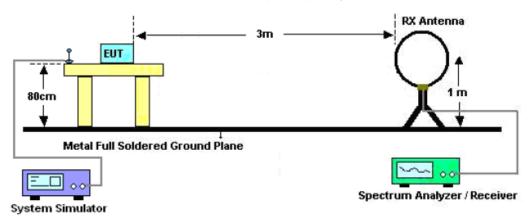

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

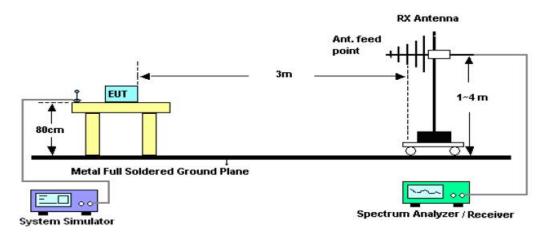

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

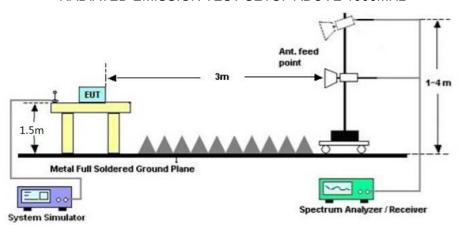



Report No.: AGC05877220313FE05

Page 88 of 130

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission.

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT


Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Radiated emission from 30MHz to 1000MHz

EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

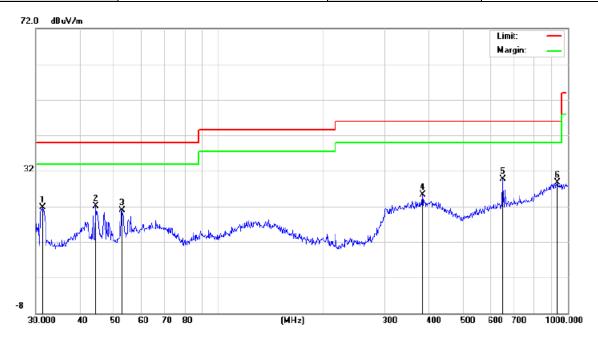


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		31.3992	14.42	7.21	21.63	40.00	-18.37	peak
2		44.4308	12.62	9.49	22.11	40.00	-17.89	peak
3		52.9453	11.44	9.54	20.98	40.00	-19.02	peak
4		383.9318	6.91	18.32	25.23	46.00	-20.77	peak
5	*	651.9417	12.10	17.57	29.67	46.00	-16.33	peak
6		935.5463	5.88	22.90	28.78	46.00	-17.22	peak

RESULT: PASS




EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

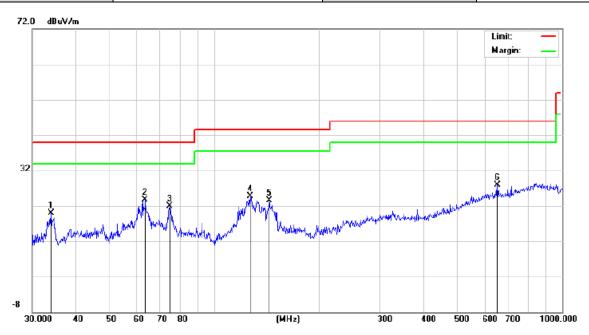

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		33.9174	12.56	7.29	19.85	40.00	-20.15	peak
2	*	63.3132	11.78	11.95	23.73	40.00	-16.27	peak
3		74.3955	10.84	11.16	22.00	40.00	-18.00	peak
4		126.7723	11.64	13.06	24.70	43.50	-18.80	peak
5		143.8295	10.74	12.84	23.58	43.50	-19.92	peak
6		651.9417	7.79	20.05	27.84	46.00	-18.16	peak

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b at low channel of antenna 1 is the worst case and recorded in the report.





Radiated emission above 1GHz

EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4824.000	56.36	0.08	56.44	74	-17.56	peak	
4824.000	46.87	0.08	46.95	54	-7.05	AVG	
7236.000	51.28	2.21	53.49	74	-20.51	peak	
7236.000	42.63	2.21	44.84	54	-9.16	AVG	
Remark:							
actor = Antenna Factor + Cable Loss – Pre-amplifier.							

EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4824.000	57.81	0.08	57.89	74	-16.11	peak	
4824.000	46.95	0.08	47.03	54	-6.97	AVG	
7236.000	52.34	2.21	54.55	74	-19.45	peak	
7236.000	41.56	2.21	43.77	54	-10.23	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							



Report No.: AGC05877220313FE05

Page 92 of 130

EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4874.000	56.85	0.14	56.99	74	-17.01	peak	
4874.000	46.29	0.14	46.43	54	-7.57	AVG	
7311.000	51.07	2.36	53.43	74	-20.57	peak	
7311.000	42.61	2.36	44.97	54	-9.03	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	55.43	0.14	55.57	74	-18.43	peak
4874.000	46.38	0.14	46.52	54	-7.48	AVG
7311.000	51.27	2.36	53.63	74	-20.37	peak
7311.000	41.16	2.36	43.52	54	-10.48	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.	•		



Report No.: AGC05877220313FE05 Page 93 of 130

EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	55.43	0.22	55.65	74	-18.35	peak
4924.000	47.52	0.22	47.74	54	-6.26	AVG
7386.000	50.16	2.64	52.8	74	-21.2	peak
7386.000	42.38	2.64	45.02	54	-8.98	AVG
Remark:						
Factor = Anten	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					

EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	55.34	0.22	55.56	74	-18.44	peak
4924.000	46.31	0.22	46.53	54	-7.47	AVG
7386.000	51.28	2.64	53.92	74	-20.08	peak
7386.000	42.61	2.64	45.25	54	-8.75	AVG
Remark:	emark:					
actor = Antenna Factor + Cable Loss – Pre-amplifier.						

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode of antenna 1 is the worst case and recorded in the report.




Test result for band edge emission at restricted bands


Antenna 1

EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement

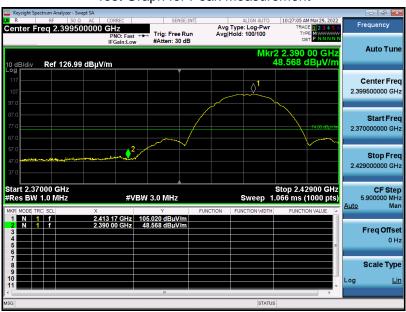

Test Graph for Average Measurement

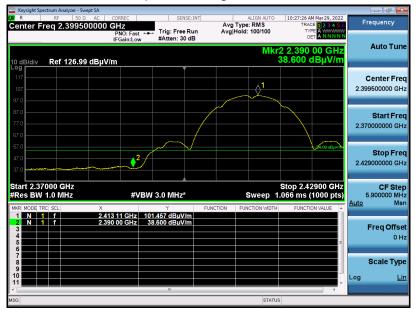


RESULT: PASS



EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

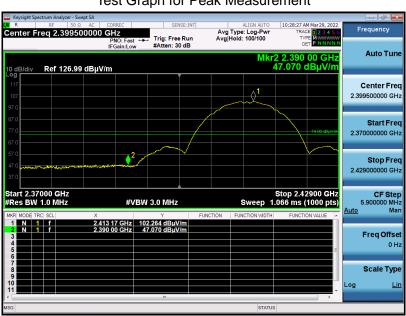

Test Graph for Average Measurement





EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement




Test Graph for Average Measurement






EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement

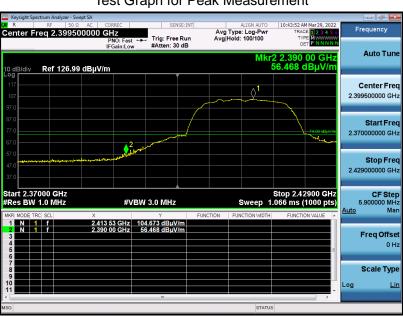

Test Graph for Average Measurement

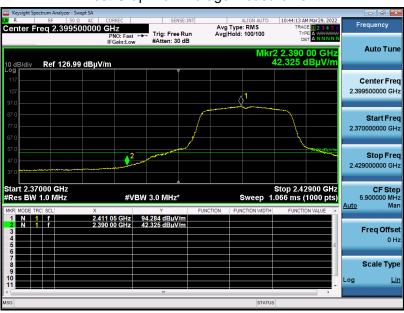



EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement






EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11g with data rate 6 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

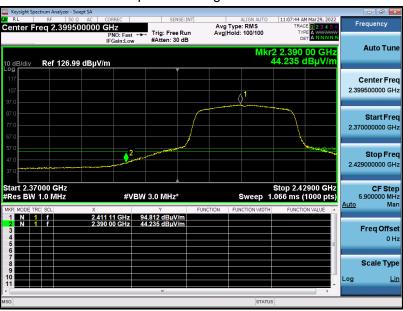






EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement

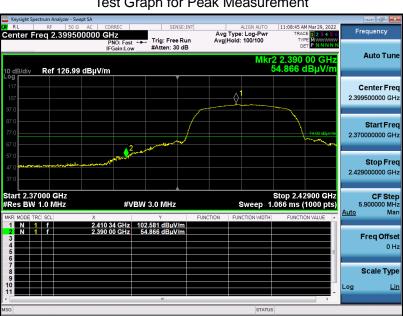

Test Graph for Average Measurement








EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement

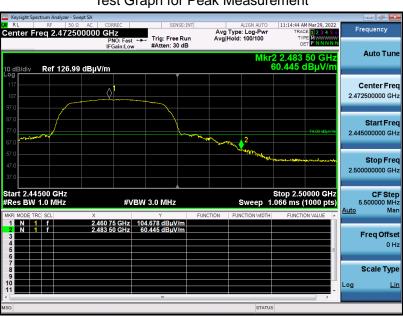

Test Graph for Average Measurement






EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n20 with data rate 6.5 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement








EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement

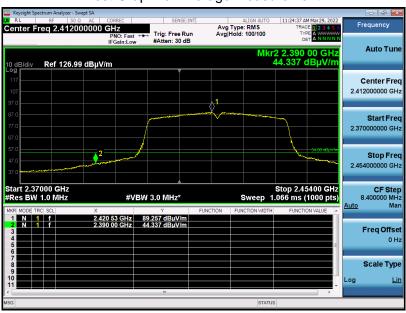






EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2422MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement









EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Horizontal

Test Graph for Peak Measurement

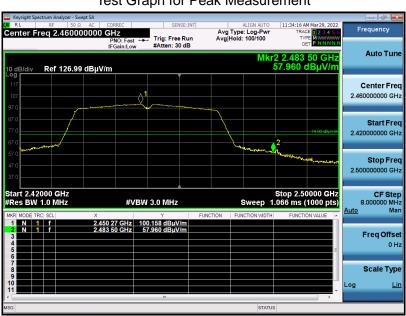

Test Graph for Average Measurement







EUT	IMILAB Doorbell Hub	Model Name	CMWG33B
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11n40 with data rate 13.5 2452MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

