



TEST REPORT

Report Reference No...... : **TRE1809007505** R/C.....: 15856
FCC ID..... : **HD5-EDA511**
Applicant's name..... : **HONEYWELL INTERNATIONAL INC**
Address..... : 9860 OLD BAILES RD FORT MILL,SC 29707 United States
Manufacturer..... : HONEYWELL INTERNATIONAL INC
Address..... : 9860 OLD BAILES RD FORT MILL,SC 29707 United States
Test item description : **Mobile Computer**
Trade Mark : Honeywell
Model/Type reference..... : EDA51-1
Listed Model(s) : -
Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**
Date of receipt of test sample..... : Sep 17,2018
Date of testing..... : Sep 18,2018- Oct 15,2018
Date of issue..... : Oct 16,2018
Result..... : **PASS**

Compiled by
(Position+Printed name+Signature): File administrators Silvia Li
Supervised by
(Position+Printed name+Signature): Project Engineer Aaron Fang
Approved by
(Position+Printed name+Signature): RF Manager Hans Hu

Silvia Li

Aaron.Fang

Hans Hu

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**
Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,
Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

1.	TEST STANDARDS AND REPORT VERSION	3
1.1.	Test Standards	3
1.2.	Report version	3
2.	TEST DESCRIPTION	4
3.	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
4.	TEST ENVIRONMENT	7
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
5.	TEST CONDITIONS AND RESULTS	11
5.1.	Antenna requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	15
5.4.	20 dB Bandwidth	19
5.5.	Carrier Frequencies Separation	23
5.6.	Hopping Channel Number	25
5.7.	Dwell Time	27
5.8.	Pseudorandom Frequency Hopping Sequence	34
5.9.	Restricted band (radiated)	35
5.10.	Band edge and Spurious Emissions (conducted)	37
5.11.	Spurious Emissions (radiated)	53
6.	TEST SETUP PHOTOS	57
7.	EXTERANAL AND INTERNAL PHOTOS	58

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Report version

Revision No.	Date of issue	Description
N/A	2018-10-16	Original

2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Antenna Requirement	15.203/15.247 (c)	PASS	Xiaokang Tan
AC Power Line Conducted Emissions	15.207	PASS	Tony Duan
Conducted Peak Output Power	15.247 (b)(1)	PASS	Xiaokang Tan
20 dB Bandwidth	15.247 (a)(1)	PASS	Xiaokang Tan
Carrier Frequencies Separation	15.247 (a)(1)	PASS	Xiaokang Tan
Hopping Channel Number	15.247 (a)(1)	PASS	Xiaokang Tan
Dwell Time	15.247 (a)(1)	PASS	Xiaokang Tan
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	PASS	Xiaokang Tan
Restricted band	15.247(d)/15.205	PASS	Shower Dai
Radiated Emissions	15.247(d)/15.209	PASS	Shower Dai

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	HONEYWELL INTERNATIONAL INC
Address:	9860 OLD BAILES RD FORT MILL,SC 29707 United States
Manufacturer:	HONEYWELL INTERNATIONAL INC
Address:	9860 OLD BAILES RD FORT MILL,SC 29707 United States

3.2. Product Description

Name of EUT:	Mobile Computer
Trade Mark:	Honeywell
Model No.:	EDA51-1
Listed Model(s):	-
IMEI:	Conducted: 9901194000067 Radiated: 99001194004106
Power supply:	DC 3.8V
Adapter information:	Model:ADS-12B-06 05010E Input: 100-240Va.c., 50/60Hz, 0.3A Output: 5.0Vd.c.,2.0A
Hardware version:	IDH60_MB_V3.0.0
Software version:	212.01.00.0017
Bluetooth	
Version:	Supported BT4.1+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	IFA Antenna
Antenna gain:	-1.0dBi

3.3. Operation state

➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2403
:	:
39	2441
:	:
77	2479
78	2480

➤ TEST MODE

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated suprious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

/	Manufacturer:	/
	Model No.:	/
/	Manufacturer:	/
	Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.5. Equipments Used during the Test

Conducted Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
2	Artificial Mains	SCHWARZBECK	NNLK 8121	573	11/11/2017	11/10/2018
3	2-Line V-Network	R&S	ESH3-Z5	100049	11/11/2017	11/10/2018
4	Pulse Limiter	R&S	ESH3-Z2	101488	11/11/2017	11/10/2018
5	RF Connection Cable	HUBER+SUHNER	EF400	N/A	11/21/2017	11/20/2018
6	Test Software	R&S	ES-K1	N/A	N/A	N/A

Radiated Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	C11121	10/16/2016	10/15/2019
2	EMI Test Receiver	R&S	ESCI	100900	11/11/2017	11/10/2018
3	Loop Antenna	R&S	HFH2-Z2	100020	11/20/2017	11/19/2020
4	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	538	4/5/2017	4/4/2020
5	Horn Antenna	SCHWARZBECK	9120D	1011	3/27/2017	3/26/2020
6	Broadband Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170 472	3/27/2017	3/26/2020
7	Pre-amplifier	SCHWARZBECK	BBV 9743	9743-0022	10/18/2017	10/17/2018
8	Broadband Pre-amplifier	SCHWARZBECK	BBV 9718	9718-248	10/18/2017	10/17/2018
9	Spectrum Analyzer	R&S	FSP40	100597	11/11/2017	11/10/2018
10	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	11/21/2017	11/20/2018
11	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	11/21/2017	11/20/2018
12	Test Software	Audix	E3	N/A	N/A	N/A
13	Test Software	R&S	ES-K1	N/A	N/A	N/A
14	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
15	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A

RF Conducted Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	Spectrum Analyzer	R&S	FSV40	100048	11/11/2017	11/10/2018
2	EXA Signal Analyzer	Agilent	N9020A	184247	9/20/2018	9/19/2019
3	OSP	R&S	OSP120	101317	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Test Result:

☒ **Passed** ☐ **Not Applicable**

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



5.2. Conducted Emissions (AC Main)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS


☒ Passed ☐ Not Applicable

Note:

- 1) Transd= Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit - Level

Test Line:

L

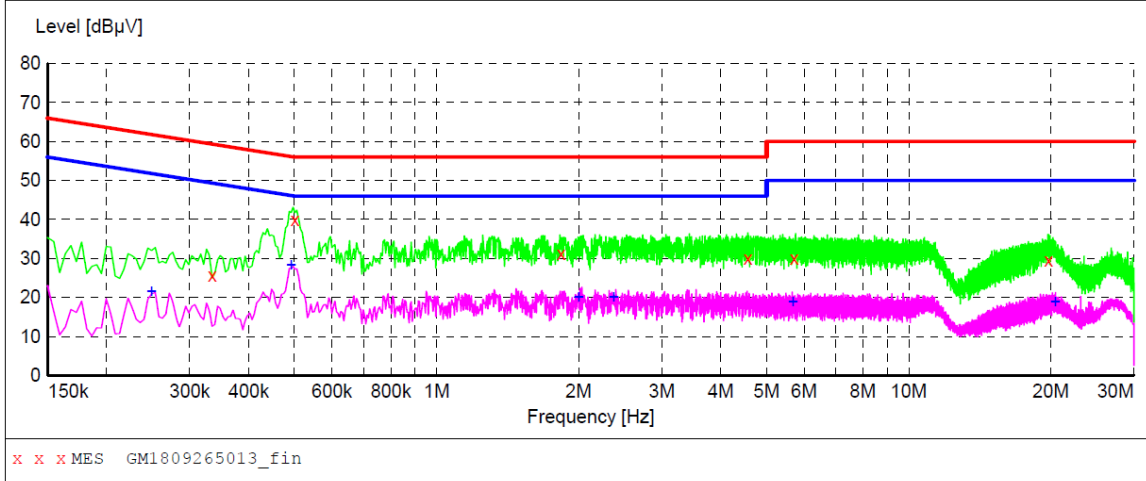**MEASUREMENT RESULT: "GM1809265013_fin"**

9/26/2018 1:21PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.334500	25.60	10.1	59	33.7	QP	L1	GND
0.501000	40.00	10.0	56	16.0	QP	L1	GND
1.833000	31.30	10.0	56	24.7	QP	L1	GND
4.564500	30.10	10.0	56	25.9	QP	L1	GND
5.716500	30.00	10.0	60	30.0	QP	L1	GND
19.747500	29.60	10.3	60	30.4	QP	L1	GND


MEASUREMENT RESULT: "GM1809265013_fin2"

9/26/2018 1:21PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.249000	21.50	10.2	52	30.3	AV	L1	GND
0.492000	28.40	10.0	46	17.7	AV	L1	GND
1.999500	20.10	10.0	46	25.9	AV	L1	GND
2.368500	20.20	10.0	46	25.8	AV	L1	GND
5.685000	18.90	10.0	50	31.1	AV	L1	GND
20.422500	18.80	10.3	50	31.2	AV	L1	GND

Test Line:

N

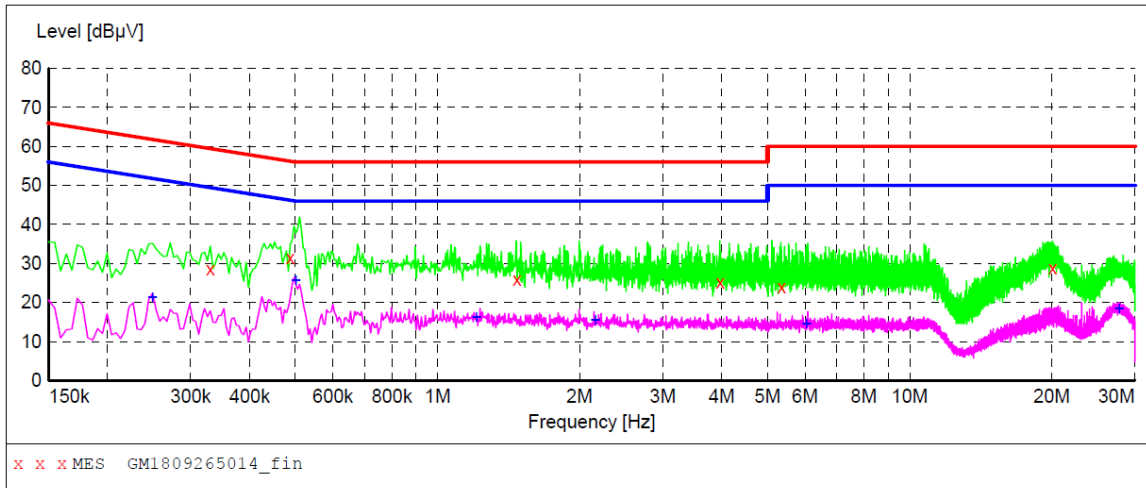**MEASUREMENT RESULT: "GM1809265014_fin"**

9/26/2018 1:23PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.330000	28.60	10.1	60	30.9	QP	N	GND
0.487500	31.50	10.0	56	24.7	QP	N	GND
1.473000	25.80	10.0	56	30.2	QP	N	GND
3.970500	25.30	10.0	56	30.7	QP	N	GND
5.347500	23.90	10.0	60	36.1	QP	N	GND
20.080500	28.80	10.3	60	31.2	QP	N	GND

MEASUREMENT RESULT: "GM1809265014_fin2"

9/26/2018 1:23PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.249000	21.40	10.2	52	30.4	AV	N	GND
0.501000	25.70	10.0	46	20.3	AV	N	GND
1.207500	16.20	10.0	46	29.8	AV	N	GND
2.157000	15.40	10.0	46	30.6	AV	N	GND
6.040500	14.50	10.0	50	35.5	AV	N	GND
27.735000	18.40	10.5	50	31.6	AV	N	GND


5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1):

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.
For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST CONFIGURATION

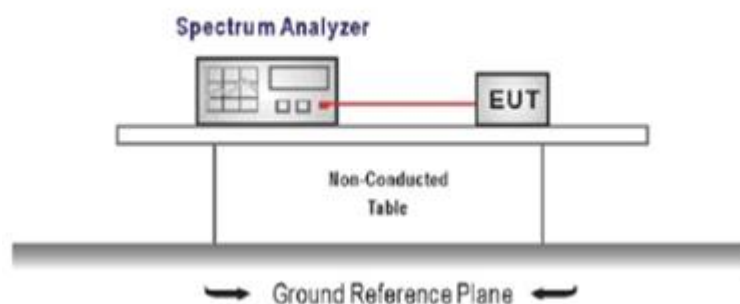

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq the 20 dB bandwidth of the emission being measured, VBW \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.


TEST MODE:


Please refer to the clause 3.3


TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	7.74	≤ 30.00	Pass
	39	8.35		
	78	8.80		
$\pi/4$ DQPSK	00	7.69	≤ 21.00	Pass
	39	8.40		
	78	8.86		
8DPSK	00	7.97	≤ 21.00	Pass
	39	8.61		
	78	9.16		

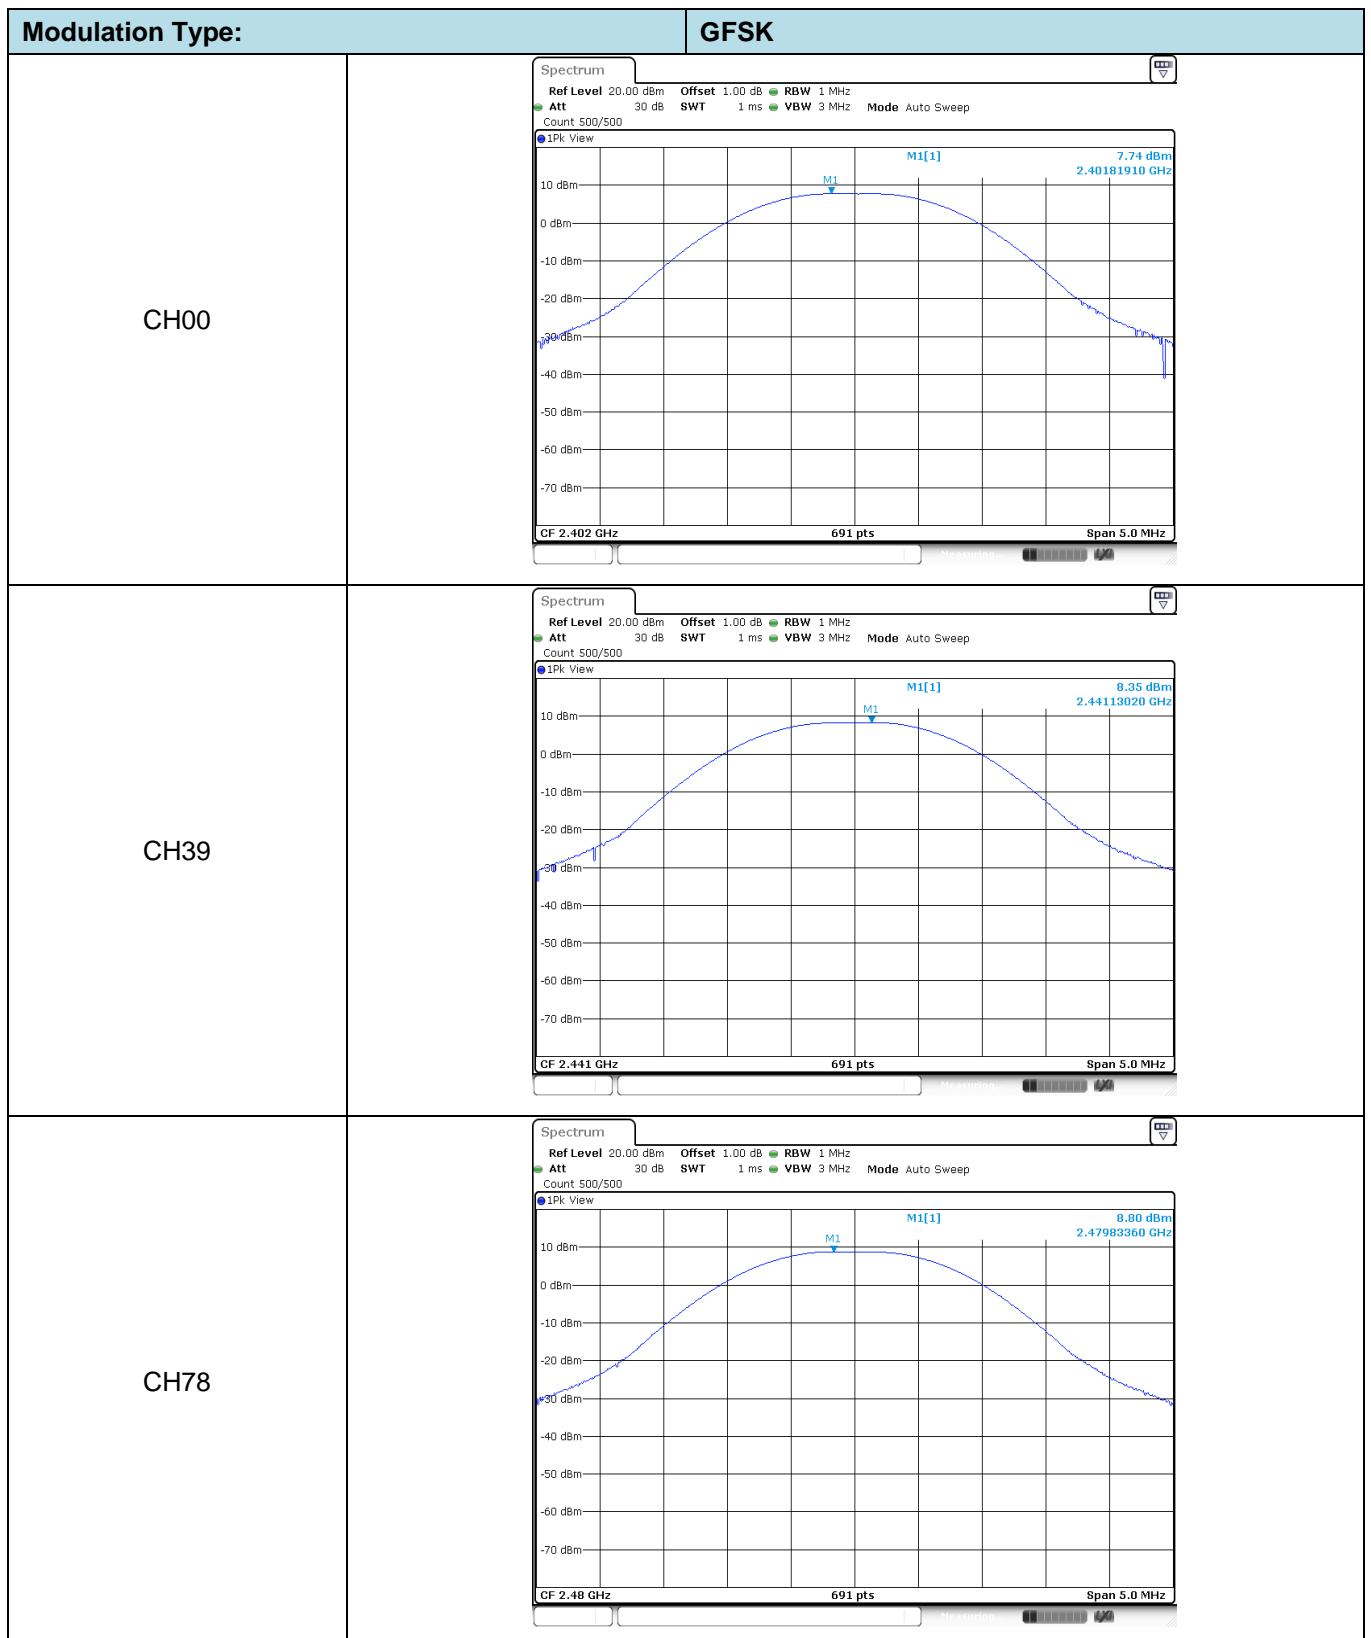

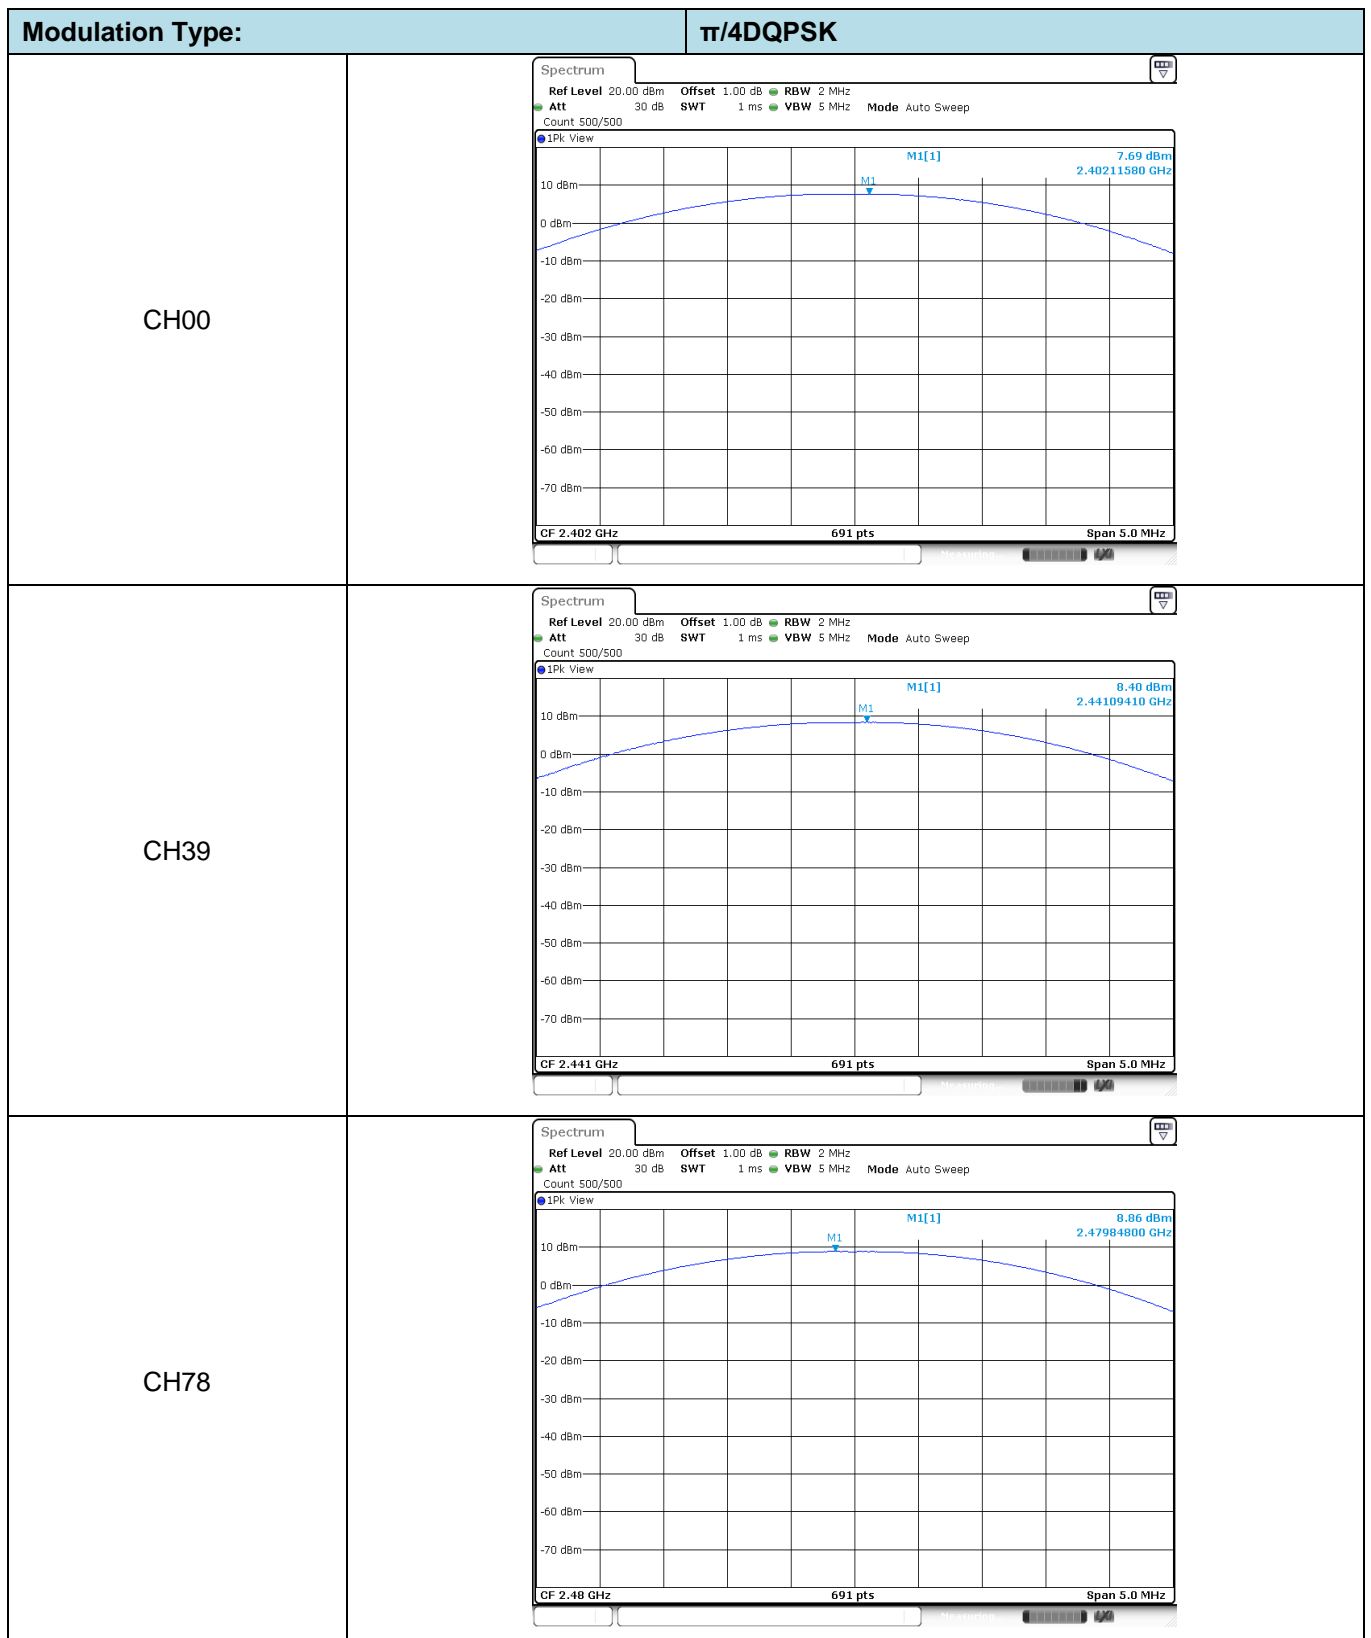

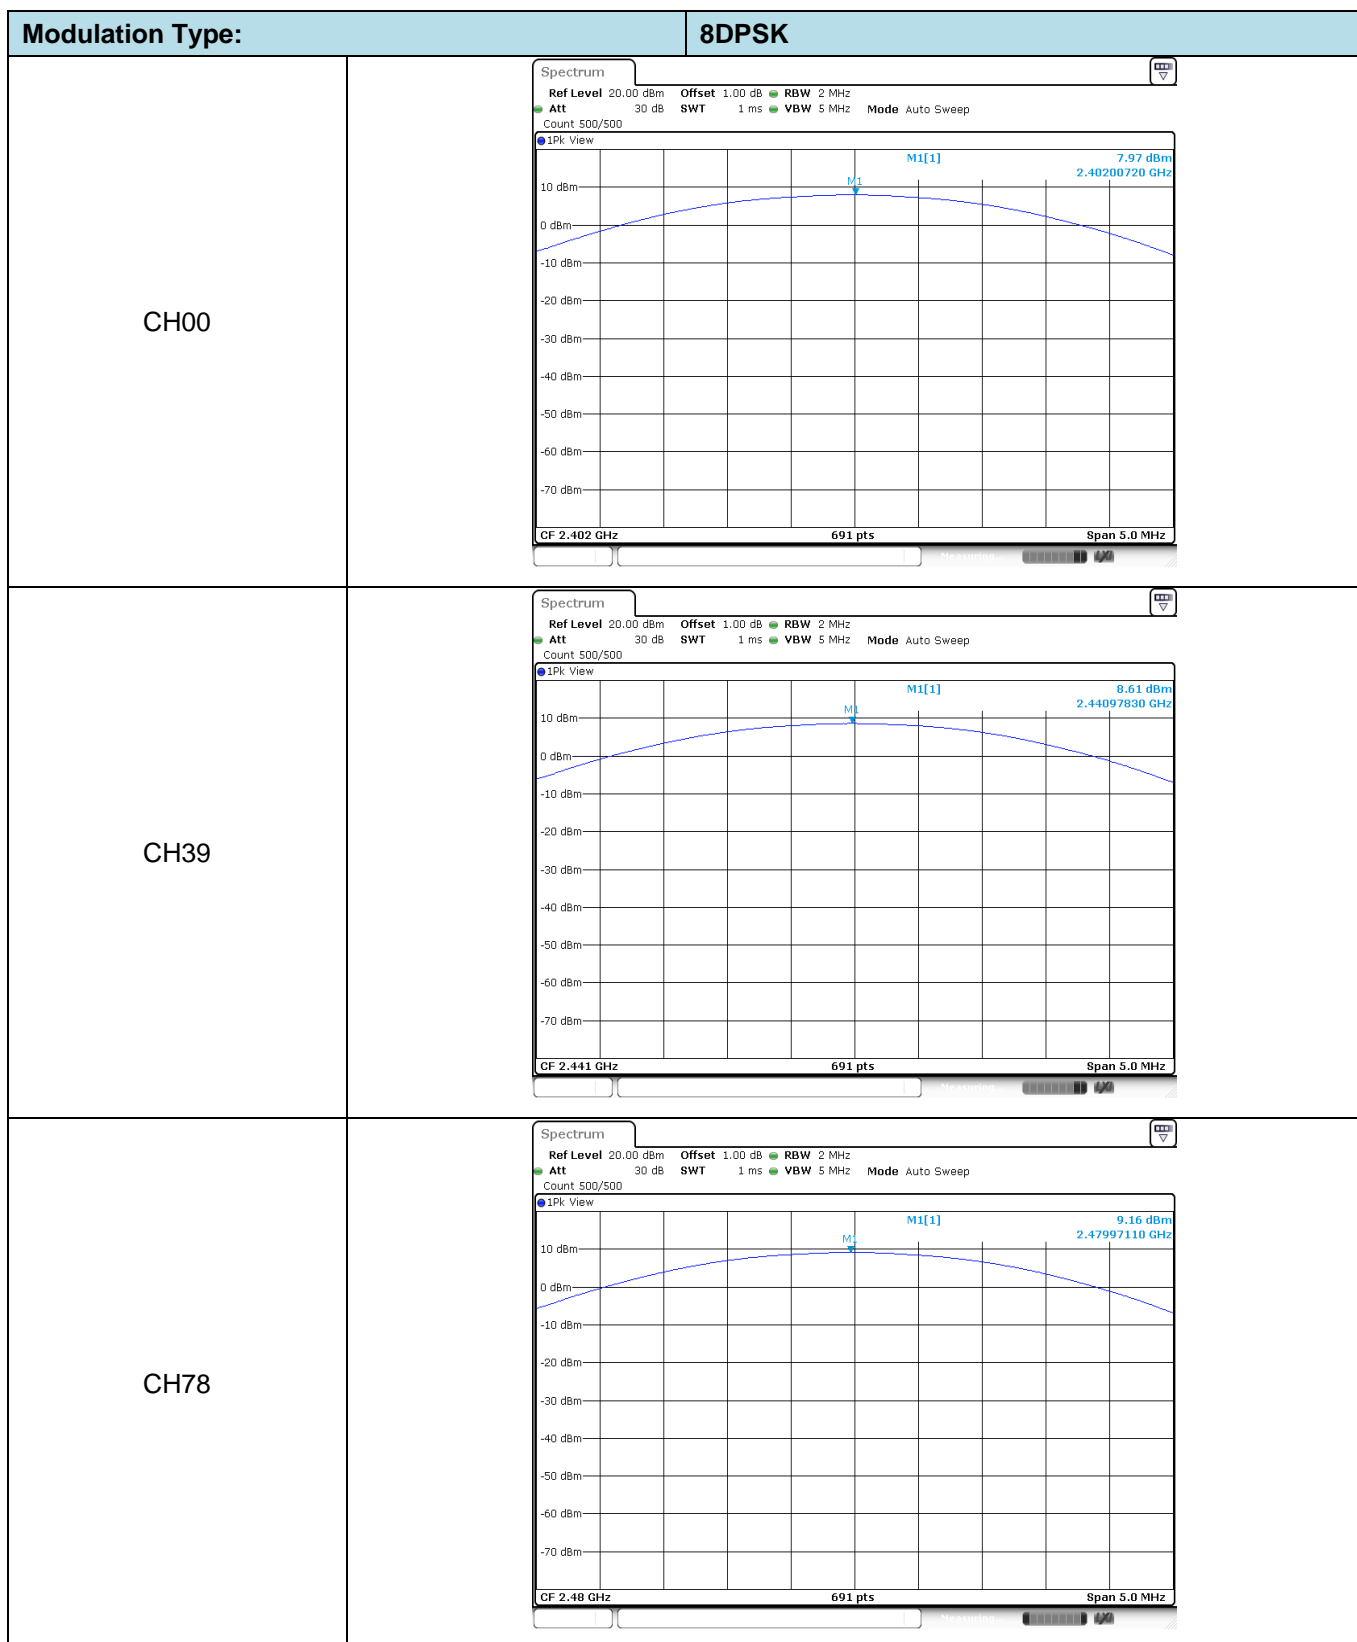


5.4. 20 dB Bandwidth

LIMIT

N/A

TEST CONFIGURATION

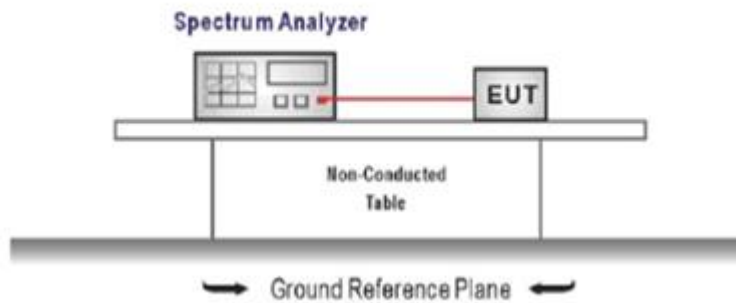

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.


TEST MODE:


Please refer to the clause 3.3


TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Modulation type	Channel	20 dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	0.93	-	Pass
	39	0.93		
	78	0.93		
$\pi/4$ DQPSK	00	1.29	-	Pass
	39	1.28		
	78	1.28		
8DPSK	00	1.29	-	Pass
	39	1.29		
	78	1.29		

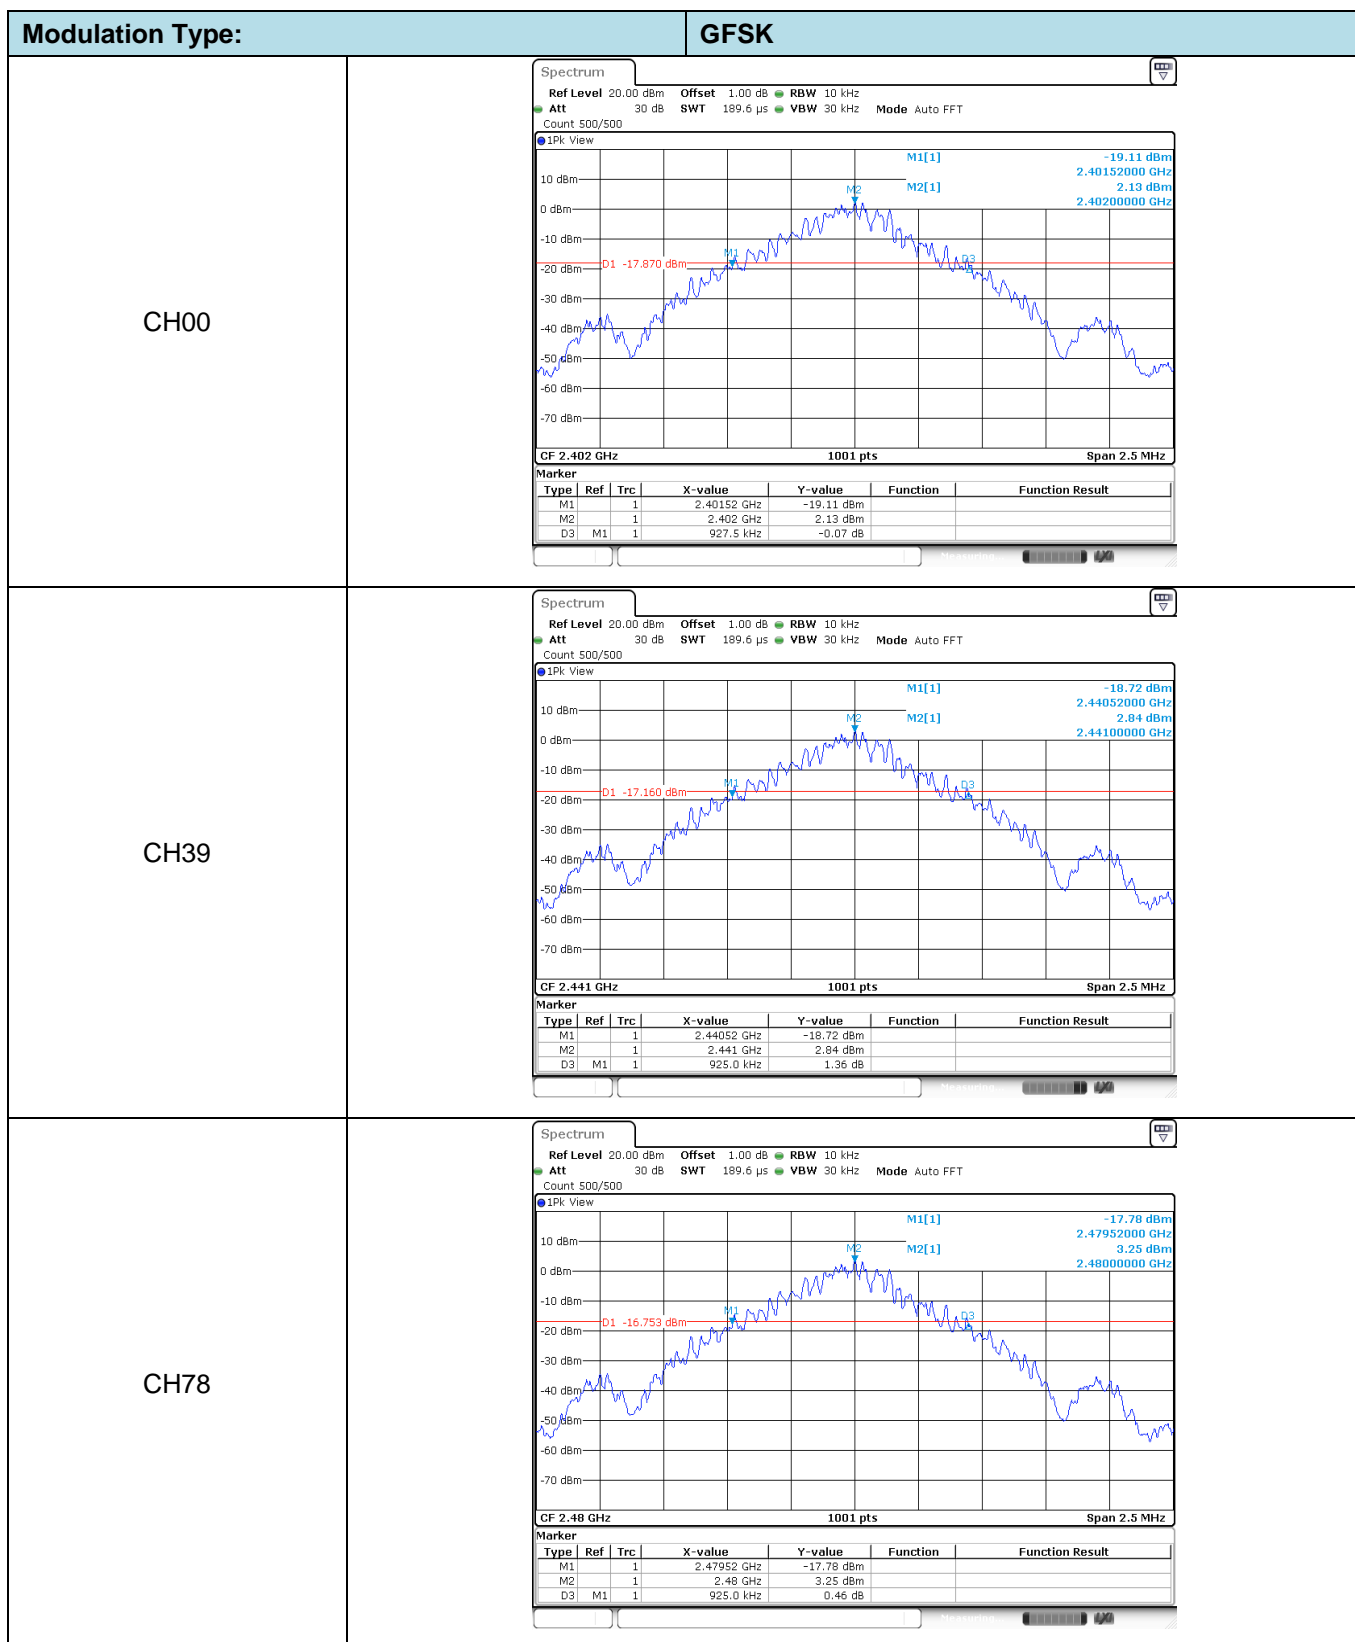

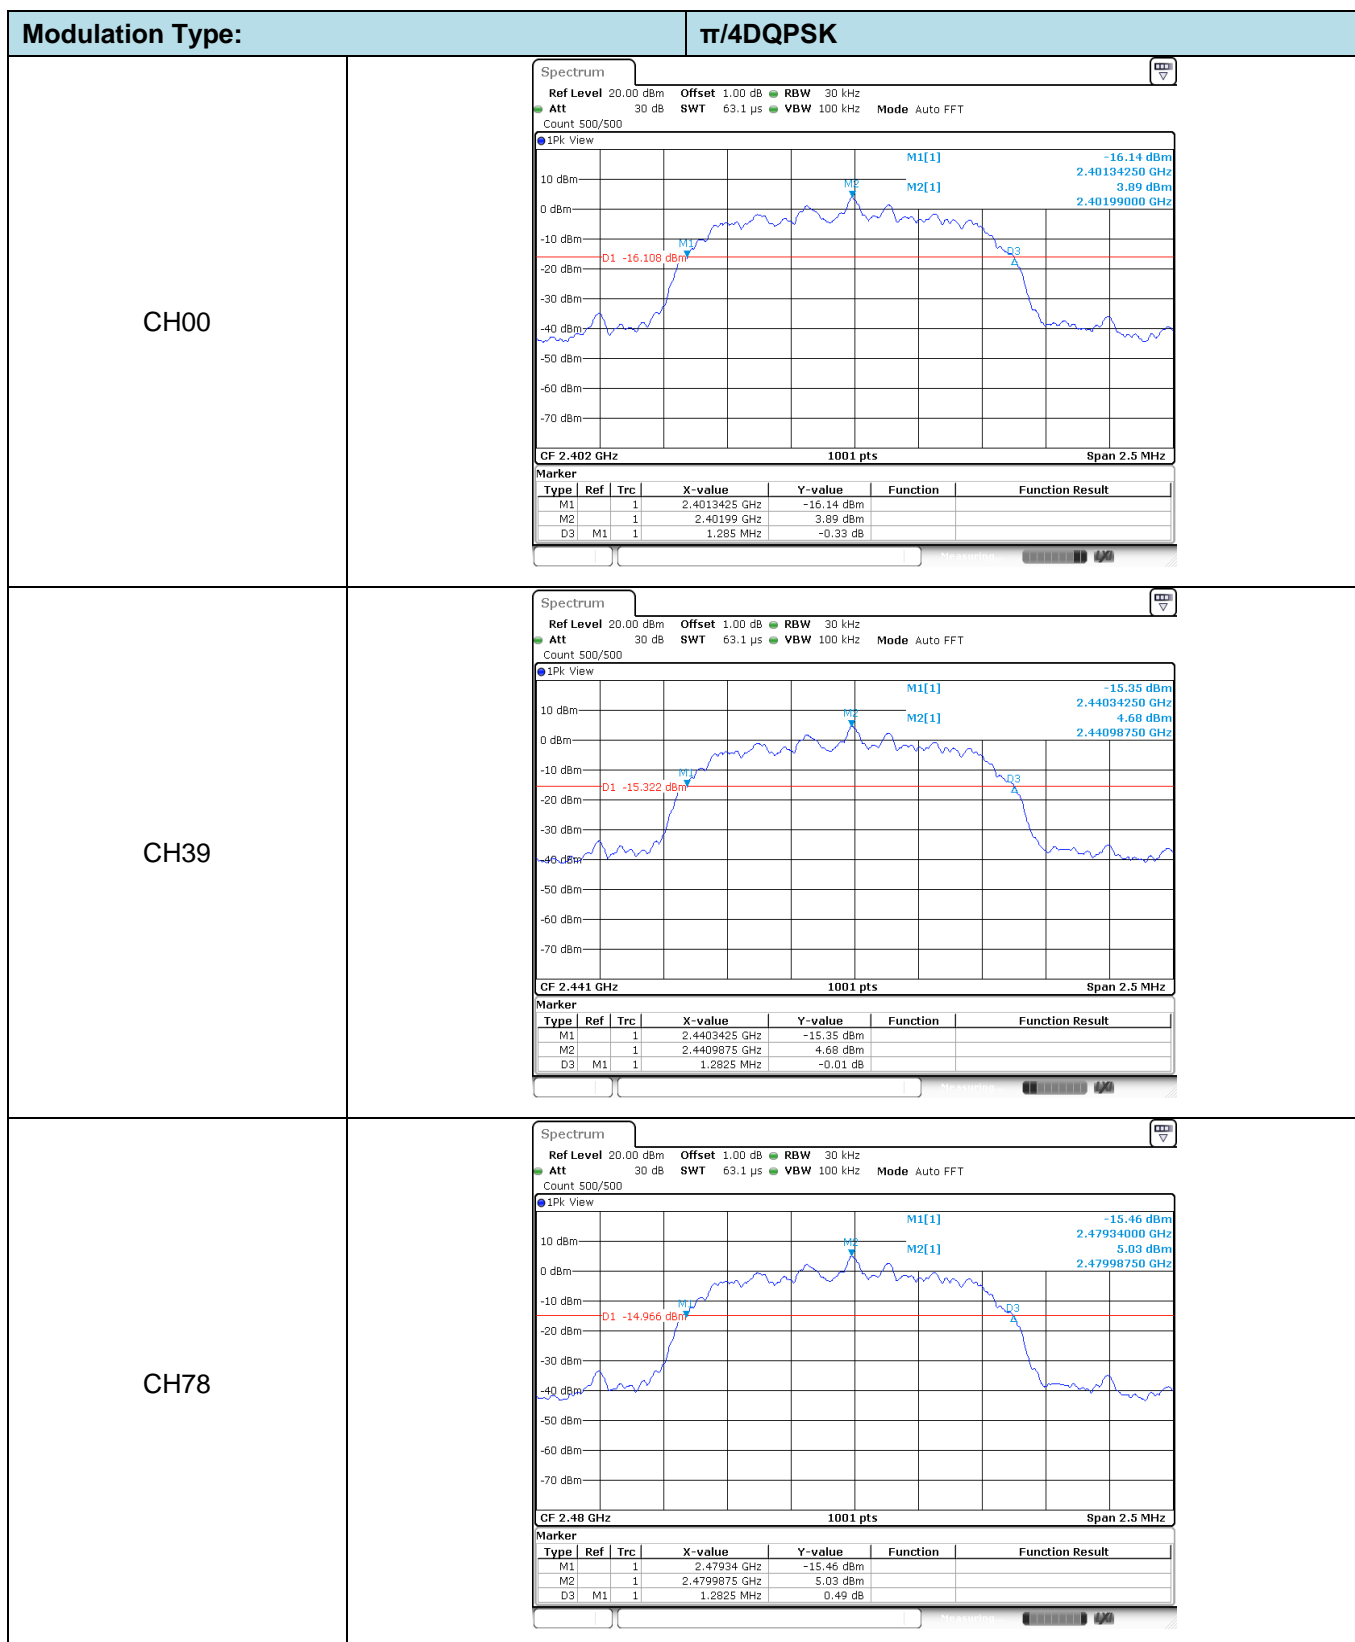

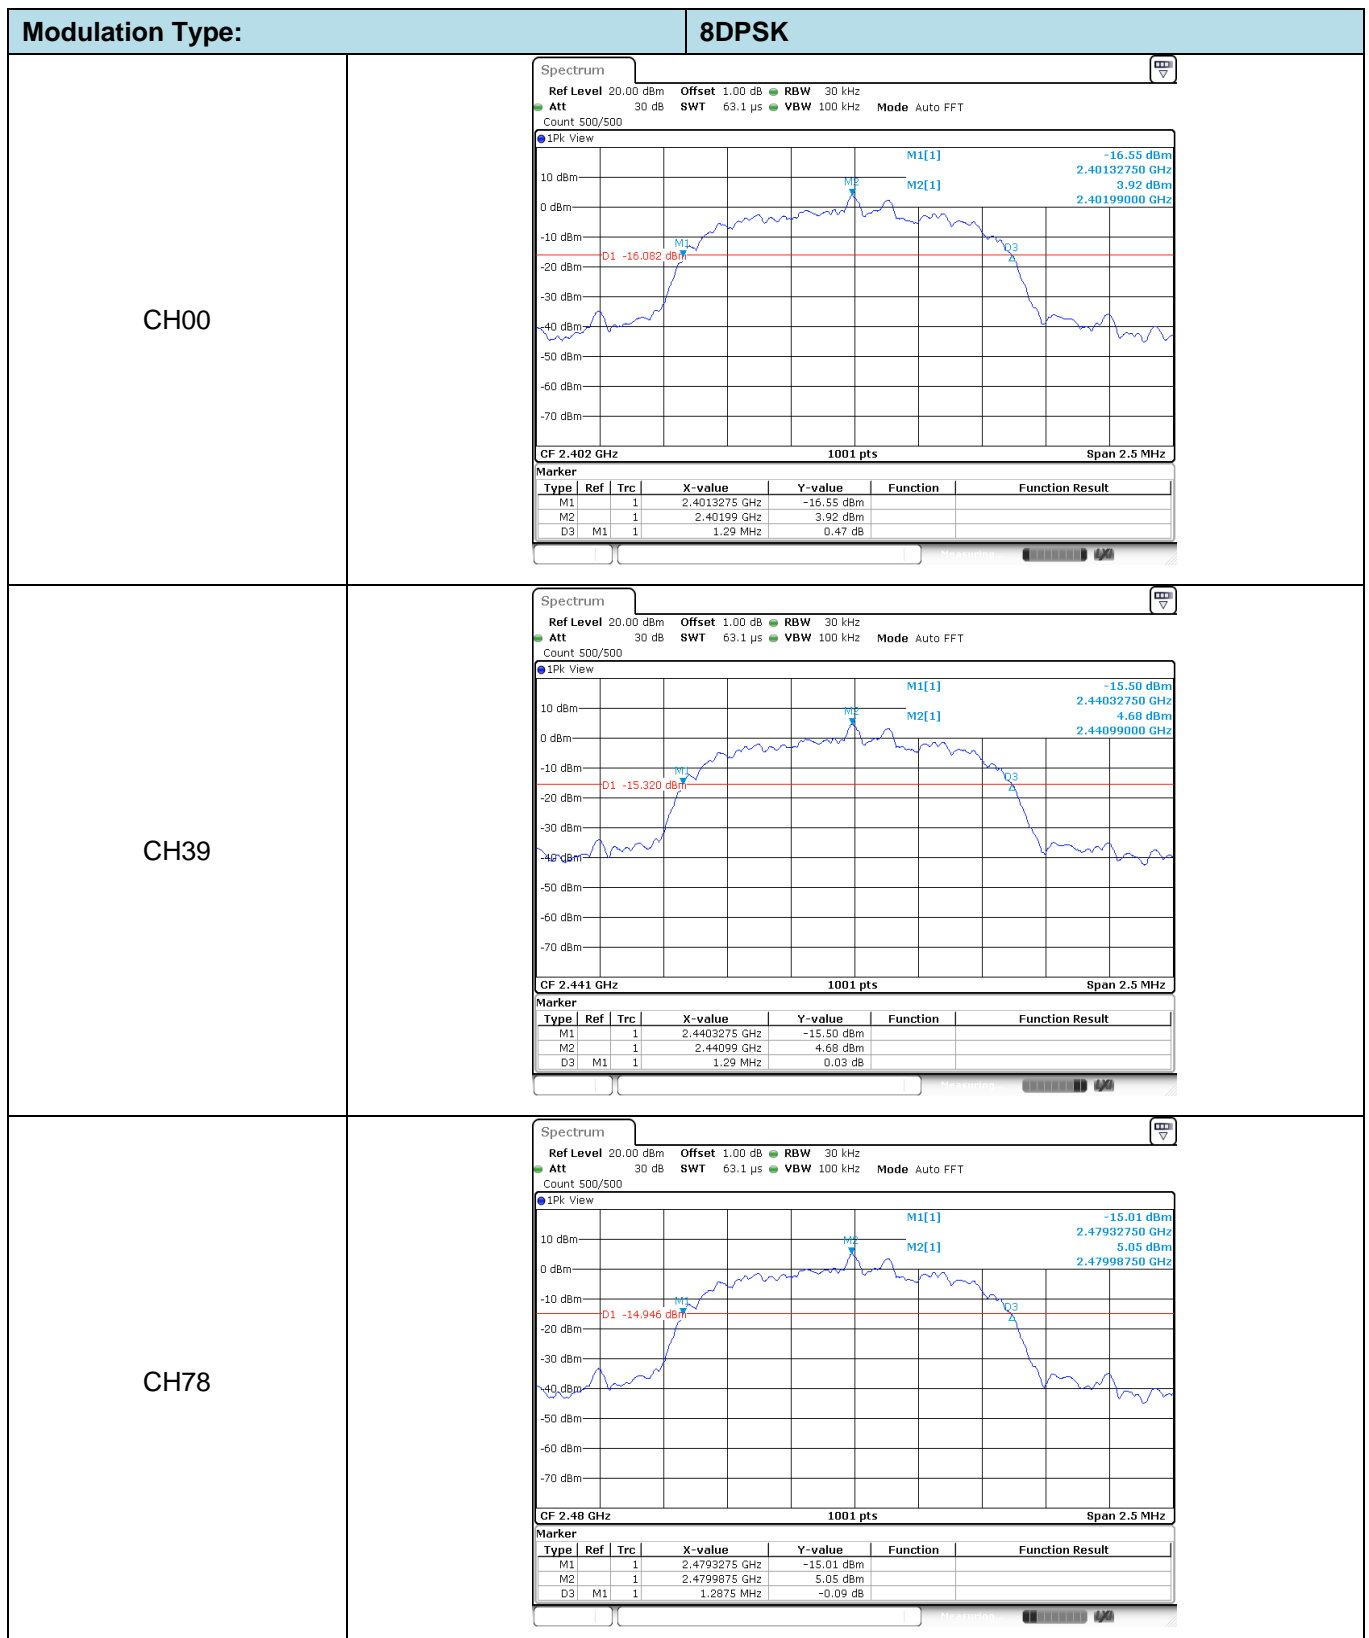


5.5. Carrier Frequencies Separation

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST CONFIGURATION

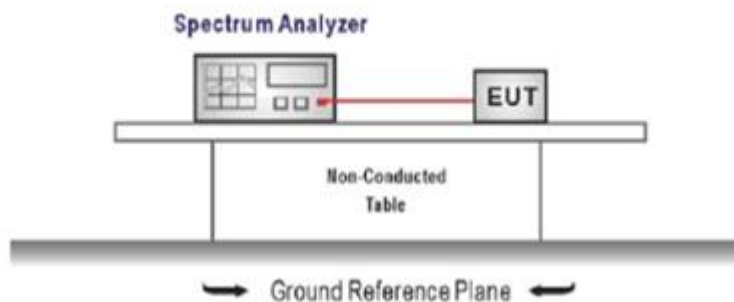

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels
RBW \geq 1% of the span, VBW \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable


Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz) *	Result
GFSK	39	1.00	≥ 0.93	Pass
$\pi/4$ DQPSK	39	1.00	≥ 0.86	Pass
8DPSK	39	1.00	≥ 0.86	Pass

Note:

*: GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the section 5.4.

$\pi/4$ DQPSK limit = $2/3$ * The maximum 20 dB Bandwidth for $\pi/4$ DQPSK modulation on the section 5.4.

8DPSK limit = $2/3$ * The maximum 20 dB Bandwidth for 8DPSK modulation on the section 5.4

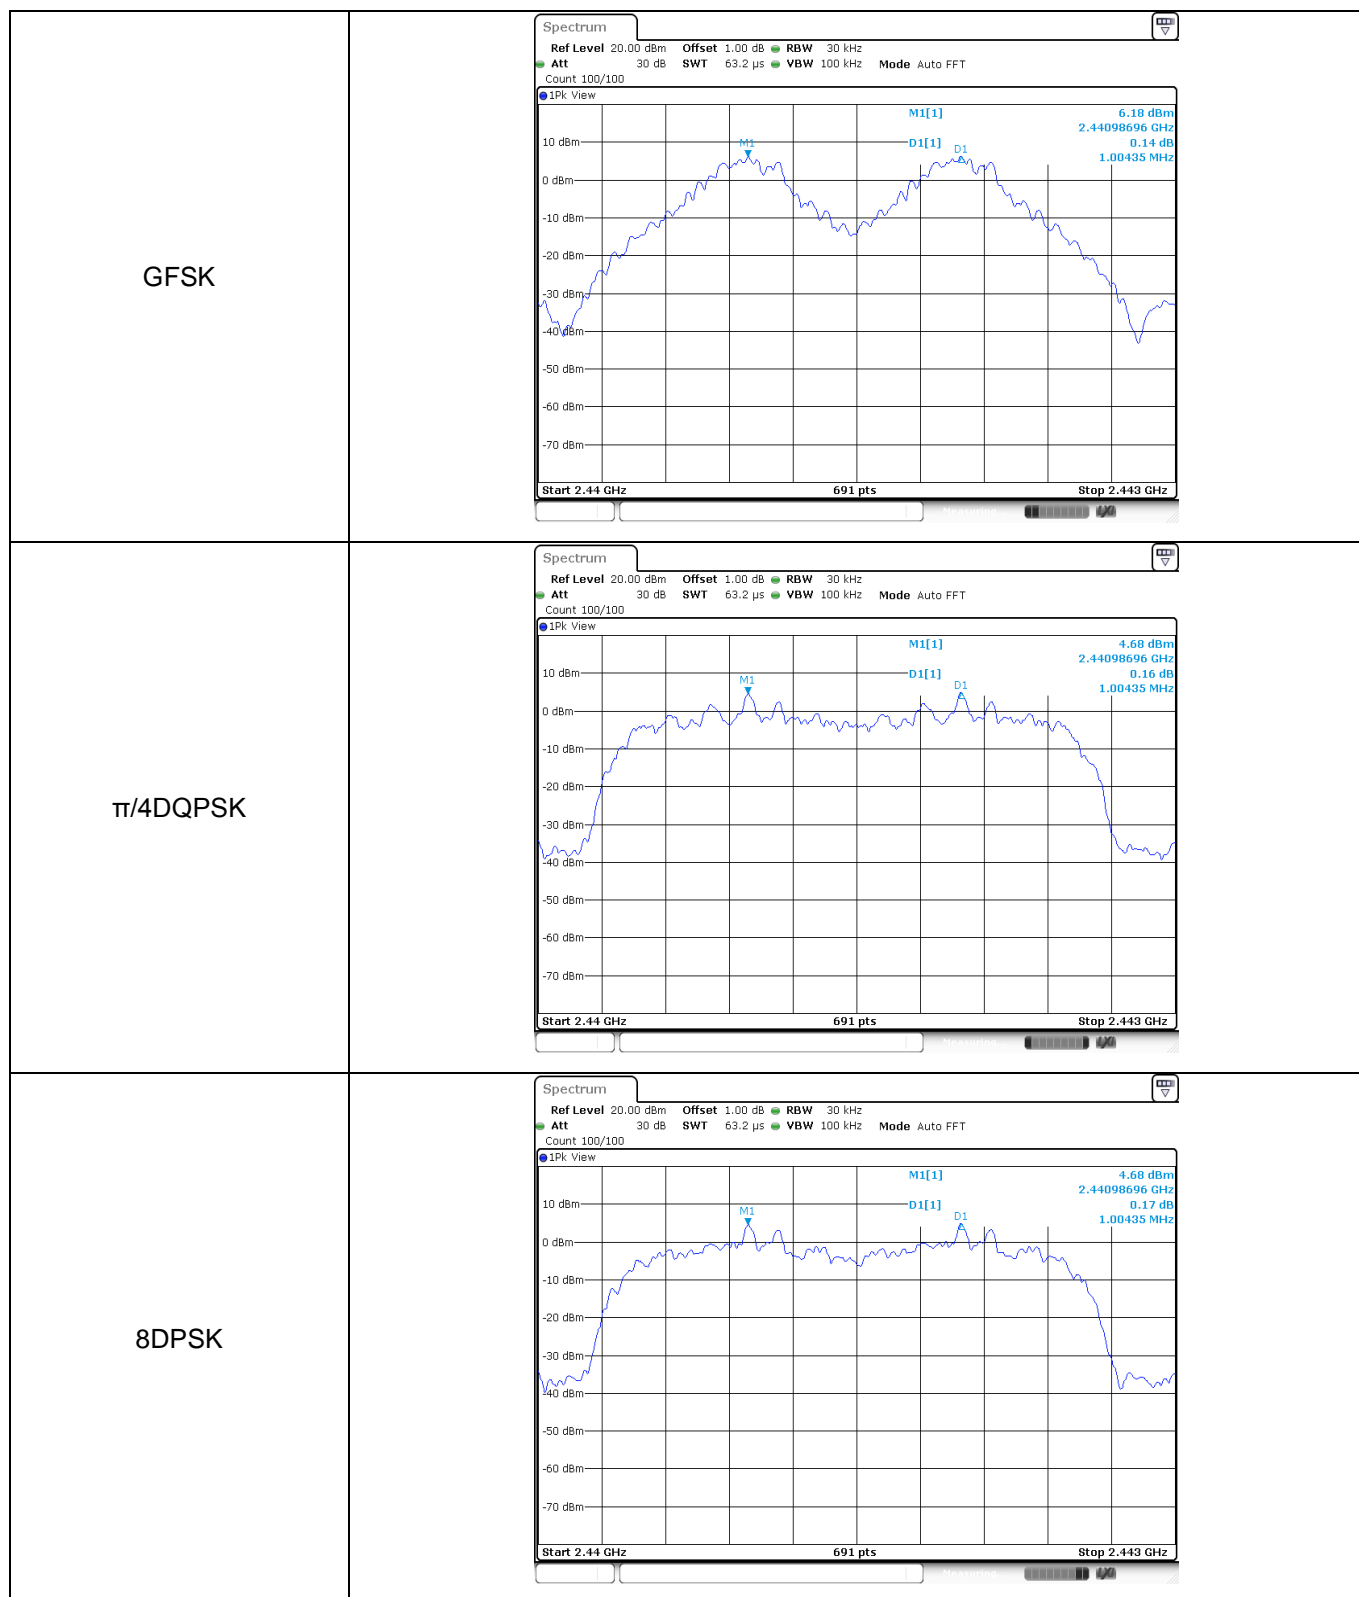


5.6. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

TEST CONFIGURATION

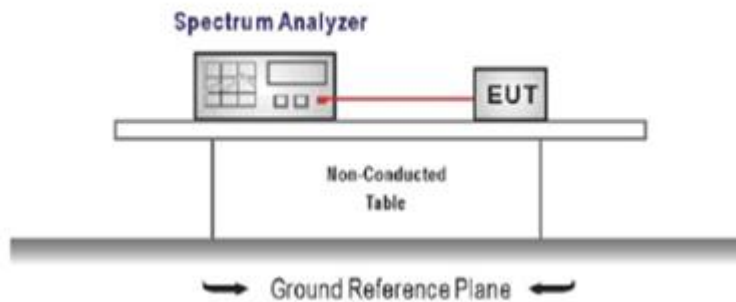

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = the frequency band of operation
RBW \geq 1% of the span, VBW \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel number	Limit	Result
GFSK	79	≥ 15.00	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		

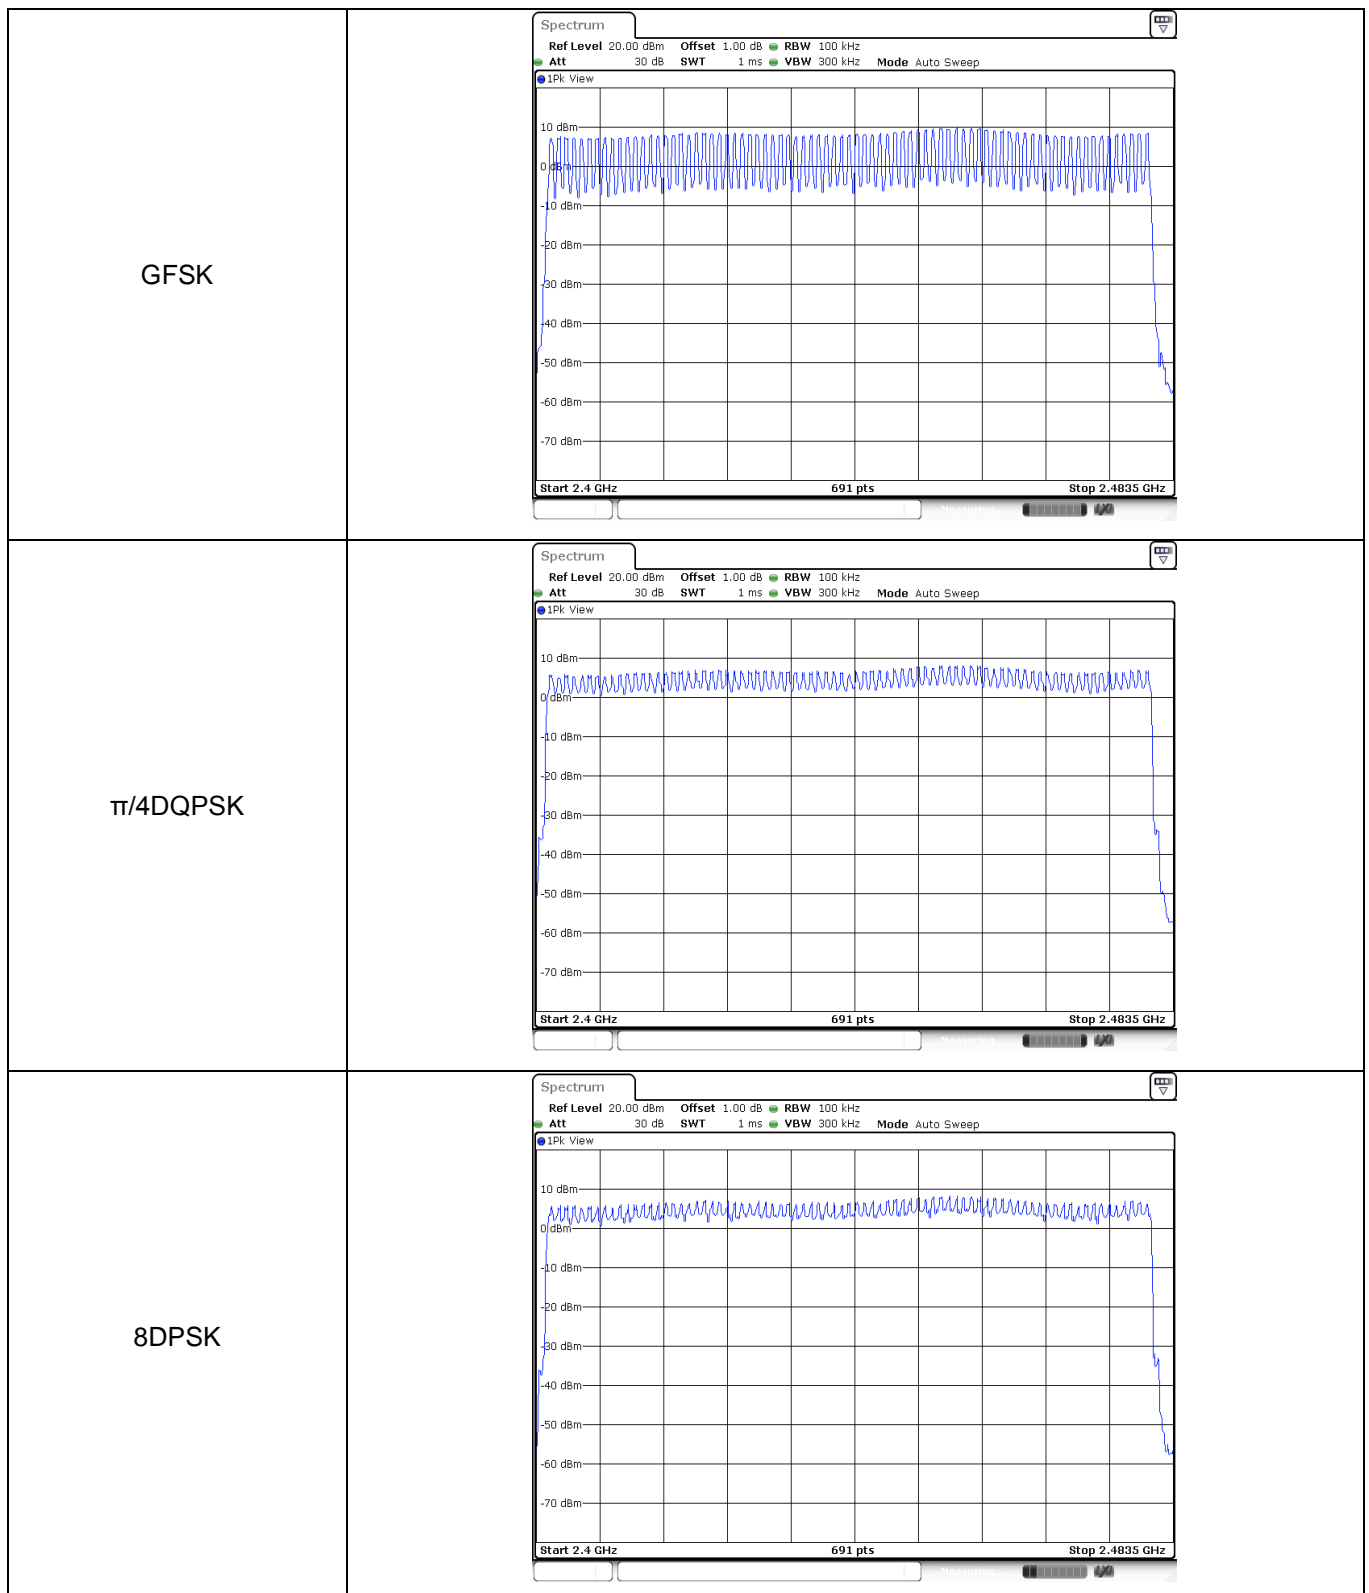


5.7. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST CONFIGURATION

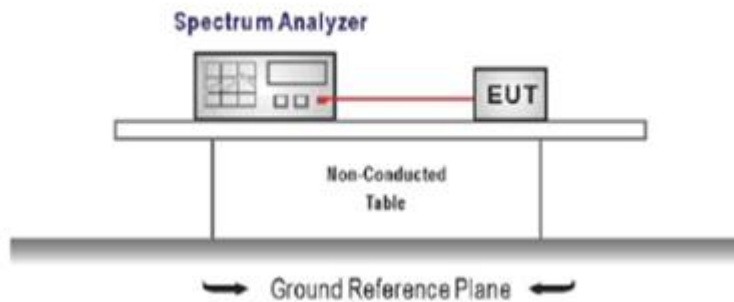

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW \geq RBW
Sweep = as necessary to capture the entire dwell time per hopping channel,
Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.




TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

☒ Passed ☐ Not Applicable


Modulation type	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1	0.38	311.00	0.12	≤ 0.40	Pass
	DH3	1.64	161.00	0.26		
	DH5	2.88	120.00	0.35		
$\pi/4$ DQPSK	2DH1	0.39	317.00	0.12	≤ 0.40	Pass
	2DH3	1.64	158.00	0.26		
	2DH5	2.89	103.00	0.30		
8DPSK	3DH1	0.39	314.00	0.12	≤ 0.40	Pass
	3DH3	1.64	159.00	0.26		
	3DH5	2.89	115.00	0.33		

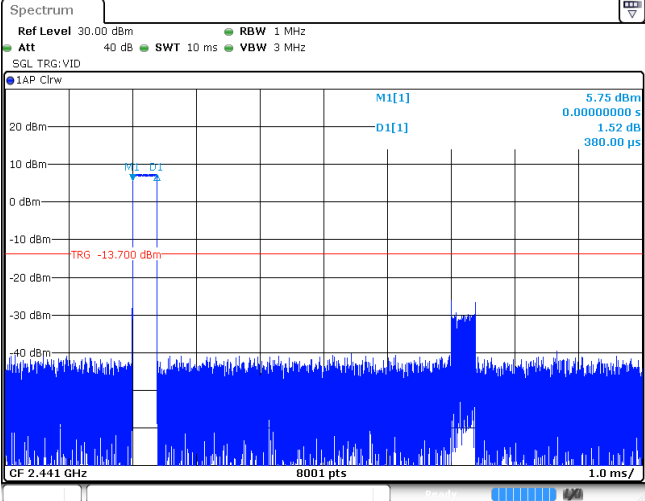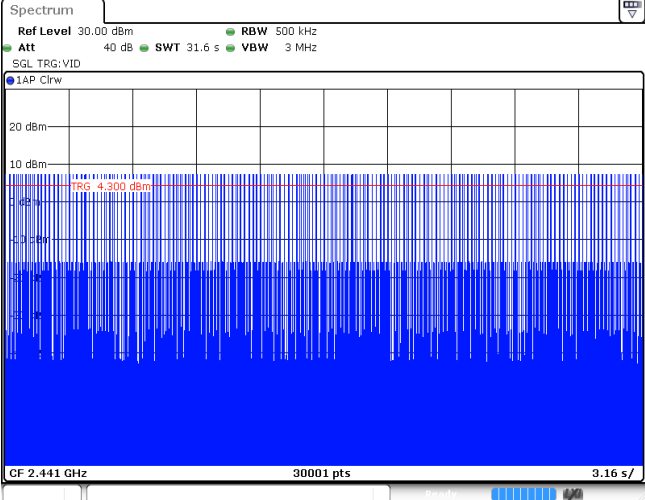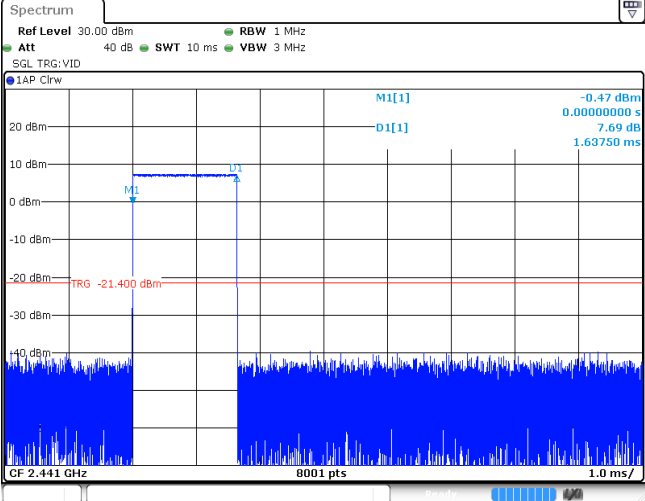Modulation Type:	GFSK
DH1 Burst width	 <p>The spectrum plot shows a signal at 2.441 GHz. The y-axis represents power in dBm, ranging from -40 to 20. The x-axis represents time in ms, ranging from 0 to 1.0. A red horizontal line indicates a threshold at -13.700 dBm. The signal is a burst that starts at approximately 0.2 ms and ends at approximately 0.4 ms. The peak power is 5.75 dBm. The plot also shows a noise floor at approximately -40 dBm.</p>
DH1 Burst number	 <p>The spectrum plot shows a signal at 2.441 GHz. The y-axis represents power in dBm, ranging from -40 to 20. The x-axis represents time in s, ranging from 0 to 3.16. A red horizontal line indicates a threshold at -4.300 dBm. The signal is a continuous burst that starts at approximately 0.2 s and ends at approximately 3.1 s. The peak power is 4.300 dBm. The plot also shows a noise floor at approximately -40 dBm.</p>
DH3 Burst width	 <p>The spectrum plot shows a signal at 2.441 GHz. The y-axis represents power in dBm, ranging from -40 to 20. The x-axis represents time in ms, ranging from 0 to 1.0. A red horizontal line indicates a threshold at -21.400 dBm. The signal is a burst that starts at approximately 0.2 ms and ends at approximately 0.4 ms. The peak power is -0.47 dBm. The plot also shows a noise floor at approximately -40 dBm.</p>


DH3
Burst number

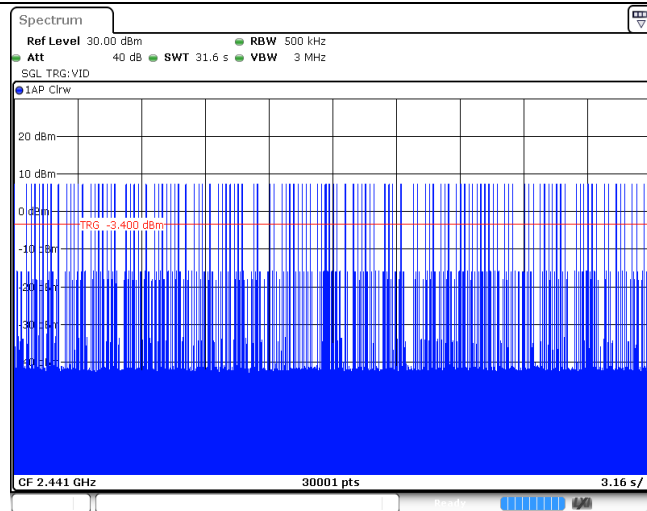


DH5
Burst width

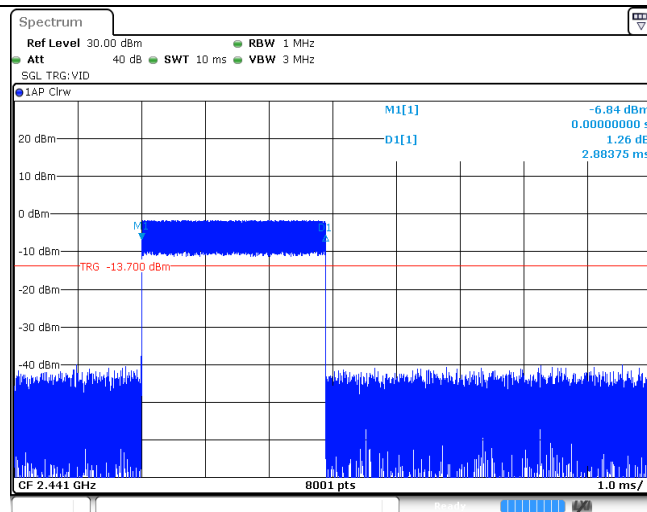


DH5
Burst number

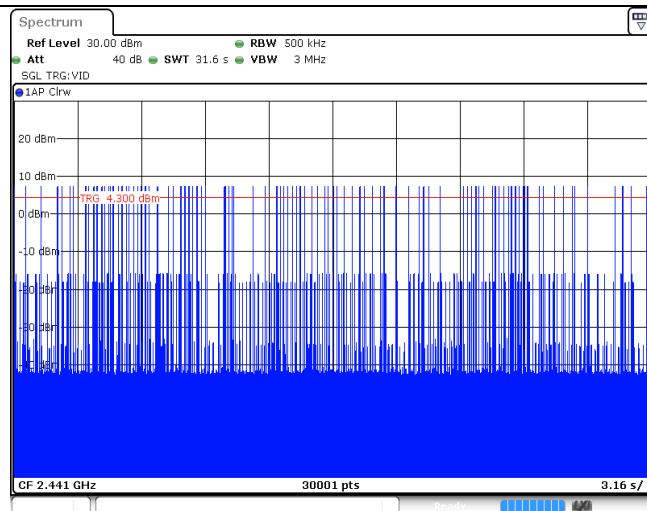


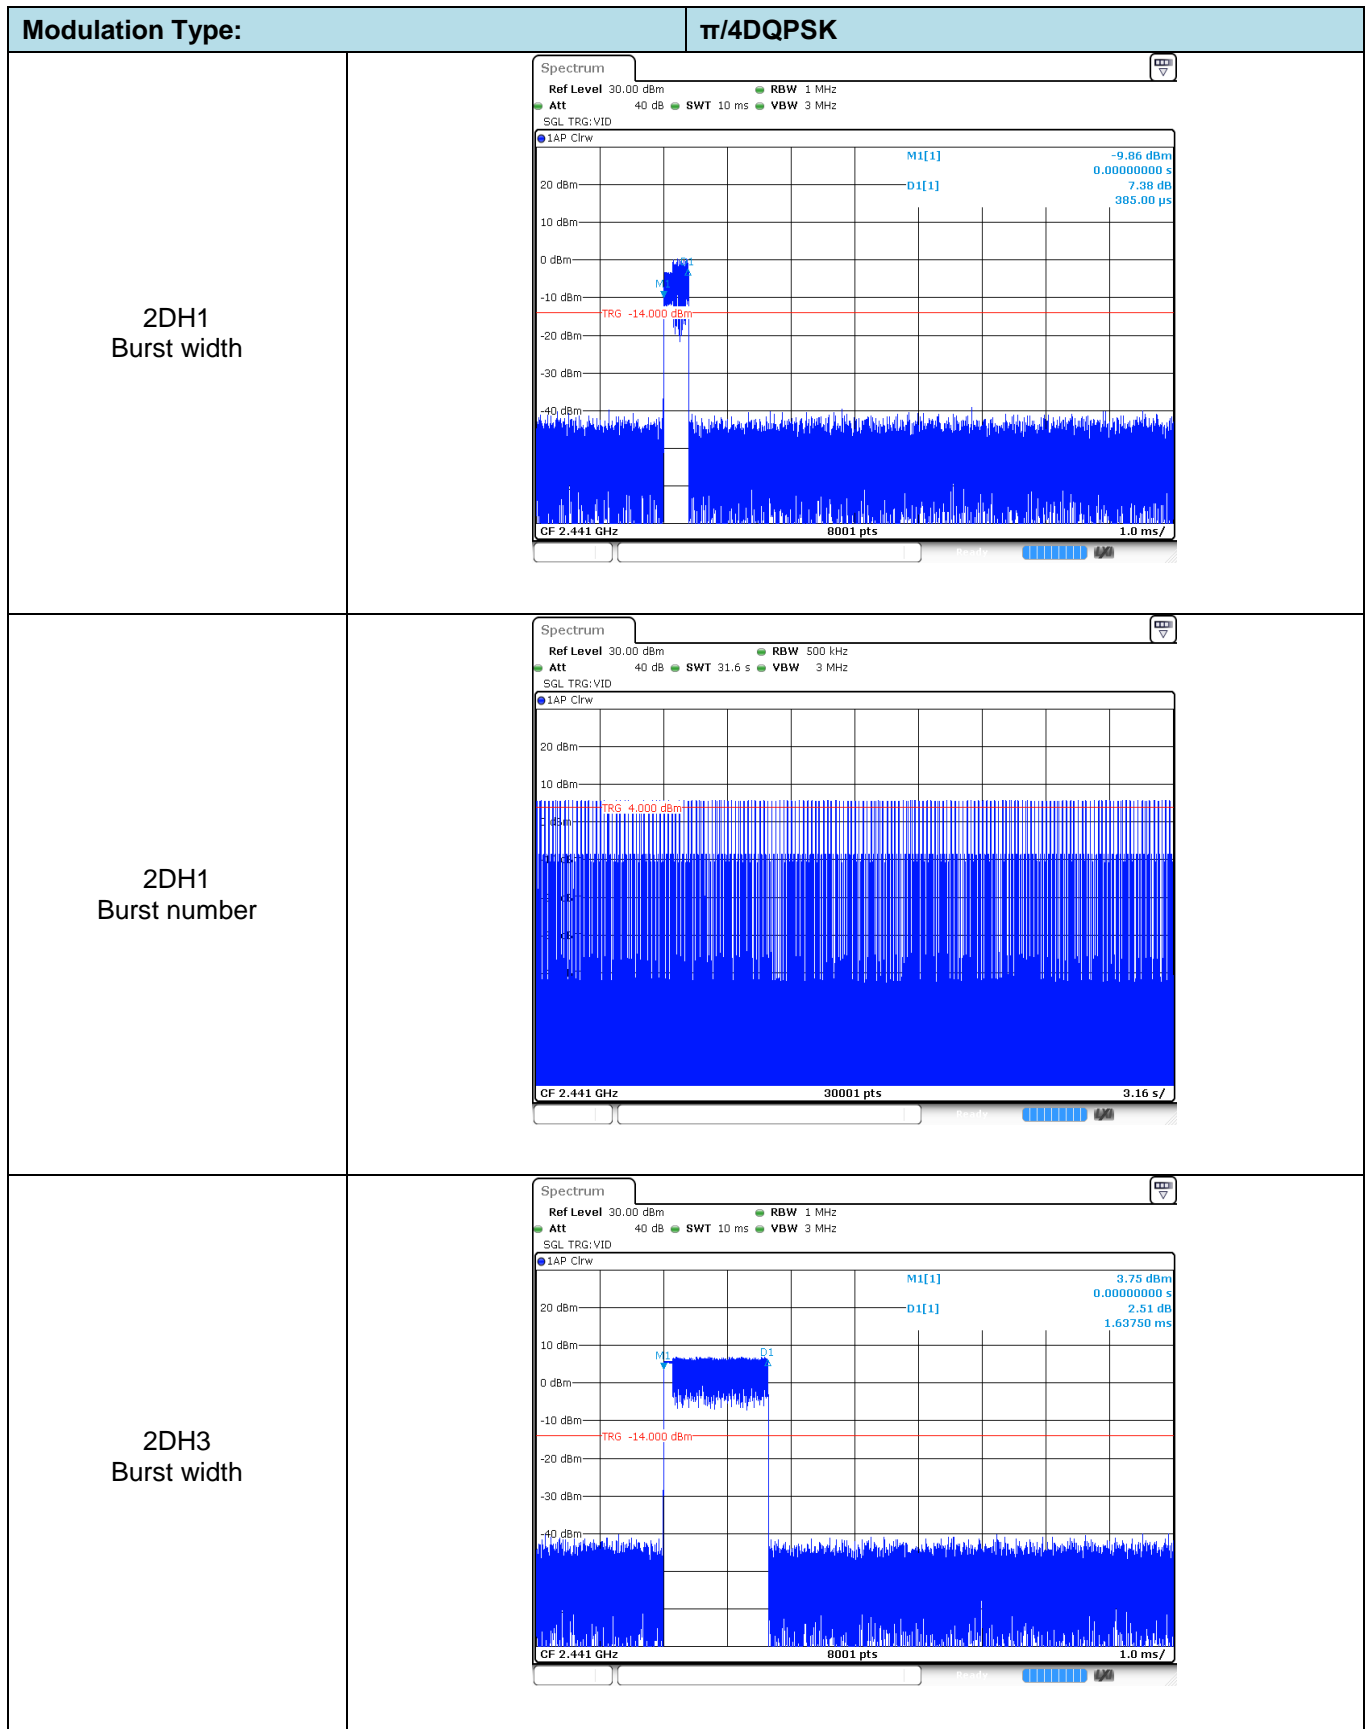


2DH3
Burst number

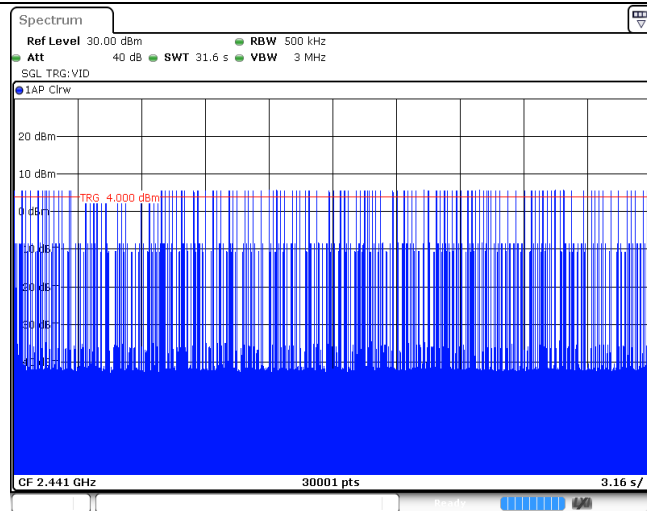


2DH5
Burst width

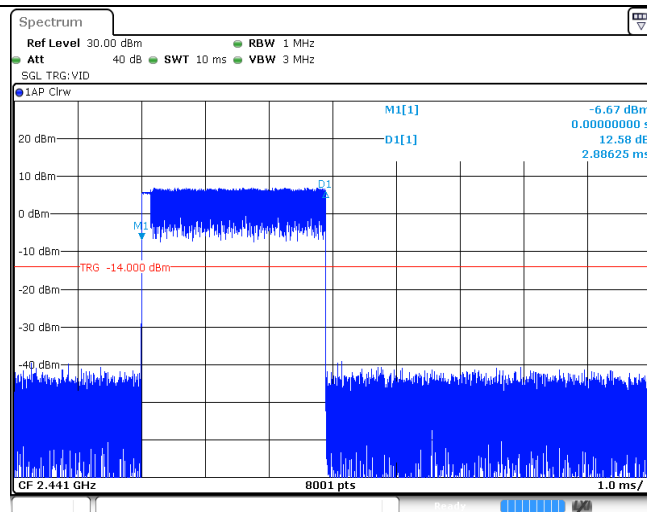


2DH5
Burst number

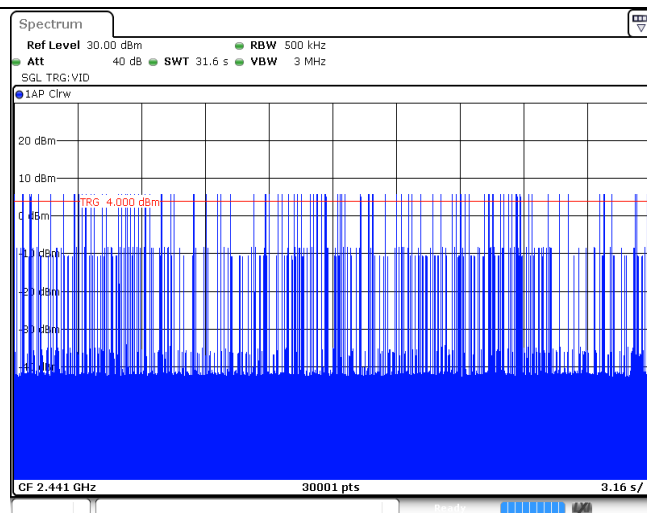


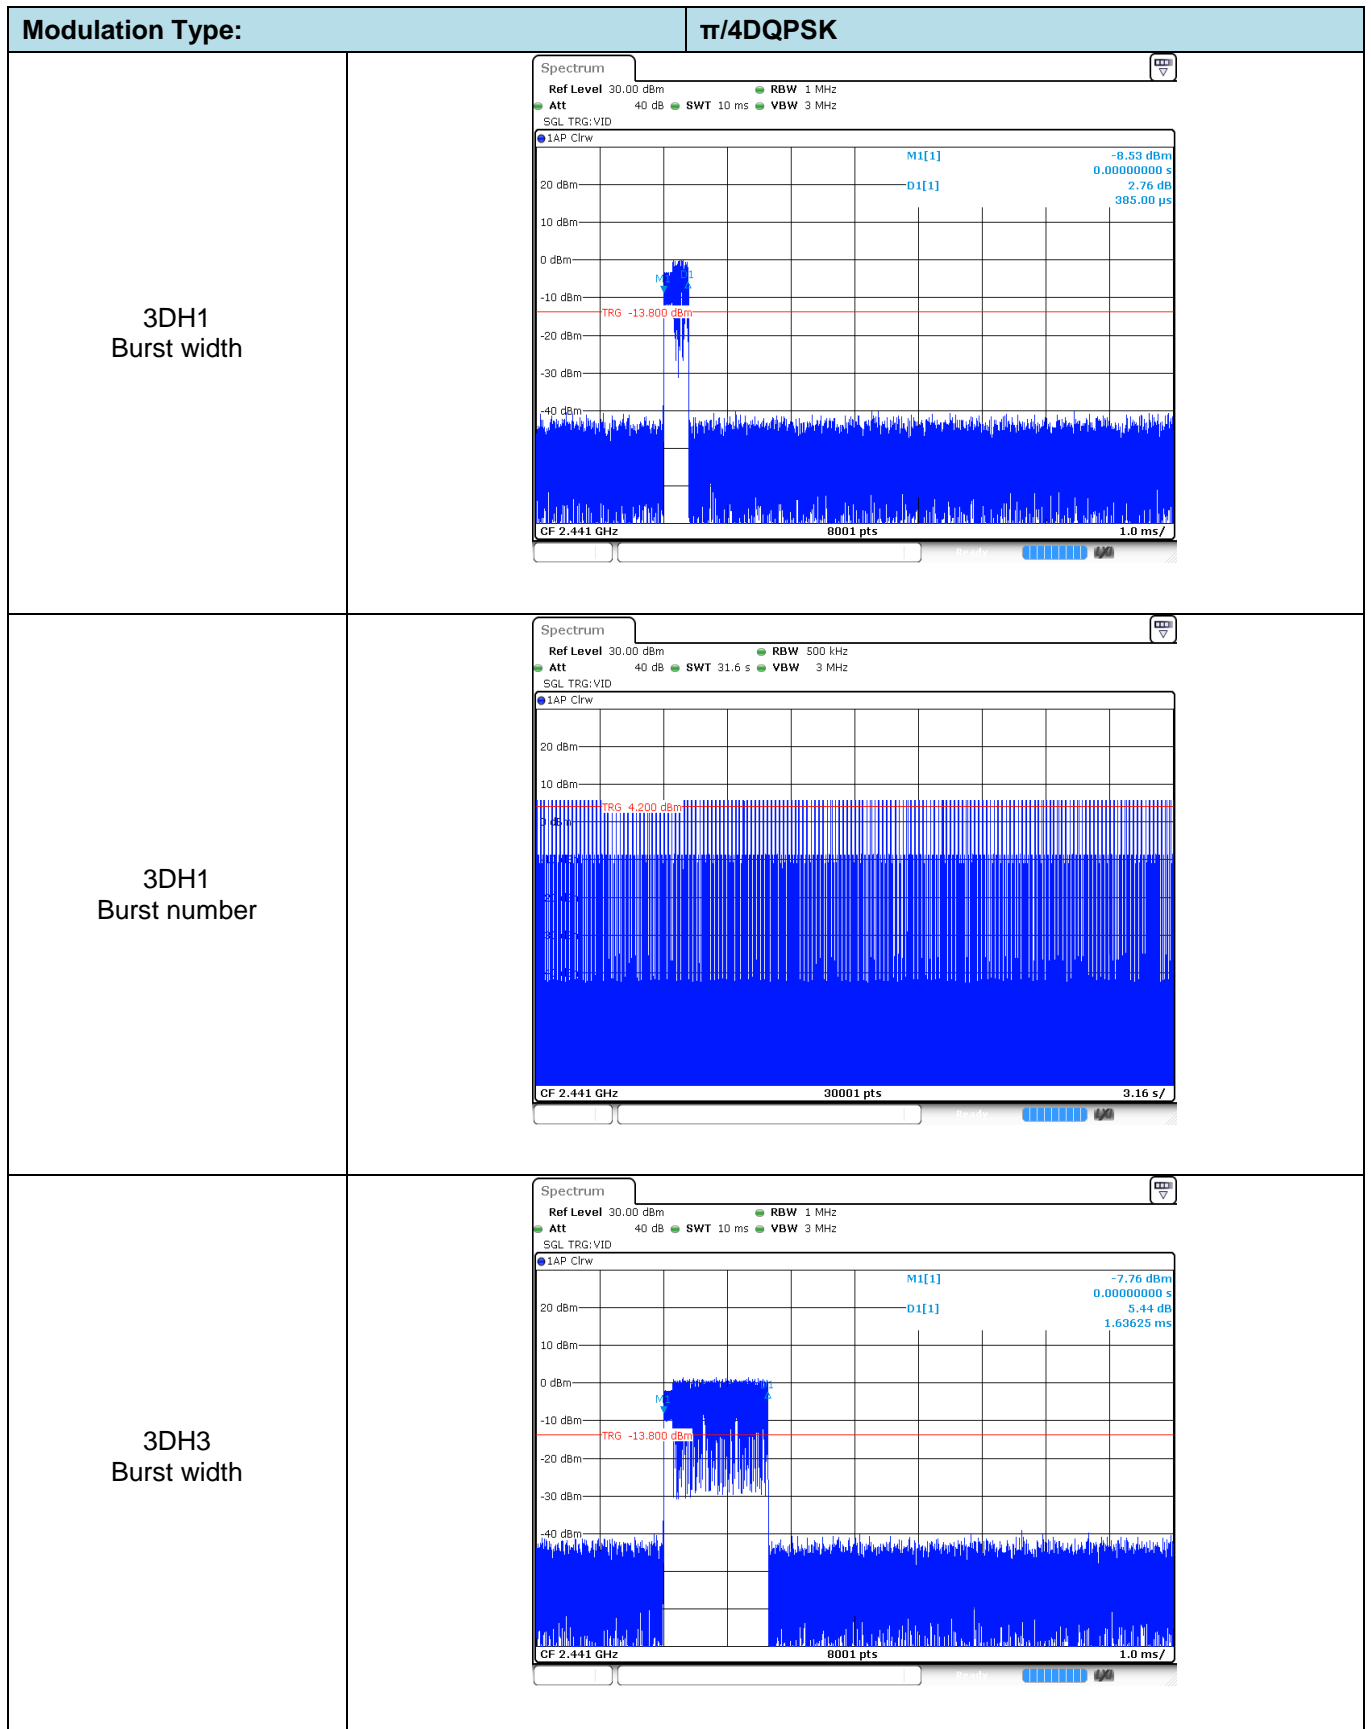


3DH3
Burst number

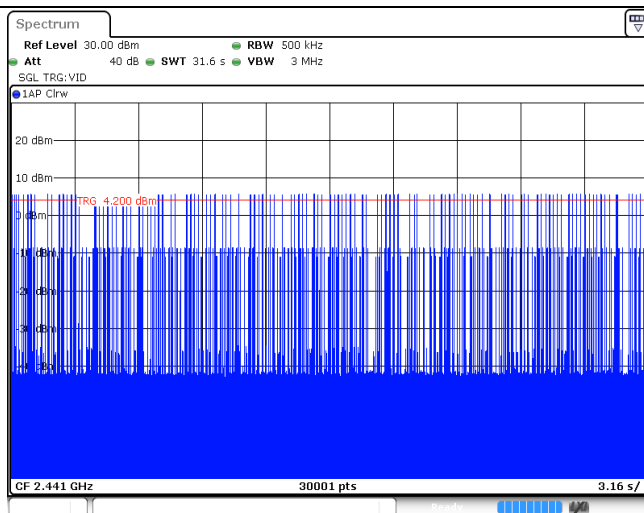

3DH5
Burst width

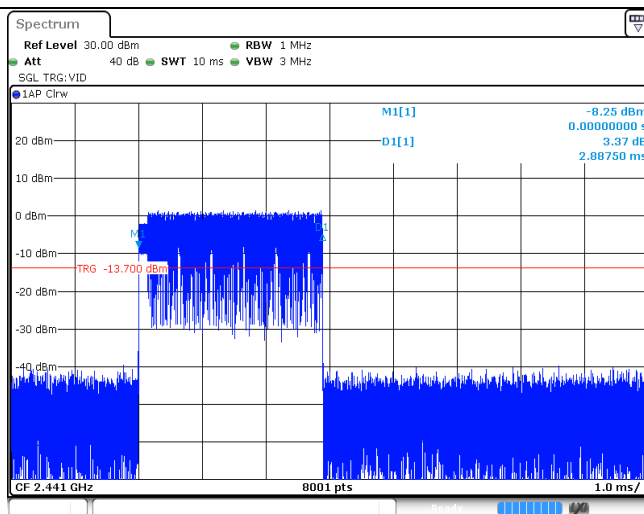

3DH5
Burst number

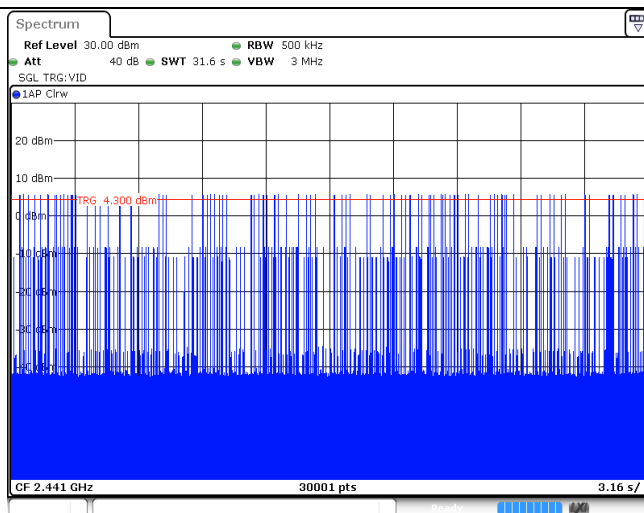

5.8. Pseudorandom Frequency Hopping Sequence


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

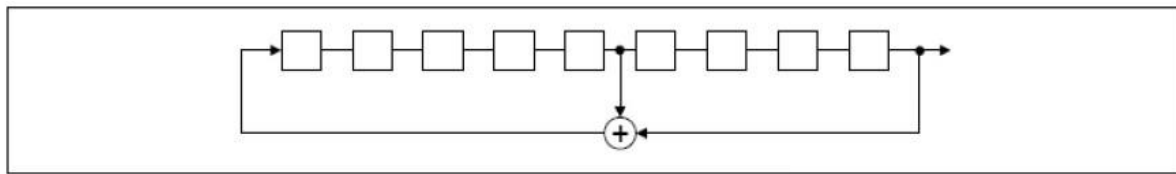

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

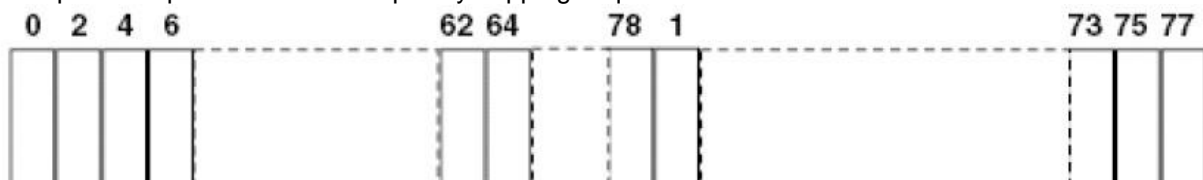

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.


5.9. Restricted band (radiated)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

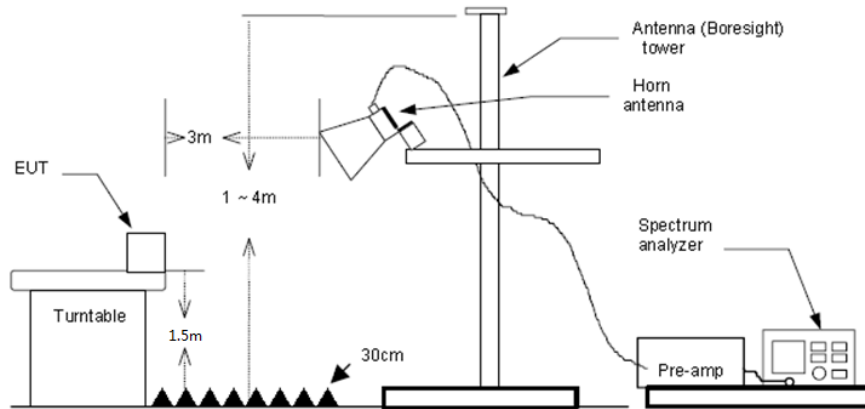

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1 MHz, VBW=3 MHz Peak detector for Peak value
RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Note:

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- 2) Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.
- 3) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

Test channel:					CH00				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	31.04	28.05	6.62	37.59	28.12	74.00	-45.88	Horizontal	Peak
2389.83	44.55	27.65	6.75	37.59	41.36	74.00	-32.64	Horizontal	Peak
2310.00	33.14	28.05	6.62	37.59	30.22	74.00	-43.78	Vertical	Peak
2390.03	43.22	27.65	6.75	37.59	40.03	74.00	-33.97	Vertical	Peak
2310.00	19.20	28.05	6.62	37.59	16.28	54.00	-37.72	Horizontal	Average
2390.03	21.02	27.65	6.75	37.59	17.83	54.00	-36.17	Horizontal	Average
2310.00	20.49	28.05	6.62	37.59	17.57	54.00	-36.43	Vertical	Average
2390.03	22.65	27.65	6.75	37.59	19.46	54.00	-34.54	Vertical	Average


Test channel:					CH78				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.50	63.64	27.26	6.83	37.59	60.14	74.00	-13.86	Horizontal	Peak
2500.00	32.05	27.20	6.84	37.59	28.50	74.00	-45.50	Horizontal	Peak
2483.50	50.55	27.26	6.83	37.59	47.05	74.00	-26.95	Vertical	Peak
2500.00	34.76	27.20	6.84	37.59	31.21	74.00	-42.79	Vertical	Peak
2483.50	49.20	27.26	6.83	37.59	45.70	54.00	-8.30	Horizontal	Average
2500.00	20.68	27.20	6.84	37.59	17.13	54.00	-36.87	Horizontal	Average
2483.50	48.78	27.26	6.83	37.59	45.28	54.00	-8.72	Vertical	Average
2500.00	19.56	27.20	6.84	37.59	16.01	54.00	-37.99	Vertical	Average

5.10. Band edge and Spurious Emissions (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

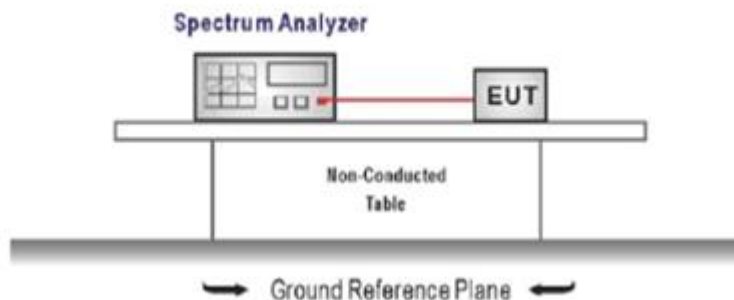

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW \geq RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:


Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable


Test Item:	Band edge	Modulation type:	GFSK																																										
CH00 No hopping mode	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm</div><div>Offset 1.00 dB</div><div>RBW 100 kHz</div><div>Att 30 dB</div><div>SWT 1.1 ms</div><div>VBW 300 kHz</div><div>Mode Auto Sweep</div><div>Count 500/500</div></div><div><div>1Pk Max</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div>M1[1] 7.27 dBm</div><div>M2[1] 2.402180 GHz</div><div>-49.77 dBm</div><div>2.400000 GHz</div></div></div><div><div>D1 -12.730 dBm</div></div><div><div>Start 2.31 GHz</div><div>691 pts</div><div>Stop 2.405 GHz</div></div><div><div>Marker</div><table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.40218 GHz</td><td>7.27 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-49.77 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-59.72 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-57.89 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.399906 GHz</td><td>-51.04 dBm</td><td></td><td></td></tr></tbody></table></div></div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40218 GHz	7.27 dBm			M2	1		2.4 GHz	-49.77 dBm			M3	1		2.39 GHz	-59.72 dBm			M4	1		2.31 GHz	-57.89 dBm			M5	1		2.399906 GHz	-51.04 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40218 GHz	7.27 dBm																																									
M2	1		2.4 GHz	-49.77 dBm																																									
M3	1		2.39 GHz	-59.72 dBm																																									
M4	1		2.31 GHz	-57.89 dBm																																									
M5	1		2.399906 GHz	-51.04 dBm																																									
CH00 Hopping mode	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm</div><div>Offset 1.00 dB</div><div>RBW 100 kHz</div><div>Att 30 dB</div><div>SWT 1.1 ms</div><div>VBW 300 kHz</div><div>Mode Auto Sweep</div><div>Count 500/500</div></div><div><div>1Pk Max</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div>M1[1] 7.41 dBm</div><div>M2[1] 2.404110 GHz</div><div>-55.79 dBm</div><div>2.400000 GHz</div></div></div><div><div>D1 -12.590 dBm</div></div><div><div>Start 2.31 GHz</div><div>691 pts</div><div>Stop 2.405 GHz</div></div><div><div>Marker</div><table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.40411 GHz</td><td>7.41 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-55.79 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-58.43 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-57.84 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.399493 GHz</td><td>-53.58 dBm</td><td></td><td></td></tr></tbody></table></div></div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40411 GHz	7.41 dBm			M2	1		2.4 GHz	-55.79 dBm			M3	1		2.39 GHz	-58.43 dBm			M4	1		2.31 GHz	-57.84 dBm			M5	1		2.399493 GHz	-53.58 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40411 GHz	7.41 dBm																																									
M2	1		2.4 GHz	-55.79 dBm																																									
M3	1		2.39 GHz	-58.43 dBm																																									
M4	1		2.31 GHz	-57.84 dBm																																									
M5	1		2.399493 GHz	-53.58 dBm																																									
CH78 No hopping mode	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm</div><div>Offset 1.00 dB</div><div>RBW 100 kHz</div><div>Att 30 dB</div><div>SWT 56.9 μs</div><div>VBW 300 kHz</div><div>Mode Auto FFT</div><div>Count 500/500</div></div><div><div>1Pk Max</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div>M1[1] 8.63 dBm</div><div>M2[1] 2.4801170 GHz</div><div>-56.23 dBm</div><div>2.4835000 GHz</div></div></div><div><div>D1 -11.370 dBm</div></div><div><div>Start 2.478 GHz</div><div>691 pts</div><div>Stop 2.5 GHz</div></div><div><div>Marker</div><table><thead><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr></thead><tbody><tr><td>M1</td><td>1</td><td></td><td>2.480117 GHz</td><td>8.63 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4835 GHz</td><td>-56.23 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-60.38 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.4836116 GHz</td><td>-55.10 dBm</td><td></td><td></td></tr></tbody></table></div></div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.480117 GHz	8.63 dBm			M2	1		2.4835 GHz	-56.23 dBm			M3	1		2.5 GHz	-60.38 dBm			M4	1		2.4836116 GHz	-55.10 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.480117 GHz	8.63 dBm																																									
M2	1		2.4835 GHz	-56.23 dBm																																									
M3	1		2.5 GHz	-60.38 dBm																																									
M4	1		2.4836116 GHz	-55.10 dBm																																									

CH78
Hopping mode

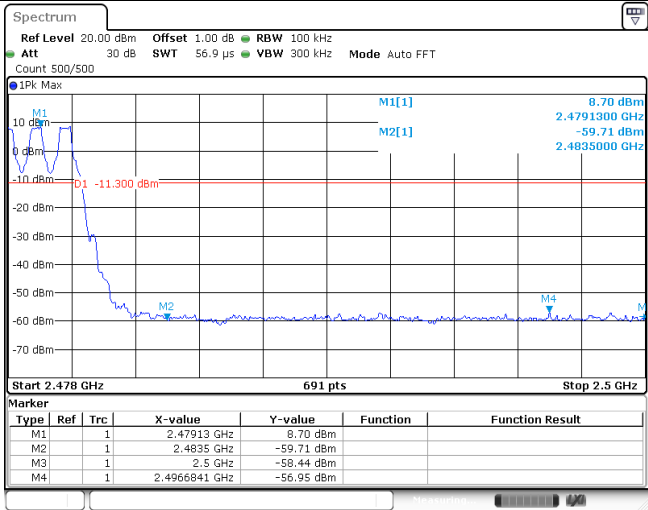


Test Item:	Band edge	Modulation type:	$\pi/4$ DQPSK																																										
CH00 No hopping mode	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm</div><div>Offset 1.00 dB</div><div>RBW 100 kHz</div><div>Att 30 dB</div><div>SWT 1.1 ms</div><div>VBW 300 kHz</div><div>Mode Auto Sweep</div><div>Count 500/500</div></div><div><div>1Pk Max</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div>M1[1]</div><div>M2[1]</div><div>D1 -14.350 dBm</div><div>M3</div><div>M4</div></div><div><div>5.65 dBm</div><div>2.401770 GHz</div><div>-49.54 dBm</div><div>2.400000 GHz</div></div></div><div><div>Start 2.31 GHz</div><div>691 pts</div><div>Stop 2.405 GHz</div></div><div><div>Marker</div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.40177 GHz</td><td>5.65 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-49.54 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-58.69 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-58.46 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.399906 GHz</td><td>-51.31 dBm</td><td></td><td></td></tr></table></div></div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40177 GHz	5.65 dBm			M2	1		2.4 GHz	-49.54 dBm			M3	1		2.39 GHz	-58.69 dBm			M4	1		2.31 GHz	-58.46 dBm			M5	1		2.399906 GHz	-51.31 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40177 GHz	5.65 dBm																																									
M2	1		2.4 GHz	-49.54 dBm																																									
M3	1		2.39 GHz	-58.69 dBm																																									
M4	1		2.31 GHz	-58.46 dBm																																									
M5	1		2.399906 GHz	-51.31 dBm																																									
CH00 Hopping mode	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm</div><div>Offset 1.00 dB</div><div>RBW 100 kHz</div><div>Att 30 dB</div><div>SWT 1.1 ms</div><div>VBW 300 kHz</div><div>Mode Auto Sweep</div><div>Count 500/500</div></div><div><div>1Pk Max</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div>M1[1]</div><div>M2[1]</div><div>D1 -14.700 dBm</div><div>M3</div><div>M4</div></div><div><div>5.30 dBm</div><div>2.404930 GHz</div><div>-56.40 dBm</div><div>2.400000 GHz</div></div></div><div><div>Start 2.31 GHz</div><div>691 pts</div><div>Stop 2.405 GHz</div></div><div><div>Marker</div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.40493 GHz</td><td>5.30 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-56.40 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-58.59 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-58.02 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.39963 GHz</td><td>-56.00 dBm</td><td></td><td></td></tr></table></div></div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40493 GHz	5.30 dBm			M2	1		2.4 GHz	-56.40 dBm			M3	1		2.39 GHz	-58.59 dBm			M4	1		2.31 GHz	-58.02 dBm			M5	1		2.39963 GHz	-56.00 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40493 GHz	5.30 dBm																																									
M2	1		2.4 GHz	-56.40 dBm																																									
M3	1		2.39 GHz	-58.59 dBm																																									
M4	1		2.31 GHz	-58.02 dBm																																									
M5	1		2.39963 GHz	-56.00 dBm																																									
CH78 No hopping mode	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm</div><div>Offset 1.00 dB</div><div>RBW 100 kHz</div><div>Att 30 dB</div><div>SWT 56.9 μs</div><div>VBW 300 kHz</div><div>Mode Auto FFT</div><div>Count 500/500</div></div><div><div>1Pk Max</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div>M1[1]</div><div>M2[1]</div><div>D1 -13.010 dBm</div><div>M2</div><div>M3</div><div>M4</div></div><div><div>6.99 dBm</div><div>2.4798310 GHz</div><div>-57.18 dBm</div><div>2.4835000 GHz</div></div></div><div><div>Start 2.478 GHz</div><div>691 pts</div><div>Stop 2.5 GHz</div></div><div><div>Marker</div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.479831 GHz</td><td>6.99 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4835 GHz</td><td>-57.18 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-57.22 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.4844087 GHz</td><td>-56.32 dBm</td><td></td><td></td></tr></table></div></div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.479831 GHz	6.99 dBm			M2	1		2.4835 GHz	-57.18 dBm			M3	1		2.5 GHz	-57.22 dBm			M4	1		2.4844087 GHz	-56.32 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.479831 GHz	6.99 dBm																																									
M2	1		2.4835 GHz	-57.18 dBm																																									
M3	1		2.5 GHz	-57.22 dBm																																									
M4	1		2.4844087 GHz	-56.32 dBm																																									




CH78
Hopping mode

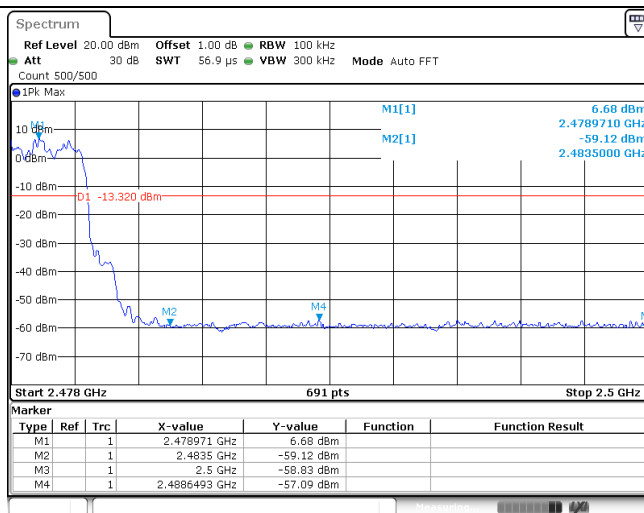


Test Item:	Band edge	Modulation type:	8DPSK																																										
CH00 No hopping mode	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz</div><div>Att 30 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep</div><div>Count 500/500</div></div><div><div>1Pk Max</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div>M1[1]</div><div>M2[1]</div><div>M3</div><div>M4</div></div><div><div>5.49 dBm</div><div>2.401770 GHz</div><div>-50.17 dBm</div><div>2.400000 GHz</div></div><div>D1 -14.510 dBm</div></div><div><div>Start 2.31 GHz 691 pts Stop 2.405 GHz</div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.40177 GHz</td><td>5.49 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-50.17 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-58.69 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-58.32 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.399906 GHz</td><td>-52.74 dBm</td><td></td><td></td></tr></table></div></div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40177 GHz	5.49 dBm			M2	1		2.4 GHz	-50.17 dBm			M3	1		2.39 GHz	-58.69 dBm			M4	1		2.31 GHz	-58.32 dBm			M5	1		2.399906 GHz	-52.74 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40177 GHz	5.49 dBm																																									
M2	1		2.4 GHz	-50.17 dBm																																									
M3	1		2.39 GHz	-58.69 dBm																																									
M4	1		2.31 GHz	-58.32 dBm																																									
M5	1		2.399906 GHz	-52.74 dBm																																									
CH00 Hopping mode	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz</div><div>Att 30 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep</div><div>Count 500/500</div></div><div><div>1Pk Max</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div>M1[1]</div><div>M2[1]</div><div>M3</div><div>M4</div></div><div><div>5.05 dBm</div><div>2.404110 GHz</div><div>-57.40 dBm</div><div>2.400000 GHz</div></div><div>D1 -14.950 dBm</div></div><div><div>Start 2.31 GHz 691 pts Stop 2.405 GHz</div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.40411 GHz</td><td>5.05 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4 GHz</td><td>-57.40 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.39 GHz</td><td>-58.92 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.31 GHz</td><td>-58.40 dBm</td><td></td><td></td></tr><tr><td>M5</td><td>1</td><td></td><td>2.314543 GHz</td><td>-56.08 dBm</td><td></td><td></td></tr></table></div></div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40411 GHz	5.05 dBm			M2	1		2.4 GHz	-57.40 dBm			M3	1		2.39 GHz	-58.92 dBm			M4	1		2.31 GHz	-58.40 dBm			M5	1		2.314543 GHz	-56.08 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40411 GHz	5.05 dBm																																									
M2	1		2.4 GHz	-57.40 dBm																																									
M3	1		2.39 GHz	-58.92 dBm																																									
M4	1		2.31 GHz	-58.40 dBm																																									
M5	1		2.314543 GHz	-56.08 dBm																																									
CH78 No hopping mode	<div><div>Spectrum</div><div><div>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz</div><div>Att 30 dB SWT 56.9 μs VBW 300 kHz Mode Auto FFT</div><div>Count 500/500</div></div><div><div>1Pk Max</div><div><div><div>10 dBm</div><div>0 dBm</div><div>-10 dBm</div><div>-20 dBm</div><div>-30 dBm</div><div>-40 dBm</div><div>-50 dBm</div><div>-60 dBm</div><div>-70 dBm</div></div><div><div>M1[1]</div><div>M2[1]</div><div>M3</div><div>M4</div></div><div><div>7.01 dBm</div><div>2.4801170 GHz</div><div>-57.60 dBm</div><div>2.4835000 GHz</div></div><div>D1 -12.990 dBm</div></div><div><div>Start 2.478 GHz 691 pts Stop 2.5 GHz</div><table><tr><th>Type</th><th>Ref</th><th>Trc</th><th>X-value</th><th>Y-value</th><th>Function</th><th>Function Result</th></tr><tr><td>M1</td><td>1</td><td></td><td>2.480117 GHz</td><td>7.01 dBm</td><td></td><td></td></tr><tr><td>M2</td><td>1</td><td></td><td>2.4835 GHz</td><td>-57.60 dBm</td><td></td><td></td></tr><tr><td>M3</td><td>1</td><td></td><td>2.5 GHz</td><td>-60.48 dBm</td><td></td><td></td></tr><tr><td>M4</td><td>1</td><td></td><td>2.4975449 GHz</td><td>-57.36 dBm</td><td></td><td></td></tr></table></div></div></div>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.480117 GHz	7.01 dBm			M2	1		2.4835 GHz	-57.60 dBm			M3	1		2.5 GHz	-60.48 dBm			M4	1		2.4975449 GHz	-57.36 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.480117 GHz	7.01 dBm																																									
M2	1		2.4835 GHz	-57.60 dBm																																									
M3	1		2.5 GHz	-60.48 dBm																																									
M4	1		2.4975449 GHz	-57.36 dBm																																									

CH78
Hoppig mode

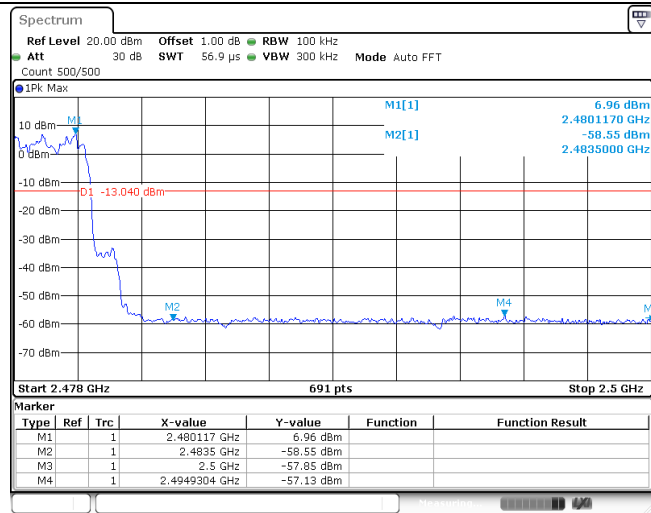


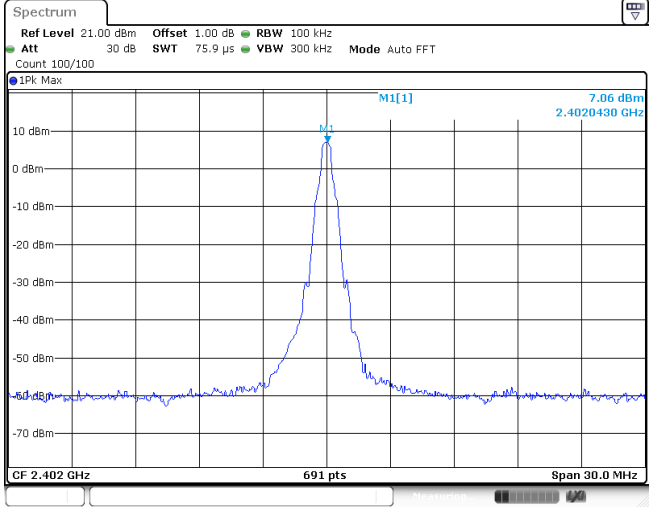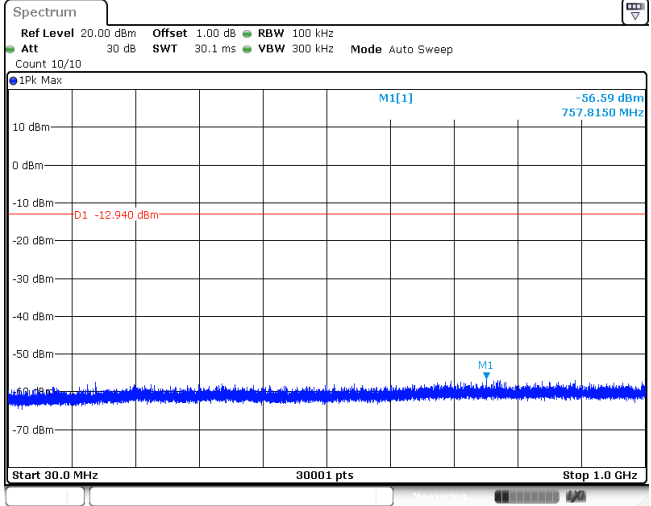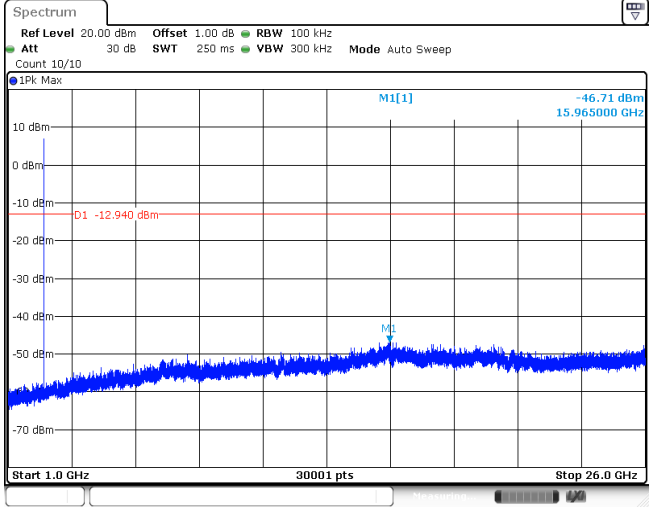Test Item:	SE	Modulation type:	GFSK
CH00 Reference level			
CH00 30MHz~1000MHz			
CH00 1GHz~26GHz			


CH39
Reference level

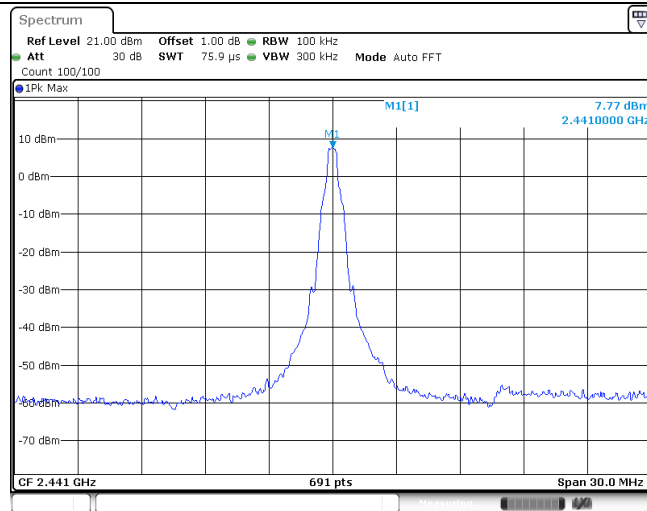


CH39
30MHz~1000MHz

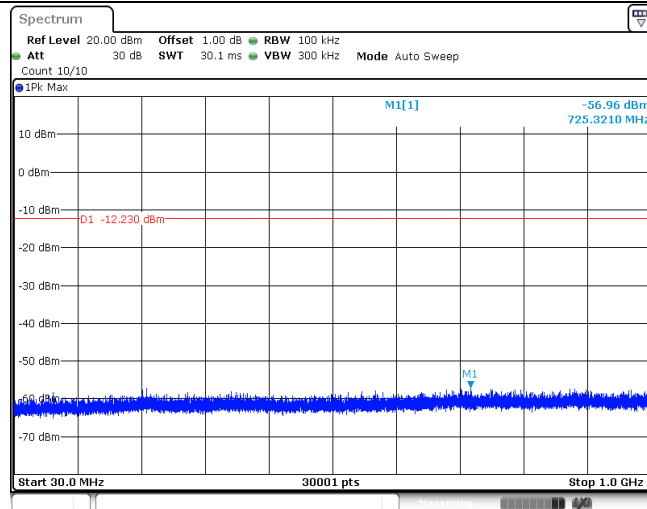


CH39
1GHz~26GHz

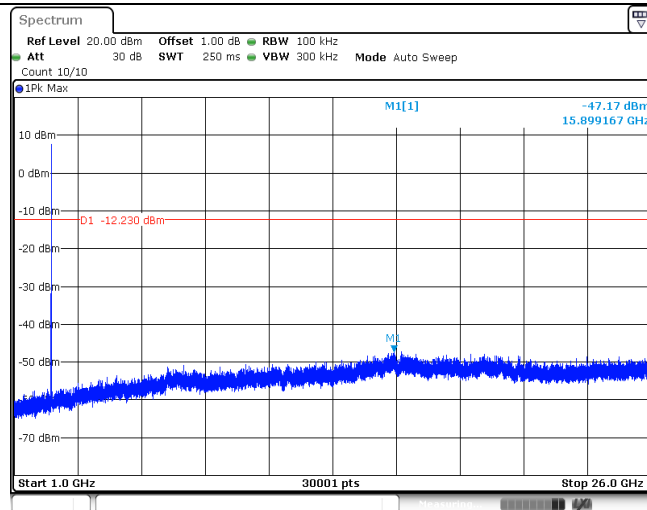


CH78
Reference level

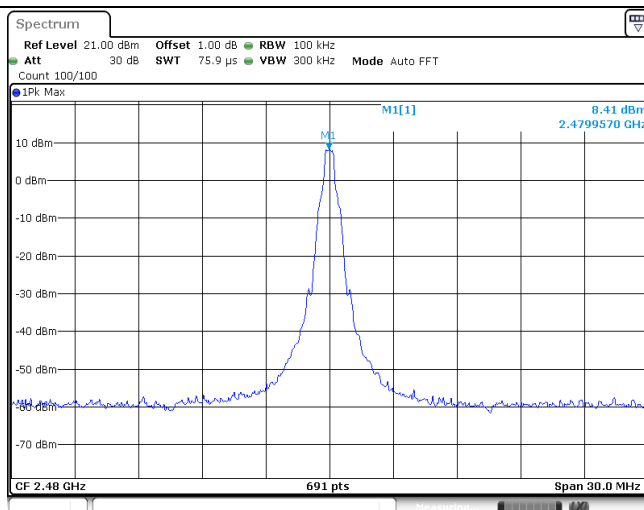

CH78
30MHz~1000MHz

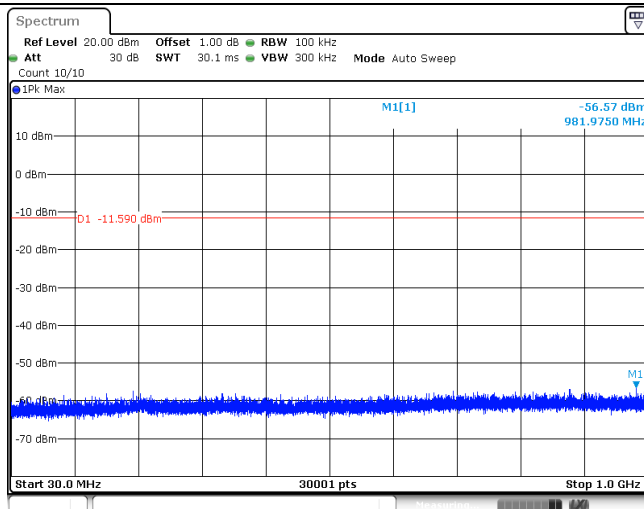


CH78
1GHz~26GHz

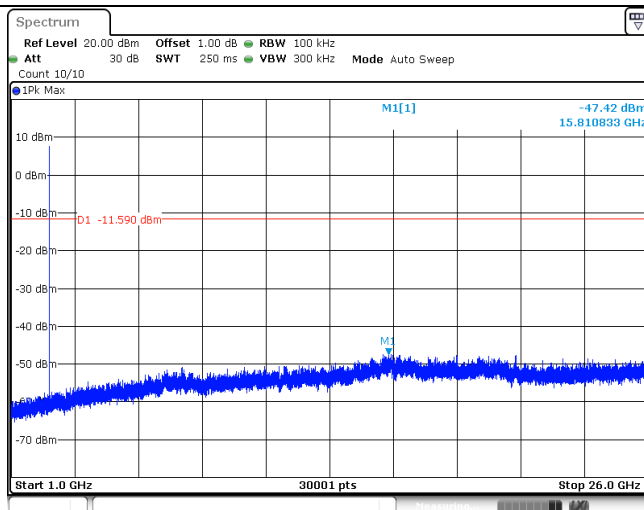


Test Item:	SE	Modulation type:	$\pi/4$ DQPSK
CH00 Reference level			
CH00 30MHz~1000MHz			
CH00 1GHz~26GHz			


CH39
Reference level

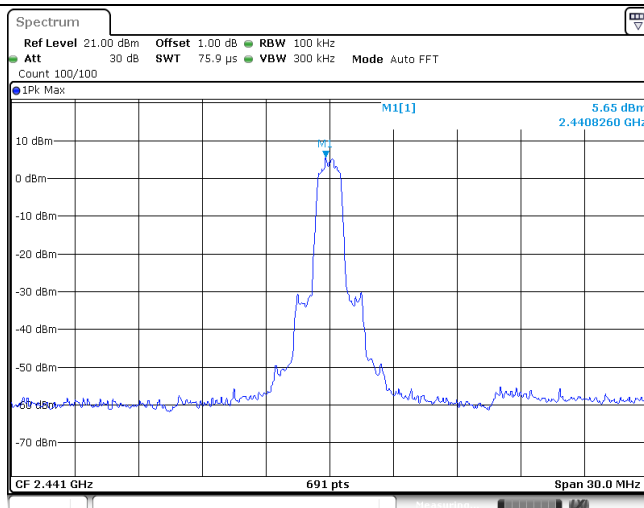


CH39
30MHz~1000MHz

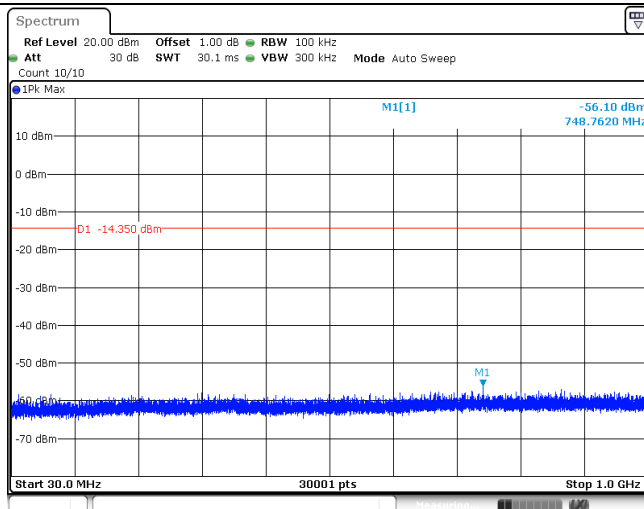


CH39
1GHz~26GHz

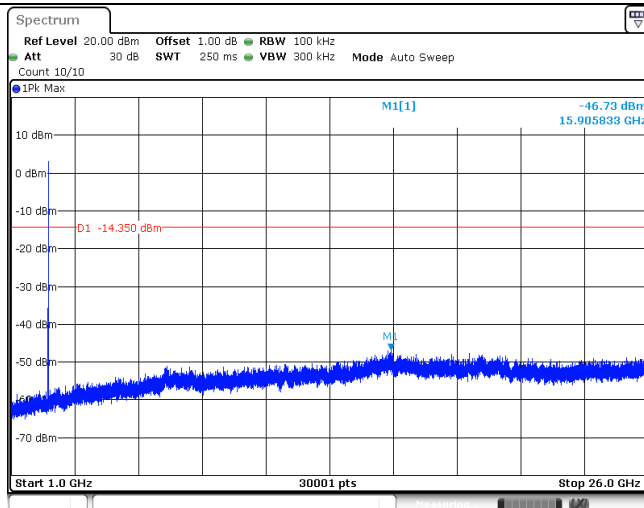


CH78
Reference level



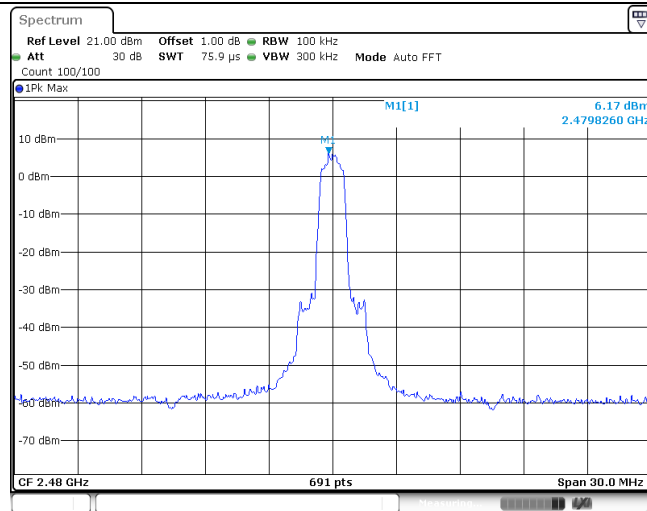


CH78
30MHz~1000MHz

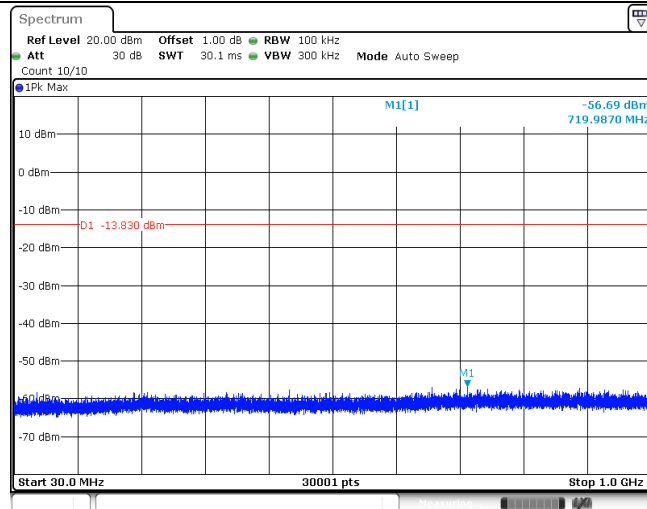


CH78
1GHz~26GHz

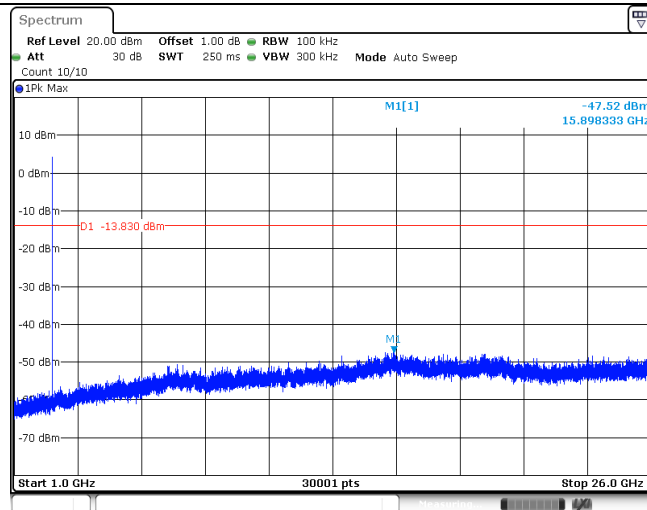


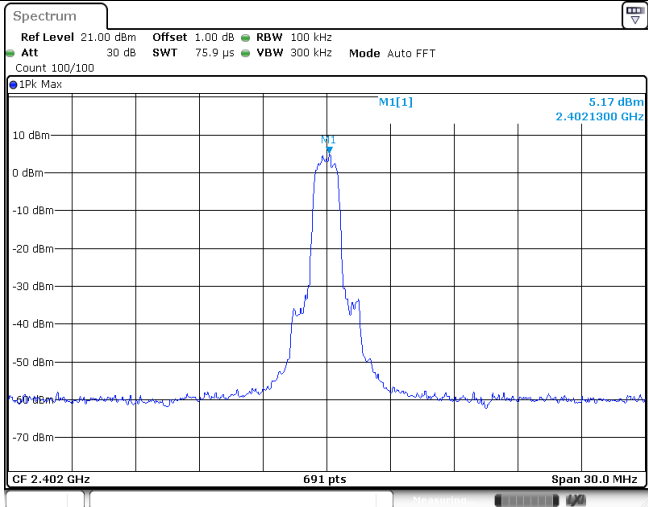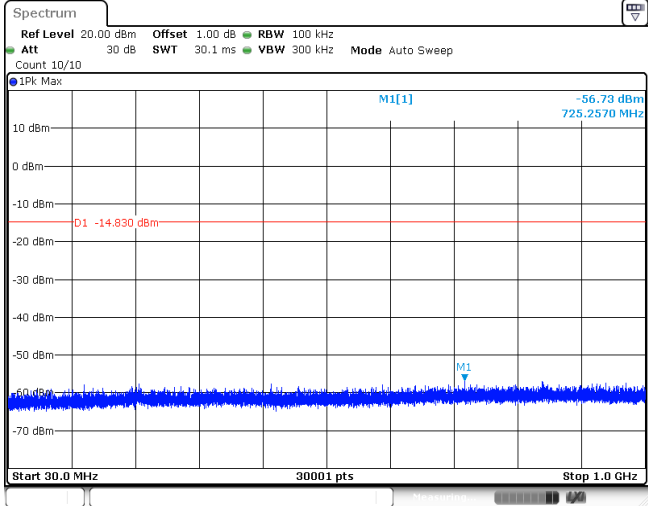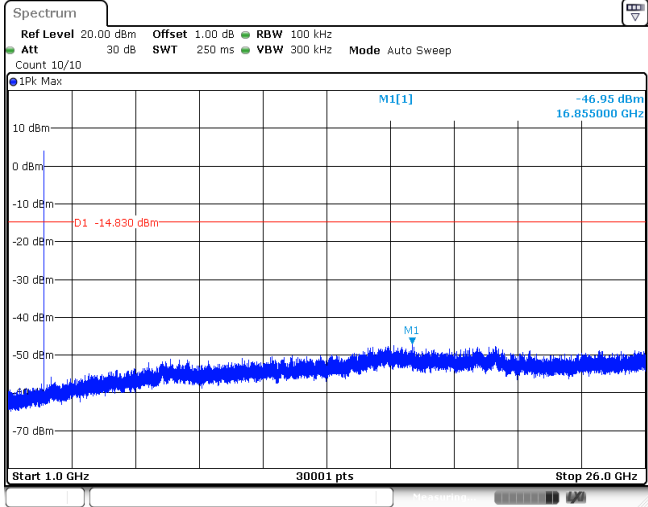Test Item:	SE	Modulation type:	8DPSK
CH00 Reference level			
CH00 30MHz~1000MHz			
CH00 1GHz~26GHz			


CH39
Reference level

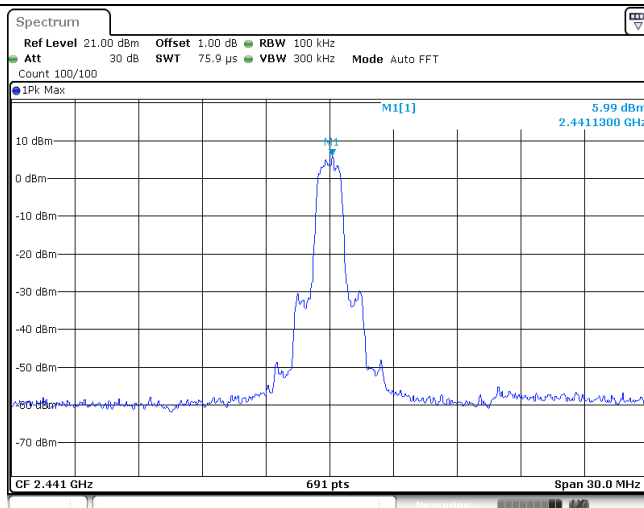


CH39
30MHz~1000MHz

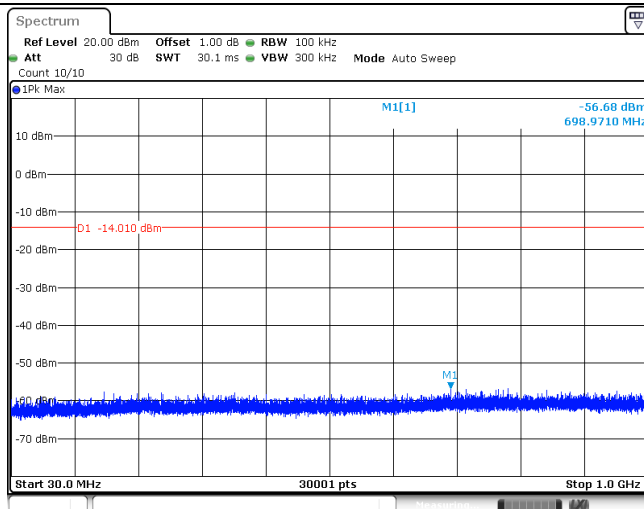


CH39
1GHz~26GHz

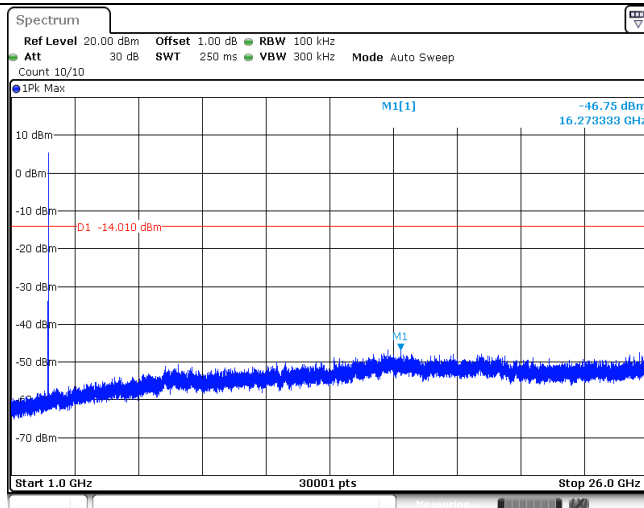


CH78
Reference level

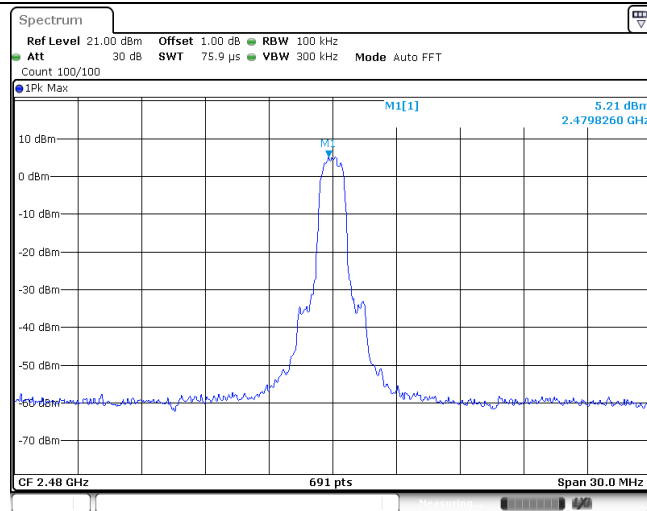

CH78
30MHz~1000MHz

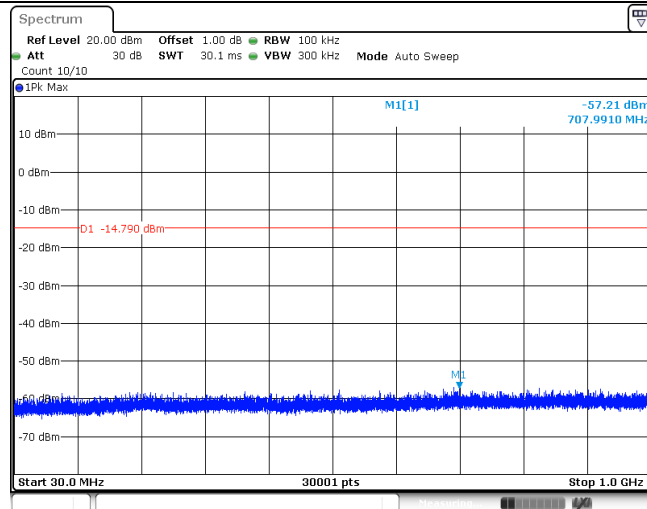

CH78
1GHz~26GHz

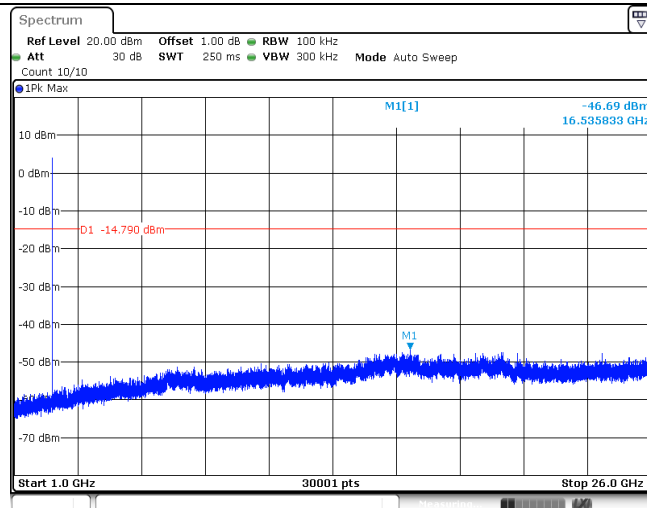

5.11. Spurious Emissions (radiated)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


- Below 30 MHz

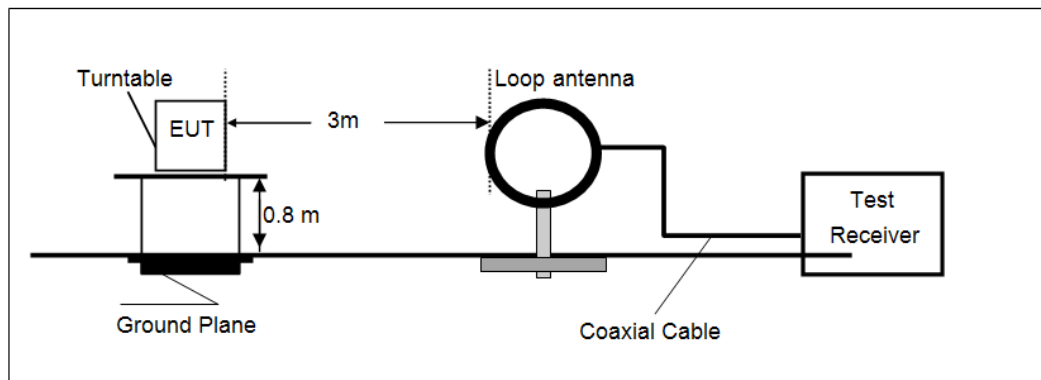

- 30 MHz ~1000 MHz

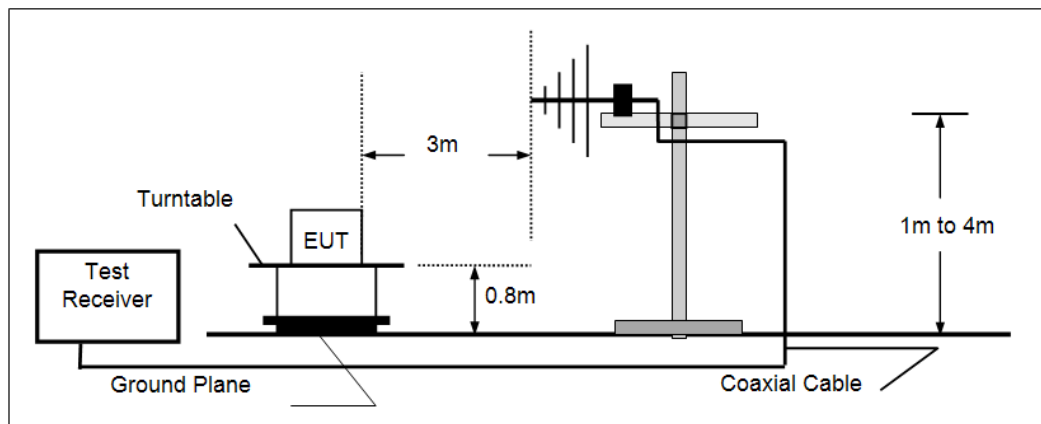

- Above 1 GHz

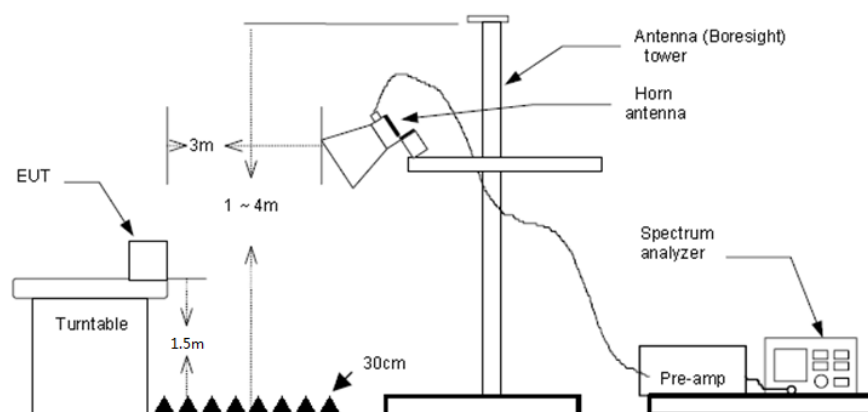

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table with 0.8 meter above ground for below 1GHz, 1.5 meter above ground for above 1GHz.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1 MHz, VBW=3 MHz Peak detector for Peak value
RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ Passed ☐ Not Applicable

Note:

- 1) Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3) Below 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation High channel which it was worst case, so only the worst case's data on the test report.
- 4) Above 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report
- 5) The peak level is lower than average limit (54 dBuV/m), this data is too weak instrument of signal is unable to test.


➤ 9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

➤ 30 MHz ~ 1 GHz

Polarization:

Vertical

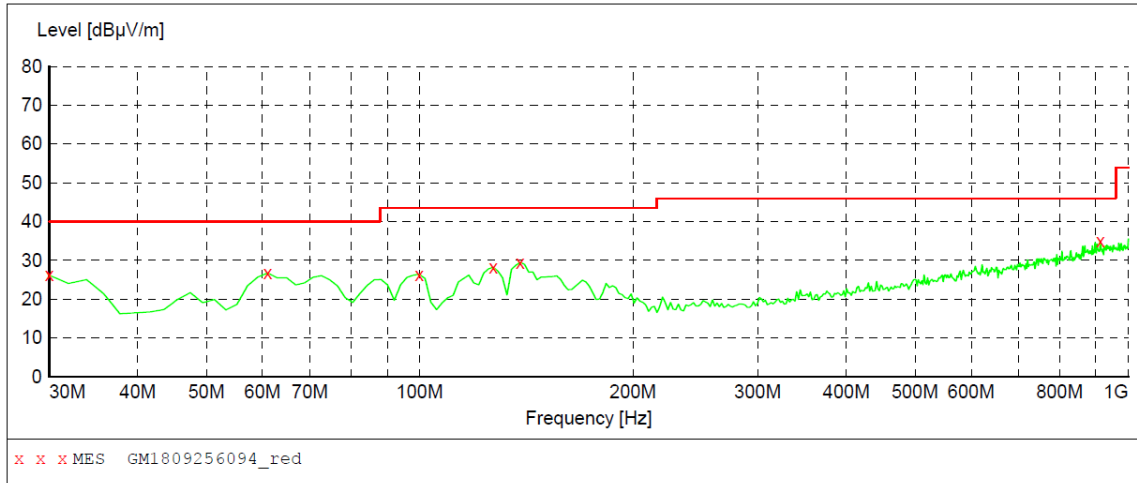
**MEASUREMENT RESULT: "GM1809256094_red"**

9/25/2018 8:18PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	26.20	-13.3	40.0	13.8	QP	100.0	107.00	VERTICAL
61.040000	26.70	-10.3	40.0	13.3	QP	100.0	13.00	VERTICAL
99.840000	26.40	-10.6	43.5	17.1	QP	100.0	119.00	VERTICAL
127.000000	28.20	-13.1	43.5	15.3	QP	100.0	78.00	VERTICAL
138.640000	29.50	-13.8	43.5	14.0	QP	100.0	211.00	VERTICAL
912.700000	35.00	6.9	46.0	11.0	QP	100.0	308.00	VERTICAL

Polarization:

Horizontal

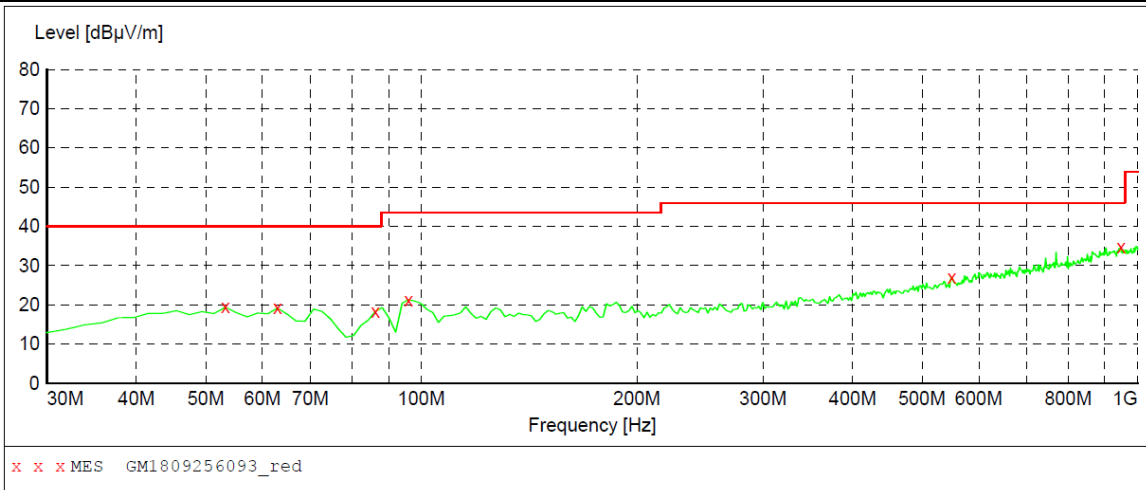**MEASUREMENT RESULT: "GM1809256093_red"**

9/25/2018 8:15PM

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
53.280000	19.40	-9.0	40.0	20.6	QP	100.0	188.00	HORIZONTAL
62.980000	19.20	-10.8	40.0	20.8	QP	100.0	174.00	HORIZONTAL
86.260000	18.30	-14.1	40.0	21.7	QP	300.0	161.00	HORIZONTAL
95.960000	21.30	-11.2	43.5	22.2	QP	300.0	284.00	HORIZONTAL
549.920000	27.10	-0.8	46.0	18.9	QP	300.0	325.00	HORIZONTAL
947.620000	34.70	7.2	46.0	11.3	QP	100.0	0.00	HORIZONTAL

➤ 1 GHz ~ 25 GHz

CH00									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1786.72	34.48	25.37	5.93	37.39	28.39	74.00	-45.61	Vertical	Peak
3160.03	35.03	28.80	7.67	37.43	34.07	74.00	-39.93	Vertical	Peak
5151.68	31.65	31.69	9.79	35.08	38.05	74.00	-35.95	Vertical	Peak
7209.02	32.33	36.21	11.87	33.51	46.90	74.00	-27.10	Vertical	Peak
1210.36	35.31	26.29	4.68	37.22	29.06	74.00	-44.94	Horizontal	Peak
1865.74	34.42	25.33	6.06	37.47	28.34	74.00	-45.66	Horizontal	Peak
1865.74	34.42	25.33	6.06	37.47	28.34	74.00	-45.66	Horizontal	Peak
3192.37	35.35	28.80	7.71	37.40	34.46	74.00	-39.54	Horizontal	Peak
5138.58	31.74	31.74	9.78	35.10	38.16	74.00	-35.84	Horizontal	Peak

CH39									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1195.05	35.05	26.26	4.65	37.23	28.73	74.00	-45.27	Vertical	Peak
1865.74	34.60	25.33	6.06	37.47	28.52	74.00	-45.48	Vertical	Peak
3681.47	34.56	29.30	8.36	37.00	35.22	74.00	-38.78	Vertical	Peak
7394.88	31.96	36.30	12.06	33.20	47.12	74.00	-26.88	Vertical	Peak
1865.74	34.86	25.33	6.06	37.47	28.78	74.00	-45.22	Horizontal	Peak
3653.46	35.40	29.30	8.33	37.02	36.01	74.00	-37.99	Horizontal	Peak
5204.40	32.80	31.49	9.84	34.98	39.15	74.00	-34.85	Horizontal	Peak
7470.56	30.97	36.16	12.30	33.07	46.36	74.00	-27.64	Horizontal	Peak

CH78									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1228.98	34.95	26.27	4.71	37.21	28.72	74.00	-45.28	Vertical	Peak
1795.84	33.56	25.39	5.95	37.40	27.50	74.00	-46.50	Vertical	Peak
3757.21	34.46	29.47	8.45	36.94	35.44	74.00	-38.56	Vertical	Peak
8002.06	30.89	37.10	12.30	33.07	47.22	74.00	-26.78	Vertical	Peak
1706.70	34.99	25.21	5.78	37.31	28.67	74.00	-45.33	Horizontal	Peak
3570.71	34.90	29.21	8.22	37.08	35.25	74.00	-38.75	Horizontal	Peak
6527.71	32.72	34.06	11.23	33.63	44.38	74.00	-29.62	Horizontal	Peak
8002.06	31.27	37.10	12.30	33.07	47.60	74.00	-26.40	Horizontal	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.


6. TEST SETUP PHOTOS

Conducted Emissions (AC Mains)



Radiated Emissions



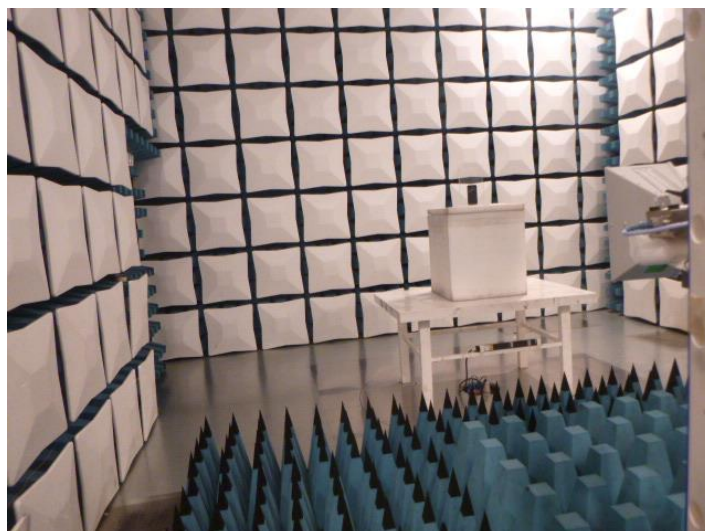

7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No.: TRE1809007501

-----End of Report-----