

FCC TEST REPORT

Application No.:	DNT230365R0532-0748	
Applicant:	Shenzhen Keithy Innovation Technology Co., Ltd.	
Address of Applicant:	15C(1588), Block C Electronic Technology Building, Huaafa North Road, Futian Shenzhen, China	
Manufacturer:	KEITHY INNOVATION TECHNOLOGY CO.,LTD	
Address of Manufacturer:	Room 1588 electronic technology building, Block C, No.2070 shennan mid road, futian shenzhen, China.	
EUT Description:	Selfie Stick Tripod	
Model No.:	K28	
FCC ID:	2AUDZ-K28	
serial model No.	K03,K03S,K05,K06,K07,K10,K10S,K12,K12S,K12D,K13,K20,K21,K22,K22S,K22D,L01 ,K29,K30,K30S,V01,V01S,V02,V02S,V03,V05,V05S,T11,T12,T13,T14,T15,X01,X02,X0 3,X04,X05,C06,C07,C08,C09,C10,S01,S01S,S02,S03,S03S,S05,S05S,S035	
Power Supply	DC 3V	
Trade Mark:	N/A	
Standards:	47 CFR FCC Part 2, Subpart J 47 CFR Part 15, Subpart C ANSI C63.10: 2013	
Date of Receipt:	2023/9/3	
Date of Test:	2023/9/6 to 2023/9/8	
Date of Issue:	2023/9/12	
Test Result :	PASS *	
Prepared By:	Test Supervisor (Chen xueqin)	<i>Pencils . chen</i>
Checked By	Reviewer (Feng nianwei)	<i>Wick . Feng</i>
Approved By:	Laboratory Manager (Yang juhui)	<i>joise Yang</i>
*	In the configuration tested, the EUT detailed in this report complied with the standards specified above. All models are just name differences, motherboard, PCB circuit board, chip, electronic components, appearance is all the same.	

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep.11, 2023	Valid	Original Report

1 Test Summary

Test Item	Test Requirement	Test Method	Test Result	Result
Antenna Requirement	15.203/247(b)	--	Clause 3.1	PASS
20dB Emission Bandwidth	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 3.2	PASS
Conducted Peak Output Power	15.247 (b)(1)	ANSI C63.10 (2013)	Clause 3.3	PASS
Carrier Frequencies Separation	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 3.4	PASS
Dwell Time	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 3.5	PASS
Hopping Channel Number	15.247 (a)(1)	ANSI C63.10 (2013)	Clause 3.6	PASS
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10 (2013)	Clause 3.7	PASS
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10 (2013)	Clause 3.8	PASS
Radiated Spurious emissions	15.247(d); 15.205/15.209	ANSI C63.10 (2013)	Clause 3.9	PASS
Restricted bands around fundamental frequency (Radiated Emission)	15.247(d); 15.205/15.209	ANSI C63.10 (2013)	Clause 3.10	PASS
AC Power Line Conducted Emission	15.207	ANSI C63.10 (2013)	NA	NA

Note:Note:

1. "N/A" denotes test is not applicable in this test report.

Contents

1 Test Summary	3
2 General Information	5
2.1 Test Location	5
2.2 General Description of EUT	6
2.3 Channel List	7
2.4 Test Environment and Mode	8
2.5 Power Setting of Test Software	9
2.6 Description of Support Units	9
2.7 Test Facility	9
2.8 Measurement Uncertainty (95% confidence levels, k=2)	10
2.9 Equipment List	10
2.10 Assistant equipment used for test	12
3 Test results and Measurement Data	13
3.1 Antenna Requirement	13
3.2 20dB Emission Bandwidth	14
3.3 Conducted Output Power	15
3.4 Carrier Frequencies Separation	16
3.5 Dwell Time	17
3.6 Hopping Channel Number	18
3.7 Band-edge for RF Conducted Emissions	19
3.8 RF Conducted Spurious Emissions	20
3.9 Radiated Spurious Emissions	21
3.10 Restricted bands around fundamental frequency	29
4 Appendix	33
Appendix A: 20dB Emission Bandwidth	33
Appendix B: Maximum conducted output power	35
Appendix C: Carrier frequency separation	37
Appendix D: Dwell Time	39
Appendix F: Number of hopping channels	41
Appendix F: Band edge measurements	43
Appendix F: Conducted Spurious Emission	46

2 General Information

2.1 Test Location

Company:	Dongguan DN Testing Co., Ltd
Address:	No. 1, West Fourth Street, South Xinfu Road, Wusha Liwu, Chang 'an Town, Dongguan City, Guangdong P.R.China
Test engineer:	Wayne Lin

2.2 General Description of EUT

EUT Description:	Selfie Stick Tripod
Model No.:	K28
Chip Type:	YC1386-F
Serial number:	SP230828011
Power Supply:	DC 3V
Trade Mark:	N/A
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	2402 MHz to 2480 MHz
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Type of Modulation:	GFSK
Sample Type:	☒ Portable Device, ☐ Module
Antenna Type:	☐ External, ☒ Integrated
Antenna Ports:	☒ Ant 1, ☐ Ant 2, ☐ Ant 3
Antenna Gain*:	☒ Provided by applicant
	-0.58dBi
RF Cable*:	☒ Provided by applicant
	0.5dB(0.6~1GHz); 0.8dB(1.4~2GHz); 1.0dB(2.1~2.7GHz); 1.5dB(3~4GHz); 1.8dB(4.4~6GHz);

Remark:

*Since the above data and/or information is provided by the applicant relevant results or conclusions of this report are only made for these data and/or information , DNT is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.

2.3 Channel List

Operation Frequency of each channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Remark:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	GFSK
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

2.4 Test Environment and Mode

Operating Environment:	
Temperature:	20~25.0 °C
Humidity:	45~56 % RH
Atmospheric Pressure:	101.0~101.30 KPa
Test mode:	
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

2.5 Power Setting of Test Software

Software Name	FCCTestTool V2.3		
Frequency(MHz)	2402	2441	2480
GFSK Setting	5	5	5

2.6 Description of Support Units

The EUT has been tested independent unit.

2.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

Lab A:

• **FCC, USA**

Designation Number: CN1348

• **A2LA (Certificate No. 7050.01)**

DONGGUAN DN TESTING CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 7050.01.

• **Innovation, Science and Economic Development Canada**

DONGGUAN DN TESTING CO., LTD. EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

IC#: 31026.

2.8 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	20dB Emission Bandwidth	$\pm 0.0196\%$
2	Carrier Frequency Separation	$\pm 1.9\%$
3	Number of Hopping Channel	$\pm 1.9\%$
4	Time of Occupancy	$\pm 0.028\%$
5	Max Peak Conducted Output Power	$\pm 0.743 \text{ dB}$
6	Band-edge Spurious Emission	$\pm 1.328 \text{ dB}$
7	Conducted RF Spurious Emission	9KHz-1GHz: $\pm 0.746 \text{ dB}$ 1GHz-26GHz: $\pm 1.328 \text{ dB}$

No.	Item	Measurement Uncertainty
1	Conduction Emission	$\pm 3.0 \text{ dB}$ (150kHz to 30MHz)
2	Radiated Emission	$\pm 4.8 \text{ dB}$ (Below 1GHz)
		$\pm 4.8 \text{ dB}$ (1GHz to 6GHz)
		$\pm 4.5 \text{ dB}$ (6GHz to 18GHz)
		$\pm 5.02 \text{ dB}$ (Above 18GHz)

2.9 Equipment List

For Connect EUT Antenna Terminal Test					
Description	Manufacturer	Model	Serial Number	Cal date	Due date
Signal Generator	Keysight	N5181A-6G	MY48180415	2022-10-28	2023-10-27
Signal Generator	Keysight	N5182B	MY57300617	2022-10-28	2023-10-27
Power supply	Keysight	E3640A	ZB2022656	2022-10-28	2023-10-27
Radio Communication Tester	R&S	CMW500	105082	2022-10-28	2023-10-27
Spectrum Analyzer	Aglient	N9010A	MY52221458	2023-2-14	2024-2-15
BT/WIFI Test Software	Tonscend	JS1120 V3.1.83	NA	NA	NA
RF Control Unit	Tonscend	JS0806-2	22F8060581	NA	NA
Power Sensor	Anritsu	ML2495A	2129005	2022-10-28	2023-10-27
Pulse Power Sensor	Anritsu	MA2411B	1911397	2022-10-28	2023-10-27
temperature and humidity box	SCOTEK	SCD-C40-80PRO	6866682020008	2022-12-30	2023-12-31

Test Equipment for Radiated Emission(30MHz-1000MHz)					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Receiver	R&S	ESR7	102497	2022-10-26	2023-10-25
Test Software	ETS-LINDGREN	TiLE-FULL	NA	NA	NA
RF Cable	ETS-LINDGREN	RFC-NMS-100-NMS-350-IN	NA	2022-11-28	2023-11-27
Log periodic antenna	ETS-LINDGREN	VULB 9168	01475	2022-11-28	2023-11-27
Pre-amplifier	Schwarzbeck	BBV9743B	00423	2022-11-28	2023-11-27

Test Equipment for Radiated Emission(Above 1000MHz)					
Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Frequency analyser	Keysight	N9010A	MY52221458	2022-10-26	2023-10-25
RF Cable	ETS-LINDGREN	RFC-NMS-100-NMS-350-IN	NA	2022-11-28	2023-11-27

Horn Antenna	ETS-LINDGREN	3117	00252567	2022-11-28	2023-11-27
Double ridged waveguide antenna	ETS-LINDGREN	3116C	00251780	2022/11/28	2023/11/27
Test Software	ETS-LINDGREN	TILE-FULL	NA	NA	NA
Pre-amplifier	ETS-LINDGREN	3117-PA	252567	2022-11-28	2023-11-27
Pre-amplifier	ETS-LINDGREN	3116C-PA	251780	2022-11-28	2023-11-27

2.10 Assistant equipment used for test


Code	Equipment	Manufacturer	Model No.	Equipment No.
1	Computer	acer	N22C8	EMC notebook01

3 Test results and Measurement Data

3.1 Antenna Requirement


Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.58dBi.	

3.2 20dB Emission Bandwidth

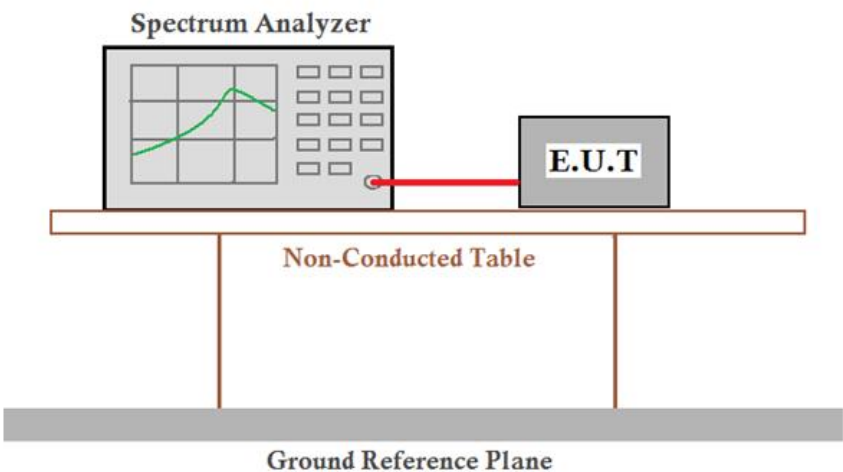Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.7
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Instruments Used:	Refer to section 2.9 for details
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type.
Limit:	NA
Test Results:	Pass


The detailed test data see: **Appendix A**

3.3 Conducted Output Power

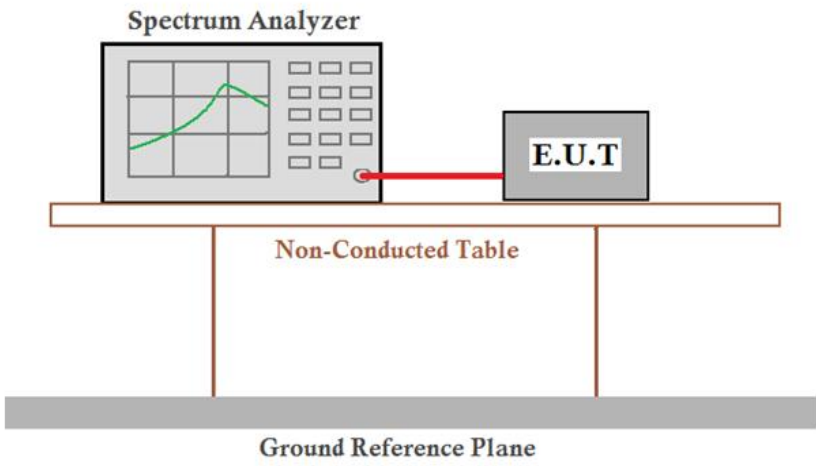Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.5
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 2.9 for details
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type.
Limit:	(20.97dBm) 125mW
Test Results:	Pass


The detailed test data see: **Appendix B**

3.4 Carrier Frequencies Separationy

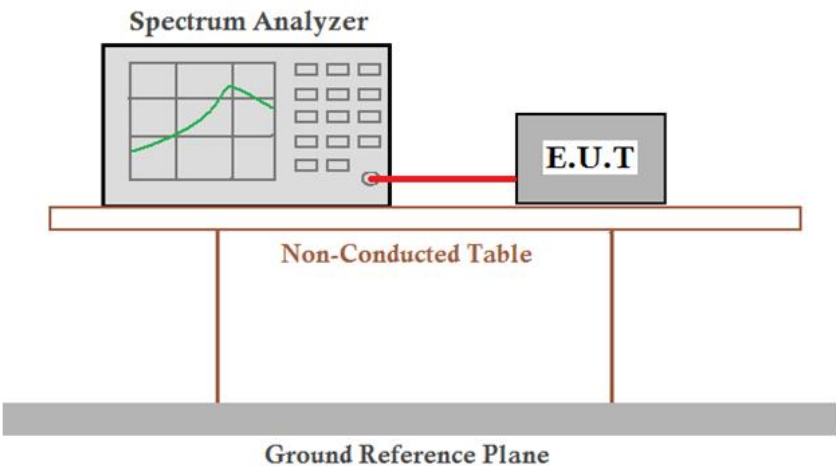Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.2
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 2.9 for details
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type.
Limit:	2/3 of the 20dB bandwidth
	Remark: the transmission power is less than 0.125W.
Test Results:	Pass


The detailed test data see: **Appendix C**

3.5 Dwell Time

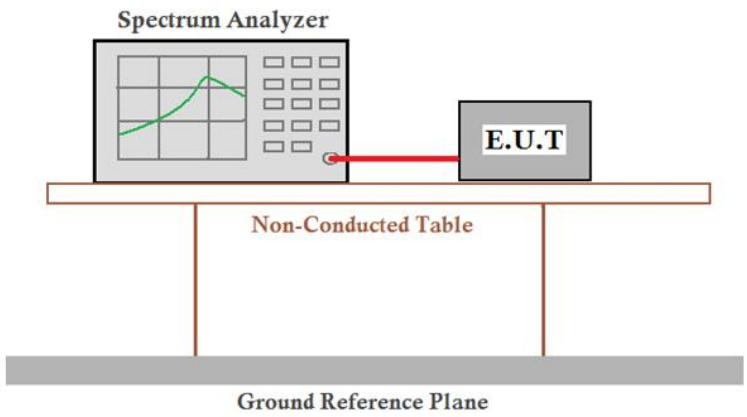Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.4
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Instruments Used:	Refer to section 2.9 for details
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Limit:	0.4 Second
Test Results:	Pass


The detailed test data see: **Appendix D**

3.6 Hopping Channel Number

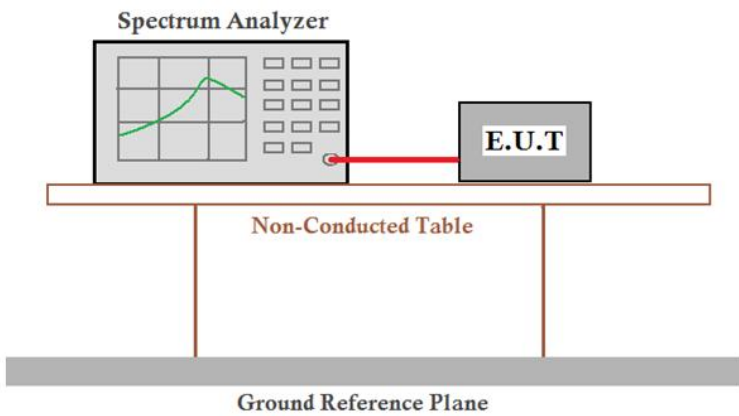Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013 Section 7.8.3
Test Setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, showing a frequency spectrum on its screen, is connected to an Equipment Under Test (E.U.T.) by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a 'Non-Conducted Table'. This table is supported by two vertical legs and sits on a 'Ground Reference Plane', which is represented by a thick grey horizontal bar at the bottom of the setup.
Instruments Used:	Refer to section 2.9 for details
Test Mode:	Hopping transmitting with all kind of modulation
Limit:	At least 15 channels
Test Results:	Pass


The detailed test data see: **Appendix E**

3.7 Band-edge for RF Conducted Emissions

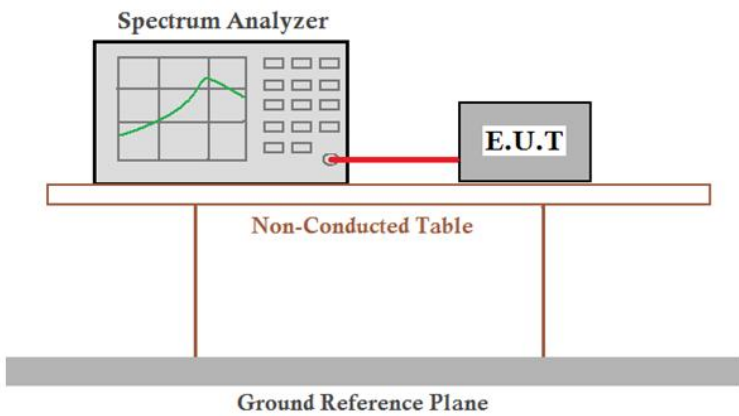Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 Section 7.8.6
Test Setup:	 The diagram illustrates the test setup for RF conducted emissions. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.
Instruments Used:	Refer to section 2.9 for details
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type.
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

The detailed test data see: **Appendix F**

3.8 RF Conducted Spurious Emissions

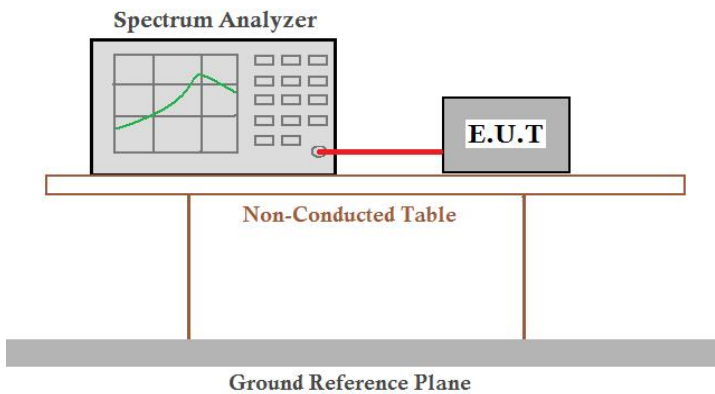Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.11
Test Setup:	 The diagram illustrates the test setup for RF conducted spurious emissions. A Spectrum Analyzer is connected via a red cable to an E.U.T (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.
Instruments Used:	Refer to section 2.9 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass

The detailed test data see: **Appendix G**

3.9 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013 Section 11.12				
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz ($DC \geq 0.98$) $\geq 1/T$ ($DC < 0.98$)	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

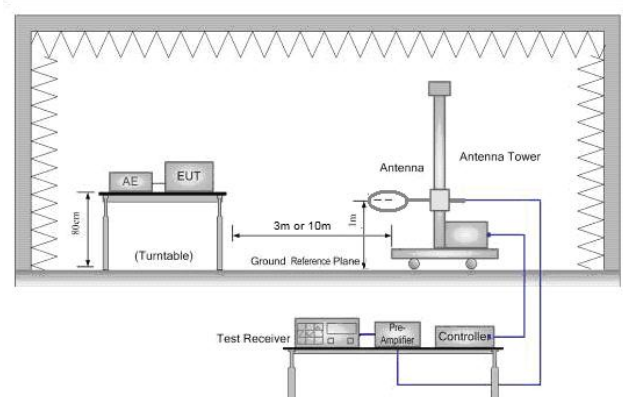


Figure 1. Below 30MHz

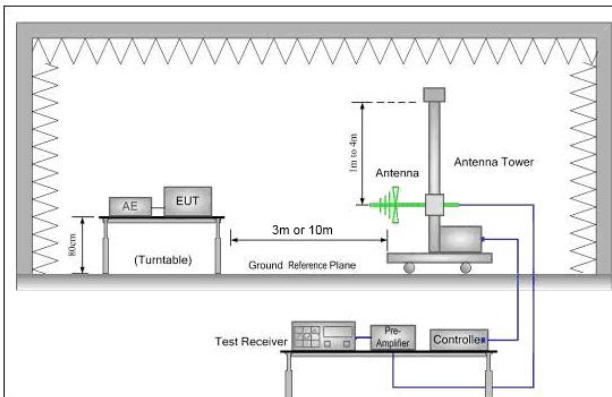


Figure 2. 30MHz to 1GHz

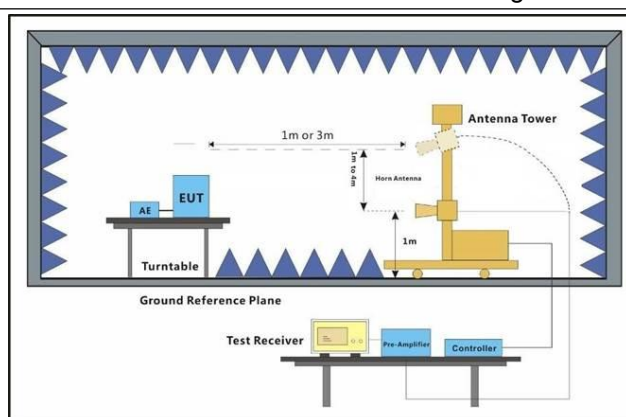


Figure 3. Above 1 GHz

Test Procedure:


- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
- Repeat above procedures until all frequencies measured was complete.

Test Configuration:	Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq$ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10 Hz, when duty cycle is no less than 98 percent. • VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode. Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass

Test data


For 30-1000MHz

Vertical:

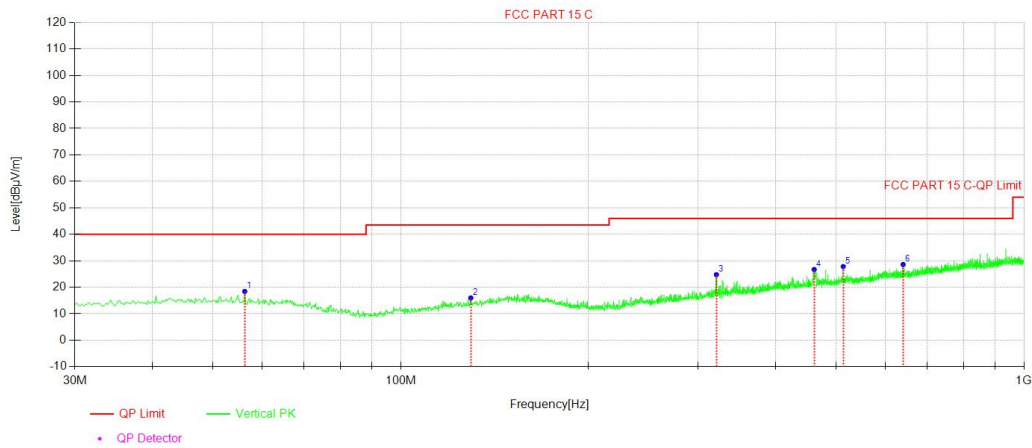

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	56.19	26.81	-8.37	18.44	40.00	21.56	100	328	QP
2	129.54	25.56	-9.57	15.99	43.50	27.51	200	359	QP
3	321.05	31.05	-6.28	24.77	46.00	21.23	200	355	QP
4	460.76	29.31	-2.57	26.74	46.00	19.26	200	357	QP
5	512.96	29.23	-1.39	27.84	46.00	18.16	200	5	QP
6	640.05	27.36	1.25	28.61	46.00	17.39	100	237	QP

Horizontal :

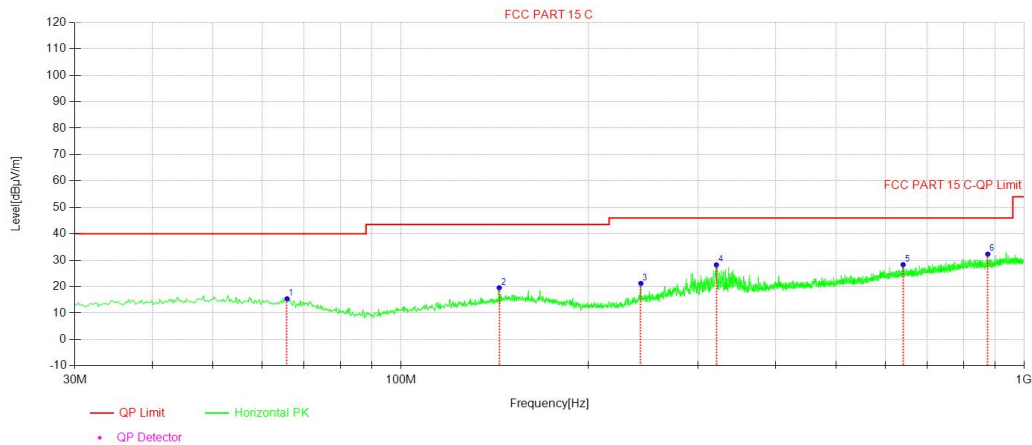


NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	65.70	24.82	-9.41	15.41	40.00	24.59	200	349	QP
2	143.90	27.83	-8.25	19.58	43.50	23.92	200	8	QP
3	242.86	30.32	-9.10	21.22	46.00	24.78	200	255	QP
4	321.05	34.52	-6.28	28.24	46.00	17.76	100	121	QP
5	640.05	27.07	1.25	28.32	46.00	17.68	200	228	QP
6	875.23	27.62	4.69	32.31	46.00	13.69	100	242	QP

For above 1GHz


2402MHz

Vertical:

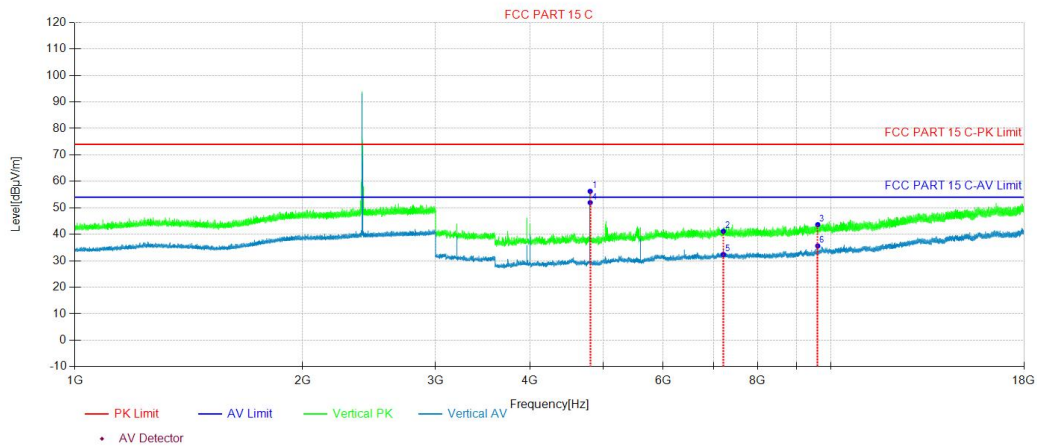

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4804	57.36	-1.10	56.26	74.00	17.74	150	48	Peak
2	7206	38.77	2.39	41.16	74.00	32.84	150	113	Peak
3	9608	38.43	5.23	43.66	74.00	30.34	150	92	Peak
4	4804	53.09	-1.10	51.99	54.00	2.01	150	155	AV
5	7206	30.03	2.39	32.42	54.00	21.58	150	102	AV
6	9608	30.39	5.23	35.62	54.00	18.38	150	0	AV


Horizontal:

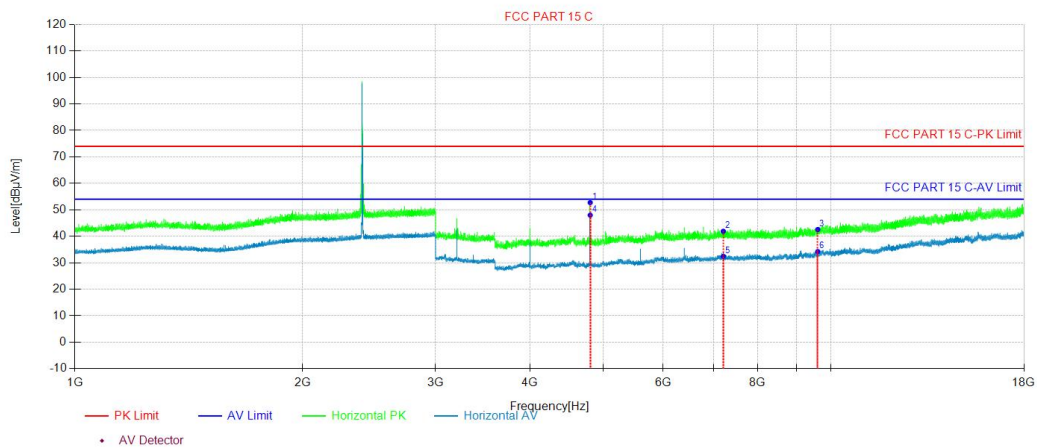

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4804	53.85	-1.10	52.75	74.00	21.25	150	360	Peak
2	7206	39.55	2.39	41.94	74.00	32.06	150	235	Peak
3	9608	37.36	5.23	42.59	74.00	31.41	150	116	Peak
4	4804	49.10	-1.10	48.00	54.00	6.00	150	351	AV
5	7206	30.08	2.39	32.47	54.00	21.53	150	235	AV
6	9608	29.04	5.23	34.27	54.00	19.73	150	116	AV


2441MHz

Vertical:

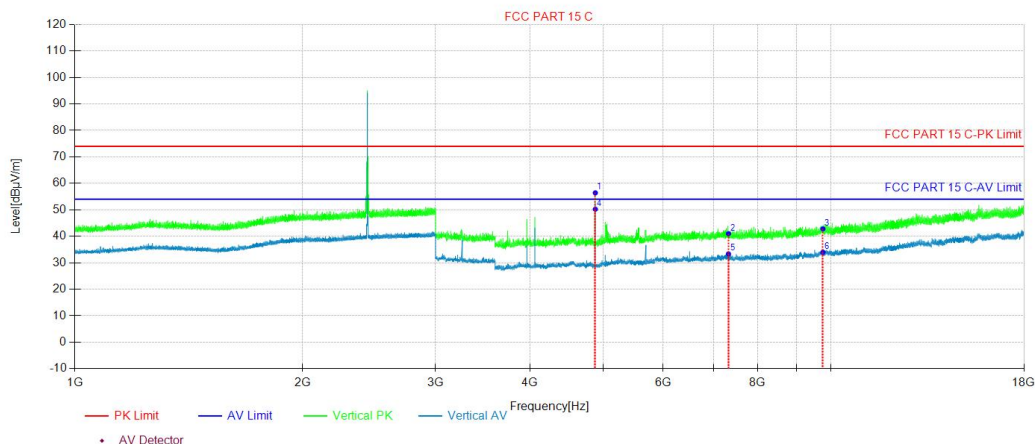

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4880	58.17	-1.74	56.43	74.00	17.57	150	178	Peak
2	7320	38.56	2.45	41.01	74.00	32.99	150	178	Peak
3	9760	36.48	6.35	42.83	74.00	31.17	150	103	Peak
4	4880	51.99	-1.74	50.25	54.00	3.75	150	210	AV
5	7320	30.90	2.45	33.35	54.00	20.65	150	359	AV
6	9760	27.65	6.35	34.00	54.00	20.00	150	231	AV


Horizontal:

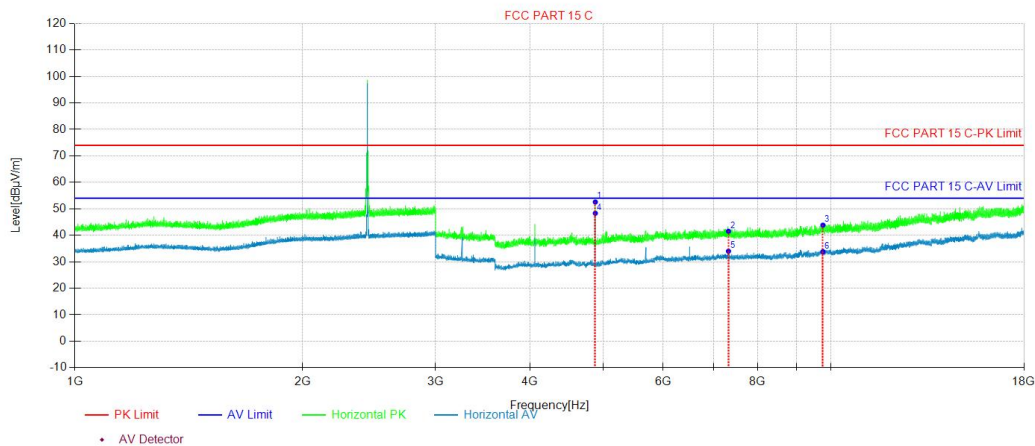

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4880	54.33	-1.74	52.59	74.00	21.41	150	83	Peak
2	7320	39.12	2.45	41.57	74.00	32.43	150	329	Peak
3	9760	37.50	6.35	43.85	74.00	30.15	150	73	Peak
4	4880	50.09	-1.74	48.35	54.00	5.65	150	105	AV
5	7320	31.56	2.45	34.01	54.00	19.99	150	265	AV
6	9760	27.46	6.35	33.81	54.00	20.19	150	265	AV


2480MHz

Vertical:

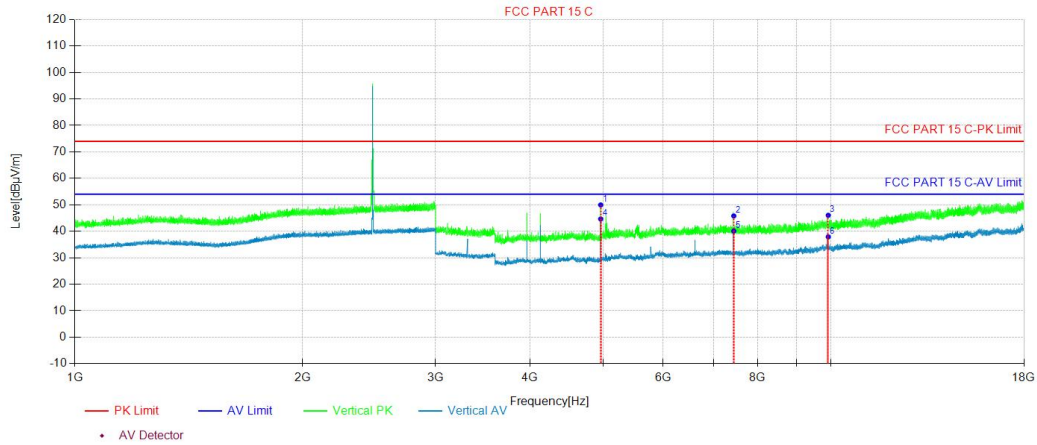

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4960	51.73	-1.75	49.98	74.00	24.02	150	179	Peak
2	7440	43.09	2.73	45.82	74.00	28.18	150	112	Peak
3	9920	39.87	6.19	46.06	74.00	27.94	150	360	Peak
4	4960	46.42	-1.75	44.67	54.00	9.33	150	242	AV
5	7440	37.38	2.73	40.11	54.00	13.89	150	201	AV
6	9920	31.72	6.19	37.91	54.00	16.09	150	359	AV

Horizontal:

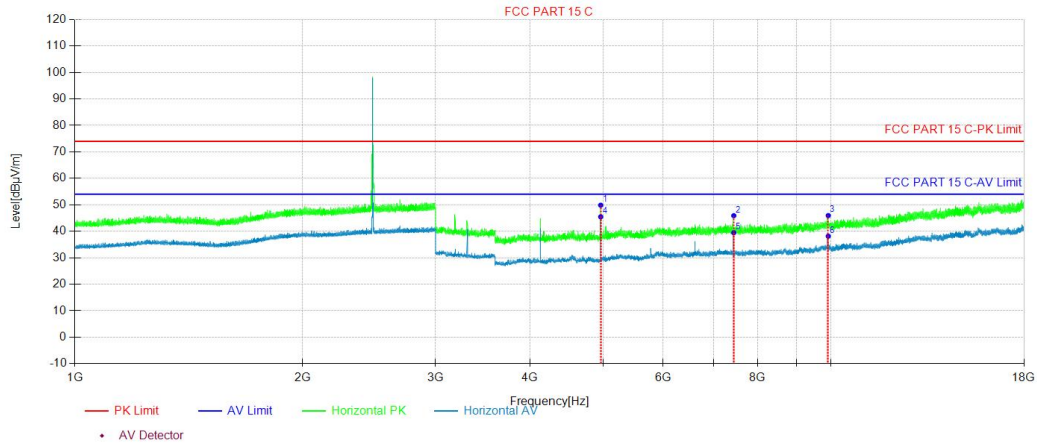

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4960	51.63	-1.75	49.88	74.00	24.12	150	29	Peak
2	7440	43.18	2.73	45.91	74.00	28.09	150	345	Peak
3	9920	39.78	6.19	45.97	74.00	28.03	150	73	Peak
4	4960	47.24	-1.75	45.49	54.00	8.51	150	29	AV
5	7440	36.76	2.73	39.49	54.00	14.51	150	345	AV
6	9920	31.99	6.19	38.18	54.00	15.82	150	73	AV

Note:

1. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including Ant.Factor and the Cable Factor etc.), The basic equation is as follows:

Result Level= Reading Level + Correct Factor(including Ant.Factor, Cable Factor etc.)

2. The amplitude of 9KHz to 30MHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

3. The amplitude of 18GHz to 25GHz spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be report.

4. All channels had been pre-test,only the worst case was reported.

3.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013 Section 11.12		
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m)	Remark
	30MHz-88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1GHz	54.0	Quasi-peak
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

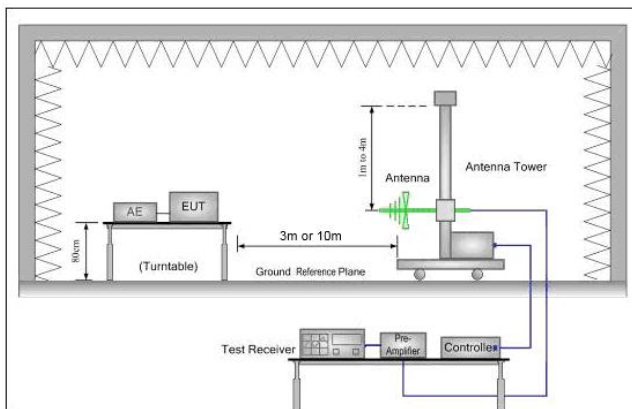


Figure 1. 30MHz to 1GHz

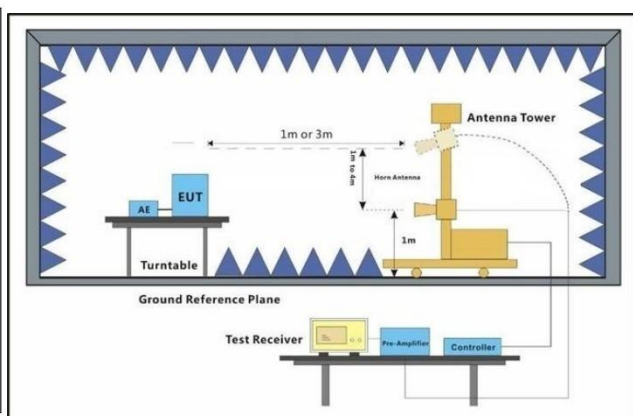



Figure 2. Above 1 GHz

Test Procedure:	- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel - Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.
-----------------	--

Test Configuration:	Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq$ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10 Hz, when duty cycle is no less than 98 percent. • VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates. Transmitting mode.
Final Test Mode:	Pretest the EUT Transmitting mode. Through Pre-scan, find the DH5 of data type is the worst case of GFSK modulation type. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 2.9 for details
Test Results:	Pass


Test Date
2402MHz

Vertical:

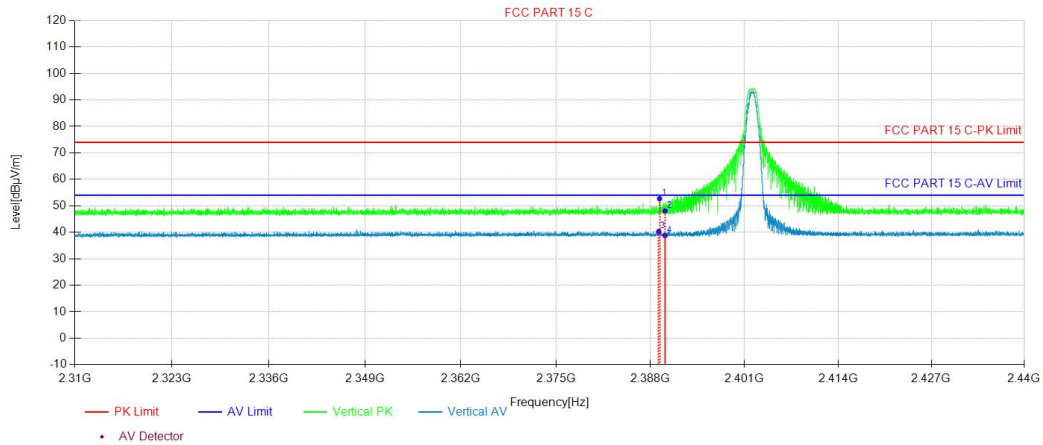

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2389.25	51.33	1.37	52.70	74.00	21.30	150	311	Peak
2	2390.01	46.71	1.37	48.08	74.00	25.92	150	244	Peak
3	2389.13	39.01	1.37	40.38	54.00	13.62	150	0	AV
4	2390.01	37.38	1.37	38.75	54.00	15.25	150	0	AV


Horizontal:

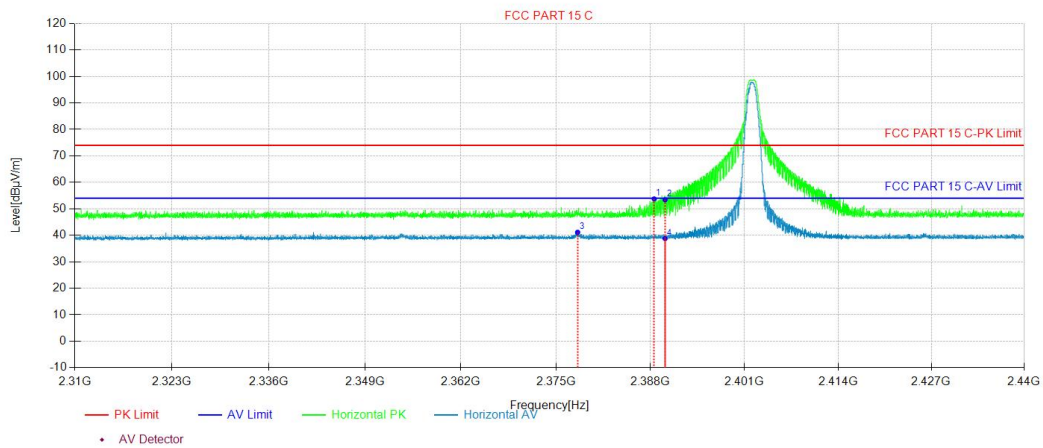

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	AV Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2388.501	52.40	1.37	53.77	74.00	20.23	150	143	Peak
2	2390.01	52.10	1.37	53.47	74.00	20.53	150	126	Peak
3	2377.98	39.82	1.35	41.17	54.00	12.83	150	105	AV
4	2390.01	37.41	1.37	38.78	54.00	15.22	150	143	AV


2480MHz

Vertical:

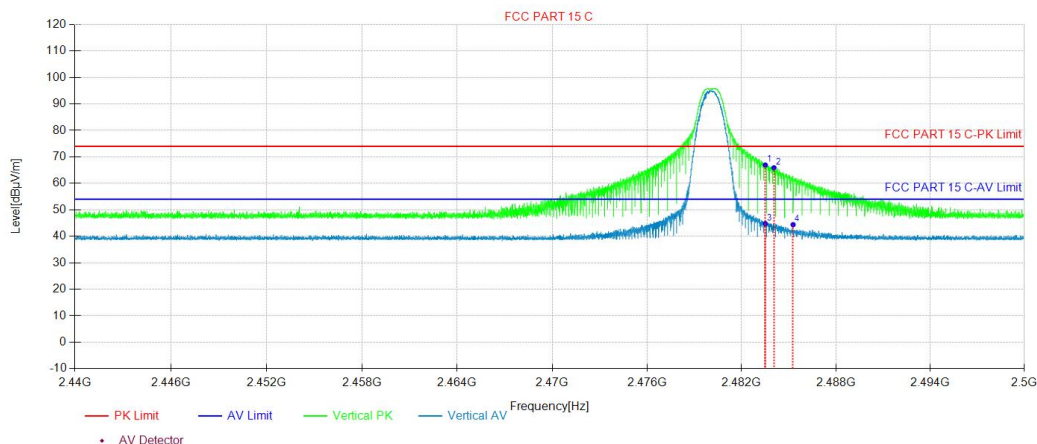

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2483.50	65.08	1.86	66.94	74.00	7.06	150	132	Peak
2	2484.05	64.05	1.86	65.91	74.00	8.09	150	184	Peak
3	2483.50	42.93	1.86	44.79	54.00	9.21	150	148	AV
4	2485.27	42.56	1.86	44.42	54.00	9.58	150	176	AV

Vertical:

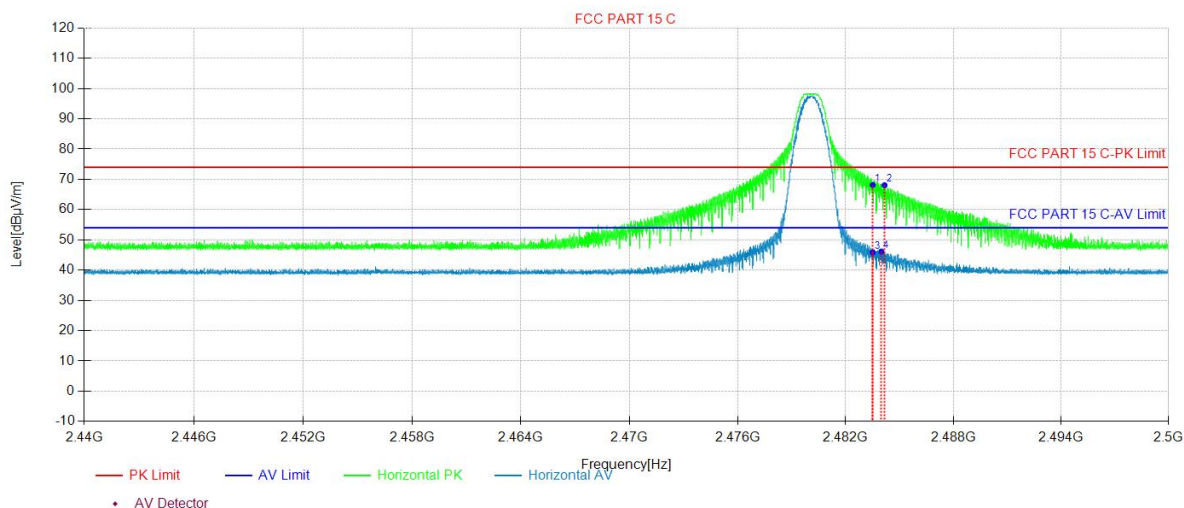

NO.	Freq. [MHz]	Reading Level [dBμV]	Correct Factor [dB/m]	Result Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2483.50	66.30	1.86	68.16	74.00	5.84	150	306	Peak
2	2484.16	66.23	1.86	68.09	74.00	5.91	150	322	Peak
3	2483.50	44.01	1.86	45.87	54.00	8.13	150	336	AV
4	2483.98	44.32	1.86	46.18	54.00	7.82	150	322	AV

Note:

1. The Measurement (Result Level) is calculated by Reading Level adding the Correct Factor(maybe including Ant.Factor and the Cable Factor etc.), The basic equation is as follows:

$$\text{Result Level} = \text{Reading Level} + \text{Correct Factor}(\text{including Ant.Factor, Cable Factor etc.})$$

4 Appendix

Appendix A: 20dB Emission Bandwidth

Test Result

Test Mode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.966	2401.622	2402.588	---	---
		2441	0.957	2440.634	2441.591	---	---
		2480	0.951	2479.631	2480.582	---	---

Test Graphs

DH5_Ant1_2402



DH5_Ant1_2441



DH5_Ant1_2480



Appendix B: Maximum conducted output power

Test Result

Test Mode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	-0.57	≤20.97	PASS
		2441	-1.94	≤20.97	PASS
		2480	-3.75	≤20.97	PASS

DH5_Ant1_2402



DH5_Ant1_2441



DH5_Ant1_2480



Appendix C: Carrier frequency separation

Test Result

Test Mode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.038	≥ 0.966	PASS

Test Graphs




Appendix D: Dwell Time

Test Result


Test Mode	Antenna	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.407	320	0.13	≤0.4	PASS
DH3	Ant1	Hop	1.606	160	0.257	≤0.4	PASS
DH5	Ant1	Hop	2.807	106.67	0.299	≤0.4	PASS

Test Graphs


DH1_Ant1_Hop

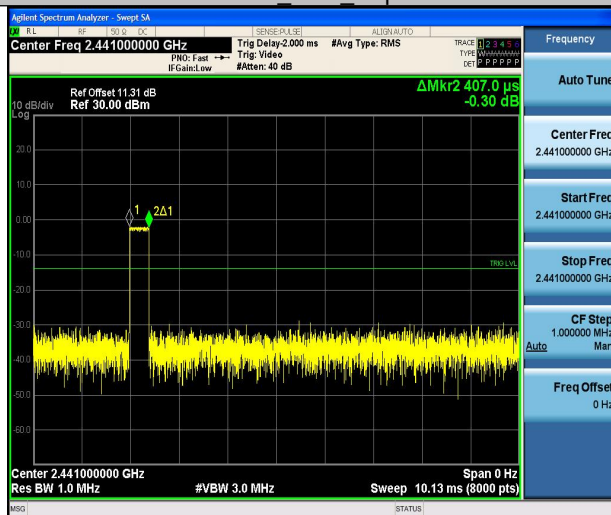

DH3_Ant1_Hop

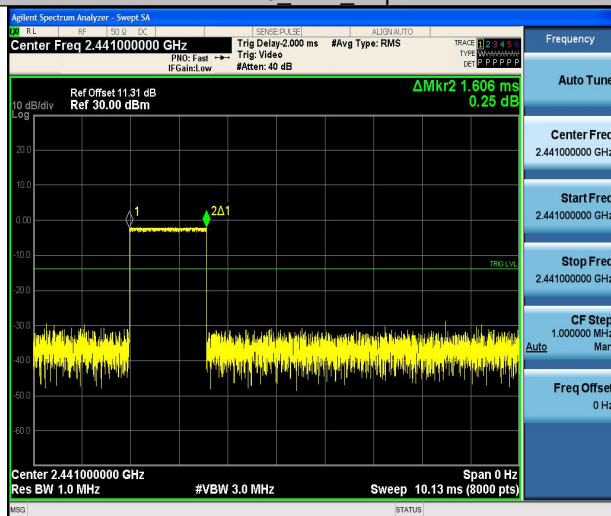

DH5_Ant1_Hop

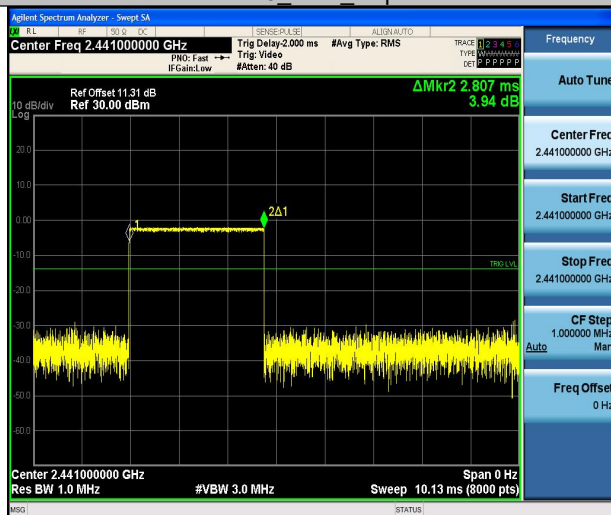


Appendix F: Number of hopping channels

Test Result

Test Mode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

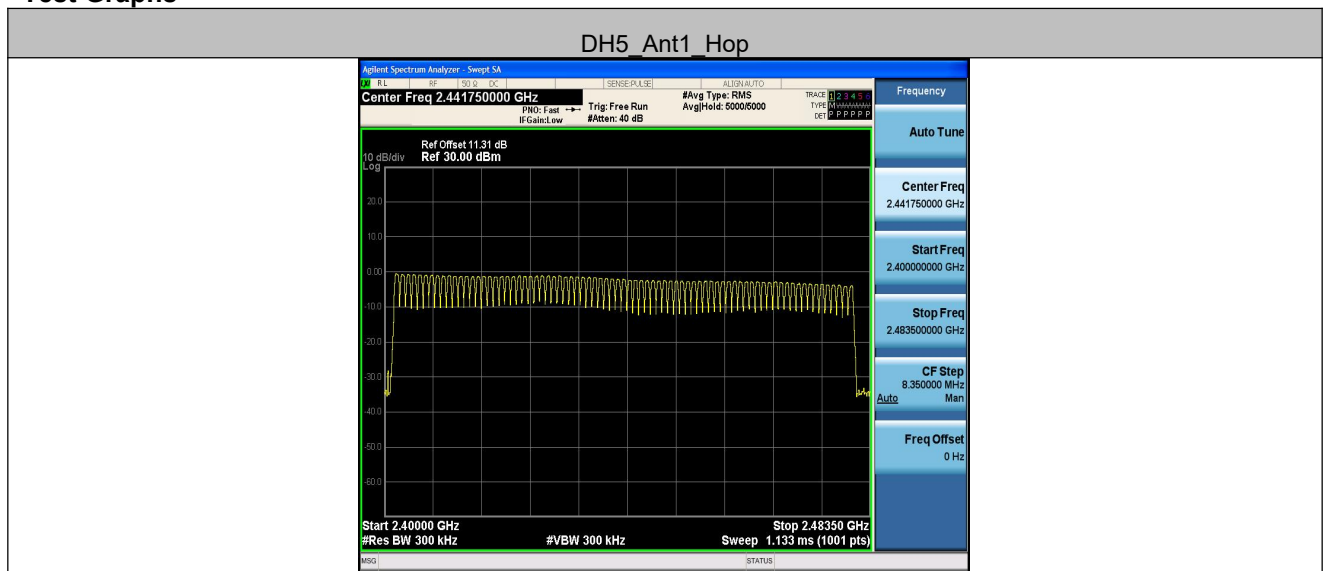


Appendix F: Band edge measurements

Test Result


Test Mode	Antenna	Ch Name	Freq(MHz)	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-3.27	-48.38	≤ -23.27	PASS
		High	2480	-6.54	-52.09	≤ -26.54	PASS
		Low	Hop_2402	-3.63	-52.32	≤ -23.63	PASS
		High	Hop_2480	-6.14	-41.69	≤ -26.14	PASS

Test Graphs


DH5_Ant1_Low_2402

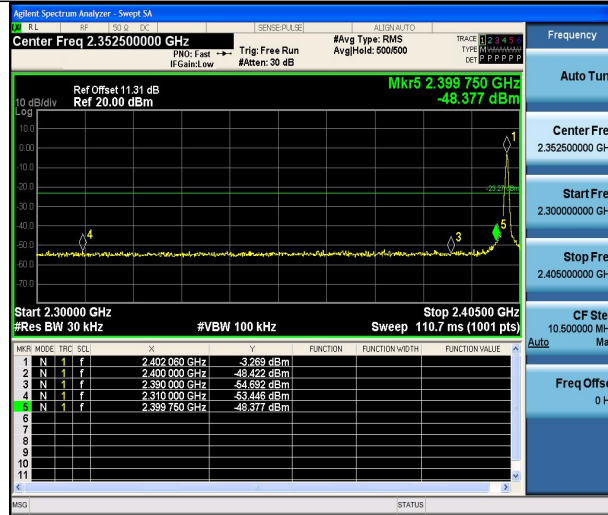


DH5_Ant1_High_2480

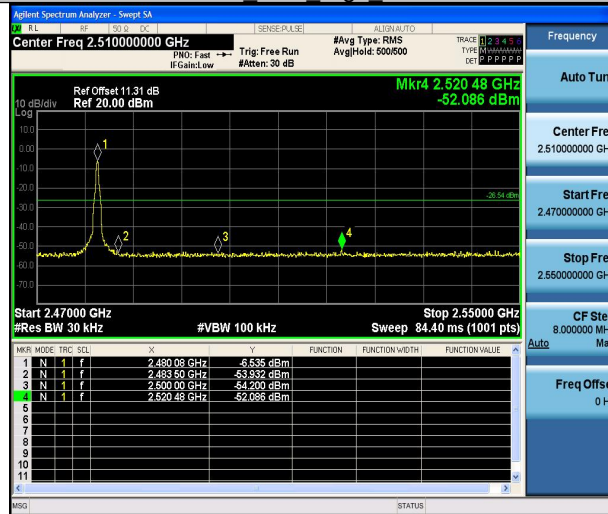

DH5 Ant1 Low Hop 2402

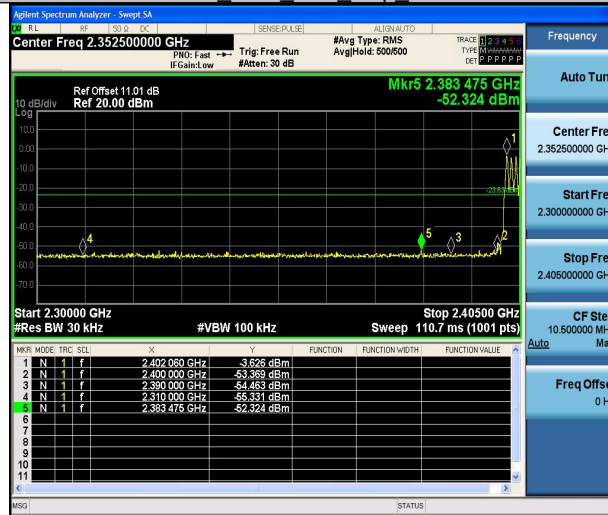

DH5 Ant1 High Hop 2480

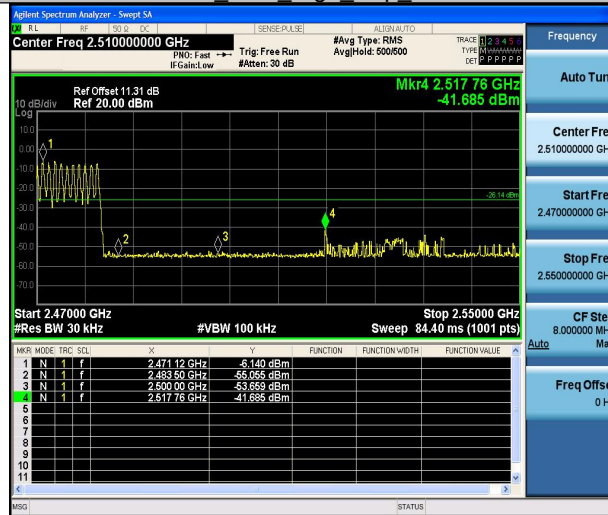

Appendix F: Conducted Spurious Emission

Test Result


Test Mode	Antenna	Freq(MHz)	Freq Range [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	-1.39	-1.39	---	PASS
			30~1000	-1.39	-42.66	≤-21.39	PASS
			1000~26500	-1.39	-42.98	≤-21.39	PASS
		2441	Reference	-2.87	-2.87	---	PASS
			30~1000	-2.87	-41.64	≤-22.87	PASS
			1000~26500	-2.87	-43.94	≤-22.87	PASS
		2480	Reference	-4.82	-4.82	---	PASS
			30~1000	-4.82	-42.27	≤-24.82	PASS
			1000~26500	-4.82	-40.11	≤-24.82	PASS

Test Graphs


DH5_Ant1_2402_0~Reference



DH5_Ant1_2402_30~1000

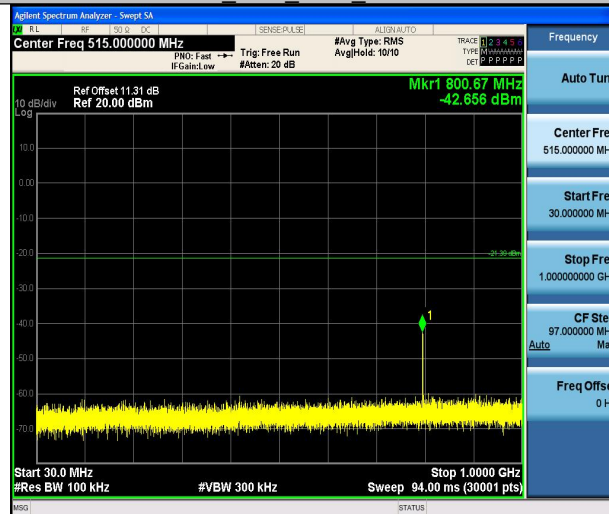

DH5_Ant1_2402_1000~26500

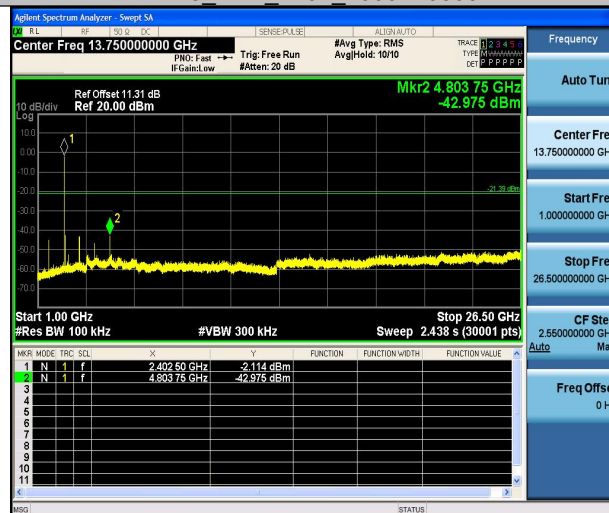

DH5_Ant1_2441_0~Reference



DH5_Ant1_2441_30~1000




DH5_Ant1_2441_1000~26500




DH5_Ant1_2480_0~Reference



DH5_Ant1_2480_30~1000

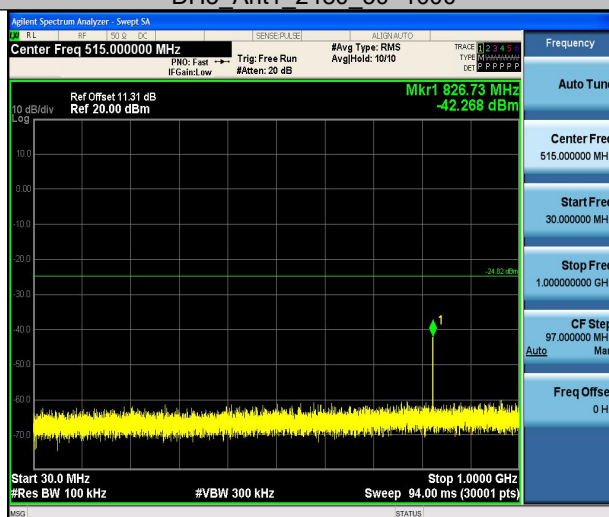

DH5_Ant1_2480_1000~26500

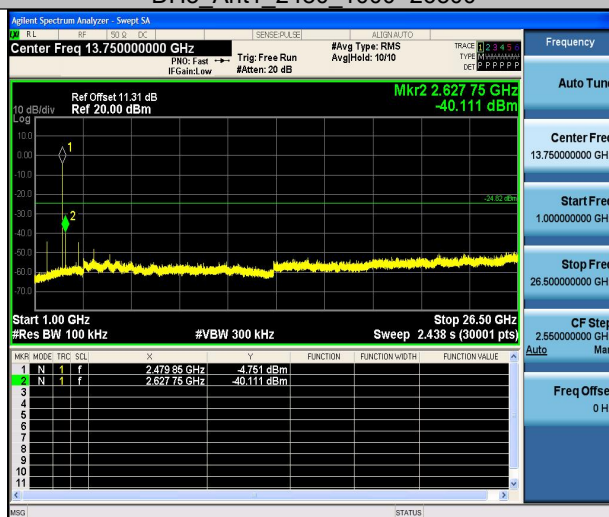

The End Report