



**Neutron Engineering Inc.**

# FCC Radio Test Report

**FCC ID: W59XWR600**

This report concerns (check one): ☒ Original Grant ☐ Class II Change

**Issued Date** : Feb. 20, 2014  
**Project No.** : 1401C155  
**Equipment** : Daul Band Wireless 600N Router  
**Model Name** : XWR-600  
**Applicant** : Luxul Wireless  
**Address** : 14203 Minuteman Drive, Suite 201,  
Draper, UT USA

**Tested by:** Neutron Engineering Inc. EMC Laboratory  
**Date of Receipt:** Jan. 22, 2014  
**Date of Test:** Jan. 22, 2014 ~ Feb. 19, 2014

**Testing Engineer** : David Mao  
(David Mao)

**Technical Manager** : Leo Hung  
(Leo Hung)

**Authorized Signatory** : Steven Lu  
(Steven Lu)

## Neutron Engineering Inc.

No.3, Jinshagang 1st Road, ShiXia,  
Dalang Town, Dong Guan, China.

TEL: 0769-8318-3000

FAX: 0769-8319-6000



### **Declaration**

**Neutron** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**Neutron's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

**Neutron's** reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

**Neutron's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

### **Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



<b>Table of Contents</b>	<b>Page</b>
<b>1 . CERTIFICATION</b>	<b>6</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
<b>3 . GENERAL INFORMATION</b>	<b>9</b>
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	14
<b>4 . EMC EMISSION TEST</b>	<b>15</b>
4.1 CONDUCTED EMISSION MEASUREMENT	15
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	15
4.1.2 TEST PROCEDURE	15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	16
4.1.5 EUT OPERATING CONDITIONS	16
4.1.6 EUT TEST CONDITIONS	16
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	19
4.2.1 RADIATED EMISSION LIMITS	19
4.2.2 TEST PROCEDURE	20
4.2.3 DEVIATION FROM TEST STANDARD	20
4.2.4 TEST SETUP	20
4.2.5 EUT OPERATING CONDITIONS	21
4.2.6 EUT TEST CONDITIONS	21
4.2.7 TEST RESULTS (9K~ 30MHZ)	22
4.2.8 TEST RESULTS (BETWEEN 30 – 1000 MHZ)	23
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	30
<b>5 . BANDWIDTH TEST</b>	<b>50</b>
5.1 APPLIED PROCEDURES	50
5.1.1 TEST PROCEDURE	50
5.1.2 DEVIATION FROM STANDARD	50
5.1.3 TEST SETUP	50
5.1.4 EUT OPERATION CONDITIONS	50
5.1.5 EUT TEST CONDITIONS	50
5.1.6 TEST RESULTS	51



<b>Table of Contents</b>	<b>Page</b>
<b>6 . MAXIMUM OUTPUT POWER TEST</b>	<b>61</b>
6.1 APPLIED PROCEDURES / LIMIT	61
6.1.1 TEST PROCEDURE	61
6.1.2 DEVIATION FROM STANDARD	61
6.1.3 TEST SETUP	61
6.1.4 EUT OPERATION CONDITIONS	61
6.1.5 EUT TEST CONDITIONS	61
6.1.6 TEST RESULTS	62
<b>7 . ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>65</b>
7.1 APPLIED PROCEDURES / LIMIT	65
7.1.1 TEST PROCEDURE	65
7.1.2 DEVIATION FROM STANDARD	65
7.1.3 TEST SETUP	65
7.1.4 EUT OPERATION CONDITIONS	65
7.1.5 EUT TEST CONDITIONS	65
7.1.6 TEST RESULTS	66
<b>8 . POWER SPECTRAL DENSITY TEST</b>	<b>89</b>
8.1 APPLIED PROCEDURES / LIMIT	89
8.1.1 TEST PROCEDURE	89
8.1.2 DEVIATION FROM STANDARD	89
8.1.3 TEST SETUP	89
8.1.4 EUT OPERATION CONDITIONS	89
8.1.5 EUT TEST CONDITIONS	89
8.1.6 TEST RESULTS	90
<b>9 . MEASUREMENT INSTRUMENTS LIST</b>	<b>102</b>
<b>10 . EUT TEST PHOTO</b>	<b>104</b>



**REPORT ISSUED HISTORY**

Issued No.	Description	Issued Date
NEI-FCCP-3-1401C155	Original Issue.	Feb. 20, 2014



## **1. CERTIFICATION**

Equipment : Daul Band Wireless 600N Router  
Brand Name : Luxul Xen™  
Model Name : XWR-600  
Applicant : Luxul Wireless  
Date of Test : Jan. 22, 2014 ~ Feb. 19, 2014  
Test Item : ENGINEERING SAMPLE  
Standard(s) : FCC Part15, Subpart C(15.247) / ANSI C63.4-2009

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-3-1401C155) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).



## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C				
Standard(s)	Section	Test Item	Judgment	Remark
FCC				
15.207		Conducted Emission	PASS	
15.247(d)		Antenna conducted Spurious Emission	PASS	
15.247(a)(2)		6dB Bandwidth	PASS	
15.247(b)(3)		Peak Output Power	PASS	
15.247(e)		Power Spectral Density	PASS	
15.203		Antenna Requirement	PASS	
15.209/15.205		Transmitter Radiated Emissions	PASS	

### NOTE:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The test follows FCC KDB Publication No. 558074 D01 DTS Meas Guidance v03r01 (Measurement Guidelines of DTS)



## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3,Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792  
Neutron's test firm number for FCC: 319330

## 2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

### A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

### B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	NOTE
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	





### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	Daul Band Wireless 600N Router	
Brand Name	Luxul Xen™	
Model Name	XWR-600	
Model Difference	N/A	
Product Description	Operation Frequency	5745~5825 MHz
	Modulation Technology	802.11a/n:OFDM
	Bit Rate of Transmitter	300Mbps
	Output Power (Max.)	802.11a: 20.46 dBm 802.11n(20MHz): 22.69 dBm 802.11n(40MHz): 22.71 dBm
Power Source	DC voltage supplied from AC/DC adapter. Manufacturer: SHENZHEN HEWEISHUN NETWORK TECHNOLOGY CO., LTD Model: TEA12U-12100	
Power Rating	I/P: AC 100-240V~50/60Hz 0.3A O/P: DC 12V 1A	
Connecting I/O Port(s)	Please refer to the User's Manual	

**Note:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

802.11a / 802.11n 20M					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>149</b>	<b>5745</b>	153	5765	<b>157</b>	<b>5785</b>
161	5805	<b>165</b>	<b>5825</b>		

802.11n 40M			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>151</b>	<b>5755</b>	<b>159</b>	<b>5795</b>

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	LUXUL	Q5095	Dipole	N/A	6.08	TX/RX
2	LUXUL	Q5096	Dipole	N/A	6.08	TX/RX

Note:

(1) The EUT incorporates a MIMO function. Physically, the EUT provides two completed two transmitters and two receivers (2T2R), all transmit signals are completely uncorrelated, then, **Direction gain =  $G_{ANT}$** , that is Directional gain=6.08.

4.

Operating Mode	1TX	2TX
TX Mode		
802.11a	V (ANT 1 or ANT 2)	-
802.11n(20MHz)	-	V (ANT 1 + ANT 2)
802.11n(40MHz)	-	V (ANT 1 + ANT 2)



### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX A MODE CHANNEL 149/157/165
Mode 2	TX N-20MHZ MODE CHANNEL 149/157/165
Mode 3	TX N-40MHZ MODE CHANNEL 151/159
Mode 4	TX MODE

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 4	TX MODE

For Radiated Test	
Final Test Mode	Description
Mode 1	TX A MODE CHANNEL 149/157/165
Mode 2	TX N-20MHZ MODE CHANNEL 149/157/165
Mode 3	TX N-40MHZ MODE CHANNEL 151/159

Note:

(1) For radiated below 1G test, the 802.11a is found to be the worst case and recorded.



### 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN


Test software version	MTool_2.0.0.3		
<b>Frequency</b>	<b>5745 MHz</b>	<b>5785 MHz</b>	<b>5825 MHz</b>
IEEE 802.11a	73	73	72
IEEE 802.11 n (20MHz)	63	62	61

Test software version	MTool_2.0.0.3	
<b>Frequency</b>	<b>5755 MHz</b>	<b>5795 MHz</b>
IEEE 802.11 n (40MHz)	63	64




### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

**Conducted TX Mode:**

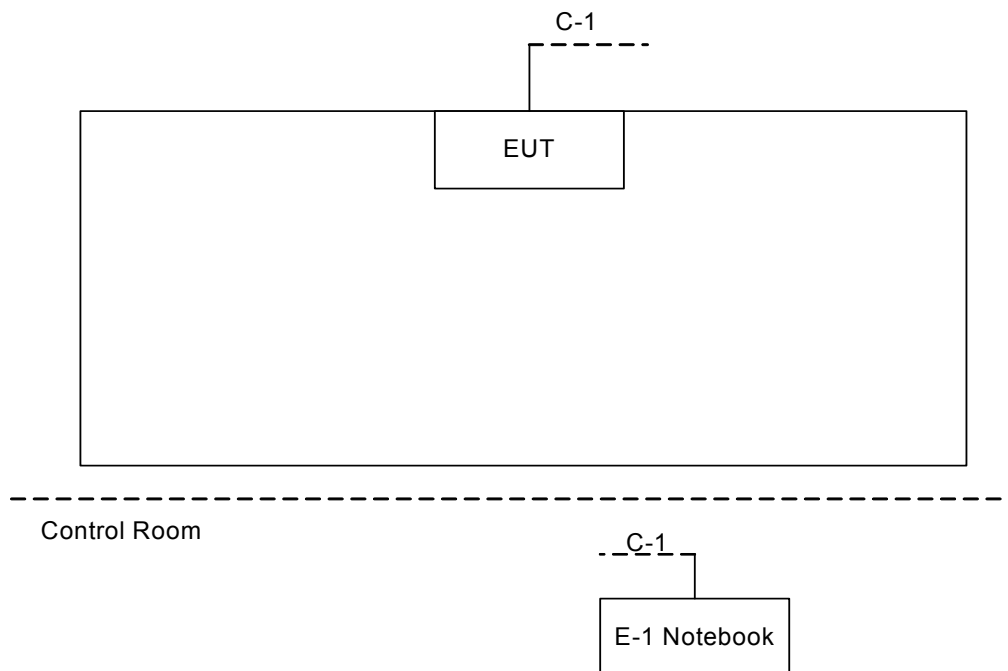

**Radiated TX Mode:**

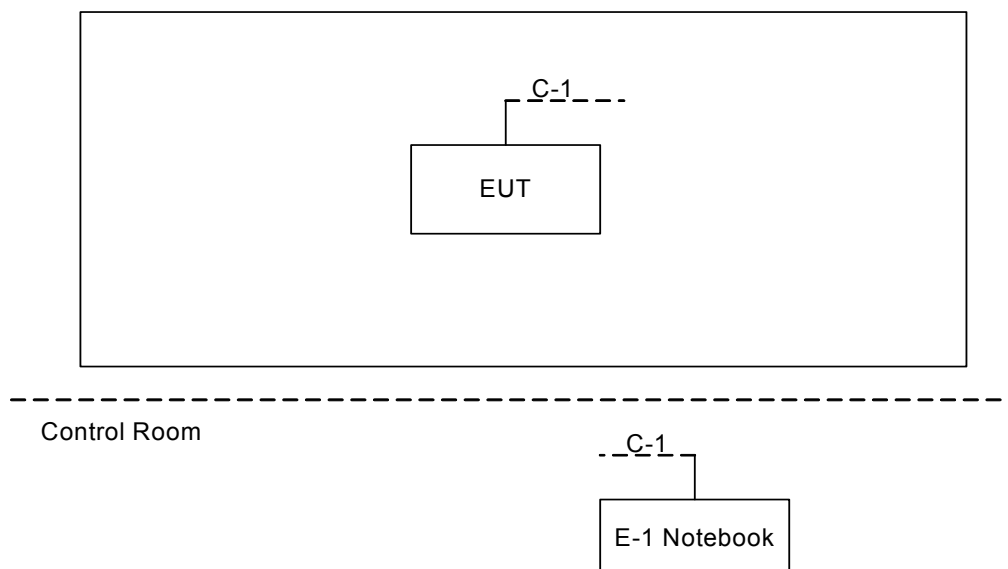



### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
E-1	Notebook	HP	HP NB 331	DOC	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	10m	RJ45 Cable



## 4. EMC EMISSION TEST

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


#### 4.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.3 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.4 TEST SETUP

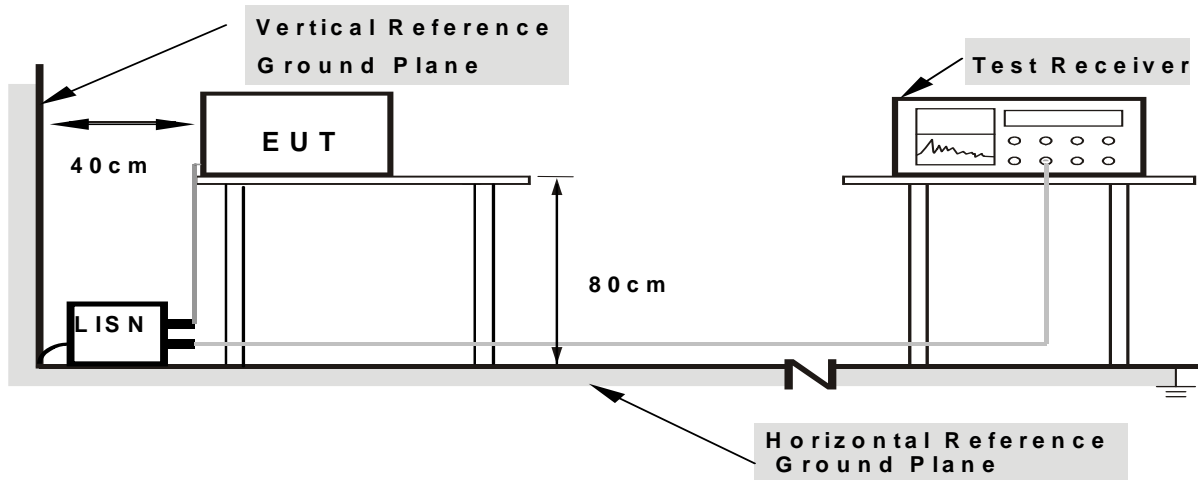

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

#### 4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

#### 4.1.6 EUT TEST CONDITIONS

Temperature: 25°C  
 Relative Humidity: 55%  
 Test Voltage: AC 120V/60Hz

#### 4.1.7 TEST RESULTS

Remark:


- (1) All readings are QP Mode value unless otherwise stated AVG in column of 'Note'. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a "\*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.





Test Mode : TX MODE

**Line**

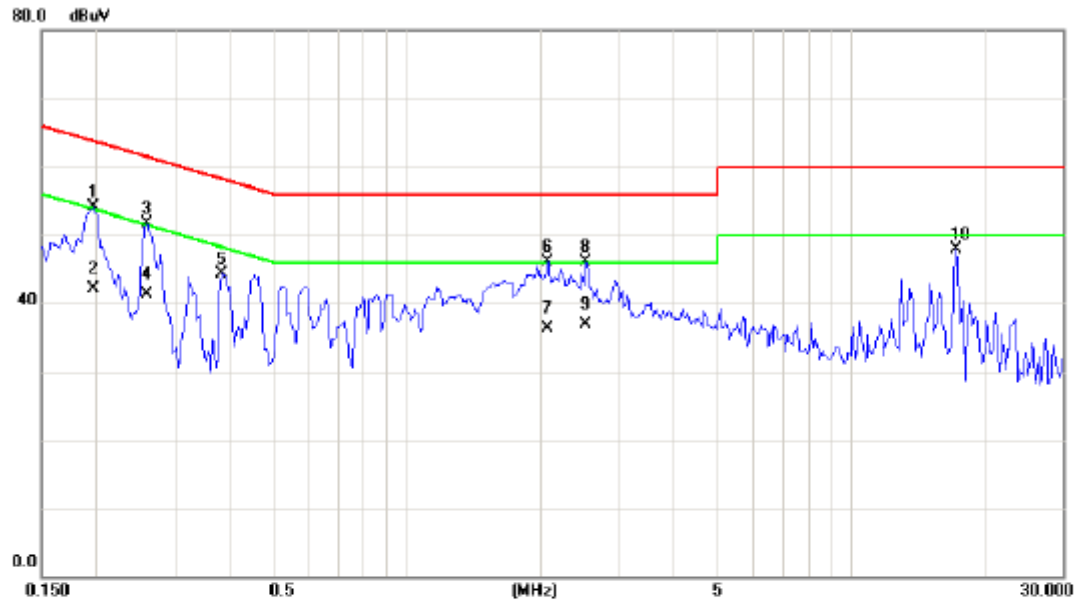


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1970	44.51	9.65	54.16	63.74	-9.58	peak	
2		0.1970	32.54	9.65	42.19	53.74	-11.55	AVG	
3		0.2594	42.08	9.66	51.74	61.45	-9.71	peak	
4		0.2594	31.71	9.66	41.37	51.45	-10.08	AVG	
5		0.3844	34.66	9.68	44.34	58.18	-13.84	peak	
6		2.0758	36.32	9.84	46.16	56.00	-9.84	peak	
7		2.0758	26.37	9.84	36.21	46.00	-9.79	AVG	
8		2.5367	36.33	9.86	46.19	56.00	-9.81	peak	
9	*	2.5367	27.10	9.86	36.96	46.00	-9.04	AVG	
10		17.2227	37.56	10.30	47.86	60.00	-12.14	peak	



Test Mode : TX MODE

**Neutral**

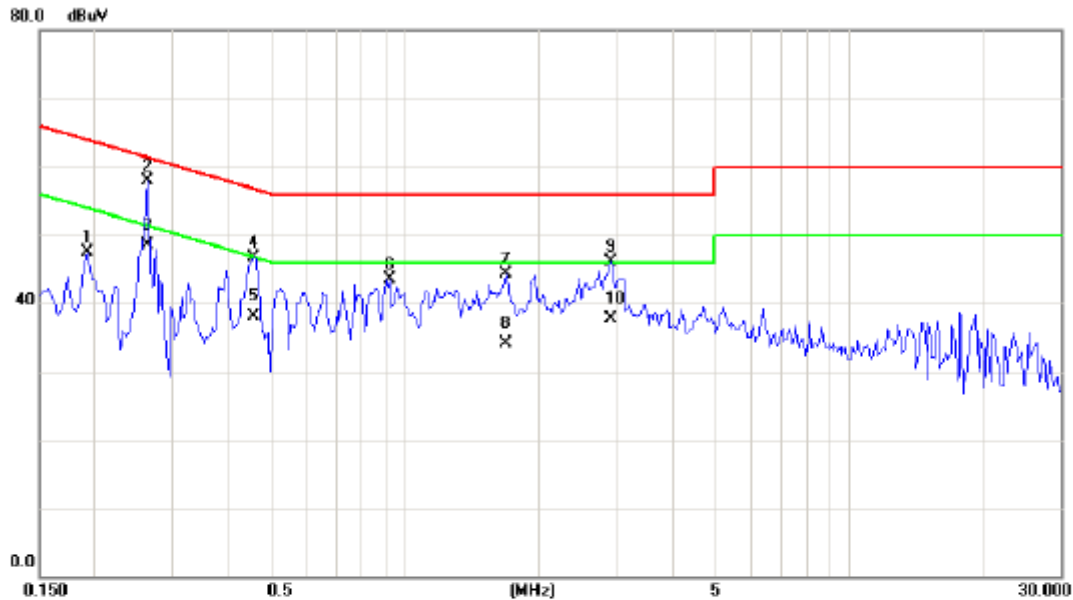

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1930	37.87	9.71	47.58	63.91	-16.33	peak	
2		0.2633	48.21	9.72	57.93	61.33	-3.40	peak	
3	*	0.2633	38.70	9.72	48.42	51.33	-2.91	AVG	
4		0.4586	36.95	9.74	46.69	56.72	-10.03	peak	
5		0.4586	28.41	9.74	38.15	46.72	-8.57	AVG	
6		0.9234	33.82	9.77	43.59	56.00	-12.41	peak	
7		1.6891	34.46	9.84	44.30	56.00	-11.70	peak	
8		1.6891	24.36	9.84	34.20	46.00	-11.80	AVG	
9		2.9078	36.29	9.89	46.18	56.00	-9.82	peak	
10		2.9078	27.76	9.89	37.65	46.00	-8.35	AVG	



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz-1000MHz)

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

#### 4.2.2 TEST PROCEDURE


- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

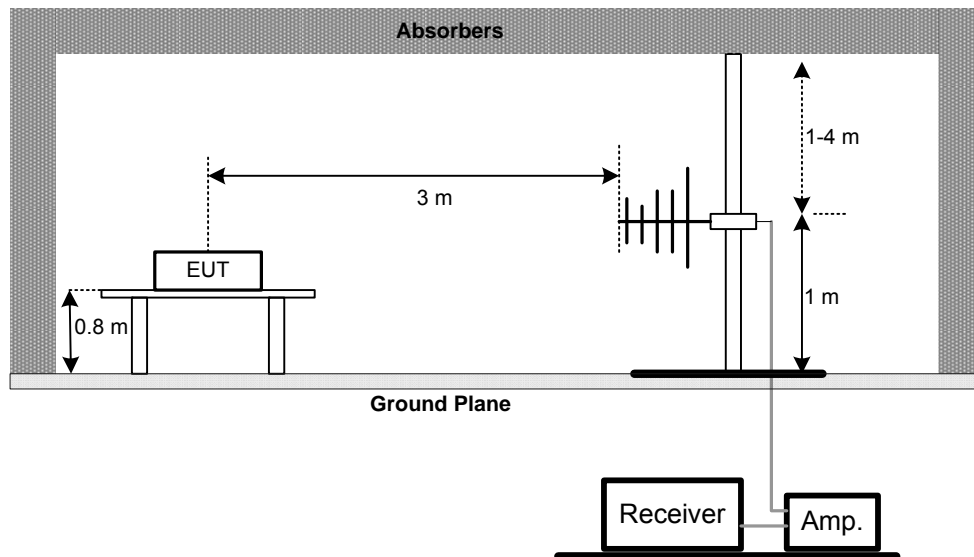

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

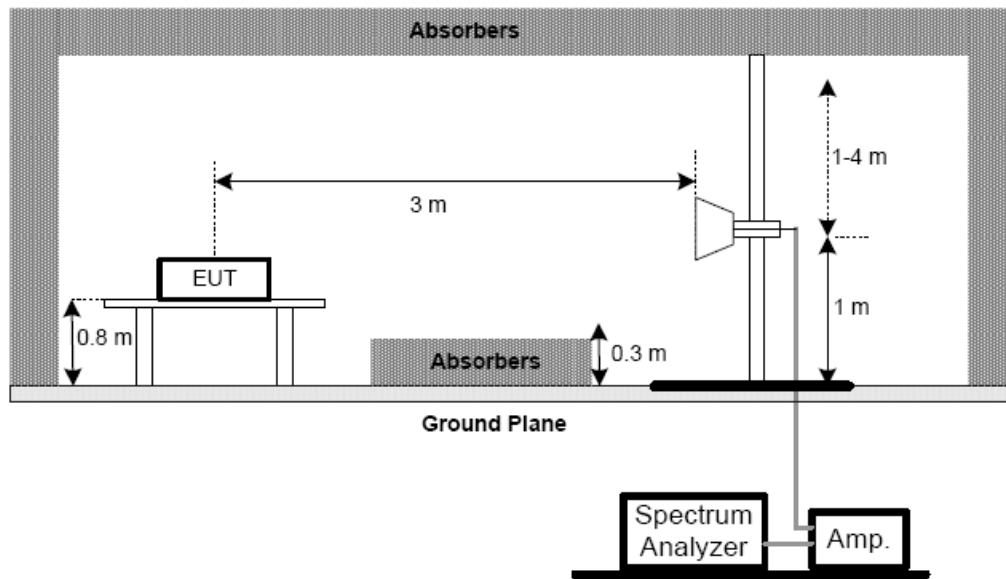

(C) For radiated emissions below 30MHz

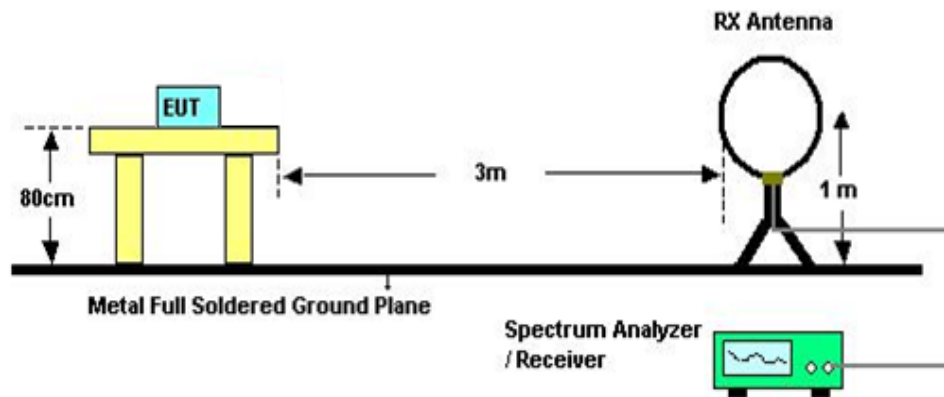

**4.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**4.2.6 EUT TEST CONDITIONS**

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz



#### 4.2.7 TEST RESULTS (9K~ 30MHZ)

Test Mode : TX Mode 5745MHz

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0094	0°	16.86	23.27	40.13	128.18	-88.05	AV
0.0094	0°	19.52	23.27	42.79	148.18	-105.39	PK
0.0142	0°	18.89	23.27	42.16	124.56	-82.40	AV
0.0144	0°	20.54	23.27	43.81	144.56	-100.75	PK
0.0245	0°	16.19	24.02	40.21	119.82	-79.62	AV
0.0247	0°	19.75	24.02	43.77	139.82	-96.06	PK
0.0333	0°	18.16	23.46	41.62	117.16	-75.54	AV
0.0335	0°	20.41	23.46	43.87	137.16	-93.29	PK
0.4210	0°	18.64	19.99	38.63	95.12	-56.49	AVG
0.4230	0°	21.91	19.99	41.90	115.12	-73.22	PK
1.5270	0°	18.82	19.55	38.37	63.93	-25.56	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0092	90°	18.03	24.30	42.33	128.30	-85.97	AVG
0.0093	90°	20.46	24.30	44.76	148.30	-103.54	PK
0.0235	90°	17.55	24.08	41.63	120.18	-78.55	AVG
0.0237	90°	20.33	24.08	44.41	140.18	-95.77	PK
0.0316	90°	18.43	23.57	42.00	117.61	-75.62	AVG
0.0318	90°	20.67	23.57	44.24	137.61	-93.38	PK
0.0427	90°	17.85	22.86	40.71	115.00	-74.28	AVG
0.0429	90°	20.39	22.86	43.25	135.00	-91.74	PK
0.2360	90°	17.45	20.43	37.88	100.15	-62.27	AVG
0.2390	90°	20.72	20.43	41.15	120.15	-79.00	PK
1.6760	90°	18.63	19.53	38.16	63.12	-24.96	QP

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.




#### **4.2.8 TEST RESULTS (BETWEEN 30 – 1000 MHZ)**

Remark:

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.



Test Mode:	TX A MODE 5745MHz
------------	-------------------

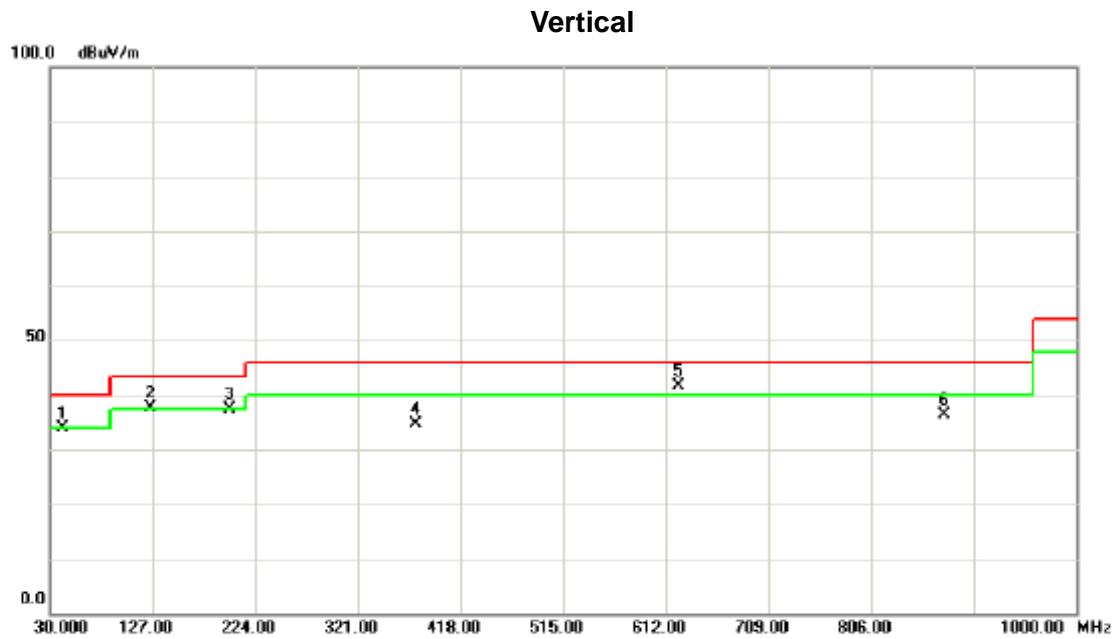


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		42.6100	48.22	-14.39	33.83	40.00	-6.17	peak	
2	!	125.0600	51.18	-13.61	37.57	43.50	-5.93	peak	
3		199.7500	52.59	-15.18	37.41	43.50	-6.09	peak	
4		375.3200	45.19	-10.66	34.53	46.00	-11.47	peak	
5	*	624.6100	48.49	-6.86	41.63	46.00	-4.37	peak	
6		874.8700	38.75	-2.48	36.27	46.00	-9.73	peak	





Test Mode: TX A MODE 5745MHz


**Horizontal**

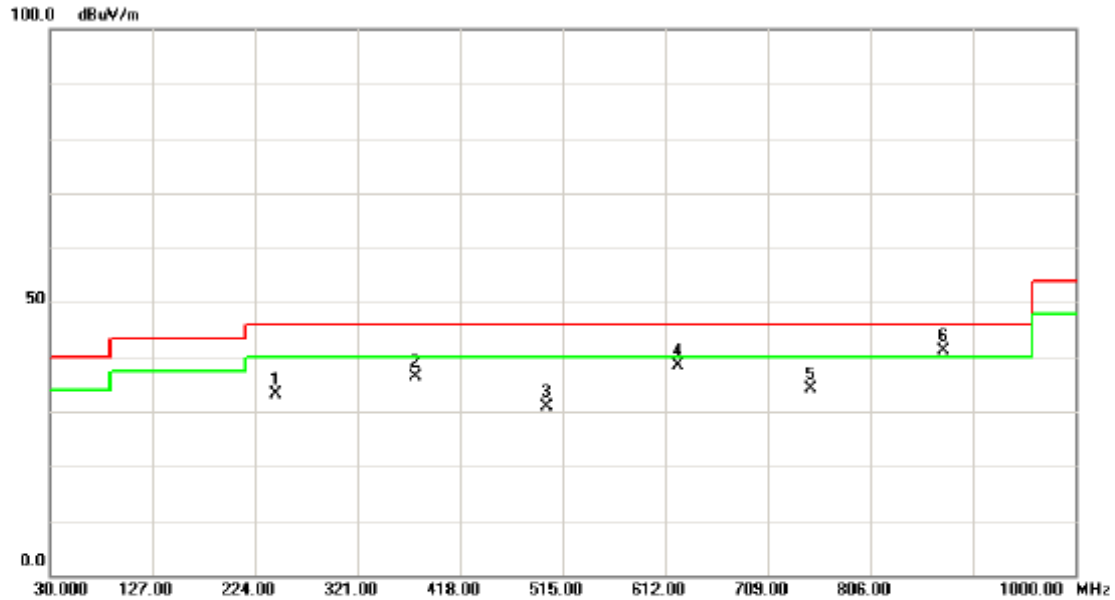

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		243.4000	48.07	-14.87	33.20	46.00	-12.80	peak	
2		375.3200	47.14	-10.66	36.48	46.00	-9.52	peak	
3		500.4500	41.10	-10.31	30.79	46.00	-15.21	peak	
4		624.6100	45.19	-6.86	38.33	46.00	-7.67	peak	
5		749.7400	38.94	-4.91	34.03	46.00	-11.97	peak	
6	*	874.8700	43.61	-2.48	41.13	46.00	-4.87	peak	




Test Mode:	TX A MODE 5785MHz
------------	-------------------

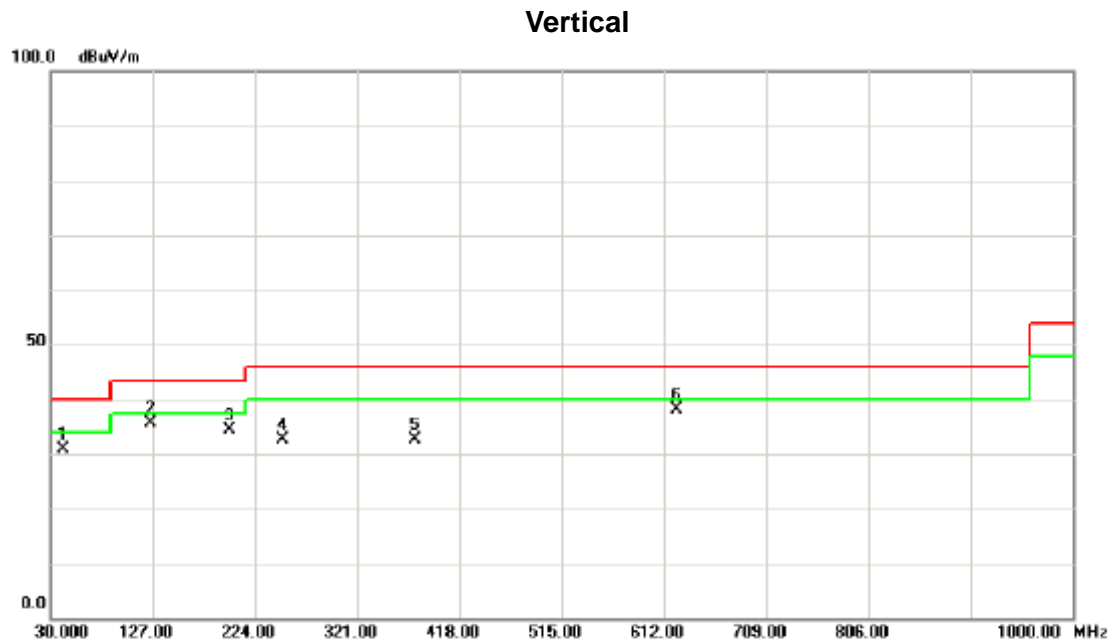

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		42.6100	45.22	-14.39	30.83	40.00	-9.17	peak	
2		125.0600	49.18	-13.61	35.57	43.50	-7.93	peak	
3		199.7500	49.59	-15.18	34.41	43.50	-9.09	peak	
4		250.1900	47.61	-14.97	32.64	46.00	-13.36	peak	
5		375.3200	43.19	-10.66	32.53	46.00	-13.47	peak	
6	*	624.6100	44.99	-6.86	38.13	46.00	-7.87	peak	




Test Mode: TX A MODE 5785MHz

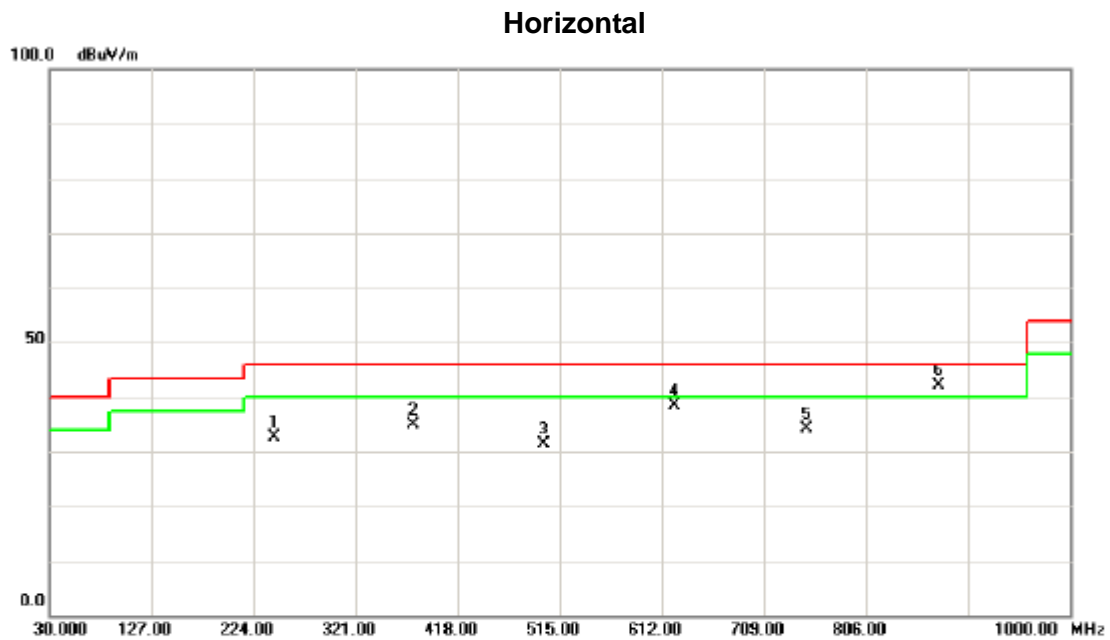

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		243.4000	47.57	-14.87	32.70	46.00	-13.30	peak	
2		375.3200	45.64	-10.66	34.98	46.00	-11.02	peak	
3		500.4500	41.60	-10.31	31.29	46.00	-14.71	peak	
4		624.6100	45.19	-6.86	38.33	46.00	-7.67	peak	
5		749.7400	38.94	-4.91	34.03	46.00	-11.97	peak	
6	*	874.8700	44.61	-2.48	42.13	46.00	-3.87	peak	




Test Mode:	TX A MODE 5825MHz
------------	-------------------

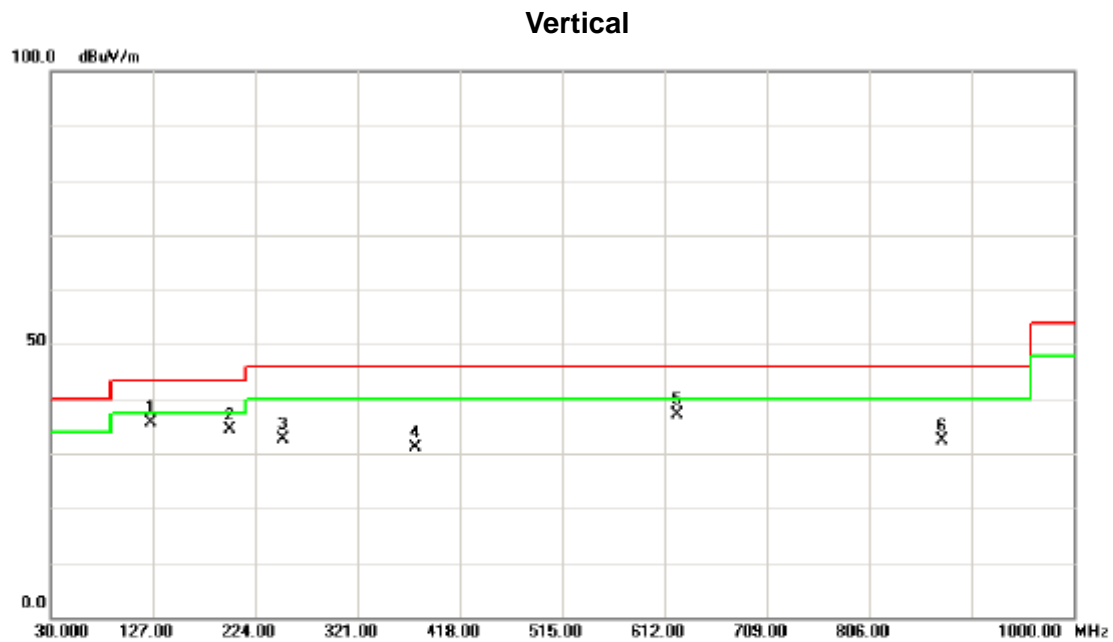

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	125.0600	49.18	-13.61	35.57	43.50	-7.93	peak	
2		199.7500	49.59	-15.18	34.41	43.50	-9.09	peak	
3		250.1900	47.61	-14.97	32.64	46.00	-13.36	peak	
4		375.3200	41.69	-10.66	31.03	46.00	-14.97	peak	
5		624.6100	43.99	-6.86	37.13	46.00	-8.87	peak	
6		874.8700	34.75	-2.48	32.27	46.00	-13.73	peak	



Test Mode:	TX A MODE 5825MHz
------------	-------------------

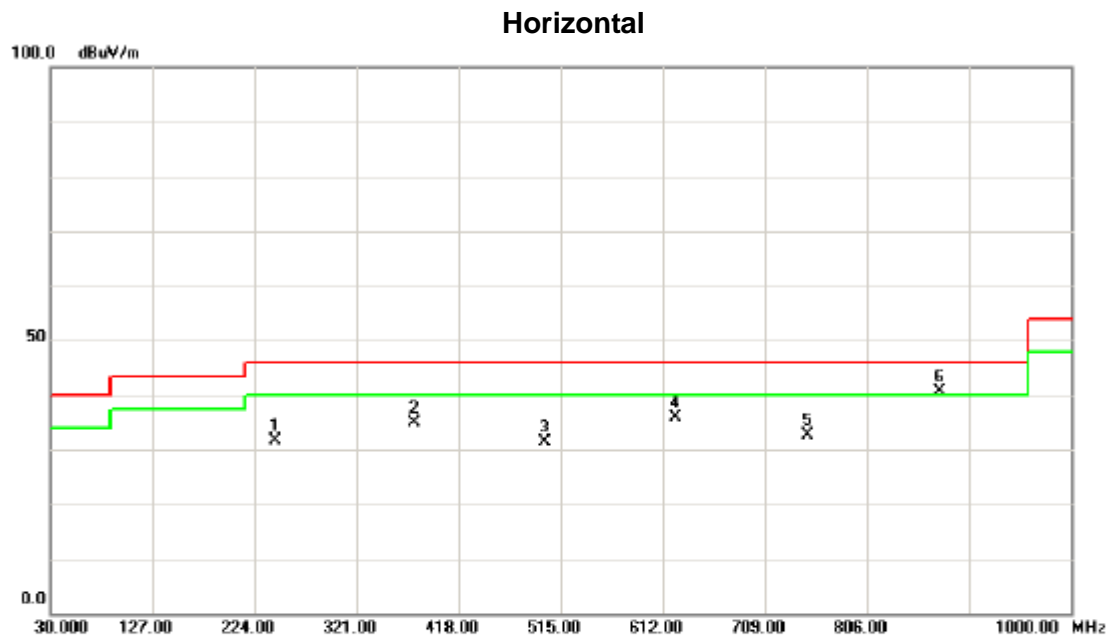

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		243.4000	46.57	-14.87	31.70	46.00	-14.30	peak	
2		375.3200	45.64	-10.66	34.98	46.00	-11.02	peak	
3		500.4500	41.60	-10.31	31.29	46.00	-14.71	peak	
4		624.6100	42.69	-6.86	35.83	46.00	-10.17	peak	
5		749.7400	37.44	-4.91	32.53	46.00	-13.47	peak	
6	*	874.8700	43.11	-2.48	40.63	46.00	-5.37	peak	



#### **4.2.9 TEST RESULTS (ABOVE 1000 MHZ)**

**Remark:**

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency; "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission.
- (4) Data of measurement within this frequency range shown " \* " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:  
"X" - denotes Laid on Table; "Y" - denotes Vertical Stand; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (8) "#" The radiated frequency is out of the restricted band. Limit line= fundamental - 20dB



Test Mode : TX A MODE 5745MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
#5725.00	V	36.28	25.41	44.34	80.62	69.75	86.46	78.32	X/E
<b>5745.80</b>	<b>V</b>	<b>62.04</b>	<b>53.90</b>	<b>44.42</b>	<b>106.46</b>	<b>98.32</b>			<b>X/F</b>
11490.36	V	41.60	30.80	18.47	60.07	49.27	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
#5725.00	H	30.00	17.74	44.34	74.34	62.08	79.34	70.52	X/E
<b>5743.70</b>	<b>H</b>	<b>54.93</b>	<b>46.11</b>	<b>44.41</b>	<b>99.34</b>	<b>90.52</b>			<b>X/F</b>
11491.21	H	39.59	29.70	18.47	58.06	48.17	74.00	54.00	X/H

Test Mode : TX A MODE 5785MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>5786.20</b>	<b>V</b>	<b>61.17</b>	<b>53.62</b>	<b>44.56</b>	<b>105.73</b>	<b>98.18</b>			<b>X/F</b>
11571.24	V	40.77	30.20	18.67	59.44	48.87	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>5785.80</b>	<b>H</b>	<b>51.03</b>	<b>43.58</b>	<b>44.56</b>	<b>95.59</b>	<b>88.14</b>			<b>X/F</b>
11569.65	H	38.39	28.76	18.67	57.06	47.43	74.00	54.00	X/H

Test Mode : TX A MODE 5825MHz


Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>5826.00</b>	<b>V</b>	<b>61.08</b>	<b>53.78</b>	<b>44.70</b>	<b>105.78</b>	<b>98.48</b>			<b>X/F</b>
#5850.00	V	25.39	12.74	44.78	70.17	57.52	85.78	78.48	X/E
11650.67	V	41.49	31.40	18.87	60.36	50.27	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>5823.40</b>	<b>H</b>	<b>51.85</b>	<b>44.41</b>	<b>44.69</b>	<b>96.54</b>	<b>89.10</b>			<b>X/F</b>
#5850.00	H	17.37	4.23	44.78	62.15	49.01	76.54	69.10	X/E
11649.52	H	39.31	29.41	18.86	58.17	48.27	74.00	54.00	X/H




TX CH149 (Above 1000 MHz, Vertical)

116.0 dBuV/m

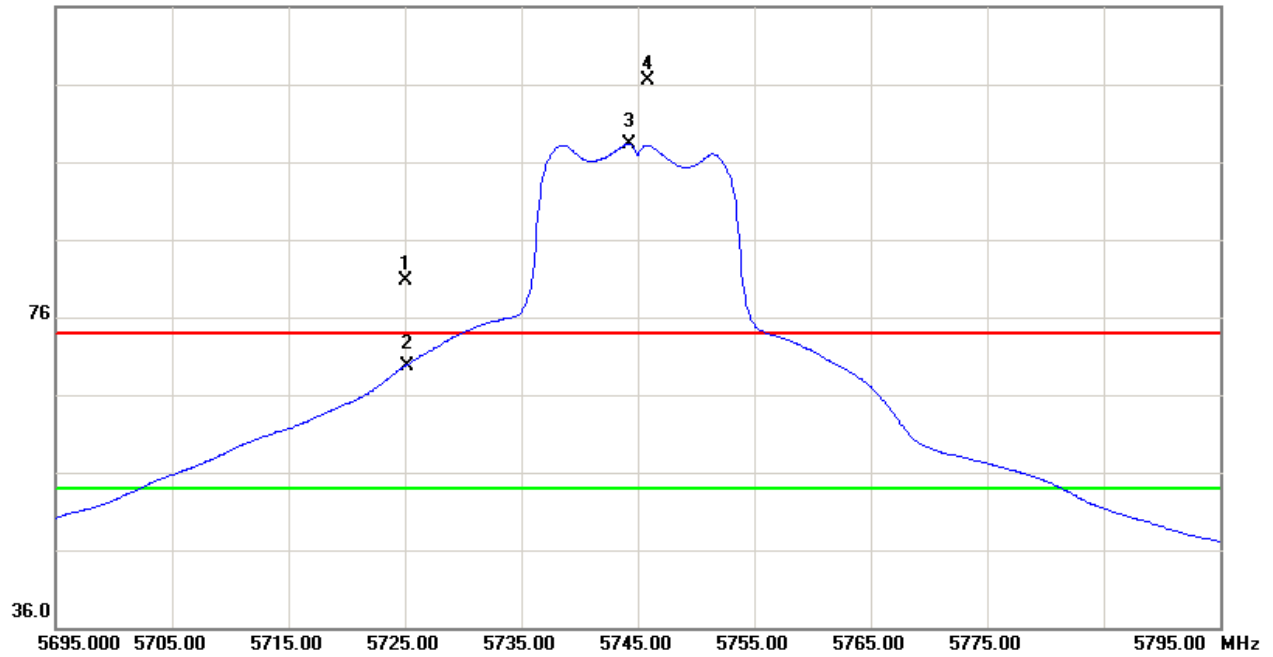

80.0 dBuV/m

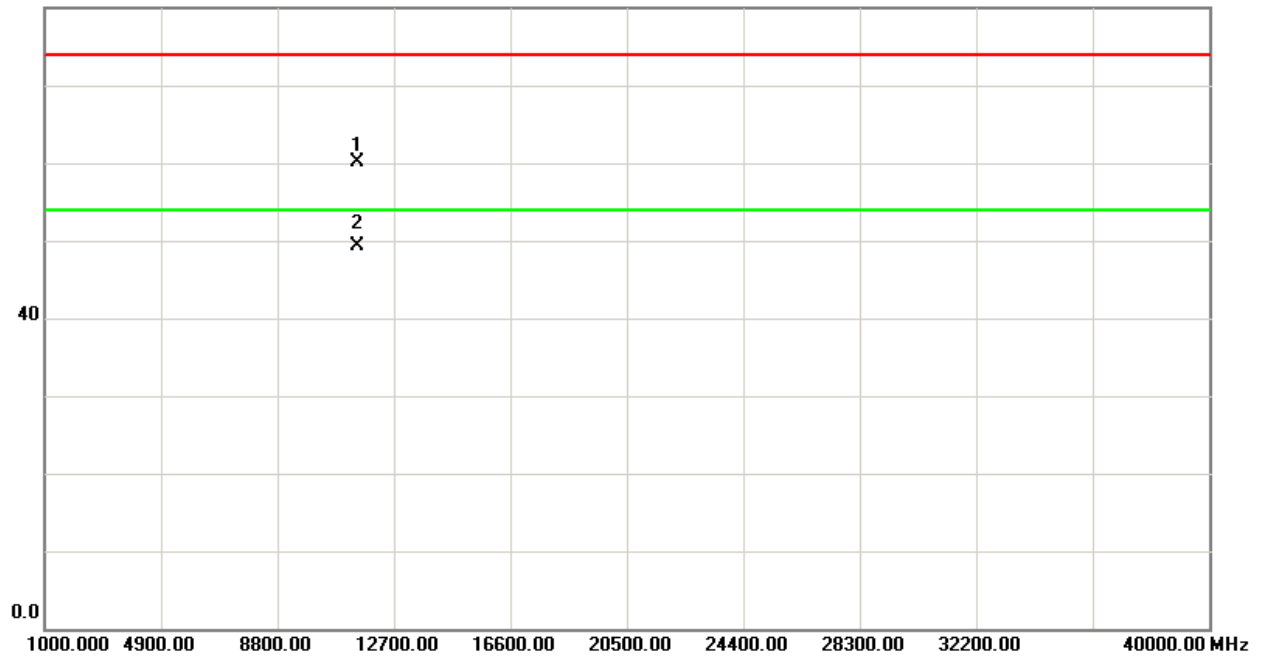







TX CH149 (Above 1000 MHz, Horizontal)

116.0 dBuV/m

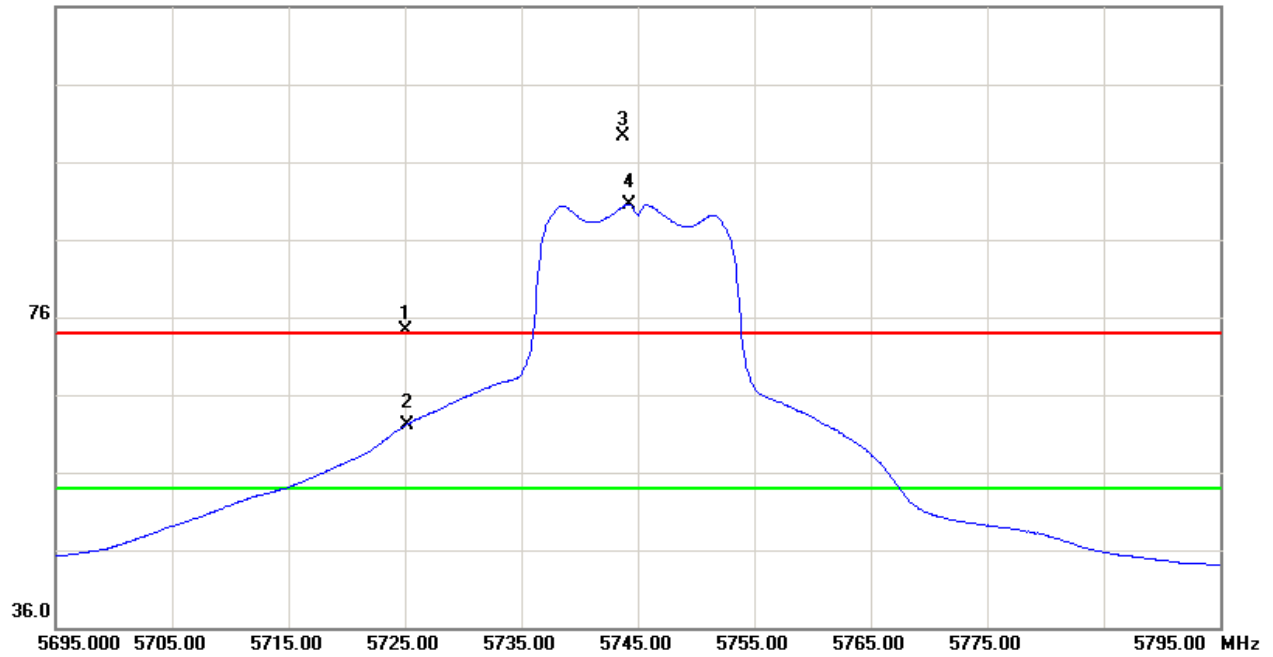


80.0 dBuV/m

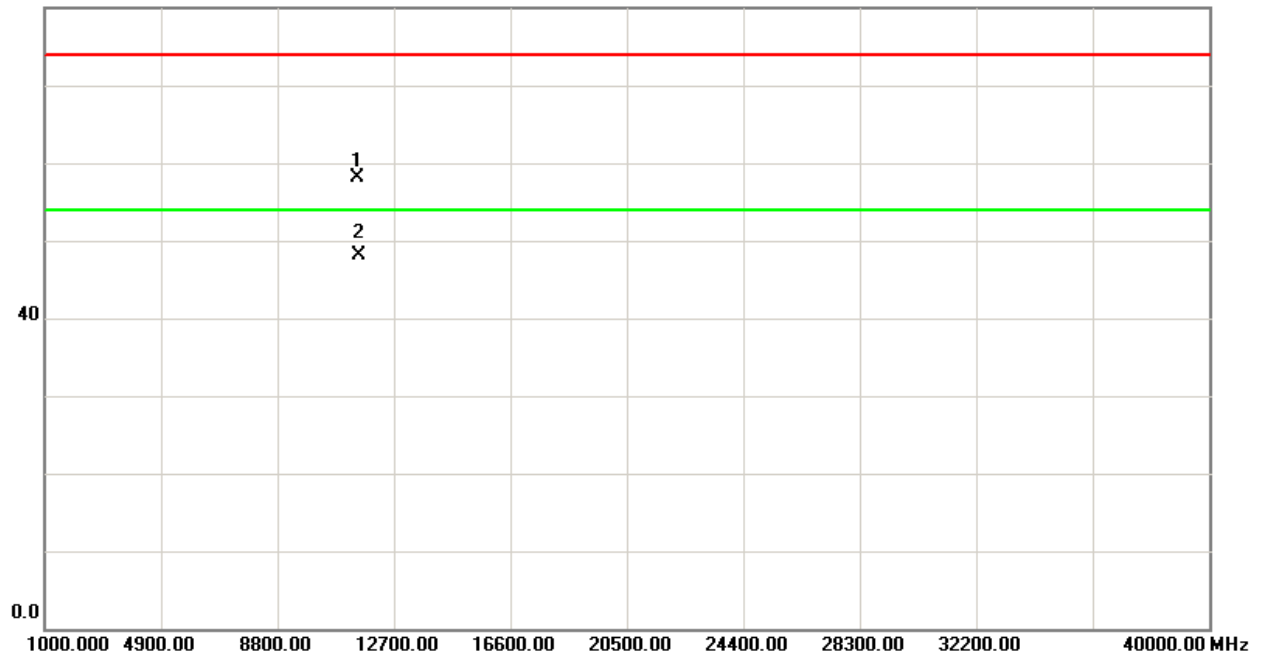




TX CH157 (Above 1000 MHz, Vertical)

116.0 dBuV/m

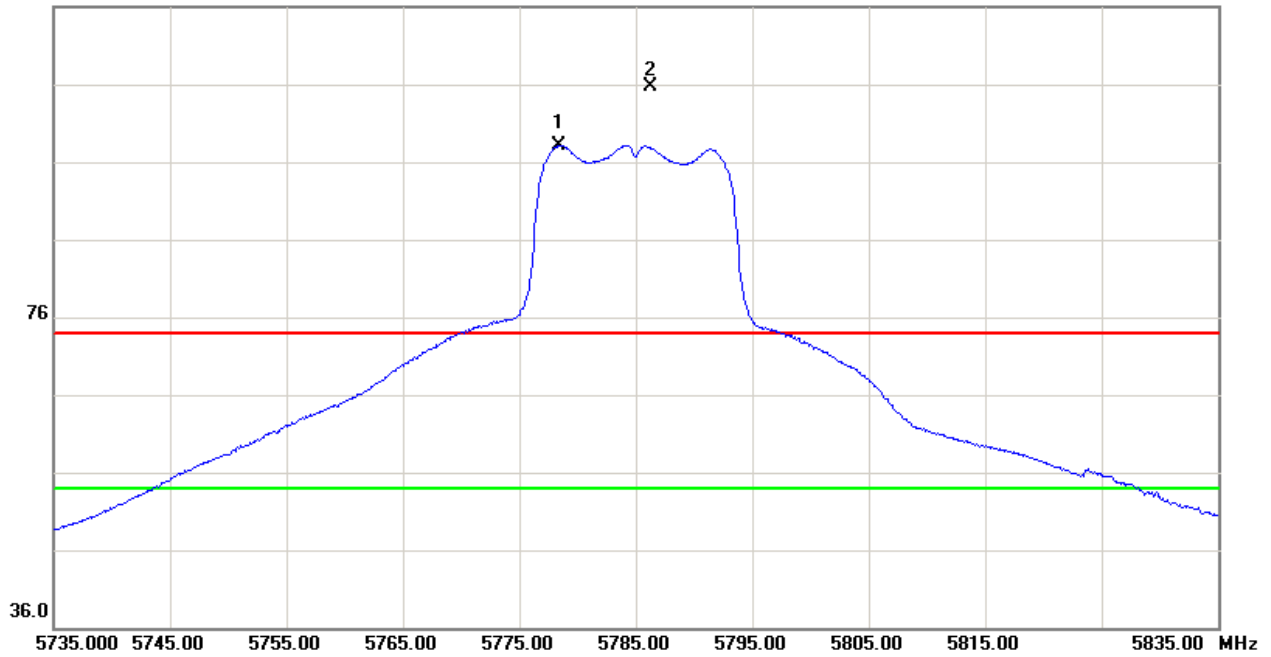


80.0 dBuV/m

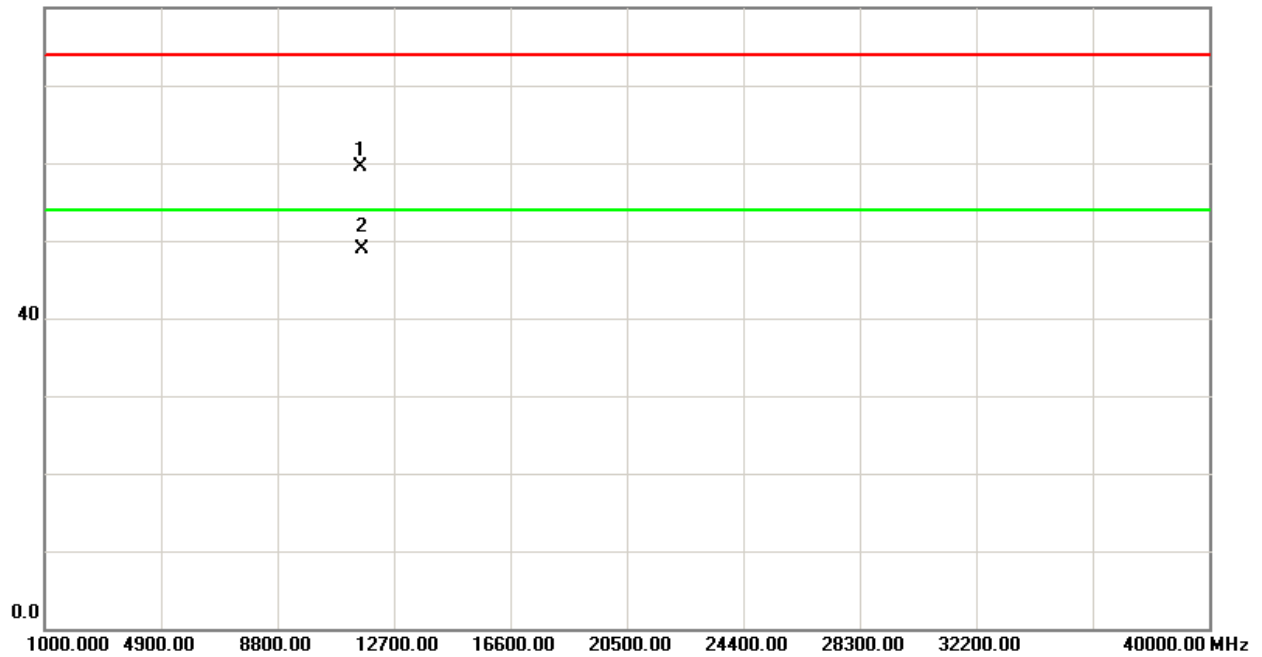




TX CH157 (Above 1000 MHz, Horizontal)

116.0 dBuV/m

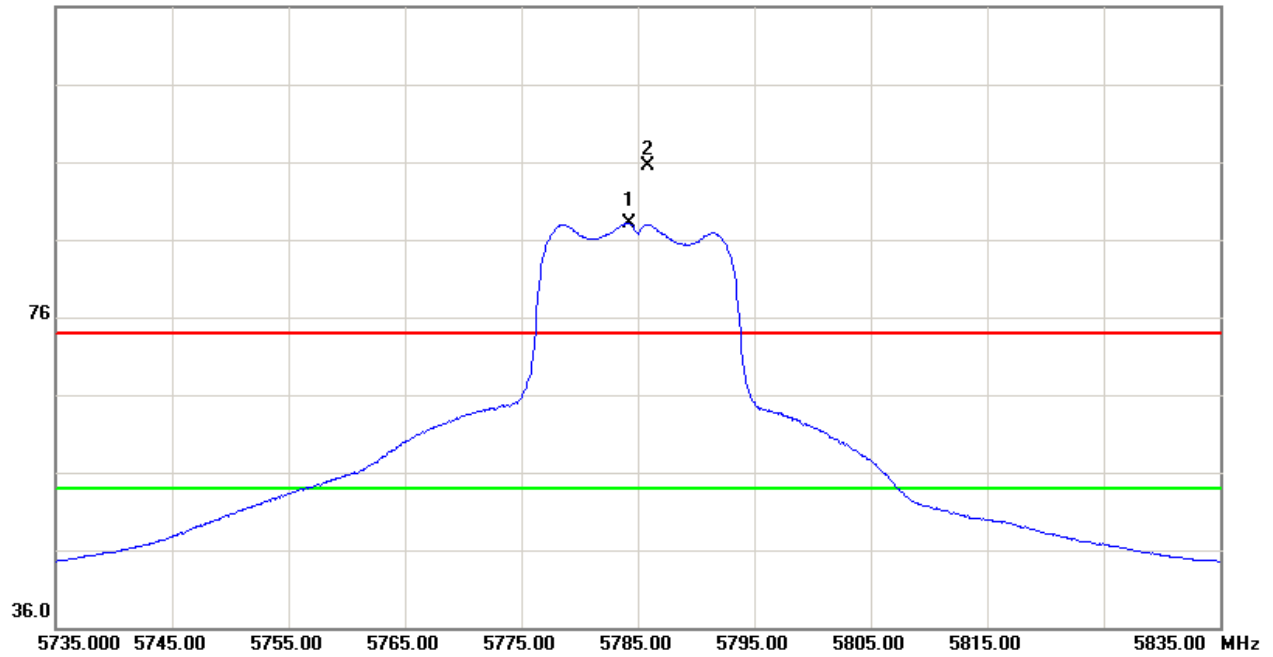


80.0 dBuV/m

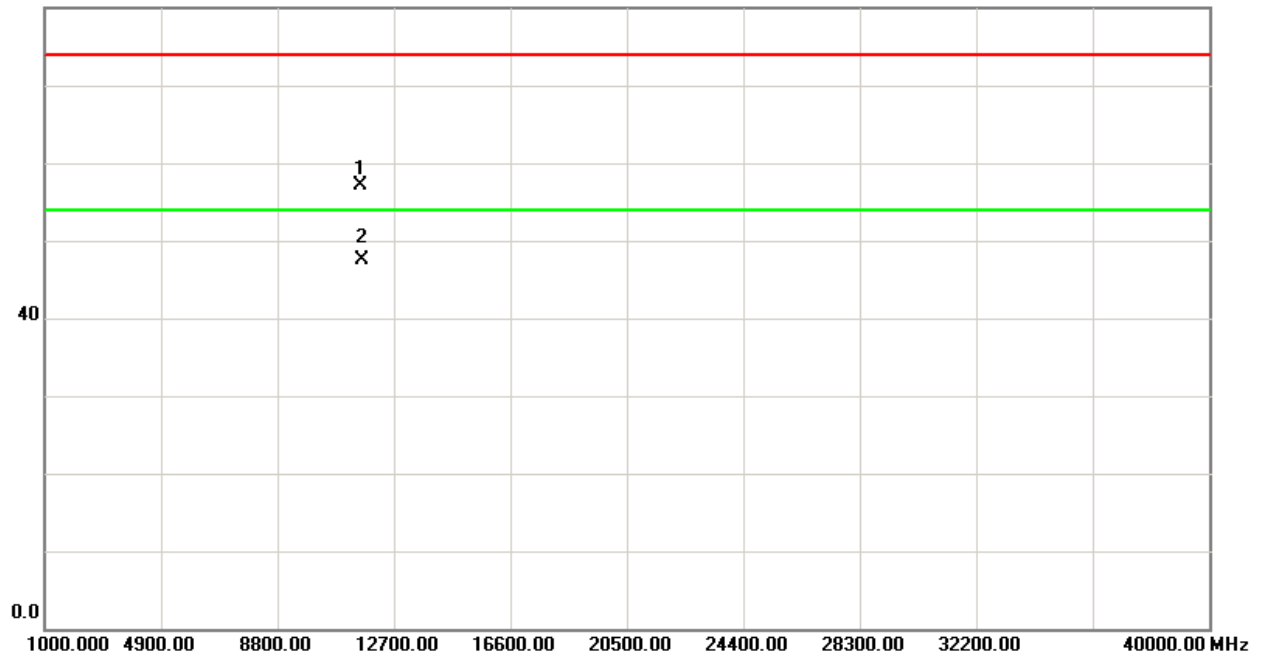




TX CH165 (Above 1000 MHz, Vertical)

116.0 dBuV/m

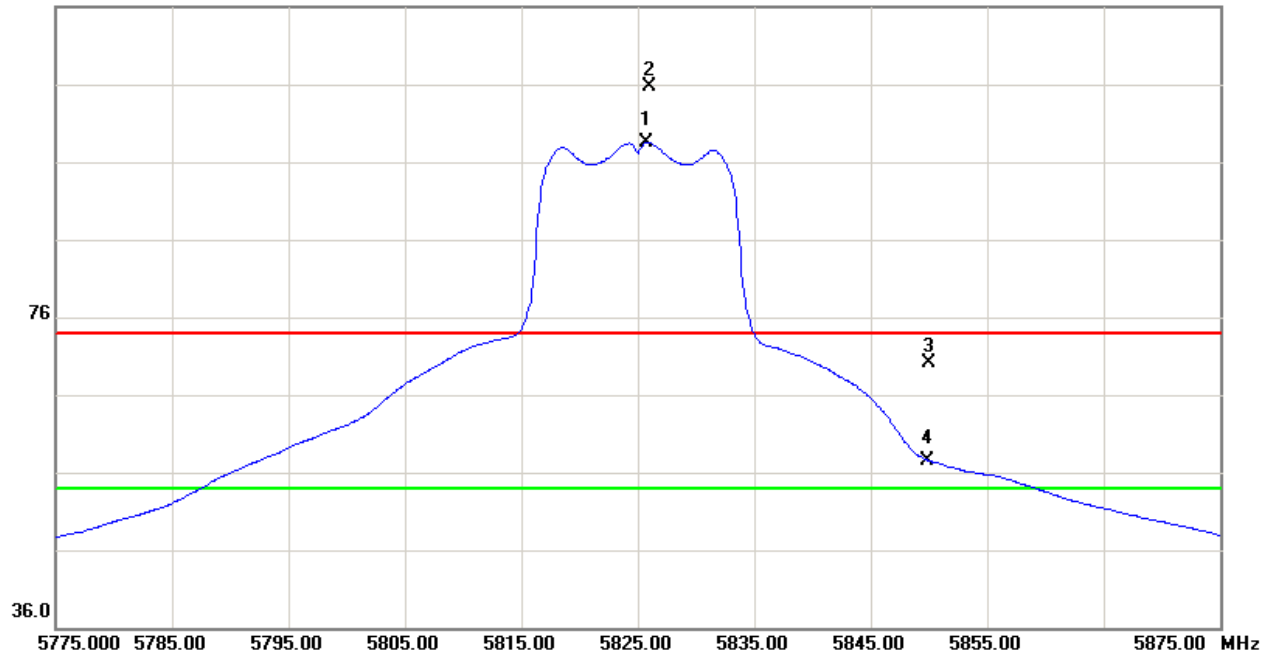


80.0 dBuV/m

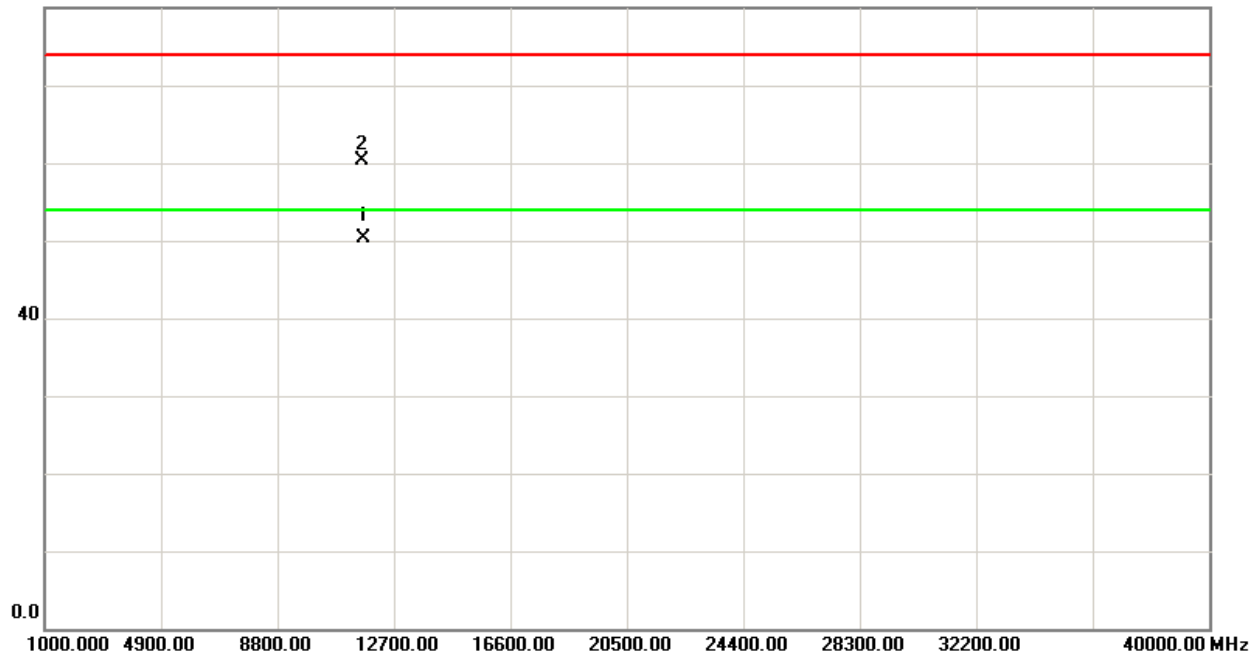




TX CH165 (Above 1000 MHz, Horizontal)

116.0 dBuV/m

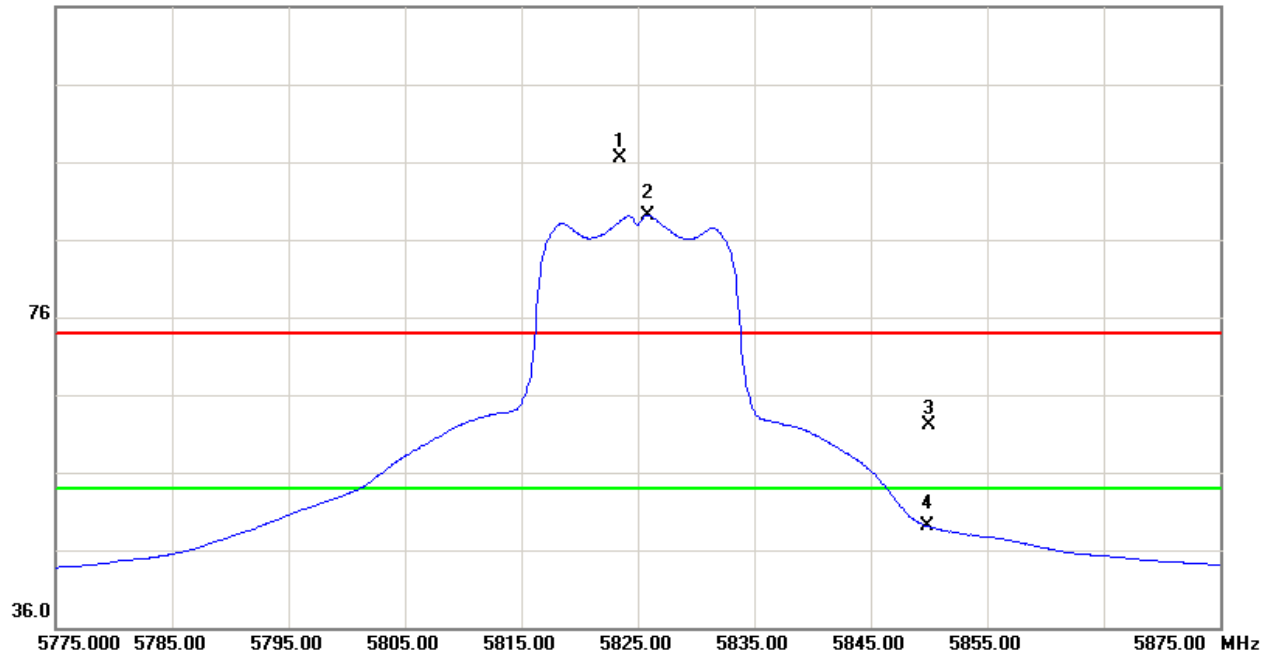

80.0 dBuV/m

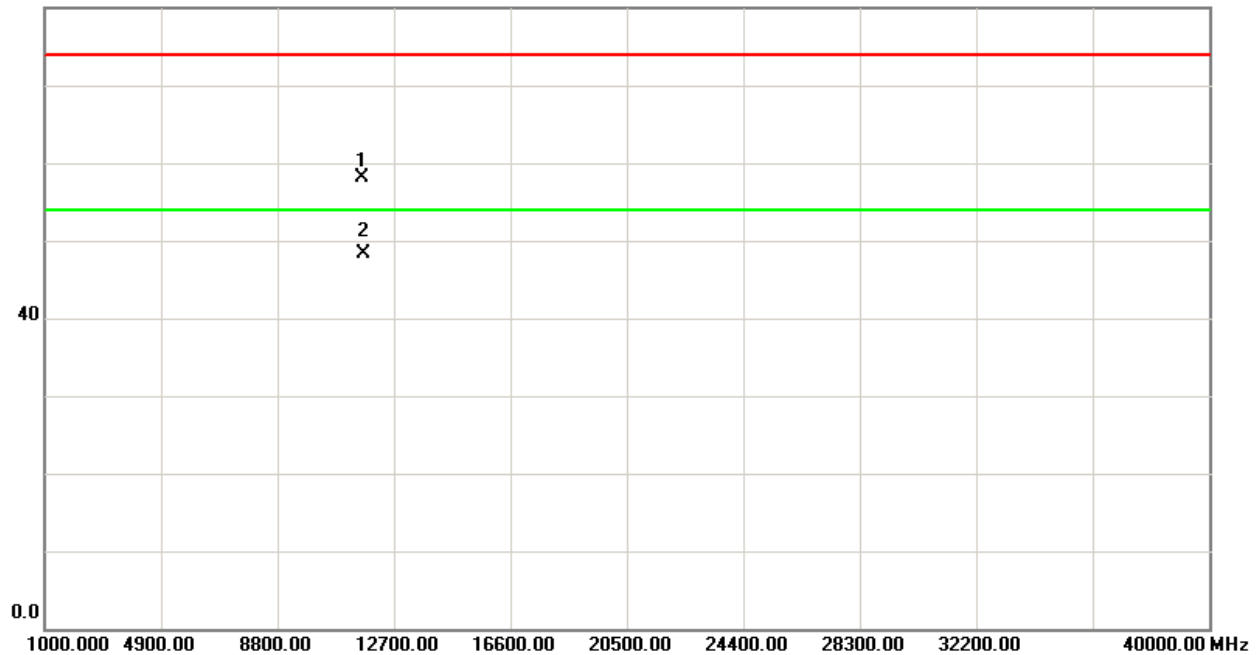



Test Mode : TX N-20M MODE 5745MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
#5725.00	V	33.38	22.54	44.34	77.72	66.88	87.17	78.29	X/E
<b>5743.90</b>	<b>V</b>	<b>62.76</b>	<b>53.88</b>	<b>44.41</b>	<b>107.17</b>	<b>98.29</b>			<b>X/F</b>
11489.36	V	39.03	29.25	18.47	57.50	47.72	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
#5725.00	H	22.38	12.33	44.34	66.72	56.67	77.94	69.01	X/E
<b>5743.10</b>	<b>H</b>	<b>53.53</b>	<b>44.60</b>	<b>44.41</b>	<b>97.94</b>	<b>89.01</b>			<b>X/F</b>
11490.35	H	38.53	28.29	18.47	57.00	46.76	74.00	54.00	X/H

Test Mode : TX N-20M MODE 5785MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>5779.30</b>	<b>V</b>	<b>63.30</b>	<b>53.68</b>	<b>44.54</b>	<b>107.84</b>	<b>98.22</b>			<b>X/F</b>
11570.95	V	40.26	29.43	18.67	58.93	48.10	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>5778.40</b>	<b>H</b>	<b>53.71</b>	<b>44.10</b>	<b>44.54</b>	<b>98.25</b>	<b>88.64</b>			<b>X/F</b>
11569.95	H	37.63	28.41	18.67	56.30	47.08	74.00	54.00	X/H

Test Mode : TX N-20M MODE 5825MHz


Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>5824.30</b>	<b>V</b>	<b>61.32</b>	<b>53.10</b>	<b>44.69</b>	<b>106.01</b>	<b>97.79</b>			<b>X/F</b>
#5850.00	V	22.34	9.92	44.78	67.12	54.70	86.01	77.79	X/E
11649.62	V	39.69	29.74	18.86	58.55	48.60	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>5826.00</b>	<b>H</b>	<b>53.00</b>	<b>43.98</b>	<b>44.70</b>	<b>97.70</b>	<b>88.68</b>			<b>X/F</b>
#5850.00	H	15.68	2.17	44.78	60.46	46.95	77.70	68.68	X/E
11650.74	H	37.37	27.85	18.87	56.24	46.72	74.00	54.00	X/H




TX CH149 (Above 1000 MHz, Vertical)

116.0 dBuV/m

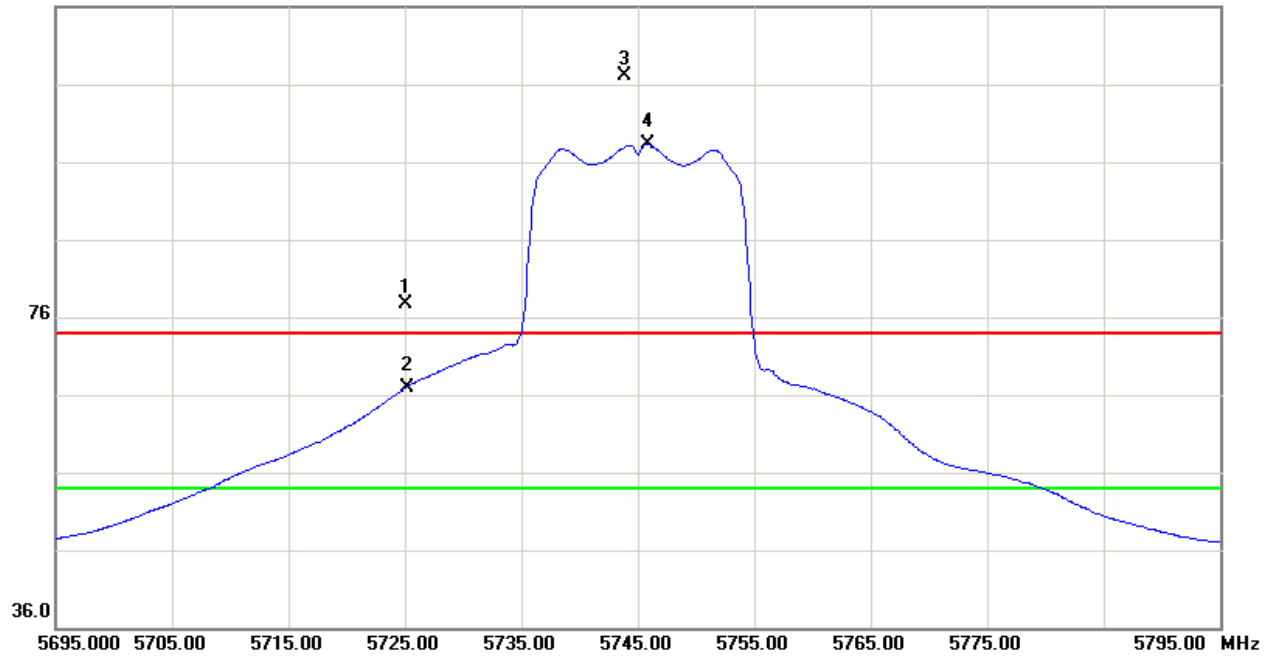


80.0 dBuV/m

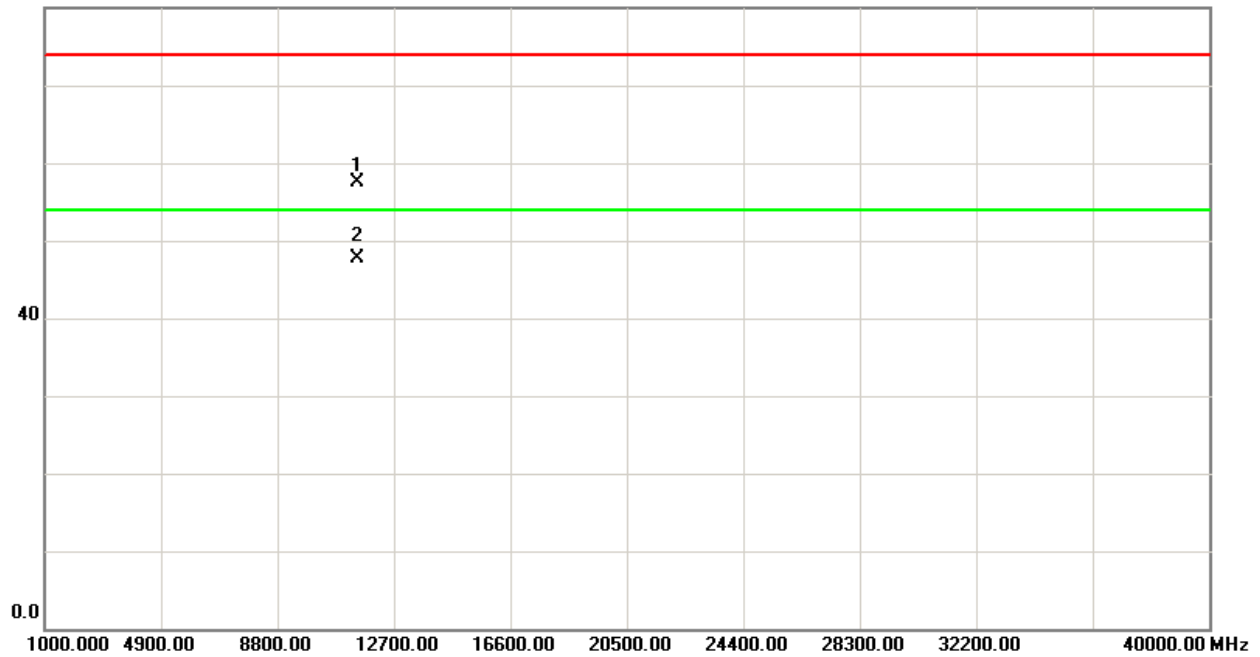




TX CH149 (Above 1000 MHz, Horizontal)

116.0 dBuV/m

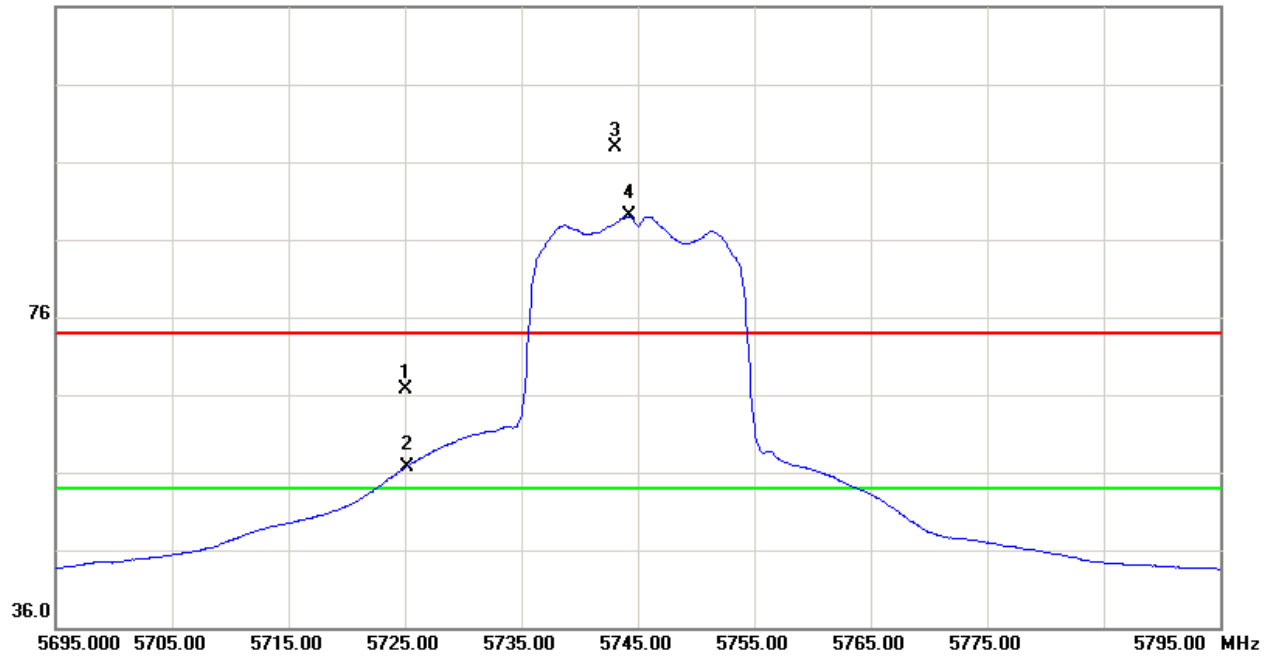

80.0 dBuV/m

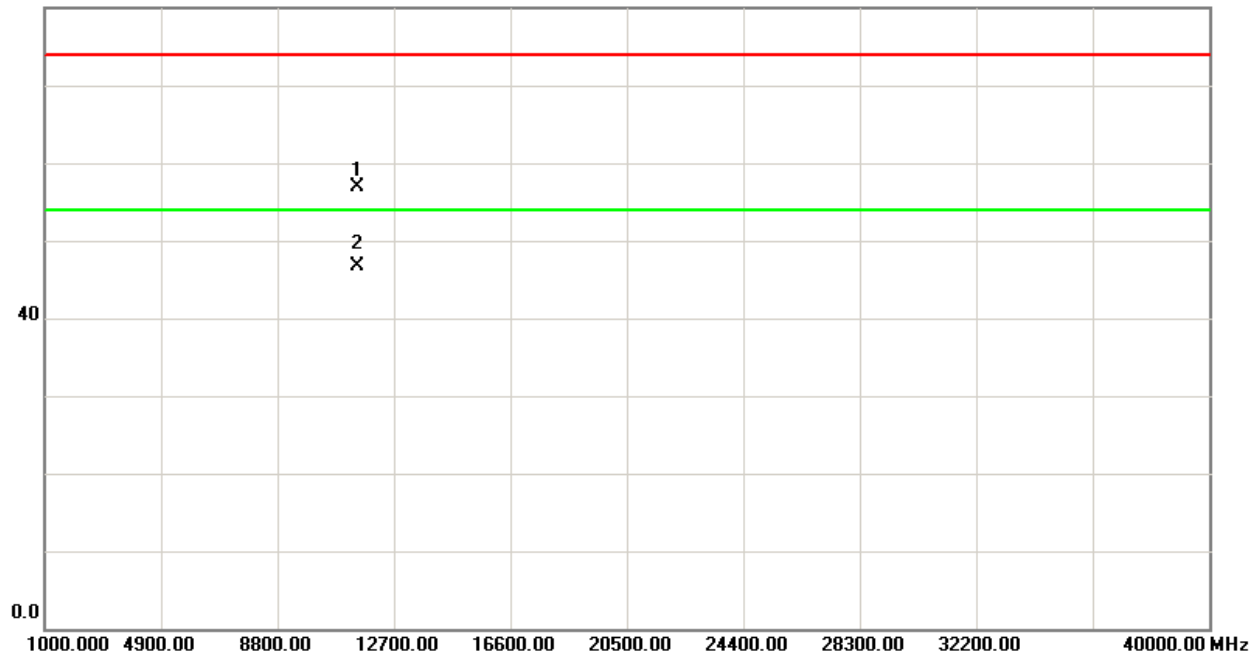







TX CH157 (Above 1000 MHz, Vertical)

116.0 dBuV/m

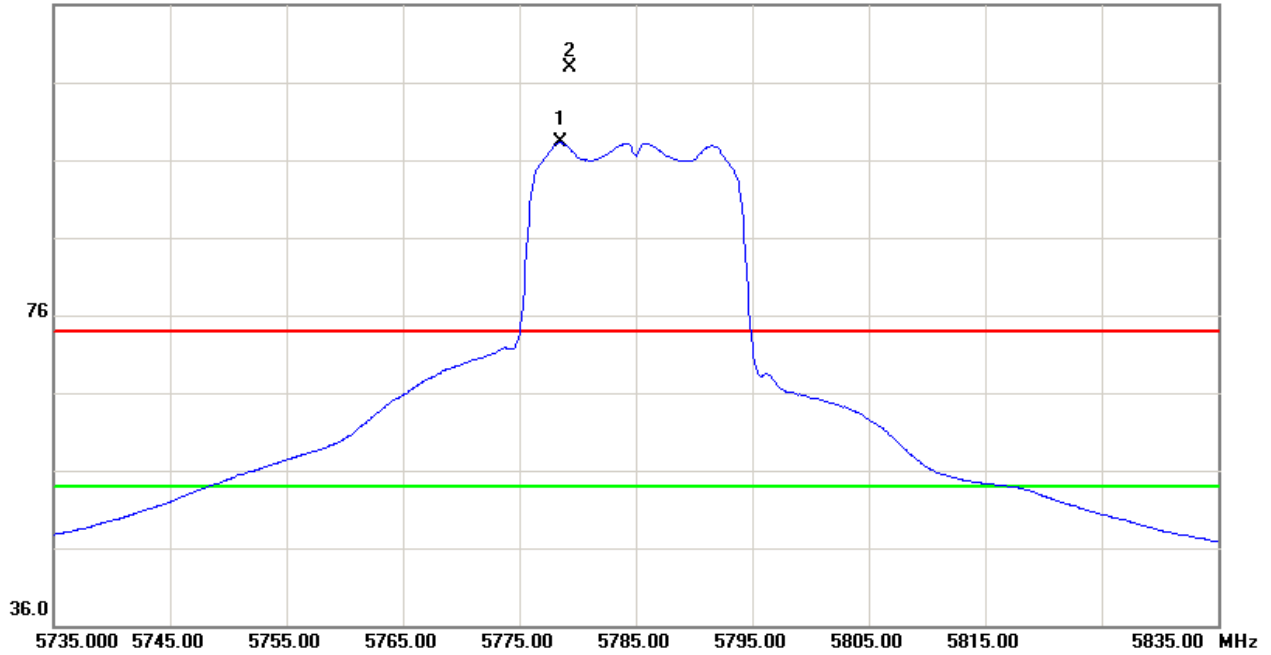


80.0 dBuV/m

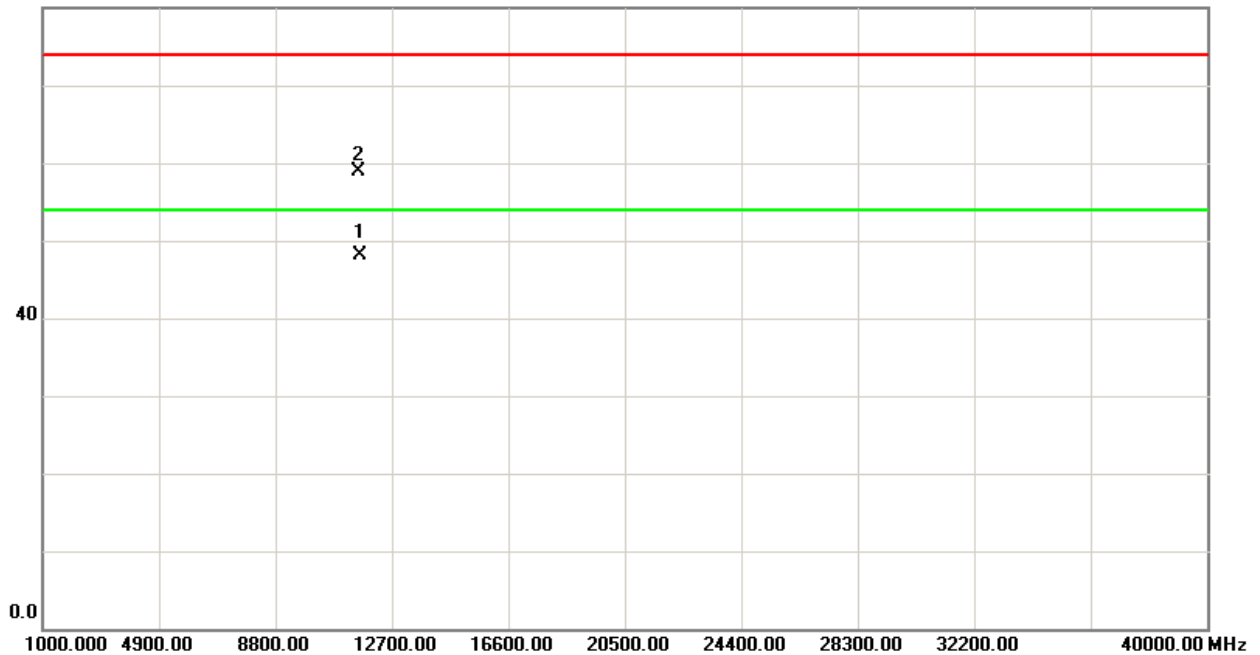




TX CH157 (Above 1000 MHz, Horizontal)

116.0 dBuV/m

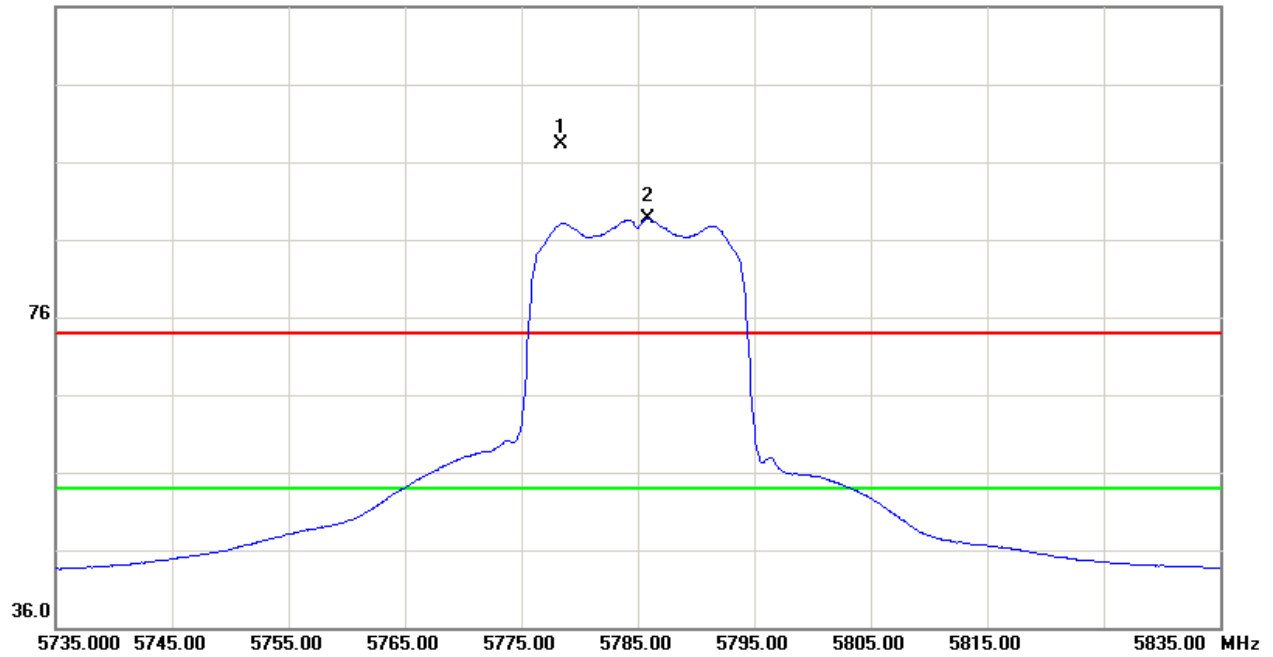


80.0 dBuV/m

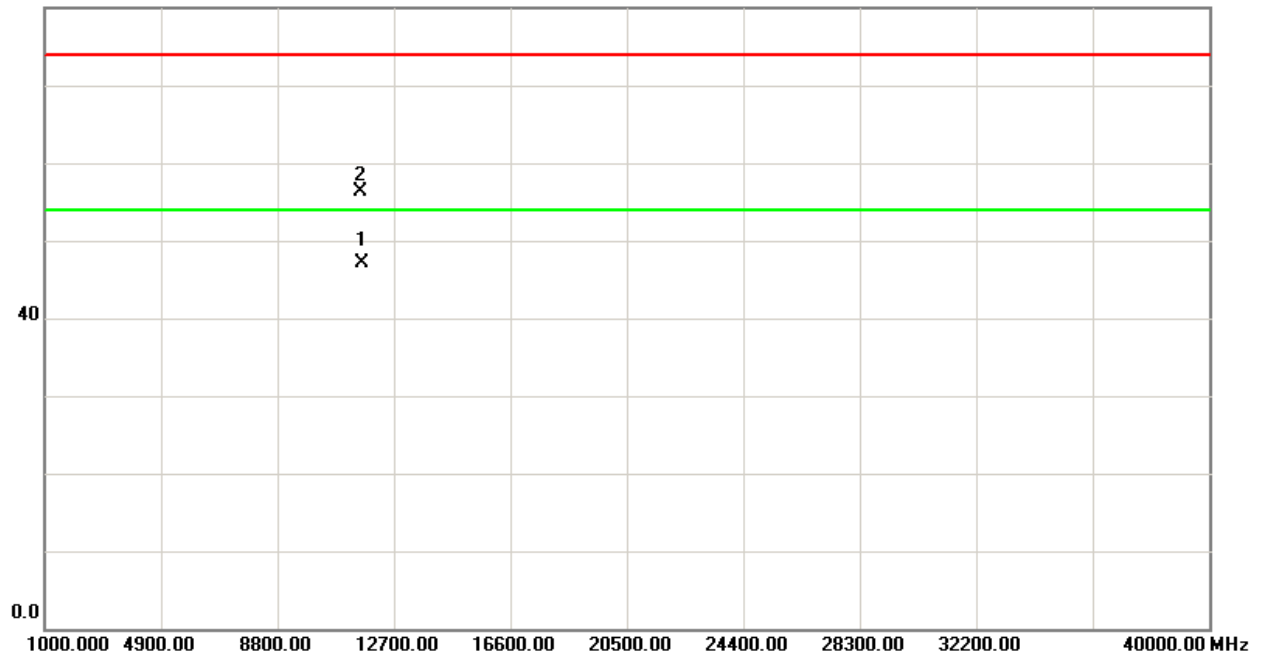




TX CH165 (Above 1000 MHz, Vertical)

116.0 dBuV/m

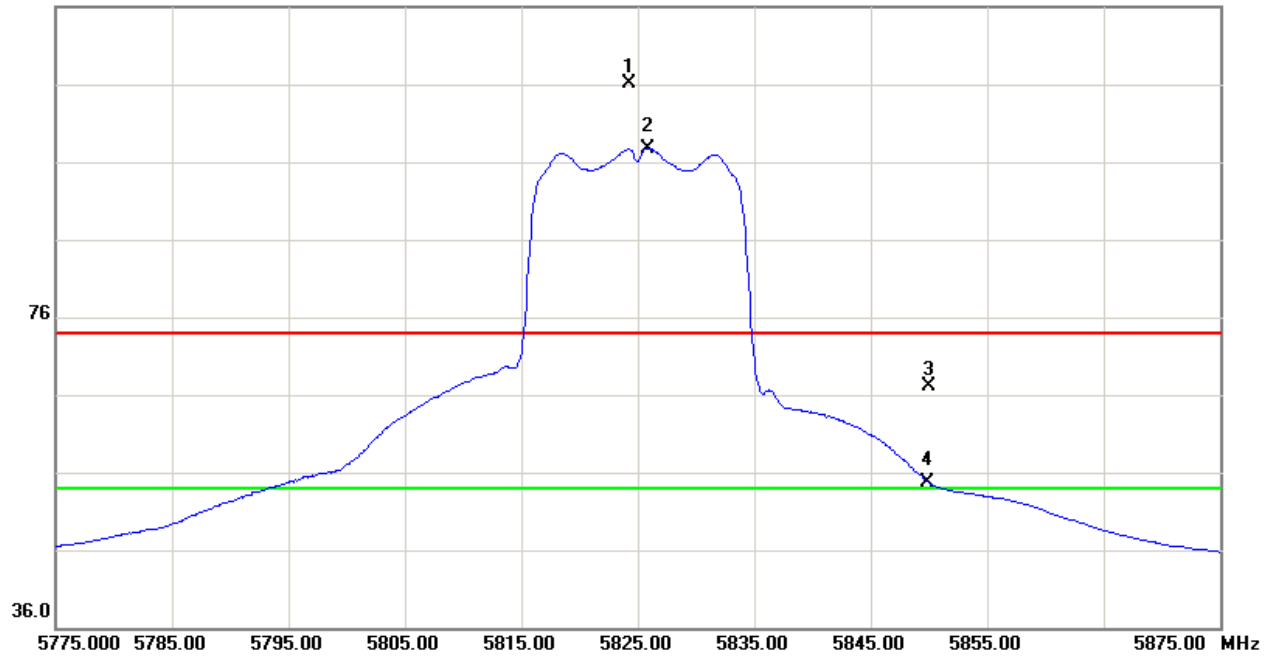


80.0 dBuV/m

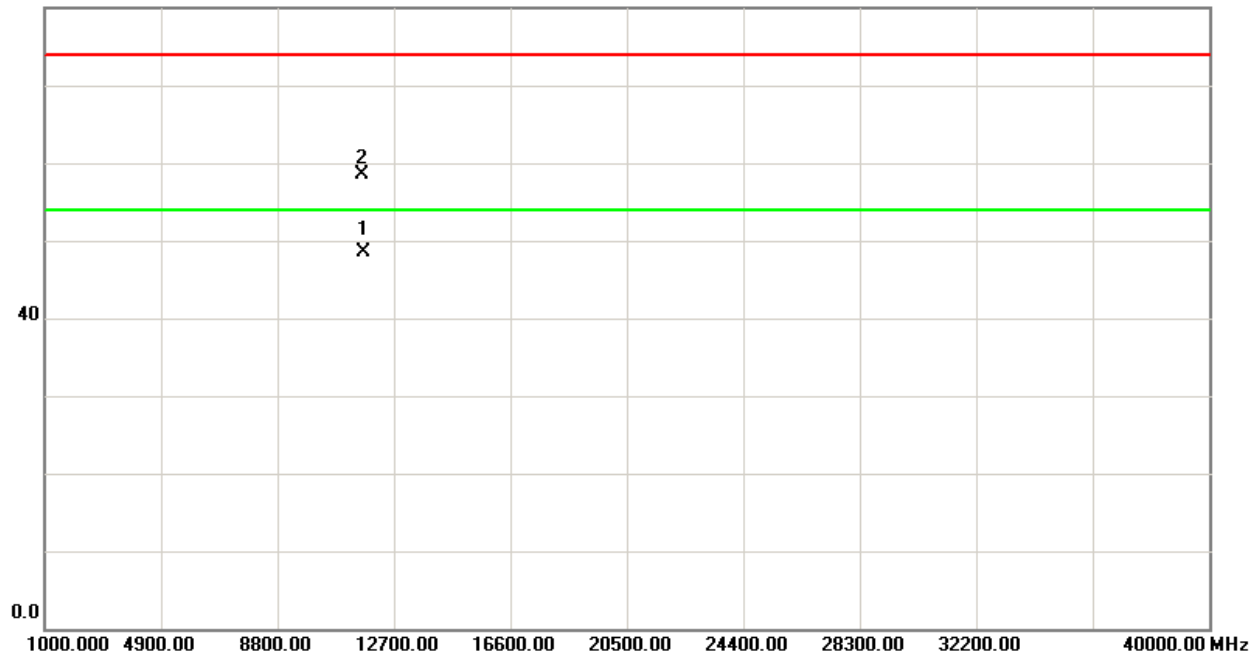




TX CH165 (Above 1000 MHz, Horizontal)

116.0 dBuV/m

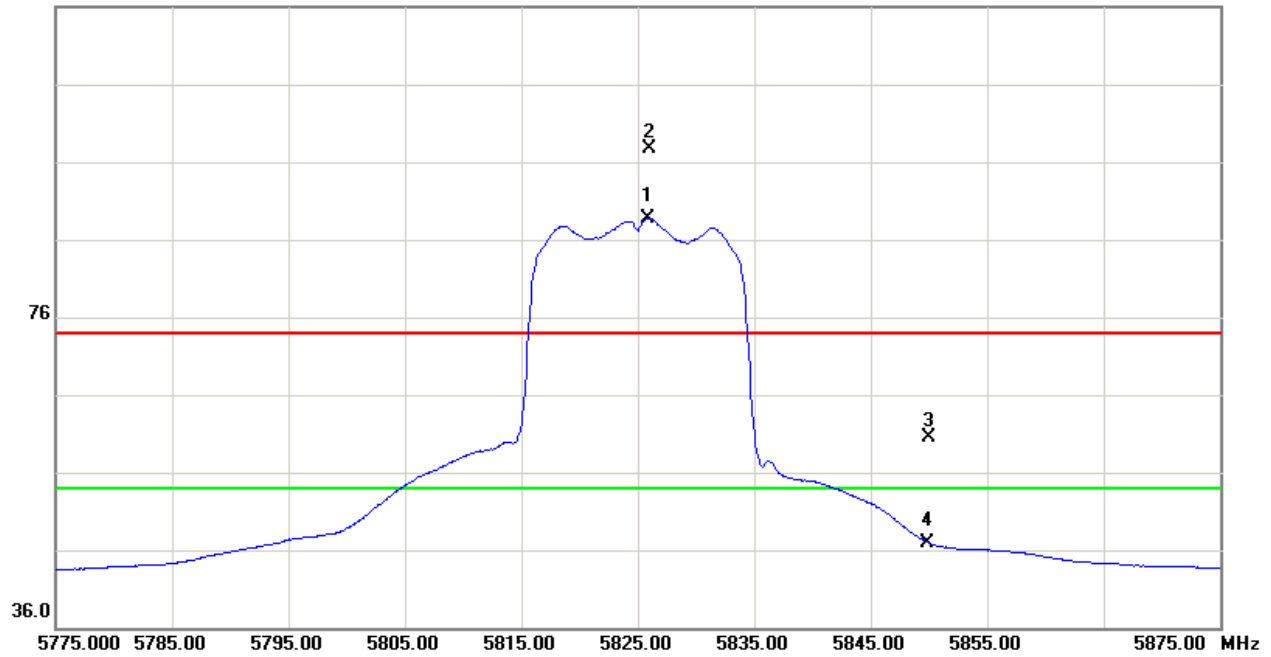

80.0 dBuV/m

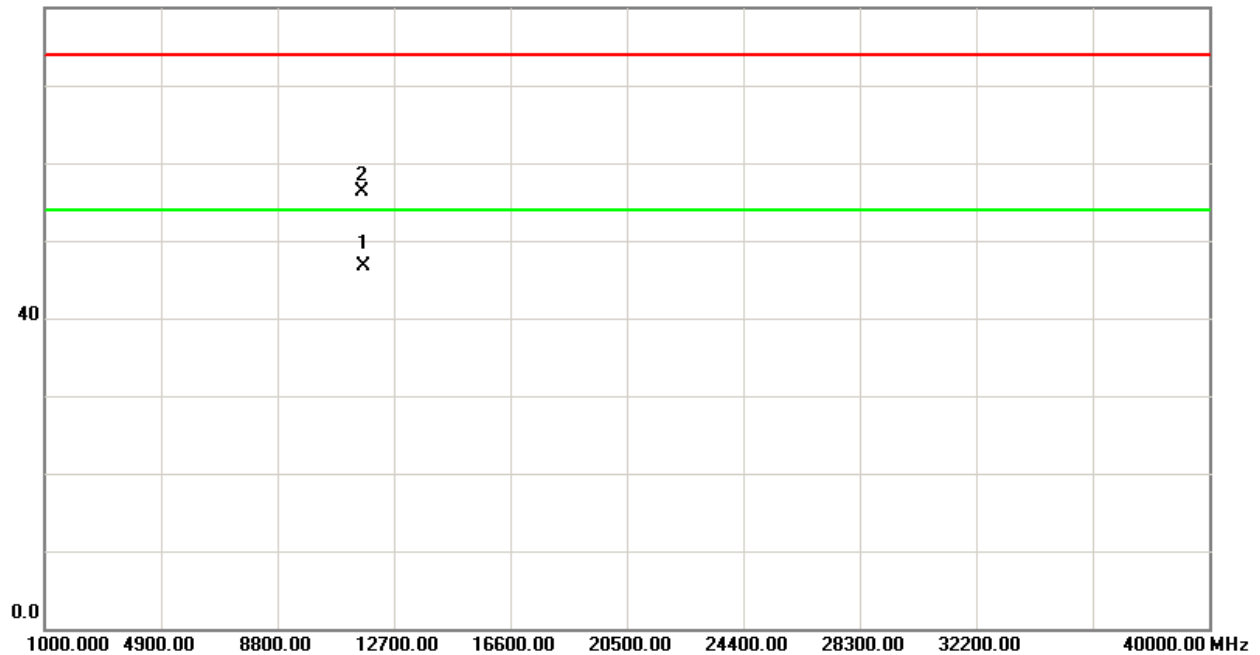



Test Mode : TX N-40M MODE 5755MHz

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
#5725.00	V	35.14	25.55	44.34	79.48	69.89	85.91	75.03	X/E
<b>5747.00</b>	<b>V</b>	<b>61.49</b>	<b>50.61</b>	<b>44.42</b>	<b>105.91</b>	<b>95.03</b>			<b>X/F</b>
11510.93	V	38.35	28.32	18.51	56.86	46.83	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
#5725.00	H	25.08	15.04	44.34	69.42	59.38	75.75	65.67	X/E
<b>5763.60</b>	<b>H</b>	<b>51.27</b>	<b>41.19</b>	<b>44.48</b>	<b>95.75</b>	<b>85.67</b>			<b>X/F</b>
11511.42	H	37.60	27.90	18.51	56.11	46.41	74.00	54.00	X/H

Test Mode : TX N-40M MODE 5795MHz


Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>5800.00</b>	<b>V</b>	<b>61.77</b>	<b>50.25</b>	<b>44.61</b>	<b>106.38</b>	<b>94.86</b>			<b>X/F</b>
#5850.00	V	26.39	10.93	44.78	71.17	55.71	86.38	74.86	X/E
11589.12	V	37.52	29.30	18.72	56.24	48.02	74.00	54.00	X/H

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>5800.80</b>	<b>H</b>	<b>51.34</b>	<b>39.93</b>	<b>44.61</b>	<b>95.95</b>	<b>84.54</b>			<b>X/F</b>
#5850.00	H	13.89	1.80	44.78	58.67	46.58	75.95	64.54	X/E
11590.62	H	39.25	27.57	18.72	57.97	46.29	74.00	54.00	X/H




TX CH151 (Above 1000 MHz, Vertical)

116.0 dBuV/m

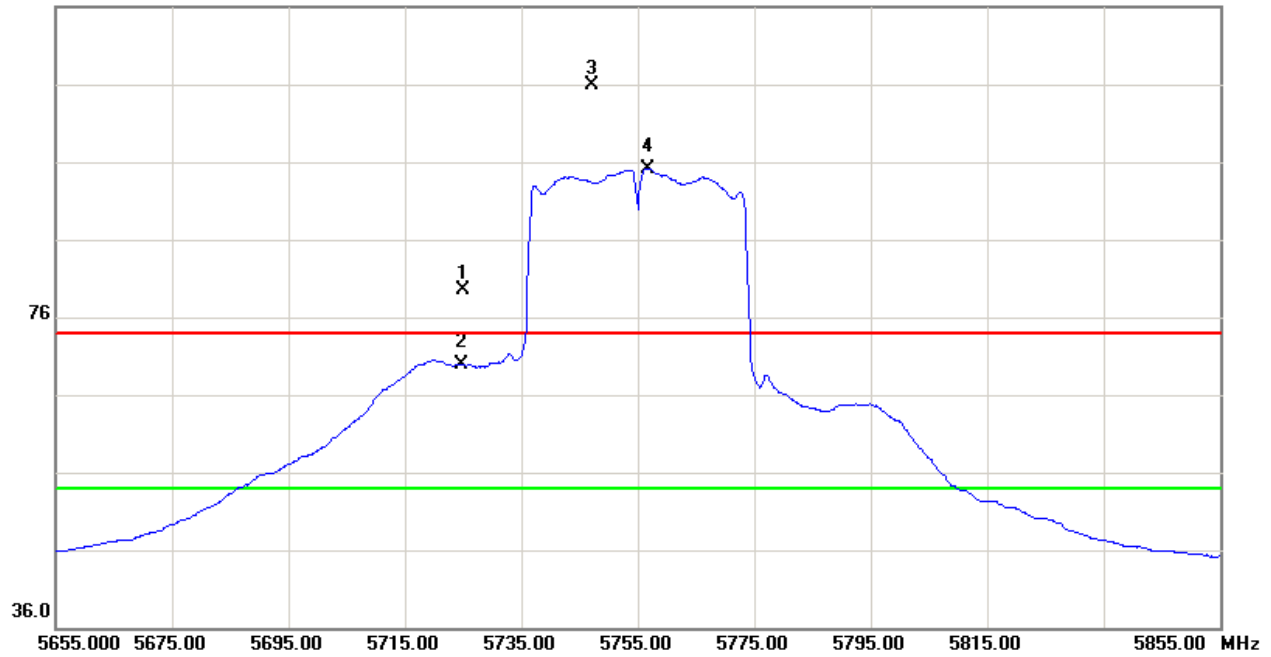


80.0 dBuV/m

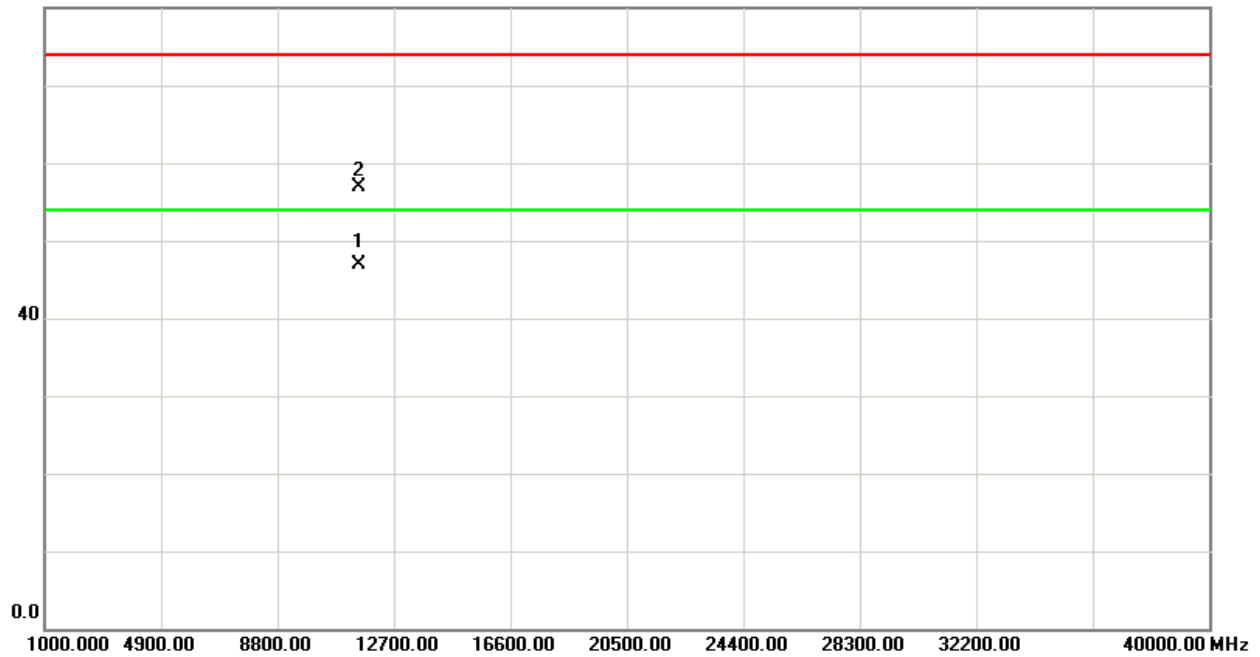




TX CH151 (Above 1000 MHz, Horizontal)

116.0 dBuV/m

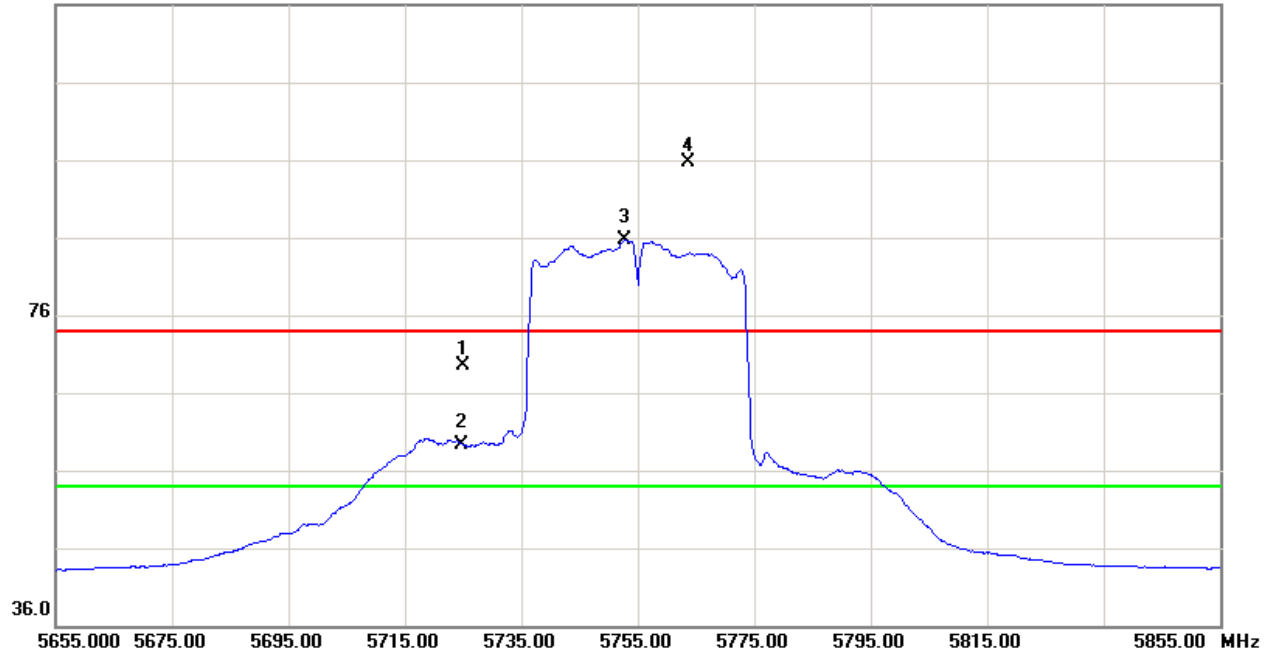


80.0 dBuV/m

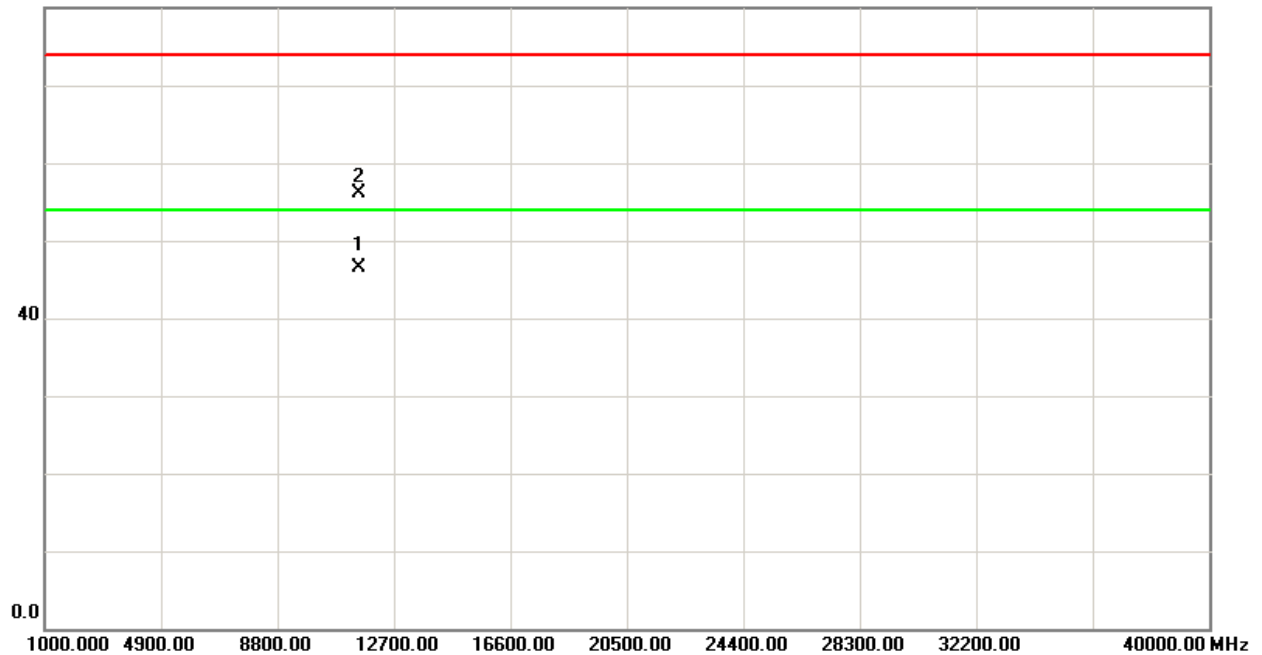




TX CH159 (Above 1000 MHz, Vertical)

116.0 dBuV/m

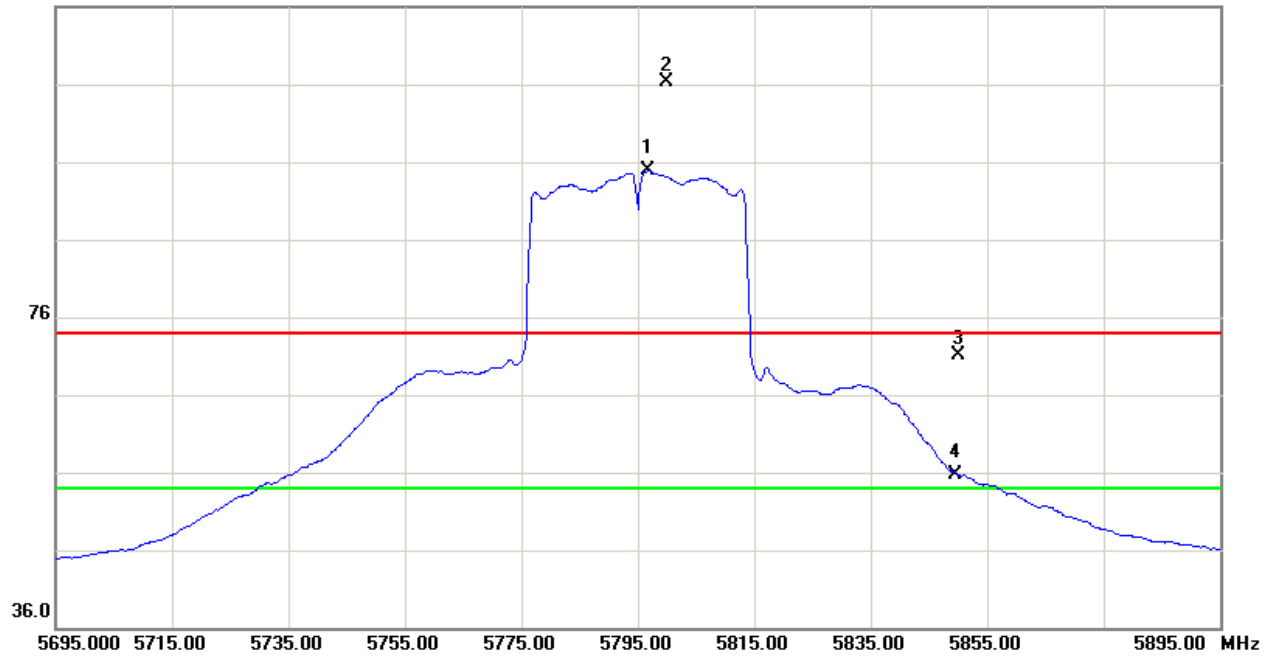

80.0 dBuV/m

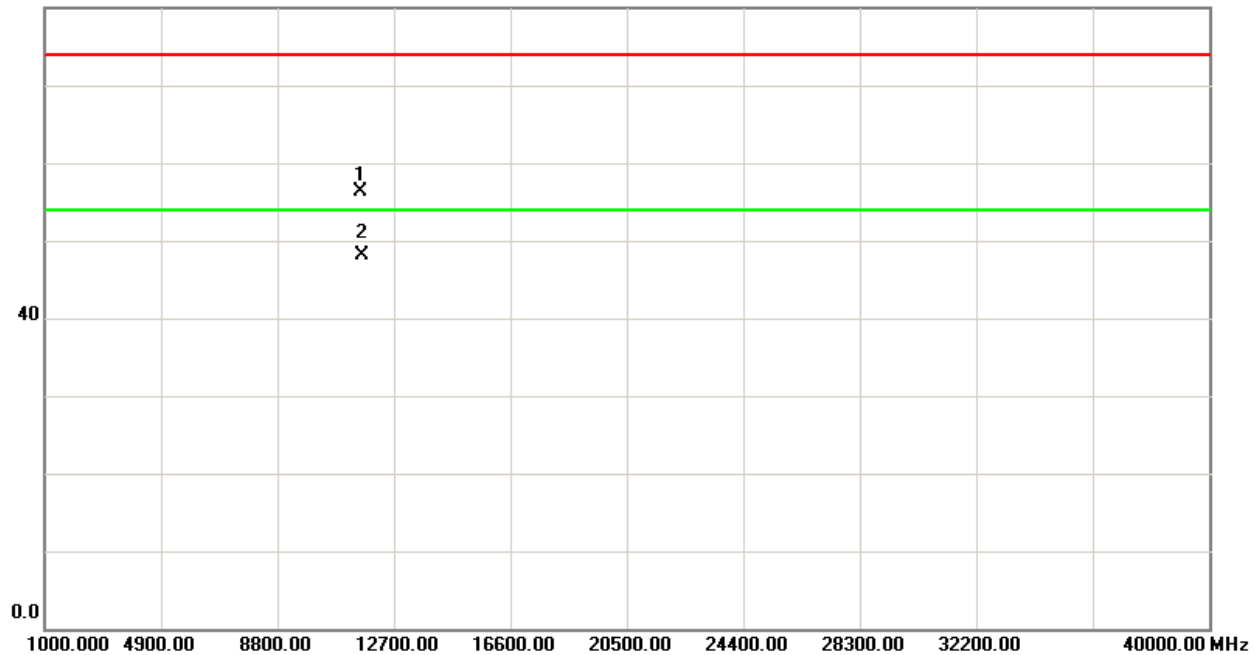







TX CH159 (Above 1000 MHz, Horizontal)

116.0 dBuV/m

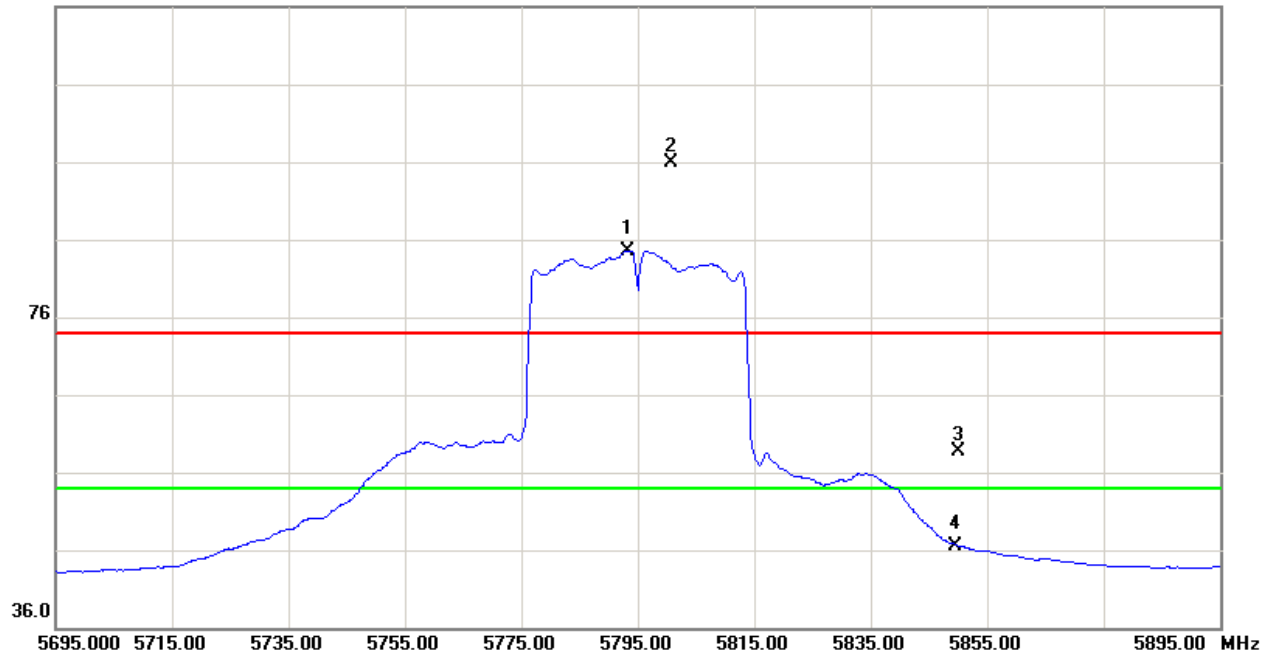

80.0 dBuV/m

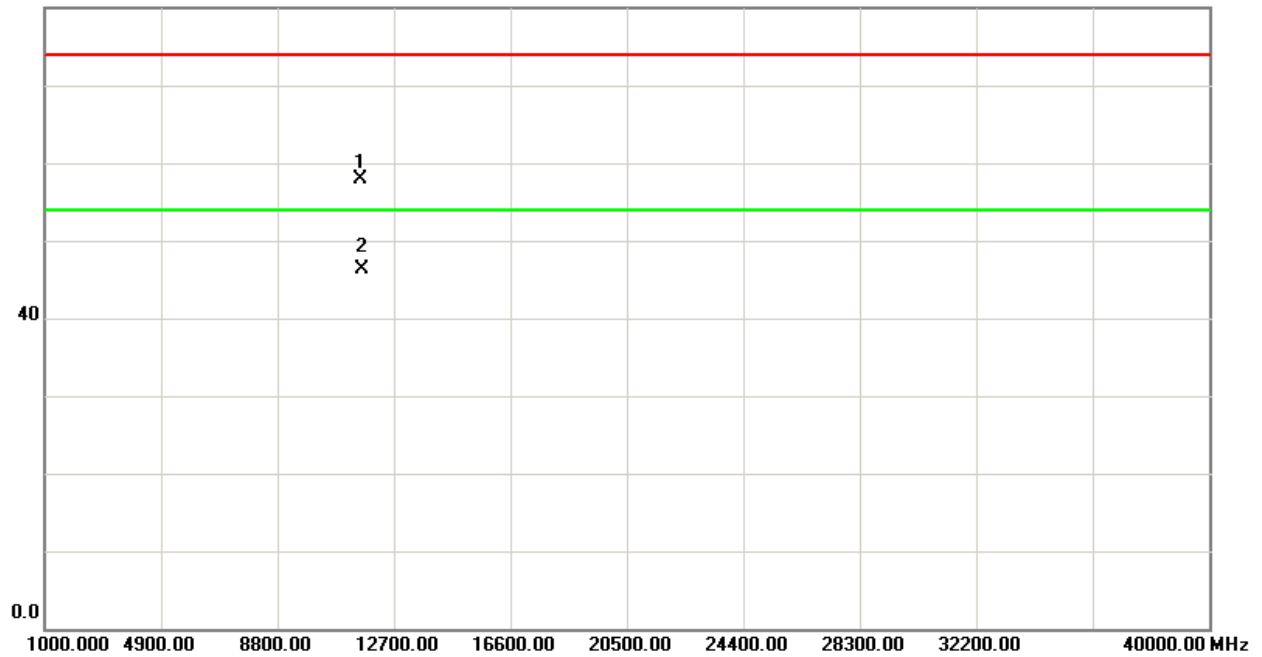



## 5. BANDWIDTH TEST

### 5.1 Applied procedures

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	5725 - 5825	PASS

#### 5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

#### 5.1.2 DEVIATION FROM STANDARD

No deviation.

#### 5.1.3 TEST SETUP



#### 5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.


#### 5.1.5 EUT TEST CONDITIONS



Temperature: 25°C  
Relative Humidity: 55%  
Test Voltage: AC 120V/60Hz



## 5.1.6 TEST RESULTS


Test Mode : TX A Mode\_CH149/157/165


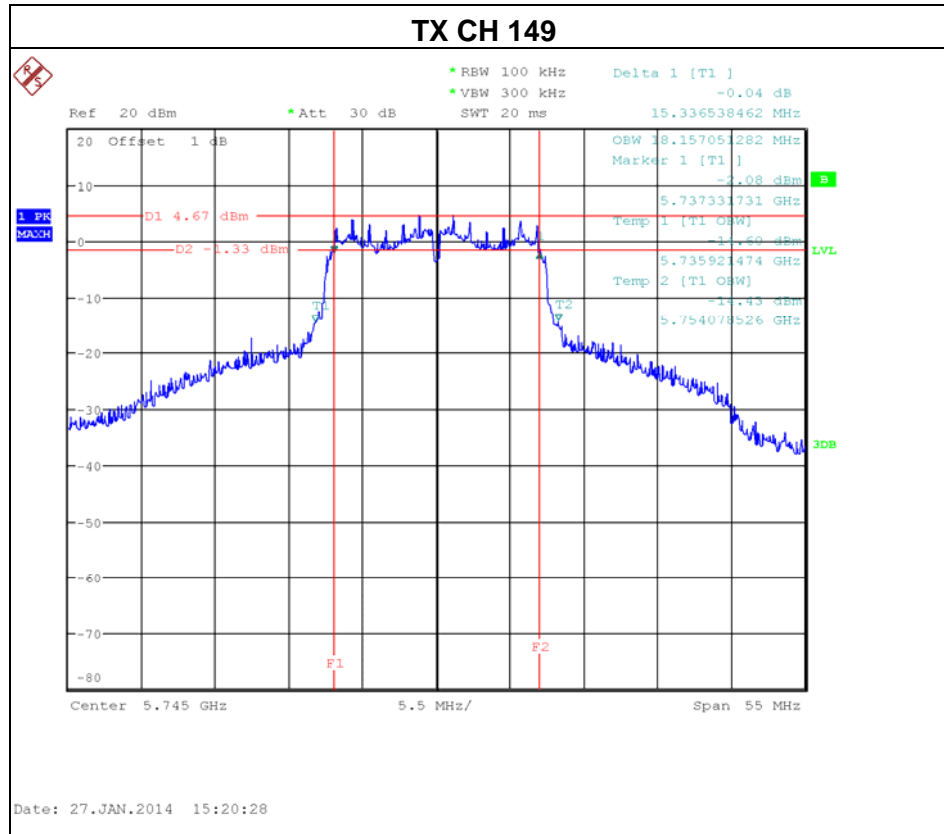


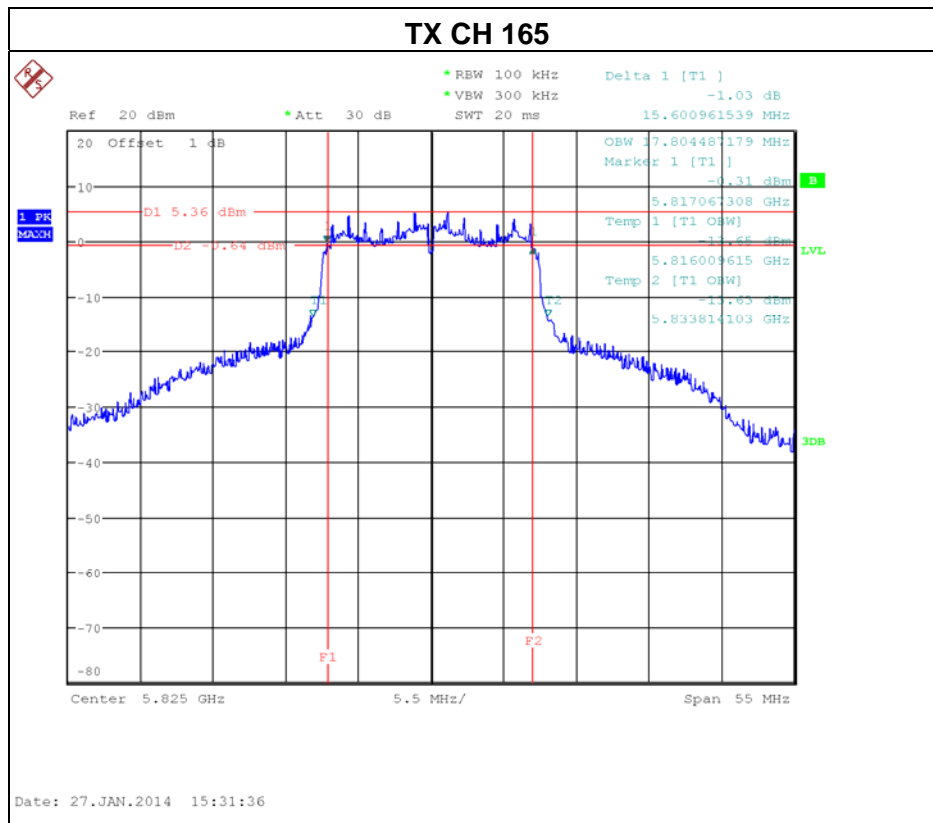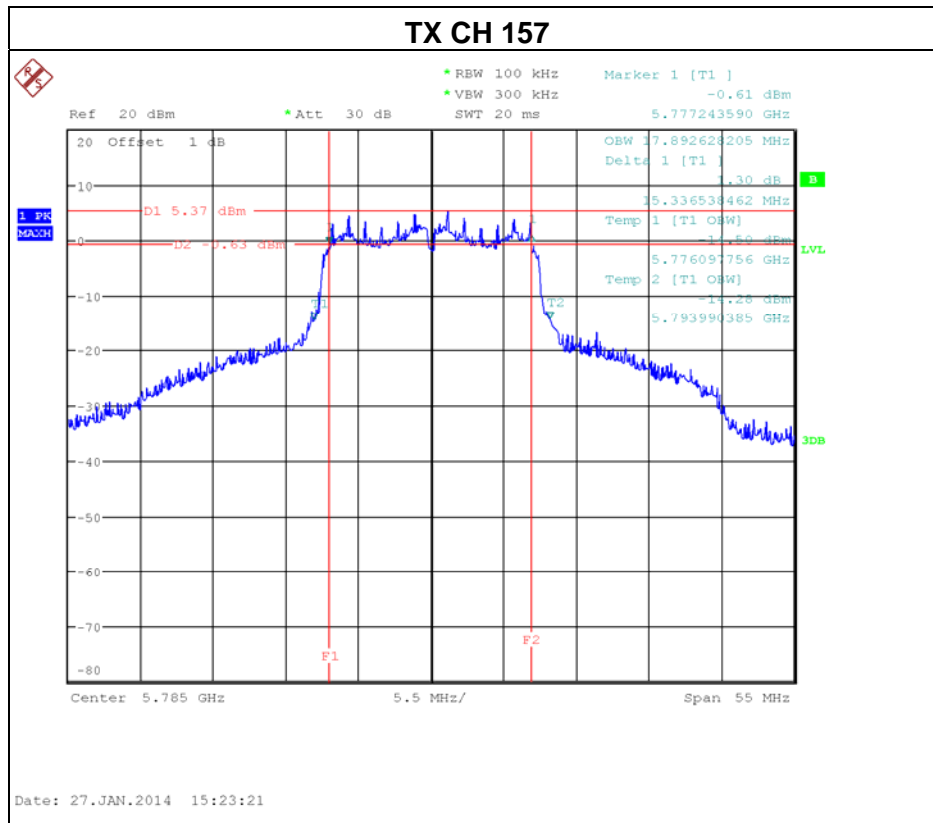



Test Mode : TX N-20MHz Mode\_CH149/157/165\_ANT 1


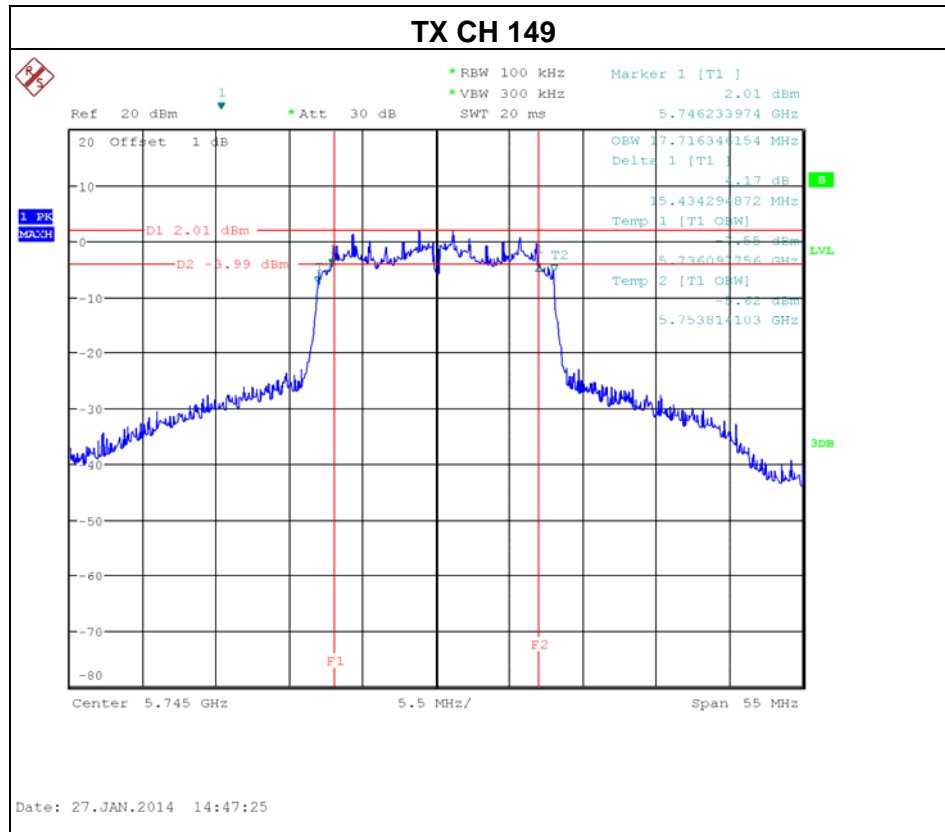


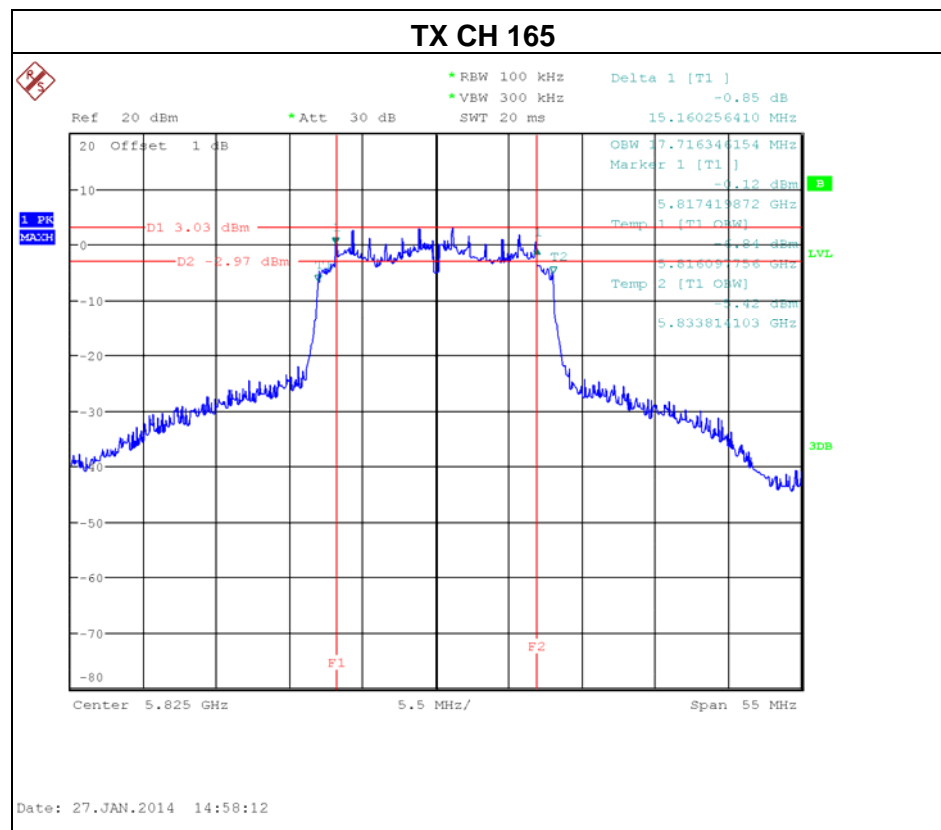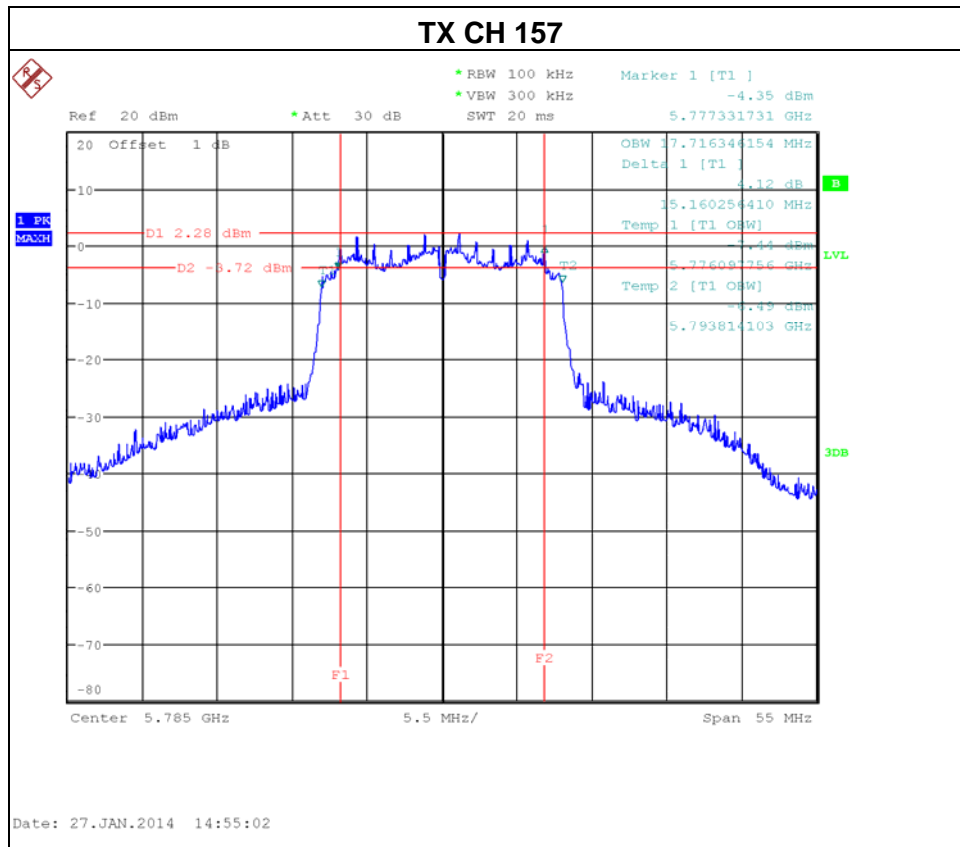



TX CH 149




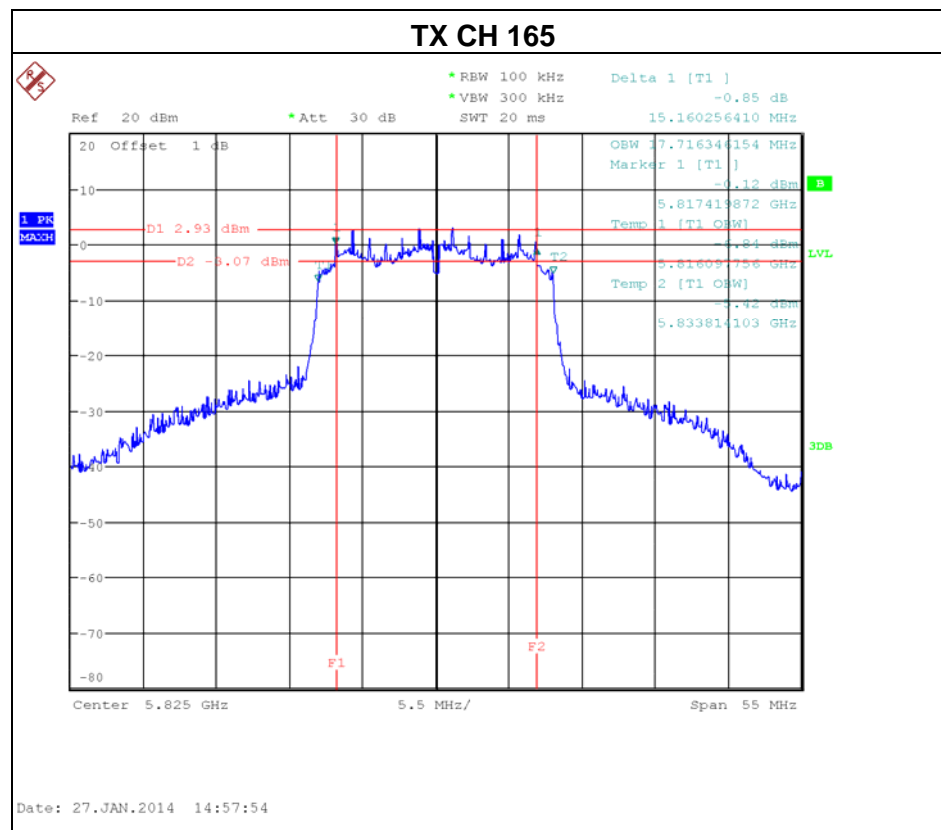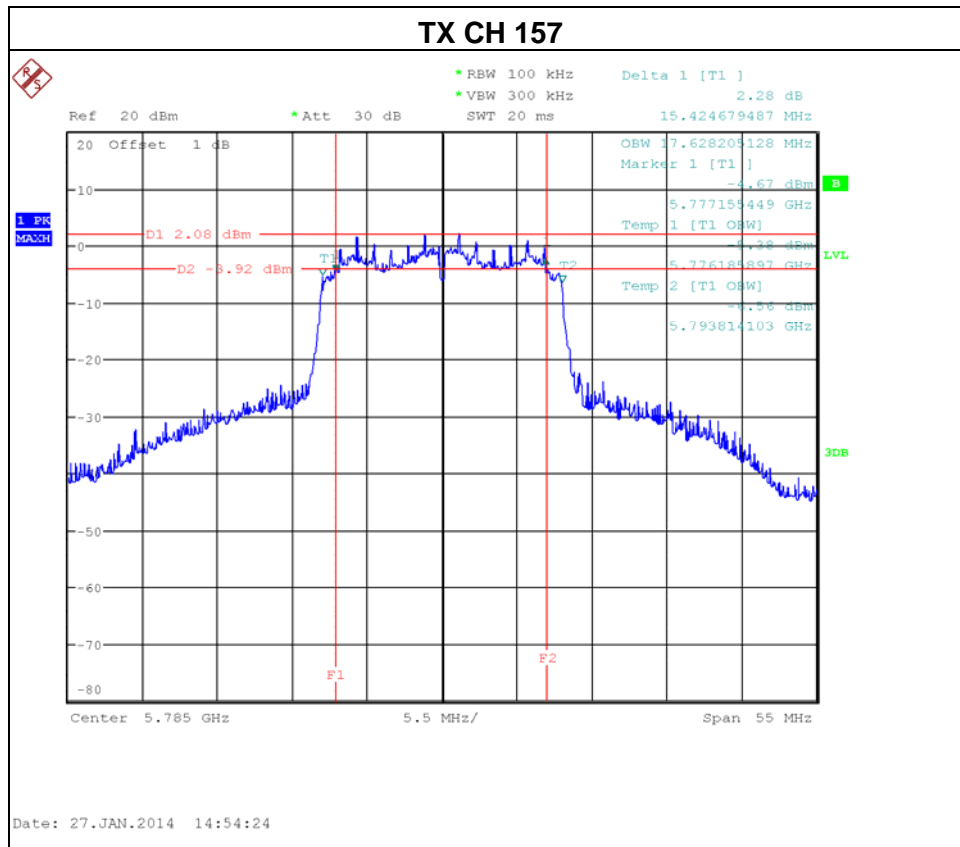






Test Mode : TX N-40MHz Mode\_CH151/159\_ANT 1

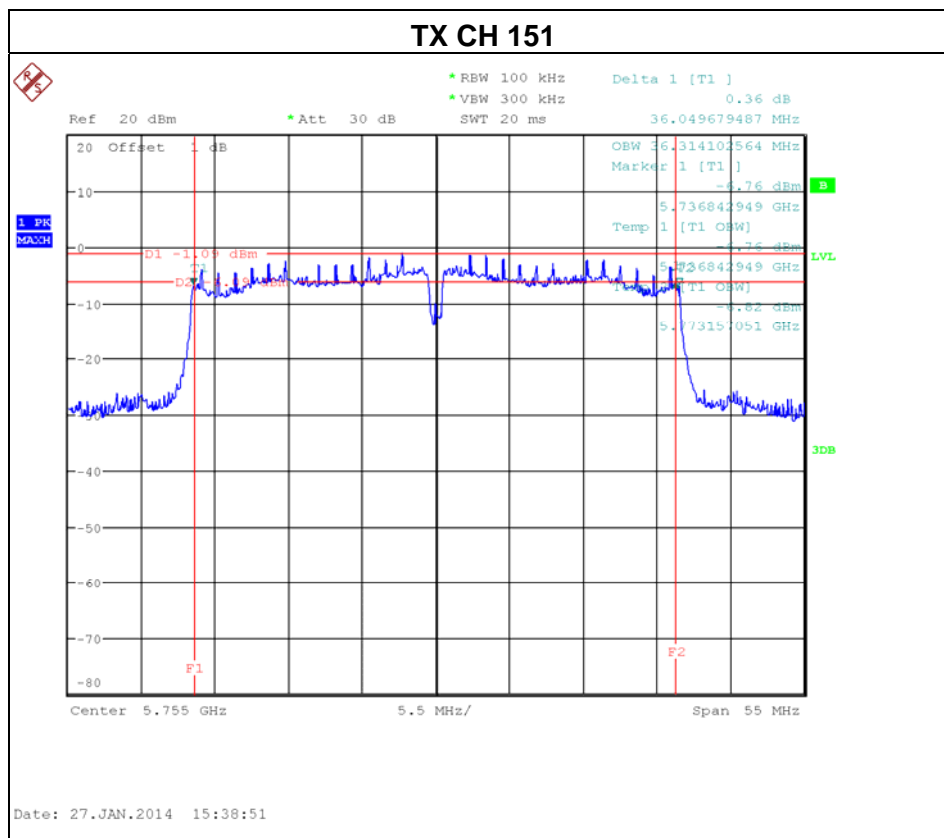


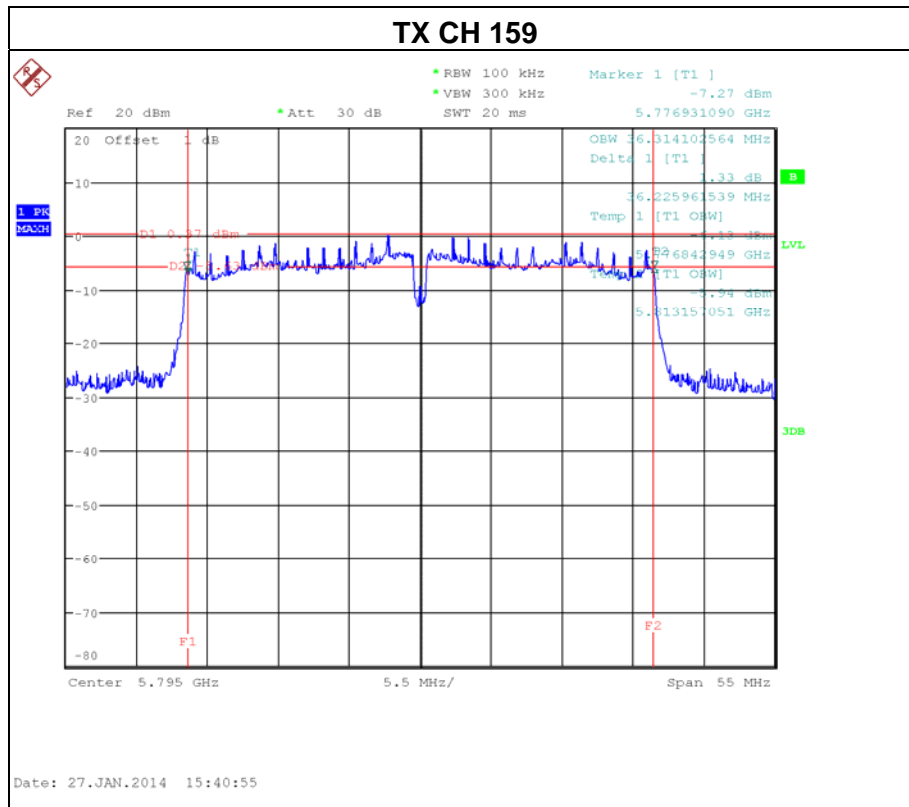



TX CH 151



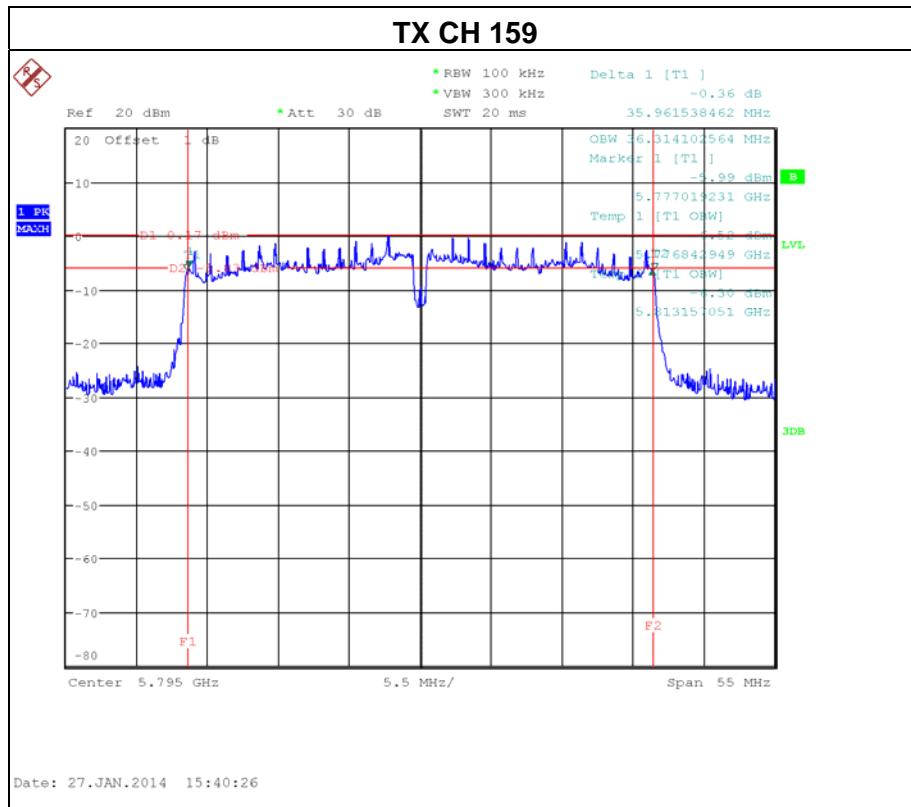



## 6. MAXIMUM OUTPUT POWER TEST

### 6.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	5725 - 5825	PASS


#### 6.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- The maximum peak conducted output power was performed in accordance with method 9.1.3 of FCC KDB 558074 D01 DTS Meas Guidance v03r01.

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP

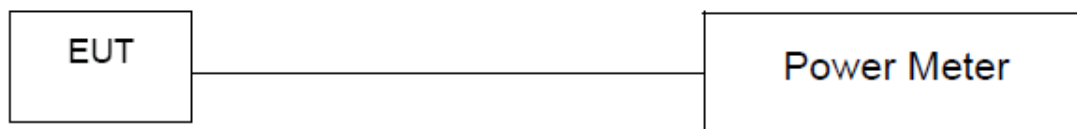

#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Transmit output power was measured while the host equipment supply voltage was varied from 85 % to 115 % of the nominal rated supply voltage. No change in transmit output power was observed.

#### 6.1.5 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V/60Hz



**6.1.6 TEST RESULTS**

Test Mode : TX A Mode				
Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	20.11	30	1
CH157	5785	20.20	30	1
CH165	5825	20.46	30	1



**Test Mode : TX N-20M Mode\_ANT 1**

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.73	30	1
CH157	5785	19.70	30	1
CH165	5825	19.63	30	1

**Test Mode : TX N-20M Mode\_ANT 2**

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	19.54	30	1
CH157	5785	19.65	30	1
CH165	5825	19.72	30	1

**Test Mode : TX N-20M Mode\_Total**

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH149	5745	22.65	30	1
CH157	5785	22.69	30	1
CH165	5825	22.69	30	1



**Test Mode : TX N-40M Mode\_ANT 1**

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	19.46	30	1
CH159	5795	19.53	30	1

**Test Mode : TX N-40M Mode\_ANT 2**

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	19.71	30	1
CH159	5795	19.86	30	1

**Test Mode : TX N-40M Mode\_Total**

Test Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH151	5755	22.60	30	1
CH159	5795	22.71	30	1





## **7. ANTENNA CONDUCTED SPURIOUS EMISSION**

### **7.1 Applied procedures / limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

#### **7.1.1 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

#### **7.1.2 DEVIATION FROM STANDARD**

No deviation.

#### **7.1.3 TEST SETUP**



#### **7.1.4 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.

#### **7.1.5 EUT TEST CONDITIONS**

Temperature: 25°C  
Relative Humidity: 55%  
Test Voltage: AC 120V/60Hz




**7.1.6 TEST RESULTS**

Test Mode :	TX A Mode
-------------	-----------




### TX A Mode CH149


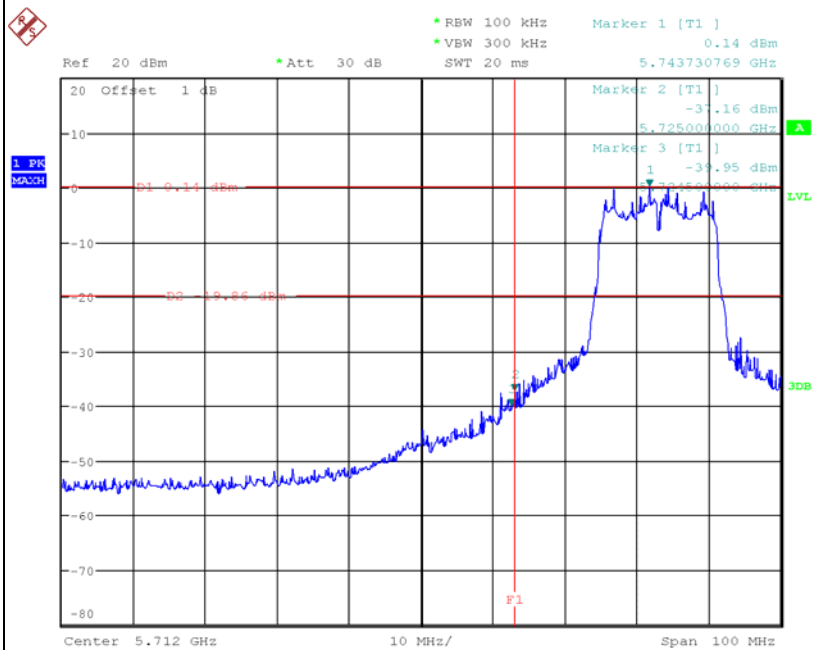


Date: 27.JAN.2014 15:12:42

### TX A Mode CH165

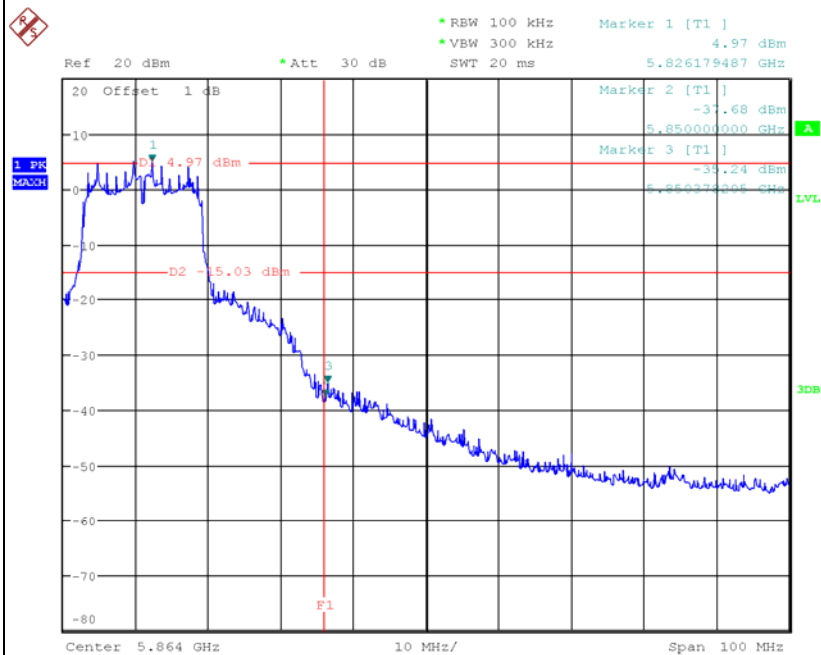


Date: 27.JAN.2014 15:29:31

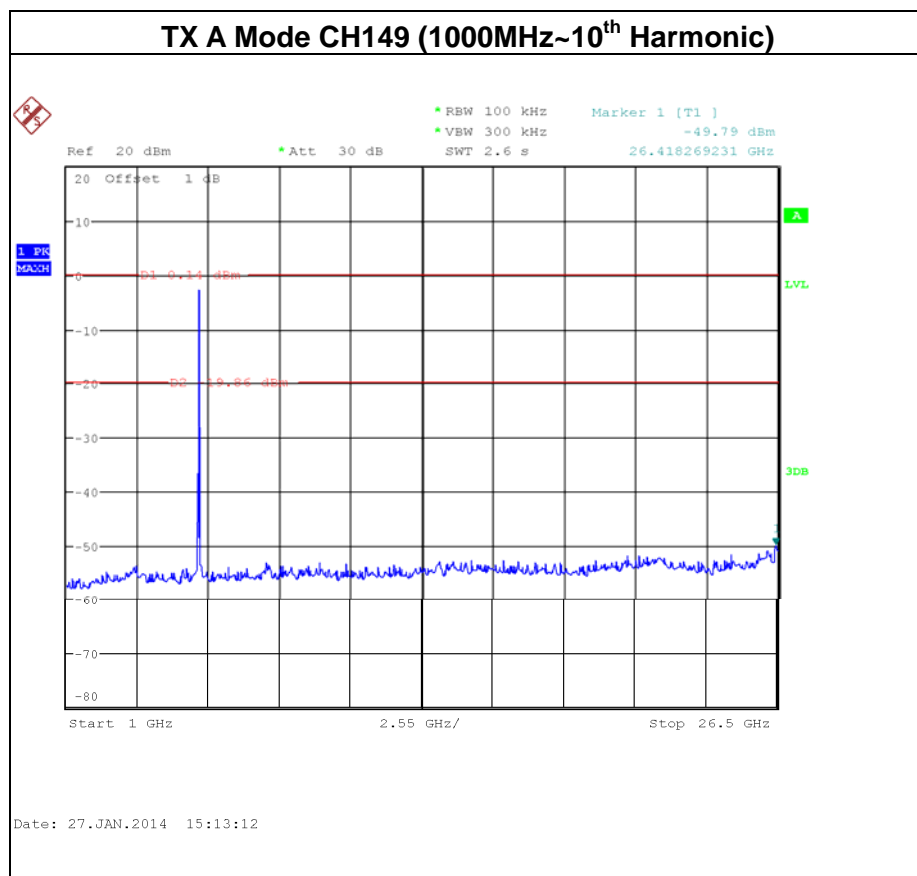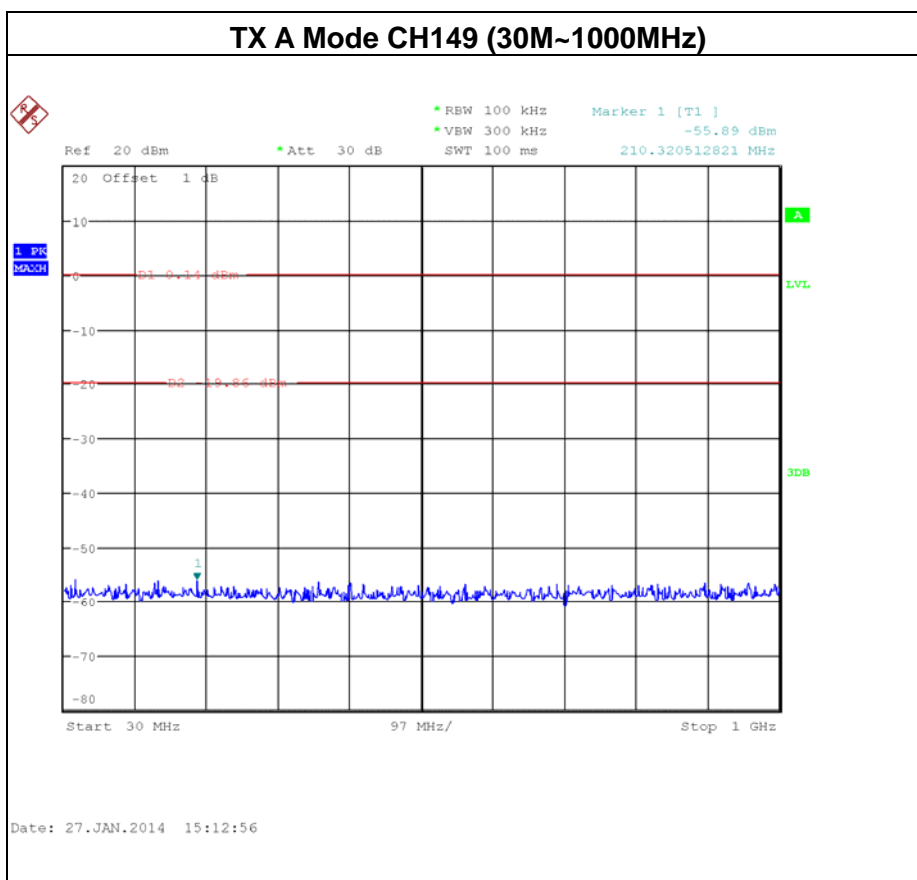




### TX A Mode CH157 (30M~1000MHz)

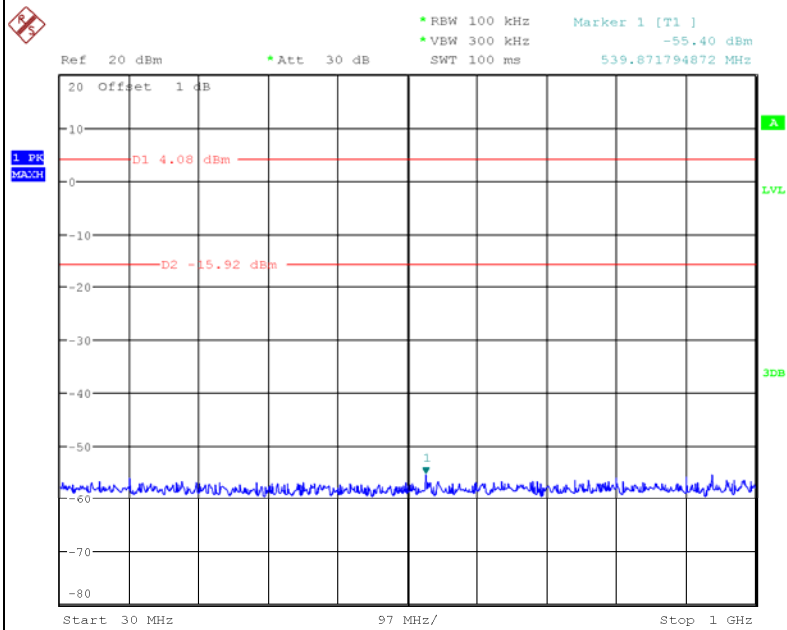

Date: 27.JAN.2014 15:25:13


### TX A Mode CH157 (1000MHz~10<sup>th</sup> Harmonic)

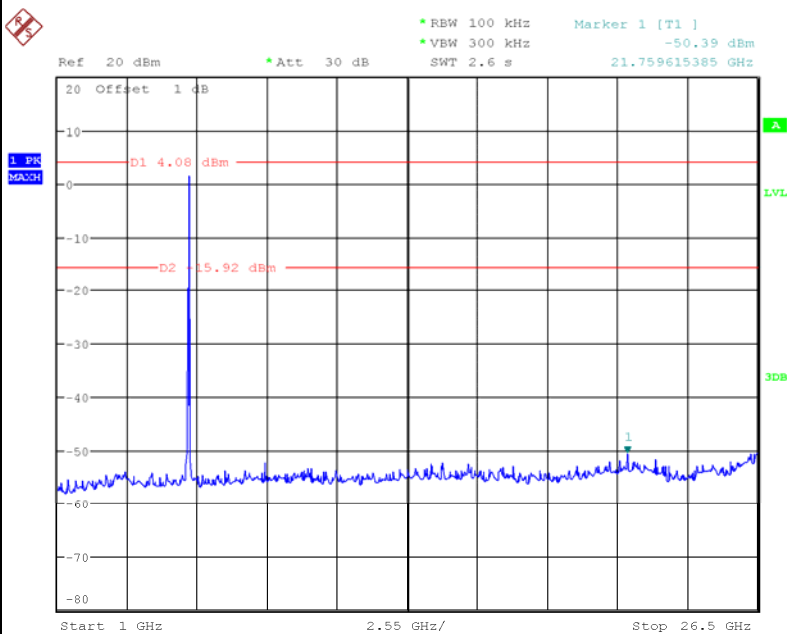

Date: 27.JAN.2014 15:25:32




### TX A Mode CH165 (30M~1000MHz)

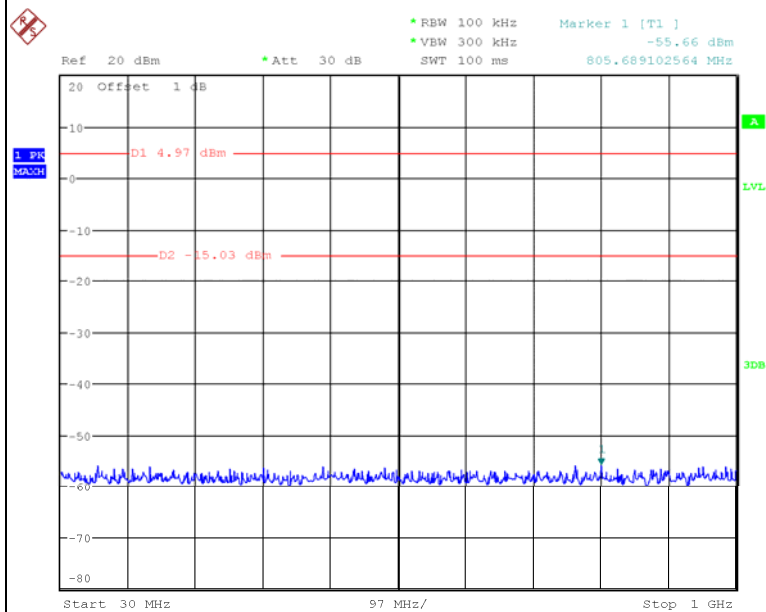

Date: 27.JAN.2014 15:29:42

### TX A Mode CH165 (1000MHz~10<sup>th</sup> Harmonic)

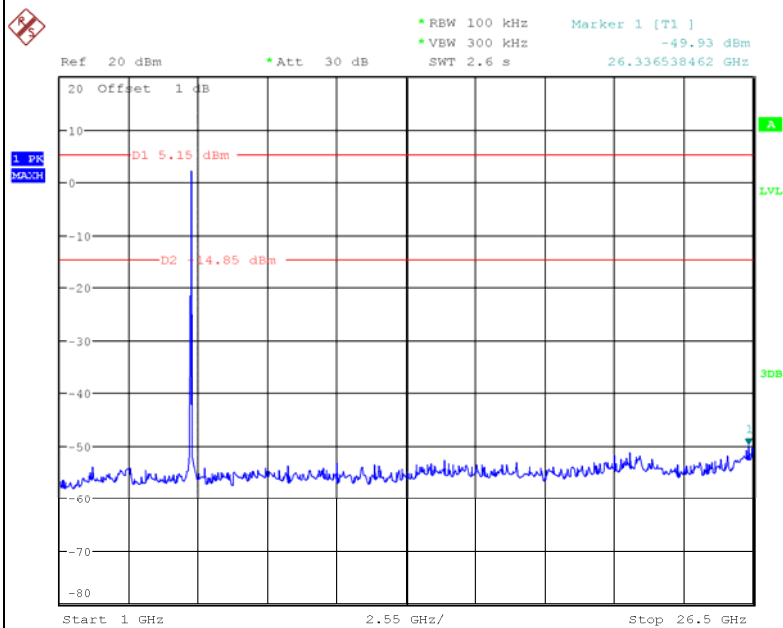


Date: 27.JAN.2014 15:28:47




<b>Test Mode :</b>	<b>TX N-20M Mode_ANT 1</b>
--------------------	----------------------------





### TX HT20 mode CH149


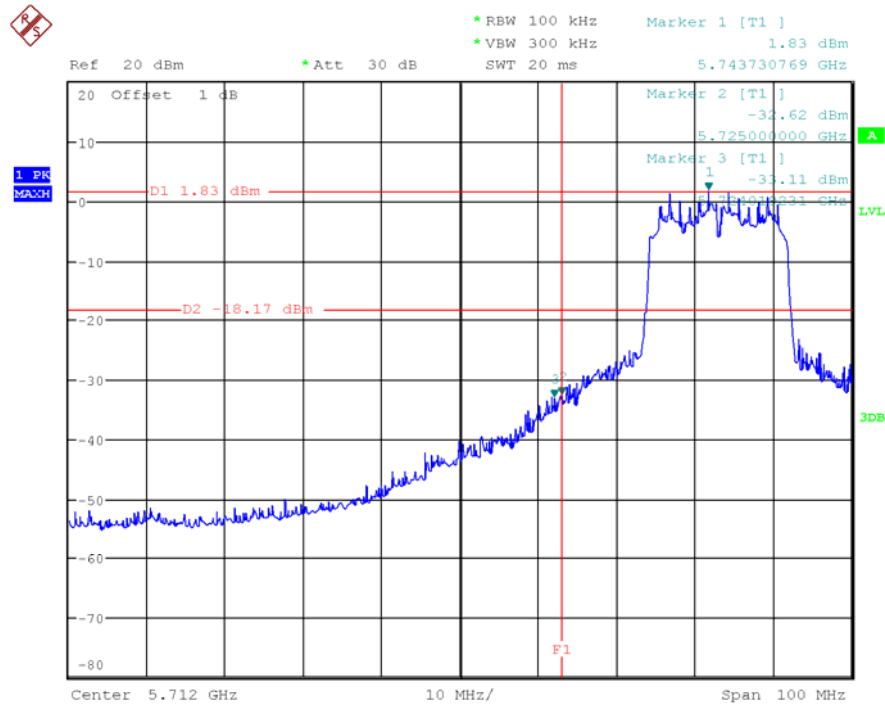




### TX HT20 mode CH165

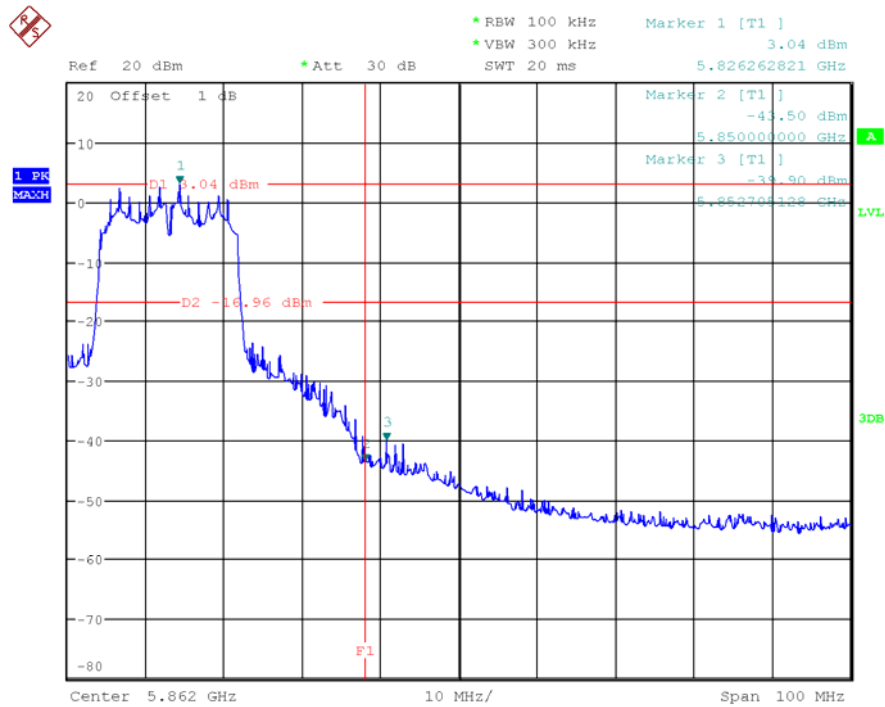



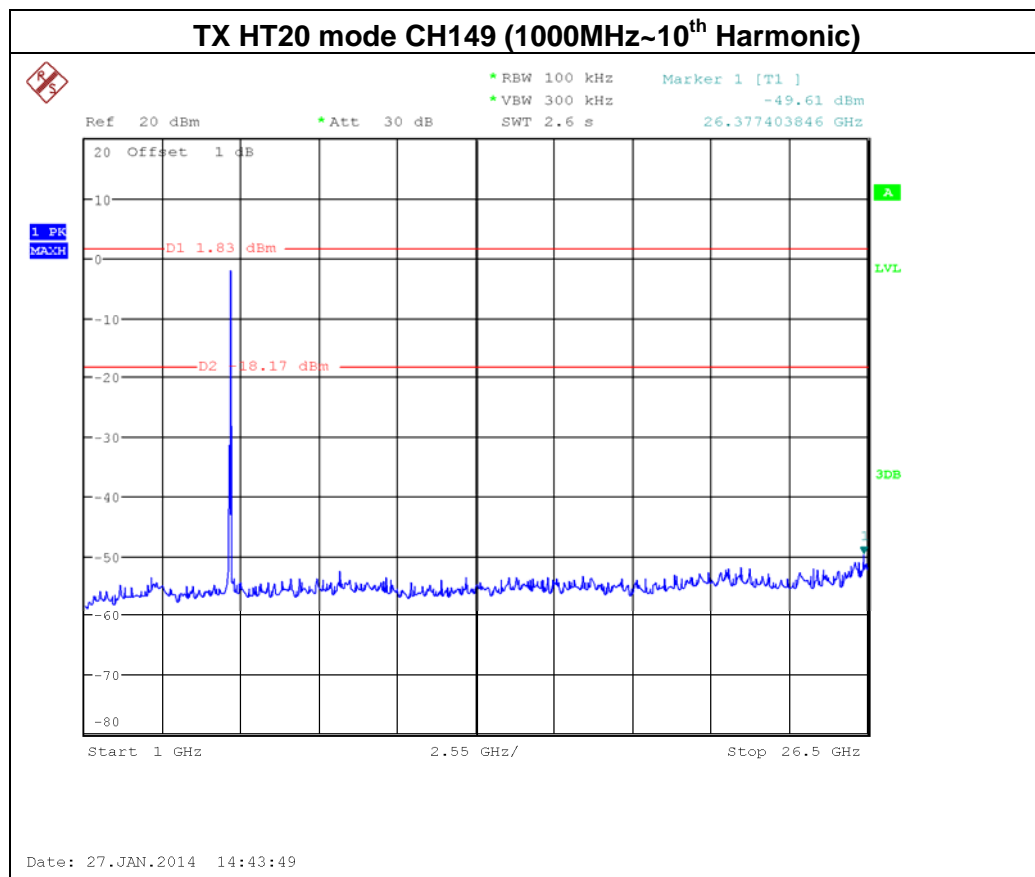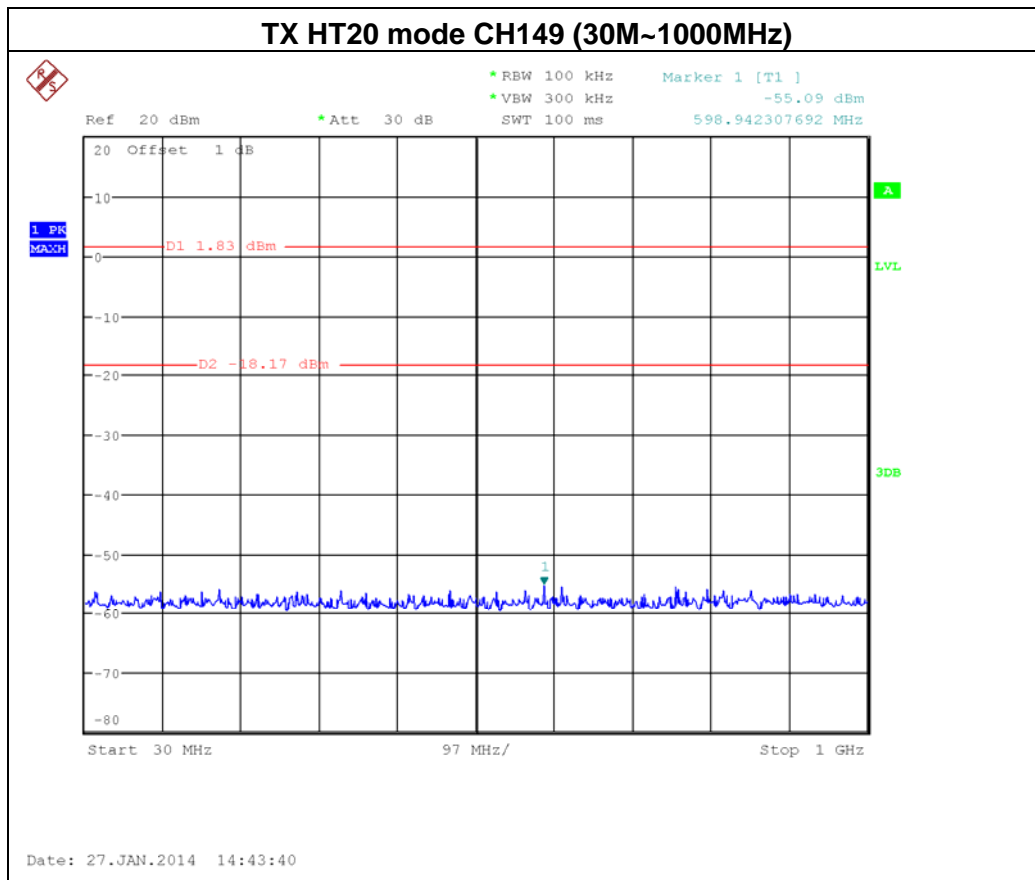

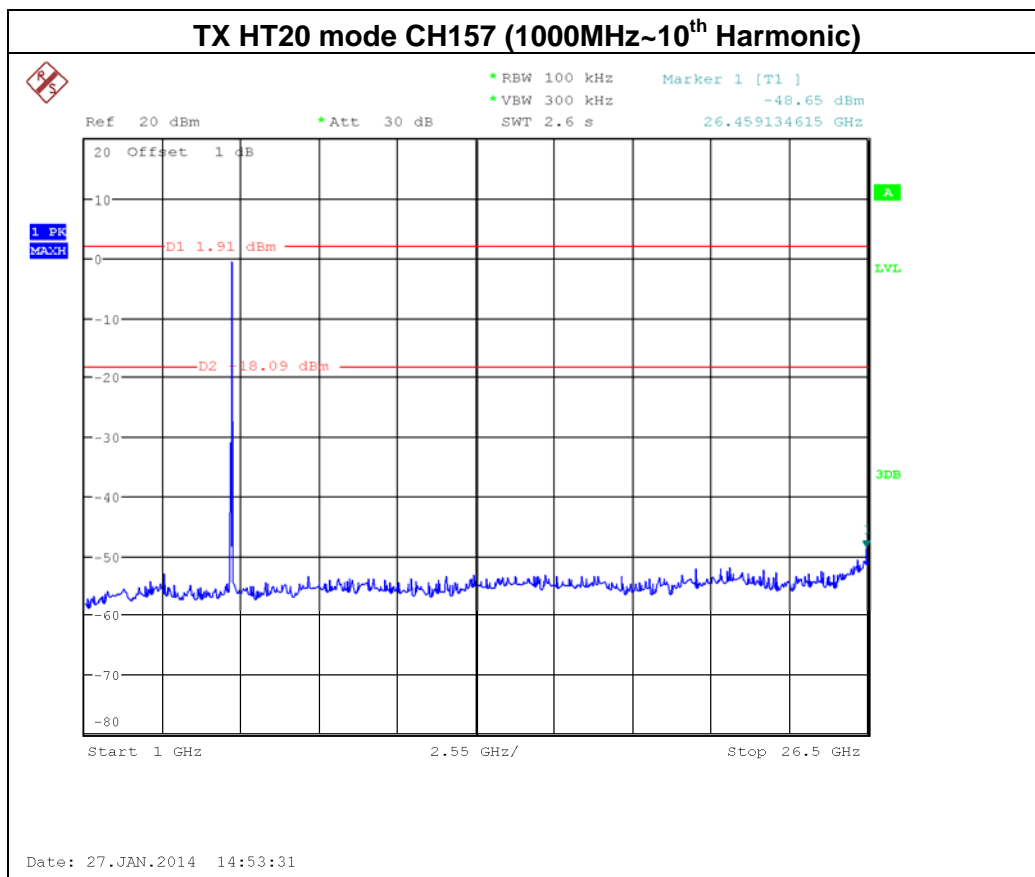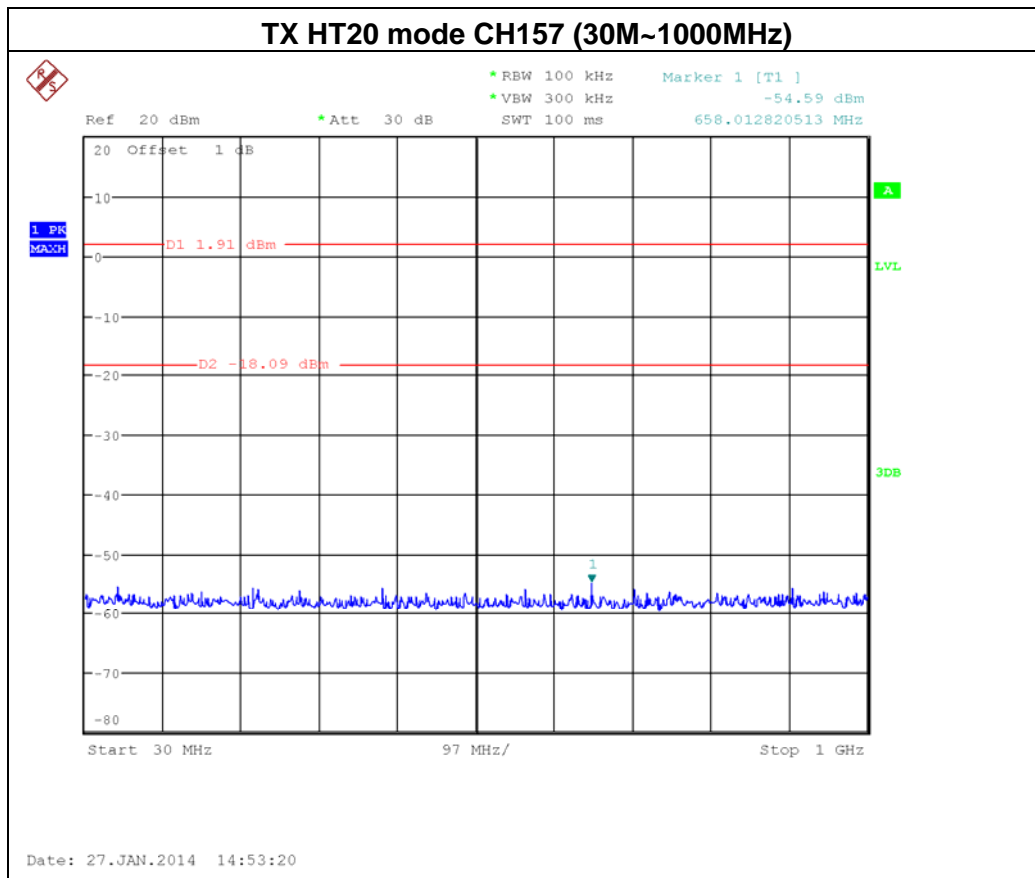

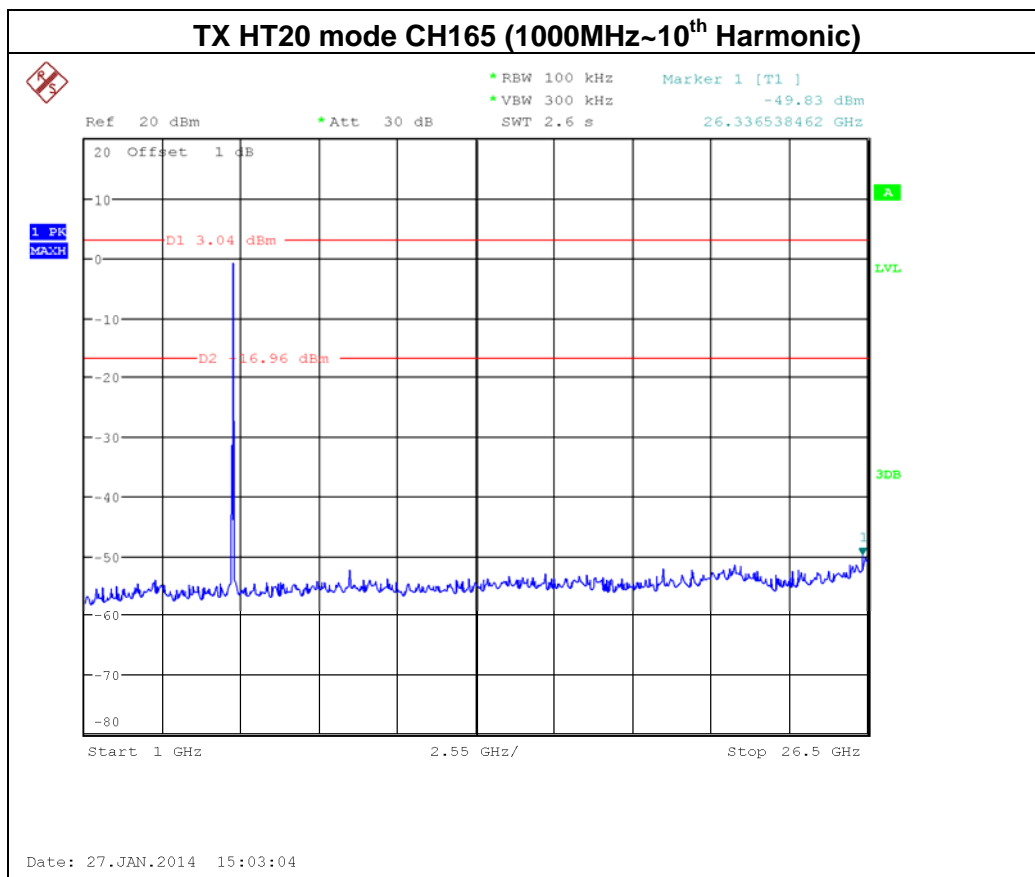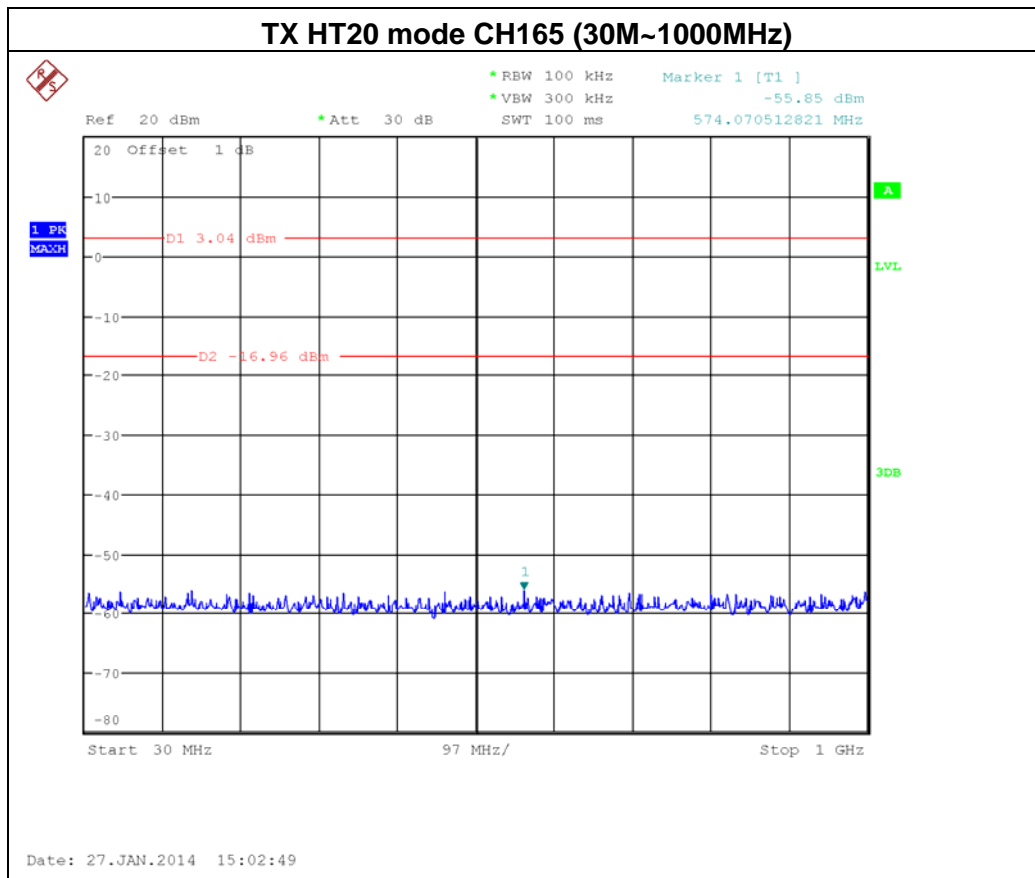




<b>Test Mode :</b>	<b>TX N-20M Mode_ANT 2</b>
--------------------	----------------------------




### TX HT20 mode CH149


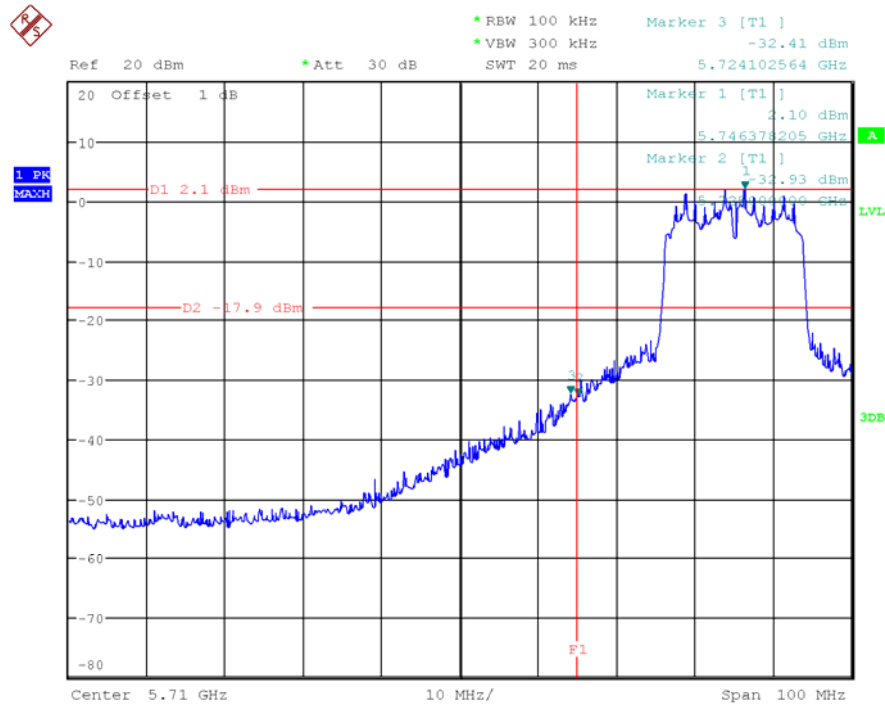




Date: 27.JAN.2014 14:41:44



### TX HT20 mode CH165

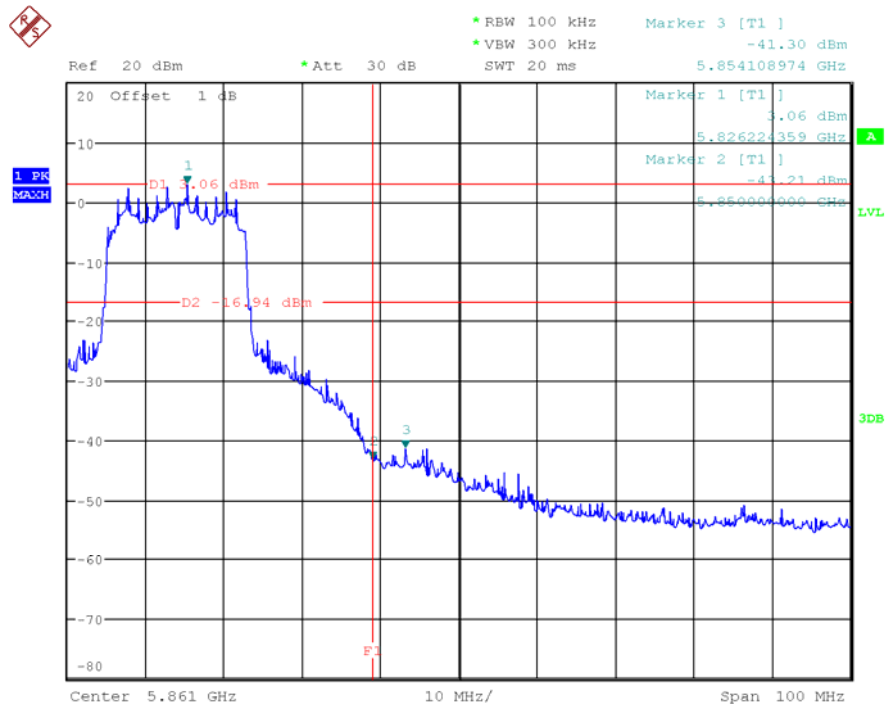

Date: 27.JAN.2014 15:00:10

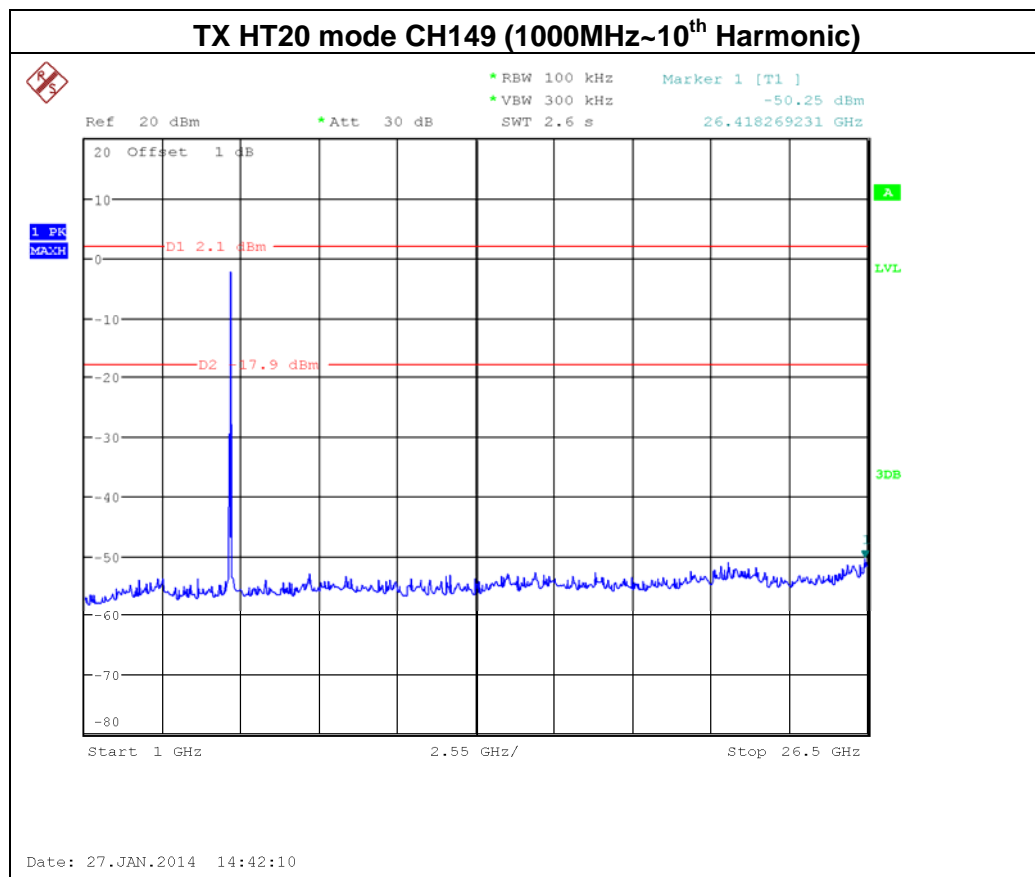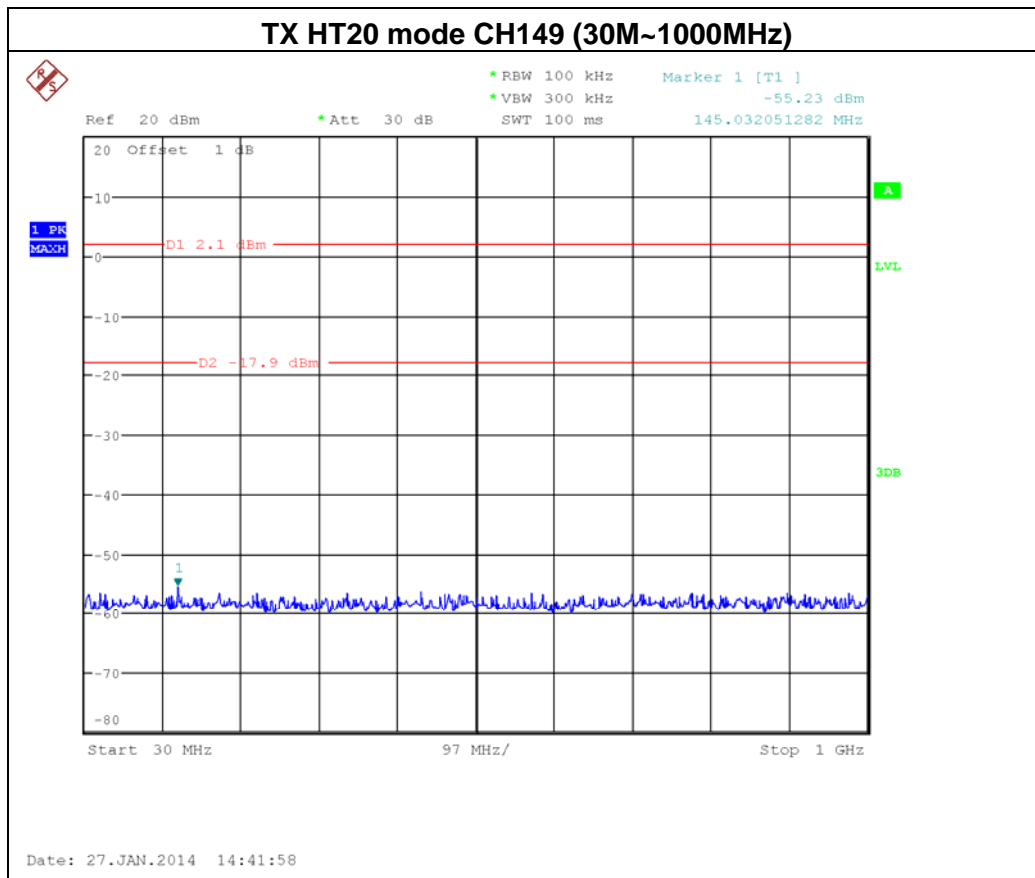

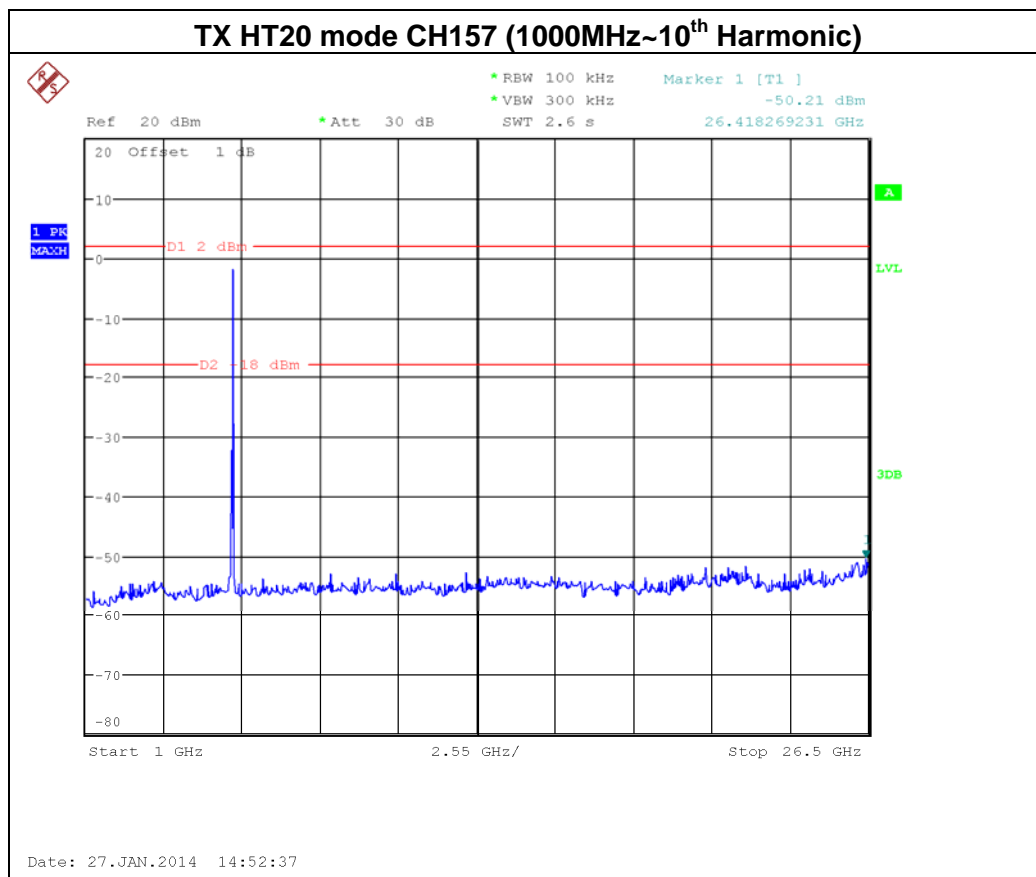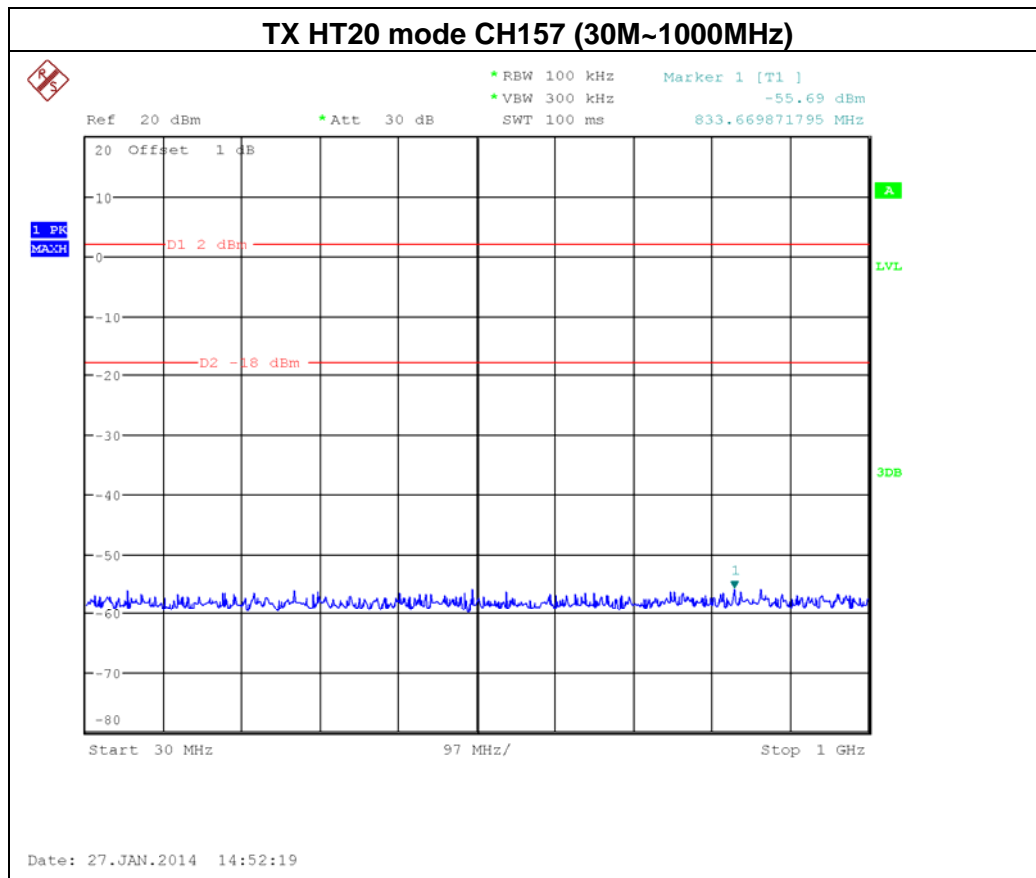

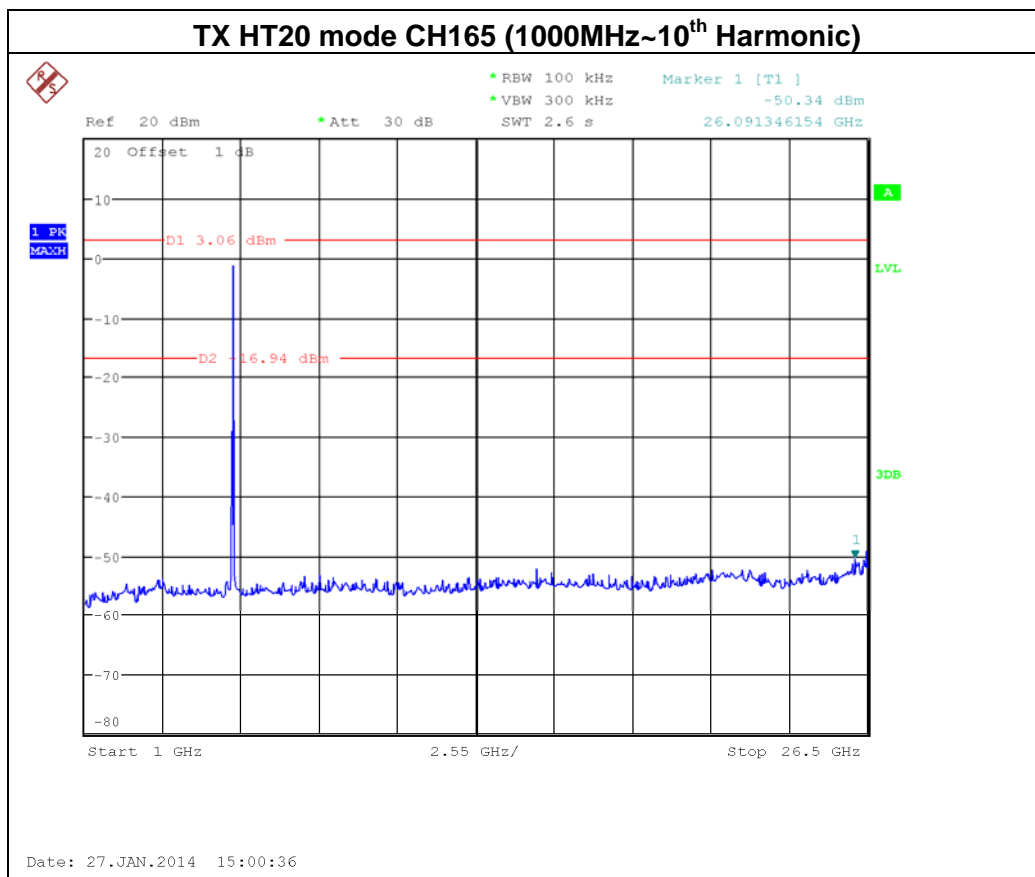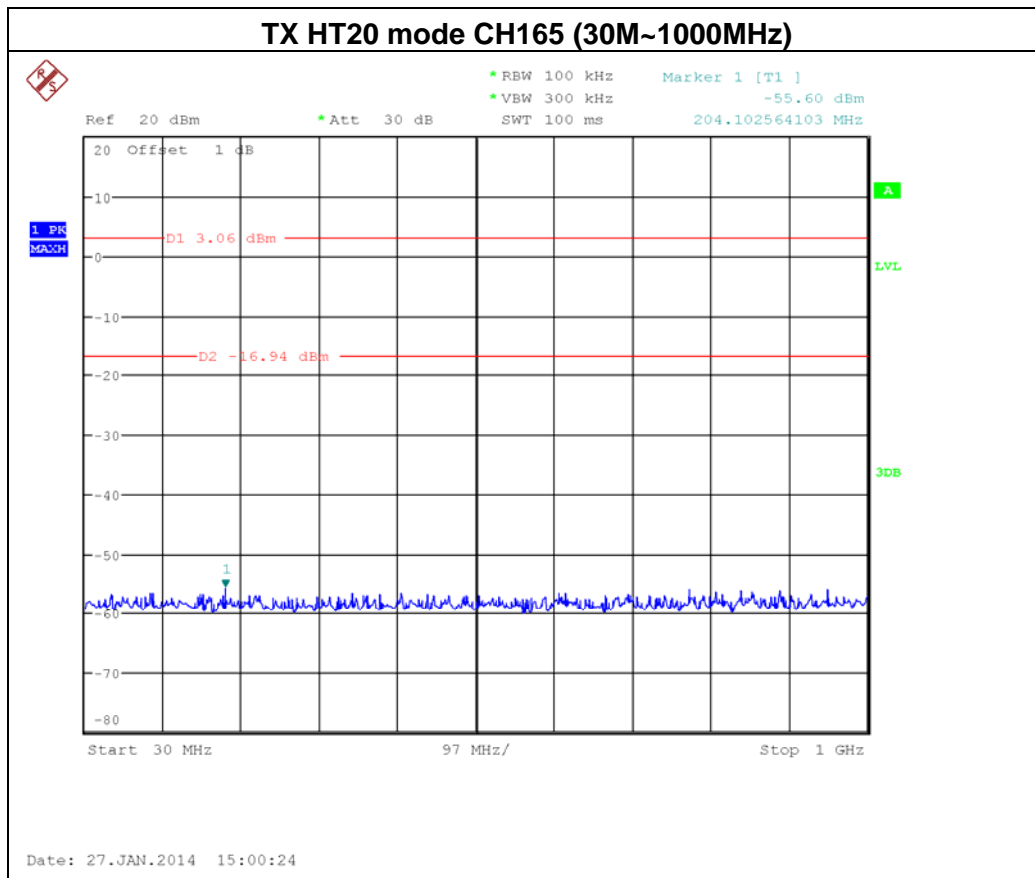






<b>Test Mode :</b>	<b>TX N-40M Mode_ANT 1</b>
--------------------	----------------------------




### TX HT40 mode CH151


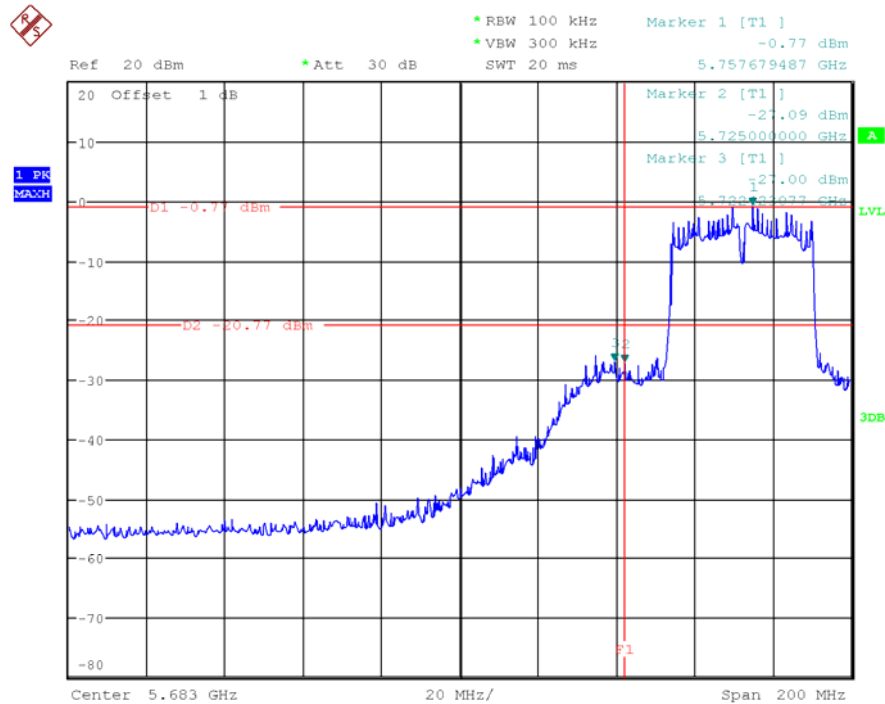




Date: 27.JAN.2014 14:21:51

### TX HT40 mode CH159

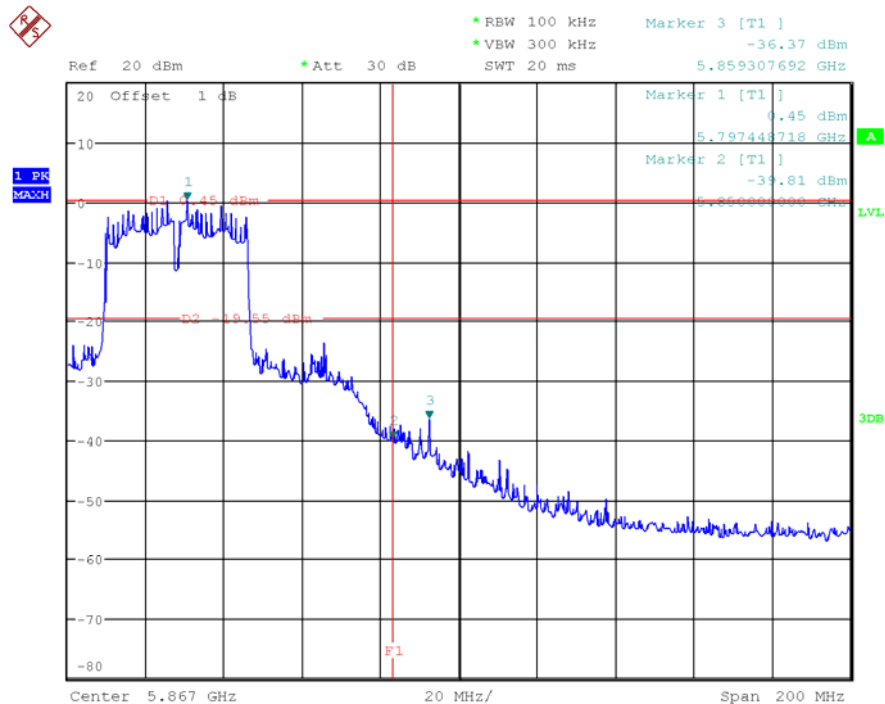

Date: 27.JAN.2014 14:35:03

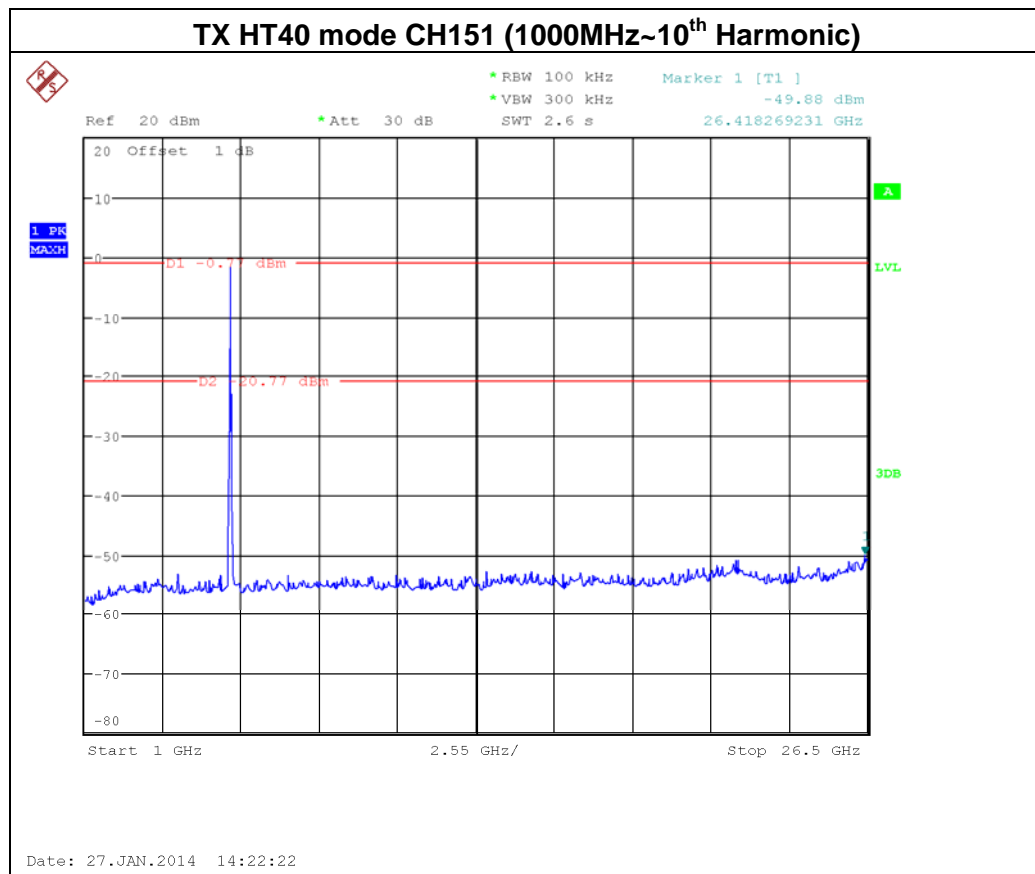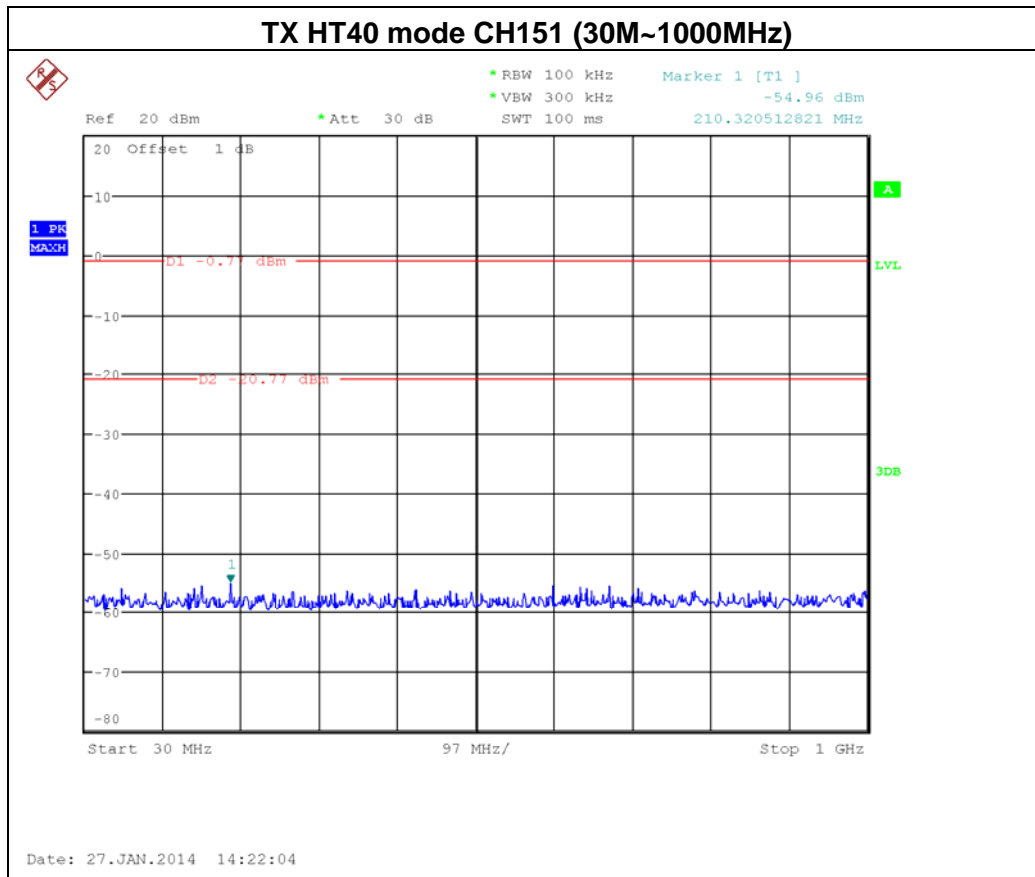

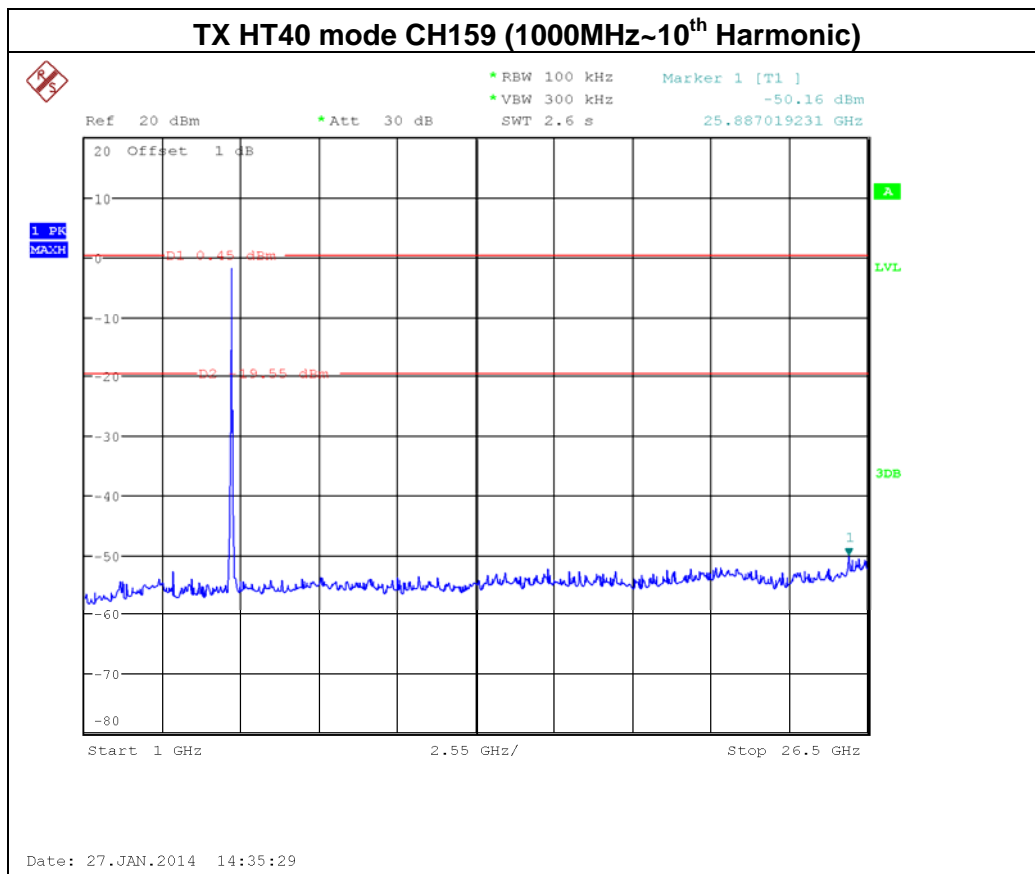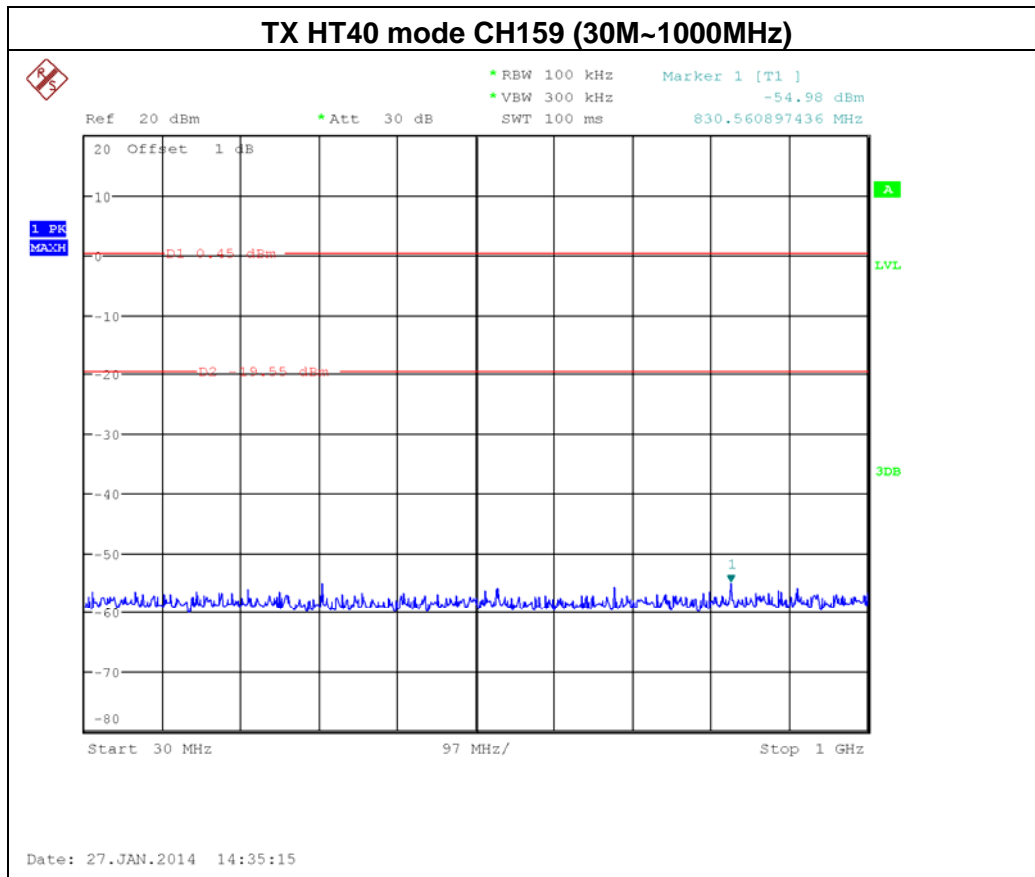




<b>Test Mode :</b>	<b>TX N-40M Mode_ANT 2</b>
--------------------	----------------------------




### TX HT40 mode CH151


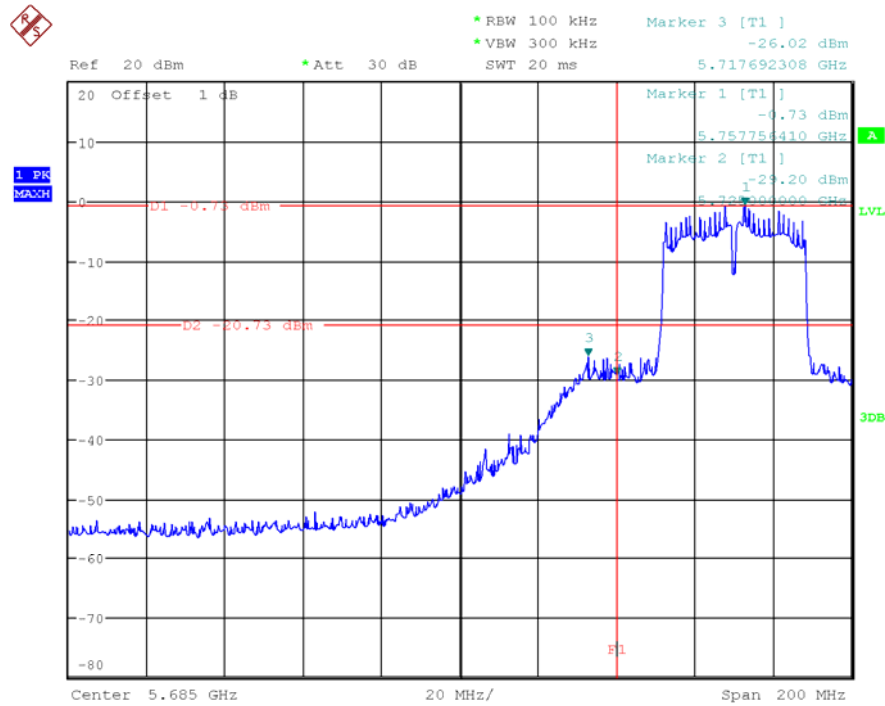




Date: 27.JAN.2014 14:20:13

### TX HT40 mode CH159

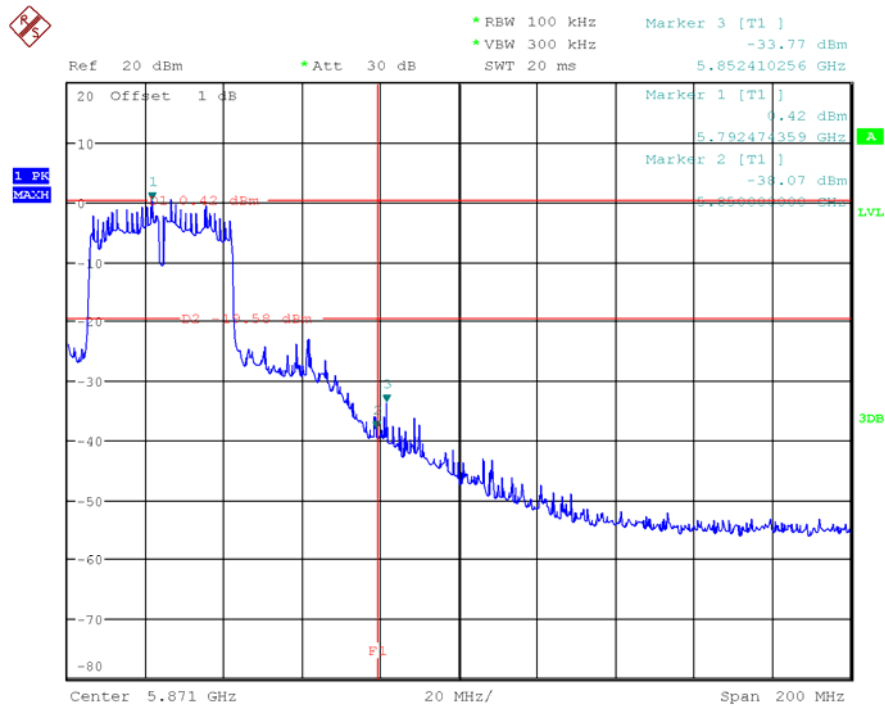

Date: 27.JAN.2014 14:33:39

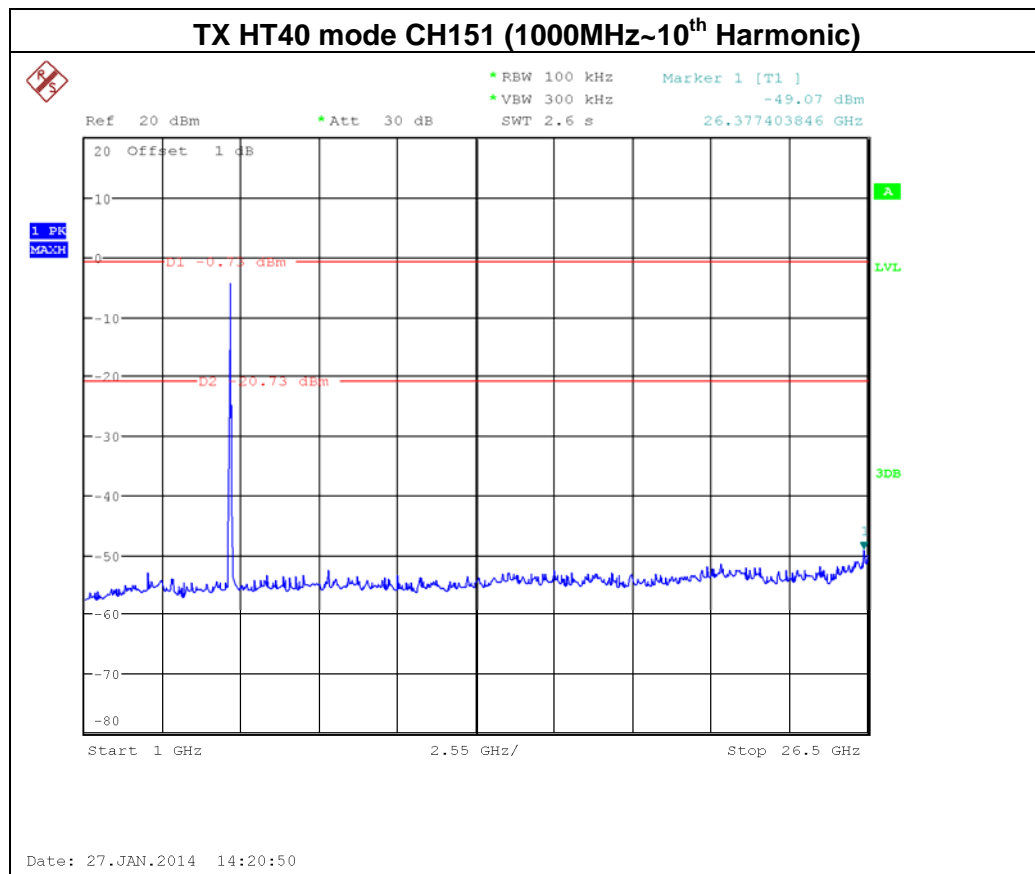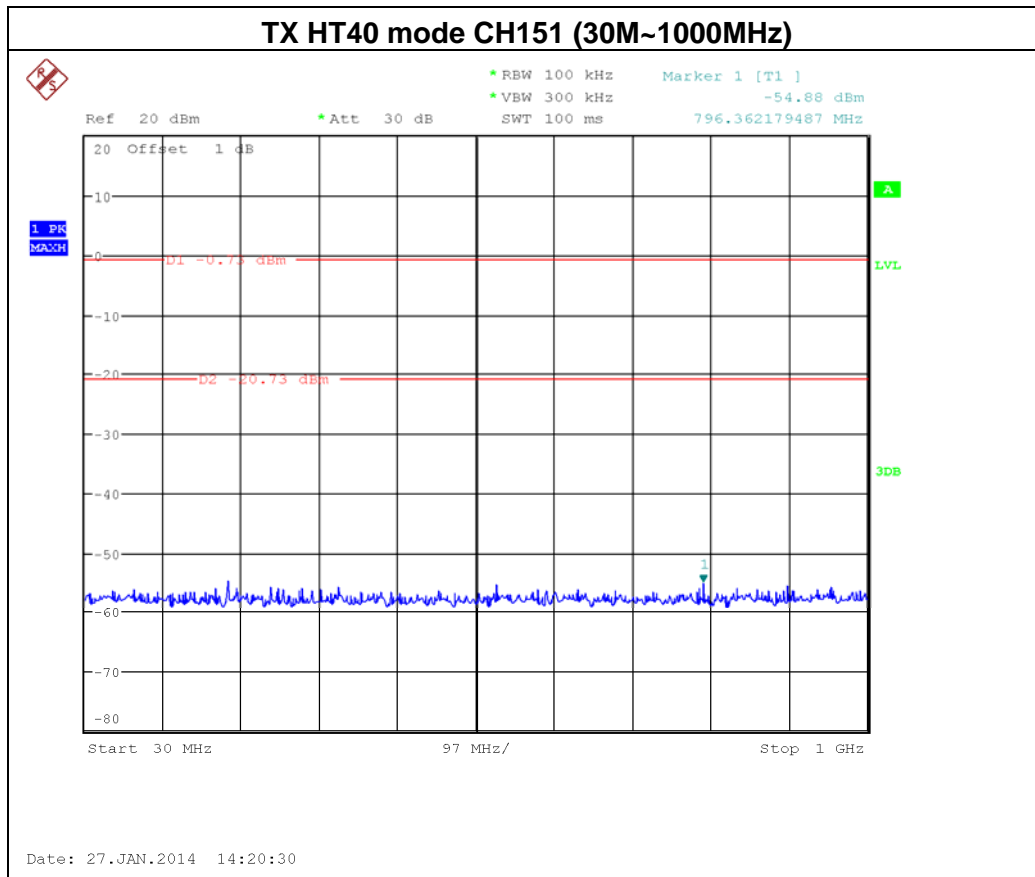

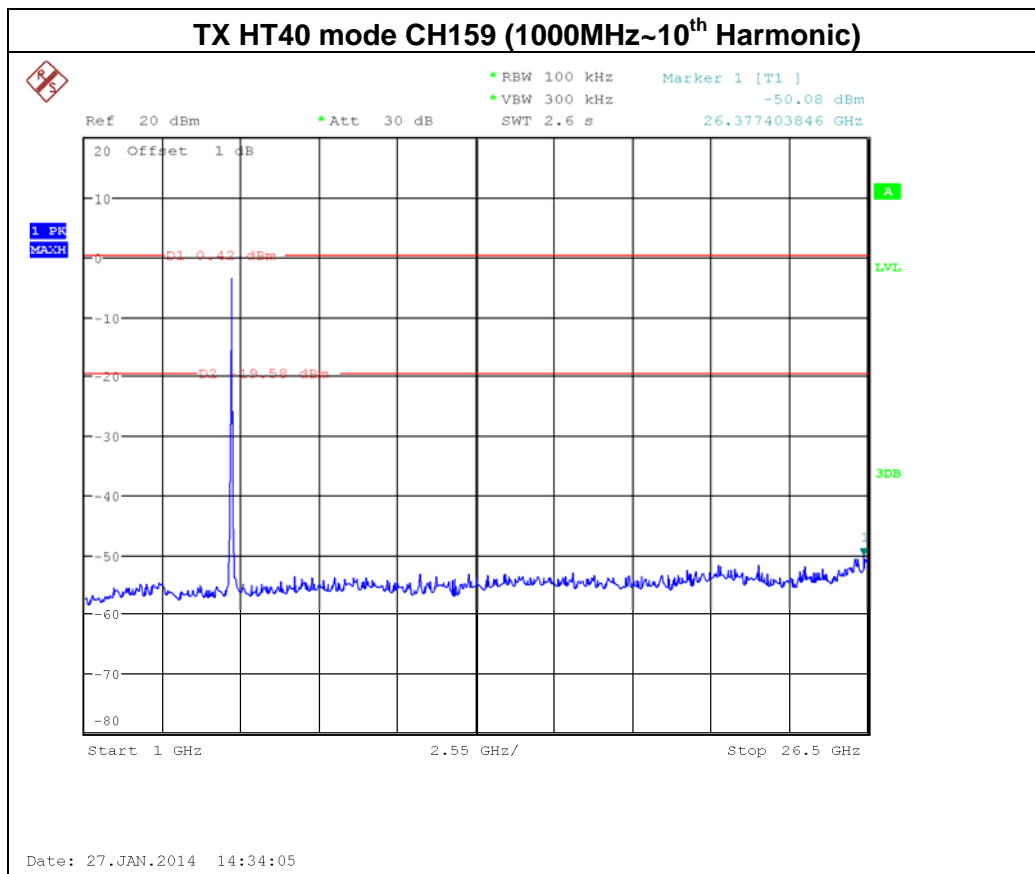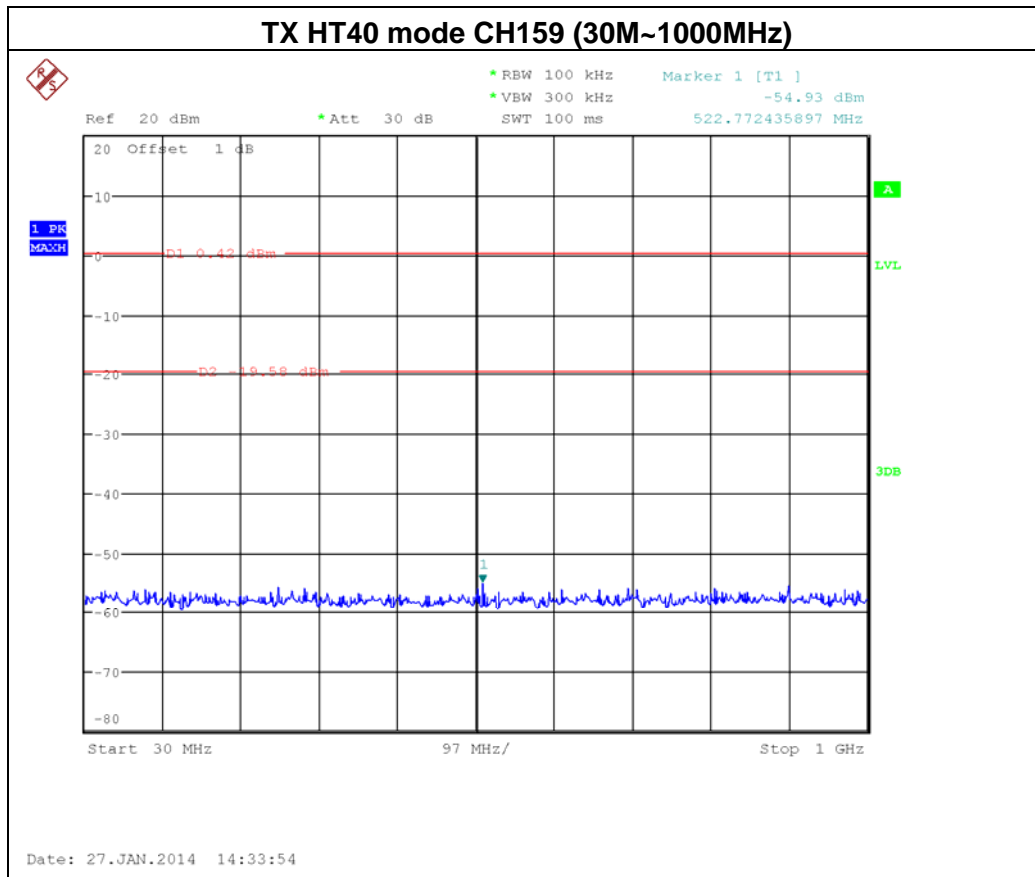





## 8. POWER SPECTRAL DENSITY TEST

### 8.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	5745 - 5825	PASS


#### 8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

#### 8.1.2 DEVIATION FROM STANDARD

No deviation.

#### 8.1.3 TEST SETUP

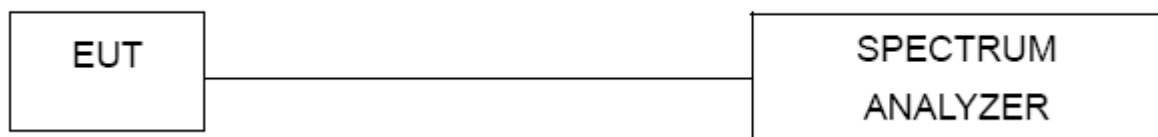

#### 8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.


#### 8.1.5 EUT TEST CONDITIONS



Temperature: 25°C  
Relative Humidity: 55%  
Test Voltage: AC 120V/60Hz



## 8.1.6 TEST RESULTS


Test Mode :TX A Mode\_CH149/157/165


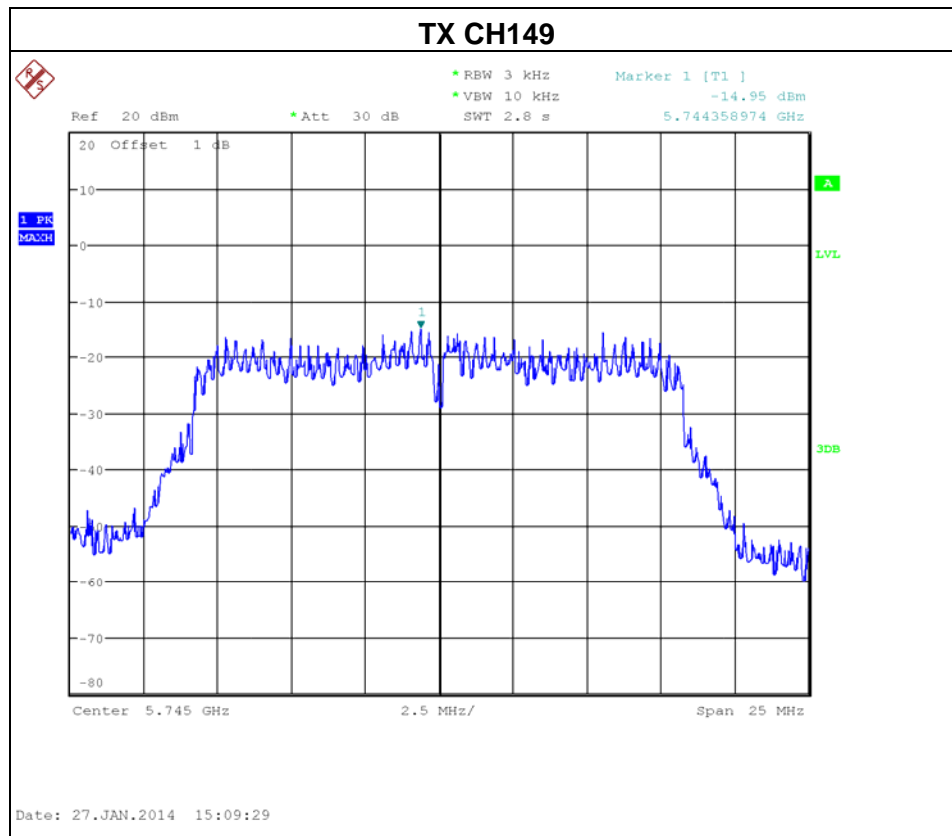


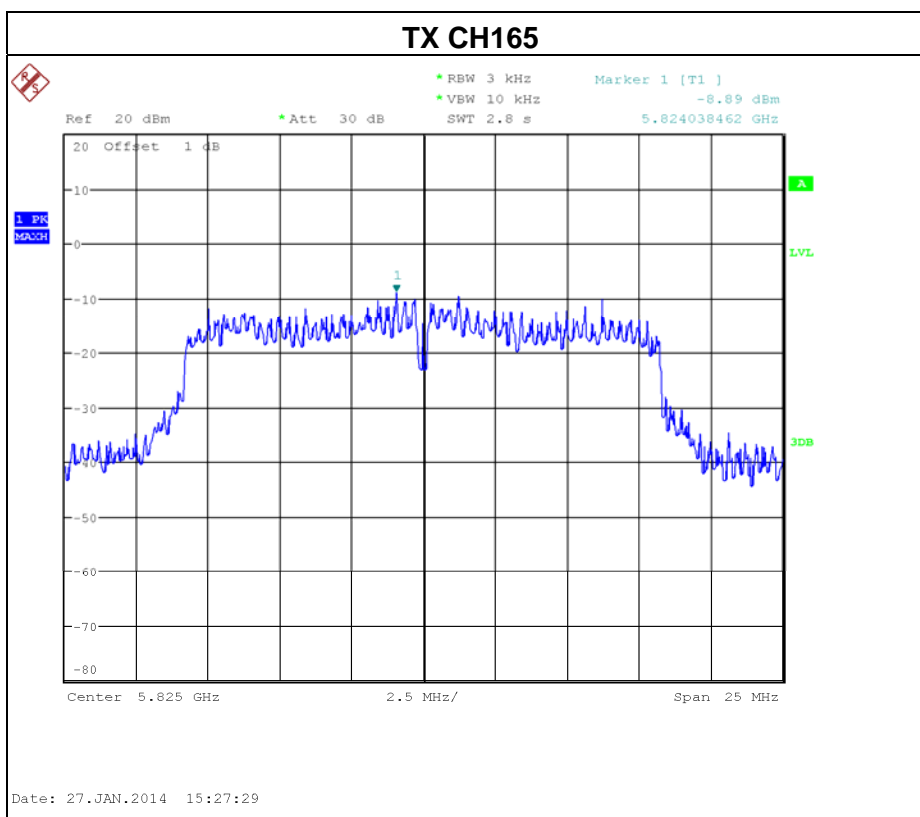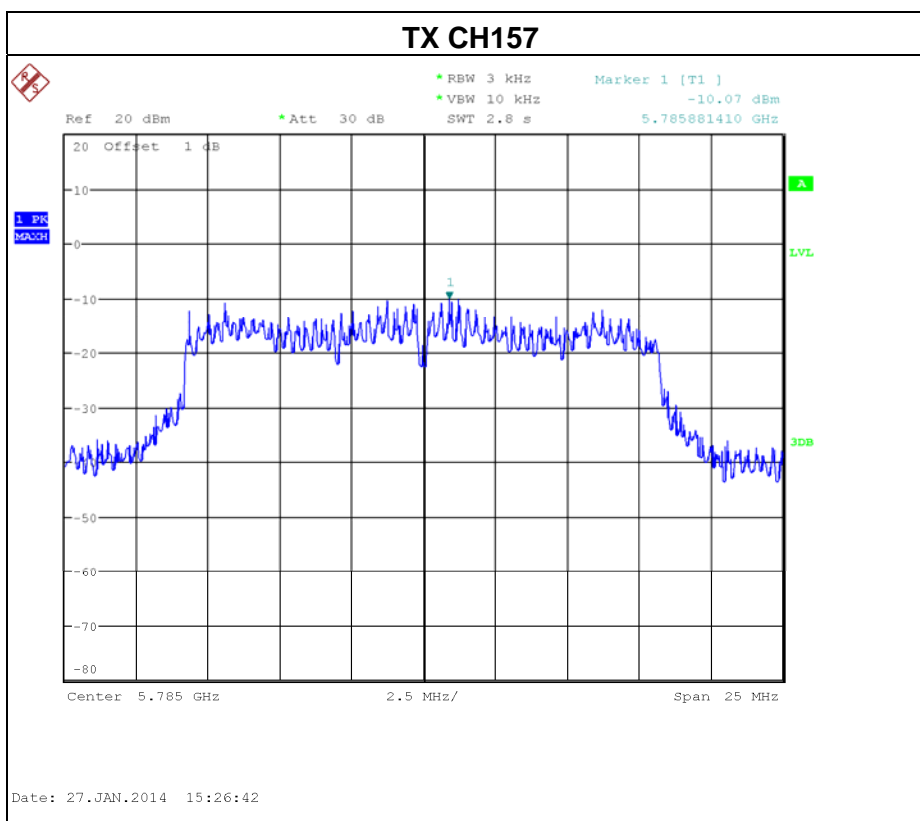




Test Mode : TX N-20M Mode\_CH149/157/165\_ANT 1


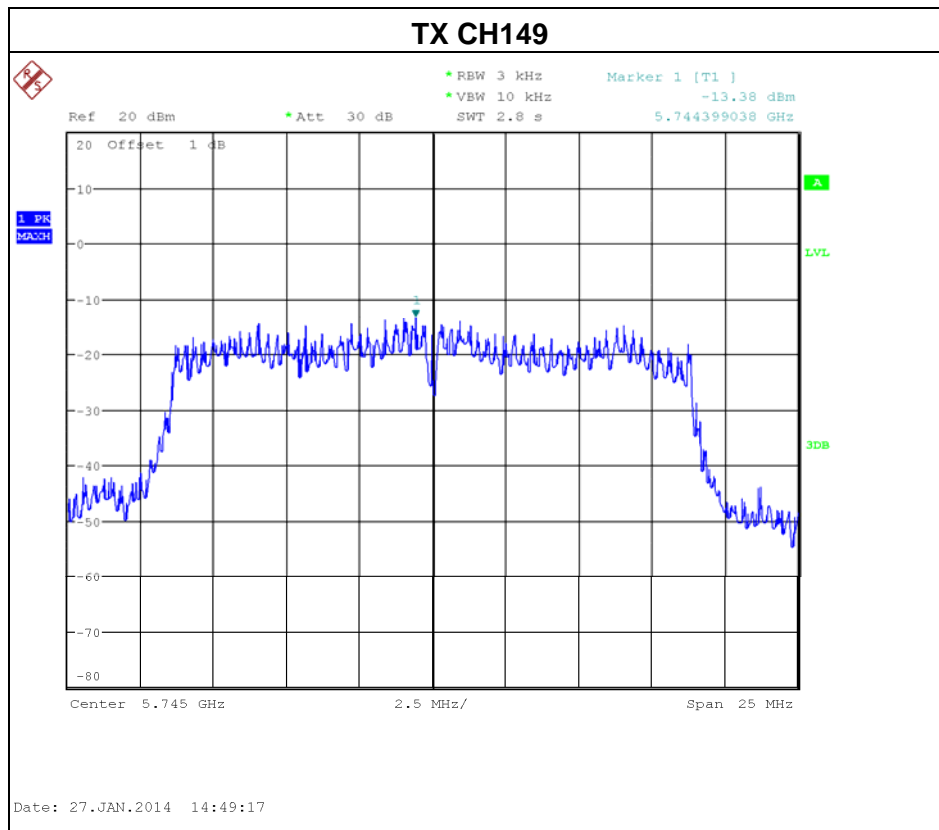


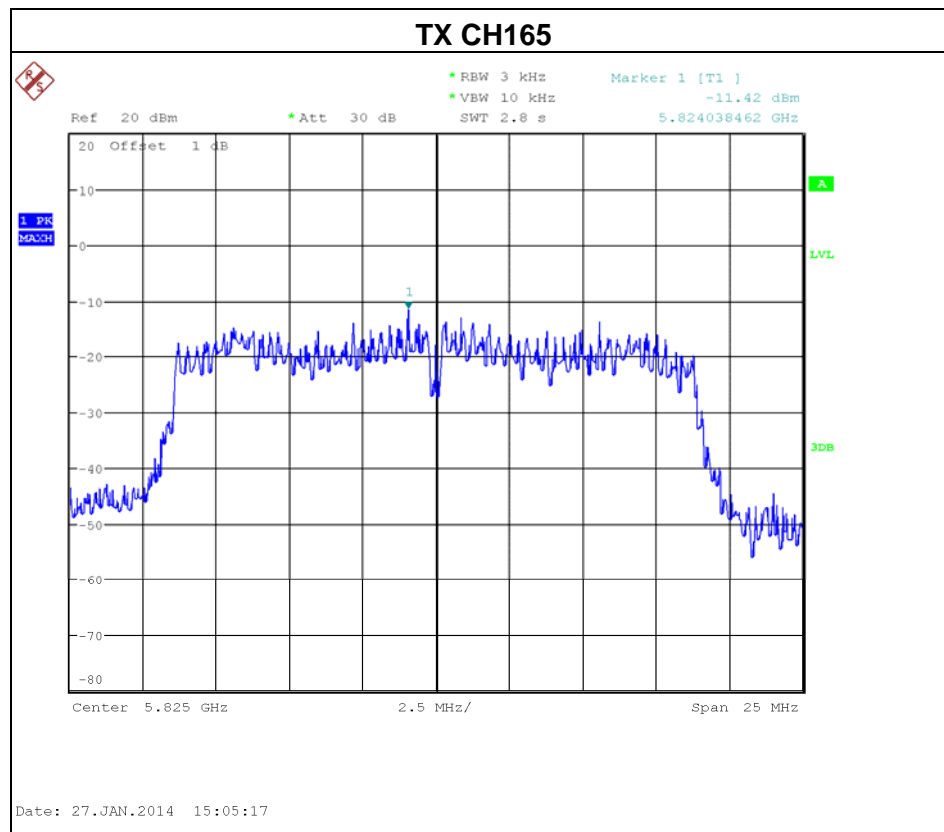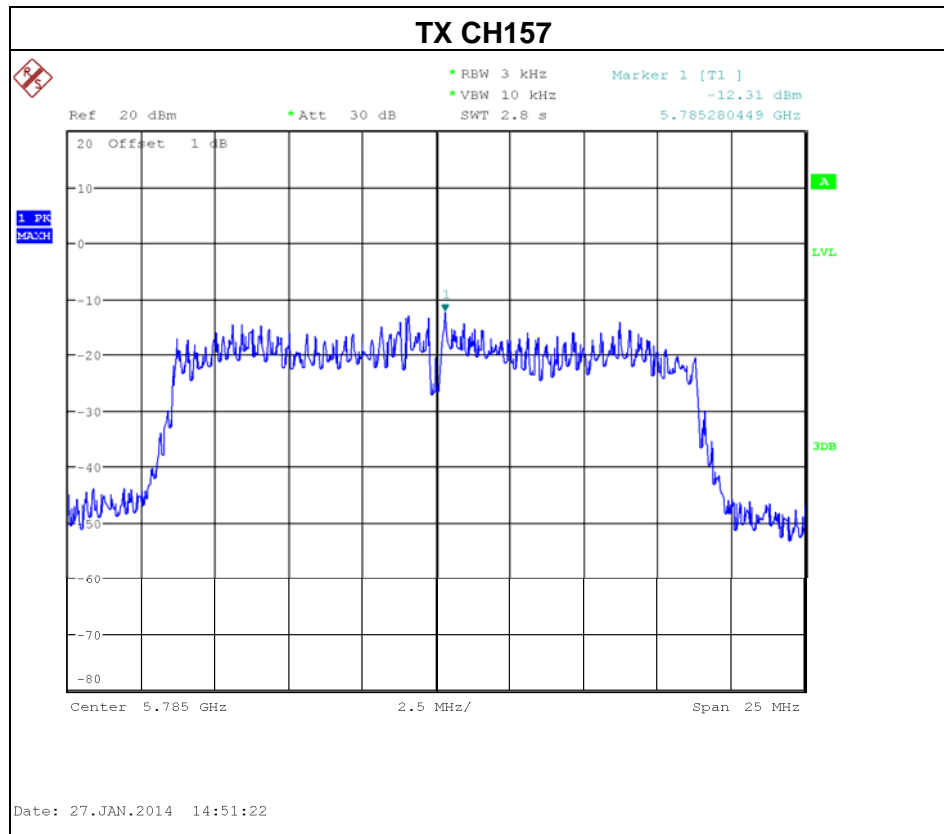



Test Mode : TX N-20M Mode\_CH149/157/165\_ANT 2

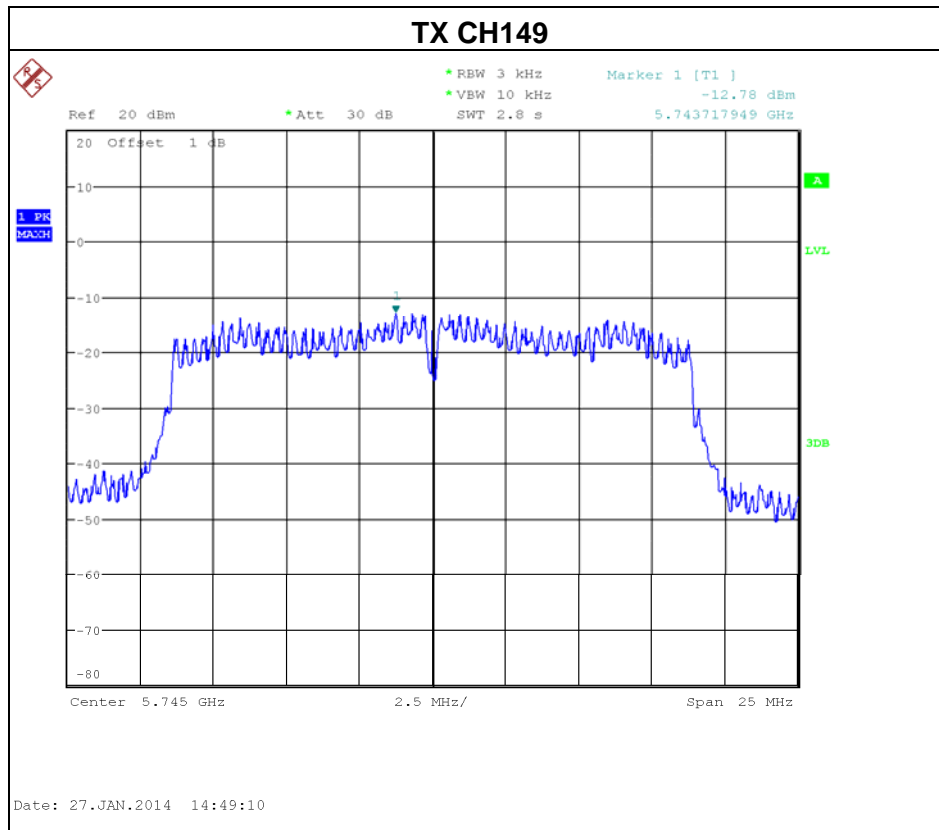

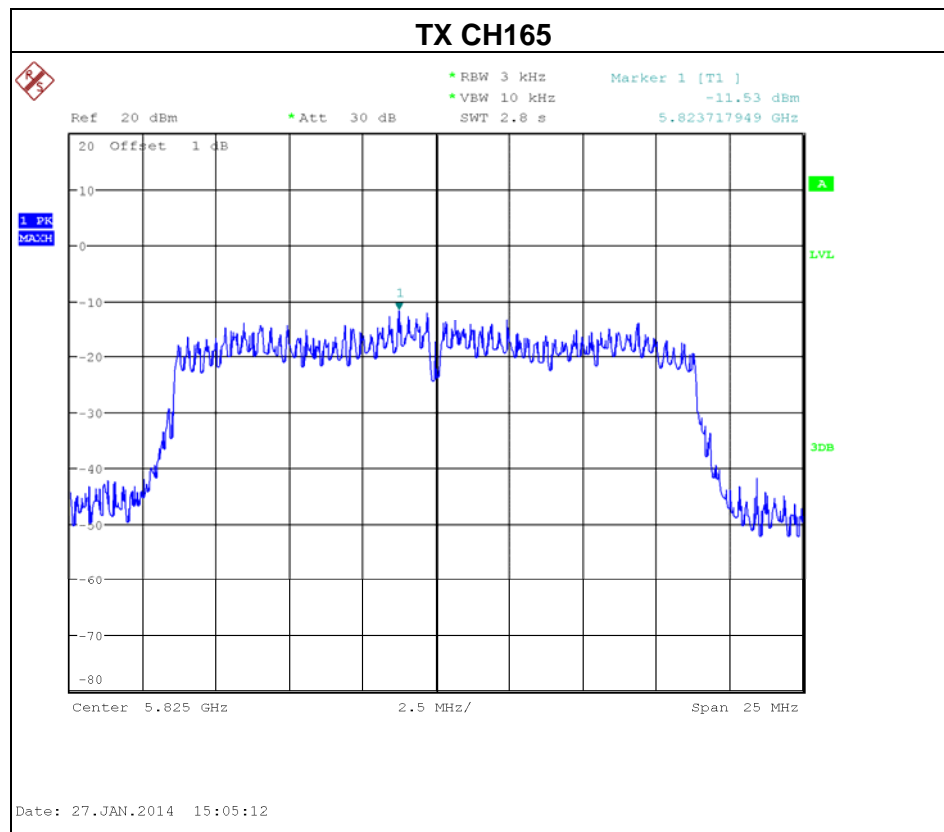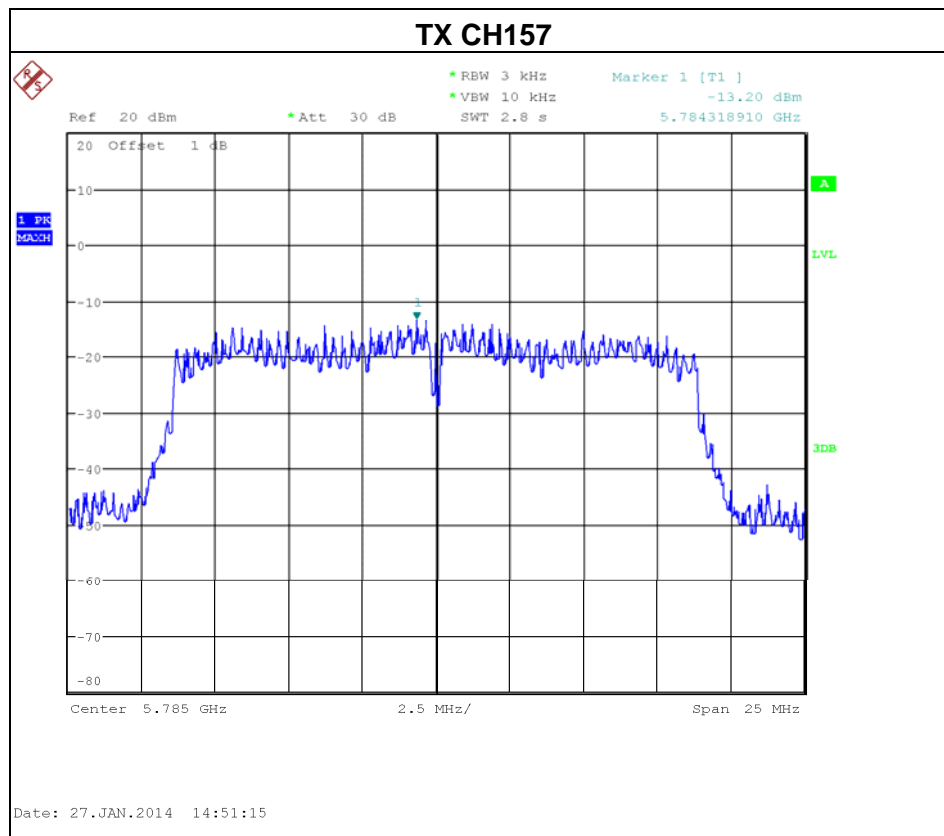





Test Mode : TX N-20M Mode_CH149/157/165_Total			
Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH149	5745	-10.06	8
CH157	5785	-9.72	8
CH165	5825	-8.46	8






Test Mode : TX N-40M Mode\_CH151/159\_ANT 1

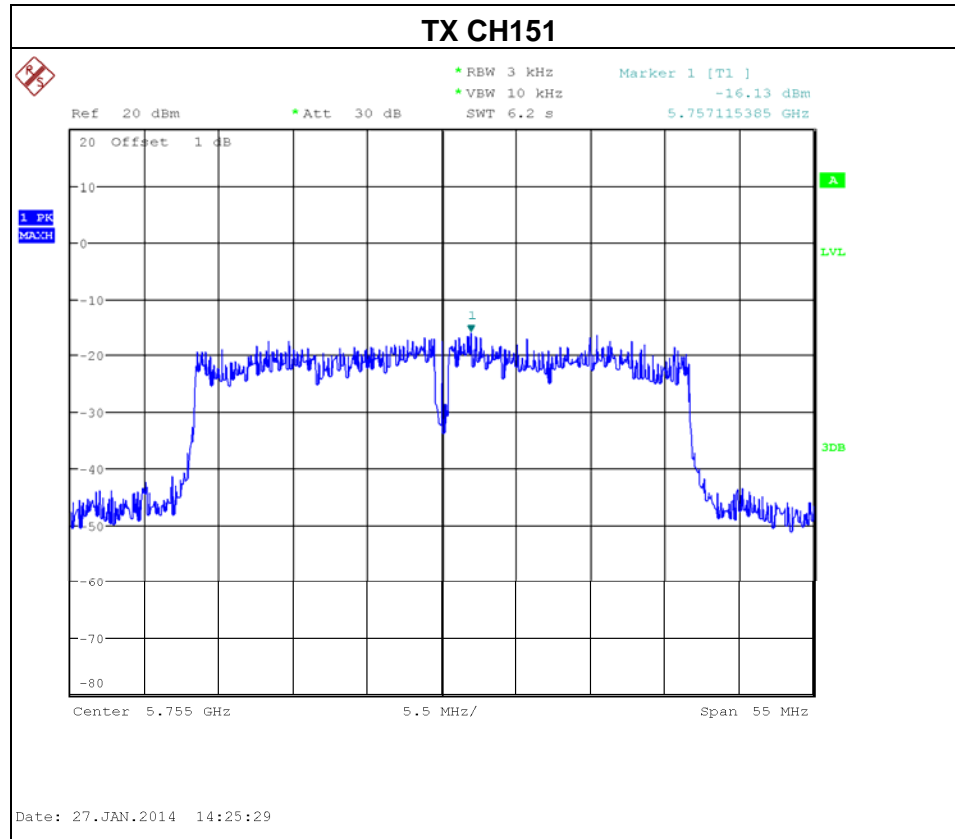


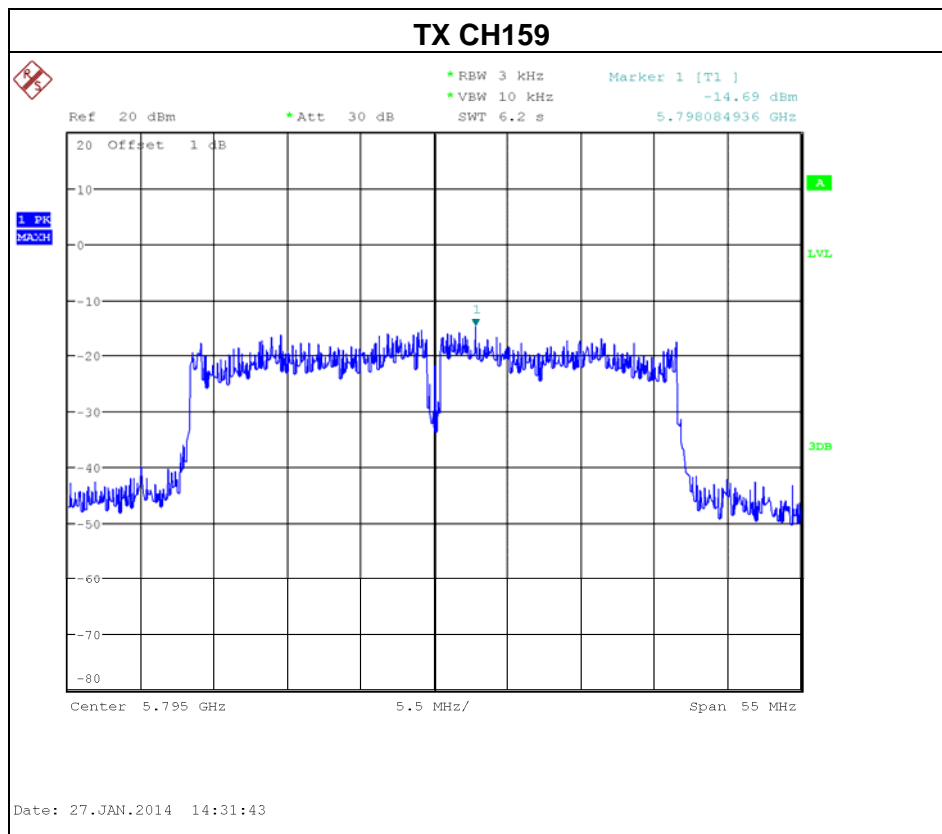



Test Mode : TX N-40M Mode\_CH151/159\_ANT 2

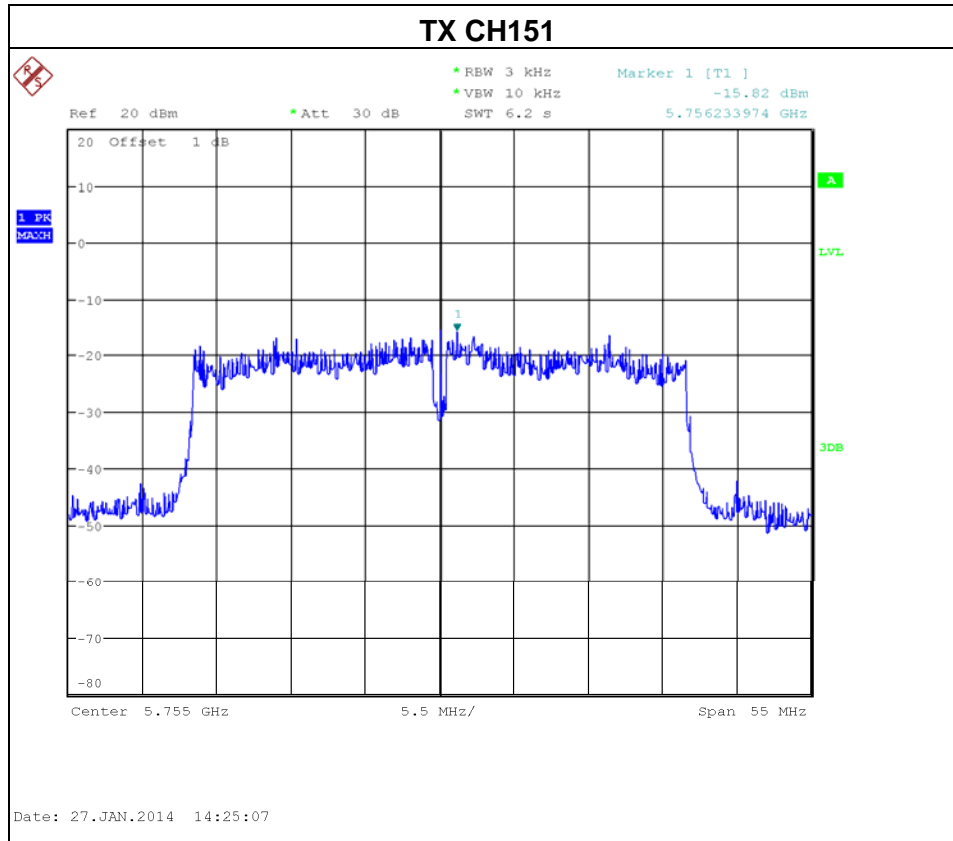

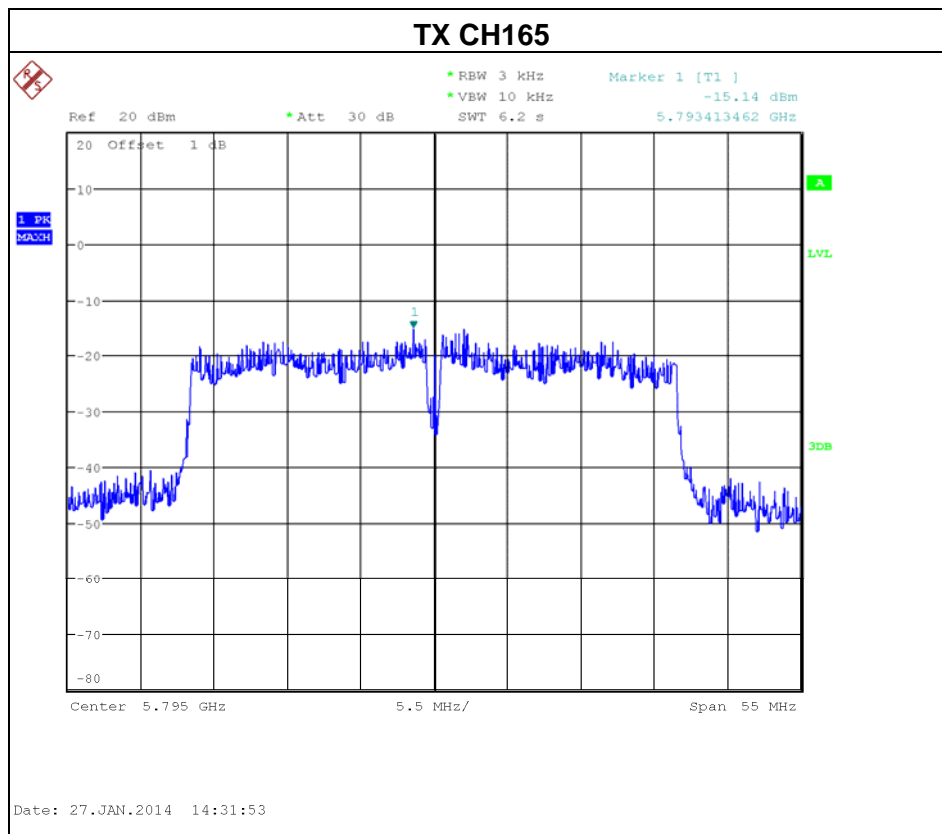



Test Mode : TX N-40M Mode_CH151/159_Total			
Test Channel	Frequency (MHz)	Power Density (dBm)	Limit (dBm)
CH151	5755	-12.96	8
CH159	5795	-11.90	8



## 9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Apr. 25, 2014
2	LISN	R&S	ENV216	100087	Nov. 09, 2014
3	Test Cable	N/A	C_17	N/A	Mar.15, 2014
4	EMI TEST RECEIVER	R&S	ESCS30	826547/022	Apr. 25, 2014
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Apr. 25, 2014

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Apr. 25, 2014
2	Amplifier	HP	8447D	2944A09673	Apr. 25, 2014
3	Test Receiver	R&S	ESCI	100382	Apr. 25, 2014
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 02, 2014
5	Antenna	ETS	3115	00075789	Apr. 25, 2014
6	Amplifier	Agilent	8449B	3008A02274	Apr. 25, 2014
7	Spectrum	Agilent	E4408B	US39240143	Nov. 09, 2014
8	Test Cable	HUBER+SUHNER	C-45	N/A	Apr. 30, 2014
9	Controller	CT	SC100	N/A	N/A
10	Horn Antenna	EMCO	3115	9605-4803	Apr. 25, 2014
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Apr. 25, 2014
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Oct. 22, 2014

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 09, 2014

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	P-series Power meter	Agilent	N1911A	MY45100473	Apr. 25, 2014
2	Wireband Power sensor	Agilent	N1921A	MY51100041	Apr. 25, 2014

**Antenna Conducted Spurious Emission Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 09, 2014

**Power Spectral Density Measurement**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 09, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.




**10. EUT TEST PHOTO**

**Conducted Measurement Photos**







**Radiated Measurement Photos  
9K~30MHz**

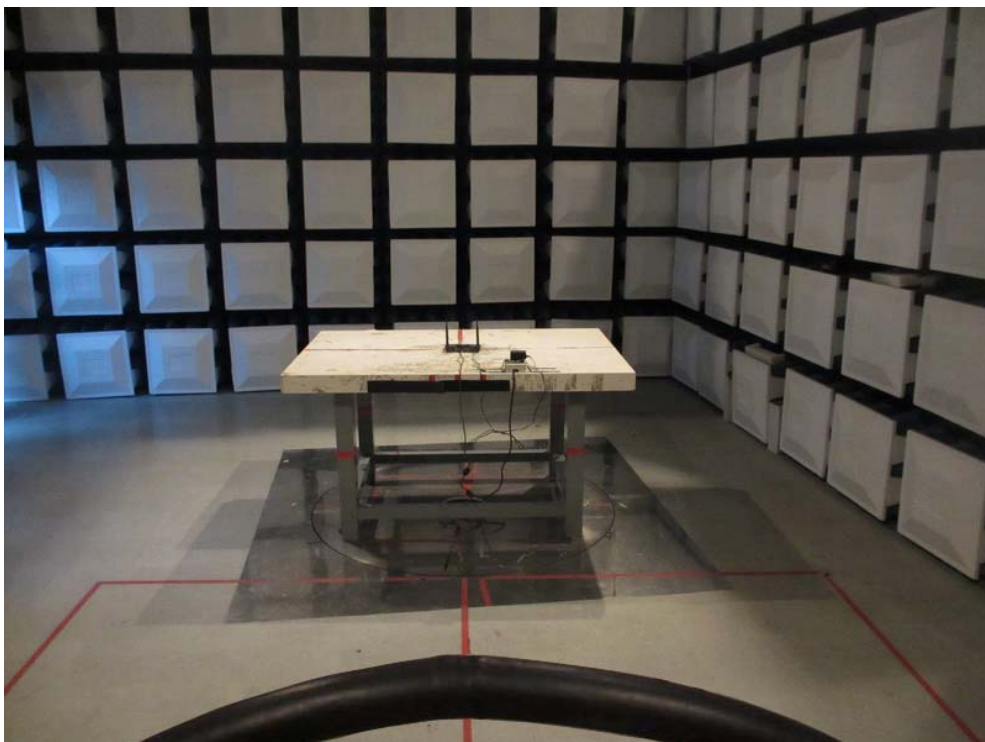

**Radiated Measurement Photos  
30~1000MHz**

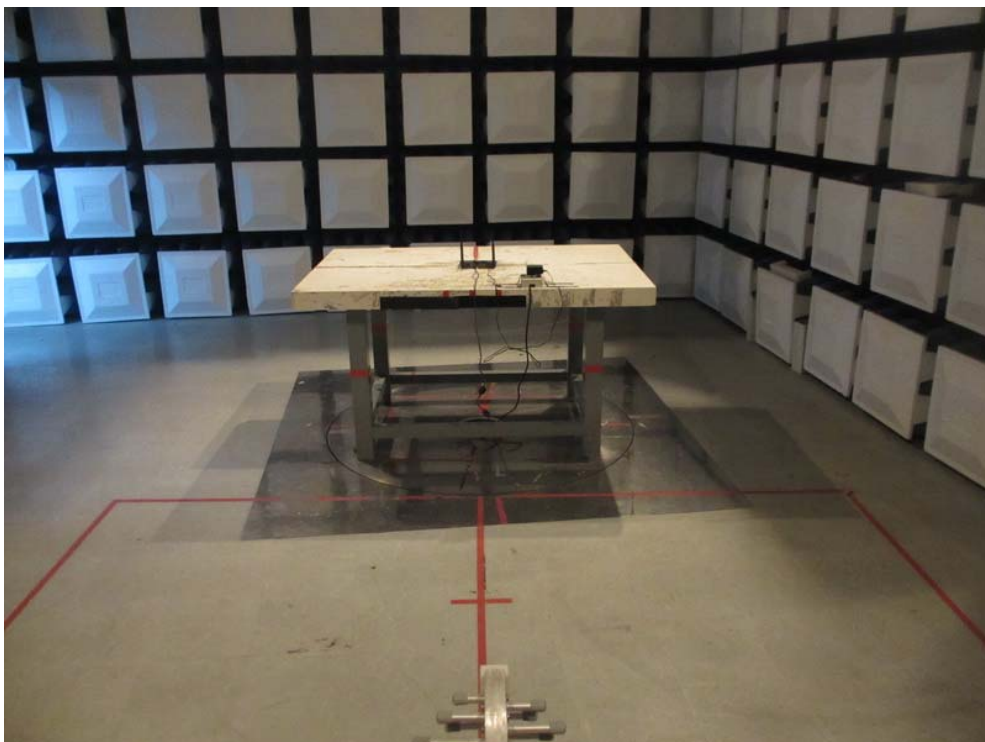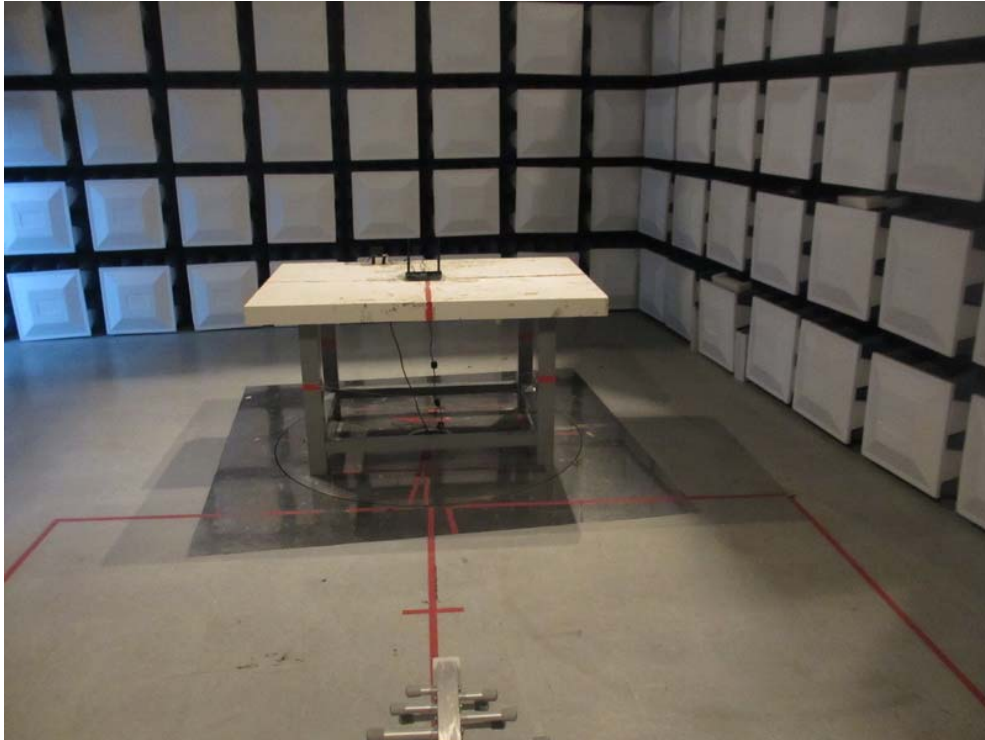

**Radiated Measurement Photos  
Above 1000MHz**

