


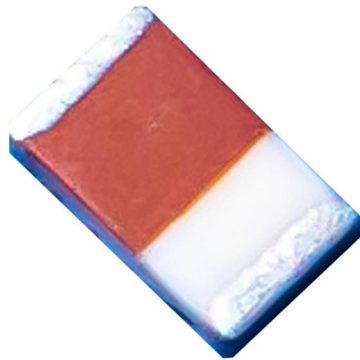

Product Name: WiFi/Bluetooth Chip Antenna – CW201

Part Number: H2U34C1H1B0100

Features:

- Supporting WiFi/Bluetooth, covering 2400 to 2484 MHz
- Surface Mount
- Dimensions: 2.0 x 1.2 x 0.6 mm
- High performance, small size.
- RoHS & REACH Compliant

Applications:

- ISM 2.4 GHz applications
- ZigBee/BLE applications
- Bluetooth earphone systems
- Hand-held devices when WiFi / Bluetooth functions are needed, e.g.,
Smart phones
- IEEE802.11 b/g/n
- Wireless PCMCIA cards or USB dongles



WiFi/Bluetooth Chip Antenna

MODEL: CW201

Version: A

I. Specifications:

Items	Specifications
Frequencies (MHz)	2400~2484
Efficiency (%)	59.2
Average Gain (dB)	-2.3
Peak Gain (dBi)	2.1
Test Condition	40 x 20 mm ² (Evaluation board)
Impedance (Ω)	50
Polarization	Linear Polarization

Mechanical Specifications	
Dimensions (mm)	2.0(L) x 1.2 (W) x 0.6 (H)
Material	Ceramic
Termination	Ag (environmental Pb free)
Environmental Conditions	
Operation Temperature (°C)	-40 ~ +85
Storage Temperature (°C)	-5 ~ +40
Relative Humidity	10 ~ 70 %

© Unictron Technologies Corp.
All specifications subject to change without notice.




II. Layout Guide:

Solder Land Pattern:


The solder land pattern (gold marking areas) is shown below. Recommendation on matching circuit will be provided according to customer's installation conditions.

Top View

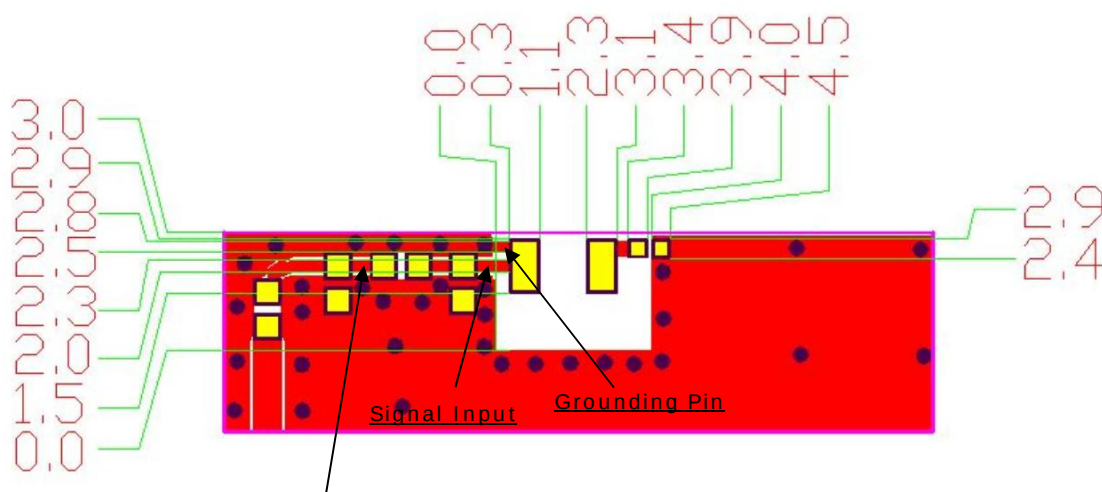


Transmission Line with 50 Ω Impedance Characteristic

Bottom View

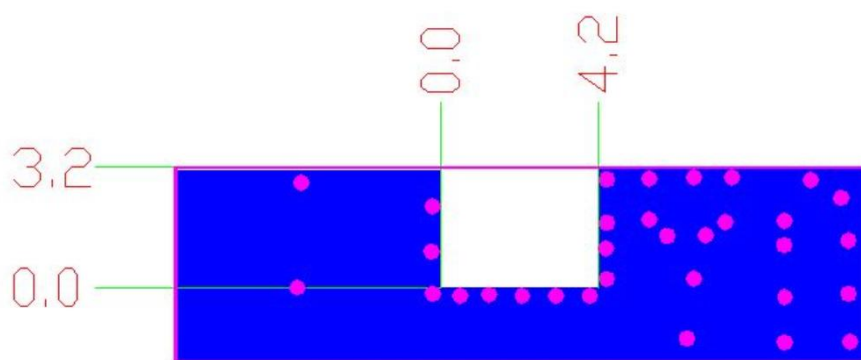


III. Mechanical Dimensions:

a) Antenna Dimensions

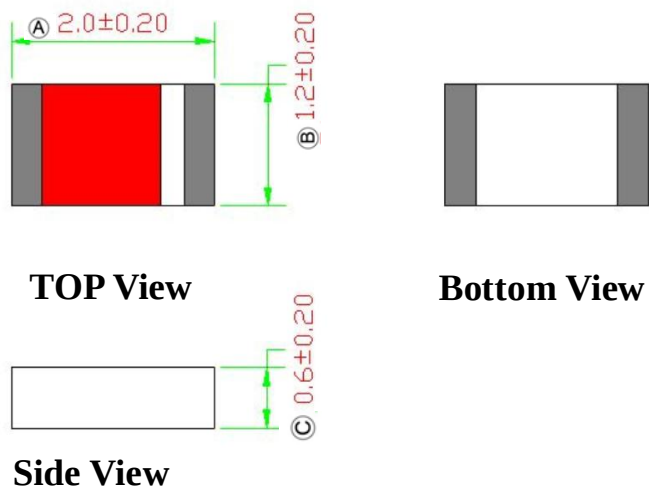

Unit: mm

b) PIN Definition

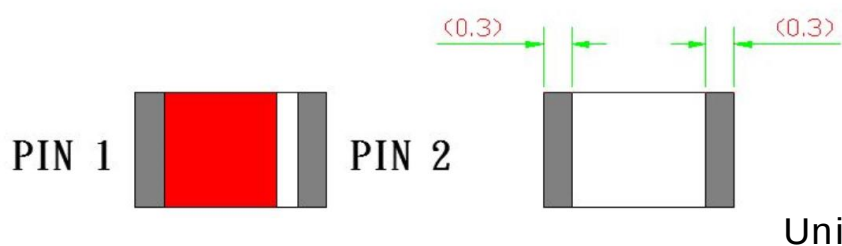


Unit: mm

PIN	1	2
Soldering Pad	Signal Input	Tuning/Signal Output



c) Test Board with Antenna

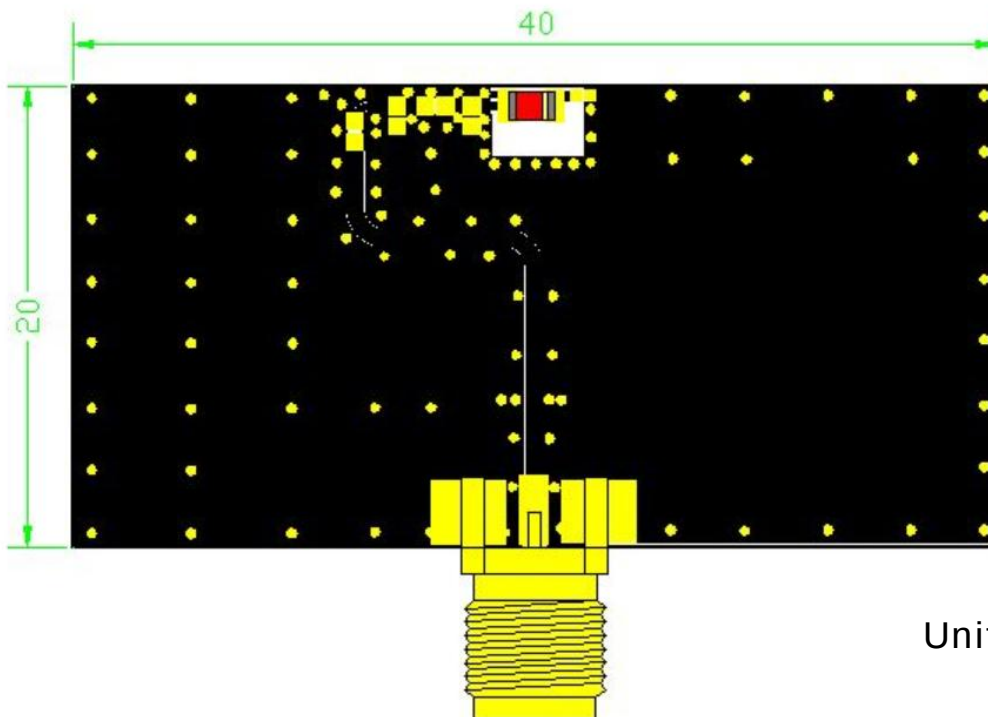


© Unictron Technologies Corp.
All specifications subject to change without notice.


Unictron
Technologies Corp.
2020-12-15
Document
Control Center

IV. Properties:

a) Return loss (dB)

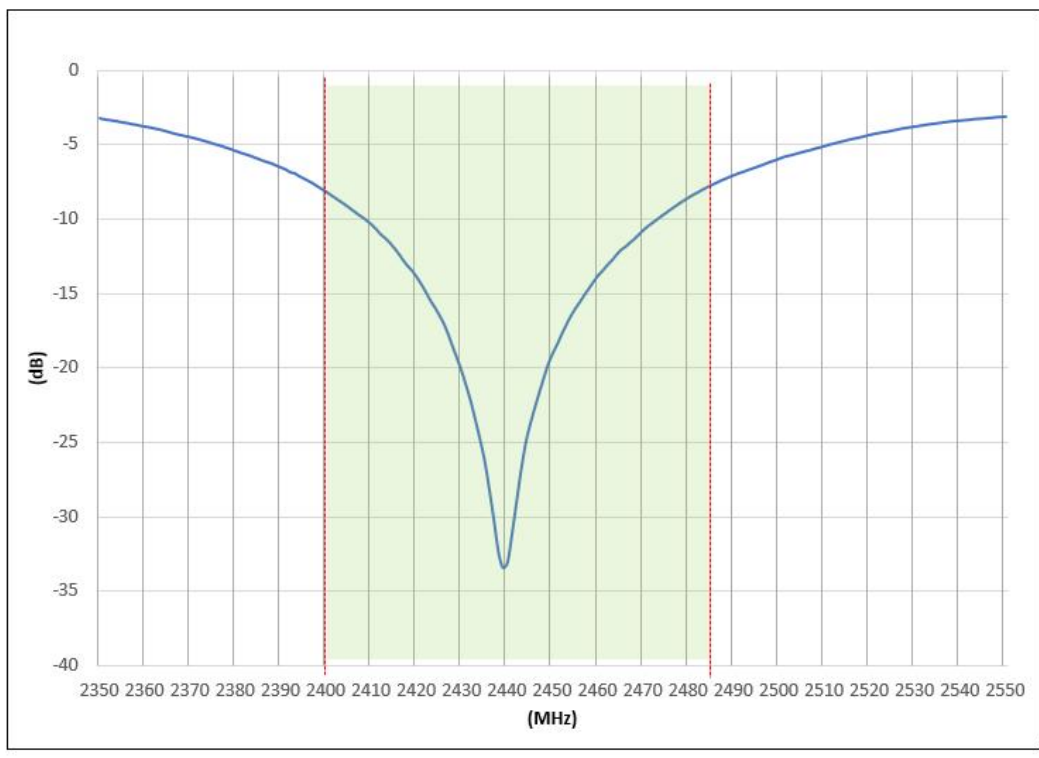


b) Efficiency (%)

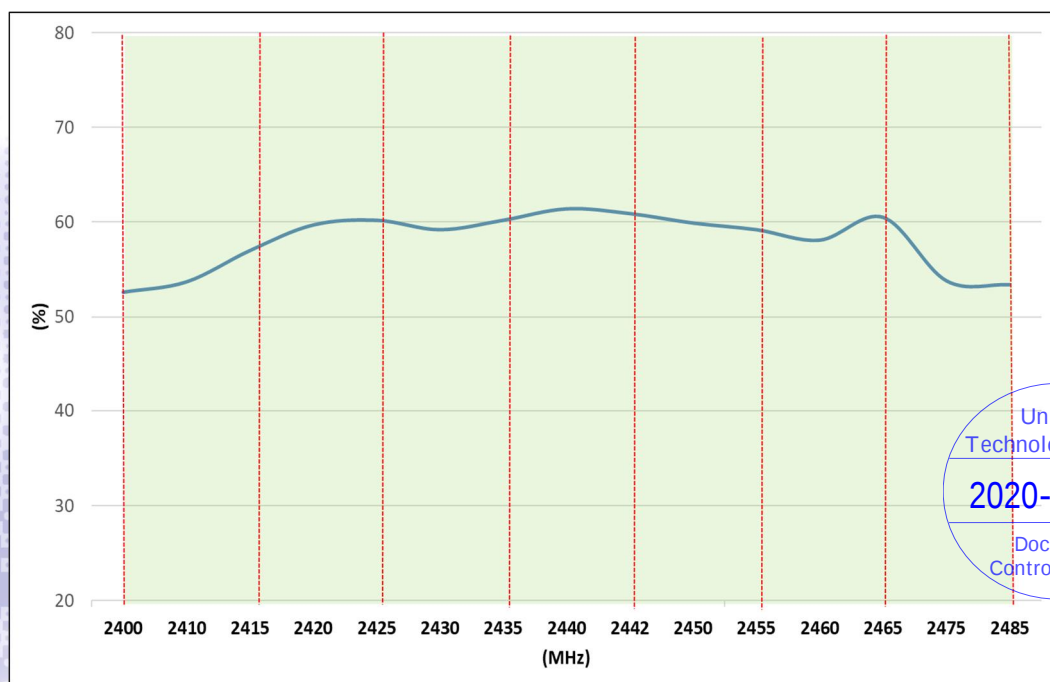


Unictron
Technologies Corp.
2020-12-15
Document
Control Center

© Unictron Technologies Corp.
All specifications subject to change without notice.

c) Average Gain (dB)

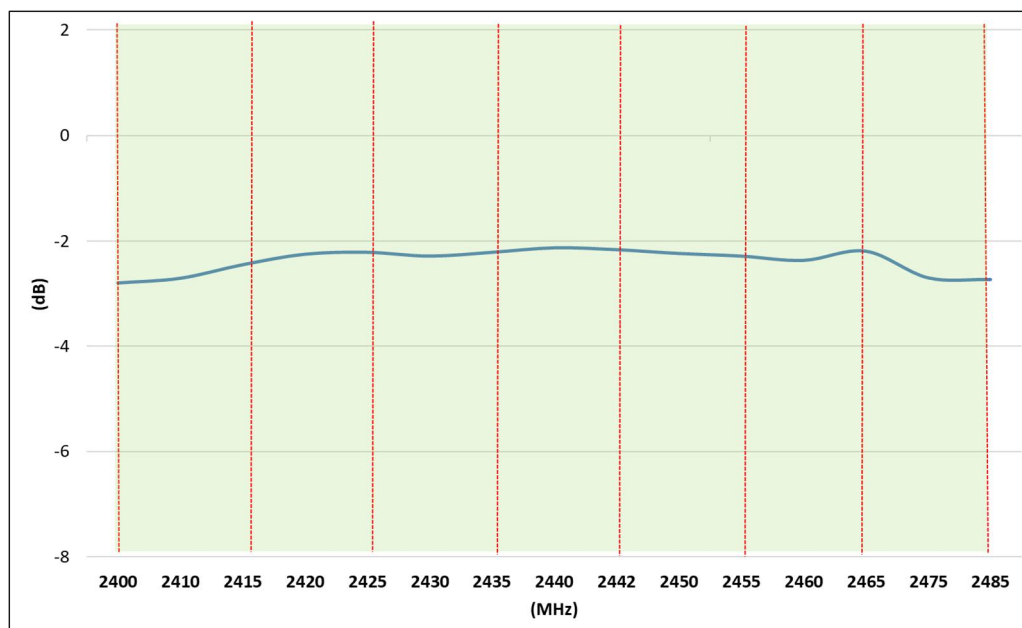

d) Peak Gain (dBi)

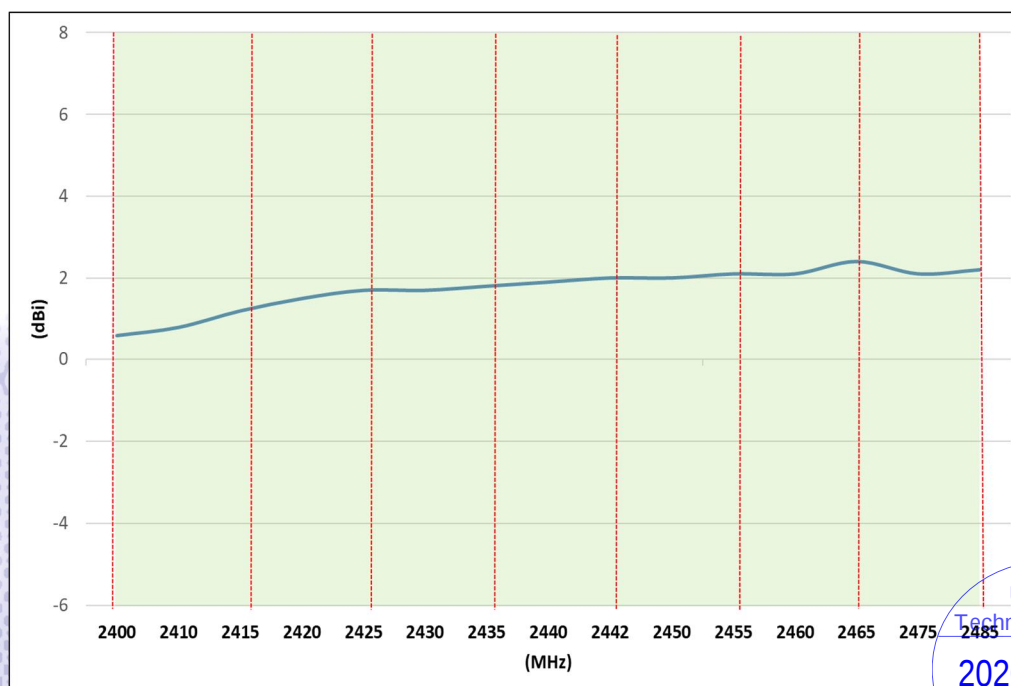


© Unictron Technologies Corp.
All specifications subject to change without notice.

Unictron
Technologies Corp.
2020-12-15
Document
Control Center

V. Antenna Radiation Pattern Measurement:


The antenna radiation patterns are measured in Unictron's 3D Anechoic Chamber. The measurement setup is as show below.

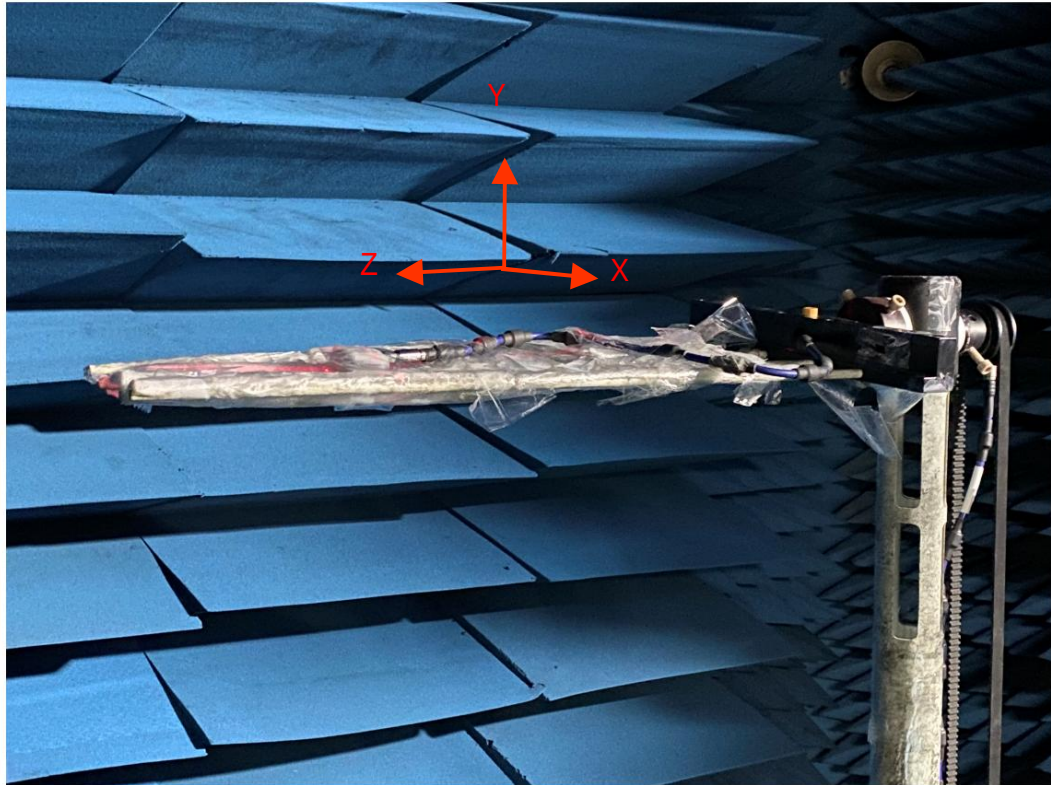

© Unictron Technologies Corp.
All specifications subject to change without notice.





3D Radiation Gain Pattern

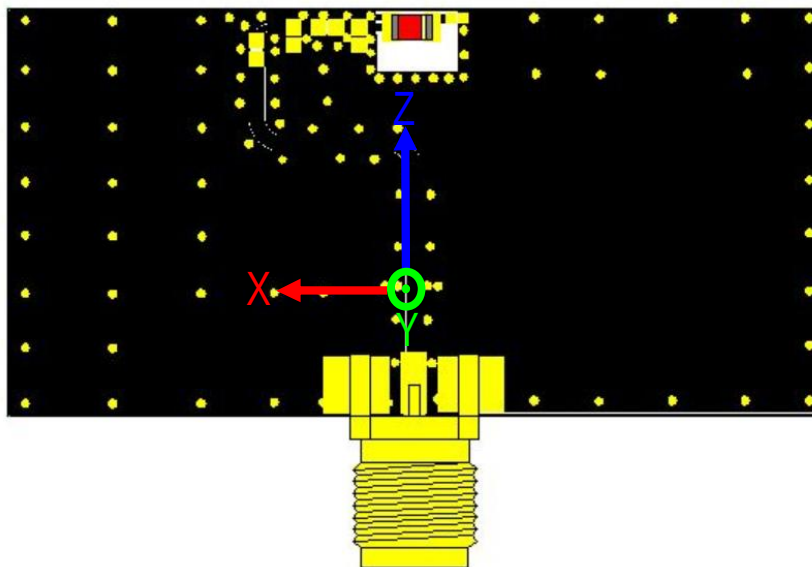

© Unictron Technologies Corp.
All specifications subject to change without notice.

2450 MHz (unit: dBi)


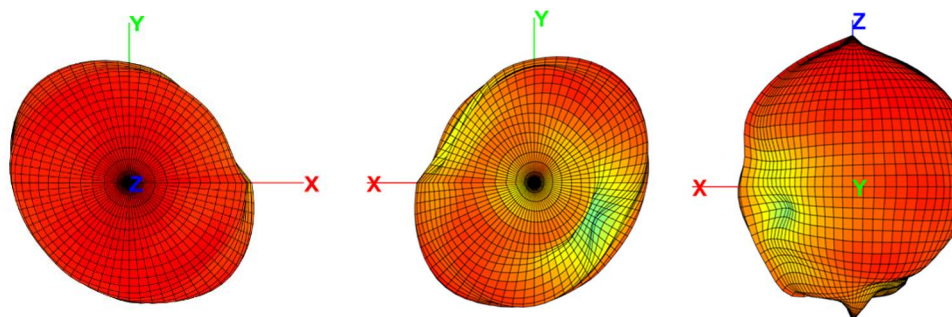


Unictron
Technologies Corp.

2020-12-15

Document
Control Center

VI. Frequency tuning:

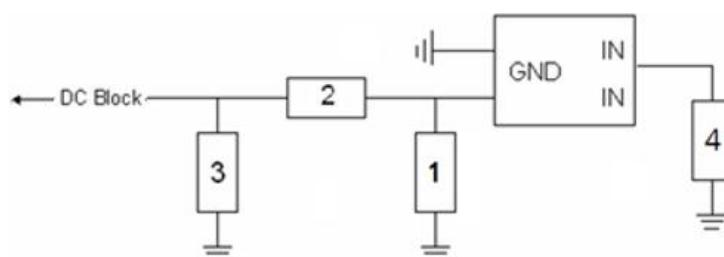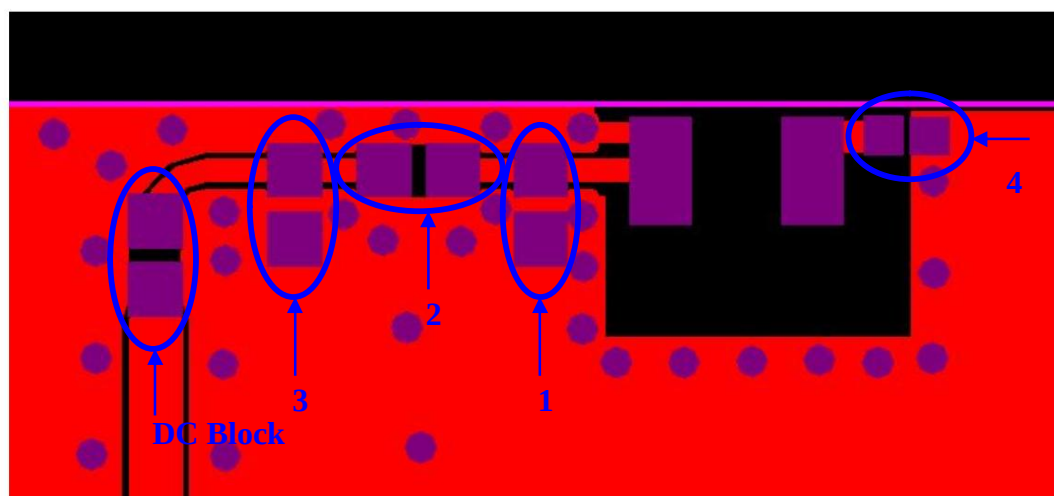

System Matching Circuit Component			
Location	Description	Vendor	Tolerance
1	N/C	-	-
2	5.0 pF (0402)	MURATA	±0.05 pF
3	0.8 pF (0402)	MURATA	±0.05 pF
4	2.7 pF (0201)	MURATA	±0.05 pF
DC Block	22 pF (0402)	MURATA	±5%


Unictron
Technologies Corp.

2020-12-15

Document
Control Center

VII. Soldering conditions:

Typical Soldering Profile for Lead-free Process

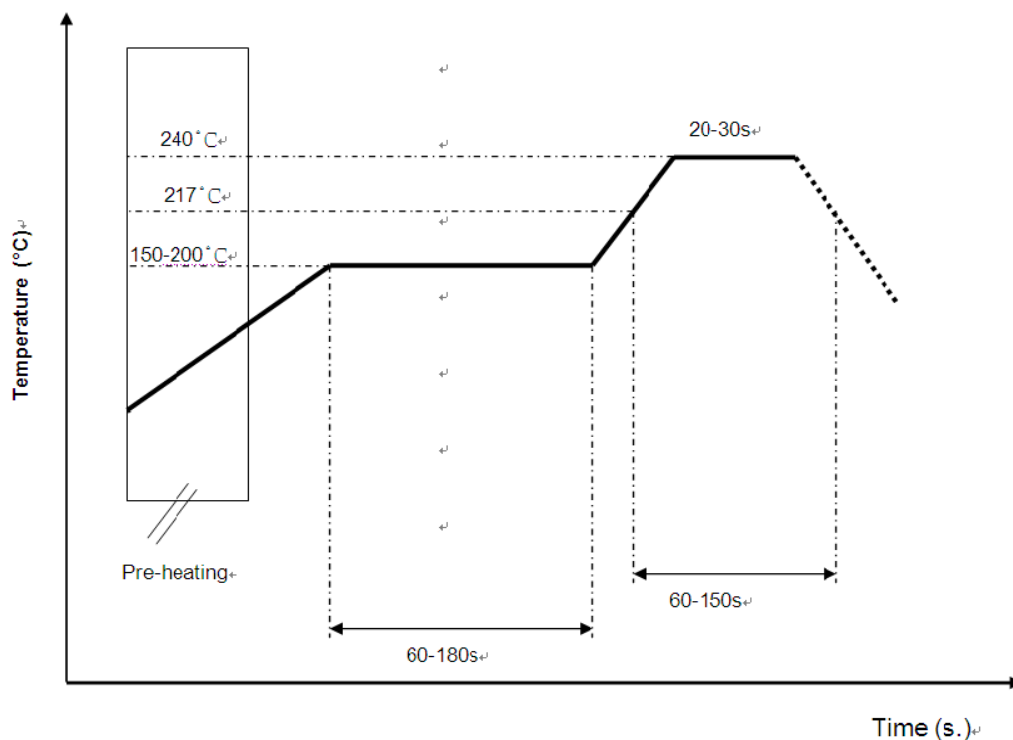

*Recommended solder paste alloy: SAC305 (Sn96.5 /Ag3 /Cu0.5) Lead Free solder paste.

© Unictron Technologies Corp.
All specifications subject to change without notice.

VIII. Reminders for use of Unictron's ceramic chip antennas:

- This chip antenna is made of ceramic materials which is relatively more rigid and brittle compared to circuit board materials. Furthermore, the length of this antenna is quite long. Bending of circuit board at the locations where chip antenna is mounted may cause the cracking of solder joints or antenna itself.
- Punching/cutting of the break-off tab of PCB panel may cause severe bending of the circuit board which may result in cracking of solder joints or chip antenna itself. Therefore break-off tab shall be located away from the installation site of chip antenna.
- Be cautious when ultrasonic welding process needs to be used near the locations where chip antennas are installed. Strong ultrasonic vibration may cause the cracking of chip antenna solder joints.

Unictron Technologies Corp.
2020-12-15
Document Control Center

IX. Operating & Storage conditions:

- a) Operating
 - (1) Maximum Input Power: 2 W
 - (2) Operating Temperature: -40°C to 85°C
 - (3) Relative Humidity: 10% to 70%
- b) Storage (sealed)
 - (1) Storage Temperature: -5°C to 40°C
 - (2) Relative Humidity: 20% to 70%
 - (3) Shelf Life: 1 year
- c) Storage (unsealed)

Meet the criteria of J-STD-033 MSL2a
- d) Storage (After mounted on customer's PCB with SMT process)
 - (1) Storage Temperature: -40°C to 85°C
 - (2) Relative Humidity: 10% to 70%

X. Notice

- (1) Installation Guide:

Please refer to Unictron's application note "General guidelines for the installation of Unictron's chip antennas" for further information.
- (2) All specifications are subject to change without notice.

