



Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: www.cqa-cert.com

Report Template Version: V05

Report Template Revision Date: 2021-11-03

TEST REPORT

Report No.: CQASZ20231202384E-02
Applicant: Hesung Innovation Limited
Address of Applicant: Room 803, Chevalier House, 45-51 Chatham Road South, Tsim Sha Tsui, Kowloon, HongKong
Equipment Under Test (EUT):
Product: Portable Air Conditioner
Model No.: DR-HAC006S, DWAC06S, DTAC06S, DCAC06S, DBAC06S, DR-HAC005S, DWAC05S, DTAC05S, DCAC05S, DBAC05S
Test Model No.: DR-HAC006S
Brand Name: DREO
FCC ID: 2A3SYHAC005
Standards: 47 CFR Part 15, Subpart C
Date of Receipt: 2023-12-26
Date of Test: 2023-12-26 to 2024-02-02
Date of Issue: 2024-02-22
Test Result : **PASS***

*In the configuration tested, the EUT complied with the standards specified above

Tested By:

Lewis Zhou

(Lewis Zhou)

Reviewed By:

Timo Lei

(Timo Lei)

Approved By:

Alex

(Alex Wang)



The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20231202384E-02	Rev.01	Initial report	2024-02-22

Note:

The difference between product #1 and product #2 is that the Appearance, Model, Cooling copper tube shape, Air conditioner cooler is different including having different Air conditioner cooler power. The key differences are the appearance and the model number. These changes do not affect RF performance.

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	N/A	PASS
AC Power Line Conducted Emission	47 CFR Part 15.207	ANSI C63.10-2013	PASS
Conducted Peak & Average Output Power	47 CFR Part 15.247	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

3 Contents

	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
4.4 TEST ENVIRONMENT AND MODE	7
4.5 DESCRIPTION OF SUPPORT UNITS	8
4.6 TEST LOCATION	8
4.7 TEST FACILITY	8
4.8 STATEMENT OF THE MEASUREMENT UNCERTAINTY	9
4.9 DEVIATION FROM STANDARDS	9
4.10 ABNORMALITIES FROM STANDARD CONDITIONS	9
4.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
4.12 EQUIPMENT LIST	10
5 TEST RESULTS AND MEASUREMENT DATA	11
5.1 ANTENNA REQUIREMENT	11
5.2 CONDUCTED EMISSIONS	12
5.3 CONDUCTED PEAK & AVERAGE OUTPUT POWER	18
<i>Test Result</i>	19
<i>Note:</i>	19
<i>When Duty cycle >98%, D.C.F is not required.</i>	19
<i>Test Graphs</i>	20
5.4 6DB OCCUPIED BANDWIDTH	25
<i>Test Result</i>	26
<i>Test Graphs</i>	27
5.5 POWER SPECTRAL DENSITY	32
<i>Test Result</i>	33
<i>Test Graphs</i>	34
5.6 BAND-EDGE FOR RF CONDUCTED EMISSIONS	39
<i>Test Result</i>	40
5.6.1 <i>Test Graphs</i>	41
5.7 RF CONDUCTED SPURIOUS EMISSIONS	44
<i>Test Result</i>	45
<i>Test Graphs</i>	46
5.8 RADIATED SPURIOUS EMISSIONS	60
5.8.1 <i>Radiated emission below 1GHz</i>	63
5.8.2 <i>Transmitter emission above 1GHz</i>	67
5.9 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	73
6 PHOTOGRAPHS - EUT TEST SETUP	78
6.1 RADIATED SPURIOUS EMISSION	78
6.2 CONDUCTED EMISSION	79
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	80

4 General Information

4.1 Client Information

Applicant:	Hesung Innovation Limited
Address of Applicant:	Room 803, Chevalier House, 45-51 Chatham Road South, Tsim Sha Tsui , Kowloon, HongKong
Manufacturer:	Shenzhen Hesung Innovation Technology Co., LTD
Address of Manufacturer:	26F, Bldg A7, Creative City, Shenzhen, China
Factory:	Shenzhen Hesung Innovation Technology Co., LTD
Address of Factory:	26F, Bldg A7, Creative City, Shenzhen, China

4.2 General Description of EUT

Product Name:	Portable Air Conditioner
Model No.:	DR-HAC006S, DWAC06S, DTAC06S, DCAC06S, DBAC06S, DR-HAC005S, DWAC05S, DTAC05S, DCAC05S, DBAC05S
Test Model No.:	DR-HAC006S
Trade Mark:	DREO
Software Version:	1.0.59
Hardware Version:	PAI-051 V1.2 20210824
Power Supply:	Power supply AC 115V
EUT Supports Radios application:	BLE: 2402-2480MHz 2.4GHz: Wi-Fi: 802.11b/g/n(HT20): 2412MHz~2462MHz;
Simultaneous Transmission	<input type="checkbox"/> Simultaneous TX is supported and evaluated in this report. <input checked="" type="checkbox"/> Simultaneous TX is not supported.

4.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20) : OFDM (64QAM, 16QAM, QPSK, BPSK)
Transfer Rate:	IEEE for 802.11b: 1Mbps/2Mbps/5.5Mbps/11Mbps IEEE for 802.11g : 6Mbps/9Mbps/12Mbps/18Mbps/24Mbps/36Mbps/48Mbps/54Mbps IEEE for 802.11n(HT20) : 6.5Mbps/13Mbps/19.5Mbps/26Mbps/39Mbps/52Mbps/58.5Mbps/65Mbps
Product Type:	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable
Test Software of EUT:	Beken
Antenna Type:	FPC antenna
Antenna Gain:	6.02dBi

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz

For 802.11n (HT40):

Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz


Note:

Software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel individually.

4.4 Test Environment and Mode

Operating Environment:	
Radiated Emissions:	
Temperature:	25.3 °C
Humidity:	55 % RH
Atmospheric Pressure:	1009 mbar
Conducted Emissions:	
Temperature:	25.6 °C
Humidity:	60 % RH
Atmospheric Pressure:	1009 mbar
Radio conducted item test (RF Conducted test room):	
Temperature:	25.5 °C
Humidity:	52 % RH
Atmospheric Pressure:	1009 mbar
Test mode:	
Transmitting mode:	EUT is set in RF test mode in all supported modulation types, bandwidth and data rate, etc.

Run Software:

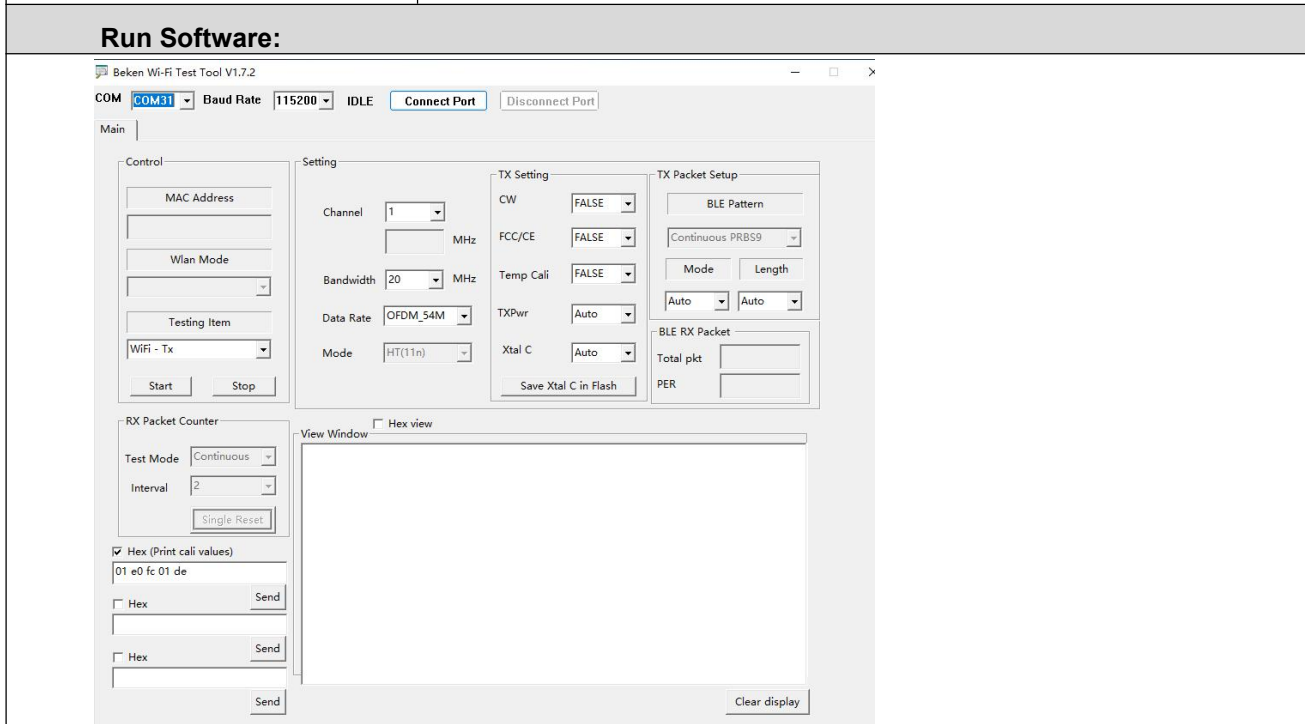

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

1) Support equipment

Description	Manufacturer	Model No.	Certification	Supplied by
/	/	/	/	/

2) Cable

Cable No.	Description	Manufacturer	Cable Type/Length	Supplied by
/	/	/	/	/

4.6 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

4.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.8 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	5.12dB	(1)
2	Radiated Emission (Above 1GHz)	4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	3.34dB	(1)
4	Radio Frequency	3×10^{-8}	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8℃	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	Frequency Error	5.5 Hz	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

4.9 Deviation from Standards

None.

4.10 Abnormalities from Standard Conditions

None.

4.11 Other Information Requested by the Customer

None.

4.12 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2023/09/08	2024/09/07
Spectrum analyzer	R&S	FSU26	CQA-038	2023/09/08	2024/09/07
Spectrum analyzer	R&S	FSU40	CQA-075	2023/09/08	2024/09/07
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2023/09/08	2024/09/07
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2023/09/08	2024/09/07
Preamplifier	EMCI	EMC184055SE	CQA-089	2023/09/08	2024/09/07
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2021/09/16	2024/09/15
Bilog Antenna	R&S	HL562	CQA-011	2021/09/16	2024/09/15
Horn Antenna	R&S	HF906	CQA-012	2021/09/16	2024/09/15
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/09/16	2024/09/15
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2023/09/08	2024/09/07
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2023/09/08	2024/09/07
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2023/09/08	2024/09/07
Antenna Connector	CQA	RFC-01	CQA-080	2023/09/08	2024/09/07
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2023/09/08	2024/09/07
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2023/09/08	2024/09/07
Power meter	R&S	NRVD	CQA-029	2023/09/08	2024/09/07
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2023/09/08	2024/09/07
EMI Test Receiver	R&S	ESR7	CQA-005	2023/09/08	2024/09/07
LISN	R&S	ENV216	CQA-003	2023/09/08	2024/09/07
Coaxial cable	CQA	N/A	CQA-C009	2023/09/08	2024/09/07
DC power	KEYSIGHT	E3631A	CQA-028	2023/09/08	2024/09/07

Test software:


	Manufacturer	Software brand
Radiated Emissions test software	Tonscend	JS1120-3
Conducted Emissions test software	Audix	e3
RF Conducted test software	Audix	e3

5 Test results and Measurement Data

5.1 Antenna Requirement

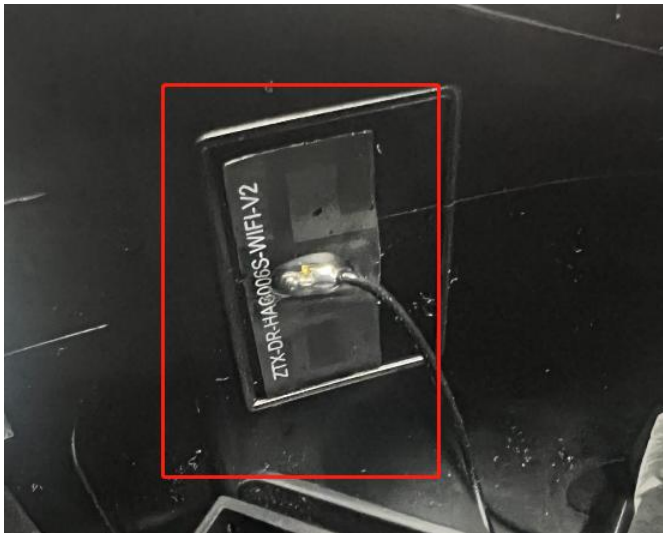Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
EUT Antenna:	
<p>The antenna is FPC antenna. The connection/connection type between the antenna to the EUT's antenna port is: unique coupling. This is either permanently attachment or a unique coupling that satisfies the requirement.</p>	

5.2 Conducted Emissions

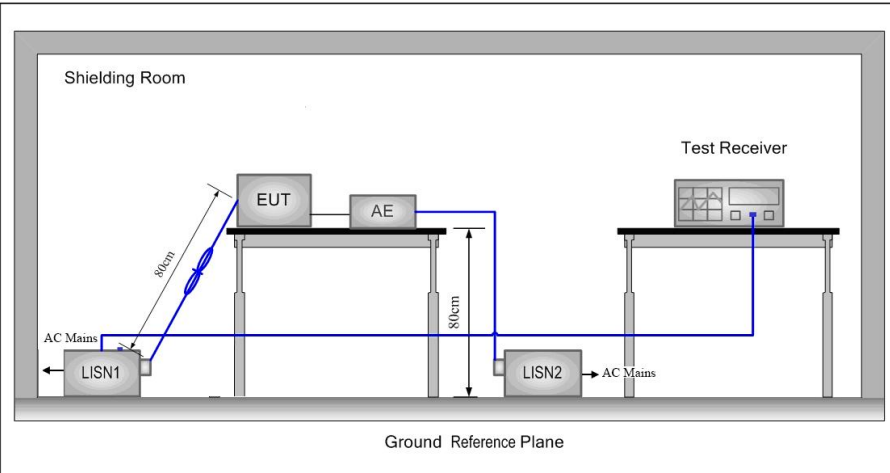
Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<ol style="list-style-type: none"> 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. 		
Test Setup:	 <p>The diagram illustrates the test setup within a Shielding Room. An Equipment Under Test (EUT) and an Antenna (AE) are positioned on a table that is 80cm high. LISN1 (Line Impedance Stabilization Network) is connected to the AC Mains and the EUT. LISN2 is connected to the AE and the AC Mains. A Test Receiver is also on a table. A Ground Reference Plane is indicated at the bottom of the setup.</p>		

Exploratory Test Mode:	Transmitting with all kind of modulations, data rates at lowest, middle and highest channel.
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate of 802.11b at middle channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC120V/60Hz
Test Results:	Pass

1#

Measurement Data

Live Line:

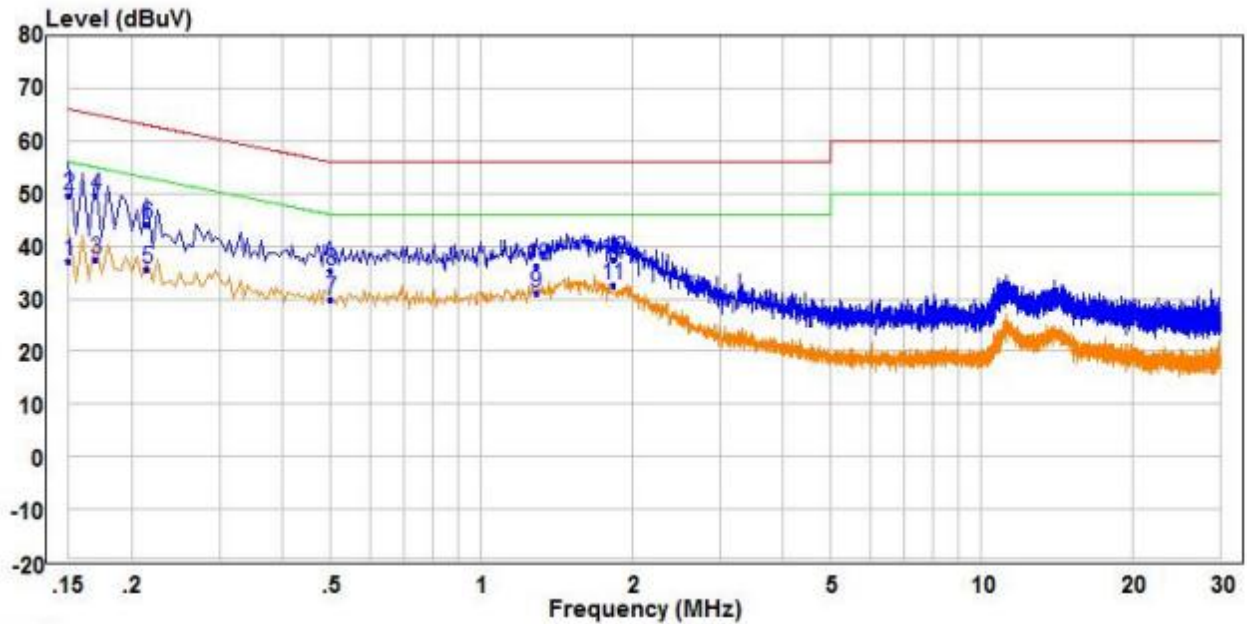


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.150	26.59	10.70	37.29	56.00	-18.71	Average	Line
2	0.150	38.85	10.70	49.55	66.00	-16.45	QP	Line
3	0.170	26.76	10.66	37.42	54.96	-17.54	Average	Line
4 QP	0.170	38.88	10.66	49.54	64.96	-15.42	QP	Line
5	0.215	24.90	10.59	35.49	53.01	-17.52	Average	Line
6	0.215	33.70	10.59	44.29	63.01	-18.72	QP	Line
7	0.500	19.30	10.70	30.00	46.00	-16.00	Average	Line
8	0.500	24.62	10.70	35.32	56.00	-20.68	QP	Line
9	1.290	19.77	11.41	31.18	46.00	-14.82	Average	Line
10	1.290	24.85	11.41	36.26	56.00	-19.74	QP	Line
11 PP	1.835	20.16	12.40	32.56	46.00	-13.44	Average	Line
12	1.835	25.10	12.40	37.50	56.00	-18.50	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:

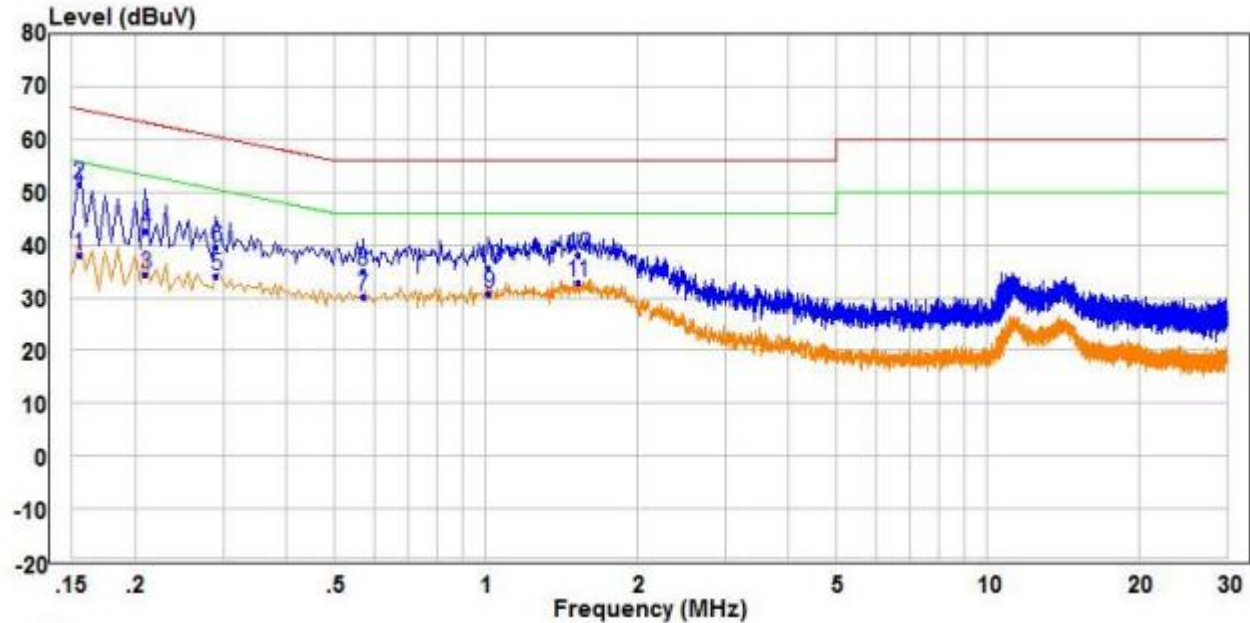

	Freq	Read		Limit	Over		
	MHz	Level	Factor	Line	Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.155	27.34	10.69	38.03	55.73	-17.70	Average
2 QP	0.155	40.74	10.69	51.43	65.73	-14.30	QP
3	0.210	23.78	10.59	34.37	53.21	-18.84	Average
4	0.210	32.16	10.59	42.75	63.21	-20.46	QP
5	0.290	23.71	10.49	34.20	50.52	-16.32	Average
6	0.290	29.05	10.49	39.54	60.52	-20.98	QP
7	0.570	19.25	10.77	30.02	46.00	-15.98	Average
8	0.570	24.27	10.77	35.04	56.00	-20.96	QP
9	1.015	19.93	10.70	30.63	46.00	-15.37	Average
10	1.015	24.83	10.70	35.53	56.00	-20.47	QP
11 PP	1.525	22.23	10.73	32.96	46.00	-13.04	Average
12	1.525	27.28	10.73	38.01	56.00	-17.99	QP


Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

2#

Measurement Data

Live Line:

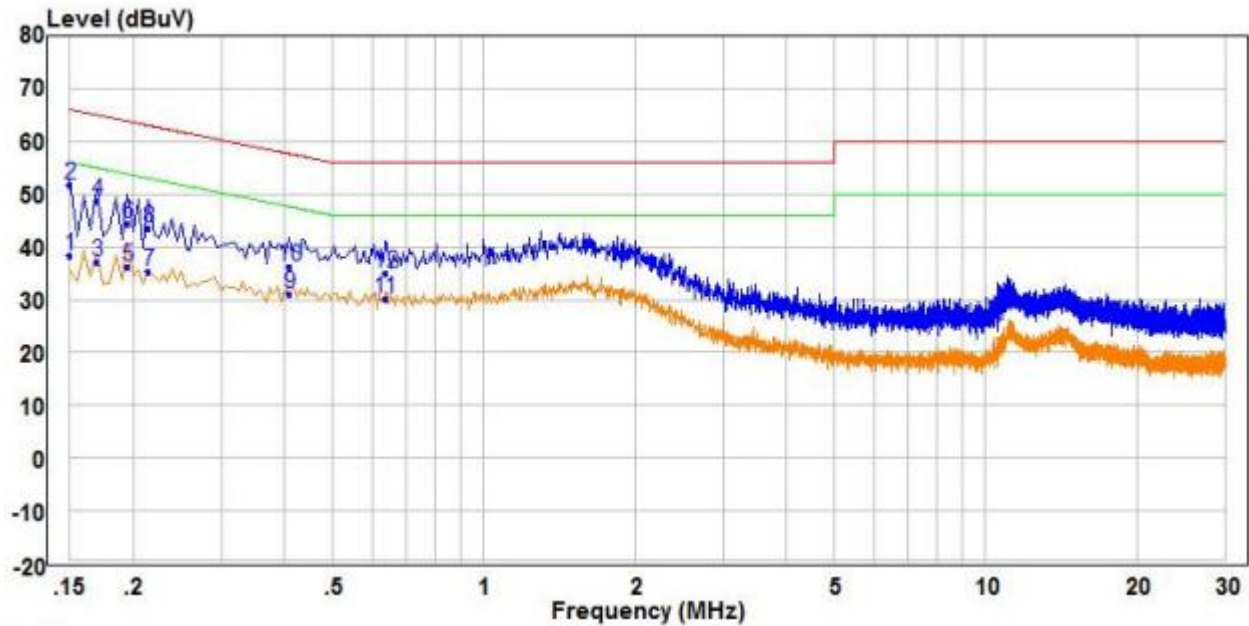


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.150	27.67	10.70	38.37	56.00	-17.63	Average	Line
2 PP	0.150	41.04	10.70	51.74	66.00	-14.26	QP	Line
3	0.170	26.38	10.66	37.04	54.96	-17.92	Average	Line
4	0.170	38.03	10.66	48.69	64.96	-16.27	QP	Line
5	0.195	25.58	10.62	36.20	53.82	-17.62	Average	Line
6	0.195	33.76	10.62	44.38	63.82	-19.44	QP	Line
7	0.215	24.65	10.59	35.24	53.01	-17.77	Average	Line
8	0.215	32.89	10.59	43.48	63.01	-19.53	QP	Line
9	0.410	20.42	10.62	31.04	47.65	-16.61	Average	Line
10	0.410	25.66	10.62	36.28	57.65	-21.37	QP	Line
11 AV	0.635	19.27	10.84	30.11	46.00	-15.89	Average	Line
12	0.635	24.26	10.84	35.10	56.00	-20.90	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral Line:


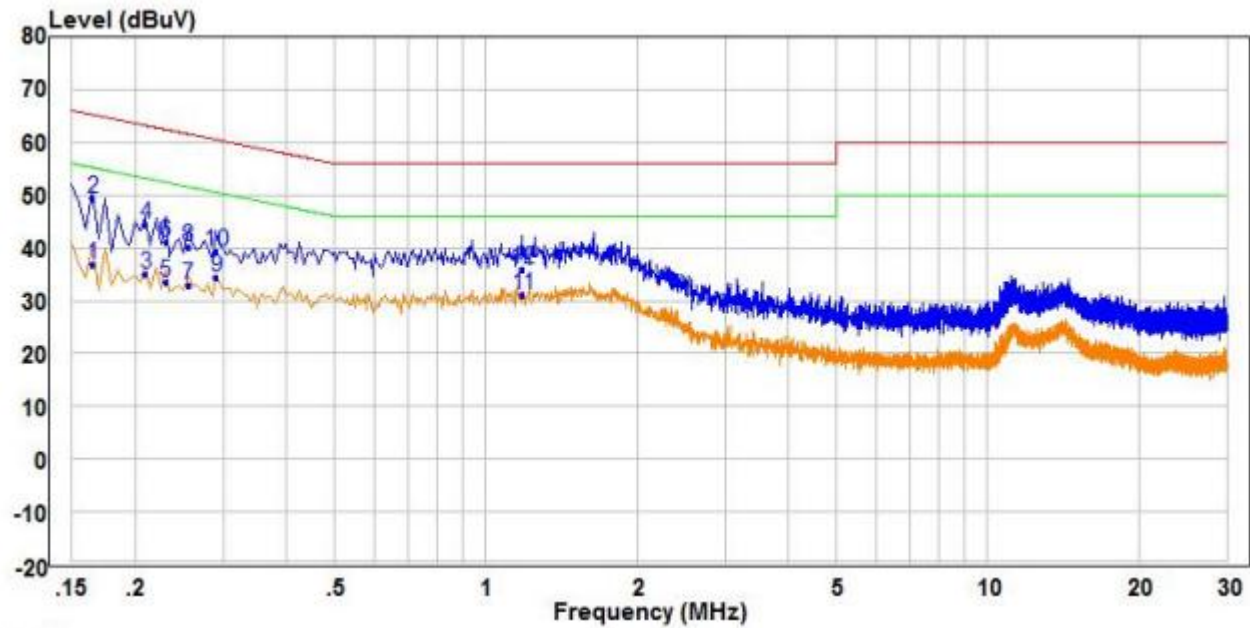


		Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.165	26.33	10.67	37.00	55.21	-18.21	Average	Neutral
2	QP	0.165	38.58	10.67	49.25	65.21	-15.96	QP	Neutral
3		0.210	24.48	10.59	35.07	53.21	-18.14	Average	Neutral
4		0.210	34.00	10.59	44.59	63.21	-18.62	QP	Neutral
5		0.230	22.97	10.56	33.53	52.45	-18.92	Average	Neutral
6		0.230	30.52	10.56	41.08	62.45	-21.37	QP	Neutral
7		0.255	22.50	10.53	33.03	51.59	-18.56	Average	Neutral
8		0.255	29.53	10.53	40.06	61.59	-21.53	QP	Neutral
9		0.290	23.93	10.49	34.42	50.52	-16.10	Average	Neutral
10		0.290	28.75	10.49	39.24	60.52	-21.28	QP	Neutral
11	PP	1.185	20.24	10.71	30.95	46.00	-15.05	Average	Neutral
12		1.185	25.26	10.71	35.97	56.00	-20.03	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak & Average Output Power

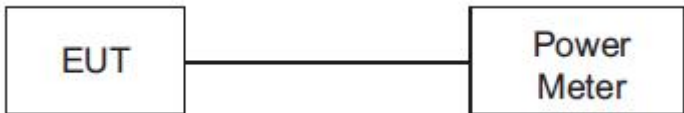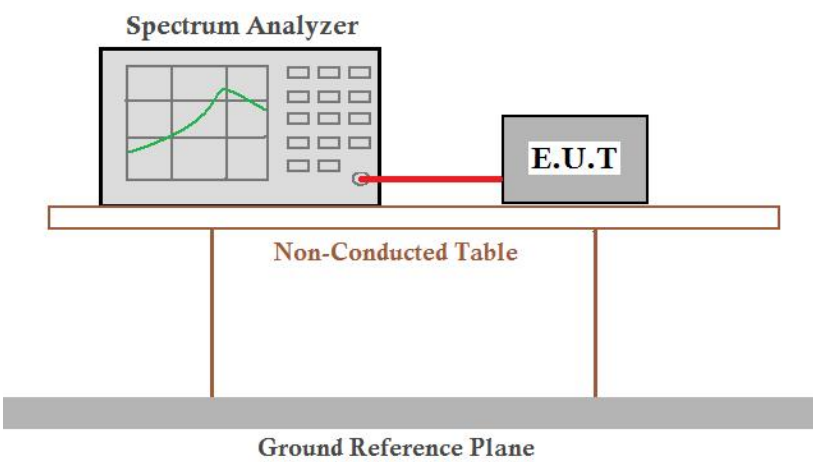Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10: 2013
Test Setup:	<p><i>Setup for Power meter measurement method</i></p>  <p><i>Setup for Spectrum analyser measurement method</i></p> 
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	30dBm
Test Results:	Pass


Test Result

Test Mode	Frequency[MHz]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	13.93	≤29.98	PASS
	2437	15.04	≤29.98	PASS
	2462	15.91	≤29.98	PASS
11G	2412	10.95	≤29.98	PASS
	2437	12.34	≤29.98	PASS
	2462	13.01	≤29.98	PASS
11N20SISO	2412	10.86	≤29.98	PASS
	2437	12.26	≤29.98	PASS
	2462	13.22	≤29.98	PASS


Note:

When Duty cycle >98%, D.C.F is not required.

Test Graphs

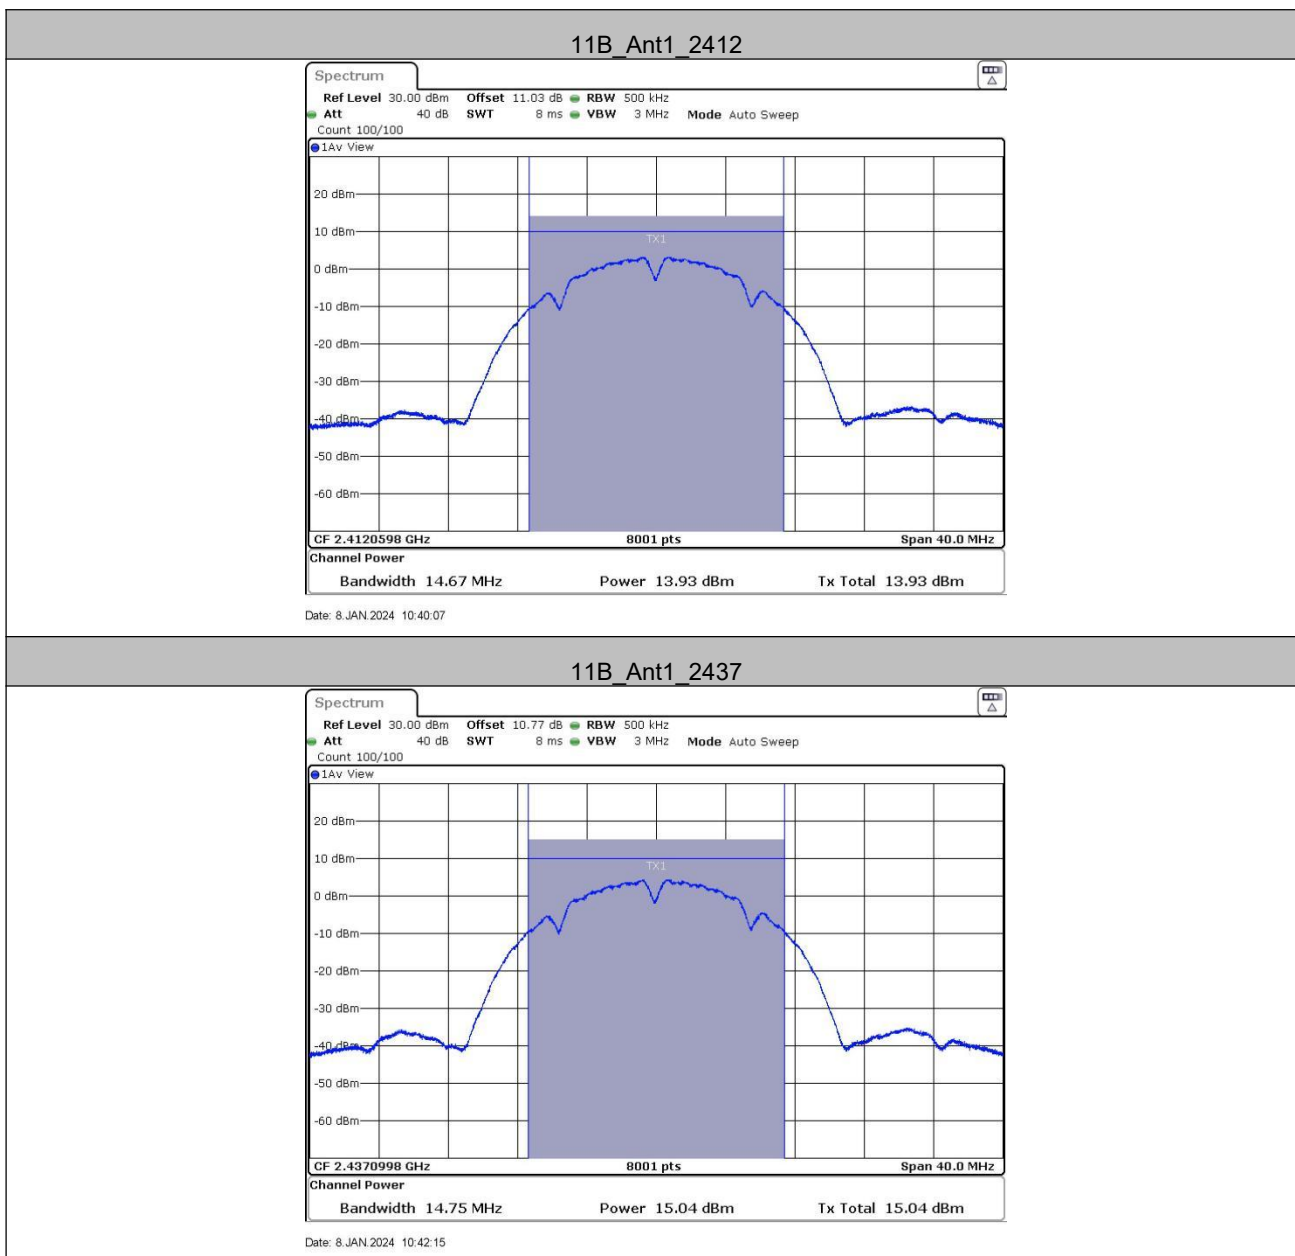


11B_Ant1_2462

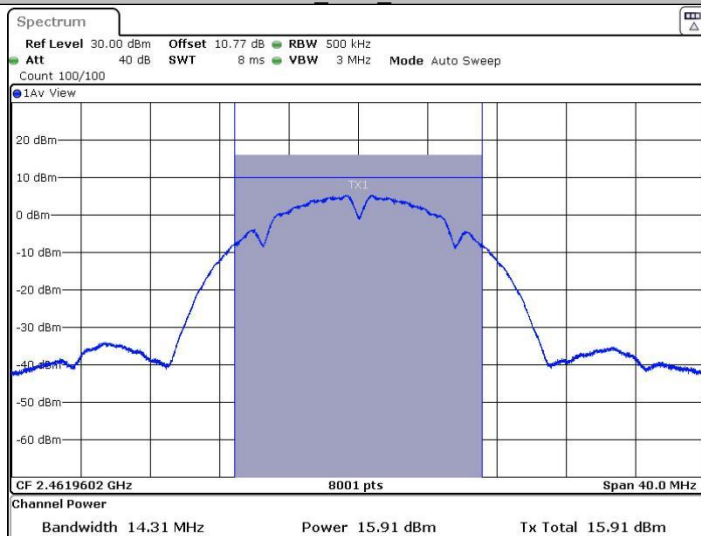


Date: 8 JAN 2024 10:45:05

11G_Ant1_2412

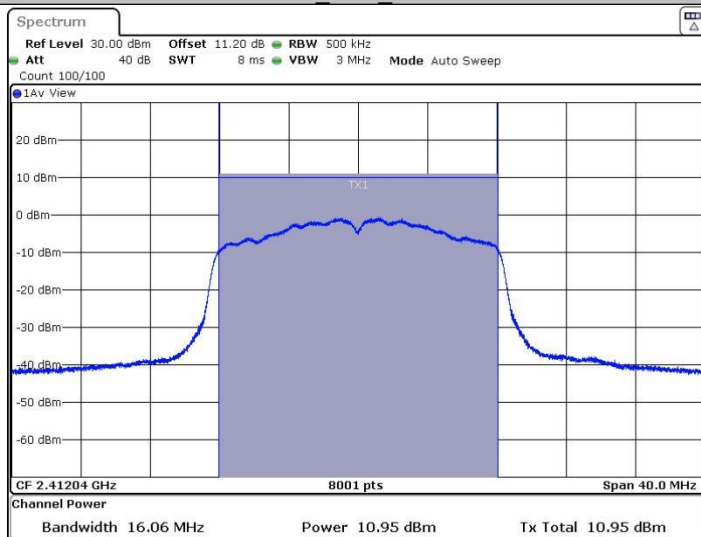


Date: 8 JAN 2024 10:46:46

11G_Ant1_2437

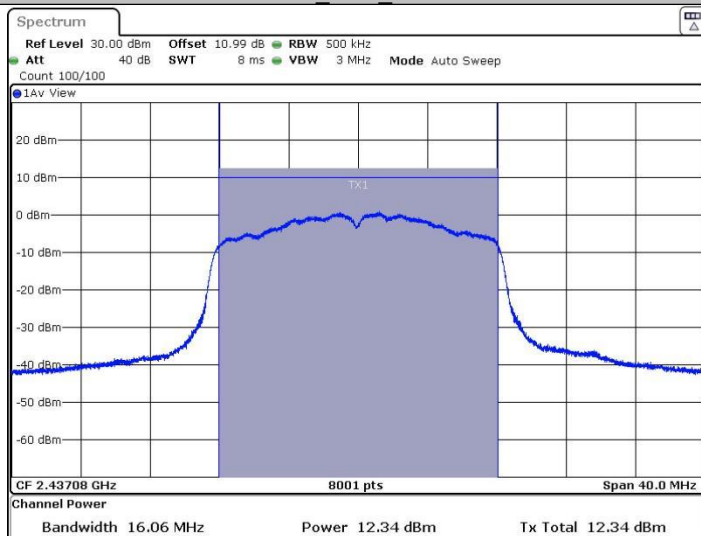


Date: 8 JAN 2024 10:49:45

11G_Ant1_2462

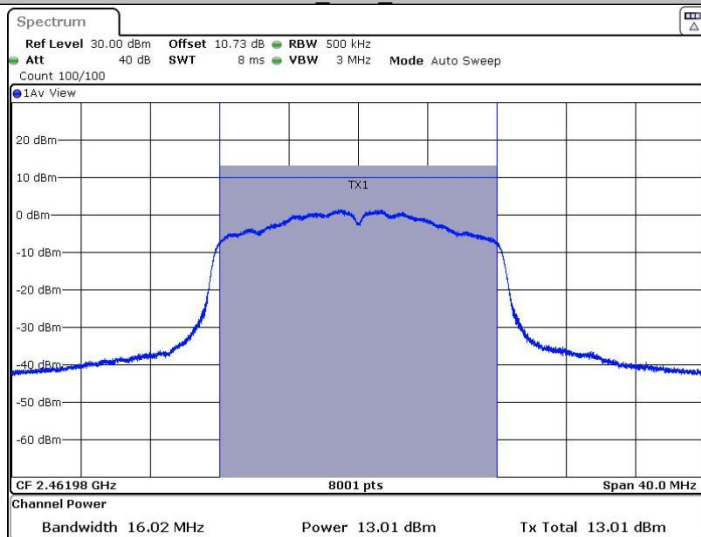



Date: 8 JAN 2024 10:51:15

11N20SISO_Ant1_2412

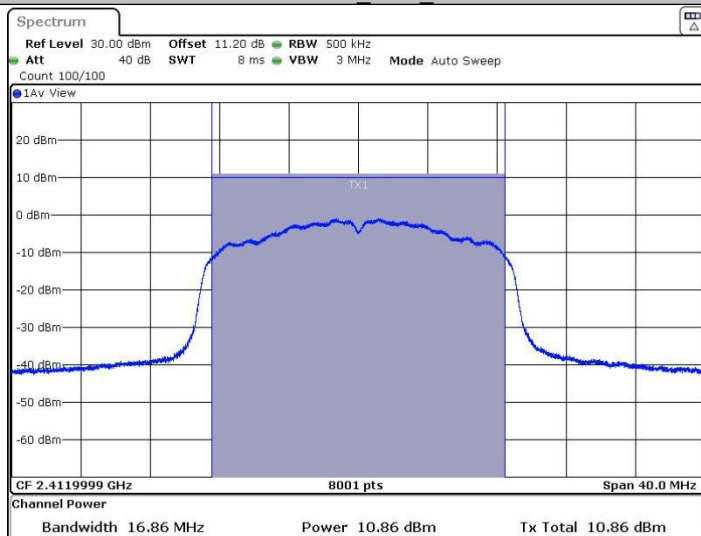


11N20SISO_Ant1_2437

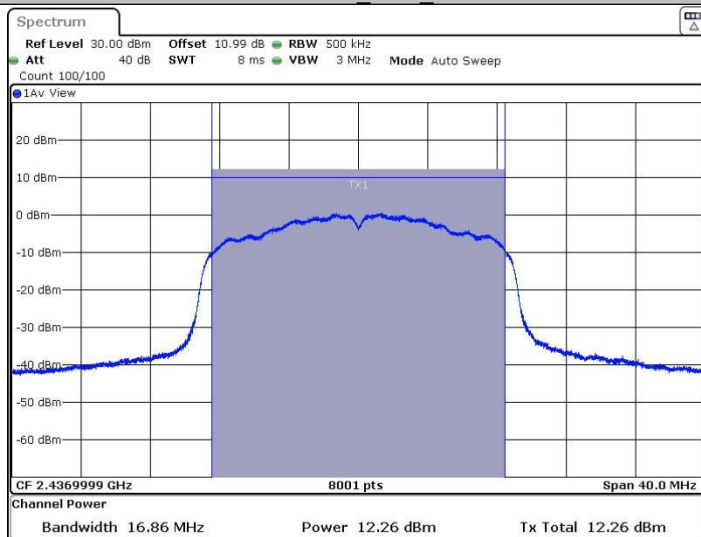

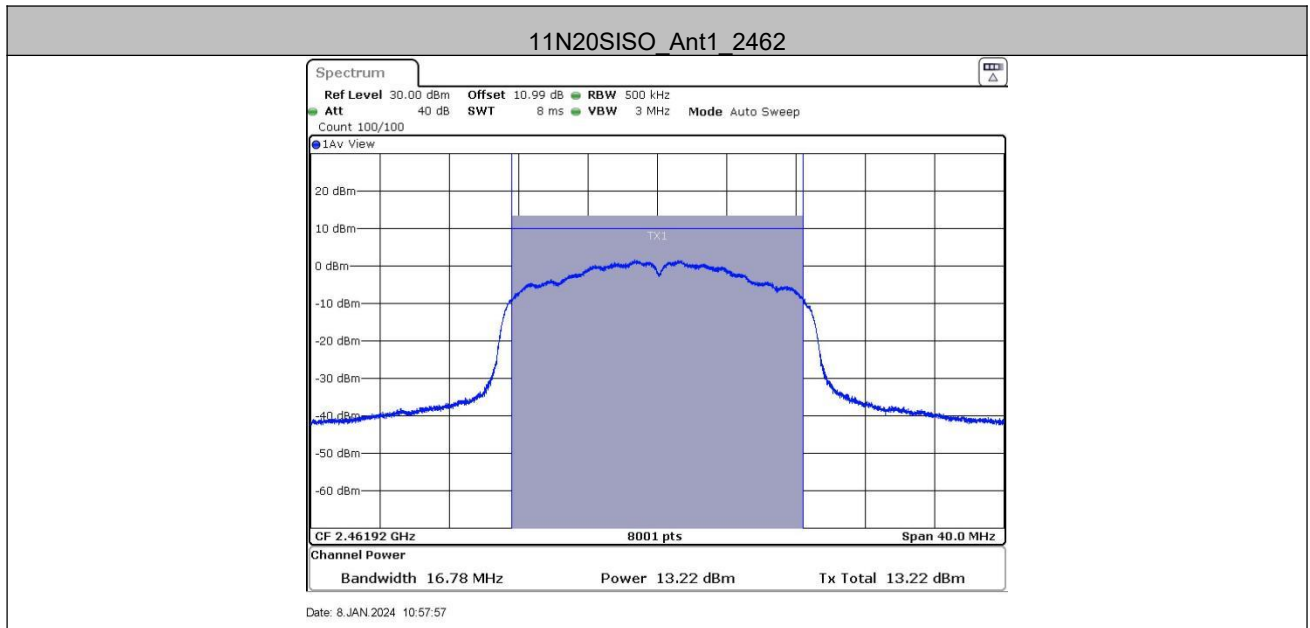


5.4 6dB Occupied Bandwidth

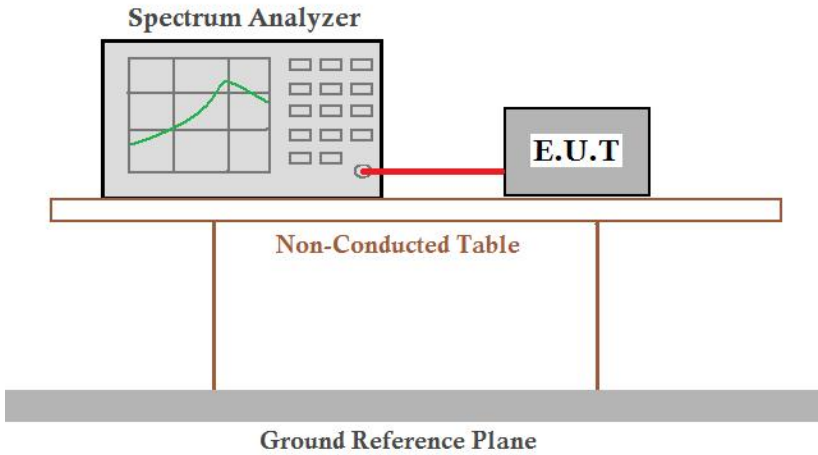Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	≥ 500 kHz
Test Results:	Pass


Test Result

TestMode	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	2412	9.56	2407.48	2417.04	0.5	PASS
	2437	9.52	2432.48	2442.00	0.5	PASS
	2462	9.52	2457.00	2466.52	0.5	PASS
11G	2412	13.80	2405.72	2419.52	0.5	PASS
	2437	13.80	2430.72	2444.52	0.5	PASS
	2462	11.32	2455.72	2467.04	0.5	PASS
11N20SISO	2412	13.80	2405.72	2419.52	0.5	PASS
	2437	13.80	2430.72	2444.52	0.5	PASS
	2462	11.32	2455.72	2467.04	0.5	PASS

Test Graphs

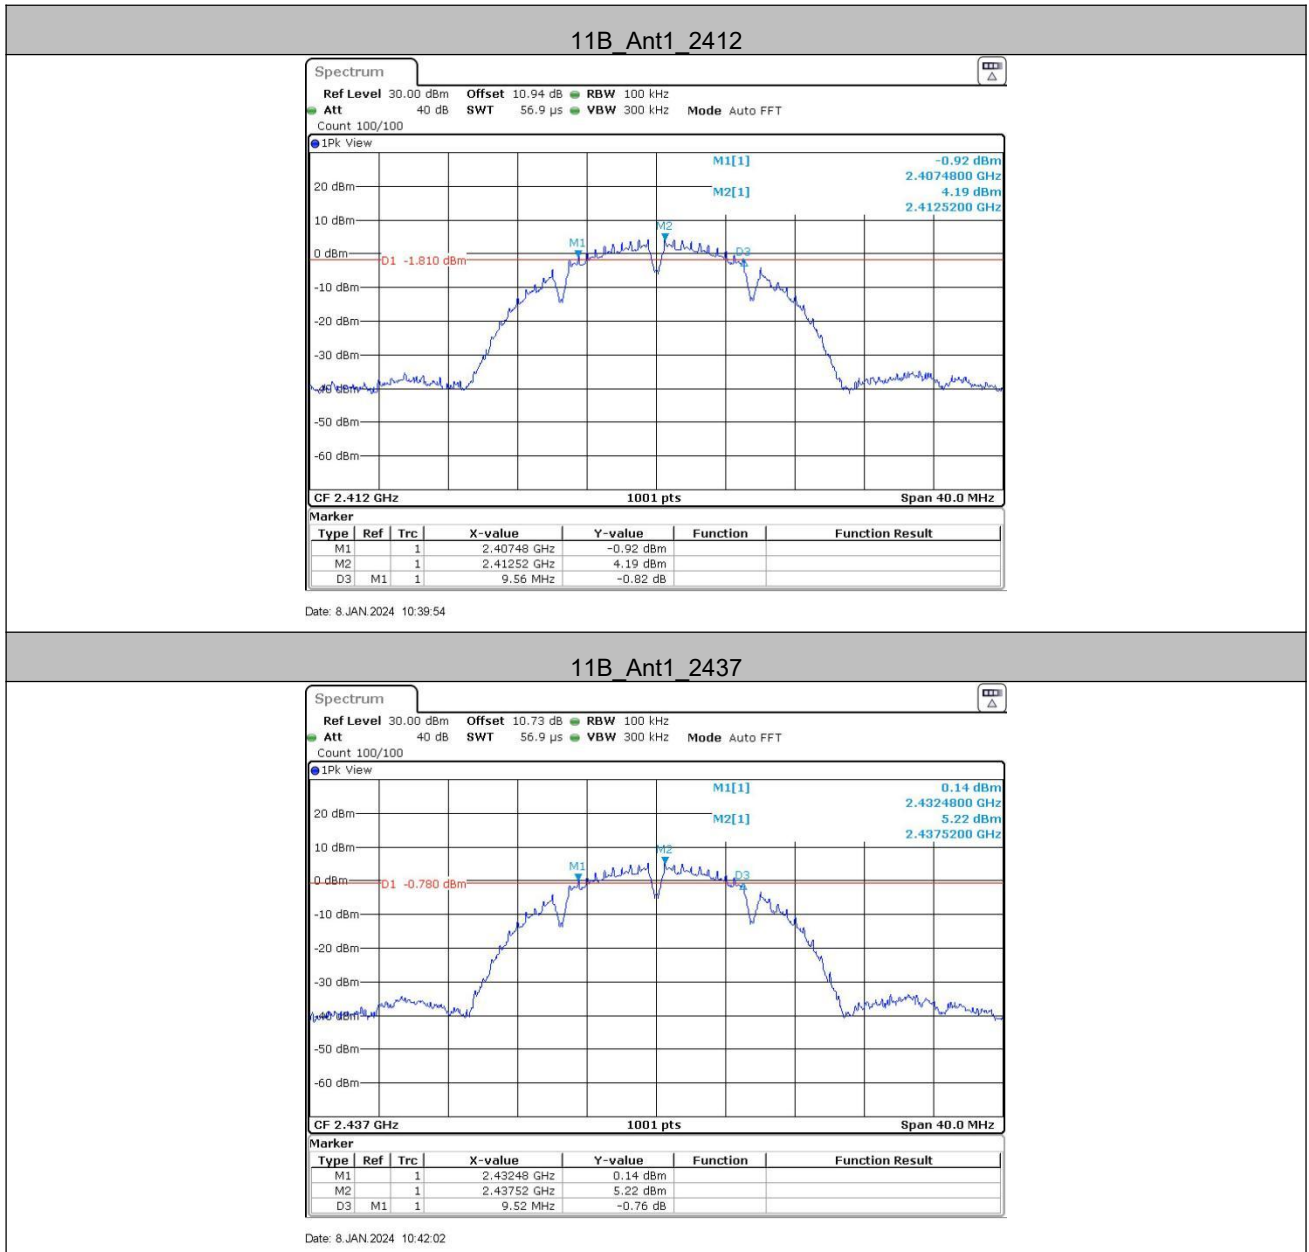


11B Ant1 2462

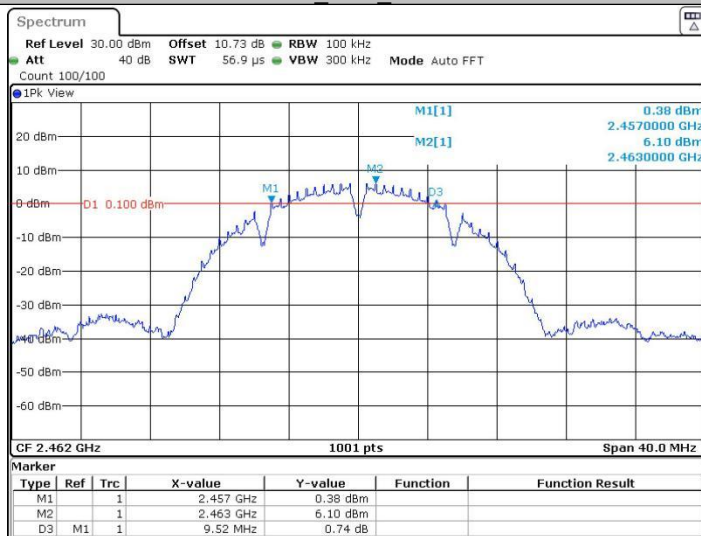


Date: 8 JAN 2024 10:44:52

11G Ant1 2412

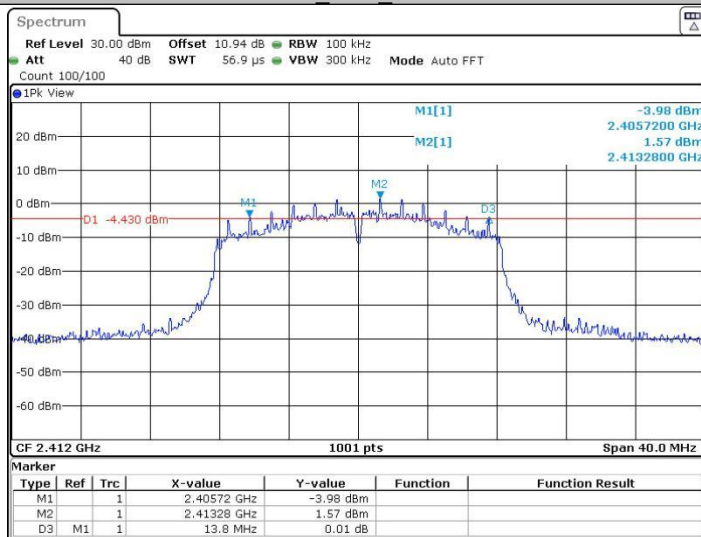


Date: 8 JAN 2024 10:46:33

11G_Ant1_2437

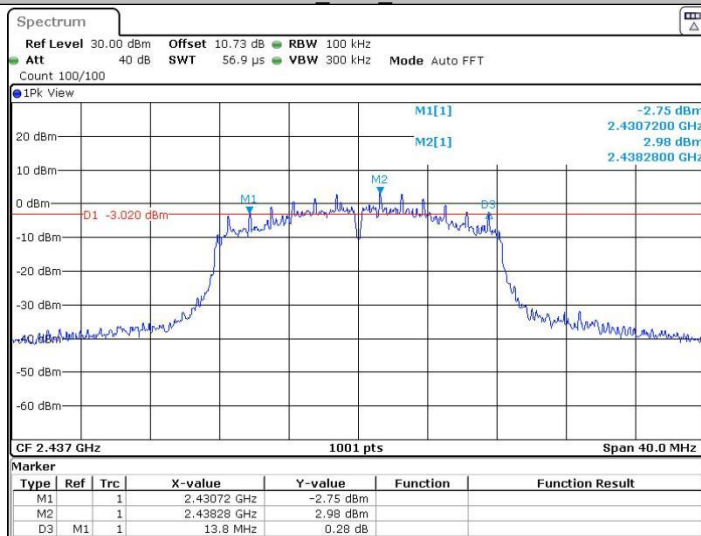


Date: 8.JAN.2024 10:49:32

11G_Ant1_2462

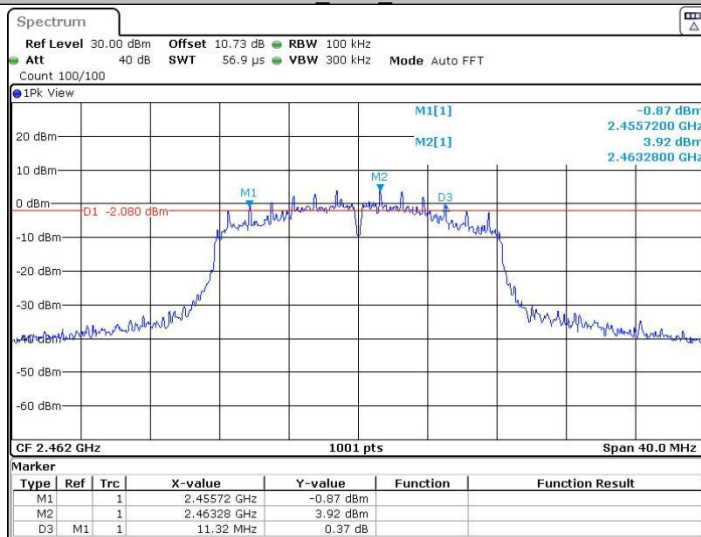


Date: 8.JAN.2024 10:51:02

11N20SISO_Ant1_2412

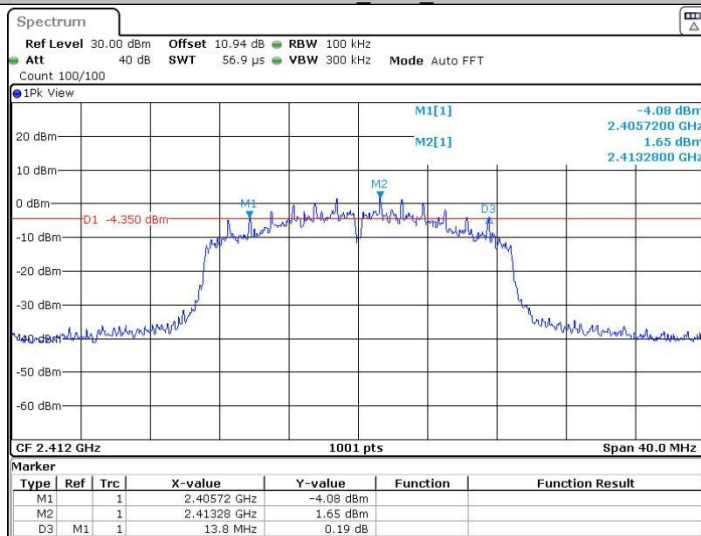


Date: 8 JAN 2024 10:53:01


11N20SISO_Ant1_2437

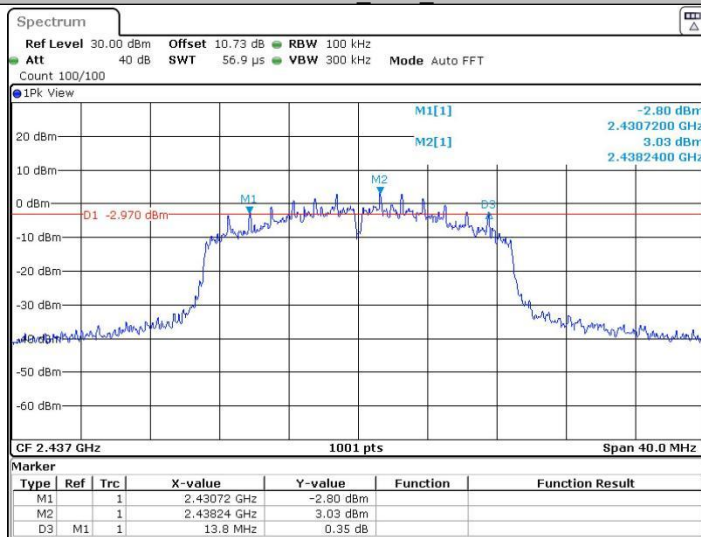

Date: 8 JAN 2024 10:55:52

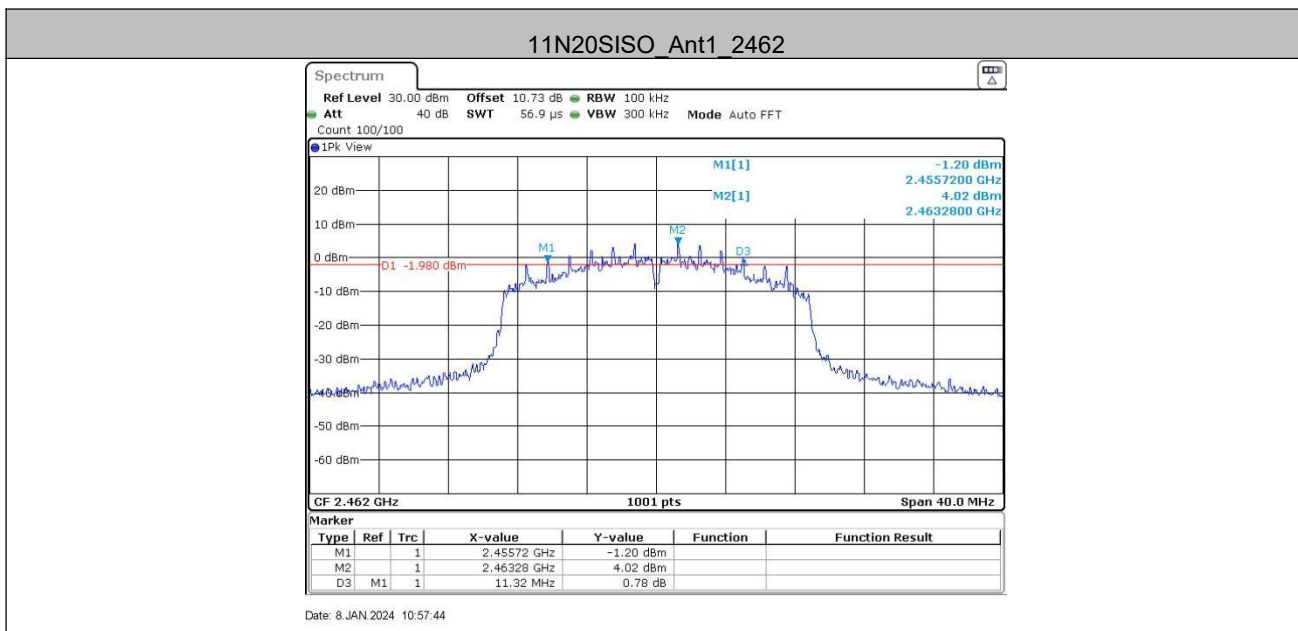

5.5 Power Spectral Density

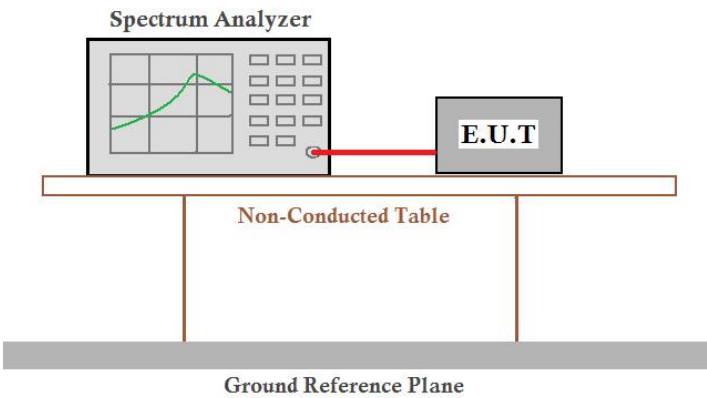Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	≤8.00dBm/3kHz
Test Results:	Pass


Test Result

TestMode	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-14.64	≤7.98	PASS
	2437	-12.23	≤7.98	PASS
	2462	-11.27	≤7.98	PASS
11G	2412	-14.56	≤7.98	PASS
	2437	-13.02	≤7.98	PASS
	2462	-12.4	≤7.98	PASS
11N20SISO	2412	-15.37	≤7.98	PASS
	2437	-13.98	≤7.98	PASS
	2462	-13.25	≤7.98	PASS


Note:

When Duty cycle >98%, D.C.F is not required.

Test Graphs

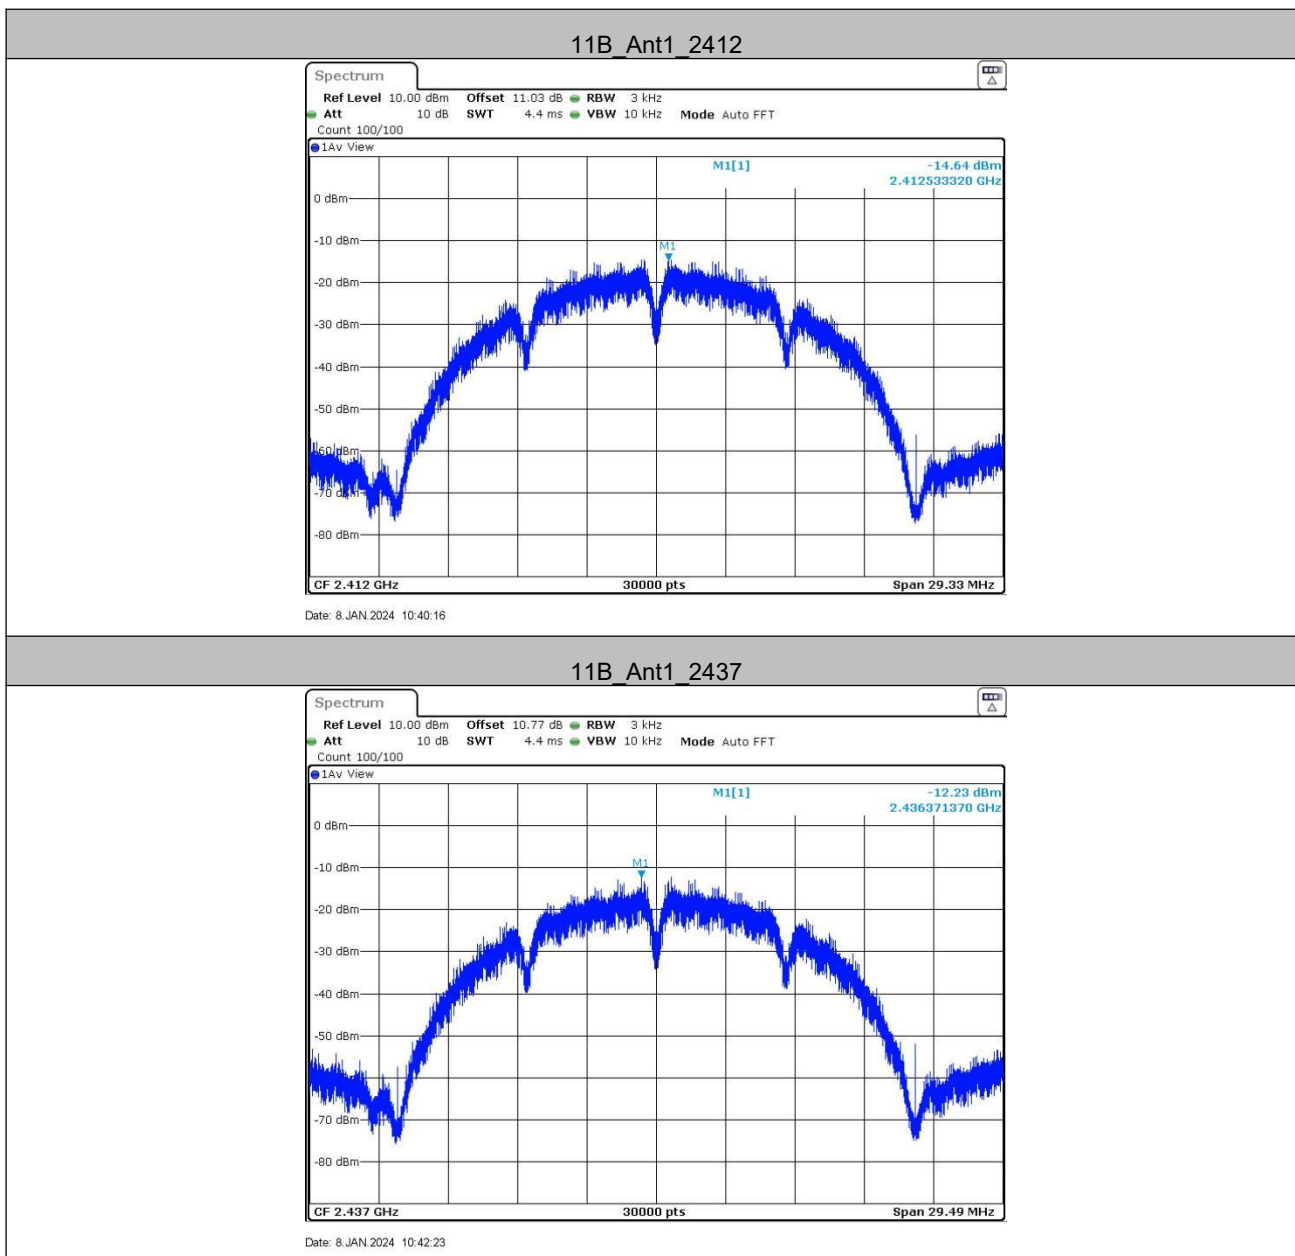


11B_Ant1_2462

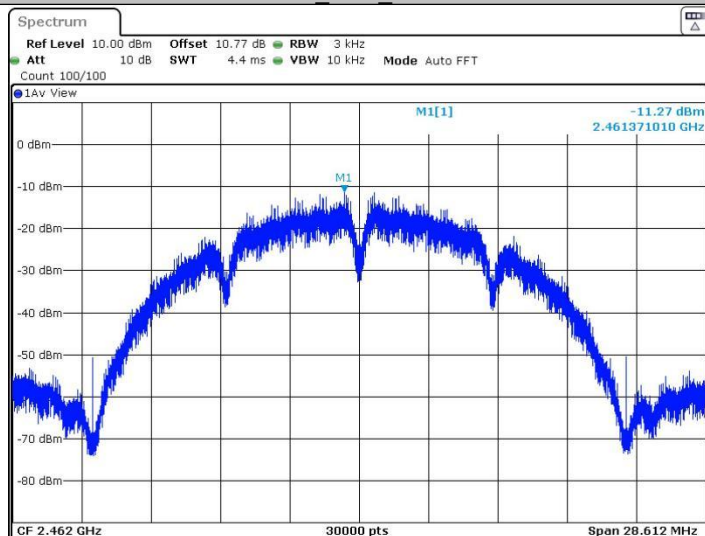


Date: 8 JAN 2024 10:45:13

11G_Ant1_2412

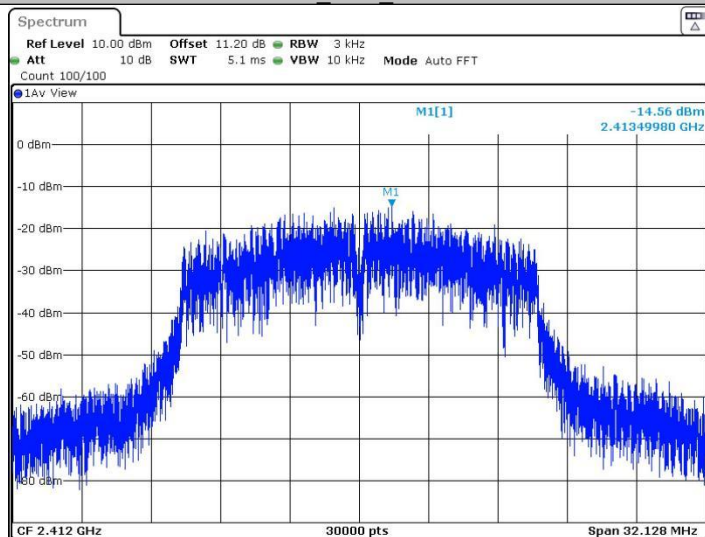


Date: 8 JAN 2024 10:46:55

11G_Ant1_2437

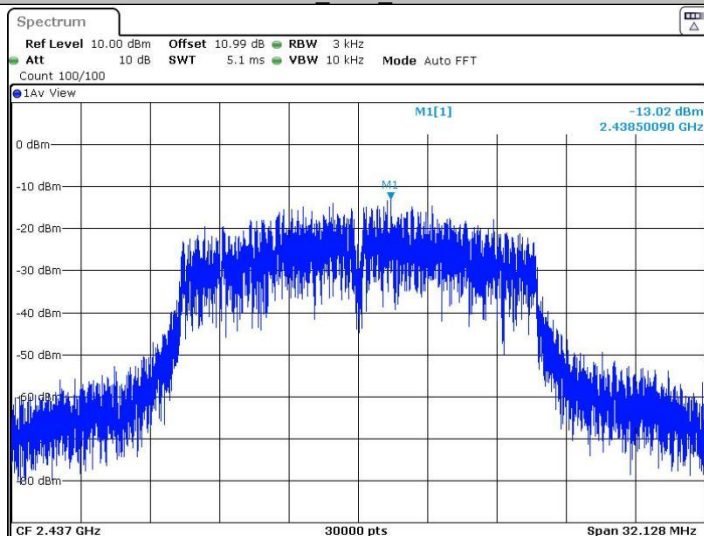


Date: 8 JAN 2024 10:49:53

11G_Ant1_2462

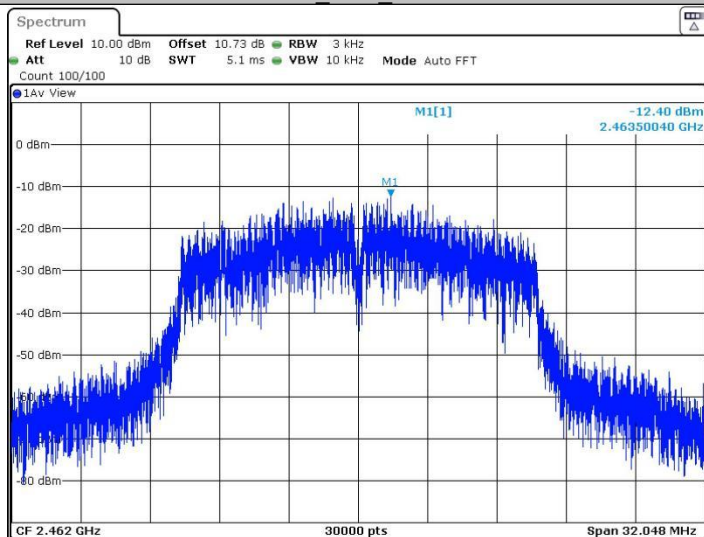


Date: 8 JAN 2024 10:51:23

11N20SISO_Ant1_2412

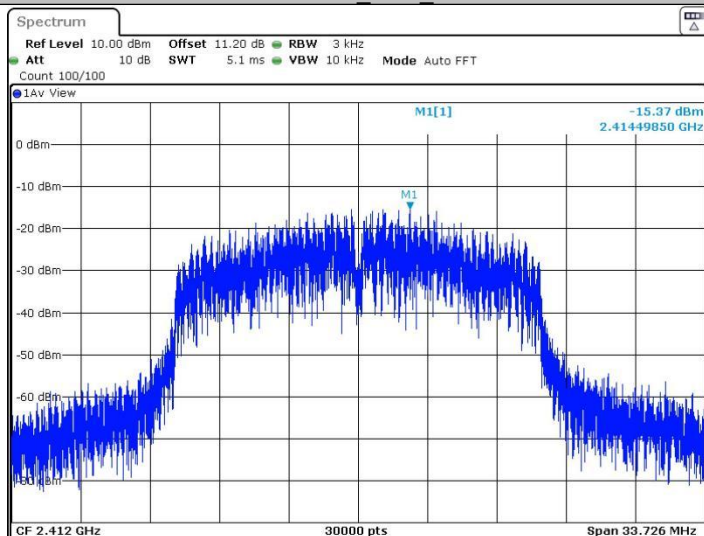


Date: 8 JAN 2024 10:53:22


11N20SISO_Ant1_2437

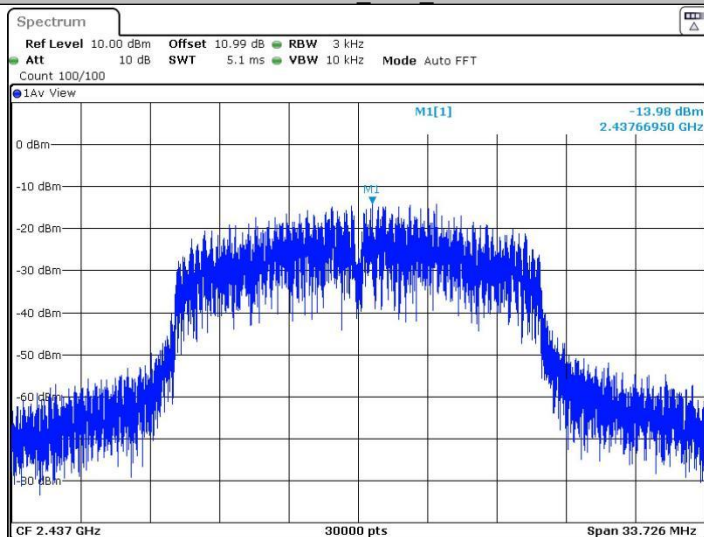

Date: 8 JAN 2024 10:56:14

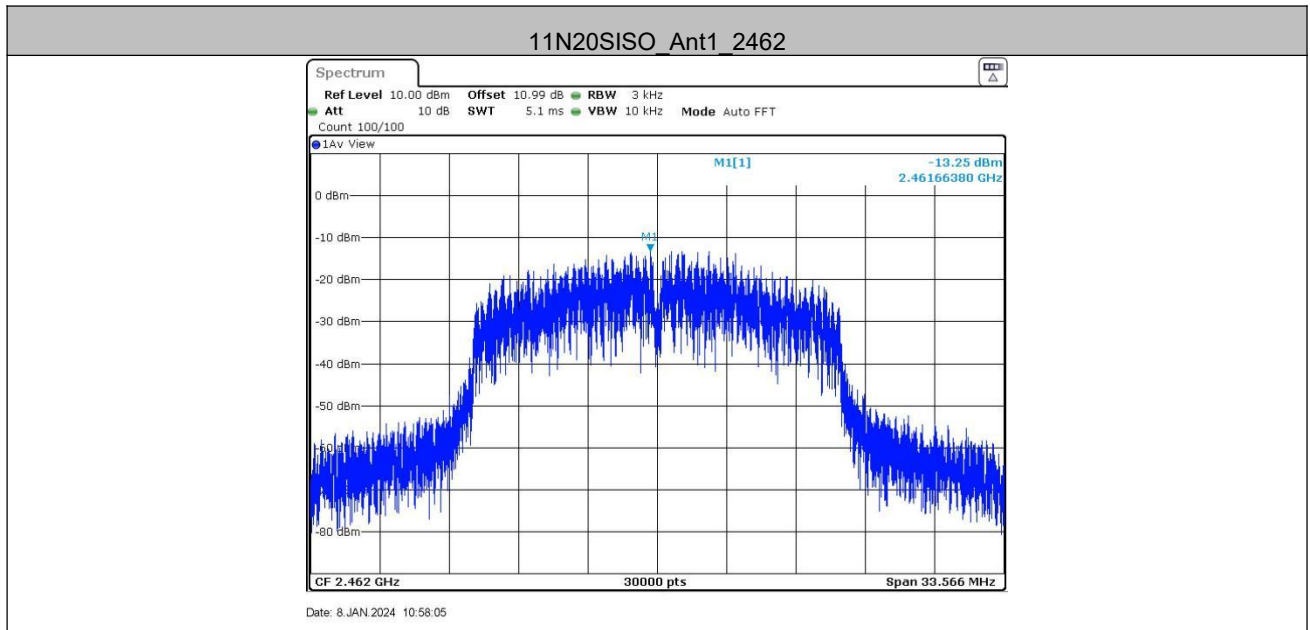


5.6 Band-edge for RF Conducted Emissions

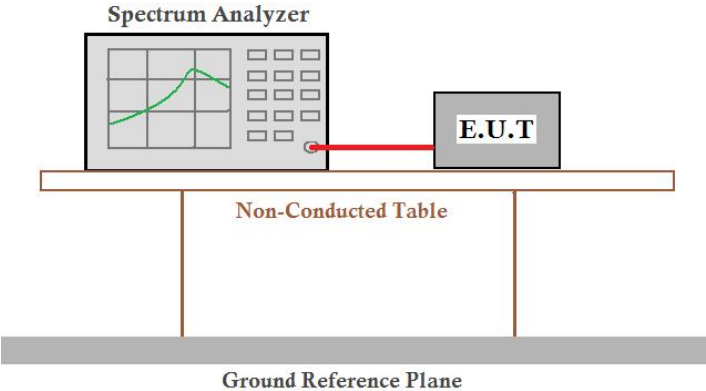Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test Result

TestMode	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Low	2412	4.08	-38.66	≤ -25.92	PASS
	High	2462	6.28	-46.57	≤ -23.72	PASS
11G	Low	2412	1.52	-39.49	≤ -28.48	PASS
	High	2462	3.98	-46.4	≤ -26.02	PASS
11N20SISO	Low	2412	1.49	-38.98	≤ -28.51	PASS
	High	2462	4.10	-46.56	≤ -25.9	PASS

5.6.1 Test Graphs

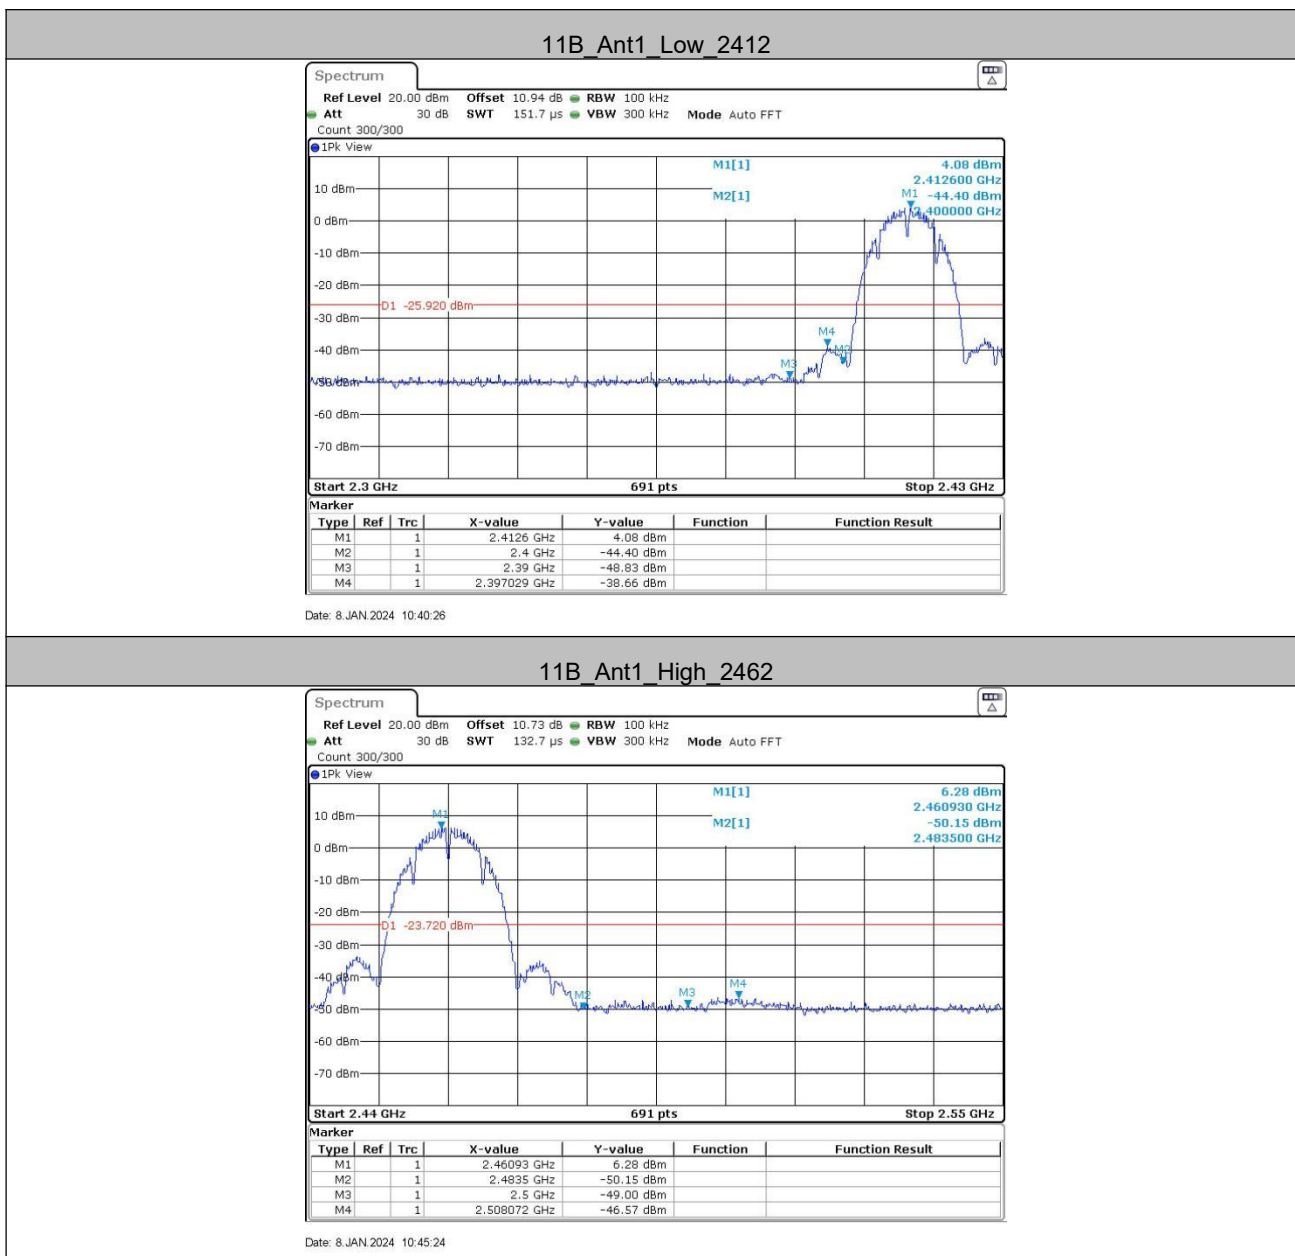


11G_Ant1_Low_2412

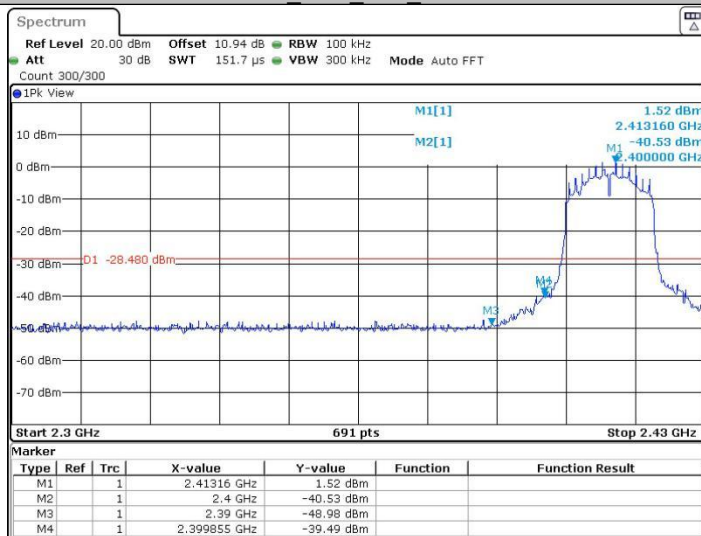


Date: 8 JAN 2024 10:47:05

11G_Ant1_High_2462

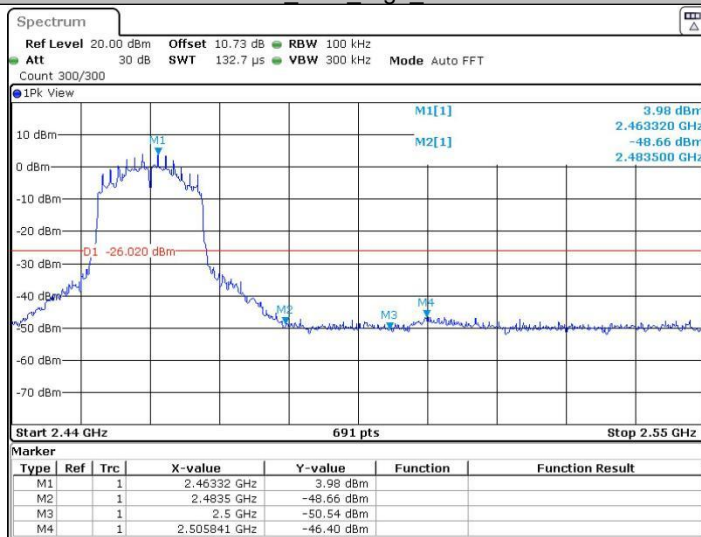

Date: 8 JAN 2024 10:51:33

11N20SISO_Ant1_Low_2412

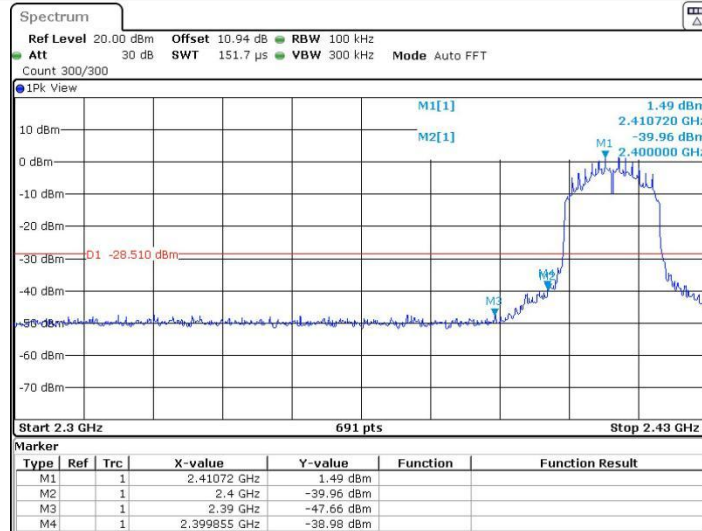


Date: 8 JAN 2024 10:53:32

11N20SISO_Ant1_High_2462



Date: 8 JAN 2024 10:58:16


5.7 RF Conducted Spurious Emissions

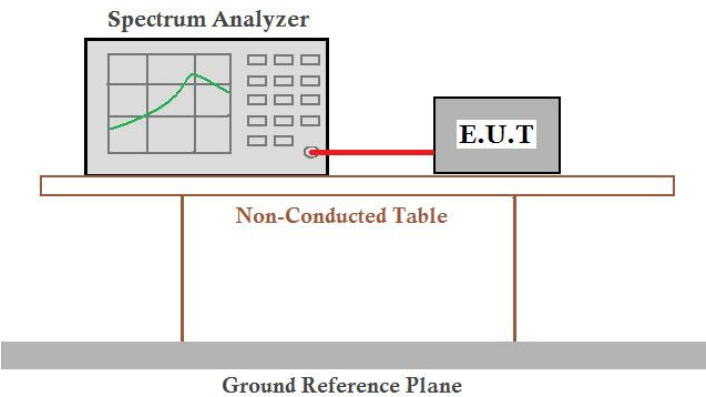Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013
Test Setup:	 <p>Offset=cable loss+ attenuation factor</p>
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Only the worst case is recorded in the report.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Results:	Pass


Test Result

TestMode	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	2412	Reference	4.18	4.18	---	PASS
		30~1000	4.18	-55.46	≤ -25.82	PASS
		1000~26500	4.18	-41.17	≤ -25.82	PASS
	2437	Reference	5.27	5.27	---	PASS
		30~1000	5.27	-55.05	≤ -24.73	PASS
		1000~26500	5.27	-43	≤ -24.73	PASS
	2462	Reference	6.21	6.21	---	PASS
		30~1000	6.21	-55.6	≤ -23.79	PASS
		1000~26500	6.21	-42.64	≤ -23.79	PASS
11G	2412	Reference	1.57	1.57	---	PASS
		30~1000	1.57	-54	≤ -28.43	PASS
		1000~26500	1.57	-52.62	≤ -28.43	PASS
	2437	Reference	2.84	2.84	---	PASS
		30~1000	2.84	-54.26	≤ -27.16	PASS
		1000~26500	2.84	-52.14	≤ -27.16	PASS
	2462	Reference	3.90	3.90	---	PASS
		30~1000	3.90	-55.83	≤ -26.1	PASS
		1000~26500	3.90	-52.75	≤ -26.1	PASS
11N20SISO	2412	Reference	1.63	1.63	---	PASS
		30~1000	1.63	-55.81	≤ -28.37	PASS
		1000~26500	1.63	-52.41	≤ -28.37	PASS
	2437	Reference	2.89	2.89	---	PASS
		30~1000	2.89	-54.87	≤ -27.11	PASS
		1000~26500	2.89	-52.49	≤ -27.11	PASS
	2462	Reference	4.01	4.01	---	PASS
		30~1000	4.01	-54.81	≤ -25.99	PASS
		1000~26500	4.01	-52.23	≤ -25.99	PASS

Test Graphs

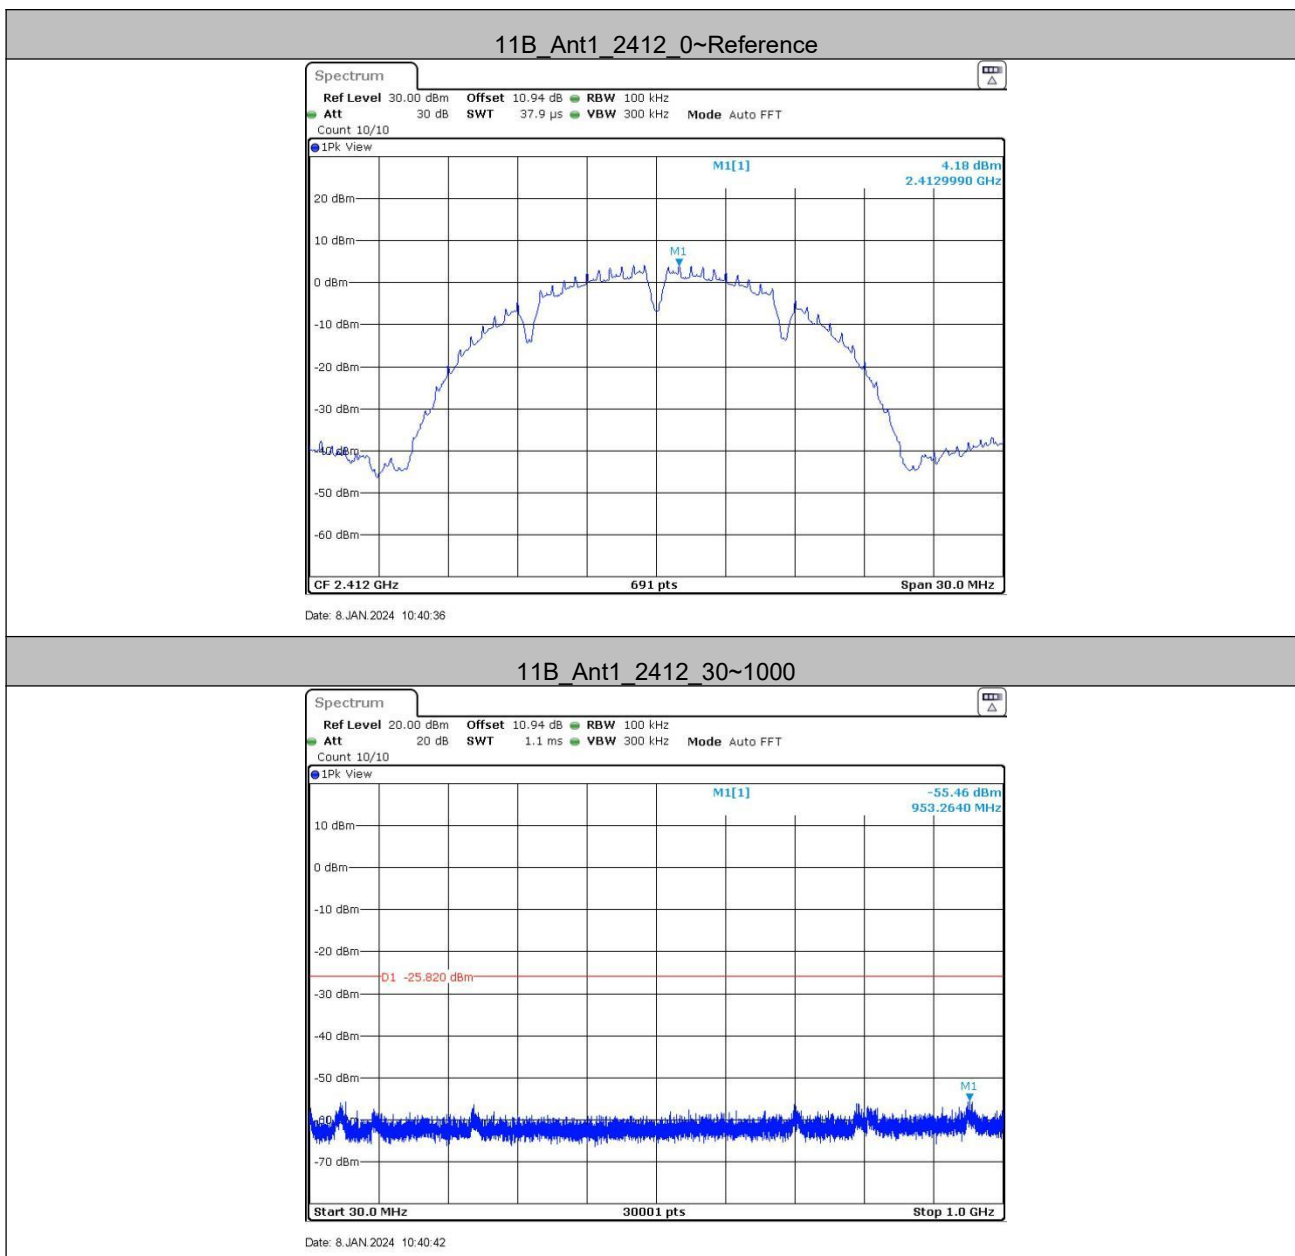

11B_Ant1_2412_1000~26500

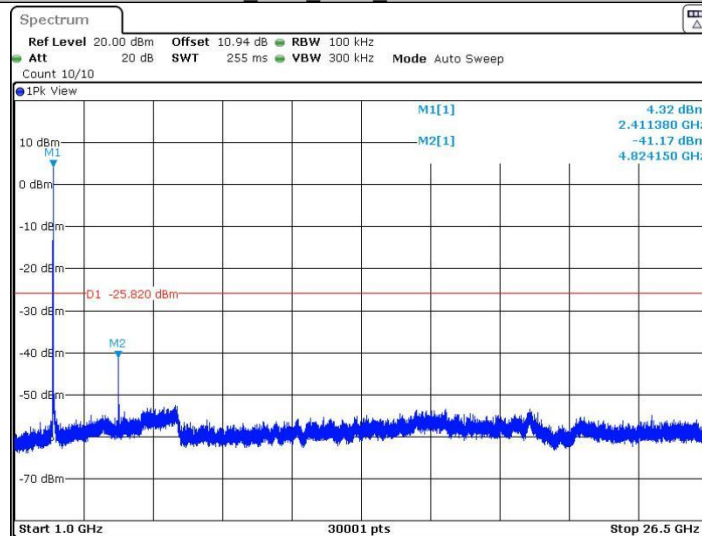


Date: 8 JAN 2024 10:41:04

11B_Ant1_2437_0~Reference




Date: 8 JAN 2024 10:42:32

11B_Ant1_2437_30~1000

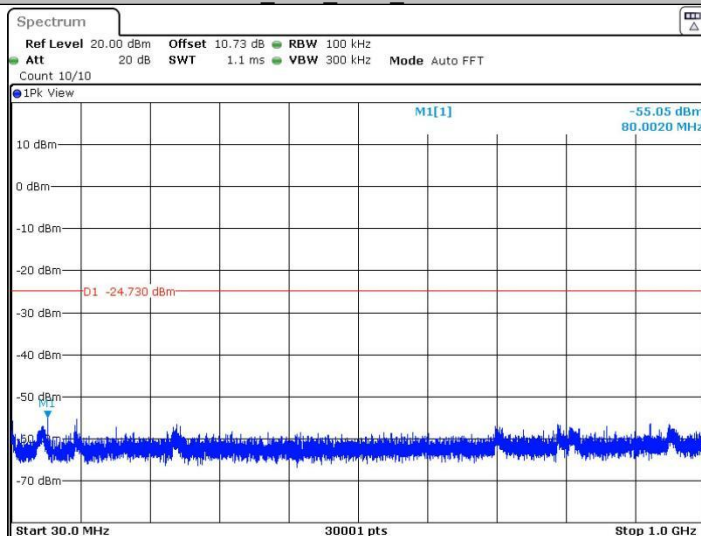


Date: 8 JAN 2024 10:42:38

11B_Ant1_2437_1000~26500

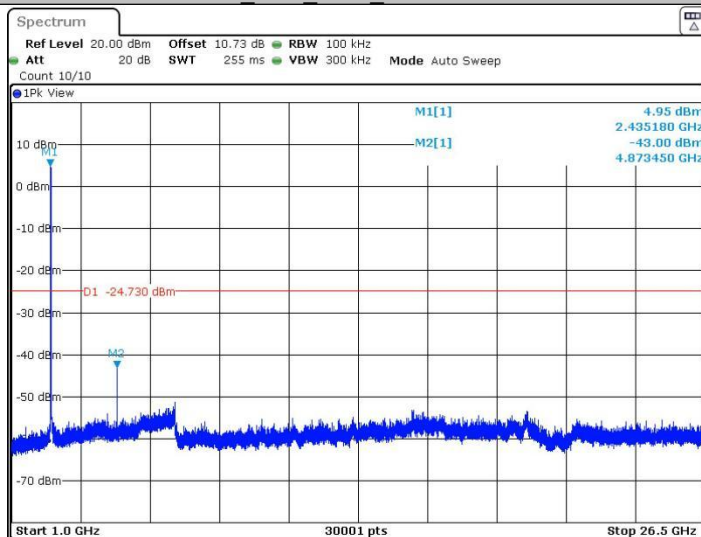


Date: 8 JAN 2024 10:43:00

11B_Ant1_2462_0~Reference

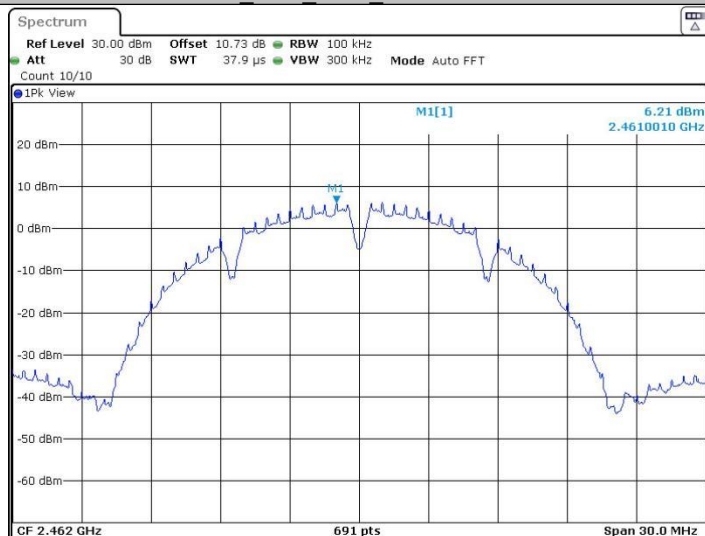


Date: 8 JAN 2024 10:45:32

11B_Ant1_2462_30~1000

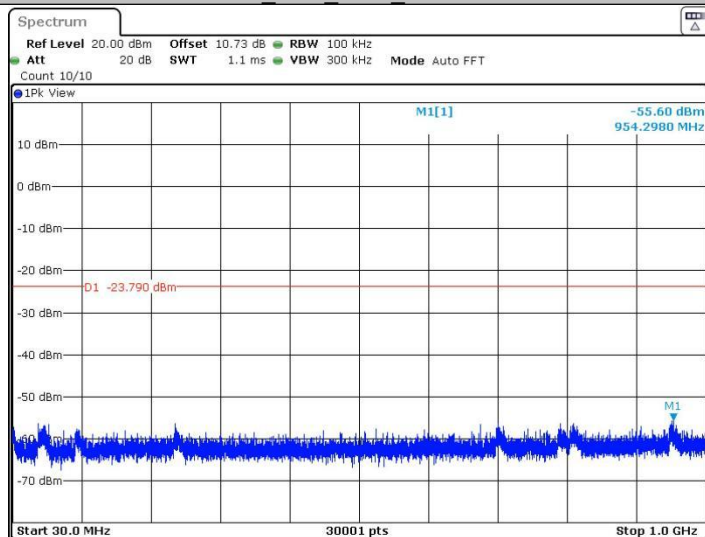


Date: 8 JAN 2024 10:45:39


11B_Ant1_2462_1000~26500

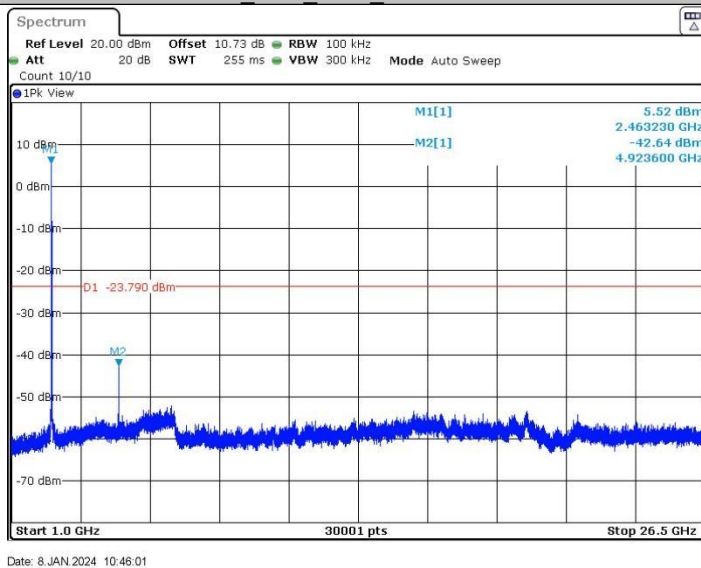

11G_Ant1_2412_0~Reference

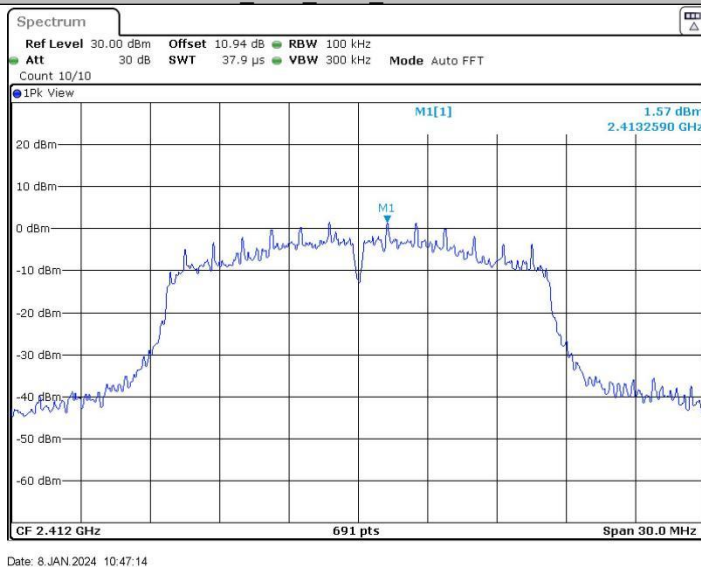


11G_Ant1_2412_30~1000

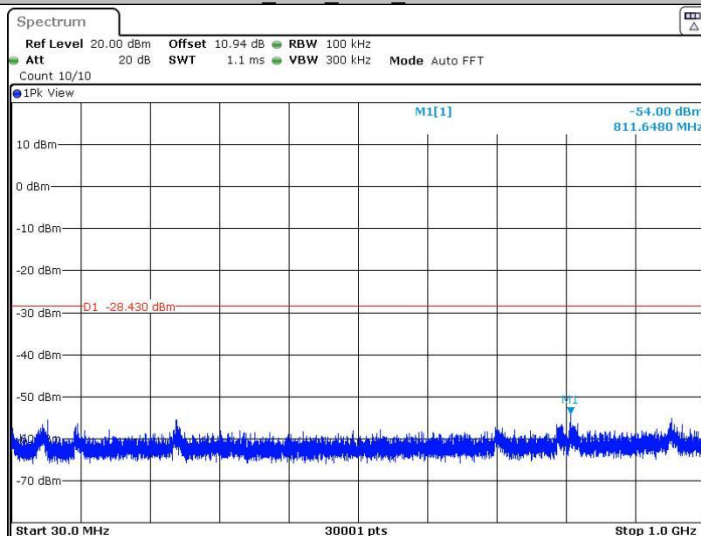


Date: 8 JAN 2024 10:47:20

11G_Ant1_2412_1000~26500

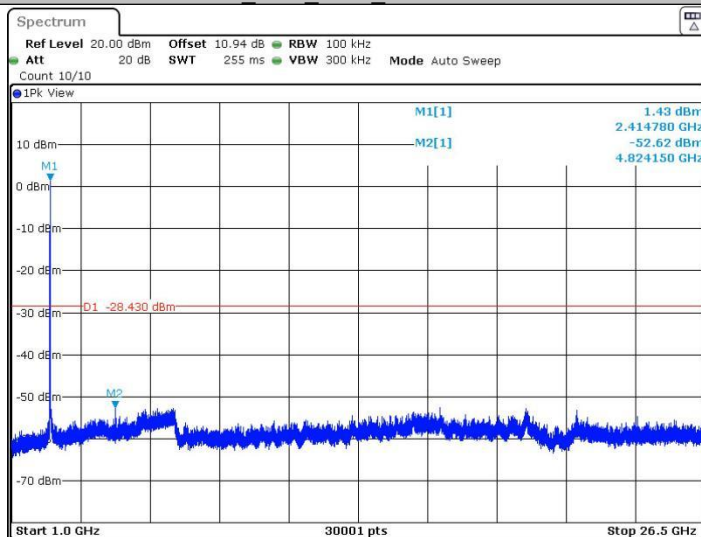


Date: 8 JAN 2024 10:47:42

11G_Ant1_2437_0~Reference

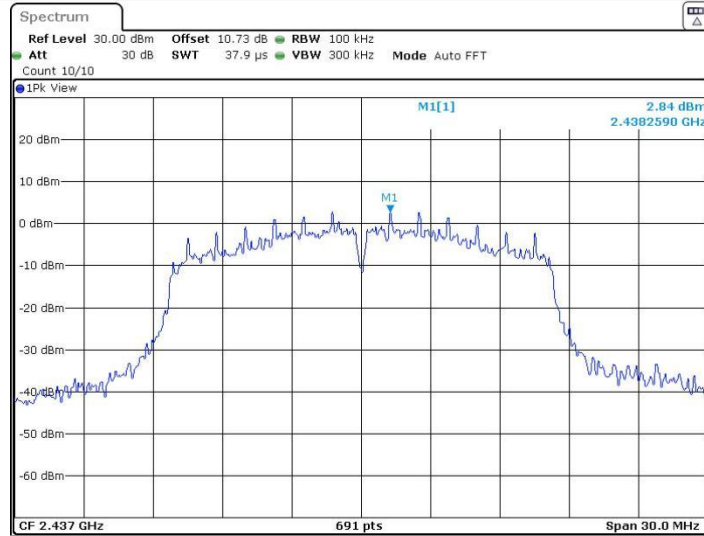


Date: 8 JAN 2024 10:50:01

11G_Ant1_2437_30~1000

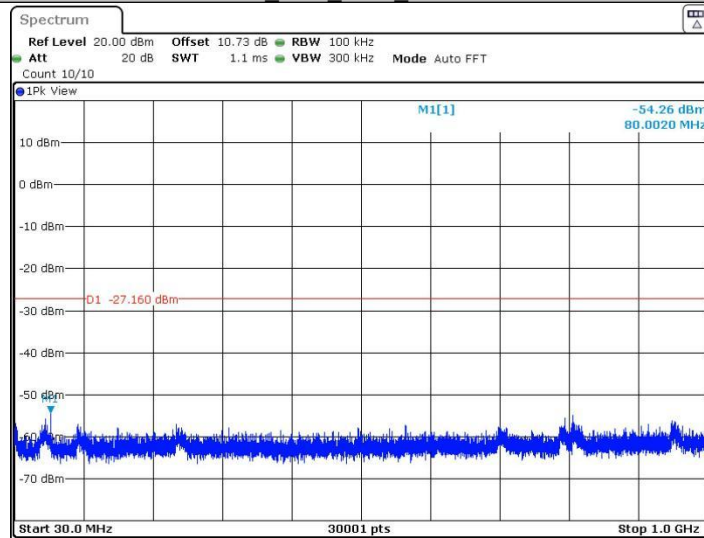


Date: 8 JAN 2024 10:50:08

11G_Ant1_2437_1000~26500

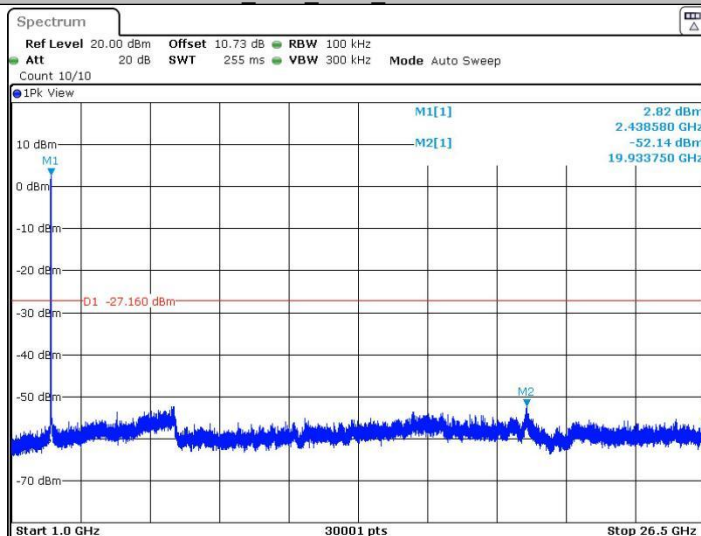


Date: 8 JAN 2024 10:50:30

11G_Ant1_2462_0~Reference

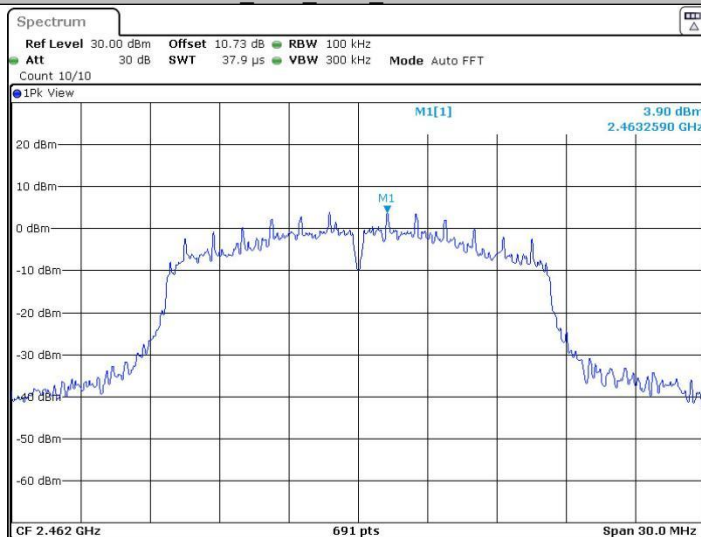


Date: 8 JAN 2024 10:51:42

11G_Ant1_2462_30~1000

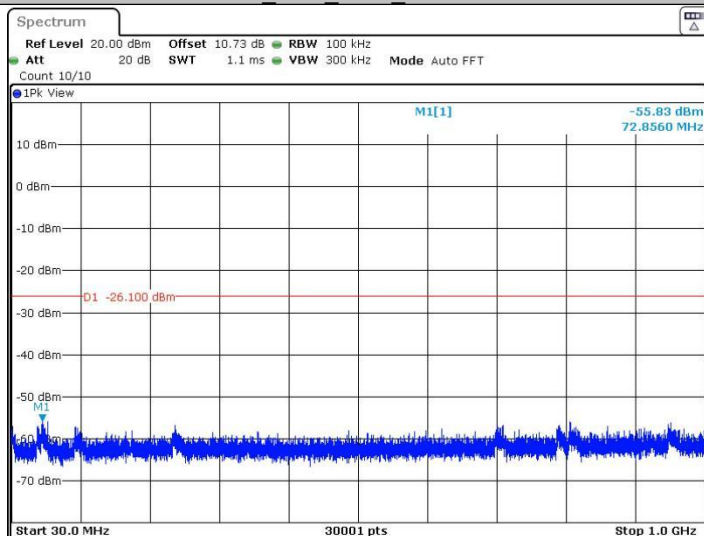


Date: 8 JAN 2024 10:51:48

11G_Ant1_2462_1000~26500

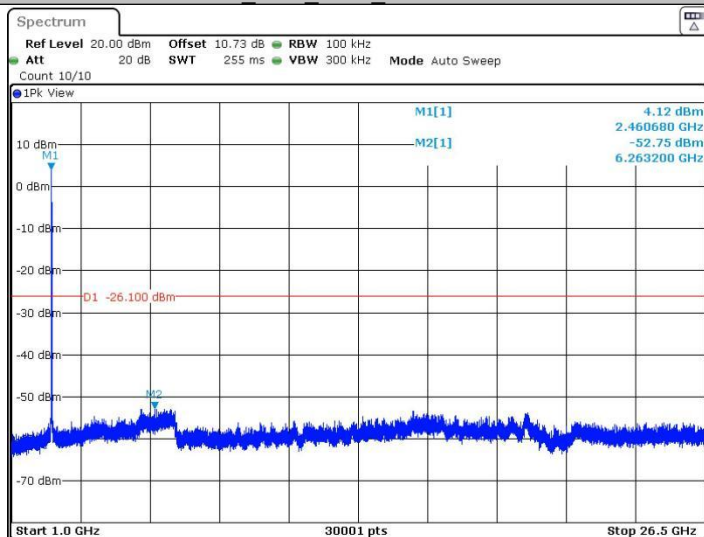


Date: 8 JAN 2024 10:52:10

11N20SISO_Ant1_2412_0~Reference

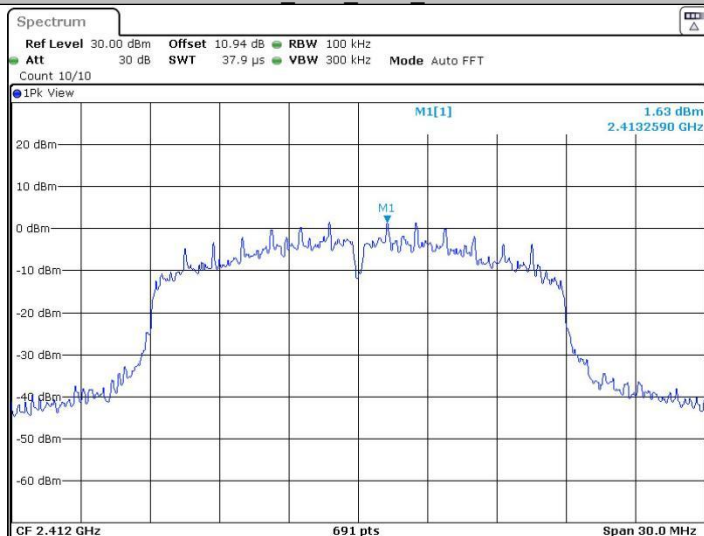


Date: 8 JAN 2024 10:53:41

11N20SISO_Ant1_2412_30~1000

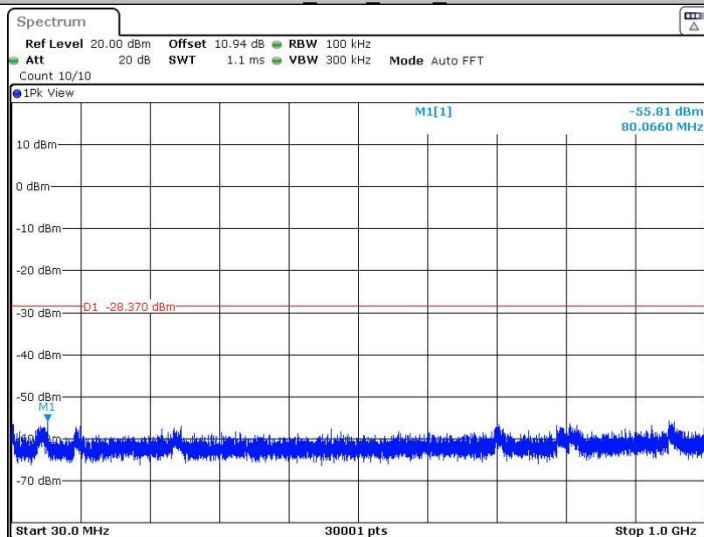


Date: 8 JAN 2024 10:53:48

11N20SISO_Ant1_2412_1000~26500

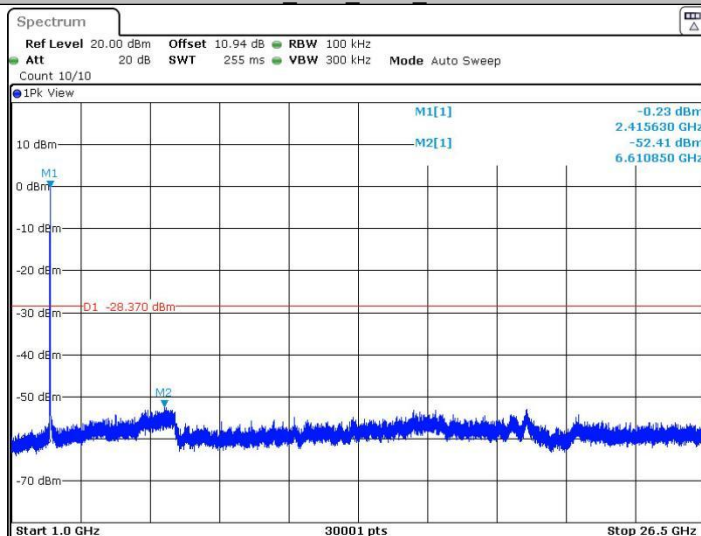


Date: 8 JAN 2024 10:54:10

11N20SISO_Ant1_2437_0~Reference

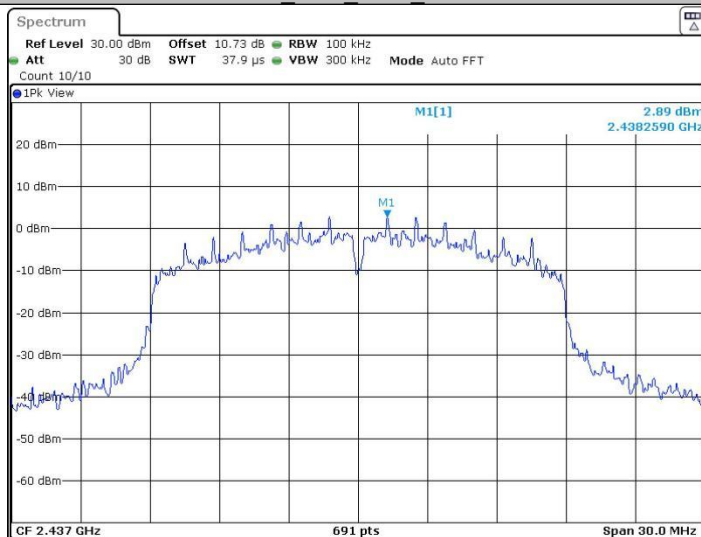


Date: 8 JAN 2024 10:56:22

11N20SISO_Ant1_2437_30~1000

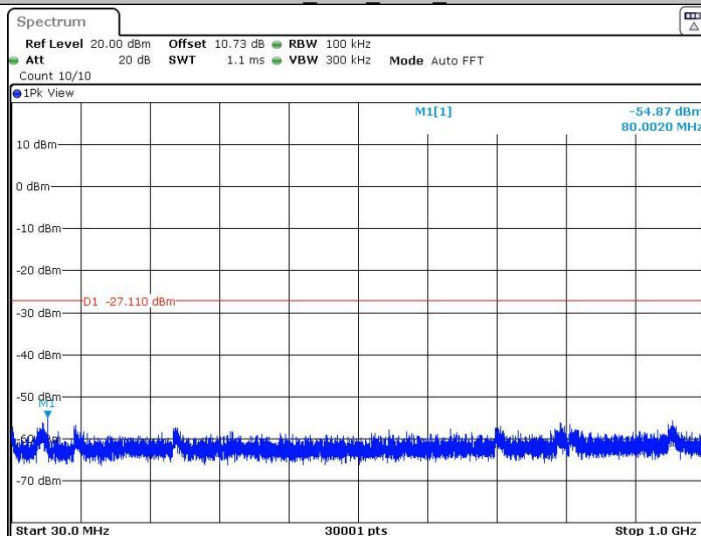


Date: 8 JAN 2024 10:56:29

11N20SISO_Ant1_2437_1000~26500

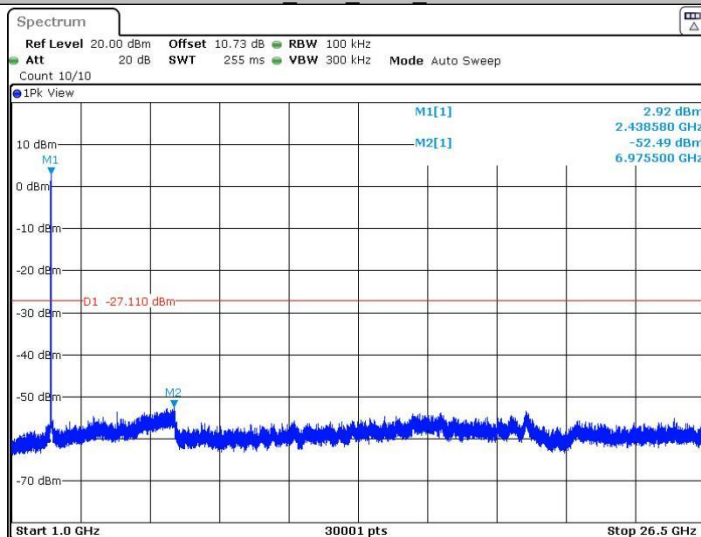


Date: 8 JAN 2024 10:56:51

11N20SISO_Ant1_2462_0~Reference

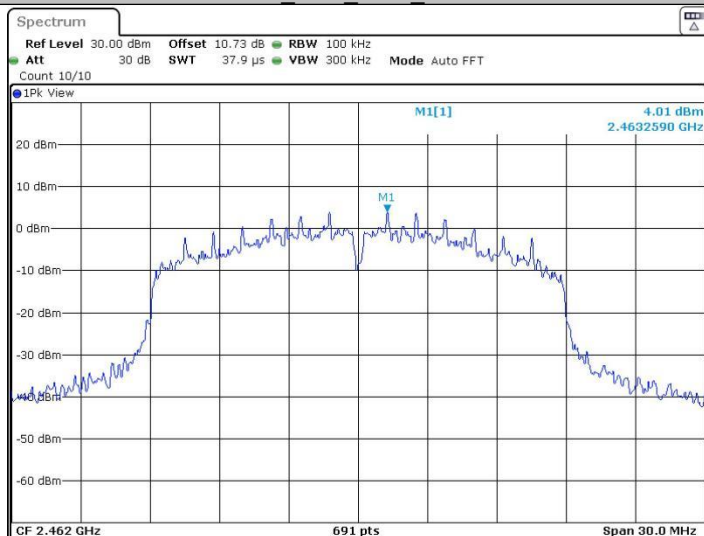


Date: 8 JAN 2024 10:58:24

11N20SISO_Ant1_2462_30~1000

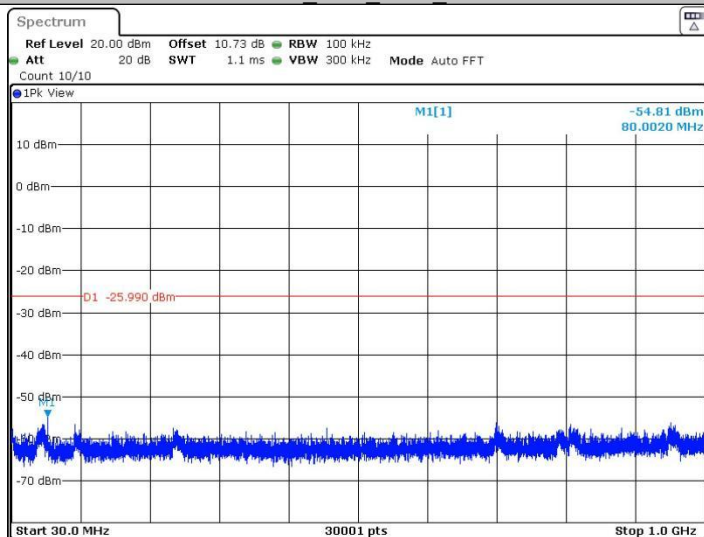

Date: 8 JAN 2024 10:58:31

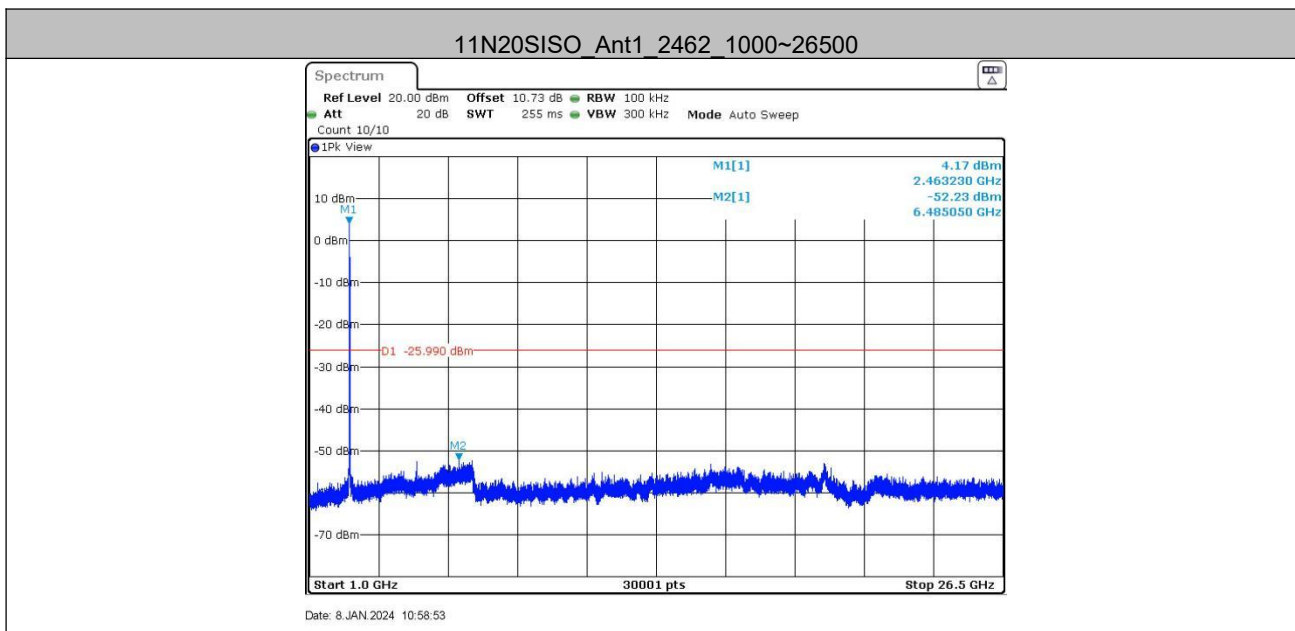

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

5.8 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				