




FCC REPORT

For LTE Cat M

Report No..... : CHTEW23060055 **Report Verification:** 

Project No..... : SHT2304055303EW

FCC ID..... : 2AM80-U214-1

Applicant..... : Alicn Medical Shenzhen, Inc

Address..... : Room 410, Building A, 3rd Sub-park, Leibo Zhongcheng Life Science Park, No. 22 Jinxiu East Road, Pingshan District, 518118 Shenzhen, Guangdong, PEOPLE'S REPUBLIC OF CHINA

Product Name..... : Arm Blood Pressure Monitor

Trade Mark..... : -

Model No..... : AES-U214

Listed Model(s)..... : -

Standard..... : FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E
FCC CFR Title 47 Part 27

Date of receipt of test sample..... : May.04, 2023

Date of testing..... : May.04, 2023-Jun.27, 2023

Date of issue..... : Jun.28, 2023

Result..... : Pass

Compiled by
(position+printedname+signature).... : File administrators Fanghui Zhu

Fanghui Zhu

Supervised by
(position+printedname+signature).... : Project Engineer Xiaodong Zhao

Xiaodong Zhao

Approved by
(position+printedname+signature).... : Manager Hans Hu

Hans Hu

Testing Laboratory Name..... : Shenzhen Huatongwei International Inspection Co., Ltd.

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

1.	TEST STANDARDS AND REPORT VERSION	3
1.1.	Applicable Standards	3
1.2.	Report version information	3
2.	TEST DESCRIPTION	4
3.	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
4.	TEST CONFIGURATION	7
4.1.	Test frequency list	7
4.2.	Test mode	8
4.3.	Test sample information	9
4.4.	Support unit used in test configuration and system	9
4.5.	Testing environmental condition	9
4.6.	Statement of the measurement uncertainty	10
4.7.	Equipments Used during the Test	11
5.	TEST CONDITIONS AND RESULTS	12
5.1.	Conducted Output Power	12
5.2.	Peak-to-Average Ratio	13
5.3.	99% Occupied Bandwidth & 26 dB Bandwidth	14
5.4.	Band Edge	15
5.5.	Conducted Spurious Emissions	16
5.6.	Frequency stability VS Temperature measurement	17
5.7.	Frequency stability VS Voltage measurement	18
5.8.	ERP and EIRP	19
5.9.	Radiated Spurious Emission	20
6.	TEST SETUP PHOTOS OF THE EUT	38
7.	EXTERNAL AND INTERNAL PHOTOS OF THE EUT	39
7.1	External photos	39
7.2	Internal photos	41
8.	APPENDIX REPORT	44

1. TEST STANDARDS AND REPORT VERSION

1.1. Applicable Standards

The tests were performed according to following standards:

[FCC CFR Title 47 Part 2:](#) Frequency Allocations and Radio Treaty Matters; General Rules and Regulations

[FCC CFR Title 47 Part 22 Subpart H:](#) Cellular Radiotelephone Service

[FCC CFR Title 47 Part 24 Subpart E:](#) Broadband PCS

[FCC CFR Title 47 Part 27:](#) Miscellaneous Wireless Communications Services

[ANSI C63.26-2015:](#) American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[KDB 971168 D01 Power Meas License Digital Systems v03:](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2023-06-28	Original

2. TEST DESCRIPTION

Section	Test Item	Section in CFR 47	Result #1	Test Engineer
5.1	Conducted Output Power	Part 2.1046 Part 22.913(a) Part 24.232(c) Part 27.50	Pass	Xiaodong Zhao
5.2	Peak-to-Average Ratio	Part 24.232 Part 27.50	Pass	Xiaodong Zhao
5.3	99% Occupied Bandwidth & 26 dB Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b) Part 27.53	Pass	Xiaodong Zhao
5.4	Band Edge	Part 2.1051 Part 22.917 Part 24.238 Part 27.53	Pass	Xiaodong Zhao
5.5	Conducted Spurious Emissions	Part 2.1051 Part 22.917 Part 24.238 Part 27.53	Pass	Xiaodong Zhao
5.6	Frequency stability vs temperature	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235 Part 27.54	Pass	Xiaodong Zhao
5.7	Frequency stability vs voltage	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235 Part 27.54	Pass	Xiaodong Zhao
5.8	ERP and EIRP	Part 22.913(a) Part 24.232(b) Part 27.50	Pass	Xiaodong Zhao
5.9	Radiated Spurious Emissions	Part 2.1053 Part 22.917 Part 24.238 Part 27.53	Pass	Yifan Wang

Note:

#1: The test result does not include measurement uncertainty value

3. SUMMARY

3.1. Client Information

Applicant:	Alicn Medical Shenzhen, Inc
Address:	Room 410, Building A, 3rd Sub-park, Leibo Zhongcheng Life Science Park, No. 22 Jinxiu East Road, Pingshan District, 518118 Shenzhen, Guangdong, PEOPLE'S REPUBLIC OF CHINA
Manufacturer:	Alicn Medical Shenzhen, Inc
Address:	Room 410, Building A, 3rd Sub-park, Leibo Zhongcheng Life Science Park, No. 22 Jinxiu East Road, Pingshan District, 518118 Shenzhen, Guangdong, PEOPLE'S REPUBLIC OF CHINA

3.2. Product Description

Main unit information:	
Product Name:	Arm Blood Pressure Monitor
Trade Mark:	-
Model No.:	AES-U214
Listed Model(s):	-
Power supply:	3.7V, 1100mAh Li-ion battery
Hardware version:	AES-066-4G-JV01
Software version:	A.01.00.00

3.3. Radio Specification Description

Support LTE type:	<input checked="" type="checkbox"/> Cat M1		<input type="checkbox"/> Cat M2			
Support Operating Band:	<input checked="" type="checkbox"/> FDD Band 2		<input checked="" type="checkbox"/> FDD Band 4		<input checked="" type="checkbox"/> FDD Band 5	
	<input checked="" type="checkbox"/> FDD Band 12		<input checked="" type="checkbox"/> FDD Band 13		<input type="checkbox"/> FDD Band 17	
	<input type="checkbox"/> FDD Band 25		<input type="checkbox"/> FDD Band 26		<input type="checkbox"/> TDD Band 41	
	<input type="checkbox"/> FDD Band 66		<input type="checkbox"/> FDD Band 71			
Operating Frequency Range:	Please refer to note #2					
Channel bandwidth:	Please refer to note #3					
Maximum RB:	Cat M1					
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
	6	6	6	6	6	6
	Cat M2					
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
	6	12	24	24	24	24

Uplink Modulation type:	<input checked="" type="checkbox"/> QPSK	<input checked="" type="checkbox"/> 16QAM	<input type="checkbox"/> 64QAM	<input type="checkbox"/> 256QAM
Downlink Modulation type:	<input checked="" type="checkbox"/> QPSK	<input checked="" type="checkbox"/> 16QAM	<input type="checkbox"/> 64QAM	<input type="checkbox"/> 256QAM
Antenna type:	FPC			
Antenna gain #4:	-3.0dBi			

Note:

- ☒ : means that this feature is supported; ☐ : means that this feature is not supported
- #2: Operating frequency range is as follow:

LTE Band	Uplink frequency	Downlink frequency
FDD Band 2	1850.7 – 1909.3 MHz	1930.7 – 1989.3 MHz
FDD Band 4	1710.7 – 1754.3 MHz	2110.7 – 2154.3 MHz
FDD Band 5	824.7 – 848.3 MHz	869.7 – 893.3 MHz
FDD Band 12	699.7 – 715.3 MHz	729.7 – 745.3 MHz
FDD Band 13	779.5 – 784.5 MHz	748.5 – 753.5 MHz

- Supported channel bandwidth is as follow:

LTE Band	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz
FDD Band 2	√	√	√	√	√	√
FDD Band 4	√	√	√	√	√	√
FDD Band 5	√	√	√	√	-	-
FDD Band 12	√	√	√	√	-	-
FDD Band 13	-	-	√	√	-	-

√: means that this feature is supported; -: means that this feature is not supported

- #4: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, HTW lab has not verified the authenticity of its information

3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Contact information:	Tel: 86-755-26715499 E-mail: cs@szhtw.com.cn http://www.szhtw.com.cn	
Qualifications	Type	Accreditation Number
	FCC	762235

4. TEST CONFIGURATION

4.1. Test frequency list

FDD Band 2	<table><tr><th>Test Frequency ID</th><th>Bandwidth [MHz]</th><th>N_{UL}</th><th>Frequency of Uplink [MHz]</th><th>N_{DL}</th><th>Frequency of Downlink [MHz]</th></tr><tr><td rowspan="6">Low Range</td><td>1.4</td><td>18607</td><td>1850.7</td><td>607</td><td>1930.7</td></tr><tr><td>3</td><td>18615</td><td>1851.5</td><td>615</td><td>1931.5</td></tr><tr><td>5</td><td>18625</td><td>1852.5</td><td>625</td><td>1932.5</td></tr><tr><td>10</td><td>18650</td><td>1855</td><td>650</td><td>1935</td></tr><tr><td>15 ^[1]</td><td>18675</td><td>1857.5</td><td>675</td><td>1937.5</td></tr><tr><td>20 ^[1]</td><td>18700</td><td>1860</td><td>700</td><td>1940</td></tr><tr><td>Mid Range</td><td>1.4/3/5/10/15 ^[1]/20 ^[1]</td><td>18900</td><td>1880</td><td>900</td><td>1960</td></tr><tr><td rowspan="6">High Range</td><td>1.4</td><td>19193</td><td>1909.3</td><td>1193</td><td>1989.3</td></tr><tr><td>3</td><td>19185</td><td>1908.5</td><td>1185</td><td>1988.5</td></tr><tr><td>5</td><td>19175</td><td>1907.5</td><td>1175</td><td>1987.5</td></tr><tr><td>10</td><td>19150</td><td>1905</td><td>1150</td><td>1985</td></tr><tr><td>15 ^[1]</td><td>19125</td><td>1902.5</td><td>1125</td><td>1982.5</td></tr><tr><td>20 ^[1]</td><td>19100</td><td>1900</td><td>1100</td><td>1980</td></tr><tr><td colspan="6">NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.</td></tr></table>	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Low Range	1.4	18607	1850.7	607	1930.7	3	18615	1851.5	615	1931.5	5	18625	1852.5	625	1932.5	10	18650	1855	650	1935	15 ^[1]	18675	1857.5	675	1937.5	20 ^[1]	18700	1860	700	1940	Mid Range	1.4/3/5/10/15 ^[1] /20 ^[1]	18900	1880	900	1960	High Range	1.4	19193	1909.3	1193	1989.3	3	19185	1908.5	1185	1988.5	5	19175	1907.5	1175	1987.5	10	19150	1905	1150	1985	15 ^[1]	19125	1902.5	1125	1982.5	20 ^[1]	19100	1900	1100	1980	NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.					
Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]																																																																												
Low Range	1.4	18607	1850.7	607	1930.7																																																																												
	3	18615	1851.5	615	1931.5																																																																												
	5	18625	1852.5	625	1932.5																																																																												
	10	18650	1855	650	1935																																																																												
	15 ^[1]	18675	1857.5	675	1937.5																																																																												
	20 ^[1]	18700	1860	700	1940																																																																												
Mid Range	1.4/3/5/10/15 ^[1] /20 ^[1]	18900	1880	900	1960																																																																												
High Range	1.4	19193	1909.3	1193	1989.3																																																																												
	3	19185	1908.5	1185	1988.5																																																																												
	5	19175	1907.5	1175	1987.5																																																																												
	10	19150	1905	1150	1985																																																																												
	15 ^[1]	19125	1902.5	1125	1982.5																																																																												
	20 ^[1]	19100	1900	1100	1980																																																																												
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.																																																																																	
FDD Band 4	<table><tr><th>Test Frequency ID</th><th>Bandwidth [MHz]</th><th>N_{UL}</th><th>Frequency of Uplink [MHz]</th><th>N_{DL}</th><th>Frequency of Downlink [MHz]</th></tr><tr><td rowspan="6">Low Range</td><td>1.4</td><td>19957</td><td>1710.7</td><td>1957</td><td>2110.7</td></tr><tr><td>3</td><td>19965</td><td>1711.5</td><td>1965</td><td>2111.5</td></tr><tr><td>5</td><td>19975</td><td>1712.5</td><td>1975</td><td>2112.5</td></tr><tr><td>10</td><td>20000</td><td>1715</td><td>2000</td><td>2115</td></tr><tr><td>15</td><td>20025</td><td>1717.5</td><td>2025</td><td>2117.5</td></tr><tr><td>20</td><td>20050</td><td>1720</td><td>2050</td><td>2120</td></tr><tr><td>Mid Range</td><td>1.4/3/5/10/15/20</td><td>20175</td><td>1732.5</td><td>2175</td><td>2132.5</td></tr><tr><td rowspan="6">High Range</td><td>1.4</td><td>20393</td><td>1754.3</td><td>2393</td><td>2154.3</td></tr><tr><td>3</td><td>20385</td><td>1753.5</td><td>2385</td><td>2153.5</td></tr><tr><td>5</td><td>20375</td><td>1752.5</td><td>2375</td><td>2152.5</td></tr><tr><td>10</td><td>20350</td><td>1750</td><td>2350</td><td>2150</td></tr><tr><td>15</td><td>20325</td><td>1747.5</td><td>2325</td><td>2147.5</td></tr><tr><td>20</td><td>20300</td><td>1745</td><td>2300</td><td>2145</td></tr></table>	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Low Range	1.4	19957	1710.7	1957	2110.7	3	19965	1711.5	1965	2111.5	5	19975	1712.5	1975	2112.5	10	20000	1715	2000	2115	15	20025	1717.5	2025	2117.5	20	20050	1720	2050	2120	Mid Range	1.4/3/5/10/15/20	20175	1732.5	2175	2132.5	High Range	1.4	20393	1754.3	2393	2154.3	3	20385	1753.5	2385	2153.5	5	20375	1752.5	2375	2152.5	10	20350	1750	2350	2150	15	20325	1747.5	2325	2147.5	20	20300	1745	2300	2145						
Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]																																																																												
Low Range	1.4	19957	1710.7	1957	2110.7																																																																												
	3	19965	1711.5	1965	2111.5																																																																												
	5	19975	1712.5	1975	2112.5																																																																												
	10	20000	1715	2000	2115																																																																												
	15	20025	1717.5	2025	2117.5																																																																												
	20	20050	1720	2050	2120																																																																												
Mid Range	1.4/3/5/10/15/20	20175	1732.5	2175	2132.5																																																																												
High Range	1.4	20393	1754.3	2393	2154.3																																																																												
	3	20385	1753.5	2385	2153.5																																																																												
	5	20375	1752.5	2375	2152.5																																																																												
	10	20350	1750	2350	2150																																																																												
	15	20325	1747.5	2325	2147.5																																																																												
	20	20300	1745	2300	2145																																																																												
FDD Band 5	<table><tr><th>Test Frequency ID</th><th>Bandwidth [MHz]</th><th>N_{UL}</th><th>Frequency of Uplink [MHz]</th><th>N_{DL}</th><th>Frequency of Downlink [MHz]</th></tr><tr><td rowspan="4">Low Range</td><td>1.4</td><td>20407</td><td>824.7</td><td>2407</td><td>869.7</td></tr><tr><td>3</td><td>20415</td><td>825.5</td><td>2415</td><td>870.5</td></tr><tr><td>5</td><td>20425</td><td>826.5</td><td>2425</td><td>871.5</td></tr><tr><td>10 ^[1]</td><td>20450</td><td>829</td><td>2450</td><td>874</td></tr><tr><td>Mid Range</td><td>1.4/3/5/10 ^[1]</td><td>20525</td><td>836.5</td><td>2525</td><td>881.5</td></tr><tr><td rowspan="4">High Range</td><td>1.4</td><td>20643</td><td>848.3</td><td>2643</td><td>893.3</td></tr><tr><td>3</td><td>20635</td><td>847.5</td><td>2635</td><td>892.5</td></tr><tr><td>5</td><td>20625</td><td>846.5</td><td>2625</td><td>891.5</td></tr><tr><td>10 ^[1]</td><td>20600</td><td>844</td><td>2600</td><td>889</td></tr><tr><td colspan="6">NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.</td></tr></table>	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Low Range	1.4	20407	824.7	2407	869.7	3	20415	825.5	2415	870.5	5	20425	826.5	2425	871.5	10 ^[1]	20450	829	2450	874	Mid Range	1.4/3/5/10 ^[1]	20525	836.5	2525	881.5	High Range	1.4	20643	848.3	2643	893.3	3	20635	847.5	2635	892.5	5	20625	846.5	2625	891.5	10 ^[1]	20600	844	2600	889	NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.																									
Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]																																																																												
Low Range	1.4	20407	824.7	2407	869.7																																																																												
	3	20415	825.5	2415	870.5																																																																												
	5	20425	826.5	2425	871.5																																																																												
	10 ^[1]	20450	829	2450	874																																																																												
Mid Range	1.4/3/5/10 ^[1]	20525	836.5	2525	881.5																																																																												
High Range	1.4	20643	848.3	2643	893.3																																																																												
	3	20635	847.5	2635	892.5																																																																												
	5	20625	846.5	2625	891.5																																																																												
	10 ^[1]	20600	844	2600	889																																																																												
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.																																																																																	
FDD Band 12	<div>Table 4.3.1.1.12-1: Test frequencies for E-UTRA channel bandwidth for operating band 12</div> <table><tr><th>Test Frequency ID</th><th>Bandwidth [MHz]</th><th>N_{UL}</th><th>Frequency of Uplink [MHz]</th><th>N_{DL}</th><th>Frequency of Downlink [MHz]</th></tr><tr><td rowspan="4">Low Range</td><td>1.4</td><td>23017</td><td>699.7</td><td>5017</td><td>729.7</td></tr><tr><td>3</td><td>23025</td><td>700.5</td><td>5025</td><td>730.5</td></tr><tr><td>5 ^[1]</td><td>23035</td><td>701.5</td><td>5035</td><td>731.5</td></tr><tr><td>10 ^[1]</td><td>23060</td><td>704</td><td>5060</td><td>734</td></tr><tr><td>Mid Range</td><td>1.4/3/5 ^[1]/10 ^[1]</td><td>23095</td><td>707.5</td><td>5095</td><td>737.5</td></tr><tr><td rowspan="4">High Range</td><td>1.4</td><td>23173</td><td>715.3</td><td>5173</td><td>745.3</td></tr><tr><td>3</td><td>23165</td><td>714.5</td><td>5165</td><td>744.5</td></tr><tr><td>5 ^[1]</td><td>23155</td><td>713.5</td><td>5155</td><td>743.5</td></tr><tr><td>10 ^[1]</td><td>23130</td><td>711</td><td>5130</td><td>741</td></tr><tr><td colspan="6">NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.</td></tr></table>	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Low Range	1.4	23017	699.7	5017	729.7	3	23025	700.5	5025	730.5	5 ^[1]	23035	701.5	5035	731.5	10 ^[1]	23060	704	5060	734	Mid Range	1.4/3/5 ^[1] /10 ^[1]	23095	707.5	5095	737.5	High Range	1.4	23173	715.3	5173	745.3	3	23165	714.5	5165	744.5	5 ^[1]	23155	713.5	5155	743.5	10 ^[1]	23130	711	5130	741	NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.																									
Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]																																																																												
Low Range	1.4	23017	699.7	5017	729.7																																																																												
	3	23025	700.5	5025	730.5																																																																												
	5 ^[1]	23035	701.5	5035	731.5																																																																												
	10 ^[1]	23060	704	5060	734																																																																												
Mid Range	1.4/3/5 ^[1] /10 ^[1]	23095	707.5	5095	737.5																																																																												
High Range	1.4	23173	715.3	5173	745.3																																																																												
	3	23165	714.5	5165	744.5																																																																												
	5 ^[1]	23155	713.5	5155	743.5																																																																												
	10 ^[1]	23130	711	5130	741																																																																												
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.																																																																																	
FDD Band 13	<table><tr><th>Test Frequency ID</th><th>Bandwidth [MHz]</th><th>N_{UL}</th><th>Frequency of Uplink [MHz]</th><th>N_{DL}</th><th>Frequency of Downlink [MHz]</th></tr><tr><td rowspan="2">Low Range</td><td>5 ^[1]</td><td>23205</td><td>779.5</td><td>5205</td><td>748.5</td></tr><tr><td>10 ^[1]</td><td>23230</td><td>782</td><td>5230</td><td>751</td></tr><tr><td>Mid Range</td><td>5 ^[1]/10 ^[1]</td><td>23230</td><td>782</td><td>5230</td><td>751</td></tr><tr><td rowspan="2">High Range</td><td>5 ^[1]</td><td>23255</td><td>784.5</td><td>5255</td><td>753.5</td></tr><tr><td>10 ^[1]</td><td>23230</td><td>782</td><td>5230</td><td>751</td></tr><tr><td colspan="6">NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.</td></tr></table>	Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]	Low Range	5 ^[1]	23205	779.5	5205	748.5	10 ^[1]	23230	782	5230	751	Mid Range	5 ^[1] /10 ^[1]	23230	782	5230	751	High Range	5 ^[1]	23255	784.5	5255	753.5	10 ^[1]	23230	782	5230	751	NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.																																													
Test Frequency ID	Bandwidth [MHz]	N _{UL}	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]																																																																												
Low Range	5 ^[1]	23205	779.5	5205	748.5																																																																												
	10 ^[1]	23230	782	5230	751																																																																												
Mid Range	5 ^[1] /10 ^[1]	23230	782	5230	751																																																																												
High Range	5 ^[1]	23255	784.5	5255	753.5																																																																												
	10 ^[1]	23230	782	5230	751																																																																												
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.																																																																																	

4.2. Test mode

Test mode	Link mode
-----------	-----------

- 1) Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems and ANSI C63.26 with maximum output power.
- 2) Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Test configuration is as follow:

Test Items	Bandwidth	Modulation	RB #		
			1	Half	Full
Conducted Output Power	#5	#6	○	○	○
Peak-to-Average Ratio	#5	#6	○	-	○
99% Occupied Bandwidth & 26 dB Bandwidth	#5	#6	-	-	○
Band Edge	#5	#6	○	-	○
Conducted Spurious Emission	#5	#6	○	-	-
Frequency Stability	#5	#6	-	-	○
ERP and EIRP	#5	#6	○	○	○
Radiated Spurious Emission	#5	#6	○	-	-

Note:

- #5: Test all kind of bandwidth in section 3.3
- #6: Test all kind of uplink modulation in section 3.3
- ○: means that this configuration is chosen for testing
- -: means that this configuration is not test.
- The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different bandwidth, modulations and RB size/offset in exploratory test. Subsequently, only the worst case emissions (highest bandwidth, QPSK, and 1RB0) are reported.

4.3. Test sample information

Test item	HTW sample no.
Conducted test items	Please refer to the description in the appendix report
Radiated test items	YPHT23040553010

Note:

Conducted test items: Conducted Output Power, Peak-Average Ratio, 99% Occupied Bandwidth & 26 dB Bandwidth, Band Edge, Conducted Spurious Emissions, Frequency stability, ERP and EIRP

Radiated test items: Radiated Spurious Emission

4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?				
✓ No				
Item	Equipment	Trade Name	Model No.	Other
1				
2				

4.5. Testing environmental condition

Voltage	VN=Nominal Voltage	DC 3.8V
	VL=Lower Voltage	DC 3.6V
	VH=Higher Voltage	DC 4.35V
Temperature	TN=Normal Temperature	25 °C
	Extreme Temperature	From -30°C to + 50°C
Humidity	30~60 %	
Air Pressure	950-1050 hPa	

4.6. Statement of the measurement uncertainty

No.	Test Items	Measurement Uncertainty
1	Conducted Output Power	0.66
2	Peak-to-Average Ratio	-
3	99% Occupied Bandwidth & 26 dB Bandwidth	0.002%
4	Band Edge	1.68dB
5	Conducted Spurious Emissions	1.68dB
6	Frequency stability	0.02ppm
7	Radiated Spurious Emission	4.54dB for 30MHz-1GHz 5.10dB for above 1GHz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.7. Equipments Used during the Test

● Conducted test item

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Spectrum Analyzer	Agilent	HTWE0286	N9020A	MY50510187	2022/08/25	2023/08/24
●	Radio communication tester	R&S	HTWE0287	CMW500	137688-Lv	2022/08/25	2023/08/24
●	Test software	Tonscend	N/A	JS1120	N/A	N/A	N/A
●	T-Cock	Weinschel	HTWE0289	1580	SC329	2022/08/25	2022/08/24

● Radiated Spurious Emission

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	C11121	2023/4/17	2026/4/16
●	Spectrum Analyzer	R&S	<u>HTWE0098</u>	FSP40	100597	2022/8/25	2023/8/24
●	Spectrum Analyzer	R&S	<u>HTWE0385</u>	N9020A	MY54486658	2022/8/25	2023/8/24
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0123	VULB9163	538	2021/4/6	2024/4/5
●	Horn Antenna	SCHWARZBECK	HTWE0126	BBHA 9120D	1011	2023/2/14	2026/2/13
●	Pre-Amplifier	CD	HTWE0071	PAP-0102	12004	2023/5/25	2024/5/24
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2023/5/25	2024/5/24
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

● Auxiliary Equipment

Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Radio communication tester	R&S	HTWE0287	CMW500	137688-Lv	2022/08/25	2023/08/24
●	High pass filter	Wainwright	HTWE0297	WHKX3.0/18G-10SS	38	2023/05/15	2024/05/14
●	Band Stop filter	-	HTWE0039	N/A	N/A	2023/01/26	2024/01/25


5. TEST CONDITIONS AND RESULTS

5.1. Conducted Output Power

LIMIT

N/A

TEST CONFIGURATION

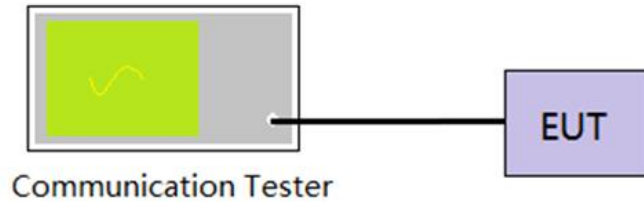

TEST PROCEDURE

1. The EUT output port was connected to communication tester.
2. Set EUT at maximum power through communication tester.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST DATA


Refer to the appendix report

5.2. Peak-to-Average Ratio

LIMIT

13dB

TEST CONFIGURATION

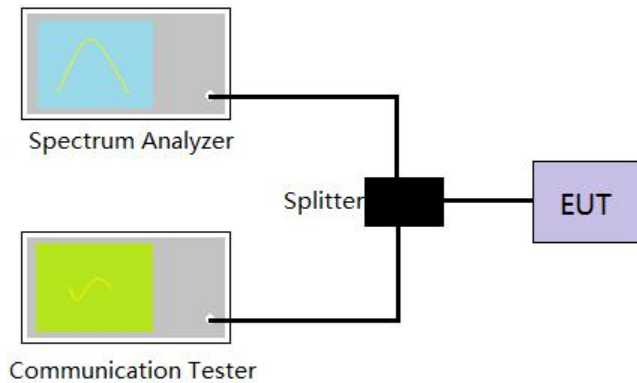

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Center Frequency = Carrier frequency, RBW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed.
 - i. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.
 - ii. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power
6. Record the maximum PAPR level associated with a probability of 0.1%.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST DATA


Refer to the appendix report

5.3. 99% Occupied Bandwidth & 26 dB Bandwidth

LIMIT

N/A

TEST CONFIGURATION

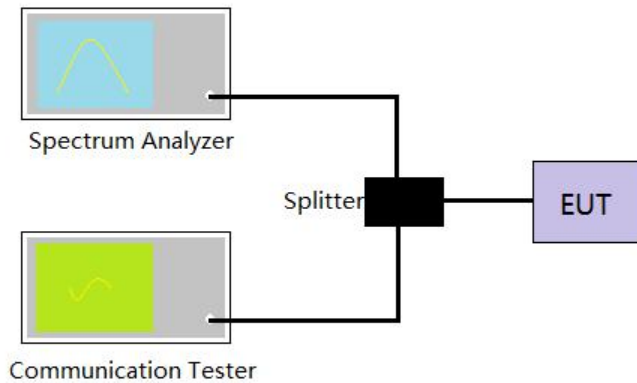

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Center Frequency= Carrier frequency, RBW=51kHz, VBW= 200kHz, Detector=Peak,
Trace maximum hold.
4. Record the value of 99% Occupied bandwidth and 26dB bandwidth.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report

5.4. Band Edge

LIMIT


Part 24.238 and Part 22.917 and Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Part 27.53(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- 1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- 2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- 3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- 4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

TEST CONFIGURATION

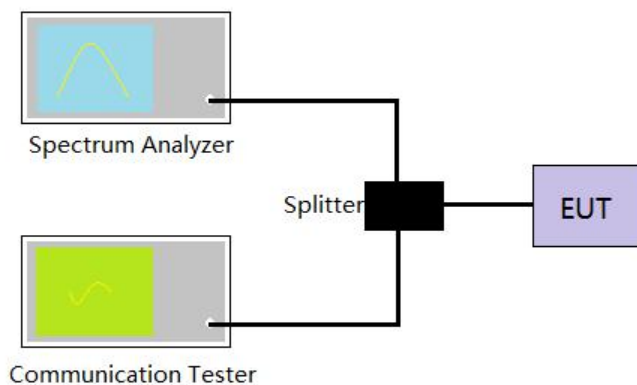

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. The band edges of low and high channels were measured.
4. Spectrum analyzer setting as follow:
RBW= no less than 1% of the OBW, VBW =3 * RBW, Sweep time= Auto
5. Record the test plot.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report

5.5. Conducted Spurious Emissions

LIMIT


Part 24.238 and Part 22.917 and Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Part 27.53(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- 1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- 2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- 3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- 4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

TEST CONFIGURATION

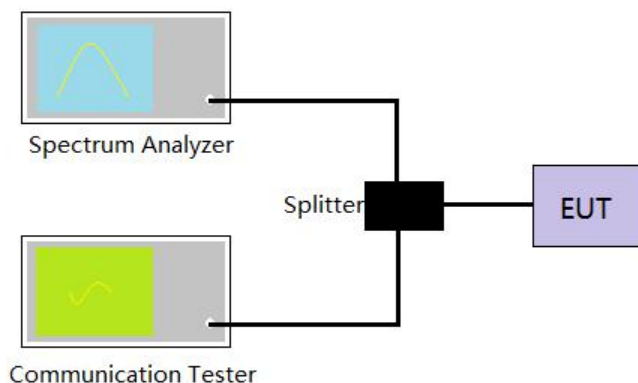

TEST PROCEDURE

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:
Below 1GHz, RBW=100KHz, VBW = 300KHz, Detector=RMS, Sweep time= Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=RMS, Sweep time= Auto
Scan frequency range up to 10th harmonic.
4. Record the test plot.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST DATA


Refer to the appendix report

5.6. Frequency stability VS Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

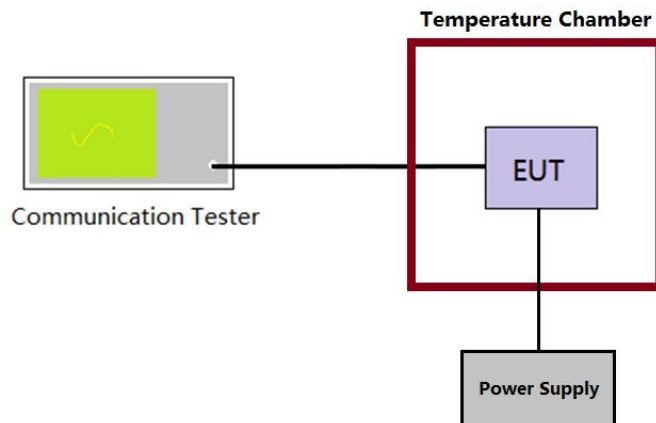

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber.
4. Turn EUT off and set the chamber temperature to -30°C . After the temperature stabilized for approximately 30 minutes recorded the frequency.
5. Repeat step 4 measure with 10°C increased per stage until the highest temperature of $+50^{\circ}\text{C}$ reached.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST DATA


Refer to the appendix report

5.7. Frequency stability VS Voltage measurement

LIMIT

2.5ppm

TEST CONFIGURATION

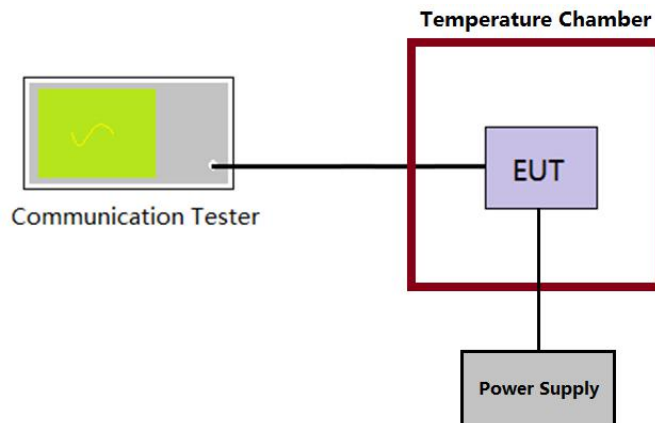

TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber at 25°C
4. The power supply voltage to the EUT was varied $\pm 15\%$ of the nominal value measured at the input to the EUT
5. Record the maximum frequency change.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

☒ Passed ☐ Not Applicable

TEST DATA

Refer to the appendix report

5.8. ERP and EIRP

LIMIT

LTE Band 2: 2W EIRP

LTE Band 4: 1W EIRP

LTE Band 5: 7W ERP

LTE Band 12/13: 3W ERP

TEST PROCEDURE

1. According to the power tested in section 5.1, select the maximum power in each mode, and use the following formula to calculate the corresponding ERP/EIRP.
2. $ERP = \text{conducted power} + \text{Gain(dBd)}$
3. $EIRP = \text{conducted power} + \text{Gain(dBi)}$
 $ERP = EIRP - 2.15$

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

TEST DATA

Refer to the appendix report

5.9. Radiated Spurious Emission

LIMIT

Part 24.238 and Part 22.917 and Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Part 27.53(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- 1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- 2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;
- 3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $76 + 10 \log(P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- 4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth.

TEST CONFIGURATION

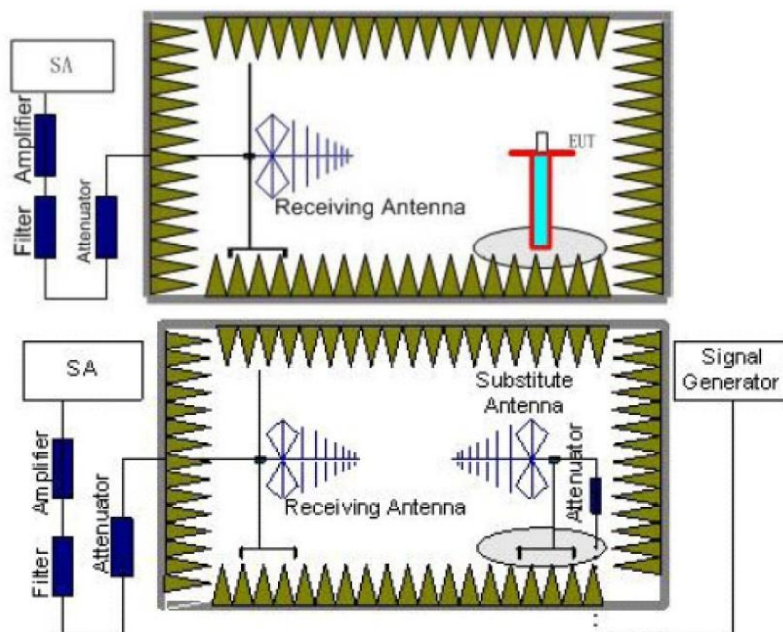

TEST PROCEDURE

1. Place the EUT in the center of the turntable.
 - a) For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
 - b) For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
2. Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical

- positions and lengths to maximize emissions levels.
3. The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
 4. Receiver or Spectrum set as follow:
Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto
 5. Each emission under consideration shall be evaluated:
 - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
 - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
 - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
 - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
 - e) Record the measured emission amplitude level and frequency
 6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
 7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
 8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
 9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
 10. For each emission that was detected and measured in the initial test
 - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
 - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
 - c) Record the output power level of the signal generator when equivalence is achieved in step b).
 11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
 12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

where
 P_e = equivalent emission power in dBm
 P_s = source (signal generator) power in dBm
NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
 13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}.$$

If necessary, the antenna gain can be calculated from calibrated antenna factor information
 14. Provide the complete measurement results as a part of the test report.

TEST MODE

Please refer to the clause 4.2

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note: only show the worse case for QPSK modulation.


LTE Band 2

Test channel:

Low

Polarization:

Horizontal

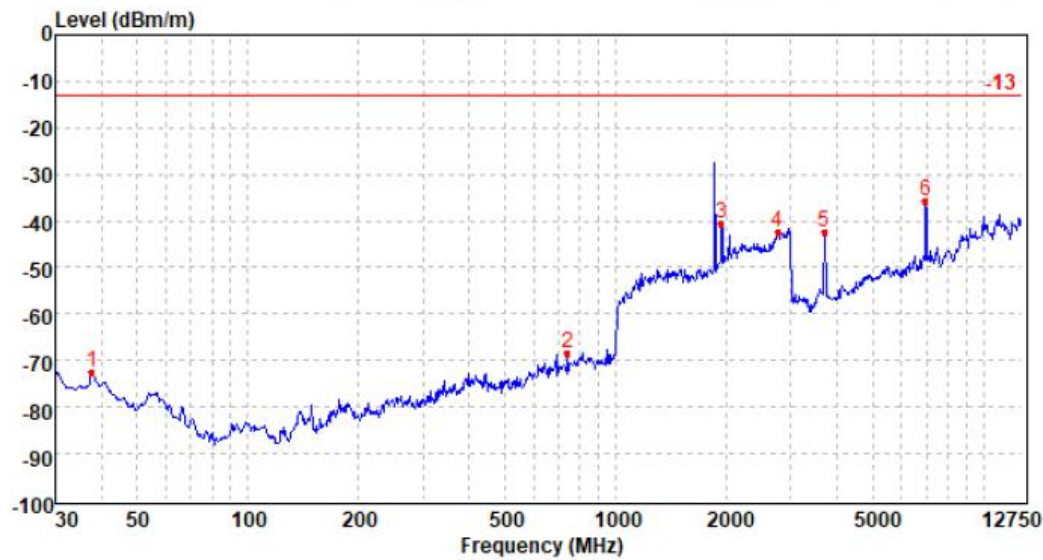


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	37.84	-75.82	27.46	6.90	30.86	-72.32	-13.00	-59.32	Peak
2	741.19	-78.22	29.48	10.37	30.16	-68.53	-13.00	-55.53	Peak
3	1941.70	-62.86	38.44	13.40	29.59	-40.61	-13.00	-27.61	Peak
4	2762.72	-72.96	40.37	16.24	26.12	-42.47	-13.00	-29.47	Peak
5	3709.69	-54.72	42.28	7.02	37.13	-42.55	-13.00	-29.55	Peak
6	6956.63	-59.52	47.45	10.20	33.65	-35.52	-13.00	-22.52	Peak

Test channel:

Low

Polarization:

Vertical

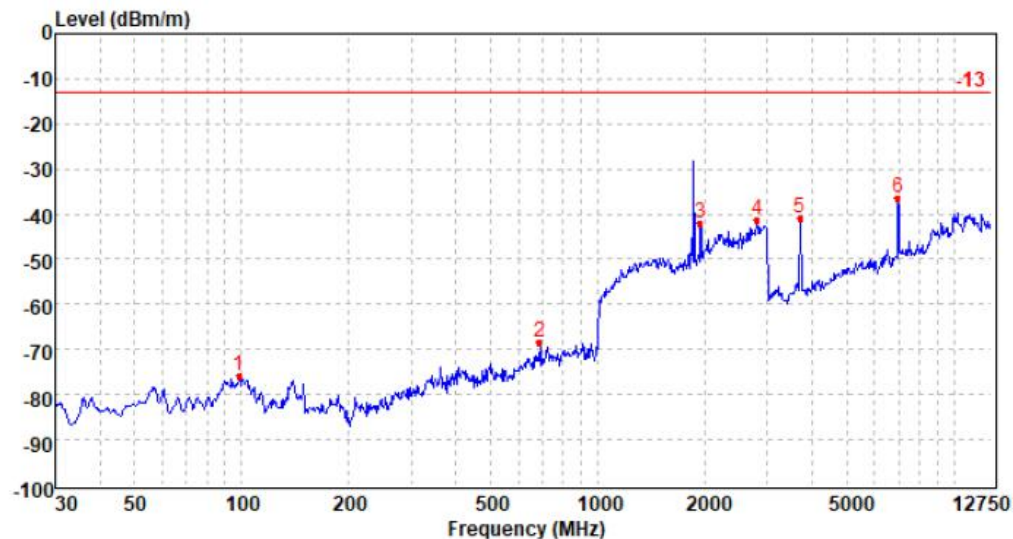


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	98.47	-78.33	25.77	7.50	30.90	-75.96	-13.00	-62.96	Peak
2	688.42	-77.01	28.59	10.21	30.09	-68.30	-13.00	-55.30	Peak
3	1943.83	-63.74	37.81	13.41	29.59	-42.11	-13.00	-29.11	Peak
4	2808.63	-72.40	40.70	16.29	25.72	-41.13	-13.00	-28.13	Peak
5	3709.69	-53.22	42.29	7.02	37.13	-41.04	-13.00	-28.04	Peak
6	6956.63	-60.50	47.36	10.20	33.65	-36.59	-13.00	-23.59	Peak

Test channel:

Middle

Polarization:

Horizontal

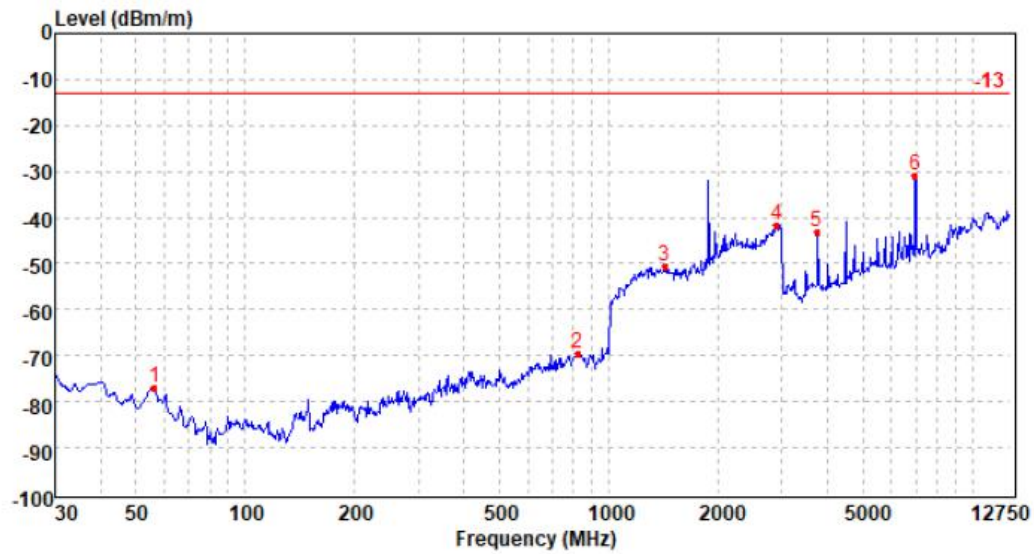


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	56.50	-77.14	24.19	7.11	31.06	-76.90	-13.00	-63.90	Peak
2	820.76	-80.20	29.94	10.64	29.92	-69.54	-13.00	-56.54	Peak
3	1424.40	-70.24	37.00	12.23	29.38	-50.39	-13.00	-37.39	Peak
4	2902.74	-73.75	40.89	16.49	25.19	-41.56	-13.00	-28.56	Peak
5	3747.66	-55.35	42.24	7.07	37.03	-43.07	-13.00	-30.07	Peak
6	6974.36	-54.92	47.53	10.15	33.54	-30.78	-13.00	-17.78	Peak

Test channel:

Middle


Polarization:

Vertical

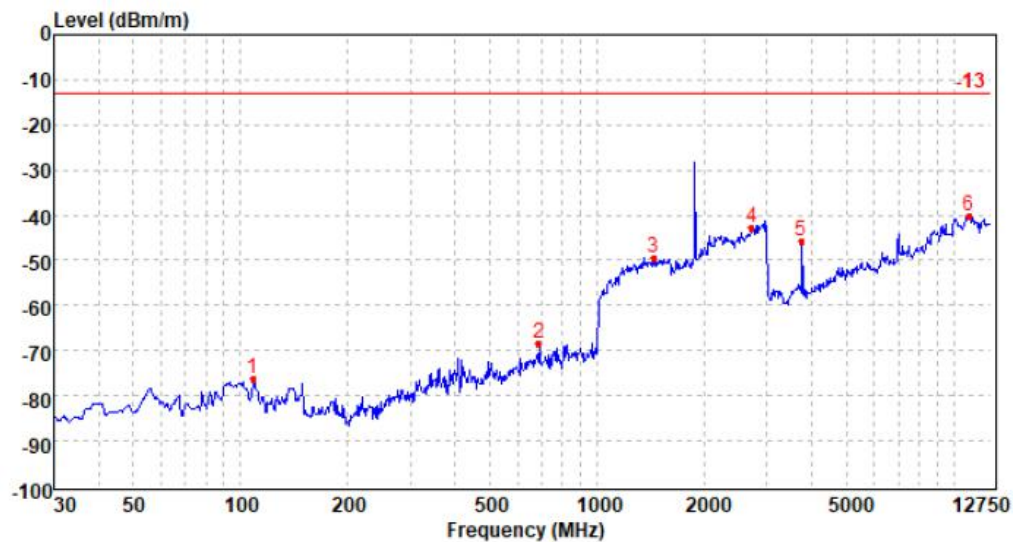


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	108.28	-77.47	24.66	7.58	30.94	-76.17	-13.00	-63.17	Peak
2	688.42	-76.94	28.59	10.21	30.09	-68.23	-13.00	-55.23	Peak
3	1446.48	-70.10	37.76	12.28	29.20	-49.26	-13.00	-36.26	Peak
4	2720.56	-72.69	40.09	16.18	26.31	-42.73	-13.00	-29.73	Peak
5	3747.66	-58.08	42.17	7.07	37.03	-45.87	-13.00	-32.87	Peak
6	11056.09	-73.29	52.84	12.55	32.16	-40.06	-13.00	-27.06	Peak

Test channel:	High	Polarization:	Horizontal
---------------	------	---------------	------------

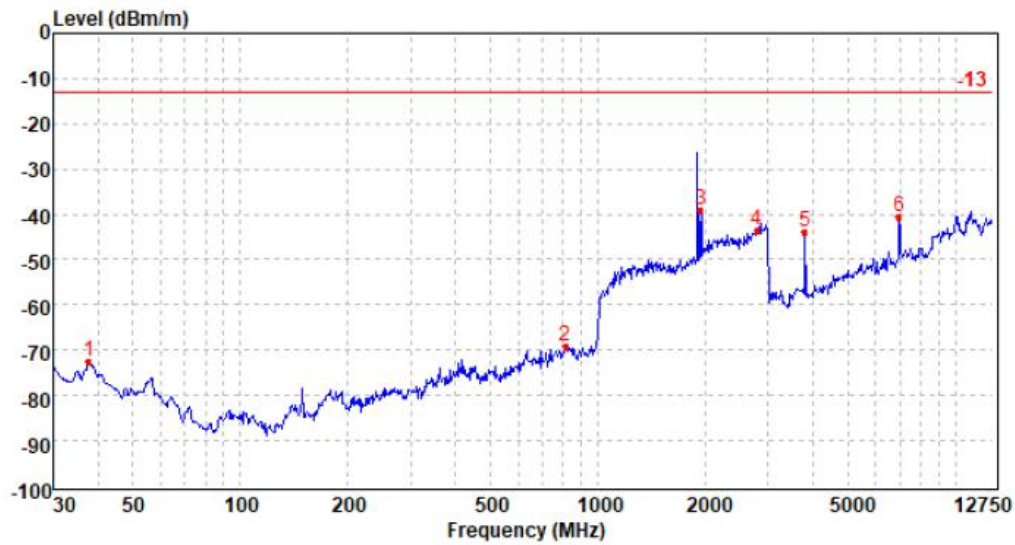

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	37.84	-76.04	27.46	6.90	30.86	-72.54	-13.00	-59.54	Peak
2	812.15	-79.92	29.91	10.61	29.88	-69.28	-13.00	-56.28	Peak
3	1943.83	-61.18	38.46	13.41	29.59	-38.90	-13.00	-25.90	Peak
4	2793.24	-74.49	40.67	16.27	25.85	-43.40	-13.00	-30.40	Peak
5	3795.66	-56.23	42.19	7.12	36.82	-43.74	-13.00	-30.74	Peak
6	6956.63	-64.59	47.45	10.20	33.65	-40.59	-13.00	-27.59	Peak

Test channel:	High	Polarization:	Vertical
---------------	------	---------------	----------

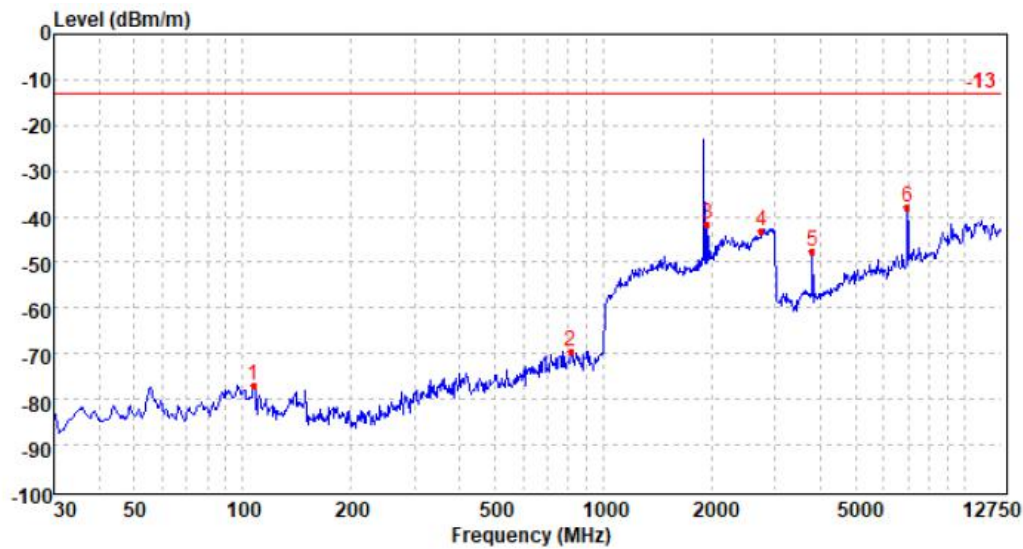

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	107.52	-78.43	24.75	7.58	30.94	-77.04	-13.00	-64.04	Peak
2	812.15	-79.86	29.64	10.61	29.88	-69.49	-13.00	-56.49	Peak
3	1943.83	-63.30	37.81	13.41	29.59	-41.67	-13.00	-28.67	Peak
4	2750.61	-73.29	40.31	16.23	26.23	-42.98	-13.00	-29.98	Peak
5	3795.66	-59.86	42.03	7.12	36.82	-47.53	-13.00	-34.53	Peak
6	6956.63	-61.83	47.36	10.20	33.65	-37.92	-13.00	-24.92	Peak


LTE Band 4

Test channel:

Low

Polarization:

Horizontal

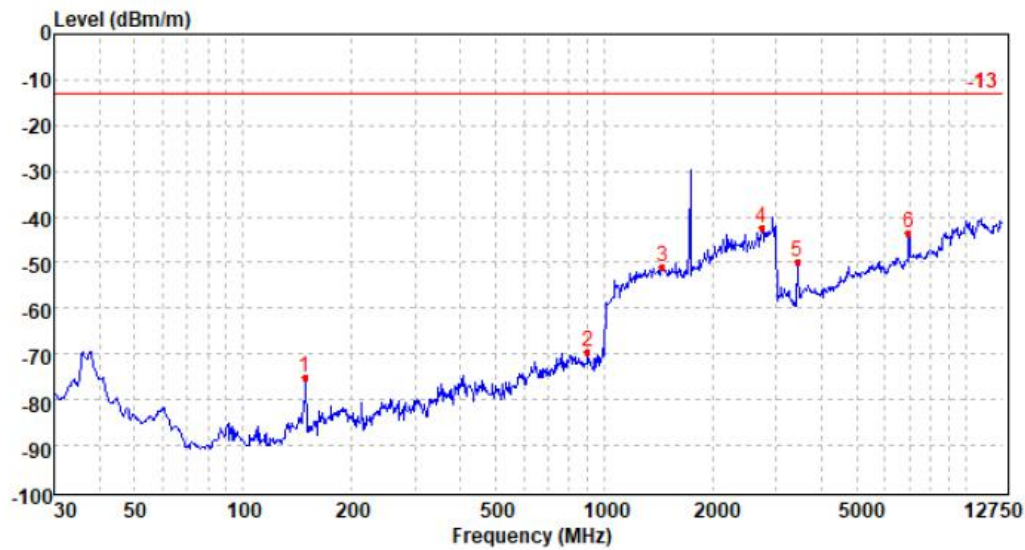


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	148.59	-70.23	17.95	7.87	30.65	-75.06	-13.00	-62.06	Peak
2	902.51	-79.86	29.49	10.87	29.95	-69.45	-13.00	-56.45	Peak
3	1454.45	-71.04	36.82	12.30	29.16	-51.08	-13.00	-38.08	Peak
4	2735.54	-72.37	40.11	16.20	26.28	-42.34	-13.00	-29.34	Peak
5	3428.21	-59.55	39.99	6.73	37.14	-49.97	-13.00	-36.97	Peak
6	6974.36	-67.61	47.53	10.15	33.54	-43.47	-13.00	-30.47	Peak

Test channel:

Low


Polarization:

Vertical

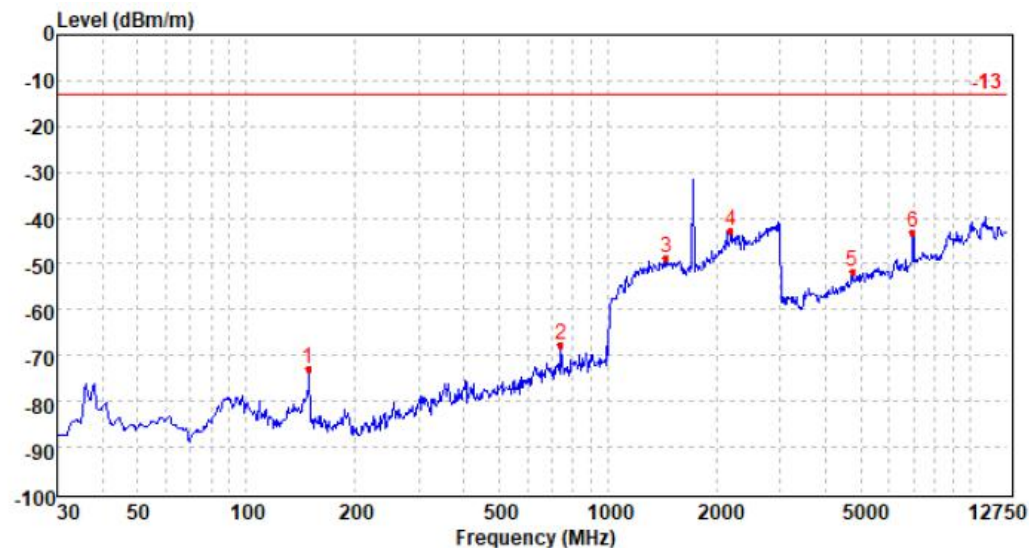


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	148.59	-70.69	20.58	7.87	30.65	-72.89	-13.00	-59.89	Peak
2	741.19	-77.52	29.60	10.37	30.16	-67.71	-13.00	-54.71	Peak
3	1449.66	-69.70	37.76	12.29	29.18	-48.83	-13.00	-35.83	Peak
4	2188.71	-68.94	41.55	14.00	29.41	-42.80	-13.00	-29.80	Peak
5	4748.67	-69.28	43.60	8.31	34.18	-51.55	-13.00	-38.55	Peak
6	6974.36	-67.17	47.36	10.15	33.54	-43.20	-13.00	-30.20	Peak

Test channel: Middle Polarization: Horizontal

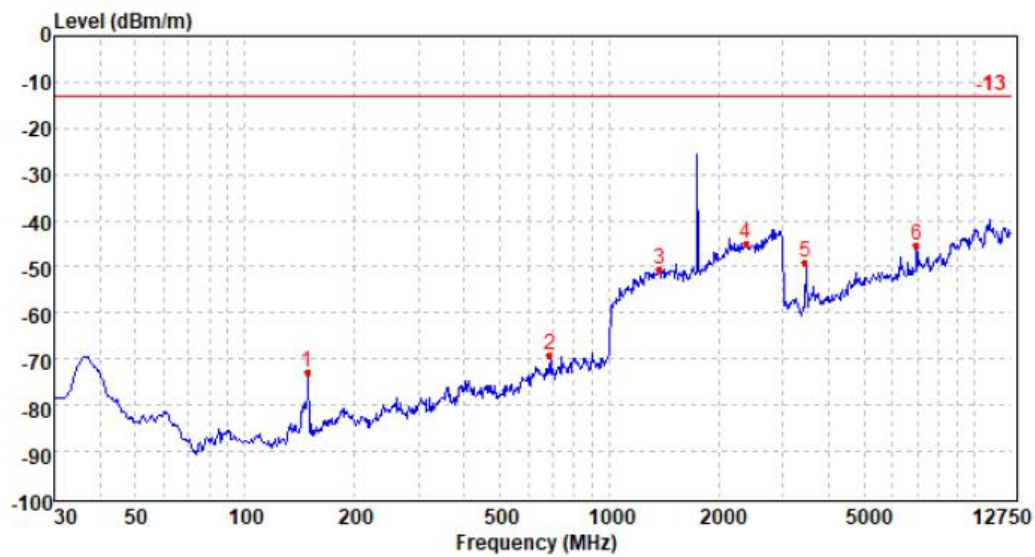

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	148.59	-68.15	17.95	7.87	30.65	-72.98	-13.00	-59.98	Peak
2	688.42	-77.46	28.10	10.21	30.09	-69.24	-13.00	-56.24	Peak
3	1372.18	-70.43	37.10	12.11	29.44	-50.66	-13.00	-37.66	Peak
4	2379.30	-70.84	39.93	14.69	28.77	-44.99	-13.00	-31.99	Peak
5	3454.49	-59.13	40.36	6.75	37.10	-49.12	-13.00	-36.12	Peak
6	6956.63	-69.19	47.45	10.20	33.65	-45.19	-13.00	-32.19	Peak

Test channel: Middle Polarization: Vertical

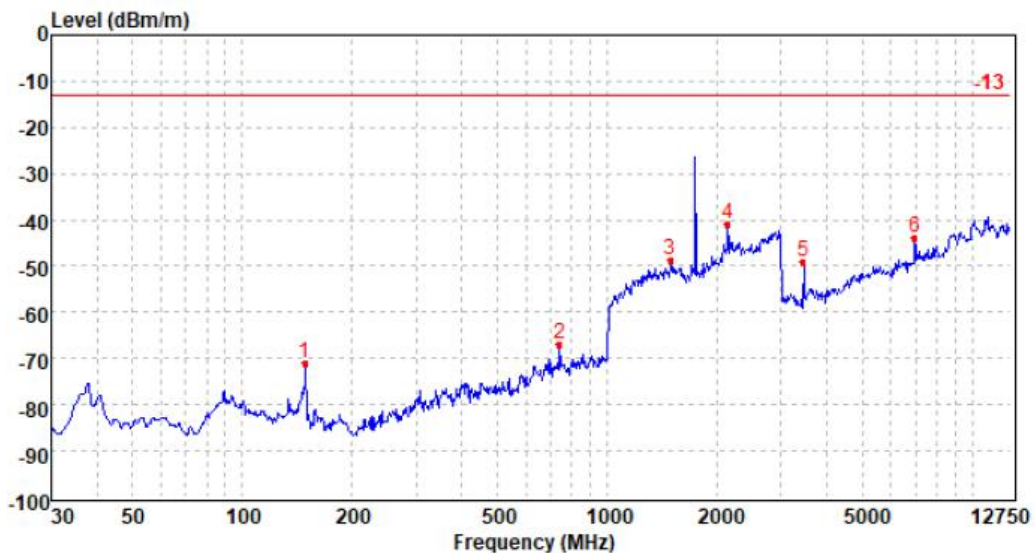


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	148.59	-68.74	20.58	7.87	30.65	-70.94	-13.00	-57.94	Peak
2	741.19	-76.66	29.60	10.37	30.16	-66.85	-13.00	-53.85	Peak
3	1491.67	-69.27	37.76	12.39	29.53	-48.65	-13.00	-35.65	Peak
4	2136.44	-65.96	40.68	13.87	29.44	-40.85	-13.00	-27.85	Peak
5	3454.49	-59.12	40.42	6.75	37.10	-49.05	-13.00	-36.05	Peak
6	6956.63	-67.68	47.36	10.20	33.65	-43.77	-13.00	-30.77	Peak

Test channel:

High

Polarization:

Horizontal

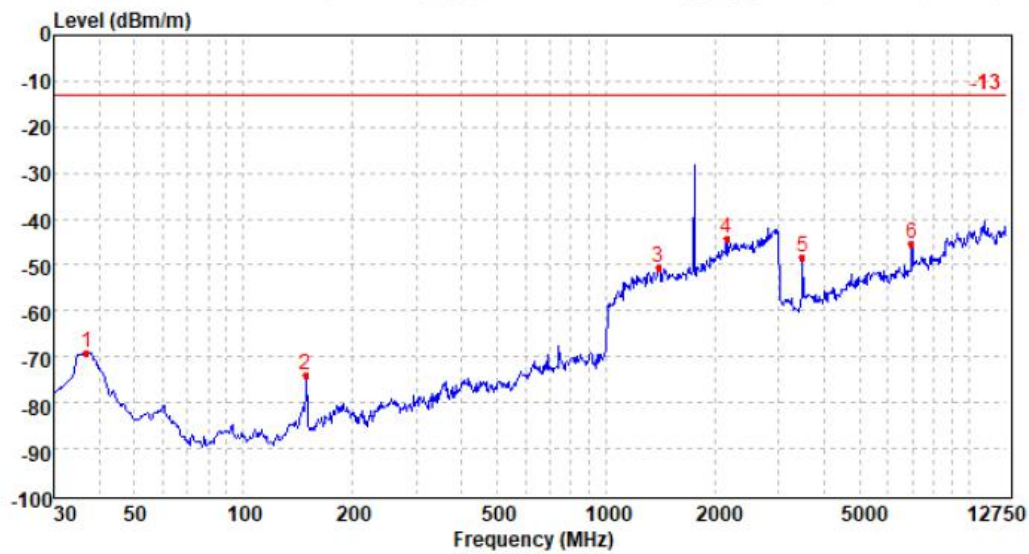


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	36.92	-72.49	27.32	6.89	30.87	-69.15	-13.00	-56.15	Peak
2	148.59	-69.28	17.95	7.87	30.65	-74.11	-13.00	-61.11	Peak
3	1398.05	-70.43	37.16	12.17	29.49	-50.59	-13.00	-37.59	Peak
4	2148.21	-69.41	40.51	13.90	29.35	-44.35	-13.00	-31.35	Peak
5	3480.97	-58.88	40.74	6.77	37.08	-48.45	-13.00	-35.45	Peak
6	6974.36	-69.43	47.53	10.15	33.54	-45.29	-13.00	-32.29	Peak

Test channel:

High

Polarization:

Vertical

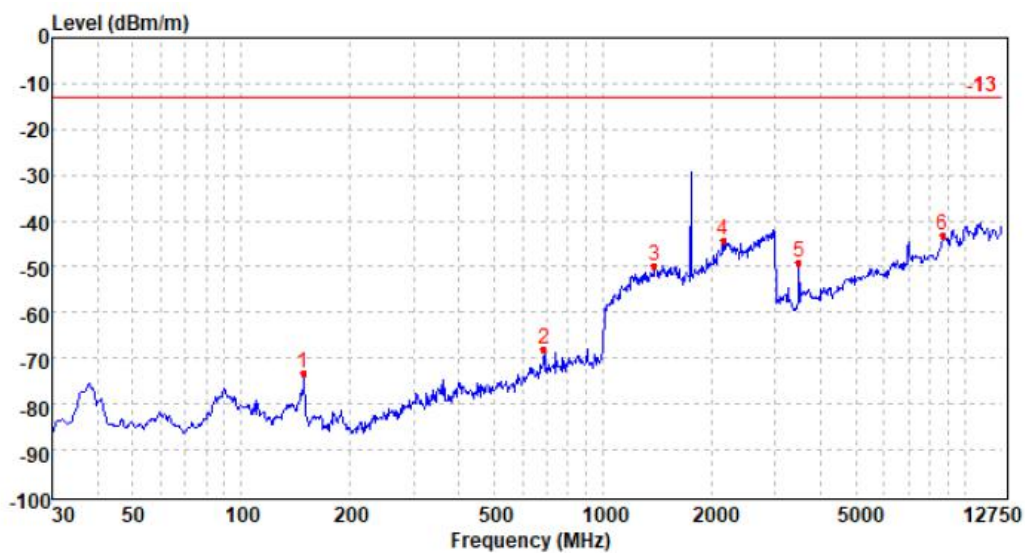

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	148.59	-71.14	20.58	7.87	30.65	-73.34	-13.00	-60.34	Peak
2	688.42	-76.78	28.59	10.21	30.09	-68.07	-13.00	-55.07	Peak
3	1390.39	-70.32	37.72	12.15	29.47	-49.92	-13.00	-36.92	Peak
4	2148.21	-69.59	40.88	13.90	29.35	-44.16	-13.00	-31.16	Peak
5	3480.97	-59.63	40.83	6.77	37.08	-49.11	-13.00	-36.11	Peak
6	8725.48	-73.86	48.88	11.97	30.09	-43.10	-13.00	-30.10	Peak


LTE Band 5

Test channel:

Low

Polarization:

Horizontal

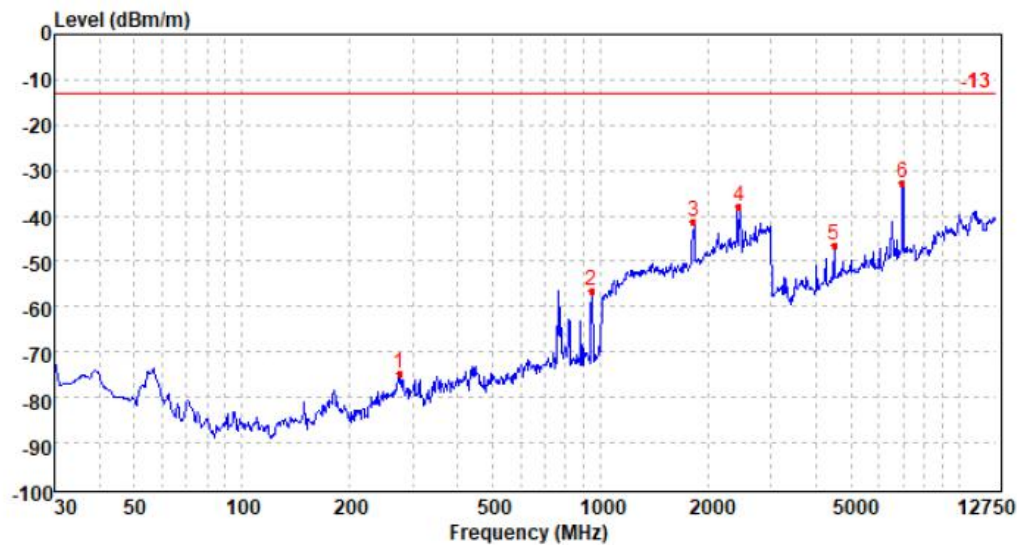


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	274.95	-75.58	22.74	8.60	30.54	-74.78	-13.00	-61.78	Peak
2	944.72	-67.01	29.33	10.99	29.75	-56.44	-13.00	-43.44	Peak
3	1821.83	-61.77	36.99	13.14	29.57	-41.21	-13.00	-28.21	Peak
4	2445.55	-64.34	39.57	15.01	28.23	-37.99	-13.00	-24.99	Peak
5	4501.49	-61.75	43.20	8.01	35.80	-46.34	-13.00	-33.34	Peak
6	6974.36	-56.99	47.53	10.15	33.54	-32.85	-13.00	-19.85	Peak

Test channel:

Low

Polarization:

Vertical

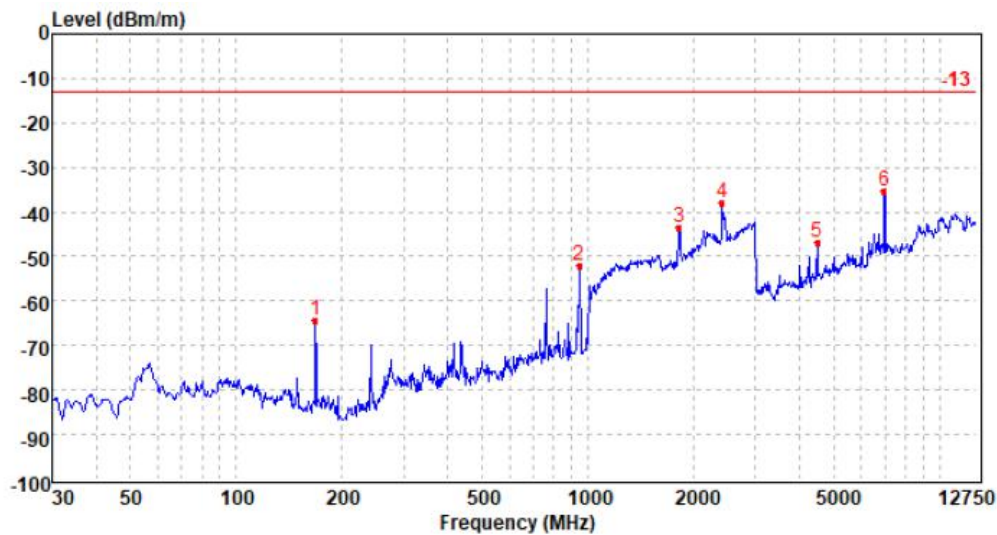


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	168.05	-61.75	20.10	7.99	30.59	-64.25	-13.00	-51.25	Peak
2	948.05	-62.36	29.13	10.99	29.74	-51.98	-13.00	-38.98	Peak
3	1823.83	-63.62	36.70	13.15	29.56	-43.33	-13.00	-30.33	Peak
4	2410.87	-63.33	39.31	14.85	28.59	-37.76	-13.00	-24.76	Peak
5	4501.49	-62.20	43.26	8.01	35.80	-46.73	-13.00	-33.73	Peak
6	6974.36	-59.38	47.36	10.15	33.54	-35.41	-13.00	-22.41	Peak

Test channel:

Middle

Polarization:

Horizontal

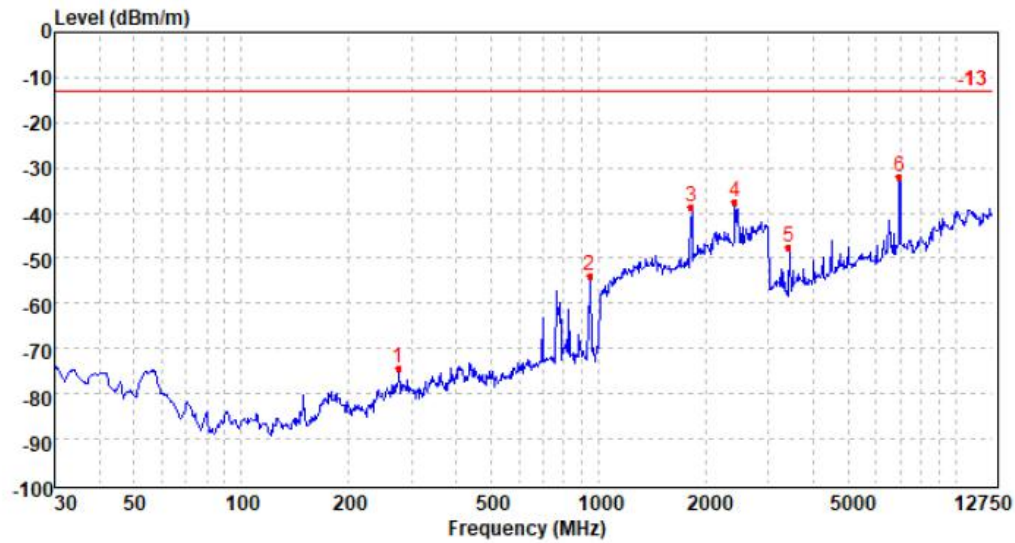


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	275.92	-74.98	22.72	8.61	30.54	-74.19	-13.00	-61.19	Peak
2	948.05	-64.52	29.40	10.99	29.74	-53.87	-13.00	-40.87	Peak
3	1819.83	-59.31	36.97	13.14	29.58	-38.78	-13.00	-25.78	Peak
4	2410.87	-63.39	39.76	14.85	28.59	-37.37	-13.00	-24.37	Peak
5	3419.49	-57.14	39.86	6.72	37.15	-47.71	-13.00	-34.71	Peak
6	6956.63	-55.99	47.45	10.20	33.65	-31.99	-13.00	-18.99	Peak

Test channel:

Middle


Polarization:

Vertical

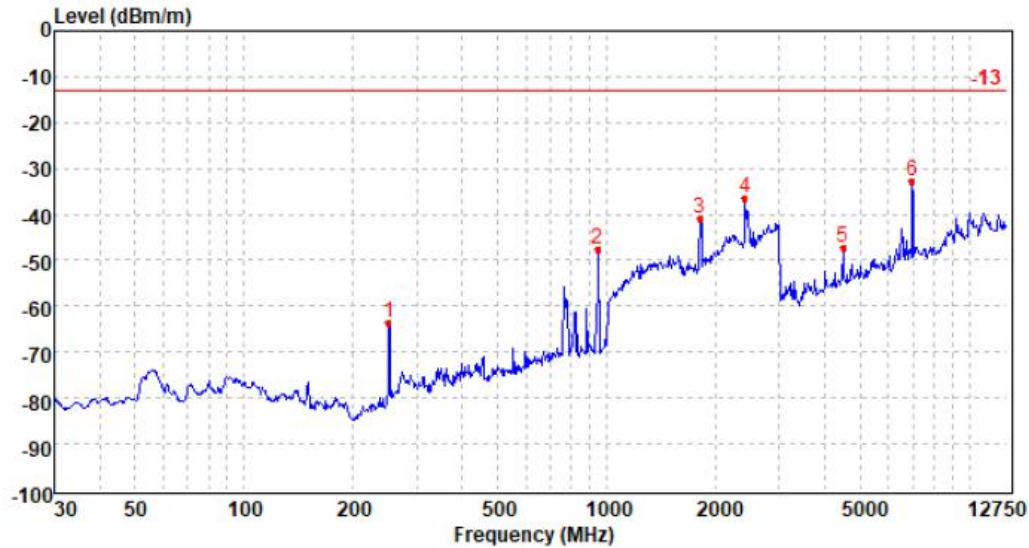


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	250.93	-62.22	20.84	8.45	30.57	-63.50	-13.00	-50.50	Peak
2	948.05	-58.11	29.13	10.99	29.74	-47.73	-13.00	-34.73	Peak
3	1811.85	-61.06	36.58	13.12	29.61	-40.97	-13.00	-27.97	Peak
4	2410.87	-62.17	39.31	14.85	28.59	-36.60	-13.00	-23.60	Peak
5	4501.49	-62.55	43.26	8.01	35.80	-47.08	-13.00	-34.08	Peak
6	6956.63	-56.66	47.36	10.20	33.65	-32.75	-13.00	-19.75	Peak

Test channel:	High	Polarization:	Horizontal
---------------	------	---------------	------------

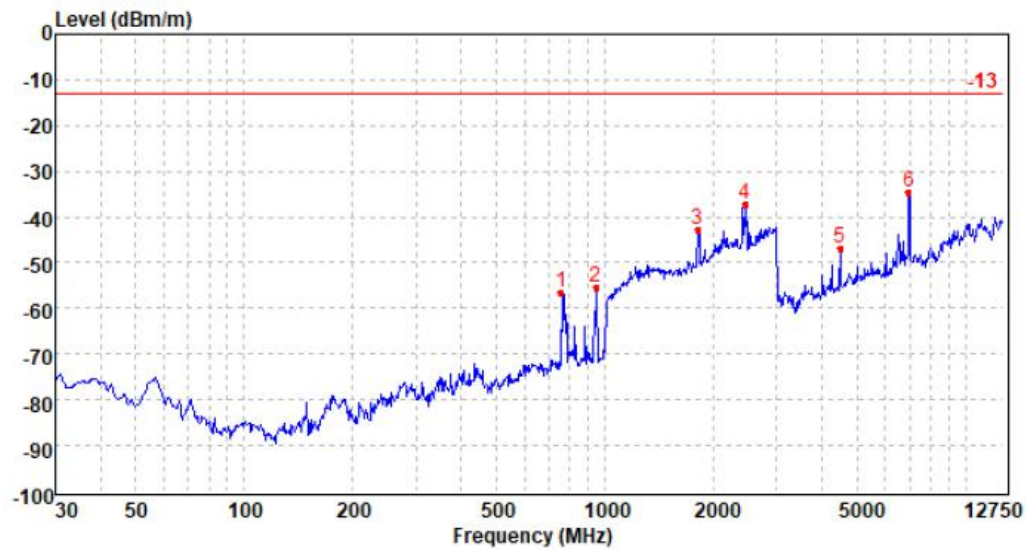

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	759.66	-65.84	29.15	10.44	30.15	-56.40	-13.00	-43.40	Peak
2	944.72	-66.04	29.33	10.99	29.75	-55.47	-13.00	-42.47	Peak
3	1807.88	-62.95	36.82	13.11	29.62	-42.64	-13.00	-29.64	Peak
4	2448.24	-63.63	39.55	15.03	28.20	-37.25	-13.00	-24.25	Peak
5	4501.49	-62.37	43.20	8.01	35.80	-46.96	-13.00	-33.96	Peak
6	6956.63	-58.63	47.45	10.20	33.65	-34.63	-13.00	-21.63	Peak

Test channel:	High	Polarization:	Vertical
---------------	------	---------------	----------

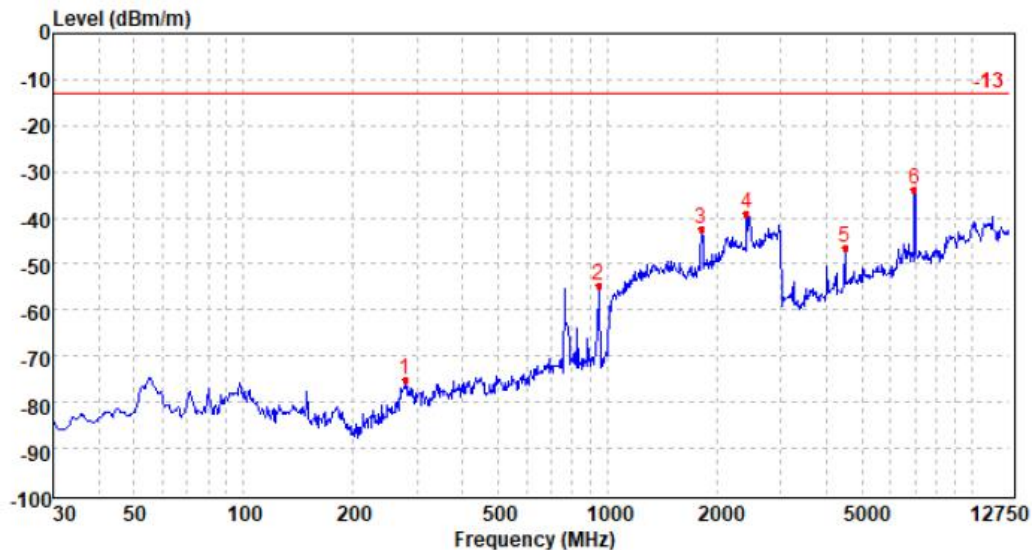

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	278.85	-75.69	22.61	8.62	30.54	-75.00	-13.00	-62.00	Peak
2	944.72	-64.87	29.05	10.99	29.75	-54.58	-13.00	-41.58	Peak
3	1807.88	-62.57	36.55	13.11	29.62	-42.53	-13.00	-29.53	Peak
4	2410.87	-64.73	39.31	14.85	28.59	-39.16	-13.00	-26.16	Peak
5	4501.49	-62.03	43.26	8.01	35.80	-46.56	-13.00	-33.56	Peak
6	6974.36	-57.96	47.36	10.15	33.54	-33.99	-13.00	-20.99	Peak


LTE Band 12

Test channel:

Low

Polarization:

Horizontal

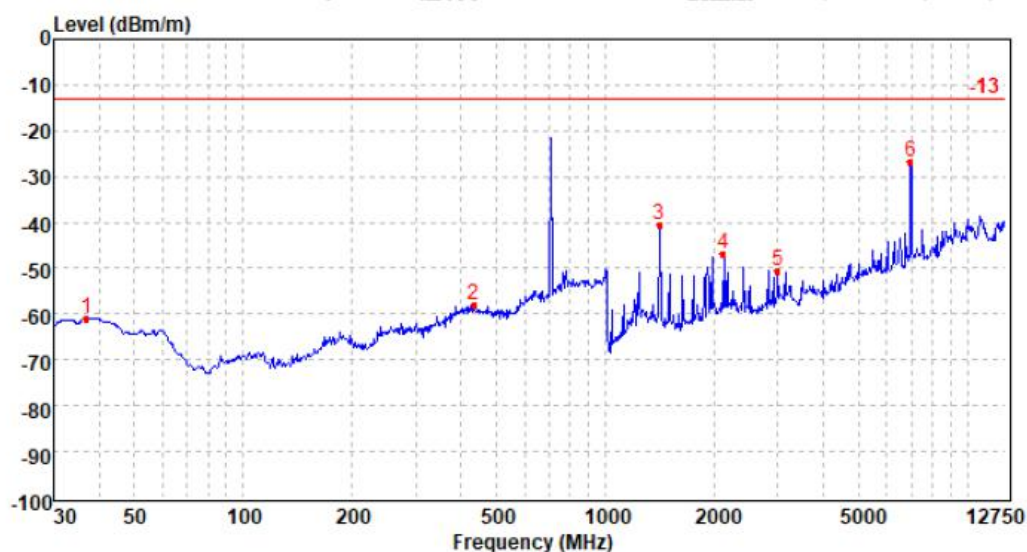


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	36.92	-95.09	27.32	6.89	0.00	-60.88	-13.00	-47.88	Peak
2	432.78	-93.24	26.02	9.30	0.00	-57.92	-13.00	-44.92	Peak
3	1413.67	-45.03	37.07	4.19	36.65	-40.42	-13.00	-27.42	Peak
4	2118.97	-54.79	40.24	5.18	37.42	-46.79	-13.00	-33.79	Peak
5	2995.54	-60.33	41.03	6.20	37.39	-50.49	-13.00	-37.49	Peak
6	6974.36	-50.94	47.53	10.15	33.54	-26.80	-13.00	-13.80	Peak

Test channel:

Low


Polarization:

Vertical

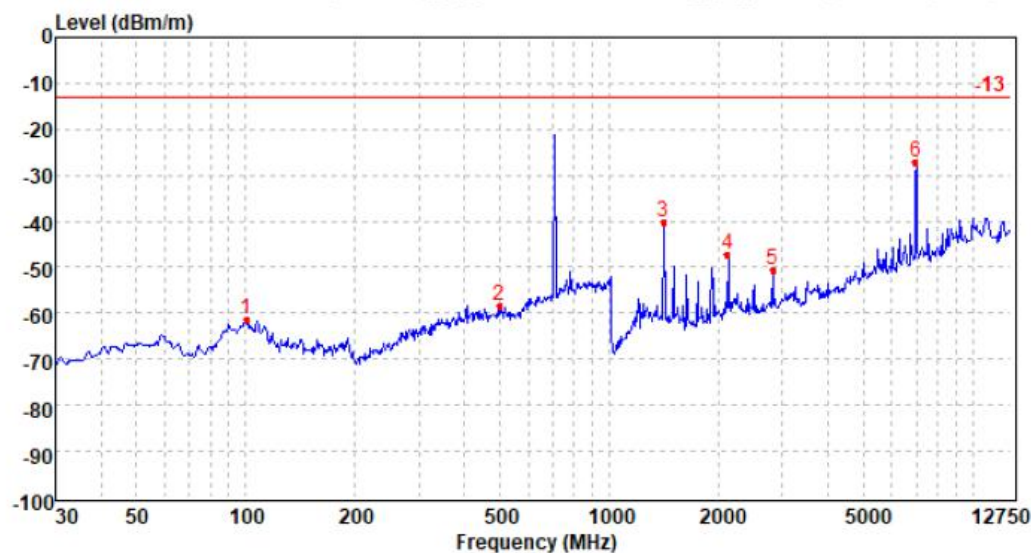


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	100.57	-94.41	25.67	7.52	0.00	-61.22	-13.00	-48.22	Peak
2	499.90	-94.25	26.26	9.56	0.00	-58.43	-13.00	-45.43	Peak
3	1413.67	-45.53	37.76	4.19	36.65	-40.23	-13.00	-27.23	Peak
4	2118.97	-55.41	40.38	5.18	37.42	-47.27	-13.00	-34.27	Peak
5	2825.19	-59.88	40.72	6.06	37.46	-50.56	-13.00	-37.56	Peak
6	6974.36	-51.05	47.36	10.15	33.54	-27.08	-13.00	-14.08	Peak

Test channel: Middle Polarization: Horizontal

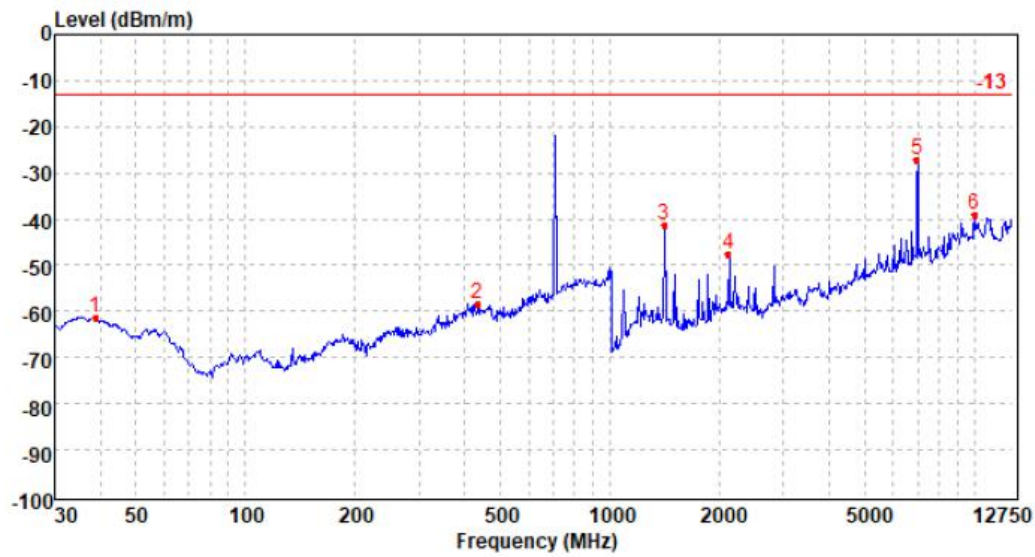


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	38.78	-95.79	27.60	6.92	0.00	-61.27	-13.00	-48.27	Peak
2	434.30	-93.57	26.02	9.30	0.00	-58.25	-13.00	-45.25	Peak
3	1413.67	-45.70	37.07	4.19	36.65	-41.09	-13.00	-28.09	Peak
4	2118.97	-55.64	40.24	5.18	37.42	-47.64	-13.00	-34.64	Peak
5	6974.36	-51.27	47.53	10.15	33.54	-27.13	-13.00	-14.13	Peak
6	10011.21	-70.65	50.43	12.37	31.35	-39.20	-13.00	-26.20	Peak

Test channel: Middle Polarization: Vertical

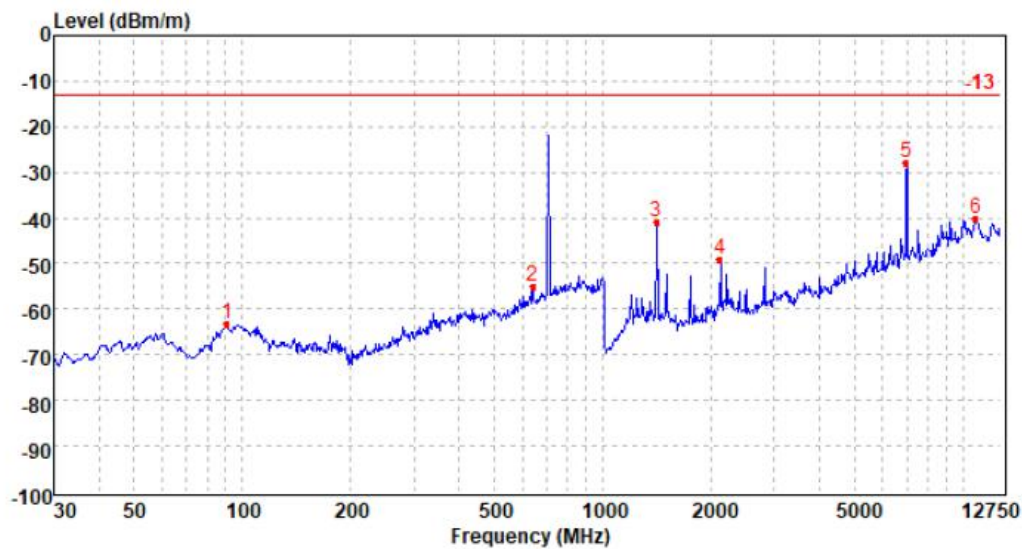


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	90.82	-96.69	25.88	7.43	0.00	-63.38	-13.00	-50.38	Peak
2	641.67	-93.65	28.42	10.06	0.00	-55.17	-13.00	-42.17	Peak
3	1413.67	-46.25	37.76	4.19	36.65	-40.95	-13.00	-27.95	Peak
4	2118.97	-57.06	40.38	5.18	37.42	-48.92	-13.00	-35.92	Peak
5	6974.36	-51.97	47.36	10.15	33.54	-28.00	-13.00	-15.00	Peak
6	10888.51	-73.11	52.69	12.52	32.37	-40.27	-13.00	-27.27	Peak

Test channel: High Polarization: Horizontal

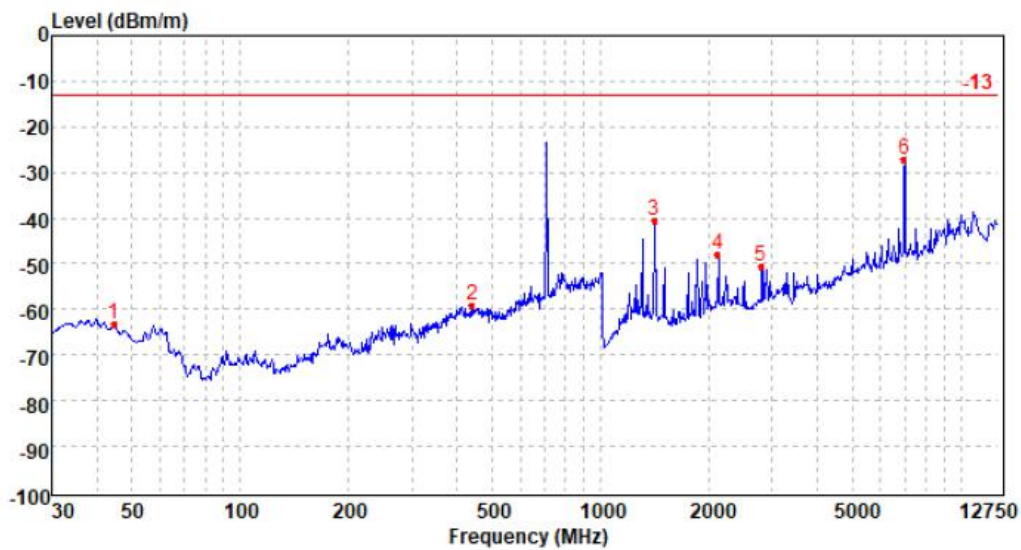

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	44.64	-95.75	25.69	6.99	0.00	-63.07	-13.00	-50.07	Peak
2	442.01	-94.33	26.02	9.34	0.00	-58.97	-13.00	-45.97	Peak
3	1413.67	-45.18	37.07	4.19	36.65	-40.57	-13.00	-27.57	Peak
4	2118.97	-56.10	40.24	5.18	37.42	-48.10	-13.00	-35.10	Peak
5	2796.57	-59.76	40.70	6.03	37.37	-50.40	-13.00	-37.40	Peak
6	6974.36	-51.21	47.53	10.15	33.54	-27.07	-13.00	-14.07	Peak

Test channel: High Polarization: Vertical

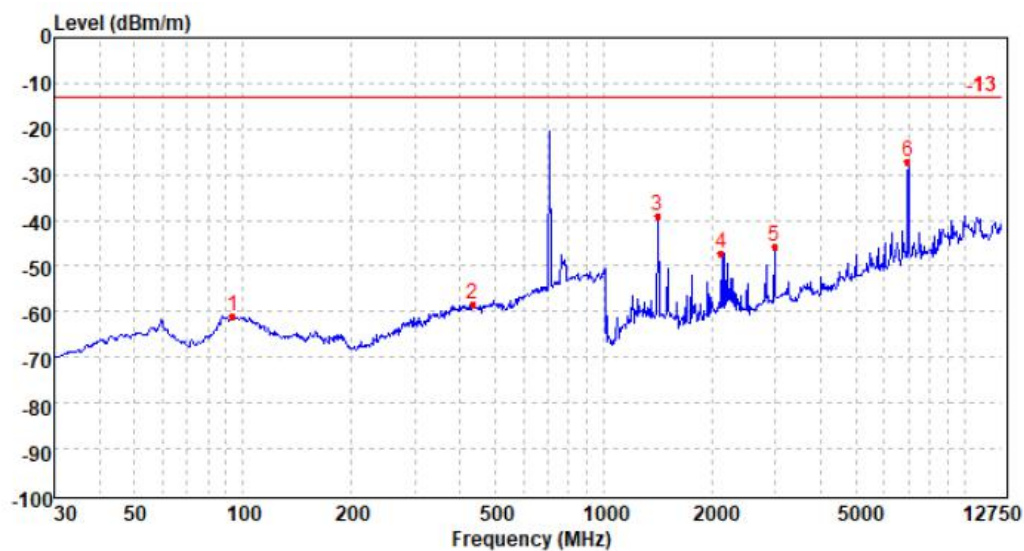

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	93.74	-94.32	25.84	7.46	0.00	-61.02	-13.00	-48.02	Peak
2	434.30	-93.04	25.54	9.30	0.00	-58.20	-13.00	-45.20	Peak
3	1413.67	-44.40	37.76	4.19	36.65	-39.10	-13.00	-26.10	Peak
4	2118.97	-55.25	40.38	5.18	37.42	-47.11	-13.00	-34.11	Peak
5	2980.33	-55.67	40.99	6.19	37.34	-45.83	-13.00	-32.83	Peak
6	6974.36	-51.06	47.36	10.15	33.54	-27.09	-13.00	-14.09	Peak


LTE Band 13

Test channel:

Low

Polarization:

Horizontal

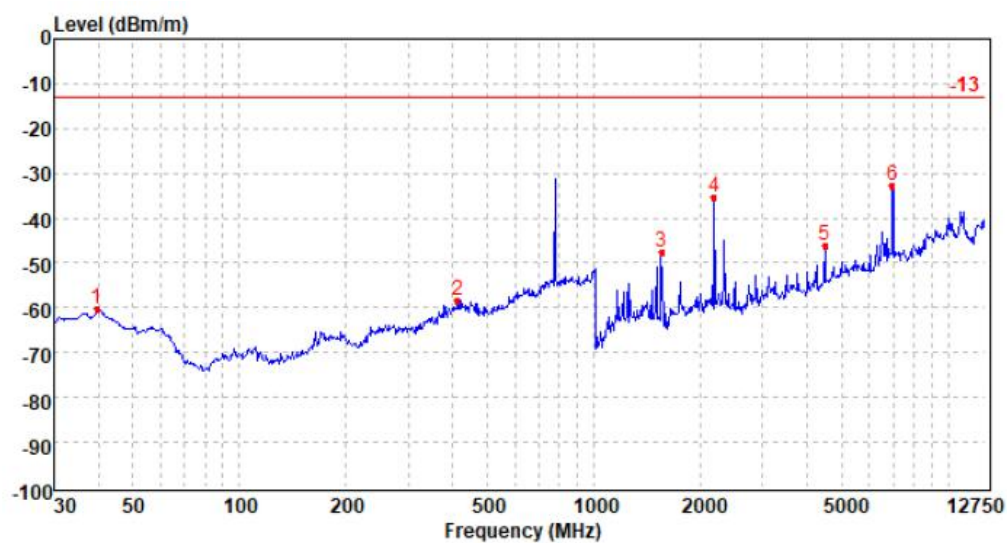


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	39.75	-95.06	27.74	6.93	0.00	-60.39	-13.00	-47.39	Peak
2	413.44	-93.39	25.80	9.23	0.00	-58.36	-13.00	-45.36	Peak
3	1553.29	-51.14	36.23	4.40	36.94	-47.45	-13.00	-34.45	Peak
4	2184.70	-43.80	40.83	5.29	37.54	-35.22	-13.00	-22.22	Peak
5	4501.49	-61.49	43.20	8.01	35.80	-46.08	-13.00	-33.08	Peak
6	6956.63	-56.58	47.45	10.20	33.65	-32.58	-13.00	-19.58	Peak

Test channel:

Low

Polarization:

Vertical

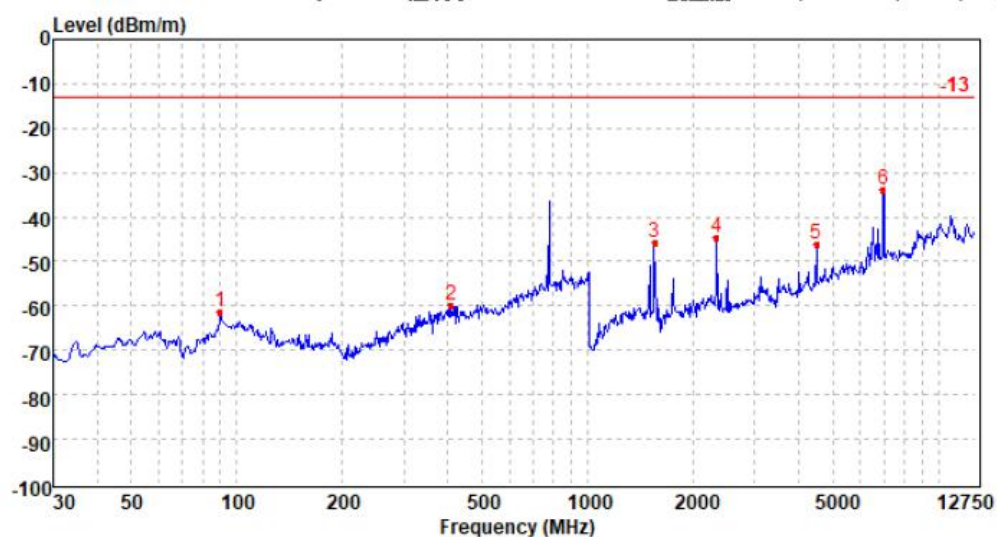


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	89.87	-94.57	25.83	7.42	0.00	-61.32	-13.00	-48.32	Peak
2	407.67	-94.26	25.30	9.22	0.00	-59.74	-13.00	-46.74	Peak
3	1553.29	-50.78	37.76	4.40	36.94	-45.56	-13.00	-32.56	Peak
4	2334.18	-52.89	40.09	5.46	37.37	-44.71	-13.00	-31.71	Peak
5	4501.49	-61.71	43.26	8.01	35.80	-46.24	-13.00	-33.24	Peak
6	6974.36	-57.73	47.36	10.15	33.54	-33.76	-13.00	-20.76	Peak

Test channel:

Middle

Polarization:

Horizontal

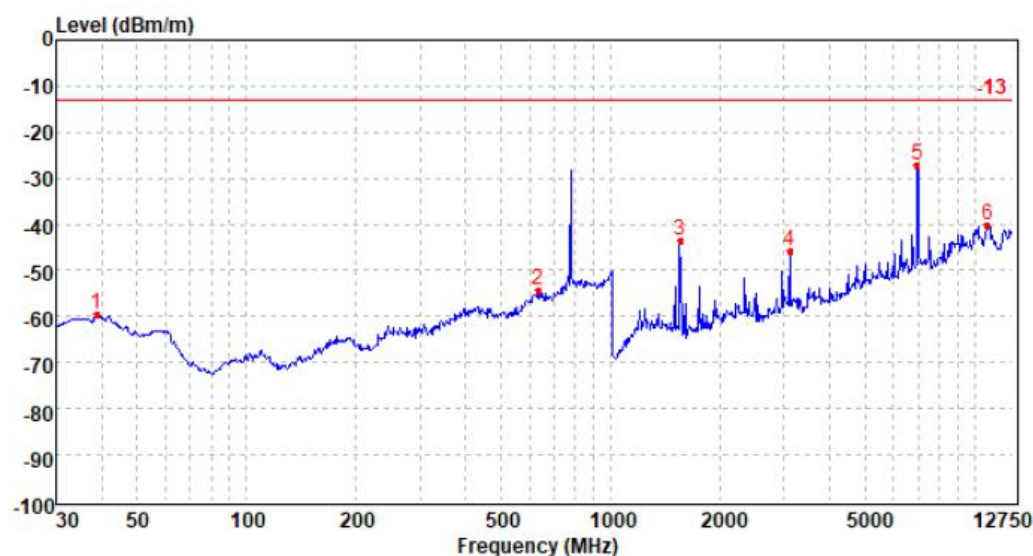


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	38.78	-93.84	27.60	6.92	0.00	-59.32	-13.00	-46.32	Peak
2	634.94	-93.30	28.85	10.03	0.00	-54.42	-13.00	-41.42	Peak
3	1553.29	-47.01	36.23	4.40	36.94	-43.32	-13.00	-30.32	Peak
4	3112.13	-56.01	41.23	6.32	37.33	-45.79	-13.00	-32.79	Peak
5	6974.36	-51.34	47.53	10.15	33.54	-27.20	-13.00	-14.20	Peak
6	10888.51	-73.09	52.64	12.52	32.37	-40.30	-13.00	-27.30	Peak

Test channel:

Middle

Polarization:

Vertical

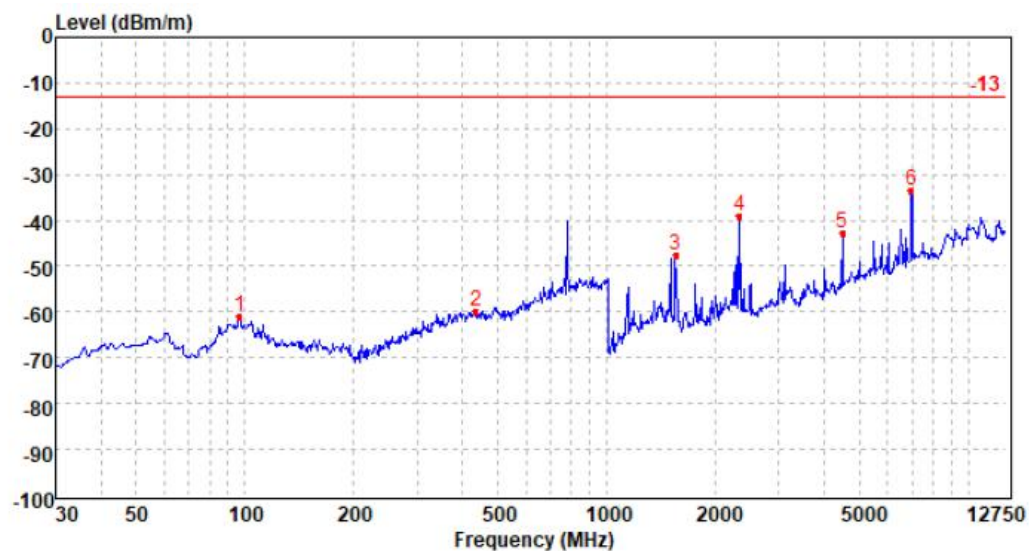


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	96.76	-94.07	25.79	7.48	0.00	-60.80	-13.00	-47.80	Peak
2	437.37	-94.73	25.58	9.32	0.00	-59.83	-13.00	-46.83	Peak
3	1553.29	-52.78	37.76	4.40	36.94	-47.56	-13.00	-34.56	Peak
4	2334.18	-47.37	40.09	5.46	37.37	-39.19	-13.00	-26.19	Peak
5	4501.49	-58.07	43.26	8.01	35.80	-42.60	-13.00	-29.60	Peak
6	6974.36	-57.30	47.36	10.15	33.54	-33.33	-13.00	-20.33	Peak

Test channel:

High

Polarization:

Horizontal

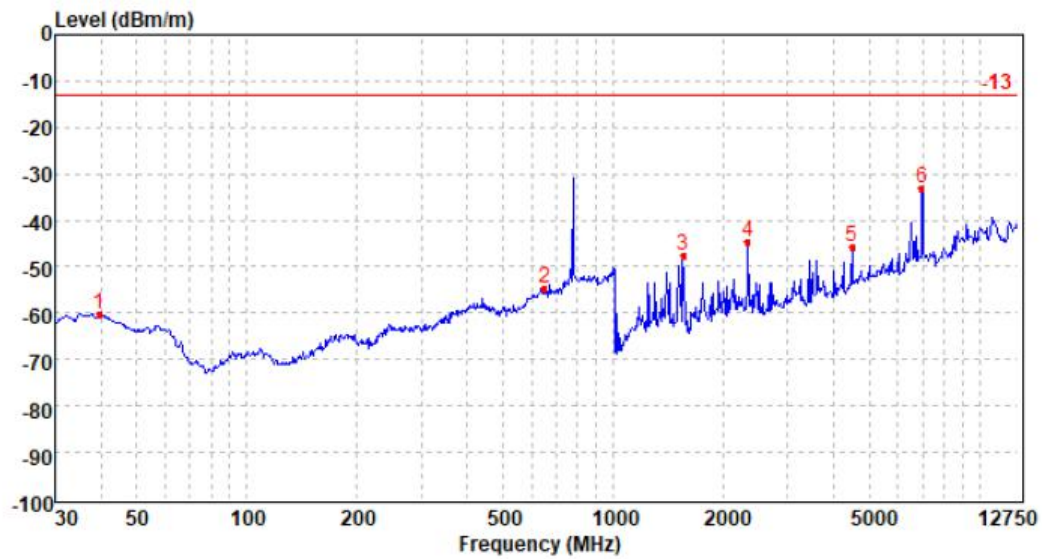


Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	39.75	-94.84	27.74	6.93	0.00	-60.17	-13.00	-47.17	Peak
2	650.76	-93.21	28.50	10.10	0.00	-54.61	-13.00	-41.61	Peak
3	1553.29	-51.14	36.23	4.40	36.94	-47.45	-13.00	-34.45	Peak
4	2334.18	-52.86	40.19	5.46	37.37	-44.58	-13.00	-31.58	Peak
5	4501.49	-61.11	43.20	8.01	35.80	-45.70	-13.00	-32.70	Peak
6	6974.36	-57.09	47.53	10.15	33.54	-32.95	-13.00	-19.95	Peak

Test channel:

High

Polarization:

Vertical

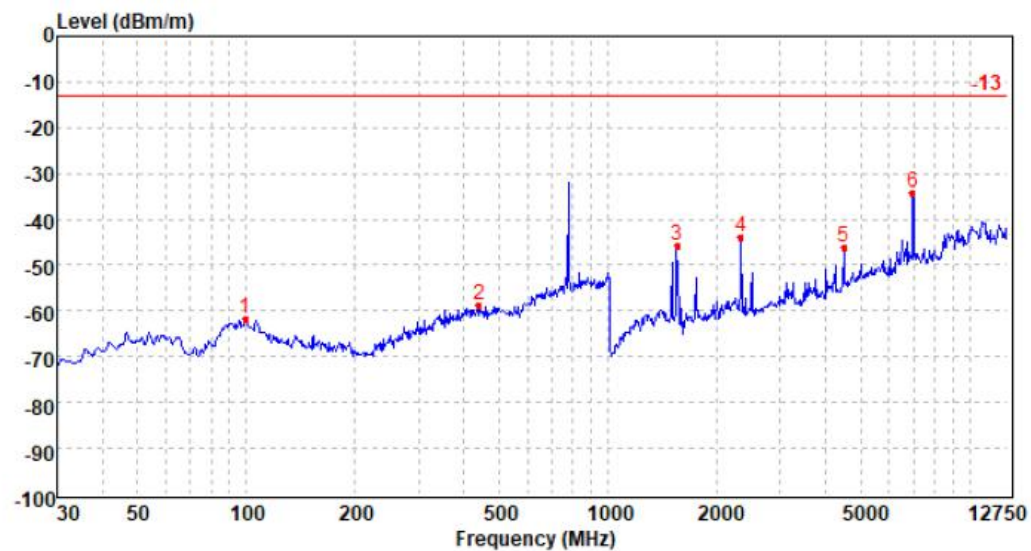

Mark	Frequency MHz	Reading dBm	Antenna dB	Cable dB	Preamp dB	Level dBm	Limit dBm	Over limit	Remark
1	99.52	-95.05	25.76	7.51	0.00	-61.78	-13.00	-48.78	Peak
2	442.01	-93.58	25.54	9.34	0.00	-58.70	-13.00	-45.70	Peak
3	1553.29	-51.07	37.76	4.40	36.94	-45.85	-13.00	-32.85	Peak
4	2334.18	-52.20	40.09	5.46	37.37	-44.02	-13.00	-31.02	Peak
5	4501.49	-61.57	43.26	8.01	35.80	-46.10	-13.00	-33.10	Peak
6	6956.63	-57.95	47.36	10.20	33.65	-34.04	-13.00	-21.04	Peak

6. TEST SETUP PHOTOS OF THE EUT





7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT




7.1 External photos









7.2 Internal photos

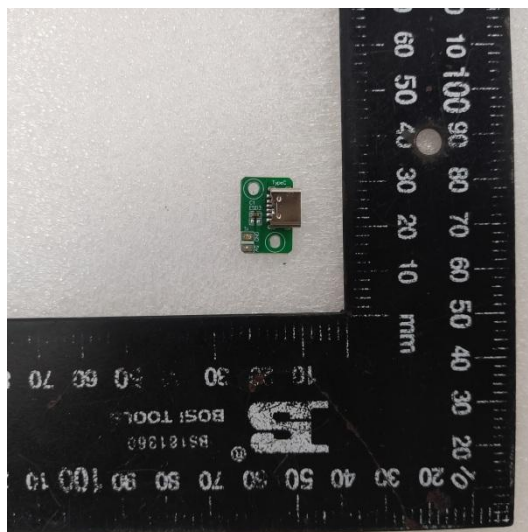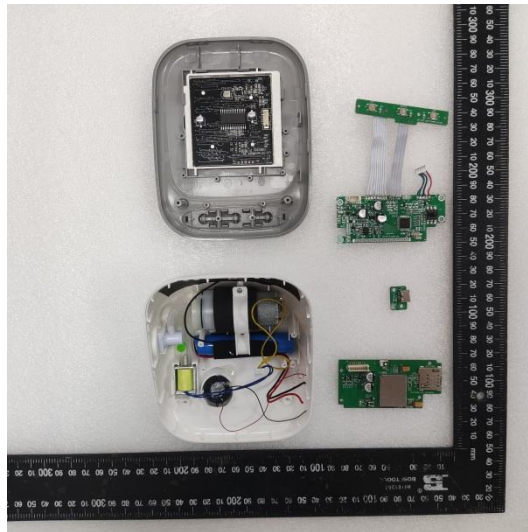

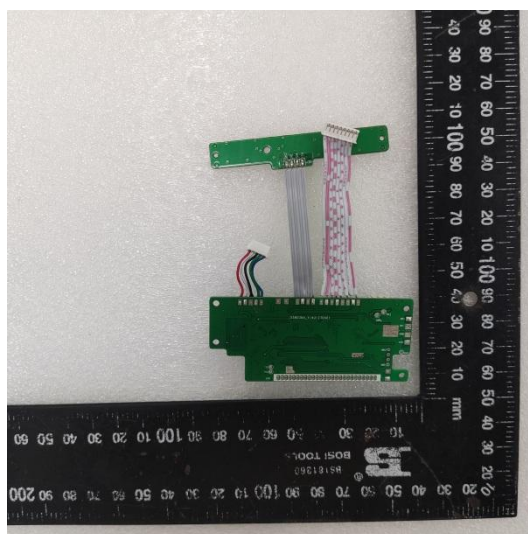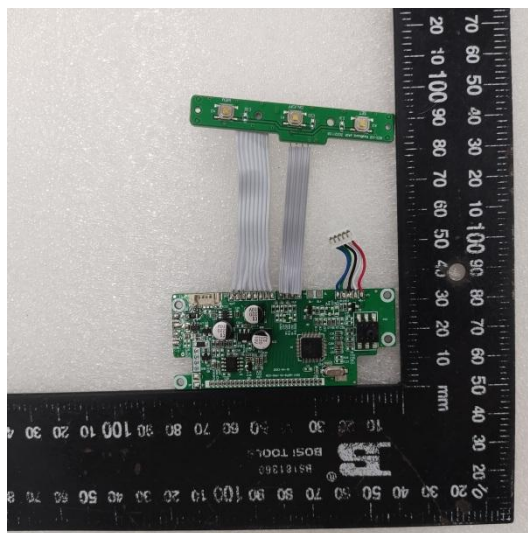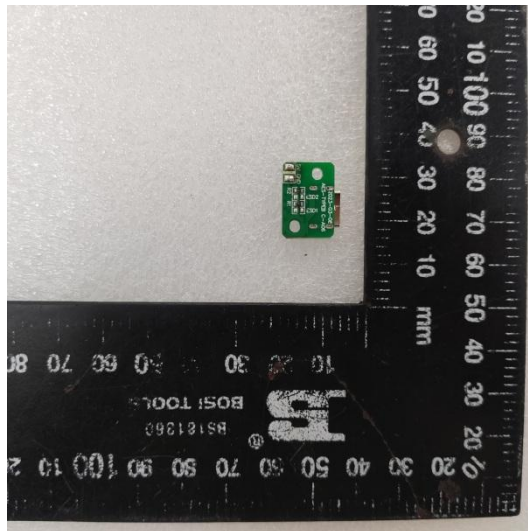

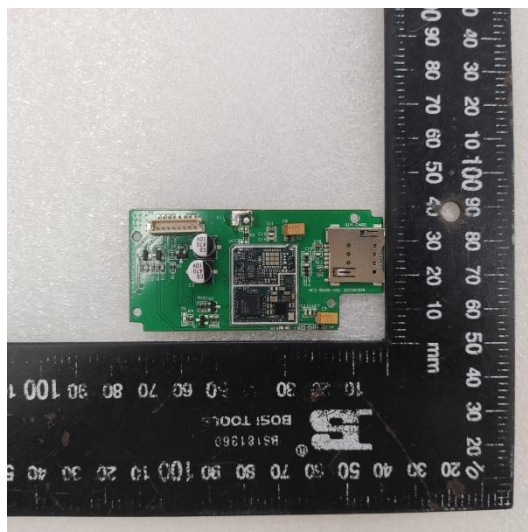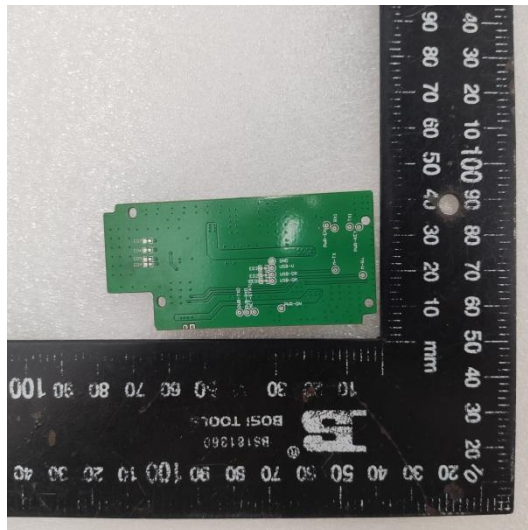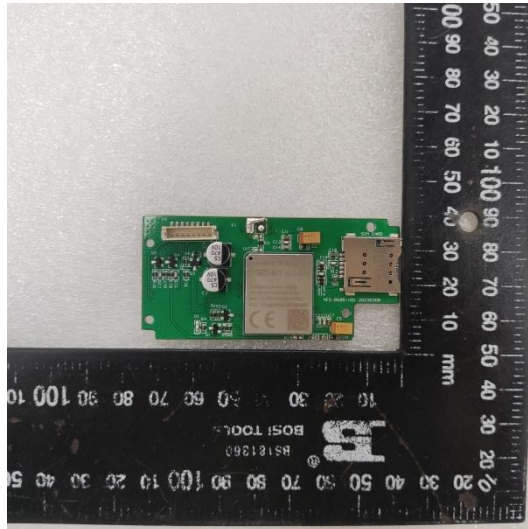

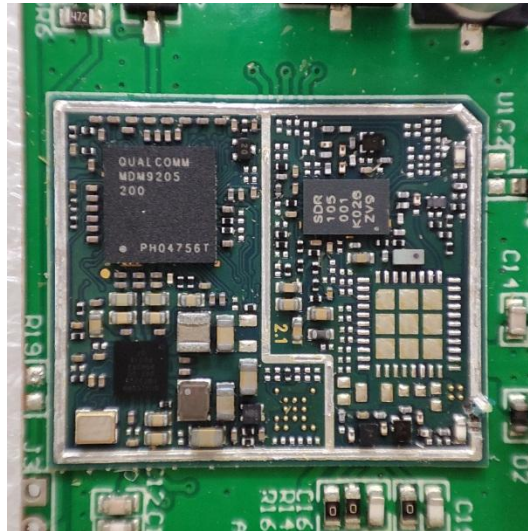

8. APPENDIX REPORT