

MFA

M. Flom Associates, Inc. - Global Compliance Center
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85224-1571
www.goodnet.com/~mflom, (602) 926-3100, FAX: 926-3598

Date: March 25, 1999

Federal Communications Commission
EQUIPMENT APPROVAL SERVICES
P.O. Box 358315
Pittsburgh, PA 15251-5315

Attention: Authorization & Evaluation Division

Applicant: Kenwood Communications Corporation
Equipment: TK-980
FCC ID: ALH24563110
FCC Rules: 90

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

MAILED: MARCH 31st, 1999.

Sincerely yours,



Morton Flom, P. Eng.

enclosure(s)
CERTIFIED MAIL, R.R.R.

cc: Applicant
MF/cvr

LIST OF EXHIBITS
(FCC CERTIFICATION (TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Kenwood Communications Corporation

FCC ID: ALH24563110

BY APPLICANT:

1. LETTER OF AUTHORIZATION
2. IDENTIFICATION DRAWINGS, 2.1033(c)(11)
 - ☒ LABEL
 - ☒ LOCATION OF LABEL
 - ☒ COMPLIANCE STATEMENT
 - ☒ LOCATION OF COMPLIANCE STATEMENT
3. PHOTOGRAPHS, 2.1033(c)(12)
4. DOCUMENTATION: 2.1033(c)

(3) INSTALLATION/OPERATING MANUAL	Instruction
(9) TUNE-UP/ALIGNMENT PROCEDURE	Tuning
(10) SCHEMATIC DIAGRAM	4
(10) CIRCUIT DESCRIPTION	3 pages
5. PART 90.203(e) & (g) ATTESTATION
6. BLOCK DIAGRAM one
7. SEMICONDUCTOR PARTS LIST 4 pages

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS

KENWOOD

KENWOOD COMMUNICATIONS CORPORATION

2201 E. Dominguez St.
Long Beach, CA 90810
Telephone: (310) 639-4200

Mailing Address:
P.O. Box 22745
Long Beach, CA 90801-5745

June 29, 1998

Federal Communications Commission
Authorization & Evaluation Division
7435 Oakland Mills Road
Columbia, MD 21046

Gentlemen:

This letter will authorize the appointment of MORTON FLOM, P. Eng, and/or M. Flom Associates, Inc. to act as our Agent in all FCC matters.


This appointment is effective until otherwise notified by us.

This is to advise that we are in full compliance with the Anti-Drug Abuse Act. The application is not subject to a denial of federal benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1988, 21 USC 8.62, and no party to the applications is subject to a denial of federal benefits pursuant to that section.

Sincerely,

Kenwood Communications Corporation


Per:




Joel E. Berger
Research & Development Department

NAME PLATE

PLEASE SEE PHOTOS FOR LOCATION OF LABEL



(Scale 1:1)

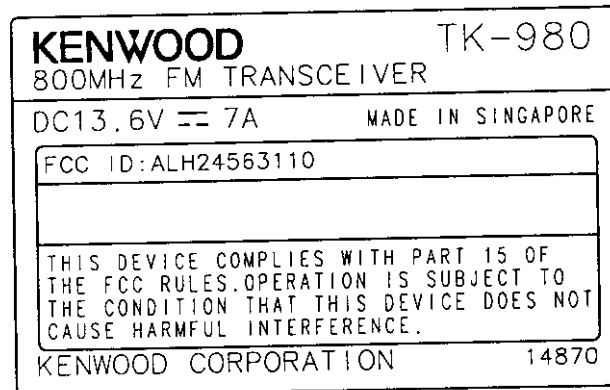

(Scale 2:1)

	DESIGN Y. SUZUKI	DATE 1999-02-22 KENWOOD	MODEL TK-980(K)
--	---------------------	----------------------------	--------------------



M. Flom Associates, Inc. - Global Compliance Center
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85224-1571
www.goodnet.com/~mflom, (602) 926-3100, FAX: 926-3598

Sub-part
2.1033(c):

EQUIPMENT IDENTIFICATION

FCC ID: ALH24563110

NAMEPLATE DRAWING

ATTACHED, EXHIBIT 1.

LOCATION

AS PER LABEL DRAWING(S)

DATE OF REPORT

March 25, 1999

SUPERVISED BY:

A handwritten signature in black ink, reading "Morton Flom, P. Eng.", is written over a horizontal line.

Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c) (14)	Rule Summary	4
	Standard Test Conditions and Engineering Practices	5
2.1046(a)	Carrier Output Power (Conducted)	6
2.1051	Unwanted Emissions (Transmitter Conducted)	8
2.1053(a)	Field Strength of Spurious Radiation	11
2.1049(c) (1)	Emission Masks (Occupied Bandwidth)	14
2.1047(a)	Audio Low Pass Filter (Voice Input)	18
2.1047(a)	Audio Frequency Response	21
2.1047(b)	Modulation Limiting	23
2.1055(a) (1)	Frequency Stability (Temperature Variation)	26
2.1055(b) (1)	Frequency Stability (Voltage Variation)	29
2.202(g)	Necessary Bandwidth and Emission Bandwidth	30

PAGE NO.

1 of 30.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

TEST REPORT

a)

b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85224

c) Report Number: d9930084

d) Client: Kenwood Communications Corporation
P.O. Box 22745
Long Beach, CA 90801-5745

e) Identification: TK-980
FCC ID: ALH24563110
Description: UHF FM Mobile Transceiver

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: March 25, 1999
EUT Received: March 10, 1999

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:



Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO.

2 of 30.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATIONIN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

90

Sub-part 2.1033

(c) (1): NAME AND ADDRESS OF APPLICANT:Kenwood Communications Corporation
2201 E. Dominguez St
P.O. Box 22745
Long Beach, CA 90801-5745MANUFACTURER:Kenwood Electronics Technologies Pte. Ltd.
1 Ang Mo Kio Street 63
Singapore 569110(c) (2): FCC ID: ALH24563110MODEL NO: TK-980(c) (3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c) (4): TYPE OF EMISSION: 16K0F3E, 11K0F3E(c) (5): FREQUENCY RANGE, MHz: 806 to 824
851 to 869(c) (6): POWER RATING, Watts: 15
___ Switchable ___ Variable x N/A(c) (7): MAXIMUM POWER RATING, Watts: 300

PAGE NO.

3 of 30.

Subpart 2.1033 (continued)

(c) (8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
COLLECTOR VOLTAGE, Vdc = per manual
SUPPLY VOLTAGE, Vdc = 13.8

(c) (9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c) (10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:
Including description of circuitry & devices provided for
determining and stabilizing frequency, for suppression of
spurious radiation, for limiting modulation and limiting
power.

PLEASE SEE ATTACHED EXHIBITS

(c) (11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c) (12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c) (13): DIGITAL MODULATION DESCRIPTION:

ATTACHED EXHIBITS
x N/A

(c) (14): TEST AND MEASUREMENT DATA:

FOLLOWS

PAGE NO.

4 of 30.

Sub-part
2.1033(c) (14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- _____ 21 - Domestic Public Fixed Radio Services
- _____ 22 - Public Mobile Services
- _____ 22 Subpart H - Cellular Radiotelephone Service
- _____ 22.901(d) - Alternative technologies and auxiliary services
- _____ 23 - International Fixed Public Radiocommunication services
- _____ 24 - Personal Communications Services
- _____ 74 Subpart H - Low Power Auxiliary Stations
- _____ 80 - Stations in the Maritime Services
- _____ 80 Subpart E - General Technical Standards
- _____ 80 Subpart F - Equipment Authorization for Compulsory Ships
- _____ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- _____ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- _____ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- _____ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- _____ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- _____ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- _____ 80 Subpart X - Voluntary Radio Installations
- _____ 87 - Aviation Services
- x 90 - Private Land Mobile Radio Services
- _____ 94 - Private Operational-Fixed Microwave Service
- _____ 95 Subpart A - General Mobile Radio Service (GMRS)
- _____ 95 Subpart C - Radio Control (R/C) Radio Service
- _____ 95 Subpart D - Citizens Band (CB) Radio Service
- _____ 95 Subpart E - Family Radio Service
- _____ 95 Subpart F - Interactive Video and Data Service (IVDS)
- _____ 101 - Fixed Microwave Services

PAGE NO.

5 of 30.

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 6 of 30.
NAME OF TEST: Carrier Output Power (Conducted)
SPECIFICATION: 47 CFR 2.1046(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS
(Worst case)

FREQUENCY OF CARRIER, MHz = 815.5, 806.05, 824.9

POWER SETTING	R. F. POWER, WATTS
High	15

SUPERVISED BY:



 Morton Flom, P. Eng.

PAGE NO.

7 of 30.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
 TEST 2: FREQUENCY STABILITY

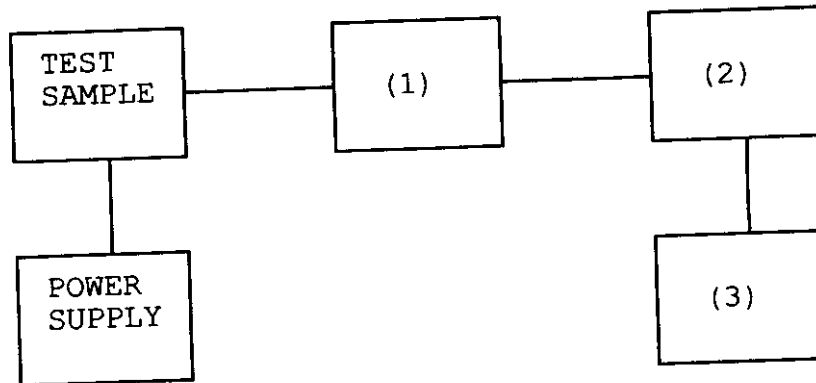

Asset Description

s/n

(1) COAXIAL ATTENUATOR

_____	i00122	Narda 766-10	7802
_____	i00123	Narda 766-10	7802A
<u> x </u>	i00069	Bird 8329 (30 dB)	1006
_____	i00113	Sierra 661A-3D	1059

(2) POWER METERS

_____	i00014	HP 435A	1733A05836
<u> x </u>	i00039	HP 436A	2709A26776
<u> x </u>	i00020	HP 8901A POWER MODE	2105A01087

(3) FREQUENCY COUNTER

_____	i00042	HP 5383A	1628A00959
<u> x </u>	i00019	HP 5334B	2704A00347
<u> x </u>	i00020	HP 8901A FREQUENCY MODE	2105A01087

PAGE NO. 8 of 30.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)

SPECIFICATION: 47 CFR 2.1051

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
 - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE

FREQUENCY OF CARRIER, MHz = 815.5, 806.05, 823.9

SPECTRUM SEARCHED, GHz = 0 to 10 x F_c

MAXIMUM RESPONSE, Hz = 3160

ALL OTHER EMISSIONS = • 20 dB BELOW LIMIT

LIMIT(S), dBc
 -(43+10xLOG P) = -54.8 (15 Watts)

SUPERVISED BY:

Morton Flom P. Eng.


Morton Flom, P. Eng.

PAGE NO.

9 of 30.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
 TEST B. OUT-OF-BAND SPURIOUS

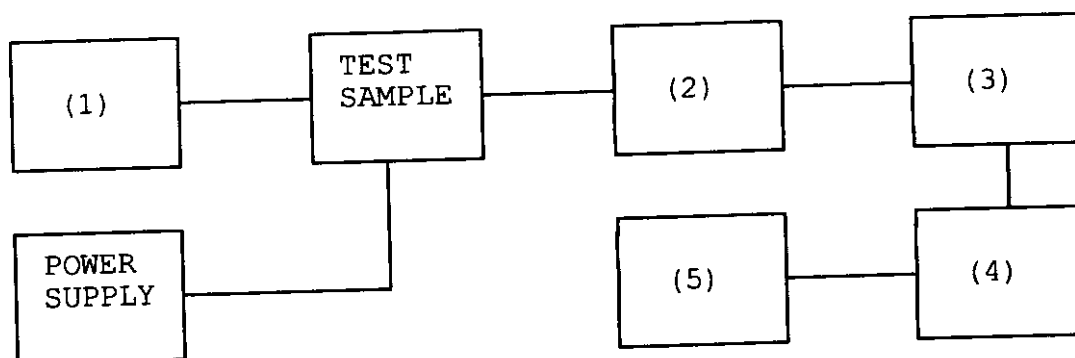

Asset Description

s/n

(1) AUDIO OSCILLATOR/GENERATOR

—	i00010	HP 204D	1105A04683
—	i00017	HP 8903A	2216A01753
<u>x</u>	i00012	HP 3312A	1432A11250

(2) COAXIAL ATTENUATOR

—	i00122	Narda 766-10	7802
—	i00123	Narda 766-10	7802A
<u>x</u>	i00069	Bird 8329 (30 dB)	1006
—	i00113	Sierra 661A-3D	1059

(3) FILTERS; NOTCH, HP, LP, BP

—	i00126	Eagle TNF-1	100-250
—	i00125	Eagle TNF-1	50-60
<u>x</u>	i00124	Eagle TNF-1	250-850

(4) SPECTRUM ANALYZER

<u>x</u>	i00048	HP 8566B	2511A01467
—	i00029	HP 8563E	3213A00104

(5) SCOPE

—	i00058	HP 1741A	2251A09356
—	i00030	HP 54502A	2927A00209
—	i00071	Tektronix 935	1935-B011343

PAGE NO.

10 of 30.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g9930066: 1999-Mar-17 Wed 08:36:00
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
815.500000	1631.215000	-42.6	-84.3	-29.6
815.500000	2446.491000	-36.1	-77.8	-23.1
815.500000	3261.987000	-35.5	-77.2	-22.5
815.500000	4077.507000	-41.6	-83.3	-28.6
815.500000	4892.790000	-43.1	-84.8	-30.1
815.500000	5708.725000	-43.3	-85	-30.3
815.500000	6524.151000	-38.6	-80.3	-25.6
815.500000	7339.784000	-37.6	-79.3	-24.6
815.500000	8154.856000	-37.4	-79.1	-24.4
815.500000	8970.221000	-37.5	-79.2	-24.5
815.500000	9785.746000	-36.9	-78.6	-23.9
815.500000	10601.932000	-37.7	-79.4	-24.7
815.500000	11417.056000	-37.2	-78.9	-24.2
815.500000	12232.235000	-37.3	-79	-24.3

PAGE NO. 11 of 30.
NAME OF TEST: Field Strength of Spurious Radiation
SPECIFICATION: 47 CFR 2.1053(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.12
TEST EQUIPMENT: As per attached page


MEASUREMENT PROCEDURE

1. A description of the measurement facilities was filed with the FCC and was found to be in compliance with the requirements of Section 15.38, by letter from the FCC dated March 3, 1997, FILE 31040/SIT. All pertinent changes will be reported to the Commission by up-date prior to March 2000.
2. At first, in order to locate all spurious frequencies and approximate amplitudes, and to determine proper equipment functioning, the test sample was set up at a distance of three meters from the test instrument. Valid spurious signals were determined by switching the power on and off.
3. In the field, the test sample was placed on a wooden turntable above ground at three (or thirty) meters away from the search antenna. Excess power leads were coiled near the power supply.

The cables were oriented in order to obtain the maximum response. At each emission frequency, the turntable was rotated and the search antennas were raised and lowered vertically.
4. The emission was observed with both a vertically polarized and a horizontally polarized search antenna and the worst case was used.
6. The field strength of each emission within 20 dB of the limit was recorded and corrected with the appropriate cable and transducer factors.
7. The worst case for all channels is shown.
8. Measurement results: ATTACHED FOR WORST CASE

PAGE NO.

12 of 30.

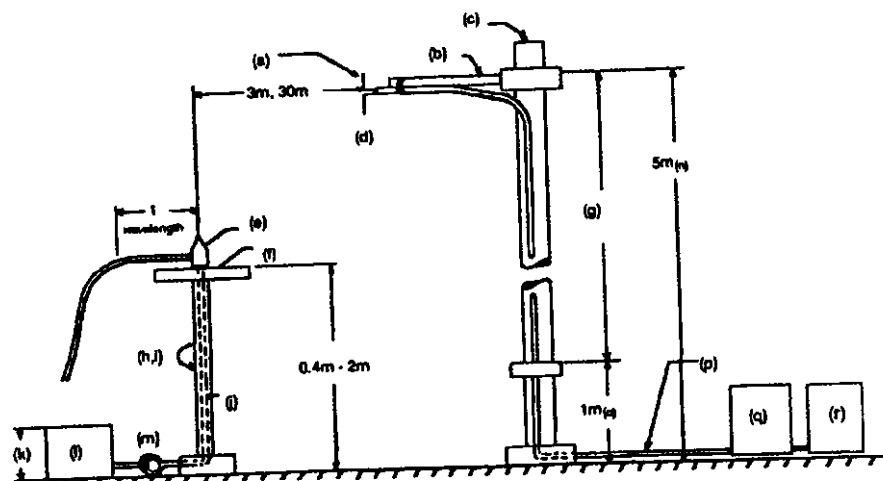RADIATED TEST SETUP

NOTES:

- (a) Search Antenna - Rotatable on boom
 (b) Non-metallic boom
 (c) Non-metallic mast
 (d) Adjustable horizontally
 (e) Equipment Under Test
 (f) Turntable
 (g) Boom adjustable in height.
 (h) External control cables routed horizontally at least one wavelength.
 (i) Rotatable
 (j) Cables routed through hollow turntable center
 (k) 30 cm or less
 (l) External power source
 (m) 10 cm diameter coil of excess cable
 (n) 25 cm (V), 1 m-7 m (V, H)
 (o) 25 cm from bottom end of 'V', 1m normally
 (p) Calibrated Cable at least 10m in length
 (q) Amplifier (optional)
 (r) Spectrum Analyzer

Asset	Description	s/n	Cycle	Last Cal
Per AWS1 C63.4-1992, 10.1.4				
<u>TRANSDUCER</u>				
—	i00065 EMCO 3109B 100Hz-50MHz	2336	12 mo.	
—	i00033 Singer 94593-1 10kHz-32MHz	0219	12 mo.	
x	i00088 EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Oct-98
x	i00089 Aprel 2001 200MHz-1GHz	001500	12 mo.	Oct-98
x	i00103 EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Oct-98
—	i00085 EMCO 3116 10GHz-40GHz	2076	12 mo.	
<u>AMPLIFIER</u>				
—	i00028 HP 8449A	2749A00121	12 mo.	Mar-98
<u>SPECTRUM ANALYZER</u>				
—	i00029 HP 8563E	3213A00104	12 mo.	Aug-98
—	i00033 HP 85462A	3625A00357	12 mo.	Dec-98
x	i00048 HP 8566B	2511AD1467	6 mo.	Dec-98

PAGE NO. 13 of 30.

NAME OF TEST: Field Strength of Spurious Radiation

ALL OTHER EMISSIONS = ≥ 20 dB BELOW LIMIT

<u>EMISSION, MHz/HARMONIC</u>	<u>SPURIOUS LEVEL, dBc</u>
	High
2nd to 10th	<-75

SUPERVISED BY:

M. Flom P. Eng.

Morton Flom, P. Eng.

PAGE NO. 14 of 30.
NAME OF TEST: Emission Masks (Occupied Bandwidth)
SPECIFICATION: 47 CFR 2.1049(c)(1)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for ± 2.5 kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

15 of 30.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9930063: 1999-Mar-17 Wed 08:16:00
STATE: 2:High Power

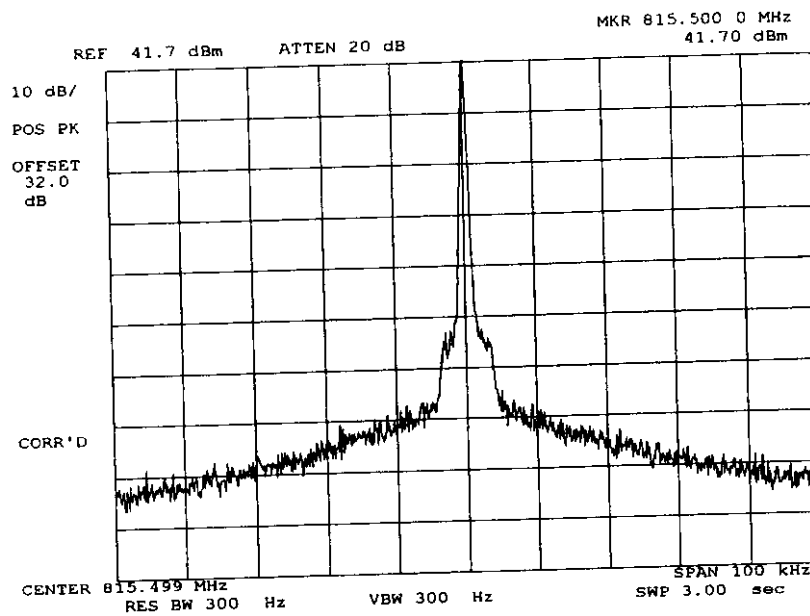

POWER:
MODULATION:

HIGH
NONE


SUPERVISED BY:

M. Flom P. Eng.
Morton Flom, P. Eng.

PAGE NO.

16 of 30.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
 g9930064: 1999-Mar-17 Wed 08:18:00
 STATE: 2:High Power

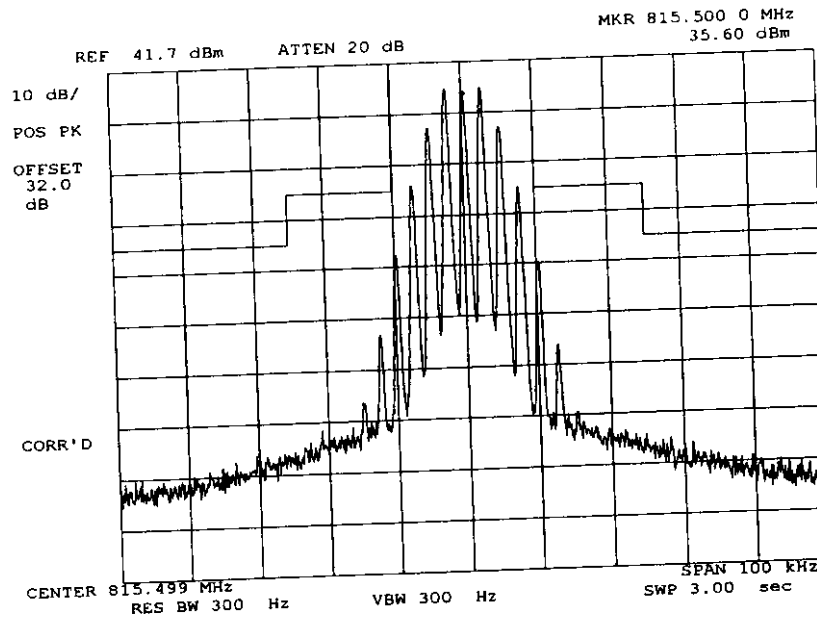

POWER:
 MODULATION:

HIGH
 VOICE: 2500 Hz SINE WAVE
 MASK: B, VHF/UHF 25kHz,
 w/LPF

SUPERVISED BY:


M. Flom P. Eng.

Morton Flom, P. Eng.

PAGE NO.

17 of 30.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g9930065: 1999-Mar-17 Wed 08:22:00
STATE: 2:High Power

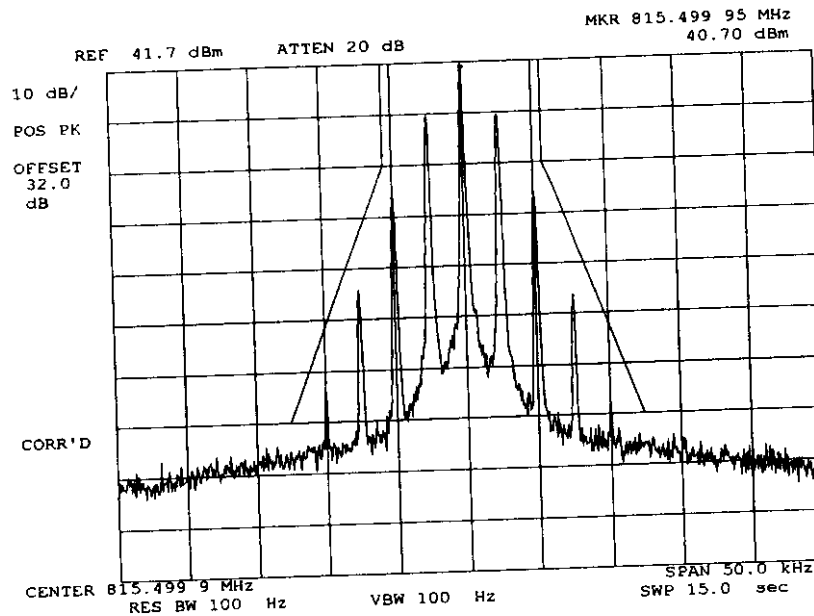

POWER:
MODULATION:

HIGH
VOICE: 2500 Hz SINE WAVE
MASK: D, VHF/UHF 12.5kHz BW

SUPERVISED BY:



Morton Flom, P. Eng.


PAGE NO. 18 of 30.
NAME OF TEST: Audio Low Pass Filter (Voice Input)
SPECIFICATION: 47 CFR 2.1047(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.15
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

TEST A. MODULATION CAPABILITY/DISTORTION
TEST B. AUDIO FREQUENCY RESPONSE
TEST C. HUM AND NOISE LEVEL
TEST D. RESPONSE OF LOW PASS FILTER
TEST E. MODULATION LIMITING

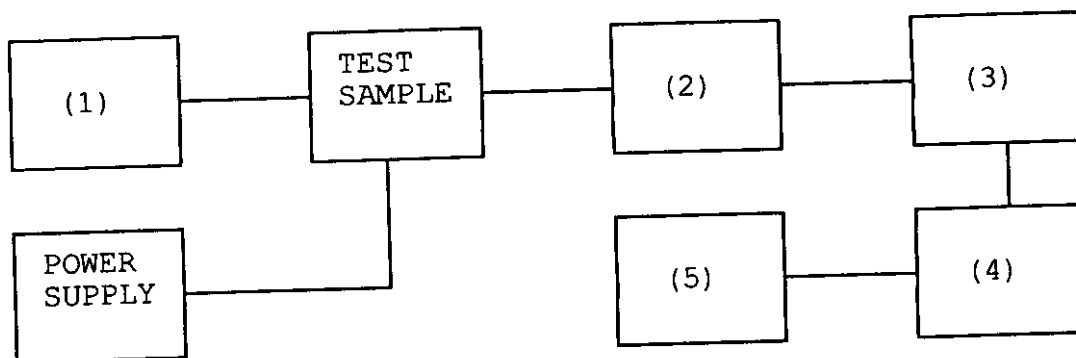


Asset	Description	s/n
(1)	<u>AUDIO GENERATOR</u>	
	i00010 HP 204D	1105A04683
<u>x</u>	i00017 HP 8903A	2216A01753
<u>x</u>	i00118 HP 33120A	US36002064
(2)	<u>COAXIAL ATTENUATOR</u>	
	i00122 NARDA 766-10	7802
	i00123 NARDA 766-10	7802A
<u>x</u>	i00113 SIERRA 661A-3D	1059
	i00069 BIRD 8329 (30 dB)	10066
(3)	<u>MODULATION ANALYZER</u>	
<u>x</u>	i00020 HP 8901A	2105A01087
(4)	<u>AUDIO ANALYZER</u>	
<u>x</u>	i00017 HP 8903A	2216A01753
(5)	<u>SCOPE</u>	
	i00058 HP 1741A	2215A09356
	i00071 Tektronix 935	1935-B011343

PAGE NO.

20 of 30.

NAME OF TEST: Audio Low Pass Filter (Voice Input)
g9930047: 1999-Mar-16 Tue 12:29:00
STATE: 0:General

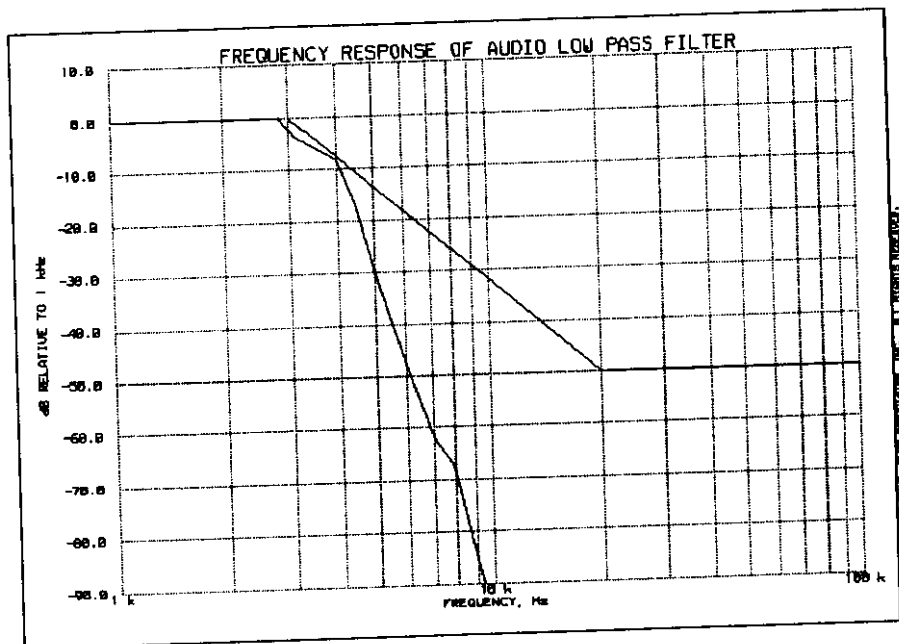

SUPERVISED BY:

M. Flom P. Eng.

Morton Flom, P. Eng.

PAGE NO. 21 of 30.
NAME OF TEST: Audio Frequency Response
SPECIFICATION: 47 CFR 2.1047(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6
TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO. _____

22 of 30.

NAME OF TEST: Audio Frequency Response
g9930048: 1999-Mar-16 Tue 12:42:00
STATE: 0:General

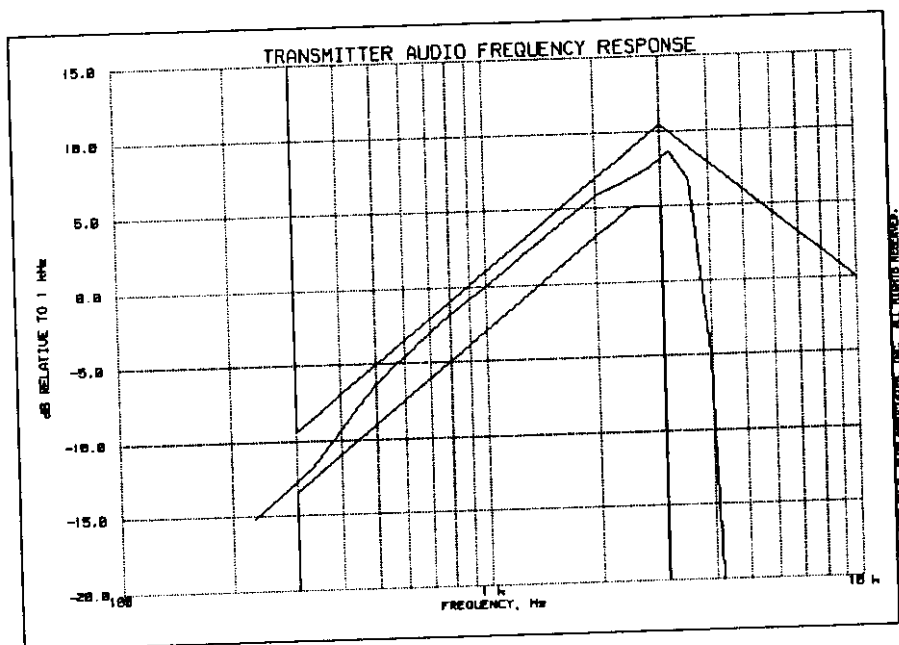

Additional points:

Additional points:	
FREQUENCY, Hz	LEVEL, dB
300	-13.60
20000	-19.09
30000	-19.09
50000	-19.09

Al. Thue P. Eng

Morton Flom, P. Eng.

SUPERVISED BY:

PAGE NO. 23 of 30.
NAME OF TEST: Modulation Limiting
SPECIFICATION: 47 CFR 2.1047(b)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.3
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 10% modulation to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.


24 of 30.

NAME OF TEST: Modulation Limiting
 g9930049: 1999-Mar-16 Tue 13:19:00
 STATE: 0:General

Positive
 Peaks:

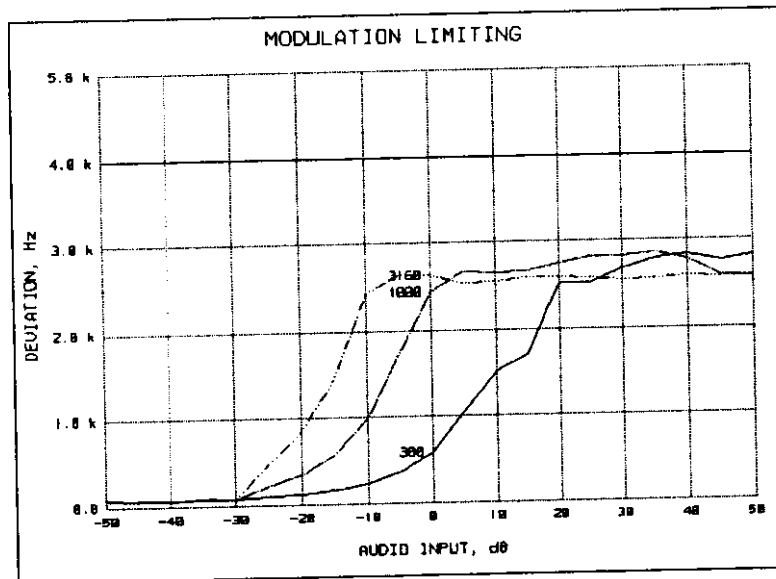

Negative
 Peaks:

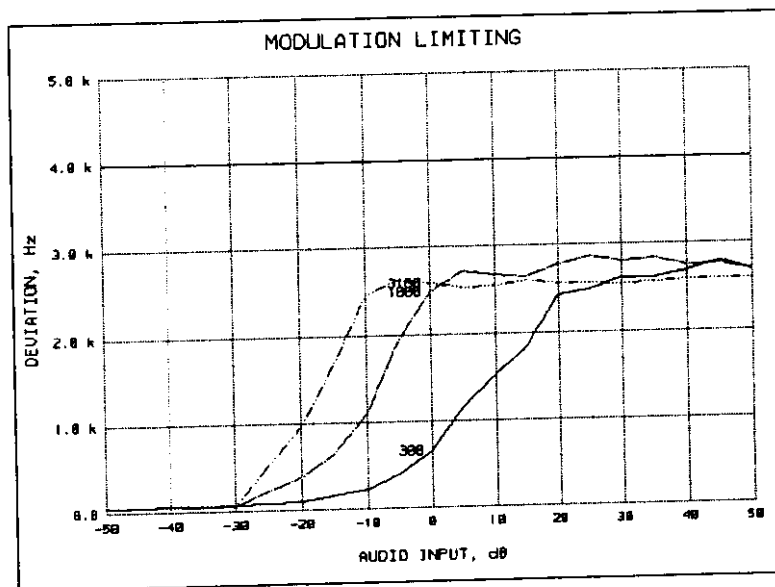

Morton Flom P. Eng.

Morton Flom, P. Eng.


SUPERVISED BY:

PAGE NO.


25 of 30.

NAME OF TEST: Modulation Limiting
 g9930053: 1999-Mar-17 Wed 08:43:00
 STATE: 0:General

Positive
 Peaks:

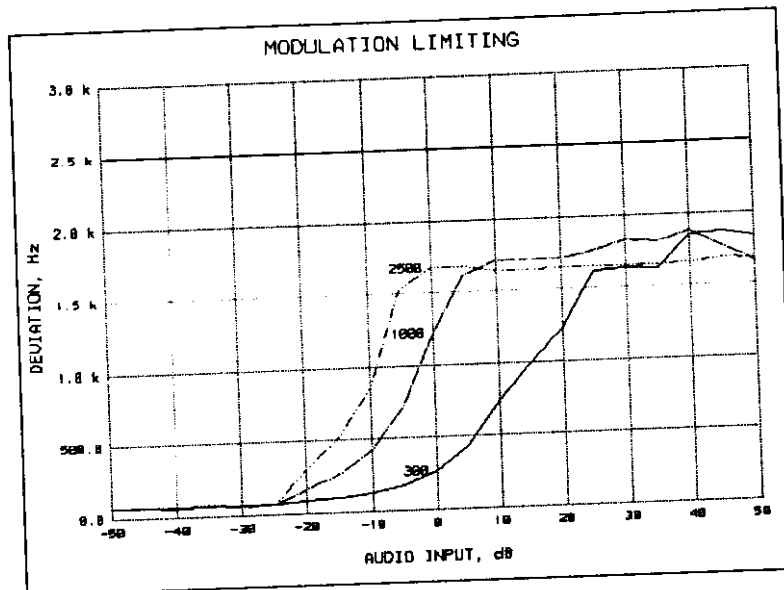

Negative
 Peaks:

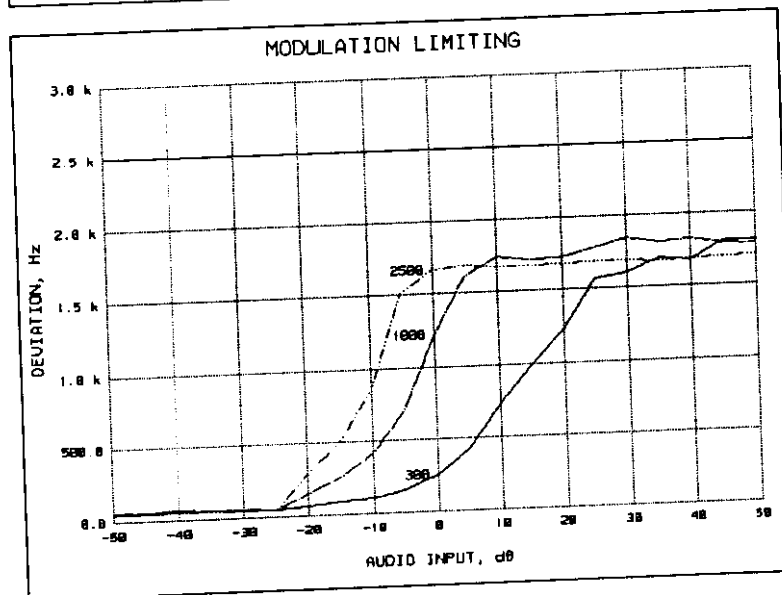

Morton Flom P. Eng.

Morton Flom, P. Eng.

SUPERVISED BY:

PAGE NO. 26 of 30.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

27 of 30.


TRANSMITTER TEST SET-UP

TEST A. OPERATIONAL STABILITY
 TEST B. CARRIER FREQUENCY STABILITY
 TEST C. OPERATIONAL PERFORMANCE STABILITY
 TEST D. HUMIDITY
 TEST E. VIBRATION
 TEST F. ENVIRONMENTAL TEMPERATURE
 TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
 TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

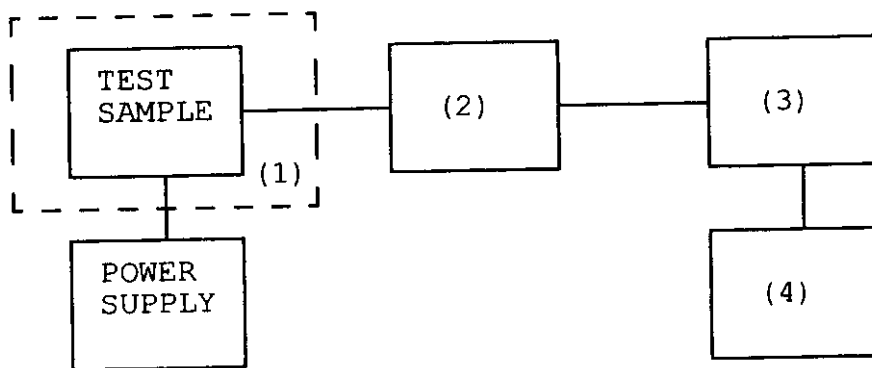

Asset	Description	s/n
(1)	<u>TEMPERATURE, HUMIDITY, VIBRATION</u>	
<u>x</u>	i00027 Tenny Temp. Chamber	9083-765-234
<u> </u>	i00 Weber Humidity Chamber	
<u> </u>	i00 L.A.B. RVH 18-100	
(2)	<u>COAXIAL ATTENUATOR</u>	
<u> </u>	i00122 NARDA 766-10	7802
<u> </u>	i00123 NARDA 766-10	7802A
<u>x</u>	i00113 SIERRA 661A-3D	1059
<u> </u>	i00069 BIRD 8329 (30 dB)	10066
(3)	<u>R.F. POWER</u>	
<u> </u>	i00014 HP 435A POWER METER	1733A05839
<u>x</u>	i00039 HP 436A POWER METER	2709A26776
<u>x</u>	i00020 HP 8901A POWER MODE	2105A01087
(4)	<u>FREQUENCY COUNTER</u>	
<u> </u>	i00042 HP 5383A	1628A00959
<u>x</u>	i00019 HP 5334B	2704A00347
<u>x</u>	i00020 HP 8901A	2105A01087

TRANSMITTER FREQUENCY STABILITY
 p9930003: KENWOOD, TK-980
 g9930014: 17 MAR 1999, 15:20

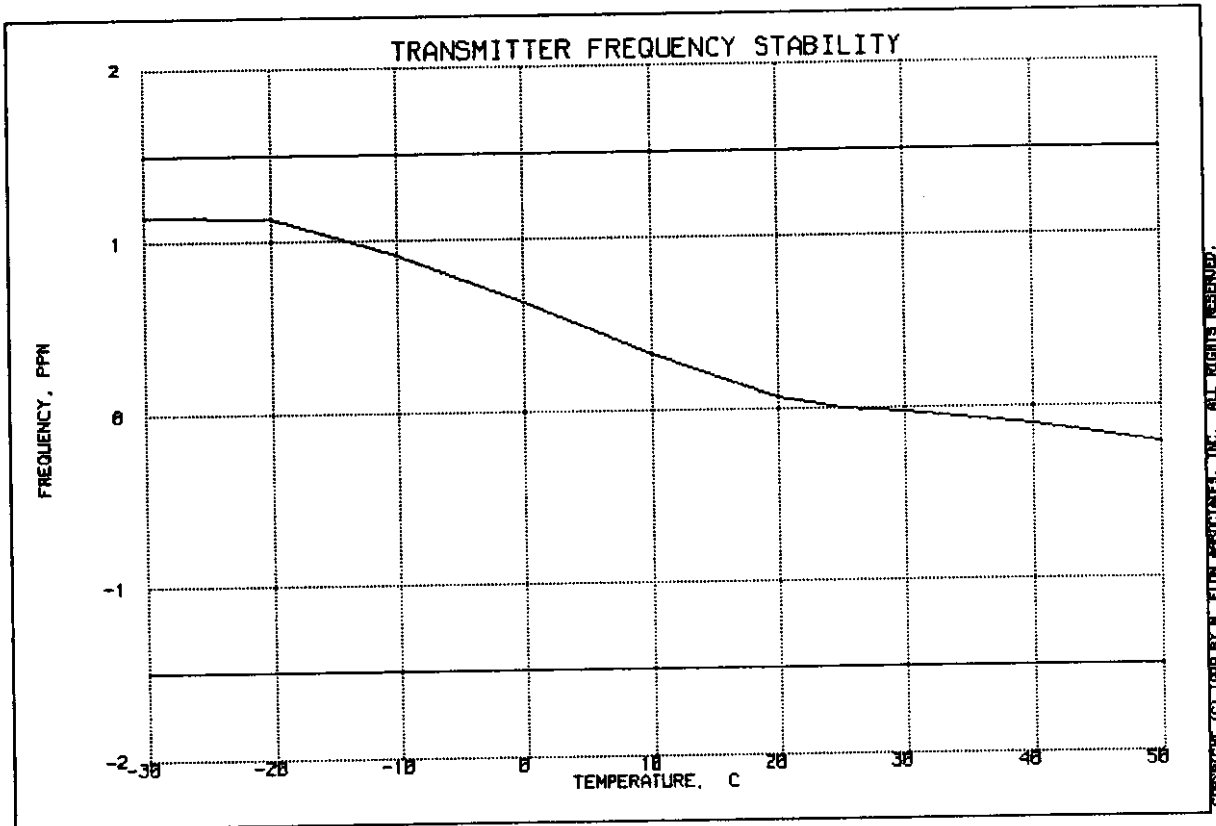

FREQUENCY OF CARRIER, MHz = 815.49991

LIMIT, ppm = 1.5

LIMIT, Hz = 1223

PAGE NO. 29 of 30.

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: 47 CFR 2.1055(b)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at $25 \pm 5^\circ\text{C}$ and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)

g9930054: 1999-Mar-16 Tue 13:41:24

STATE: 0:General

LIMIT, ppm = 1.5

LIMIT, Hz = 1237

BATTERY END POINT (Voltage) = 9

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	11.56	824.900000	0	0.00
100	13.6	824.900000	0	0.00
115	15.64	824.900000	0	0.00
66	9	824.900010	10	0.01

Morton Flom P. Eng.

Morton Flom, P. Eng.

SUPERVISED BY:

PAGE NO. 30 of 30.
NAME OF TEST: Necessary Bandwidth and Emission Bandwidth
SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 16K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= 3
MAXIMUM DEVIATION (D), kHz	= 5
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B _N), kHz	= (2 x M) + (2 x D x K)
	= 16.0

MODULATION = 11K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= 3
MAXIMUM DEVIATION (D), kHz	= 2.5
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B _N), kHz	= (2 x M) + (2 x D x K)
	= 11.0

SUPERVISED BY:

Morton Flom, P. Eng.

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.

STATEMENT OF QUALIFICATIONS

EDUCATION:

1. B. ENG. in ENGINEERING PHYSICS, 1949, McGill University, Montreal, Canada.
2. Post Graduate Studies, McGill University & Sir George Williams University, Montreal.

PROFESSIONAL AFFILIATIONS:

1. ARIZONA SOCIETY OF PROFESSIONAL ENGINEERS (NSPE), #026 031 821.
2. ORDER OF ENGINEERS (QUEBEC) 1949. #45 34.
3. ASSOCIATION OF PROFESSIONAL ENGINEERS, GEOPHYSICISTS & GEOLOGISTS OF ALBERTA #5916.
4. REGISTERED ENGINEERING CONSULTANT - GOVERNMENT OF CANADA, DEPARTMENT OF COMMUNICATIONS. Radio Equipment approvals.
5. IEEE, Lifetime member no. 041/204 (Member since 1947).

EXPERIENCE:

1. Research/Development/Senior Project Engineer. R.C.A. LIMITED (4 years).
2. Owner/Chief Engineer of Electronics. Design/Manufacturing & Cable TV Companies (10 years)
3. CONSULTING ENGINEER (over 25 years).



MORTON FLOM, P. Eng.