





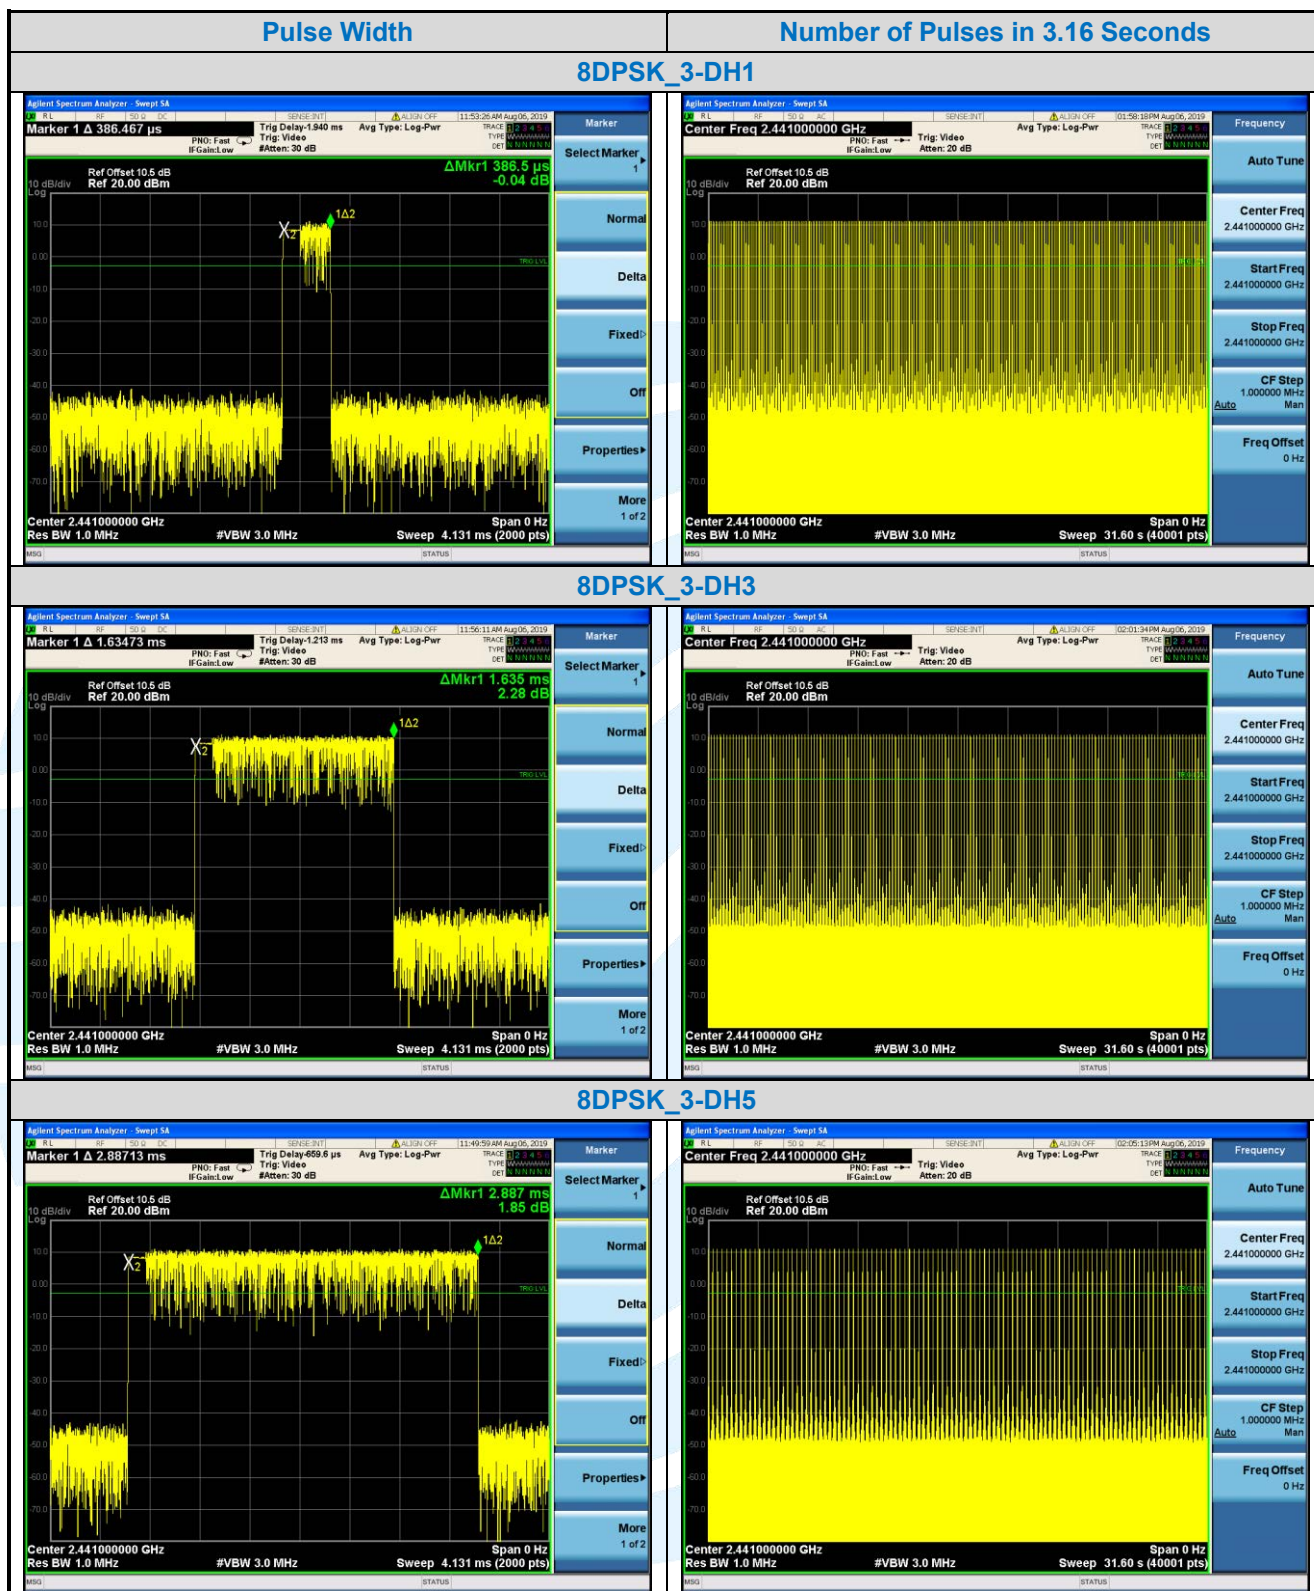

For Right Earphone:

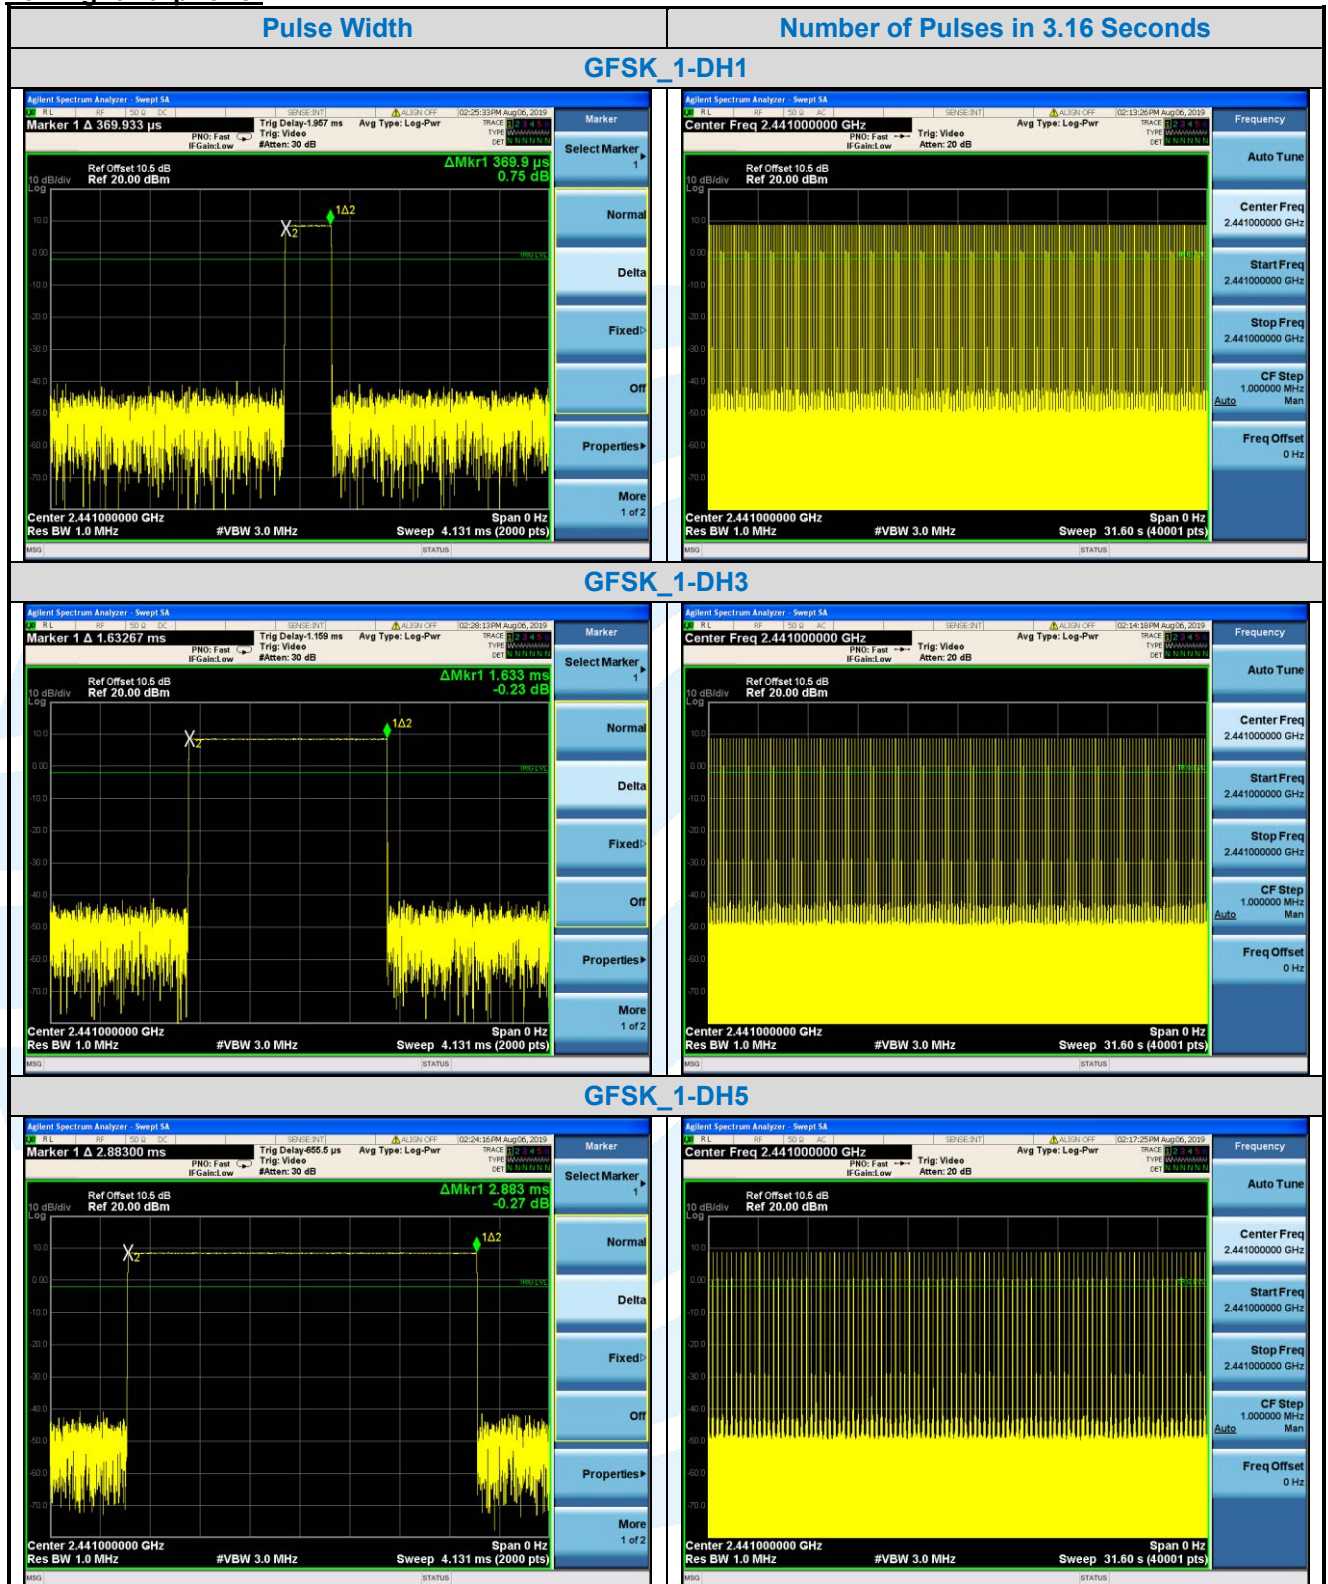

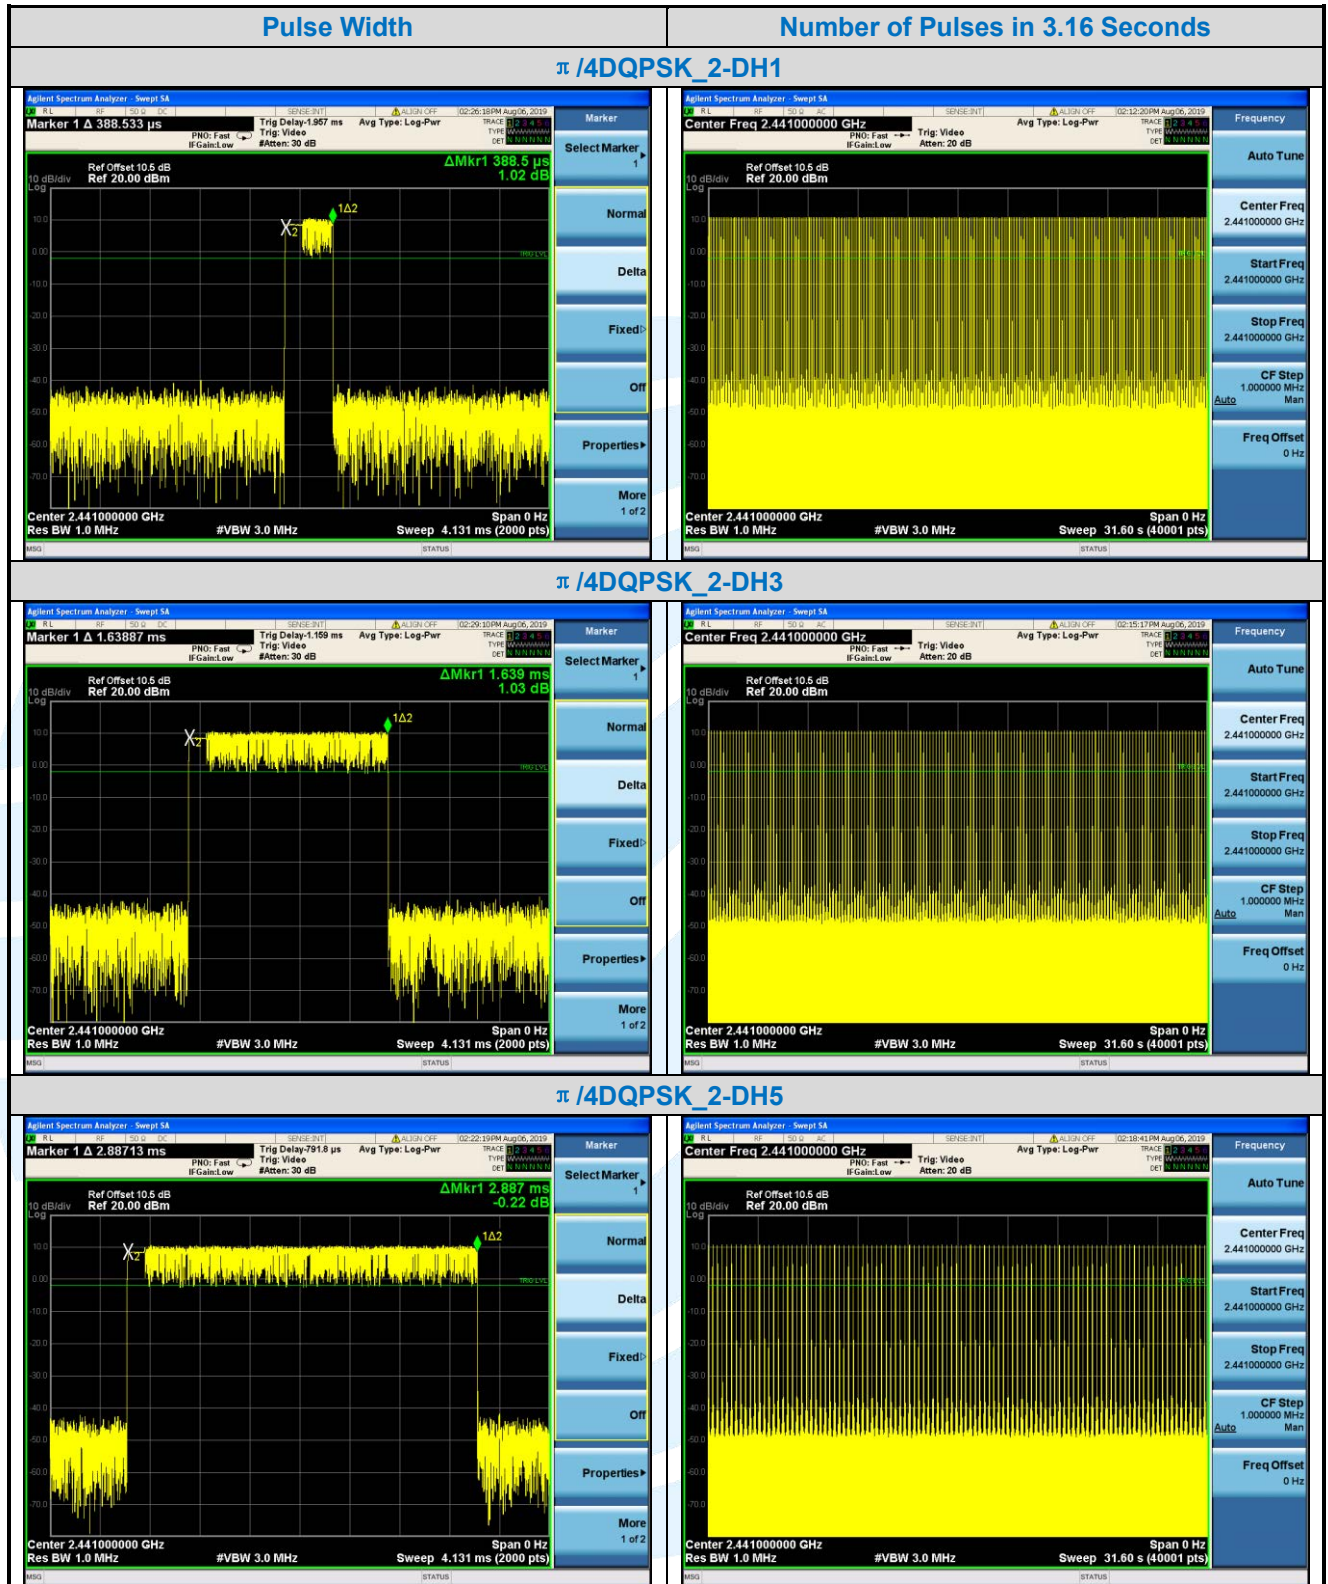

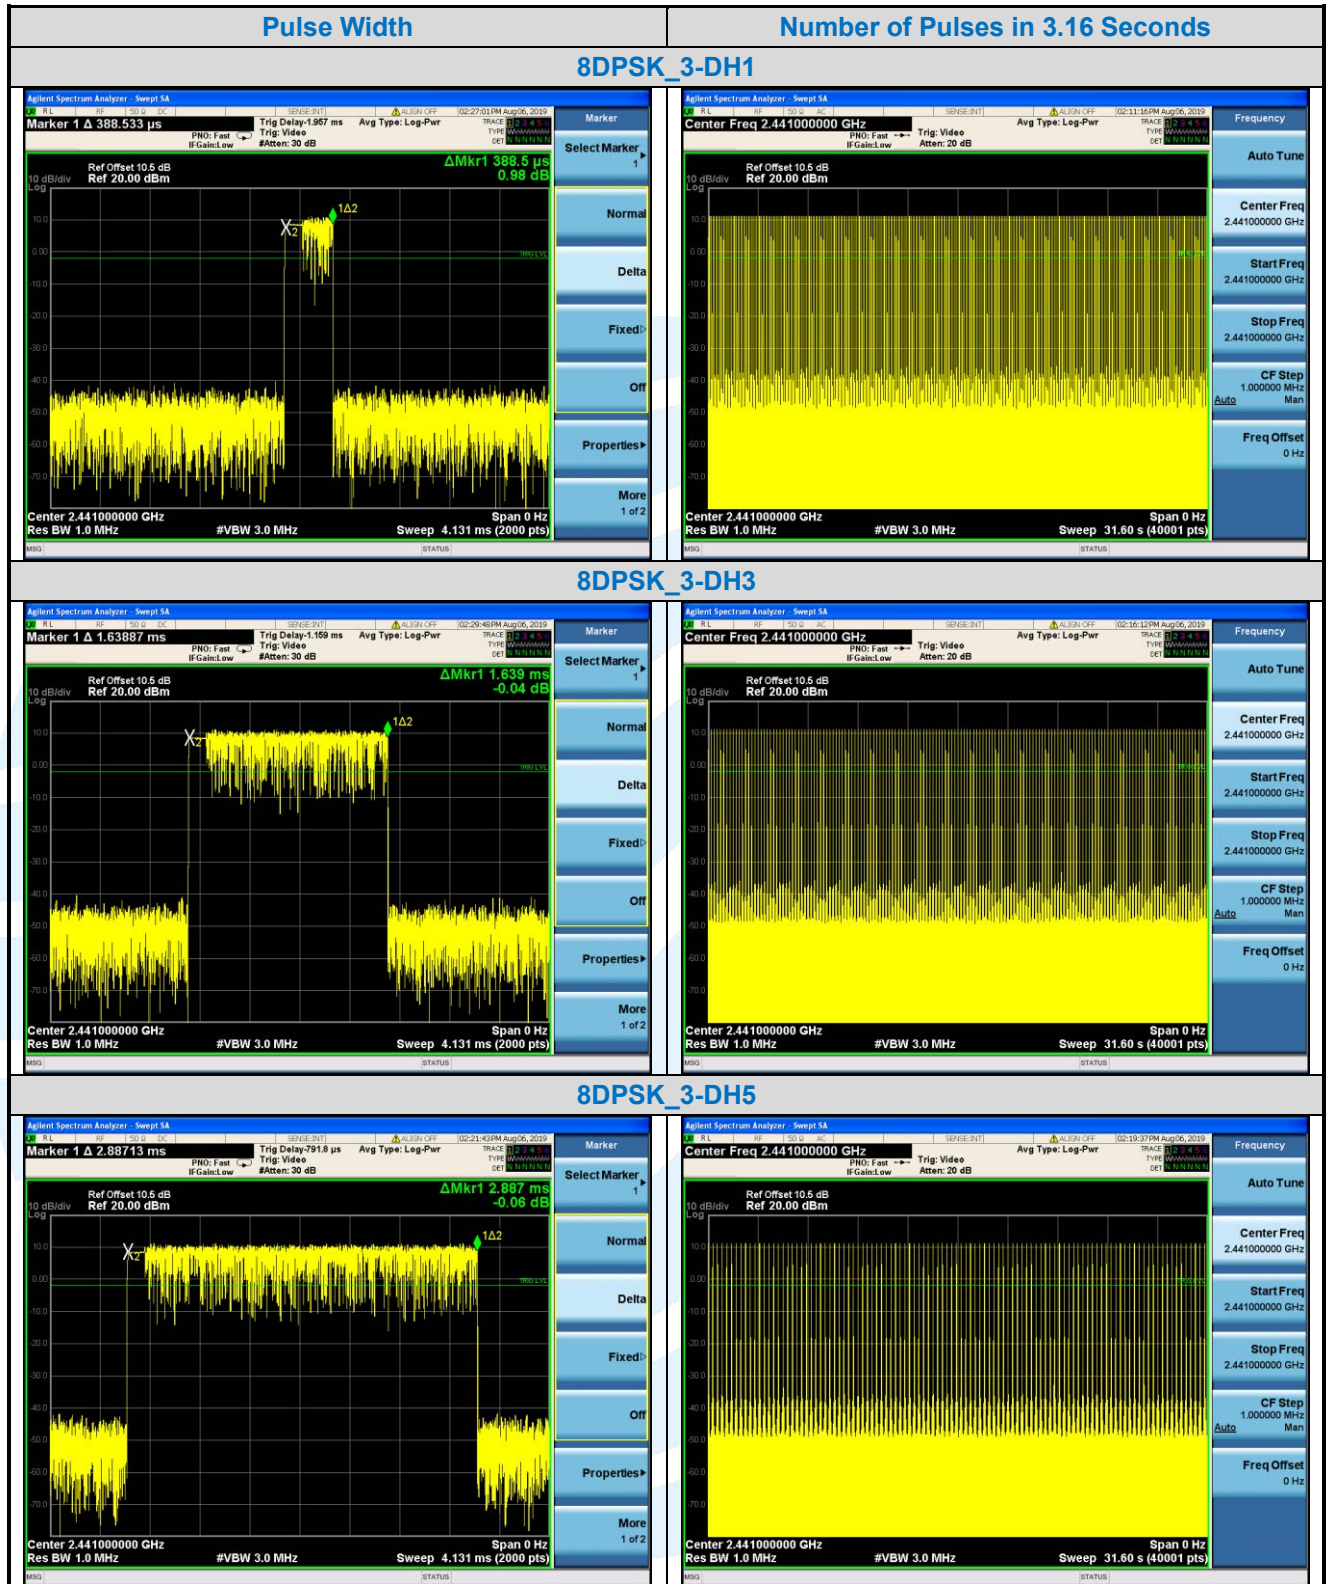

5.8 CONDUCTED OUT OF BAND EMISSION

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 2, Section 5.5
Test Method:	ANSI C63.10-2013 Section 6.10.4 & Section 7.8.8
Limit:	In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings:

Step 1: Measurement Procedure REF

- Set instrument center frequency to 2400 MHz or 2483.5 MHz.
- Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
- Set the RBW = 100 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Sweep points $\geq 2 \times$ Span/RBW
- Trace mode = max hold.
- Allow the trace to stabilize.
- Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission.


Step 2: Measurement Procedure OOBE


- Set RBW = 100 kHz.
- Set VBW ≥ 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.


Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Mode:	Hopping Frequencies Transmitter mode
Test Results:	Pass
Test Data:	

The test plots as follows:
For Left Earphone:

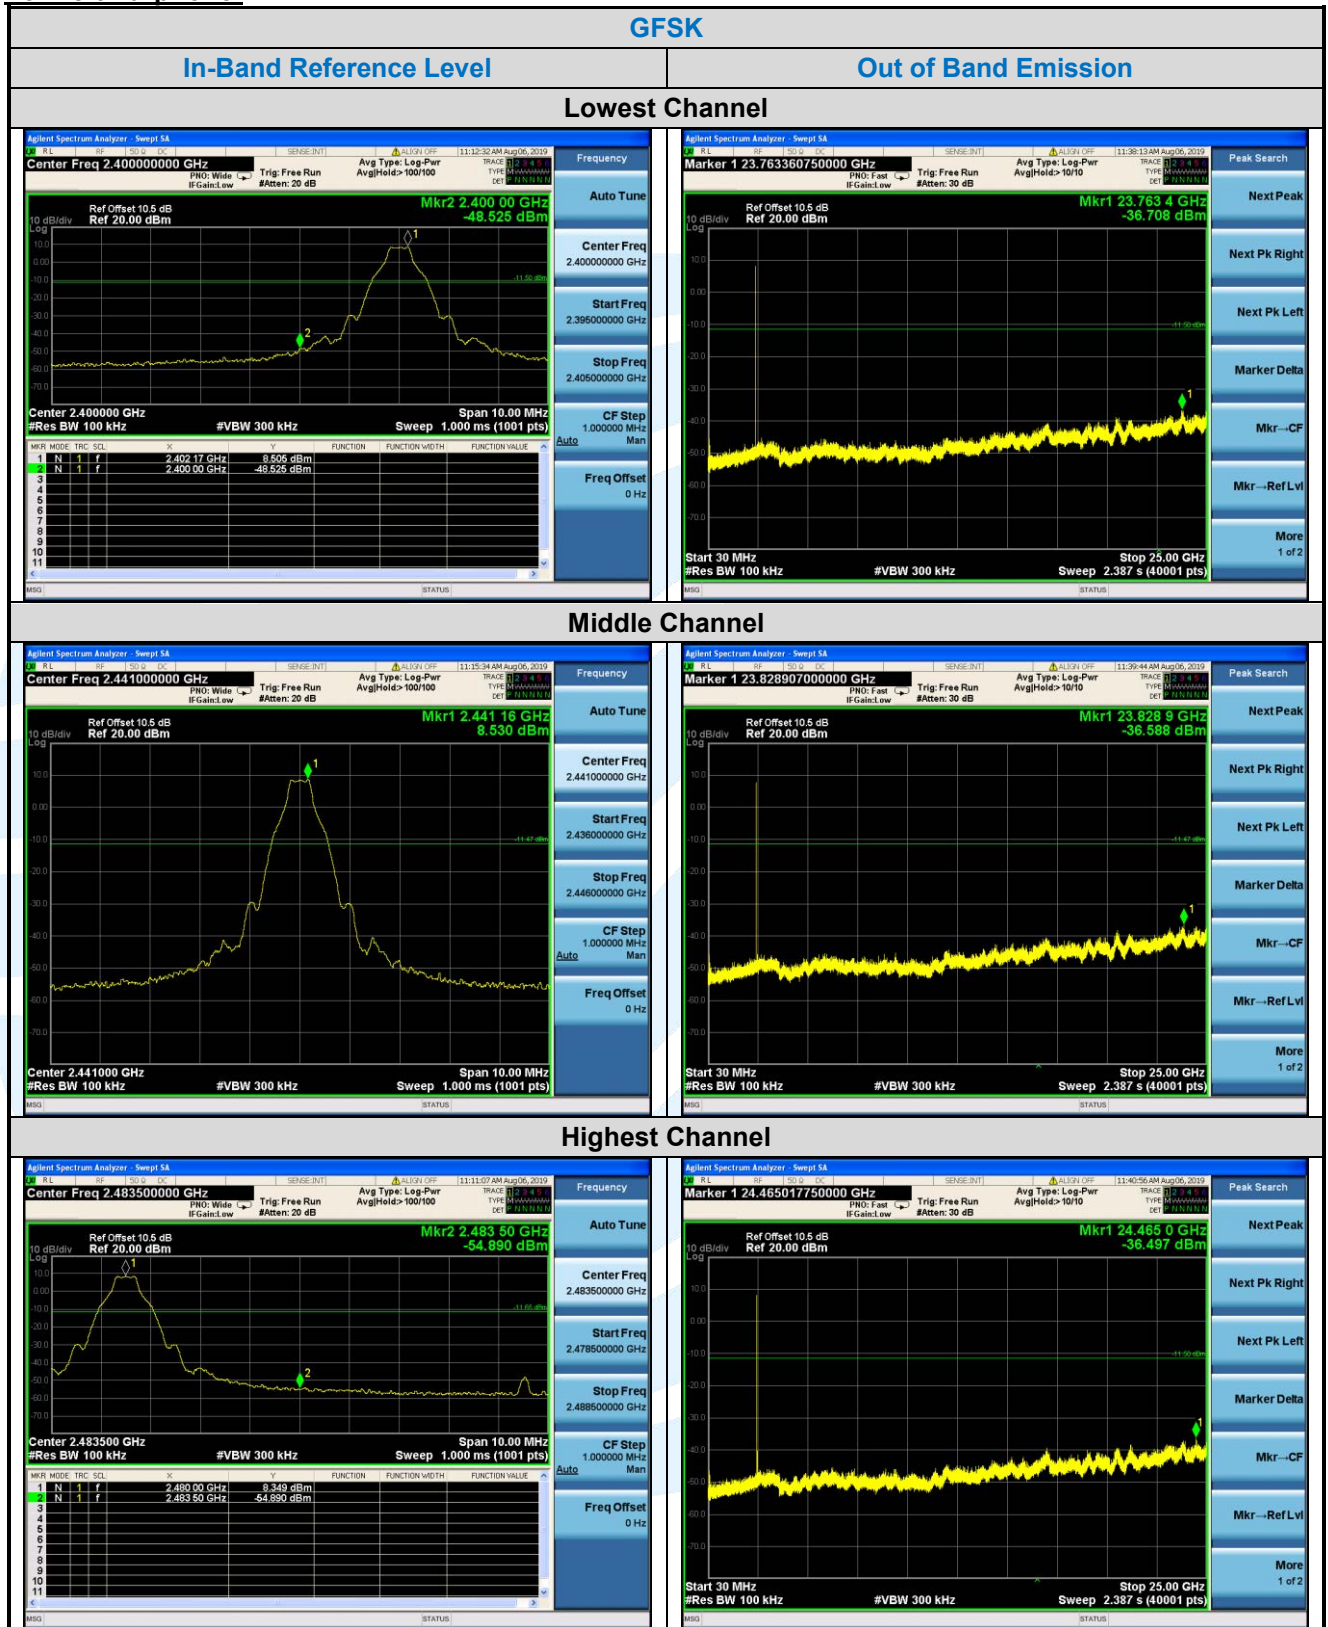


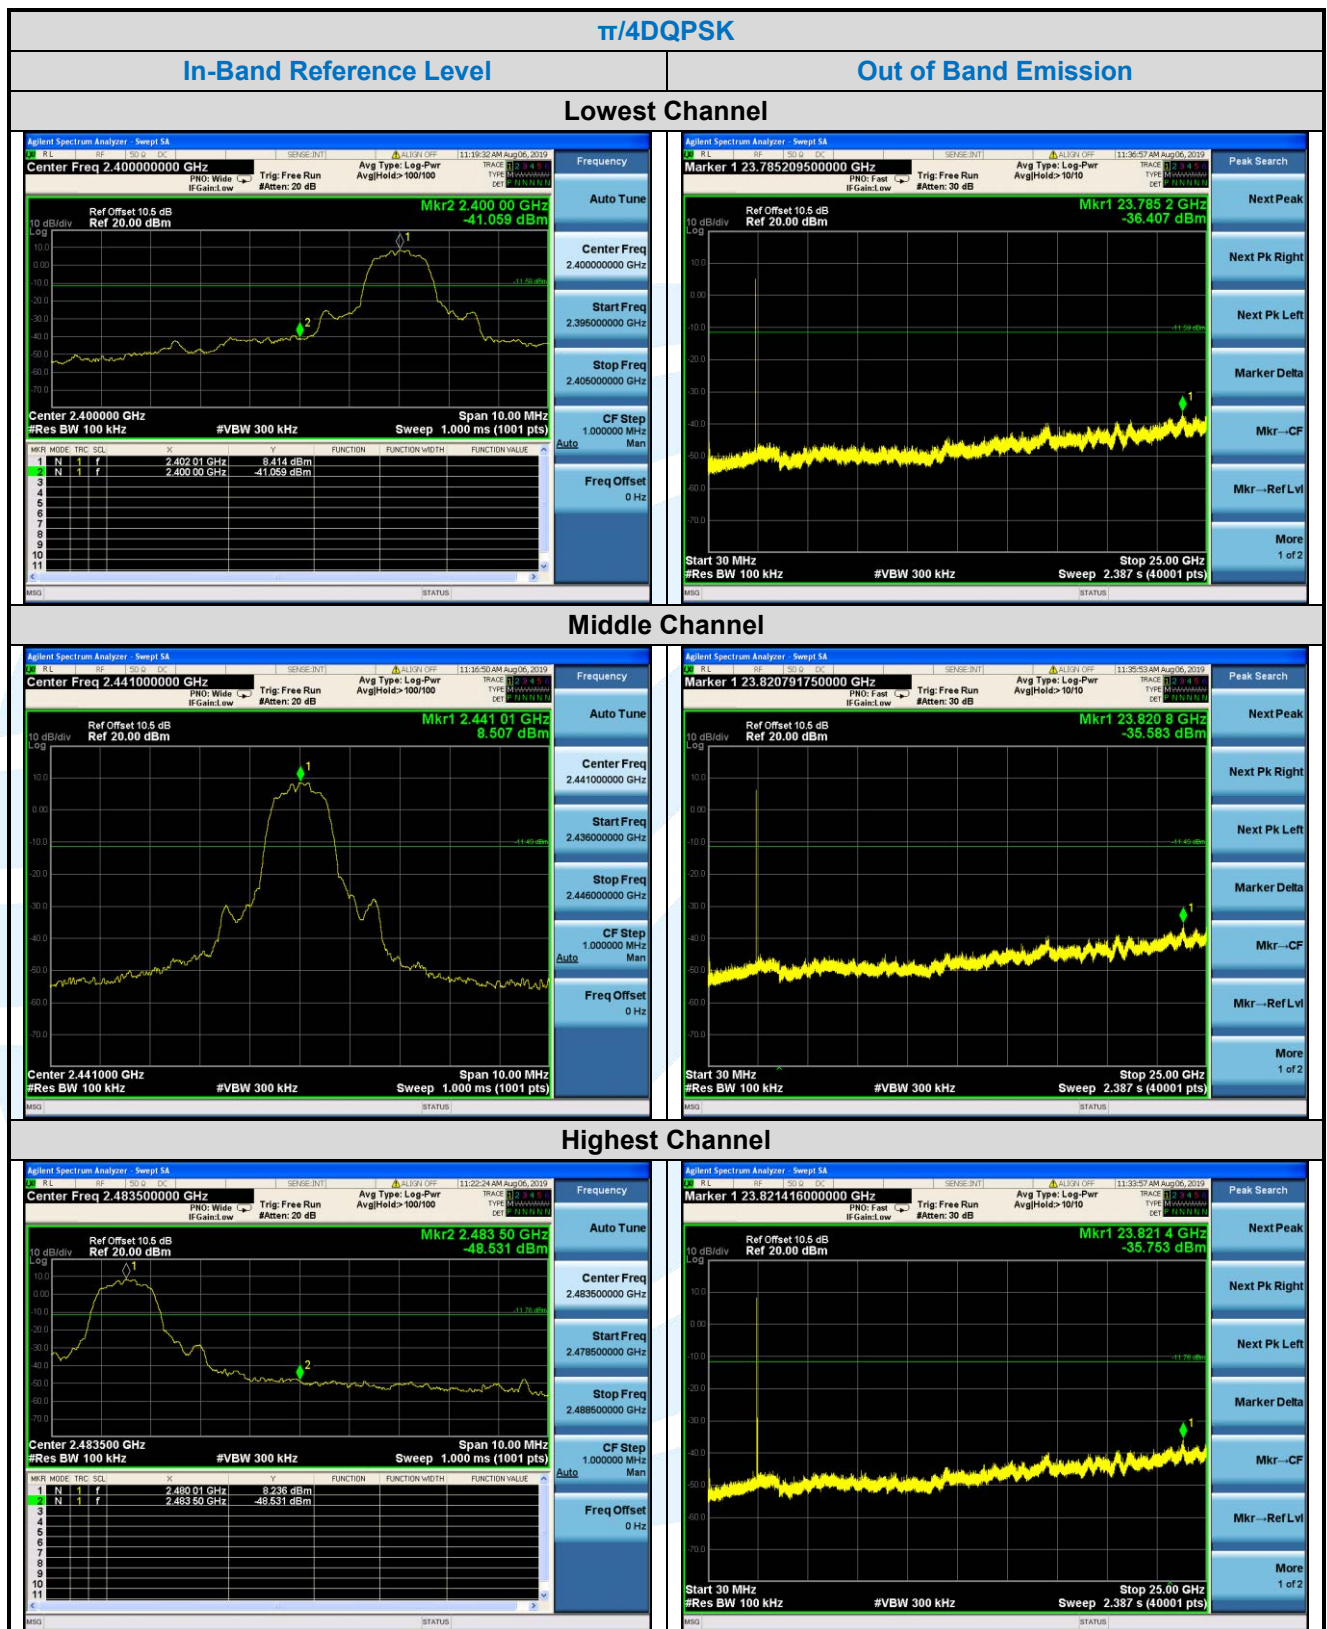


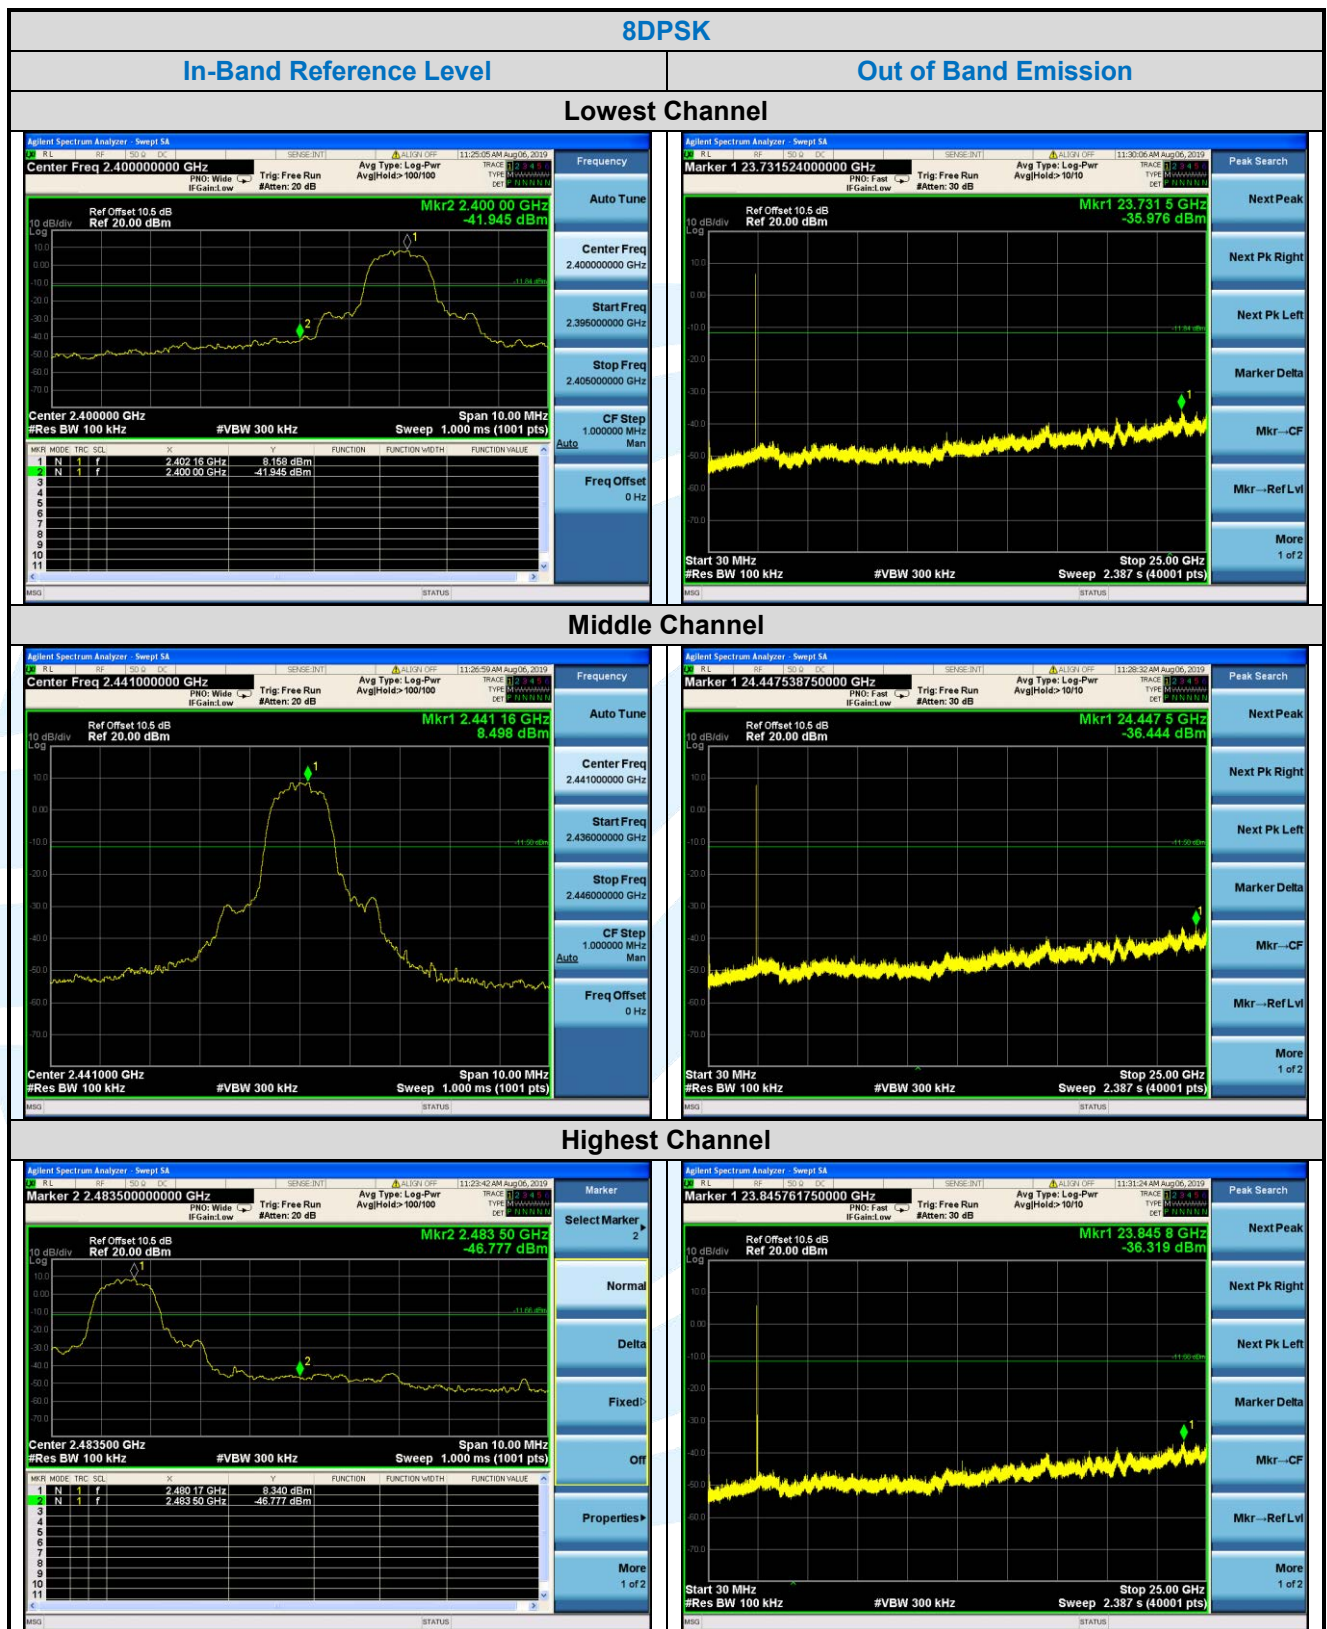




For Right Earphone:

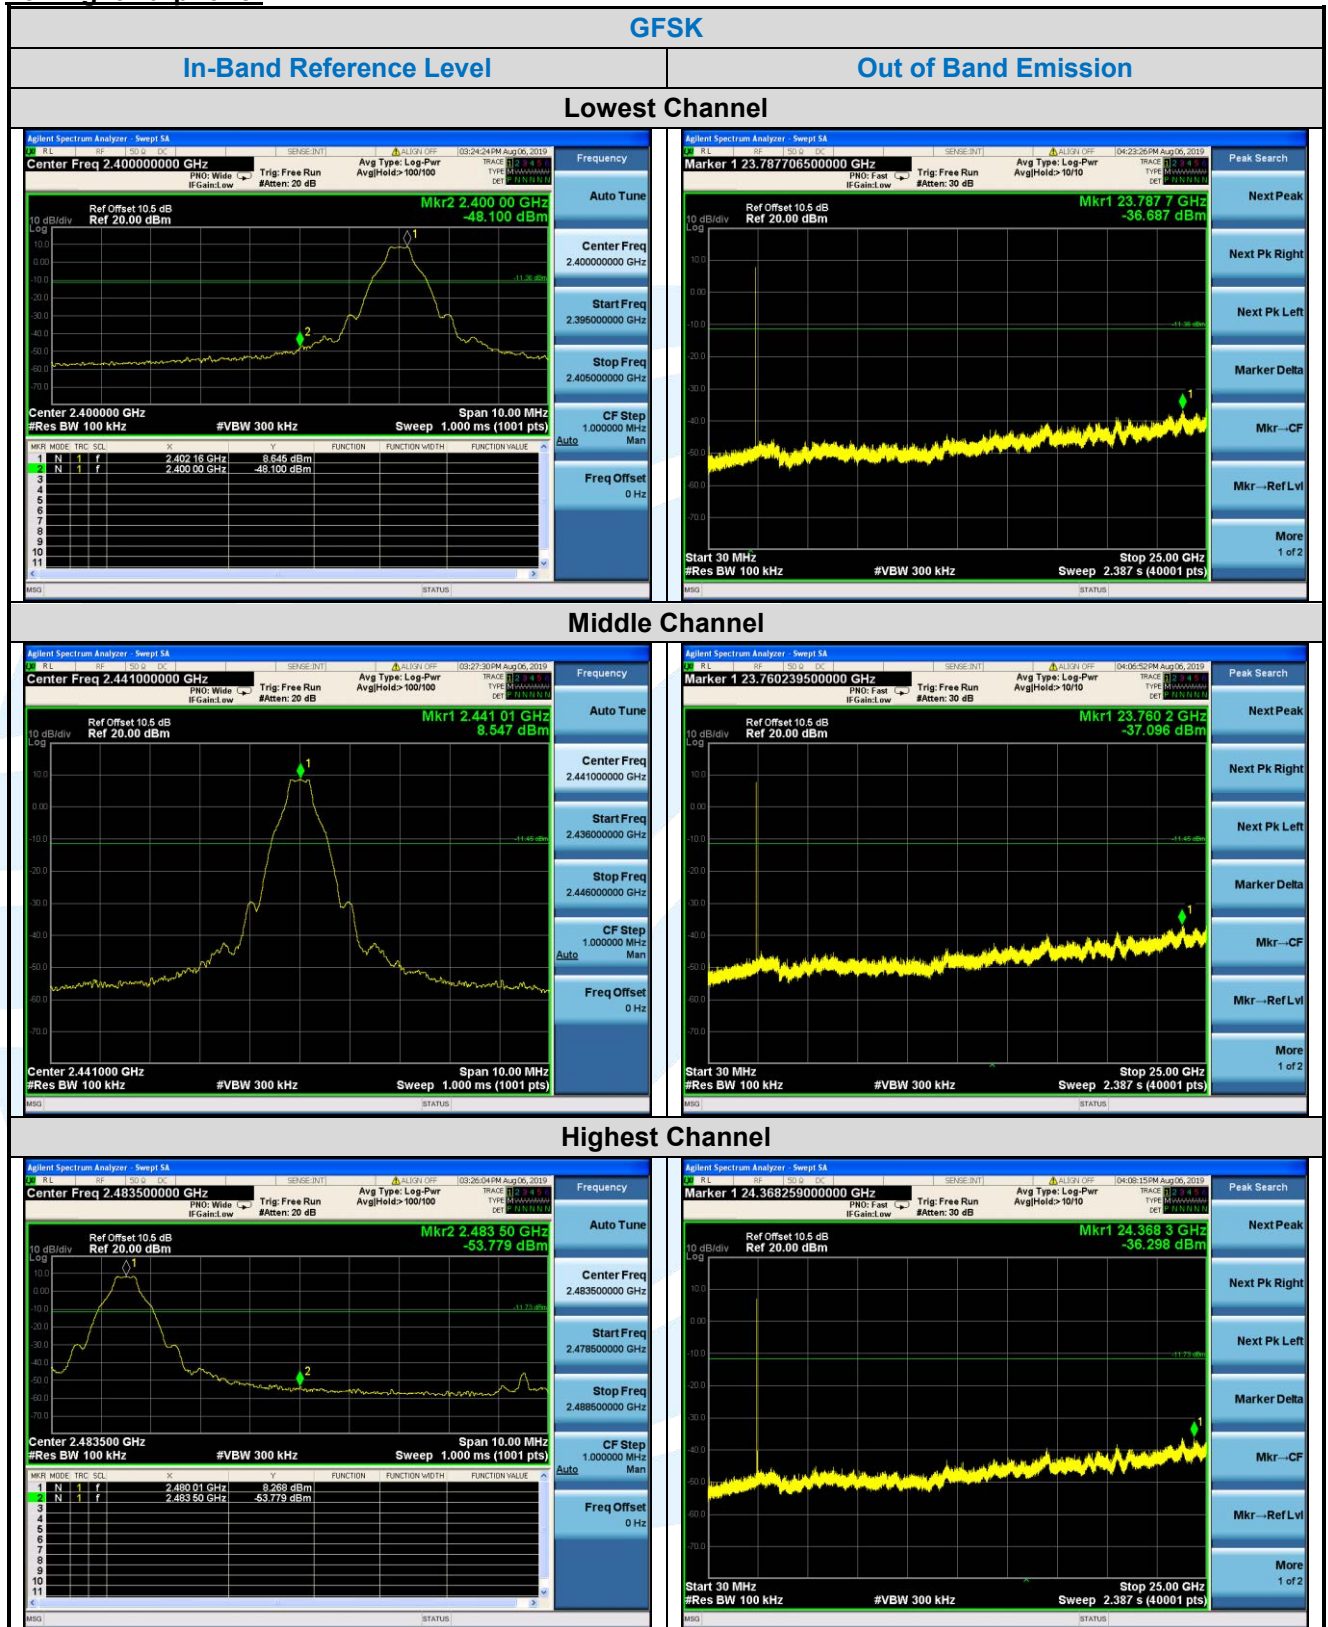

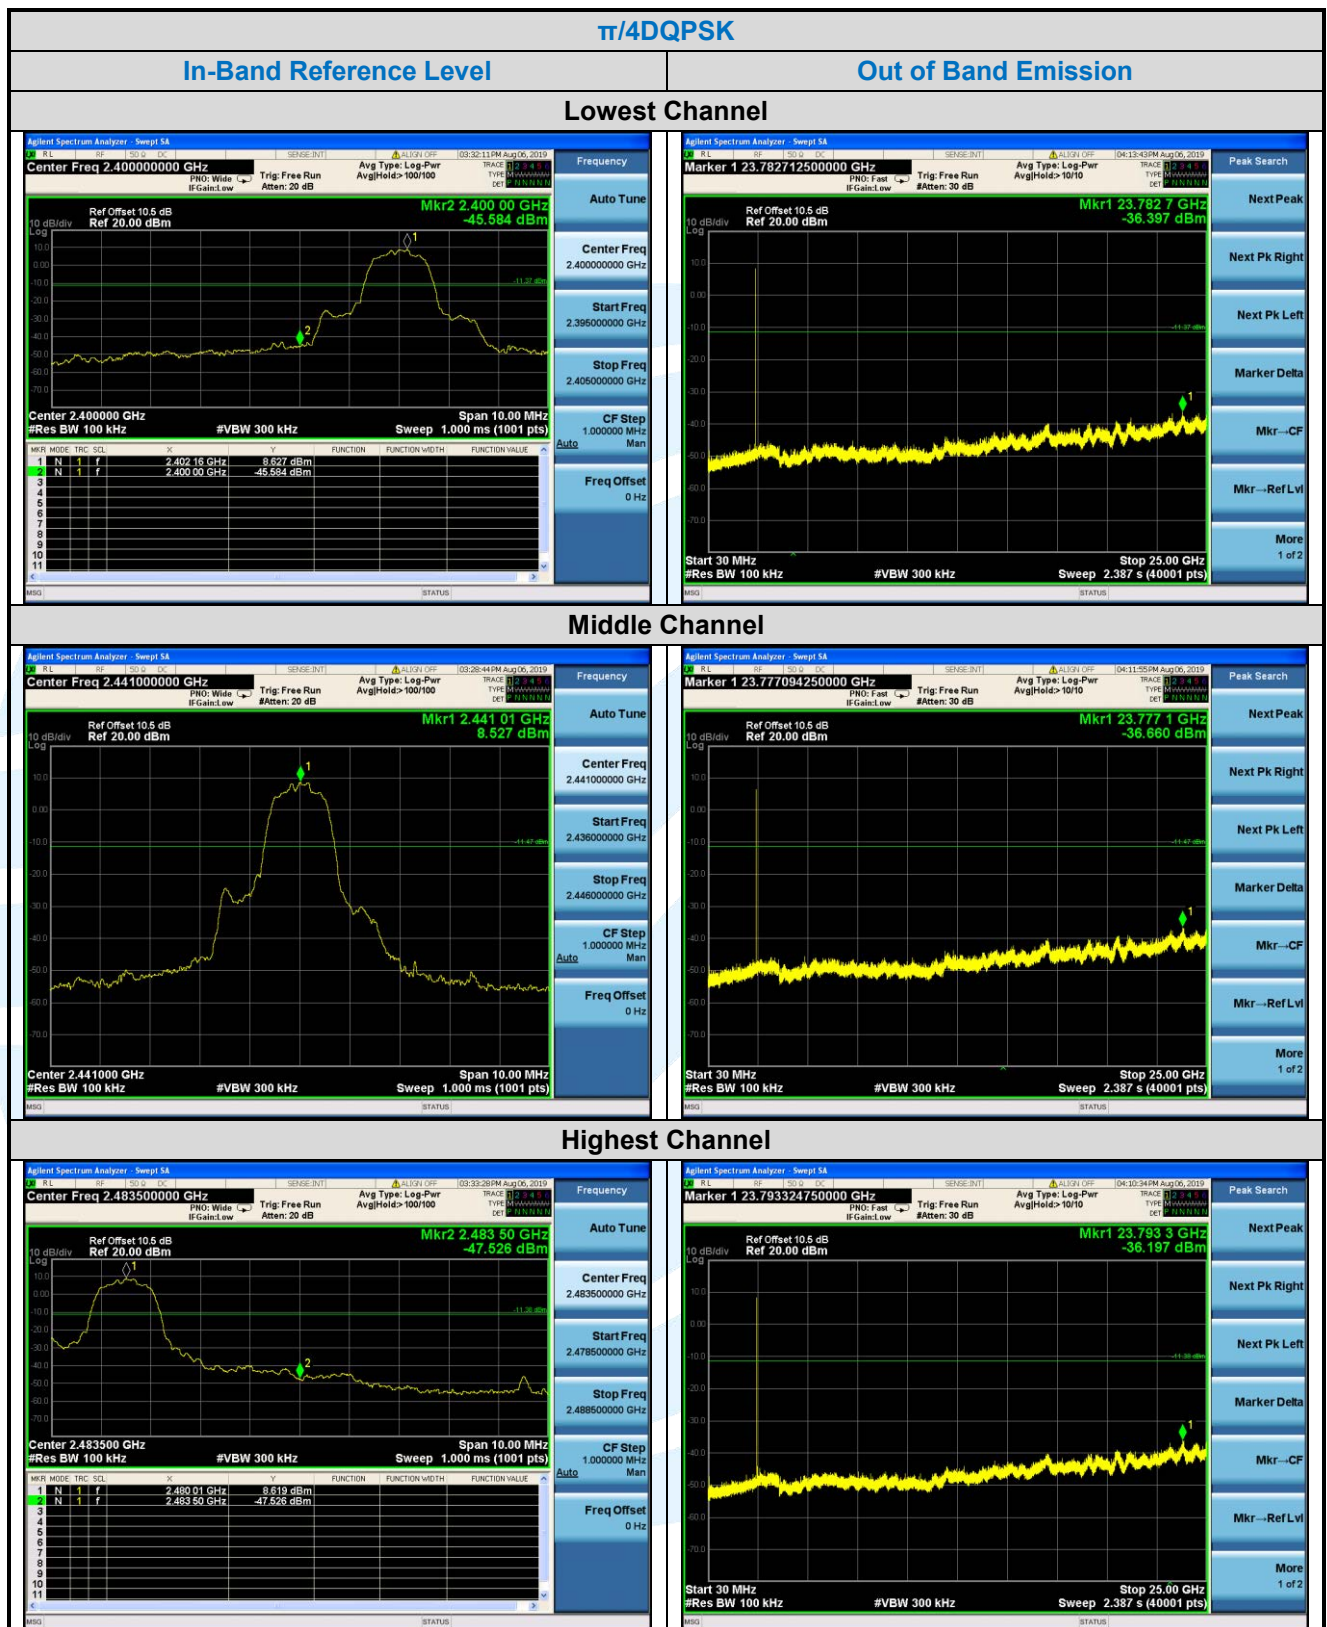

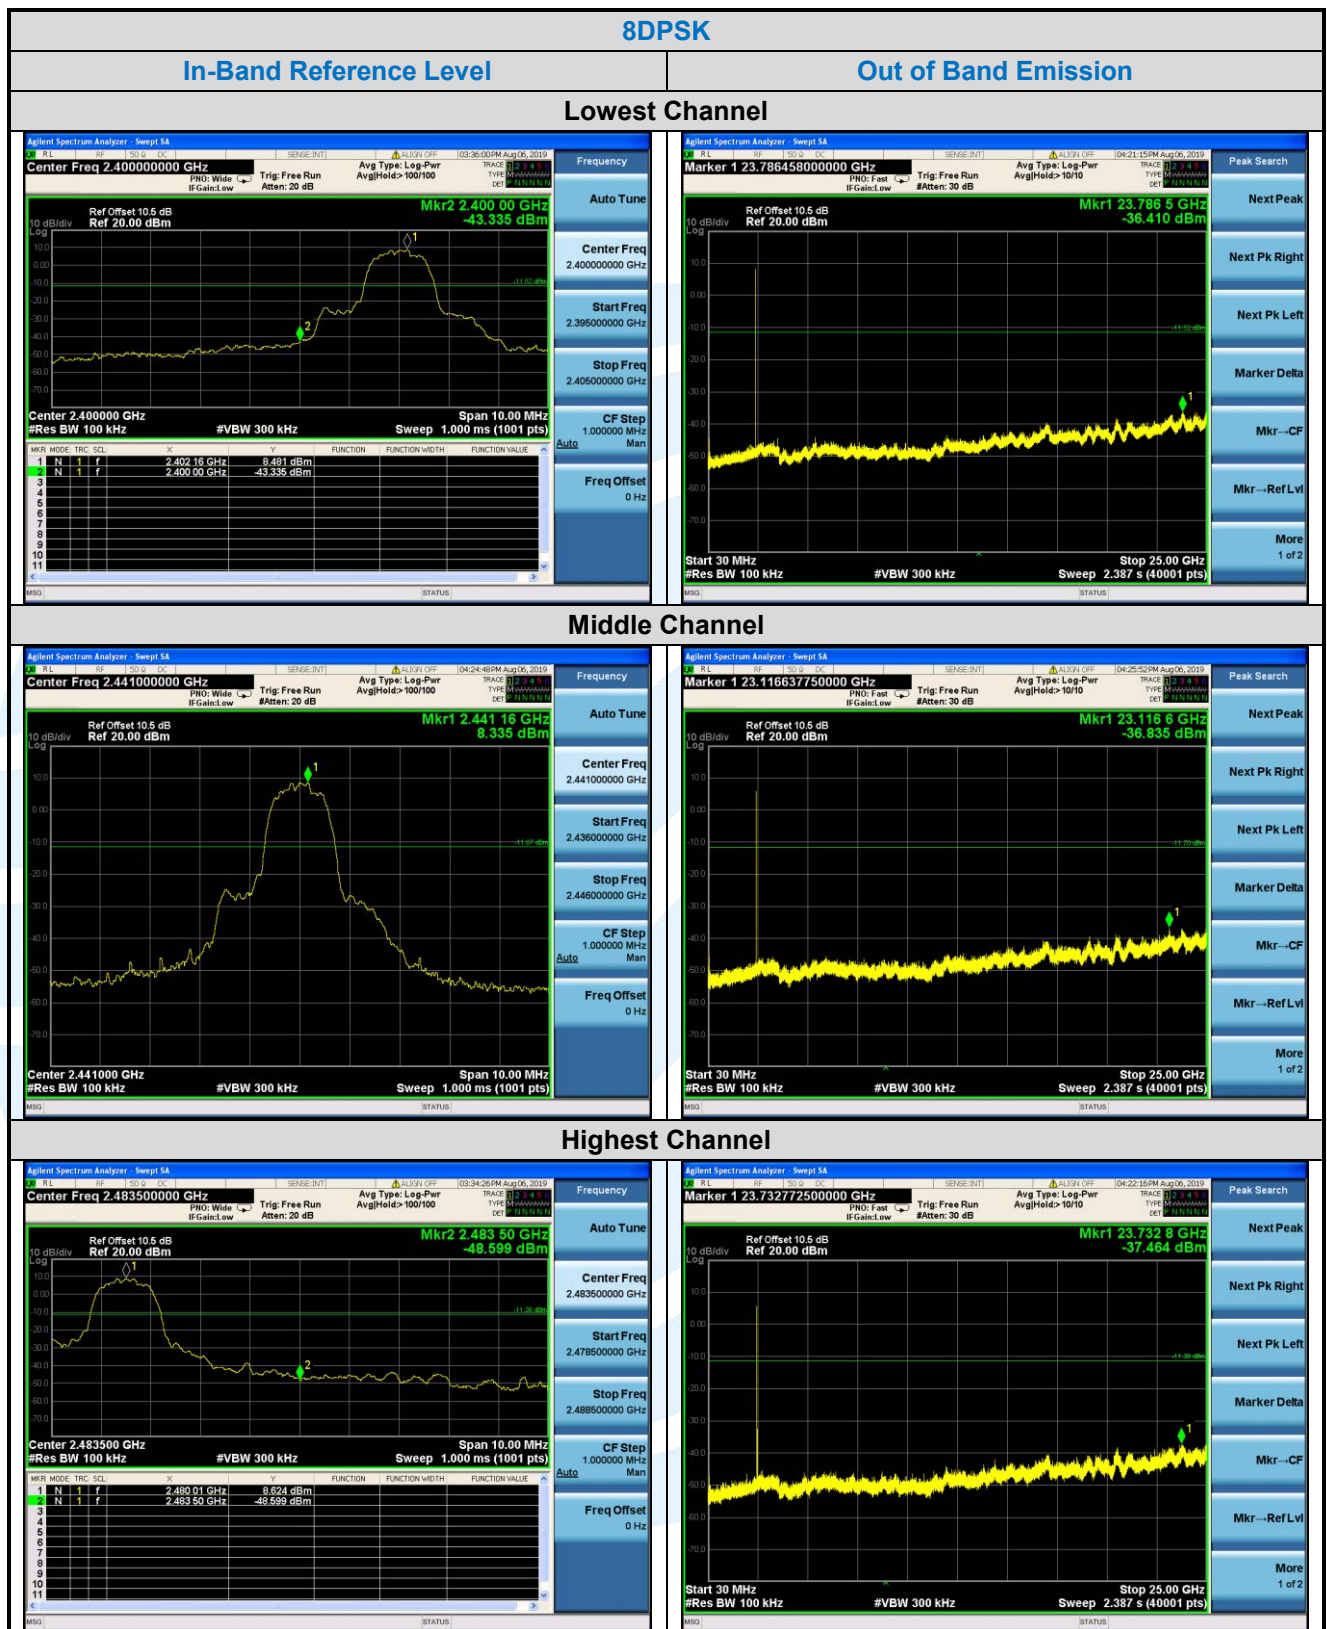



5.9 RADIATED SPURIOUS EMISSIONS

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209
RSS-Gen Issue 5, Section 6.13/8.9/8.10

Test Method: ANSI C63.10-2013 Section 6.3 & 6.5 & 6.6

Receiver Setup:

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

Limits:

Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Remark:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

1. From 30 MHz to 1GHz test procedure as below:
 - 1) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
 - 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
 - 3) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
 - 4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
 - 5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
 - 6) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
2. Above 1GHz test procedure as below:
 - 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
 - 2) Test the EUT in the lowest channel ,middle channel, the Highest channel

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

- 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Y axis positioning which it is worse case.
- 4) Repeat above procedures until all frequencies measured was complete.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:


Radiated Emission Test Data (9 KHz ~ 30 MHz):

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.


Radiated Emission Test Data (30 MHz ~ 1 GHz):


Left Ear_Worst-Case Configuration

Horizontal

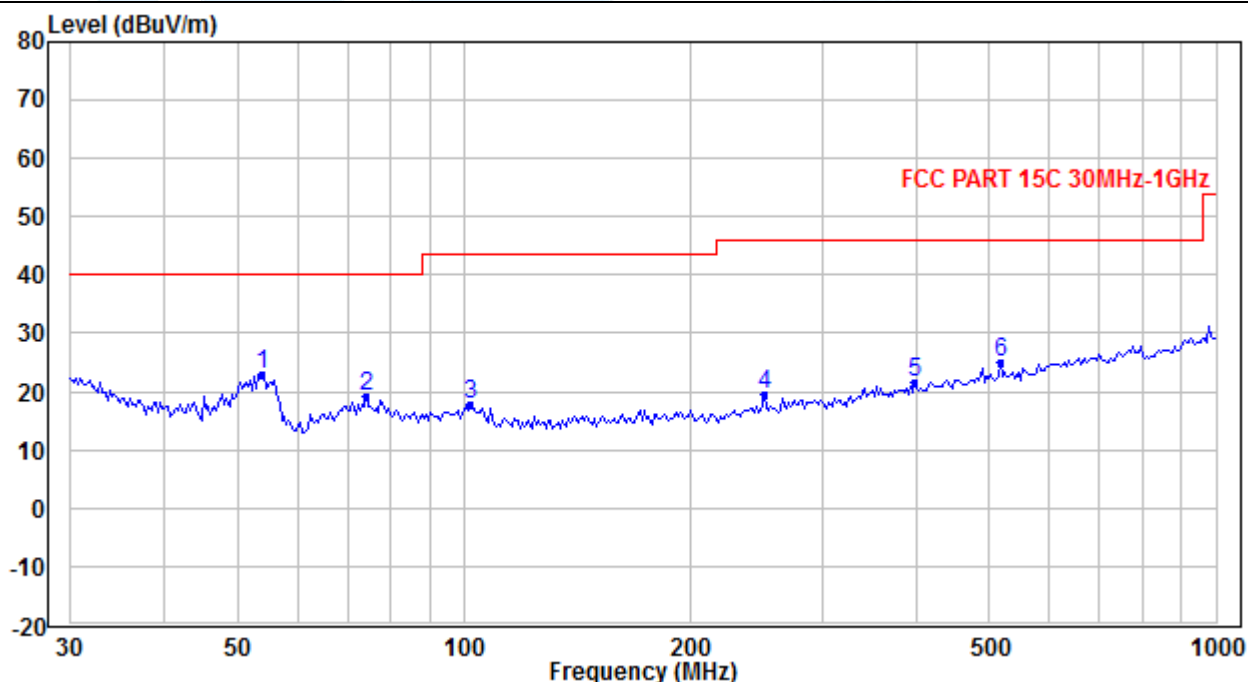


No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	53.756	33.75	-14.66	19.09	40.00	-20.91	Peak
2	103.335	28.96	-13.34	15.62	43.50	-27.88	Peak
3	781.961	26.89	-1.66	25.23	46.00	-20.77	Peak
4	53.756	36.83	-13.73	23.10	40.00	-16.90	Peak
5	74.270	32.55	-13.36	19.19	40.00	-20.81	Peak
6	101.893	29.65	-11.77	17.88	43.50	-25.62	Peak

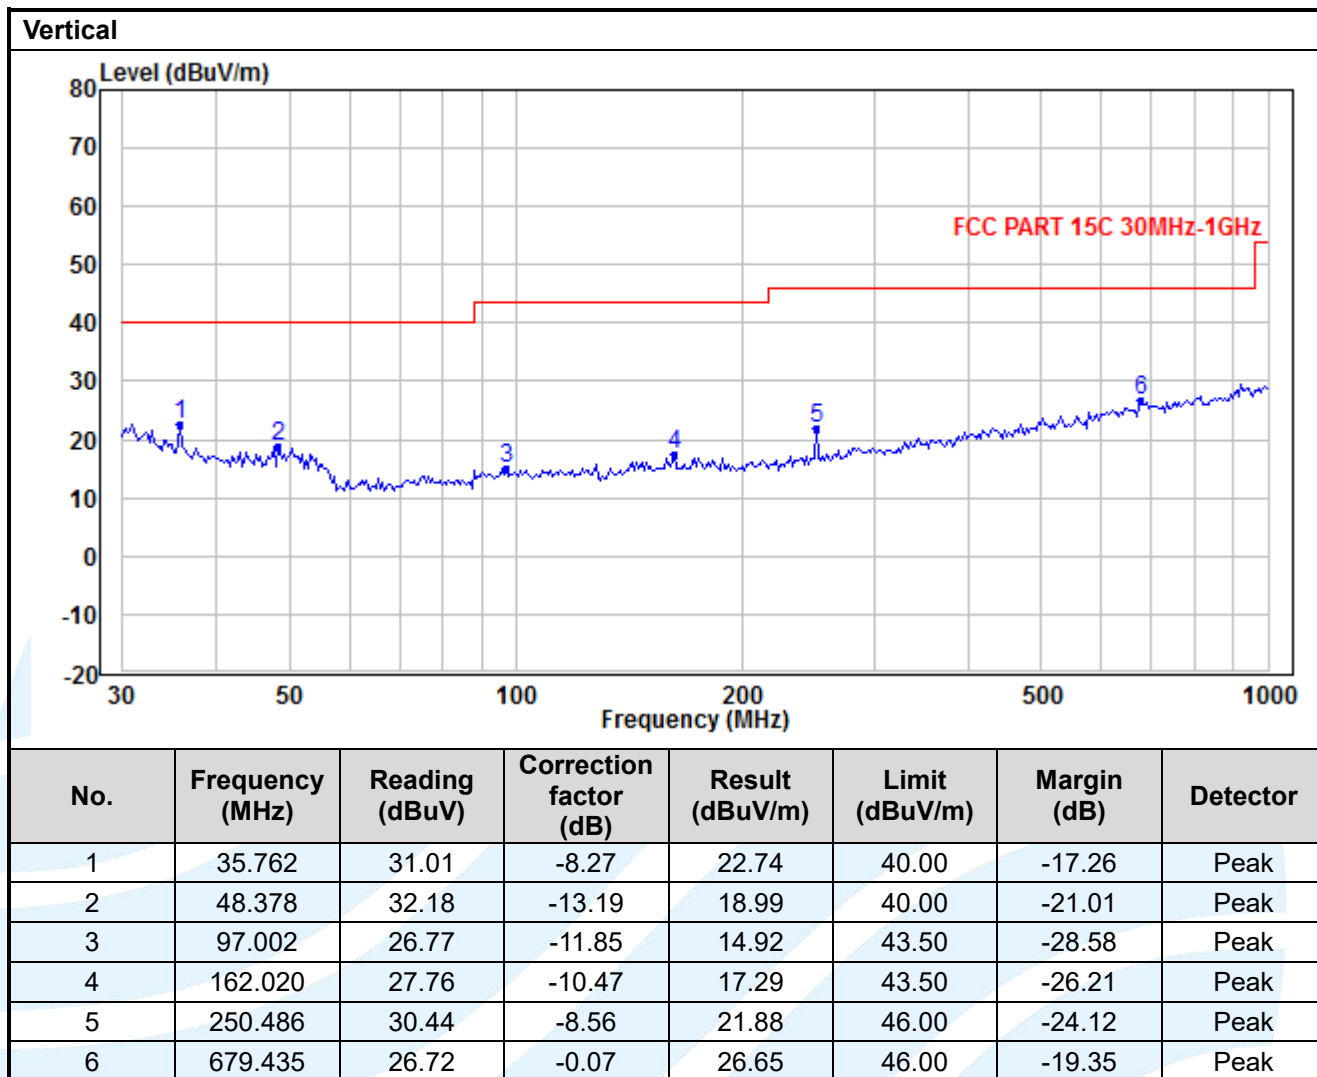

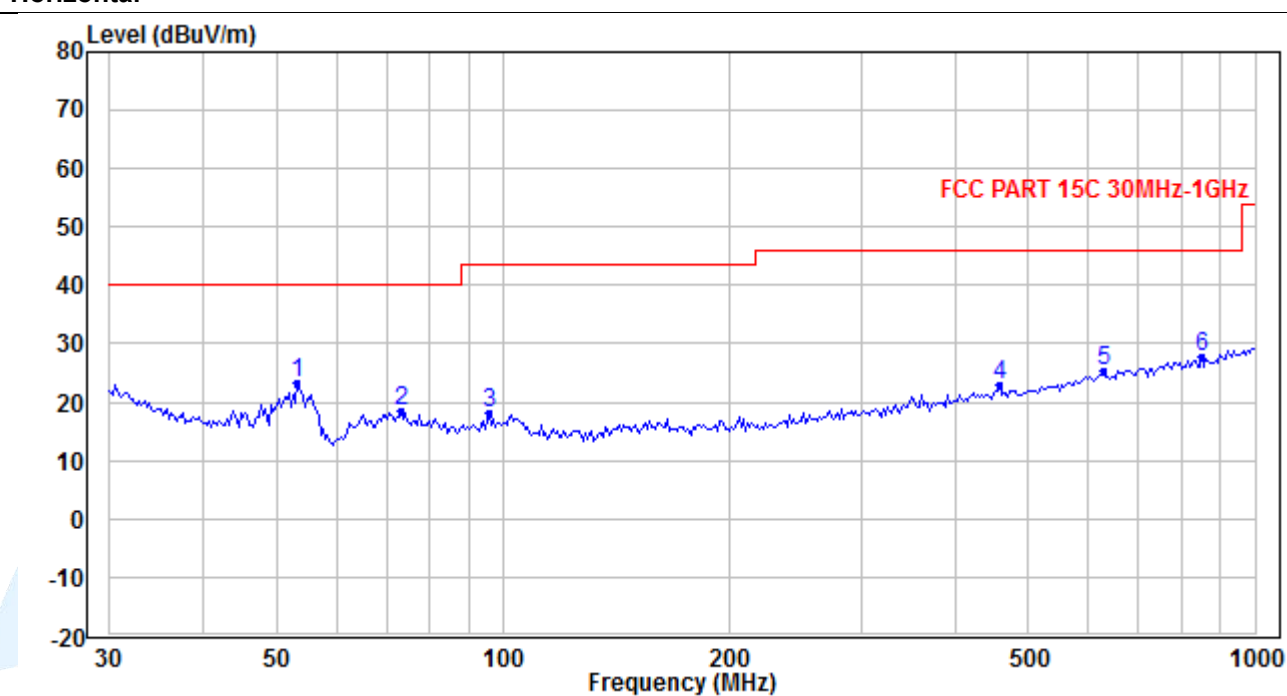Radiated Emission Test Data (30 MHz ~ 1 GHz):
Right Ear_Worst-Case Configuration
Horizontal


No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	53.379	36.93	-13.63	23.30	40.00	-16.70	Peak
2	73.233	31.77	-13.43	18.34	40.00	-21.66	Peak
3	95.649	30.13	-11.96	18.17	43.50	-25.33	Peak
4	458.399	27.26	-4.29	22.97	46.00	-23.03	Peak
5	628.894	26.15	-0.80	25.35	46.00	-20.65	Peak
6	850.760	25.81	2.06	27.87	46.00	-18.13	Peak

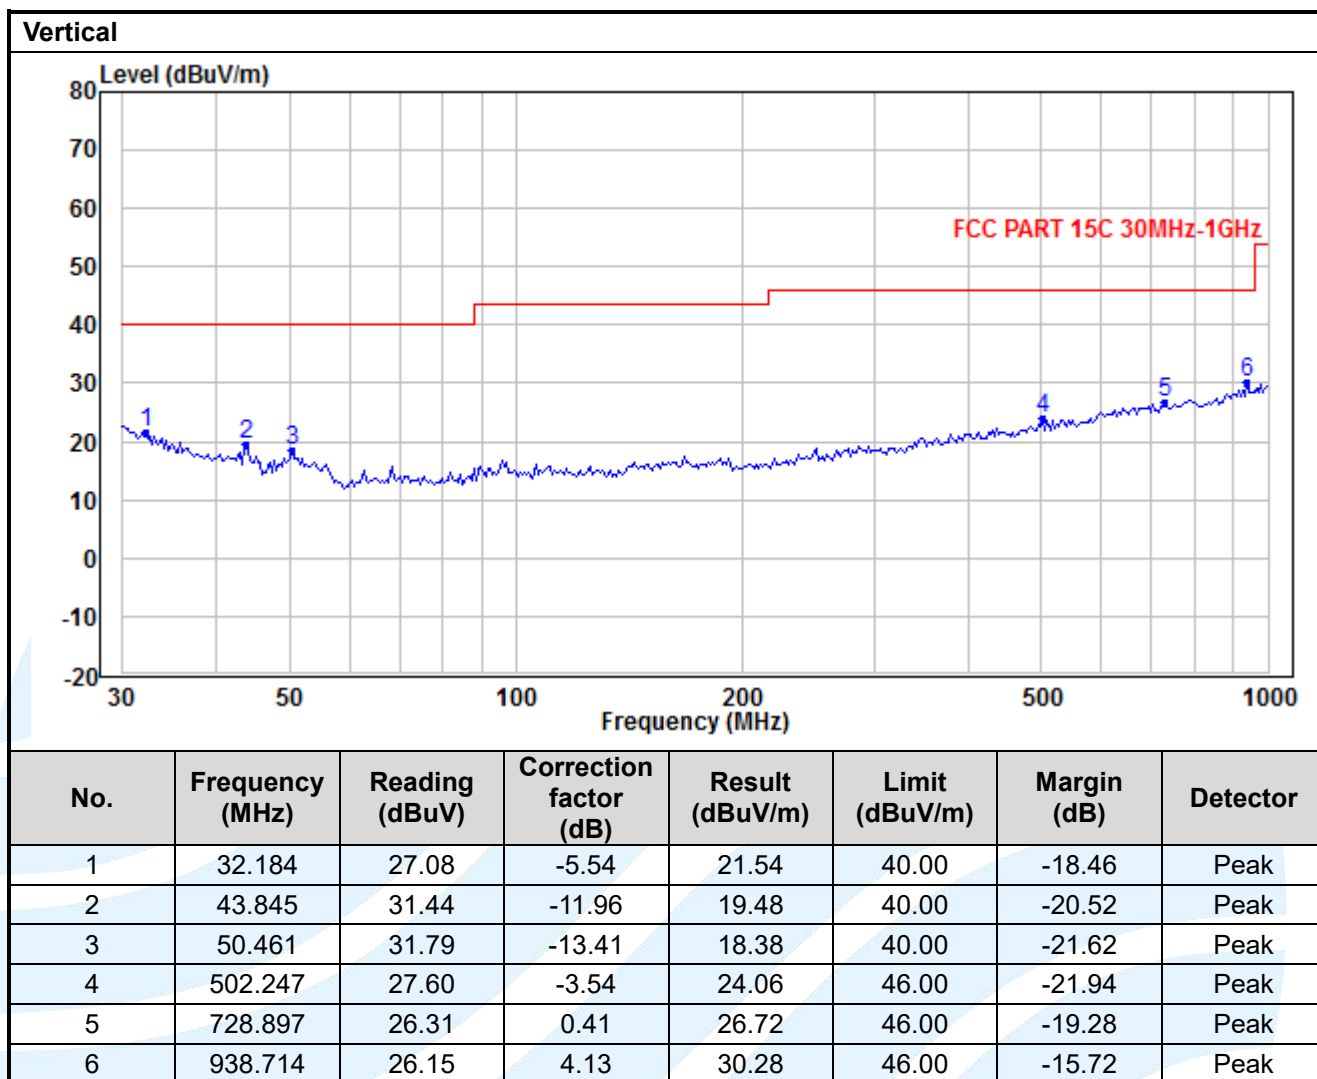

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit

Radiated Emission Test Data (Above 1GHz):
Left Ear_Lowest Channel:

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4804.000	24.81	3.93	28.74	54.00	-25.26	Average	Horizontal
2	4804.000	39.66	3.93	43.59	74.00	-30.41	Peak	Horizontal
3	7206.000	30.29	6.76	37.05	54.00	-16.95	Average	Horizontal
4	7206.000	46.68	6.76	53.44	74.00	-20.56	Peak	Horizontal
5	4804.000	27.11	4.93	32.04	54.00	-21.96	Average	Vertical
6	4804.000	44.12	4.93	49.05	74.00	-24.95	Peak	Vertical
7	7206.000	33.52	6.34	39.86	54.00	-14.14	Average	Vertical
8	7206.000	54.39	6.34	60.73	74.00	-13.27	Peak	Vertical

Left Ear_Middle Channel:

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4882.000	25.33	3.99	29.32	54.00	-24.68	Average	Horizontal
2	4882.000	36.31	3.99	40.30	74.00	-33.70	Peak	Horizontal
3	7323.000	29.57	6.98	36.55	54.00	-17.45	Average	Horizontal
4	7323.000	46.90	6.98	53.88	74.00	-20.12	Peak	Horizontal
5	4882.000	26.27	4.99	31.26	54.00	-22.74	Average	Vertical
6	4882.000	40.42	4.99	45.41	74.00	-28.59	Peak	Vertical
7	7323.000	31.96	6.48	38.44	54.00	-15.56	Average	Vertical
8	7323.000	54.06	6.48	60.54	74.00	-13.46	Peak	Vertical

Left Ear_Highest Channel:

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4960.000	25.05	4.06	29.11	54.00	-24.89	Average	Horizontal
2	4960.000	37.88	4.06	41.94	74.00	-32.06	Peak	Horizontal
3	7440.000	29.97	7.19	37.16	54.00	-16.84	Average	Horizontal
4	7440.000	46.91	7.19	54.10	74.00	-19.90	Peak	Horizontal
5	4960.000	26.89	5.06	31.95	54.00	-22.05	Average	Vertical
6	4960.000	42.48	5.06	47.54	74.00	-26.46	Peak	Vertical
7	7440.000	33.10	6.63	39.73	54.00	-14.27	Average	Vertical
8	7440.000	56.01	6.63	62.64	74.00	-11.36	Peak	Vertical

Right Ear_Lowest Channel:

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4777.554	30.55	3.82	34.37	54.00	-19.63	Average	Horizontal
2	4777.554	49.24	3.82	53.06	74.00	-20.94	Peak	Horizontal
3	7207.945	32.39	6.77	39.16	54.00	-14.84	Average	Horizontal
4	7207.945	51.24	6.77	58.01	74.00	-15.99	Peak	Horizontal
5	4777.554	49.39	4.82	54.21	74.00	-19.79	Average	Vertical
6	4804.000	29.13	4.93	34.06	54.00	-19.94	Peak	Vertical
7	7206.000	29.56	6.34	35.90	54.00	-18.10	Average	Vertical
8	7207.945	46.88	6.34	53.22	74.00	-20.78	Peak	Vertical

Right Ear_Middle Channel:

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4861.298	25.32	3.98	29.30	54.00	-24.70	Average	Horizontal
2	4882.000	42.95	3.99	46.94	74.00	-27.06	Peak	Horizontal
3	7323.000	27.90	6.98	34.88	54.00	-19.12	Average	Horizontal
4	7323.000	46.75	6.98	53.73	74.00	-20.27	Peak	Horizontal
5	4882.000	30.13	4.99	35.12	54.00	-18.88	Average	Vertical
6	4882.000	50.06	4.99	55.05	74.00	-18.95	Peak	Vertical
7	7323.000	29.10	6.48	35.58	54.00	-18.42	Average	Vertical
8	7323.000	46.39	6.48	52.87	74.00	-21.13	Peak	Vertical

Right Ear_Highest Channel:

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4960.000	24.25	4.06	28.31	54.00	-25.69	Average	Horizontal
2	4960.000	39.38	4.06	43.44	74.00	-30.56	Peak	Horizontal
3	7440.000	28.55	7.19	35.74	54.00	-18.26	Average	Horizontal
4	7440.000	46.70	7.19	53.89	74.00	-20.11	Peak	Horizontal
5	4960.000	27.09	5.06	32.15	54.00	-21.85	Average	Vertical
6	4960.000	46.06	5.06	51.12	74.00	-22.88	Peak	Vertical
7	7440.000	28.55	6.63	35.18	54.00	-18.82	Average	Vertical
8	7440.000	47.90	6.63	54.53	74.00	-19.47	Peak	Vertical

Remark:

- Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
- Result = Reading + Correct Factor.
- Margin = Result – Limit

5.10 BAND EDGE MEASUREMENTS (RADIATED)

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209
RSS-247 Issue 2, Section 5.5

Test Method: ANSI C63.10-2013 Section 6.10.5

Limits:

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Frequency	Limit (dB μ V/m @3m)	Remark
30 MHz-88 MHz	40.0	Quasi-peak Value
88 MHz-216 MHz	43.5	Quasi-peak Value
216 MHz-960 MHz	46.0	Quasi-peak Value
960 MHz-1 GHz	54.0	Quasi-peak Value
Above 1 GHz	54.0	Average Value
	74.0	Peak Value

Test Setup: Refer to section 4.5.1 for details.

Test Procedures:

Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels).


1. Use radiated spurious emission test procedure described in clause 5.10. The transmitter output (antenna port) was connected to the test receiver.
2. Set the PK and AV limit line.
3. Record the fundamental emission and emissions out of the band-edge.
4. Determine band-edge compliance as required.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The measurement data as follows:


Left Ear

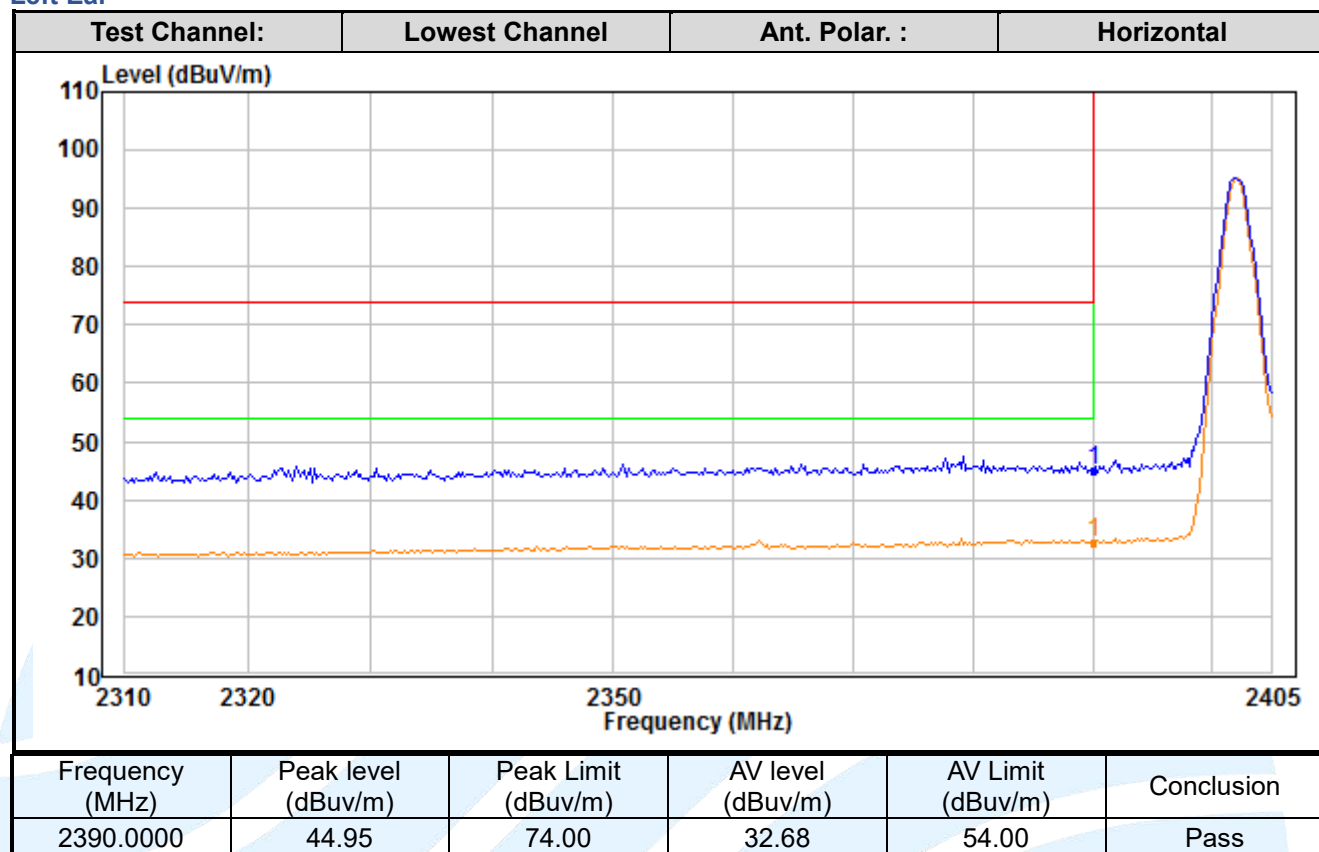


Left Ear

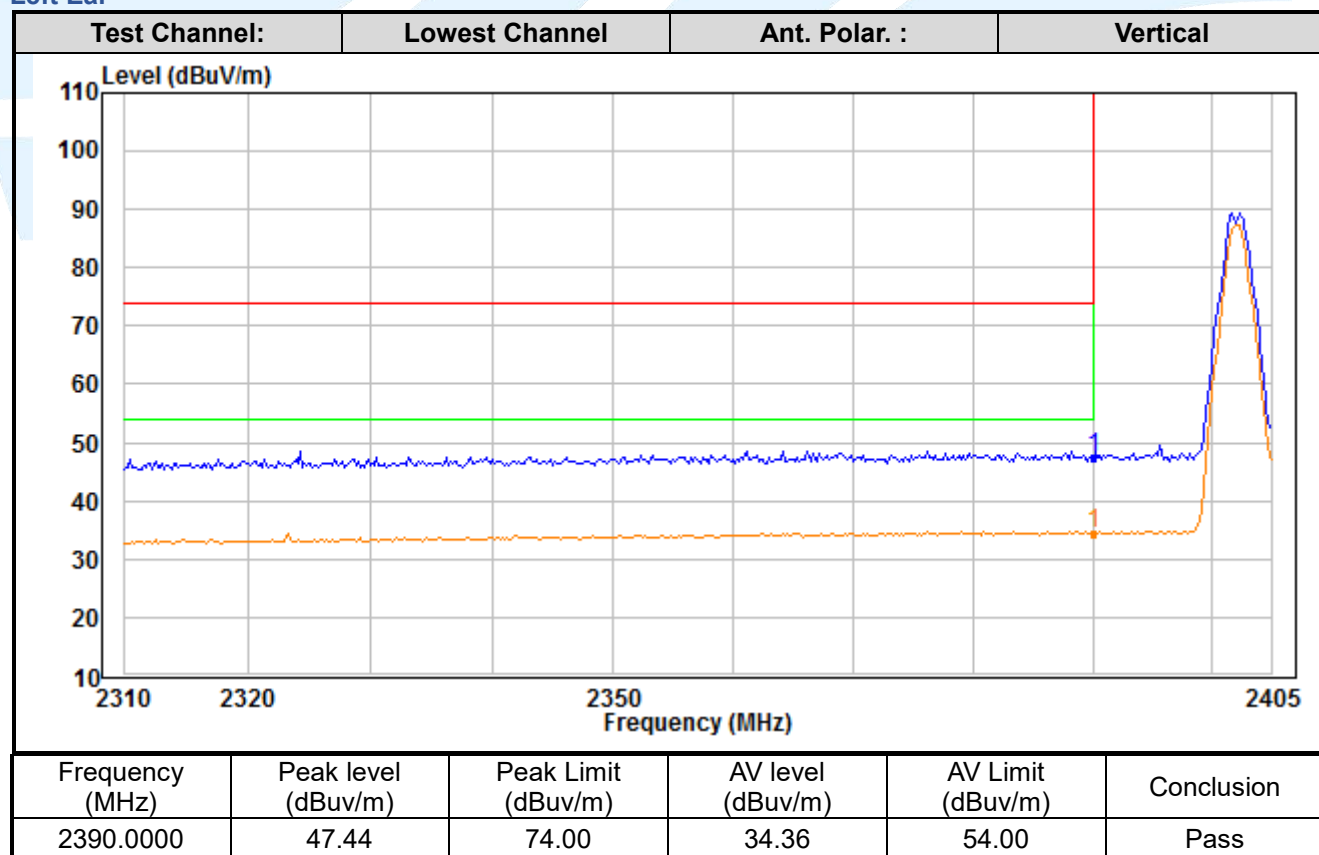


Left Ear

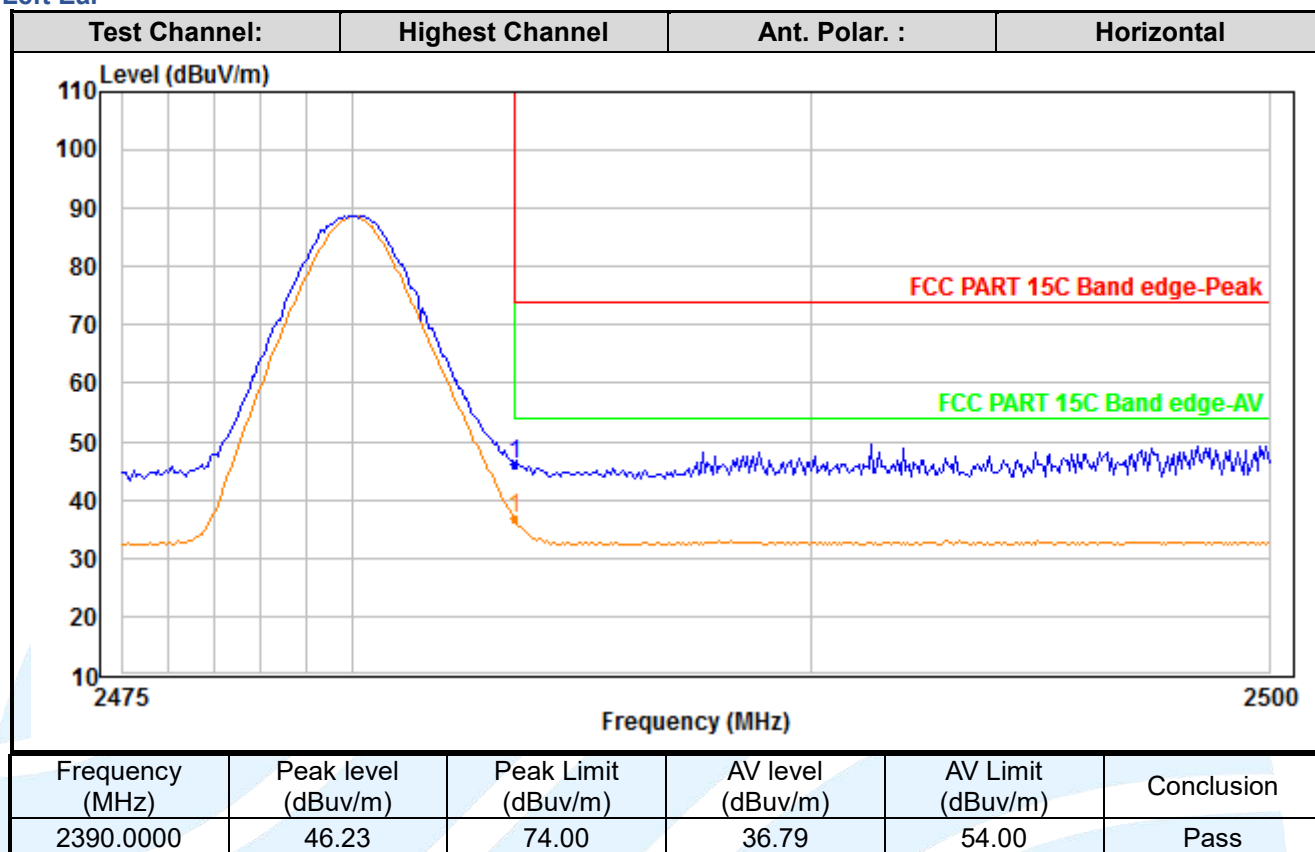


Left Ear

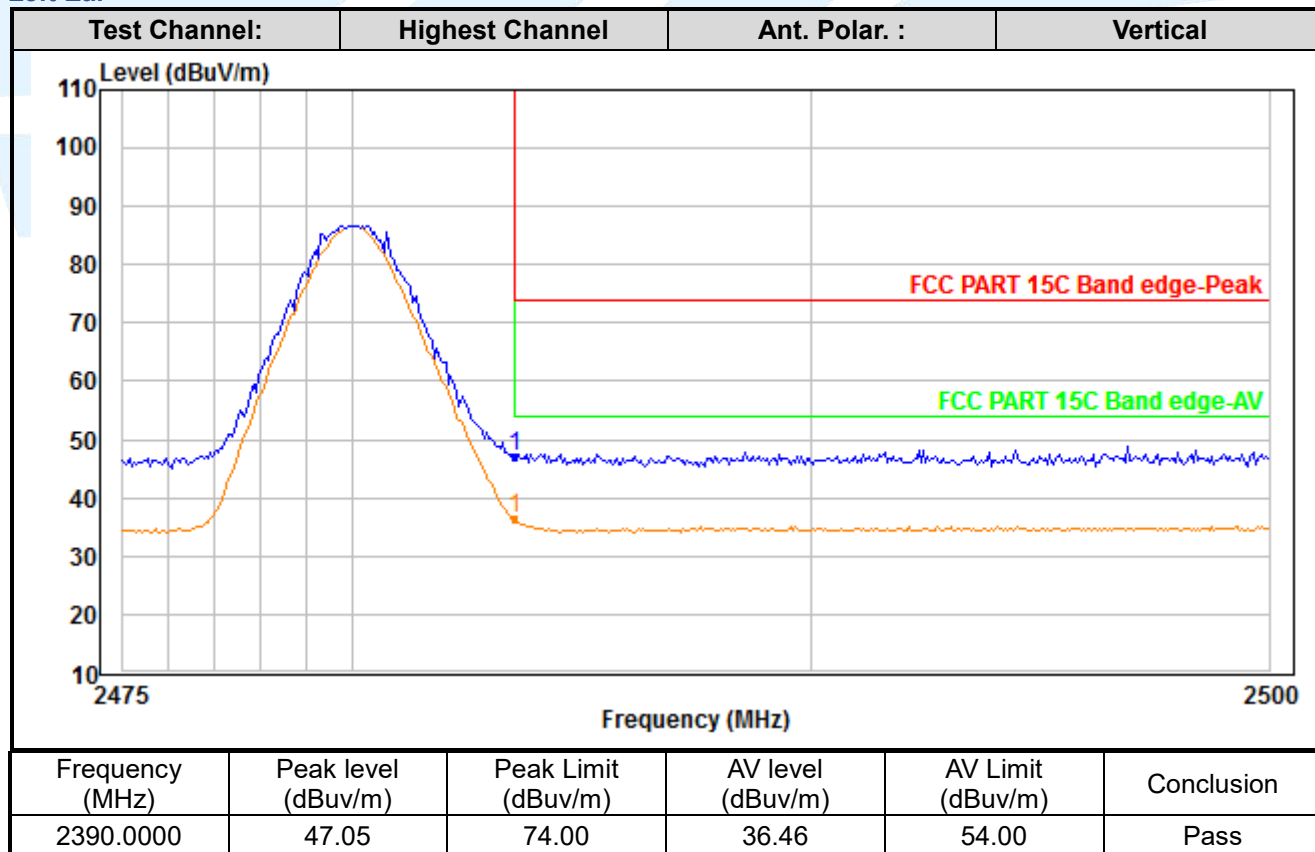


Right Ear

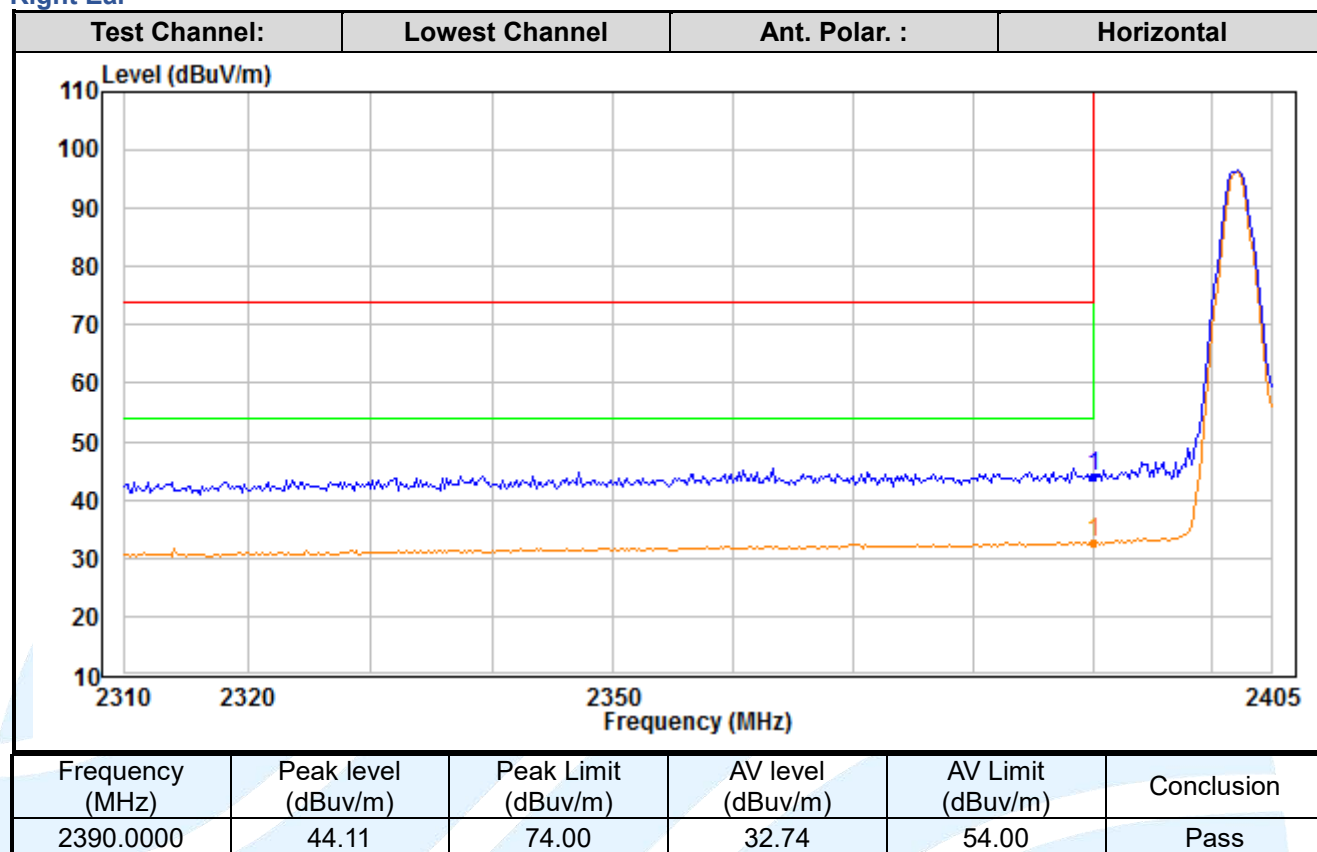


Right Ear

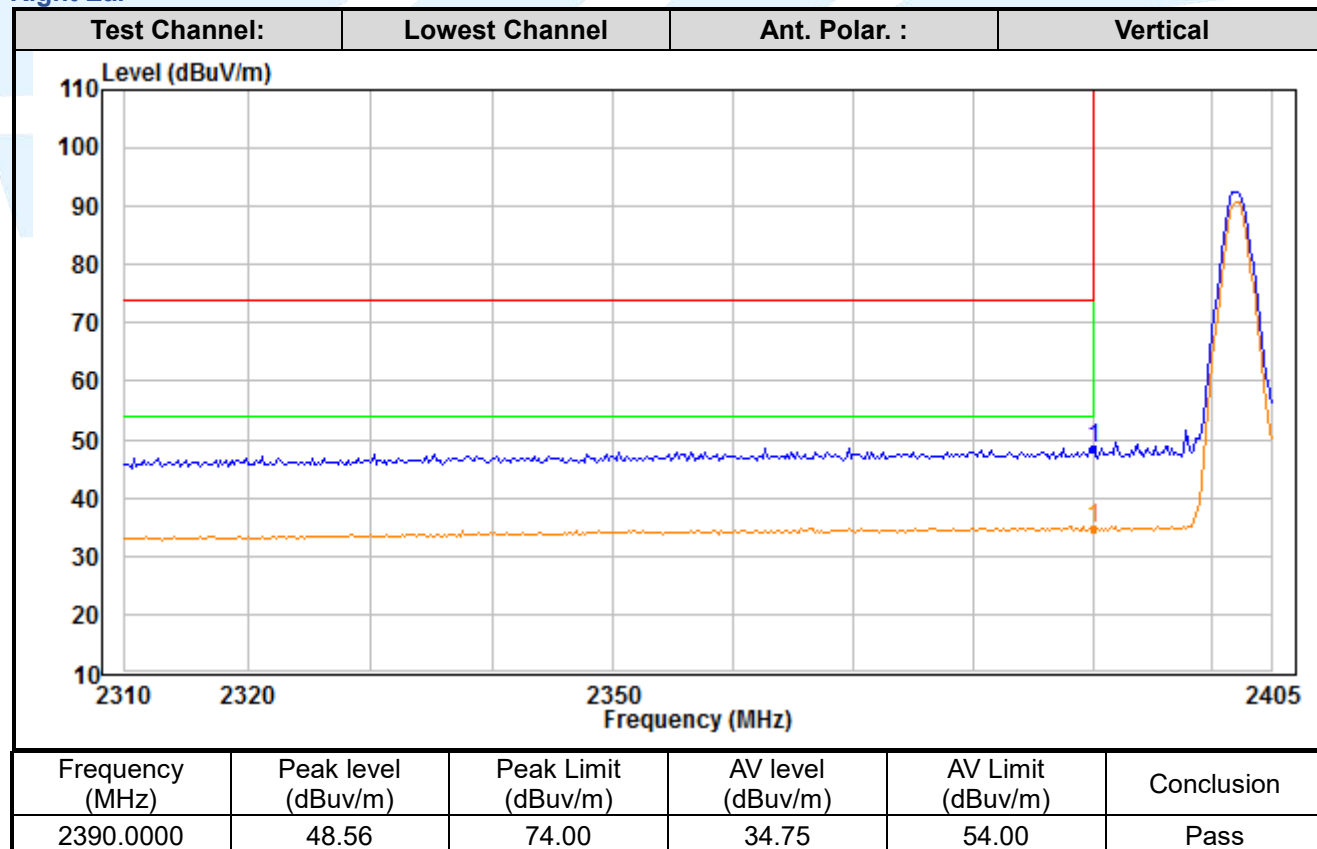

Right Ear

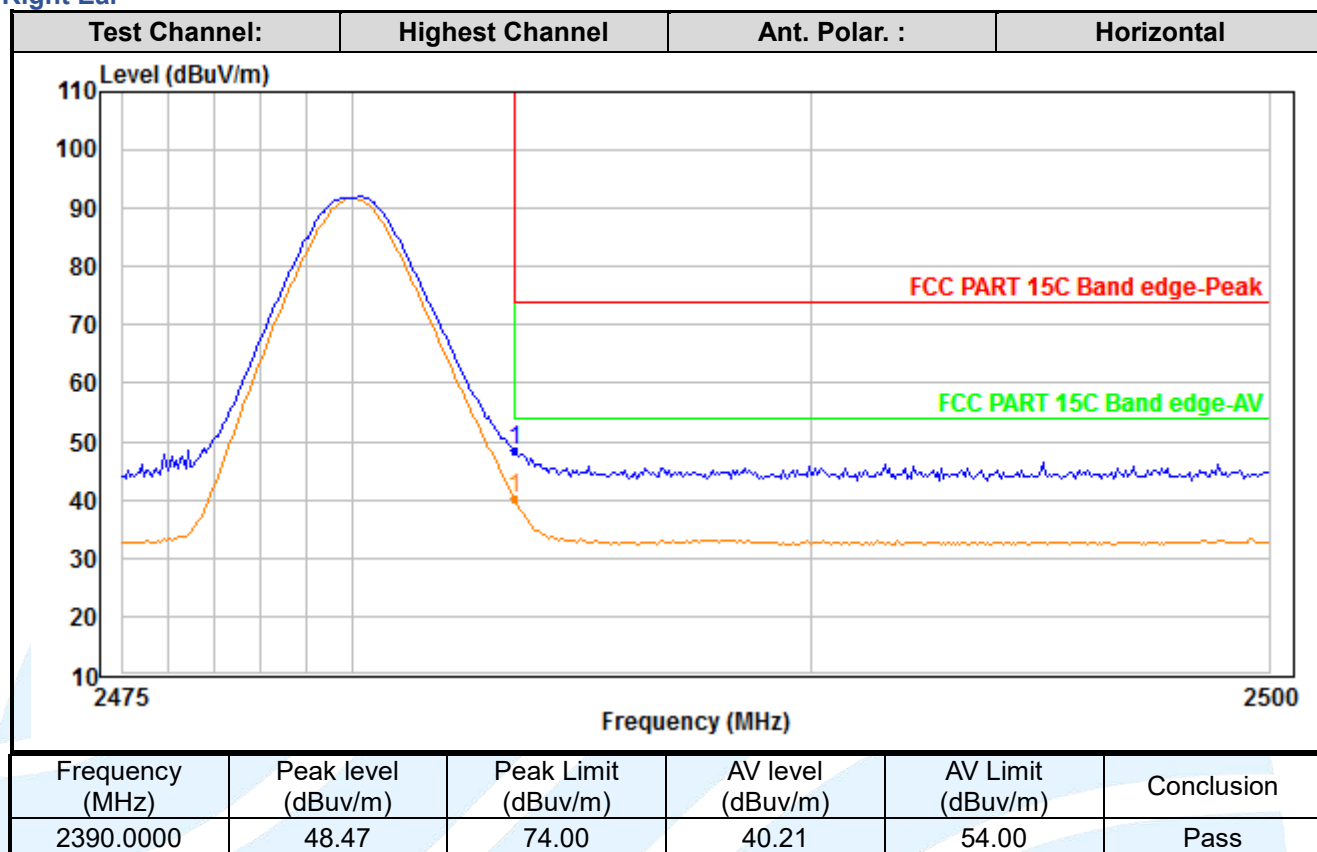

Right Ear

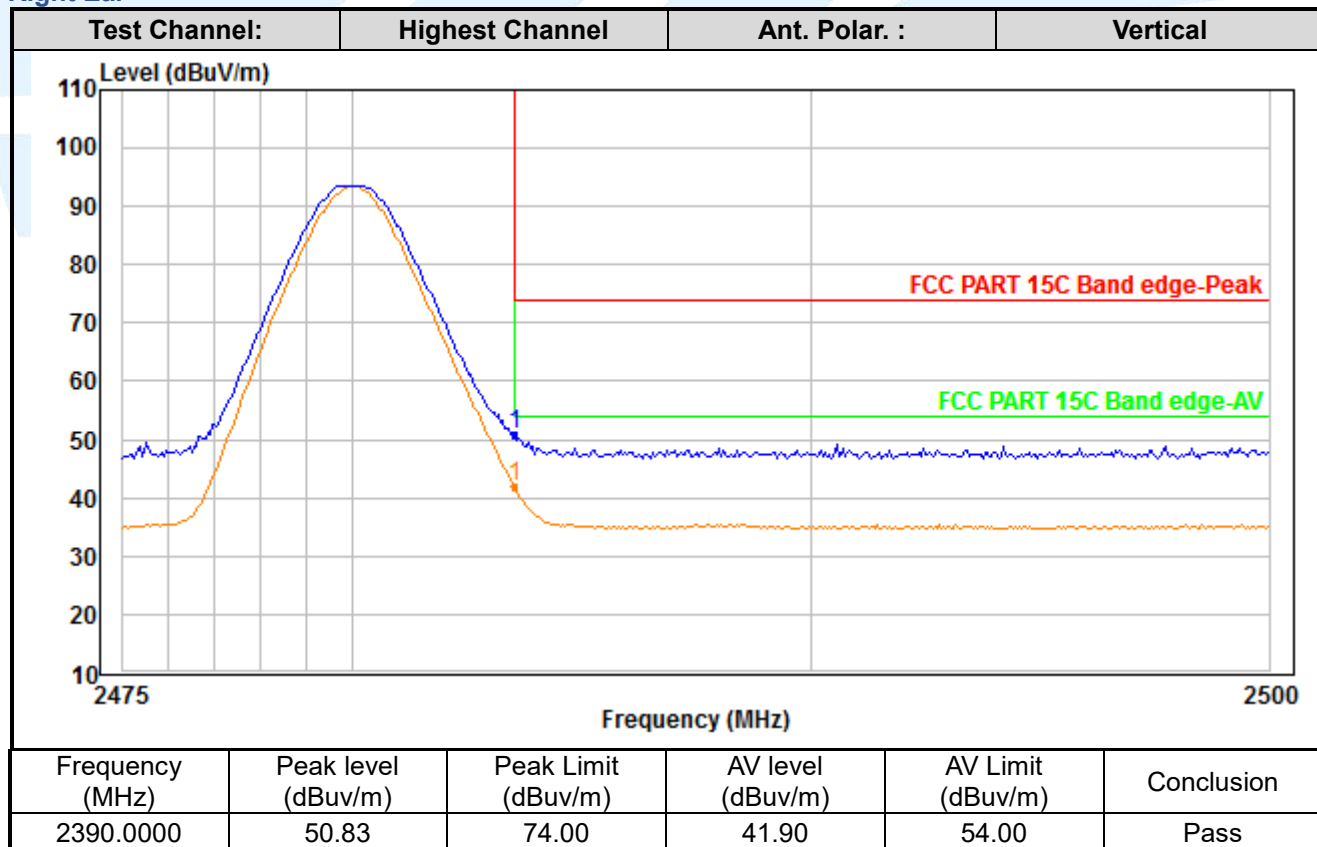

Remark:

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

1. $\text{Correct Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$, the value was added to Original Receiver Reading by the software automatically.
2. $\text{Result} = \text{Reading} + \text{Correct Factor}$.
3. $\text{Margin} = \text{Result} - \text{Limit}$



APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
