

FCC PART 15C TEST REPORT FOR CERTIFICATION

On Behalf of

Sony Corporation

Wireless Speaker

LF-S50G

FCC ID: AK8LFS50G

Prepared for : Sony Corporation
1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F17131
Date of Test : Jun.06~Jul.04,2017
Date of Report : Jul.31,2017

TABLE OF CONTENTS

Description	Page
1. SUMMARY OF STANDARDS AND RESULTS.....	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT).....	2-1
2.2. Tested Supporting System Details	2-2
2.3. Block Diagram of connection between EUT and simulators	2-2
2.4. Test information.....	2-3
2.5. Test Facility	2-3
2.6. Measurement Uncertainty (95% confidence levels, k=2)	2-4
3. POWER LINE CONDUCTED EMISSION TEST	3-1
3.1. Test Equipments.....	3-1
3.2. Block Diagram of Test Setup.....	3-1
3.3. Power Line Conducted Emission Test Limits.....	3-1
3.4. Configuration of EUT on Test	3-2
3.5. Operating Condition of EUT	3-2
3.6. Test Procedure	3-2
3.7. Power Line Conducted Emission Test Results	3-2
4. RADIATED EMISSION MEASUREMENT	4-1
4.1. Test Equipment	4-1
4.2. Block Diagram of Test Setup.....	4-1
4.3. Radiated Emission Limit Standard:	4-2
4.4. EUT Configuration on Test	4-2
4.5. Operating Condition of EUT	4-2
4.6. Test Procedure	4-2
4.7. Radiated Emission Test Results.....	4-3
5. CONDUCTED SPURIOUS EMISSIONS.....	5-1
5.1. Test Equipment	5-1
5.2. Limit.....	5-1
5.3. Test Procedure	5-1
5.4. Test result.....	5-1
6. 20 DB BANDWIDTH TEST	6-1
6.1. Test Equipment	6-1
6.2. Limit.....	6-1
6.3. Test Procedure	6-1
6.4. Test Results.....	6-1
7. CARRIER FREQUENCY SEPARATION TEST	7-1
7.1. Test Equipment	7-1
7.2. Limit.....	7-1
7.3. Test Procedure	7-1
7.4. Test Results.....	7-1
8. NUMBER OF HOPPING FREQUENCY TEST	8-1
8.1. Test Equipment	8-1
8.2. Limit.....	8-1
8.3. Test Procedure	8-1
8.4. Test Results.....	8-1
9. DWELL TIME	9-1

9.1.	Test Equipment	9-1
9.2.	Limit.....	9-1
9.3.	Test Procedure	9-1
9.4.	Test Results	9-1
10.	MAXIMUM PEAK OUTPUT POWER TEST	10-1
10.1.	Test Equipment	10-1
10.2.	Limit.....	10-1
10.3.	Test Procedure	10-1
10.4.	Test Results	10-1
11.	BAND EDGE COMPLIANCE TEST	11-1
11.1.	Test Equipment	11-1
11.2.	Limit.....	11-1
11.3.	Test Produce.....	11-1
11.4.	Test Results	11-1
12.	ANTENNA REQUIREMENT	12-1
12.1.	Standard Applicable.....	12-1
12.2.	Antenna Connected Construction	12-1
13.	DEVIATION TO TEST SPECIFICATIONS.....	13-1
14.	PHOTOGRAPH OF TEST	14-1
14.1.	Photos of Power Line Conducted Emission Test.....	14-1
14.2.	Photos of Radiated Emission Test	14-2
15.	PHOTOS OF THE EUT	15-1

TEST REPORT CERTIFICATION

Applicant : Sony Corporation
Manufacturer : Sony Corporation
Product : Wireless Speaker
FCC ID : AK8LFS50G
(A) Model No. : LF-S50G
(B) Power Supply : DC 15V
(C) Test Voltage : DC 15V From Adaptor Input 120V/60Hz

Tested for comply with:
FCC CFR47 Part 15 Subpart C

Test procedure used:
ANSI C63.10: 2013

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Jun.06~Jul.04,2017 Report of date: Jul.31,2017

Prepared by : Apul Tseng for Brave Zhang / Assistant Reviewed by : Sunny Lu / Deputy Manager



Approved & Authorized Signer :

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10 2013	PASS
Radiated Emission Test	FCC Part 15 15.209 FCC Part 15 15.247(d) ANSI C63.10 2013	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(a)(1) ANSI C63.10 2013	PASS
Carrier Frequency Separation Test	FCC Part 15: 15.247(a)(1) ANSI C63.10 2013	PASS
20dB Bandwidth Test	FCC Part 15: 15.215 ANSI C63.10 2013	PASS
Number Of Hopping Frequency Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 2013	PASS
Dwell Time Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 2013	PASS
Maximum Peak Output Power Test	FCC Part 15 15.247(b)(1)\ ANSI C63.10 2013	PASS
Band Edge Compliance Test	FCC Part 15 15.247(d) ANSI C63.10 2013	PASS

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product	: Wireless Speaker
Model No.	: LF-S50G
FCC ID	: AK8LFS50G
Radio	: IEEE802.11 a/b/g/n; Bluetooth V3.0+EDR; Bluetooth V4.2; NFC Rx
Operation Frequency	: IEEE 802.11a: 5180MHz—5240MHz; 5260MHz—5320MHz 5500MHz—5720MHz; 5745MHz—5825MHz IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE802.11nHT20: 2412MHz—2462MHz; 5180MHz—5240MHz; 5260MHz—5320MHz 5500MHz—5720MHz; 5745MHz—5825MHz IEEE802.11nHT40: 5190MHz—5230MHz; 5270MHz—5310MHz 5510MHz—5710MHz; 5755MHz—5795MHz Bluetooth : 2402-2480MHz NFC: 13.56MHz
Modulation Technology	: IEEE 802.11b: DSSS(CCK,DQPSK,BPSK) IEEE 802.11a/g: OFDM(64QAM, 16QAM, 256QAM, BPSK) IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM, 256QAM,BPSK) Bluetooth V3.0+EDR: GFSK, $\pi/4$ DQPSK,8-DPSK Bluetooth V4.2:GFSK NFC: ASK
Antenna Assembly Gain	: Antenna Type: FPC Board Bluetooth: 2.1dBi WIFI 2.4GHz: 2.1dBi WIFI 5GHz: Band 1: 6.02dBi Band 2: 6.09dBi Band 3: 5.41dBi Band 4: 6.39dBi Loop Antenna for NFC

Applicant : Sony Corporation
1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Manufacturer : Sony Corporation
1-7-1 Konan Minato-ku Tokyo, 108-0075 Japan

Power Adaptor : Manufacturer: Sony, M/N: AC-E1525
Input: AC 100-240V; 50/60Hz, 1.0A
Output: DC 15V, 2.5A
DC Cable: Unshielded, Undetachable, 1.6m

Date of Test : Jun.06~Jul.04,2017


Date of Receipt : May.30,2017

Remark : This report only for Bluetooth V3.0+EDR.

2.2. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	DELL	PP09S	N/A
Power Cord: Unshielded, Detachable, 1.8m Power Adaptor: Manufacturer: DELL, M/N: LA65NS1-00 Cable: Unshielded, Detachable, 4.0m(Bond one ferrite core)					

2.3. Block Diagram of connection between EUT and simulators

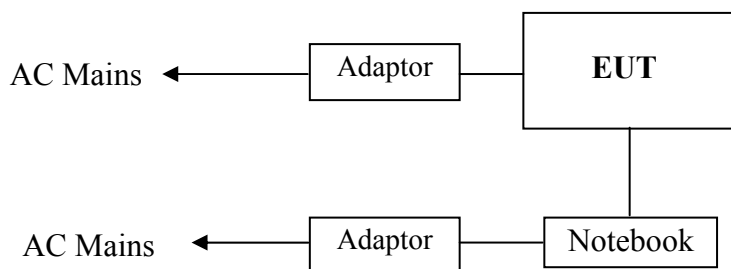

(EUT: Wireless Speaker)

2.4. Test information

A special software was used to control EUT work in continuous TX mode (GFSK, $\pi/4$ DQPSK, 8-DPSK Modulation)

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)	Channel	Frequency (MHz)
Tx Mode GFSK modulation	1	Low :CH 0	2402
	1	Middle: CH39	2441
	1	High: CH78	2480
Tx Mode 8-DPSK modulation	3	Low :CH 0	2402
	3	Middle: CH39	2441
	3	High: CH78	2480

Note: $\pi/4$ DQPSK modulation is same type modulation with 8-DPSK, and according exploratory test, 8-DPSK will have worse emissions, so the final test were only performed with GFSK and 8-DPSK modulation.

2.5. Test Facility

Site Description

Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

EMC Lab. : Certificated by Industry Canada
Registration Number: IC 5183A-1
Valid Date: May.07, 2020

: Certificated by DAkkS, Germany
Registration No: D-PL-12151-01-00
Valid Date: Dec.07, 2021

: Accredited by NVLAP, USA
NVLAP Code: 200372-0
Valid Date: Mar.31, 2018

2.6. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.2dB(150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	2.8dB(30~200MHz, Polarization: H)
	2.8dB(30~200MHz, Polarization: V)
	3.0dB(200M~1GHz, Polarization: H)
	3.0dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber(1GHz-18GHz)	5.8dB(1~6GMHz, Distance: 3m)
	5.8dB(6~18GMHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.6dB
Uncertainty for Conduction Spurious emission test	2.0dB
Uncertainty for Output power test	0.8dB
Uncertainty for Bandwidth test	83kHz
Uncertainty for DC power test	0.1%
Uncertainty for test site temperature and humidity	0.6℃
	3%


3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	Apr.17,17	1 Year
2.	Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.22,17	1 Year
3.	L.I.S.N	Rohde & Schwarz	ENV216	102160	Mar.06.17	1 Year
4.	L.I.S.N.#2	Kyoritsu	K NW-403D	8-1750-2	Apr.22,17	1 Year
5.	I.S.N.	TESEQ	S751	24559	Mar.06.17	1.year
6.	Terminator	Hubersuhner	50Ω	No.1	Apr.23,17	1 Year
7.	Terminator	Hubersuhner	50Ω	No.2	Apr.23,17	1 Year
8.	RF Cable	MIYAZAKI	3D-2W	No.1	Apr.23,17	1 Year
9.	Coaxial Switch	Anritsu	MP59B	6200766906	Apr.22,17	1 Year
10.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

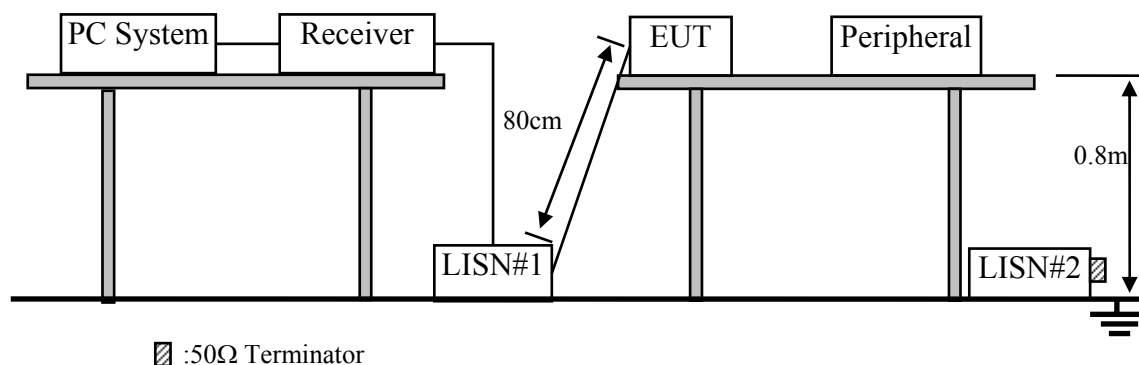

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4.Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. Wireless Speaker (EUT)

Model Number : LF-S50G

Serial Number : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5.Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turn on the power of all equipments.

3.5.3. PC run test software to control EUT work in BT 3.0 Tx mode.

3.6.Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via PC connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7.Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

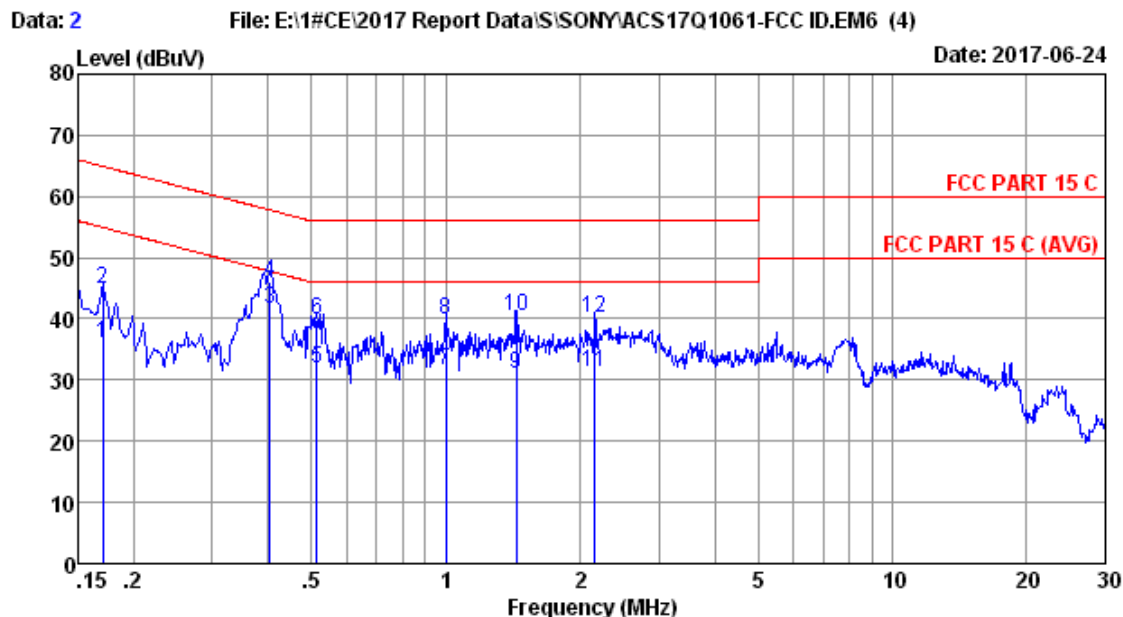

Site no :1# CE Data No :2
Dis./Lisn :2017 LISN ENV216-L LISN phase:
Limit :FCC PART 15 C
Env./Ins. :22.8°C/56% Engineer :Garry
EUT :M/N:LF-S50G
Power Rating :AC 120V/60Hz
Test Mode :BT Tx Mode

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.170	9.51	0.02	26.50	36.03	54.94	18.91	Average
2	0.170	9.51	0.02	35.28	44.81	64.94	20.13	QP
3	0.404	9.50	0.03	32.00	41.53	47.77	6.24	Average
4	0.404	9.50	0.03	36.60	46.13	57.77	11.64	QP
5	0.513	9.50	0.03	22.40	31.93	46.00	14.07	Average
6	0.513	9.50	0.03	30.31	39.84	56.00	16.16	QP
7	1.000	9.49	0.05	22.10	31.64	46.00	14.36	Average
8	1.000	9.49	0.05	30.23	39.77	56.00	16.23	QP
9	1.441	9.49	0.06	21.30	30.85	46.00	15.15	Average
10	1.441	9.49	0.06	30.89	40.44	56.00	15.56	QP
11	2.155	9.49	0.07	21.70	31.26	46.00	14.74	Average
12	2.155	9.49	0.07	30.58	40.14	56.00	15.86	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

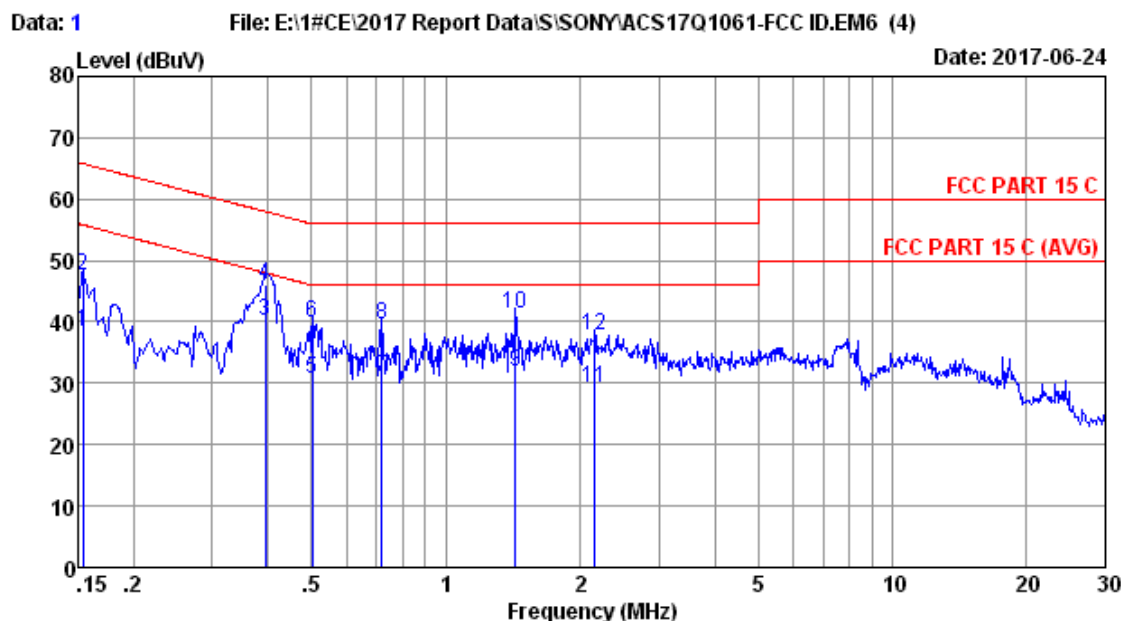

Site no :1# CE
Dis./Lisn :2017 LISN ENV216-N
Limit :FCC PART 15 C
Env./Ins. :22.8°C/56%
EUT :M/N:LF-S50G
Power Rating :AC 120V/60Hz
Test Mode :BT Tx Mode

Data No :1
LISN phase:
Engineer :Garry

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.154	9.48	0.02	28.90	38.40	55.78	17.38	Average
2	0.154	9.48	0.02	38.13	47.63	65.78	18.15	QP
3	0.393	9.42	0.03	30.70	40.15	47.99	7.84	Average
4	0.393	9.42	0.03	36.60	46.05	57.99	11.94	QP
5	0.502	9.31	0.03	21.50	30.84	46.00	15.16	Average
6	0.502	9.31	0.03	30.45	39.79	56.00	16.21	QP
7	0.720	9.32	0.04	21.60	30.96	46.00	15.04	Average
8	0.720	9.32	0.04	30.12	39.48	56.00	16.52	QP
9	1.433	9.35	0.06	22.60	32.01	46.00	13.99	Average
10	1.433	9.35	0.06	31.80	41.21	56.00	14.79	QP
11	2.155	9.37	0.07	19.80	29.24	46.00	16.76	Average
12	2.155	9.37	0.07	28.25	37.69	56.00	18.31	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipment

Frequency range: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Mar.28,17	1 Year
2.	Spectrum Analyzer	Agilent	N9010A	MY52220804	Oct.15,16	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR7	101547	Apr.22,17	1 Year
4.	Amplifier	HP	8447D	2648A04738	Apr.22,17	1 Year
5.	Bi-log Antenna	TESEQ	CBL6112D	35375	Aug.03,16	1 Year
6.	RF Cable	MIYAZAKI	CFD400NL-LW	No.3	Sep.26.16	1 Year
7.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.22,17	1 Year
8.	Attenuator	EMCI	EMCI-N-6-06	AT-N0639	Sep.26.16	1 Year
9.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.


Frequency range: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Mar.28,17	1 Year
2.	Spectrum Analyzer	Agilent	N9010A	MY52220804	Oct.15,16	1 Year
3.	Amplifier	Agilent	83017A	MY53270084	May.08,17	1 Year
4.	RF Cable	Hubersuhner	SUCOFLEX104	274094/4	Apr.22,17	1 Year
5.	Horn Antenna	ETS	3115	9510-4580	Nov.16,16	1 Year
6.	Horn Antenna	ETS	3116	00060089	Nov.16,16	1 Year
7.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A


Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

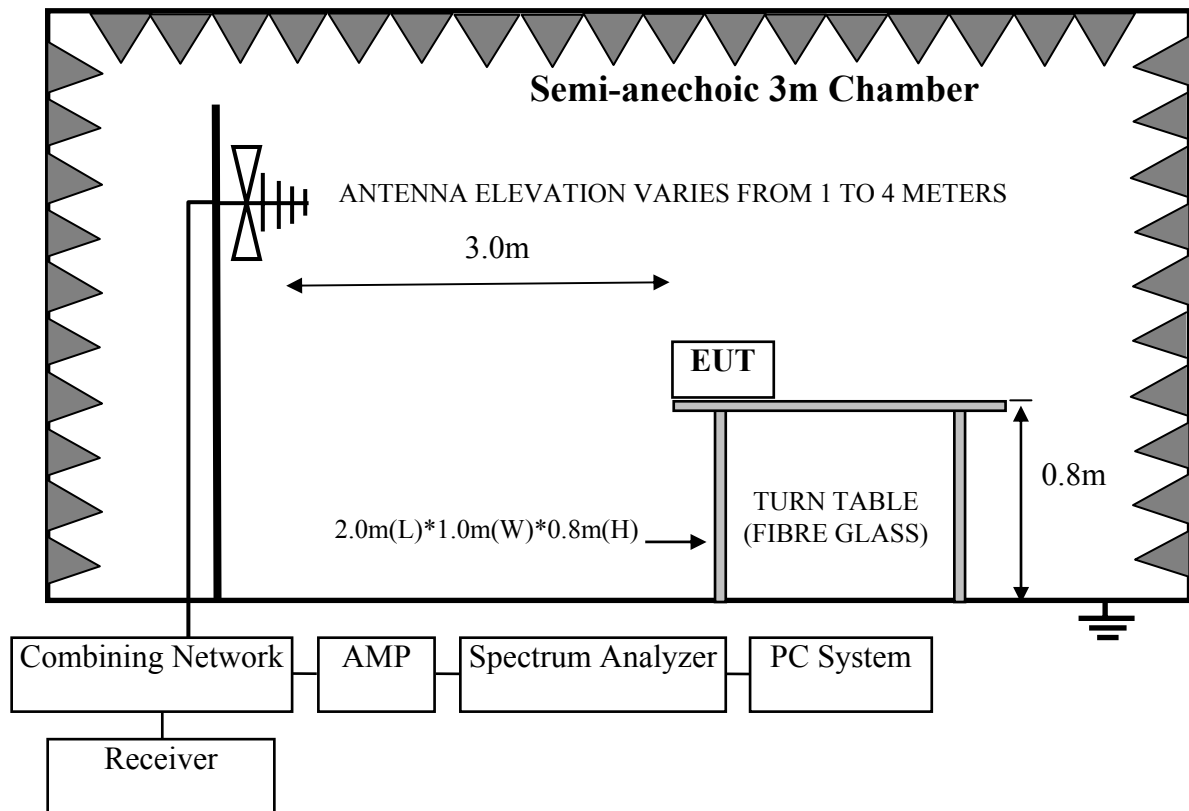

For frequency range 1GHz-25GHz

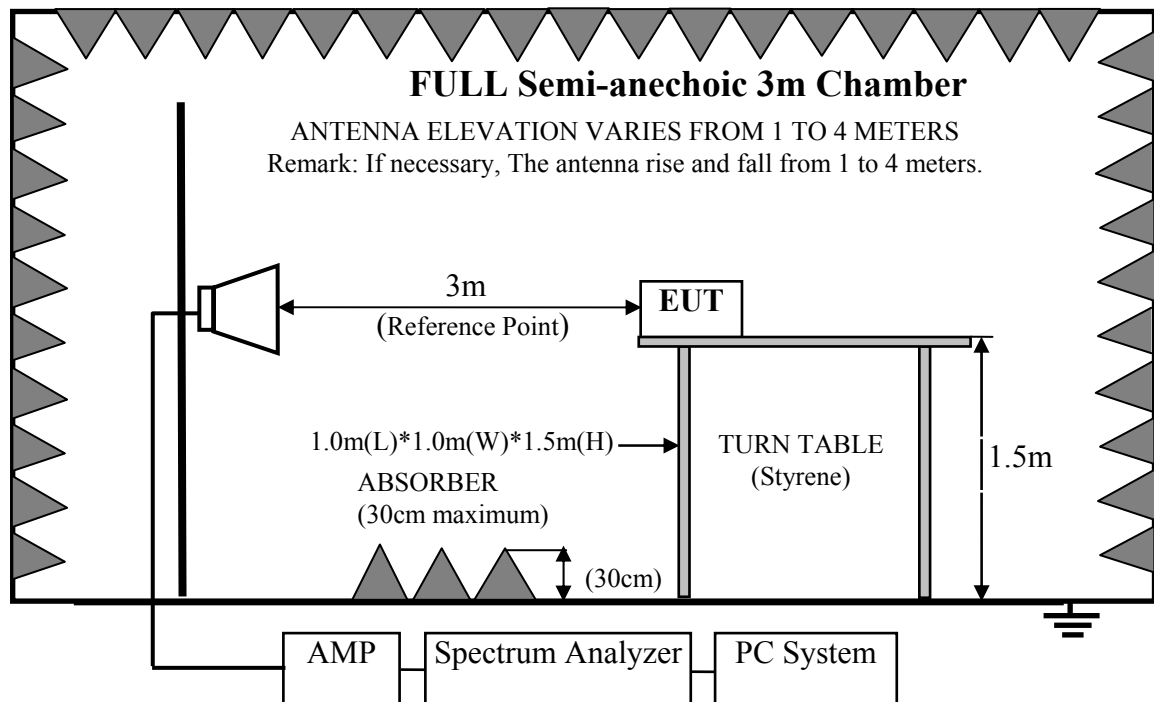

4.3. Radiated Emission Limit Standard:

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. Wireless Speaker (EUT)

Model Number : LF-S50G
Serial Number : N/A

4.5. Operating Condition of EUT

4.5.1. Setup the EUT and simulator as shown as Section 4.2.

4.5.2. Turn on the power of all equipments.

4.5.3. Let EUT work in BT 3.0 Tx mode.

4.6. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as the test photo indicated.

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz

This device is pulse Modulated, a duty cycle factor was used to calculated average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.



4.7.Radiated Emission Test Results

PASS.

All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.

Note: The duty cycle factor for calculate average level is -30.722dB, and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.

Duty cycle factor = $20\log(\text{Dwell time}/100\text{ms}) = -30.722\text{dB}$

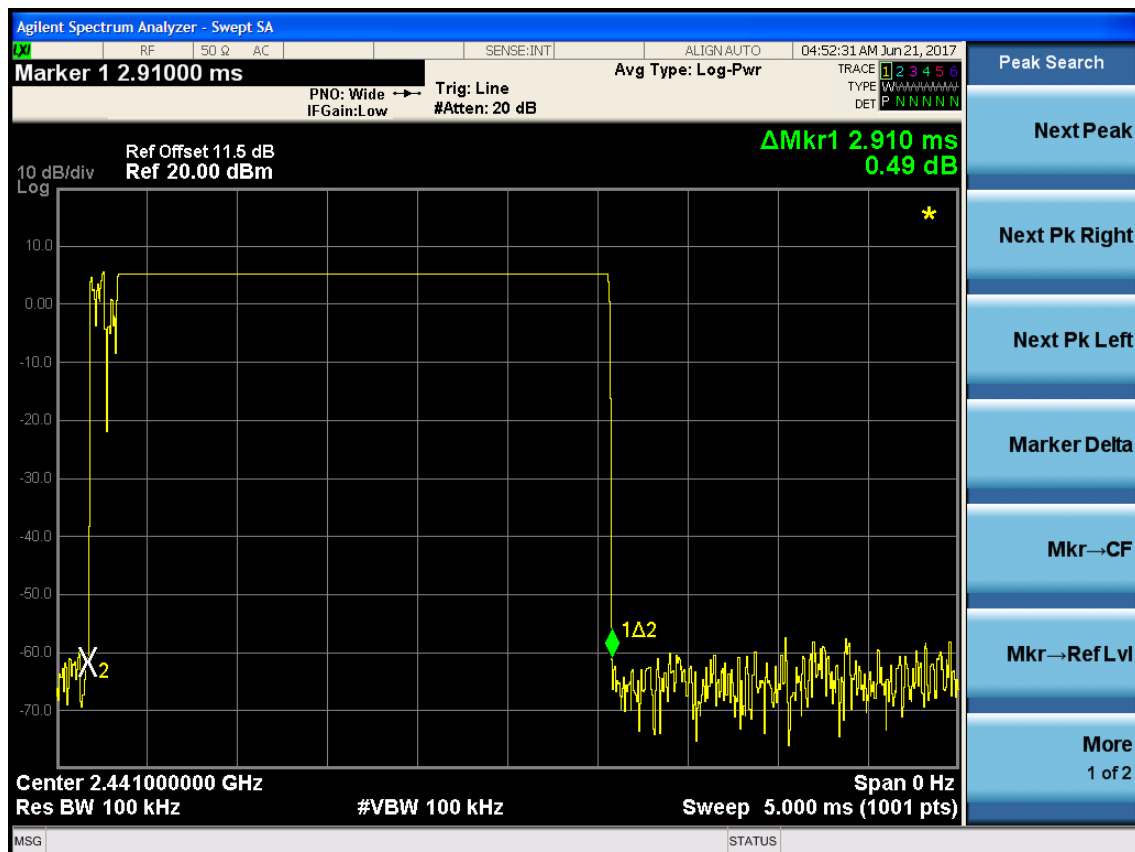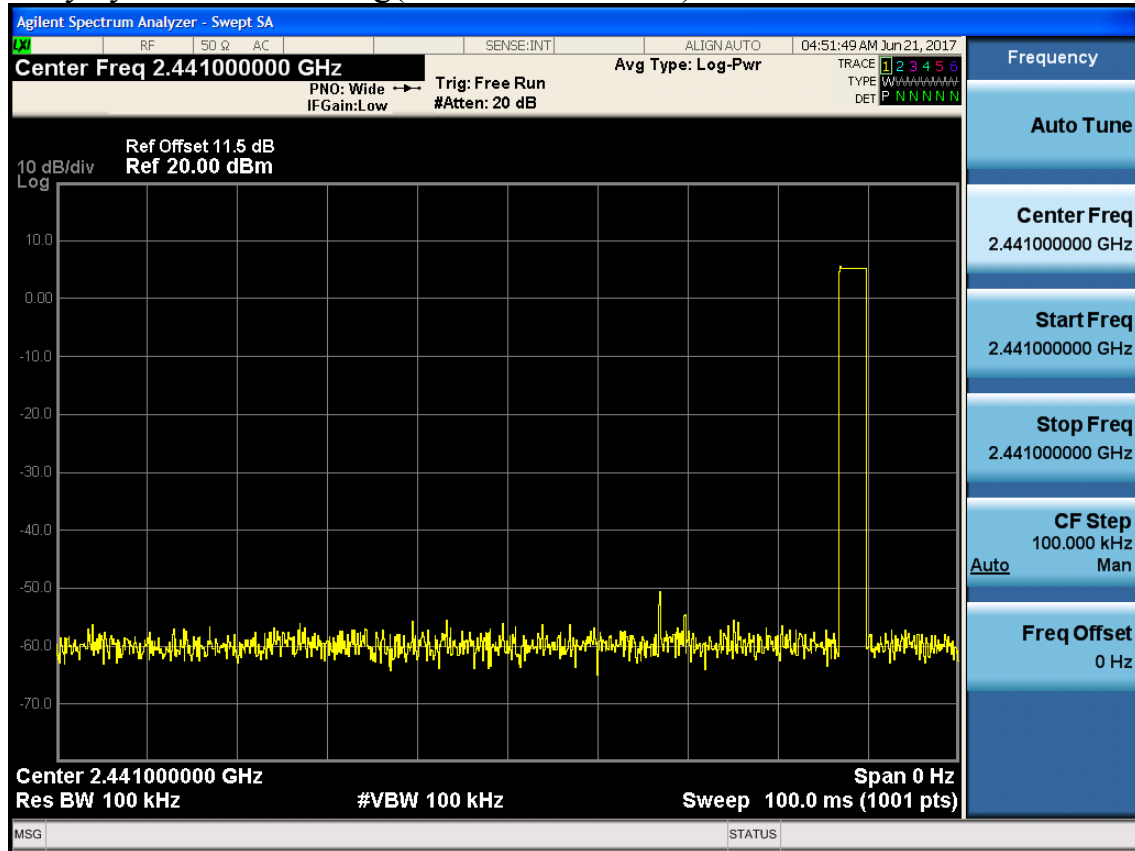


Frequency: 30MHz~1GHz

Data: 1

File: E:\2017 Report Data\S\Sony\ACS17Q1061-FCC-RF.EM6 (14)


Date: 2017-07-04

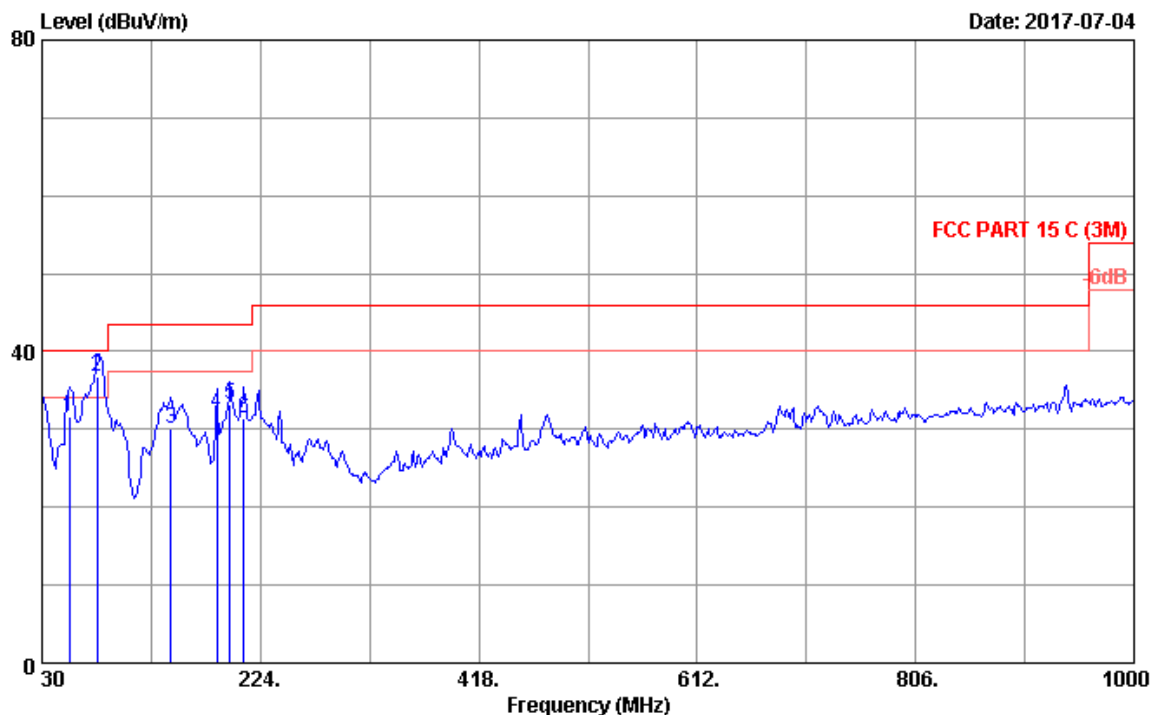

Site no. : 3m Chamber Data no. : 1
Dis. / Ant. : 3m 2017 CBL6112D 35375 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C (3M)
Env. / Ins. : 21.4°C/54% Engineer : Garry
EUT : Wireless Speaker M/N:LF-S50G
Power rating : AC 120V/60Hz
Test Mode : BT 3.0 TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	54.250	8.70	6.67	16.17	31.54	40.00	8.46	QP
2	78.649	7.63	6.84	22.40	36.87	40.00	3.13	QP
3	144.460	11.68	7.12	11.22	30.02	43.50	13.48	QP
4	185.200	10.20	7.31	14.62	32.13	43.50	11.37	QP
5	196.840	10.44	7.37	15.35	33.16	43.50	10.34	QP
6	209.450	10.74	7.42	13.27	31.43	43.50	12.07	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

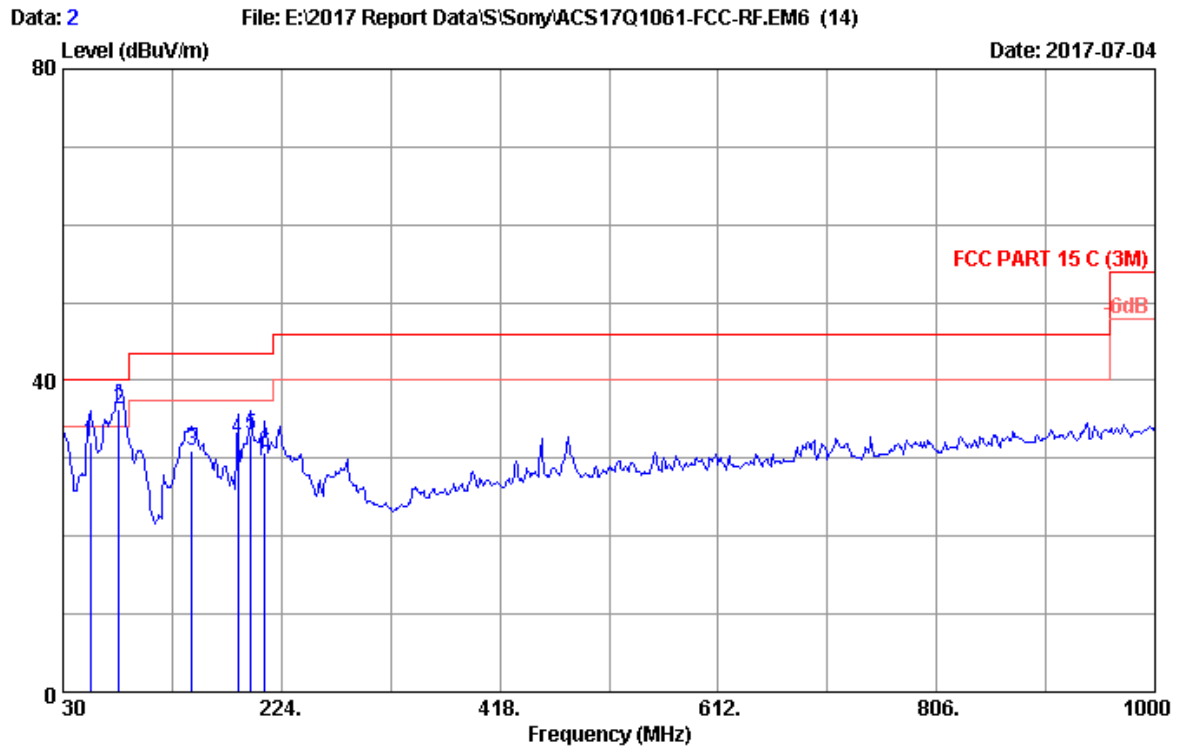


Site no. : 3m Chamber Data no. : 2
Dis. / Ant. : 3m 2017 CBL6112D 35375 Ant. pol. : VERTICAL
Limit : FCC PART 15 C (3M)
Env. / Ins. : 21.4°C/54% Engineer : Garry
EUT : Wireless Speaker M/N:LF-S50G
Power rating : AC 120V/60Hz
Test Mode : BT 3.0 TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	54.250	8.70	6.67	16.68	32.05	40.00	7.95	QP
2	80.031	7.70	6.84	21.81	36.35	40.00	3.65	QP
3	144.460	11.68	7.12	12.19	30.99	43.50	12.51	QP
4	185.200	10.20	7.31	15.06	32.57	43.50	10.93	QP
5	196.840	10.44	7.37	15.19	33.00	43.50	10.50	QP
6	209.450	10.74	7.42	12.60	30.76	43.50	12.74	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz

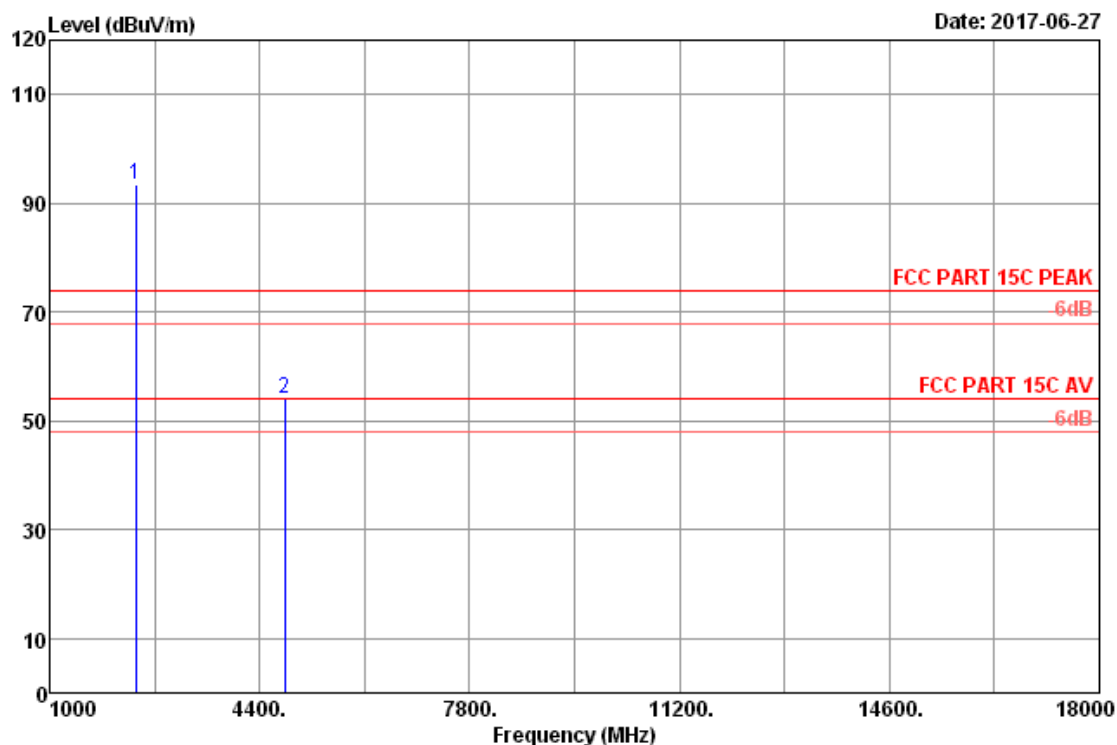


Site no. : 3m Chamber Data no. : 4
Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
EUT : Wireless Speaker
Power : DC 15V From Adaptor Input AC 120V/60Hz
Test Mode : BT3.0 GFSK 2402MHz Tx Mode
: M/N: LF-S50G


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	28.24	8.34	93.35	36.39	93.54	74.00	-19.54	Peak
2	4804.00	32.93	11.75	45.00	35.67	54.01	74.00	19.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor
2. The emission levels that are 20dB below the official
limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	Final AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4804.00	54.01	-30.722	23.288	54	Pass

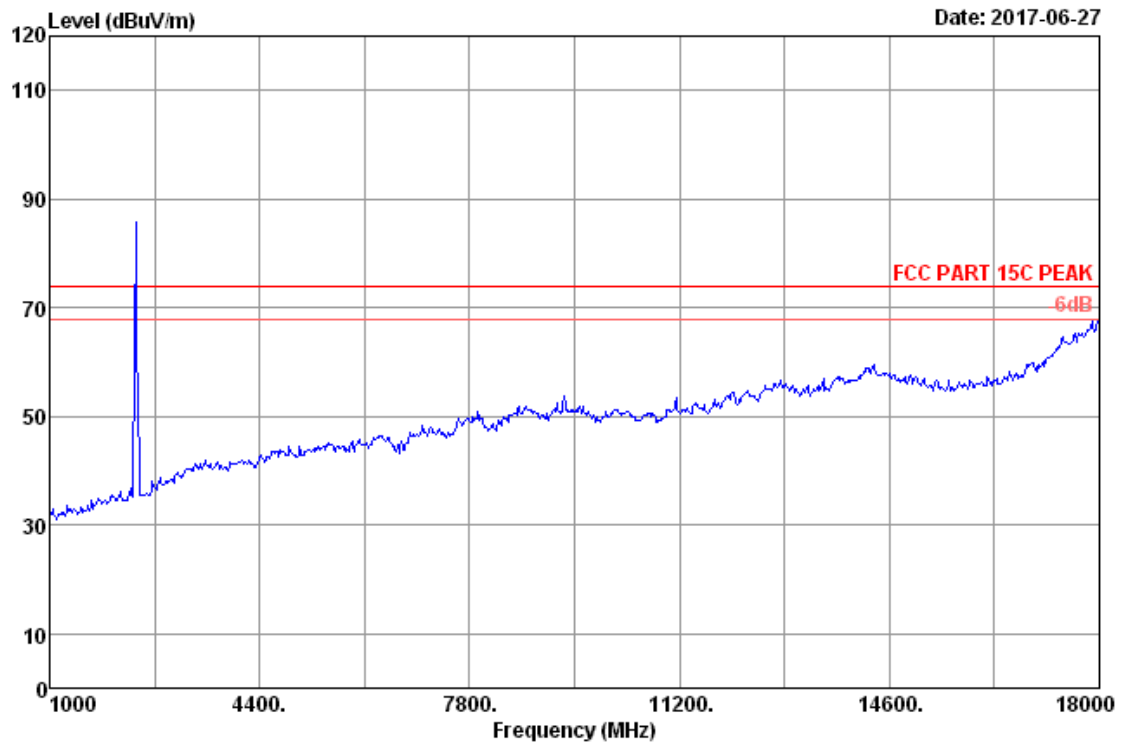


Site no.	: 3m Chamber	Data no.	: 5
Dis. / Ant.	: 3m 2016 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Pre	: 101.2kPa
Env. / Ins.	: 23.3°C/53.1%	Engineer	: zack_zhu
EUT	: Wireless Speaker		
Power	: DC 15V From Adaptor Input AC 120V/60Hz		
Test Mode	: BT3.0 GFSK 2402MHz Tx Mode		
	: M/N: LF-S50G		

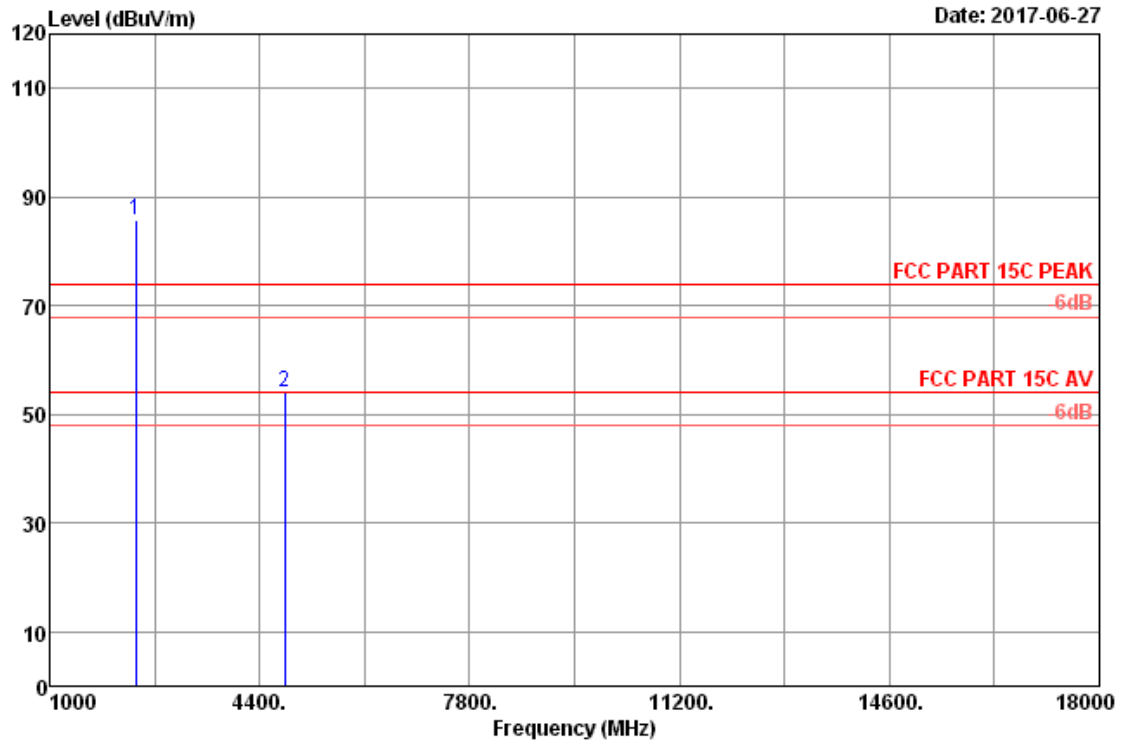


Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2402MHz Tx Mode
 : M/N: LF-S50G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	28.24	8.34	85.70	36.39	85.89	74.00	-11.89	Peak
2	4804.00	32.93	11.75	44.93	35.67	53.94	74.00	20.06	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

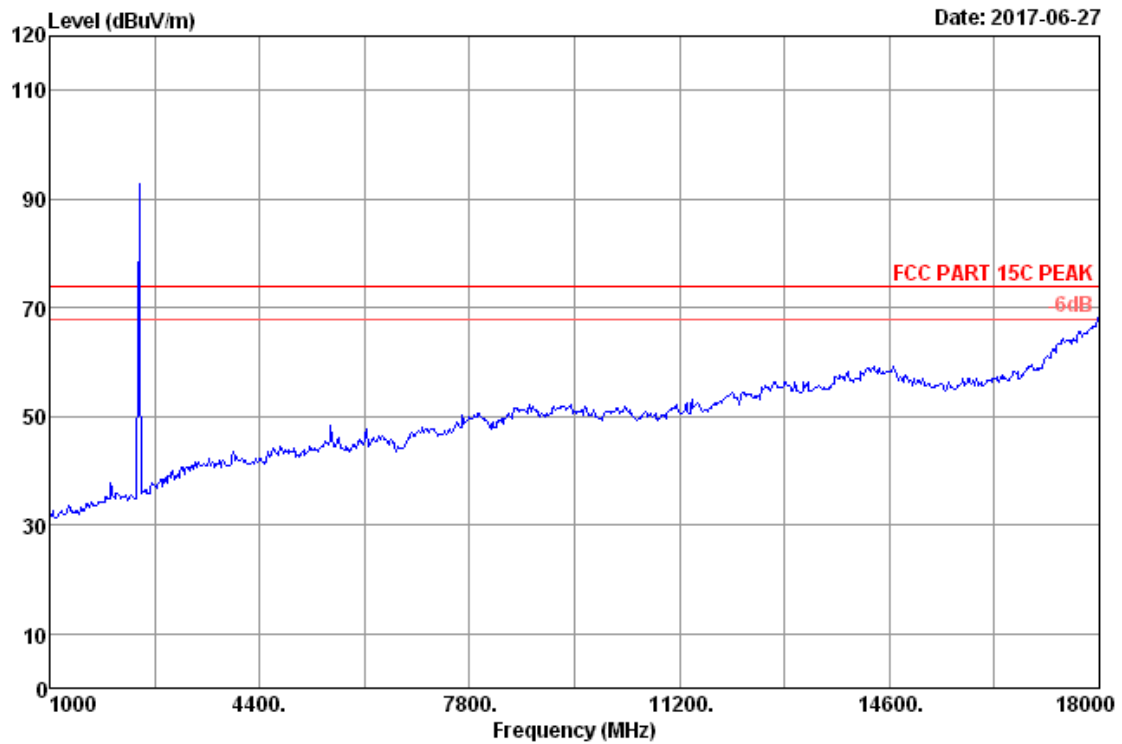


Site no.	: 3m Chamber	Data no.	: 7
Dis. / Ant.	: 3m 2016 3115(4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK	Pre	: 101.2kPa
Env. / Ins.	: 23.3°C/53.1%	Engineer	: zack_zhu
EUT	: Wireless Speaker		
Power	: DC 15V From Adaptor Input AC 120V/60Hz		
Test Mode	: BT3.0 GFSK 2441MHz Tx Mode		
	: M/N: LF-S50G		

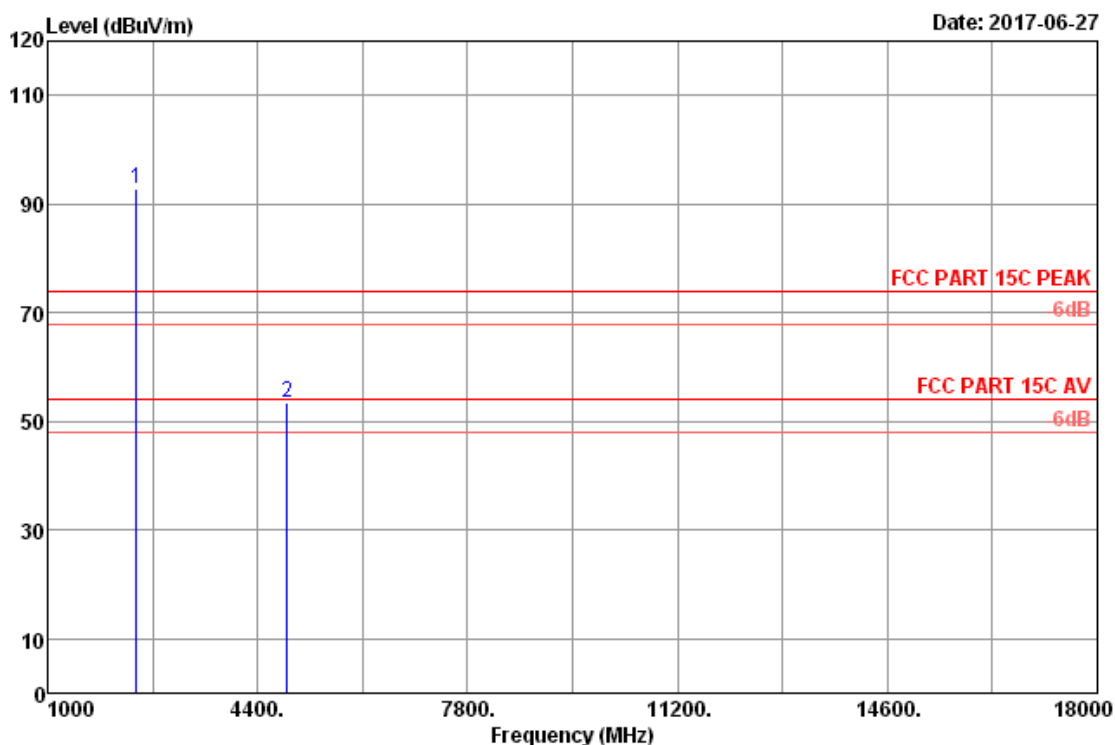


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2441MHz Tx Mode
 : M/N: LF-S50G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.26	8.38	92.40	36.38	92.66	74.00	-18.66	Peak
2	4882.00	33.12	11.80	44.15	35.69	53.38	74.00	20.62	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

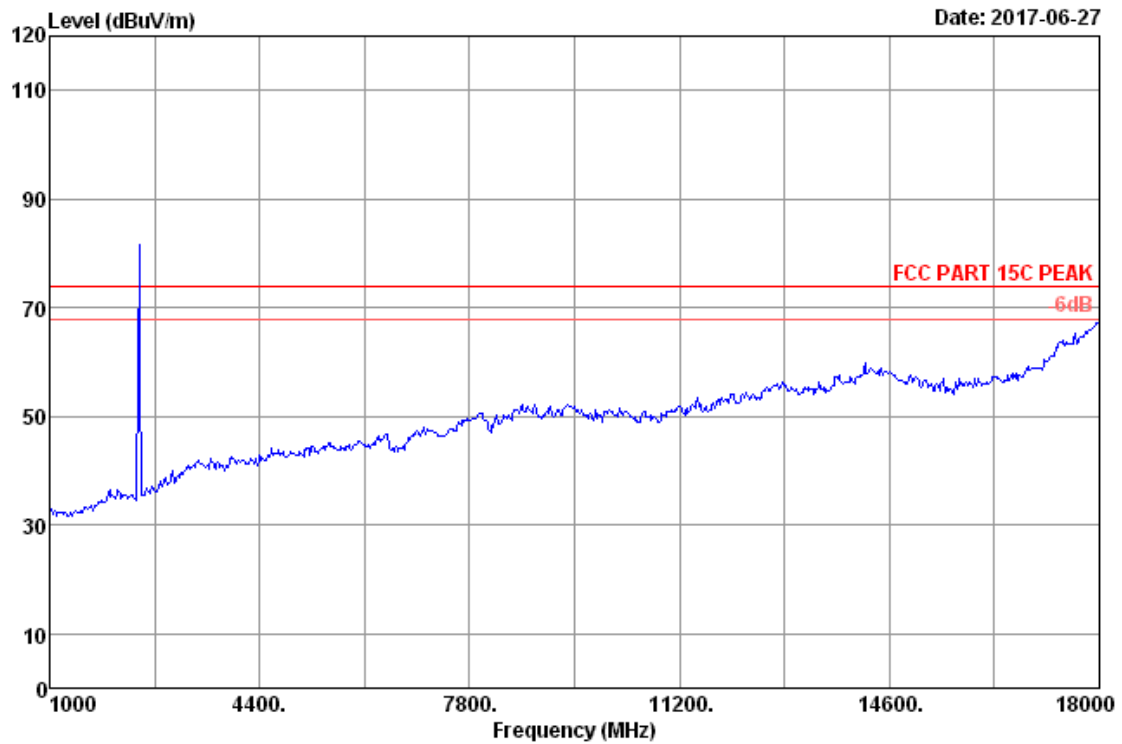


Site no.	: 3m Chamber	Data no.	: 9
Dis. / Ant.	: 3m 2016 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Pre	: 101.2kPa
Env. / Ins.	: 23.3°C/53.1%	Engineer	: zack_zhu
EUT	: Wireless Speaker		
Power	: DC 15V From Adaptor Input AC 120V/60Hz		
Test Mode	: BT3.0 GFSK 2441MHz Tx Mode		
	: M/N: LF-S50G		

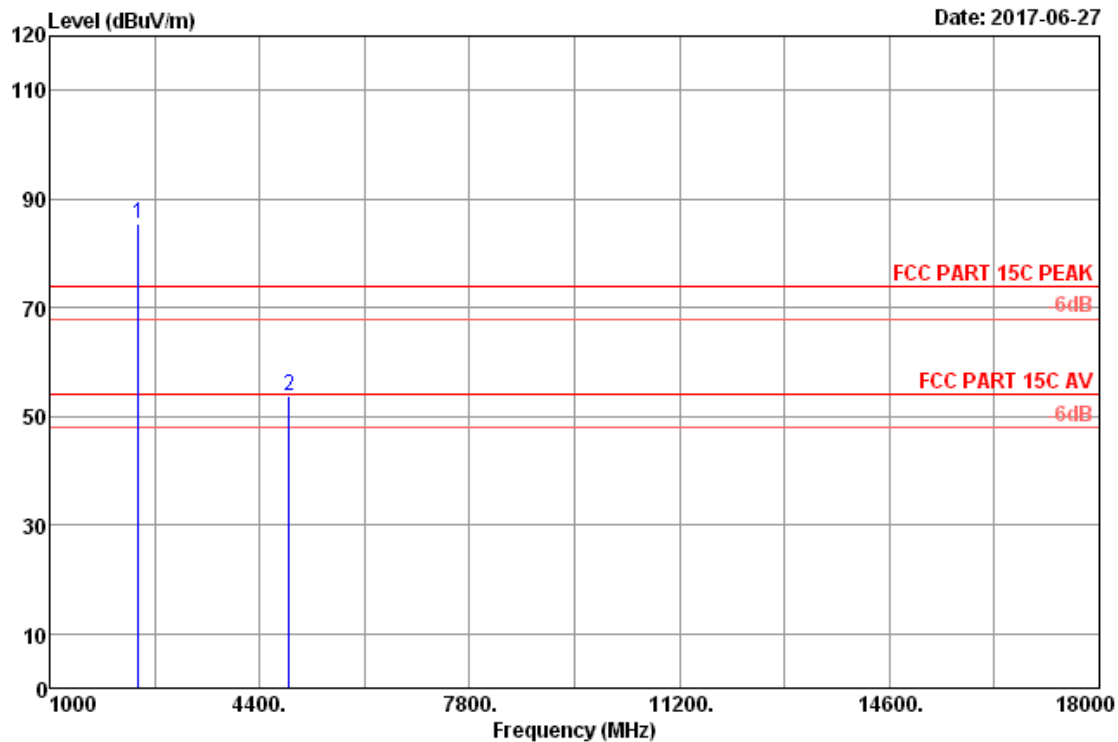


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2441MHz Tx Mode
 : M/N: LF-S50G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.26	8.38	85.20	36.38	85.46	74.00	-11.46	Peak
2	4882.00	33.12	11.80	44.42	35.69	53.65	74.00	20.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

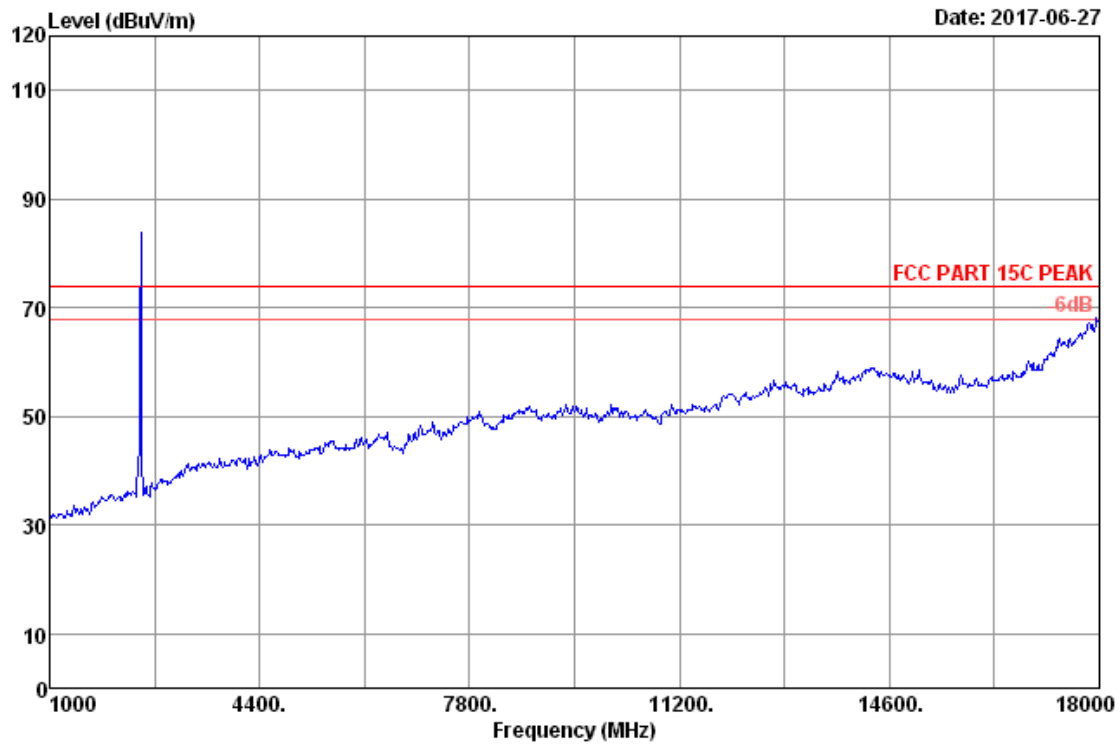


Site no.	: 3m Chamber	Data no.	: 11
Dis. / Ant.	: 3m 2016 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Pre	: 101.2kPa
Env. / Ins.	: 23.3°C/53.1%	Engineer	: zack_zhu
EUT	: Wireless Speaker		
Power	: DC 15V From Adaptor Input AC 120V/60Hz		
Test Mode	: BT3.0 GFSK 2480MHz Tx Mode		
	: M/N: LF-S50G		

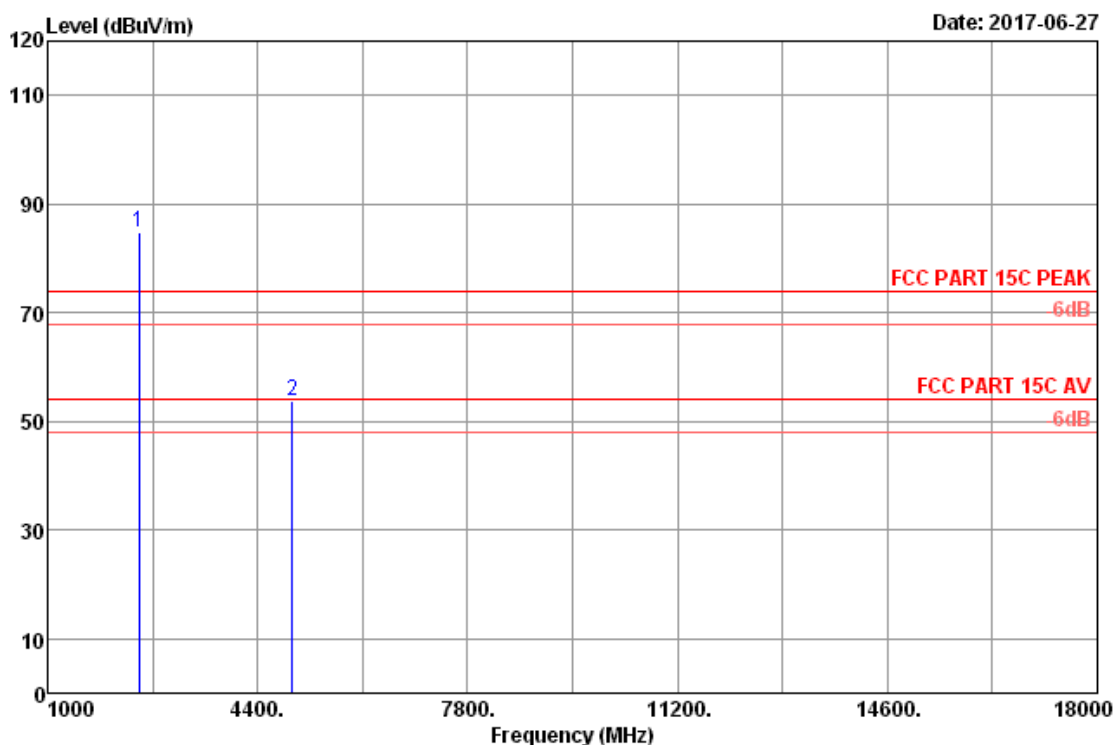


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2480MHz Tx Mode
 : M/N: LF-S50G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.29	8.42	84.35	36.38	84.68	74.00	-10.68	Peak
2	4960.00	33.30	11.85	44.17	35.71	53.61	74.00	20.39	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

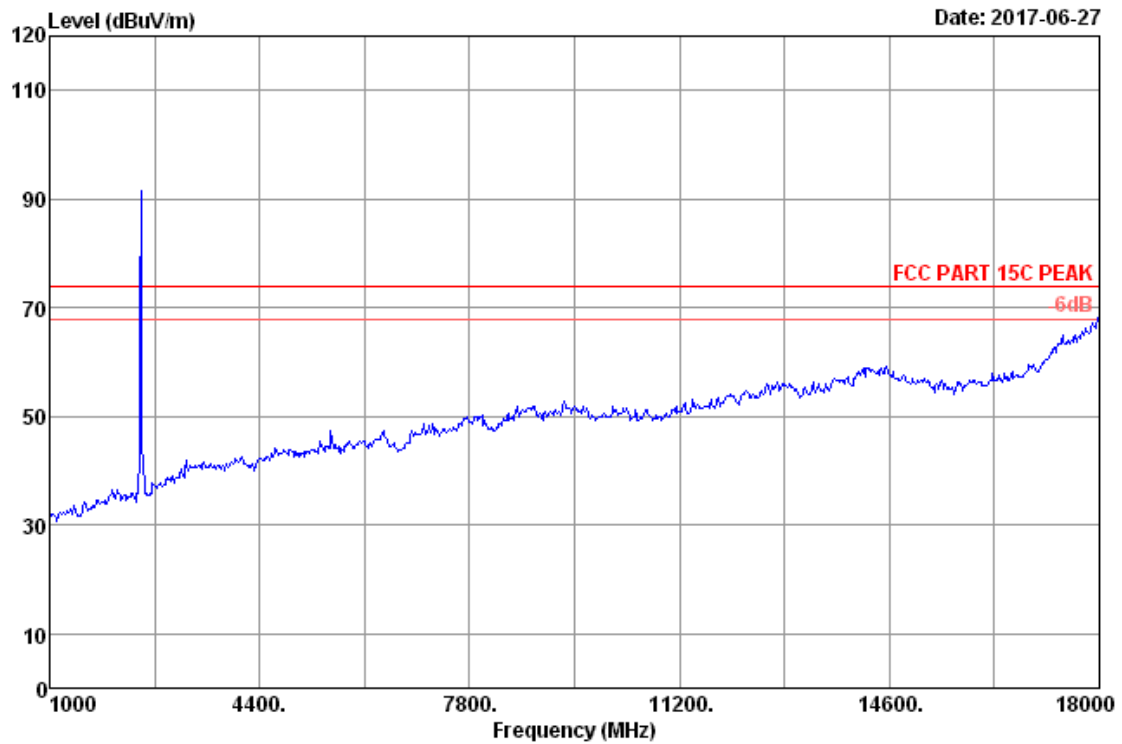

Site no.	: 3m Chamber	Data no.	: 13
Dis. / Ant.	: 3m 2016 3115(4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK	Pre	: 101.2kPa
Env. / Ins.	: 23.3°C/53.1%	Engineer	: zack_zhu
EUT	: Wireless Speaker		
Power	: DC 15V From Adaptor Input AC 120V/60Hz		
Test Mode	: BT3.0 GFSK 2480MHz Tx Mode		
	: M/N: LF-S50G		

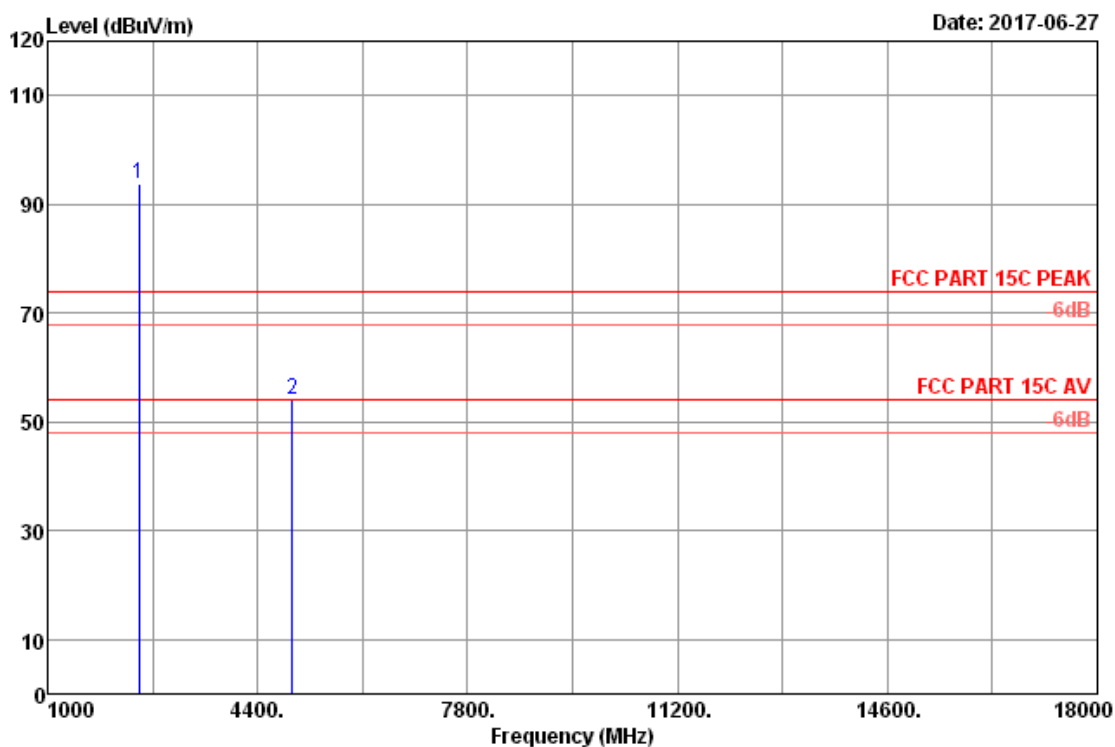


Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2480MHz Tx Mode
 : M/N: LF-S50G


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.29	8.42	93.29	36.38	93.62	74.00	-19.62	Peak
2	4960.00	33.30	11.85	44.68	35.71	54.12	74.00	19.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	Final AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4960.00	54.12	-30.722	23.398	54	Pass

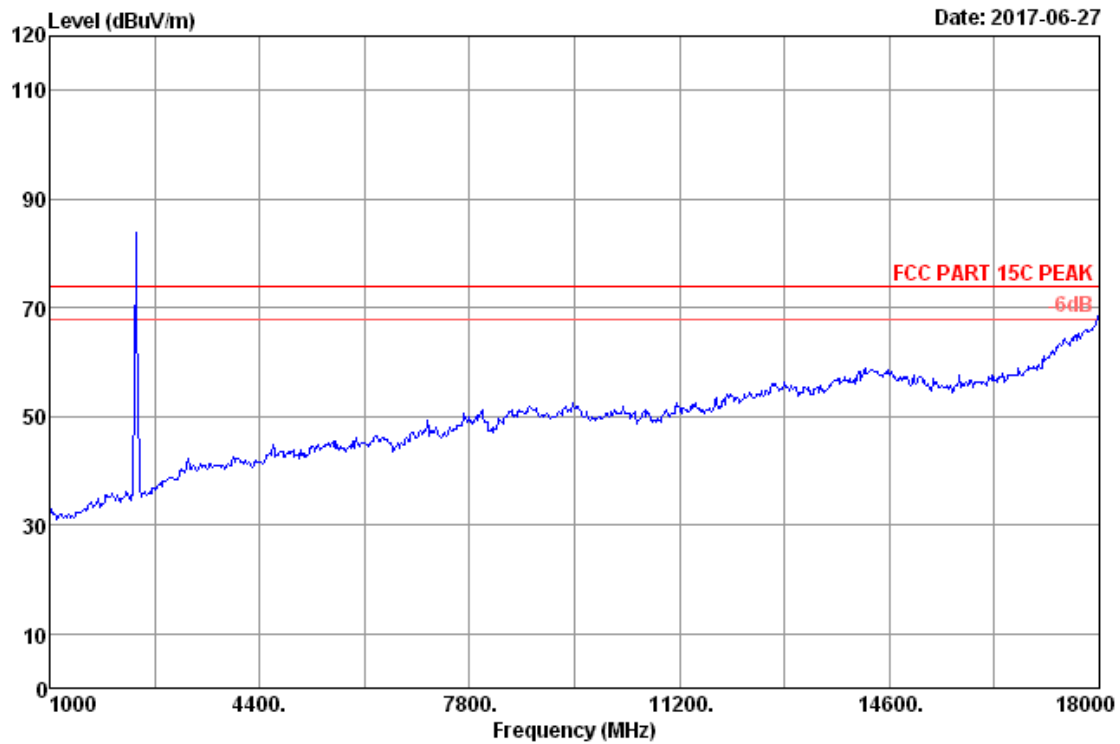

Site no.	: 3m Chamber	Data no.	: 17
Dis. / Ant.	: 3m 2016 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Pre	: 101.2kPa
Env. / Ins.	: 23.3°C/53.1%	Engineer	: zack_zhu
EUT	: Wireless Speaker		
Power	: DC 15V From Adaptor Input AC 120V/60Hz		
Test Mode	: BT3.0 8-DPSK 2402MHz Tx Mode		
	: M/N: LF-S50G		

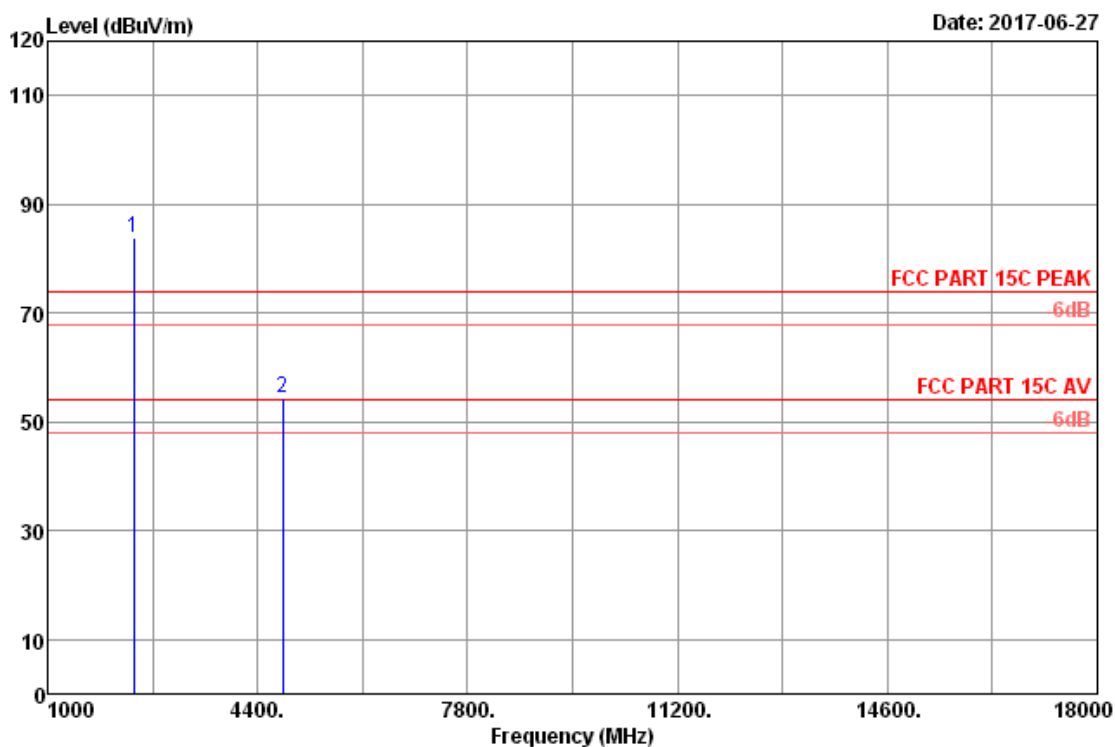


Site no. : 3m Chamber Data no. : 18
Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
EUT : Wireless Speaker
Power : DC 15V From Adaptor Input AC 120V/60Hz
Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode
: M/N: LF-S50G


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	28.24	8.34	83.63	36.39	83.82	74.00	-9.82	Peak
2	4804.00	32.93	11.75	45.43	35.67	54.44	74.00	19.56	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor
2. The emission levels that are 20dB below the official
limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	Final AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
4804.00	54.44	-30.722	23.718	54	Pass

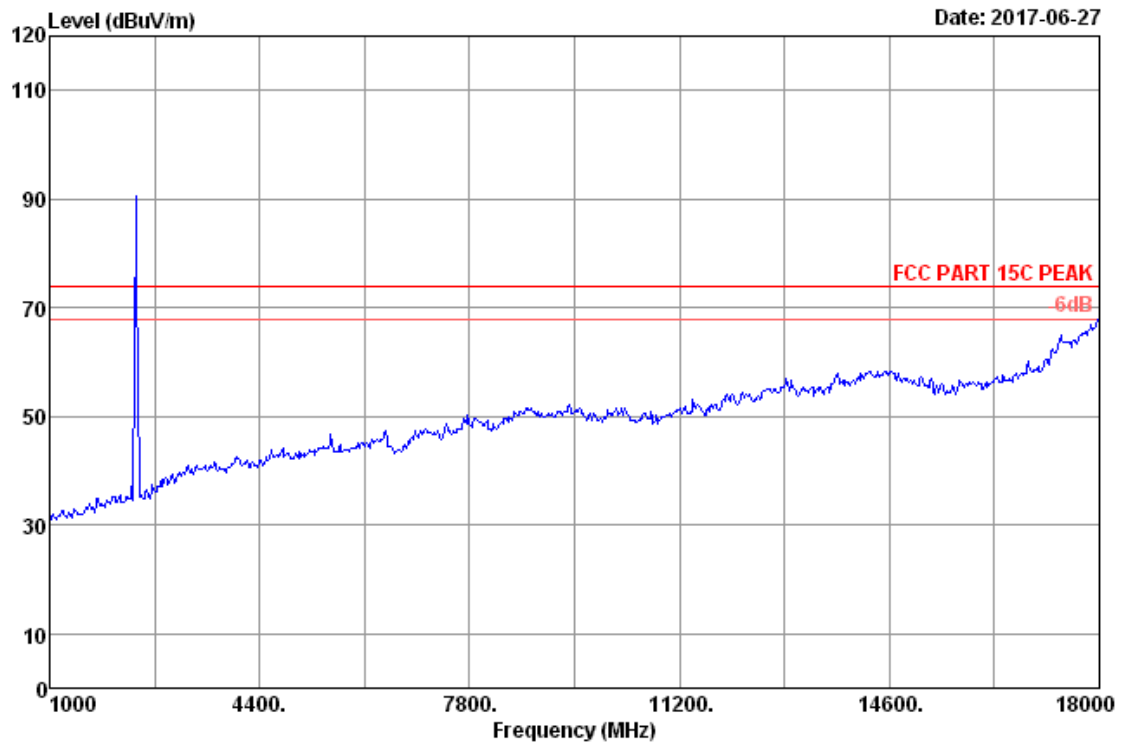

Site no.	: 3m Chamber	Data no.	: 19
Dis. / Ant.	: 3m 2016 3115(4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK	Pre	: 101.2kPa
Env. / Ins.	: 23.3°C/53.1%	Engineer	: zack_zhu
EUT	: Wireless Speaker		
Power	: DC 15V From Adaptor Input AC 120V/60Hz		
Test Mode	: BT3.0 8-DPSK 2402MHz Tx Mode		
	: M/N: LF-S50G		

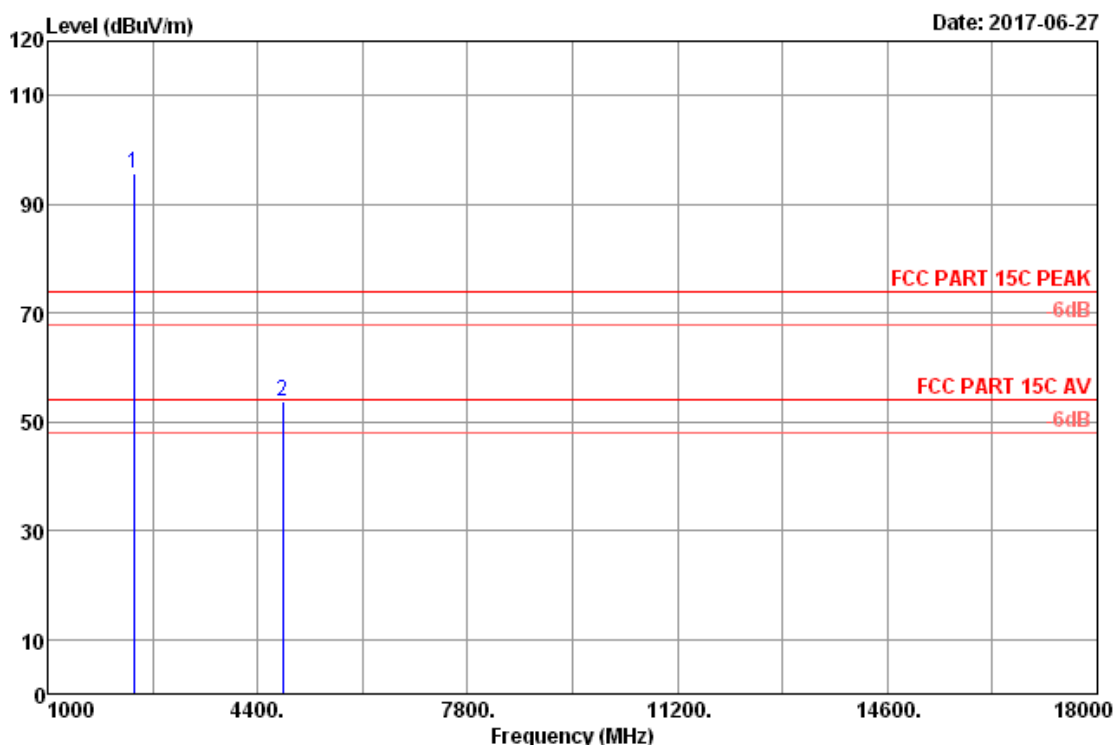


Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode
 : M/N: LF-S50G


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	28.24	8.34	95.47	36.39	95.66	74.00	-21.66	Peak
2	4804.00	32.93	11.75	44.63	35.67	53.64	74.00	20.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	Final AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2402.00	95.66	-30.722	64.938	94	Pass

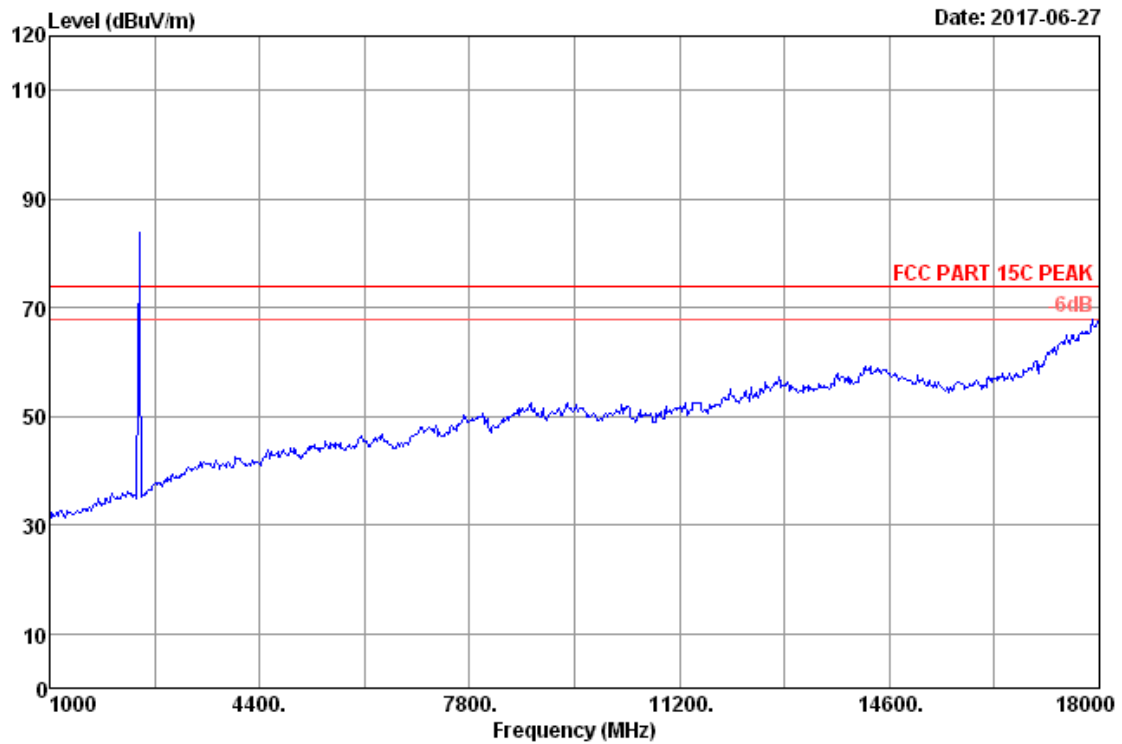


Site no.	: 3m Chamber	Data no.	: 23
Dis. / Ant.	: 3m 2016 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Pre	: 101.2kPa
Env. / Ins.	: 23.3°C/53.1%	Engineer	: zack_zhu
EUT	: Wireless Speaker		
Power	: DC 15V From Adaptor Input AC 120V/60Hz		
Test Mode	: BT3.0 8-DPSK 2441MHz Tx Mode		
	: M/N: LF-S50G		

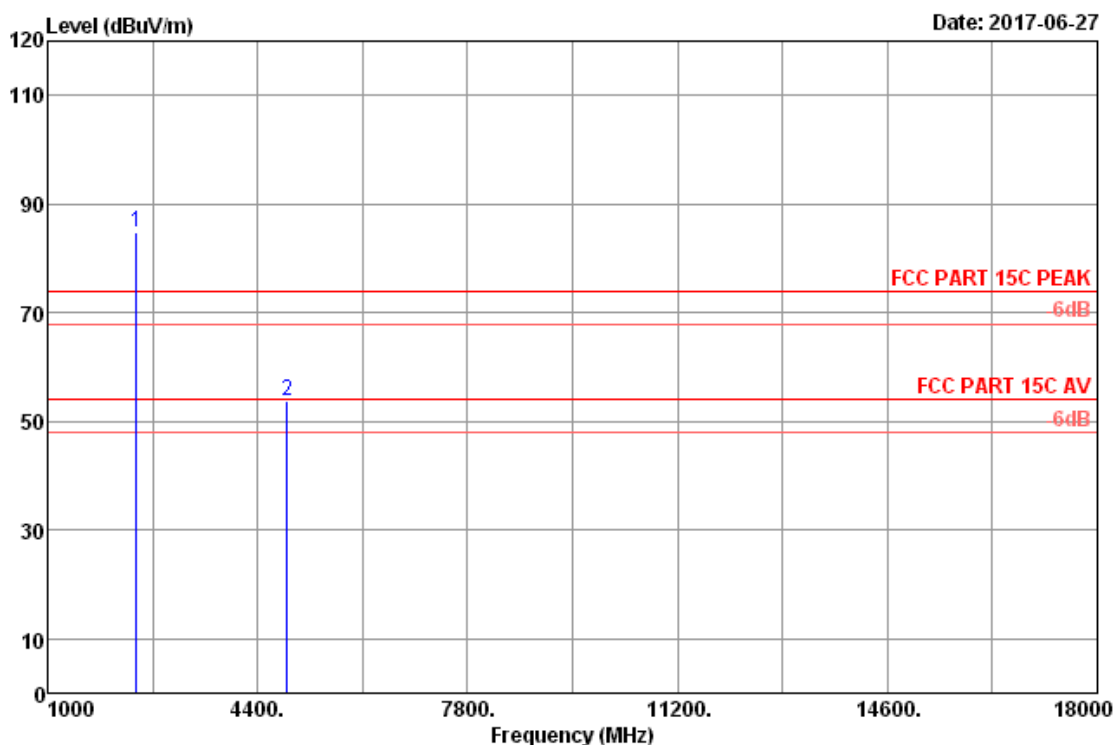


Site no. : 3m Chamber Data no. : 24
Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK Pre : 101.2kPa
Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
EUT : Wireless Speaker
Power : DC 15V From Adaptor Input AC 120V/60Hz
Test Mode : BT3.0 8-DPSK 2441MHz Tx Mode
: M/N: LF-S50G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.26	8.38	84.56	36.38	84.82	74.00	-10.82	Peak
2	4882.00	33.12	11.80	44.60	35.69	53.83	74.00	20.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
-Amp Factor
2. The emission levels that are 20dB below the official
limit are not reported.

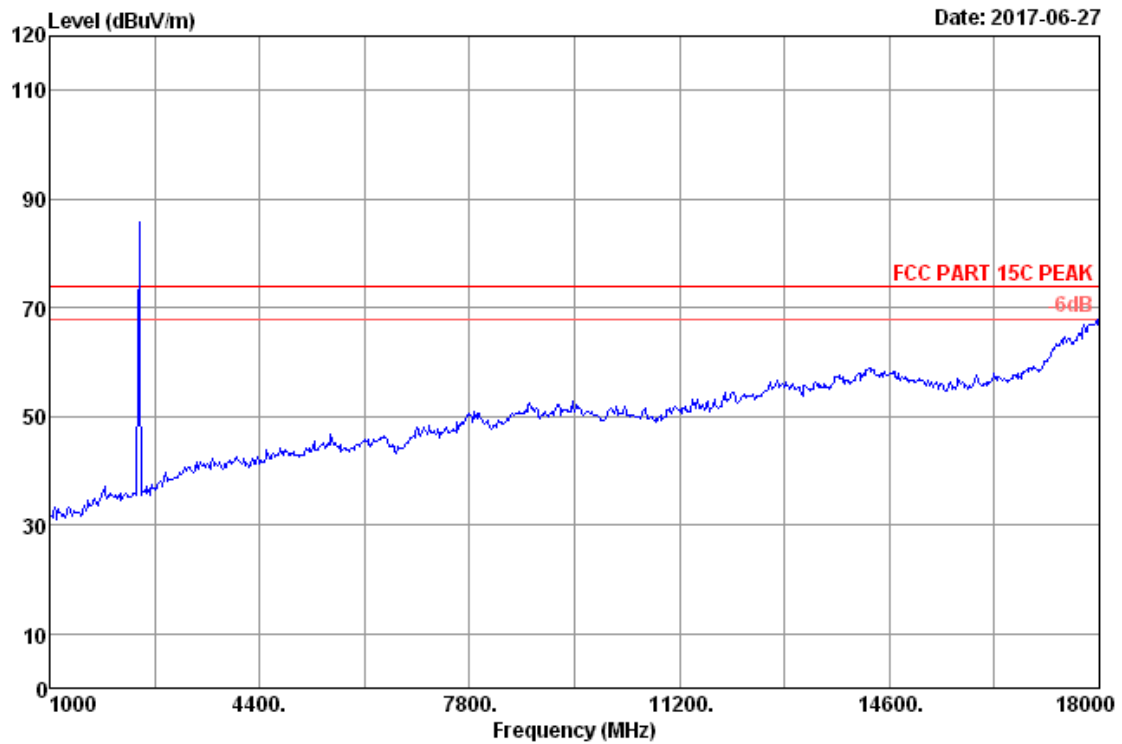


Site no.	: 3m Chamber	Data no.	: 25
Dis. / Ant.	: 3m 2016 3115(4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK	Pre	: 101.2kPa
Env. / Ins.	: 23.3°C/53.1%	Engineer	: zack_zhu
EUT	: Wireless Speaker		
Power	: DC 15V From Adaptor Input AC 120V/60Hz		
Test Mode	: BT3.0 8-DPSK 2441MHz Tx Mode		
	: M/N: LF-S50G		

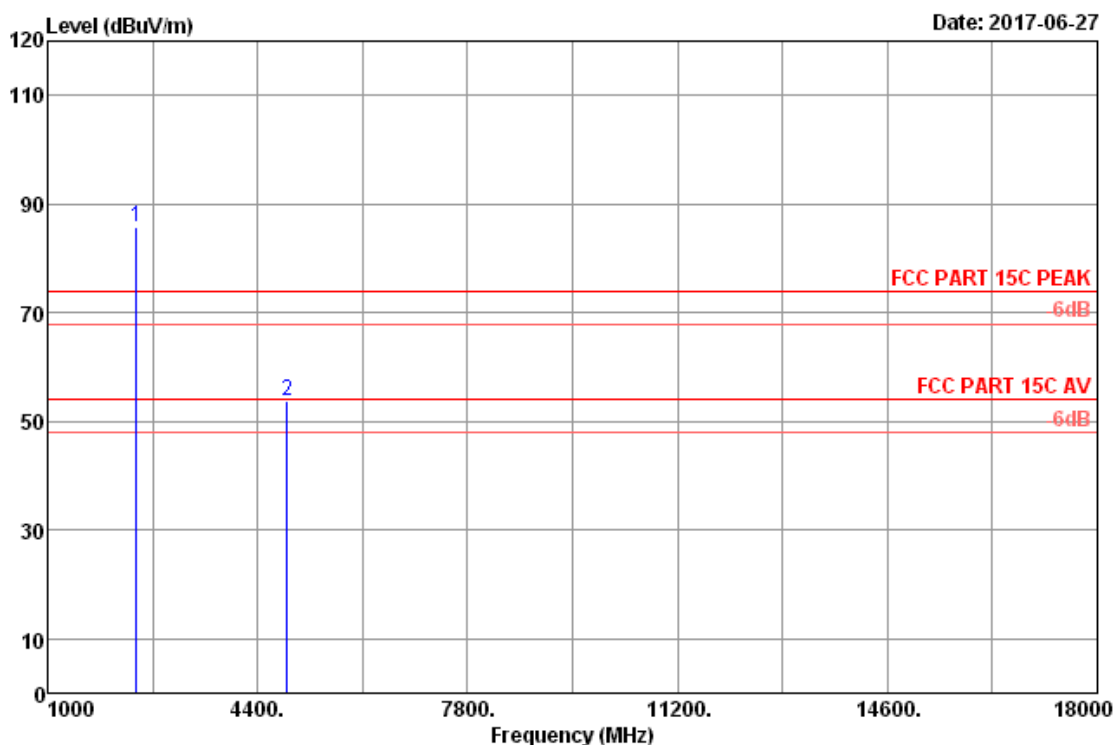


Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2441MHz Tx Mode
 : M/N: LF-S50G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.26	8.38	85.53	36.38	85.79	74.00	-11.79	Peak
2	4882.00	33.12	11.80	44.45	35.69	53.68	74.00	20.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

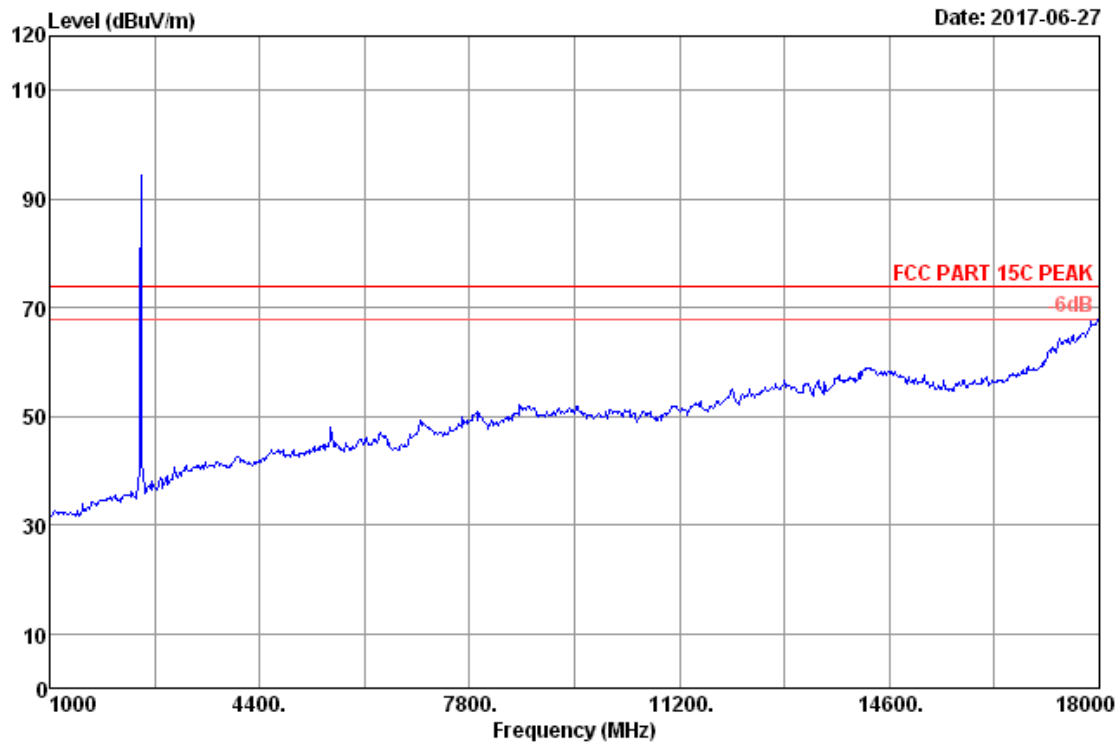

Site no.	: 3m Chamber	Data no.	: 27
Dis. / Ant.	: 3m 2016 3115(4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK	Pre	: 101.2kPa
Env. / Ins.	: 23.3°C/53.1%	Engineer	: zack_zhu
EUT	: Wireless Speaker		
Power	: DC 15V From Adaptor Input AC 120V/60Hz		
Test Mode	: BT3.0 8-DPSK 2480MHz Tx Mode		
	: M/N: LF-S50G		

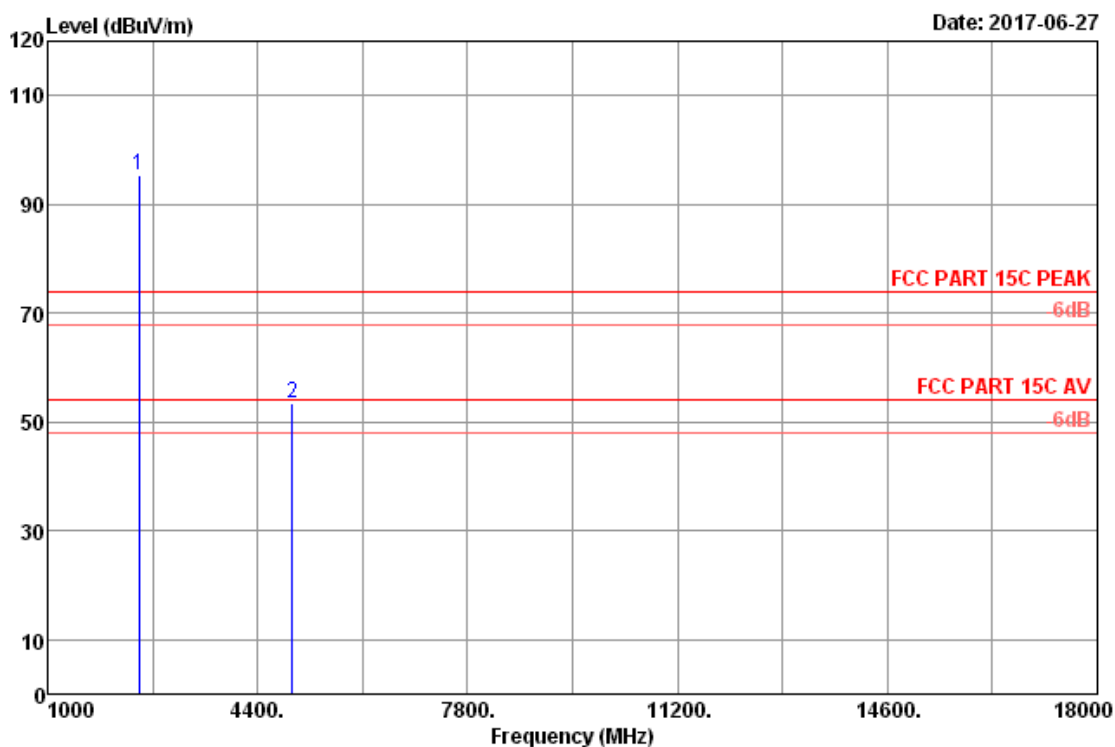


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode
 : M/N: LF-S50G


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.29	8.42	95.18	36.38	95.51	74.00	-21.51	Peak
2	4960.00	33.30	11.85	44.04	35.71	53.48	74.00	20.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	Final AV level (dBuV/m)	Limit(dBuV/m)	Conclusion
2480.00	95.51	-30.722	64.788	94	Pass

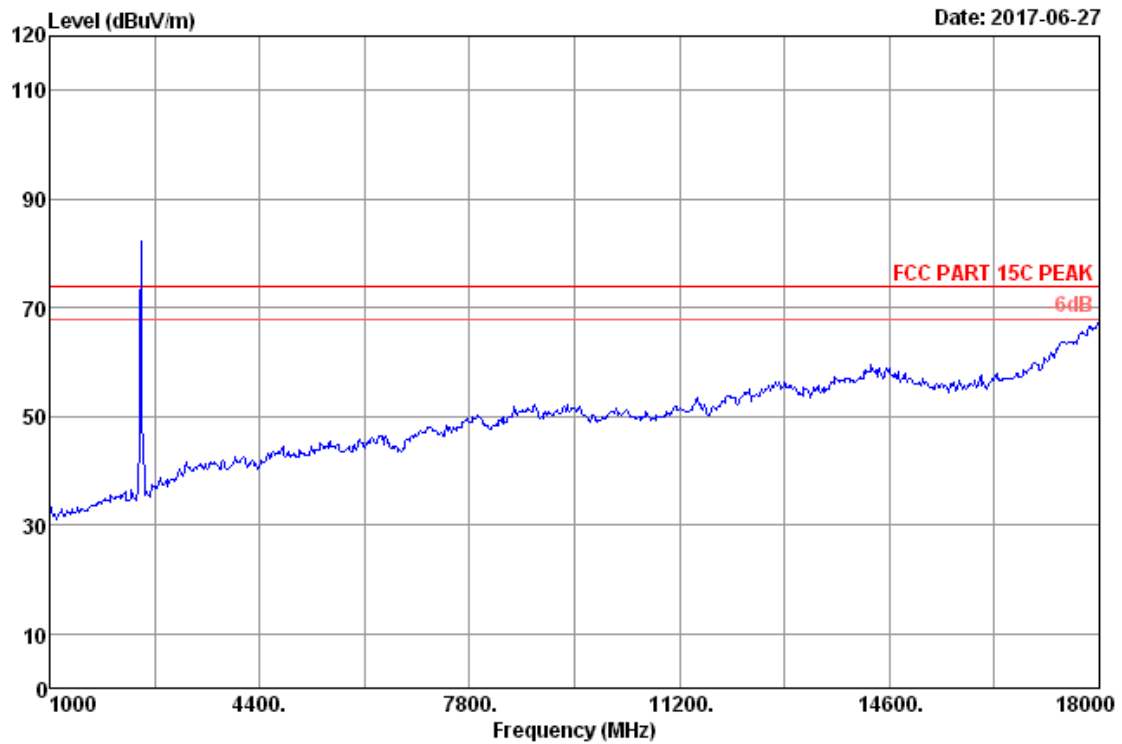

Site no.	: 3m Chamber	Data no.	: 29
Dis. / Ant.	: 3m 2016 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK	Pre	: 101.2kPa
Env. / Ins.	: 23.3°C/53.1%	Engineer	: zack_zhu
EUT	: Wireless Speaker		
Power	: DC 15V From Adaptor Input AC 120V/60Hz		
Test Mode	: BT3.0 8-DPSK 2480MHz Tx Mode		
	: M/N: LF-S50G		

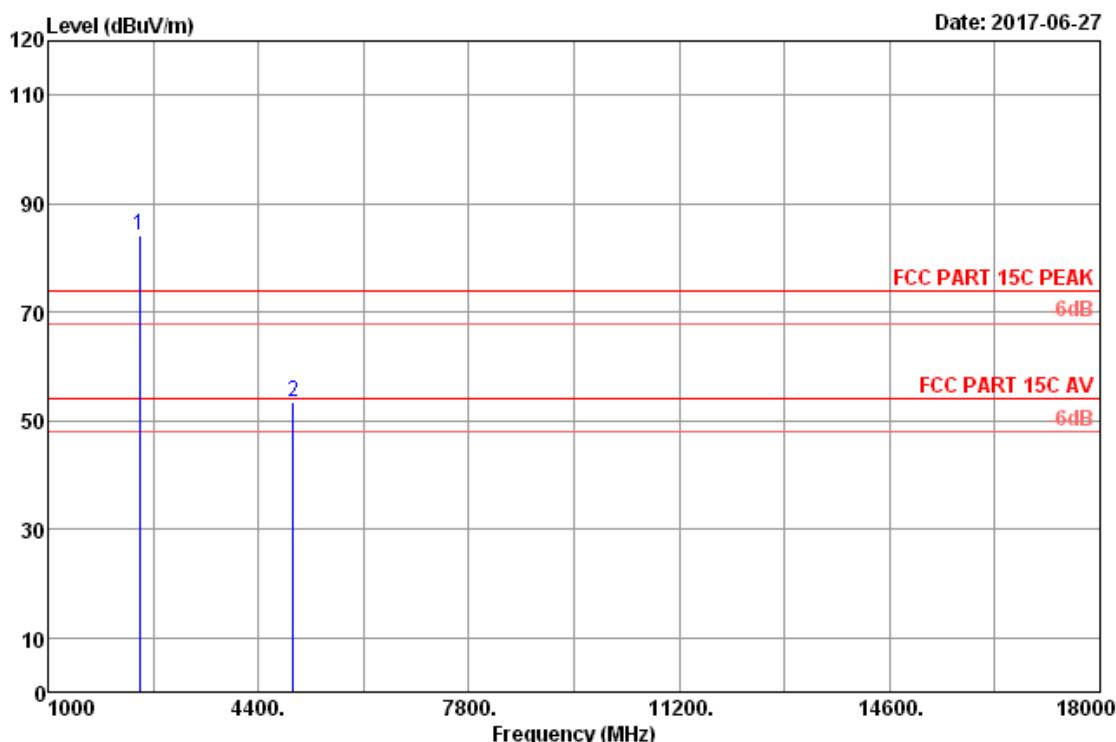

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode
 : M/N: LF-S50G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.29	8.42	83.93	36.38	84.26	74.00	-10.26	Peak
2	4960.00	33.30	11.85	44.00	35.71	53.44	74.00	20.56	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.15,16	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	Apr.27,17	1 Year
3.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	No.1	Oct.15,16	1 Year

5.2.Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.3.Test Procedure

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions With peak detector.


5.4.Test result

PASS (The testing data was attached in the next pages.)


Hopping off

GFSK


2402MHz(30MHz – 1GHz)

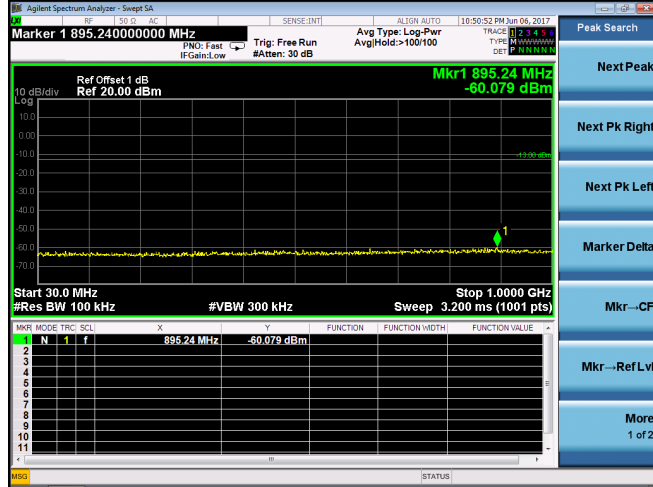


2402MHz(10GHz – 25GHz)

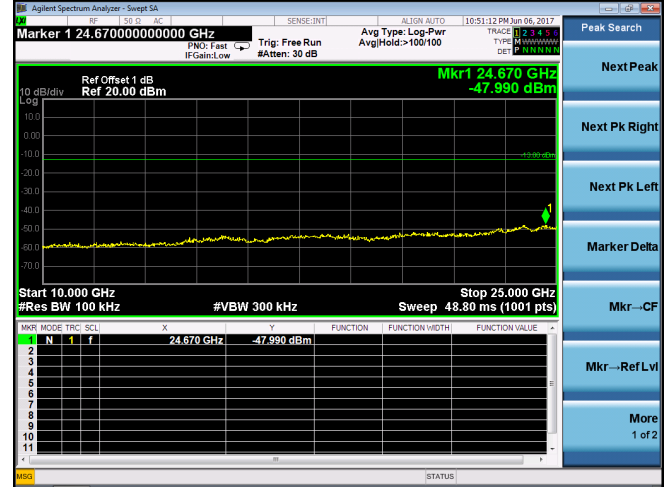


2402MHz(1GHz – 10GHz)

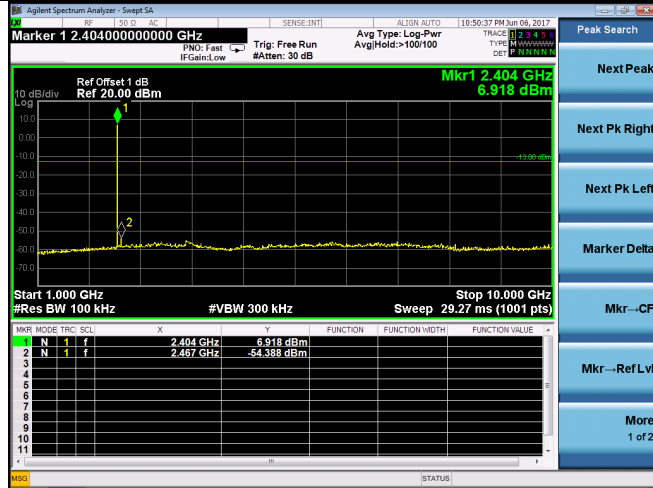


2441(30MHz – 1GHz)

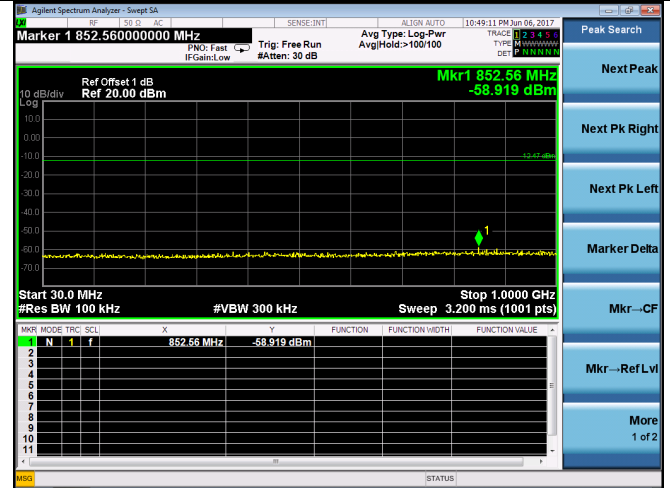


2402MHz(2.3GHz – 2.4GHz)

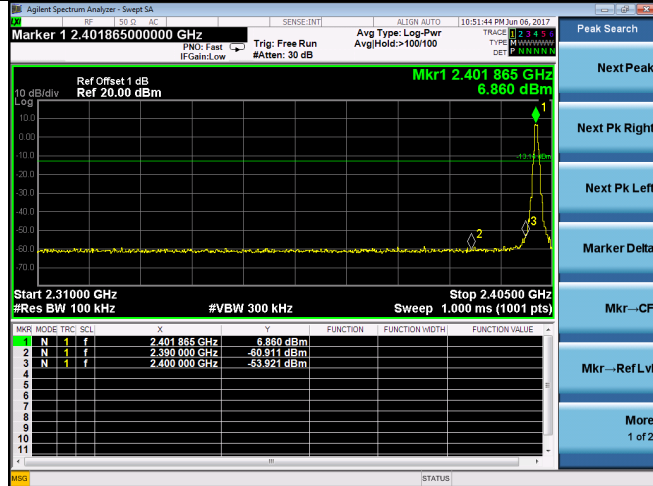


2441(1GHz – 10GHz)

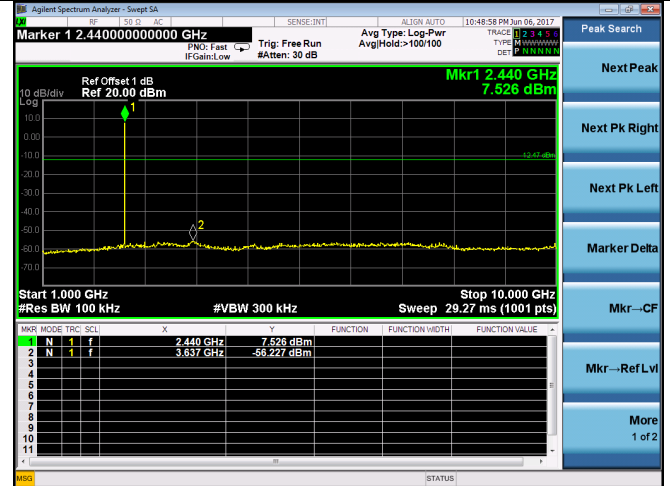


2441(10GHz – 25GHz)

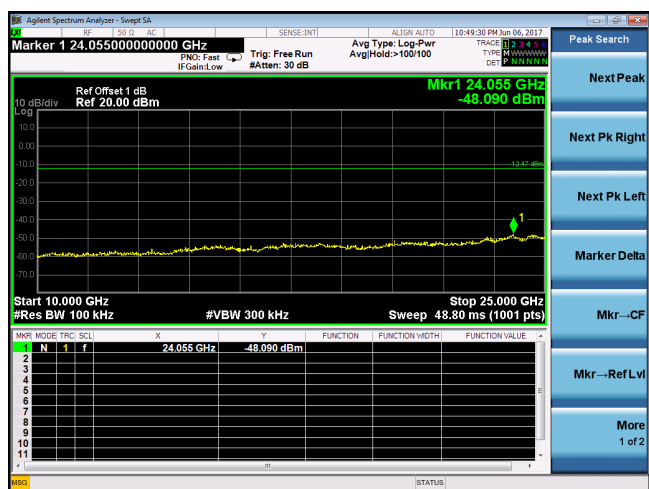


2480MHz(2.4GHz – 2.5GHz)

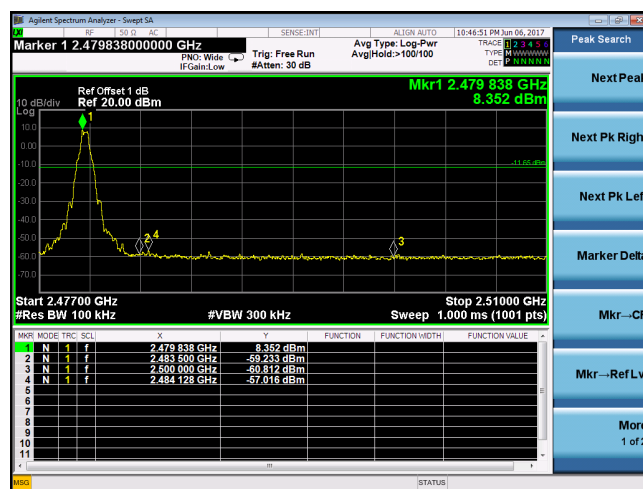


2480MHz(30MHz – 1GHz)

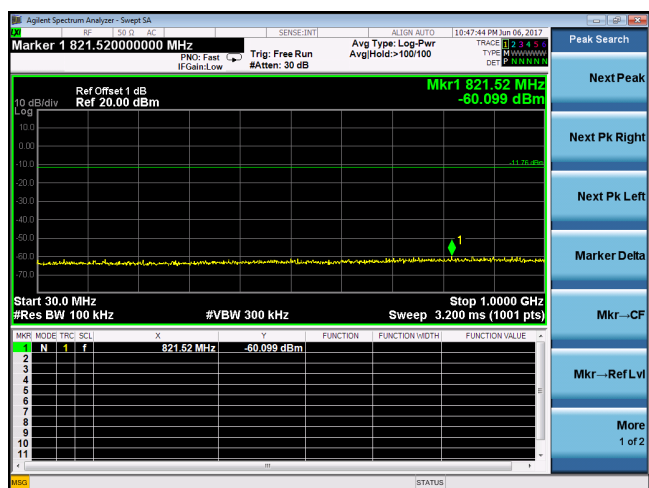

2480MHz(10GHz – 25GHz)

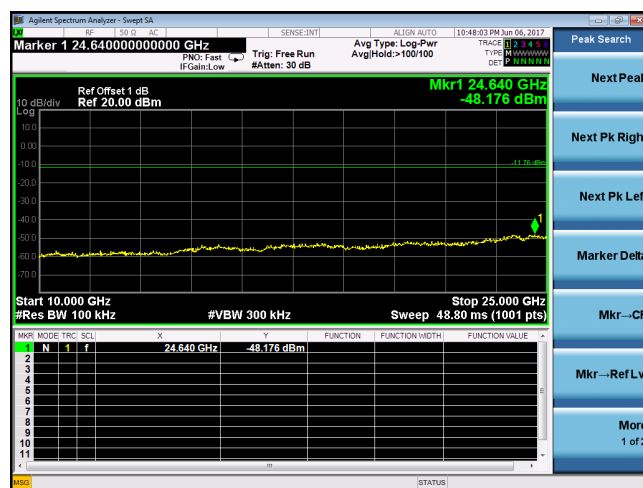


2480MHz(1GHz – 10GHz)

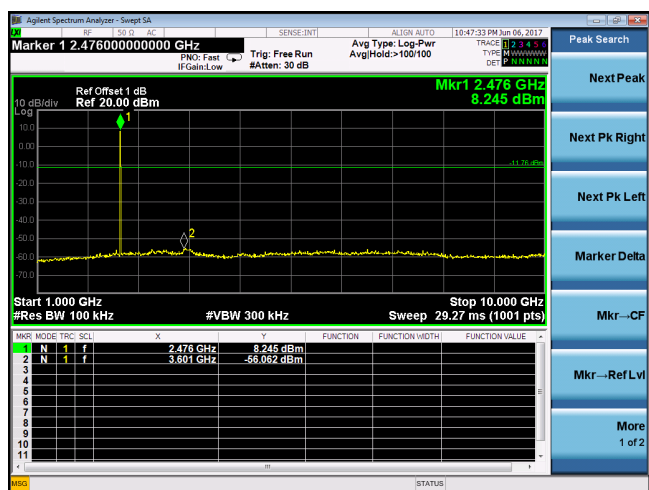


8-DPSK


2402MHz(30MHz – 1GHz)

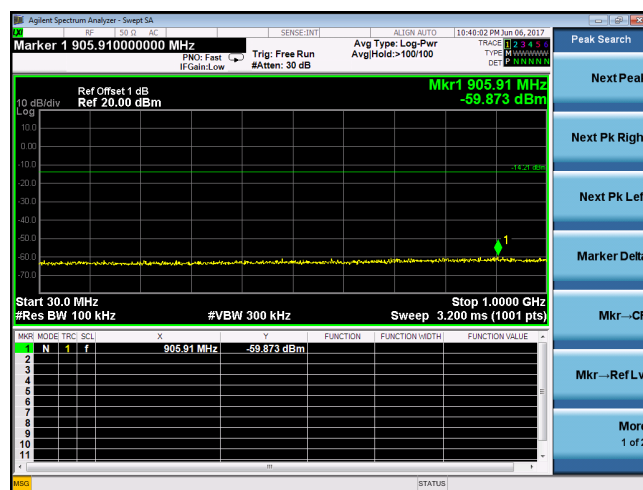


2402MHz(1GHz – 10GHz)

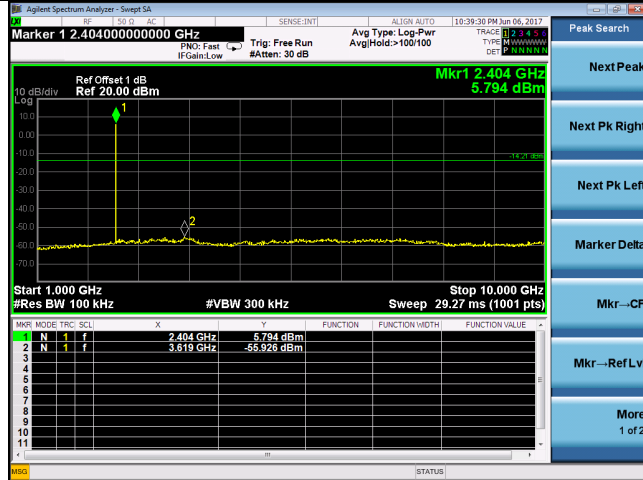


2441MHz (30MHz – 1GHz)

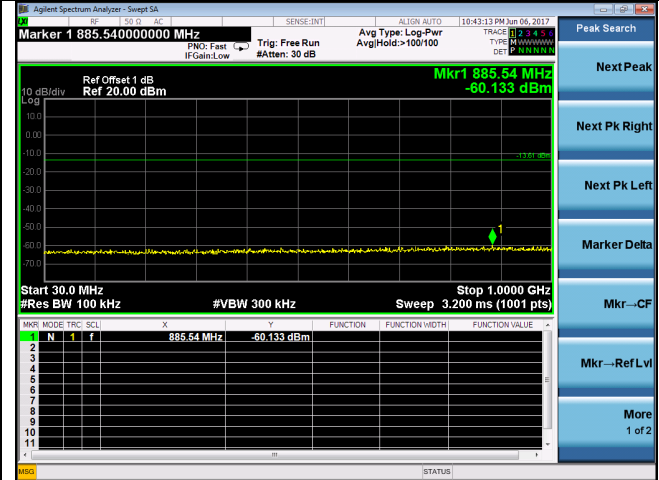


2402MHz(2.3GHz – 2.4GHz)

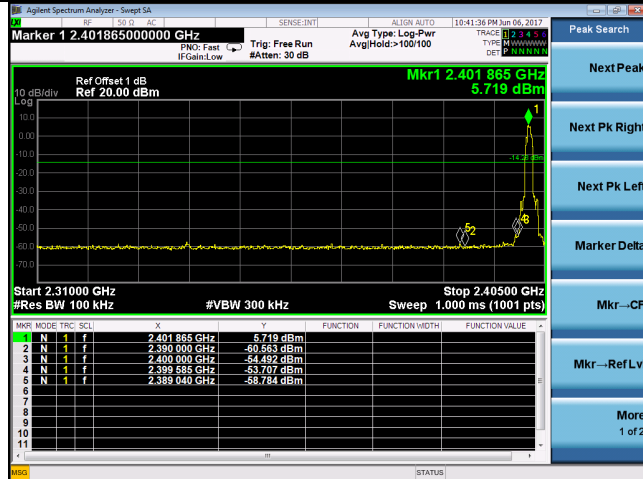


2441MHz(1GHz – 10GHz)

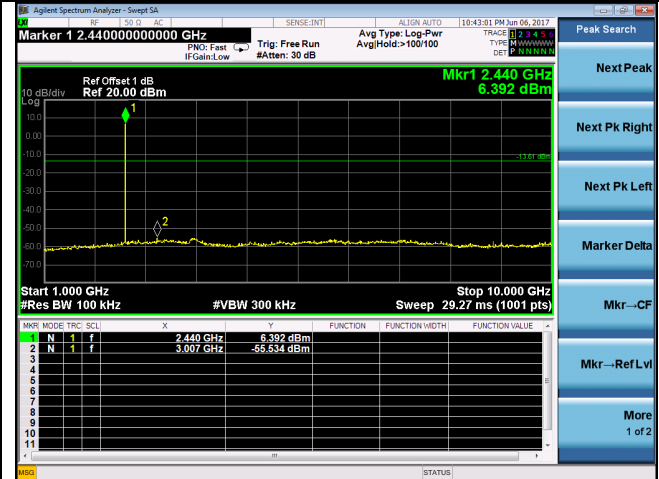


2402MHz(10GHz – 25GHz)

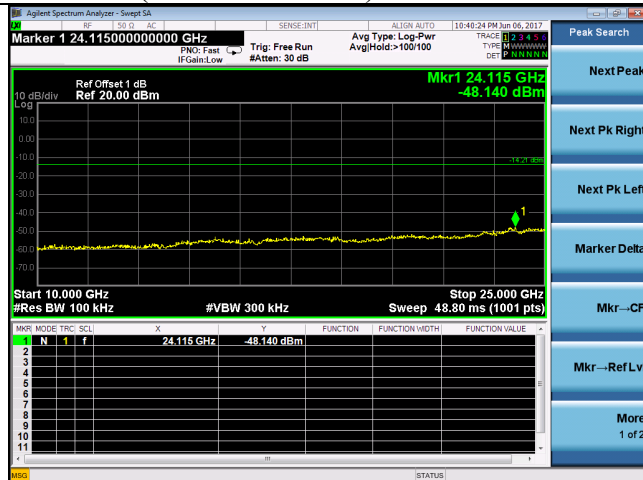


2441MHz(10GHz – 25GHz)

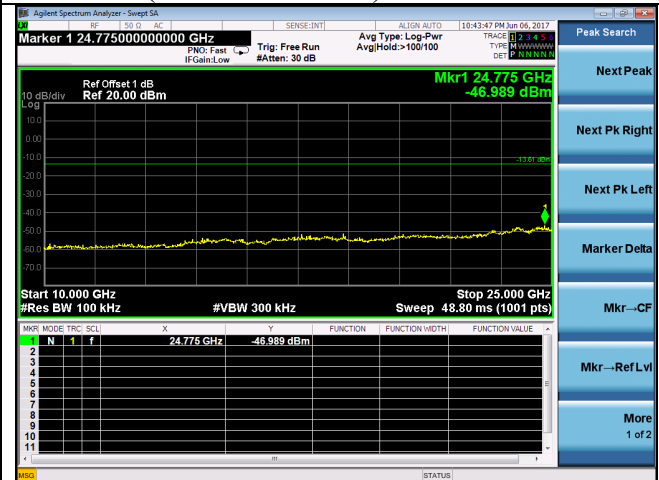



2480MHz(30MHz – 1GHz)

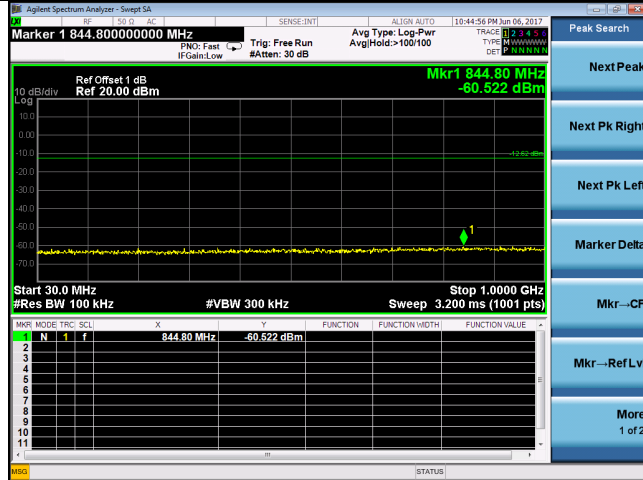


2480MHz(10GHz – 25GHz)

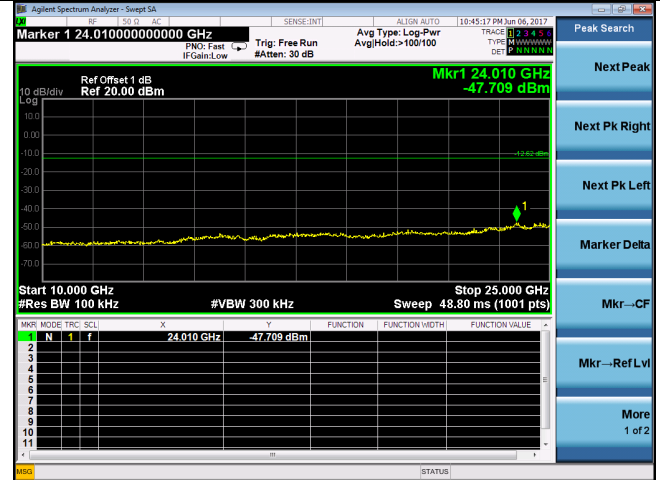


2480MHz(1GHz – 10GHz)

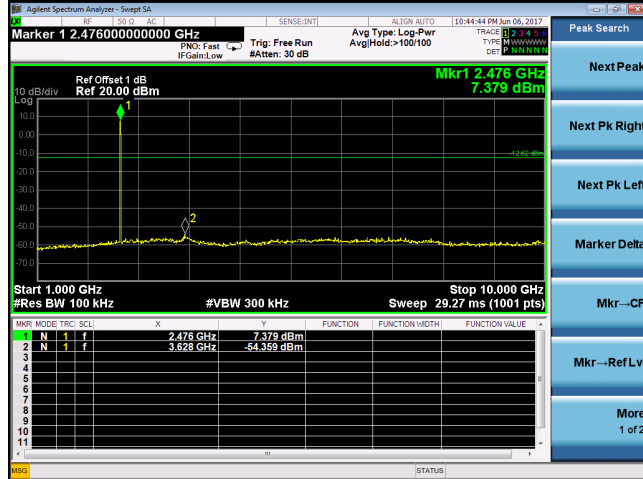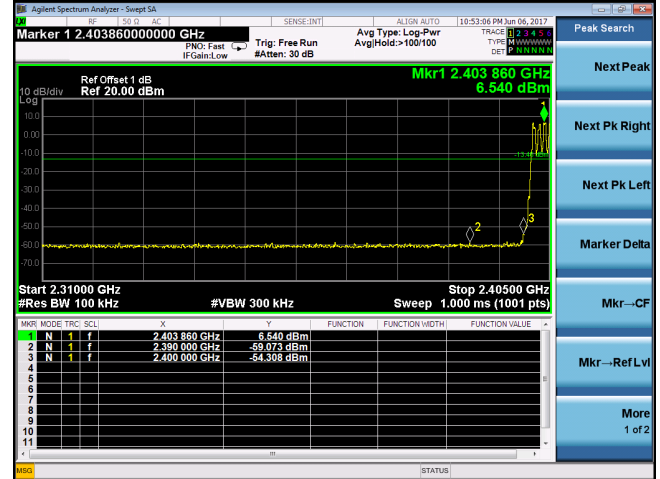
Hopping on
GFSK(2.3GHz – 2.4GHz)


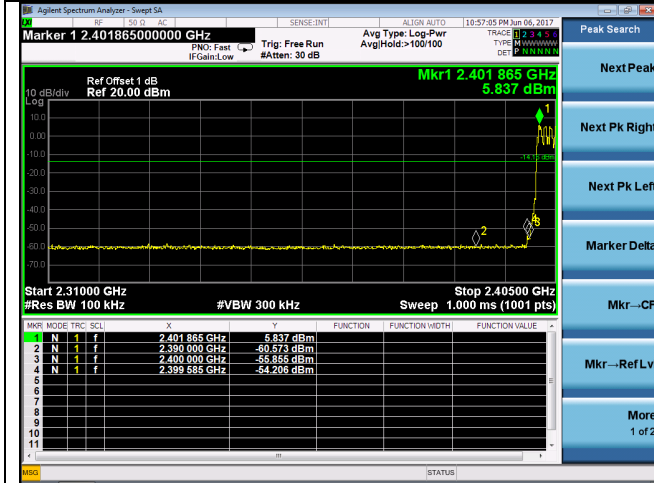
2480MHz(2.4GHz – 2.5GHz)

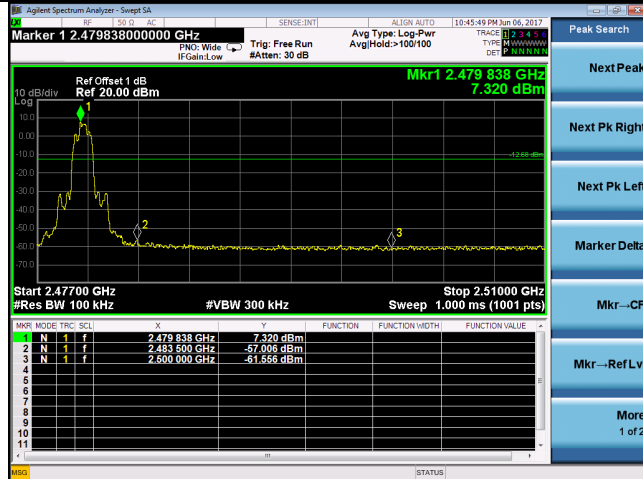


(2.4GHz – 2.5GHz)

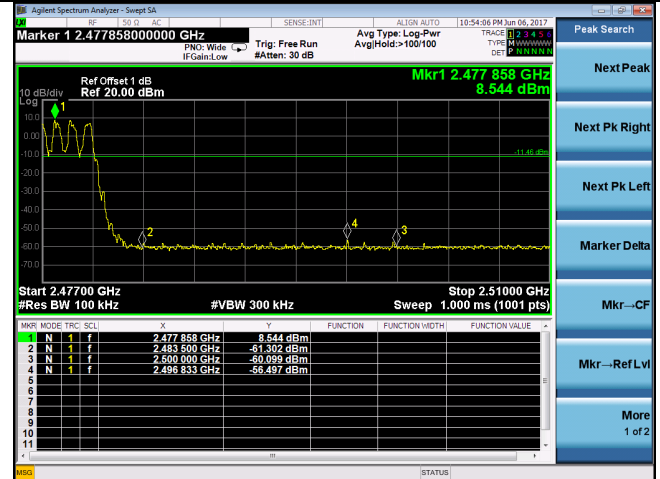

8-DPSK(2.3GHz – 2.4GHz)



(2.4GHz – 2.5GHz)

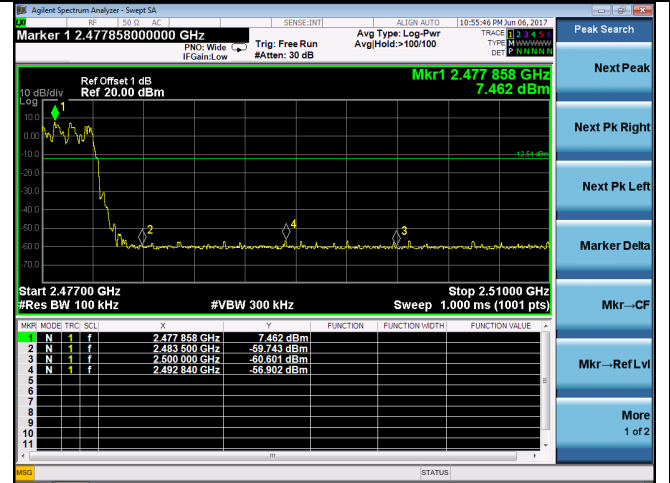

6. 20 DB BANDWIDTH TEST

6.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.15,16	1 Year
2.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr.27,17	1 Year
3.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	No.1	Oct.15,16	1 Year

6.2. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

6.3. Test Procedure


1. Connect the antenna port of the EUT to the spectrum analyzer.
2. Let the EUT transmit at Low/ Mid/ High channel with test software.
3. Setting of SA is following as: RBW: 30kHz / VBW: 100kHz
Sweep Mode: Continuous sweep
Detect mode: Positive peak
Trace mode: Max hold.
4. Use the occupied bandwidth function of the SA measure the 20dB bandwidth directly.

6.4. Test Results

EUT: Wireless Speaker			
M/N: LF-S50G			
Test date: 2017-06-21		Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Alice-Yang		Test site: RF site	Temperature: 22.8±0.6 °C
Test Mode	Frequency (MHz)	20dB bandwidth (KHz)	Limit (KHz)
GFSK	2402	833.4	N/A
	2441	830.4	N/A
	2480	832.9	N/A
8-DPSK	2402	1167	N/A
	2441	1164	N/A
	2480	1165	N/A
Conclusion : PASS			

GFSK

2402MHz

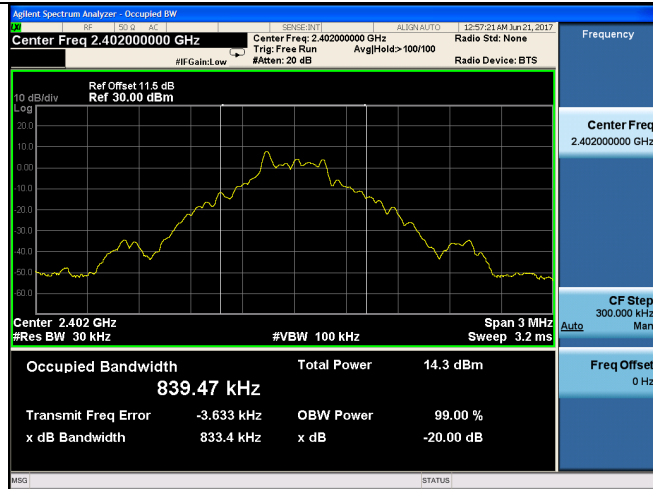


8-DPSK


2402MHz




2441MHz

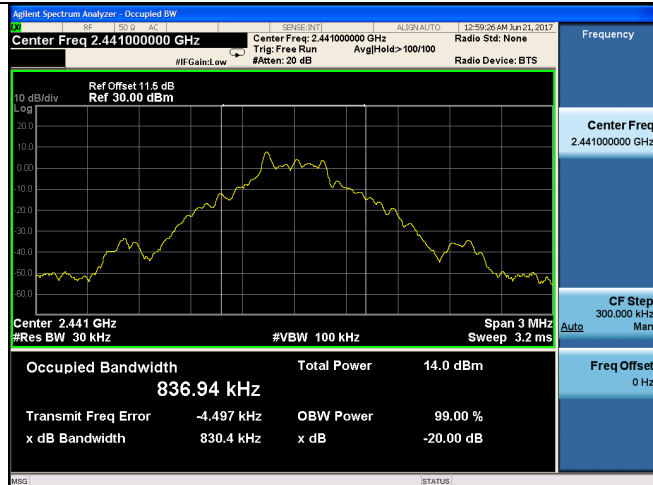


2441MHz

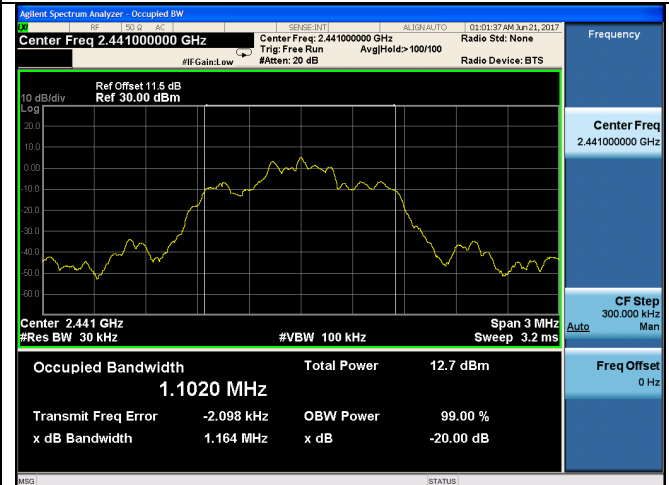

2480MHz

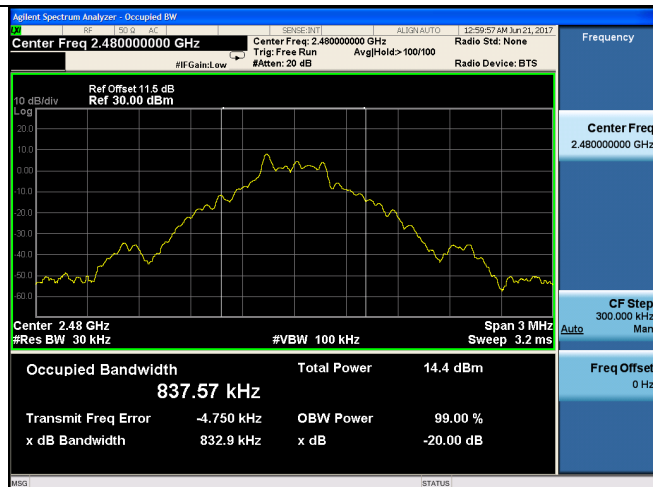

2480MHz

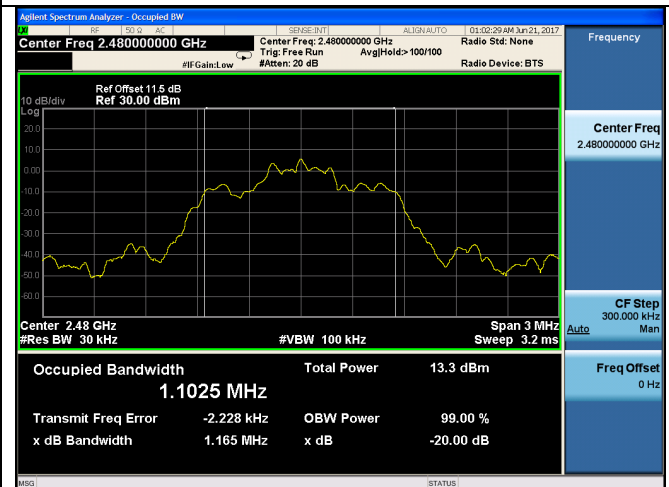

7. CARRIER FREQUENCY SEPARATION TEST

7.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.15,16	1Year
2.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	No.1	Oct.15,16	1 Year

7.2. Limit


Frequency hopping systems shall have hopping channel carrier frequency separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test Procedure

1. Connect the antenna port of the EUT to the Spectrum analyzer.
2. Let the EUT transmit at Low/ Mid/ High channel.
3. Setting of SA is following as: RBW: 100kHz / VBW: 300kHz.Span:5MHz
4. Use the mark Delta function of the SA measure out the channel separation.

7.4. Test Results.

EUT: Wireless Speaker			
M/N: LF-S50G			
Test date: 2017-06-21		Pressure: 102.5±1.0kpa	Humidity: 51.3±3.0%
Tested by: Alice-Yang		Test site: RF site	Temperature:22.1±0.6 °C
Test Mode	Channel separation	Limit(KHz)	Conclusion
GFSK	1.0MHz	555.6	PASS
8-DPSK	1.0MHz	778.0	PASS

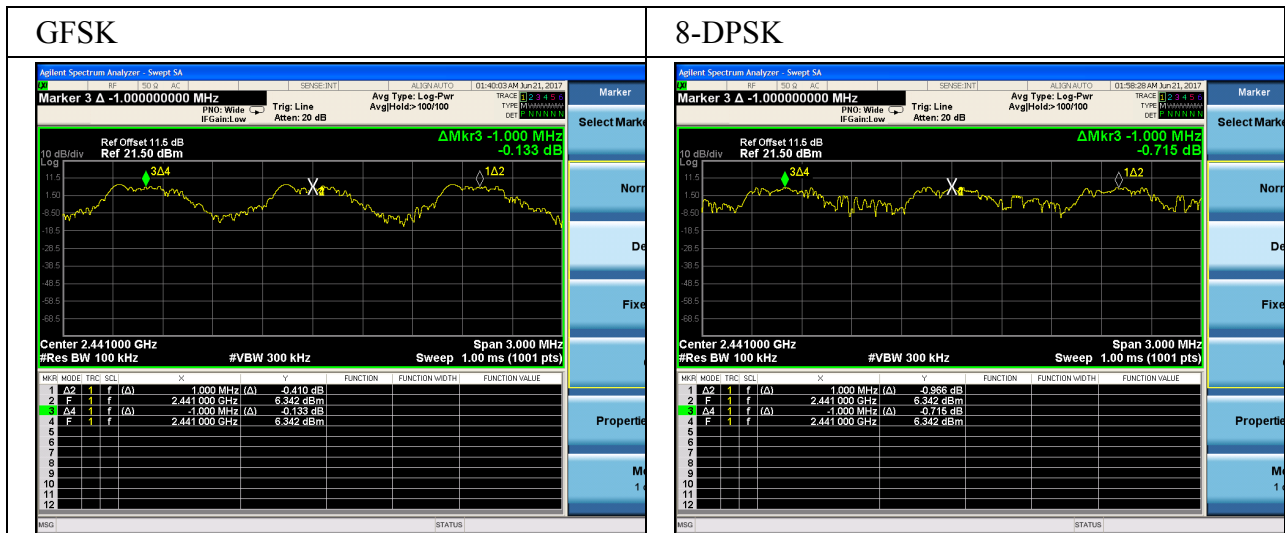

8. NUMBER OF HOPPING FREQUENCY TEST

8.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.15,16	1Year
2.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	No.1	Oct.15,16	1 Year

8.2. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

8.3. Test Procedure


1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.
2. Setting of SA is following as: RBW: 100kHz / VBW: 300kHz ,
Start frequency: 2390MHz
Stop frequency: 2483.5MHz
And waiting for the hopping trace until stability, count out the number of the hopping.

8.4. Test Results


EUT: Wireless Speaker		
M/N: LF-S50G		
Test date: 2017-06-21	Pressure: 101.3±1.0kpa	Humidity: 51.1±3.0%
Tested by: Alice-Yang	Test site: RF site	Temperature: 22.3±0.6 °C

Test Mode	Number of channel	Limit	Conclusion
GFSK	79	≥15	PASS
8-DPSK	79	≥15	PASS

GFSK

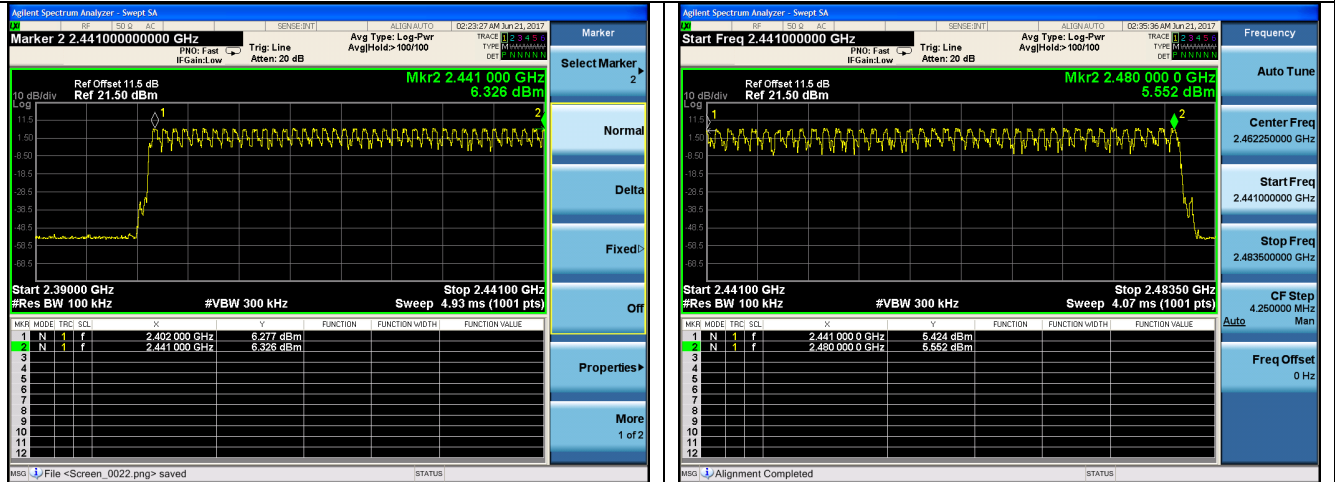

8-DPSK

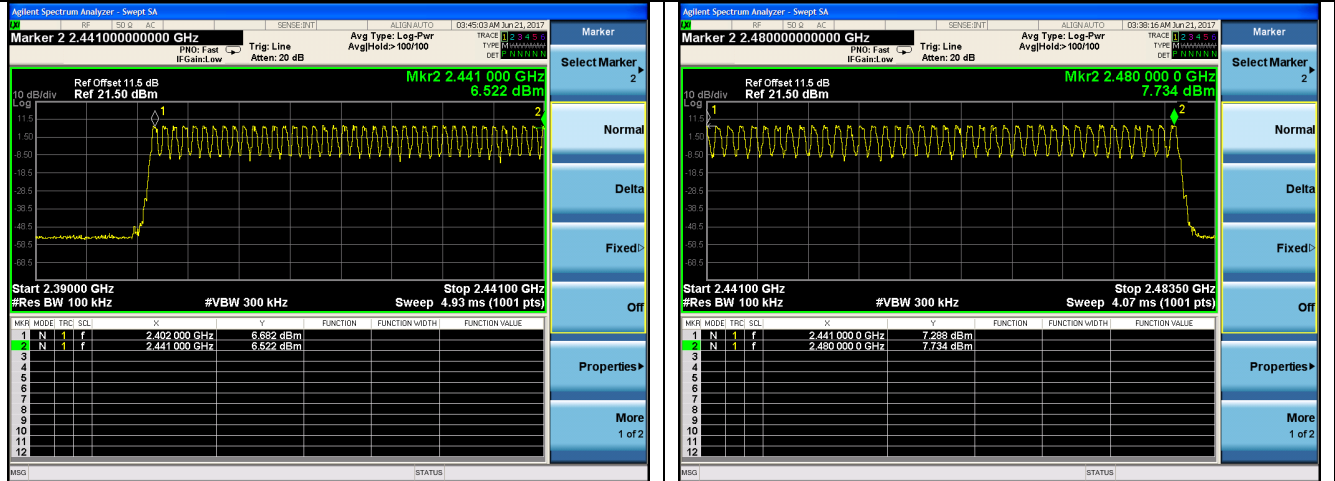

9. DWELL TIME

9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.15,16	1Year
2.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	No.1	Oct.15,16	1 Year

9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.3. Test Procedure

1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.
2. Setting of SA is following as:
RBW: 100kHz / VBW: 100kHz
Sweep Mode: Single
Detect mode: Positive peak
Trace mode: Auto
Span: 0Hz
Sweep time: 5s and big enough to measure one hopping signal
3. Use below formula calculate the Dwell time
Dwell time=Hopping number per second*0.4*channel number*Pulse bandwidth per hopping.

9.4. Test Results



EUT: Wireless Speaker		
M/N: LF-S50G		
Test date: 2017-06-21	Pressure: 102.4±1.0kpa	Humidity: 52.2±3.0%
Tested by: Alice-Yang	Test site: RF site	Temperature: 22.0±0.6 °C

Mode		dwell time	Limit	Conclusion
GFSK	DH1	27 hops/5s*0.4*79channels* 0.397 ms =67.744ms	≦ 400ms	PASS
	DH3	25 hops/5s*0.4*79channels* 1.662 ms =262.596ms	≦ 400ms	PASS
	DH5	7 hops/5s*0.4*79channels* 2.915 ms =128.960ms	≦ 400ms	PASS
8-DPSK	3-DH1	28 hops/5s*0.4*79channels* 0.405 ms =71.669ms	≦ 400ms	PASS
	3-DH3	29 hops/5s*0.4*79channels* 1.656 ms =303.512ms	≦ 400ms	PASS
	3-DH5	15 hops/5s*0.4*79channels* 2.920 ms =276.816ms	≦ 400ms	PASS



Note: All the lower levels were signaled from receiver and should not be considered in here.

GFSK



DH 1

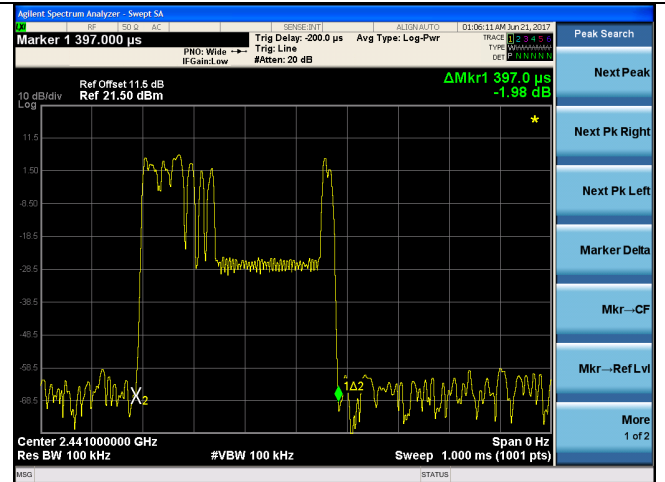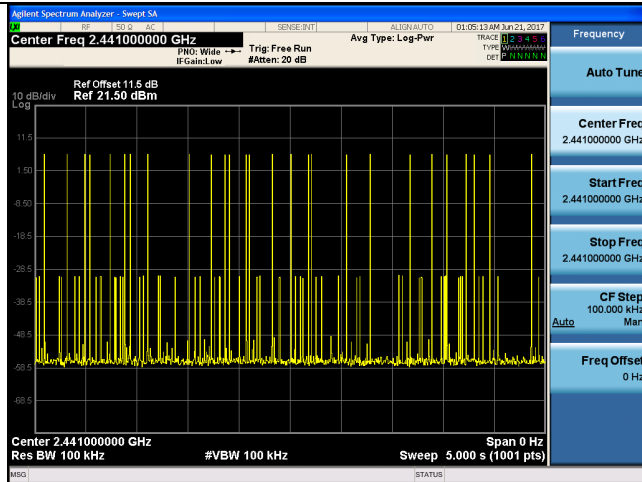

DH 3

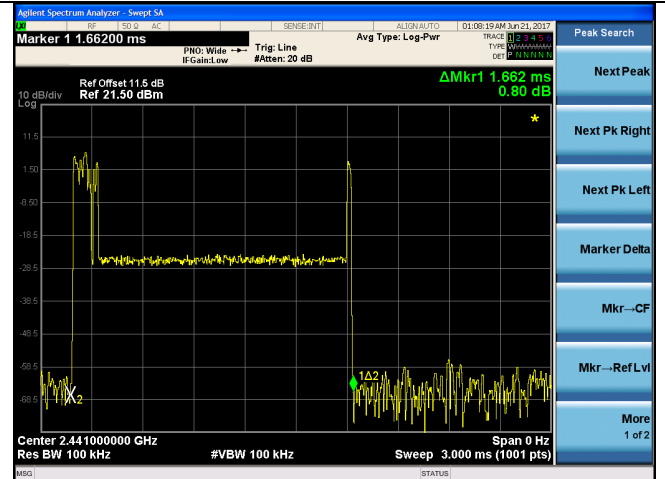
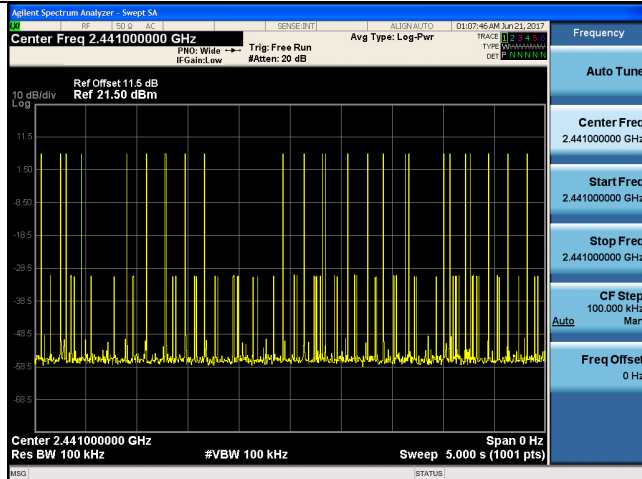


DH 5

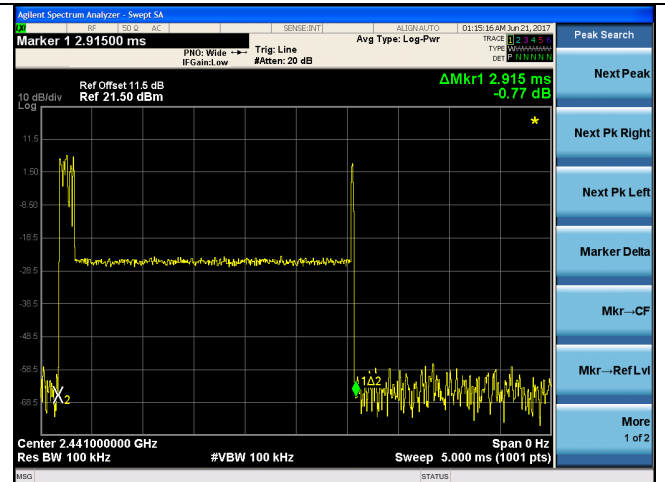
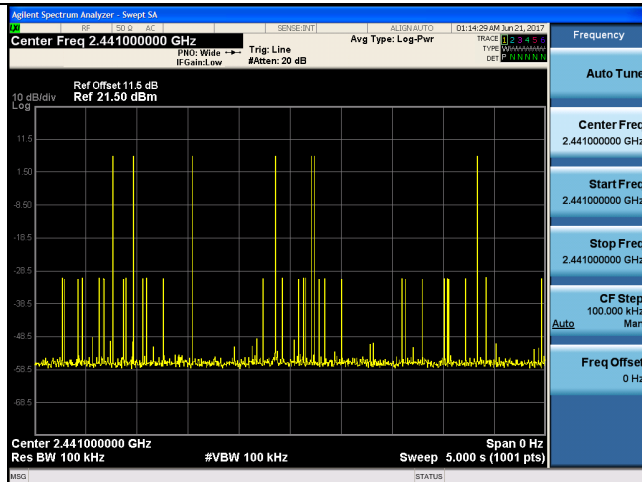


8-DPSK



3DH 1

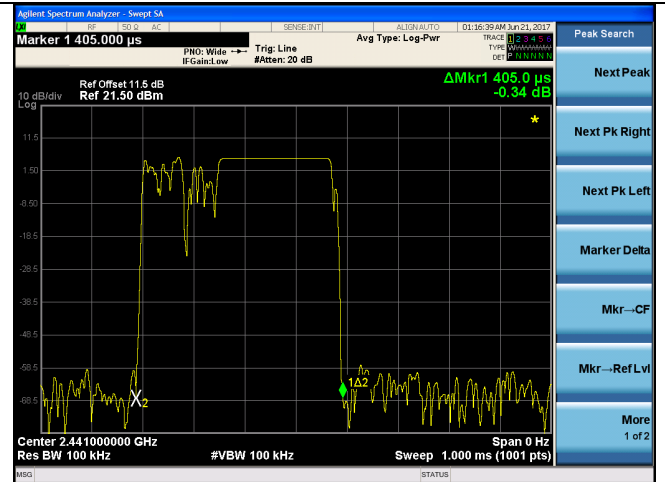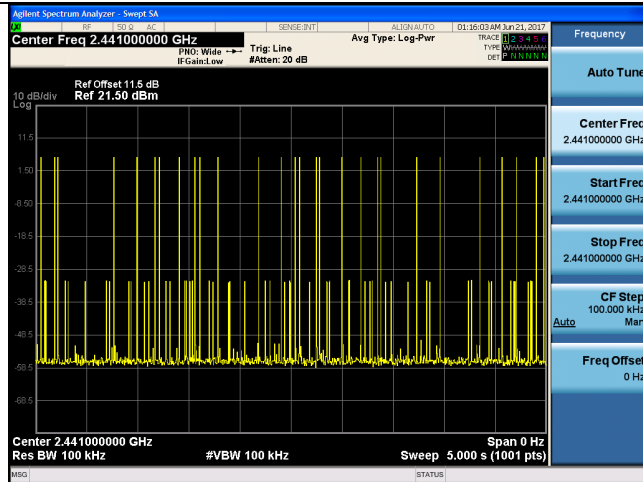

3DH 3

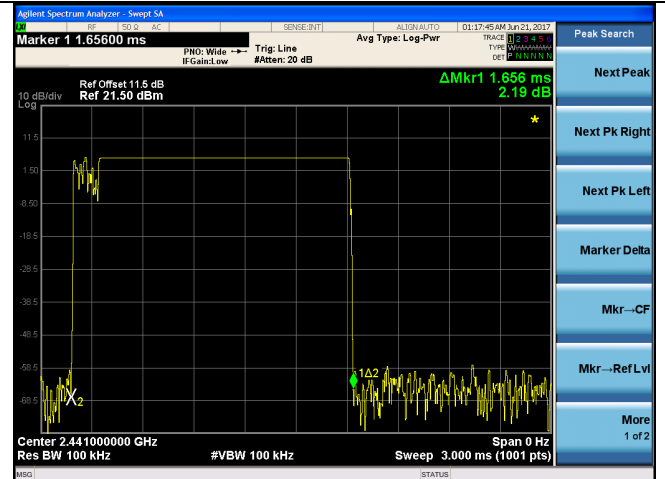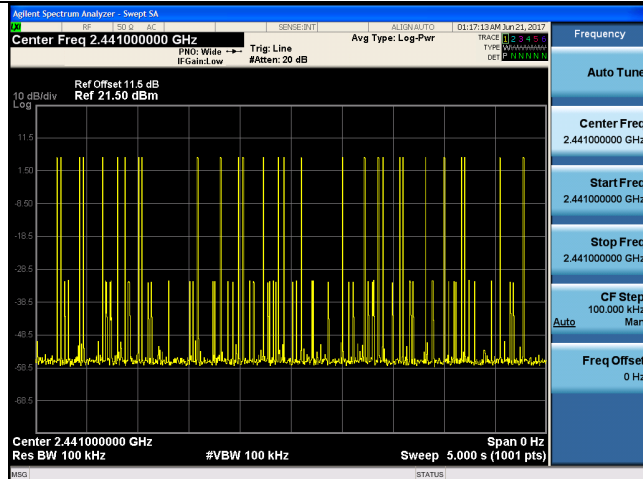

3DH 5

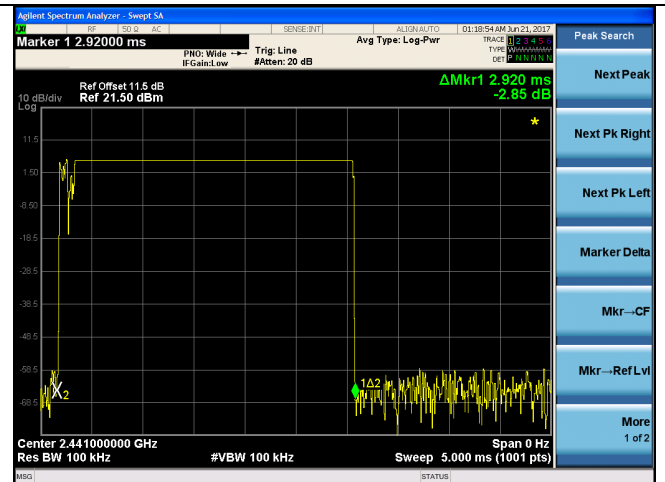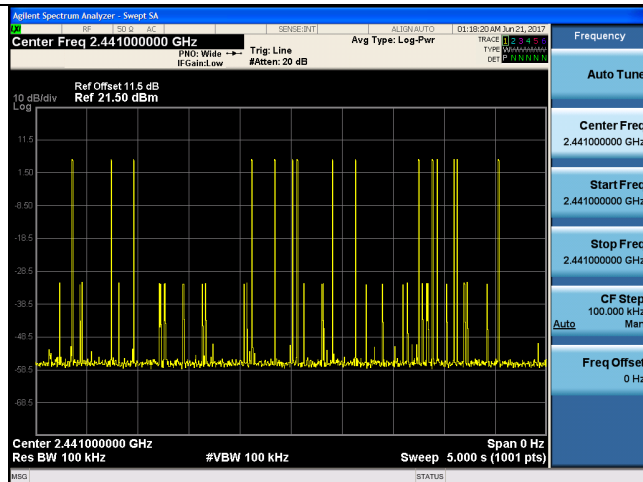

10. MAXIMUM PEAK OUTPUT POWER TEST

10.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	N9030A	MY51380221	Oct.15,16	1 Year
2.	Power meter	Anritsu	ML2487A	6K00002472	Apr.22,17	1 Year
3.	Power sensor	Anritsu	MA2491A	0033005	Apr.22,17	1 Year
4.	Attenuator (20dB)	Agilent	8491B	MY39262165	Apr.22,17	1 Year
5.	RF Cable	Marvelous Microwave Inc	SFL402105FLEX	No.1	Oct.15,16	1 Year

10.2. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

10.3. Test Procedure

Connected the EUT's antenna port to Power Sensor, and use power meter to test peak output power directly.

10.4. Test Results

EUT: Wireless Speaker			
M/N: LF-S50G			
Test date: 2017-06-21		Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Alice-Yang		Test site: RF site	Temperature: 22.8±0.6 °C
Test Mode	Frequency	Peak output Power (dBm)	Limit (dBm)
GFSK	2402	7.158	21
	2441	7.748	21
	2480	8.673	21
8-DPSK	2402	6.723	21
	2441	7.351	21
	2480	8.243	21
Conclusion: PASS			

11.BAND EDGE COMPLIANCE TEST

11.1.Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300459	Apr.22,17	1 Year
2.	Amp	HP	8449B	3008A02495	Apr.22.17	1 Year
3.	Horn Antenna	ETS	3115	9510-4580	Nov.16,16	1 Year
4.	HF Cable	Hubersuhne	SUCOFLEX1 04	274094/4	Apr.22,17	1 Year

11.2.Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

11.3.Test Produce

For upper band emissions that are up to two bandwidths(2MHz) away (2483.5MHz to 2485.5MHz) from the band-edge use below produce:

1. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 100KHz and with a video bandwidth 300KHz. Record the peak levels of the fundamental emission and the relevant band-edge emission, Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
2. Subtract the delta measured in step (1) from the maximum field strengths measured in clause 4 .The resultant field strengths are then used to determine band-edge compliance as required by Section 15.205


For emissions above two bandwidths away from the band-edge use below produce:

1. The EUT is placed on a insulating material (up to 12mm thick) worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
 - (b) This is pulse Modulation device a duty cycle factor was used to calculate average level based measured peak level.

11.4.Test Results

Pass (The testing data was attached in the next pages.)

Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

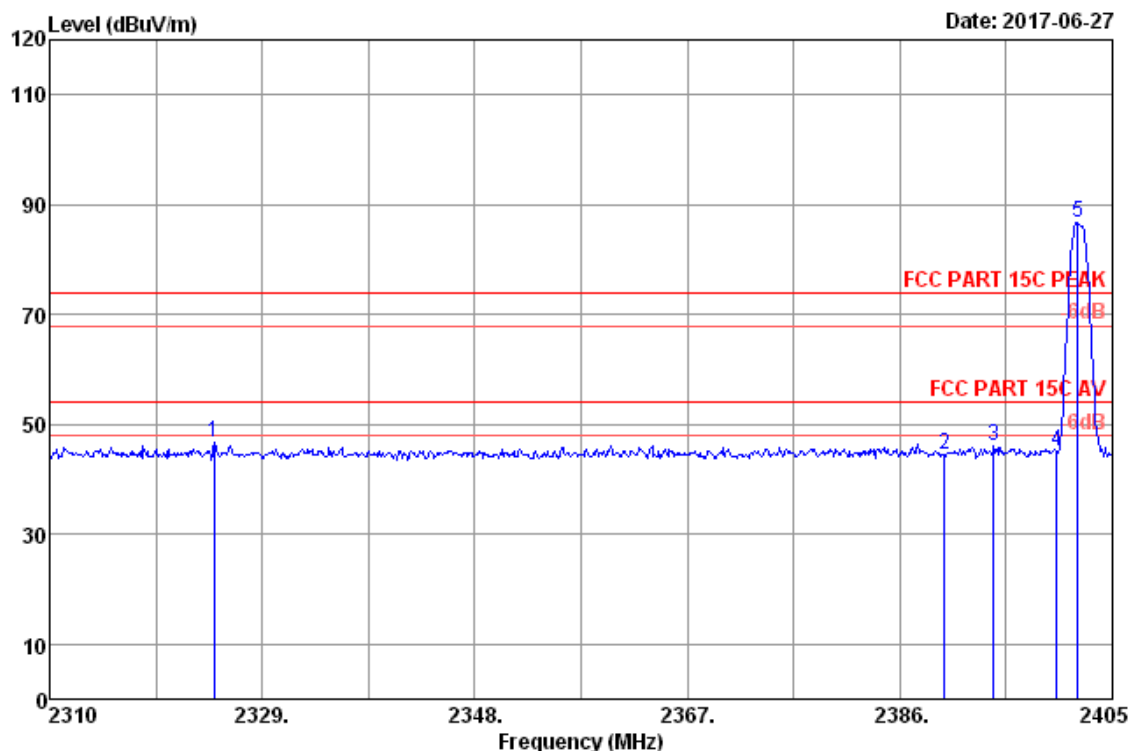


Site no. : 3m Chamber
 Dis. / Ant. : 3m 2016 3115(4580)
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.3°C/53.1%
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2402MHz Tx Mode
 : M/N: LF-S50G

Data no. : 1
 Ant. pol. : HORIZONTAL
 Pre : 101.2kPa
 Engineer : zack_zhu

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2324.73	28.19	8.26	46.81	36.39	46.87	74.00	27.13	Peak
2	2390.00	28.23	8.33	44.35	36.39	44.52	74.00	29.48	Peak
3	2394.36	28.24	8.33	45.94	36.39	46.12	74.00	27.88	Peak
4	2400.00	28.24	8.34	44.96	36.39	45.15	74.00	28.85	Peak
5	2401.87	28.24	8.34	86.47	36.39	86.66	74.00	-12.66	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

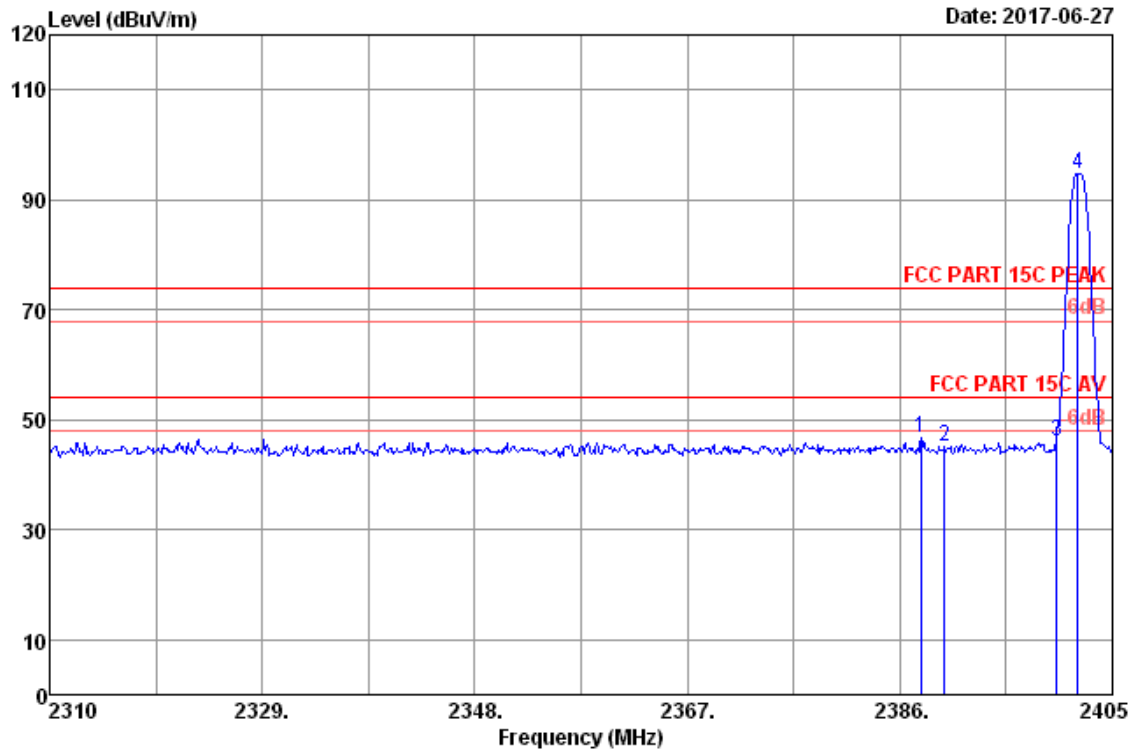

Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2402MHz Tx Mode
 : M/N: LF-S50G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2387.90	28.23	8.33	46.40	36.39	46.57	74.00	27.43	Peak
2	2390.00	28.23	8.33	44.84	36.39	45.01	74.00	28.99	Peak
3	2400.00	28.24	8.34	45.74	36.39	45.93	74.00	28.07	Peak
4	2401.87	28.24	8.34	94.52	36.39	94.71	74.00	-20.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

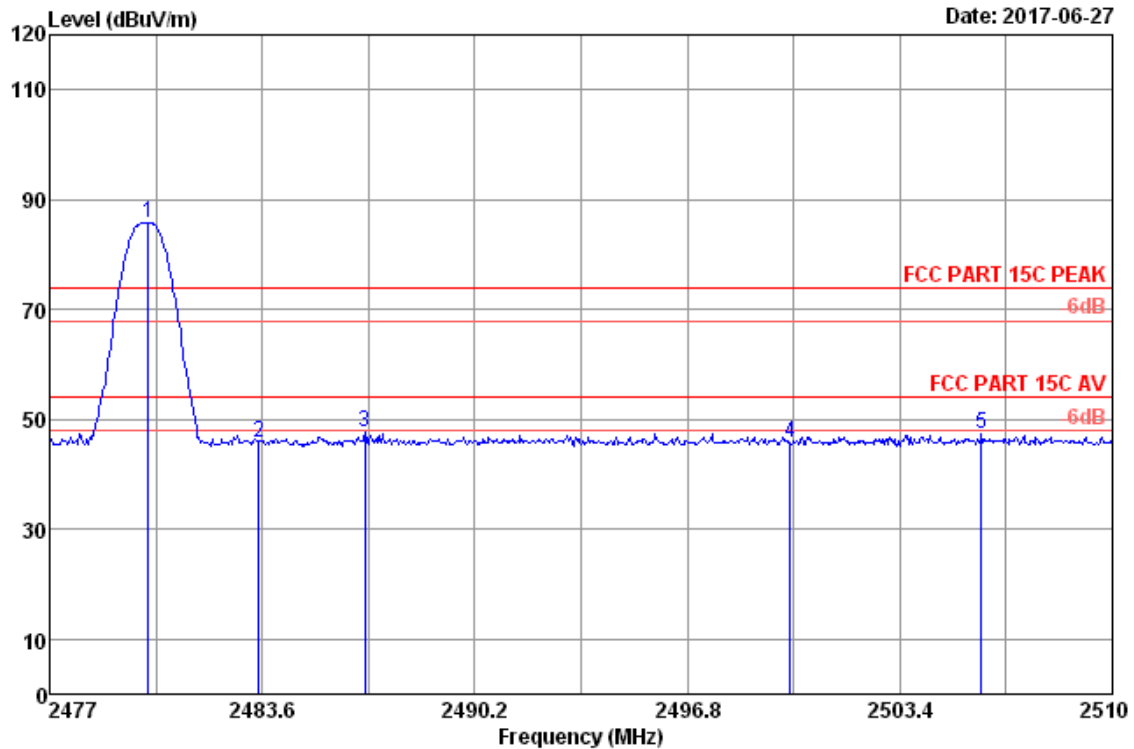

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2480MHz Tx Mode
 : M/N: LF-S50G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.07	28.29	8.42	85.41	36.38	85.74	74.00	-11.74	Peak
2	2483.50	28.29	8.42	45.58	36.38	45.91	74.00	28.09	Peak
3	2486.80	28.29	8.43	47.35	36.38	47.69	74.00	26.31	Peak
4	2500.00	28.30	8.44	45.31	36.38	45.67	74.00	28.33	Peak
5	2505.94	28.32	8.46	46.89	36.38	47.29	74.00	26.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

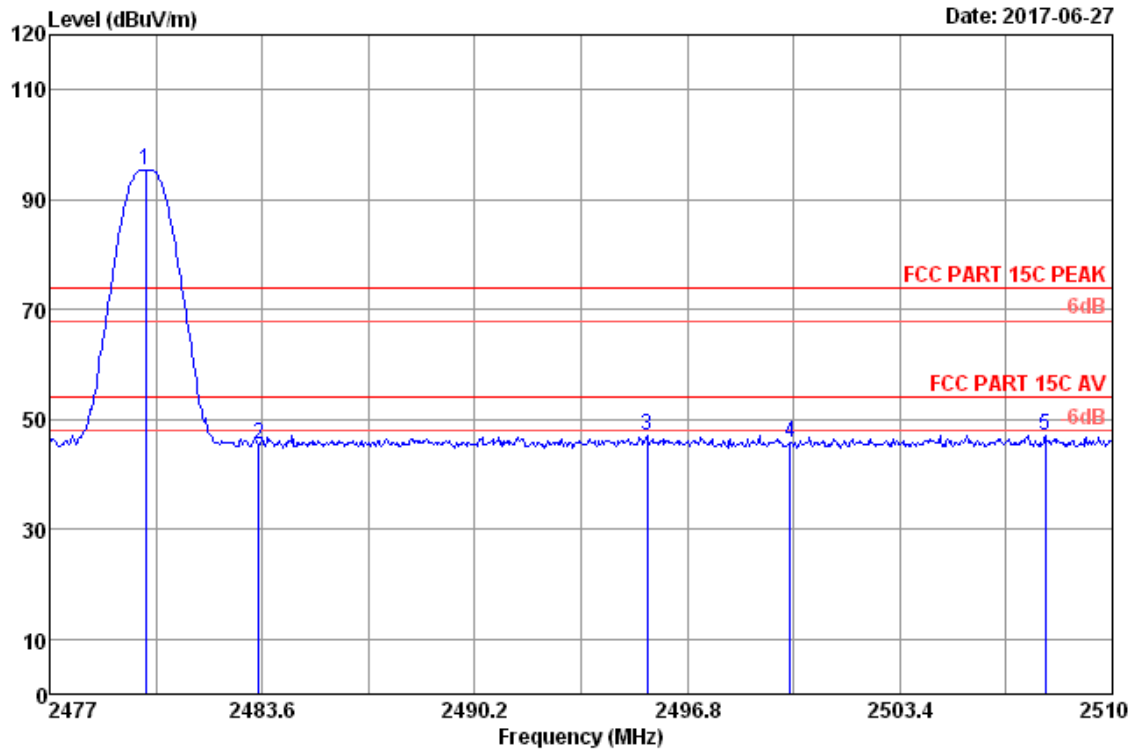

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 GFSK 2480MHz Tx Mode
 : M/N: LF-S50G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.97	28.29	8.42	95.09	36.38	95.42	74.00	-21.42	Peak
2	2483.50	28.29	8.42	45.08	36.38	45.41	74.00	28.59	Peak
3	2495.55	28.30	8.44	46.64	36.38	47.00	74.00	27.00	Peak
4	2500.00	28.30	8.44	45.37	36.38	45.73	74.00	28.27	Peak
5	2507.92	28.32	8.47	46.66	36.38	47.07	74.00	26.93	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

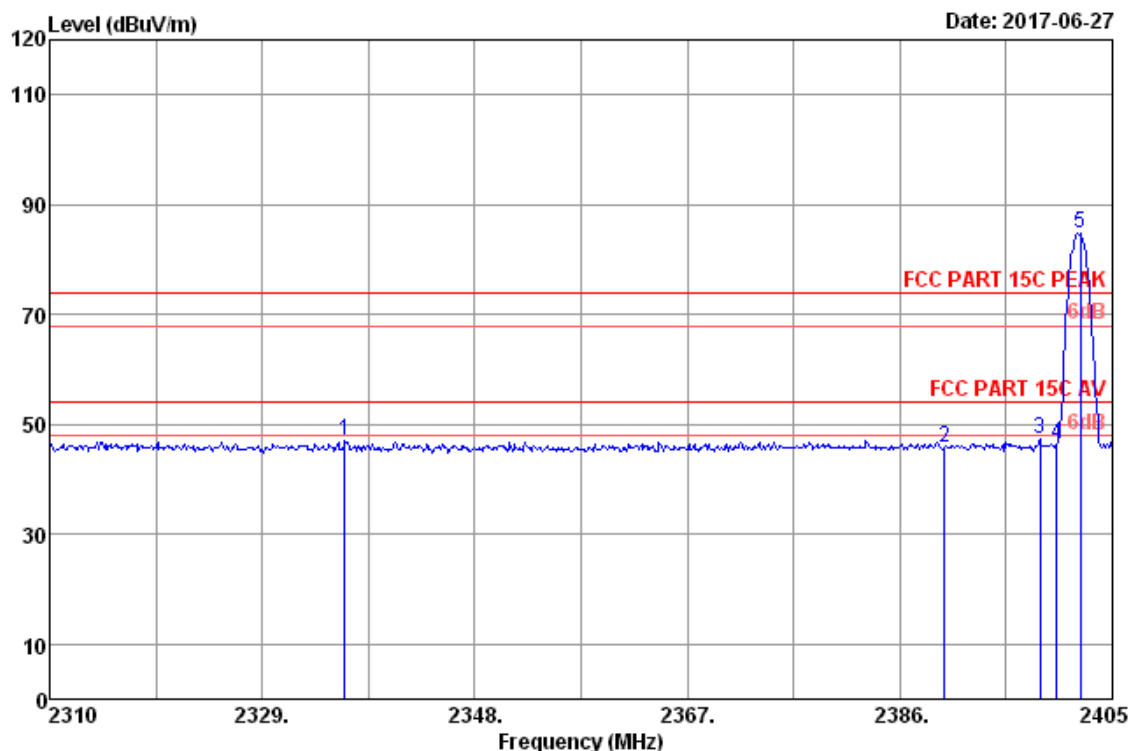


Site no. : 3m Chamber
 Dis. / Ant. : 3m 2016 3115(4580)
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.3°C/53.1%
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode
 : M/N: LF-S50G

Data no. : 22
 Ant. pol. : HORIZONTAL
 Pre : 101.2kPa
 Engineer : zack_zhu

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2336.41	28.20	8.27	46.97	36.39	47.05	74.00	26.95	Peak
2	2390.00	28.23	8.33	45.74	36.39	45.91	74.00	28.09	Peak
3	2398.54	28.24	8.34	47.03	36.39	47.22	74.00	26.78	Peak
4	2400.00	28.24	8.34	46.12	36.39	46.31	74.00	27.69	Peak
5	2402.15	28.24	8.34	84.62	36.39	84.81	74.00	-10.81	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

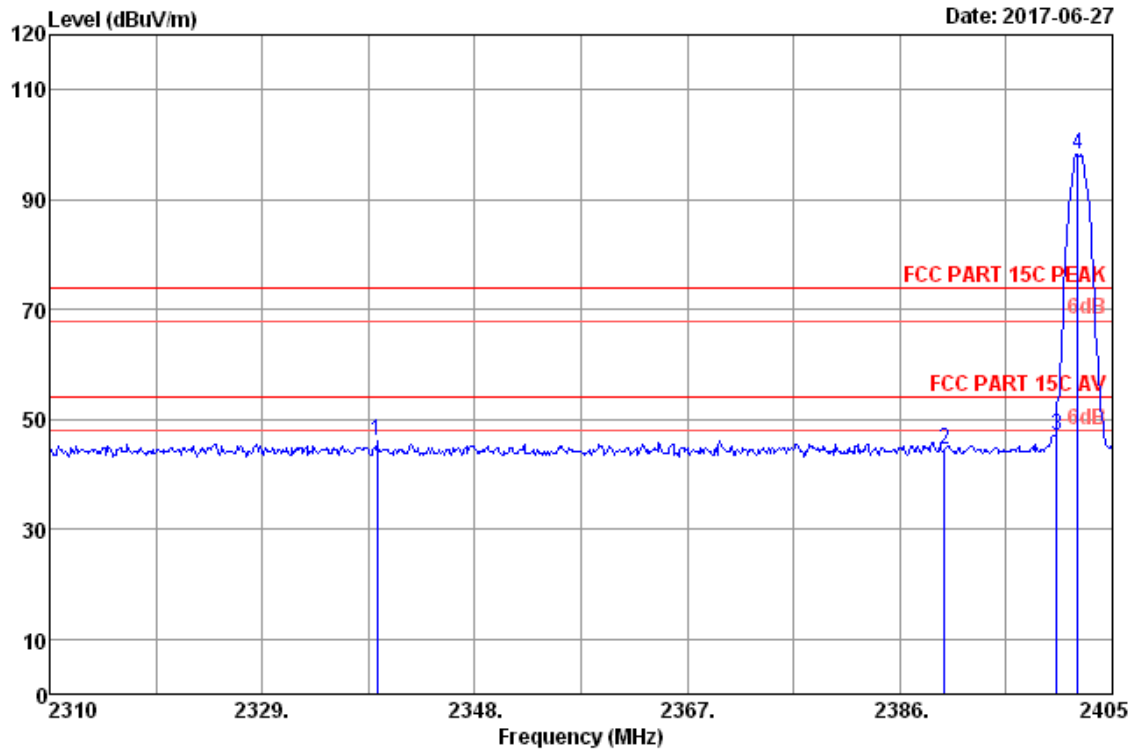

Site no. : 3m Chamber Data no. : 21
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode
 : M/N: LF-S50G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2339.26	28.20	8.28	46.04	36.39	46.13	74.00	27.87	Peak
2	2390.00	28.23	8.33	44.40	36.39	44.57	74.00	29.43	Peak
3	2400.00	28.24	8.34	46.96	36.39	47.15	74.00	26.85	Peak
4	2401.87	28.24	8.34	97.97	36.39	98.16	74.00	-24.16	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

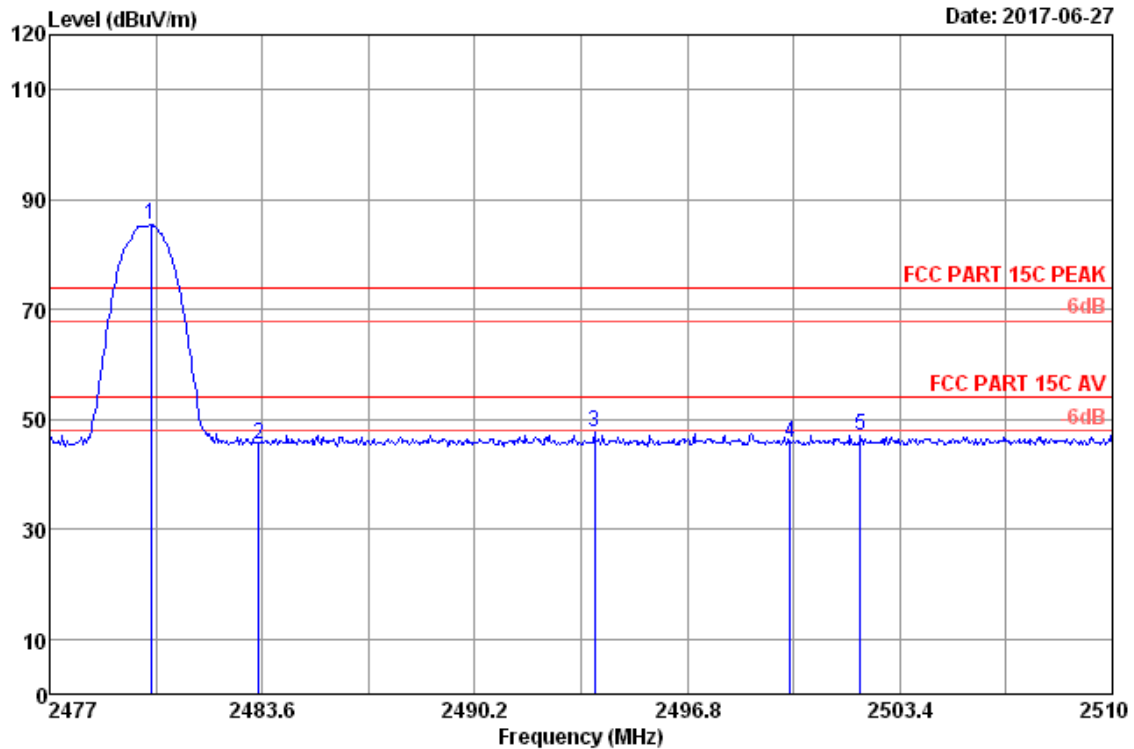

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode
 : M/N: LF-S50G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.14	28.29	8.42	84.97	36.38	85.30	74.00	-11.30	Peak
2	2483.50	28.29	8.42	45.15	36.38	45.48	74.00	28.52	Peak
3	2493.93	28.30	8.43	47.26	36.38	47.61	74.00	26.39	Peak
4	2500.00	28.30	8.44	45.39	36.38	45.75	74.00	28.25	Peak
5	2502.18	28.31	8.45	46.80	36.38	47.18	74.00	26.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

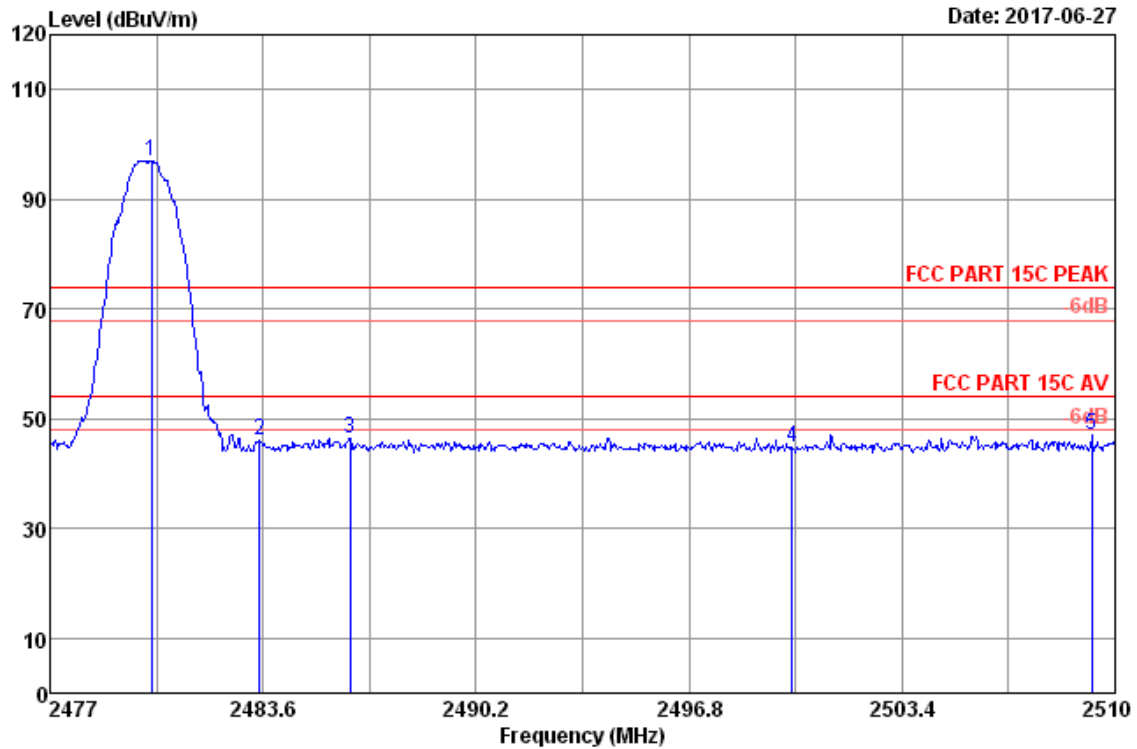

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2016 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK Pre : 101.2kPa
 Env. / Ins. : 23.3°C/53.1% Engineer : zack_zhu
 EUT : Wireless Speaker
 Power : DC 15V From Adaptor Input AC 120V/60Hz
 Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode
 : M/N: LF-S50G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.14	28.29	8.42	96.70	36.38	97.03	74.00	-23.03	Peak
2	2483.50	28.29	8.42	45.85	36.38	46.18	74.00	27.82	Peak
3	2486.31	28.29	8.43	46.17	36.38	46.51	74.00	27.49	Peak
4	2500.00	28.30	8.44	44.50	36.38	44.86	74.00	29.14	Peak
5	2509.27	28.33	8.47	46.60	36.38	47.02	74.00	26.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp Factor
 2. The emission levels that are 20dB below the official
 limit are not reported.

12. ANTENNA REQUIREMENT

12.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2. Antenna Connected Construction

The antennas used for this product are FPC Board antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 2.1dBi

13.DEVIATION TO TEST SPECIFICATIONS

[NONE]