

FCC Test Report

Report No.: AGC12060221001FE03

FCC ID : 2AY4C-GM05

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Mini PC

BRAND NAME : GEEKOM

MODEL NAME : Mini IT12

APPLICANT: Shenzhen Jiteng Network Technology Co., Ltd

DATE OF ISSUE : Dec. 05, 2022

STANDARD(S) : FCC Part 15.247

REPORT VERSION : V1.0

Attestation of Global Action (Shenzhen) Co., Ltd





Report No.: AGC12060221001FE03

Page 2 of 85

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec. 05, 2022	Valid	Initial Release




TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	
2.3. RECEIVER INPUT BANDWIDTH	
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	<u></u>
2.6. RELATED SUBMITTAL(S) / GRANT (S)	g
2.7. TEST METHODOLOGY	9
2.8. SPECIAL ACCESSORIES	g
2.9. EQUIPMENT MODIFICATIONS	
2.10. ANTENNA REQUIREMENT	10
3. MEASUREMENT UNCERTAINTY	11
4. DESCRIPTION OF TEST MODES	12
5. SYSTEM TEST CONFIGURATION	13
5.1. CONFIGURATION OF EUT SYSTEM	13
5.2. EQUIPMENT USED IN TESTED SYSTEM	13
5.3. SUMMARY OF TEST RESULTS	13
6. TEST FACILITY	14
7. PEAK OUTPUT POWER	15
7.1. MEASUREMENT PROCEDURE	15
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
7.3. LIMITS AND MEASUREMENT RESULT	
8. 20DB BANDWIDTH	21
8.1. MEASUREMENT PROCEDURE	21
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	21
8.3. LIMITS AND MEASUREMENT RESULTS	22
9. CONDUCTED SPURIOUS EMISSION	27
9.1 MEASUREMENT PROCEDURE	27



9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	27
9.3. MEASUREMENT EQUIPMENT USED	27
9.4. LIMITS AND MEASUREMENT RESULT	27
10. RADIATED EMISSION	48
10.1. MEASUREMENT PROCEDURE	48
10.2. TEST SETUP	50
10.3. LIMITS AND MEASUREMENT RESULT	51
10.4. TEST RESULT	51
11. NUMBER OF HOPPING FREQUENCY	71
11.1. MEASUREMENT PROCEDURE	71
11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	71
11.3. MEASUREMENT EQUIPMENT USED	71
11.4. LIMITS AND MEASUREMENT RESULT	71
12. TIME OF OCCUPANCY (DWELL TIME)	72
12.1. MEASUREMENT PROCEDURE	72
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	72
12.3. MEASUREMENT EQUIPMENT USED	72
12.4. LIMITS AND MEASUREMENT RESULT	72
13. FREQUENCY SEPARATION	76
13.1. MEASUREMENT PROCEDURE	76
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	76
13.3. MEASUREMENT EQUIPMENT USED	76
13.4. LIMITS AND MEASUREMENT RESULT	76
14. LINE CONDUCTED EMISSION TEST	77
14.1. LIMITS OF LINE CONDUCTED EMISSION TEST	77
14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	77
14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	78
14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	78
14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	78
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	85
APPENDIX B: PHOTOGRAPHS OF EUT	85





1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen Jiteng Network Technology Co., Ltd
Address No.1202, Bitian Pavilion, Bizhong Garden, No.10 Bibo First Street, Bi Community, Huangbei Street, Luohu District, Shenzhen City, China.	
Manufacturer	Shenzhen Jiteng Network Technology Co., Ltd
Address	No.1202, Bitian Pavilion, Bizhong Garden, No.10 Bibo First Street, Bibo Community, Huangbei Street, Luohu District, Shenzhen City, China.
Product Designation	Mini PC
Brand Name	GEEKOM
Test Model	Mini IT12
Date of receipt of test item	Oct. 26, 2022
Date of test	Oct. 28, 2022 –Dec. 02, 2022
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Reviewed By

Calvin Liu
(Reviewer)

Approved By

Max Zhang
(Authorized Officer)

Dec. 05, 2022

Dec. 05, 2022



Report No.: AGC12060221001FE03 Page 6 of 85

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "Mini PC". It is designed by way of utilizing the GFSK, Pi/4 DQPSK and 8DPSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480 GHz	
RF Output Power	8.532dBm (Max)	
Bluetooth Version V5.2		
BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps		
Number of channels 79		
Hardware Version	NUCAL02	
Software Version Window 11		
Antenna Designation PIFA Antenna (Comply with requirements of the FCC part 15.203)		
Antenna Gain 1.23dBi		
Power Supply DC 19V		

Note: The tested device has 5 adaptors (adapter 1#: BSY065T1903423D, adapter 2#: A653-1903420DI, adapter 3#: A1001-1904740DI, adapter 4#: SOY-1900474-410, adapter 5#: MS-Z6320R190-120D0-E) and 4 CPUs (CPU 1#: I7-12700H, CPU 2#: I7-1260P, CPU 3#: I3-1220P, CPU 4#: I5-1240P) respectively. The radiation part only shows the following 3 adapters (adapter 2#: A653-1903420DI, adapter 3#: A1001-1904740DI, adapter 5#: MS-Z6320R190-120D0-E) and the highest performance CPU: I7-12700H is the worst test result.



Report No.: AGC12060221001FE03

Page 7 of 85

Product: Mini PC

Model Number: Mini IT12

NOTE: The following information is for sale collocation, select the highest configuration for matching test

Object/part no.	Manufacturer/ Trademark	Type/Model	Technical Data
CPU	Intel	I7-12700H	4.70 GHz, 6 core
DDR	Crucial	CT32G4SFD832A	32GB*2
Hard disk	Toshiba	ST2000LM015	1TB
SSD	Kingston	OM8PDP3 Series	512GB

Object/part no.	Manufacturer/ Trademark	Type/Model	Technical Data
CPU	Intel	I7-1260P	4.70 GHz, 4 core
DDR	Crucial	CT32G4SFD832A	8GB*2
Hard disk	Toshiba	ST2000LM015	1TB
SSD	Kingston	OM8PDP3 Series	256GB

Object/part no.	Manufacturer/ Trademark	Type/Model	Technical Data
CPU	Intel	I3-1220P	4.70 GHz, 4 core
DDR	Crucial	CT32G4SFD832A	8GB*2
Hard disk	Toshiba	ST2000LM015	1TB
SSD	Kingston	OM8PDP3 Series	256GB

Object/part no.	Manufacturer/ Trademark	Type/Model	Technical Data
CPU	Intel	I5-1240P	4.70 GHz, 4 core
DDR	Crucial	CT32G4SFD832A	8GB*2
Hard disk	Toshiba	ST2000LM015	1TB
SSD	Kingston	OM8PDP3 Series	256GB



Page 8 of 85



2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	1	2403 MHz
	:	:
	38	2440 MHz
2402~2480MHz	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a hopping sequence in data mode:

40, 21, 44, 23, 04, 15, 66, 56, 19, 78, 07, 28, 69, 55,

36, 45, 05, 13, 43, 74, 57, 35, 67, 76, 02, 34, 54, 63,

42, 11, 30, 06, 64, 25, 75, 48, 17, 33, 58, 01, 29, 14,

51, 72, 03, 31, 50, 61, 77, 18, 10, 47, 12, 68, 08, 49,

20, 00, 73, 09, 16, 60, 71, 41, 24, 53, 38, 26, 46, 37,

65, 32, 70, 52, 27, 59, 22, 62, 39



Report No.: AGC12060221001FE03 Page 9 of 85

2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AY4C-GM05** filing to comply with the FCC PART 15.247 requirements.

2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



Report No.: AGC12060221001FE03

Page 10 of 85

2.10. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Report No.: AGC12060221001FE03

Page 11 of 85

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2.7 %
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$




4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π/4-DQPSK
5	Middle channel π/4-DQPSK
6	High channel π/4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Hopping mode GFSK
11	Hopping mode π/4-DQPSK
12	Hopping mode 8DPSK

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

Software Setting

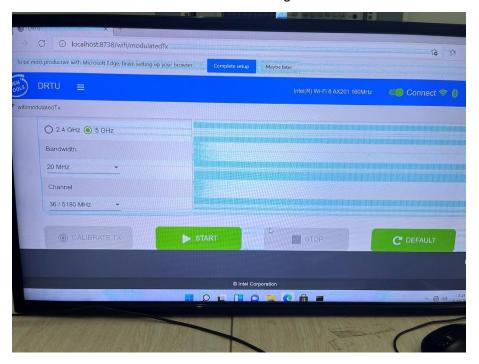

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




Report No.: AGC12060221001FE03 Page 13 of 85


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:



5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Mini PC	Mini IT12	2AY4C-GM05	EUT
2	Bluetooth speaker	SRS-XB01		AE
3	Xiaomi router	R4A		AE
4	Adapter 1	BSY065T1903423D	Input: 100-240V, 50/60Hz, 1.5 A Output: DC 19.0V, 3.42A, 64.98W	AE
5	Adapter 2	A653-1903420DI	Input: 100-240V, 50/60Hz, 1.5 A Output: DC 19.0V, 3.42A, 65W	AE
6	Adapter 3	A1001-1904740DI	Input: 100-240V, 50/60Hz, 2.5A Output: DC 19.0V, 4.74A, 90.0W	AE
7	Adapter 4	SOY-1900474-410	Input: 100-240V, 50/60Hz, 1.8A Output: DC19.04V, 4.74A, 90.06W	AE
8	Adapter 5	MS-Z6320R190-120 D0-E	Input: 100-240V, 50/60Hz, 2.0 A Output: DC 19.0V, 6.32A, 120.0W	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(1)	Peak Output Power	Compliant
15.247 (a)(1)	20 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.209	Radiated Emission	Compliant
15.247 (a)(1)(iii)	Number of Hopping Frequency	Compliant
15.247 (a)(1)(iii)	Time of Occupancy	Compliant
15.247 (a)(1)	Frequency Separation	Compliant
15.207	Conducted Emission	Compliant



Report No.: AGC12060221001FE03

Page 14 of 85

6. TEST FACILITY


Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	N/A	N/A
Attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 21, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Aug. 04, 2022	Aug. 03, 2024
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2020	Jan. 07, 2023
Test software	Tonscend	JS32-RE	Ver.2.5	N/A	N/A





7. PEAK OUTPUT POWER

7.1. MEASUREMENT PROCEDURE


For peak power test:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW ≥RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP

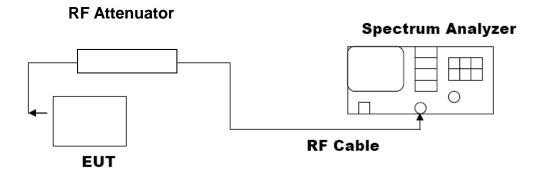





7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power					
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2402	6.902	 \$21	Pass	
GFSK	2441	5.150	⊴ 21	Pass	
	2480	8.532	 \$21	Pass	
	2402	5.272	 21	Pass	
π /4-DQPSK	2441	5.697	⊴ 21	Pass	
	2480	5.870	 \$21	Pass	
	2402	5.454	 \$21	Pass	
8DPSK	2441	5.934	⊴ 21	Pass	
	2480	6.132	 \$21	Pass	

Test Graphs of Conducted Output Power



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/


Freq Offset

Scale Type

Log

Span 5.000 MHz Sweep 1.066 ms (1000 pts)



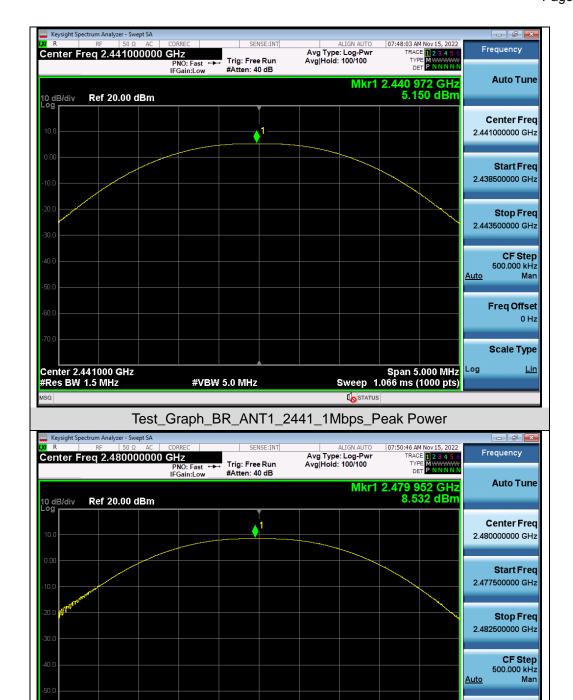

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_BR_ANT1_2480_1Mbps_Peak Power

#VBW 5.0 MHz

Center 2.480000 GHz #Res BW 1.5 MHz







Stop Freq 2.404500000 GHz

CF Step 500.000 kHz


Freq Offset

Scale Type

Man

<u>Auto</u>



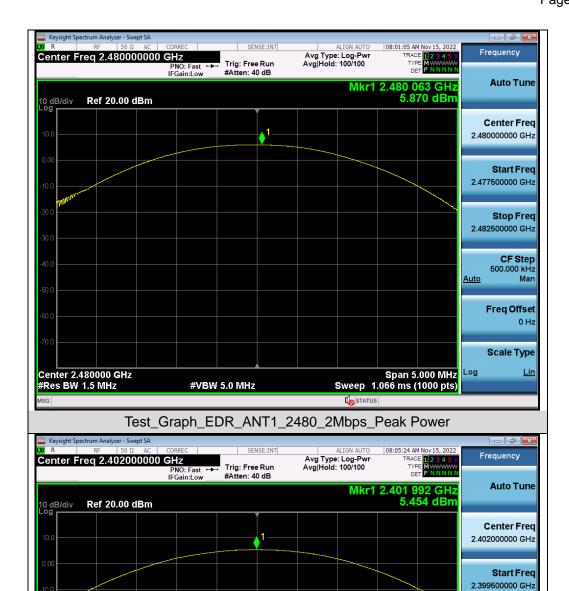


Center 2.402000 GHz
#Res BW 1.5 MHz #VBW 5.0 MHz Sweep 1.066 ms (1000 pts)

MSG

Test_Graph_EDR_ANT1_2402_3Mbps_Peak Power

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



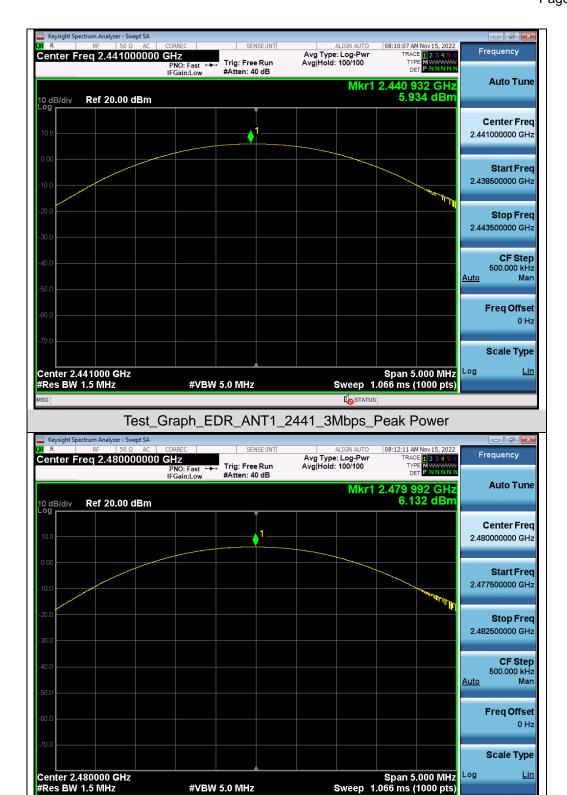

Test_Graph_EDR_ANT1_2480_3Mbps_Peak Power

#VBW 5.0 MHz

Web: http://www.agccert.com/



Report No.: AGC12060221001FE03


Page 21 of 85


8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

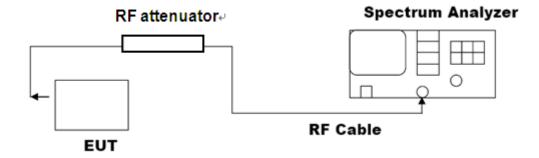






8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and -20dB Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail
	2402	0.880	0.951	N/A	Pass
GFSK	2441	0.888	0.973	N/A	Pass
	2480	0.890	0.971	N/A	Pass
	2402	1.358	1.433	N/A	Pass
π /4-DQPSK	2441	1.353	1.442	N/A	Pass
	2480	1.354	1.442	N/A	Pass
	2402	1.367	1.476	N/A	Pass
8DPSK	2441	1.356	1.475	N/A	Pass
	2480	1.356	1.477	N/A	Pass

Test Graphs of Occupied Bandwidth and -20 Bandwidth

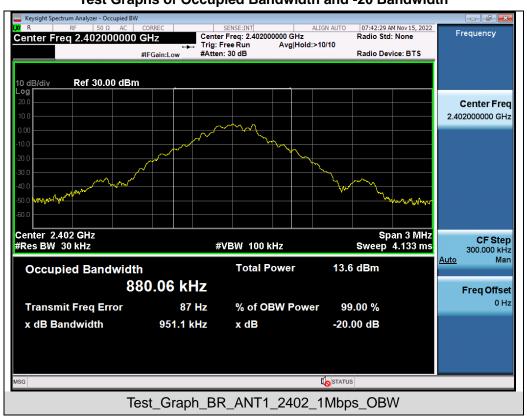



















Report No.: AGC12060221001FE03

Page 27 of 85

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
 - RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

9.3. MEASUREMENT EQUIPMENT USED


The same as described in section 6

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Amuliachia Limita	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 kHz Bandwidth Outside the	At least -20dBc than the limit			
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS		
intentional radiator is operating, the radio frequency	Channel			
power that is produce by the intentional radiator shall				
be at least 20 dB below that in 100KHz bandwidth				
within the band that contains the highest level of the				
desired power.	At least -20dBc than the limit	PASS		
In addition, radiation emissions which fall in the	Specified on the TOP Channel	PASS		
restricted bands, as defined in §15.205(a), must also				
comply with the radiated emission limits specified				
in§15.209(a))				



Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands

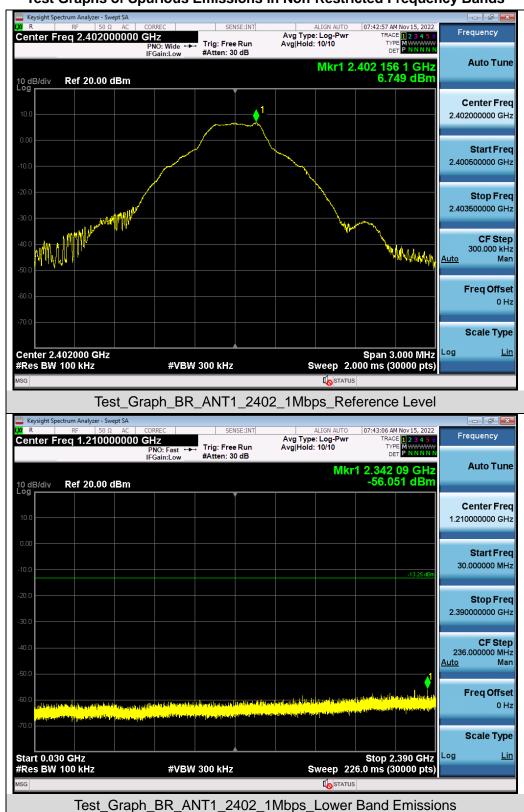


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Scale Type

Log

Span 3.000 MHz Sweep 2.000 ms (30000 pts)



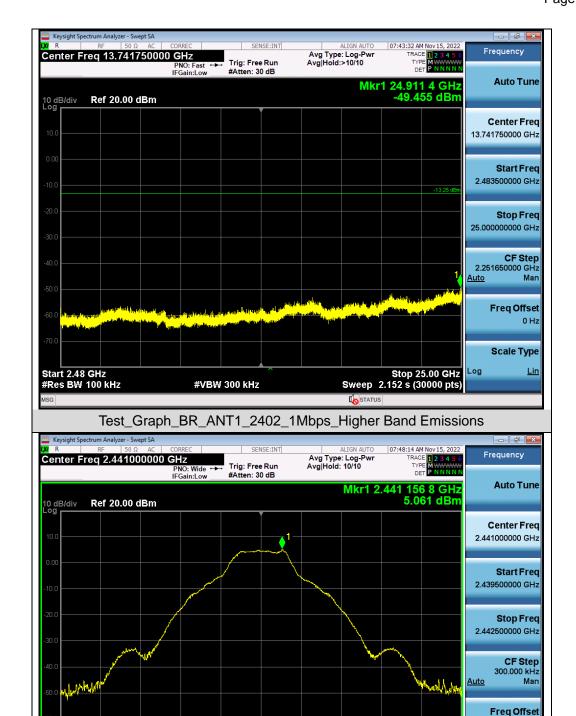


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_BR_ANT1_2441_1Mbps_Reference Level

#VBW 300 kHz

Center 2.441000 GHz #Res BW 100 kHz



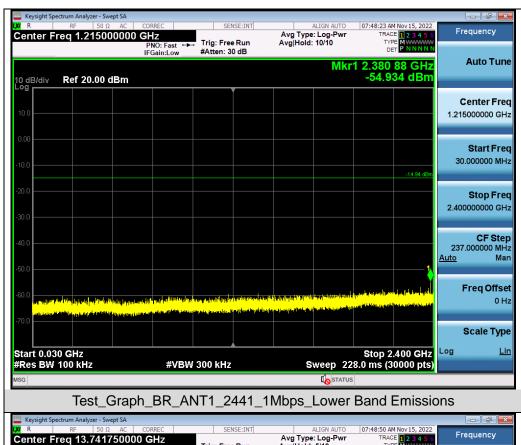








Test_Graph_BR_ANT1_2480_1Mbps_Lower Band Emissions









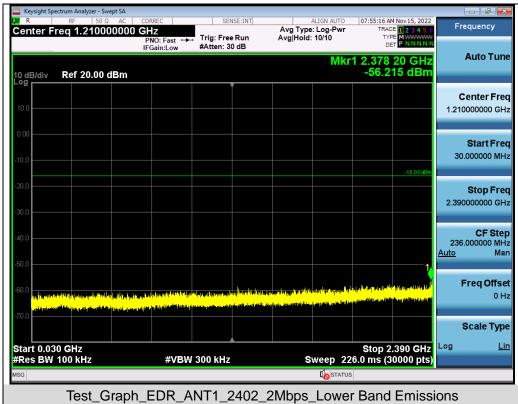




Scale Type

Log

Stop 2.400 GHz Sweep 228.0 ms (30000 pts)



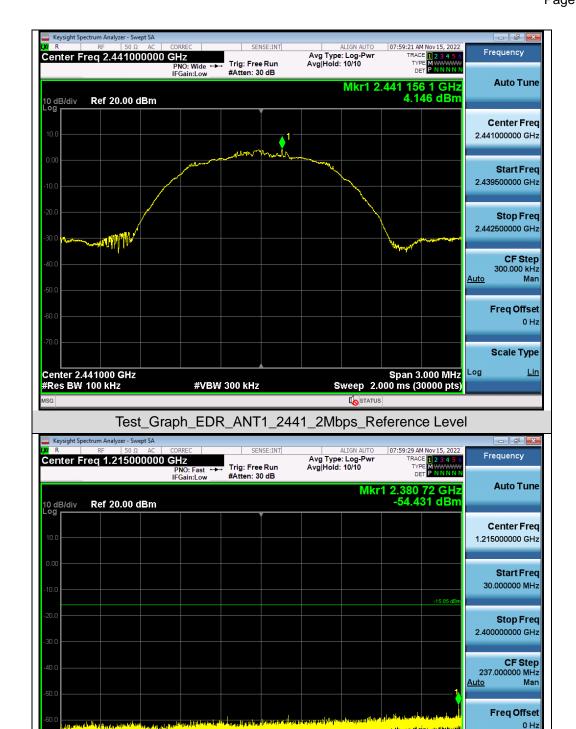

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_EDR_ANT1_2441_2Mbps_Lower Band Emissions

#VBW 300 kHz

Start 0.030 GHz #Res BW 100 kHz

300.000 kHz

Freq Offset

Scale Type


Man

<u>Auto</u>

Log

Span 3.000 MHz Sweep 2.000 ms (30000 pts)



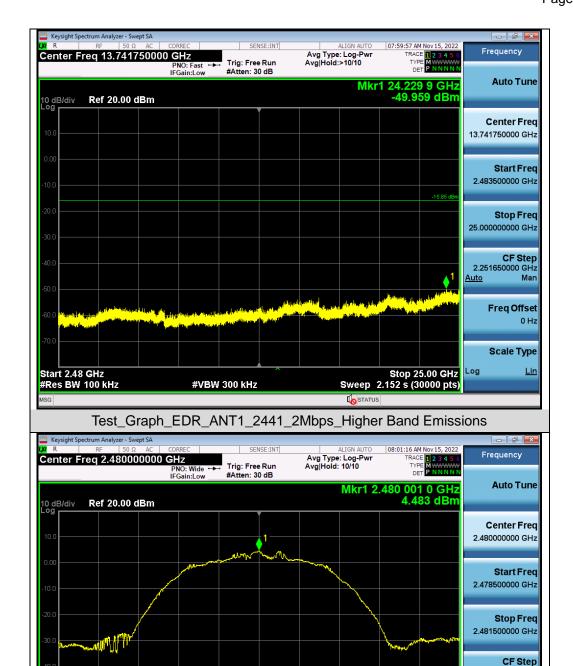


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_EDR_ANT1_2480_2Mbps_Reference Level

#VBW 300 kHz

Center 2.480000 GHz #Res BW 100 kHz




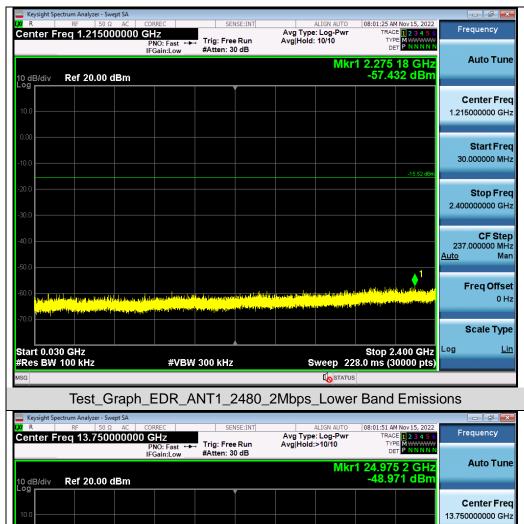

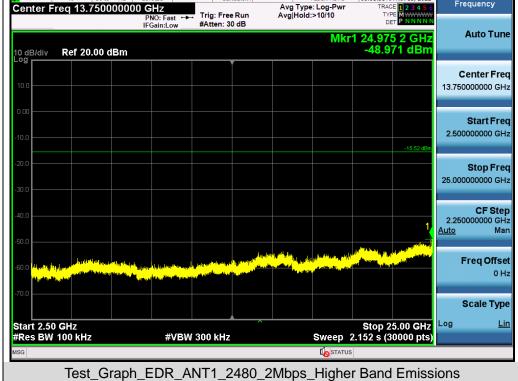





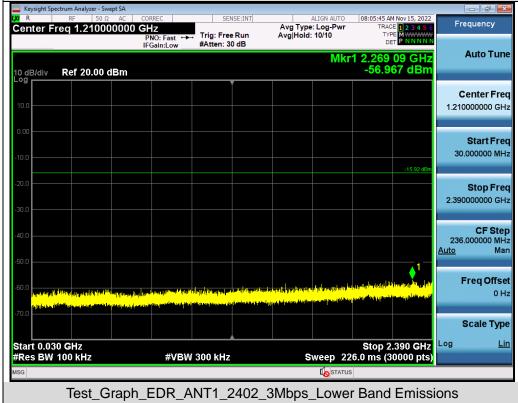


Freq Offset

Scale Type

Log

Span 3.000 MHz Sweep 2.000 ms (30000 pts)



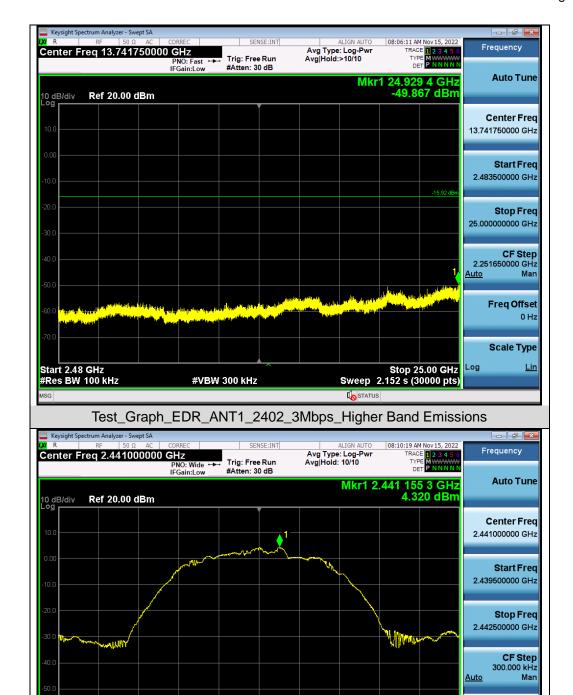


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_EDR_ANT1_2441_3Mbps_Reference Level

#VBW 300 kHz

Center 2.441000 GHz #Res BW 100 kHz



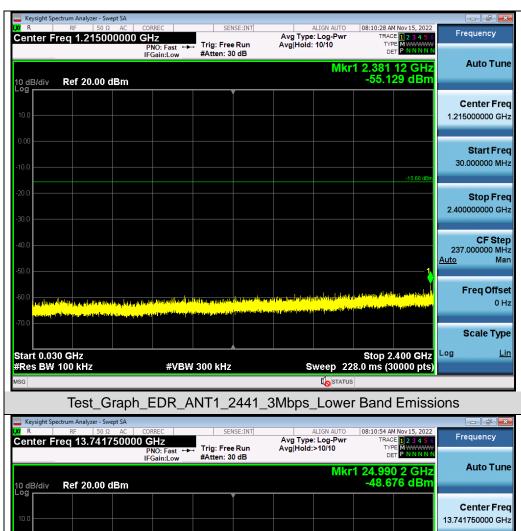

PNO: Fast → Trig: Free Run | Avg|Hold:>10.10 | Free Run | Avg|Hold:>10.10 | Free Run | Ref 20.00 dBm | Avg|Hold:>10.10 | Ref 20.00 dBm | Avg|Hold:>10.10 |


Freq Offset 0 Hz

Scale Type

Log

Stop 2.400 GHz Sweep 228.0 ms (30000 pts)



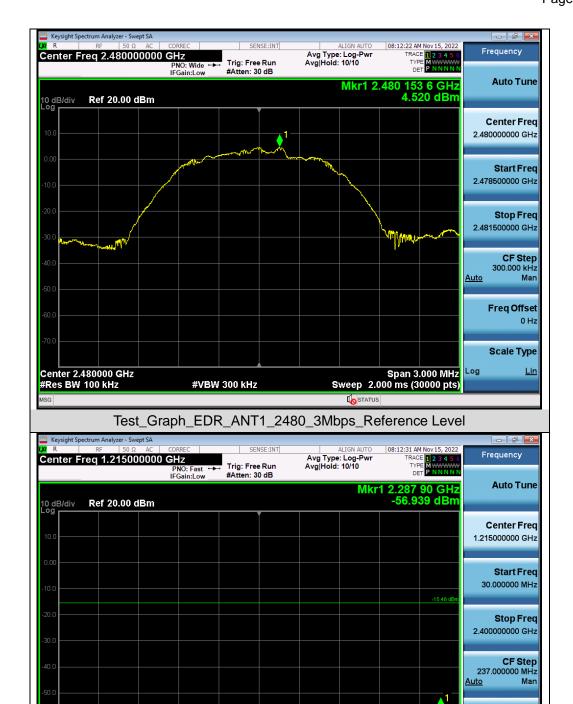


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_EDR_ANT1_2480_3Mbps_Lower Band Emissions

#VBW 300 kHz

Start 0.030 GHz #Res BW 100 kHz




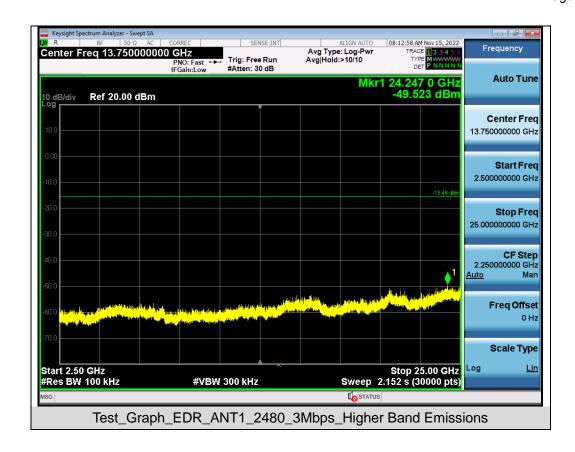





Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

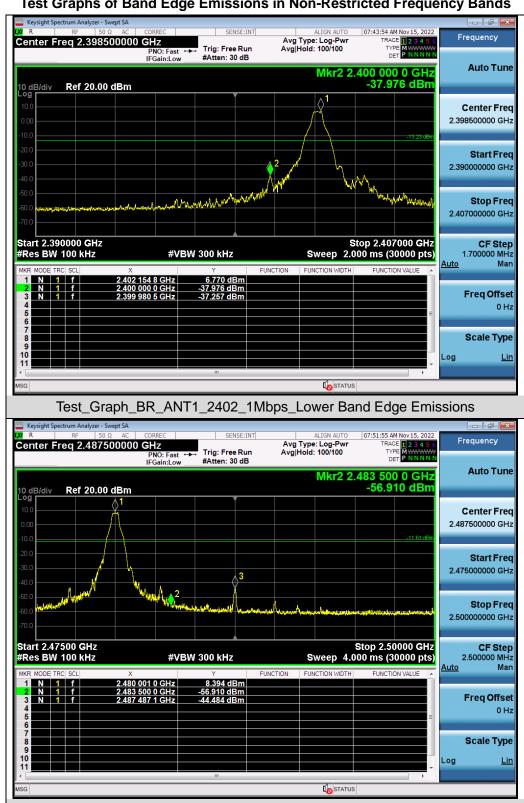


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_BR_ANT1_2480_1Mbps_Higher Band Edge Emissions

Web: http://www.agccert.com/



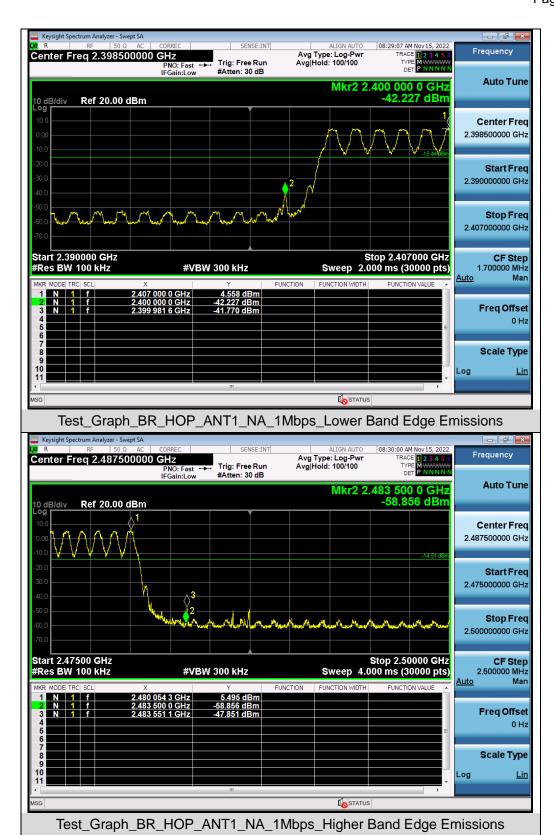





Scale Type

Log





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_EDR_HOP_ANT1_NA_2Mbps_Higher Band Edge Emissions





Scale Type

Log





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_EDR_HOP_ANT1_NA_3Mbps_Higher Band Edge Emissions



Report No.: AGC12060221001FE03 Page 48 of 85

10. RADIATED EMISSION

10.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Report No.: AGC12060221001FE03

Page 49 of 85

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start Stan Fraguency	1GHz~26.5GHz		
Start ~Stop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average		

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




10.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

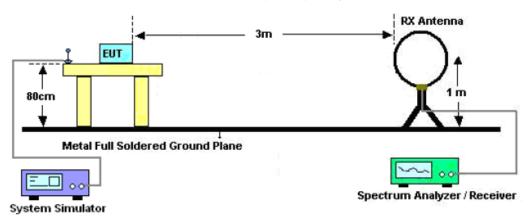

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

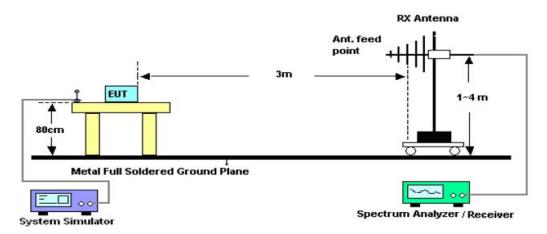

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

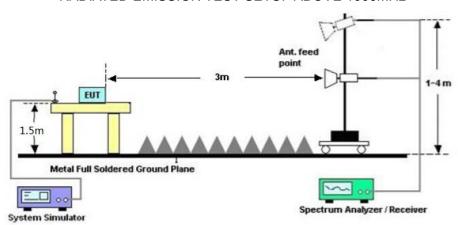



Report No.: AGC12060221001FE03

Page 51 of 85

10.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

10.4. TEST RESULT

Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Radiated emission from 30MHz to 1000MHz

Adapter 2

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

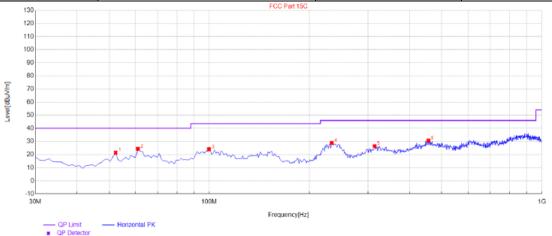


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	52.31	21.43	10.76	40.00	18.57	100	1	Horizontal
2	61.04	24.33	13.64	40.00	15.67	100	171	Horizontal
3	99.84	24.05	18.39	43.50	19.45	100	183	Horizontal
4	233.7	28.87	17.53	46.00	17.13	100	78	Horizontal
5	314.21	26.48	20.84	46.00	19.52	100	320	Horizontal
6	455.83	30.60	26.00	46.00	15.40	100	140	Horizontal

RESULT: PASS



EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

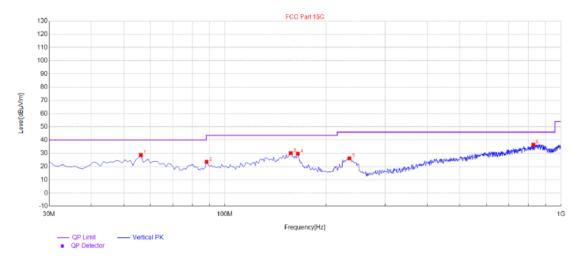


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	56.19	28.71	14.92	40.00	11.29	100	4	Vertical
2	88.2	23.53	11.83	43.50	19.97	100	3	Vertical
3	157.07	30.13	21.64	43.50	13.37	100	153	Vertical
4	164.83	29.76	20.24	43.50	13.74	100	56	Vertical
5	234.67	26.24	13.52	46.00	19.76	100	126	Vertical
6	827.34	36.55	31.55	46.00	9.45	100	299	Vertical

RESULT: PASS



Adapter 3

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

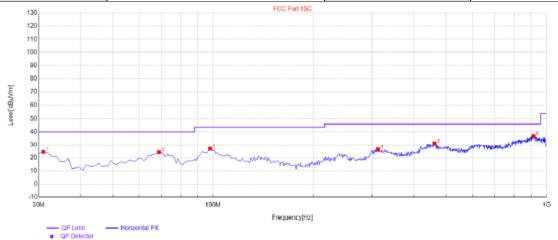


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.97	24.38	12.16	40.00	15.62	100	116	Horizontal
2	68.8	24.16	11.63	40.00	15.84	100	231	Horizontal
3	97.9	26.97	17.45	43.50	16.53	100	238	Horizontal
4	312.27	26.47	20.68	46.00	19.53	100	356	Horizontal
5	461.65	31.16	26.41	46.00	14.84	100	178	Horizontal
6	913.67	37.00	31.07	46.00	9.00	100	103	Horizontal

RESULT: PASS



EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

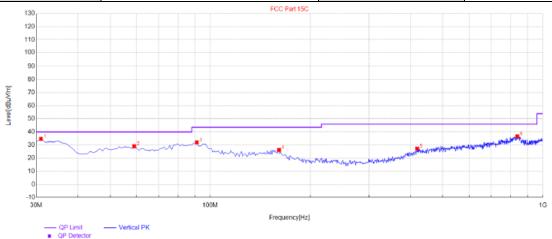


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.97	34.63	9.93	40.00	5.37	100	21	Vertical
2	59.1	29.04	15.68	40.00	10.96	100	168	Vertical
3	91.11	31.98	11.73	43.50	11.52	100	330	Vertical
4	160.95	26.35	21.61	43.50	17.15	100	231	Vertical
5	418.97	27.28	21.39	46.00	18.72	100	17	Vertical
6	838.01	36.70	31.54	46.00	9.30	100	168	Vertical

RESULT: PASS



Adapter 5

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

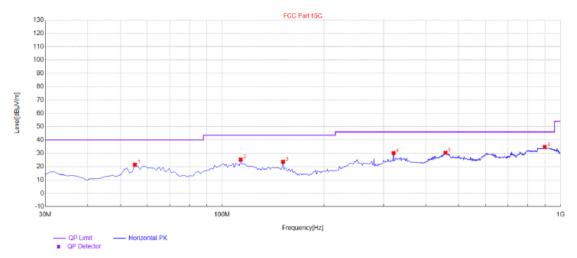


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	55.22	21.46	11.95	40.00	18.54	100	261	Horizontal
2	113.42	25.37	15.12	43.50	18.13	100	230	Horizontal
3	151.25	23.67	14.20	43.50	19.83	100	58	Horizontal
4	321	30.18	21.31	46.00	15.82	100	297	Horizontal
5	456.8	30.35	26.15	46.00	15.65	100	62	Horizontal
6	898.15	34.68	31.50	46.00	11.32	100	0	Horizontal

RESULT: PASS



EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

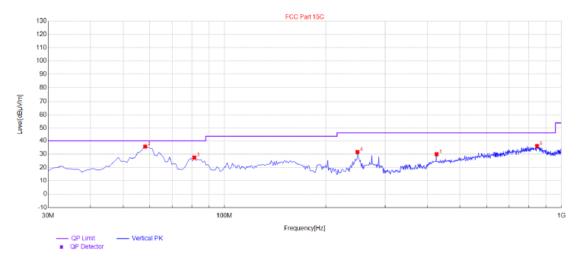


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	58.13	35.60	15.43	40.00	4.40	100	82	Vertical
2	58.13	35.60	15.43	40.00	4.40	100	82	Vertical
3	81.41	27.46	12.09	40.00	12.54	100	355	Vertical
4	248.25	31.64	12.03	46.00	14.36	100	204	Vertical
5	425.76	29.94	21.43	46.00	16.06	100	122	Vertical
6	845.77	35.99	31.83	46.00	10.01	100	236	Vertical

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 3 is the worst case and recorded in the report.





Radiated emission above 1GHz

Adapter 2

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.35	0.08	46.43	74	-27.57	peak
4804.000	37.54	0.08	37.62	54	-16.38	AVG
7206.000	41.05	2.21	43.26	74	-30.74	peak
7206.000	31.59	2.21	33.8	54	-20.2	AVG
Remark:						


Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	44.94	0.08	45.02	74	-28.98	peak
4804.000	35.87	0.08	35.95	54	-18.05	AVG
7206.000	41.04	2.21	43.25	74	-30.75	peak
7206.000	32.91	2.21	35.12	54	-18.88	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.





EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
45.16	0.14	45.3	74	-28.7	peak
37.48	0.14	37.62	54	-16.38	AVG
42.13	2.36	44.49	74	-29.51	peak
32.64	2.36	35	54	-19	AVG
	(dBµV) 45.16 37.48 42.13	(dBµV) (dB) 45.16 0.14 37.48 0.14 42.13 2.36	(dBμV) (dB) (dBμV/m) 45.16 0.14 45.3 37.48 0.14 37.62 42.13 2.36 44.49	(dBμV) (dB) (dBμV/m) (dBμV/m) 45.16 0.14 45.3 74 37.48 0.14 37.62 54 42.13 2.36 44.49 74	(dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m) 45.16 0.14 45.3 74 -28.7 37.48 0.14 37.62 54 -16.38 42.13 2.36 44.49 74 -29.51

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	46.29	0.14	46.43	74	-27.57	peak
4882.000	37.84	0.14	37.98	54	-16.02	AVG
7323.000	41.06	2.36	43.42	74	-30.58	peak
7323.000	32.45	2.36	34.81	54	-19.19	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.





EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.29	0.22	46.51	74	-27.49	peak
4960.000	37.64	0.22	37.86	54	-16.14	AVG
7440.000	41.05	2.64	43.69	74	-30.31	peak
7440.000	32.94	2.64	35.58	54	-18.42	AVG
emark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.91	0.22	47.13	74	-26.87	peak
4960.000	37.18	0.22	37.4	54	-16.6	AVG
7440.000	41.05	2.64	43.69	74	-30.31	peak
7440.000	32.48	2.64	35.12	54	-18.88	AVG
Remark:	1		'	ı	1	ı
Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

RESULT: PASS





Adapter 3

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	45.23	0.08	45.31	74	-28.69	peak
4804.000	36.84	0.08	36.92	54	-17.08	AVG
7206.000	41.02	2.21	43.23	74	-30.77	peak
7206.000	31.59	2.21	33.8	54	-20.2	AVG

Remark

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	44.97	0.08	45.05	74	-28.95	peak
4804.000	35.12	0.08	35.2	54	-18.8	AVG
7206.000	40.19	2.21	42.4	74	-31.6	peak
7206.000	39.97	2.21	42.18	54	-11.82	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: AGC12060221001FE03

Page 62 of 85

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4882.000	45.13	0.14	45.27	74	-28.73	peak
4882.000	38.41	0.14	38.55	54	-15.45	AVG
7323.000	41.05	2.36	43.41	74	-30.59	peak
7323.000	32.49	2.36	34.85	54	-19.15	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4882.000	46.23	0.14	46.37	74	-27.63	peak
4882.000	37.51	0.14	37.65	54	-16.35	AVG
7323.000	41.02	2.36	43.38	74	-30.62	peak
7323.000	32.19	2.36	34.55	54	-19.45	AVG
		_				

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.





EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.25	0.22	46.47	74	-27.53	peak
4960.000	37.54	0.22	37.76	54	-16.24	AVG
7440.000	42.16	2.64	44.8	74	-29.2	peak
7440.000	31.59	2.64	34.23	54	-19.77	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4960.000	46.28	0.22	46.5	74	-27.5	peak	
4960.000	37.54	0.22	37.76	54	-16.24	AVG	
7440.000	41.05	2.64	43.69	74	-30.31	peak	
7440.000	32.19	2.64	34.83	54	-19.17	AVG	
Remark:							
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

RESULT: PASS





Adapter 5

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	45.26	0.08	45.34	74	-28.66	peak
4804.000	37.54	0.08	37.62	54	-16.38	AVG
7206.000	41.02	2.21	43.23	74	-30.77	peak
7206.000	32.49	2.21	34.7	54	-19.3	AVG

Remark

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	44.26	0.08	44.34	74	-29.66	peak
4804.000	35.97	0.08	36.05	54	-17.95	AVG
7206.000	41.05	2.21	43.26	74	-30.74	peak
7206.000	32.48	2.21	34.69	54	-19.31	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Report No.: AGC12060221001FE03

Page 65 of 85

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	46.34	0.14	46.48	74	-27.52	peak
4882.000	38.54	0.14	38.68	54	-15.32	AVG
7323.000	42.16	2.36	44.52	74	-29.48	peak
7323.000	32.59	2.36	34.95	54	-19.05	AVG
Domorla						I

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	46.19	0.14	46.33	74	-27.67	peak
4882.000	37.84	0.14	37.98	54	-16.02	AVG
7323.000	41.05	2.36	43.41	74	-30.59	peak
7323.000	32.16	2.36	34.52	54	-19.48	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Report No.: AGC12060221001FE03

Page 66 of 85

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4960.000	46.28	0.22	46.5	74	-27.5	peak
4960.000	38.61	0.22	38.83	54	-15.17	AVG
7440.000	42.18	2.64	44.82	74	-29.18	peak
7440.000	32.94	2.64	35.58	54	-18.42	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	Mini PC	Model Name	Mini IT12
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	- Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4960.000	47.51	0.22	47.73	74	-26.27	peak
4960.000	38.54	0.22	38.76	54	-15.24	AVG
7440.000	41.05	2.64	43.69	74	-30.31	peak
7440.000	32.99	2.64	35.63	54	-18.37	AVG
Remark:				1	•	•
Factor = Anter	nna Factor + Cabl	e Loss – Pre-a	mplifier.			

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The GFSK modulation is the worst case and recorded in the report.