


## FCC PART 15.247 TEST REPORT

For

### Shenzhen Xiantaistar Technology Co., Ltd

201&401, No.528 Pinglong East Rd, Pinghu Street, Longgang District, Shenzhen, China

**FCC ID: 2AXLH7003WS**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Anti-Stress Gel Silicone Wireless Mouse
<b>Report Number:</b> RSZ200903008-00	
<b>Report Date:</b> 2021-01-12	
Jacob Kong 	
<b>Reviewed By:</b> RF Engineer	
<b>Prepared By:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '\*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## **TABLE OF CONTENTS**

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	4
OBJECTIVE .....	4
TEST METHODOLOGY .....	4
MEASUREMENT UNCERTAINTY .....	5
TEST FACILITY .....	5
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION .....	6
EUT EXERCISE SOFTWARE .....	6
SPECIAL ACCESSORIES .....	6
EQUIPMENT MODIFICATIONS .....	6
SUPPORT EQUIPMENT LIST AND DETAILS .....	6
EXTERNAL I/O CABLE .....	6
BLOCK DIAGRAM OF TEST SETUP .....	7
<b>SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>9</b>
<b>FCC§15.247 (i), §1.1307 (b) (1) &amp; §2.1093 – RF EXPOSURE .....</b>	<b>10</b>
APPLICABLE STANDARD .....	10
<b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>	<b>11</b>
APPLICABLE STANDARD .....	11
ANTENNA CONNECTOR CONSTRUCTION .....	11
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
EUT SETUP .....	12
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	13
TEST PROCEDURE .....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	13
TEST DATA .....	13
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>	<b>21</b>
APPLICABLE STANDARD .....	21
TEST PROCEDURE .....	21
TEST DATA .....	21
<b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....</b>	<b>23</b>
APPLICABLE STANDARD .....	23
TEST PROCEDURE .....	23
TEST DATA .....	23
<b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>26</b>
APPLICABLE STANDARD .....	26
TEST PROCEDURE .....	26
TEST DATA .....	26
<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>28</b>
APPLICABLE STANDARD .....	28
TEST PROCEDURE .....	28
TEST DATA .....	28

<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>30</b>
APPLICABLE STANDARD .....	30
TEST PROCEDURE .....	30
TEST DATA .....	30
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>31</b>
APPLICABLE STANDARD .....	31
TEST PROCEDURE .....	31
TEST DATA .....	31

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	Anti-Stress Gel Silicone Wireless Mouse
Tested Model	7003WS
Multiple Model	7004WS
Model Differences	Refer to the DoS letter
Frequency Range	2411~2471 MHz
Maximum Conducted Peak Output Power	0.99dBm
Modulation Technique	GFSK
Antenna Specification*	-3dBi(It is provided by the applicant)
Voltage Range	DC 1.5V
Date of Test	2020-09-18 to 2021-01-11
Sample serial number	RSZ200903008-RF-S1 (Assigned by BACL, Shenzhen)
Received date	2020-09-03
Sample/EUT Status	Good condition

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

For Radiated Emissions testing, please refer to DA 00-705 Released March 30, 2000, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
AC Power Lines Conducted Emissions		±1.95dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

#### Channel list

Channel	Freq.(MHz)	Channel	Freq.(MHz)	Channel	Freq.(MHz)	Channel	Freq.(MHz)
0	2411	8	2427	16	2443	24	2459
1	2413	9	2429	17	2445	25	2461
2	2415	10	2431	18	2447	26	2463
3	2417	11	2433	19	2449	27	2465
4	2419	12	2435	20	2451	28	2467
5	2421	13	2437	21	2453	29	2469
6	2423	14	2439	22	2455	30	2471
7	2425	15	2441	23	2457	/	/

EUT was tested with Channel 0, 15 and 30.

### EUT Exercise Software

No exercise software.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

### External I/O Cable

Cable Description	Length (m)	From Port	To
/	/	/	/

## Block Diagram of Test Setup

For radiated emission:

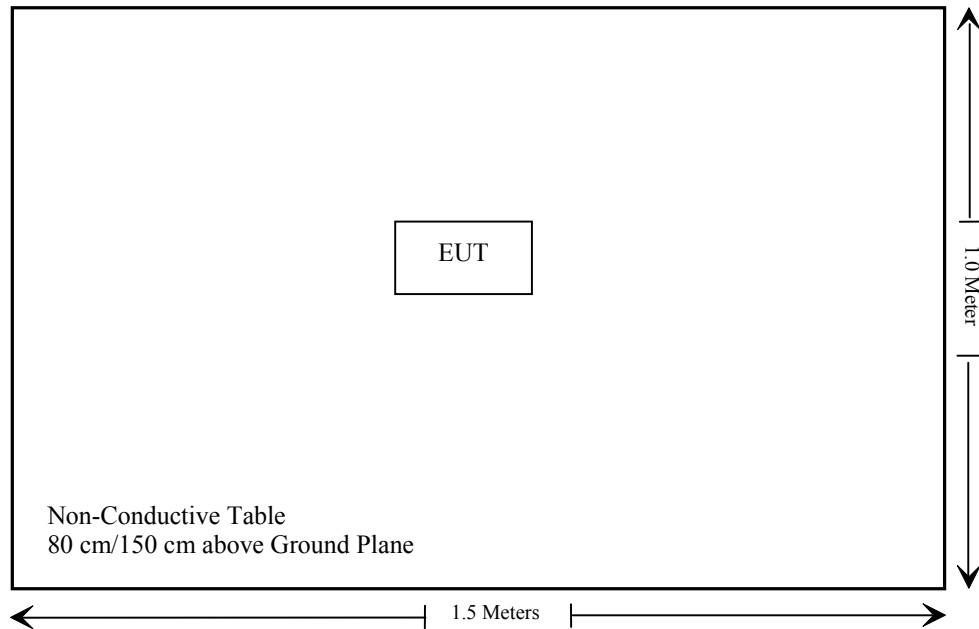

**SUMMARY OF TEST RESULTS**

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

Not Applicable: The EUT is powered by battery.



**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test</b>					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2019/11/29	2020/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2019/11/29	2020/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2020/11/29	2021/11/28
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2020/11/29	2021/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2020/12/22	2021/12/21
Insulated Wire Inc.	RF Cable	SPS-2503-3150	02222010	2020/11/29	2021/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2020/11/29	2021/11/28
SNSD	Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2020/04/20	2021/04/20
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-02 1304	2020/12/06	2023/12/05
<b>RF Conducted Test</b>					
Agilent	USB Wideband Power Sensor	U2021XA	MY54250003	2020/08/04	2021/08/03
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2020/04/03	2021/04/02
WEINSCHTEL	10dB Attenuator	5324	AU3842	2019/11/29	2020/11/28
WEINSCHTEL	10dB Attenuator	5324	AU3842	2020/11/29	2021/11/28
Unknown	RF Cable	Unknown	2301 276	2019/11/29	2020/11/28
Unknown	RF Cable	Unknown	2301 276	2020/11/29	2021/11/28

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## **FCC§15.247 (i), §1.1307 (b) (1) &§2.1093 – RF EXPOSURE**

### **Applicable Standard**

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

1.  $f(\text{GHz})$  is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test Exclusion.

**For worst case:**

Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold	SAR Test Exclusion
	(dBm)	(mW)				
2471	1.2	1.32	5	0.4	3.0	Yes

**Result: No Standalone SAR test is required**

---

**FCC §15.203 – ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.



**Antenna Connector Construction**

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is -3 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

**Result: Pass**

**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS****Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

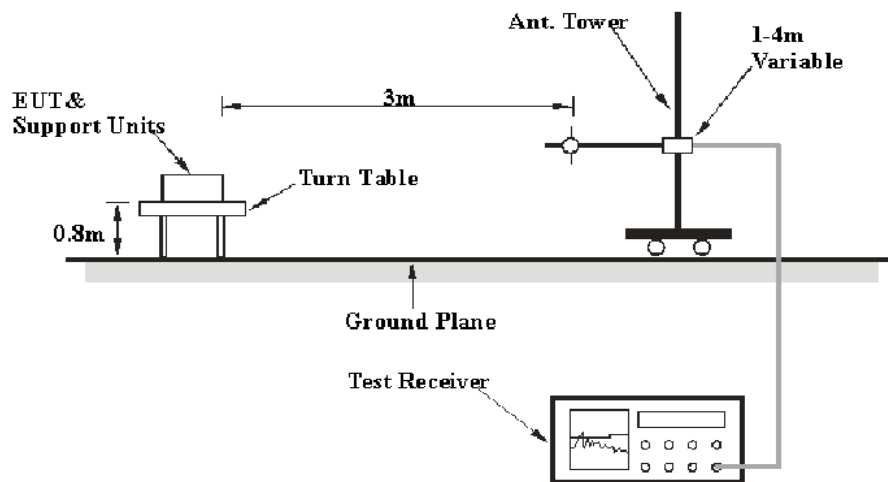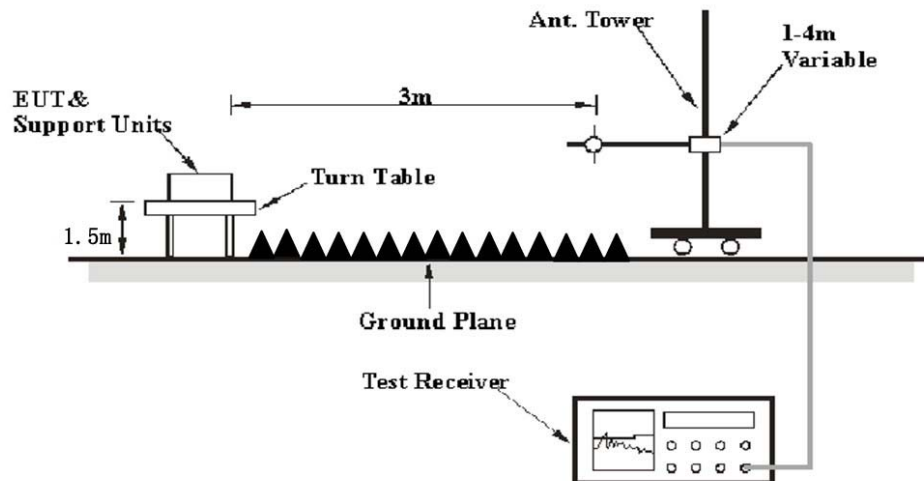**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, according to the DA 00-705 Released March 30, 2000, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$


## Test Data

### Environmental Conditions

<b>Temperature:</b>	30~32.2 °C
<b>Relative Humidity:</b>	55~60 %
<b>ATM Pressure:</b>	100.7~101.0 kPa


*The testing was performed by Harris He on 2020-09-18 for below 1GHz and Alan He on 2021-01-06 for above 1GHz.*

*EUT Operation Mode: Transmitting*

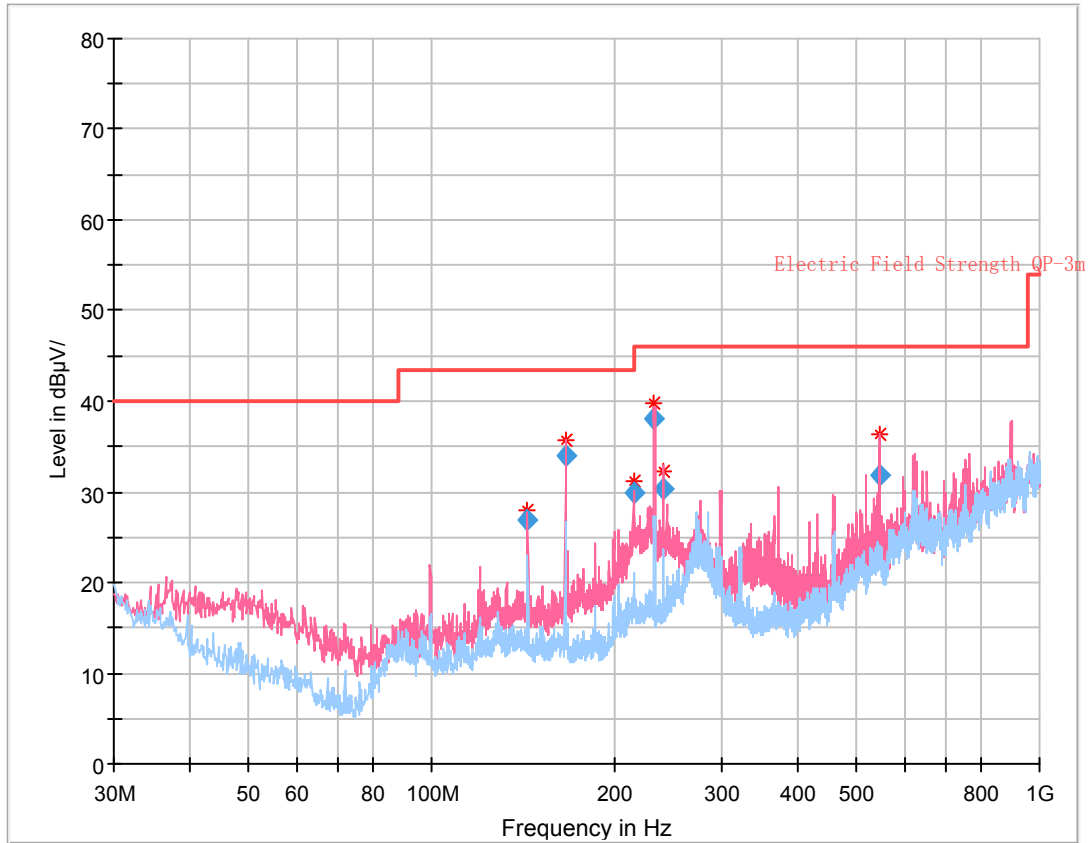**30 MHz~1 GHz:***For EUT Model: 7003WS***Final Result**

Frequency (MHz)	QuasiPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
144.009500	26.86	43.50	16.64	110.0	V	312.0	-14.2
165.964625	33.90	43.50	9.60	102.0	V	317.0	-14.7
214.775500	29.81	43.50	13.69	103.0	V	244.0	-13.9
232.350375	38.13	46.00	7.87	103.0	V	310.0	-14.0
239.998375	30.30	46.00	15.70	111.0	V	307.0	-14.1
546.812250	31.89	46.00	14.11	181.0	V	314.0	-4.2

For EUT Model: 7004WS

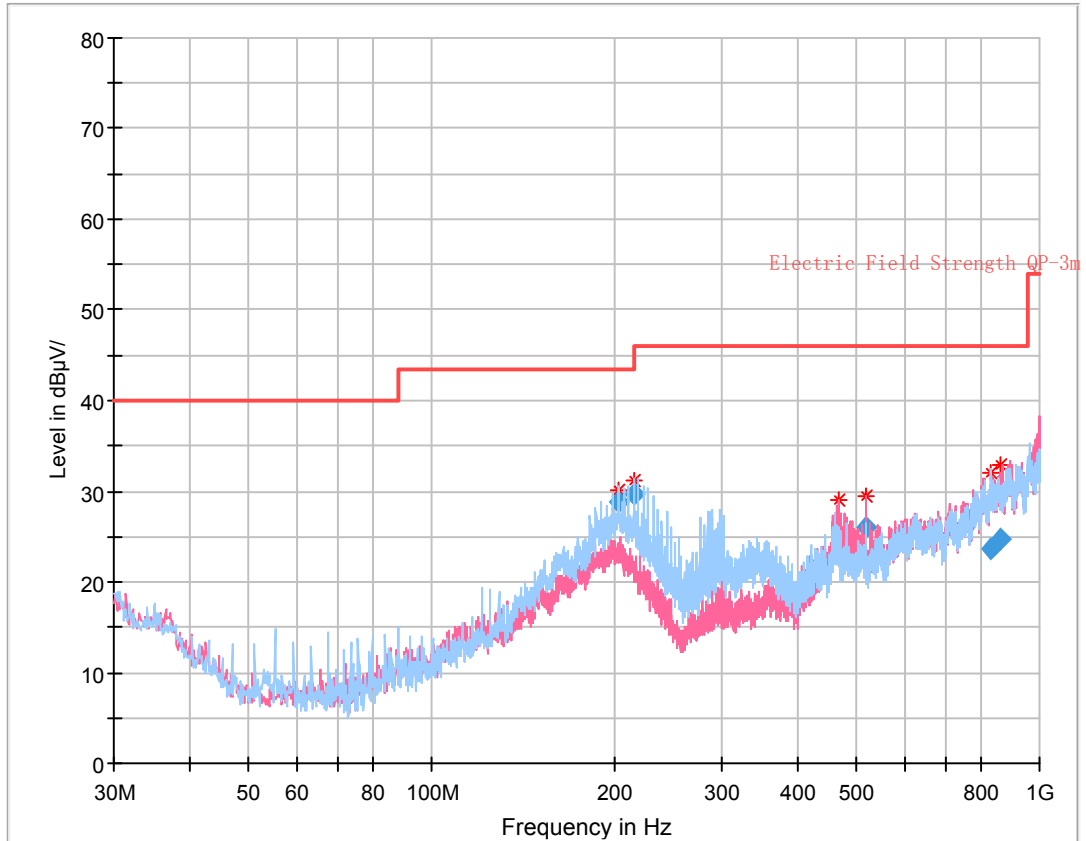

## Final Result

Frequency (MHz)	QuasiPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
202.593500	28.75	43.50	14.75	225.0	H	86.0	-13.8
215.195000	29.66	43.50	13.84	134.0	H	62.0	-13.9
466.831250	23.26	46.00	22.74	400.0	V	137.0	-7.2
517.660125	26.00	46.00	20.00	119.0	V	158.0	-4.8
833.572125	23.70	46.00	22.30	334.0	H	316.0	2.7
862.746750	24.70	46.00	21.30	337.0	V	71.0	3.4

**1 GHz - 25 GHz:**

Frequency (MHz)	Receiver		Turn- Table	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	FCC Part15.247	
	Reading (dBμV)	Detector (PK/QP/ AV)	Angle Degree	Height (m)	Polar (H / V)			Limit (dBμV/m)	Margin (dB)
Low Channel(2411MHz)									
2357.76	29.15	PK	168	2.0	H	31.77	60.92	74	13.08
2357.76	14.61	AV	168	2.0	H	31.77	46.38	54	7.62
2488.62	29.36	PK	269	1.6	H	32.13	61.49	74	12.51
2488.62	14.69	AV	269	1.6	H	32.13	46.82	54	7.18
4822.00	58.81	PK	257	1.3	H	6.28	65.09	74	8.91
4822.00	30.76	AV	257	1.3	H	6.28	37.04	54	16.96
Middle Channel(2441MHz)									
4882.00	60.75	PK	8	2.4	H	6.76	67.51	74	6.49
4882.00	30.78	AV	8	2.4	H	6.76	37.54	54	16.46
High Channel(2471 MHz)									
2378.60	29.78	PK	35	1.9	H	31.87	61.65	74	12.35
2378.60	14.58	AV	35	1.9	H	31.87	46.45	54	7.55
2497.95	29.51	PK	160	1.0	H	32.13	61.64	74	12.36
2497.95	14.66	AV	160	1.0	H	32.13	46.79	54	7.21
4942.00	61.22	PK	70	1.1	H	6.76	67.98	74	6.02
4942.00	30.67	AV	70	1.1	H	6.76	37.43	54	16.57

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor



Corrected Amplitude = Corrected Factor + Reading

Margin = Limit - Corrected. Amplitude



The other spurious emission which is 20dB to the limit was not recorded.




### Pre-scan with middle channel Peak Horizontal

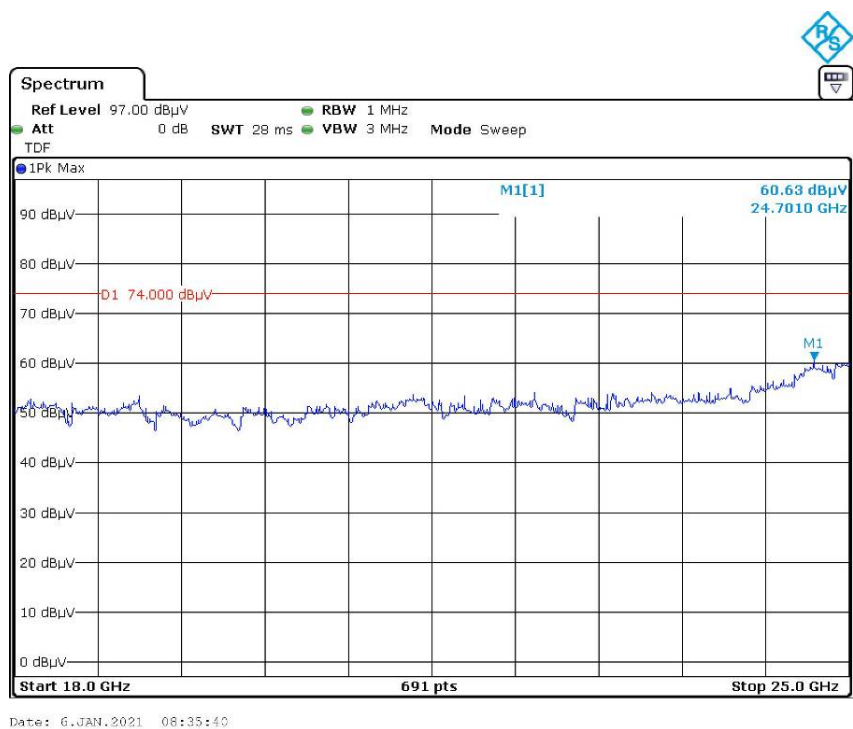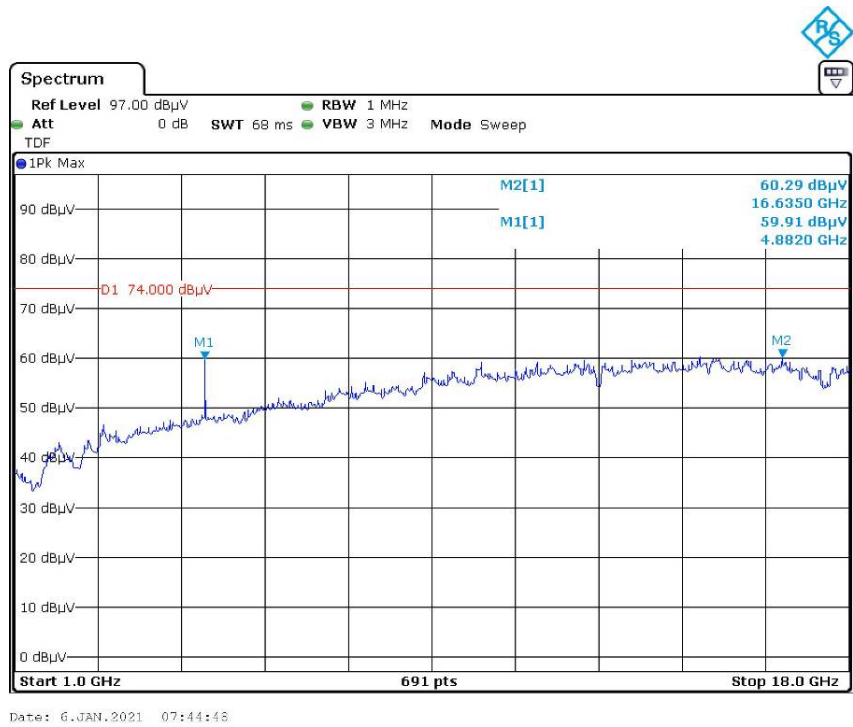


# Vertical

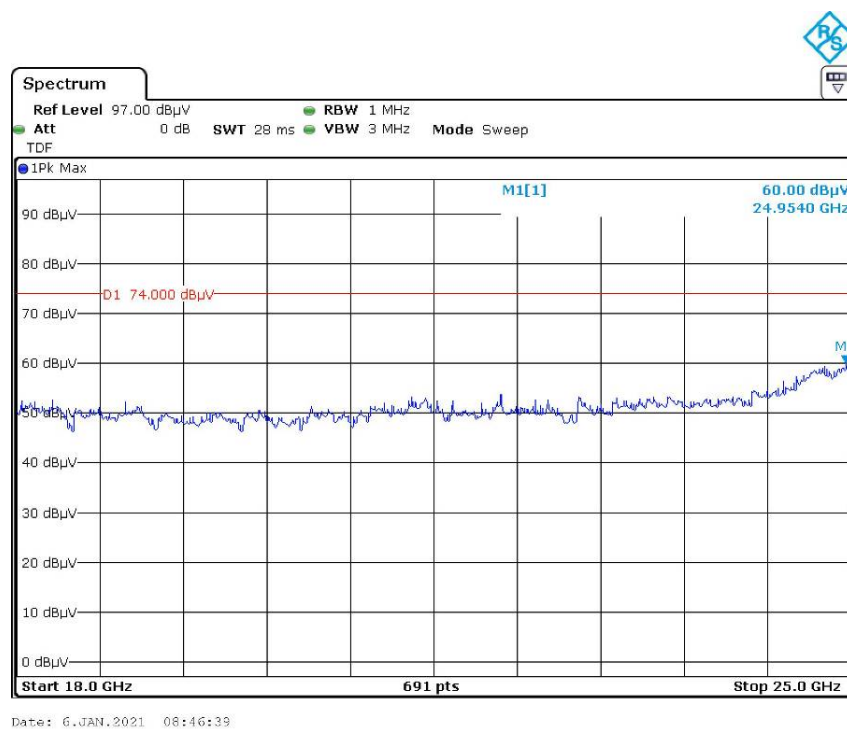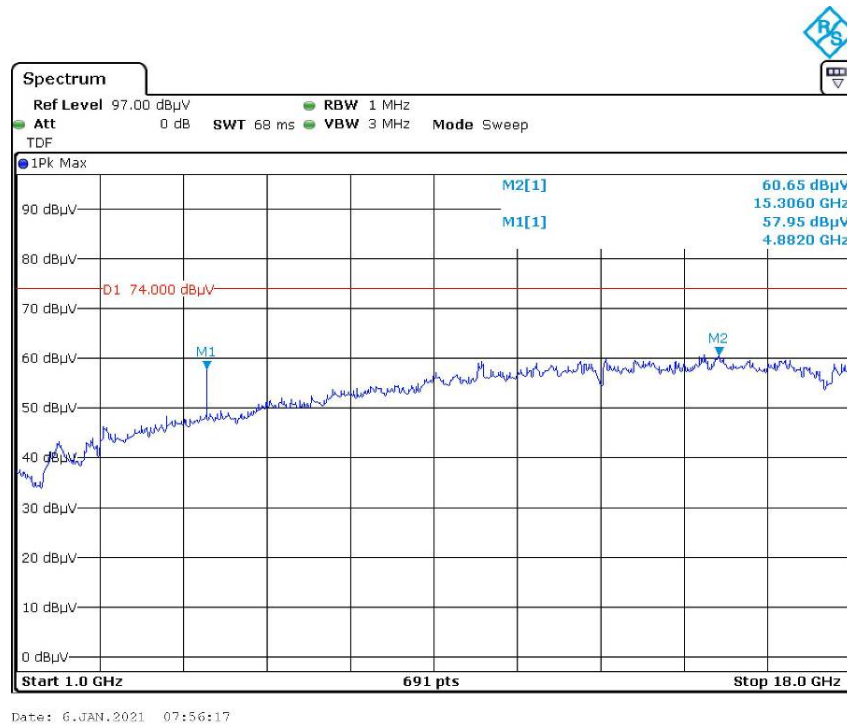

### Average Horizontal


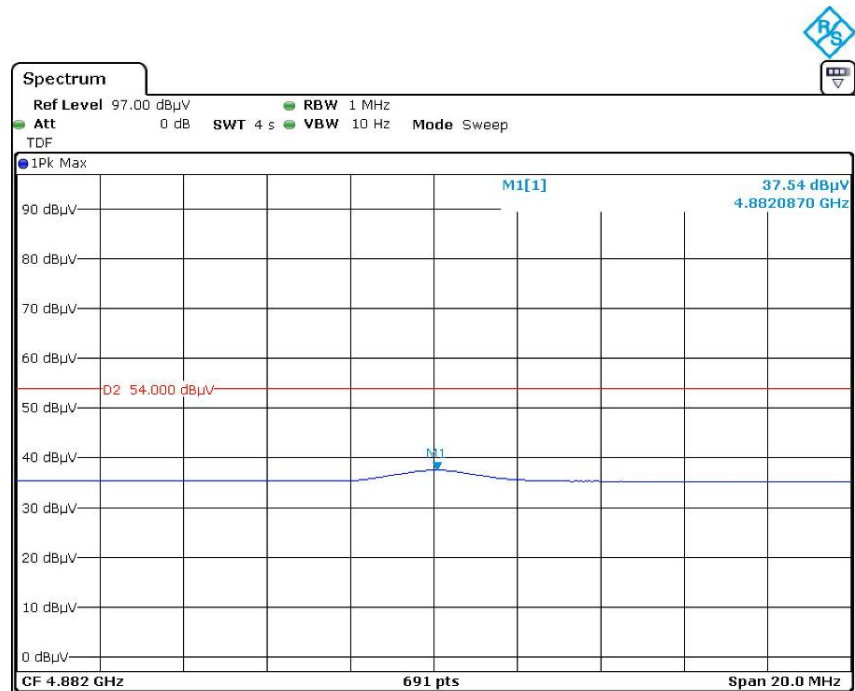


Date: 6.JAN.2021 07:49:35

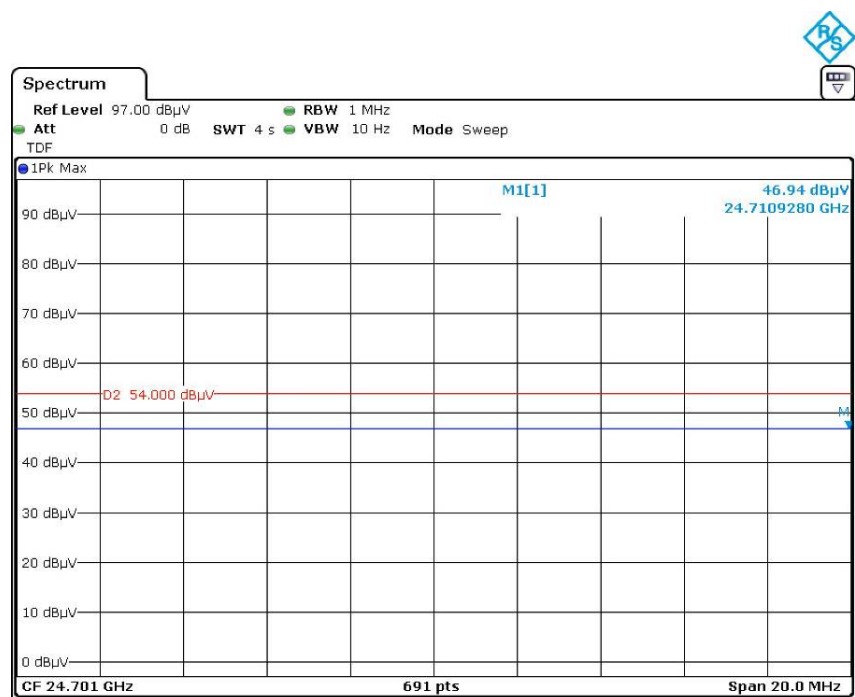

Date: 6.JAN.2021 08:41:29

## Vertical

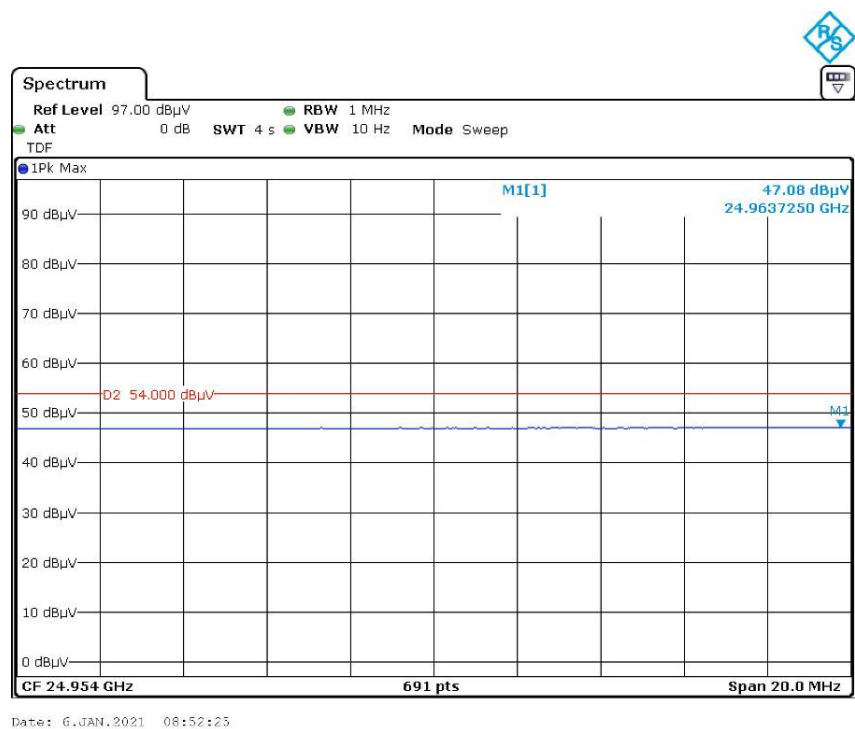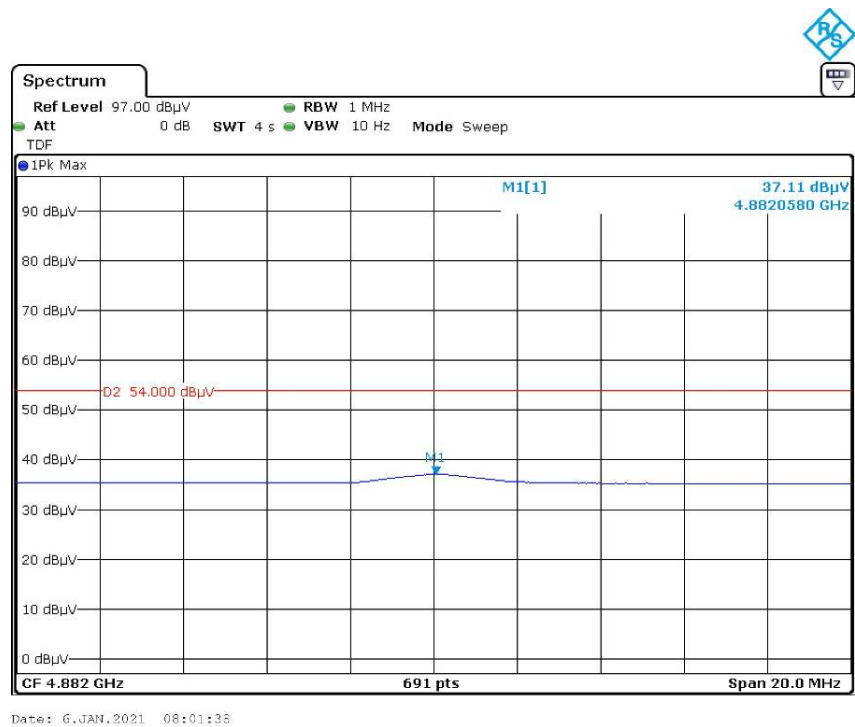

## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

### Test Data

#### Environmental Conditions

Temperature:	27.8 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

*The testing was performed by Coco Liu on 2021-01-11.*


*EUT operation mode: Transmitting*

**Test Result: Pass**

*Please refer to following table and plots.*

Test Mode	Channel Separation (MHz)	20 dBc BW (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit	Result
GFSK					
Hopping	2.000	1.279	0.853	> two-thirds of the 20 dB bandwidth	Pass

Please refer to the following plots.

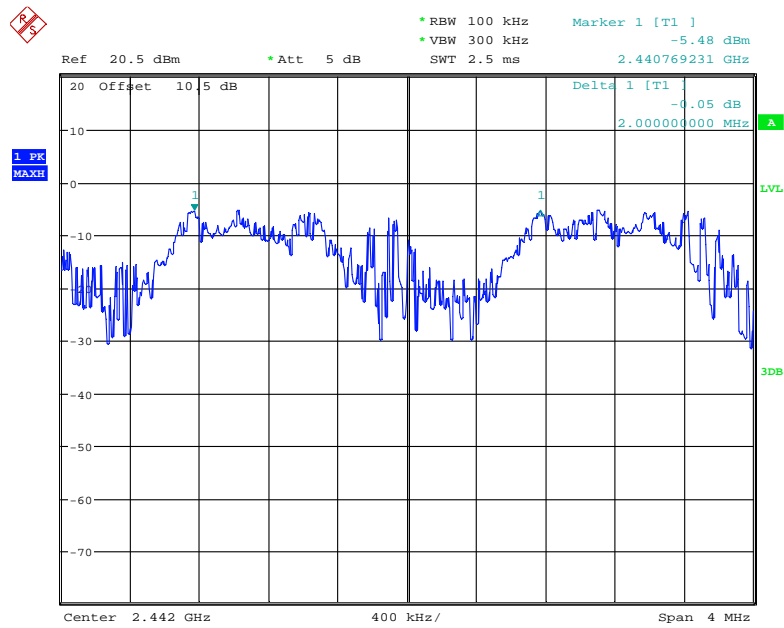

Date: 11.JAN.2021 20:49:59

**FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH****Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	27.8 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Coco Liu on 2021-01-11.*


*EUT operation mode: Transmitting*

**Test Result: Pass**

*Please refer to following table and plots.*


Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
GFSK	Low	2411	1.256
	Middle	2441	1.279
	High	2471	1.298

### Low Channel

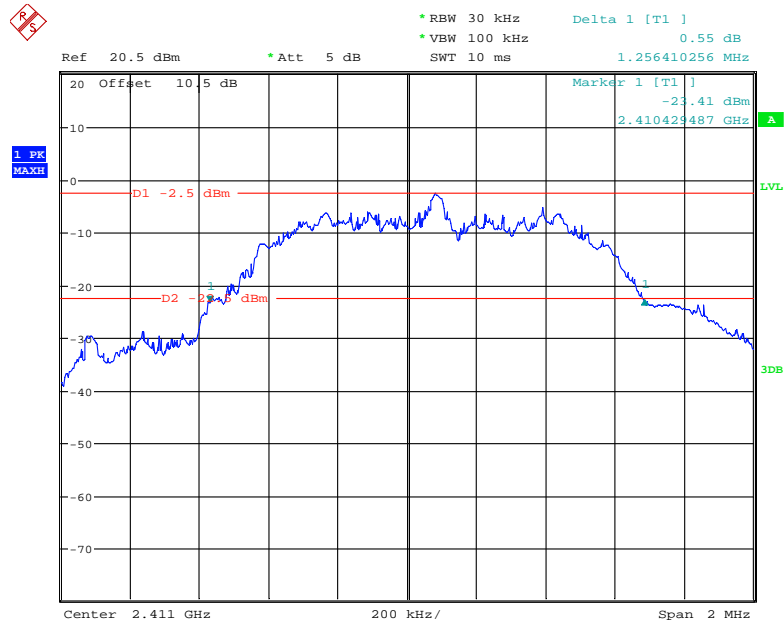

Date: 11.JAN.2021 20:30:51


### Middle Channel

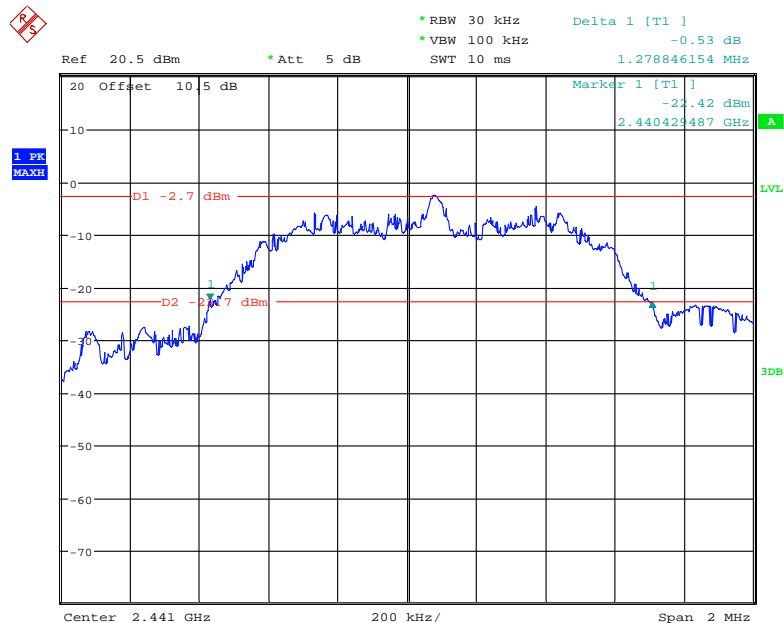

Date: 11.JAN.2021 20:29:44



High Channel

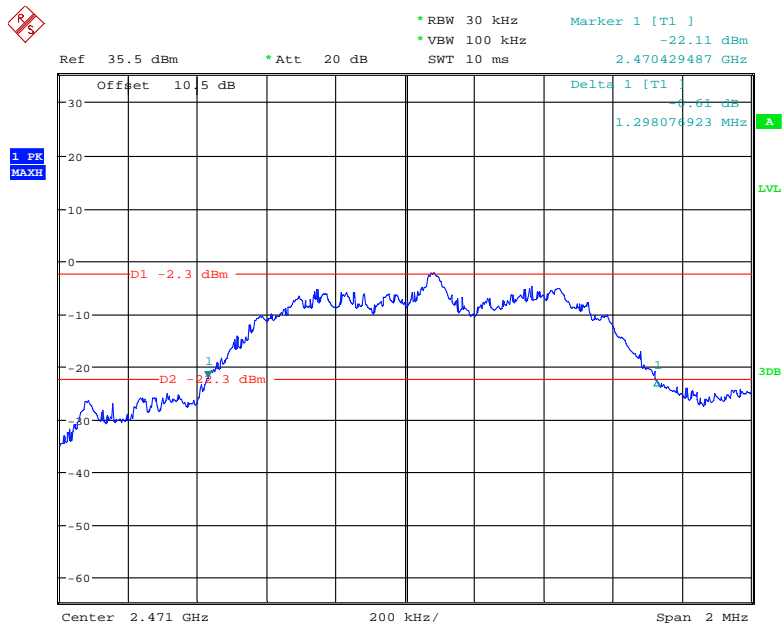

Date: 11.JAN.2021 20:27:39

**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	27.8 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Coco Liu on 2020-09-18.*


*EUT operation mode: Transmitting*

**Test Result: Pass**

*Please refer to following table and plots.*

<b>Mode</b>	<b>Frequency Range (MHz)</b>	<b>Number of Hopping Channel (CH)</b>	<b>Limit (CH)</b>
GFSK	2400-2483.5	31	≥15

Number of Hopping Channels

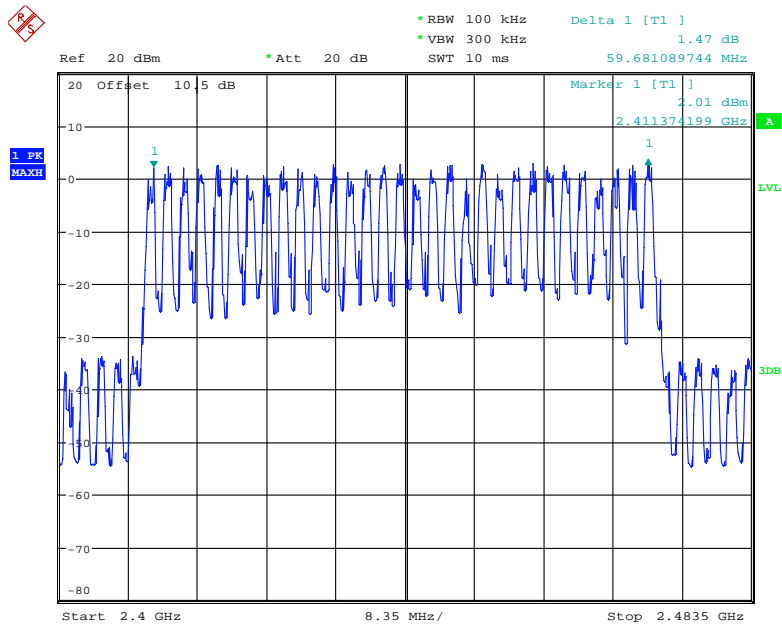

Date: 18.SEP.2020 09:53:52

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$  RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

**Test Data****Environmental Conditions**

<b>Temperature:</b>	27.8 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Coco Liu on 2021-01-11.*

*EUT operation mode: Transmitting*


**Test Result: Pass**

*Please refer to following table and plots*

Test Mode	Channel	Pulse Time (ms)	Total Hops	Period Time (s)	Dwell Time (ms)	Limit (ms)	Result
Test mode: Hopping							
GFSK	Hop	0.274	48	12.4	13.15	400	Pass


Note: A period time=0.4\*31=12.4(s), Dwell Time= Pulse Time\* Total Hops

### Pulse time

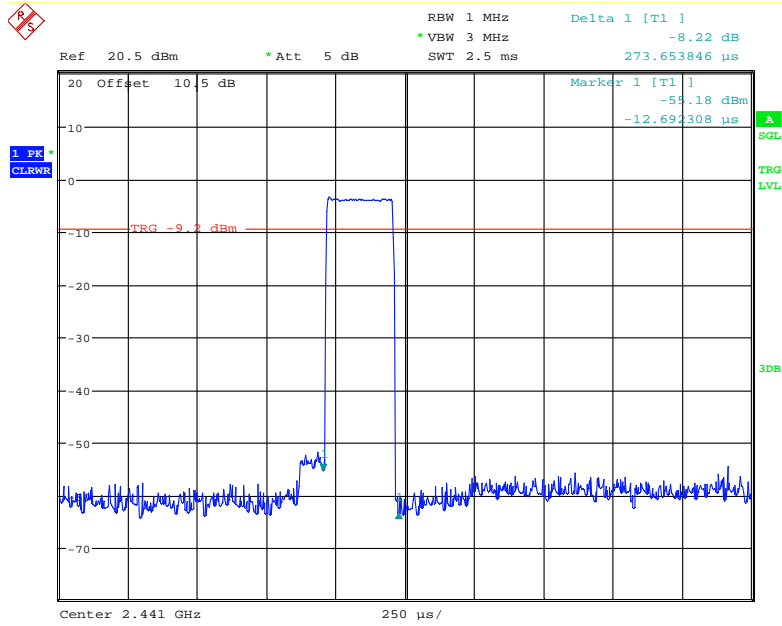

Date: 11.JAN.2021 20:38:28

### Dwell Time

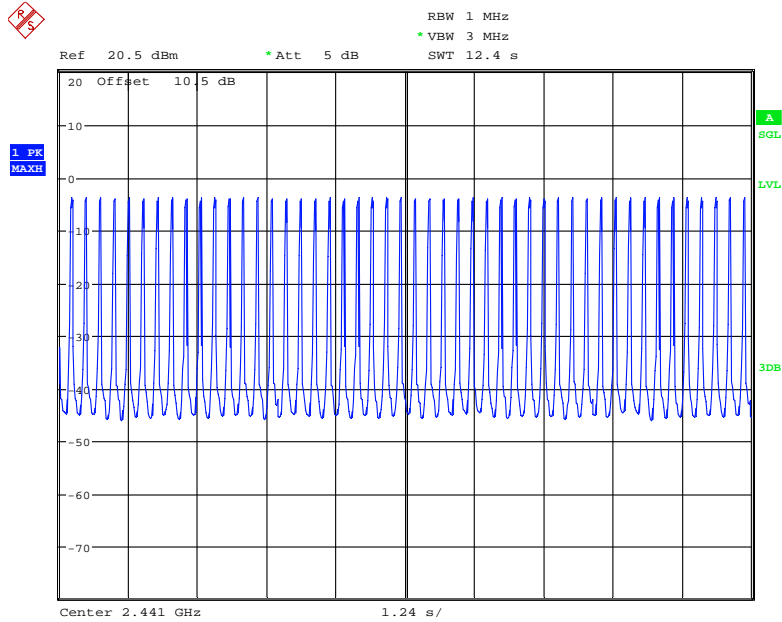

Date: 11.JAN.2021 20:44:44

**FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT****Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

**Test Procedure**

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	27.8 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Coco Liu on 2021-01-11.*

*EUT operation mode: Transmitting*

**Test Result: Pass**

*Please refer to following table*

Mode	Channel	Frequency (MHz)	Conducted Peak Output Power (dBm)	Limit (dBm)
GFSK	Low	2411	0.14	21
	Middle	2441	0.82	21
	High	2471	0.99	21

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Data

#### Environmental Conditions

Temperature:	27.8 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

*The testing was performed by Coco Liu 2021-01-11.*


*EUT operation mode: Transmitting*

**Test Result: Pass**

*Please refer to following plots*


## Band Edge-Left Side

### Single

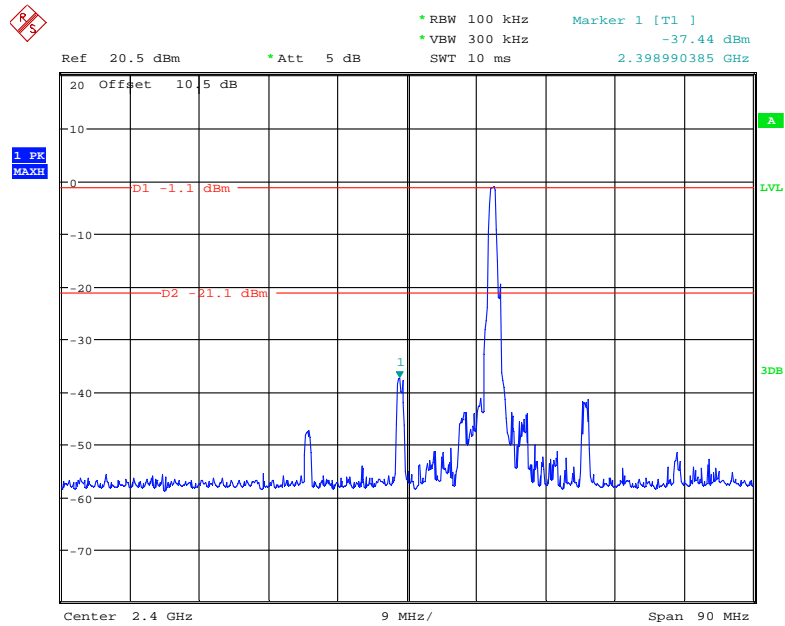

Date: 11.JAN.2021 20:33:19

### Hopping

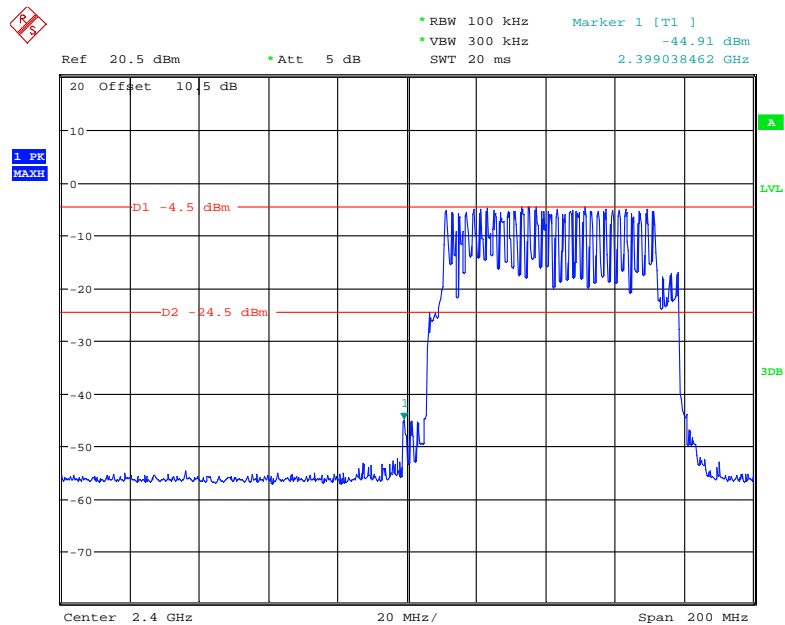


Date: 11.JAN.2021 21:02:06




# Band Edge-Right Side

## Single

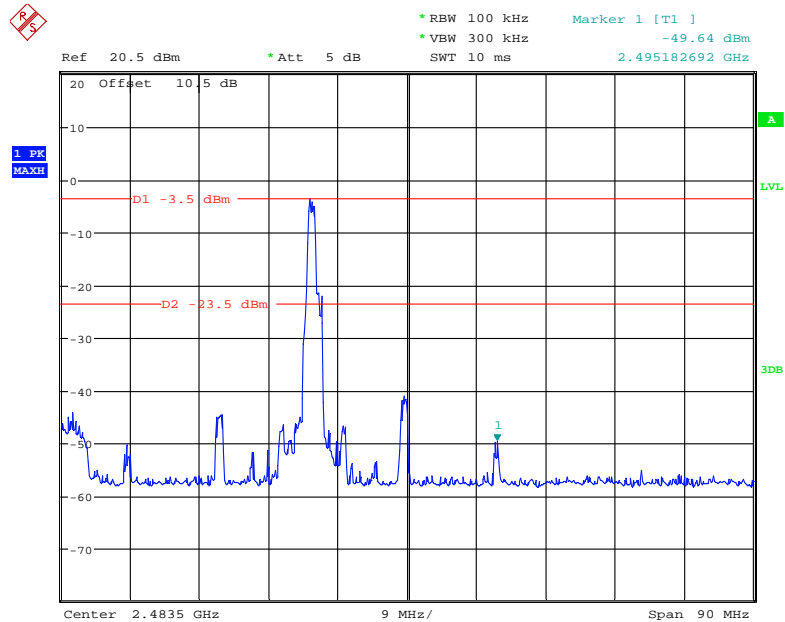

Date: 11.JAN.2021 21:26:09

## Hopping

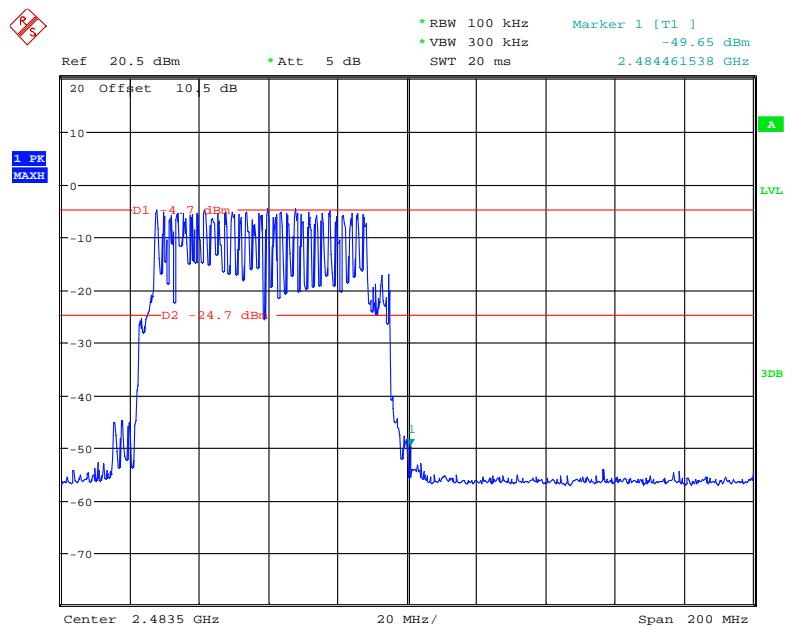

Date: 11.JAN.2021 21:10:11

\*\*\*\*\* END OF REPORT \*\*\*\*\*