

FCC PART 15.247

TEST REPORT

For

Autel Robotics Co., Ltd.

9th Floor, Bldg.B1, Zhiyuan, 1001 Xueyuan Rd., Xili, Nanshan, Shenzhen, China

FCC ID: 2AGNTAC5809A

Report Type: Original Report	Product Type: X-Star series
Test Engineer: <u>Simon Wang</u> <i>Simon wang</i>	
Report Number: <u>RSZ151118002-00B</u>	
Report Date: <u>2015-12-16</u>	
Reviewed By: <u>Bell Hu</u> <i>Bell Hu</i>	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EQUIPMENT MODIFICATIONS	5
EUT EXERCISE SOFTWARE	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	7
FCC §15.407 (f) & §2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	8
APPLICABLE STANDARD	8
FCC §15.203 – ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.205, §15.209 & §15.247 (d) – SPURIOUS EMISSIONS.....	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY.....	10
EUT SETUP	10
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST RESULTS SUMMARY	12
TEST DATA	13
FCC §15.247 (a) (2) – 6 dB EMISSION BANDWIDTH.....	16
APPLICABLE STANDARD	16
TEST PROCEDURE	16
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA	16
FCC §15.247 (b) (3) – MAXIMUM CONDUCTED OUTPUT POWER.....	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST EQUIPMENT LIST AND DETAILS.....	19
TEST DATA	20
FCC §15.247 (d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA	22

FCC §15.247 (e) – POWER SPECTRAL DENSITY.....24
 APPLICABLE STANDARD24
 TEST PROCEDURE24
 TEST EQUIPMENT LIST AND DETAILS.....24
 TEST DATA25

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Autel Robotics Co., Ltd.*'s product, model number: *X-Star Premium (FCC ID: 2AGNTAC5809A)* or the "EUT" in this report was an *X-Star series*, which was measured approximately: 31.5 cm (L) x 16.7 cm (W) x 20.0 cm (H), rated with input voltage: DC 14.8V Li-Po battery.

**All measurement and test data in this report was gathered from production sample serial number: 1507133 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2015-11-18.*

Objective

This report is prepared on behalf of *Autel Robotics Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

Part 15.407 NII submission with FCC ID: 2AGNTAC5809A.
Part 15.407 NII submission with FCC ID: 2AGNTRC5809A.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with RF radiated emission is 5.91 dB for 30MHz-1GHz, and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on October 31, 2013. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode which was selected by manufacturer.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software


No exercise software was used.

External I/O Cable


Cable Description	Length (m)	From/Port	To
/	/	/	/

Block Diagram of Test Setup

Below 1GHz:

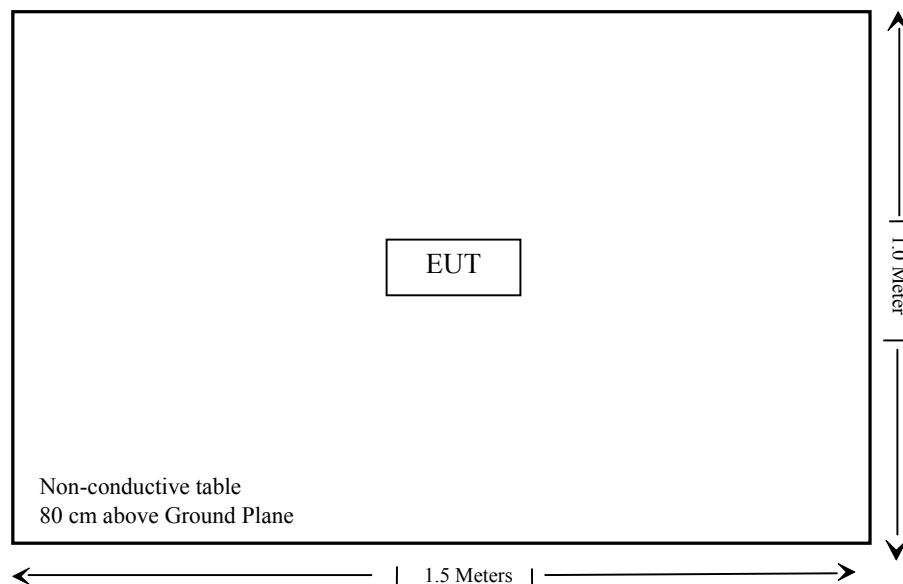

Above 1GHz:

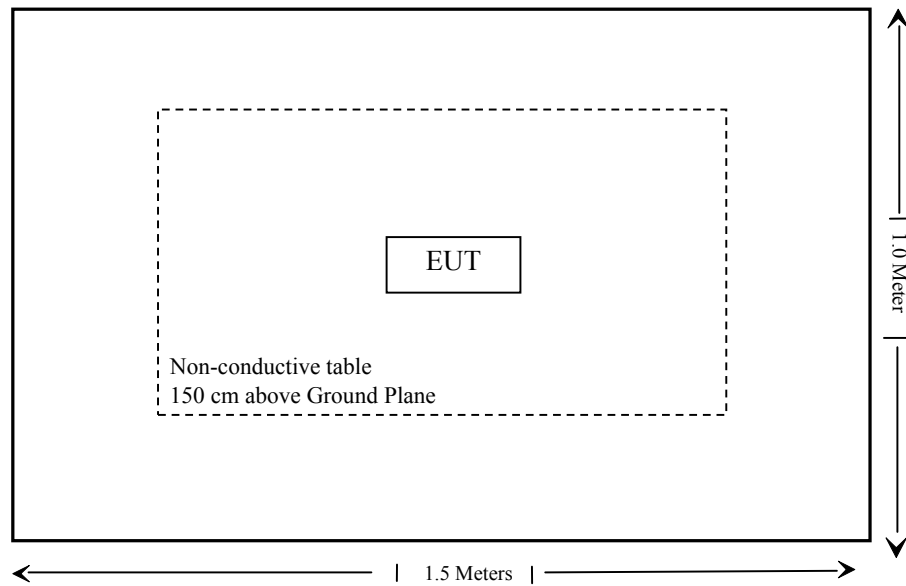

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.407 (f) & §2.1091	Maximum Permissible exposure (MPE)	Compliance
FCC §15.203	Antenna Requirement	Compliance
FCC §15.207 (a)	AC Line Conducted Emissions	Not Applicable
FCC §15.205, §15.209 & §15.247 (d)	Spurious Emissions	Compliance
FCC §15.247 (a) (2)	6 dB Emission Bandwidth	Compliance
FCC §15.247(b) (3)	Maximum Conducted Output Power	Compliance
FCC §15.247 (d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
FCC §15.247 (e)	Power Spectral Density	Compliance

Not Applicable: The EUT was powered by battery.

FCC §15.407 (f) & §2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to FCC §2.1091 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency (MHz)	Antenna Gain		Max tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
	(dBi)	(numeric)	(dBm)	(mW)			
905.3-925	2	1.58	15.5	35.5	20	0.011	0.6

Note: To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- Antenna must be permanently attached to the unit.
- Antenna must use a unique type of connector to attach to the EUT.


Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two internal antenna arrangements, which were permanently attached and the highest antenna gain is 2.0 dBi, fulfill the requirement of this section. Please refer to the EUT photos. Note: the two antennas share the same chip and they can't support simultaneous transmission.

Below is the antenna switch circuit provided by our applicant:

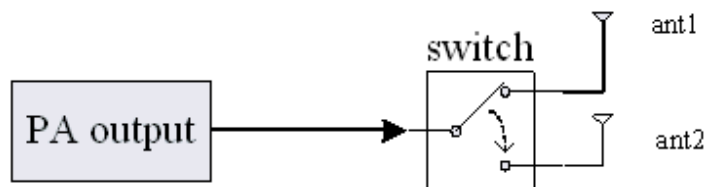

Result: Compliance.

FCC §15.205, §15.209 & §15.247 (d) – SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.205; §15.209;


Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement at antenna port. And the uncertainty will not be taken into consideration for the test data recorded in the report.

EUT Setup

Below 1 GHz:

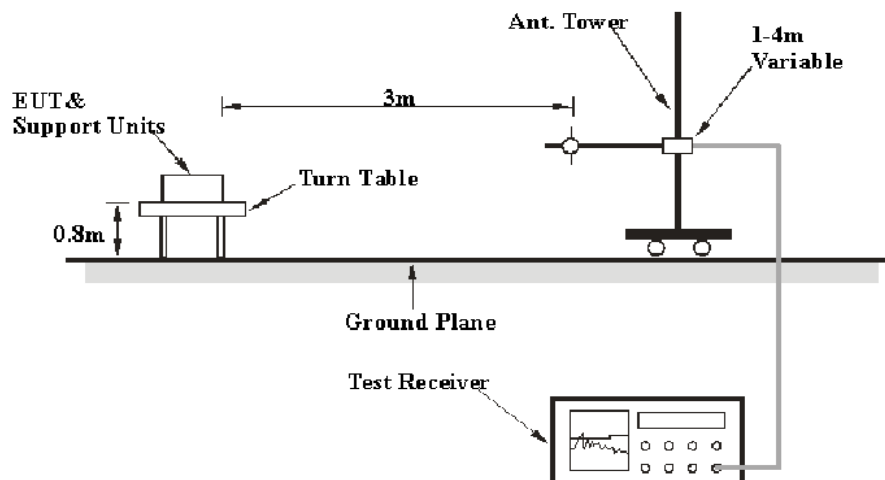

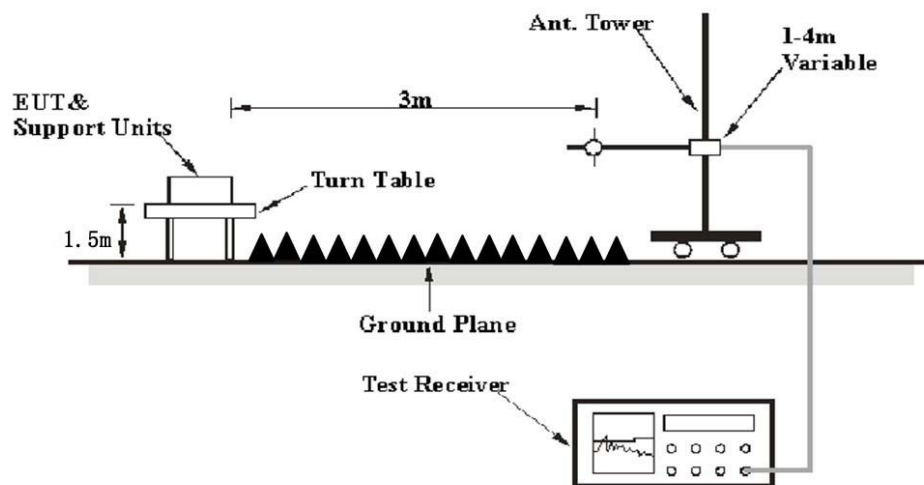Above 1GHz:

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.209 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 10 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447E	1937A01046	2015-05-06	2016-05-06
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2015-11-03	2016-11-03
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-07	2017-12-06
Mini	Amplifier	ZVA-183-S+	5969001149	2015-04-23	2016-04-23
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2013-10-14	2016-10-13
TDK	Chamber	Chamber A	2#	2013-10-15	2016-10-15
TDK	Chamber	Chamber B	1#	2015-07-23	2016-07-22
DUCOMMUN	Pre-amplifier	ALN-22093530-01	991373-01	2015-08-03	2016-08-03
R&S	Auto test Software	EMC32	V9.10	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

11.77 dB at 1810.60 MHz in the Vertical polarization for Low Channel

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$

In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**

Temperature:	21 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2015-12-12.

EUT operation mode: Transmitting

30 MHz-10 GHz:**Antenna 1#:**

Frequency	Receiver		Turntable	Rx Antenna		Corrected	Corrected	FCC Part15.247	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Degree	Height (m)	Polar (H / V)	Factor (dB)	Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel (905.3 MHz)									
280.5	41.15	QP	85	1.1	H	-13.5	27.65	46	18.35
905.3	86.06	PK	45	1.5	H	26.5	112.56	/	/
905.3	82.42	Ave.	23	1.5	H	26.5	108.92	/	/
905.3	87.79	PK	96	1.3	V	26.5	114.29	/	/
905.3	85.8	Ave.	119	1.3	V	26.5	112.3	/	/
1810.60	59.97	PK	97	1.2	H	1.87	61.84	74	12.16
1810.60	33.73	Ave.	97	1.2	H	1.87	35.60	54	18.40
1810.60	60.36	PK	156	2.0	V	1.87	62.23	74	11.77
1810.60	34.45	Ave.	156	2.0	V	1.87	36.32	54	17.68
2715.90	46.52	PK	0	2.2	H	6.69	53.21	74	20.79
2715.90	23.57	Ave.	0	2.2	H	6.69	30.26	54	23.74
2715.90	51.58	PK	357	2.4	V	6.69	58.27	74	15.73
2715.90	23.90	Ave.	357	2.4	V	6.69	30.59	54	23.41
Middle Channel (916 MHz)									
280.5	41.09	QP	312	1.1	H	-13.5	27.59	46	18.41
916	88.36	PK	96	1.2	H	26.5	114.86	/	/
916	85.54	Ave.	10	1.2	H	26.5	112.04	/	/
916	88.61	PK	74	1.1	V	26.5	115.11	/	/
916	85.72	Ave.	226	1.1	V	26.5	112.22	/	/
1832.00	56.78	PK	309	1.9	H	1.87	58.65	74	15.35
1832.00	31.66	Ave.	309	1.9	H	1.87	33.53	54	20.47
1832.00	57.89	PK	134	1.9	V	1.87	59.76	74	14.24
1832.00	31.92	Ave.	134	1.9	V	1.87	33.79	54	20.21
2748.00	45.44	PK	194	1.4	H	6.69	52.13	74	21.87
2748.00	22.81	Ave.	194	1.4	H	6.69	29.50	54	24.50
2748.00	45.27	PK	73	2.1	V	6.69	51.96	74	22.04
2748.00	22.71	Ave.	73	2.1	V	6.69	29.40	54	24.60
High Channel (925 MHz)									
280.5	41.05	QP	79	1.1	H	-13.5	27.55	46	18.45
925	87.98	PK	96	1.2	H	26.5	114.48	/	/
925	84.86	Ave.	33	1.2	H	26.5	111.36	/	/
925	88.49	PK	106	1.3	V	26.5	114.99	/	/
925	85.15	Ave.	226	1.3	V	26.5	111.65	/	/
1850.00	56.45	PK	19	1.1	H	3.86	60.31	74	13.69
1850.00	30.99	Ave.	19	1.1	H	3.86	34.85	54	19.15
1850.00	55.59	PK	353	2.2	V	3.86	59.45	74	14.55
1850.00	30.61	Ave.	353	2.2	V	3.86	34.47	54	19.53
2775.00	43.56	PK	333	2.4	H	7.30	50.86	74	23.14
2775.00	20.65	Ave.	333	2.4	H	7.30	27.95	54	26.05
2775.00	45.63	PK	93	1.5	V	7.30	52.93	74	21.07
2775.00	23.54	Ave.	93	1.5	V	7.30	30.84	54	23.16

Antenna 2#:

Frequency	Receiver		Turntable	Rx Antenna		Corrected	Corrected	FCC Part 15.247	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Degree	Height (m)	Polar (H / V)	Factor (dB)	Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel (905.3 MHz)									
280.5	40.85	QP	306	1.1	H	-13.5	27.35	46	18.65
905.3	85.96	PK	227	1.6	H	26.5	112.46	/	/
905.3	81.98	Ave.	227	1.6	H	26.5	108.48	/	/
905.3	88.63	PK	327	1.4	V	26.5	115.13	/	/
905.3	84.97	Ave.	327	1.4	V	26.5	111.47	/	/
1810.6	60.12	PK	169	1.2	H	1.87	61.99	74	12.01
1810.6	35.17	Ave.	169	1.2	H	1.87	37.04	54	16.96
1810.6	59.87	PK	277	1.7	V	1.87	61.74	74	12.26
1810.6	36.44	Ave.	277	1.7	V	1.87	38.31	54	15.69
2715.9	45.13	PK	213	1.9	H	6.69	51.82	74	22.18
2715.9	24.39	Ave.	213	1.9	H	6.69	31.08	54	22.92
2715.9	47.86	PK	64	1.8	V	6.69	54.55	74	19.45
2715.9	24.07	Ave.	64	1.8	V	6.69	30.76	54	23.24
Middle Channel (916 MHz)									
280.5	42.63	QP	196	1.1	H	-13.5	29.13	46	16.87
916	89.63	PK	96	1.6	H	26.5	116.13	/	/
916	86.12	Ave.	96	1.6	H	26.5	112.62	/	/
916	87.02	PK	124	1.4	V	26.5	113.52	/	/
916	83.69	Ave.	124	1.4	V	26.5	110.19	/	/
1832.00	55.76	PK	240	1.2	H	1.87	57.63	74	16.37
1832.00	32.71	Ave.	240	1.2	H	1.87	34.58	54	19.42
1832.00	60.02	PK	213	1.7	V	1.87	61.89	74	12.11
1832.00	33.69	Ave.	213	1.7	V	1.87	35.56	54	18.44
2748.00	44.73	PK	119	1.9	H	6.69	51.42	74	22.58
2748.00	23.42	Ave.	119	1.9	H	6.69	30.11	54	23.89
2748.00	46.28	PK	204	1.8	V	6.69	52.97	74	21.03
2748.00	24.05	Ave.	204	1.8	V	6.69	30.74	54	23.26
High Channel (925 MHz)									
280.5	40.75	QP	232	1.1	H	-13.5	27.25	46	18.75
925	86.12	PK	238	1.7	H	26.5	112.62	/	/
925	83.31	Ave.	238	1.7	H	26.5	109.81	/	/
925	89.02	PK	211	1.6	V	26.5	115.52	/	/
925	84.75	Ave.	211	1.6	V	26.5	111.25	/	/
1850.00	55.64	PK	77	1.3	H	1.87	57.51	74	16.49
1850.00	31.02	Ave.	77	1.3	H	1.87	32.89	54	21.11
1850.00	56.41	PK	357	1.8	V	1.87	58.28	74	15.72
1850.00	31.02	Ave.	357	1.8	V	1.87	32.89	54	21.11
2775.00	44.23	PK	277	1.5	H	6.69	50.92	74	23.08
2775.00	21.74	Ave.	277	1.5	H	6.69	28.43	54	25.57
2775.00	46.03	PK	75	1.6	V	6.69	52.72	74	21.28
2775.00	22.95	Ave.	75	1.6	V	6.69	29.64	54	24.36

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Limit - Corrected. Amplitude

FCC §15.247 (a) (2) – 6 dB EMISSION BANDWIDTH**Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	21 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2015-12-12.


Test Result: Pass.

Please refer to the following tables and plots.


EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (kHz)
Low	905.3	5.731	≥500
Middle	916	5.731	≥500
High	925	5.752	≥500


Low Channel

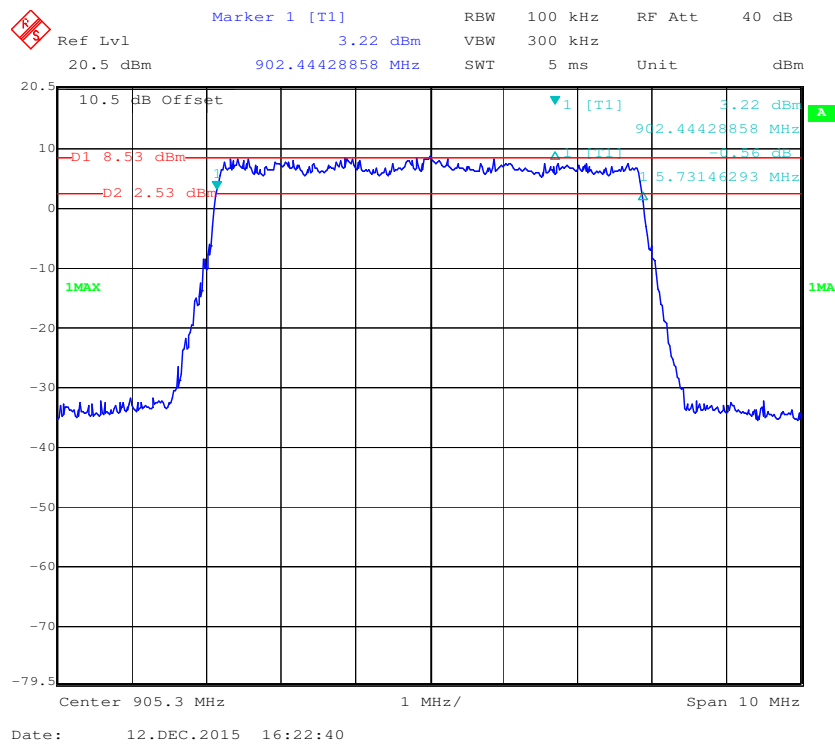

Middle Channel

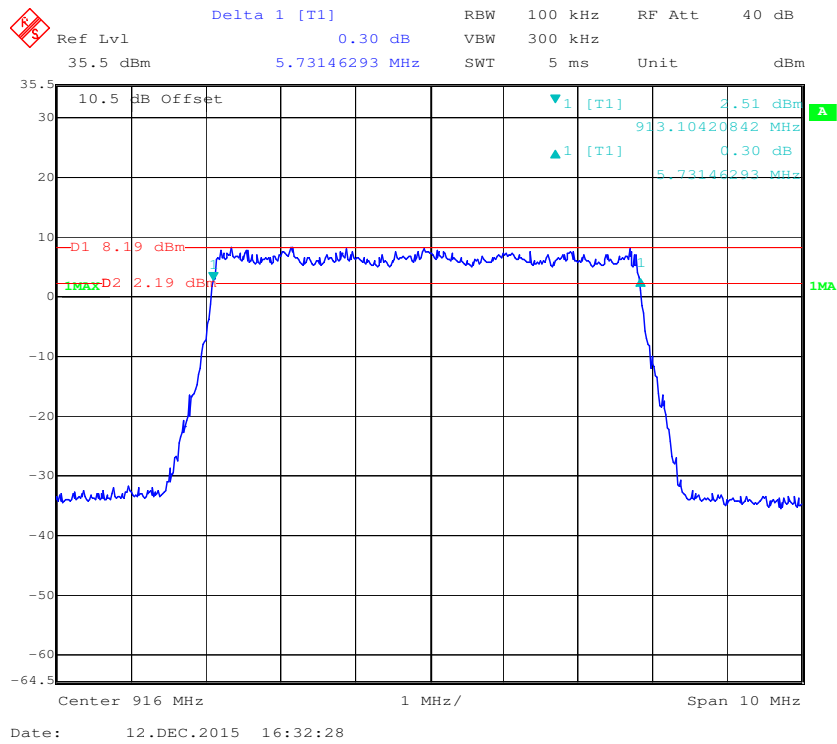

High Channel

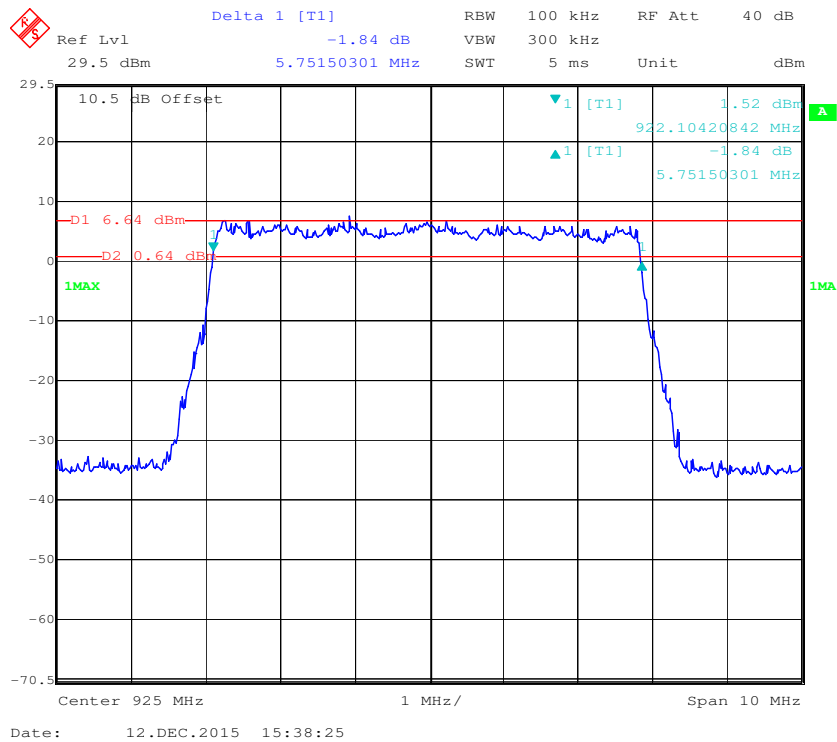


FCC §15.247 (b) (3) – MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Power Meter	N1912A	MY5000448	2015-11-03	2016-11-03
HP	Power Sensor	N1921A	MY54210016	2015-11-03	2016-11-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	21 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2015-12-12.

EUT operation mode: Transmitting


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Max Conducted Average Output Power (dBm)	Limit (dBm)
Low	905.3	26.59	15.35	30
Middle	916	25.93	14.58	30
High	925	25.17	14.08	30

FCC §15.247 (d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	21 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa


The testing was performed by Simon Wang on 2015-12-12.

Test Result: Compliance

Please refer to the following table and plots.

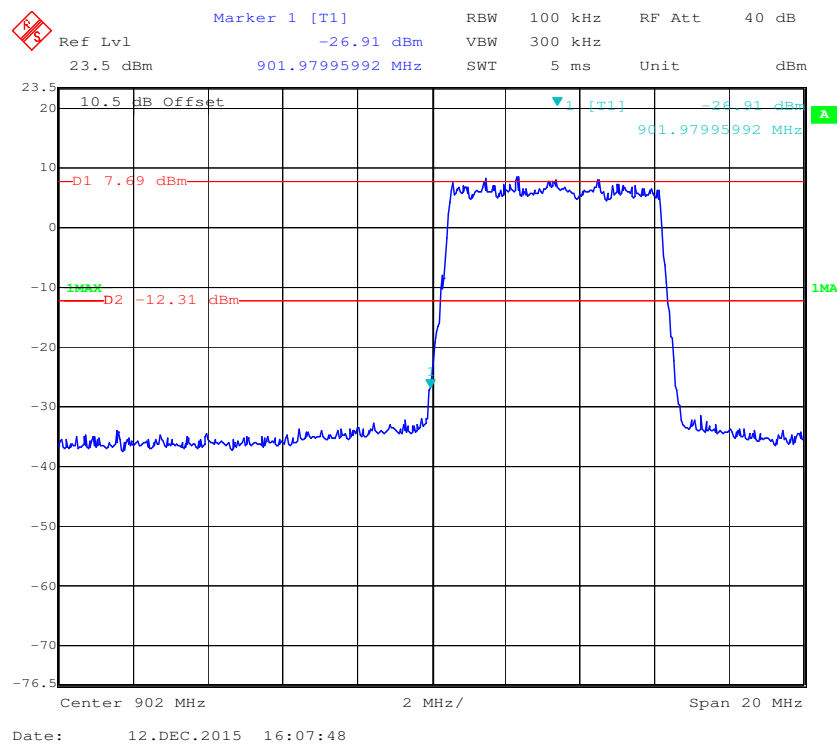Band Edge, Left Side

Band Edge, Right Side

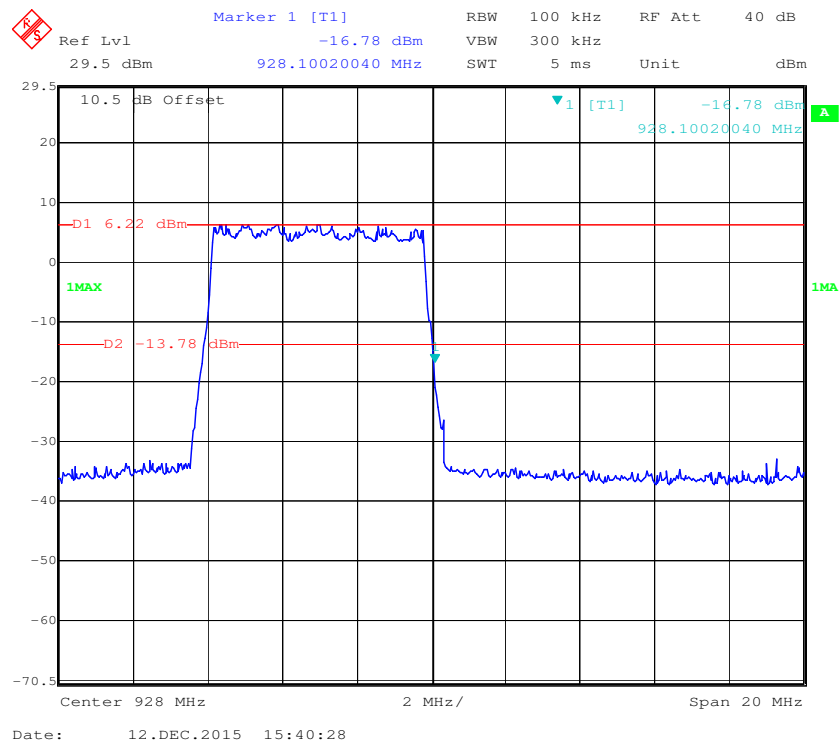

FCC §15.247 (e) – POWER SPECTRAL DENSITY


Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v03r02 sub-clause 10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2015-12-11	2016-12-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	21 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

The testing was performed by Simon Wang on 2015-12-12.


EUT operation mode: Transmitting

Test Result: Pass


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	905.3	-4.47	≤8
Middle	916	-4.81	≤8
High	925	-6.25	≤8

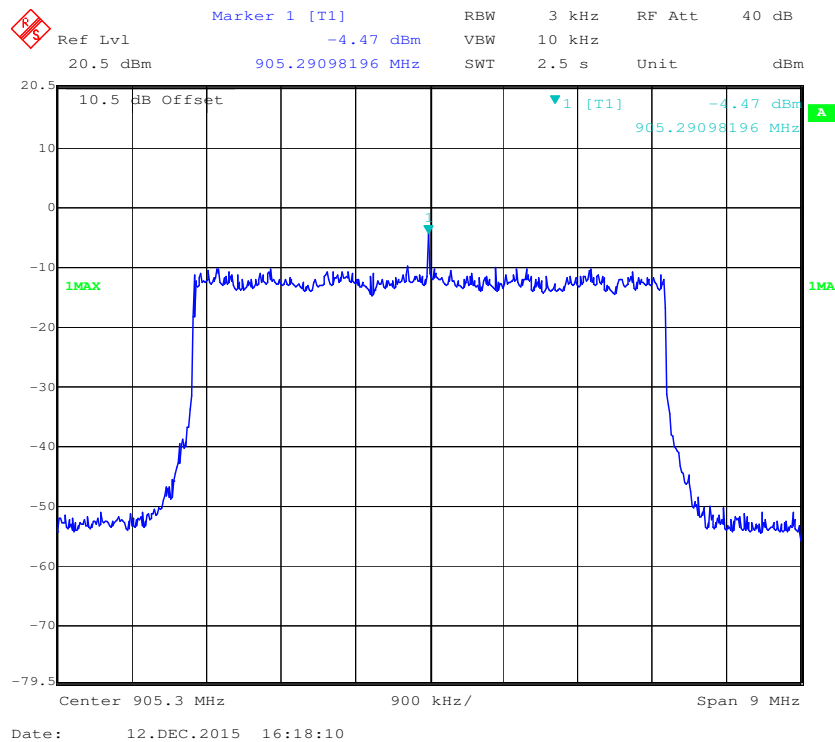Power Spectral Density, Low Channel

Power Spectral Density, Middle Channel

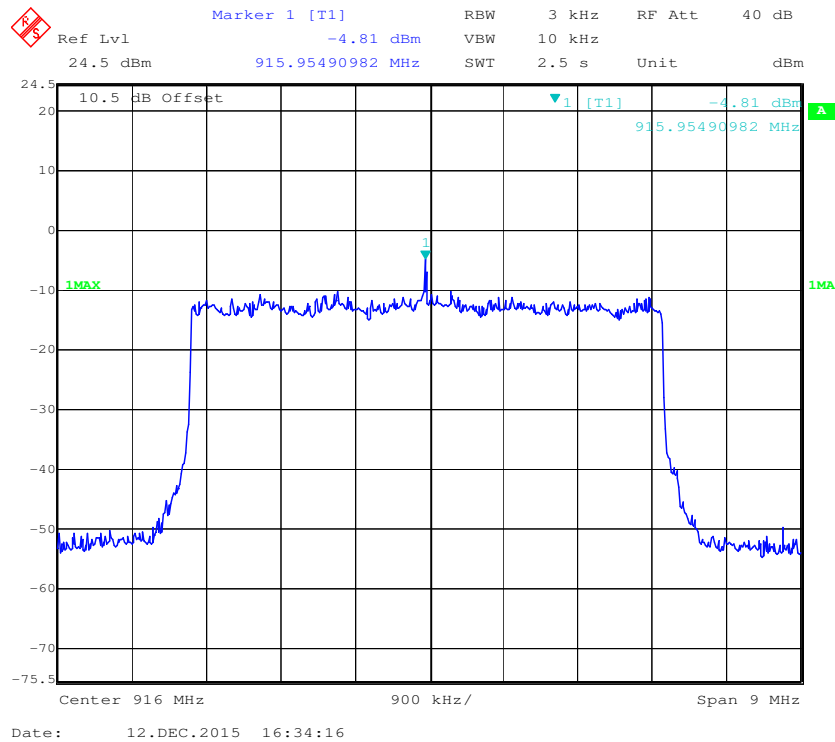

Power Spectral Density, High Channel

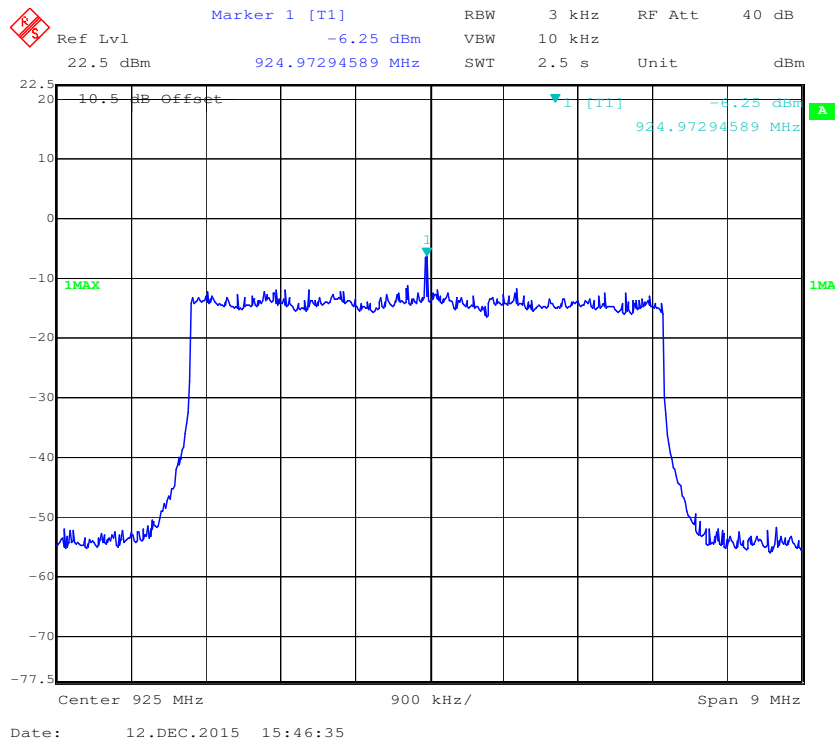

***** END OF REPORT *****