

EXHIBIT 3

Test Report With Eut Photograph



Test Report

For

Applicant : AboCom Systems, Inc.
Equipment Type : 10/100 Mbps Dual Speeds Fast Ethernet
PC Card
Model : FE1500A
FCC ID : MQ4FE1500A

Report No. : 995005F



Test Report Certification

QuieTek Corporation

No.75-1, Wang-Yeh Valley, Yung-Hsing, Chiung-Lin,
Hsin-Chu County, Taiwan, R.O.C.

Tel : 886-3-592-8858, Fax: 886-3-592-8859

E-Mail : quietek@ms24.hinet.net

Accredited by NIST(NVLAP), VCCI, BSMI, DNV, TUV

Applicant : AboCom Systems, Inc.
Address : 1F, No. 21, R&D Rd. II, Science-based Industrial Park,
Hsin Chu, Taiwan, R.O.C.
Equipment Type : 10/100 Mbps Dual Speeds Fast Ethernet PC Card
Model : FE1500A
Measurement Standard : CISPR 22/1994
Measurement Procedure : ANSI C63.4 /1992
FCC ID : MQ4FE1500A
Operation Voltage : DC12V
Classification : Class B
Test Result : Complied
Test Date : May 15, 1999
Report No. : 995005F

The Test Results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of QuieTek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented by: Kim Hung

Test Engineer: Jack Wu

Approved: Gene Chang

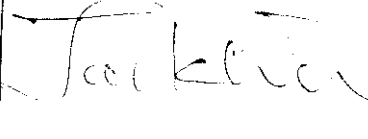


TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1 EUT DESCRIPTION	4
1.2 TESTED SYSTEM DETAILS.....	5
1.3 EUT CONFIGURATION	7
1.4 EUT EXERCISE SOFTWARE.....	7
1.5 TEST PERFORMED	7
1.6 TEST FACILITY	8
2. CONDUCTED EMISSION	9
2.1 TEST EQUIPMENT LIST	9
2.2 TEST SETUP	9
2.3 LIMITS	9
2.4 TEST PROCEDURE.....	10
2.5 TEST RESULTS	10
3. RADIATED EMISSION.....	11
3.1 TEST EQUIPMENT	11
3.2 TEST SETUP	11
3.3 LIMITS	12
3.4 TEST PROCEDURE.....	12
3.5 TEST RESULTS	12
4. SUMMARY OF TEST RESULTS.....	13
5. EMI REDUCTION METHOD DURING COMPLIANCE TESTING.....	18
6. TEST PHOTOGRAPHS.....	19
7. EUT DETAIL PHOTOGRAPHS.....	21
ATTACHMENT	
LABORATORY OF LICENSE	

1. General Information

1.1 EUT Description

Applicant : AboCom Systems, Inc.

Address : 1F, No. 21, R&D Rd. II, Science-based Industrial Park,
Hsin Chu, Taiwan, R.O.C.

Equipment Type : 10/100 Mbps Dual Speeds Fast Ethernet PC Card

Model : FE1500A

FCC ID : MQ4FE1500A

Operation Voltage : DC12V

Data Cable : Non-shielded, 0.12m

Baul Rate : 10 Mbps & 100Mbps



1.2 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

1.2.1 Notebook

Model Number : ThinkPad560X
 Serial Number : 97-6492R
 Manufacturer : IBM
 Power Adapter : IBM, M/N:P\N83-6339
 Cable In: Non-Shielded, 1.8m
 Cable Out: Non-Shielded, 1.8m

FCC ID: DoC

1.2.2 Extra Floppy for Notebook

Model Number : FD-05P
 Serial Number : N/A
 Manufacturer : IBM
 Data Cable : Shielded, 2.2m
 FCC ID : DoC

1.2.3 Monitor

Model Number : CM752ET-311
 Serial Number : T8D003312
 FCC ID : DoC
 Manufacturer : HITACHI
 Data Cable : Shielded, 1.6m
 Power Cord : Shielded, 1.8m

1.2.4 Mouse

Model Number : M-S34
 Serial Number : LZB75078428
 FCC ID : DZL211029
 Manufacturer : HP
 Data Cable : Shielded, 1.8m

1.2.5 Modem

Model Number : 1414
 Serial Number : 980033033
 FCC ID : IFAXDM1414
 Manufacturer : ACEEX
 Data Cable : Shielded, 1.5m
 Power Adapter : ACCEX, M/N: SCP41-91000A
 Cable Output : Shielded, 1.5m



1.2.6 Printer

Model Number : C2642A
Serial Number : MY75N1D2XN
FCC ID : B94C2642X
Manufacturer : HP
Data Cable : Shielded, 1.2m
Power Adapter : NMB, M/N: C2175A
Cable for AC IN: Non-Shielded, 0.7m
Cable for AC Out: Non-Shielded, 1.5m

1.2.7 Video Camera

Model Number : Vcam 3X
Serial Number : N/A
FCC ID : DoC
Manufacturer : Mustek
Data Cable (USB) : Shielded, 1.5m

1.2.8 Host Personal Computer

Model Number : P2L97
Serial Number : 9842
FCC ID : DoC
Manufacturer : ASUS
Power Cord : Non-Shielded, 1.8m

1.2.9 Monitor


Model Number : CM752ET-311
Serial Number : T8F006364
FCC ID : DoC
Manufacturer : HITACHI
Data Cable : Shielded, 1.5m
Power Cord : Shielded, 1.8m

1.2.10 Keyboard

Model Number : 6311-TW2C
Serial Number : N/A
FCC ID : DoC
Manufacturer : ACER
Data Cable : Shielded, 1.8m



1.3 EUT Configuration

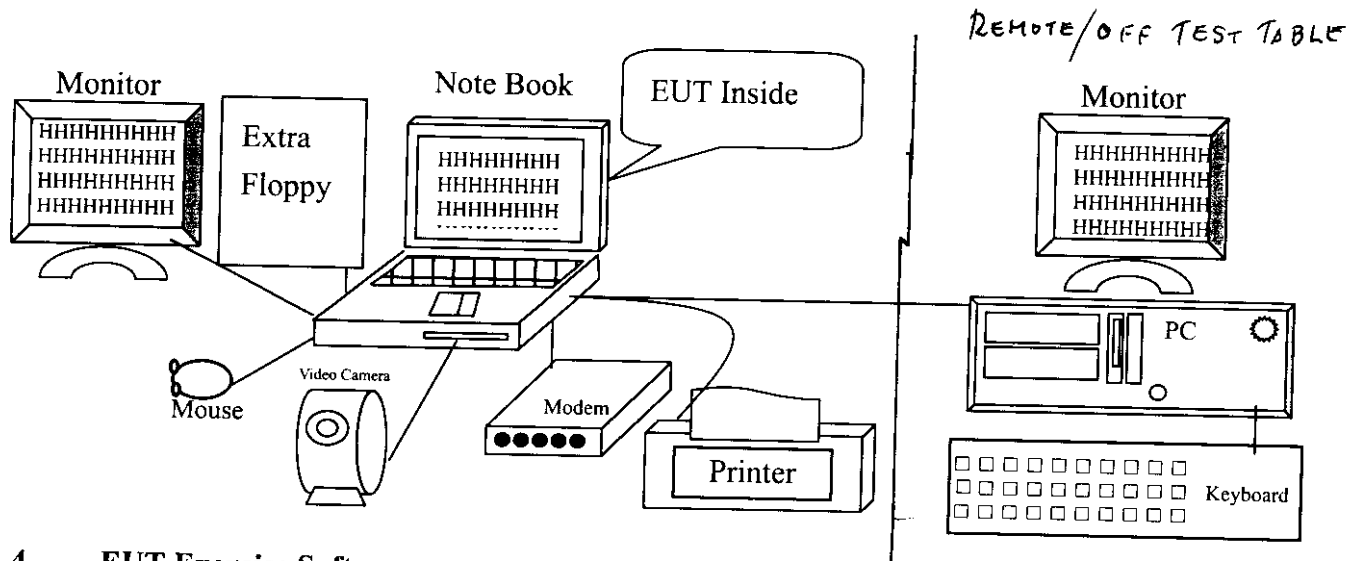

1.4 EUT Exercise Software

The EUT exercise program used during conducted testing was designed to exercise the EUT in a manner similar to a typical use. The exercise sequence is listed as below:

- 1.4.1 Setup the EUT and simulators as shown on 1.3.
- 1.4.2 Turn on the power of all equipment.
- 1.4.3 Boot the PC from Hard Disk .
- 1.4.4 Data will communicate between notebook personal computer and partner personal computer(1) through Cardbus Fast Ethernet PC card (EUT) that is within Notebook PC.
- 1.4.5 The notebook personal computer's and partner computer's monitor will show the transmitting and receiving characteristics when the communication is success.
- 1.4.6 Printer and modem will keep at standby mode during EUT operation.
- 1.4.7 Repeat the above procedure 1.4.4 to 1.4.6

1.5 Test performed

Conducted emissions were invested over the frequency range from **0.15MHz to 30MHz** using a receiver bandwidth of 9kHz.

Radiated emissions were invested over the frequency range from **30MHz to 1000MHz** using a receiver bandwidth of 120kHz. Radiated testing was performed at an antenna to EUT distance of 10 meters .

1.6 Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: November 3, 1998 File on

Federal Communications Commission

FCC Engineering Laboratory

7435 Oakland Mills Road

Columbia, MD 21046

Reference 31040/SIT1300F2



September 30, 1998 Accreditation on NVLAP

NVLAP Lab Code: 200347-0

February 23, 1999 Accreditation on DNV
Statement No. : 413-99-LAB11



December 8, 1998 Registration on VCCI
Registration No. for No.2 Shielded Room C-858
Registration No. for No.1 Open Area Test Site R-823
Registration No. for No.2 Open Area Test Site R-835



January 04, 1999 Accreditation on TÜV Rheinland
Certificate No.: I9865712-9901



Name of firm : QuieTek Corporation

Site location : No.75-1, Wang-Yeh Valley, Yung-Hsing Tsuen,
Chiung-Lin, Hsin-Chu County, Taiwan, R.O.C.



2. Conducted Emission


2.1 Test Equipment List

The following test equipment are used during the conducted emission test:

Item	Instrument	Manufacturer	Type No./Serial No	Last Cal..	Remark
1	Test Receiver	R & S	ESCS 30/825442/17	May, 1998	
2	L.I.S.N.	R & S	ESH3-Z5/825016/6	May, 1998	EUT
3	L.I.S.N.	Kyoritsu	KNW-407/8-1420-3	May, 1998	Peripherals
4	Pulse Limiter	R & S	ESH3-Z2	N/A	
5	N0.2 Shielded Room			N/A	

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2.2 Test Setup

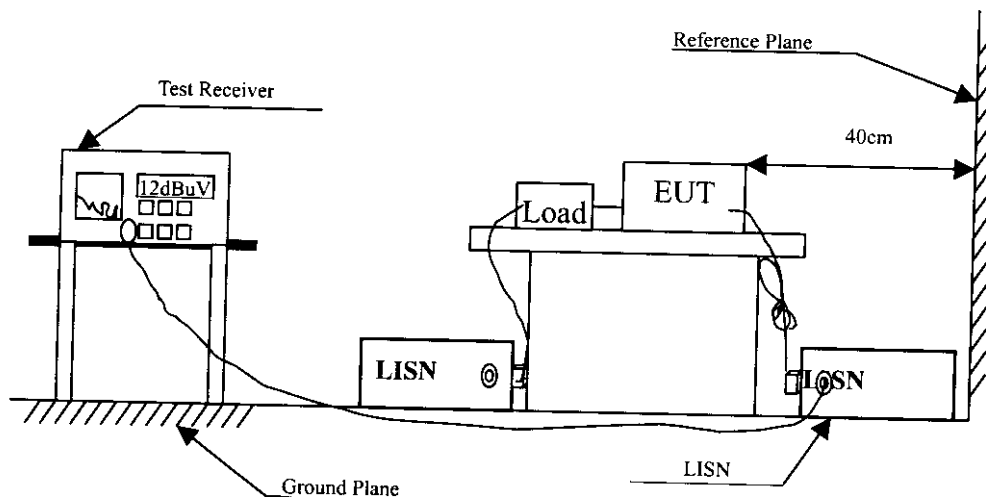

2.3 Limits

CISPR 22 Limits (dBuV)					FCC Part 15 Subpart B (dBuV)				
Frequency MHz	Class A		Class B		Frequency MHz	Class A		Class B	
	QP	AV	MHz	AV		uV	dBuV	uV	dBuV
0.15 - 0.50	79	66	66-56	56-46	0.45-1.705	1000	60.0	250	48.0
0.50-5.0	73	60	56	46	1.705-30	3000	69.5	250	48.0
5.0 - 30	73	60	60	50					

Remarks : In the above table, the tighter limit applies at the band edges.

2.4 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.) This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 /1992 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

2.5 Test Results

The emission from the EUT was below the specified limits. The worst case emissions are shown in Chapter 4. The acceptance criterion was met and the EUT passed the test.

3.3

Limits

CISPR 22 Limits (dBuV)					FCC Part 15 Subpart B (dBuV)				
Frequency MHz	Class A		Class B		Frequency	Class A		Class B	
	Distance (m)	dBuV/m	Distance (m)	dBuV/m		uV	dBuV	uV	dBuV
30 – 230	10	40	10	30	30 – 88	90	39	100	40.0
230 – 1000	10	47	10	37	88 – 216	150	43.5	150	43.5
					216 – 960	210	46.5	200	46.0
					960 - 2000	300	49.5	500	54.0

Remark: 1. The tighter limit shall apply at the edge between two frequency bands.

2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3. RF Line Voltage (dBuV) = 20 log RF Line Voltage (uV)

3.4

Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 10 meters .

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4 /1992 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30) is 120 kHz.

3.5

Test Results

The emission from the EUT was below the specified limits. The worst case emissions are shown in Chapter 4. The acceptance criterion was met and the EUT passed the test.

4. Summary of Test Results

The test results in the emission was performed according to the requirements of measurement standard and process. QuieTek Corporation is assumed full responsibility for the accuracy and completeness of these measurements. The test data of the emission is listed as the attached data..

All the tests were carried out with the EUT in normal operation, which was defined as:

(1) Mode 1 : 100 bps Baul Rate

The EUT passed all the tests.

The uncertainty is calculated in accordance with NAMAS NIS 81, The total uncertainty for this test is as follows:

➤ **Emission Test**

- Uncertainty in the Conducted Emission Test: $< \pm 2.0 \text{ dB}$
- Uncertainty in the field strength measured: $< \pm 4.0 \text{ dB}$

CONDUCTED EMISSION DATA

Date of Test : May 15, 1999 EUT : 10/100 Mbps Dual Speeds
Fast Ethernet PC Card
Test Mode : Mode 1 Detect Mode : Quasi-Peak & Average

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level Line1 dBuV	Measurement Level Line1 dBuV	Limits dBuV
0.155	0.00	0.10	44.77	44.87	65.75
0.173	0.01	0.10	39.42	39.53	64.82
0.207	0.02	0.10	45.72	45.84	63.32
0.254	0.03	0.10	31.83	31.96	61.64
2.451	0.16	0.14	34.69	34.98	56.00
*17.693	0.34	0.41	42.56	43.31	60.00

Average:

0.155	0.00	0.10	35.12	35.22	55.73
0.173	0.01	0.10	33.24	33.35	54.82
0.207	0.02	0.10	35.14	35.26	53.32
0.254	0.03	0.10	22.75	22.88	51.63
2.451	0.16	0.14	26.57	26.86	46.00
17.693	0.34	0.41	31.47	32.22	50.00

Remarks :

1. " * " means that this data is the worst emission level.



CONDUCTED EMISSION DATA

Date of Test : May 15, 1999 EUT : 10/100 Mbps Dual Speeds
Fast Ethernet PC Card
Test Mode : Mode 1 Detect Mode : Quasi-Peak & Average

Frequency MHz	Cable Loss dB	LISN Factor dB	Reading Level Line2 dBuV	Measurement Level Line2 dBuV	Limits dBuV
0.189	0.01	0.10	36.21	36.32	64.08
0.205	0.02	0.10	44.58	44.70	63.42
0.248	0.03	0.10	30.75	30.88	61.84
2.560	0.16	0.14	36.79	37.09	56.00
13.005	0.31	0.29	38.73	39.33	60.00
*18.244	0.34	0.42	42.83	43.59	60.00

Average:

0.189	0.01	0.10	29.54	29.65	54.08
0.205	0.02	0.10	36.85	36.97	53.41
0.248	0.03	0.10	26.94	27.07	51.82
2.560	0.16	0.14	30.45	30.75	46.00
13.005	0.31	0.29	31.54	32.14	50.00
18.240	0.34	0.42	31.57	32.33	50.00

Remarks :

1. " * " means that this data is the worst emission level.



Radiated Emission Data

Date of Test : May 10, 1999 EUT : 10/100 Mbps Dual Speeds
Fast Ethernet PC Card
Test Mode : Mode 1 Detect Mode : Quasi-Peak

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit	Ant	Turn
MHz	Loss	Factor		Level	Horizontal			cm	deg
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m		
84.850	0.00	8.70	0.00	4.85	13.55	16.45	30.00	395	143
131.790	0.00	11.39	0.00	5.07	16.46	13.54	30.00	395	148
141.232	0.00	11.27	0.00	10.82	22.09	7.91	30.00	395	203
*250.010	0.00	12.61	0.00	17.74	30.35	6.65	37.00	395	70
265.436	0.00	13.81	0.00	1.82	15.63	21.37	37.00	395	203
400.009	0.00	15.85	0.00	5.09	20.94	16.06	37.00	395	21

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss



Radiated Emission Data

Date of Test : May 10, 1999 EUT : 10/100 Mbps Dual Speeds
Fast Ethernet PC Card

Test Mode : Mode 1 Detect Mode : Quasi-Peak

Freq.	Cable	Probe	PreAMP	Reading	Measurement	Margin	Limit	Ant	Turn
MHz	Loss	Factor		Level	Vertical			cm	deg
	dB	dB/m	dB	dBuV	dBuV/m	dB	dBuV/m		
66.119	0.00	5.83	0.00	8.73	14.56	15.44	30.00	99	194
132.500	0.00	11.35	0.00	3.48	14.83	15.17	30.00	99	172
139.860	0.00	11.15	0.00	4.36	15.51	14.49	30.00	99	8
230.384	0.00	10.23	0.00	3.10	13.33	23.67	37.00	99	134
250.008	0.00	12.26	0.00	15.57	27.83	9.17	37.00	99	203
*250.008	0.00	12.26	0.00	15.88	28.14	8.86	37.00	99	133
651.249	0.00	18.52	0.00	4.37	22.89	14.11	37.00	178	23

Remarks:

1. All Readings below 1GHz are Quasi-Peak, above are average value.
2. " * ", means this data is the worst emission level.
3. Emission Level = Reading Level + Antenna Factor + Cable loss



5. EMI Reduction Method During Compliance Testing

No modification was made during testing.

