

RF Exposure Report

Report No.: AGC01741230307FH01A

| FCC ID | : | 2AYT3-AC60 |
|-----------------------|------------|---|
| APPLICATION PURPOSE | : | Class II Permissive Change |
| PRODUCT DESIGNATION | : | Portable Power Station |
| BRAND NAME | : | BLUETTI |
| MODEL NAME | : | AC60 |
| APPLICANT | : | SHENZHEN POWEROAK NEWENER CO., LTD |
| DATE OF ISSUE | : | Oct. 19, 2023 |
| STANDARD(S) | : | KDB680106 D01 RF Exposure Wireless Charging Base App v03r01 |
| REPORT VERSION | : | V 1.0 V 1.0 |
| <u>Attestation of</u> | <u>Glo</u> | bal Compliance (Shenzhen) Co., Ltd |





REPORT REVISE RECORD

| Report Version | Revise Time | Issued Date | Valid Version | Notes |
|----------------|-------------|---------------|---------------|-----------------|
| V1.0 | / | Oct. 19, 2023 | Valid | Initial Release |

Note: The original test report Ref. No AGC01741230307FH01 (dated Jun. 30, 2023, tested Mar. 16, 2023 to Apr.

21, 2023), was modified on Oct. 19, 2023 to include the following changes and additions for:

- Optimize the wiring of the IC peripheral circuits for LED light boards and PV charging,

- Add magnetic rings to the AC input and LED optical and communication cables for optimization

For above described change(s), no further testing is necessary.



TABLE OF CONTENTS

| 1. GENERAL INFORMATION | |
|---------------------------------------|----|
| 2. PRODUCT INFORMATION | 5 |
| 2.1 PRODUCT TECHNICAL DESCRIPTION | 5 |
| 2.2 TEST FREQUENCY LIST | |
| 3. TEST ENVIRONMENT | 6 |
| 3.1 ADDRESS OF THE TEST LABORATORY | 6 |
| 3.2 TEST FACILITY | 6 |
| 3.3 ENVIRONMENTAL CONDITIONS | |
| 3.4 MEASUREMENT UNCERTAINTY | |
| 3.5 LIST OF EQUIPMENTS USED | |
| 4. EQUIPMENT USED IN TESTED SYSTEM | - |
| 5. DESCRIPTION OF TEST MODES | |
| 6. RF EXPOSURE MEASUREMENT | - |
| 6.1 REFER EVALUATION METHOD | |
| 6.2 TEST LIMITS | - |
| 6.3 MEASUREMENT SETUP | |
| 6.4 MEASUREMENT PROCEDURE | |
| 6.5 MEASUREMENT RESULTS | |
| APPENDIX I: PHOTOGRAPHS OF TEST SETUP | 14 |



1. GENERAL INFORMATION

| Applicant | SHENZHEN POWEROAK NEWENER CO., LTD |
|-------------------------------|---|
| Address | F19, BLD No.1, Kaidaer Tongsha Rd No.168, Xili Street, Nanshan, Shenzhen, China |
| Manufacturer | SHENZHEN POWEROAK NEWENER CO., LTD |
| Address | F19, BLD No.1, Kaidaer Tongsha Rd No.168, Xili Street, Nanshan, Shenzhen, China |
| Factory | Huizhou PowerOak Innovation Co., Ltd |
| Address | (No.1 Workshop) Longsheng 5th Road, Laoshe Village, Dayawan West Zone, Huizhou, Guangdong, China |
| Product Designation | Portable Power Station |
| Brand Name | BLUETTI |
| Test Model | AC60 |
| Deviation from Standard | No any deviation from the test method |
| Date of receipt of test ite m | Oct. 07, 2023 |
| Date of Test: | N/A |
| Test Result | Pass |

Prepared By

Han Duan eer) Oc

Oct. 19, 2023

Reviewed By

Calvin Liu (Reviewer)

Alan Duan

(Project Engineer)


Oct. 19, 2023

Approved By

Max Zhang

Max Zhang Authorized Officer

Oct. 19, 2023





2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

| Equipment Specification | WPT | |
|-------------------------------|--|--|
| Frequency Band | 110.5KHz-205KHz | |
| Operation Frequency | 130KHz | |
| Hardware Version | AC60_U2 V4.0 | |
| Software Version | V2073 | |
| Modulation Type | ASK | |
| Number of channels | 1 | |
| Field Strength of Fundamental | 65.78dBuV/m (Max) | |
| Antenna Designation | Coil Antenna | |
| Antenna Gain | 0dBi | |
| Input Rating | AC: 120V~50/60Hz, 10A Max DC/PV:12V-28V=8A, 200W Max | |
| Output Rating | AC: 120V~50/60Hz, 600W Max. USB-A: 5V=3A USB-C: 5/9/12/15/20V=3A; 20V=5A(E-Marker chip built-in) Wireless Charge: 5/7.5/10/15W Cigarette Lighter Socket: 12V=10A AC and DC output: 600W Total Battery Expansion: 22.4V=30A Total | |

2.2 TEST FREQUENCY LIST

| Frequency Band | Channel Number | Frequency |
|-----------------|----------------|-----------|
| 110.5KHz-205KHz | 01 | 130KHz |



3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 ENVIRONMENTAL CONDITIONS

| | NORMAL CONDITIONS | EXTREME CONDITIONS | |
|--|-------------------|--------------------|--|
| Temperature range (°C) | 15 - 35 | | |
| Relative humidity range | 20 % - 75 % | | |
| Pressure range (kPa) | 86 - 106 | | |
| Power supply | | | |
| Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer. | | | |

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

| Item | Measurement Uncertainty |
|--------------------------------|-------------------------|
| E-Field Strength(0.003-0.4MHz) | ±1.5dB |
| E-Field Strength(0.4-10MHz) | ±1.3dB |
| H-Field Strength(0.003-0.4MHz) | ±1.3dB |
| H-Field Strength(0.4-10MHz) | ±1.2dB |

3.5 LIST OF EQUIPMENTS USED

| Equipment | Manufacturer | Model | S/N | Cal. Date | Cal. Due |
|--------------------------|--------------|-------|--------|---------------|---------------|
| Broadband Field Meter | WAVECONTROL | SMP2 | J-0004 | Jun. 08, 2022 | Jun. 07, 2023 |
| Probe FHP | WAVECONTROL | WP400 | J-0015 | Jun. 08, 2022 | Jun. 07, 2023 |



4. EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement: Test Accessories Come From The Laboratory

| Item | Equipment | Model No. | Identifier | Note |
|------|------------------------|-----------|------------|------|
| 1 | wireless charging load | Huawei | - | EUT |

☐ Test Accessories Come From The Manufacturer

| Item | Equipment | Model No. | Identifier | Note | |
|------|------------------------|-----------|------------|------|--|
| 1 | Portable Power Station | AC60 | 2AYT3-AC60 | EUT | |



5. DESCRIPTION OF TEST MODES

| NO. | TEST MODE DESCRIPTION | Exposure Conditions | | | |
|-------|---|------------------------|--|--|--|
| 1 | AC/DC Adapter + EUT + Wireless load (Full Load) | Mobile | | | |
| 2 | AC/DC Adapter + EUT + Wireless load (Half Load) | Mobile | | | |
| 3 | AC/DC Adapter + EUT + Wireless load (Null Load) | Mobile | | | |
| 4 | AC/DC Adapter + EUT (Null Load) | Mobile | | | |
| Note: | | | | | |
| 1. O | 1. Only the result of the worst case was recorded in the report, if no other cases. | | | | |

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.



6. RF EXPOSURE MEASUREMENT

6.1 REFER EVALUATION METHOD

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

FCC KDB publication 680106 D01v03r01 RF Exposure Wireless Charging Apps v03: RF Exposure Considerations for Low Power Consumer Wireless Power Transfer Applications

FCC CFR 47 part1 1.1310: Radiofrequency radiation exposure limits.

FCC CFR 47 part2 2.1091: Radiofrequency radiation exposure evaluation: mobile devices.

FCC CFR 47 part 18.107: Indusial, Scientific, and Medical Equipment.

6.2 TEST LIMITS

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

| Frequency | Electric Field | Electric Field Magnetic Field Power Density | | Averaging Time | | |
|---|----------------|---|---------------------|----------------|--|--|
| Range(MHz) | Strength(V/m) | Strength(A/m) | (mW/cm²) | (minute) | | |
| Limits for Occupational/Controlled Exposure | | | | | | |
| 0.3-3.0 | 614 | 1.63 | *100 | 6 | | |
| 3.0-30 | 1842/f | 4.89/f | *900/f ² | 6 | | |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 | | |
| 300-1,500 | / | / | f/300 | 6 | | |
| 1,500-100,000 | / | / | 5 | 6 | | |

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

| Frequency | Electric Field | Magnetic Field | Power Density | Averaging Time | | |
|---|----------------|----------------|---------------------|----------------|--|--|
| Range(MHz) | Strength(V/m) | Strength(A/m) | (mW/cm²) | (minute) | | |
| Limits for General Population/Uncontrolled Exposure | | | | | | |
| 0.3-1.34 | 614 | 1.63 | *100 | 30 | | |
| 1.34-30 | 824/f | 2.19/f | *180/f ² | 30 | | |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 | | |
| 300-1,500 | / | / | f/1500 | 30 | | |
| 1,500-100,000 | / | / | 1.0 | 30 | | |

F=frequency in MHz

*=Plane-wave equivalent power density


According to FCC KDB 680106 D01v03r01 Section 3. RF Exposure Requirements clause 3 the Emission-Limits in the frequency range from 100 KHz to 300 KHz should be assessed versus the limits at 300 KHz in Table 1 of CFR 47 – Section1.310 as following (measured distance shall be 15cm from the center of the probe to the edge of the device):

| | E-Field | */* | B-Field | |
|-------------------|---------------------------------|-----------------------------------|---------|--|
| Frequency V/m | | A/m | uT | |
| 0.3 MHz – 3.0 MHz | 0.3 MHz – 3.0 MHz 614 | | 2.0 | |
| 3.0 MHz – 30 MHz | 824/f (=27.5 _{30MHz}) | 2.19/f (=0.073 _{30MHz}) | | |


A KDB inquire was required to determine/confirm the applicable limits below 100 KHz.



6.3 MEASUREMENT SETUP

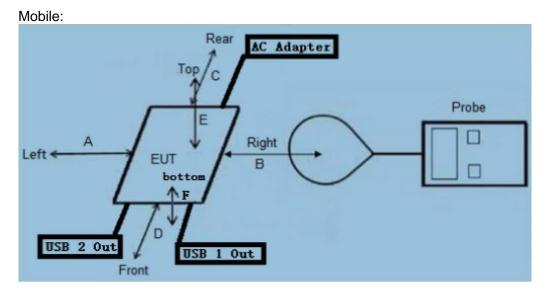

Portable:

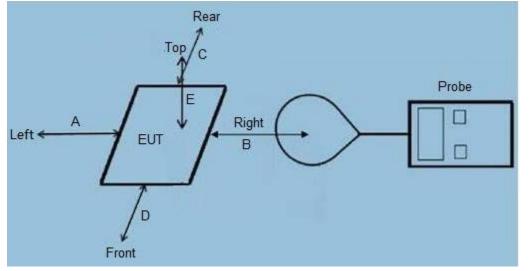

Note:

-- RF exposure assessment tests are conducted in a shielded room.

-- Refer to the following test method description for the test distance between the edge of the charger and the measuring probe.

-- As shown in the above picture, the test layout is not for the real object, only the requirements of the test layout listed in the standard requirements are presented, for reference only.

-- The actual test EUT distinguishes the test type according to the requirements as shown in the figure above.

-- The mobile schematic device under test may not be connected to the power supply reference.



6.4 MEASUREMENT PROCEDURE

For mobile RF exposure:

- a) The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- b) The measurement probe was placed at test distance (15cm) which is between the edge of
- c) the charger and the geometric center of probe. And a test distance (20cm) which is between the Top of the charger and the geometric center of probe.
- d) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- e) The EUT were measured according to the dictates of KDB 680106 D01v03r01.

For portable RF exposure:

- a) The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- b) The measurement probe was placed at test distance (from 0 cm to 20 cm, in 2 cm maximum increment) which is between the edge of the charger and the geometric center of probe.
- c) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F,) were completed.
- d) The EUT were measured according to the dictates of KDB 680106 D01v03r01

Remark: The diameter size of the probe is 11.5cm.



6.5 MEASUREMENT RESULTS

Mobile devices are evaluated as follows:

| Operate | Field | Measured H-Field Strength Values (A/m) Measured E-Field Strength Values (V/m) | | | | FCC | 50%_FCC | |
|---------|----------|--|-----------------------|-----------------------|-----------------------|-----------------------|---------|-------|
| | Strength | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Limit | limit |
| Mode 1 | nT | 836.11 | 921.25 | 639.52 | 881.42 | 907.51 | | |
| Mode 1 | A/m | 0.67 | 0.74 | 0.51 | 0.71 | 0.73 | 1.63 | 0.815 |
| Mode 1 | V/m | 0.25 | 0.23 | 0.33 | 0.28 | 0.24 | 614 | 307 |

Note: Unit conversion formula: 1µt=1.25A/m



APPENDIX I: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC01741230307AP03A

-----END OF REPORT-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.