

## 4.5 6dB Bandwidth


### Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

### Test Configuration



### Test Results

Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	11.080	≥500	Pass
	06	10.080		
	11	9.520		
802.11g	01	16.480	≥500	Pass
	06	16.280		
	11	16.320		
802.11n(HT20)	01	17.560	≥500	Pass
	06	17.560		
	11	17.600		
802.11n(HT40)	03	34.160	≥500	Pass
	06	34.720		
	09	35.520		

Note:


- 1) Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
- 2) Test results including cable loss;
- 3) Worst case data at 1Mbps at IEEE 802.11b; 6Mbps at IEEE 802.11g; 6.5Mbps at IEEE 802.11n HT20; 13.5Mbps at IEEE 802.11n HT40;

Please refer to following plots;

802.11b




802.11g

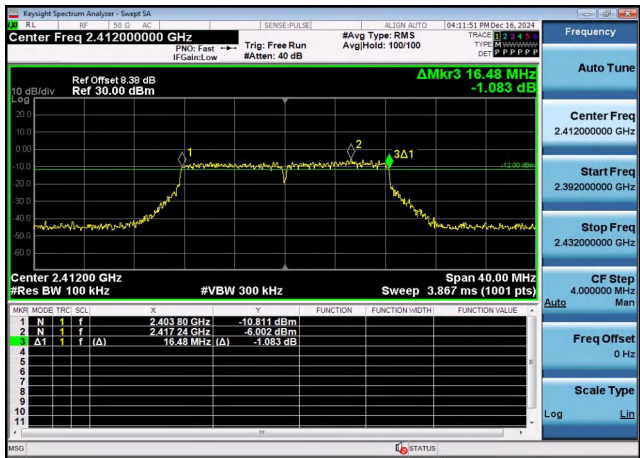



CH01

CH01

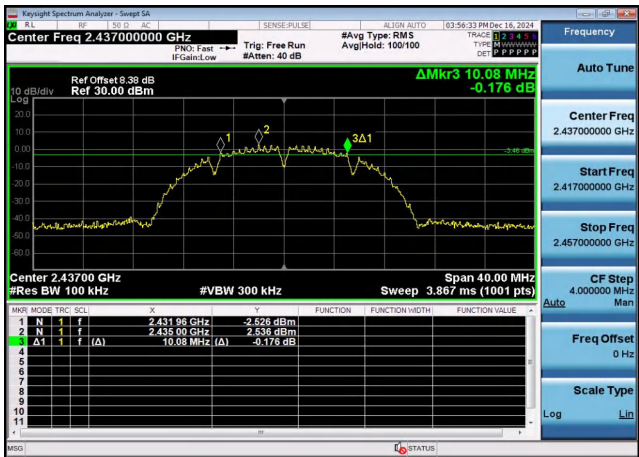

CH06


CH06

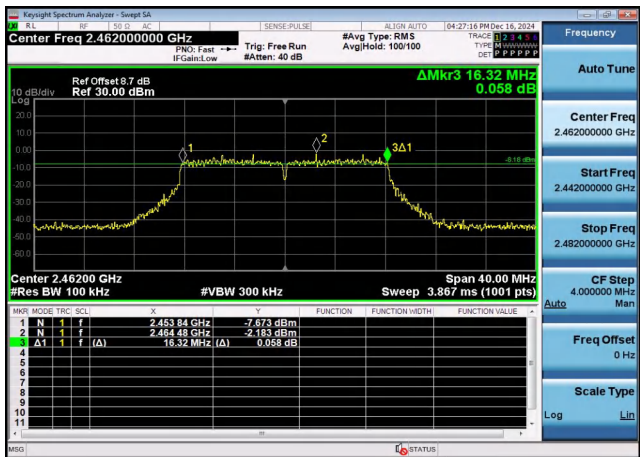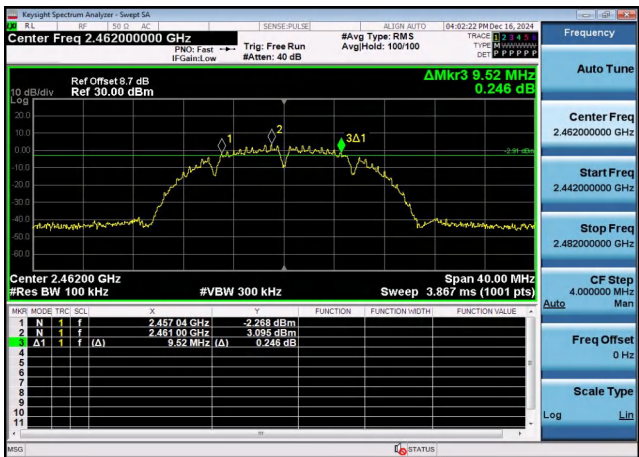


CH11

CH11


802.11n(HT20)

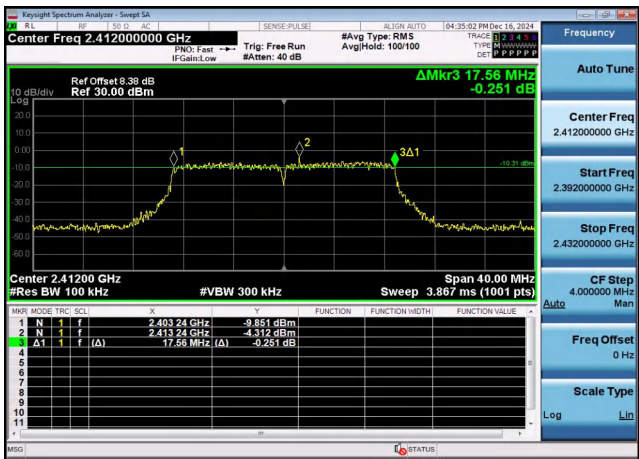


802.11n(HT40)

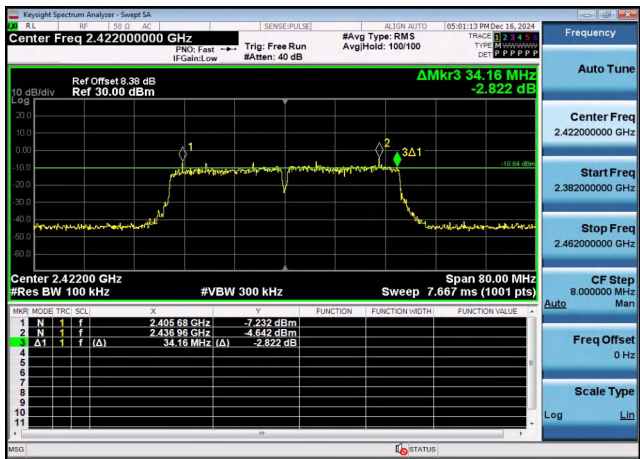

CH01

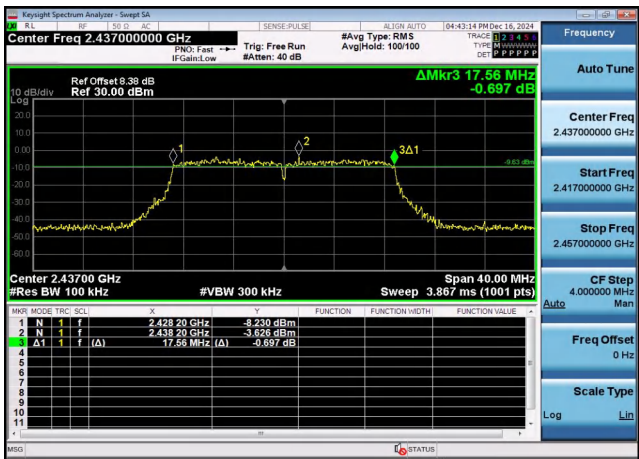


CH03

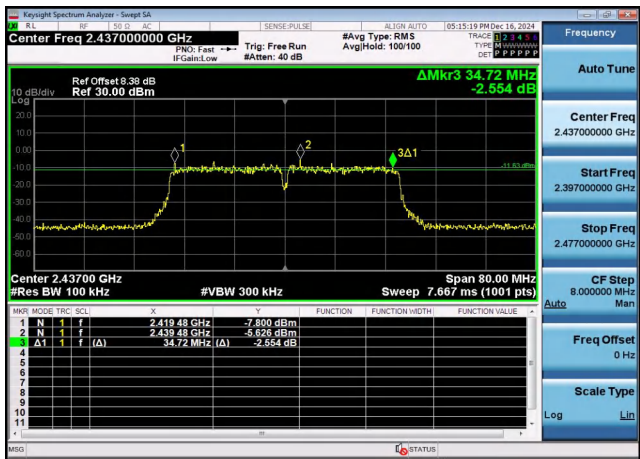

CH06



CH06

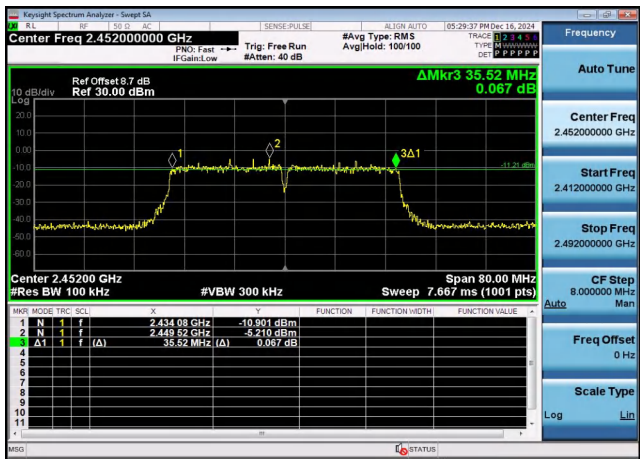

CH11



CH09



## 4.6 Out-of-band Emissions

### Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

### Test Configuration



### Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data. And record the worst data in the report.



Test plot as follows:



802.11b





CH01

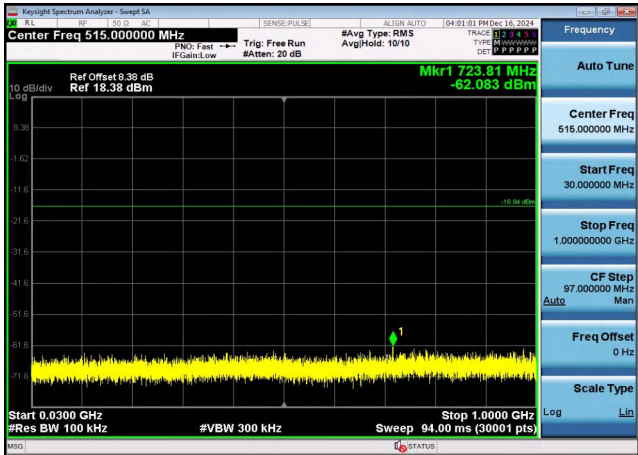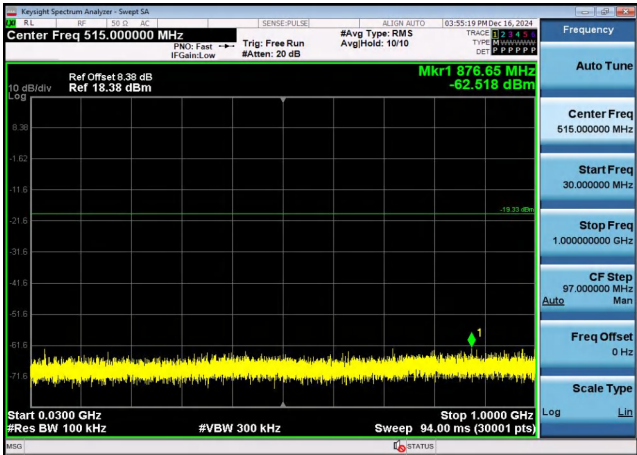

30MHz-1GHz

30MHz-1GHz

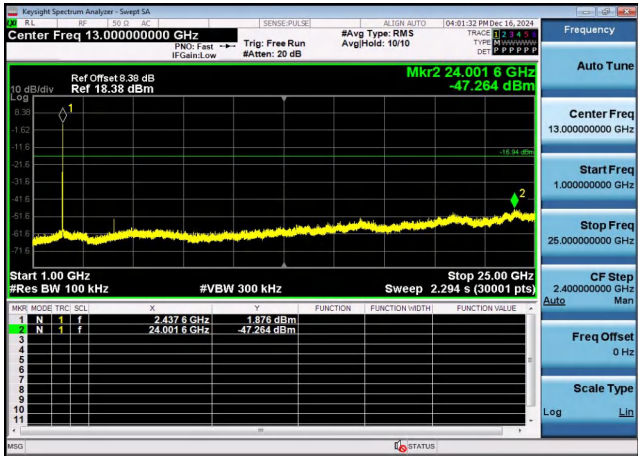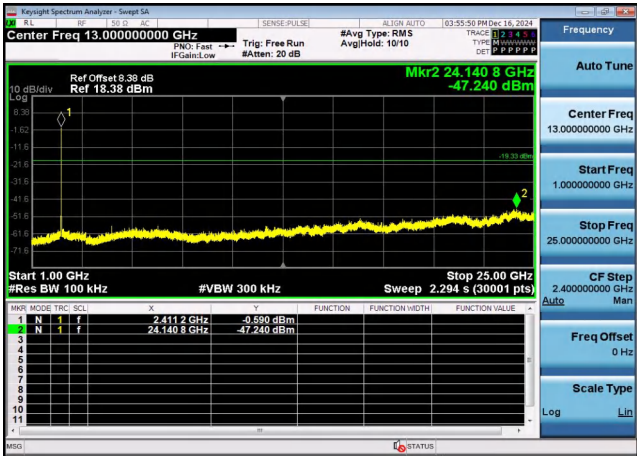


1GHz -25GHz

1GHz -25GHz


802.11b




802.11g

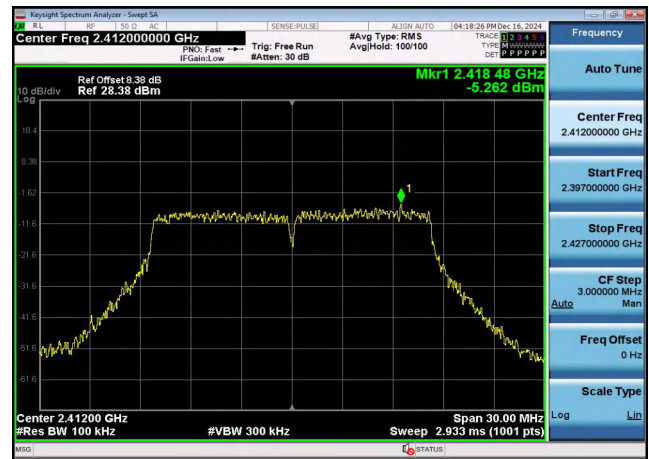


CH11

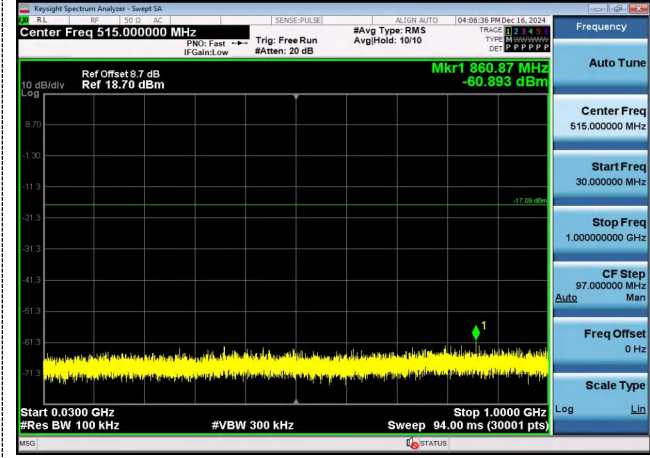


CH01

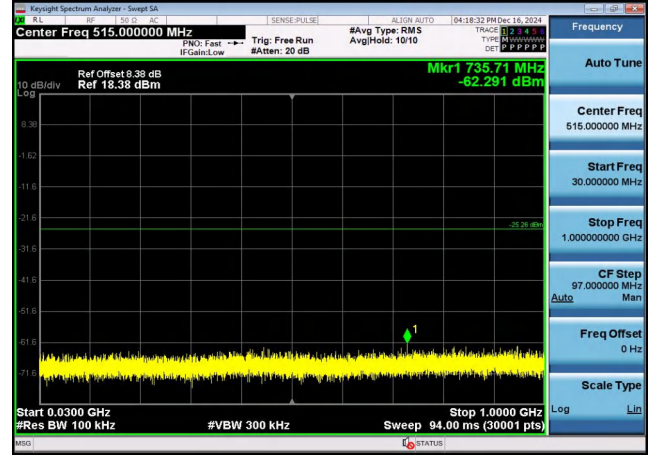

30MHz-1GHz

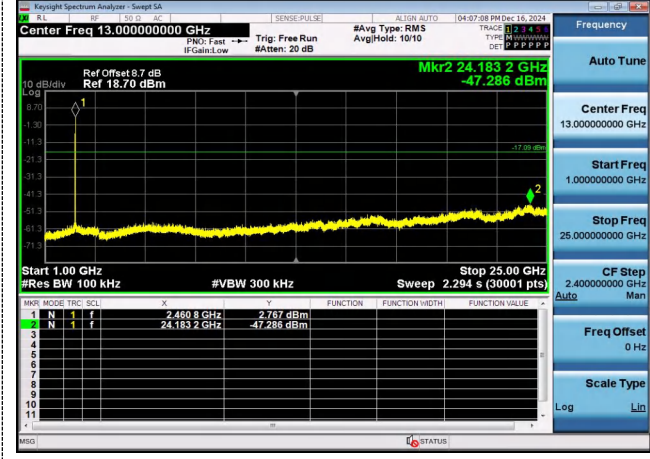

30MHz-1GHz

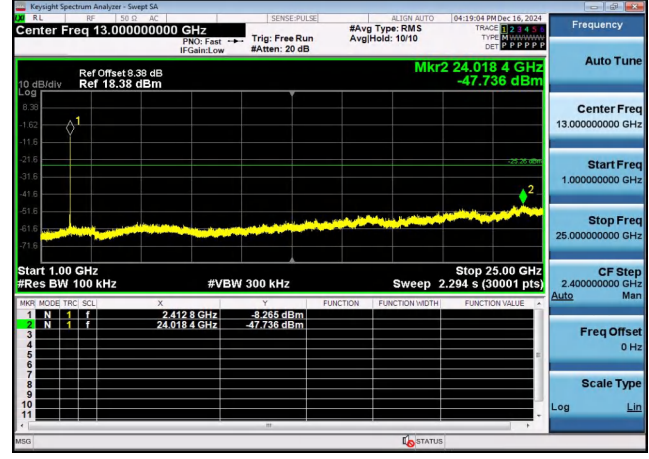


1GHz -25GHz



1GHz -25GHz





802.11g

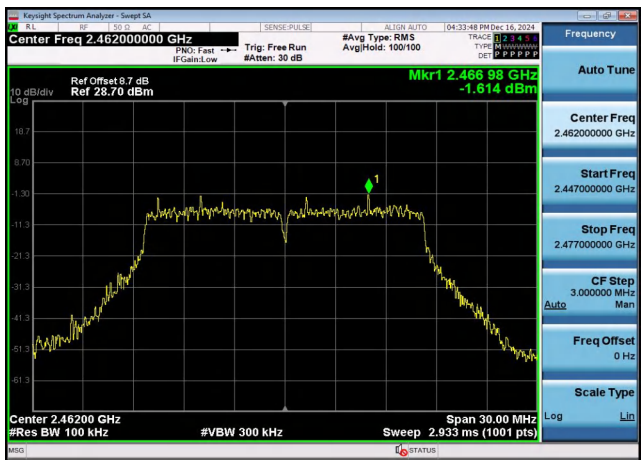

CH06

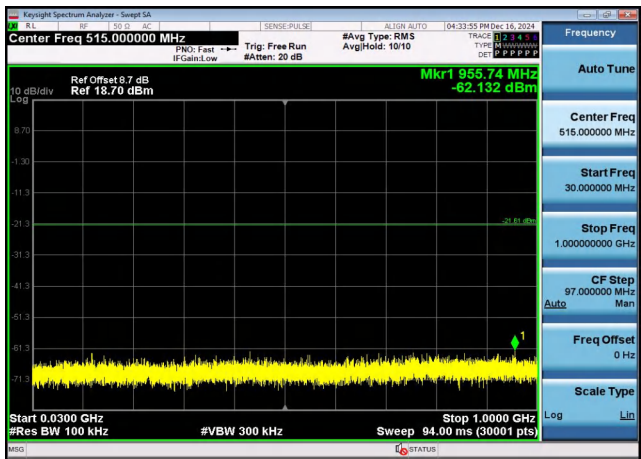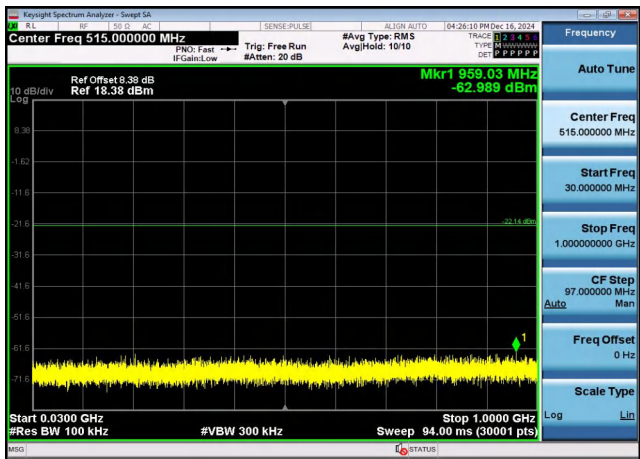



30MHz-1GHz

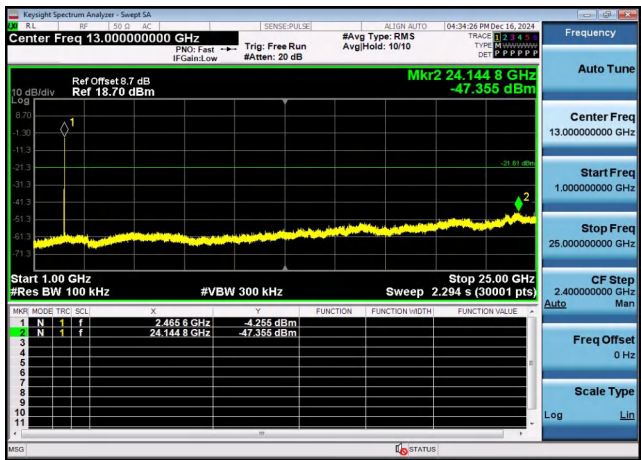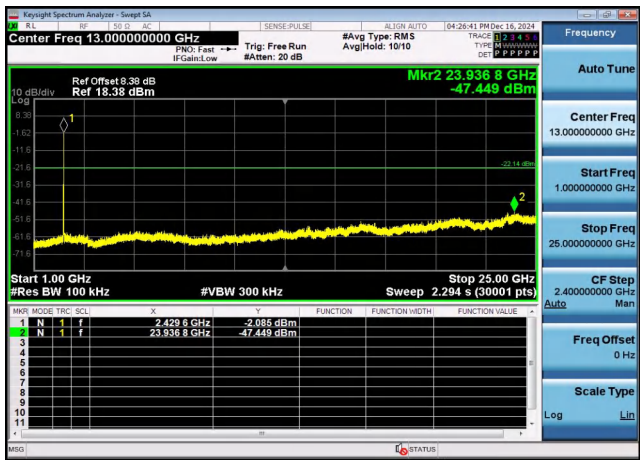



1GHz -25GHz

1GHz -25GHz

802.11n(HT20)

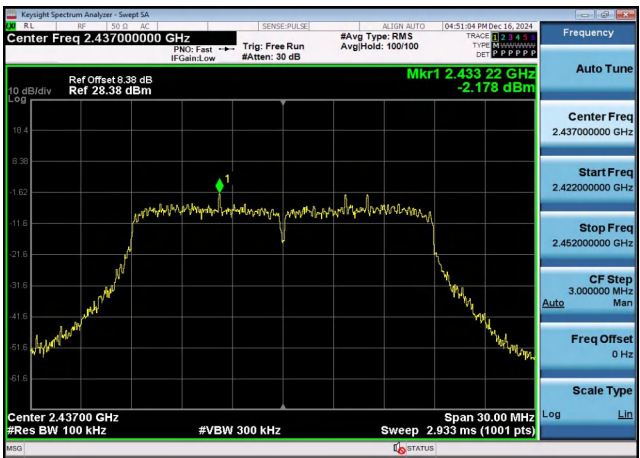
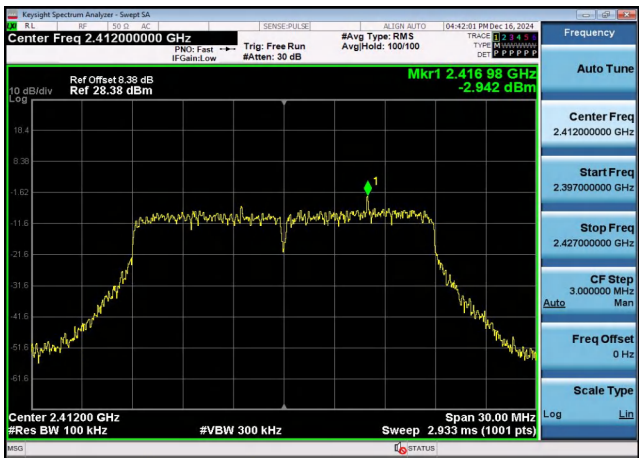


CH01

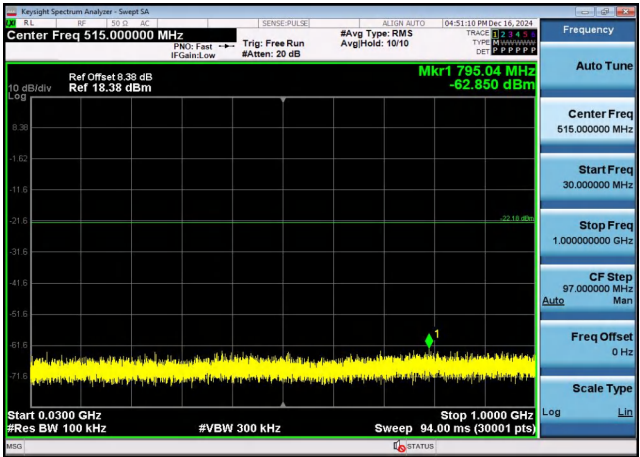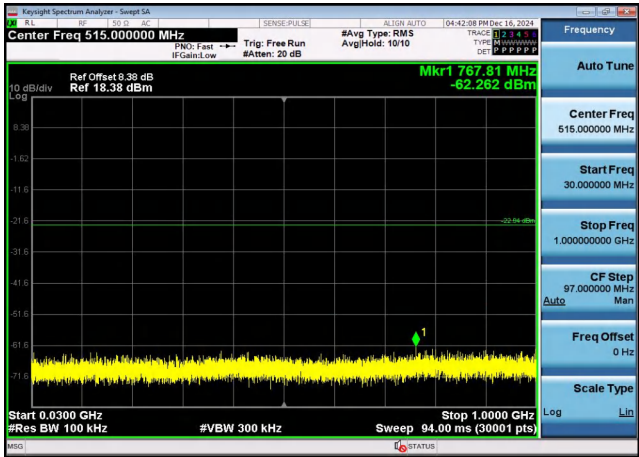

30MHz-1GHz

30MHz-1GHz

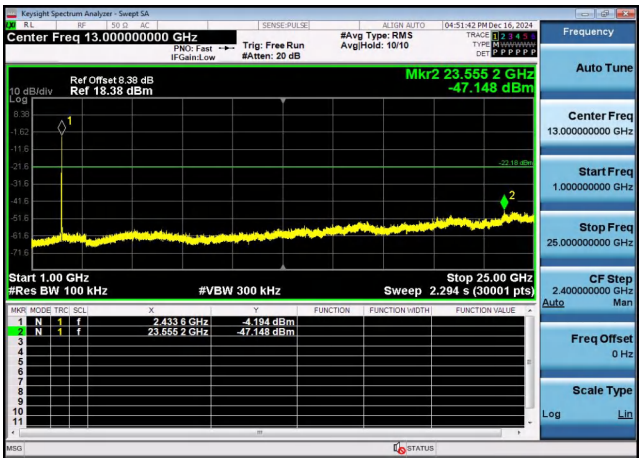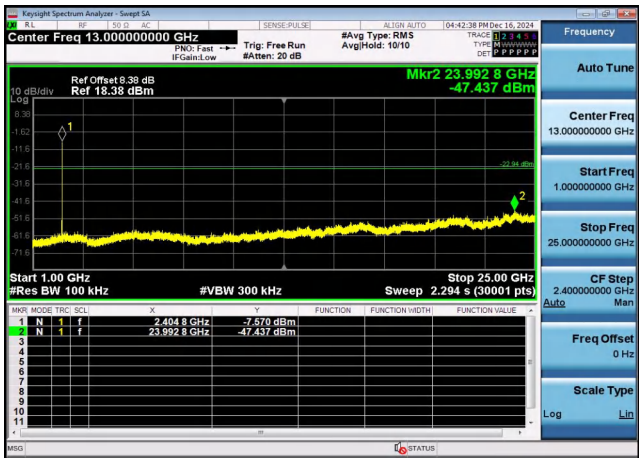


1GHz -25GHz


1GHz -25GHz




802.11n(HT20)

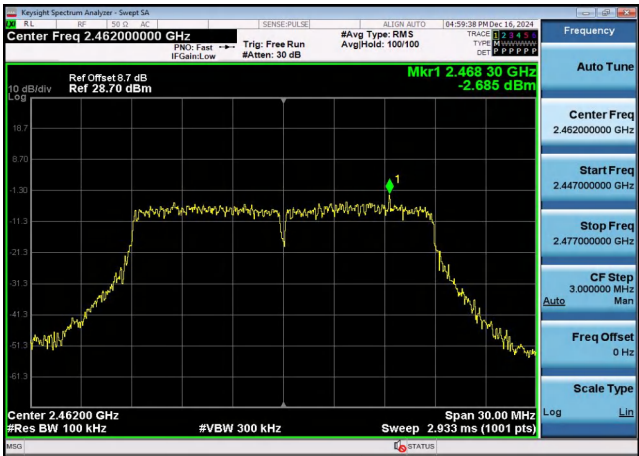


802.11n(HT40)

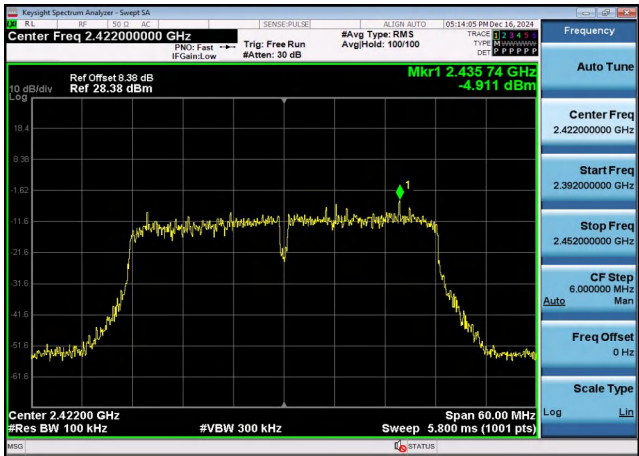


CH11

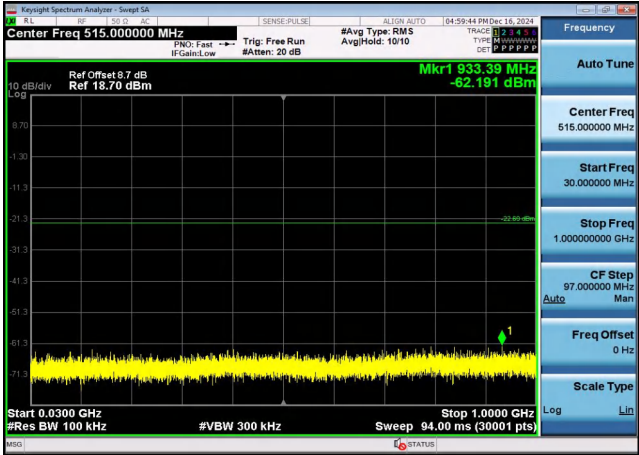


CH03

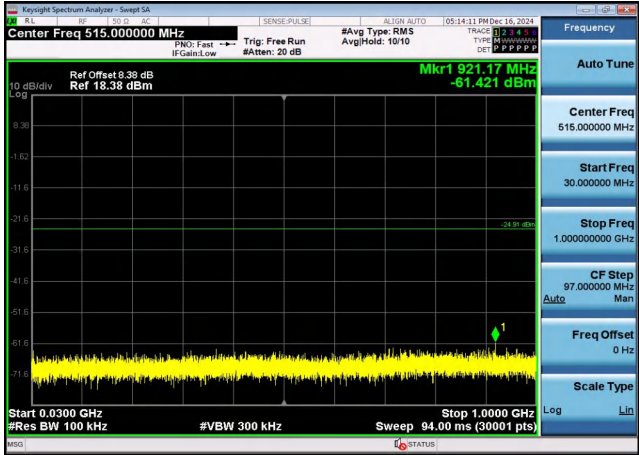

30MHz-1GHz

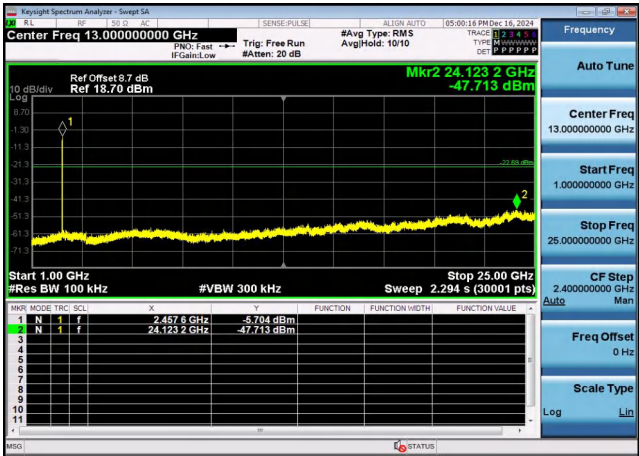


30MHz-1GHz

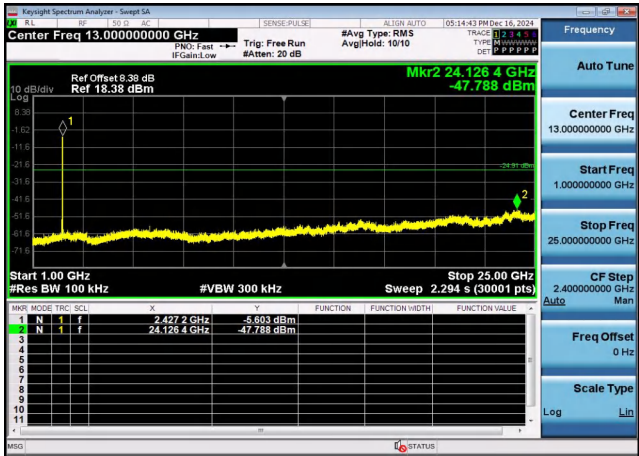



1GHz -25GHz





1GHz -25GHz





802.11n(HT40)

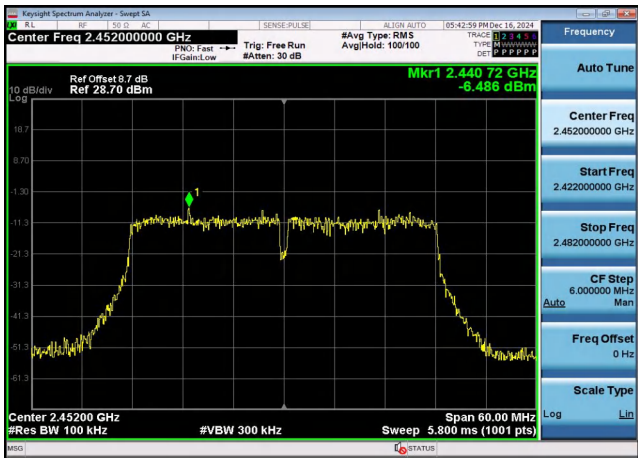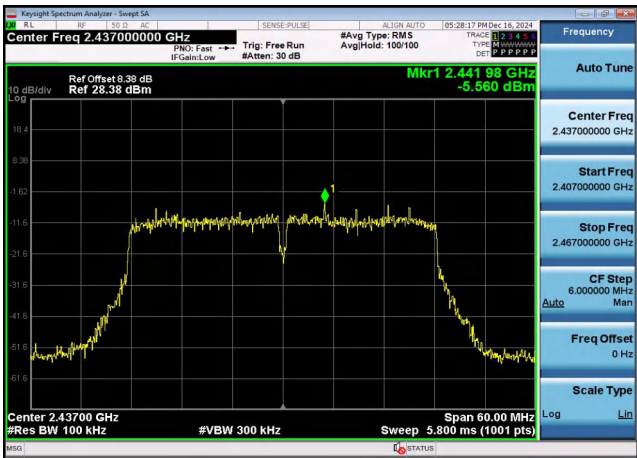

CH06

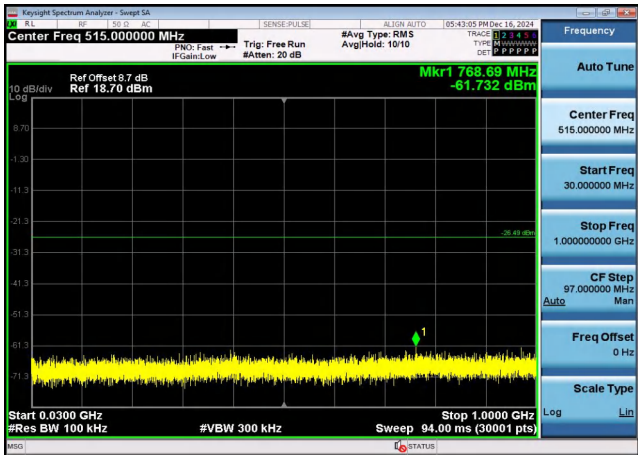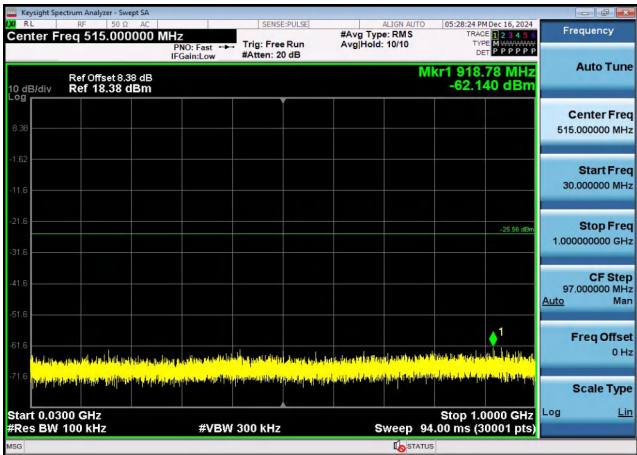

30MHz-1GHz

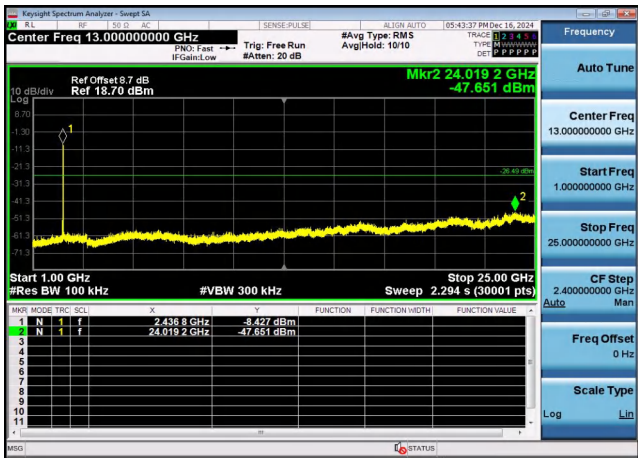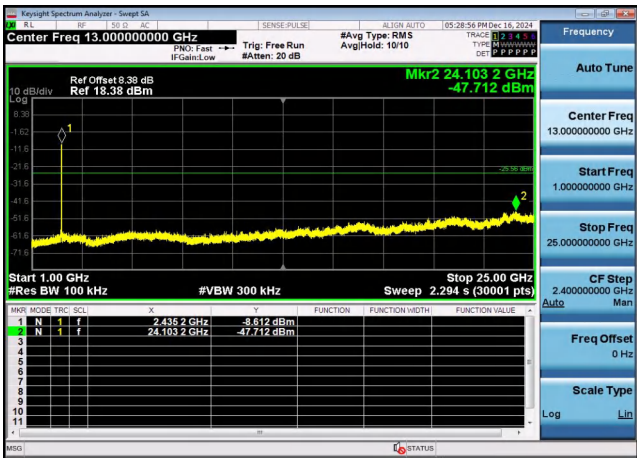


1GHz -25GHz


1GHz -25GHz

Band-edge Measurements for RF Conducted Emissions:

802.11b

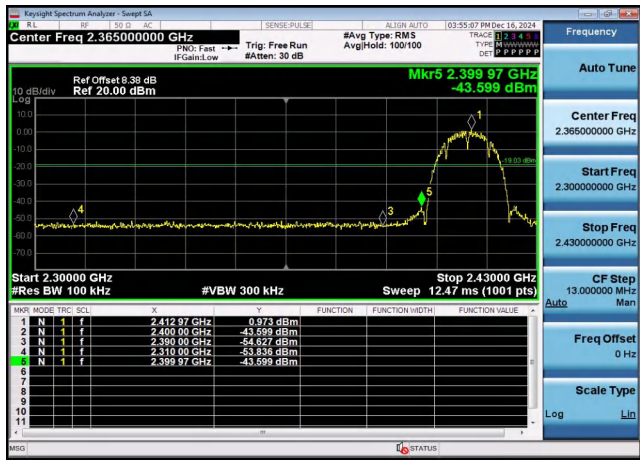


Left bandedge

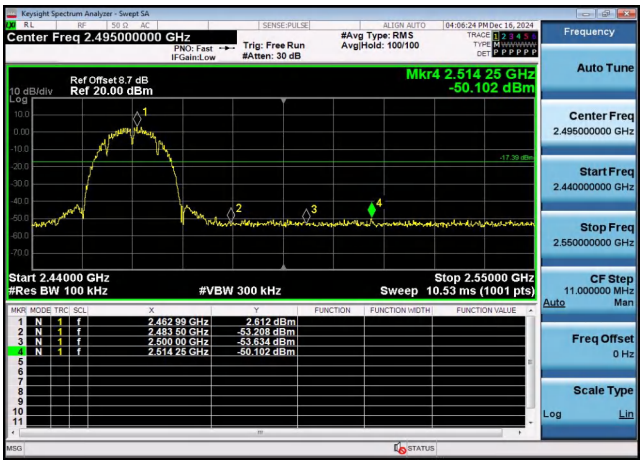


Right bandedge

802.11g

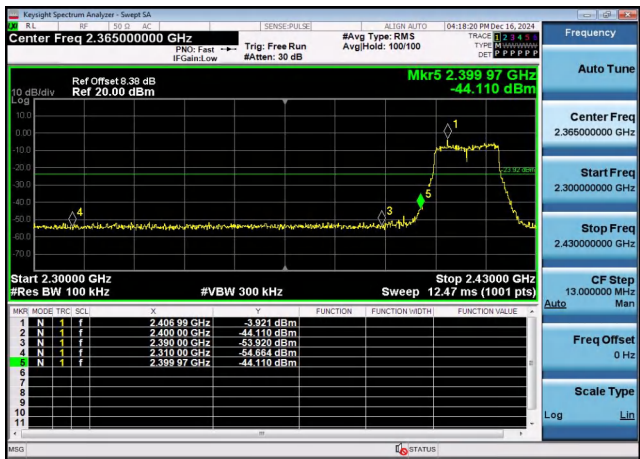


Left bandedge

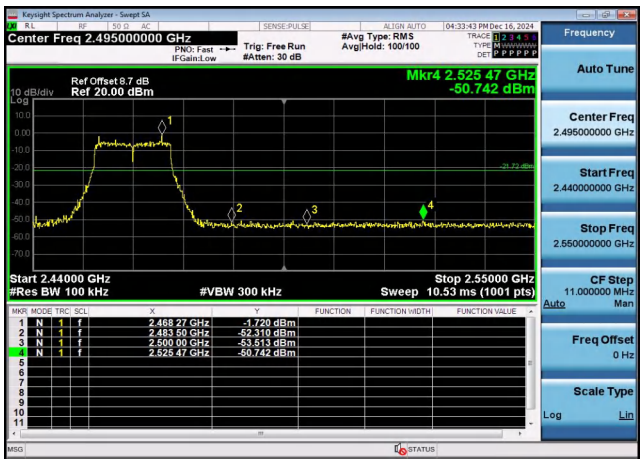


Right bandedge



802.11n(HT20)

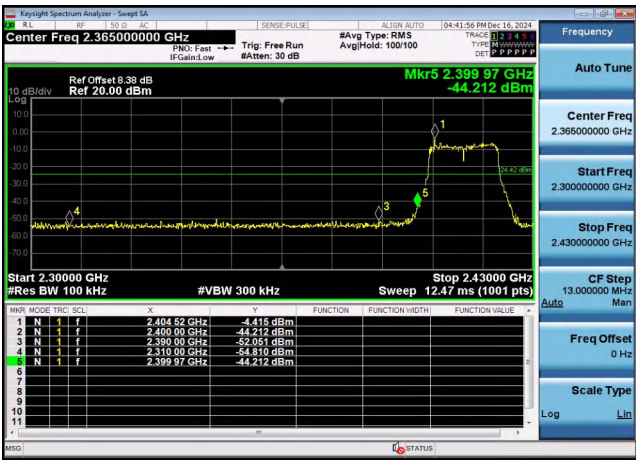


Left bandedge

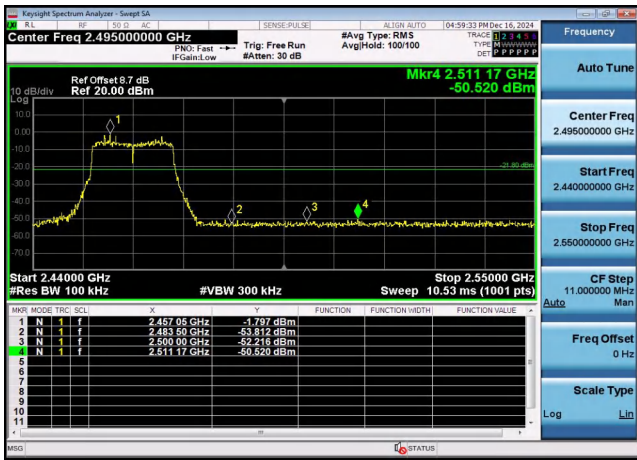


Right bandedge

802.11n(HT40)

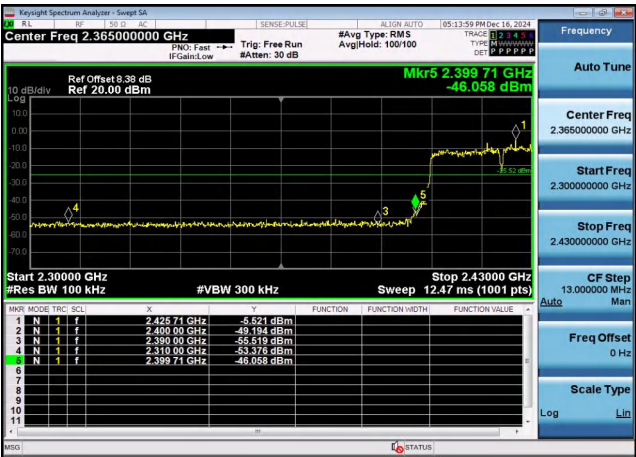

Left bandedge

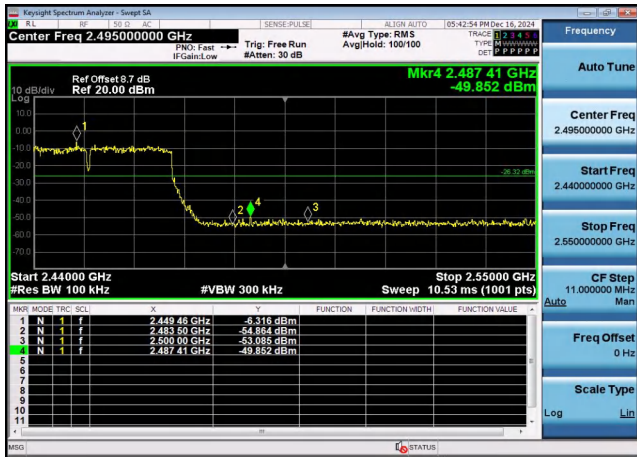

Right bandedge



## 4.7 Antenna Requirement

### Standard Applicable

**For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):**



(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### Test Result:

The maximum gain of antenna was 0.59 dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen GUOREN Certification Technology Service Co., Ltd. does not assume any responsibility.

## 5 Test Setup Photos of the EUT

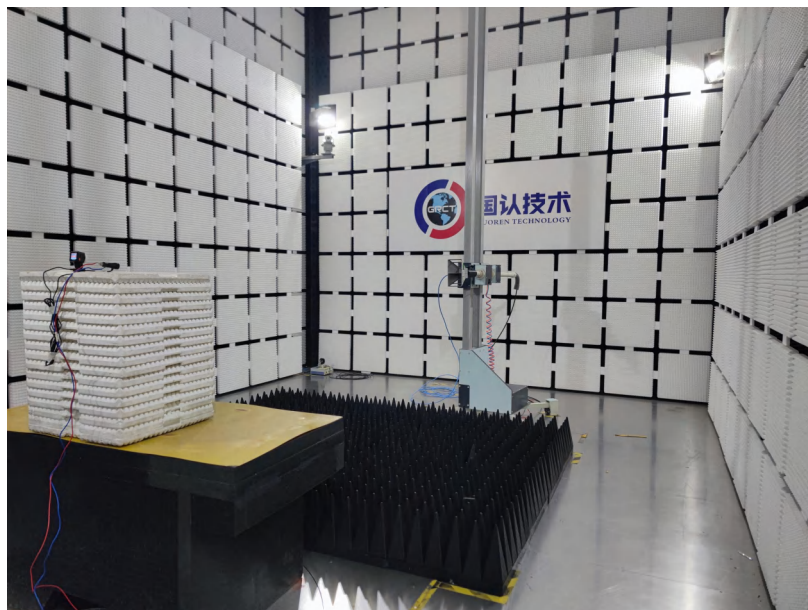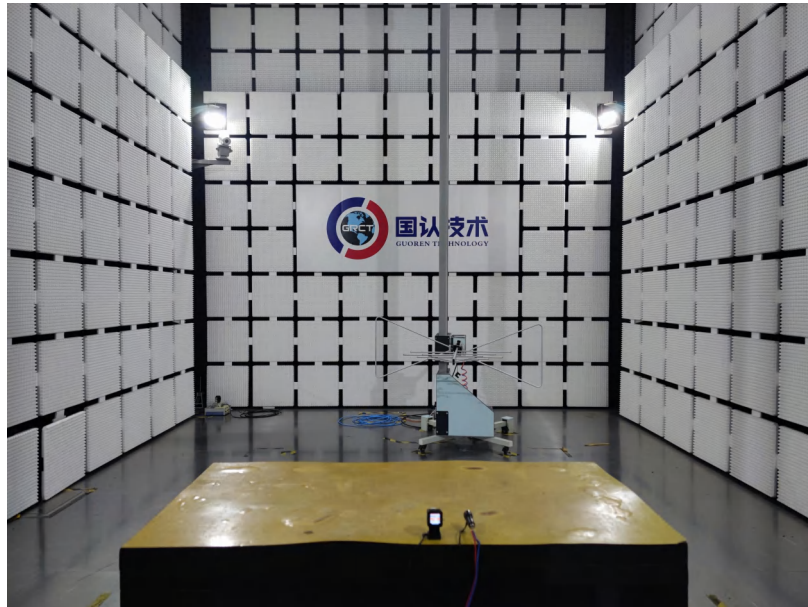

## 6 Photos of the EUT

Reference to the test report No. GRCTR241102068-01.

\*\*\*\*\* End of Report \*\*\*\*\*