


Appendix C. Radiated Emission


Below 1 GHz

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	Transmit mode		
Polarization:	Horizontal		
Remark:	6E		

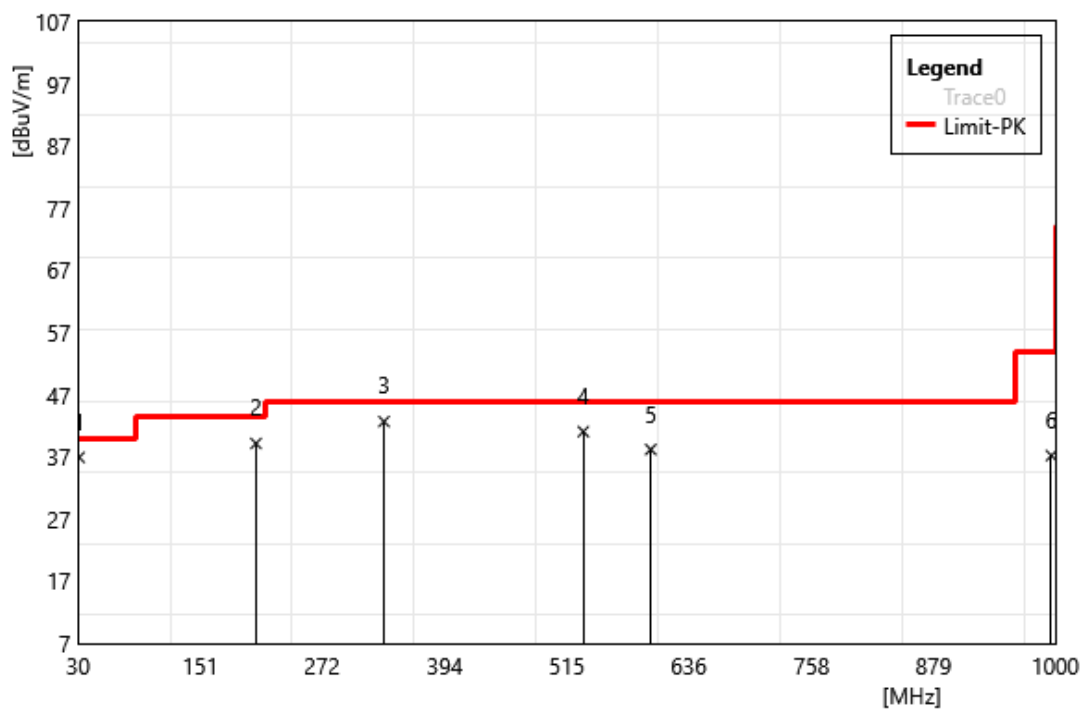

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	30.97	50.12	-13.20	36.92	40.00	-3.08	QP
2	206.54	54.58	-15.41	39.17	43.50	-4.34	QP
3	333.61	53.33	-10.65	42.68	46.00	-3.32	QP
4	531.49	47.49	-6.43	41.06	46.00	-4.94	QP
5	598.42	43.24	-5.05	38.19	46.00	-7.81	QP
6	996.12	36.53	0.68	37.21	54.00	-16.79	QP

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	Transmit mode		
Polarization:	Vertical		
Remark:	6E		

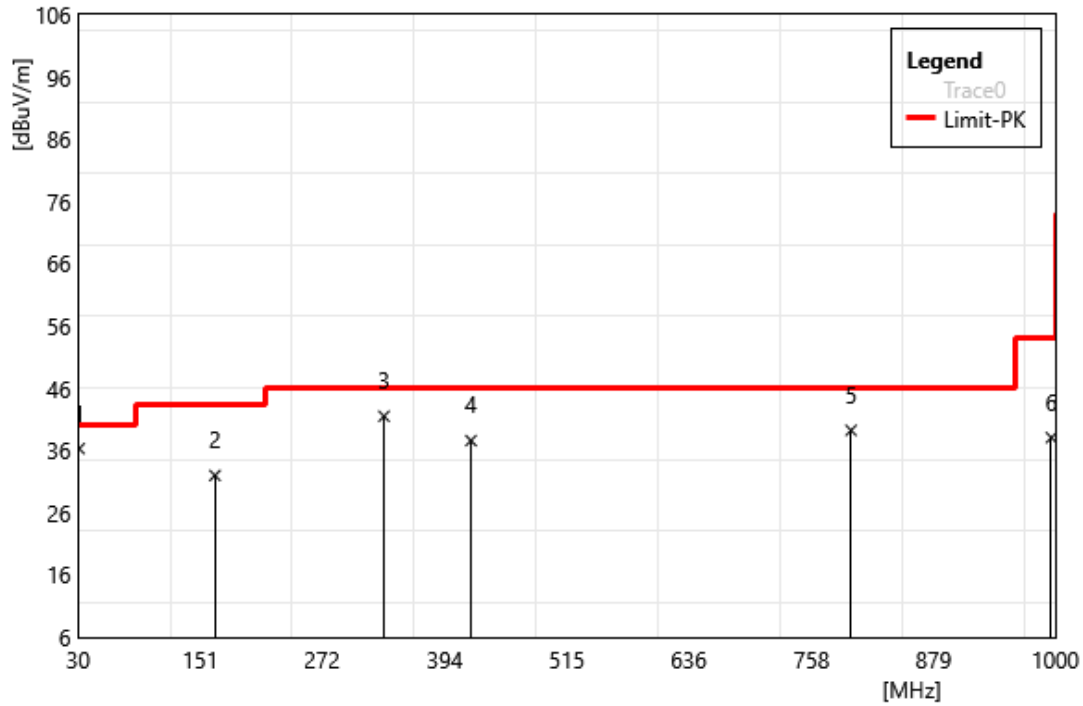


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	30.97	49.51	-13.20	36.31	40.00	-3.69	QP
2	165.80	44.45	-12.46	31.99	43.50	-11.51	QP
3	333.61	52.16	-10.65	41.51	46.00	-4.49	QP
4	419.94	46.43	-8.83	37.60	46.00	-8.40	QP
5	797.27	41.40	-2.15	39.25	46.00	-6.75	QP
6	996.12	37.39	0.68	38.07	54.00	-15.93	QP

Harmonic


Above 1 GHz

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5955 MHz		
Polarization:	Horizontal		
Remark:			

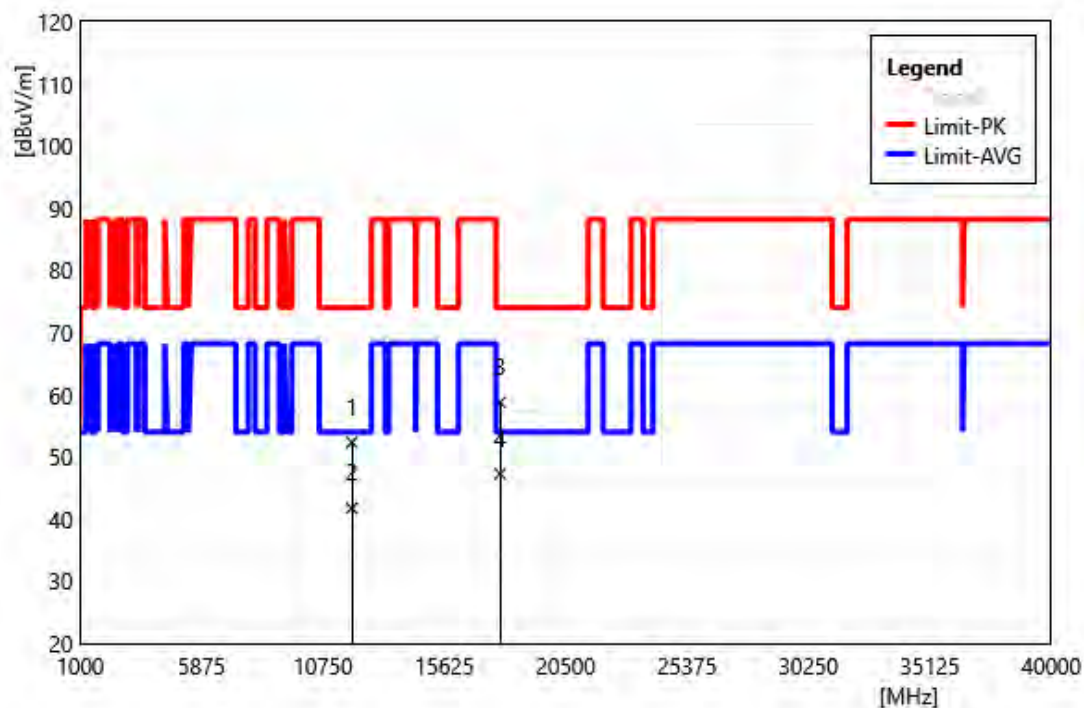


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	44.54	7.81	52.35	74.00	-21.66	PEAK
2	11910.00	33.94	7.81	41.75	54.00	-12.26	AVG
3	17865.00	51.21	7.57	58.78	74.00	-15.22	PEAK
4	17865.00	39.71	7.57	47.28	54.00	-6.72	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 5955 MHz
Polarization: Vertical
Remark:

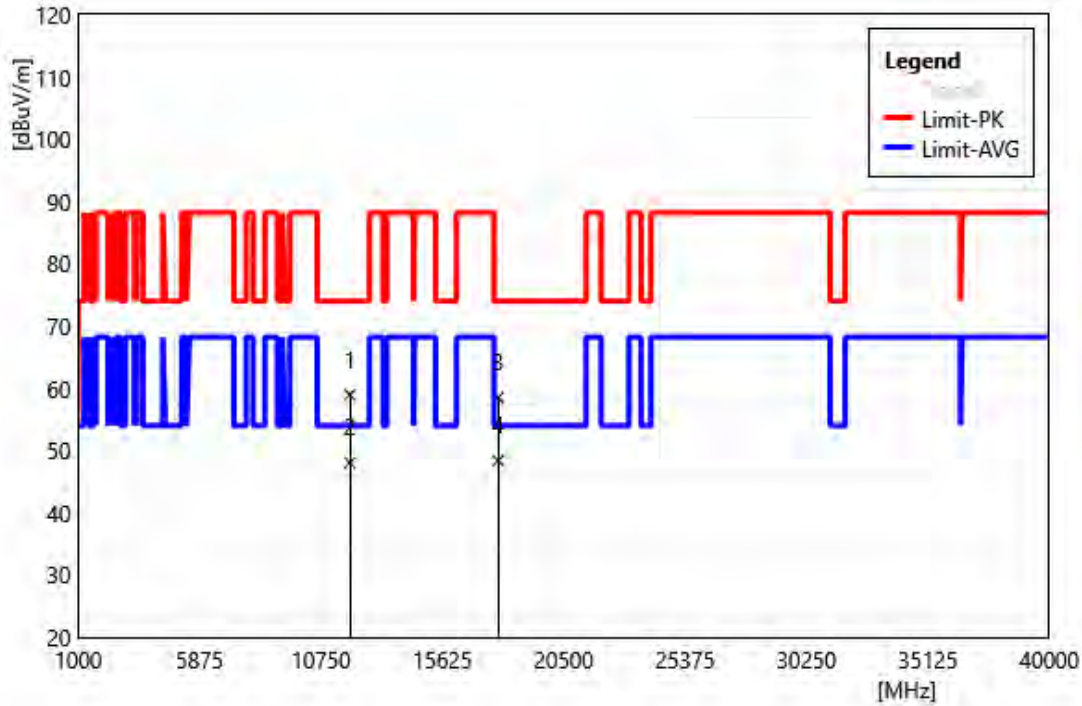


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	51.12	7.81	58.93	74.00	-15.07	PEAK
2	11910.00	40.23	7.81	48.04	54.00	-5.96	AVG
3	17865.00	50.93	7.57	58.50	74.00	-15.50	PEAK
4	17865.00	40.84	7.57	48.41	54.00	-5.60	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 6175 MHz
Polarization: Horizontal
Remark:

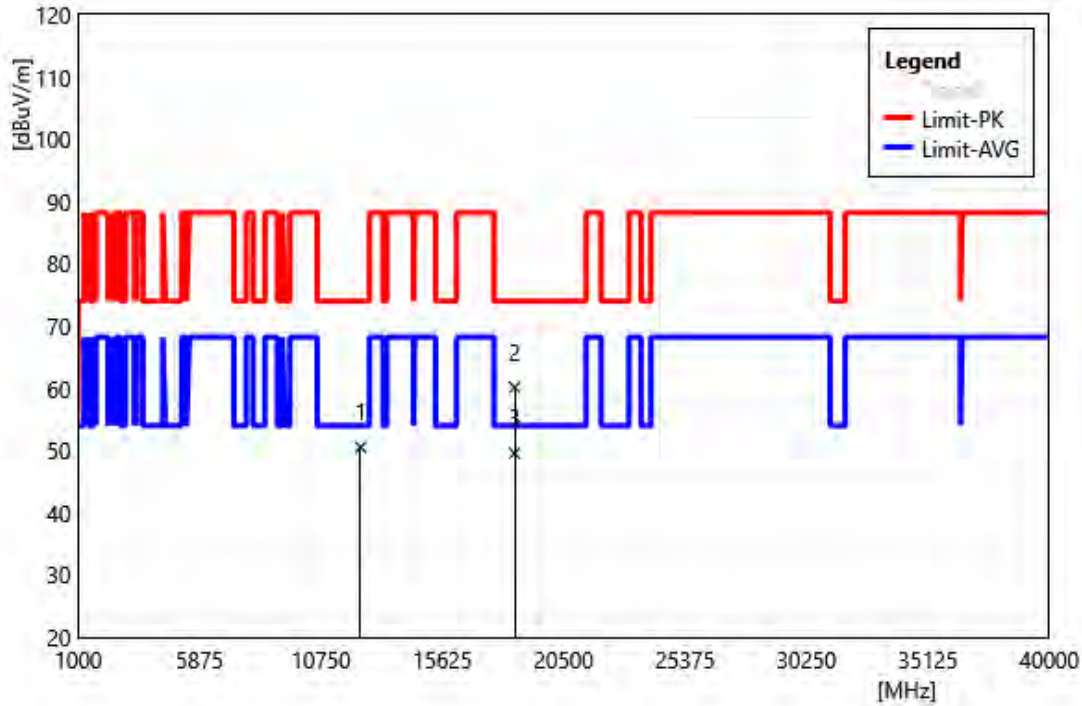


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	42.55	7.97	50.52	74.00	-23.48	PEAK
2	18525.00	50.96	9.17	60.13	74.00	-13.87	PEAK
3	18525.00	40.39	9.17	49.56	54.00	-4.44	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6175 MHz		
Polarization:	Vertical		
Remark:			

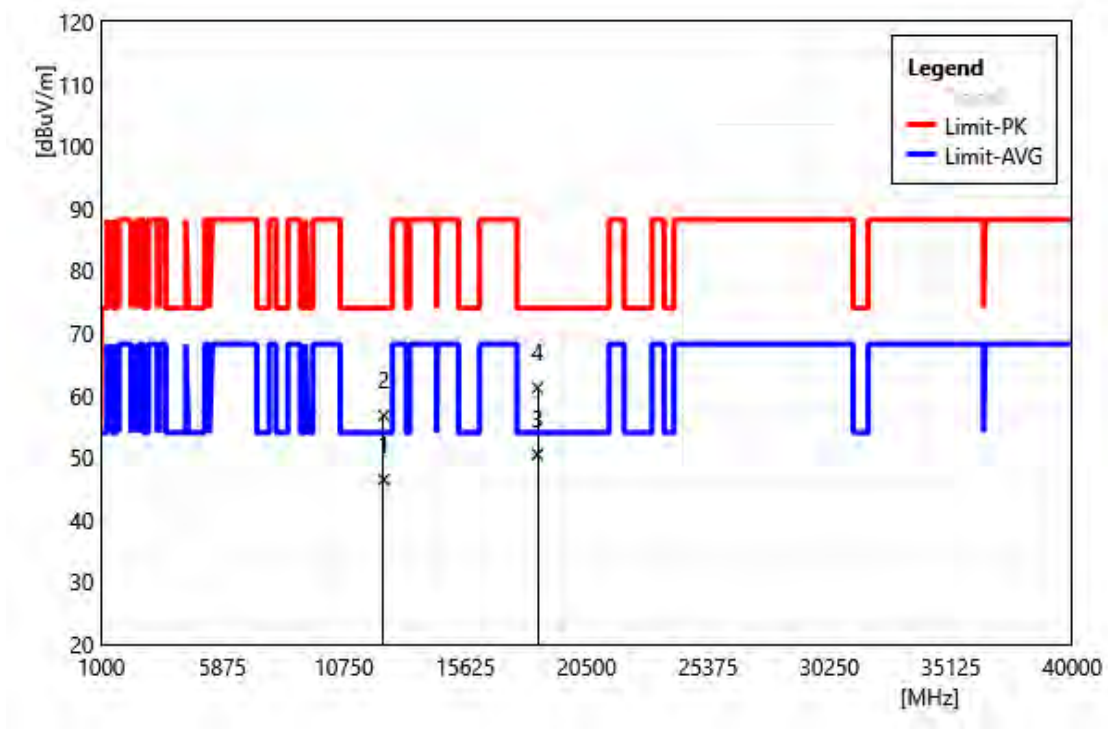


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	38.48	7.97	46.45	54.00	-7.55	AVG
2	12350.00	48.77	7.97	56.74	74.00	-17.26	PEAK
3	18525.00	41.33	9.17	50.50	54.00	-3.50	AVG
4	18525.00	52.04	9.17	61.21	74.00	-12.79	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6415 MHz		
Polarization:	Horizontal		
Remark:			

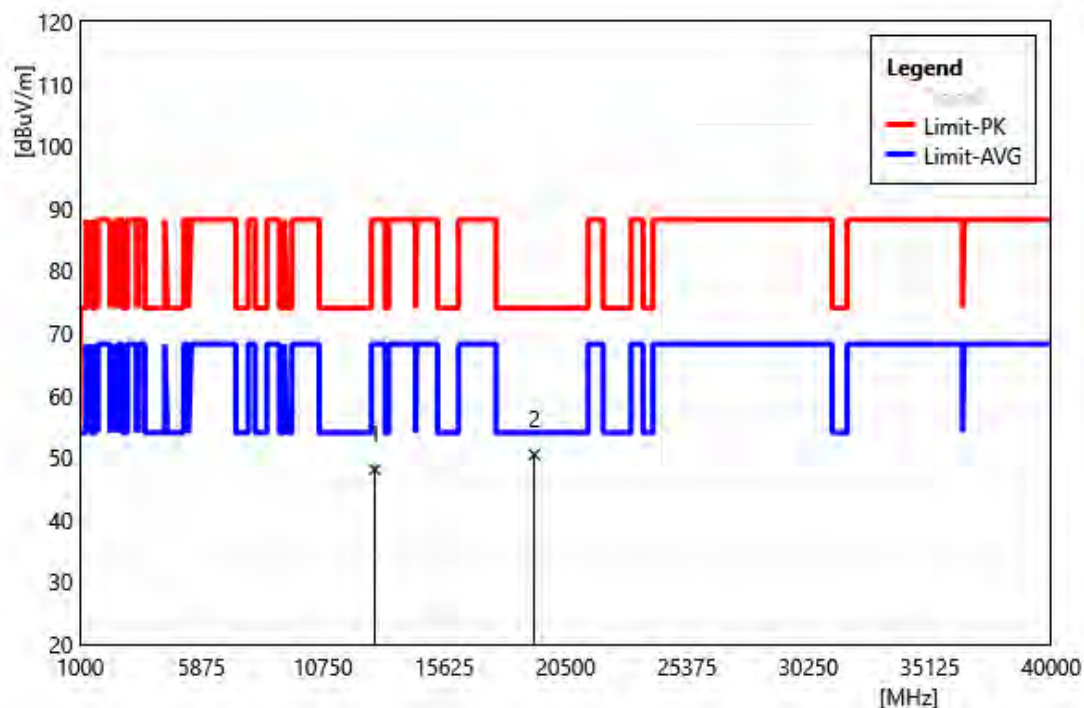


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	39.54	8.56	48.10	88.20	-40.10	PEAK
2	19245.00	41.14	9.33	50.47	74.00	-23.53	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 6415 MHz
Polarization: Vertical
Remark:

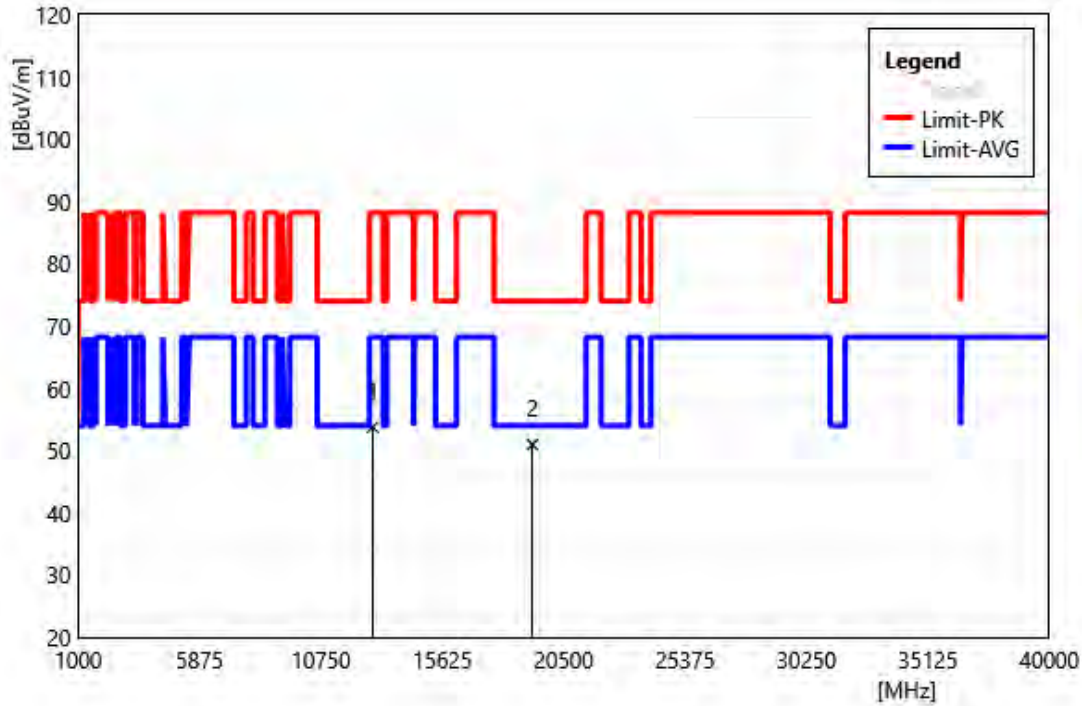


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	45.17	8.56	53.73	88.20	-34.47	PEAK
2	19245.00	41.64	9.33	50.97	74.00	-23.03	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6435 MHz		
Polarization:	Horizontal		
Remark:			

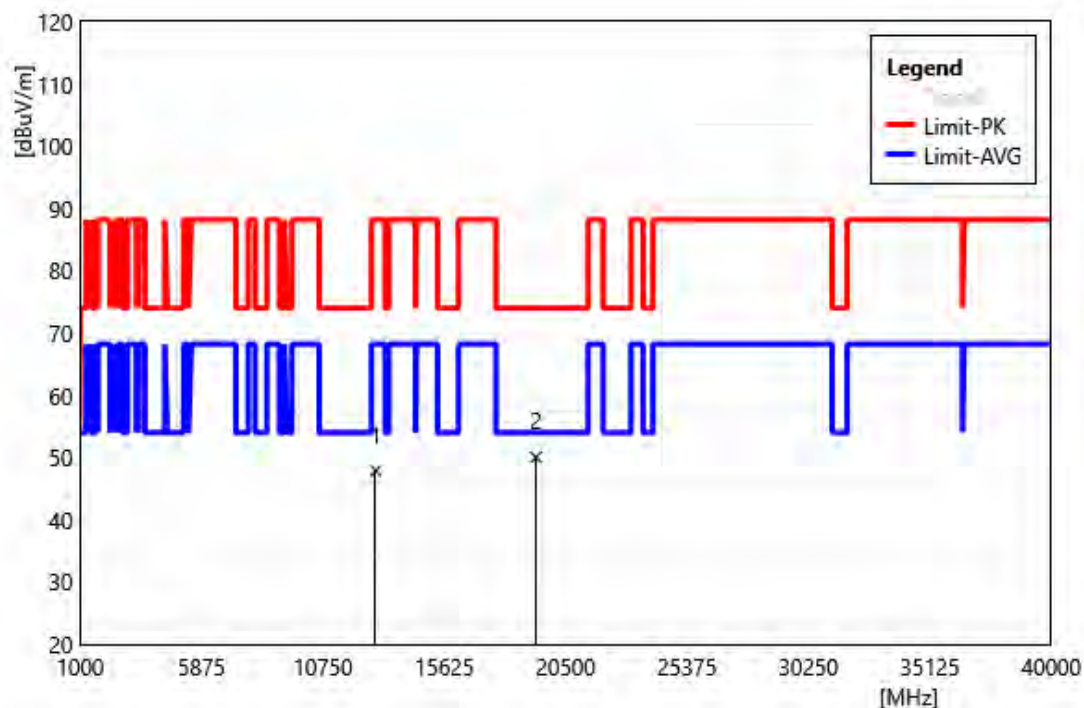


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	39.11	8.77	47.88	88.20	-40.32	PEAK
2	19305.00	40.71	9.34	50.05	74.00	-23.95	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6435 MHz		
Polarization:	Vertical		
Remark:			

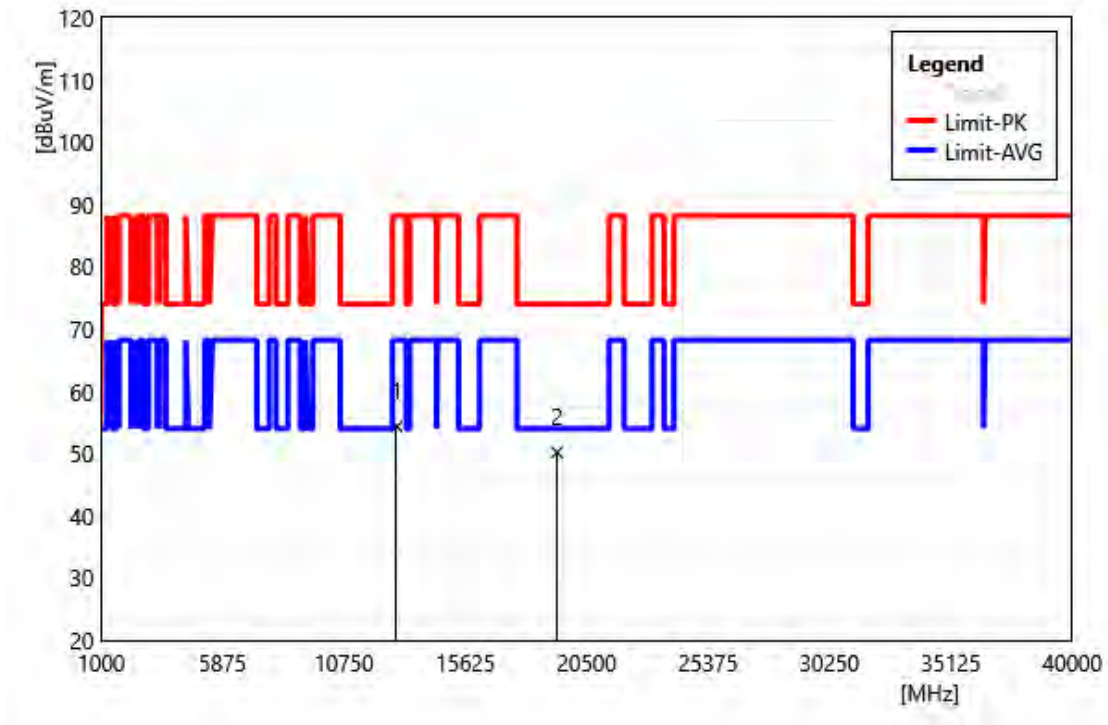


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	45.58	8.77	54.35	88.20	-33.85	PEAK
2	19305.00	40.84	9.34	50.18	74.00	-23.82	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6475 MHz		
Polarization:	Horizontal		
Remark:			

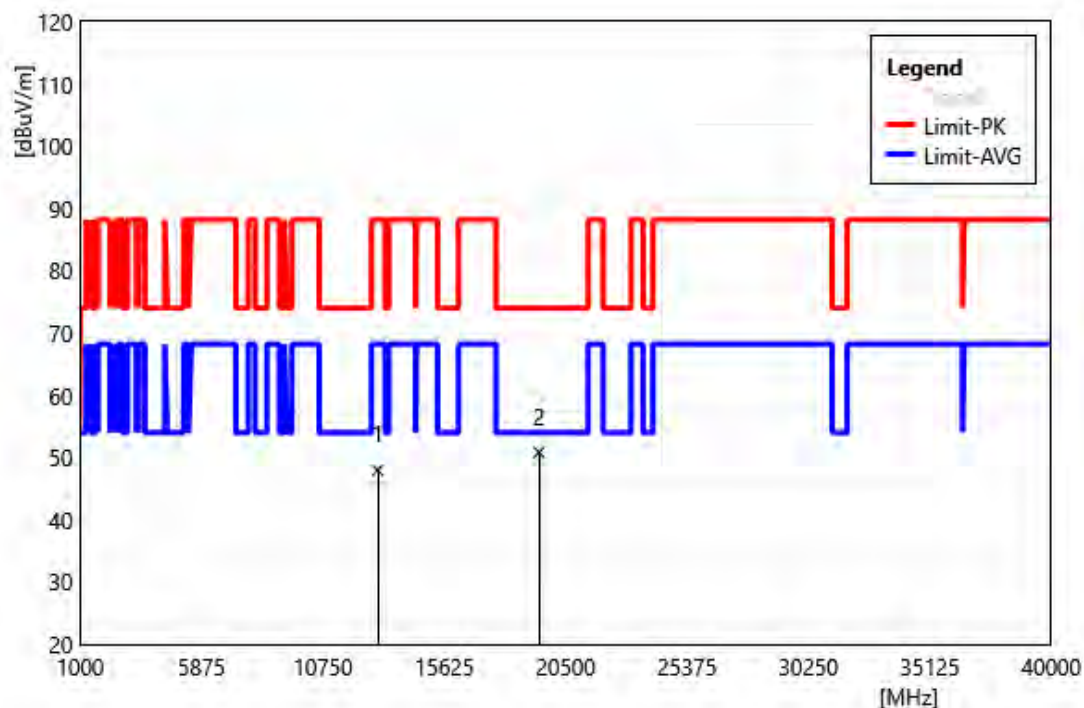


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	39.26	8.70	47.96	88.20	-40.24	PEAK
2	19425.00	41.49	9.33	50.82	74.00	-23.18	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 6475 MHz
Polarization: Vertical
Remark:

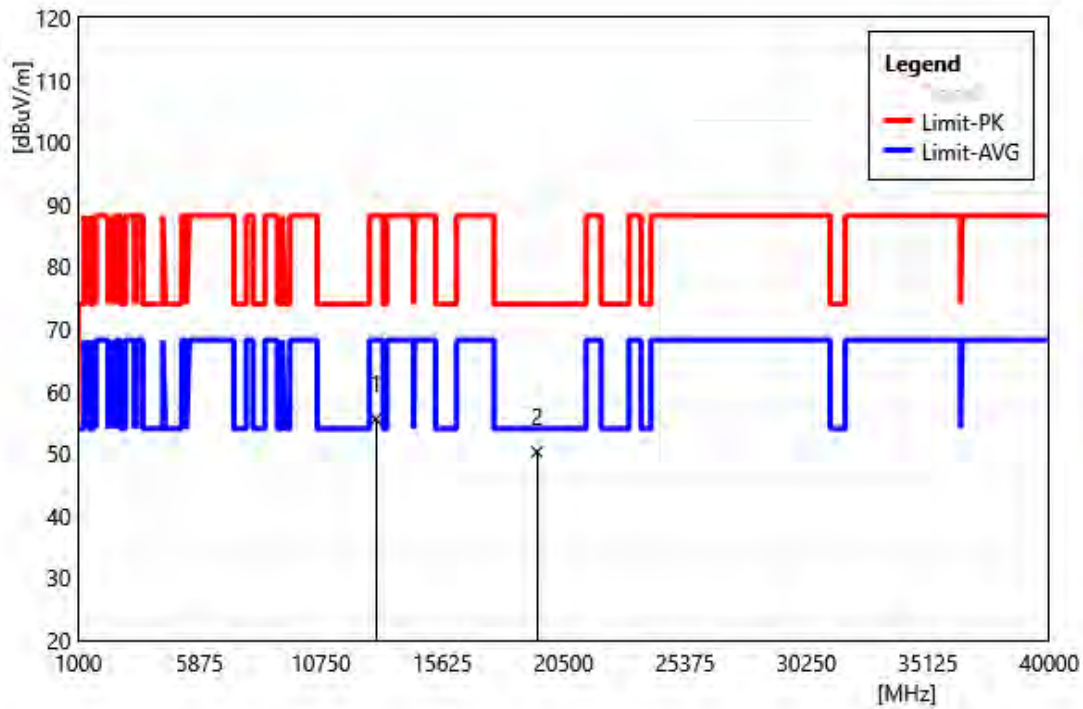


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	46.77	8.70	55.47	88.20	-32.73	PEAK
2	19425.00	40.94	9.33	50.27	74.00	-23.73	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6515 MHz		
Polarization:	Horizontal		
Remark:			

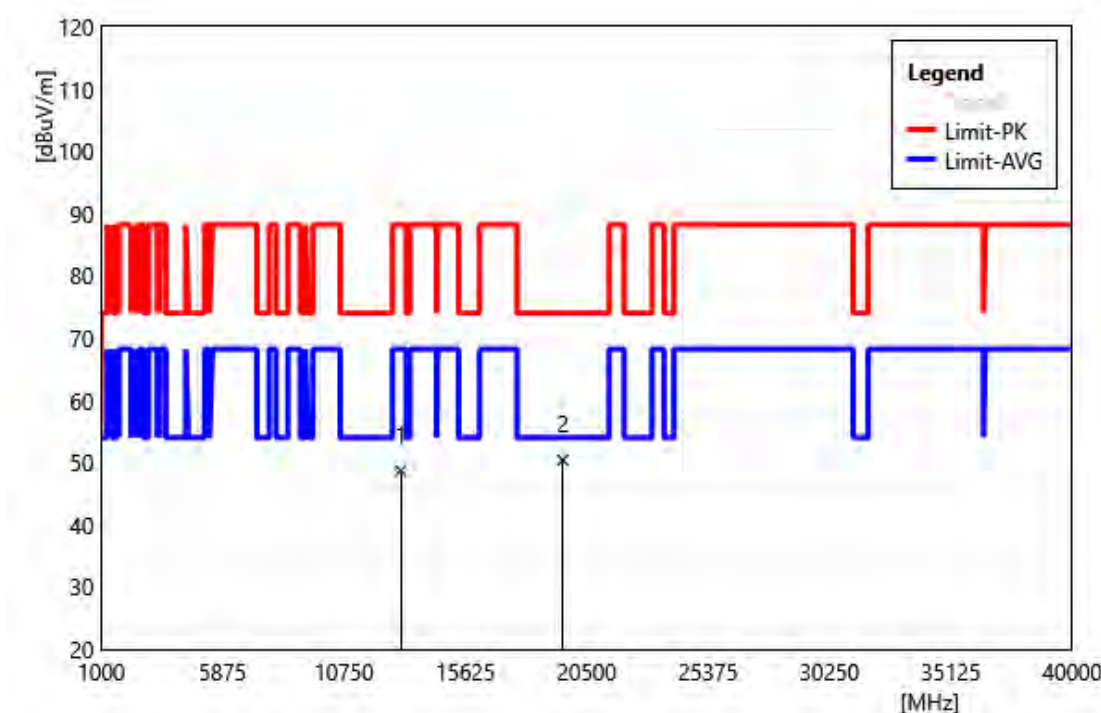


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	39.87	8.83	48.70	88.20	-39.50	PEAK
2	19545.00	41.05	9.33	50.38	74.00	-23.62	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6515 MHz		
Polarization:	Vertical		
Remark:			

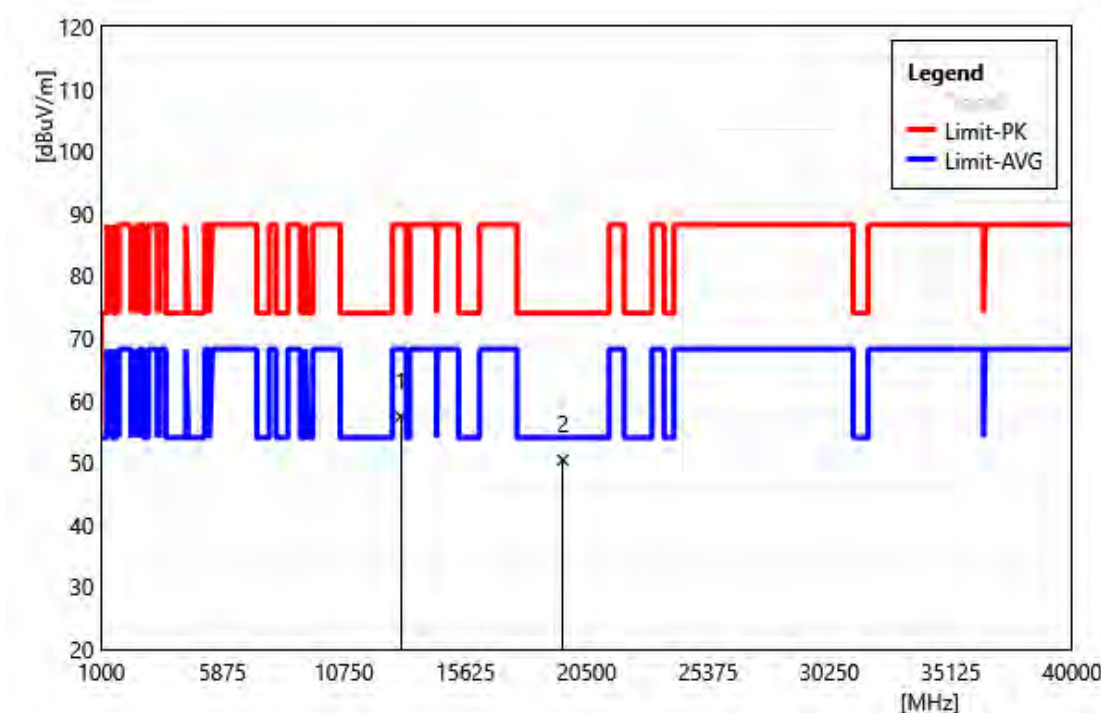


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	48.57	8.83	57.40	88.20	-30.80	PEAK
2	19545.00	41.68	8.73	50.41	74.00	-23.59	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6535 MHz		
Polarization:	Horizontal		
Remark:			

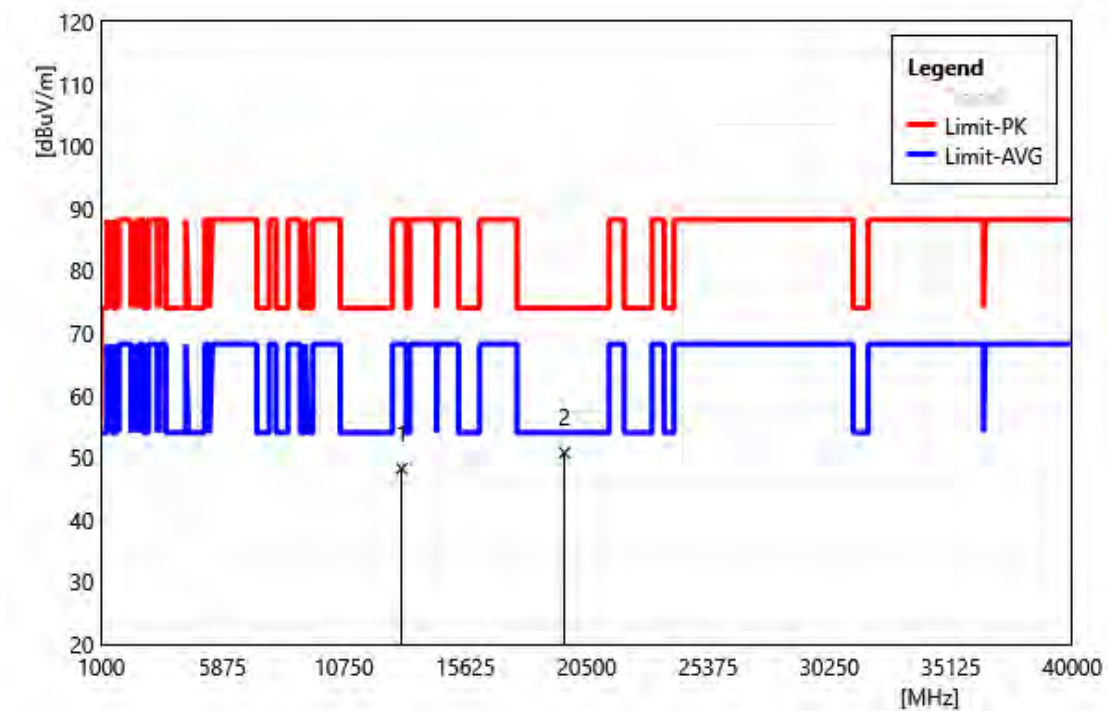


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	39.62	8.61	48.23	88.20	-39.97	PEAK
2	19605.00	41.47	9.30	50.77	74.00	-23.23	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 6535 MHz
Polarization: Vertical
Remark:

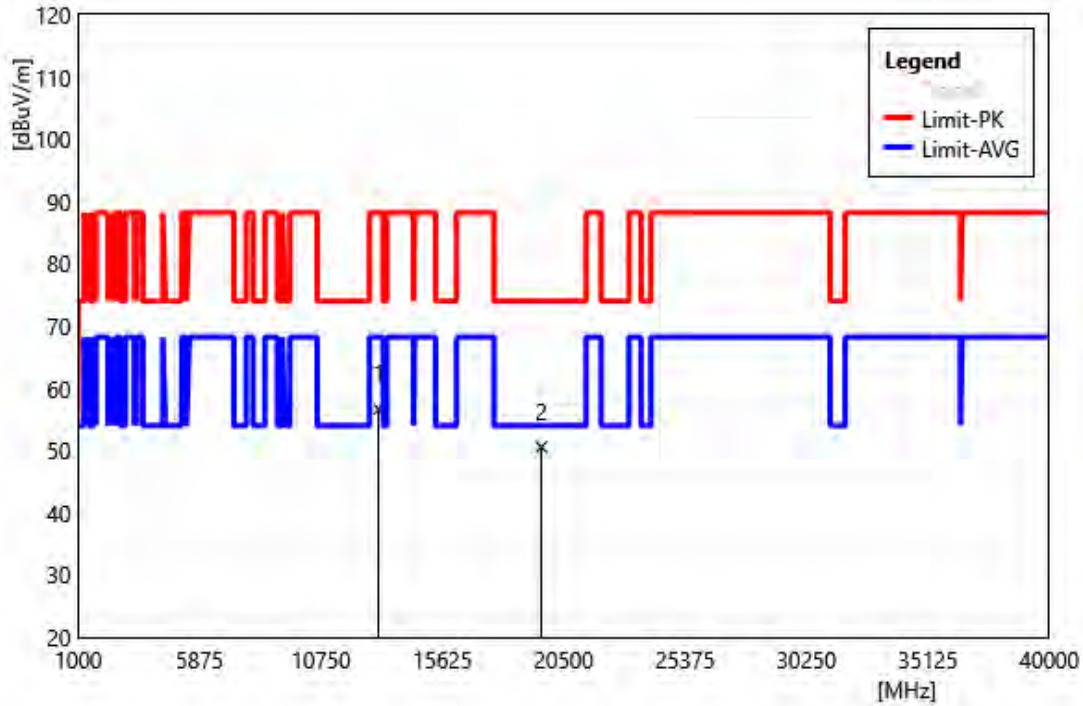


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	48.02	8.61	56.63	88.20	-31.57	PEAK
2	19605.00	41.26	9.30	50.56	74.00	-23.44	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 6695 MHz
Polarization: Horizontal
Remark:

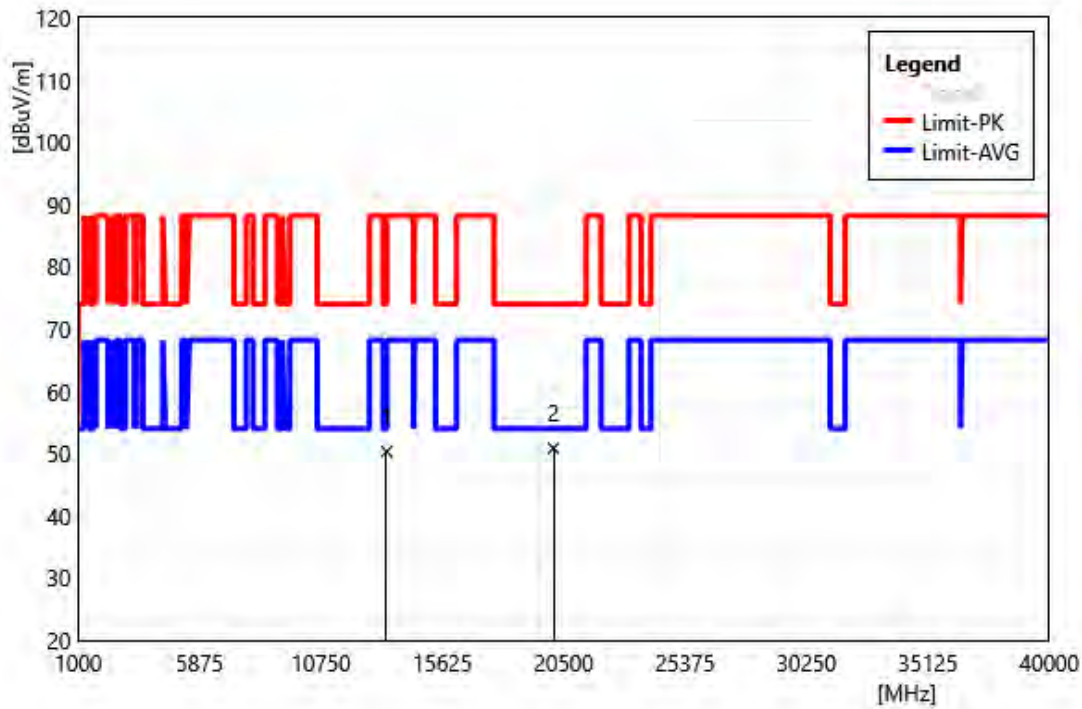


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	42.02	8.29	50.31	74.00	-23.69	PEAK
2	20085.00	41.59	9.25	50.84	74.00	-23.16	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 6695 MHz
Polarization: Vertical
Remark:

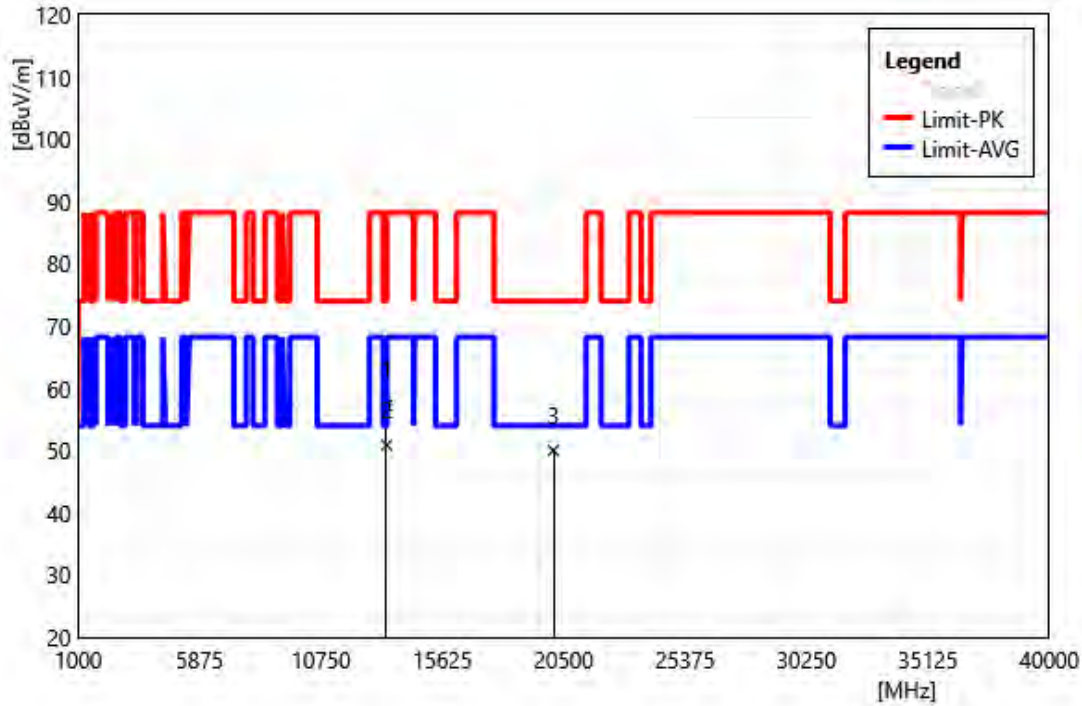


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	48.94	8.29	57.23	74.00	-16.77	PEAK
2	13390.00	42.58	8.29	50.87	54.00	-3.13	AVG
3	20085.00	40.76	9.25	50.01	74.00	-23.99	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6855 MHz		
Polarization:	Horizontal		
Remark:			

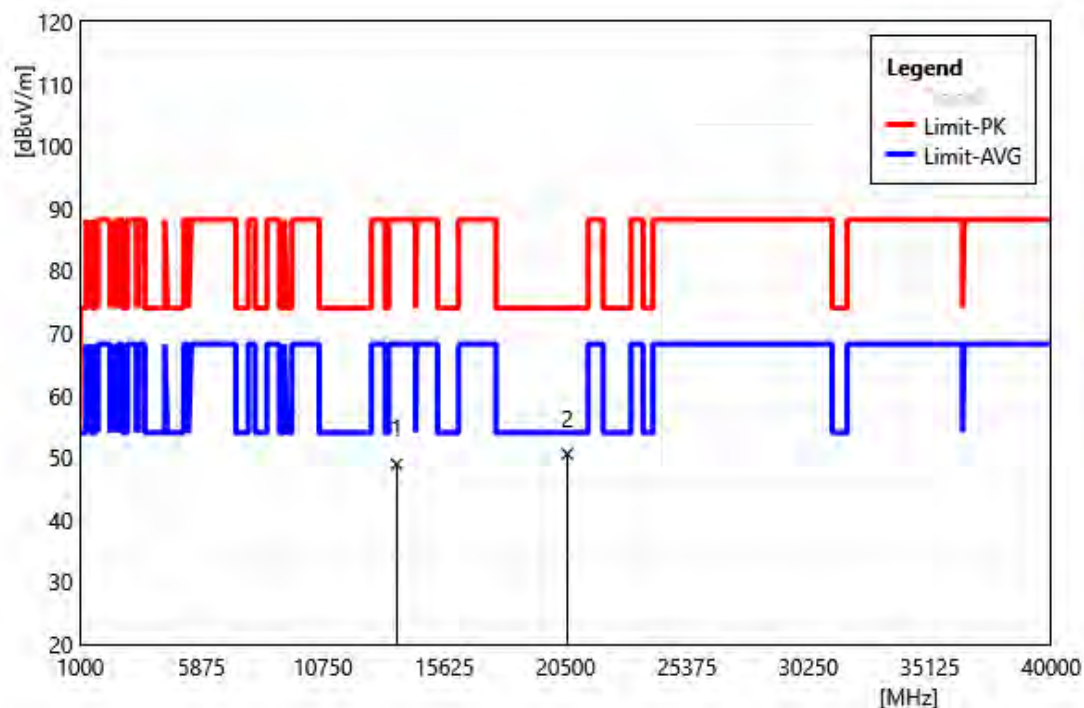


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	40.96	7.94	48.90	88.20	-39.30	PEAK
2	20565.00	41.09	9.47	50.56	74.00	-23.44	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 6855 MHz
Polarization: Vertical
Remark:

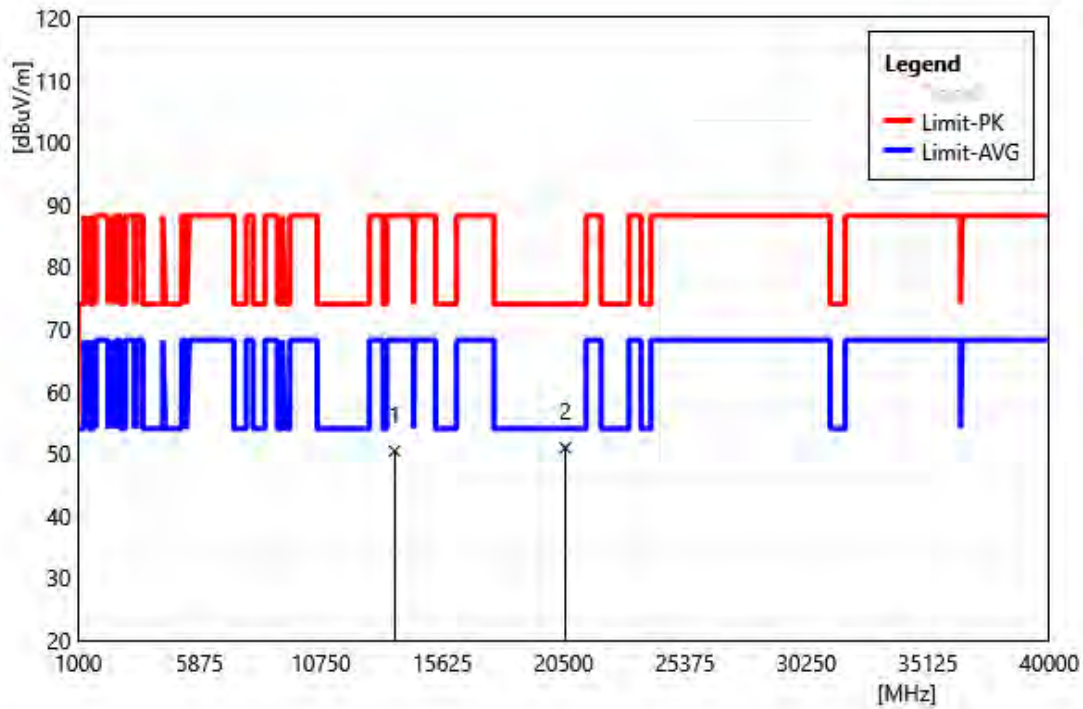


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	42.46	7.94	50.40	88.20	-37.80	PEAK
2	20565.00	41.46	9.47	50.93	74.00	-23.07	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6875 MHz		
Polarization:	Horizontal		
Remark:			

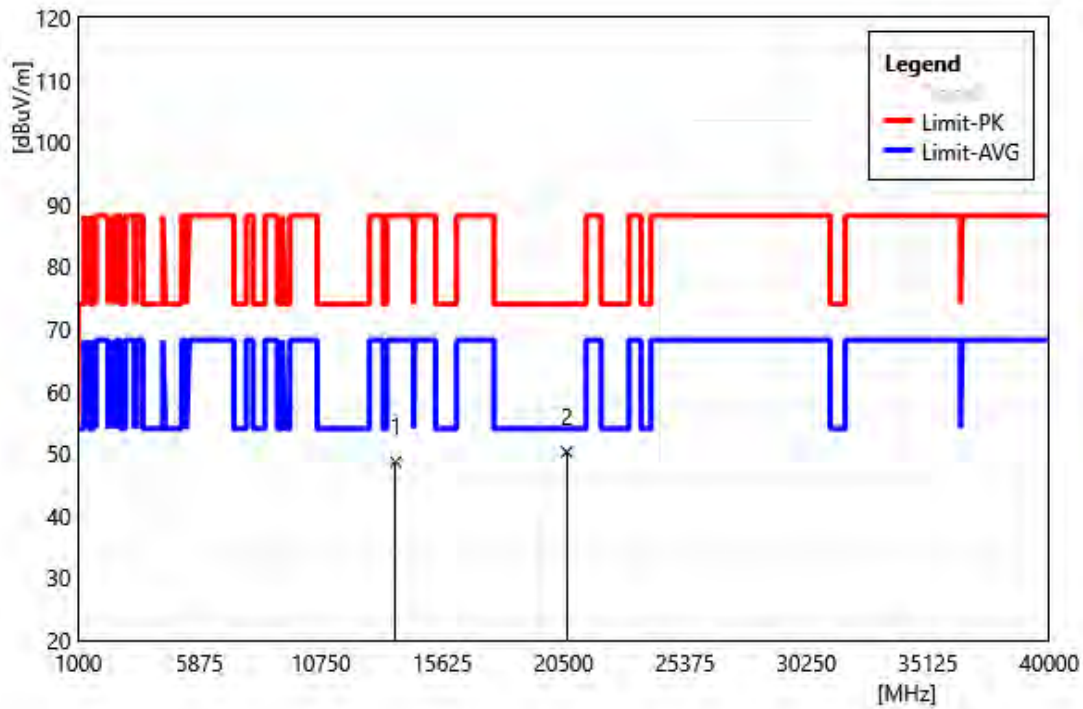


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	40.59	8.10	48.69	88.20	-39.51	PEAK
2	20625.00	40.78	9.49	50.27	74.00	-23.73	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6875 MHz		
Polarization:	Vertical		
Remark:			

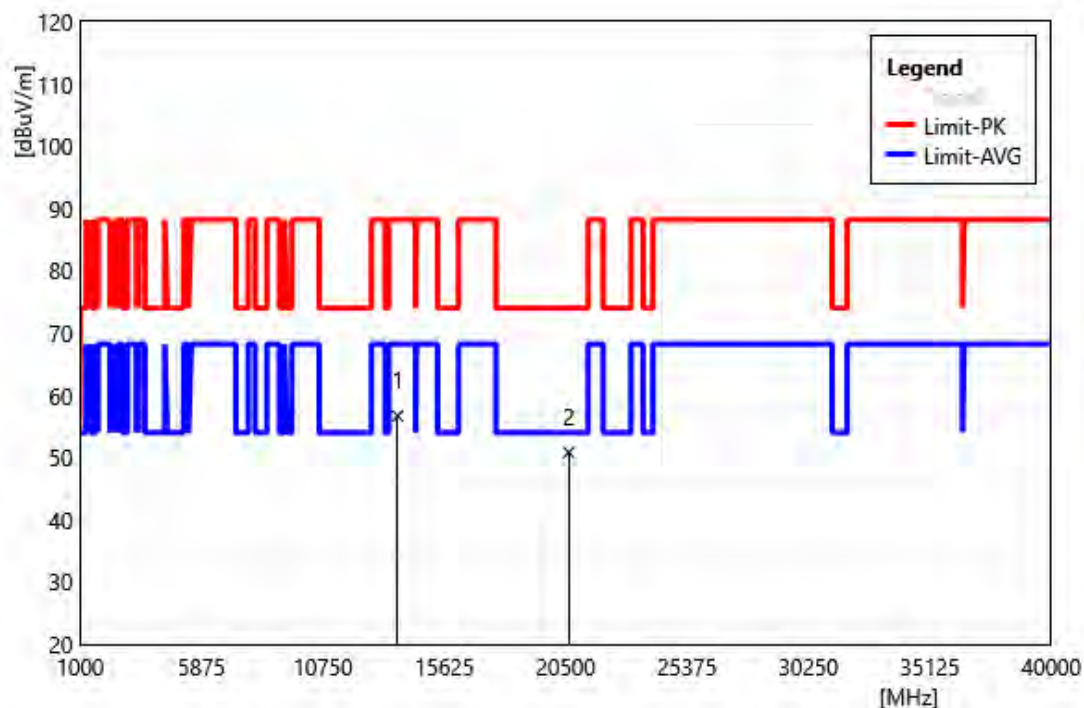


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	48.59	8.10	56.69	88.20	-31.51	PEAK
2	20625.00	41.33	9.49	50.82	74.00	-23.18	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6895 MHz		
Polarization:	Horizontal		
Remark:			

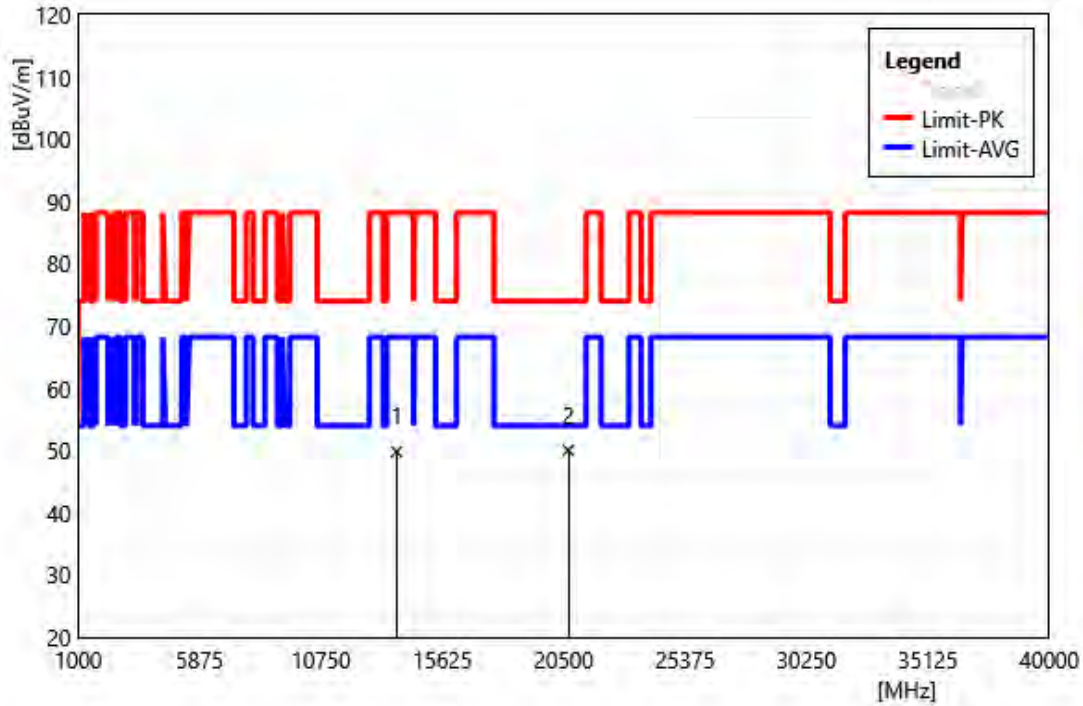


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	41.84	7.95	49.79	88.20	-38.41	PEAK
2	20685.00	40.51	9.51	50.02	74.00	-23.98	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 6895 MHz		
Polarization:	Vertical		
Remark:			

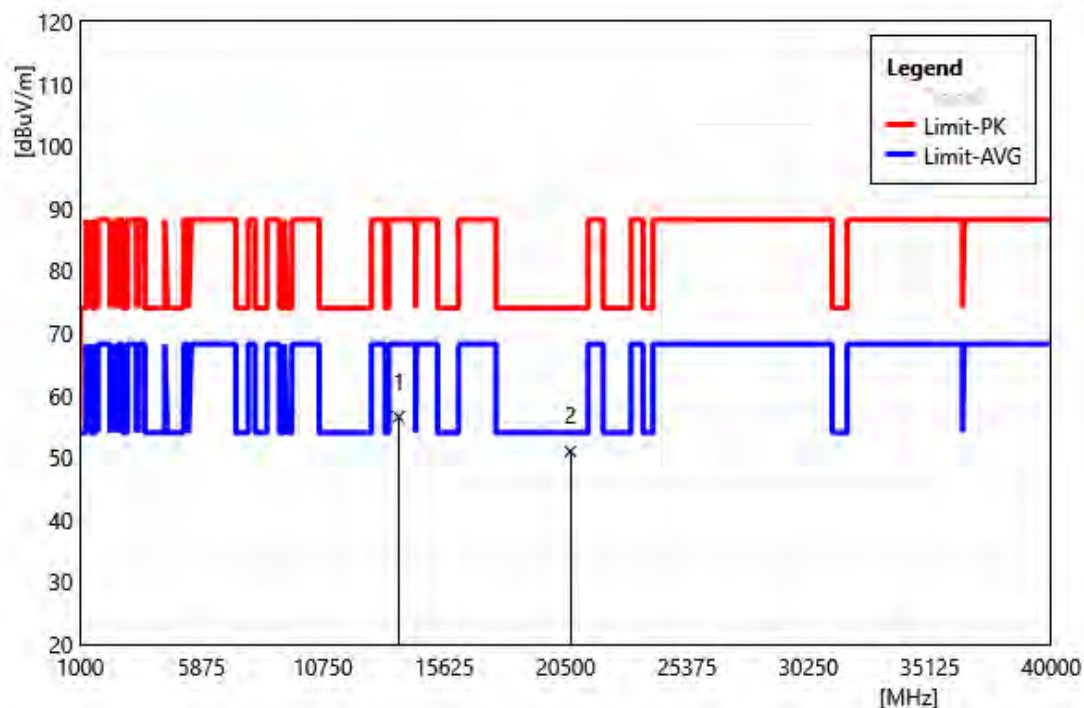


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	48.57	7.95	56.52	88.20	-31.68	PEAK
2	20685.00	41.49	9.51	51.00	74.00	-23.00	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 6995 MHz
Polarization: Horizontal
Remark:

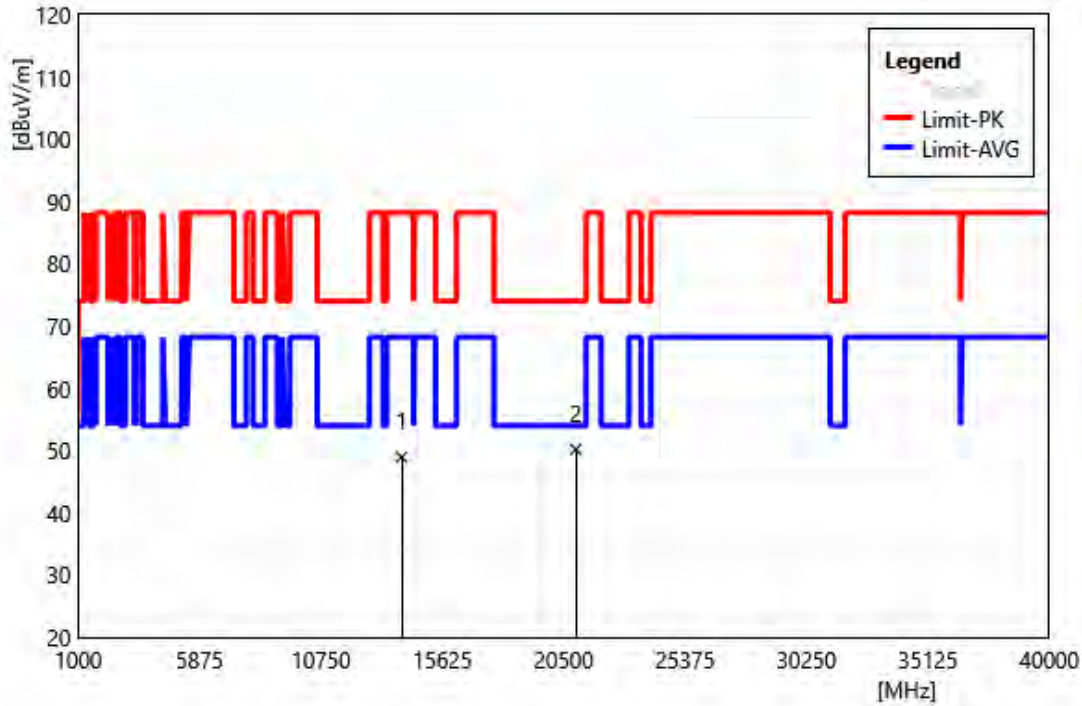


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	40.40	8.54	48.94	88.20	-39.26	PEAK
2	20985.00	40.80	9.37	50.17	74.00	-23.83	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 6995 MHz
Polarization: Vertical
Remark:

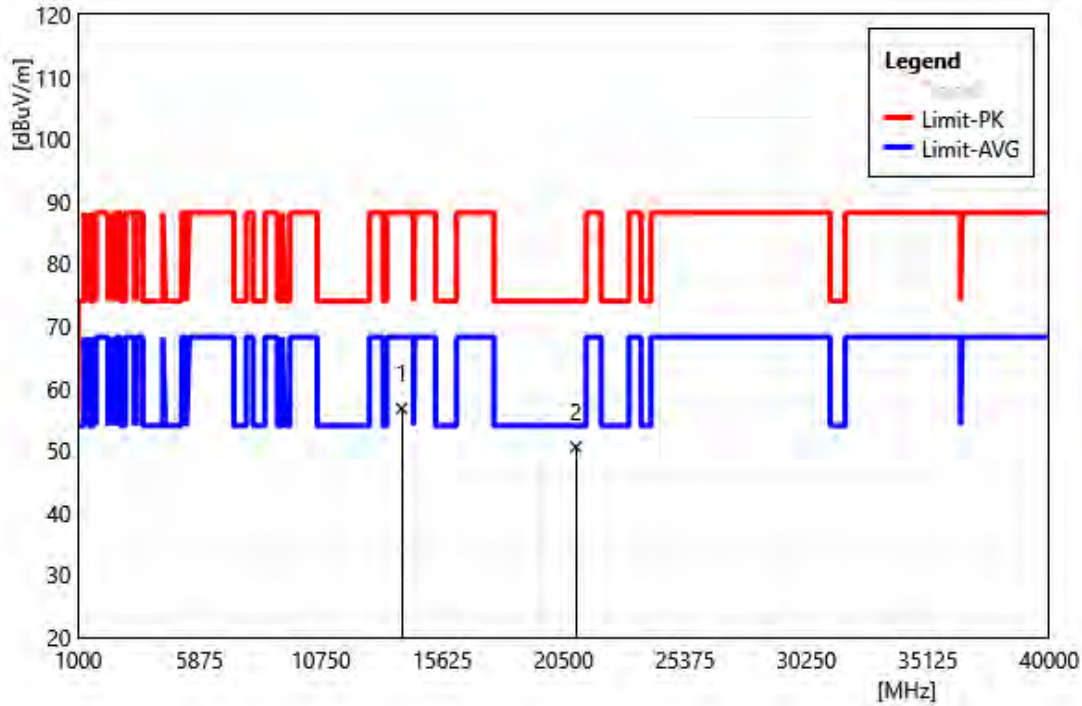


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	48.20	8.54	56.74	88.20	-31.46	PEAK
2	20985.00	40.92	9.65	50.57	74.00	-23.43	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 7115 MHz
Polarization: Horizontal
Remark:

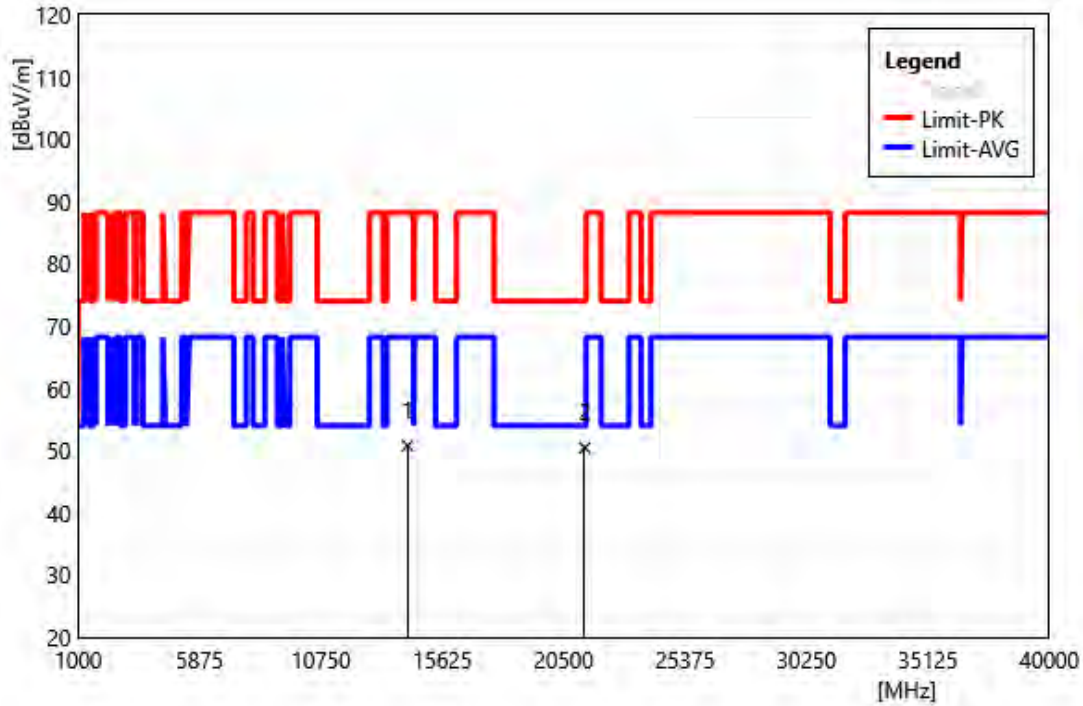


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14230.00	42.08	8.72	50.80	88.20	-37.40	PEAK
2	21345.00	40.62	9.83	50.45	74.00	-23.55	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 7115 MHz
Polarization: Vertical
Remark:

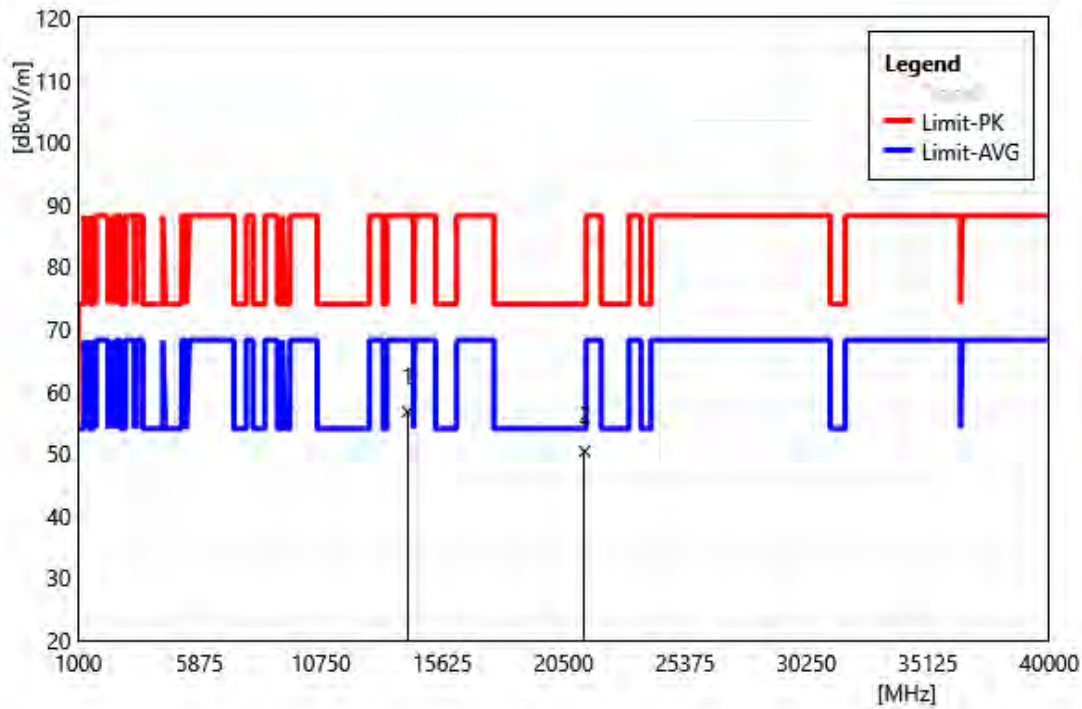


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14230.00	47.99	8.72	56.71	88.20	-31.49	PEAK
2	21345.00	40.52	9.83	50.35	74.00	-23.65	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 5955 MHz
Polarization: Horizontal
Remark:

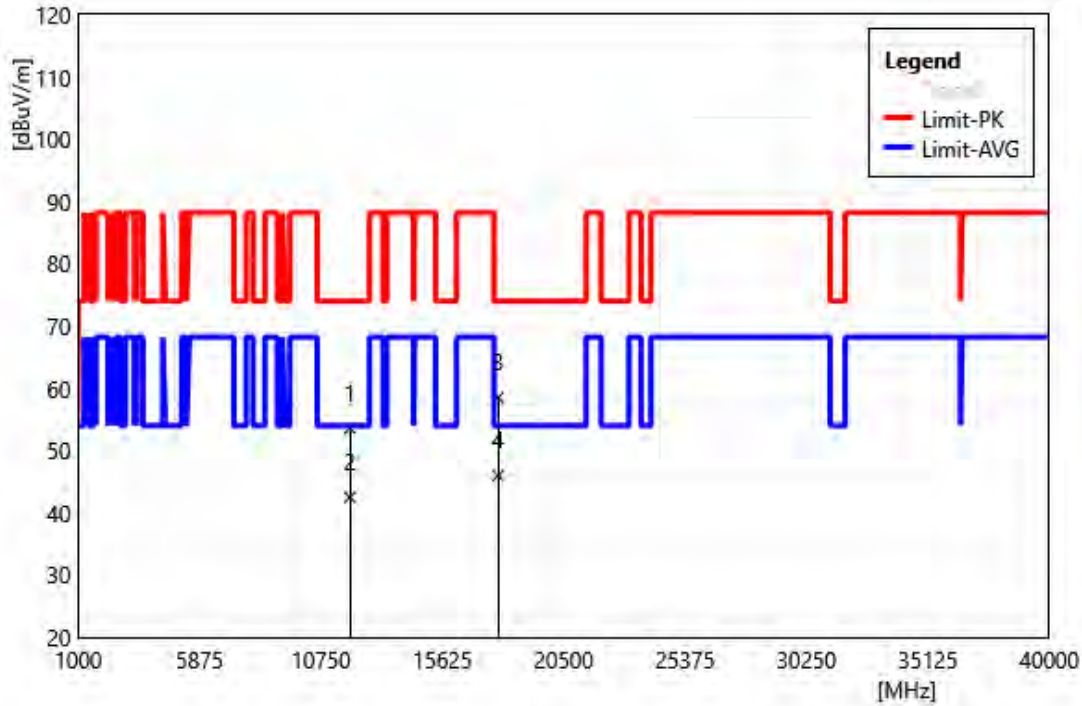


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	45.77	7.81	53.58	74.00	-20.42	PEAK
2	11910.00	34.68	7.81	42.49	54.00	-11.51	AVG
3	17865.00	50.91	7.57	58.48	74.00	-15.52	PEAK
4	17865.00	38.37	7.57	45.94	54.00	-8.06	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 5955 MHz
Polarization: Vertical
Remark:

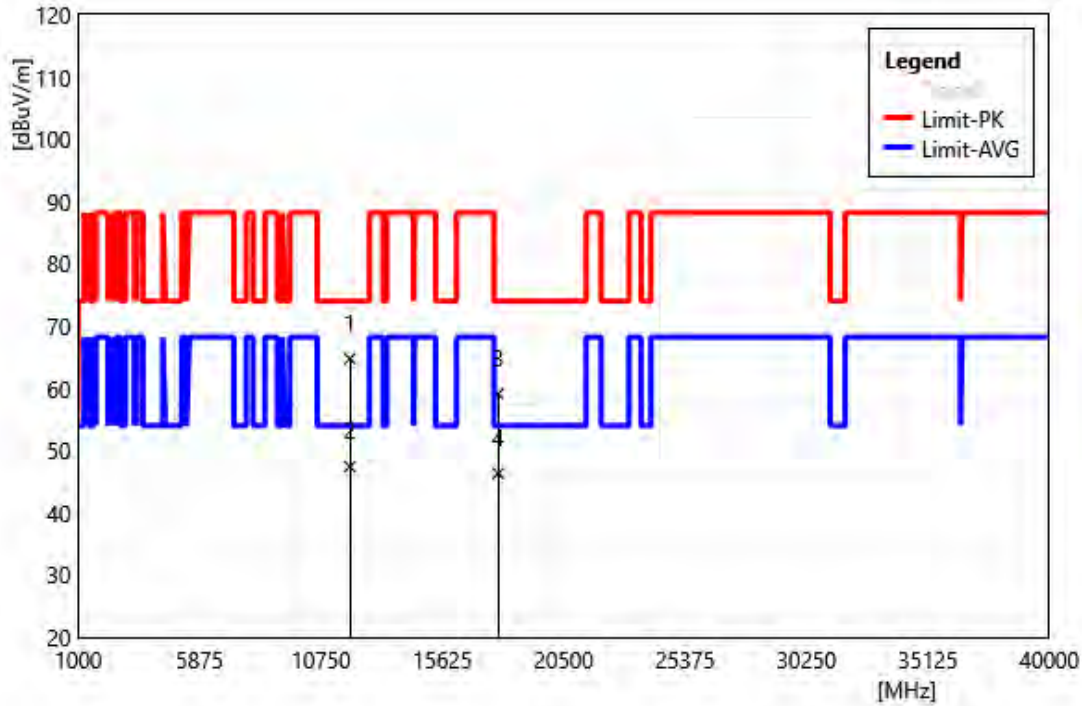


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11910.00	56.94	7.81	64.75	74.00	-9.25	PEAK
2	11910.00	39.62	7.81	47.43	54.00	-6.57	AVG
3	17865.00	51.54	7.57	59.11	74.00	-14.89	PEAK
4	17865.00	38.73	7.57	46.30	54.00	-7.70	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 6175 MHz
Polarization: Horizontal
Remark:

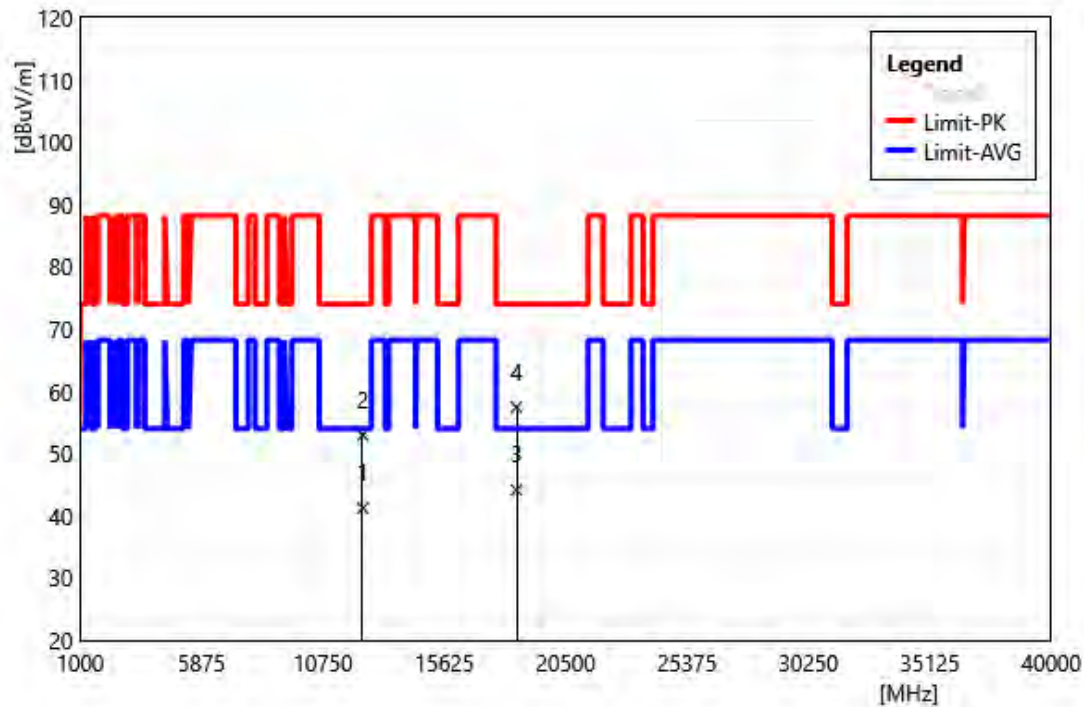


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	33.26	7.97	41.23	54.00	-12.77	AVG
2	12350.00	45.00	7.97	52.97	74.00	-21.03	PEAK
3	18525.00	34.96	9.17	44.13	54.00	-9.87	AVG
4	18525.00	48.27	9.17	57.44	74.00	-16.56	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6175 MHz		
Polarization:	Vertical		
Remark:			

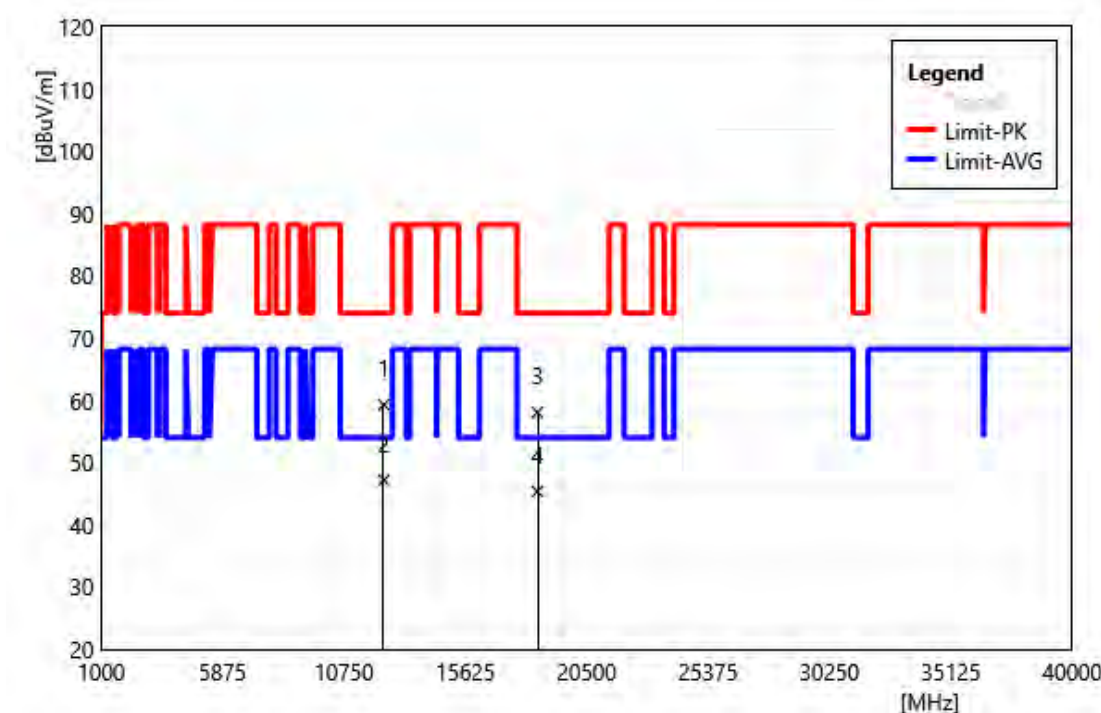


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12350.00	51.31	7.97	59.28	74.00	-14.72	PEAK
2	12350.00	39.17	7.97	47.14	54.00	-6.86	AVG
3	18525.00	48.89	9.17	58.06	74.00	-15.94	PEAK
4	18525.00	36.18	9.17	45.35	54.00	-8.65	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 6415 MHz
Polarization: Horizontal
Remark:

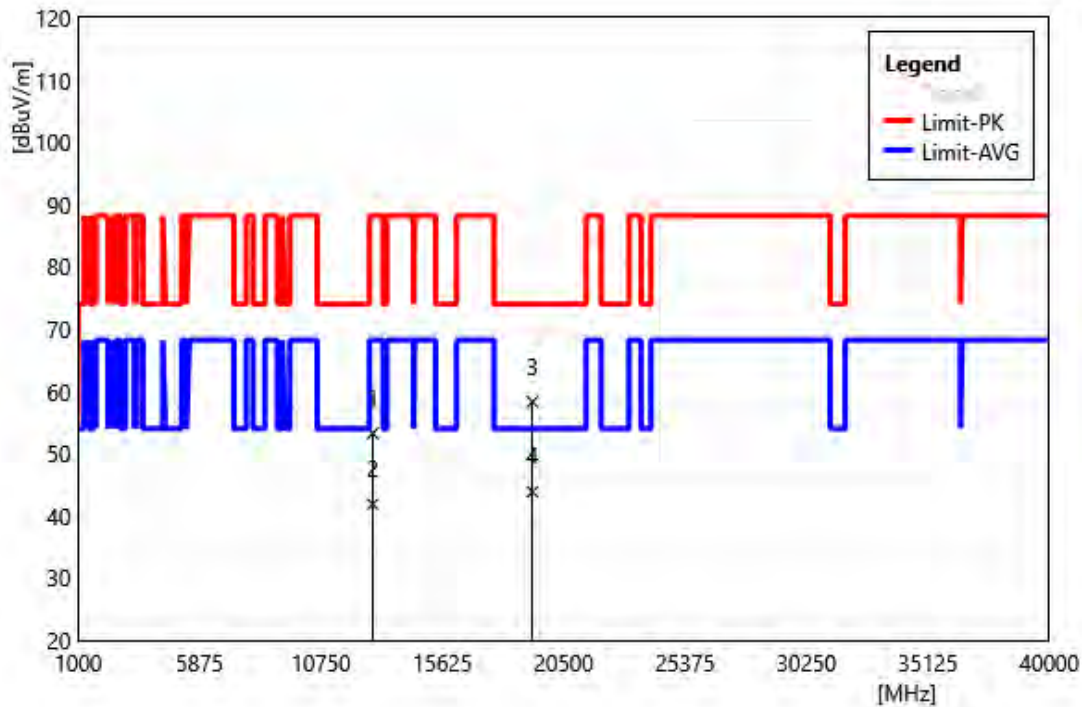


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	44.80	8.43	53.23	88.20	-34.97	PEAK
2	12830.00	33.42	8.43	41.85	68.20	-26.35	AVG
3	19245.00	49.73	8.59	58.32	74.00	-15.68	PEAK
4	19245.00	35.26	8.59	43.85	54.00	-10.15	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 6415 MHz
Polarization: Vertical
Remark:

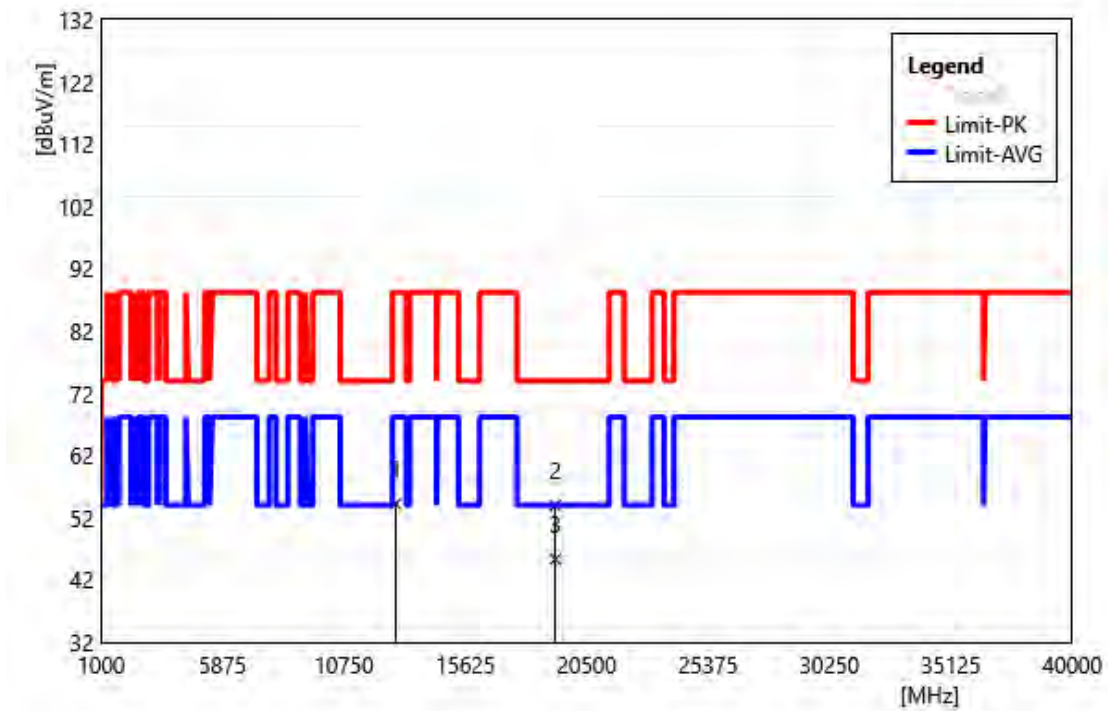


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12830.00	45.83	8.43	54.26	88.20	-33.94	PEAK
2	19245.00	45.35	8.59	53.94	74.00	-20.06	PEAK
3	19245.00	36.76	8.59	45.35	54.00	-8.65	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 6435 MHz
Polarization: Horizontal
Remark:

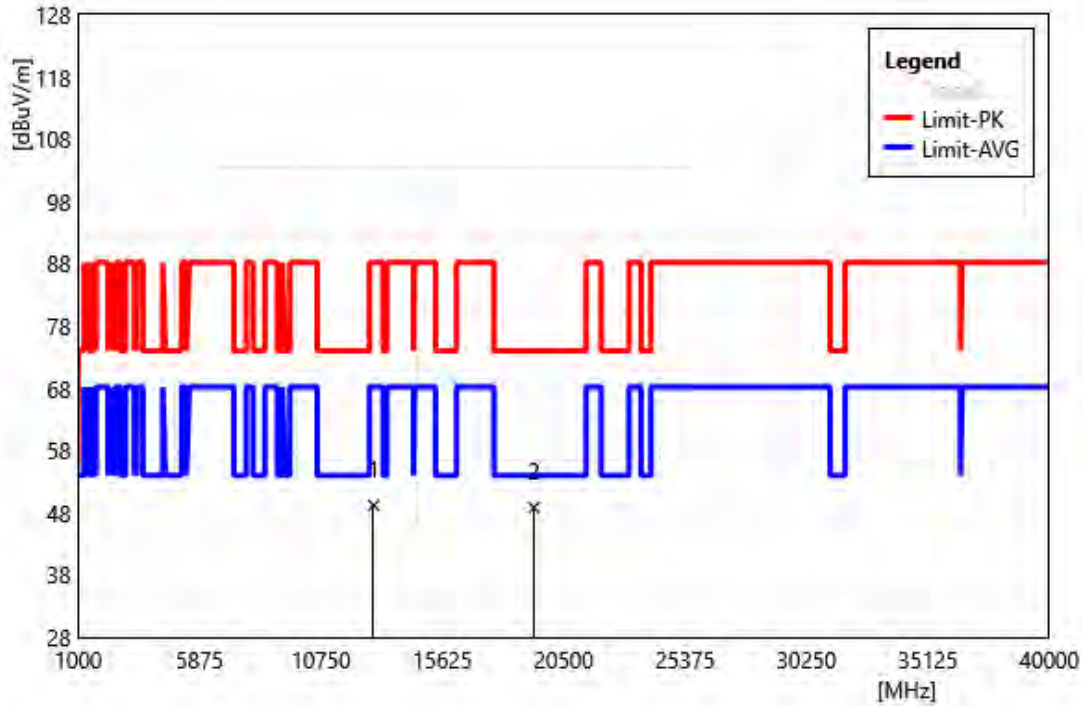


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	40.69	8.49	49.18	88.20	-39.02	PEAK
2	19305.00	40.24	8.62	48.86	74.00	-25.14	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6435 MHz		
Polarization:	Vertical		
Remark:			

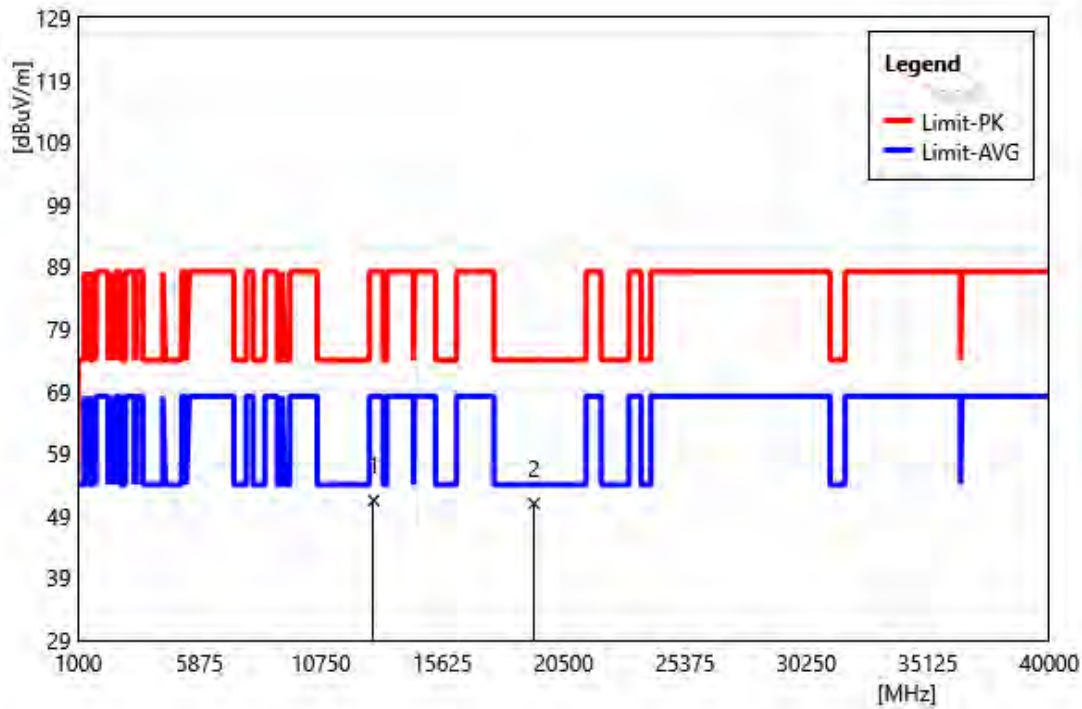


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12870.00	42.97	8.49	51.46	88.20	-36.74	PEAK
2	19305.00	42.36	8.62	50.98	74.00	-23.02	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6475 MHz		
Polarization:	Horizontal		
Remark:			

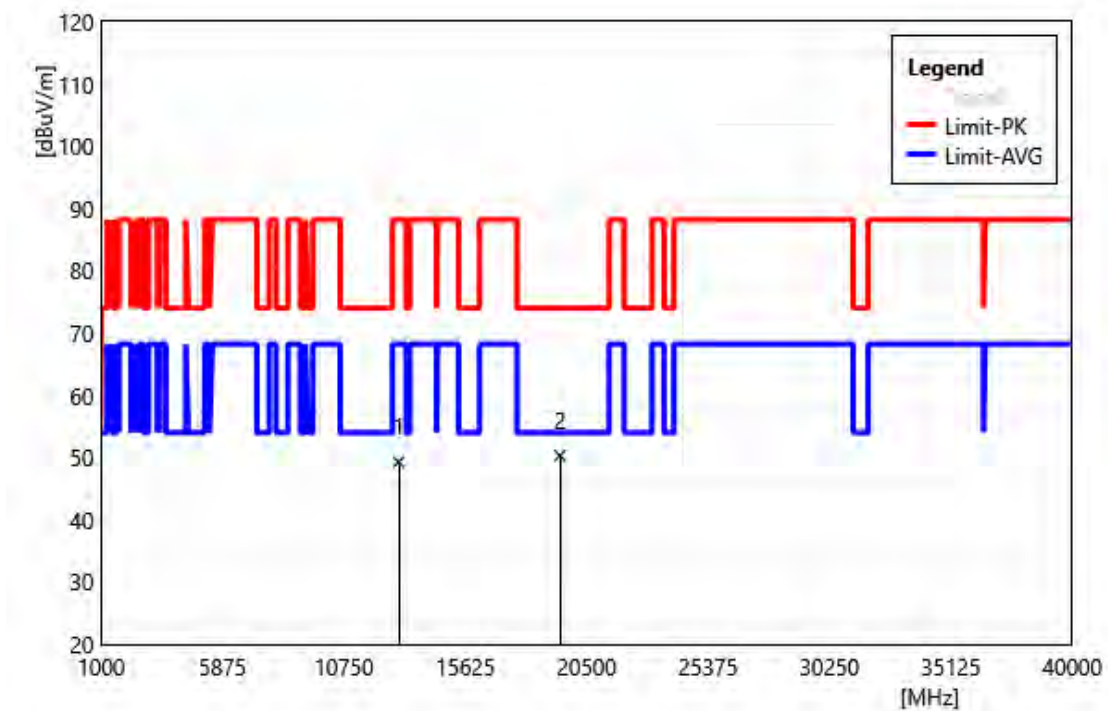


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	40.78	8.50	49.28	88.20	-38.92	PEAK
2	19425.00	41.63	8.67	50.30	74.00	-23.70	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6475 MHz		
Polarization:	Vertical		
Remark:			

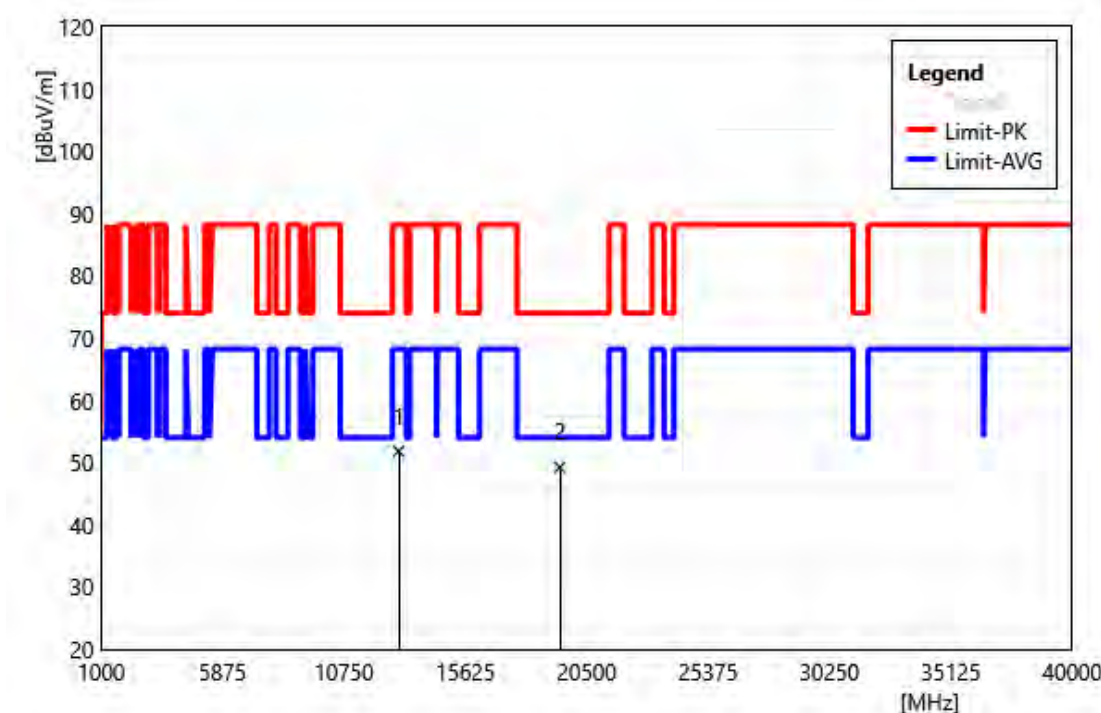


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12950.00	43.30	8.50	51.80	88.20	-36.40	PEAK
2	19425.00	40.54	8.67	49.21	74.00	-24.79	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6515 MHz		
Polarization:	Horizontal		
Remark:			

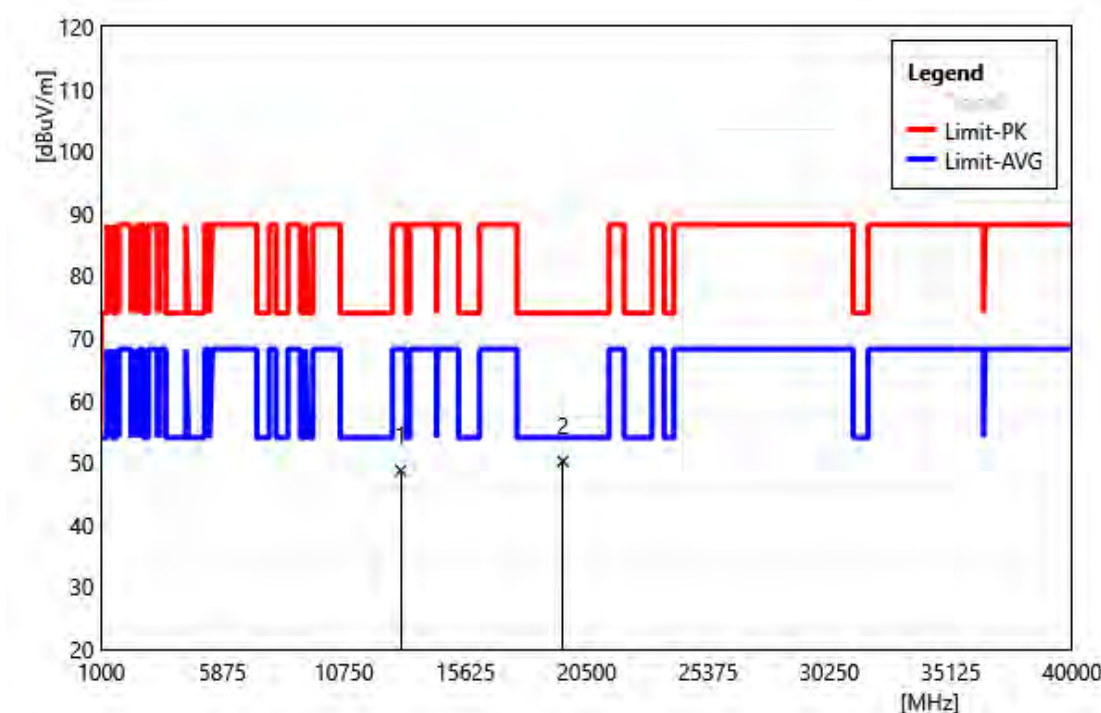


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	40.23	8.49	48.72	88.20	-39.48	PEAK
2	19545.00	41.47	8.73	50.20	74.00	-23.80	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 6515 MHz
Polarization: Vertical
Remark:

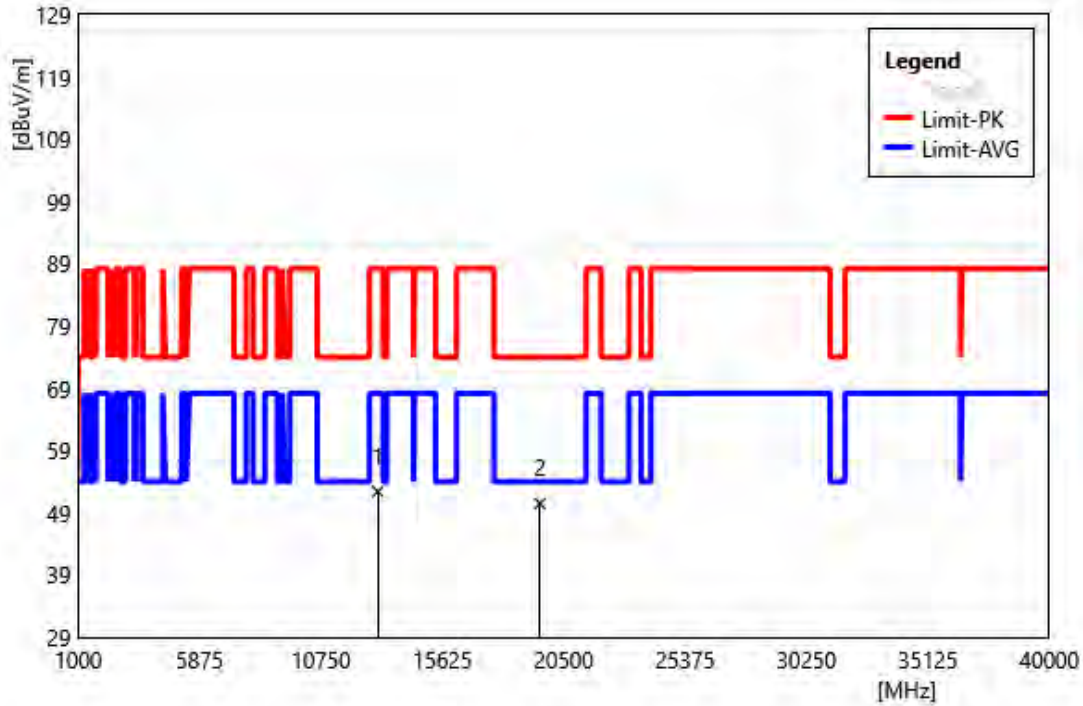


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13030.00	43.94	8.49	52.43	88.20	-35.77	PEAK
2	19545.00	41.75	8.73	50.48	74.00	-23.52	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 6535 MHz
Polarization: Horizontal
Remark:

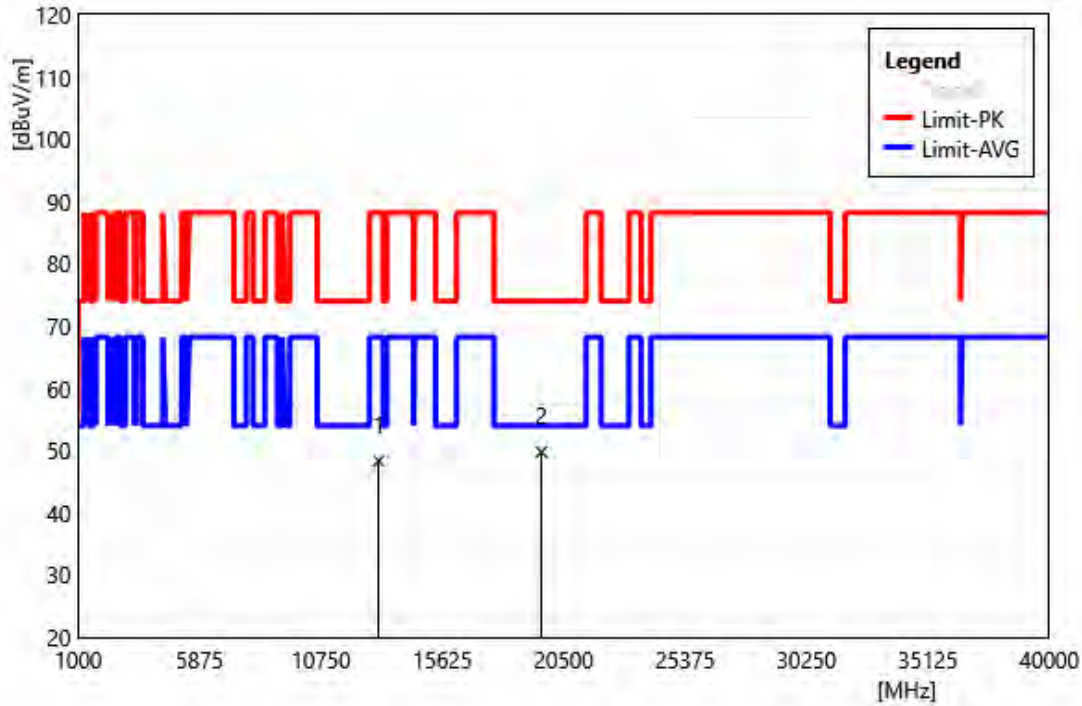


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	39.80	8.52	48.32	88.20	-39.88	PEAK
2	19605.00	40.98	8.75	49.73	74.00	-24.27	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 6535 MHz
Polarization: Vertical
Remark:

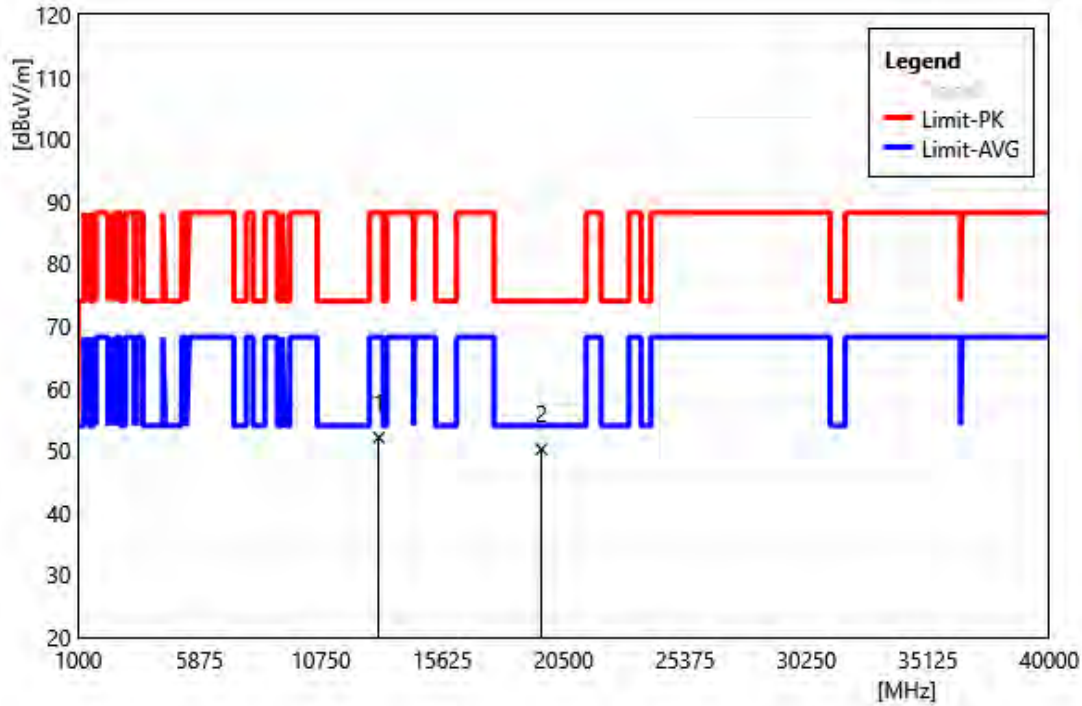


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13070.00	43.56	8.52	52.08	88.20	-36.12	PEAK
2	19605.00	41.45	8.75	50.20	74.00	-23.80	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 6695 MHz
Polarization: Horizontal
Remark:

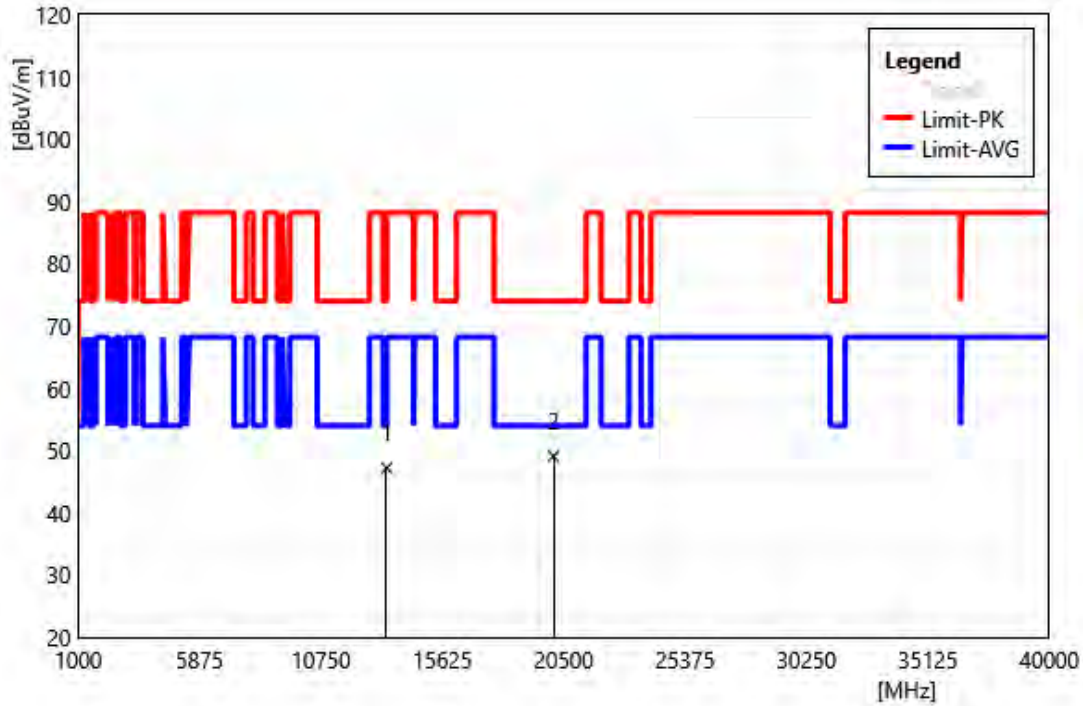


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	39.06	8.13	47.19	74.00	-26.81	PEAK
2	20085.00	40.10	8.98	49.08	74.00	-24.92	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6695 MHz		
Polarization:	Vertical		
Remark:			

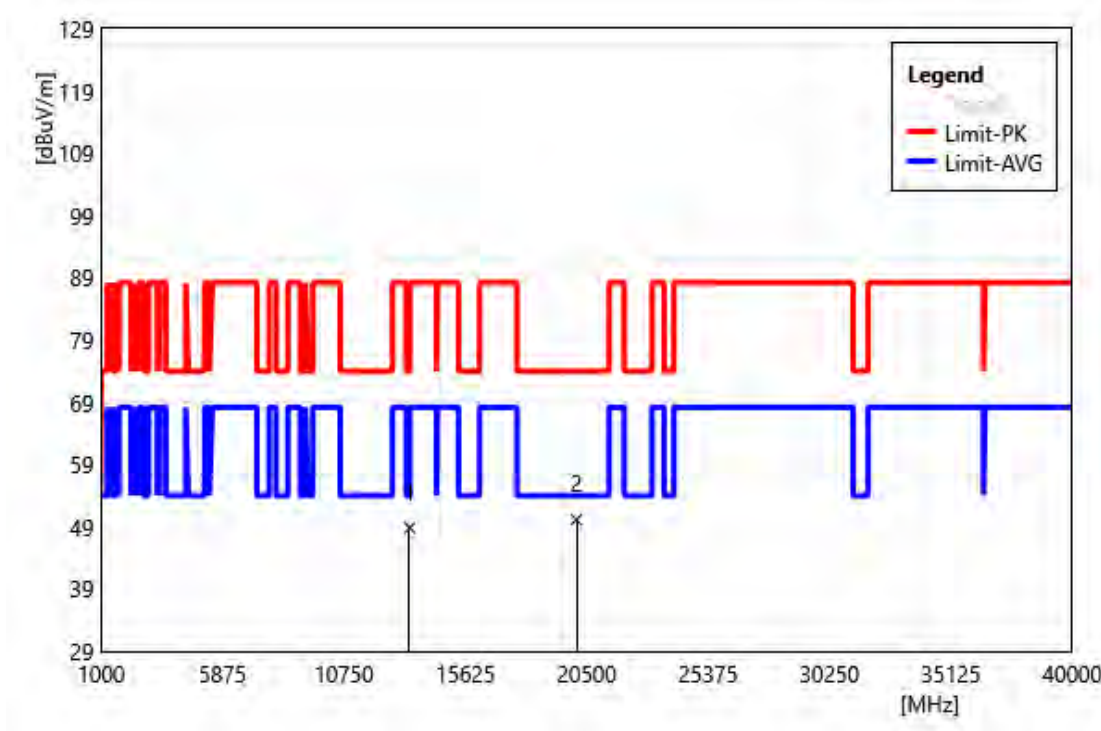


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13390.00	40.68	8.13	48.81	74.00	-25.19	PEAK
2	20085.00	41.17	8.98	50.15	74.00	-23.85	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 6855 MHz
Polarization: Vertical
Remark:

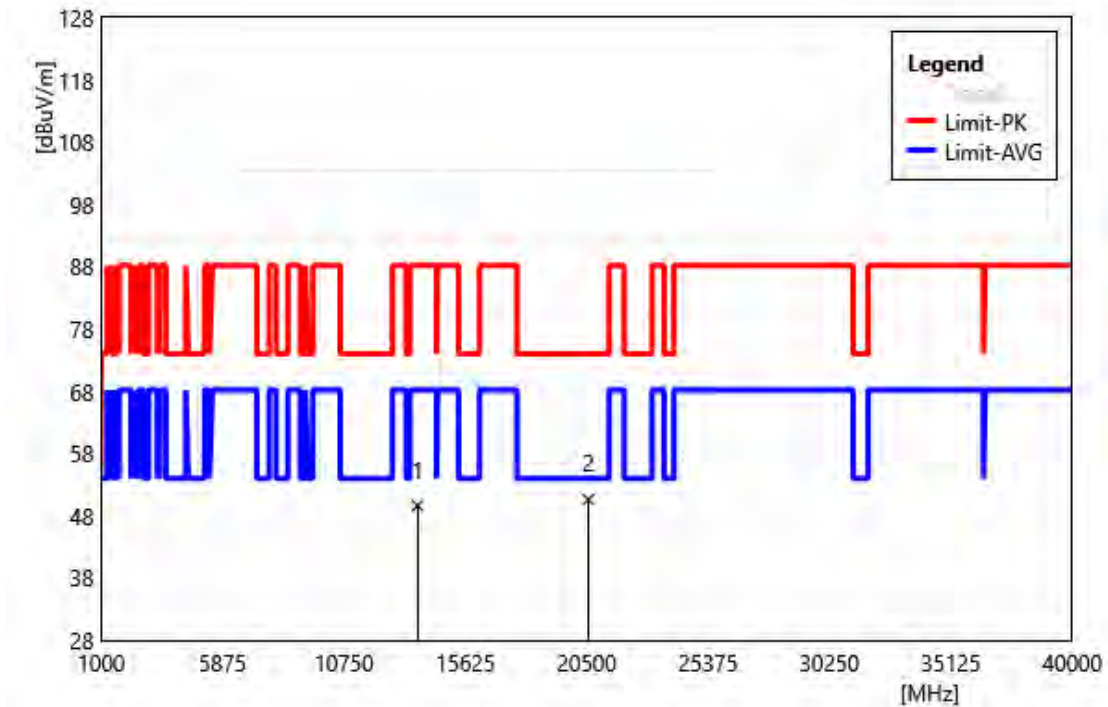


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	41.82	7.80	49.62	88.20	-38.58	PEAK
2	20565.00	41.43	9.19	50.62	74.00	-23.38	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 6855 MHz
Polarization: Vertical
Remark:

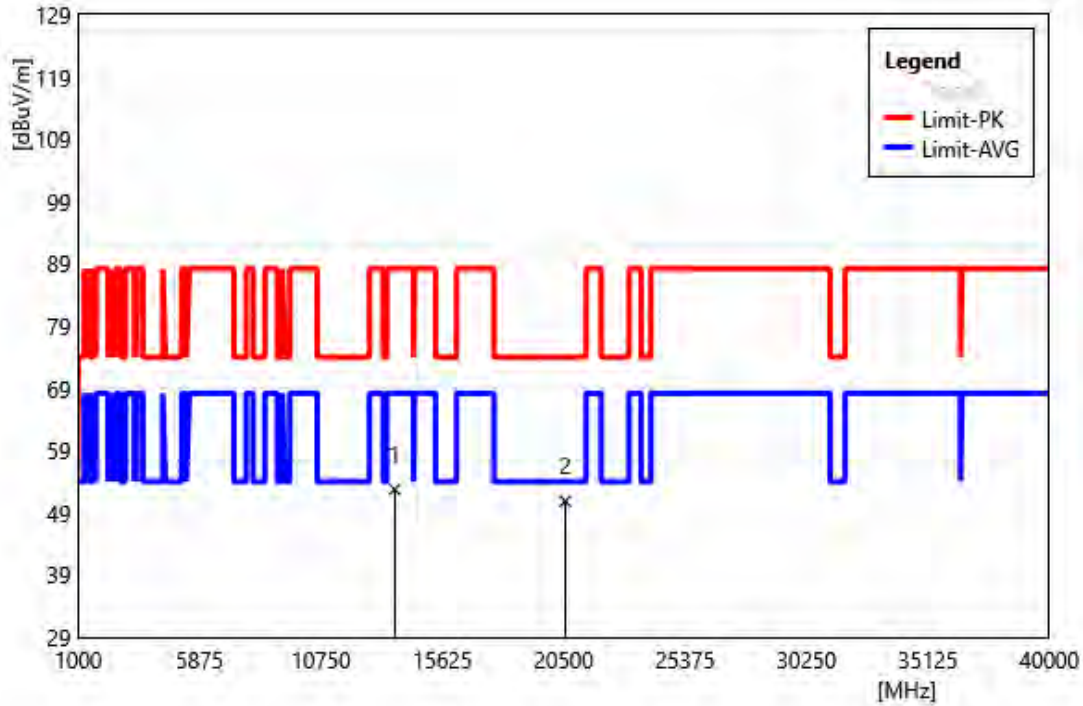


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13710.00	44.95	7.80	52.75	88.20	-35.45	PEAK
2	20565.00	41.67	9.19	50.86	74.00	-23.14	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6875 MHz		
Polarization:	Horizontal		
Remark:			

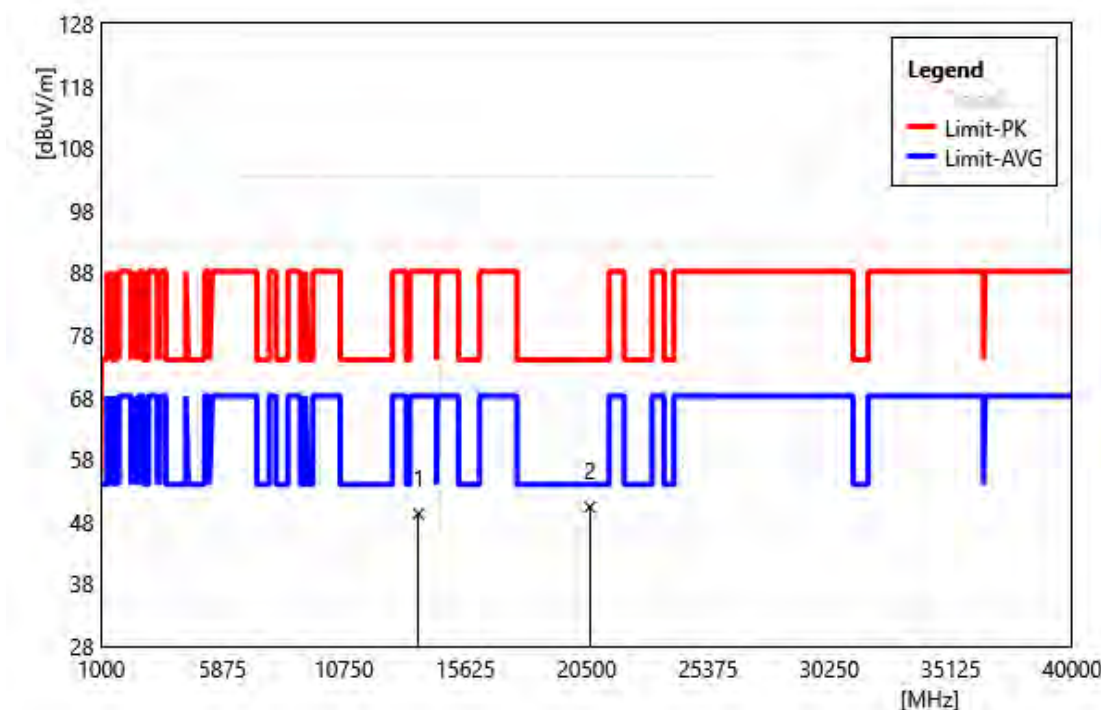


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	41.48	7.79	49.27	88.20	-38.93	PEAK
2	20625.00	41.18	9.21	50.39	74.00	-23.61	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 6875 MHz
Polarization: Vertical
Remark:

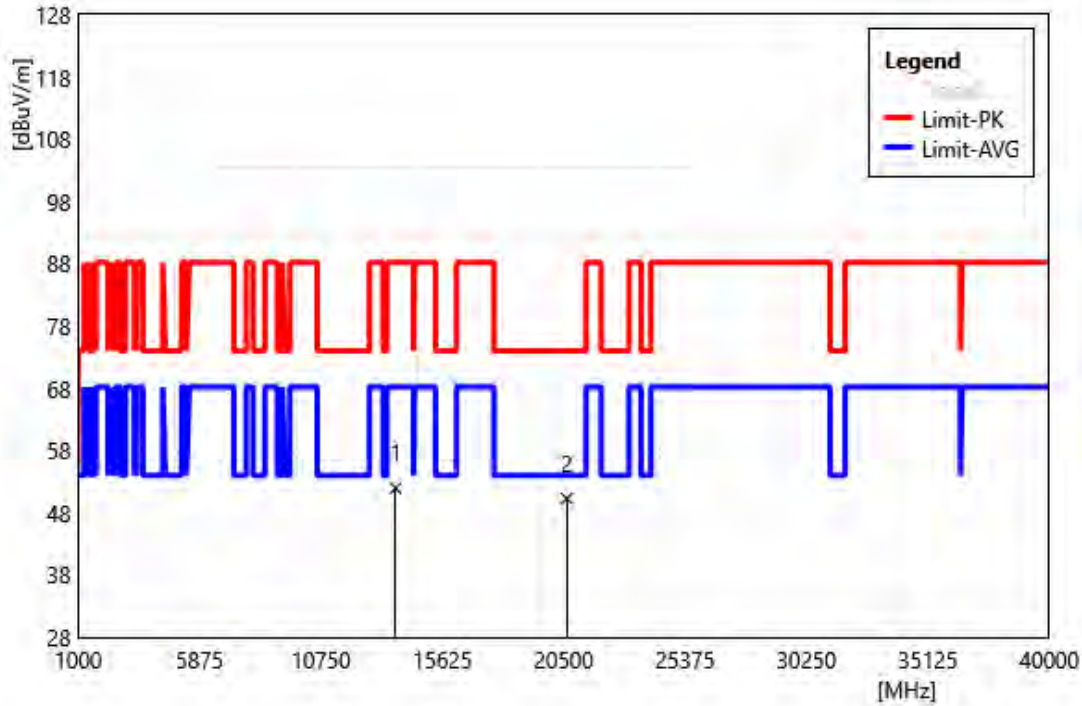


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13750.00	44.17	7.79	51.96	88.20	-36.24	PEAK
2	20625.00	41.07	9.21	50.28	74.00	-23.72	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 6895 MHz
Polarization: Horizontal
Remark:

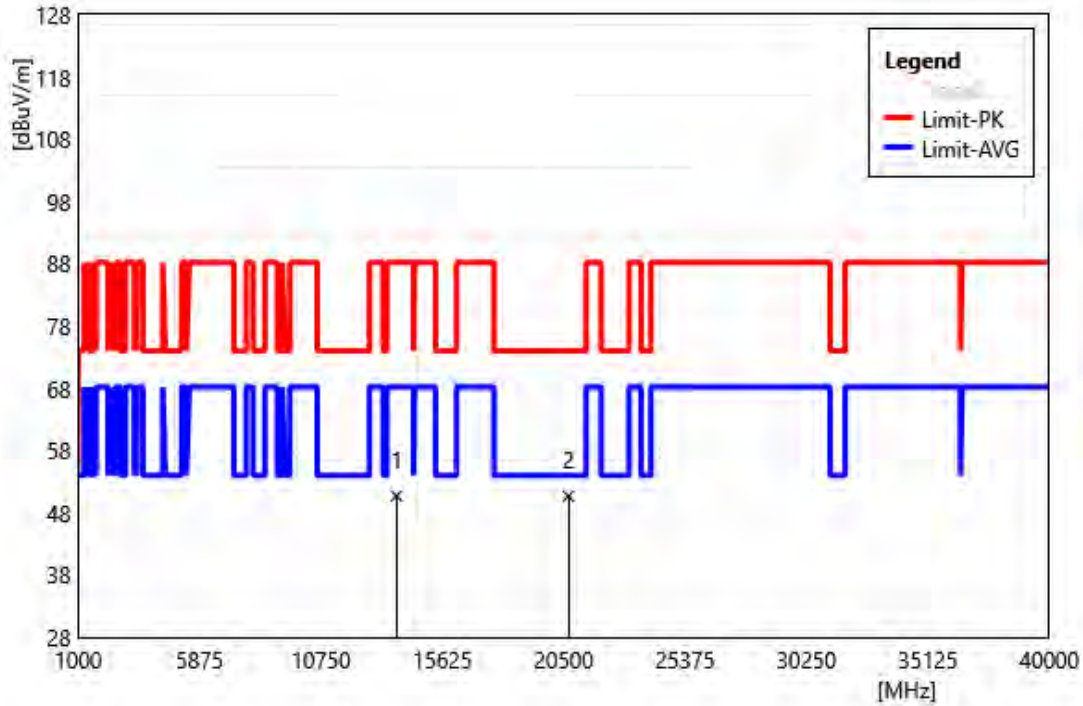


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	42.91	7.79	50.70	88.20	-37.50	PEAK
2	20685.00	41.42	9.23	50.65	74.00	-23.35	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 6895 MHz		
Polarization:	Vertical		
Remark:			

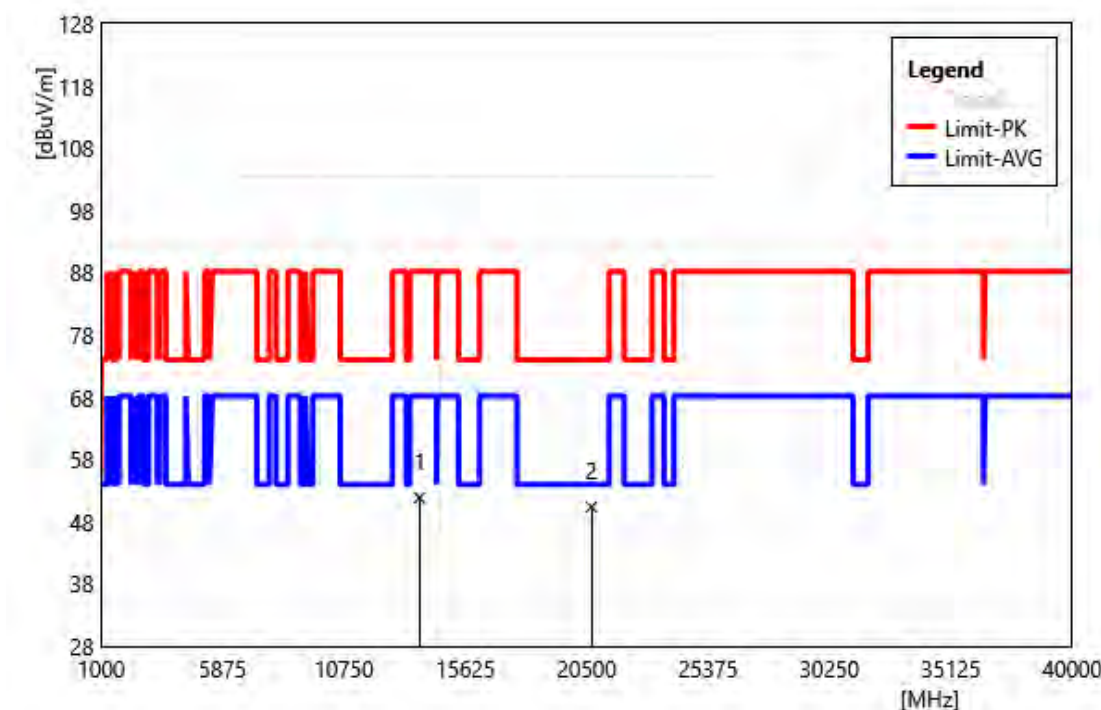


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13790.00	44.06	7.79	51.85	88.20	-36.35	PEAK
2	20685.00	41.14	9.23	50.37	74.00	-23.63	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 6995 MHz
Polarization: Horizontal
Remark:

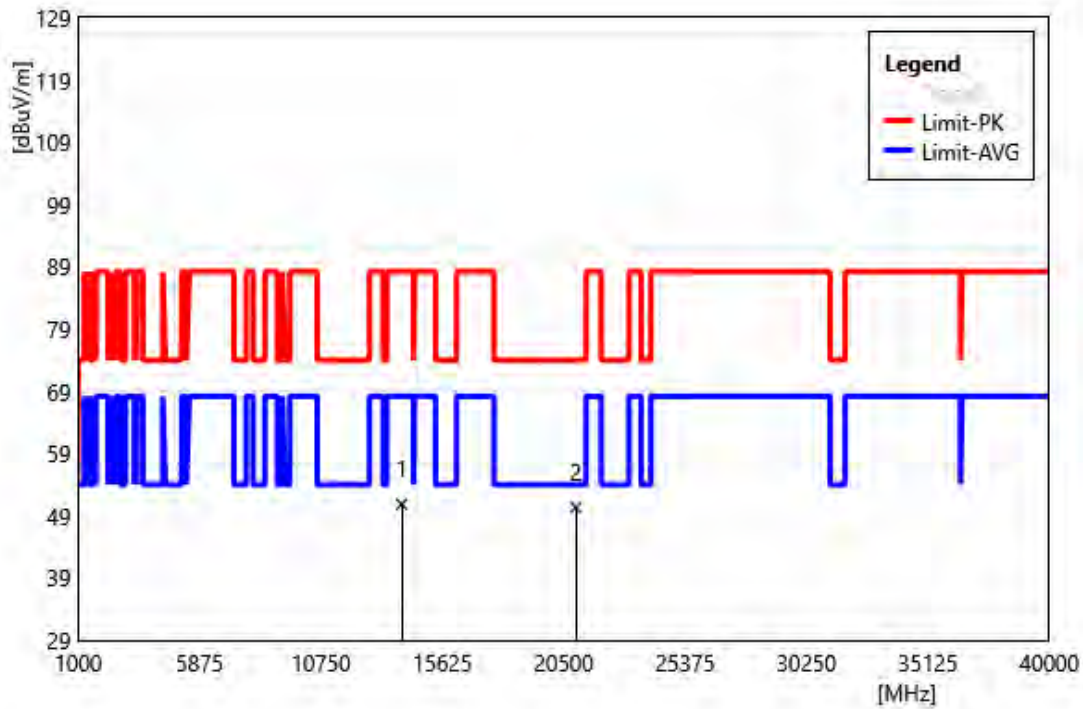


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	42.60	8.27	50.87	88.20	-37.33	PEAK
2	20985.00	41.00	9.37	50.37	74.00	-23.63	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 6995 MHz
Polarization: Vertical
Remark:

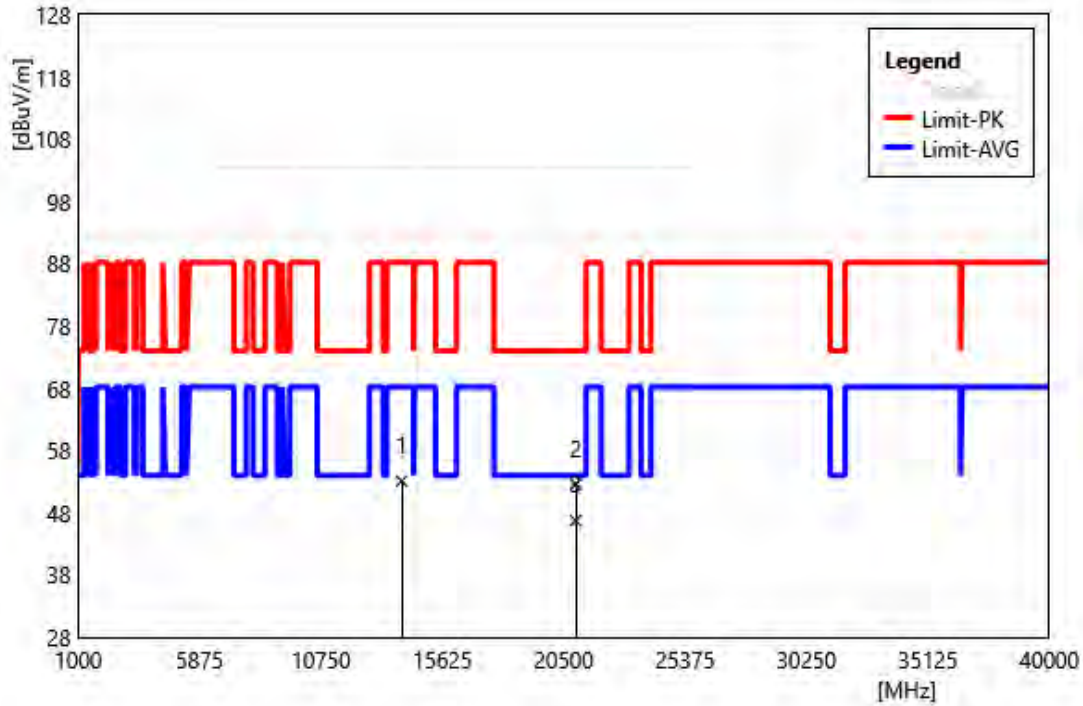


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13990.00	44.83	8.27	53.10	88.20	-35.10	PEAK
2	20985.00	43.23	9.37	52.60	74.00	-21.40	PEAK
3	20985.00	37.37	9.37	46.74	54.00	-7.26	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7115 MHz		
Polarization:	Horizontal		
Remark:			

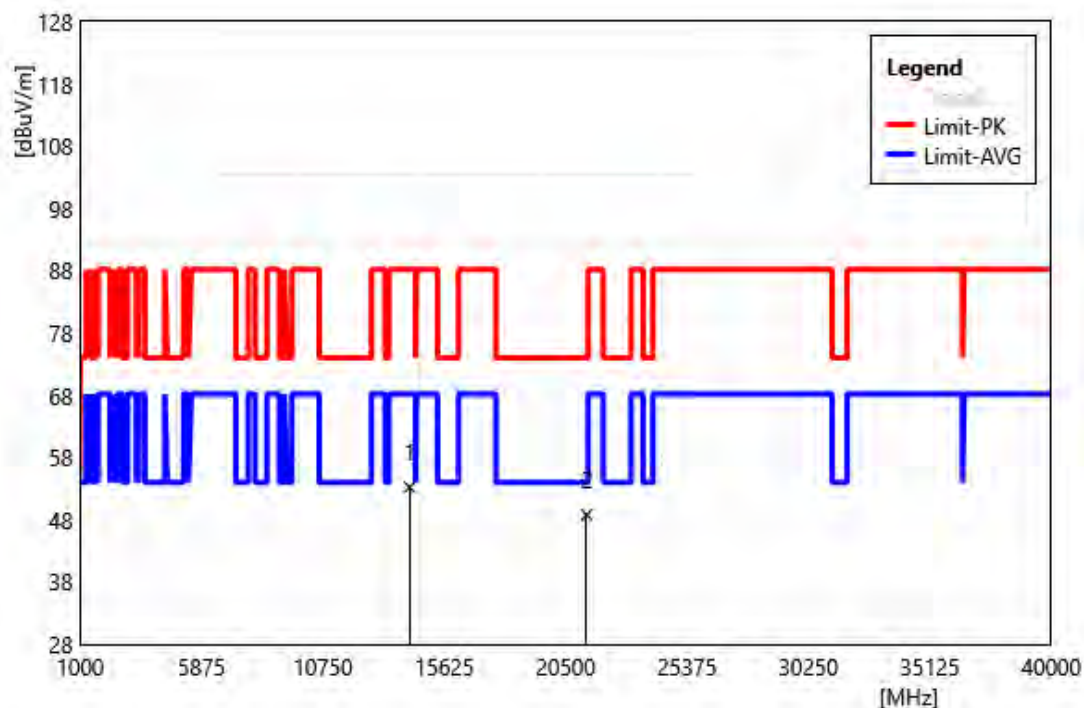


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14230.00	44.74	8.50	53.24	88.20	-34.96	PEAK
2	21345.00	39.24	9.54	48.78	74.00	-25.22	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 7115 MHz
Polarization: Vertical
Remark:

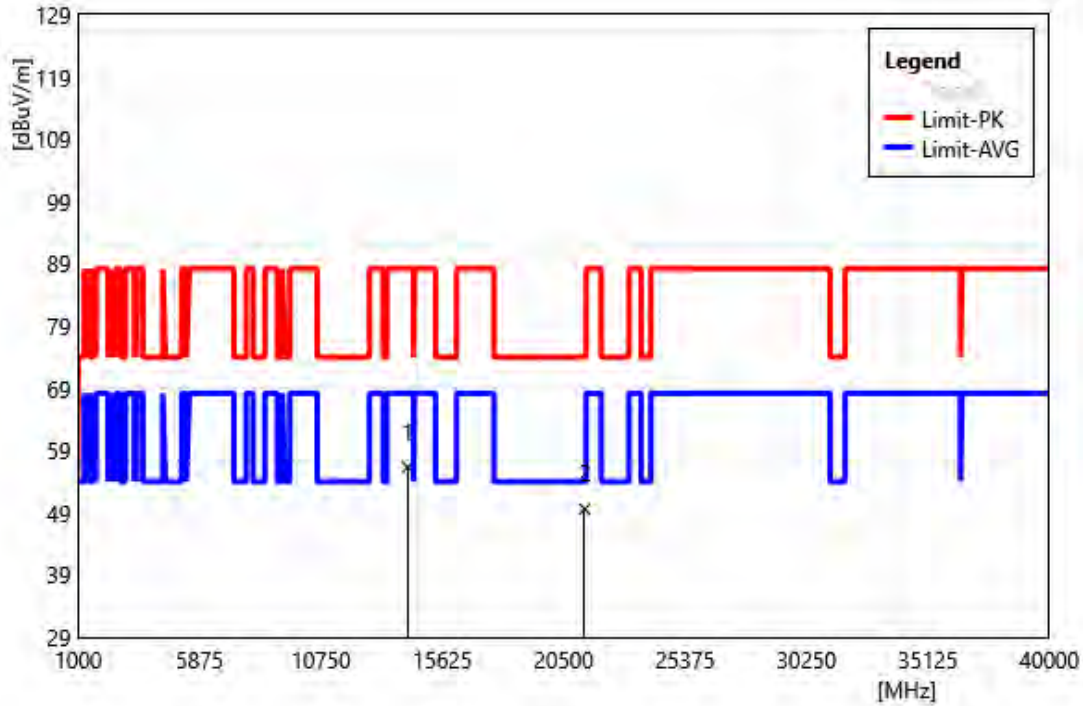


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14230.00	47.81	8.50	56.31	88.20	-31.89	PEAK
2	21345.00	40.06	9.54	49.60	74.00	-24.40	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965 MHz		
Polarization:	Horizontal		
Remark:			

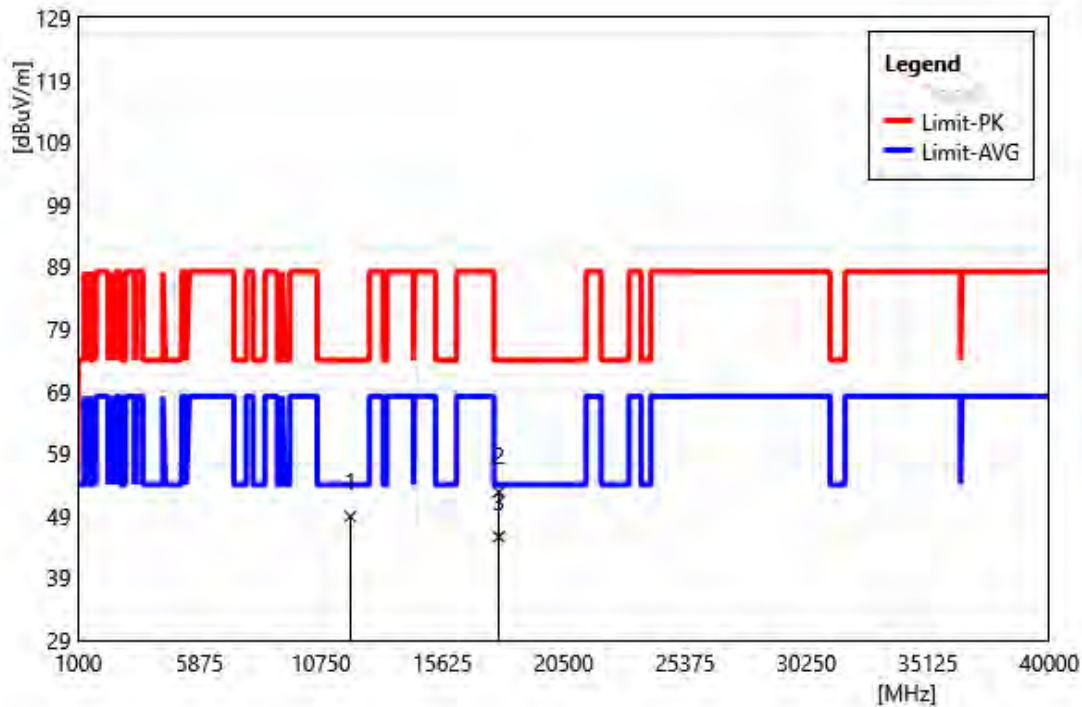


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11930.00	41.28	7.59	48.87	74.00	-25.13	PEAK
2	17895.00	45.48	7.33	52.81	74.00	-21.19	PEAK
3	17895.00	38.30	7.33	45.63	54.00	-8.37	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965 MHz		
Polarization:	Vertical		
Remark:			

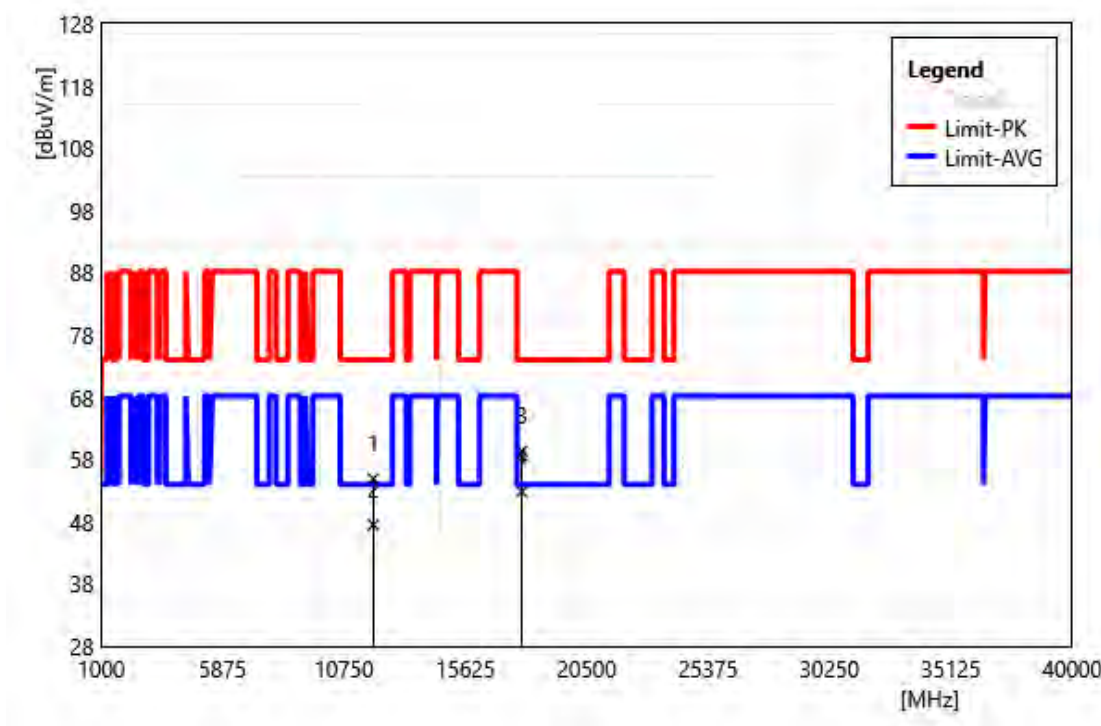


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11930.00	47.34	7.59	54.93	74.00	-19.07	PEAK
2	11930.00	39.92	7.59	47.51	54.00	-6.49	AVG
3	17895.00	52.01	7.33	59.34	74.00	-14.66	PEAK
4	17895.00	45.47	7.33	52.80	54.00	-1.20	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 6165 MHz
Polarization: Horizontal
Remark:

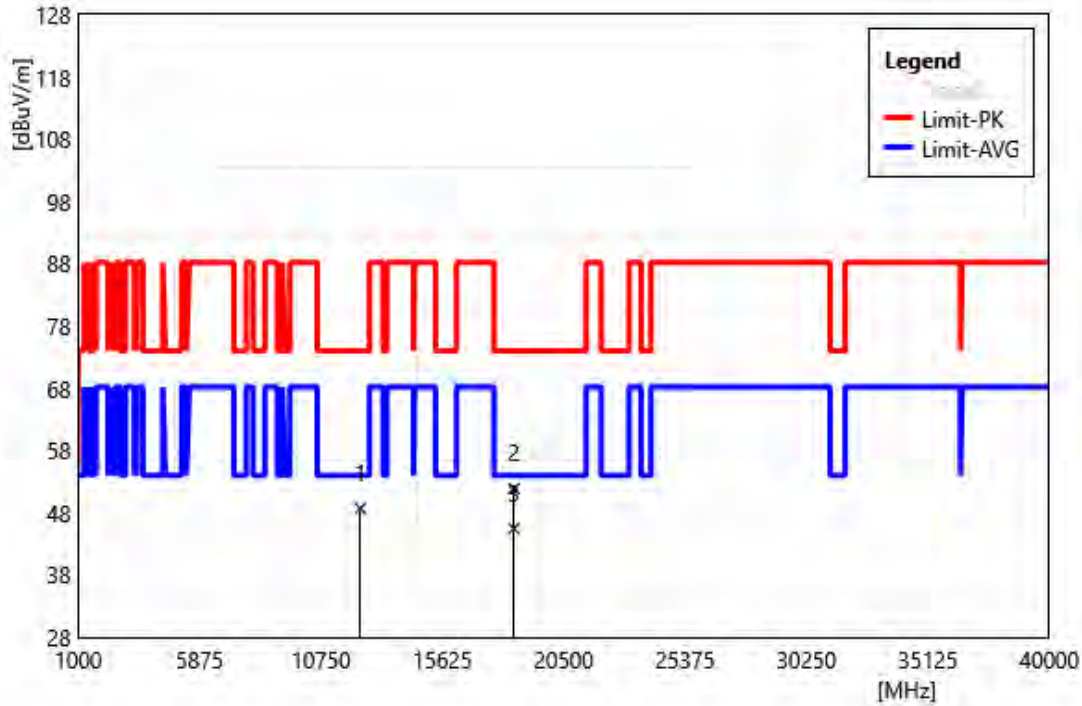


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12330.00	40.91	7.82	48.73	74.00	-25.27	PEAK
2	18495.00	43.62	8.26	51.88	74.00	-22.12	PEAK
3	18495.00	37.22	8.26	45.48	54.00	-8.52	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6165 MHz		
Polarization:	Vertical		
Remark:			

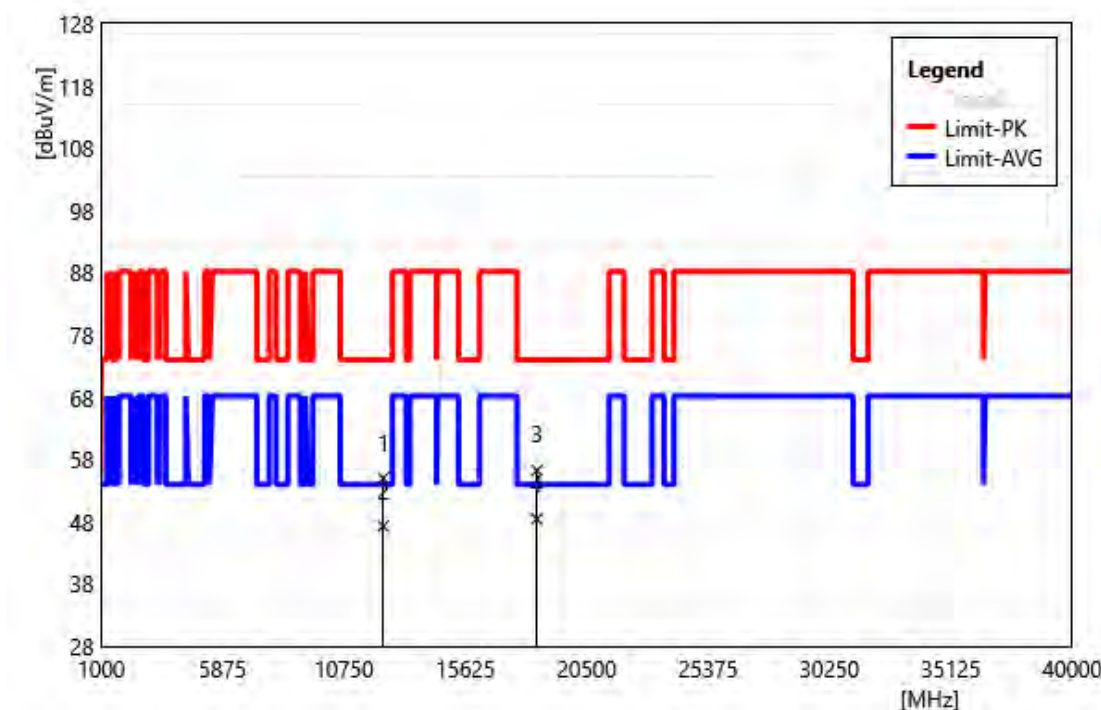


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12330.00	47.18	7.82	55.00	74.00	-19.00	PEAK
2	12330.00	39.49	7.82	47.31	54.00	-6.69	AVG
3	18495.00	47.99	8.26	56.25	74.00	-17.75	PEAK
4	18495.00	40.20	8.26	48.46	54.00	-5.54	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6405 MHz		
Polarization:	Horizontal		
Remark:			

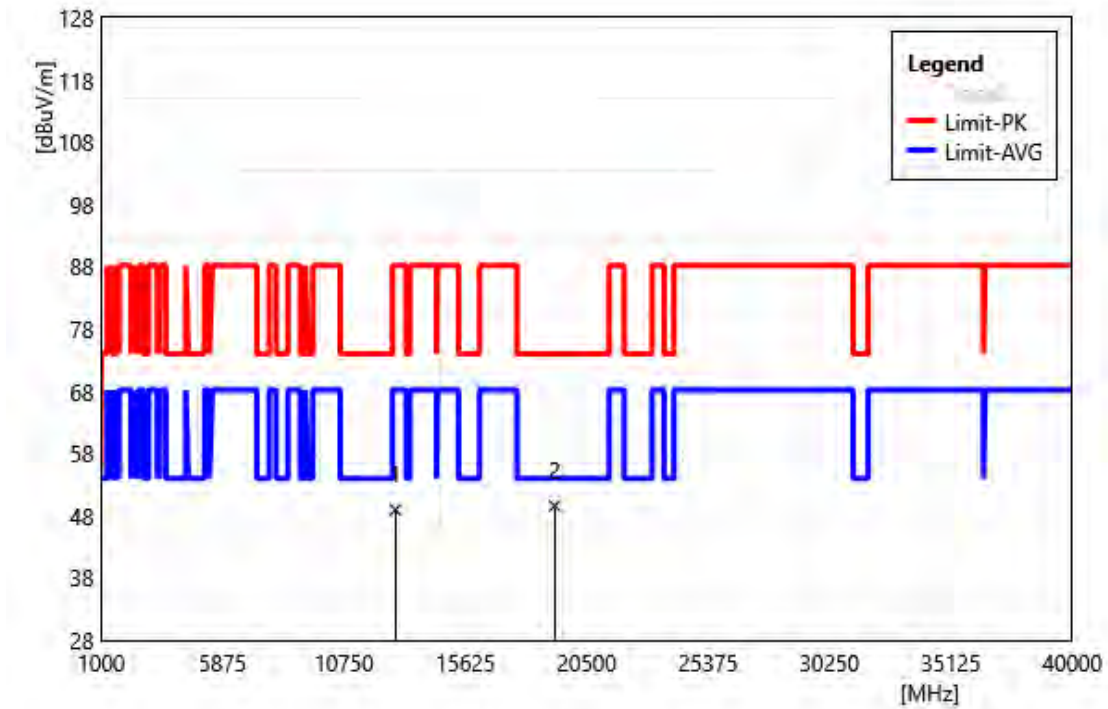


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12810.00	40.55	8.40	48.95	88.20	-39.25	PEAK
2	19215.00	41.02	8.58	49.60	74.00	-24.40	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6405 MHz		
Polarization:	Vertical		
Remark:			

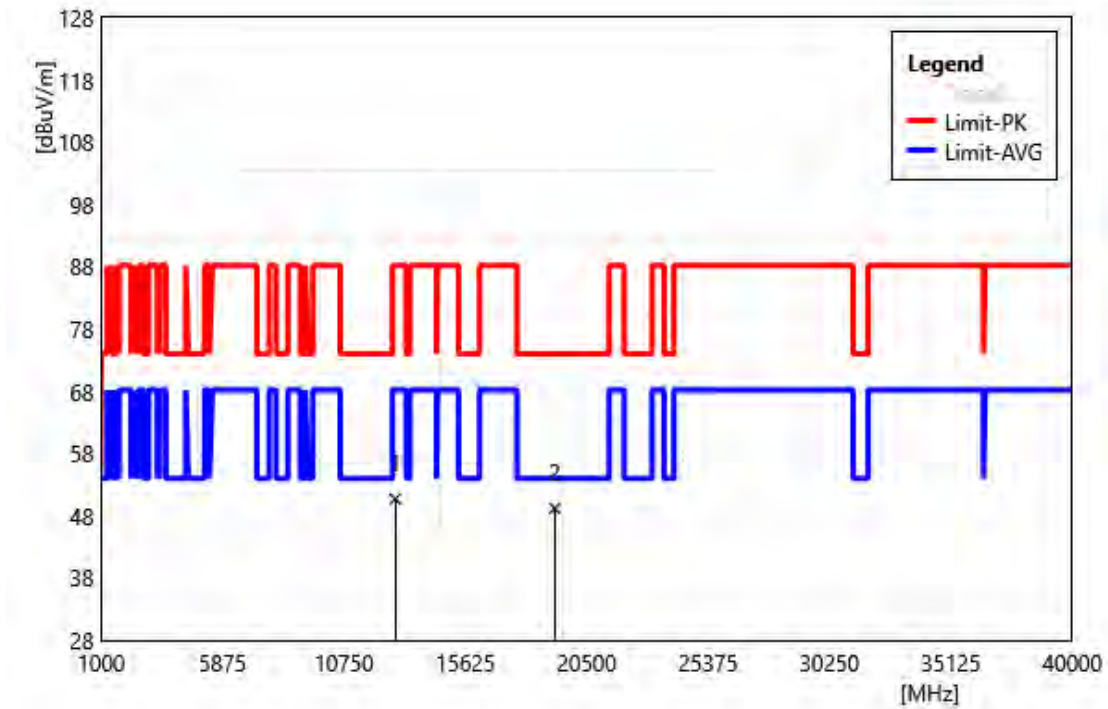


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12810.00	42.32	8.40	50.72	88.20	-37.48	PEAK
2	19215.00	40.60	8.58	49.18	74.00	-24.82	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6445 MHz		
Polarization:	Horizontal		
Remark:			

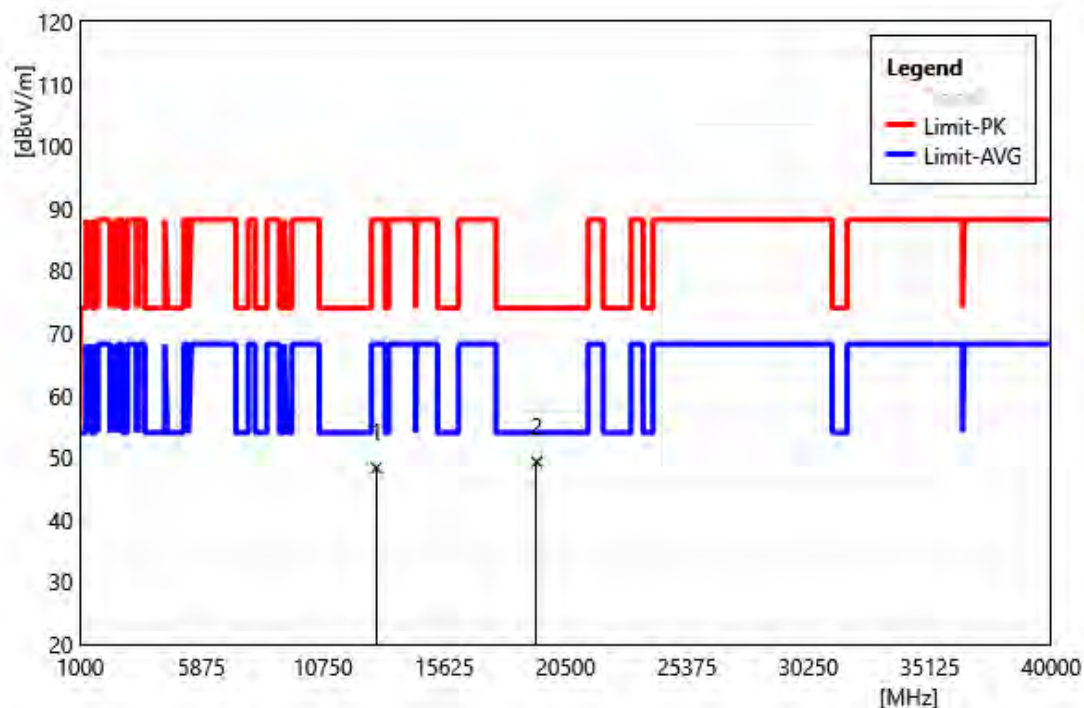


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12890.00	39.83	8.51	48.34	88.20	-39.86	PEAK
2	19335.00	40.64	8.64	49.28	74.00	-24.72	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 6445 MHz
Polarization: Vertical
Remark:

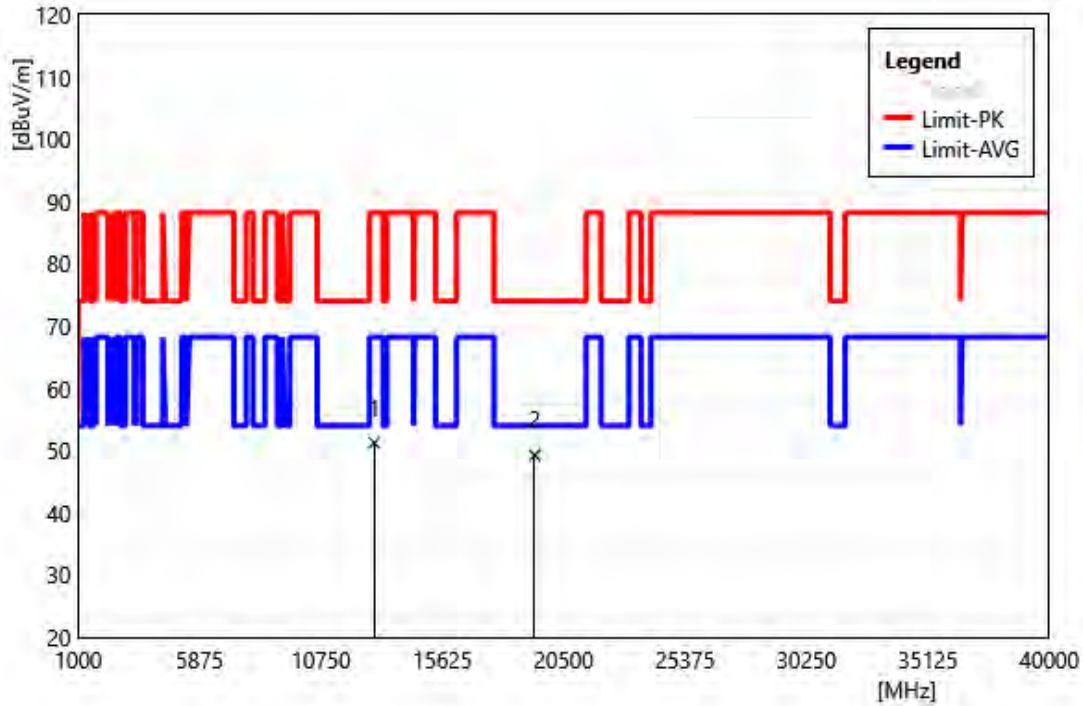


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12890.00	42.71	8.51	51.22	88.20	-36.98	PEAK
2	19335.00	40.60	8.64	49.24	74.00	-24.76	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6485 MHz		
Polarization:	Horizontal		
Remark:			

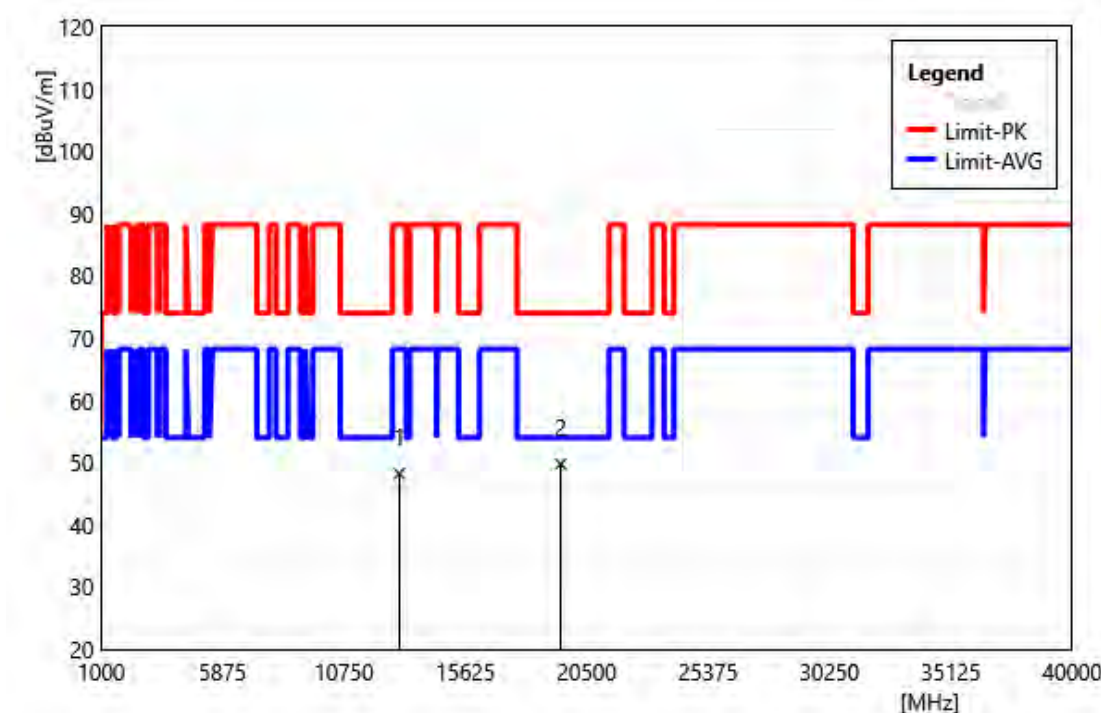


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12970.00	39.75	8.50	48.25	88.20	-39.95	PEAK
2	19455.00	41.05	8.68	49.73	74.00	-24.27	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6485 MHz		
Polarization:	Vertical		
Remark:			

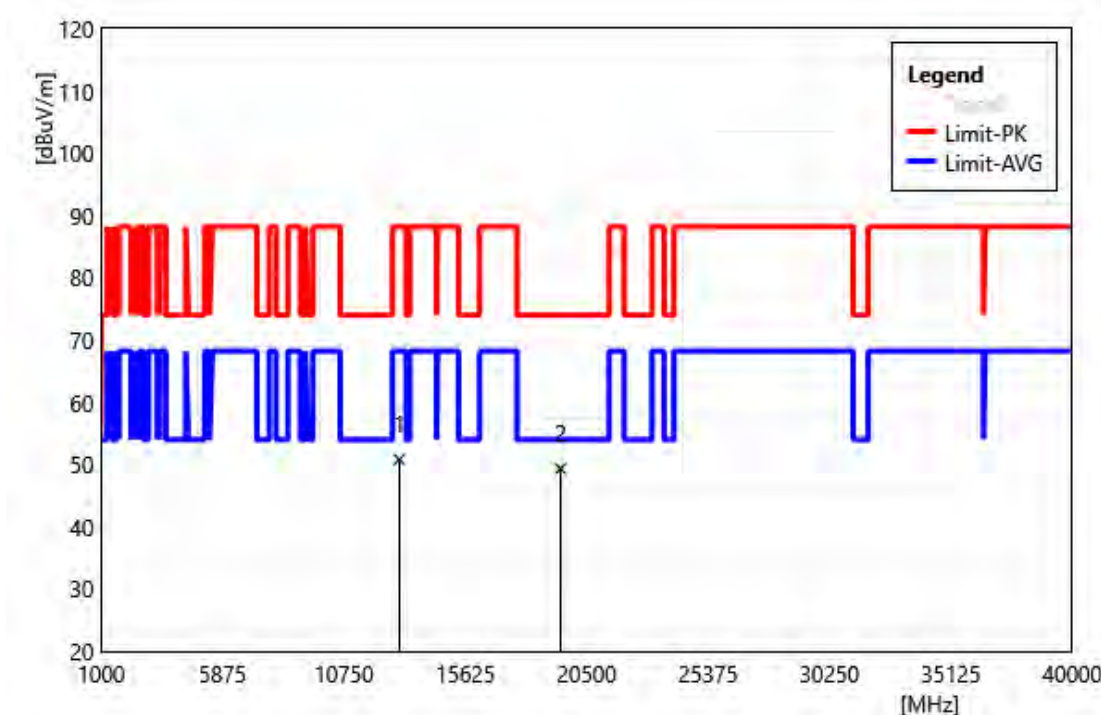


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12970.00	42.28	8.50	50.78	88.20	-37.42	PEAK
2	19455.00	40.63	8.68	49.31	74.00	-24.69	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 6525 MHz
Polarization: Horizontal
Remark:

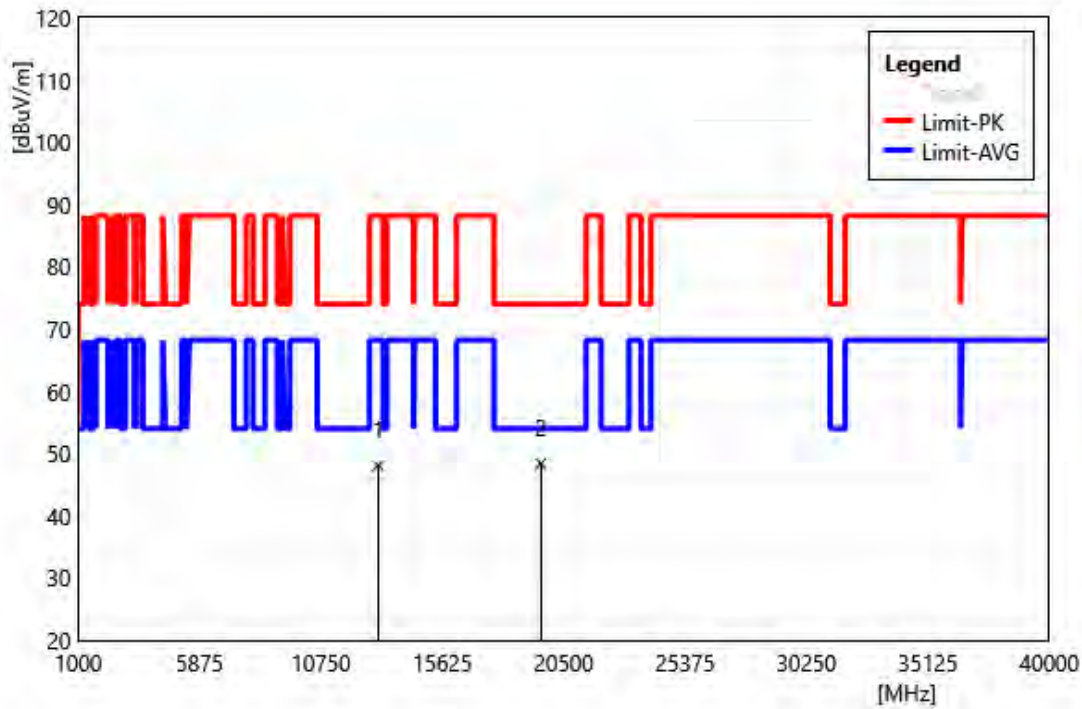


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13050.00	39.57	8.51	48.08	88.20	-40.12	PEAK
2	19575.00	39.62	8.74	48.36	74.00	-25.64	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 6525 MHz
Polarization: Vertical
Remark:

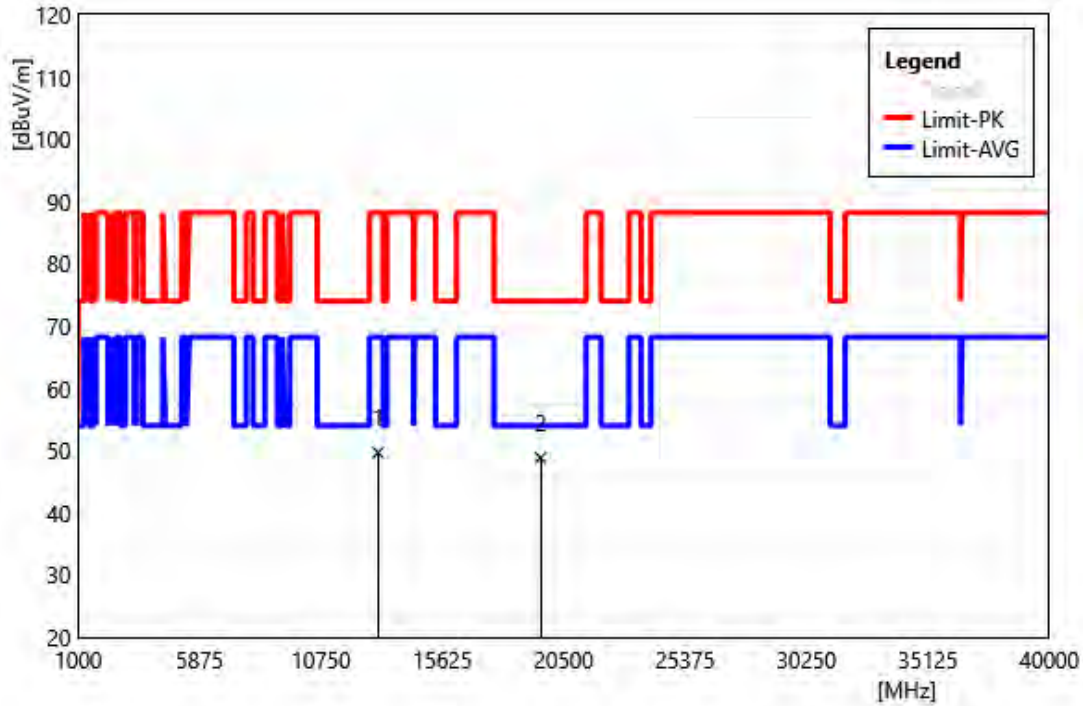


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13050.00	41.15	8.51	49.66	88.20	-38.54	PEAK
2	19575.00	40.08	8.74	48.82	74.00	-25.18	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6565 MHz		
Polarization:	Horizontal		
Remark:			

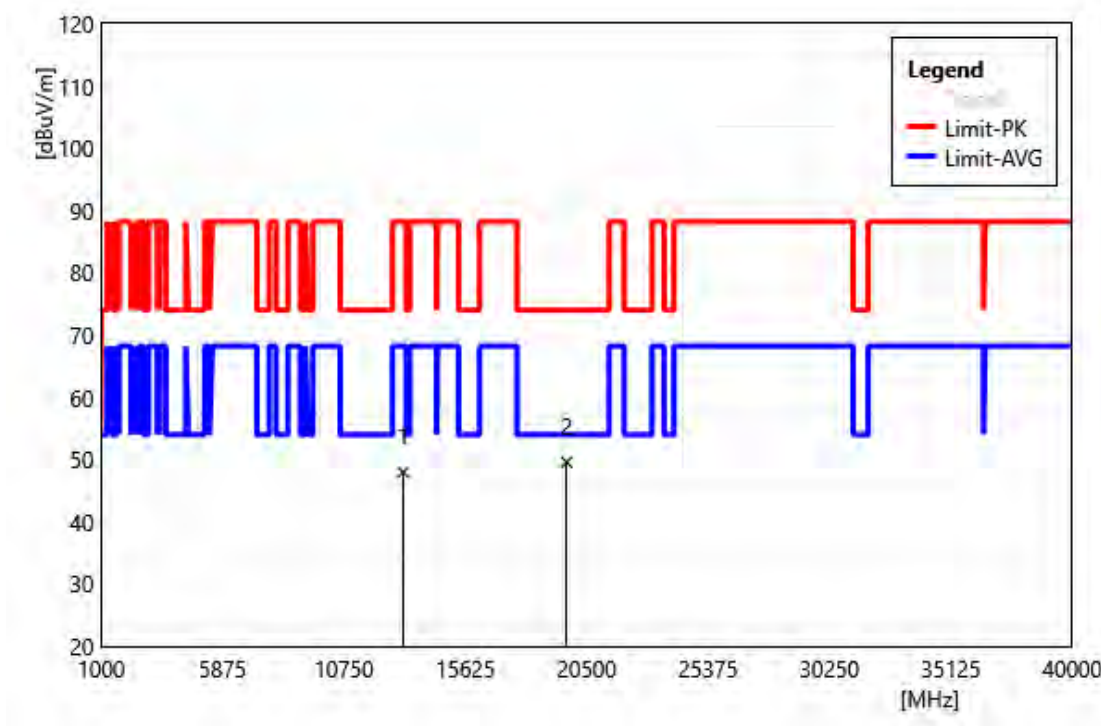


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	39.47	8.49	47.96	88.20	-40.24	PEAK
2	19695.00	40.78	8.80	49.58	74.00	-24.42	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6565 MHz		
Polarization:	Vertical		
Remark:			

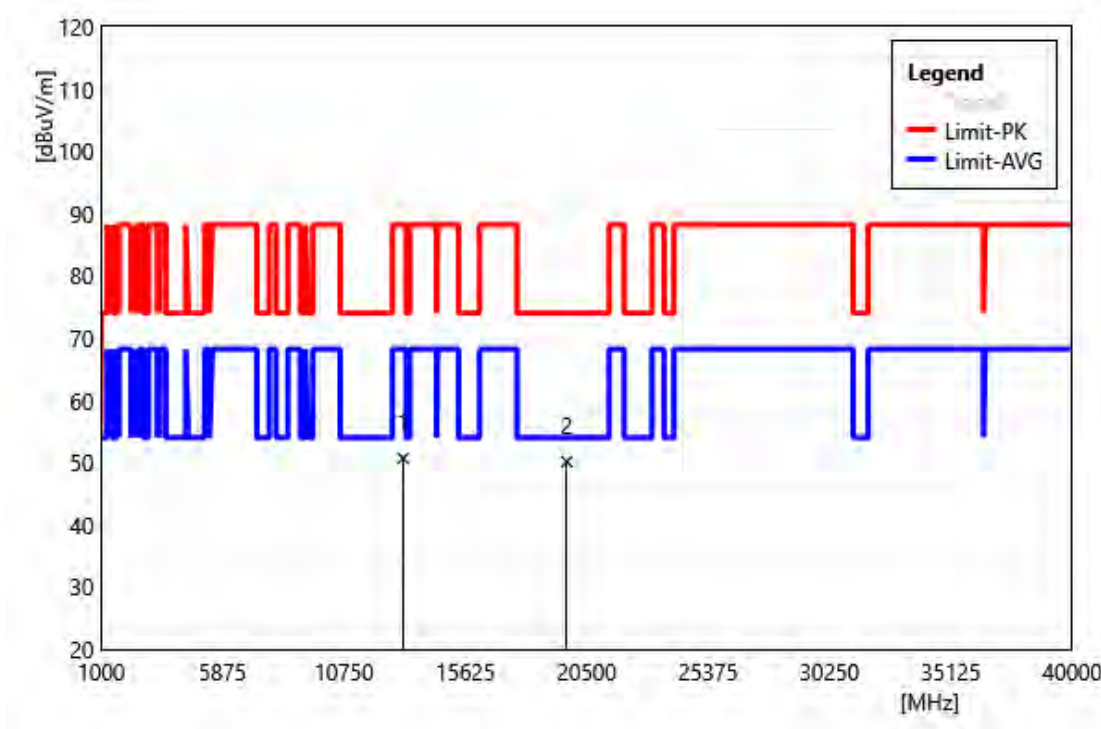


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13130.00	42.19	8.49	50.68	88.20	-37.52	PEAK
2	19695.00	41.34	8.80	50.14	74.00	-23.86	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 6685 MHz
Polarization: Horizontal
Remark:

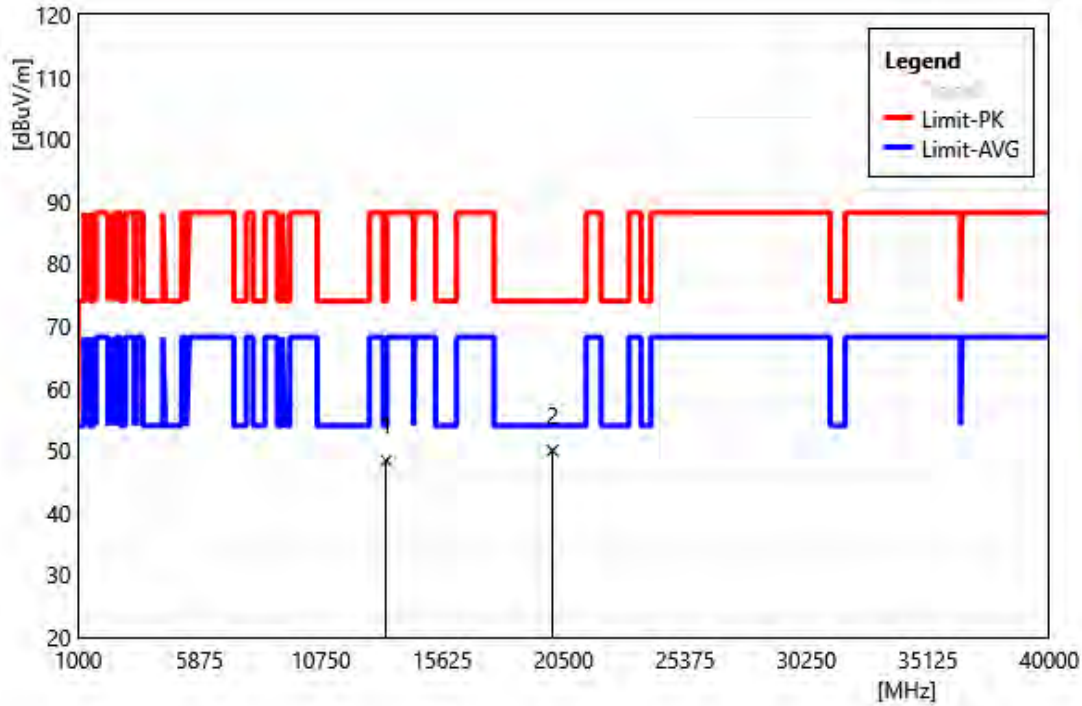


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	40.20	8.17	48.37	74.00	-25.63	PEAK
2	20055.00	41.05	8.95	50.00	74.00	-24.00	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 6685 MHz
Polarization: Vertical
Remark:

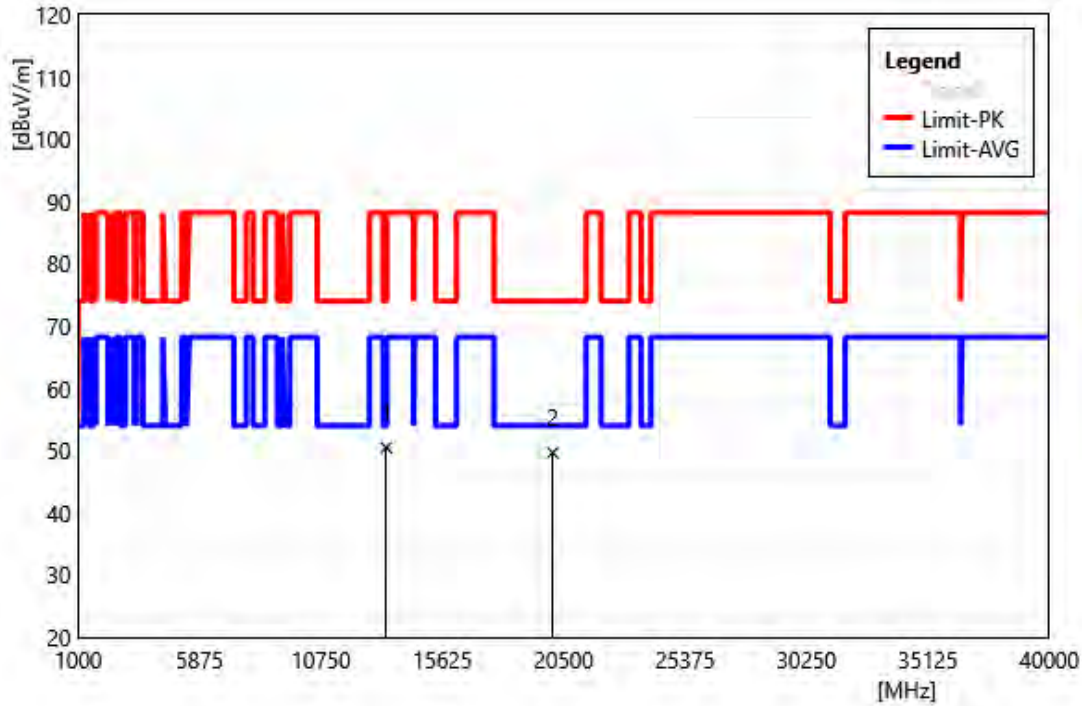


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13370.00	42.32	8.17	50.49	74.00	-23.51	PEAK
2	20055.00	40.69	8.95	49.64	74.00	-24.36	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 6845 MHz
Polarization: Horizontal
Remark:

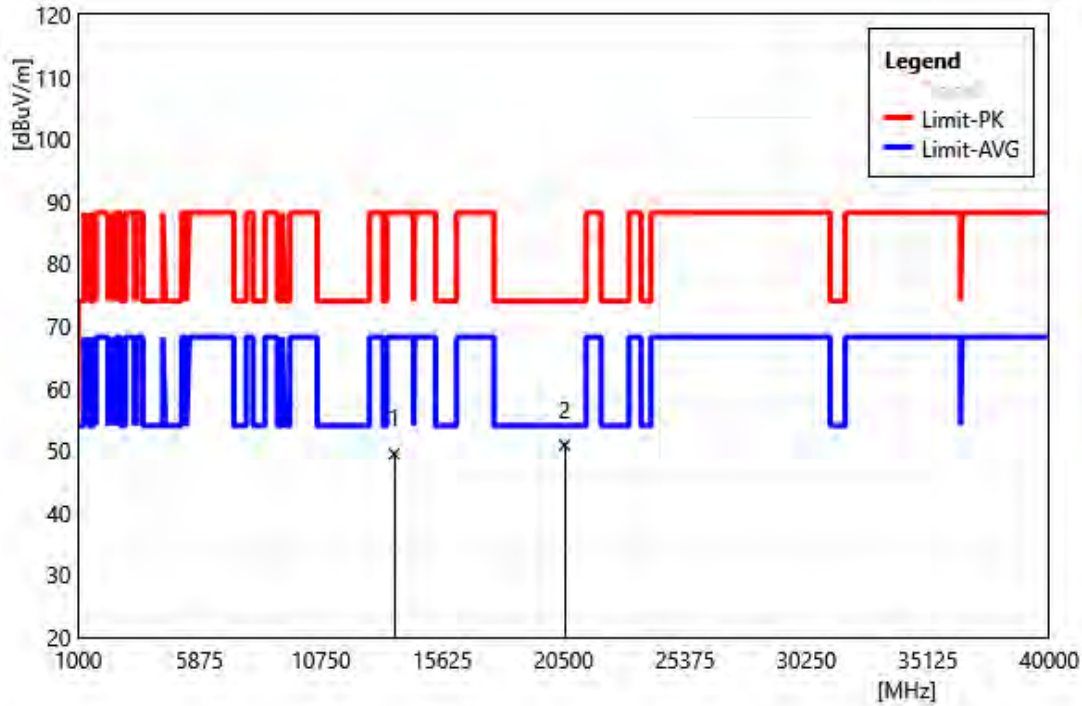


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	41.64	7.80	49.44	88.20	-38.76	PEAK
2	20535.00	41.70	9.17	50.87	74.00	-23.13	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6845 MHz		
Polarization:	Vertical		
Remark:			

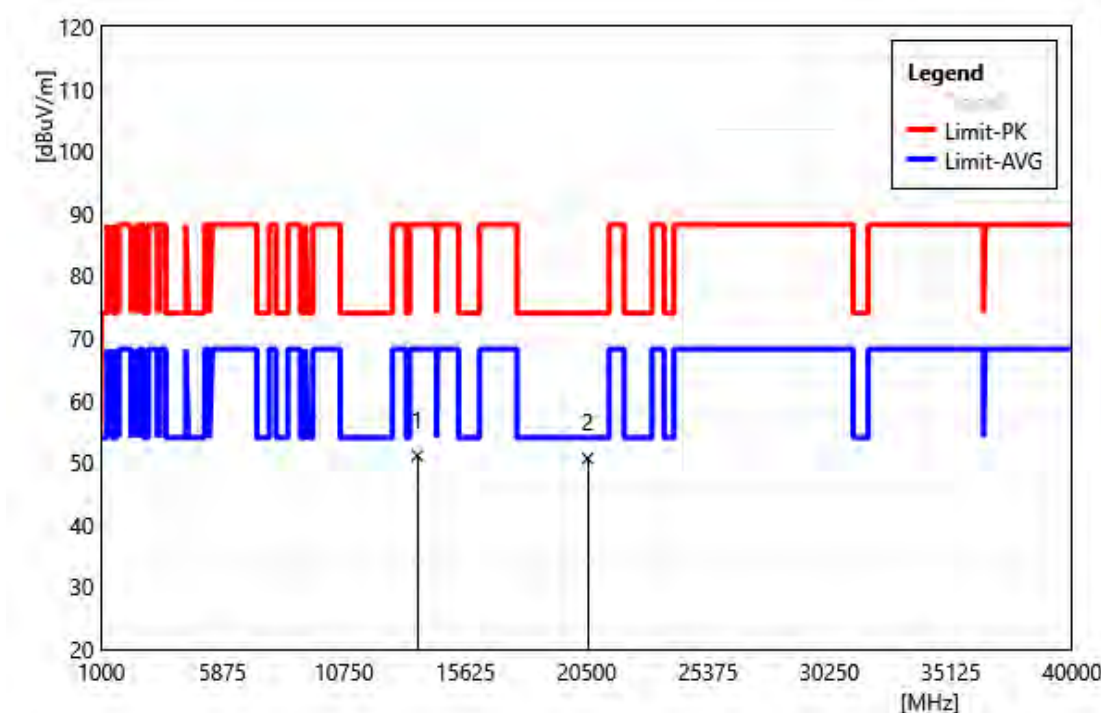


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13690.00	43.31	7.80	51.11	88.20	-37.09	PEAK
2	20535.00	41.47	9.17	50.64	74.00	-23.36	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 6885 MHz
Polarization: Horizontal
Remark:

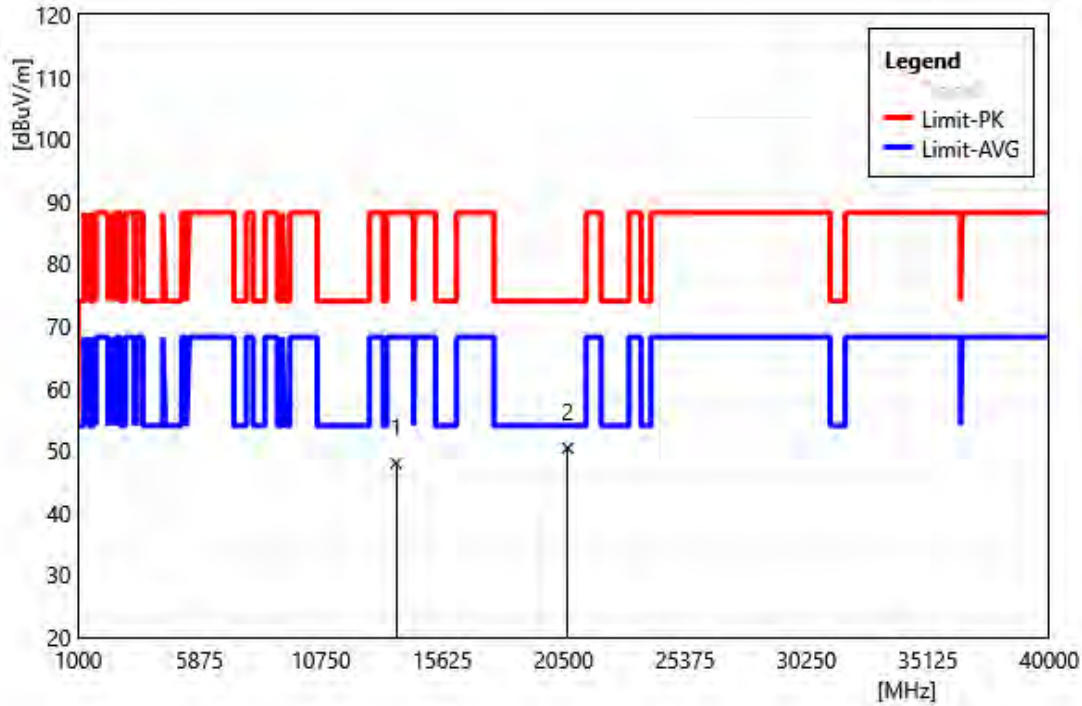


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	40.20	7.79	47.99	88.20	-40.21	PEAK
2	20655.00	41.15	9.22	50.37	74.00	-23.63	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6885 MHz		
Polarization:	Vertical		
Remark:			

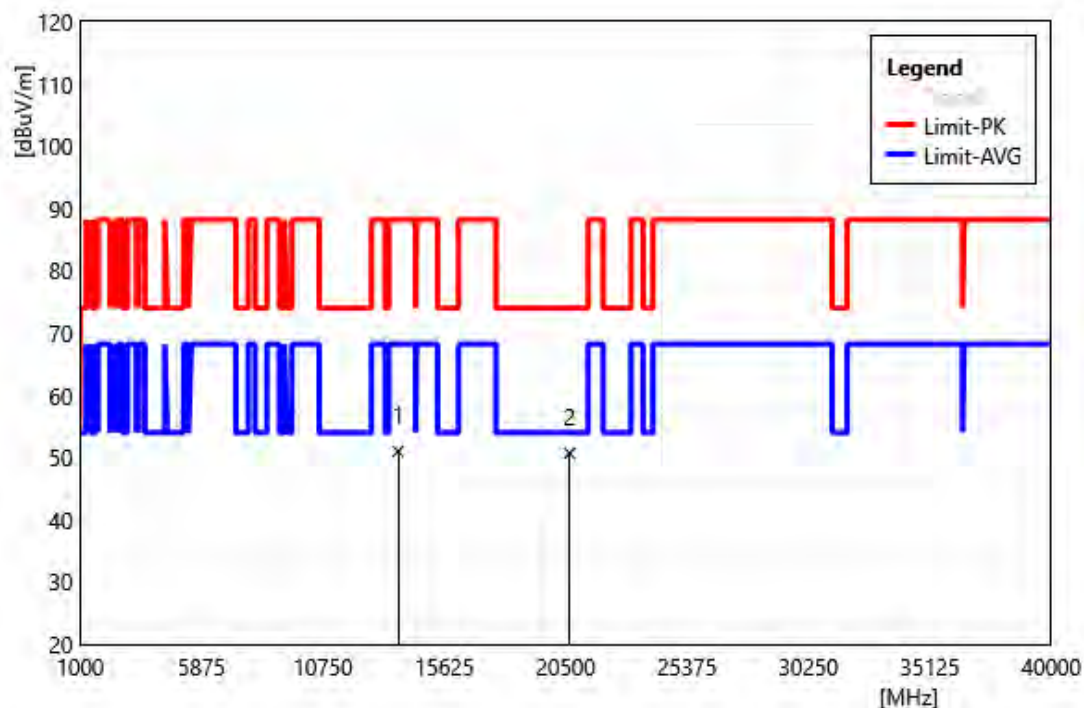


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13770.00	43.19	7.79	50.98	88.20	-37.22	PEAK
2	20655.00	41.48	9.22	50.70	74.00	-23.30	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 6925 MHz		
Polarization:	Horizontal		
Remark:			

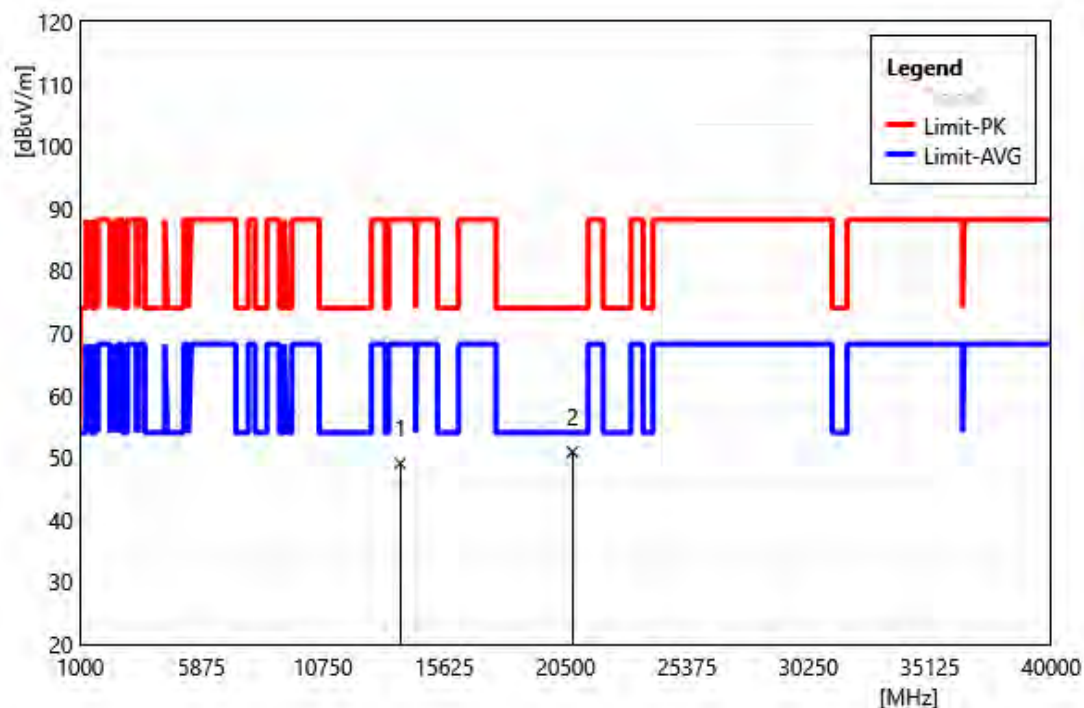


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	41.12	7.91	49.03	88.20	-39.17	PEAK
2	20775.00	41.63	9.28	50.91	74.00	-23.09	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 6925 MHz
Polarization: Vertical
Remark:

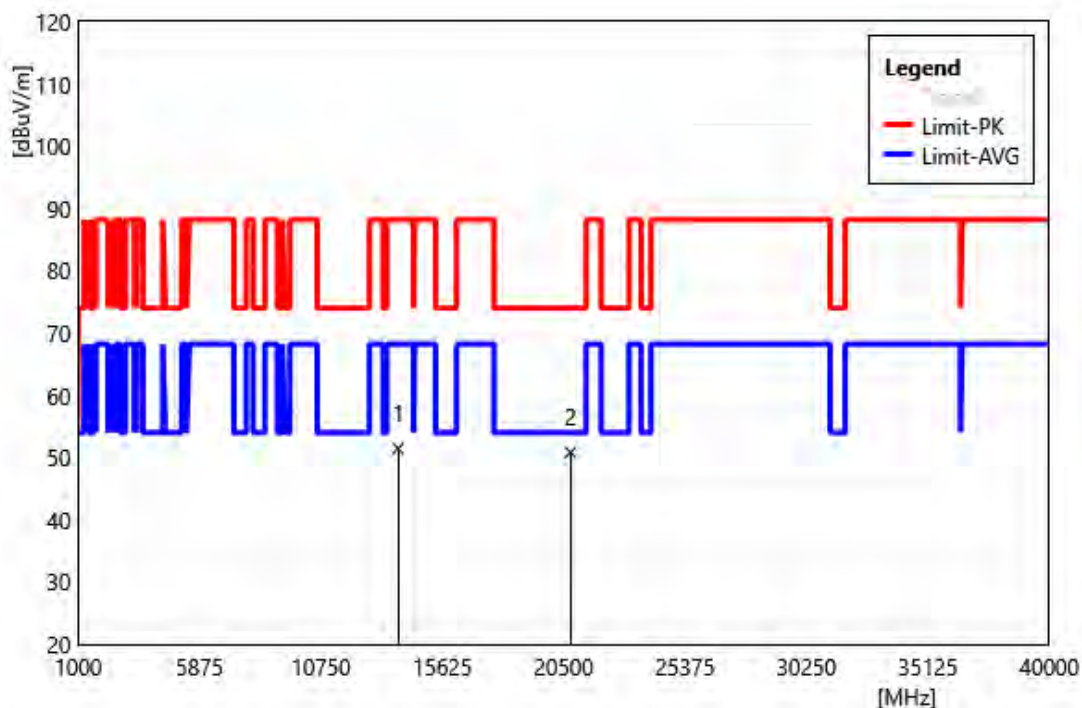


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13850.00	43.56	7.91	51.47	88.20	-36.73	PEAK
2	20775.00	41.52	9.28	50.80	74.00	-23.20	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7005 MHz		
Polarization:	Horizontal		
Remark:			

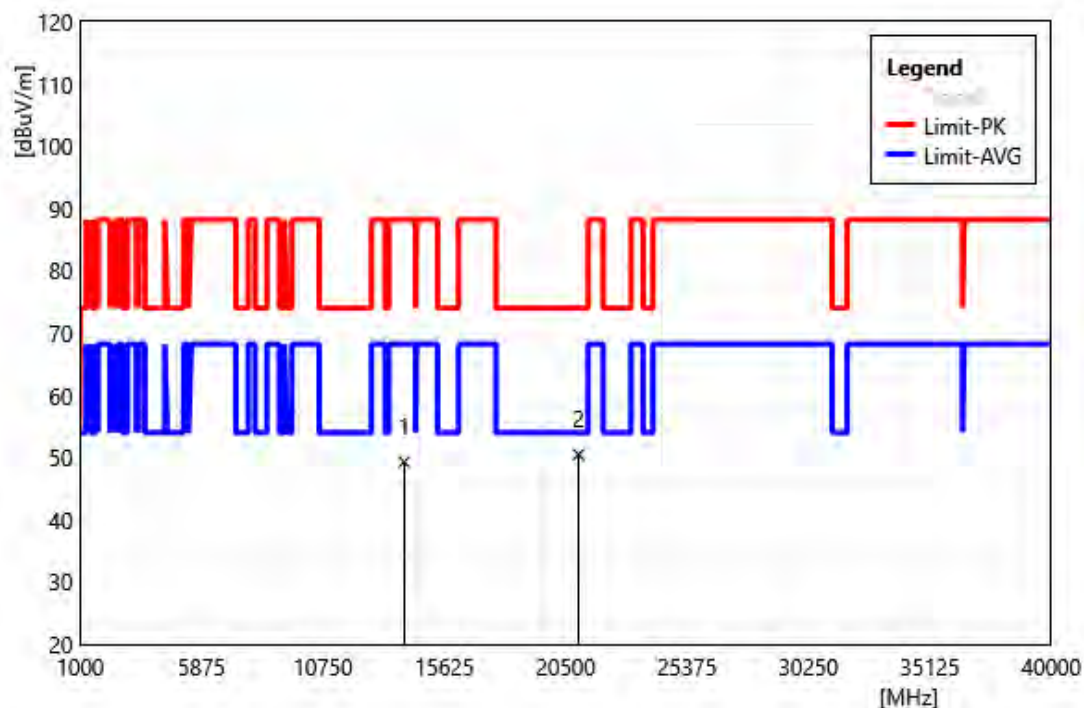


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	40.95	8.31	49.26	88.20	-38.94	PEAK
2	21015.00	41.10	9.39	50.49	74.00	-23.51	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 7005 MHz
Polarization: Vertical
Remark:

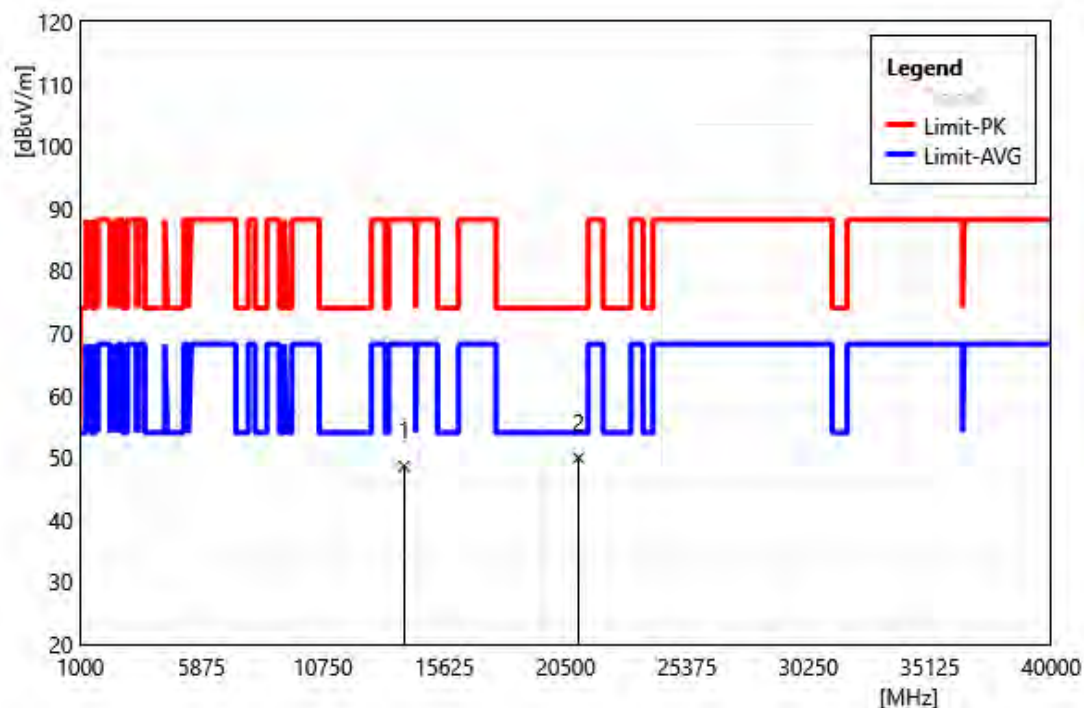


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14010.00	40.29	8.31	48.60	88.20	-39.60	PEAK
2	21015.00	40.54	9.39	49.93	74.00	-24.07	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 7085 MHz
Polarization: Horizontal
Remark:

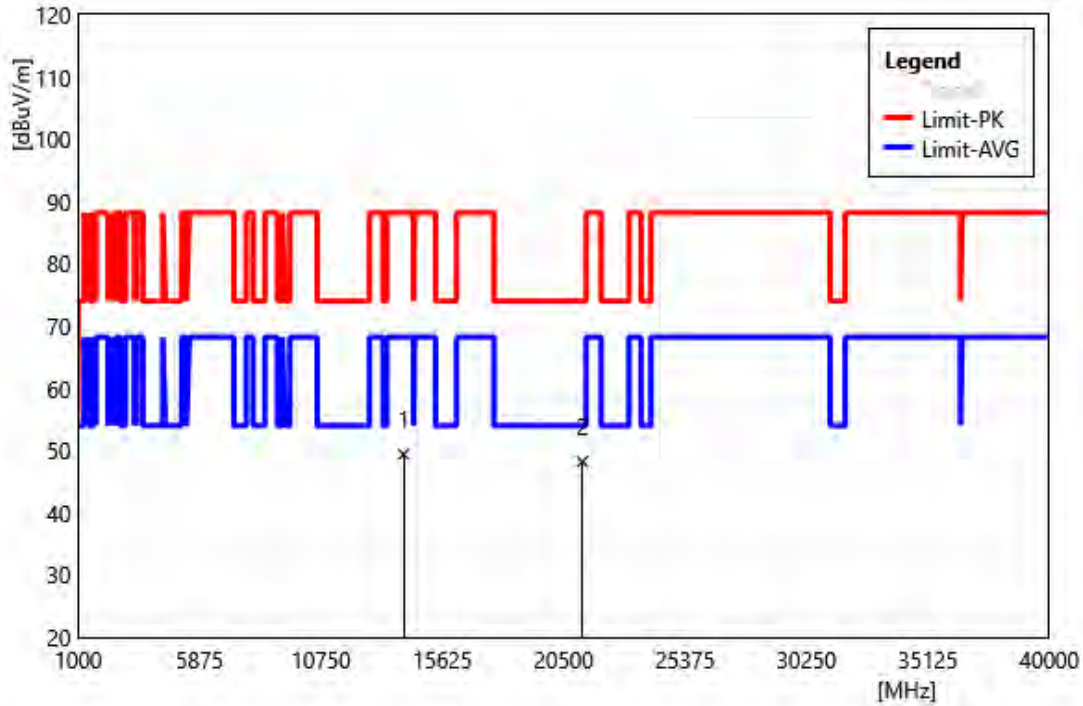


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14070.00	40.96	8.39	49.35	88.20	-38.85	PEAK
2	21255.00	38.74	9.49	48.23	74.00	-25.77	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 7085 MHz
Polarization: Vertical
Remark:

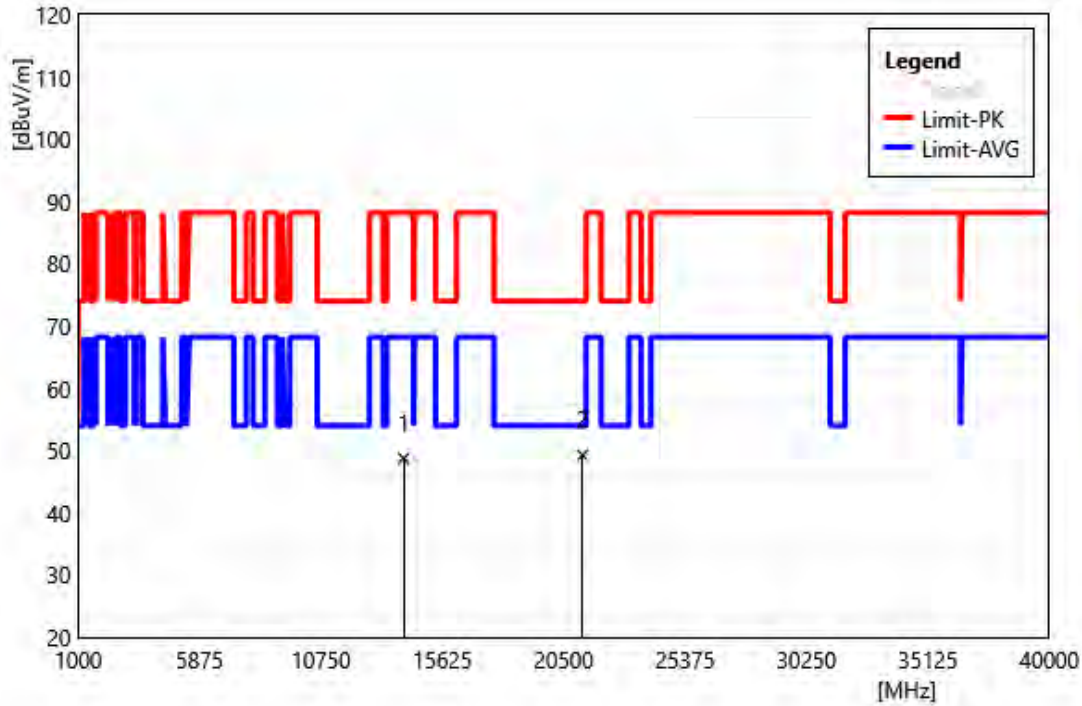


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14070.00	40.35	8.39	48.74	88.20	-39.46	PEAK
2	21255.00	39.76	9.49	49.25	74.00	-24.76	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985 MHz		
Polarization:	Horizontal		
Remark:			

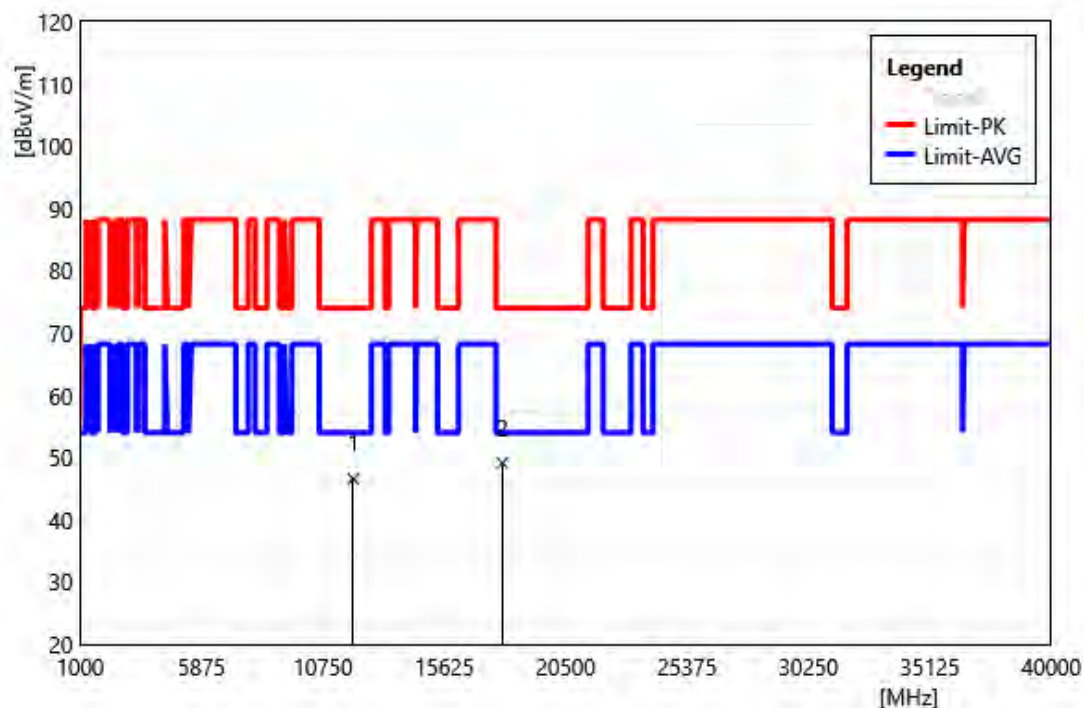


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	38.96	7.59	46.55	74.00	-27.45	PEAK
2	17955.00	41.39	7.73	49.12	74.00	-24.88	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985 MHz		
Polarization:	Vertical		
Remark:			

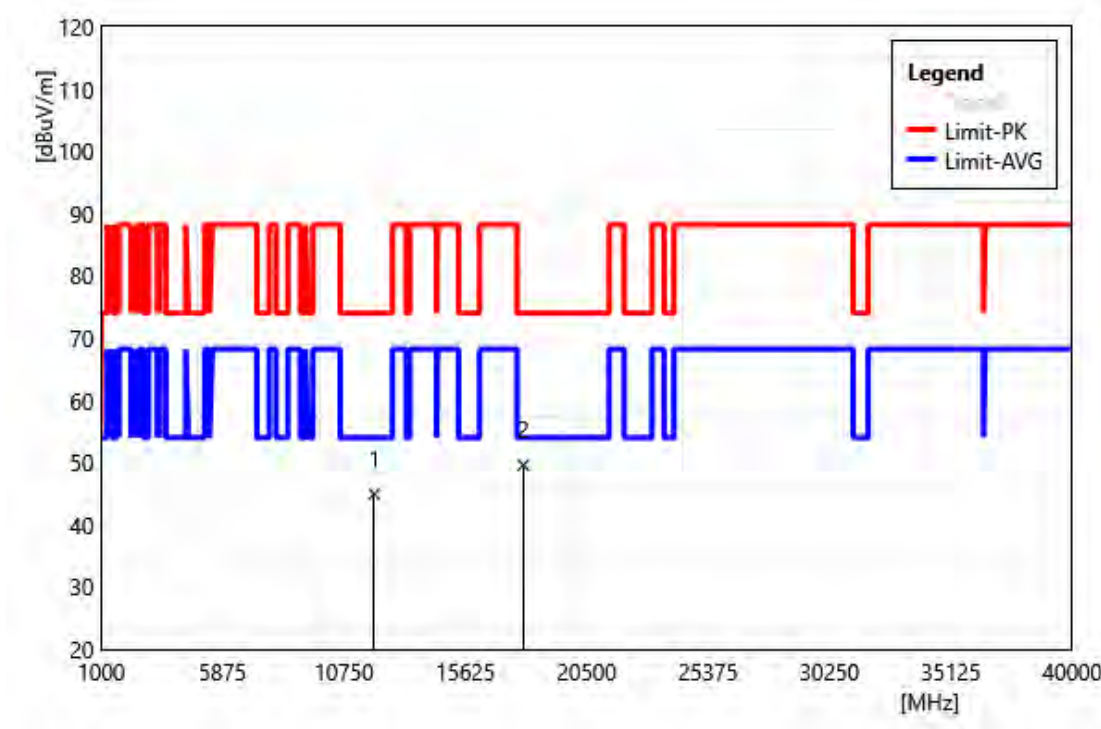


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11970.00	37.36	7.59	44.95	74.00	-29.05	PEAK
2	17955.00	41.85	7.73	49.58	74.00	-24.42	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 6145 MHz
Polarization: Horizontal
Remark:

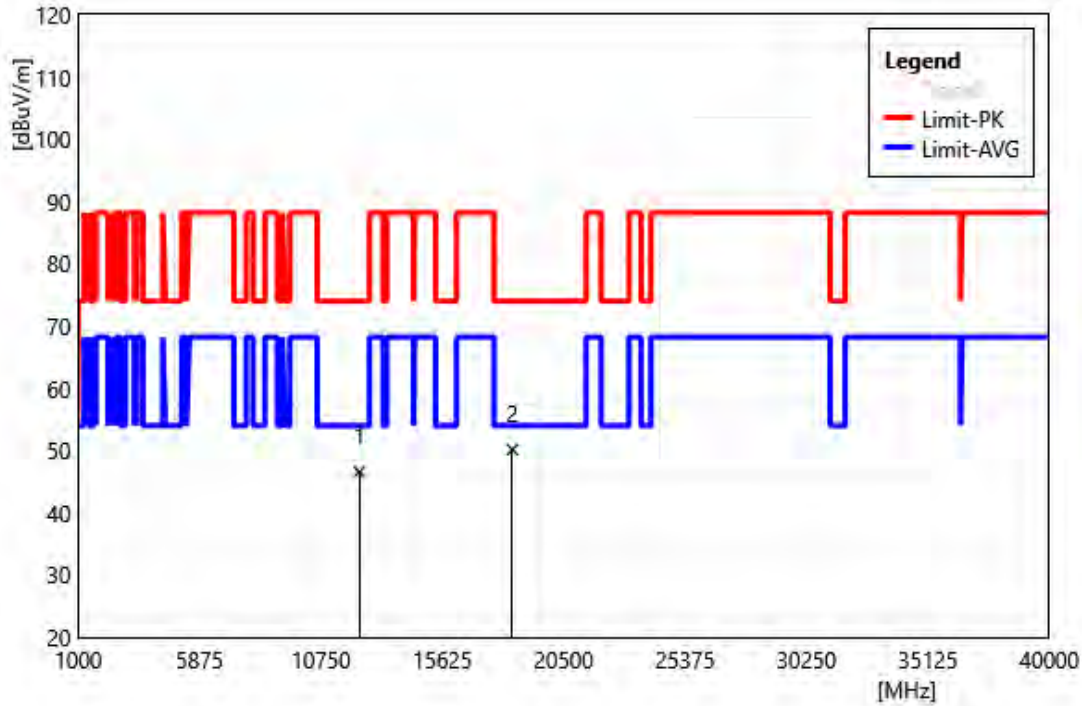


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	38.84	7.72	46.56	74.00	-27.44	PEAK
2	18435.00	41.92	8.23	50.15	74.00	-23.85	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 6145 MHz
Polarization: Vertical
Remark:

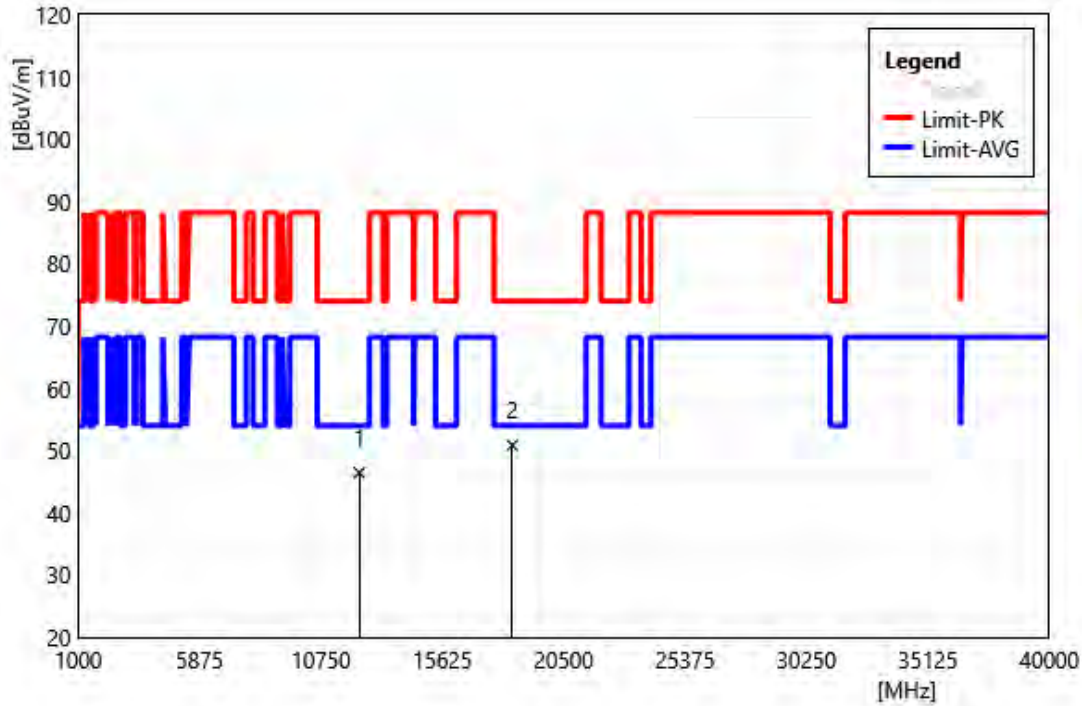


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12290.00	38.70	7.72	46.42	74.00	-27.58	PEAK
2	18435.00	42.61	8.23	50.84	74.00	-23.16	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 6385 MHz
Polarization: Horizontal
Remark:

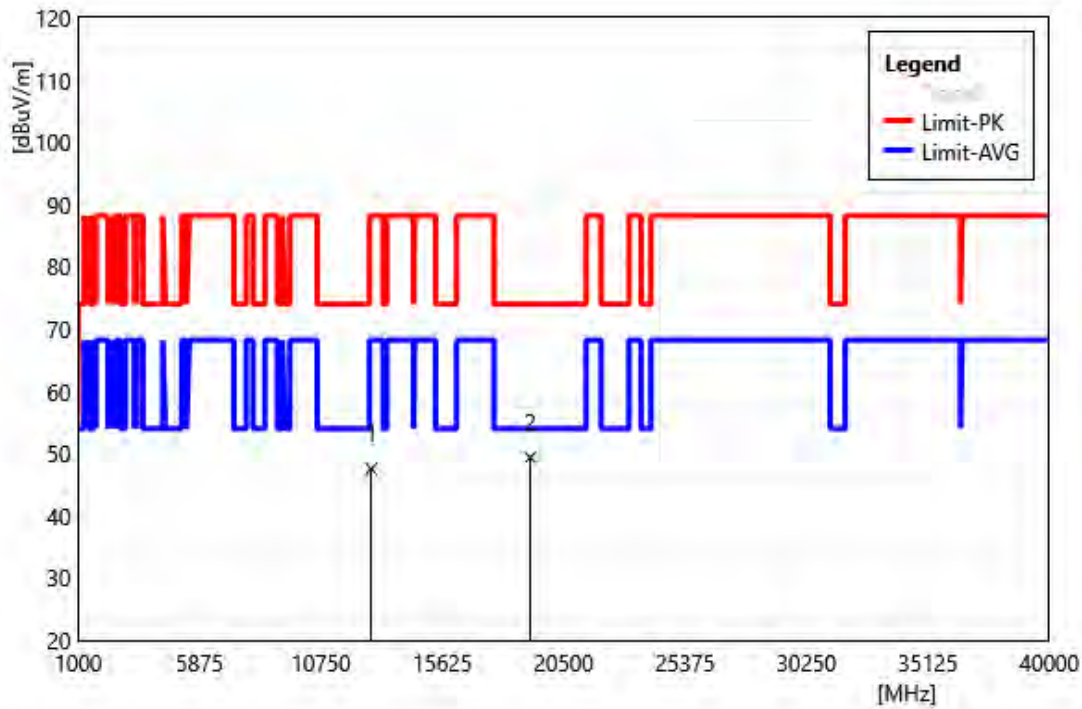


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	39.21	8.35	47.56	88.20	-40.64	PEAK
2	19155.00	40.82	8.56	49.38	74.00	-24.62	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6385 MHz		
Polarization:	Vertical		
Remark:			

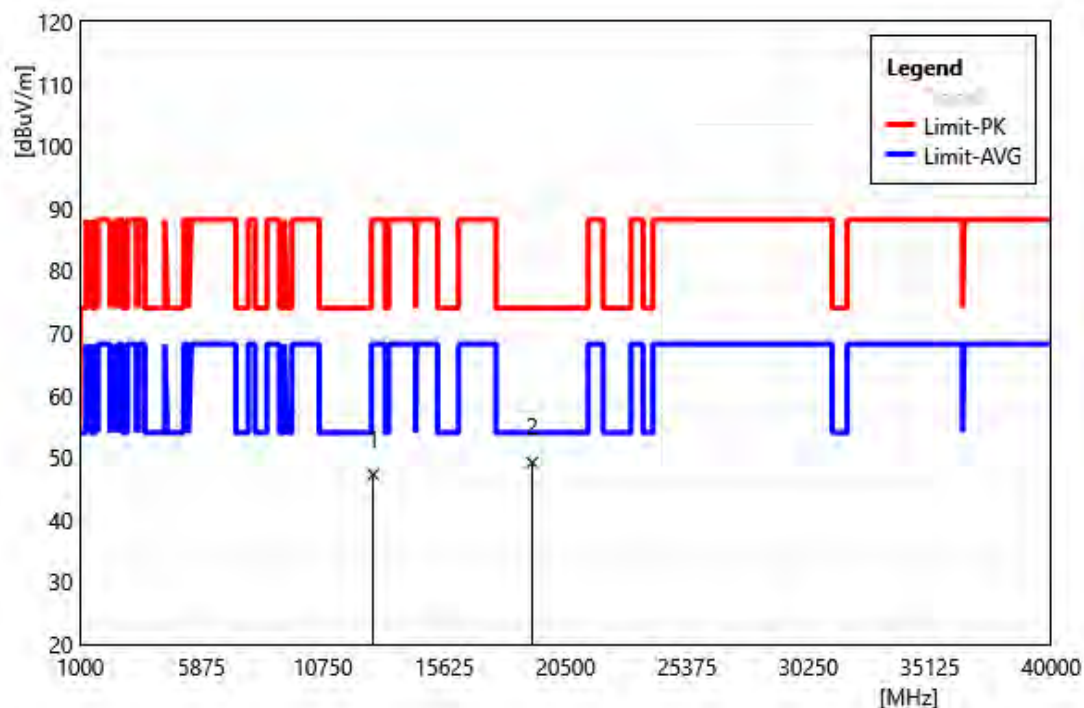


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12770.00	38.94	8.35	47.29	88.20	-40.91	PEAK
2	19155.00	40.63	8.56	49.19	74.00	-24.81	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6465 MHz		
Polarization:	Horizontal		
Remark:			

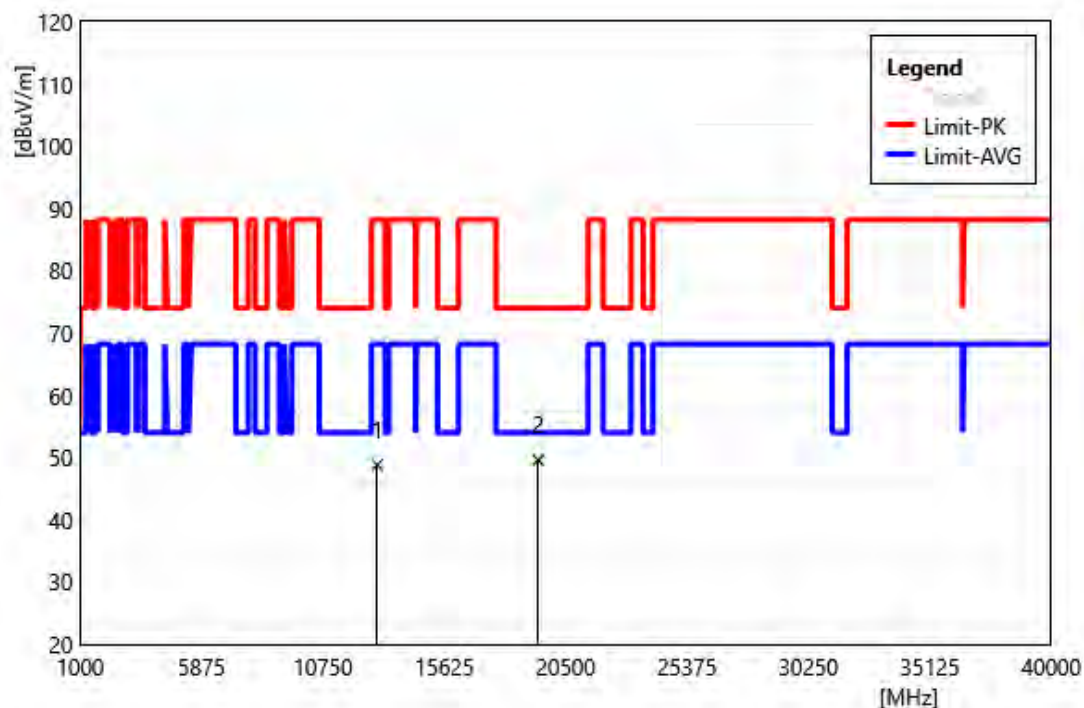


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	40.28	8.52	48.80	88.20	-39.40	PEAK
2	19395.00	40.95	8.67	49.62	74.00	-24.38	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 6465 MHz
Polarization: Vertical
Remark:

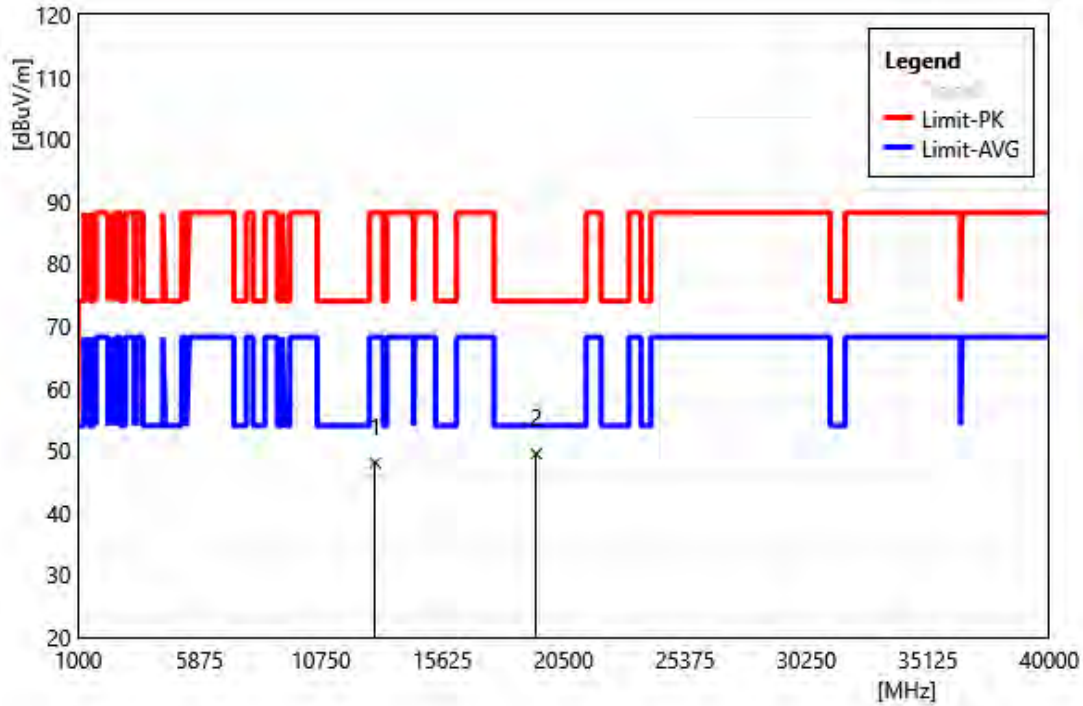


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12930.00	39.52	8.52	48.04	88.20	-40.16	PEAK
2	19395.00	40.78	8.67	49.45	74.00	-24.55	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 6545 MHz
Polarization: Horizontal
Remark:

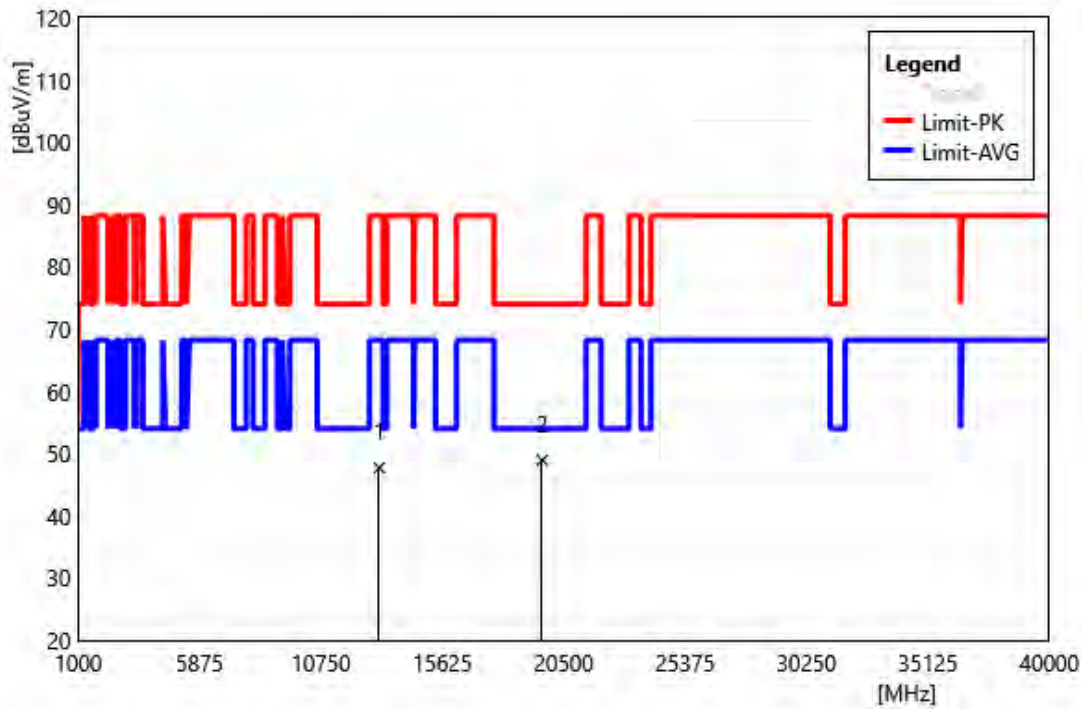


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	39.17	8.53	47.70	88.20	-40.50	PEAK
2	19635.00	40.16	8.77	48.93	74.00	-25.07	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6545 MHz		
Polarization:	Vertical		
Remark:			

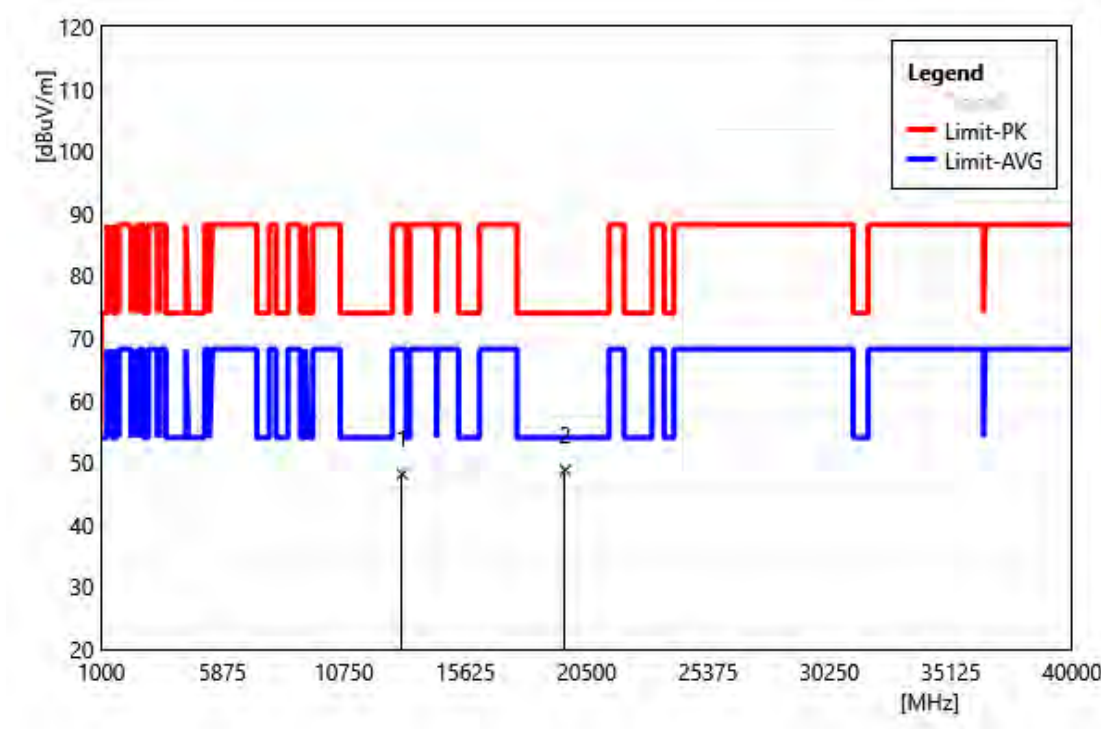


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13090.00	39.63	8.53	48.16	88.20	-40.04	PEAK
2	19635.00	39.98	8.77	48.75	74.00	-25.25	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 6625 MHz
Polarization: Horizontal
Remark:

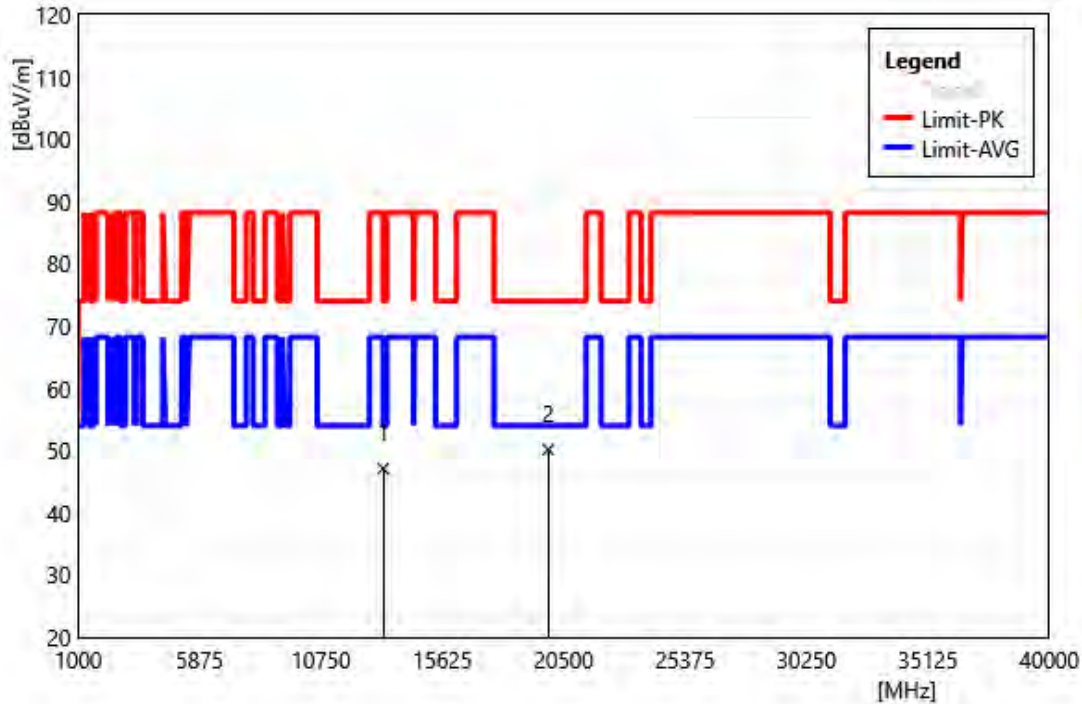


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	38.72	8.35	47.07	74.00	-26.93	PEAK
2	19875.00	41.28	8.87	50.15	74.00	-23.85	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 6625 MHz
Polarization: Vertical
Remark:

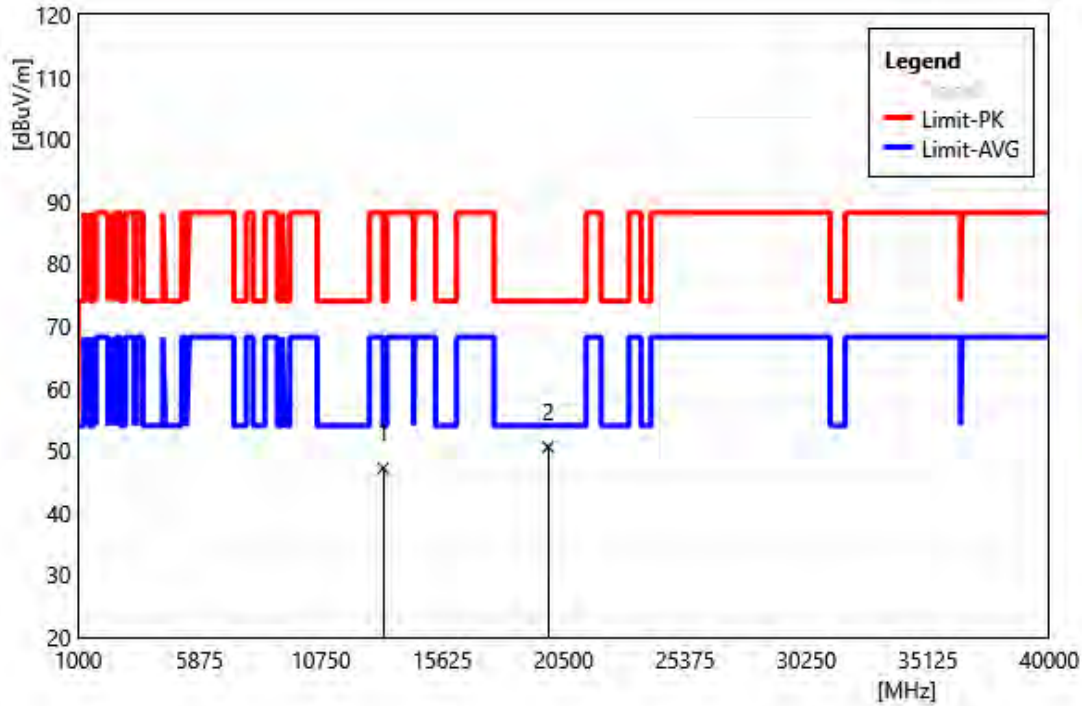


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13250.00	38.78	8.35	47.13	74.00	-26.87	PEAK
2	19875.00	41.70	8.87	50.57	74.00	-23.43	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 6705 MHz
Polarization: Horizontal
Remark:

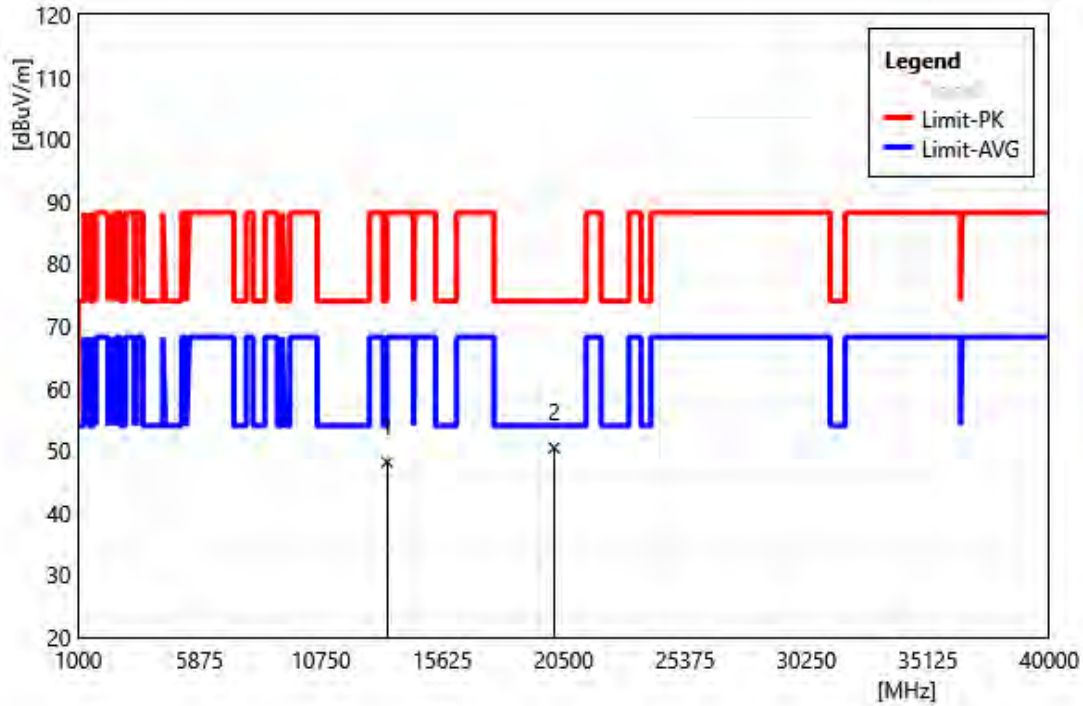


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	40.08	8.08	48.16	88.20	-40.04	PEAK
2	20115.00	41.45	8.99	50.44	74.00	-23.56	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 6705 MHz
Polarization: Vertical
Remark:

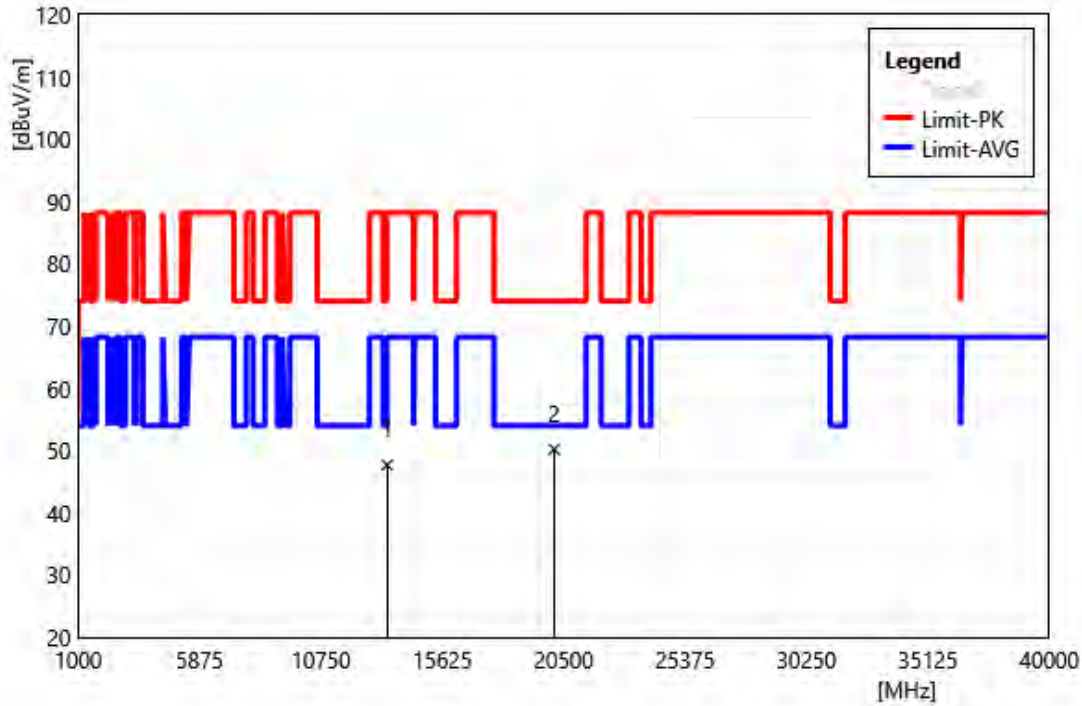


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13410.00	39.59	8.08	47.67	88.20	-40.53	PEAK
2	20115.00	41.19	8.99	50.18	74.00	-23.82	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6785 MHz		
Polarization:	Horizontal		
Remark:			

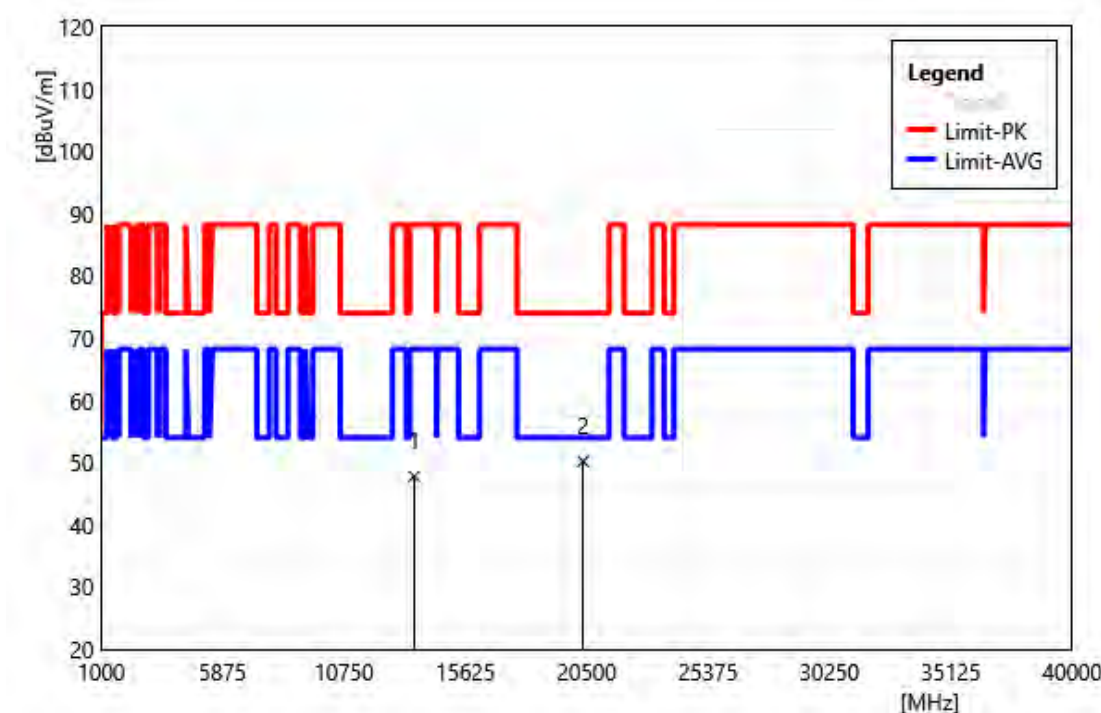


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	39.96	7.82	47.78	88.20	-40.42	PEAK
2	20355.00	41.08	9.09	50.17	74.00	-23.83	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6785 MHz		
Polarization:	Vertical		
Remark:			

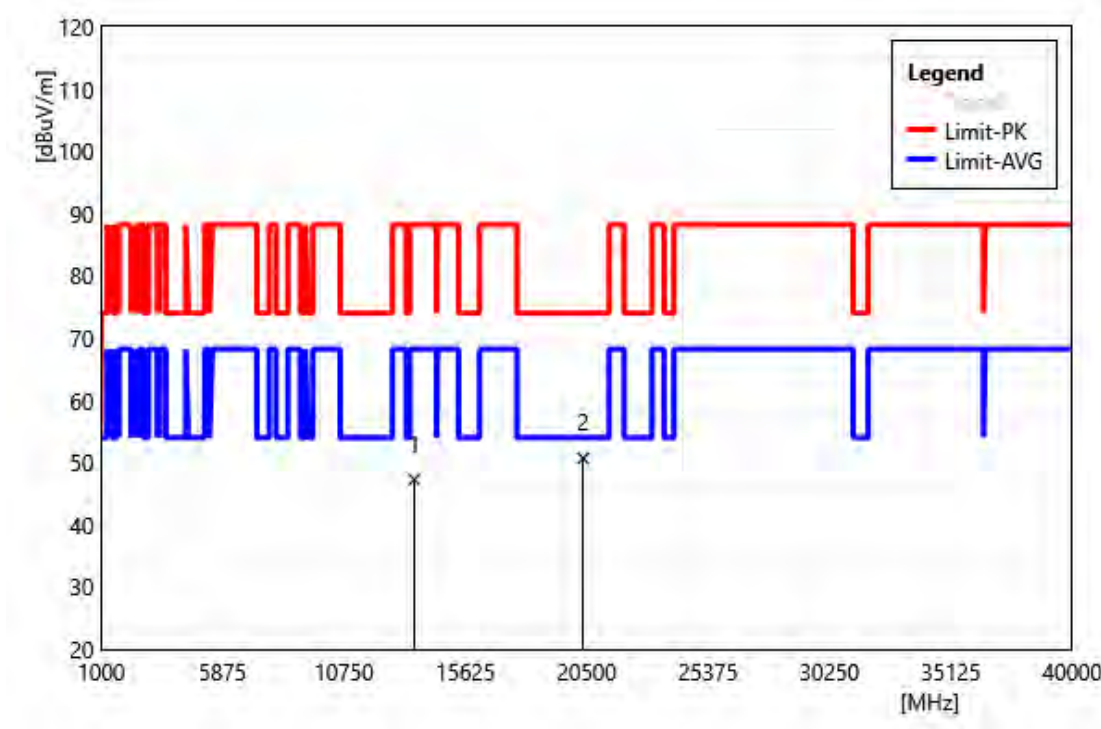


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13570.00	39.48	7.82	47.30	88.20	-40.90	PEAK
2	20355.00	41.60	9.09	50.69	74.00	-23.31	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6865 MHz		
Polarization:	Horizontal		
Remark:			

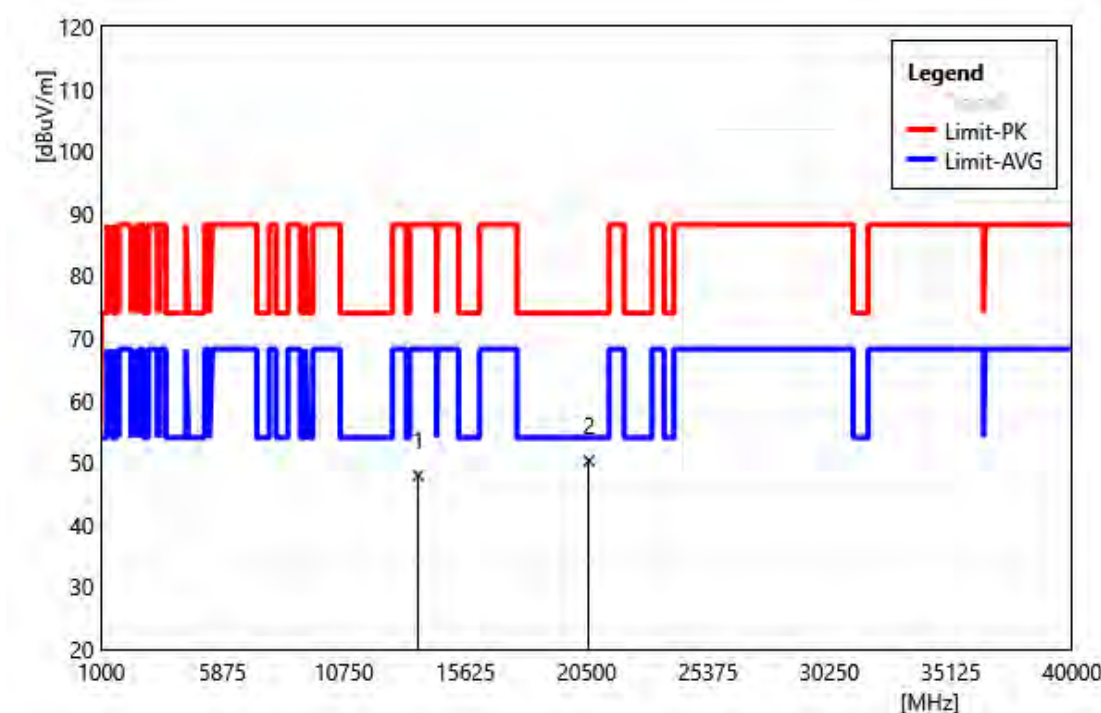


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	40.14	7.79	47.93	88.20	-40.27	PEAK
2	20595.00	41.08	9.21	50.29	74.00	-23.71	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 6865 MHz
Polarization: Vertical
Remark:

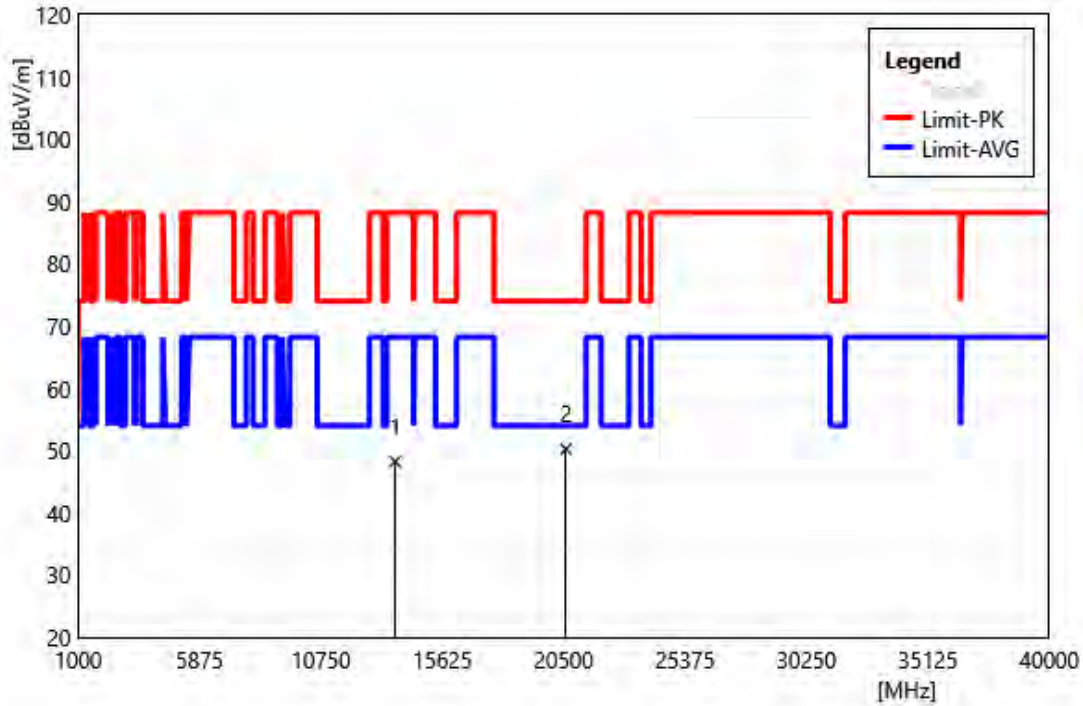


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13730.00	40.43	7.79	48.22	88.20	-39.98	PEAK
2	20595.00	41.03	9.21	50.24	74.00	-23.76	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 6945 MHz		
Polarization:	Horizontal		
Remark:			

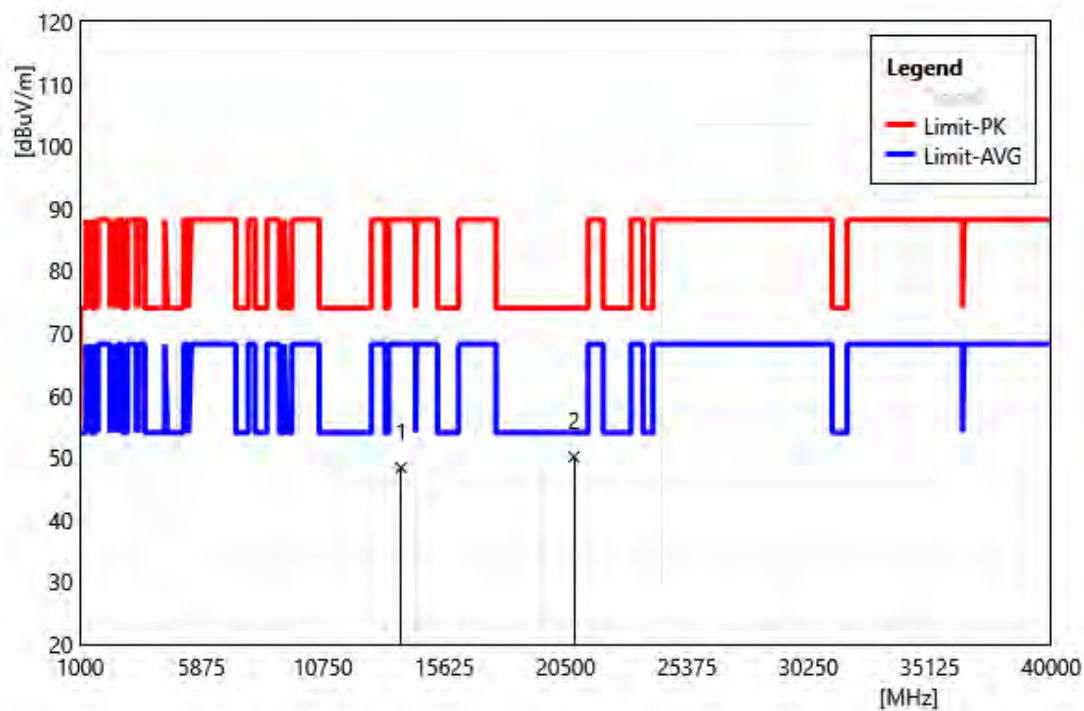


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	40.33	8.02	48.35	88.20	-39.85	PEAK
2	20835.00	40.81	9.30	50.11	74.00	-23.89	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 6945 MHz
Polarization: Vertical
Remark:

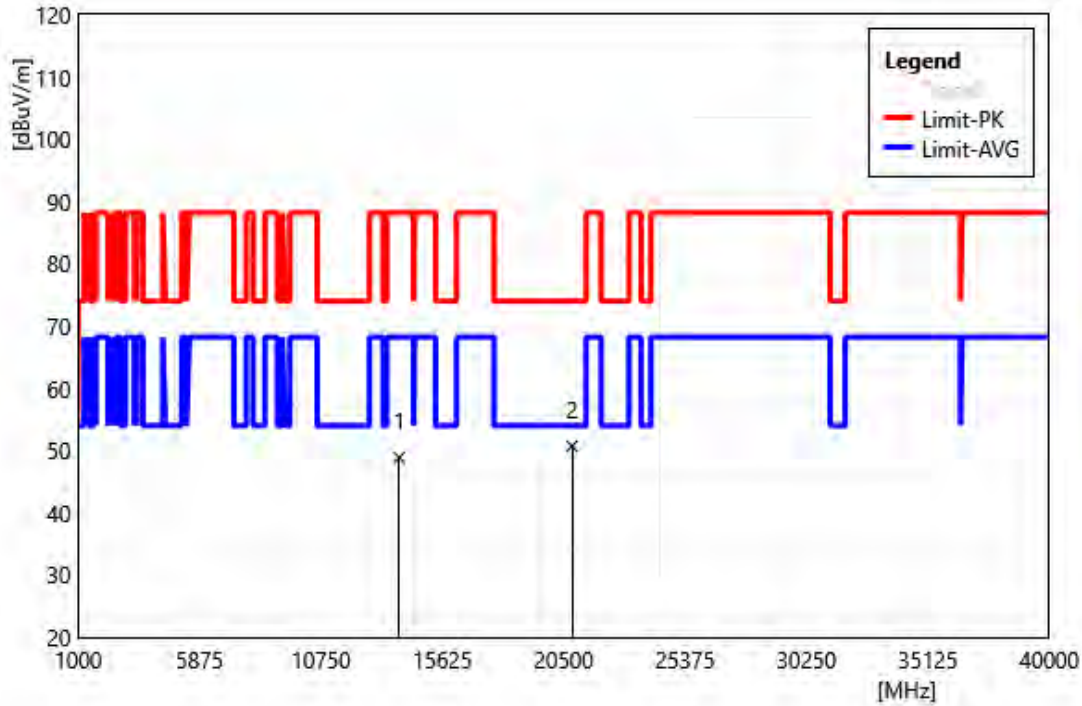


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13890.00	40.84	8.02	48.86	88.20	-39.34	PEAK
2	20835.00	41.40	9.30	50.70	74.00	-23.30	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 7025 MHz
Polarization: Horizontal
Remark:

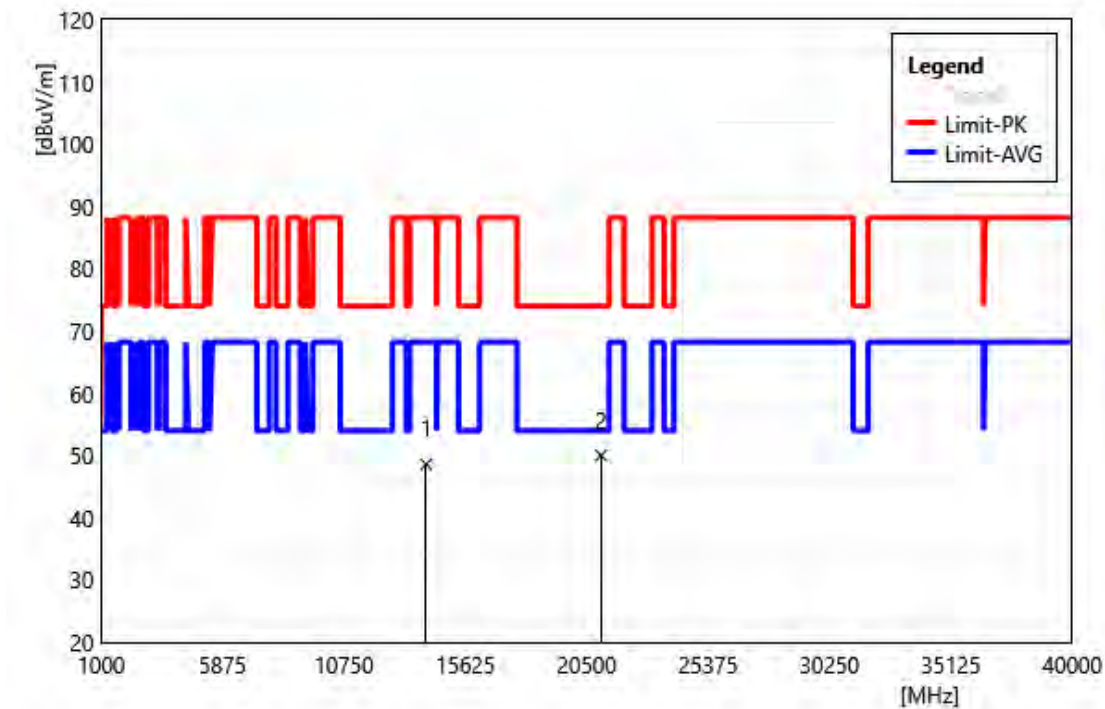


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	40.25	8.36	48.61	88.20	-39.59	PEAK
2	21075.00	40.59	9.41	50.00	74.00	-24.00	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025 MHz		
Polarization:	Vertical		
Remark:			

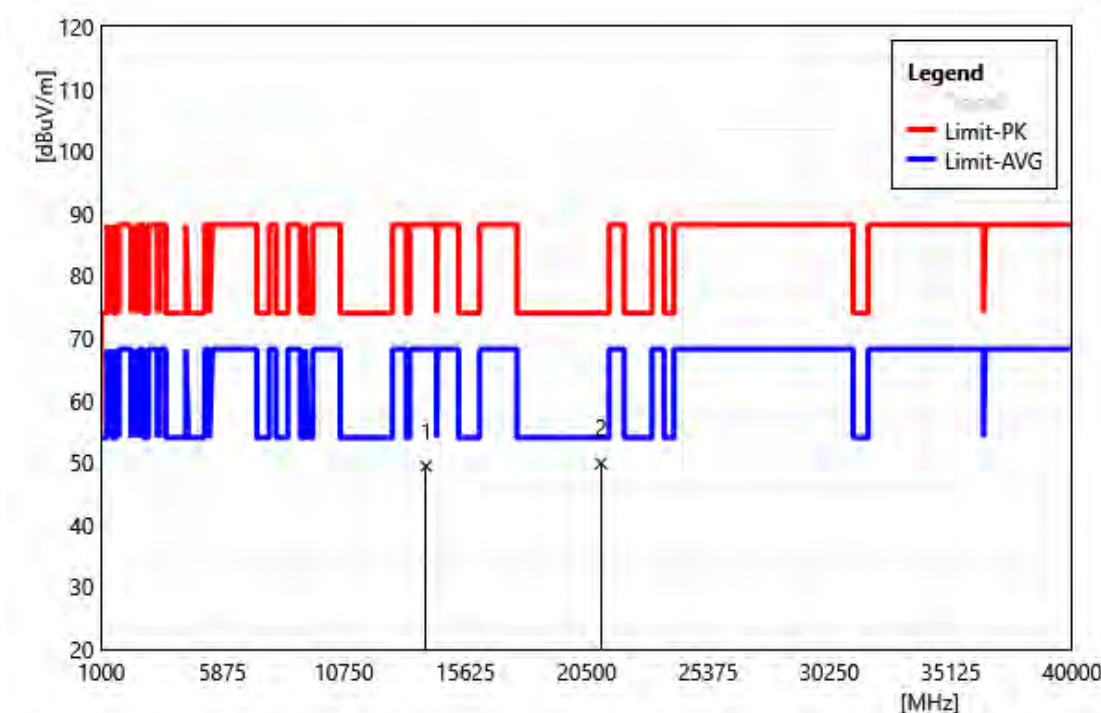


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	14050.00	41.04	8.36	49.40	88.20	-38.80	PEAK
2	21075.00	40.45	9.41	49.86	74.00	-24.14	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

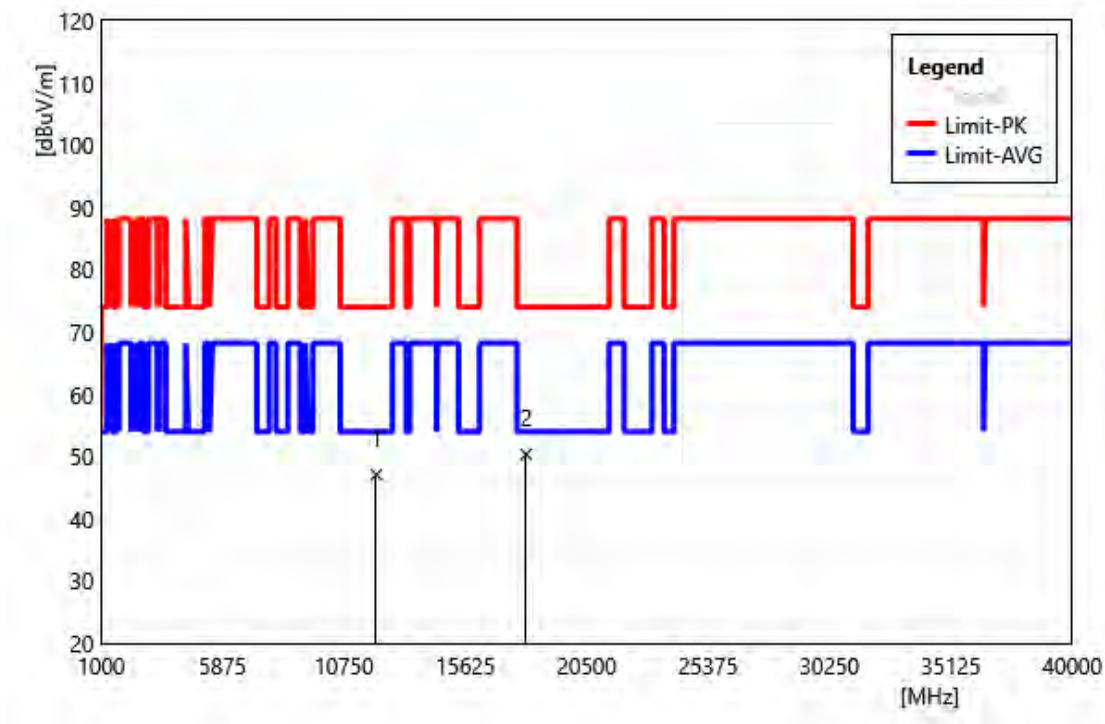


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	39.47	7.60	47.07	74.00	-26.93	PEAK
2	18075.00	42.28	8.07	50.35	74.00	-23.65	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Vertical		
Remark:			

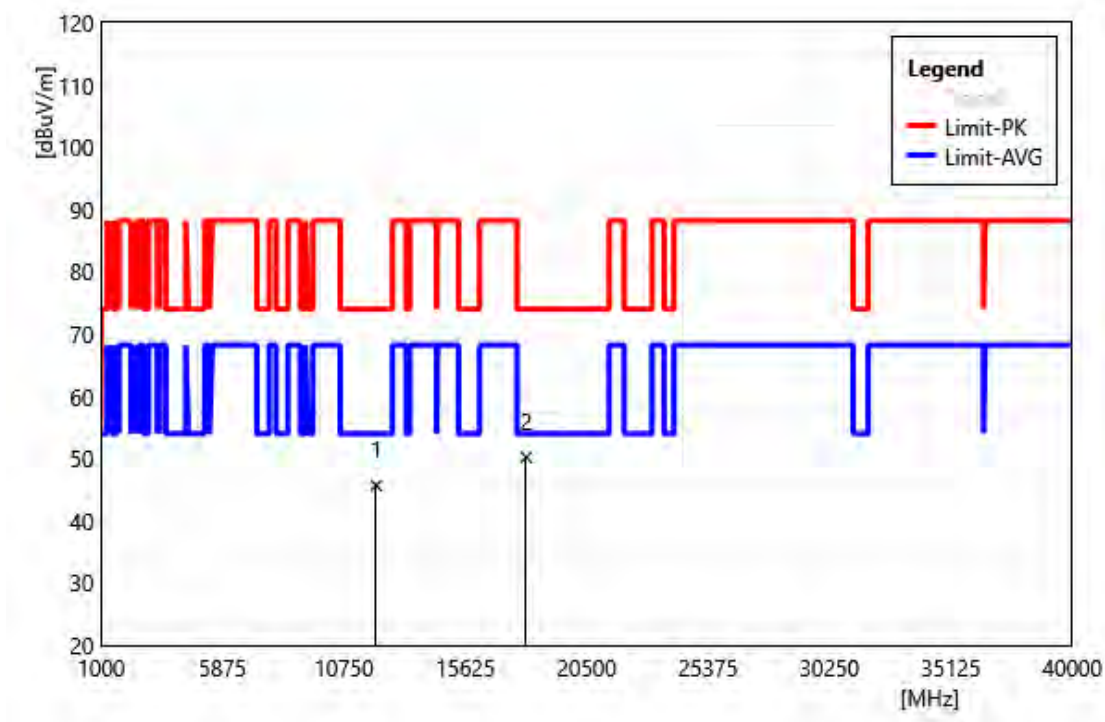


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12050.00	38.09	7.60	45.69	74.00	-28.31	PEAK
2	18075.00	42.12	8.07	50.19	74.00	-23.81	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT160 6185
MHz
Polarization: Horizontal
Remark:

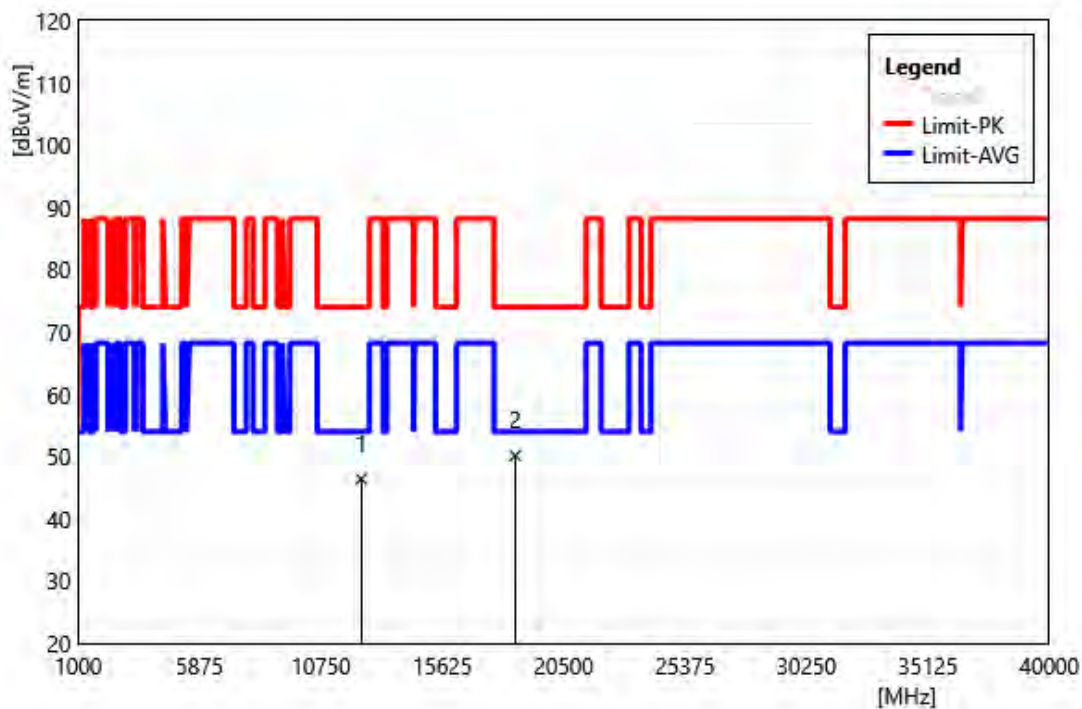


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	38.43	7.96	46.39	74.00	-27.61	PEAK
2	18555.00	41.84	8.29	50.13	74.00	-23.87	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6185		
	MHz		
Polarization:	Vertical		
Remark:			

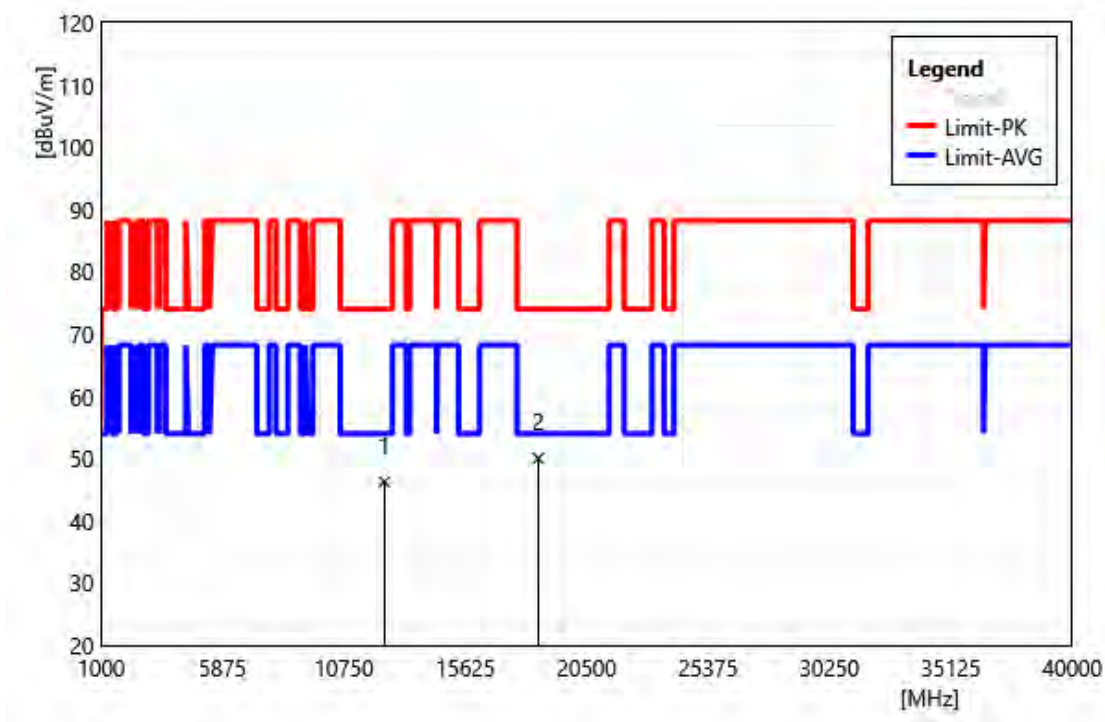


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12370.00	38.32	7.96	46.28	74.00	-27.72	PEAK
2	18555.00	41.74	8.29	50.03	74.00	-23.97	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6345		
	MHz		
Polarization:	Horizontal		
Remark:			

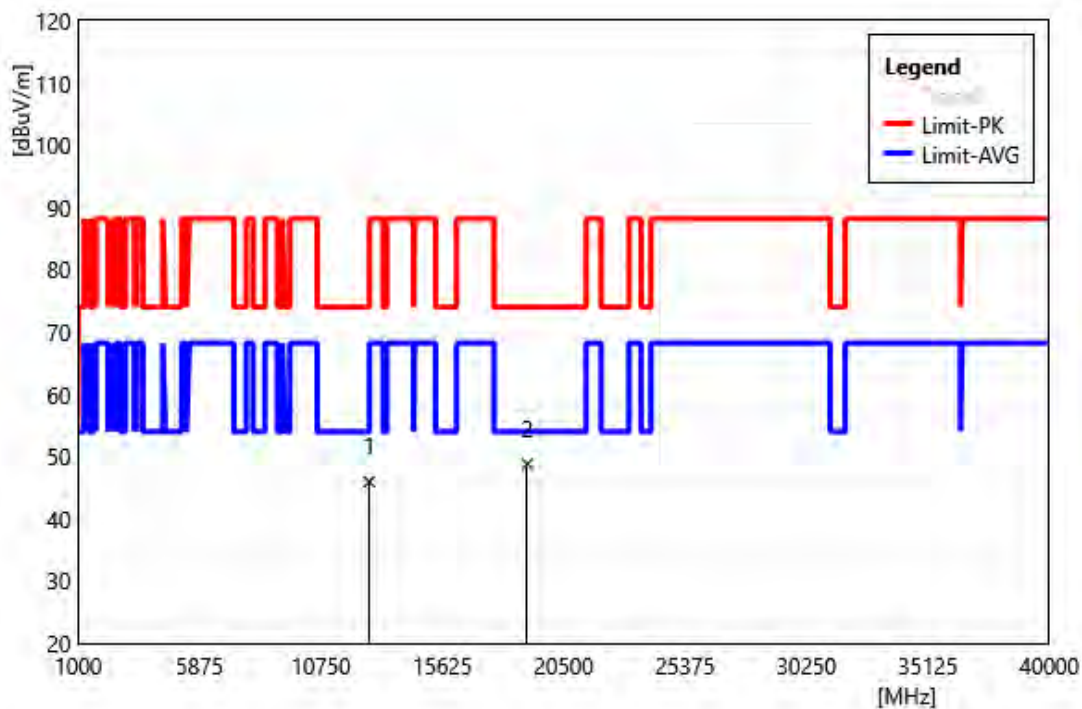


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	37.71	8.24	45.95	74.00	-28.05	PEAK
2	19035.00	40.27	8.50	48.77	74.00	-25.23	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6345		
	MHz		
Polarization:	Vertical		
Remark:			

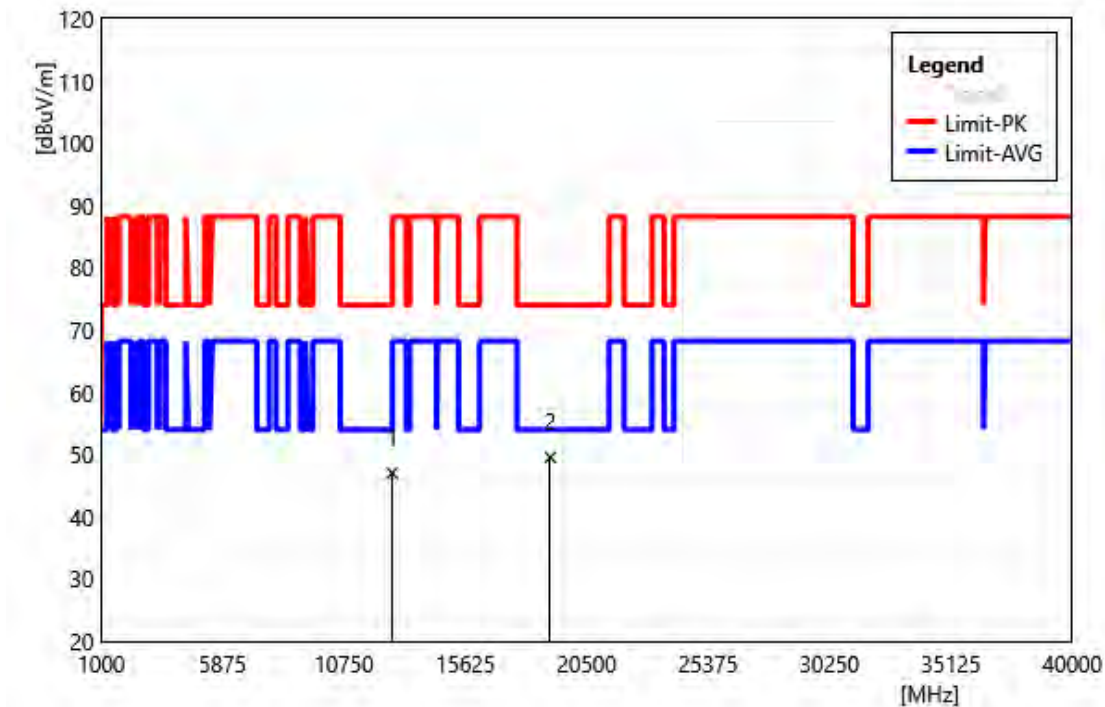


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12690.00	38.77	8.24	47.01	74.00	-26.99	PEAK
2	19035.00	41.04	8.50	49.54	74.00	-24.46	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6505		
	MHz		
Polarization:	Horizontal		
Remark:			

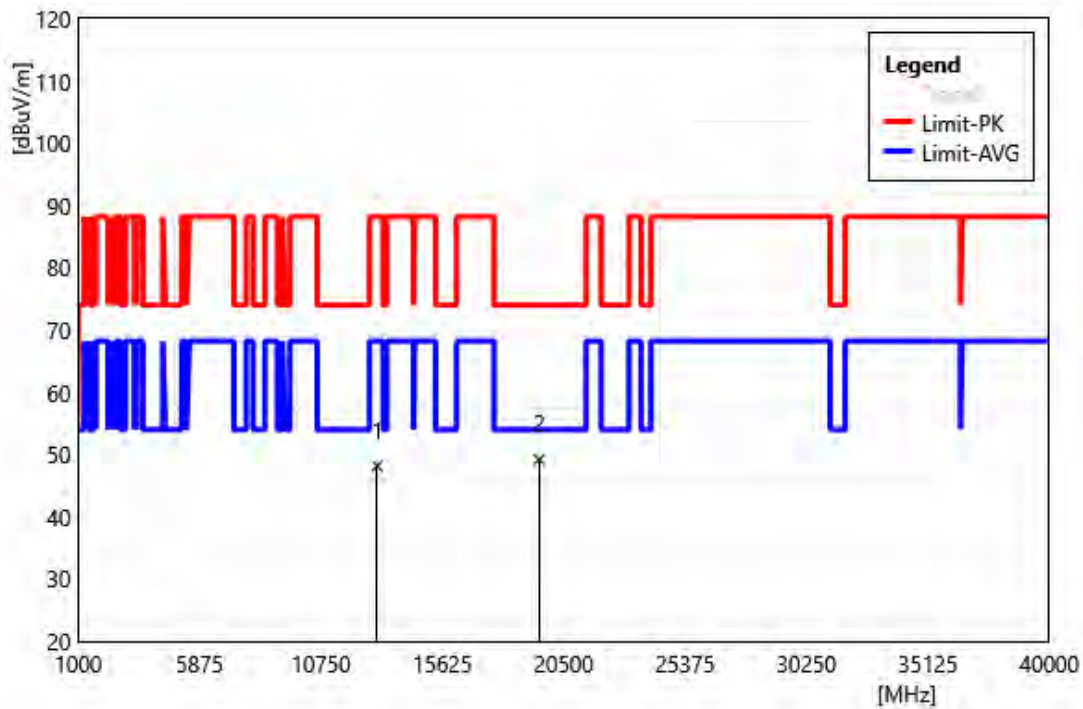


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	39.68	8.49	48.17	88.20	-40.03	PEAK
2	19515.00	40.43	8.72	49.15	74.00	-24.85	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6505		
	MHz		
Polarization:	Vertical		
Remark:			

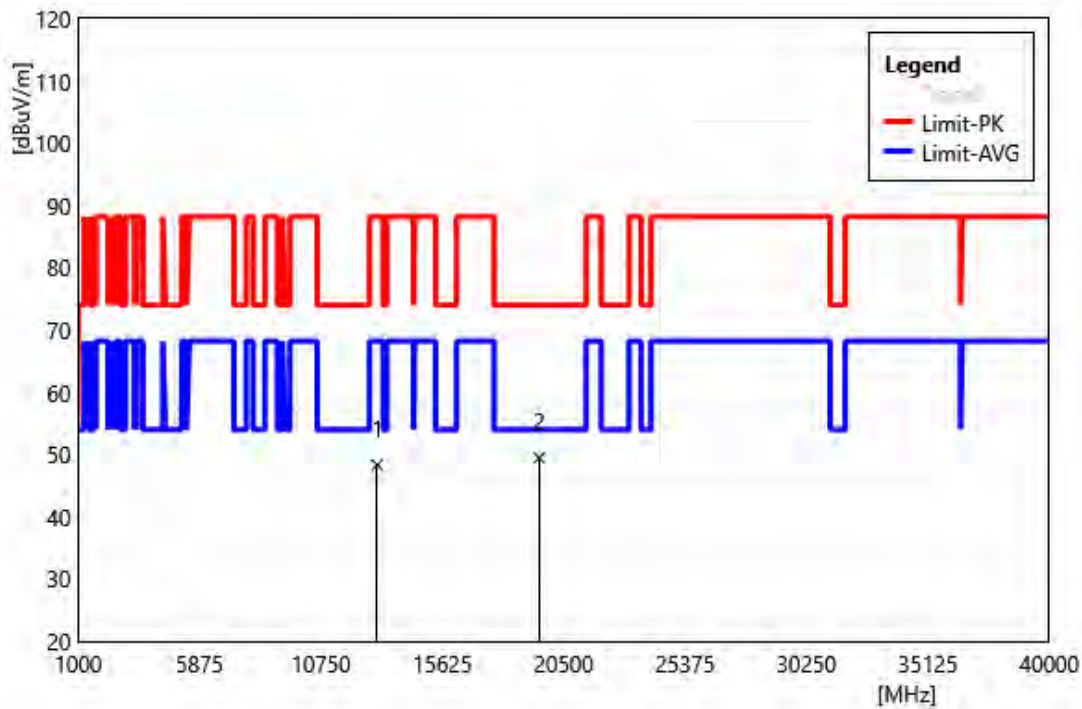


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13010.00	39.81	8.49	48.30	88.20	-39.90	PEAK
2	19515.00	40.73	8.72	49.45	74.00	-24.55	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6665		
	MHz		
Polarization:	Horizontal		
Remark:			

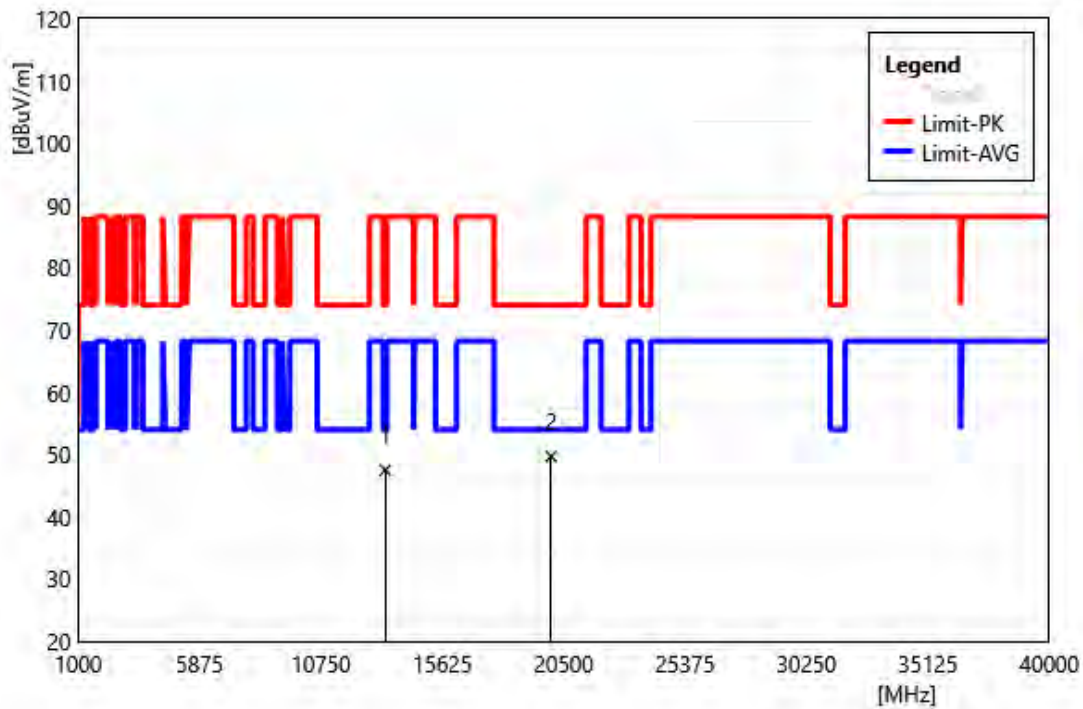


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	39.26	8.25	47.51	74.00	-26.49	PEAK
2	19995.00	40.76	8.94	49.70	74.00	-24.30	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6665		
	MHz		
Polarization:	Vertical		
Remark:			

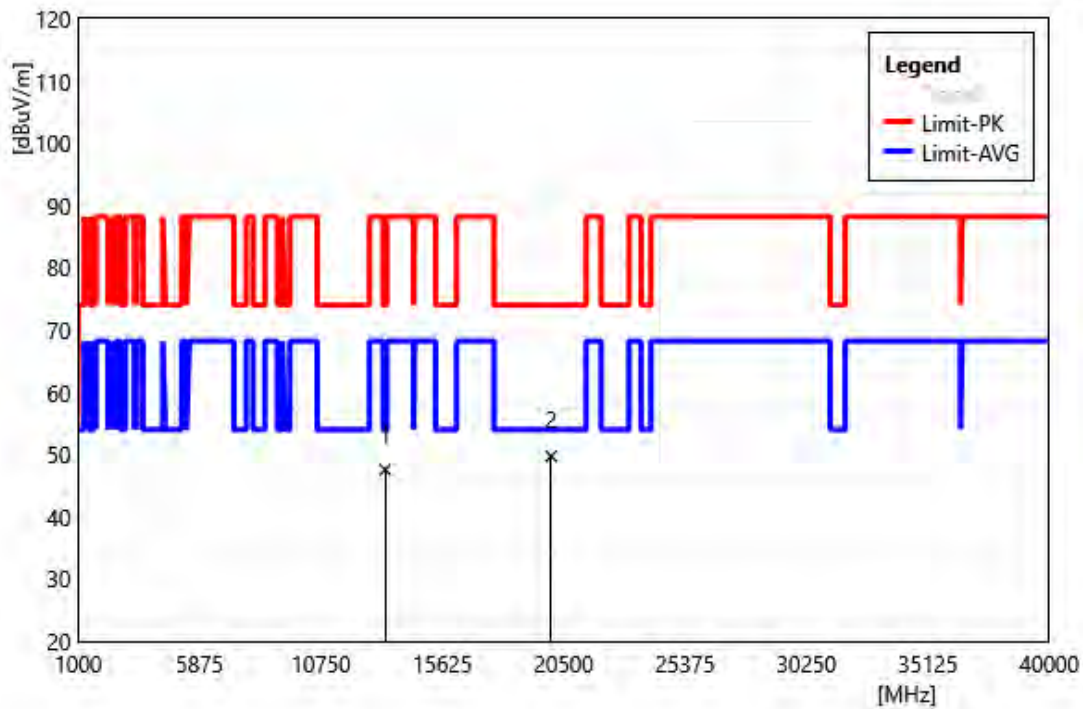


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13330.00	39.31	8.25	47.56	74.00	-26.44	PEAK
2	19995.00	40.80	8.94	49.74	74.00	-24.26	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6825		
	MHz		
Polarization:	Horizontal		
Remark:			

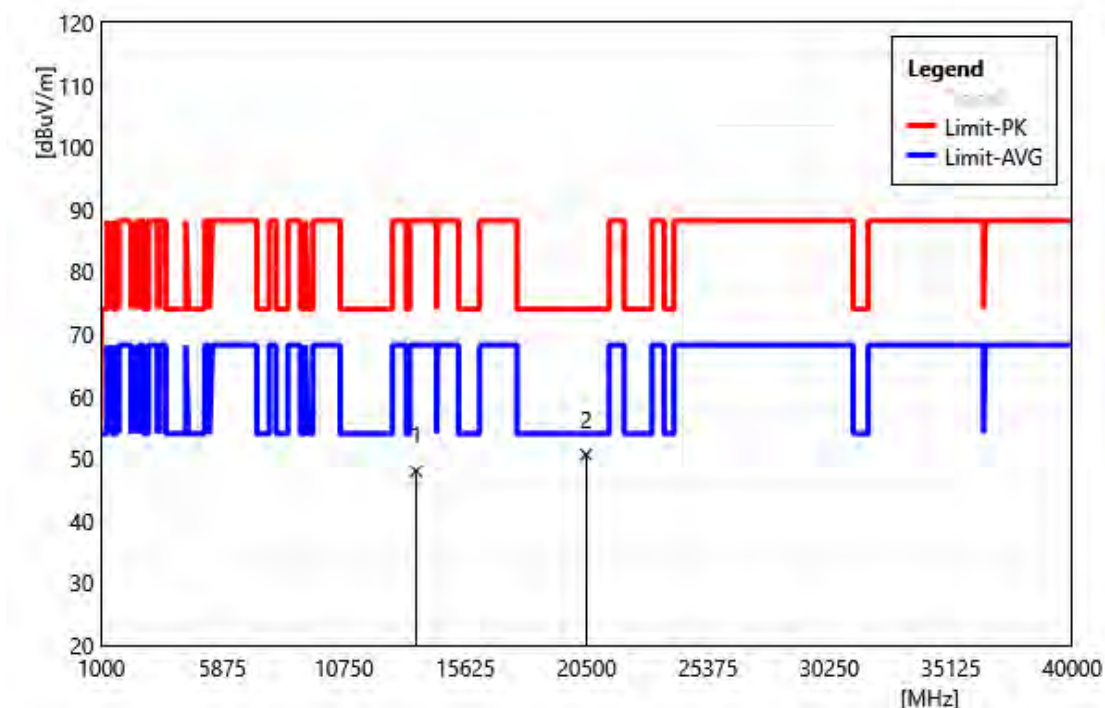


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	40.19	7.81	48.00	88.20	-40.20	PEAK
2	20475.00	41.47	9.14	50.61	74.00	-23.39	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT160 6825
MHz
Polarization: Vertical
Remark:

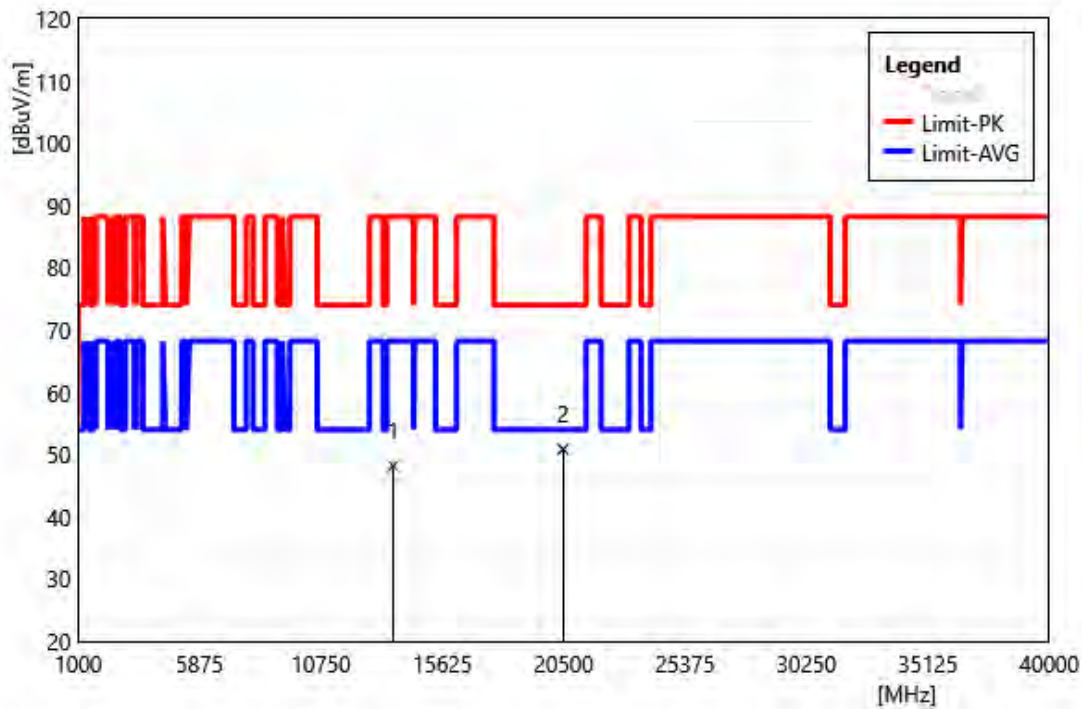


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13650.00	40.35	7.81	48.16	88.20	-40.04	PEAK
2	20475.00	41.71	9.14	50.85	74.00	-23.15	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Horizontal		
Remark:			

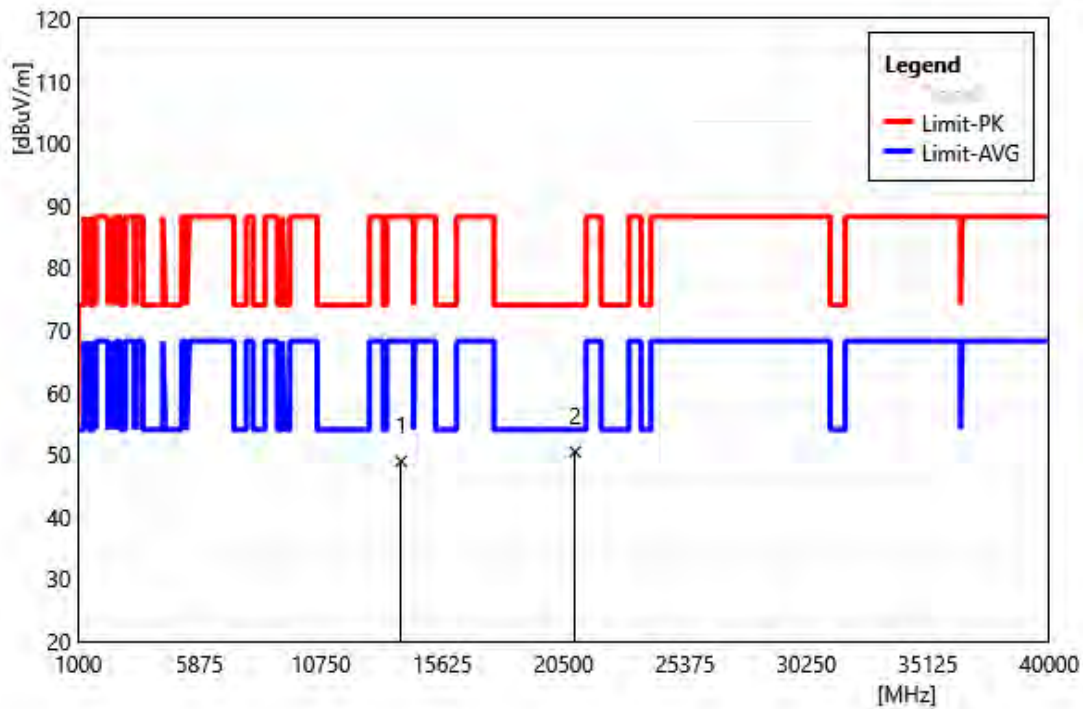


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	40.68	8.22	48.90	88.20	-39.30	PEAK
2	20955.00	41.08	9.36	50.44	74.00	-23.56	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Vertical		
Remark:			

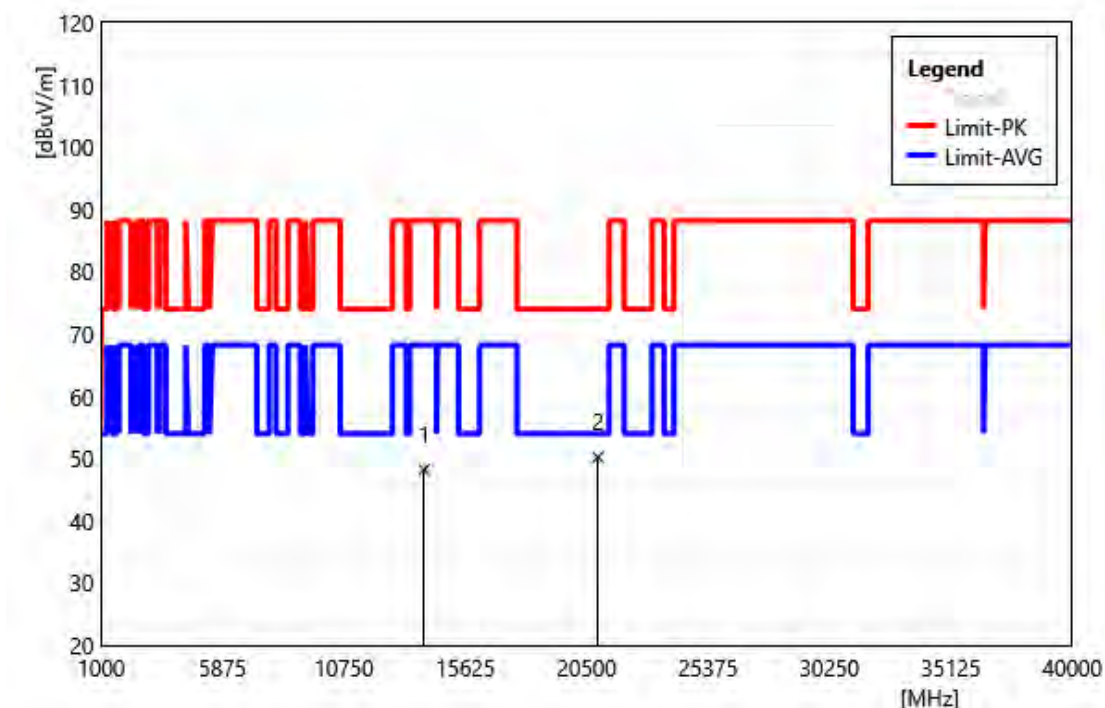


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13970.00	39.99	8.22	48.21	88.20	-39.99	PEAK
2	20955.00	40.85	9.36	50.21	74.00	-23.79	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Horizontal		
Remark:			

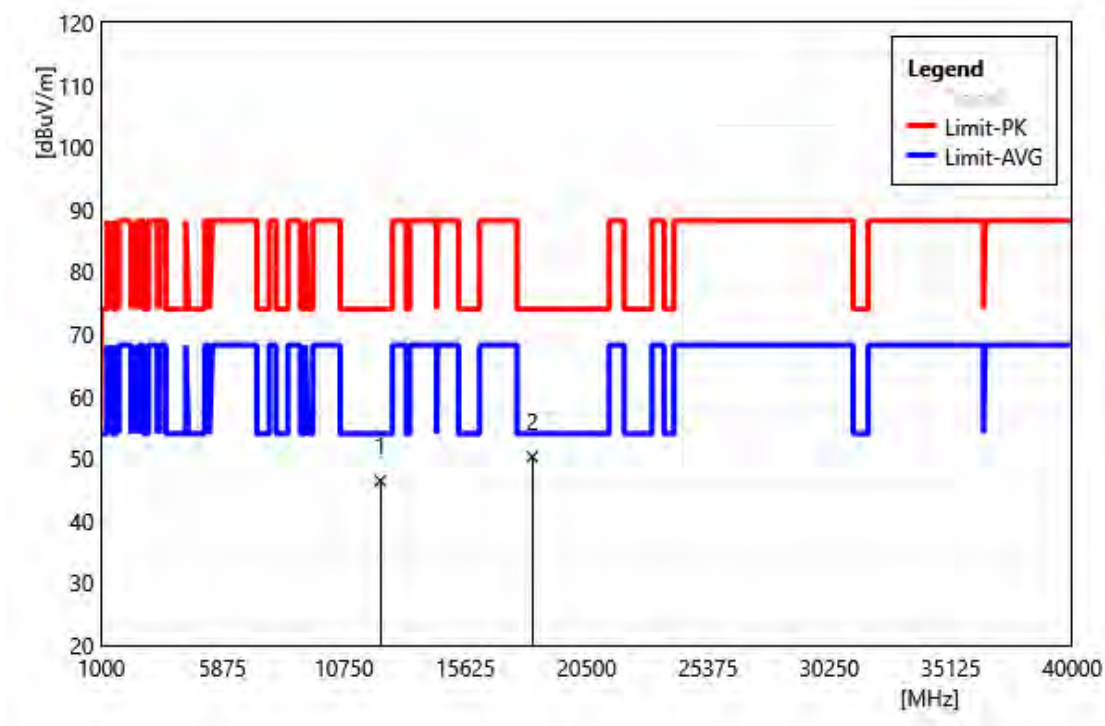


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12210.00	38.74	7.70	46.44	74.00	-27.56	PEAK
2	18315.00	42.11	8.18	50.29	74.00	-23.71	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT320 6105
MHz
Polarization: Vertical
Remark:

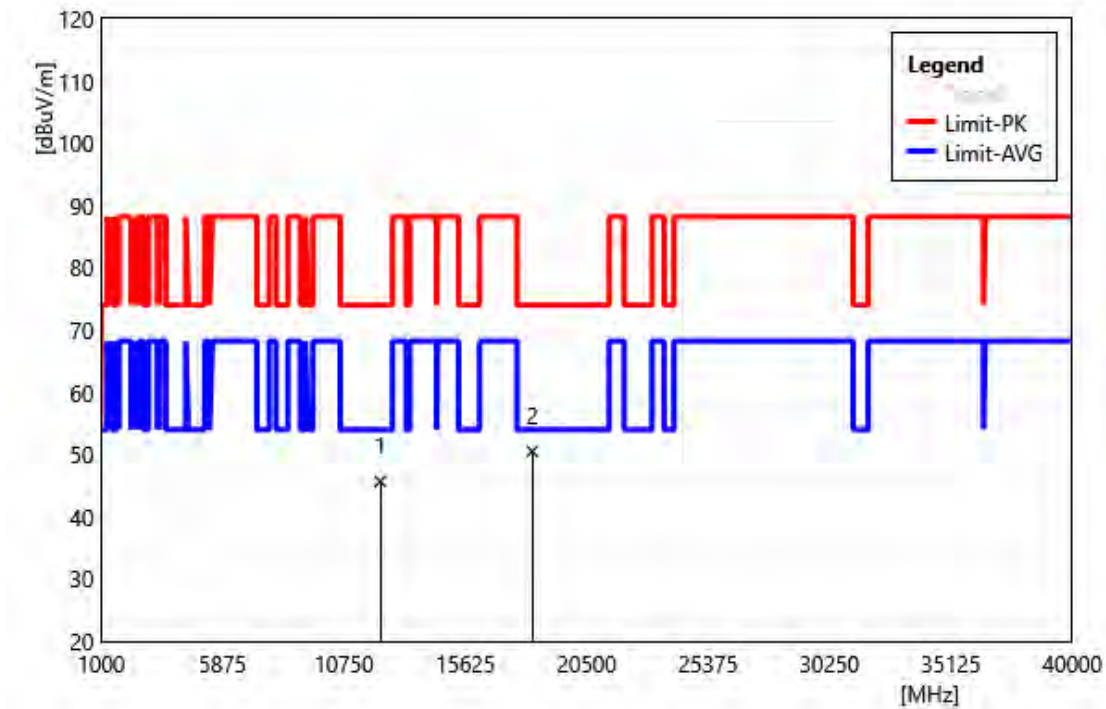


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12210.00	38.00	7.70	45.70	74.00	-28.30	PEAK
2	18315.00	42.34	8.18	50.52	74.00	-23.48	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6425		
	MHz		
Polarization:	Horizontal		
Remark:			

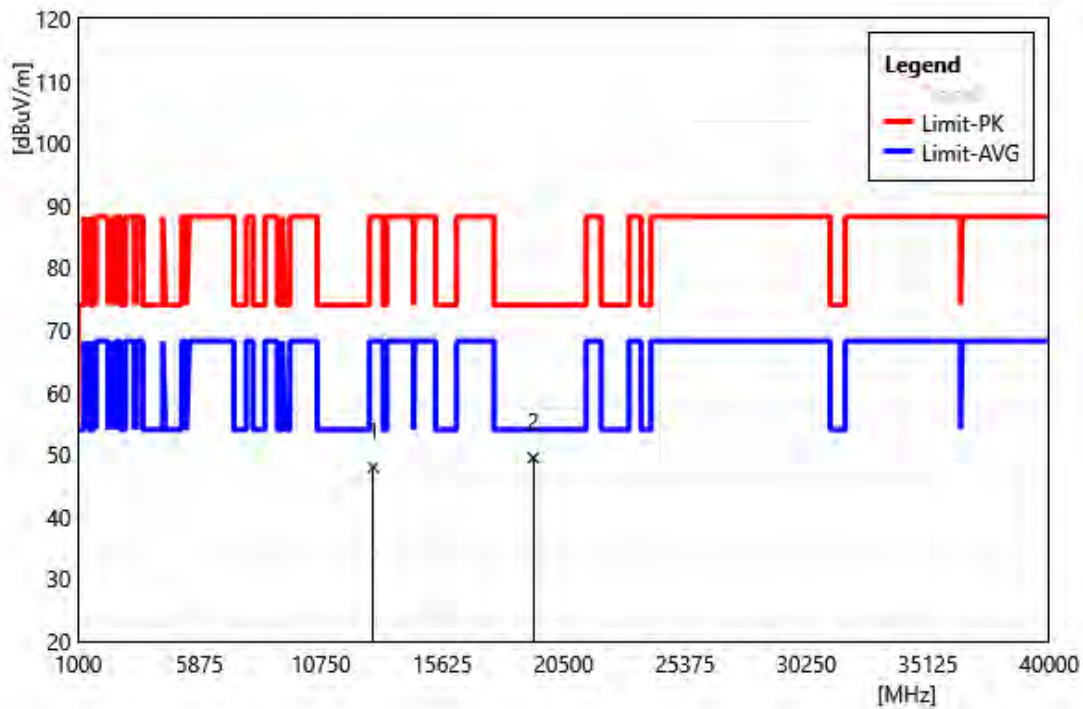


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12850.00	39.51	8.46	47.97	88.20	-40.23	PEAK
2	19275.00	40.85	8.61	49.46	74.00	-24.54	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6425		
	MHz		
Polarization:	Vertical		
Remark:			

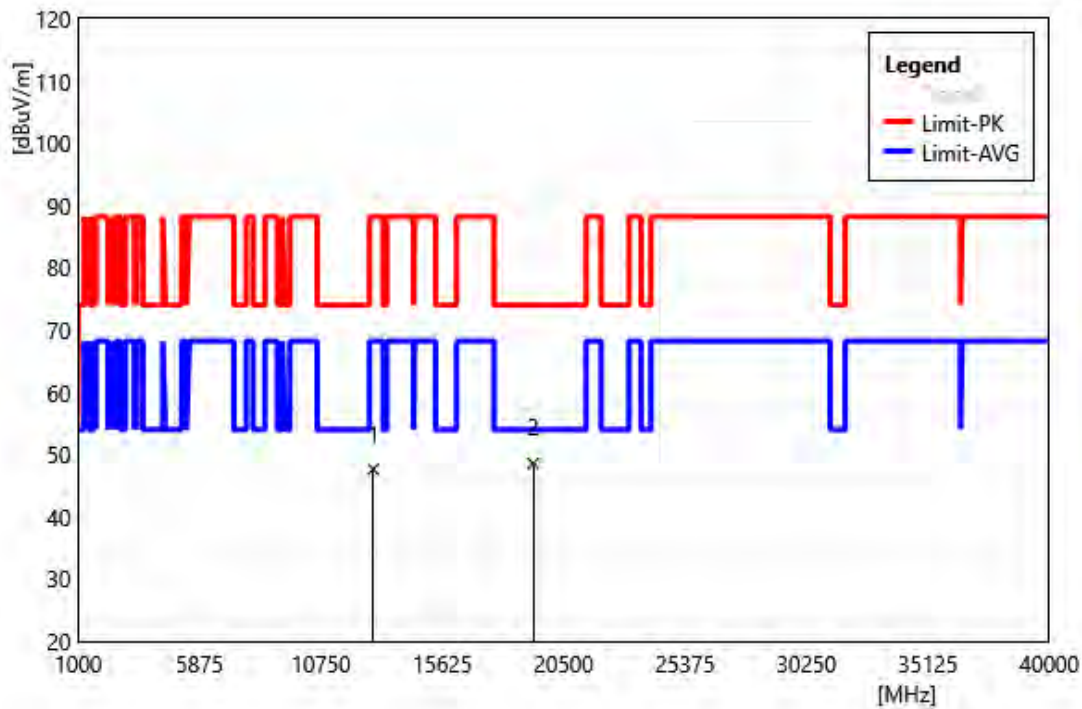


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12850.00	39.17	8.46	47.63	88.20	-40.57	PEAK
2	19275.00	39.95	8.61	48.56	74.00	-25.44	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6745		
	MHz		
Polarization:	Horizontal		
Remark:			

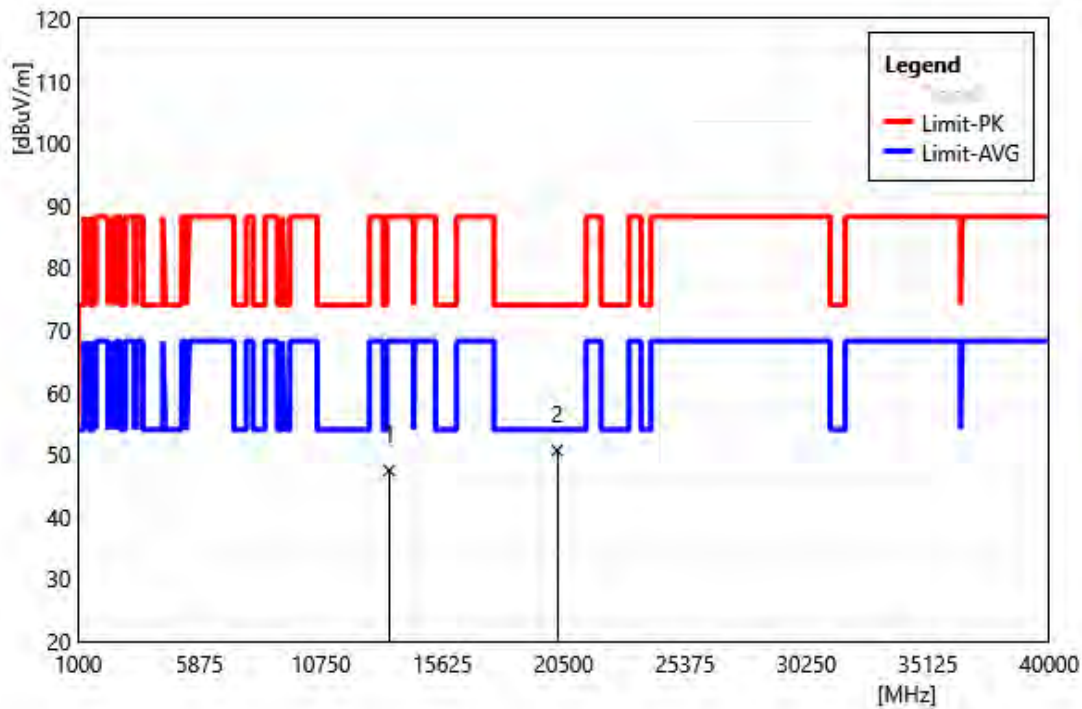


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13490.00	39.55	7.85	47.40	88.20	-40.80	PEAK
2	20235.00	41.59	9.04	50.63	74.00	-23.37	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6745		
	MHz		
Polarization:	Vertical		
Remark:			

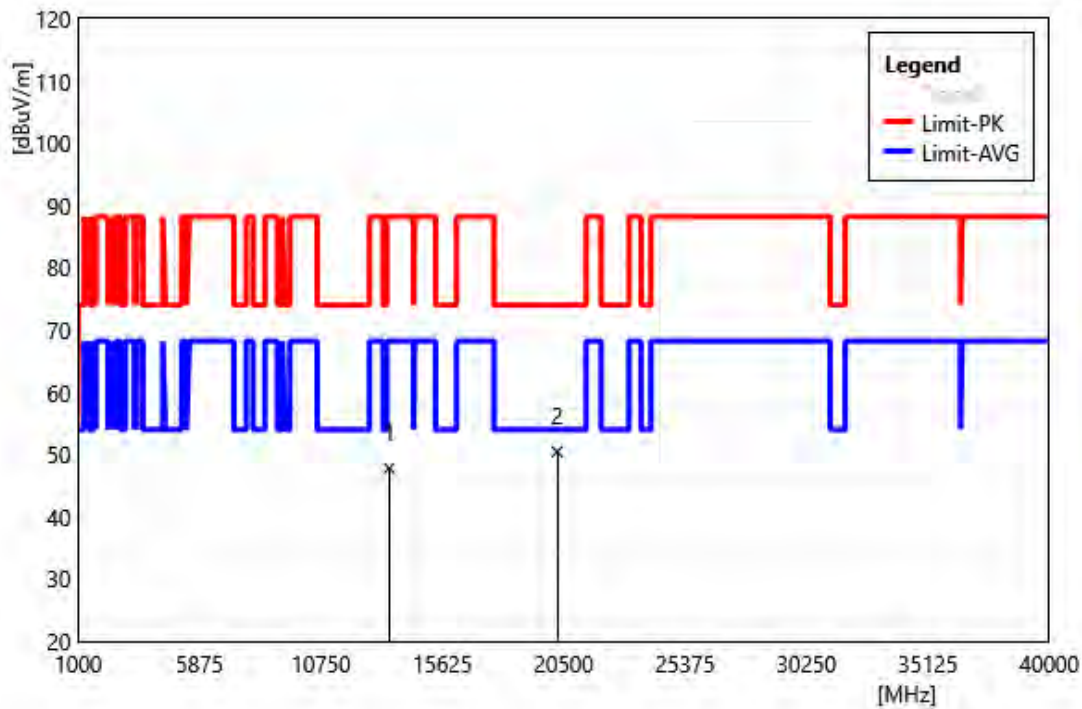


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13490.00	39.94	7.85	47.79	88.20	-40.41	PEAK
2	20235.00	41.41	9.04	50.45	74.00	-23.55	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6265		
	MHz		
Polarization:	Horizontal		
Remark:			

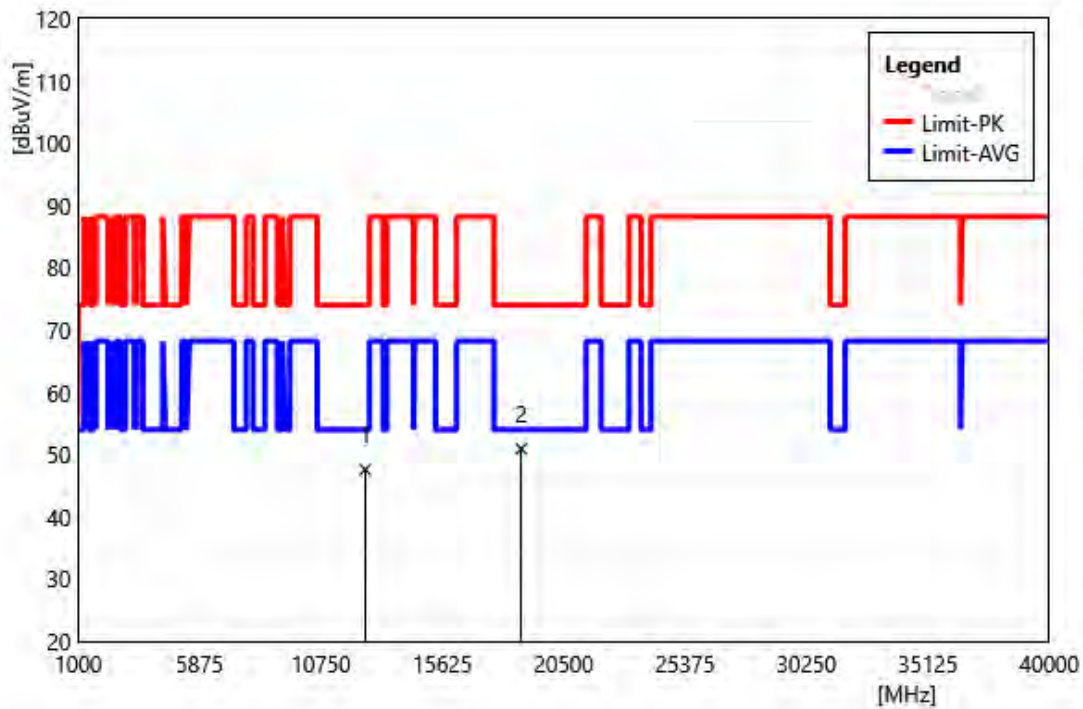


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12530.00	39.45	8.13	47.58	74.00	-26.42	PEAK
2	18795.00	42.51	8.40	50.91	74.00	-23.09	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6265		
	MHz		
Polarization:	Vertical		
Remark:			

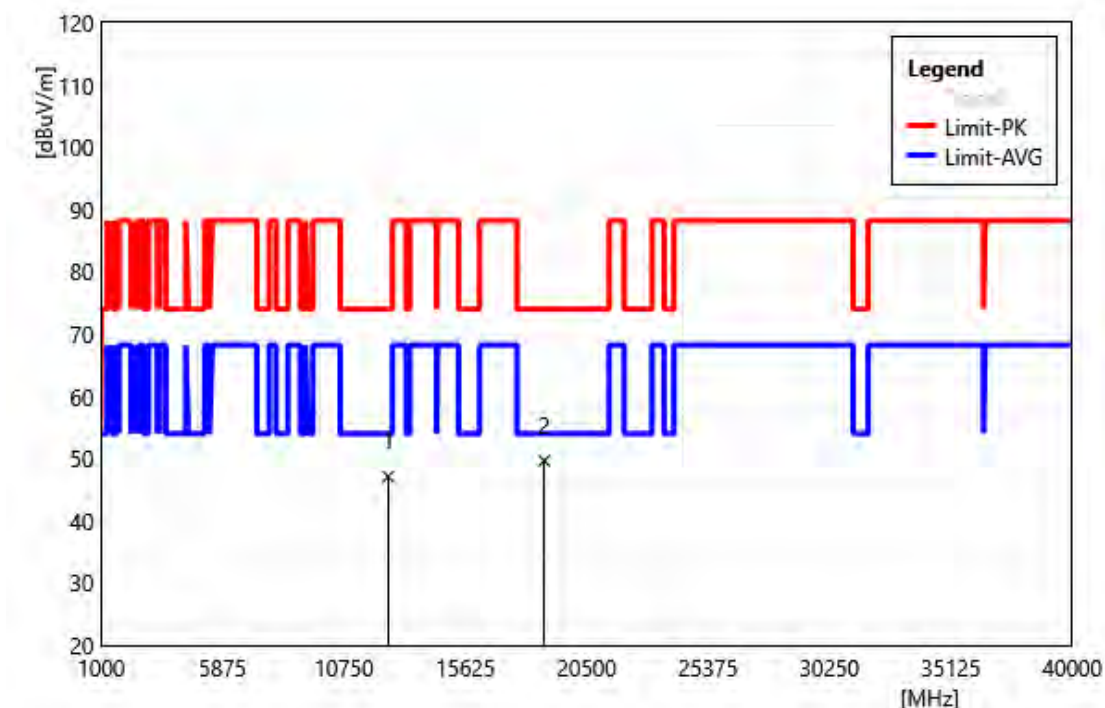


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	12530.00	38.97	8.13	47.10	74.00	-26.90	PEAK
2	18795.00	41.25	8.40	49.65	74.00	-24.35	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6585		
	MHz		
Polarization:	Horizontal		
Remark:			

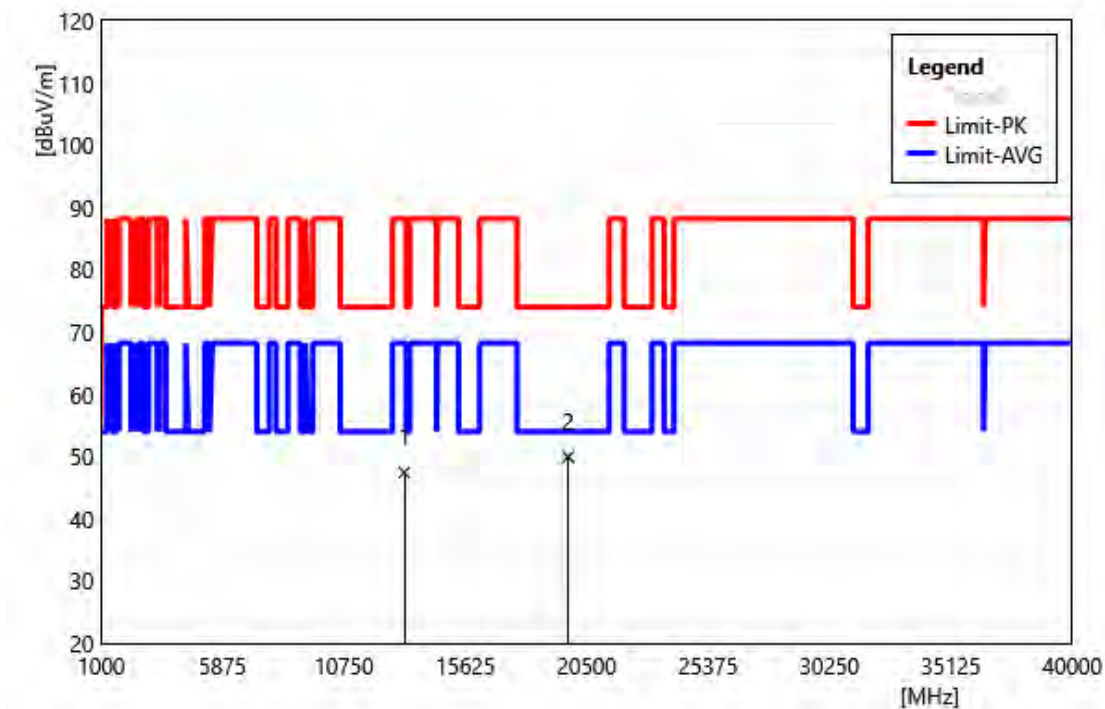

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13170.00	39.00	8.44	47.44	88.20	-40.76	PEAK
2	19755.00	41.10	8.82	49.92	74.00	-24.08	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT320 6585
MHz
Polarization: Vertical
Remark:

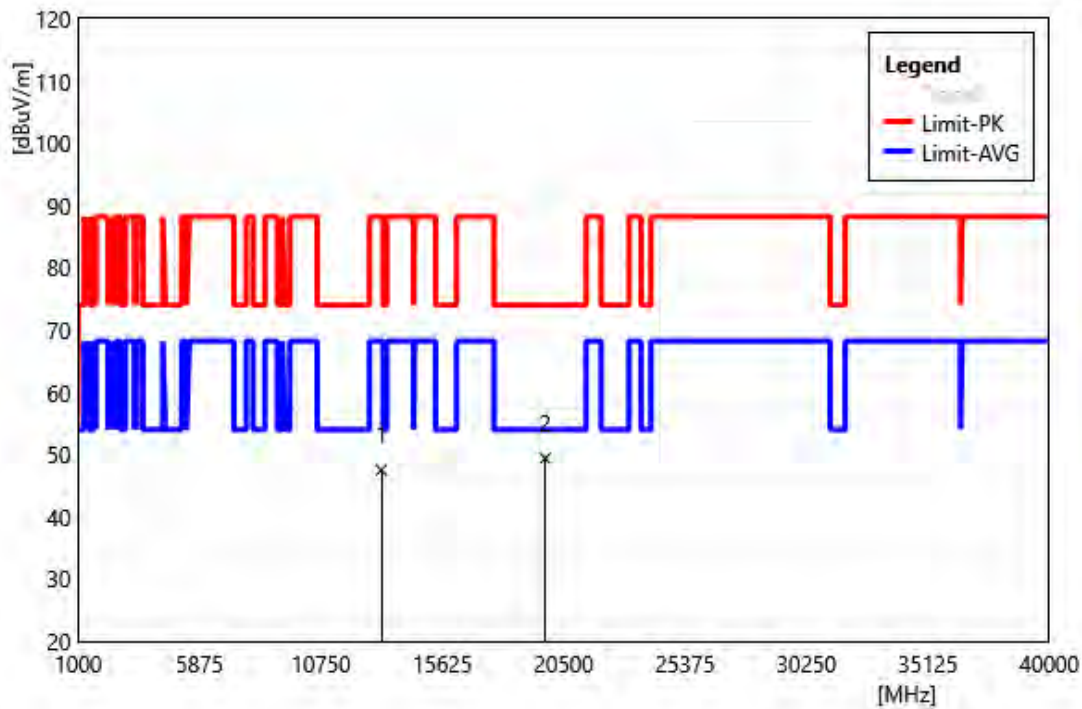


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	13170.00	39.07	8.44	47.51	88.20	-40.69	PEAK
2	19755.00	40.57	8.82	49.39	74.00	-24.61	PEAK

Band Edge


Peak

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5955 MHz		
Polarization:	Horizontal		
Remark:			

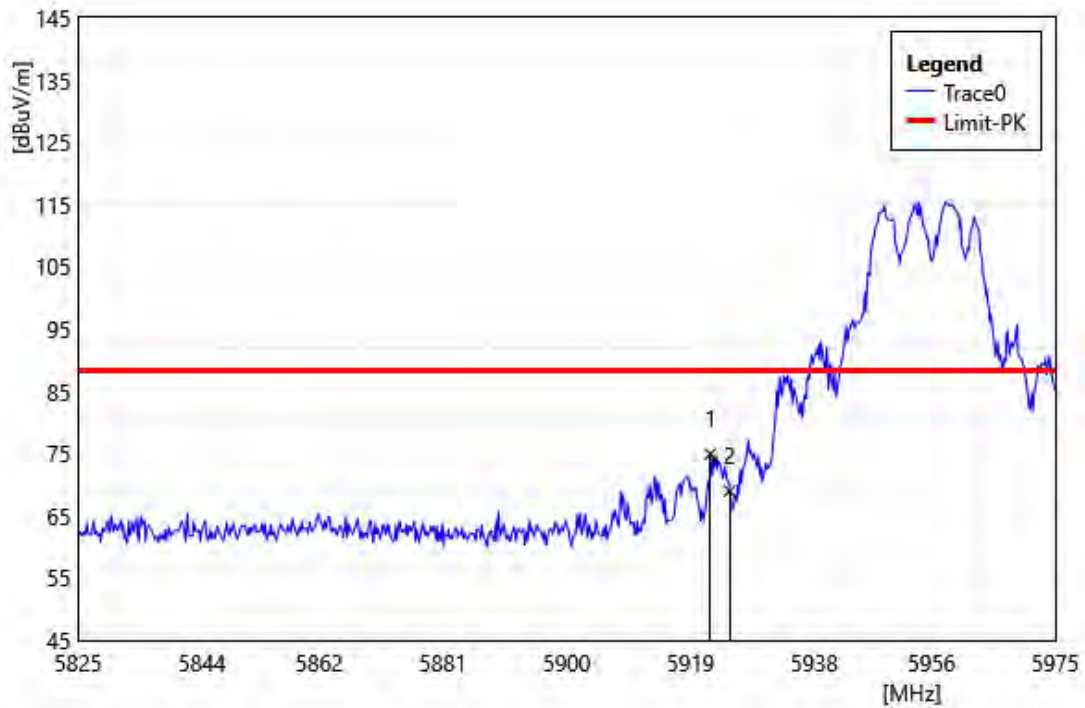


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5922.05	71.59	3.33	74.92	88.20	-13.28	PEAK
2	5925.00	65.67	3.31	68.98	88.20	-19.22	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5955 MHz		
Polarization:	Vertical		
Remark:			

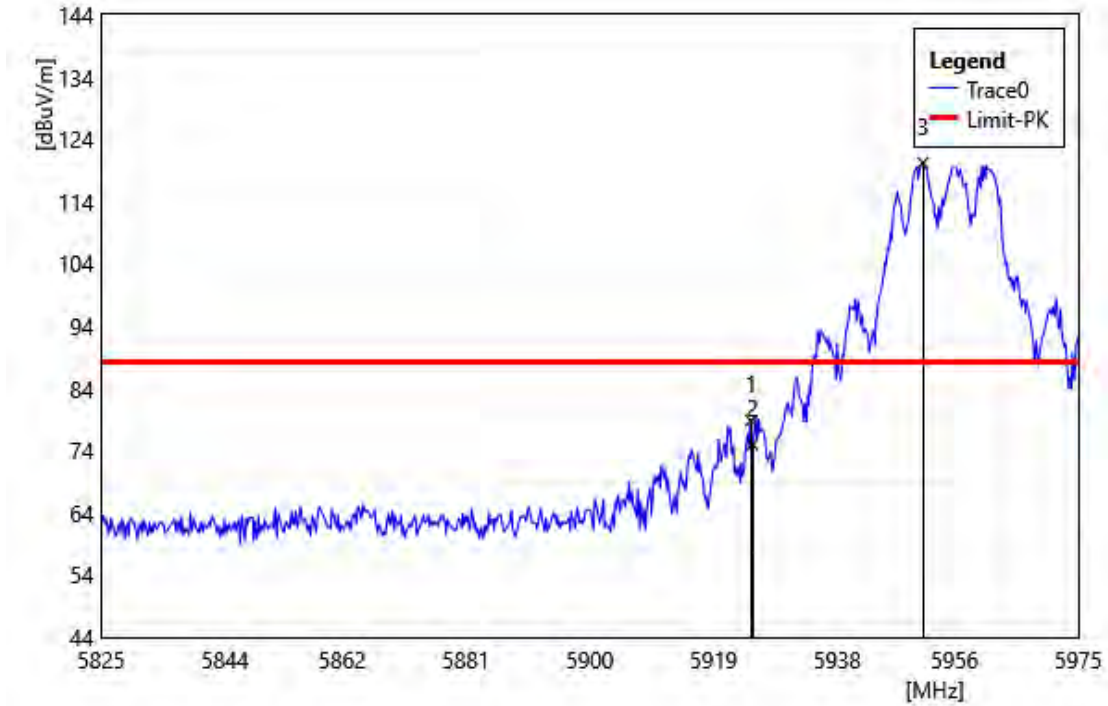


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.75	75.49	3.31	78.80	88.20	-9.40	PEAK
2	5925.00	71.64	3.31	74.95	88.20	-13.25	PEAK
3	5951.15	117.08	3.15	120.23	88.20	32.03	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 7115 MHz		
Polarization:	Horizontal		
Remark:			

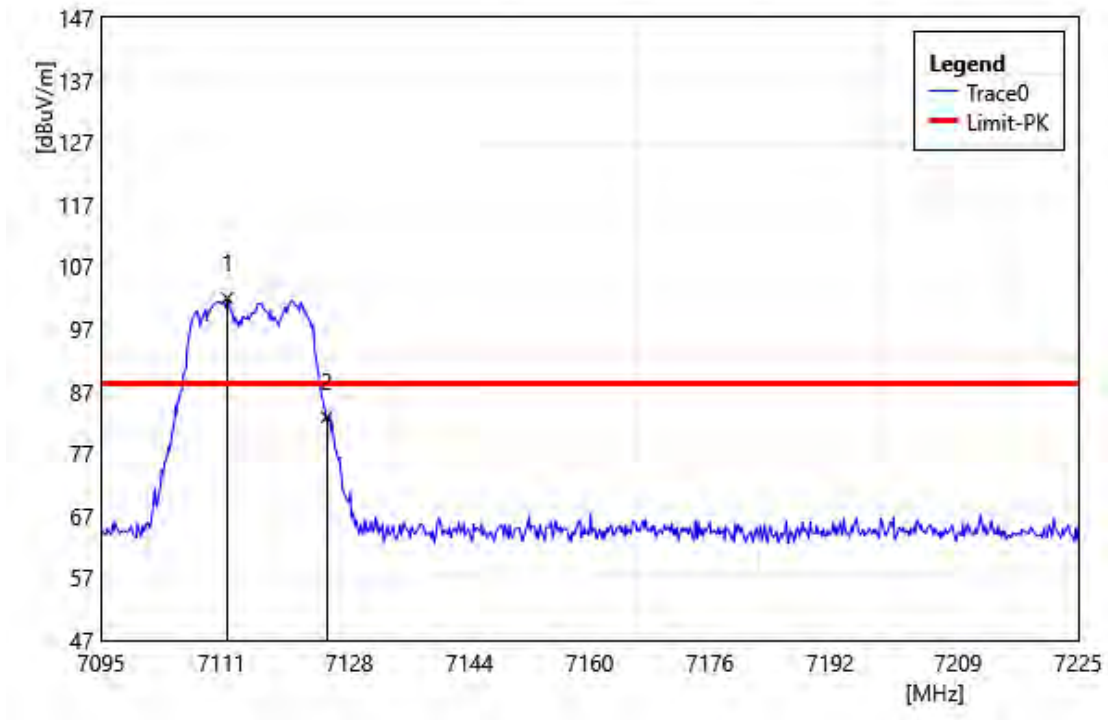


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7111.77	95.51	6.43	101.94	88.20	13.74	PEAK
2	7125.00	76.44	6.43	82.87	88.20	-5.33	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 7115 MHz
Polarization: Vertical
Remark:

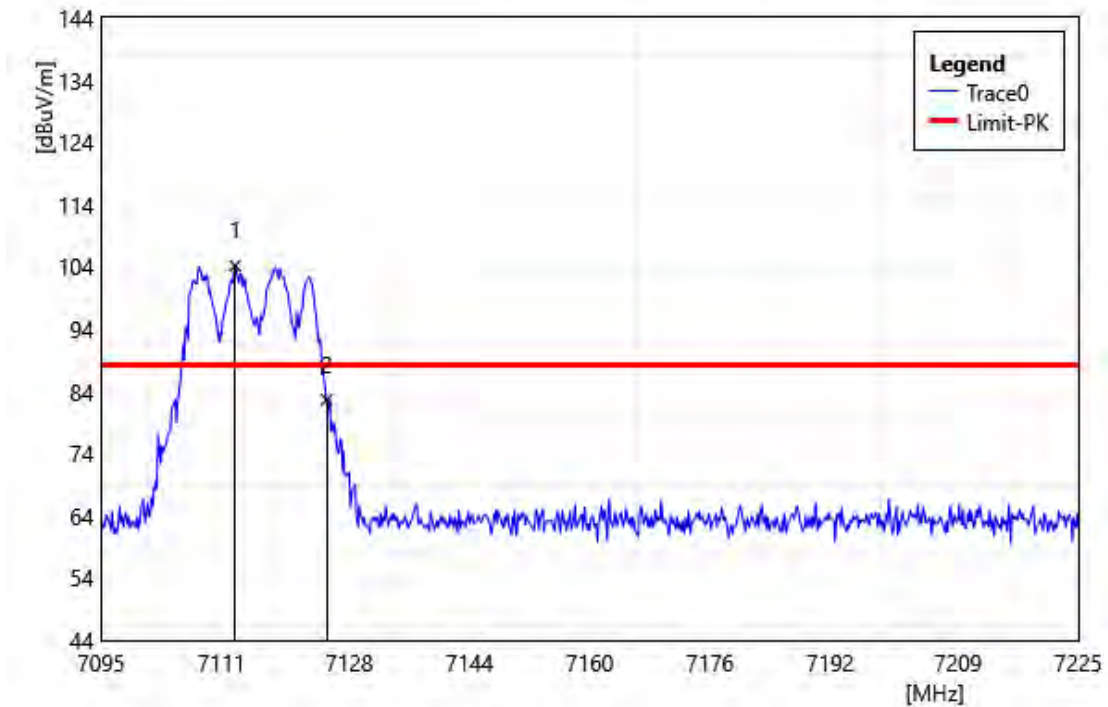


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7112.81	97.74	6.43	104.17	88.20	15.97	PEAK
2	7125.00	76.21	6.43	82.64	88.20	-5.56	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955 MHz		
Polarization:	Horizontal		
Remark:			

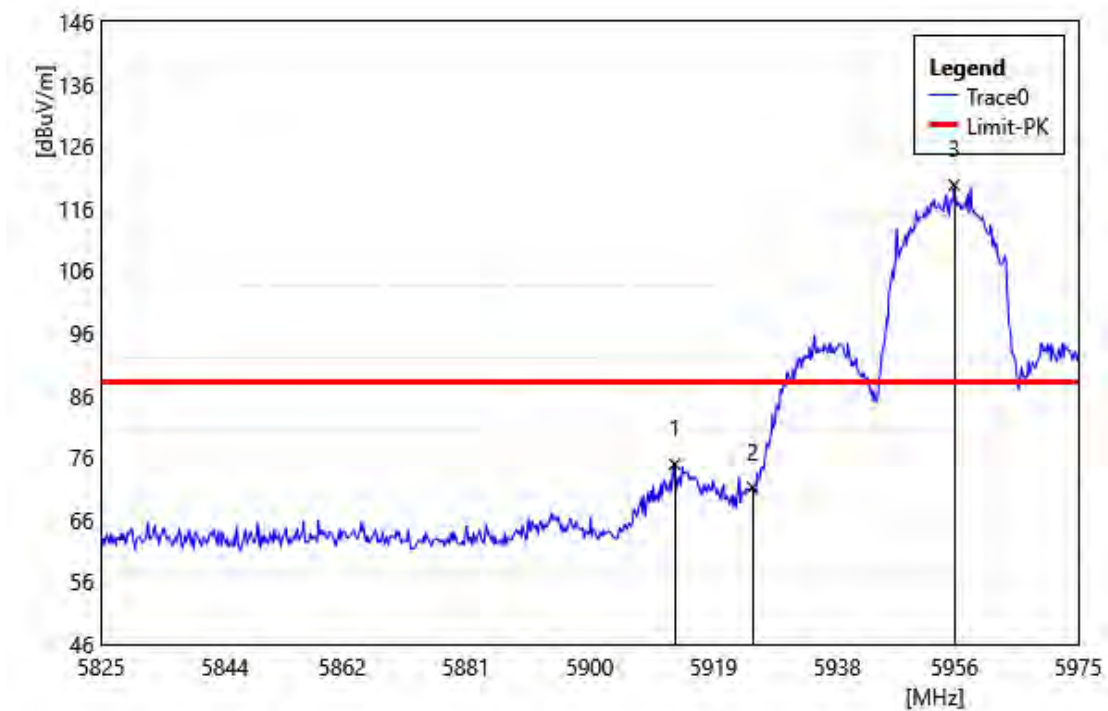


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5913.05	71.55	3.39	74.94	88.20	-13.26	PEAK
2	5925.00	67.90	3.31	71.21	88.20	-16.99	PEAK
3	5955.95	116.64	3.15	119.79	88.20	31.59	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955 MHz		
Polarization:	Vertical		
Remark:			

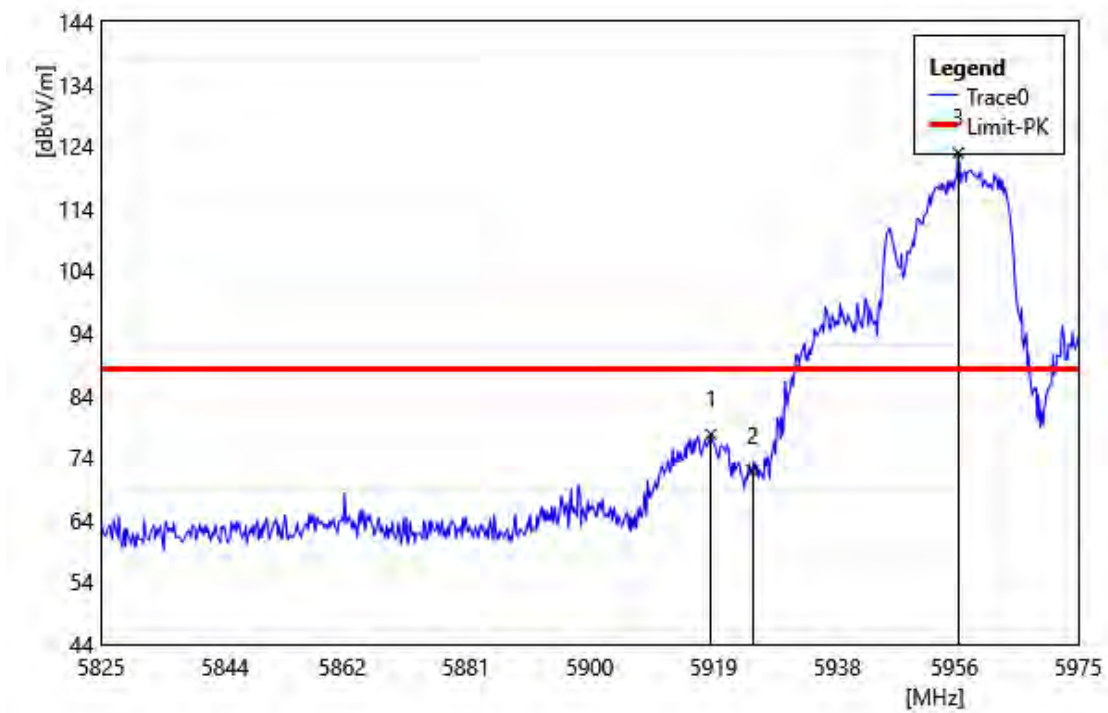


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5918.60	74.38	3.35	77.73	88.20	-10.47	PEAK
2	5925.00	68.57	3.31	71.88	88.20	-16.32	PEAK
3	5956.55	119.79	3.15	122.94	88.20	34.74	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11ax HE20 7115 MHz		
Polarization:	Horizontal		
Remark:			

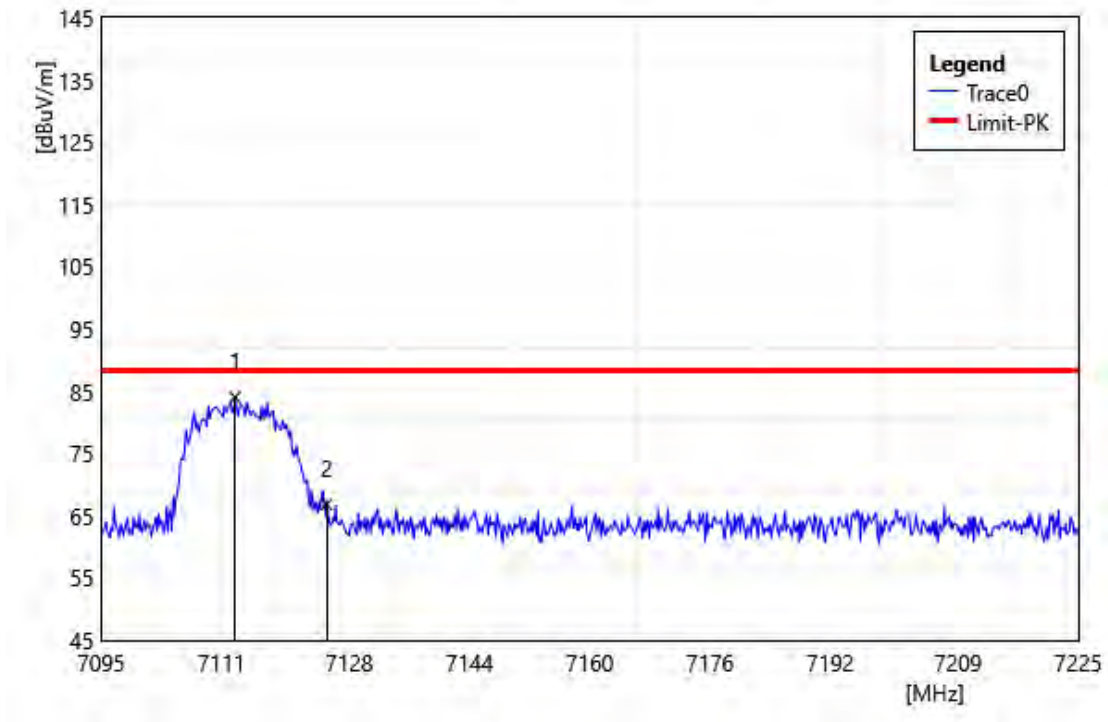


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7112.81	77.62	6.43	84.05	88.20	-4.16	PEAK
2	7125.00	60.40	6.43	66.83	88.20	-21.37	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7115 MHz		
Polarization:	Vertical		
Remark:			

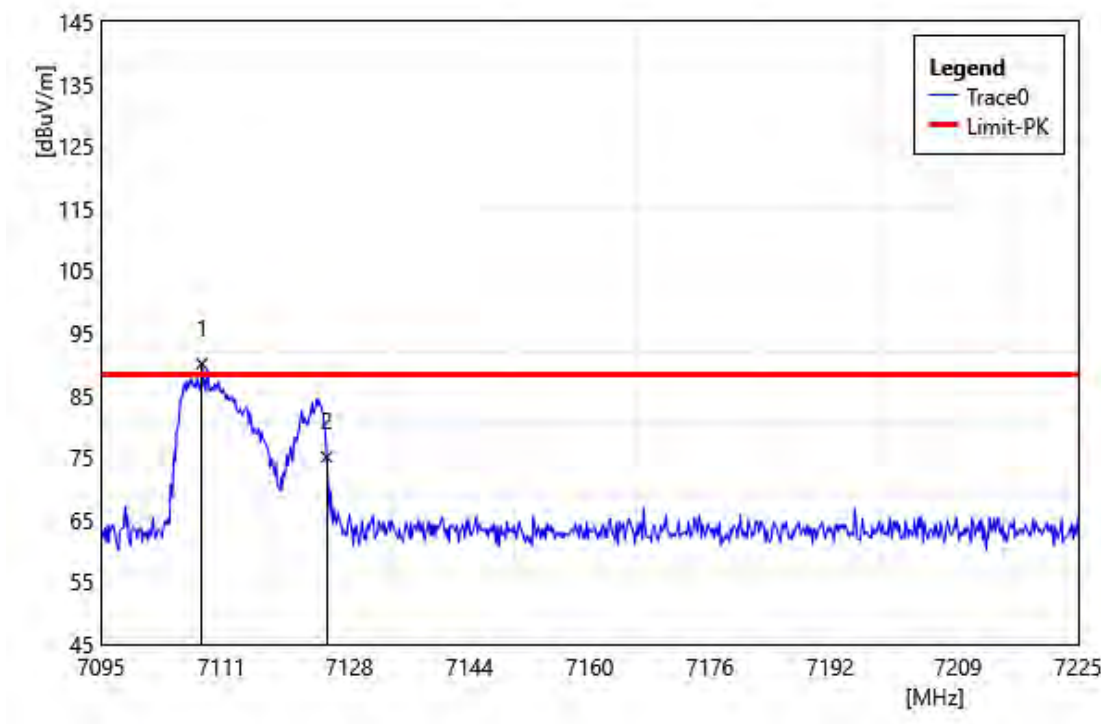


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7108.39	83.62	6.43	90.05	88.20	1.85	PEAK
2	7125.00	68.66	6.43	75.09	88.20	-13.11	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965 MHz		
Polarization:	Horizontal		
Remark:			

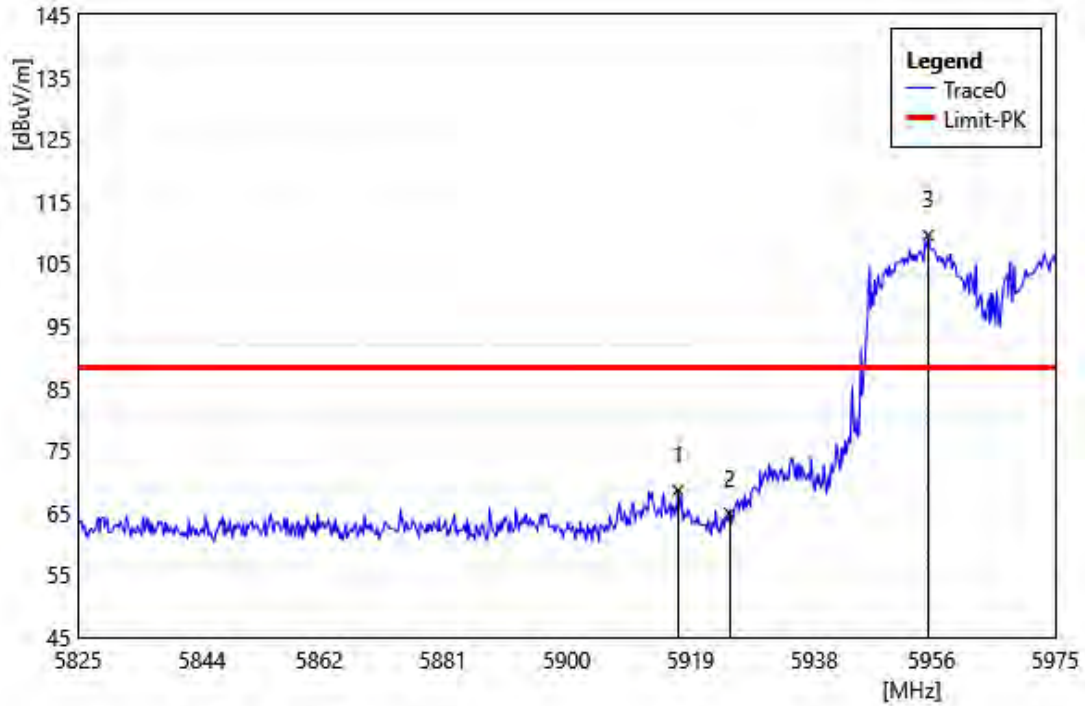


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5917.10	65.24	3.36	68.60	88.20	-19.60	PEAK
2	5925.00	61.56	3.31	64.87	88.20	-23.33	PEAK
3	5955.50	106.41	3.15	109.56	88.20	21.36	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965 MHz		
Polarization:	Vertical		
Remark:			

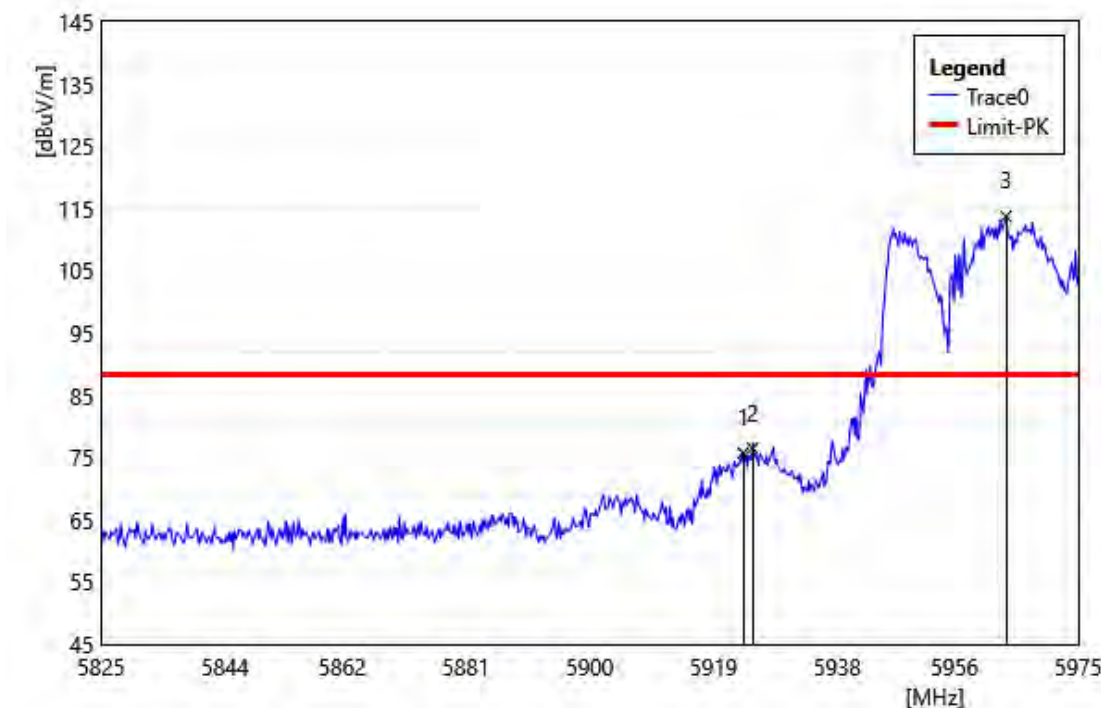


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.55	72.39	3.32	75.71	88.20	-12.49	PEAK
2	5925.00	73.19	3.31	76.50	88.20	-11.70	PEAK
3	5963.90	110.58	3.14	113.72	88.20	25.52	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085 MHz		
Polarization:	Horizontal		
Remark:			

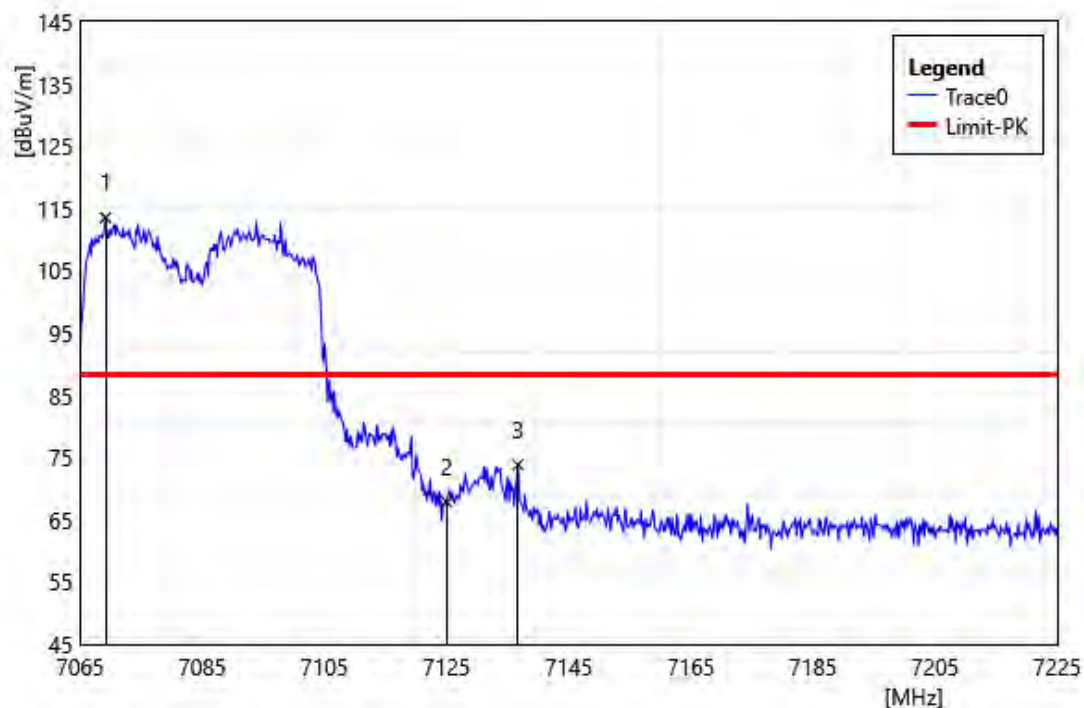


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7069.16	107.17	6.36	113.53	88.20	25.33	PEAK
2	7125.00	61.45	6.43	67.88	88.20	-20.32	PEAK
3	7136.68	67.39	6.43	73.82	88.20	-14.38	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 7085 MHz
Polarization: Vertical
Remark:

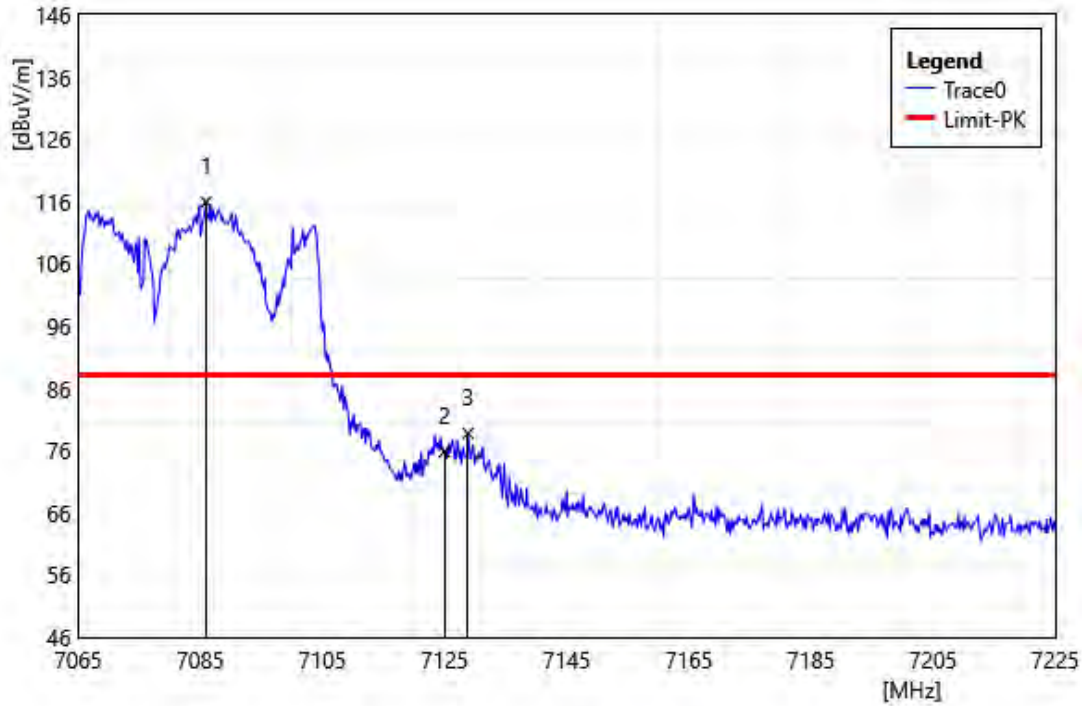


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7085.96	109.51	6.40	115.91	88.20	27.71	PEAK
2	7125.00	69.38	6.43	75.81	88.20	-12.39	PEAK
3	7128.84	72.32	6.43	78.76	88.20	-9.45	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 5985 MHz
Polarization: Horizontal
Remark:

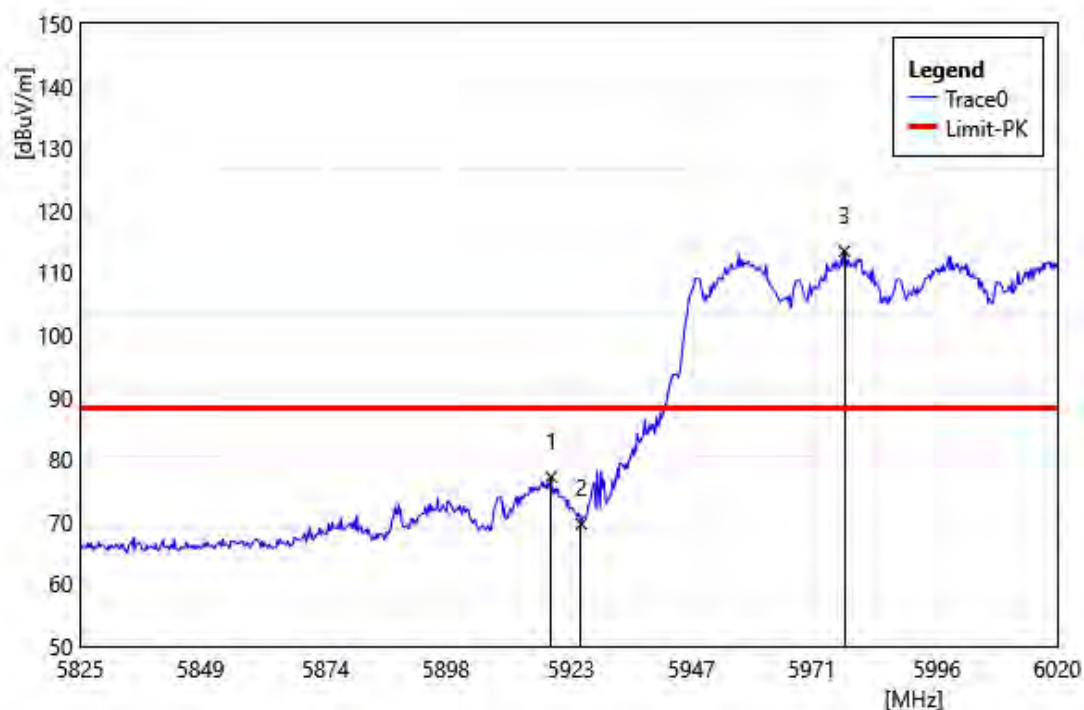


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5918.99	73.85	3.35	77.20	88.20	-11.00	PEAK
2	5925.00	66.34	3.31	69.65	88.20	-18.55	PEAK
3	5977.49	110.32	3.13	113.45	88.20	25.25	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985 MHz		
Polarization:	Vertical		
Remark:			

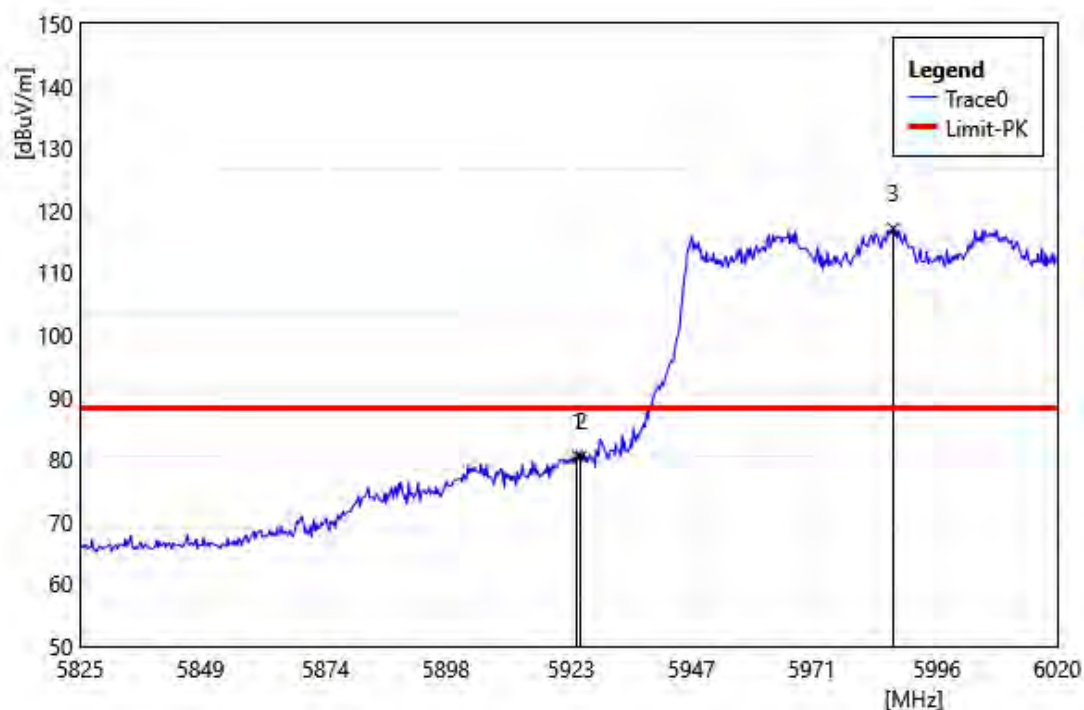


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.26	77.26	3.32	80.58	88.20	-7.63	PEAK
2	5925.00	77.22	3.31	80.53	88.20	-7.67	PEAK
3	5987.24	113.97	3.14	117.11	88.20	28.91	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025 MHz		
Polarization:	Horizontal		
Remark:			

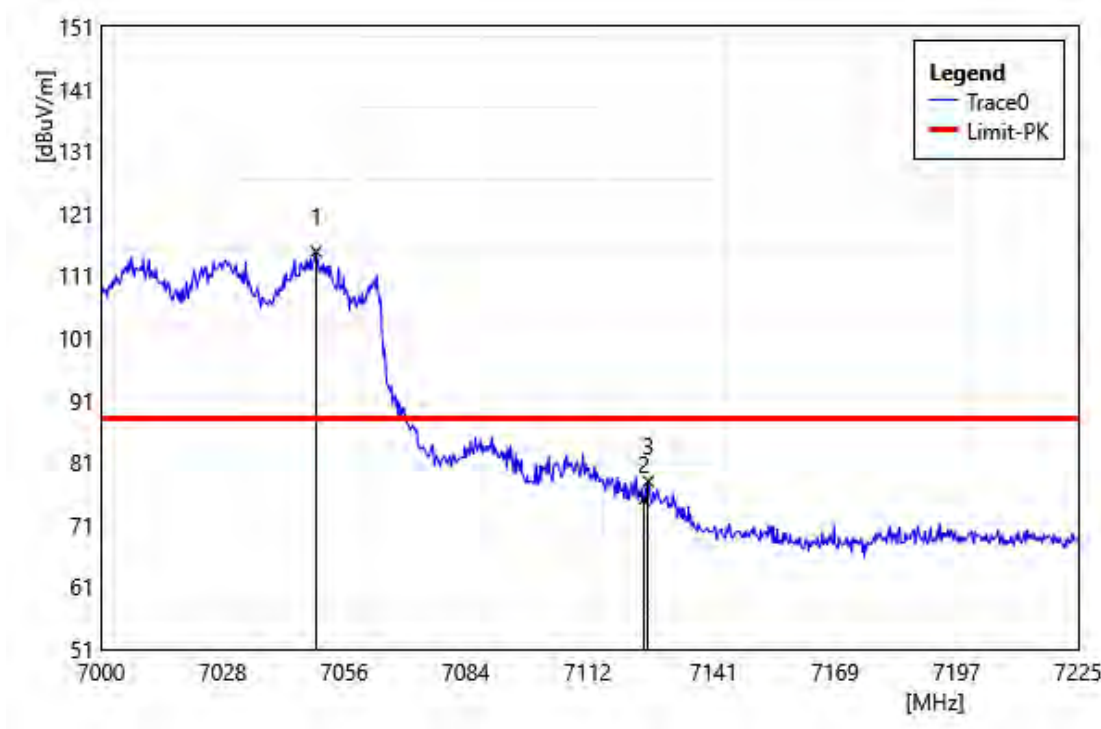


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7049.50	108.56	6.32	114.88	88.20	26.68	PEAK
2	7125.00	68.62	6.43	75.05	88.20	-13.15	PEAK
3	7126.00	71.54	6.42	77.97	88.20	-10.24	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 7025 MHz		
Polarization:	Vertical		
Remark:			

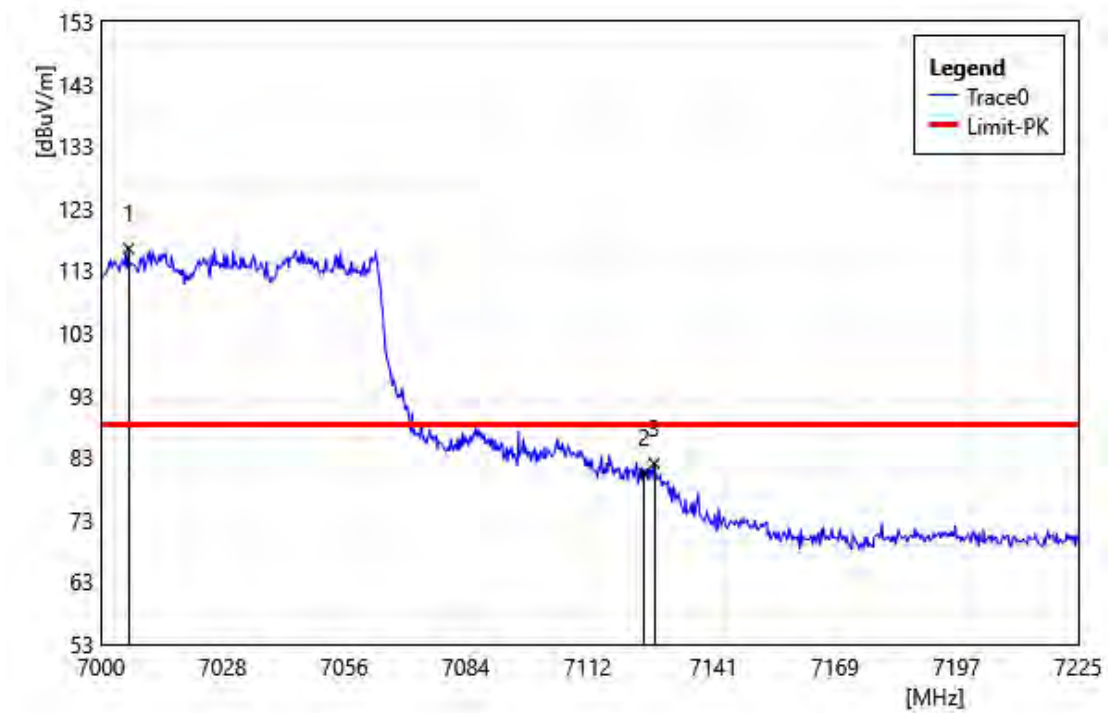


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7006.30	110.06	6.48	116.54	88.20	28.34	PEAK
2	7125.00	73.96	6.43	80.39	88.20	-7.81	PEAK
3	7127.35	75.62	6.42	82.04	88.20	-6.16	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

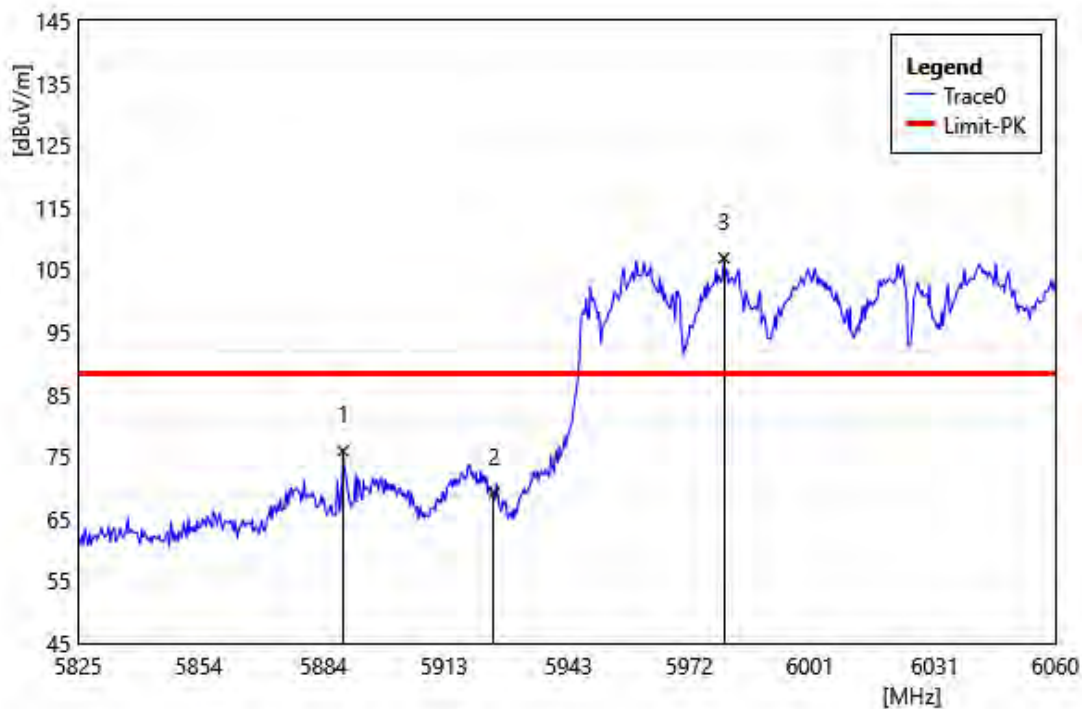


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5888.69	72.45	3.49	75.94	88.20	-12.26	PEAK
2	5925.00	65.85	3.31	69.16	88.20	-19.04	PEAK
3	5980.34	103.75	3.14	106.89	88.20	18.69	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT160 6025
MHz
Polarization: Vertical
Remark:

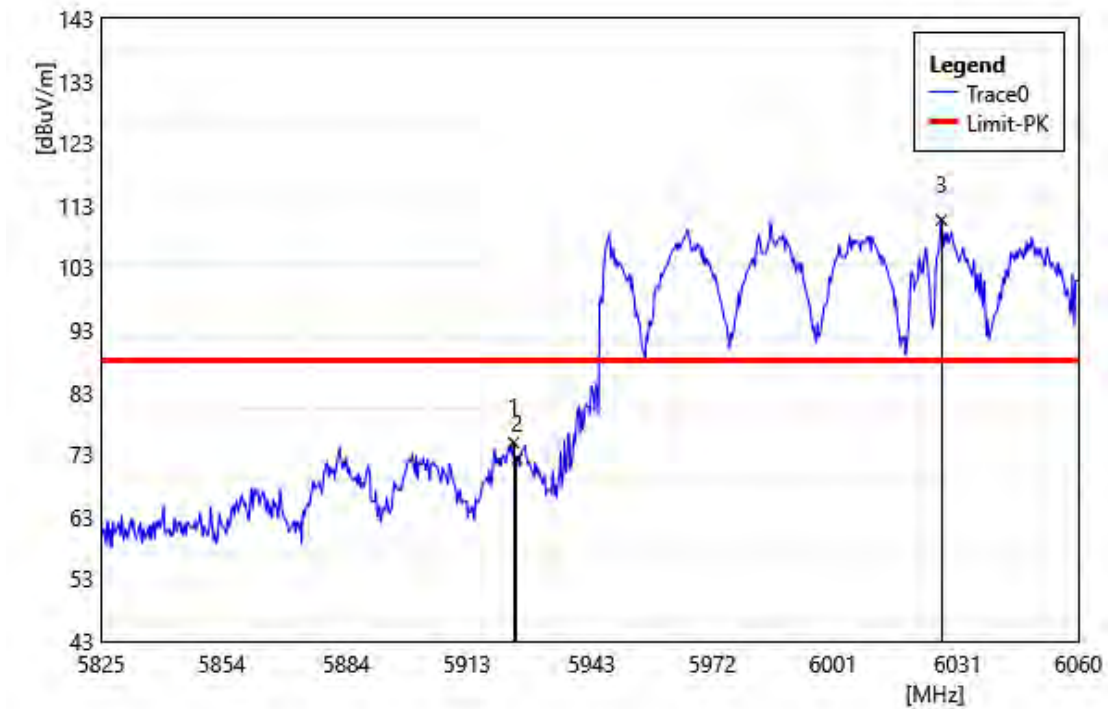


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.17	71.58	3.32	74.90	88.20	-13.30	PEAK
2	5925.00	68.99	3.31	72.30	88.20	-15.90	PEAK
3	6027.10	107.33	3.35	110.68	88.20	22.48	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT160 6985
MHz
Polarization: Horizontal
Remark:

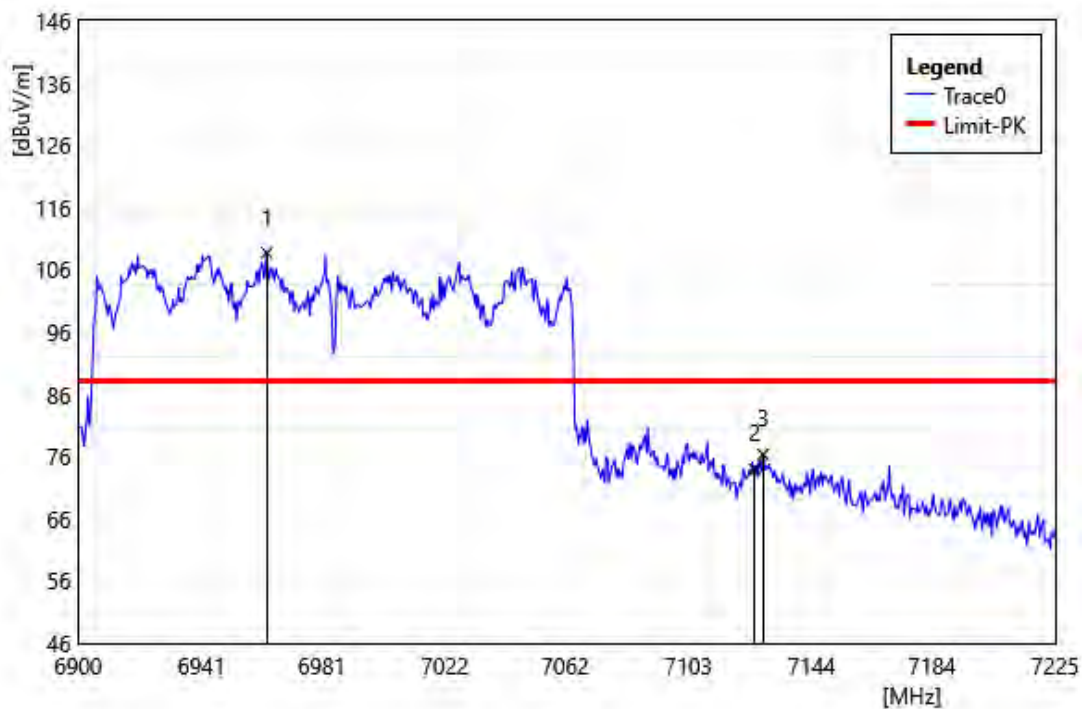


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6962.73	102.33	6.38	108.71	88.20	20.51	PEAK
2	7125.00	67.52	6.43	73.95	88.20	-14.25	PEAK
3	7127.83	69.91	6.43	76.34	88.20	-11.86	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT160 6985
MHz
Polarization: Vertical
Remark:

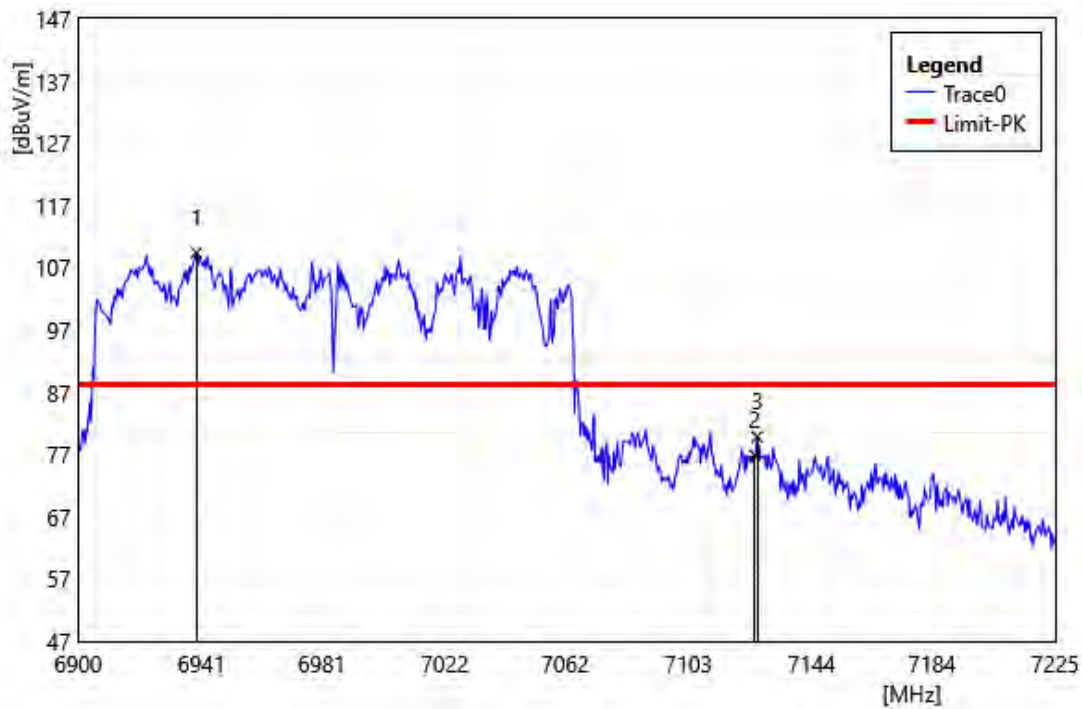


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6939.33	103.09	6.31	109.40	88.20	21.20	PEAK
2	7125.00	70.46	6.43	76.89	88.20	-11.31	PEAK
3	7125.88	73.41	6.42	79.83	88.20	-8.37	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Horizontal		
Remark:			

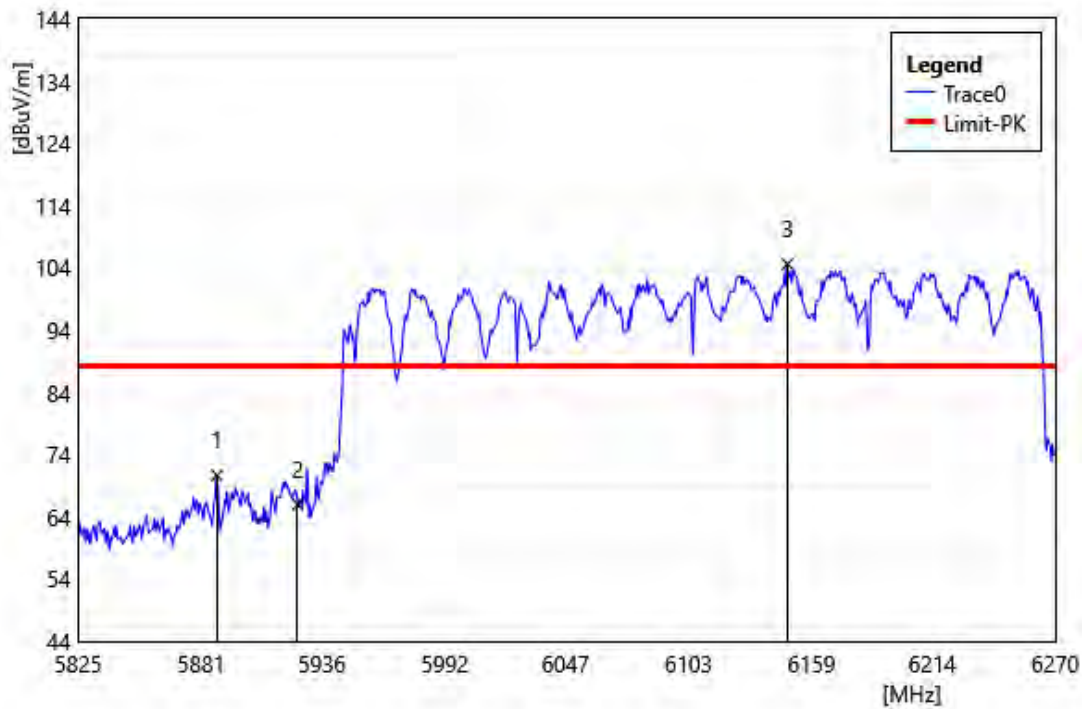


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5888.19	67.18	3.49	70.67	88.20	-17.54	PEAK
2	5925.00	62.66	3.31	65.97	88.20	-22.23	PEAK
3	6148.07	100.46	4.15	104.61	88.20	16.41	PEAK

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Vertical		
Remark:			

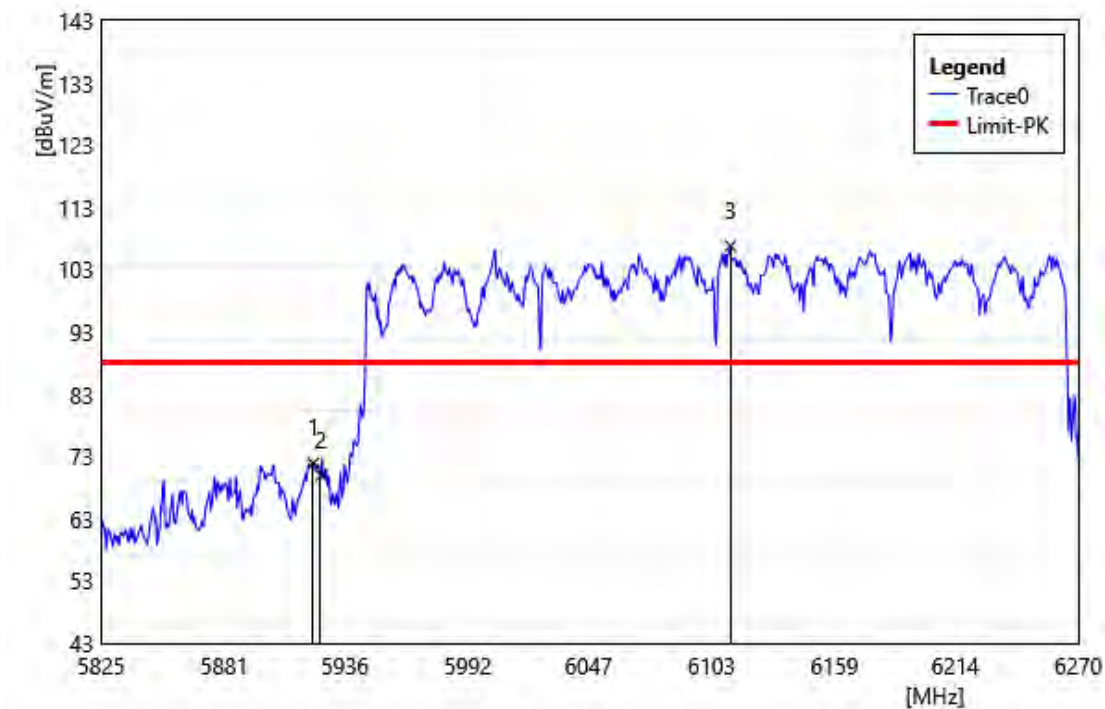


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5921.57	68.59	3.33	71.92	88.20	-16.28	PEAK
2	5925.00	66.69	3.31	70.00	88.20	-18.20	PEAK
3	6111.58	102.91	3.92	106.83	88.20	18.63	PEAK

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT320 6905
MHz
Polarization: Horizontal
Remark:

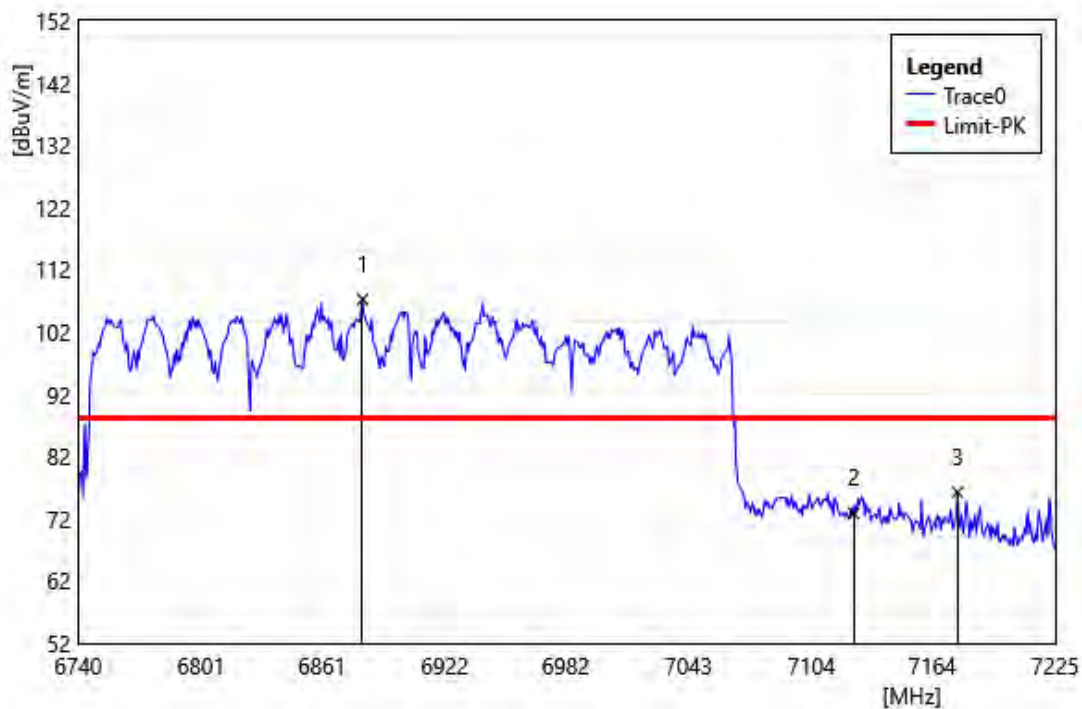

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6881.14	100.98	6.27	107.25	88.20	19.05	PEAK
2	7125.00	66.42	6.43	72.85	88.20	-15.35	PEAK
3	7176.50	69.80	6.48	76.28	88.20	-11.92	PEAK


Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT320 6905
MHz
Polarization: Vertical
Remark:

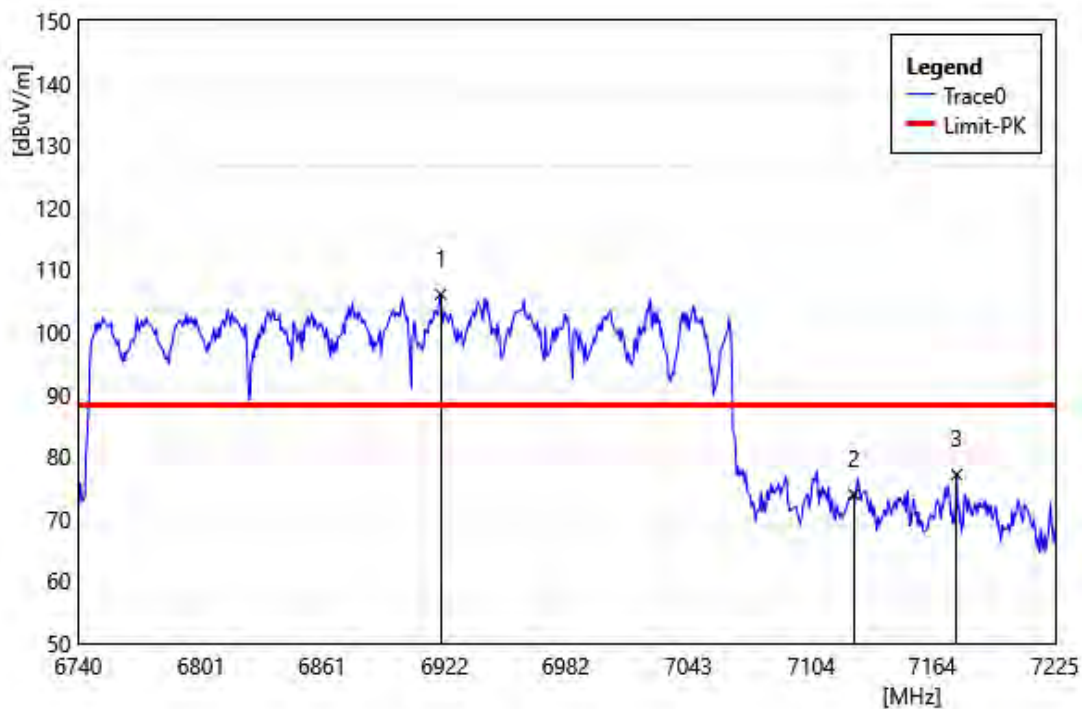

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	6919.94	99.77	6.29	106.06	88.20	17.86	PEAK
2	7125.00	67.49	6.43	73.92	88.20	-14.28	PEAK
3	7176.02	70.62	6.47	77.09	88.20	-11.11	PEAK


Average

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 5955 MHz
Polarization: Horizontal
Remark:

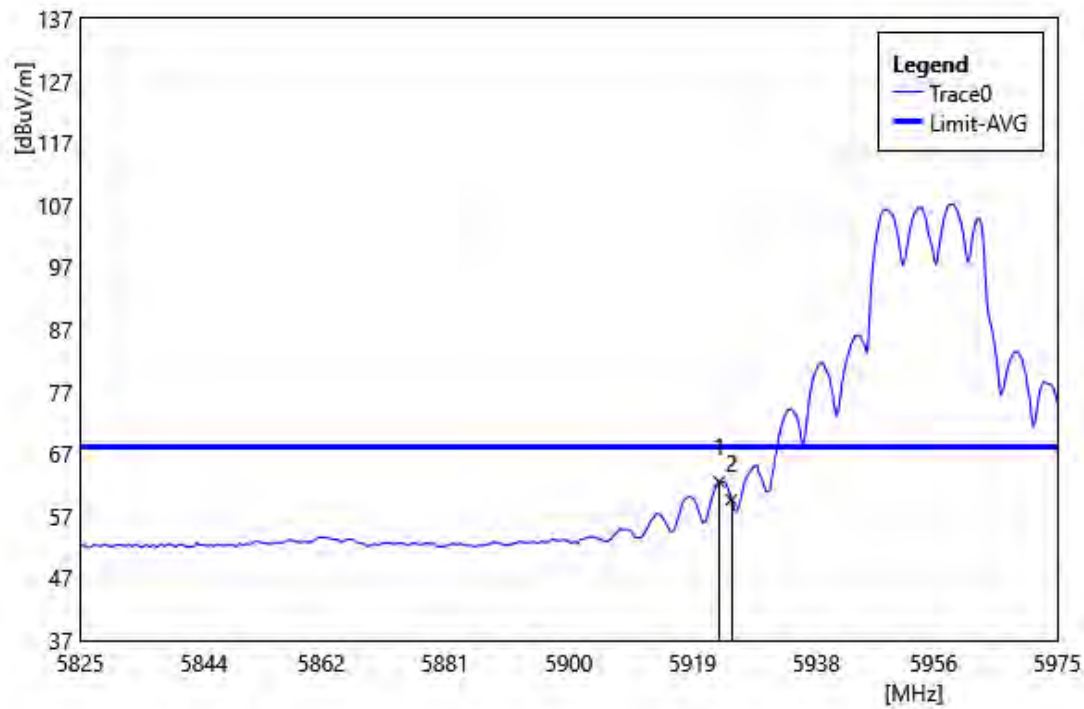


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.10	59.18	3.33	62.52	68.20	-5.69	AVG
2	5925.00	56.33	3.31	59.64	68.20	-8.56	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 5955 MHz		
Polarization:	Vertical		
Remark:			

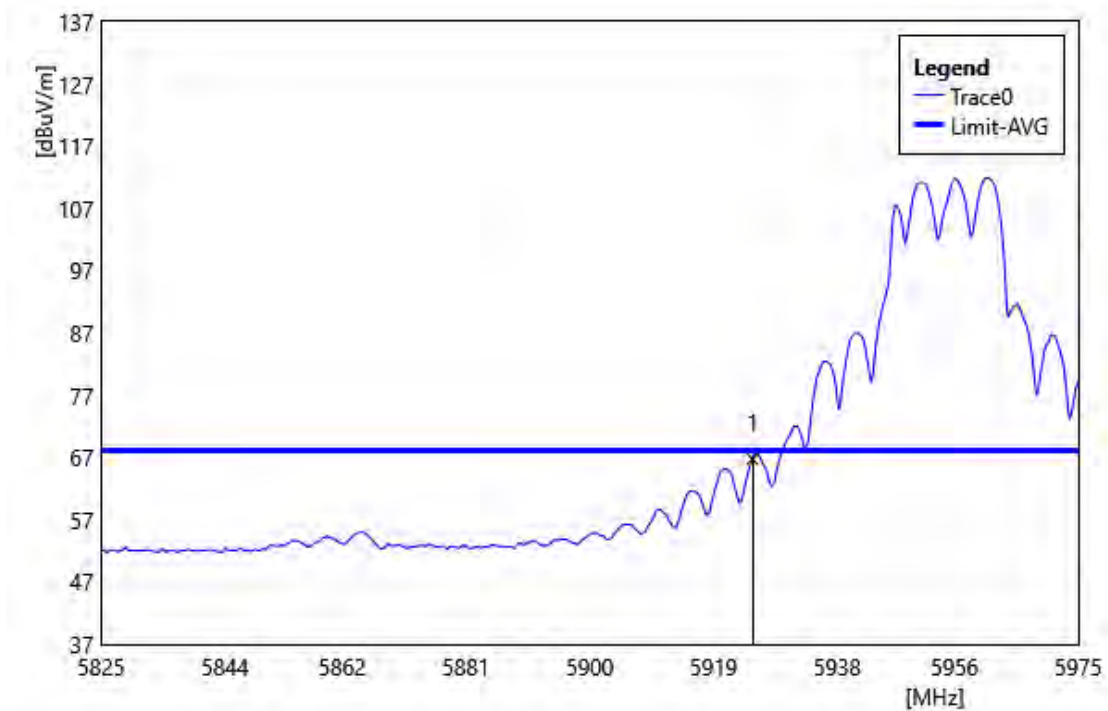


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5925.00	63.42	3.31	66.73	68.20	-1.47	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11a 7115 MHz		
Polarization:	Horizontal		
Remark:			

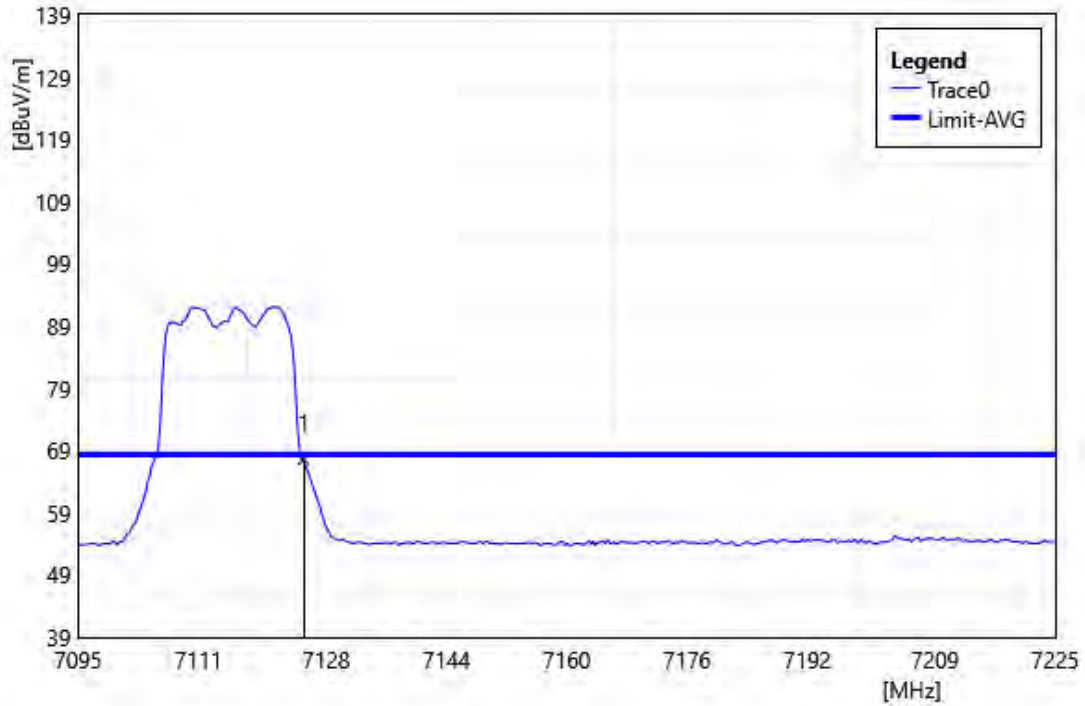


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	61.15	6.43	67.58	68.20	-0.62	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11a 7115 MHz
Polarization: Vertical
Remark:

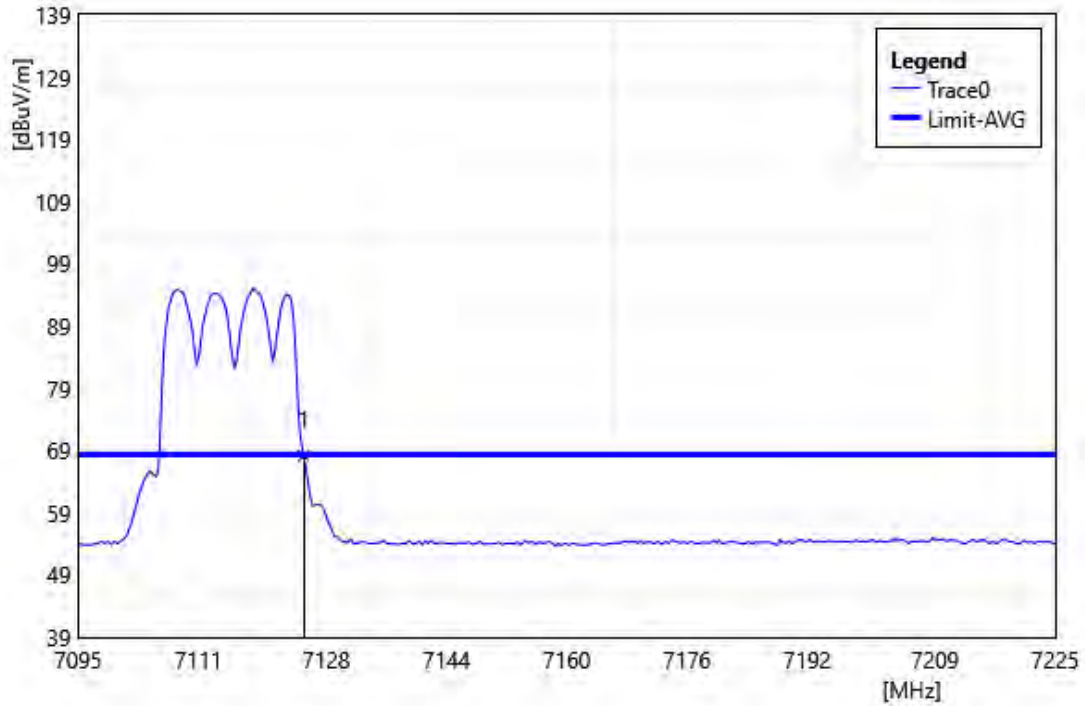


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	61.72	6.43	68.15	68.20	-0.06	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 5955 MHz		
Polarization:	Horizontal		
Remark:			

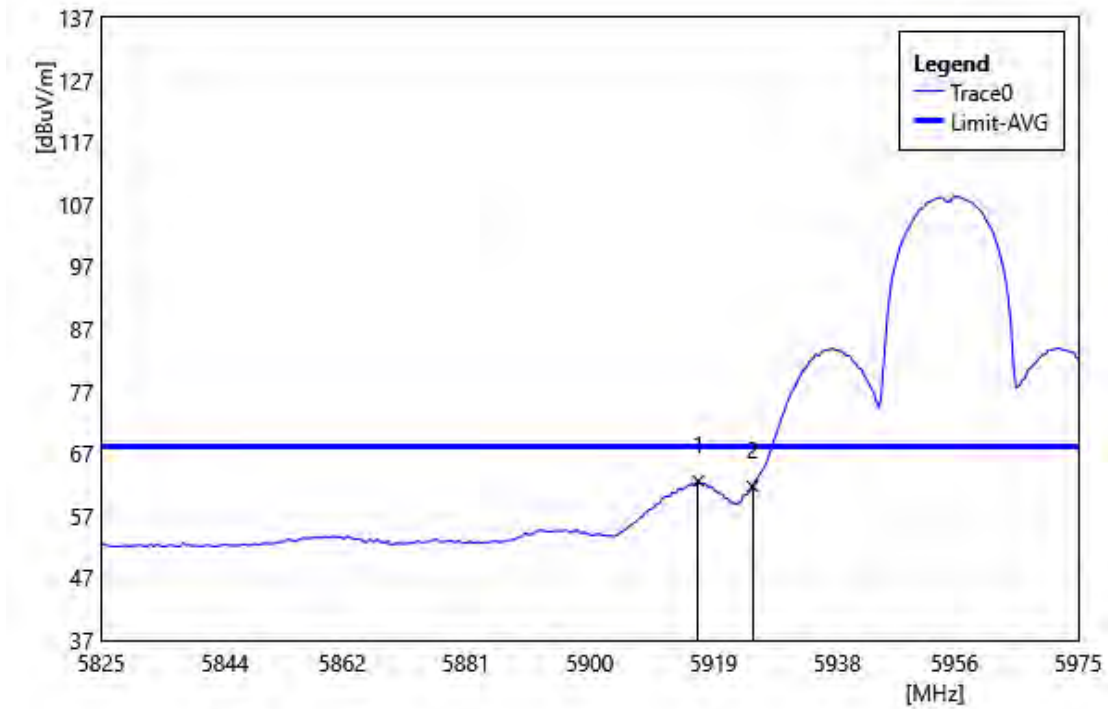


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5916.65	59.22	3.37	62.59	68.20	-5.61	AVG
2	5925.00	58.41	3.31	61.72	68.20	-6.48	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 5955 MHz
Polarization: Vertical
Remark:

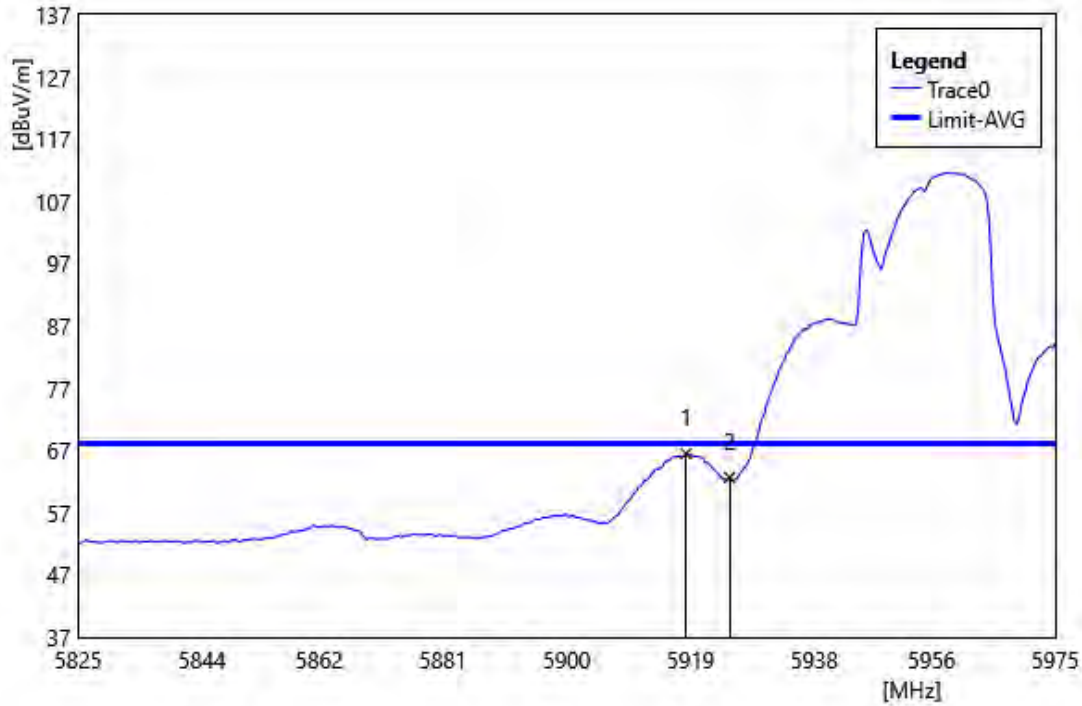


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5918.30	63.14	3.35	66.49	68.20	-1.72	AVG
2	5925.00	59.36	3.31	62.67	68.20	-5.53	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT20 7115 MHz
Polarization: Horizontal
Remark:

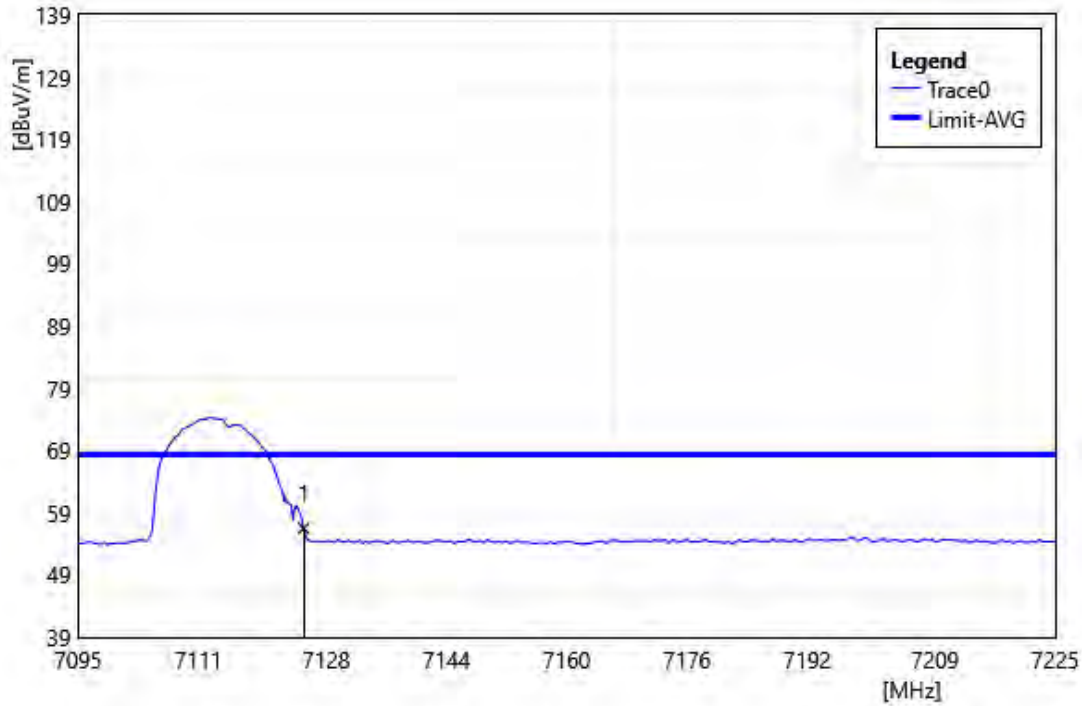


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	50.06	6.43	56.49	68.20	-11.71	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT20 7115 MHz		
Polarization:	Vertical		
Remark:			

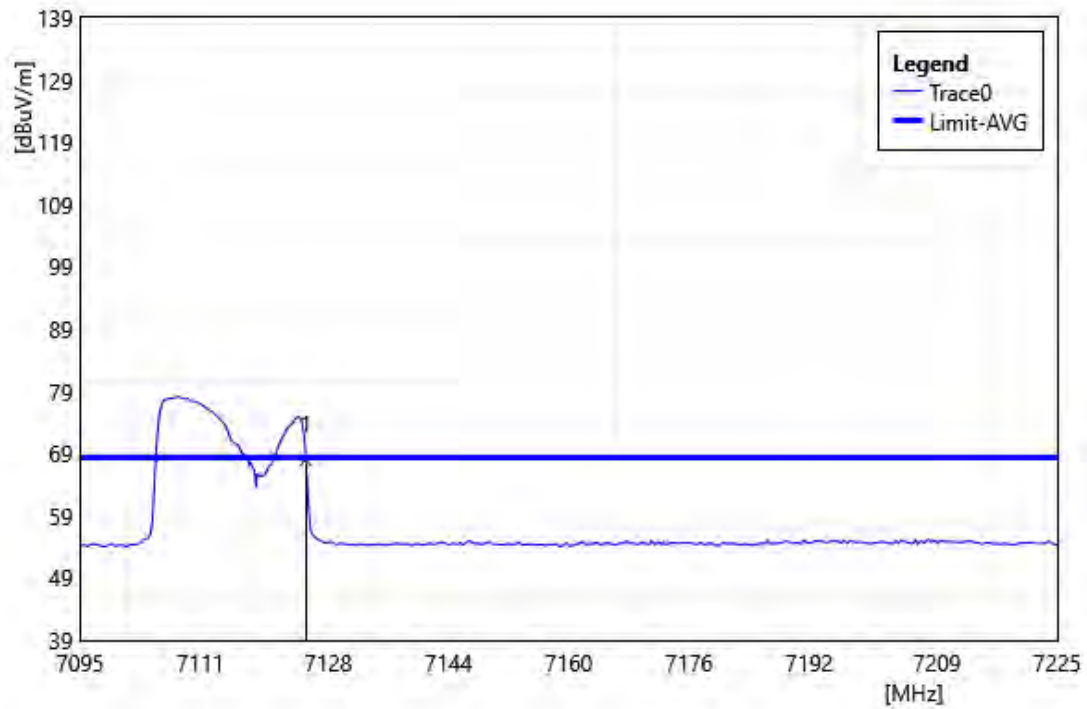


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	61.52	6.43	67.95	68.20	-0.25	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 5965 MHz		
Polarization:	Horizontal		
Remark:			

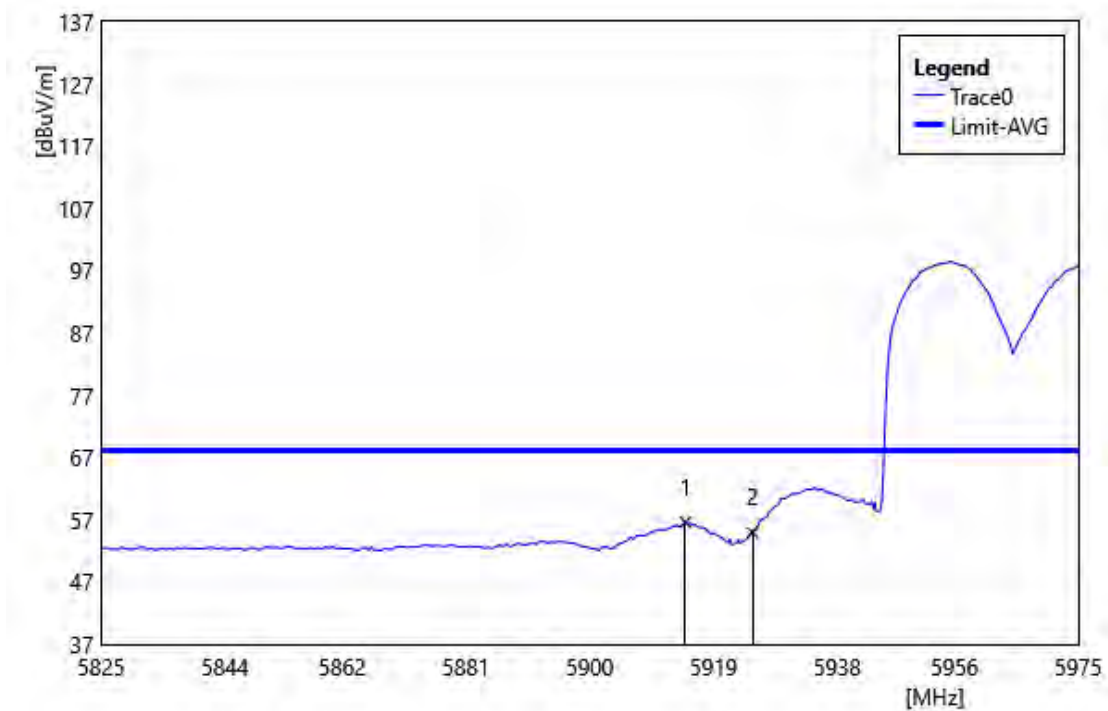


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5914.70	53.22	3.37	56.59	68.20	-11.61	AVG
2	5925.00	51.63	3.31	54.94	68.20	-13.26	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 5965 MHz
Polarization: Vertical
Remark:

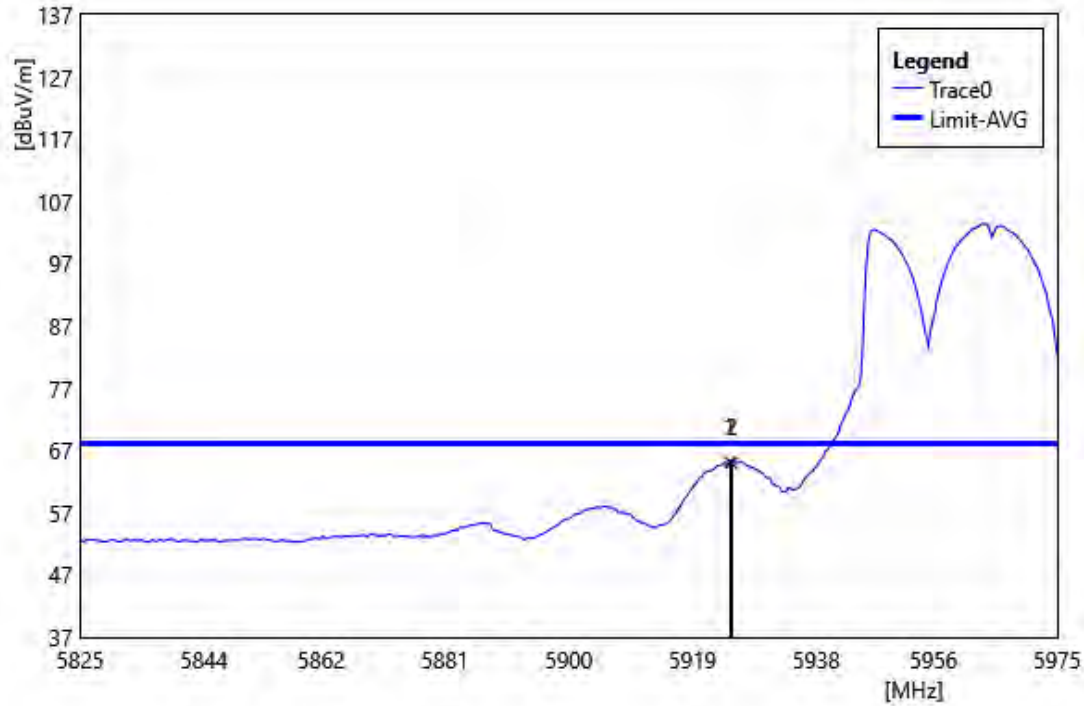


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.75	61.90	3.31	65.21	68.20	-2.99	AVG
2	5925.00	61.69	3.31	65.00	68.20	-3.20	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT40 7085 MHz
Polarization: Vertical
Remark:

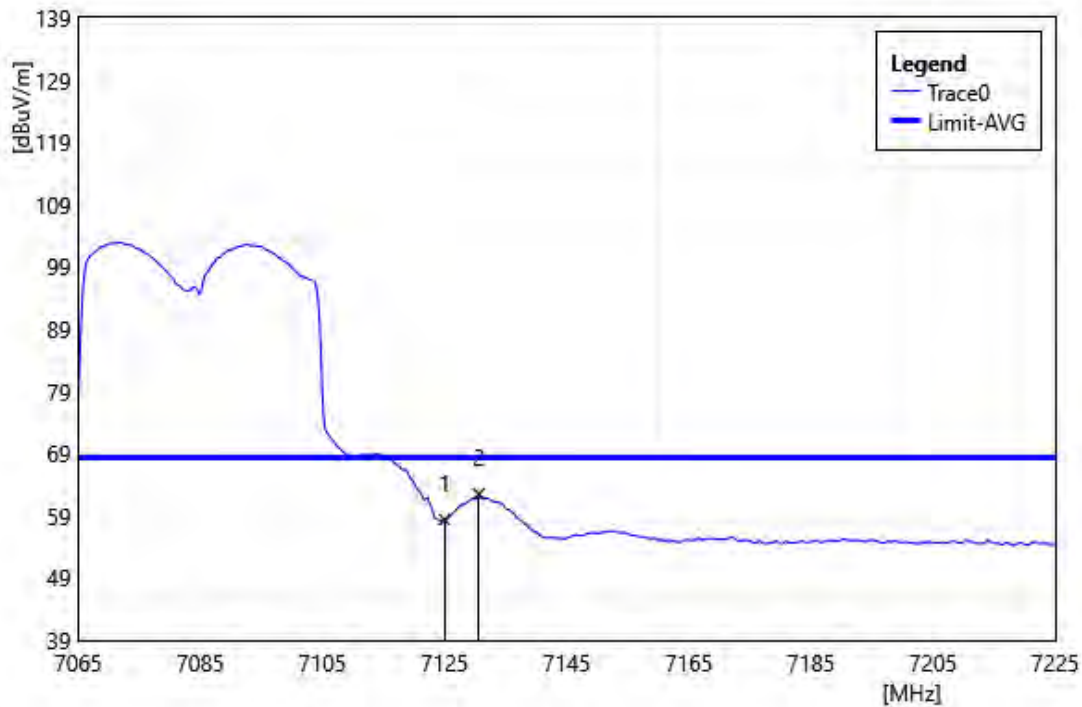


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	51.95	6.43	58.38	68.20	-9.82	AVG
2	7130.60	56.07	6.42	62.49	68.20	-5.71	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT40 7085 MHz		
Polarization:	Vertical		
Remark:			

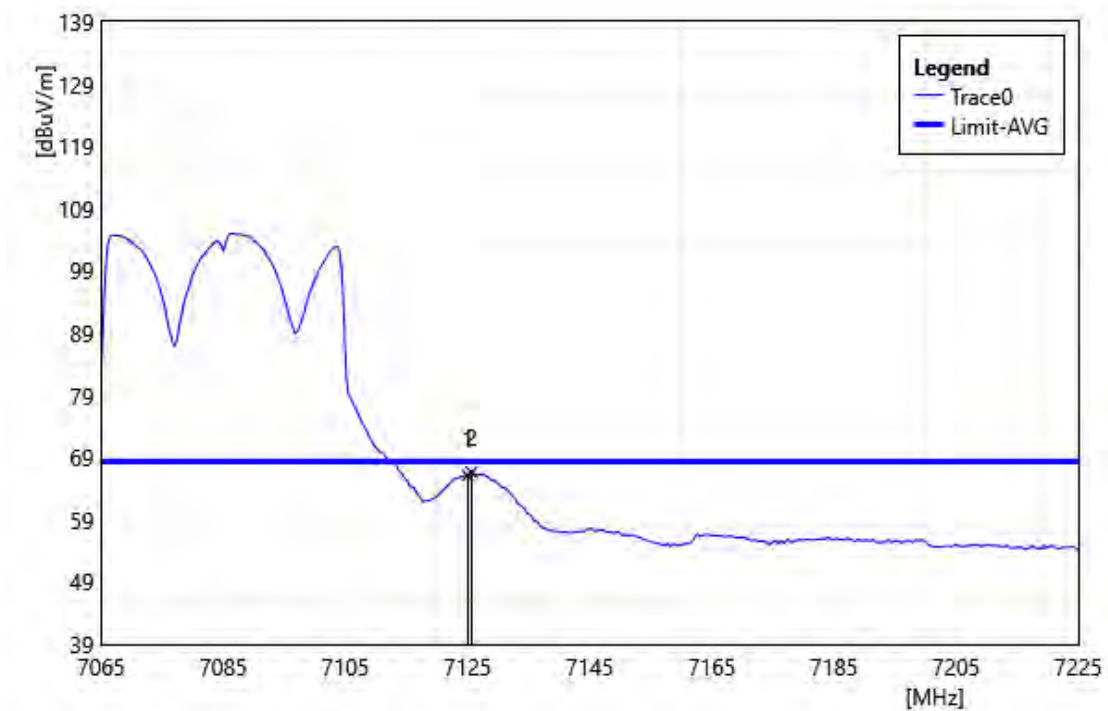


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	59.70	6.43	66.13	68.20	-2.07	AVG
2	7125.64	60.21	6.42	66.63	68.20	-1.57	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT80 5985 MHz		
Polarization:	Horizontal		
Remark:			

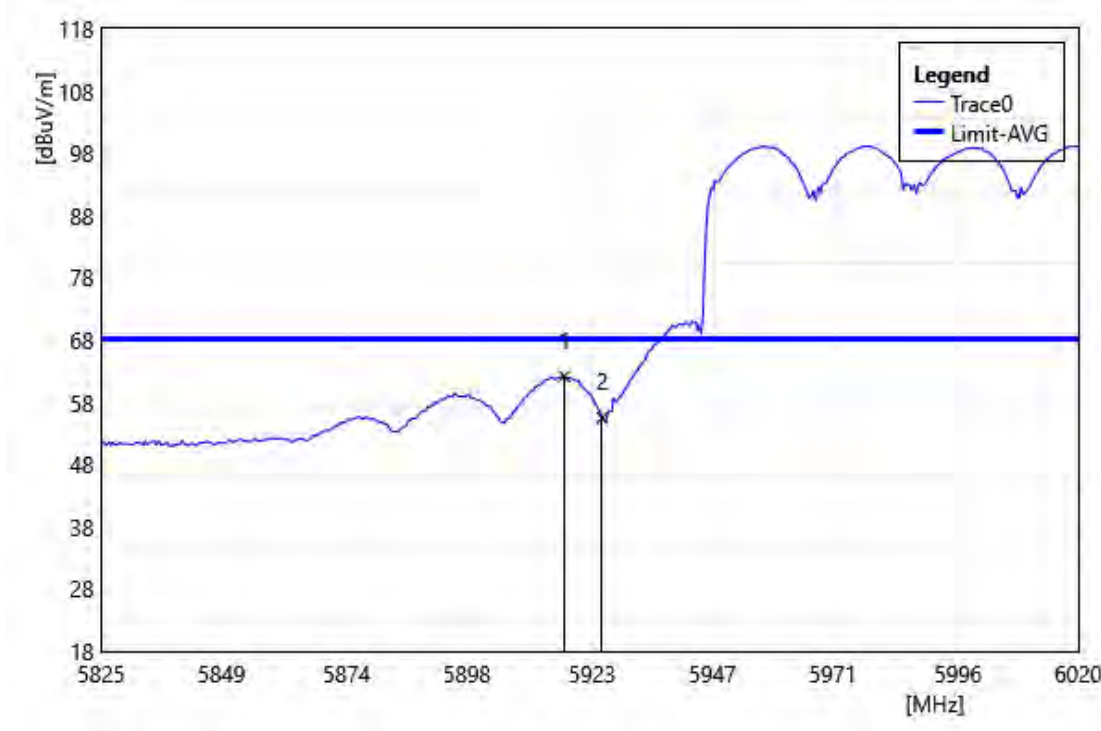


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5917.43	58.80	3.36	62.16	68.20	-6.04	AVG
2	5925.00	52.17	3.31	55.48	68.20	-12.72	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 5985 MHz
Polarization: Vertical
Remark:

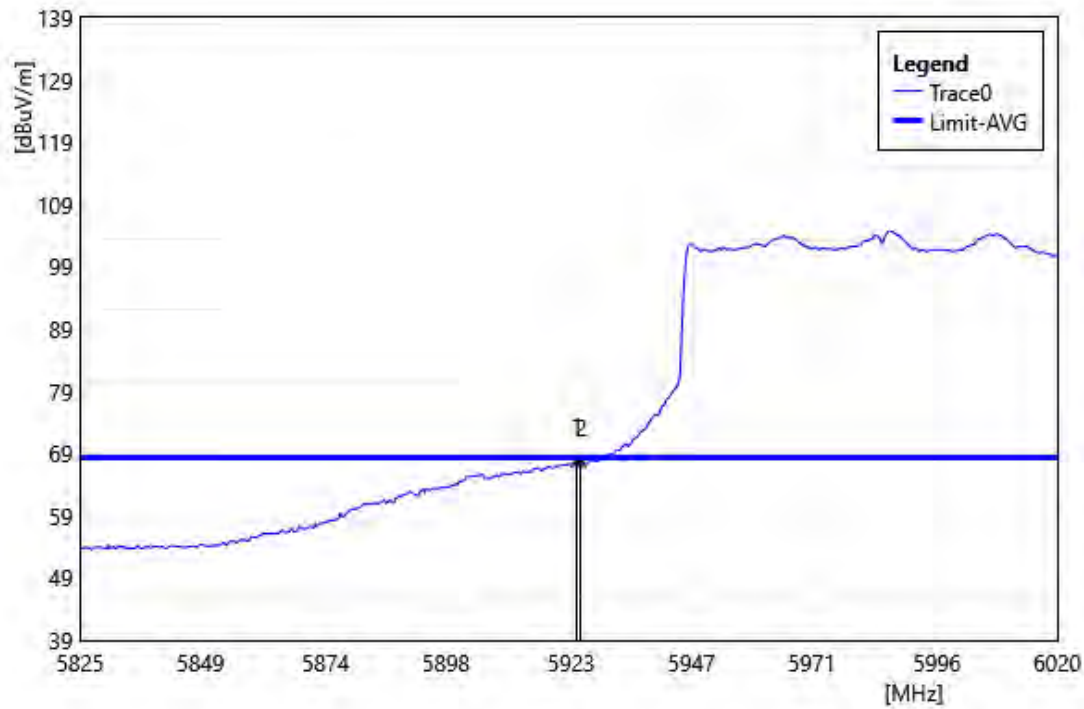


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.06	64.30	3.32	67.62	68.20	-0.58	AVG
2	5925.00	64.21	3.31	67.52	68.20	-0.68	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 7025 MHz
Polarization: Horizontal
Remark:

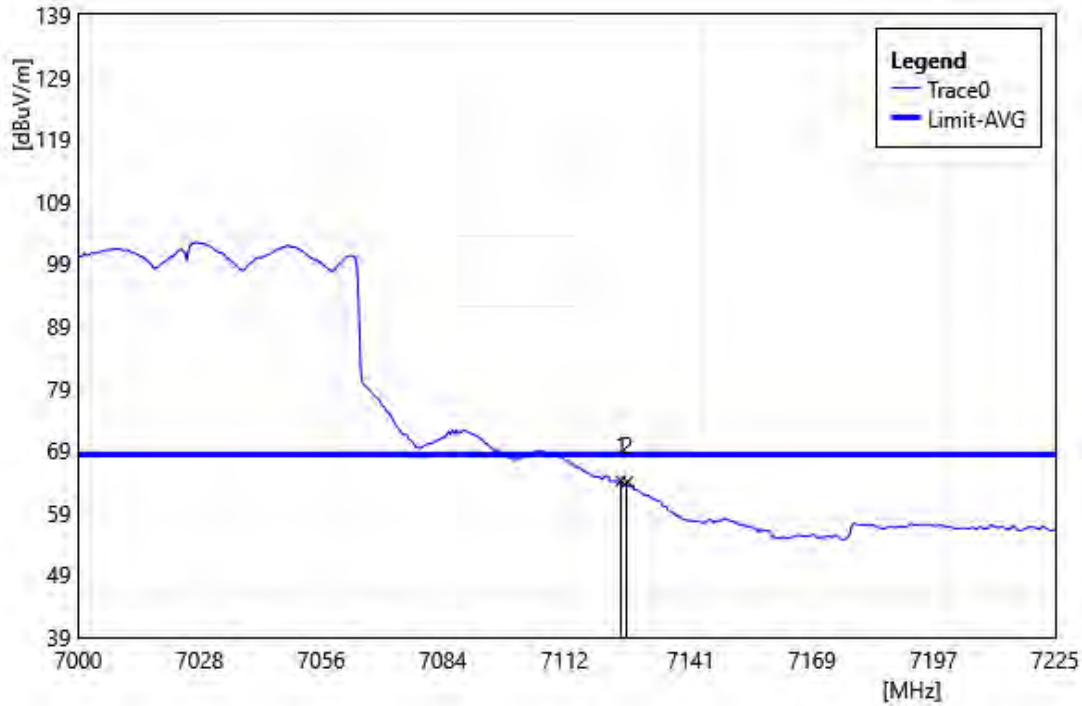


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	57.69	6.43	64.12	68.20	-4.08	AVG
2	7126.45	57.55	6.42	63.97	68.20	-4.23	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT80 7025 MHz
Polarization: Vertical
Remark:

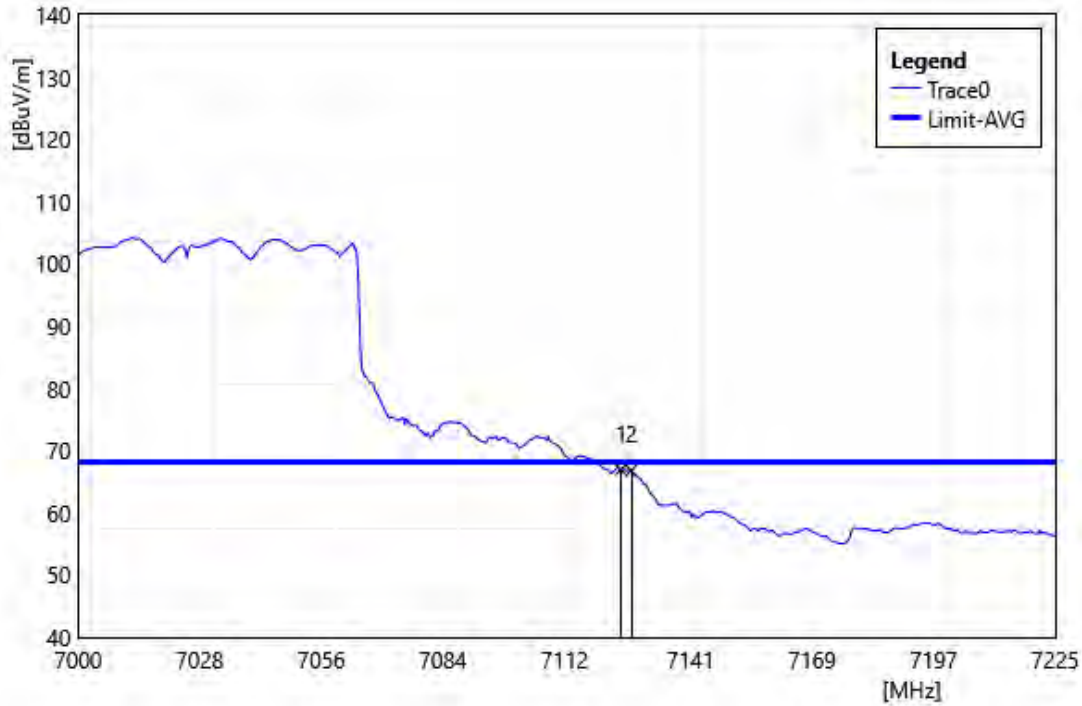


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	60.52	6.43	66.95	68.20	-1.25	AVG
2	7127.35	60.38	6.42	66.80	68.20	-1.40	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Horizontal		
Remark:			

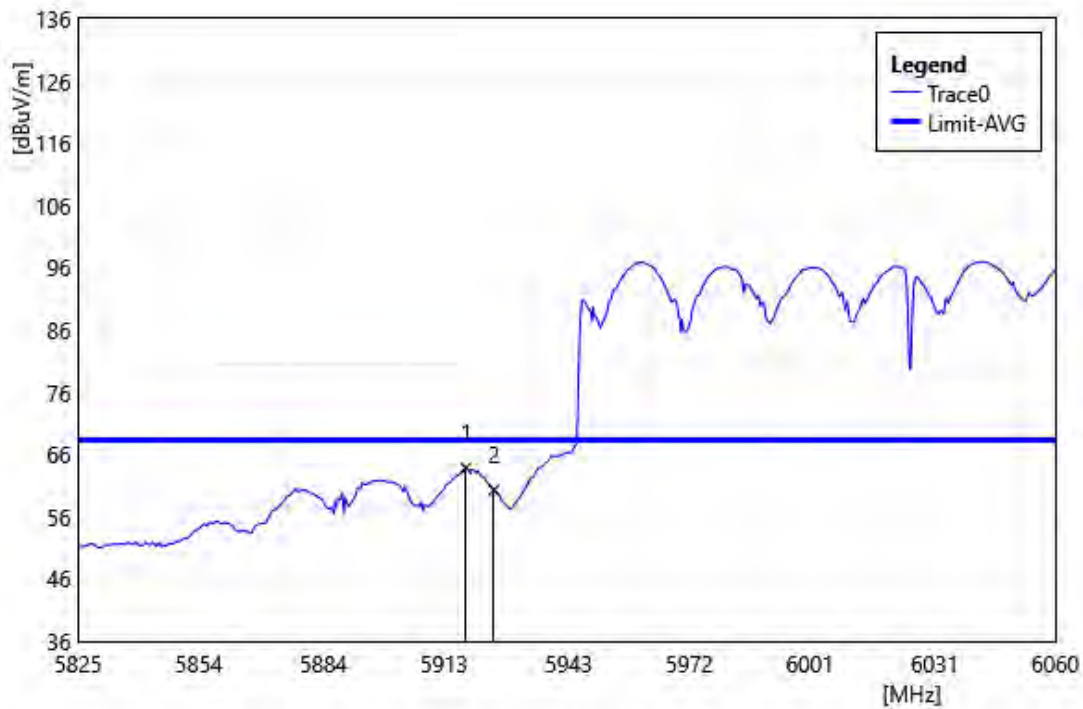


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5918.30	60.50	3.35	63.85	68.20	-4.35	AVG
2	5925.00	57.01	3.31	60.32	68.20	-7.88	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6025		
	MHz		
Polarization:	Vertical		
Remark:			

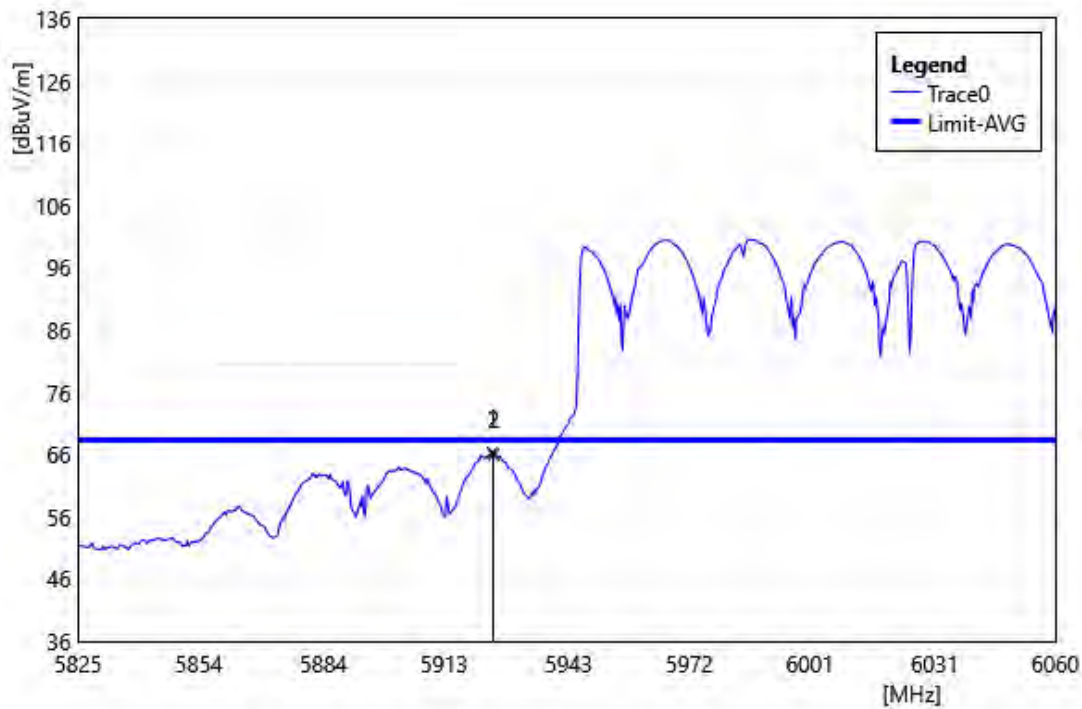


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5924.64	62.99	3.31	66.30	68.20	-1.90	AVG
2	5925.00	62.64	3.31	65.95	68.20	-2.25	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT160 6985		
	MHz		
Polarization:	Horizontal		
Remark:			

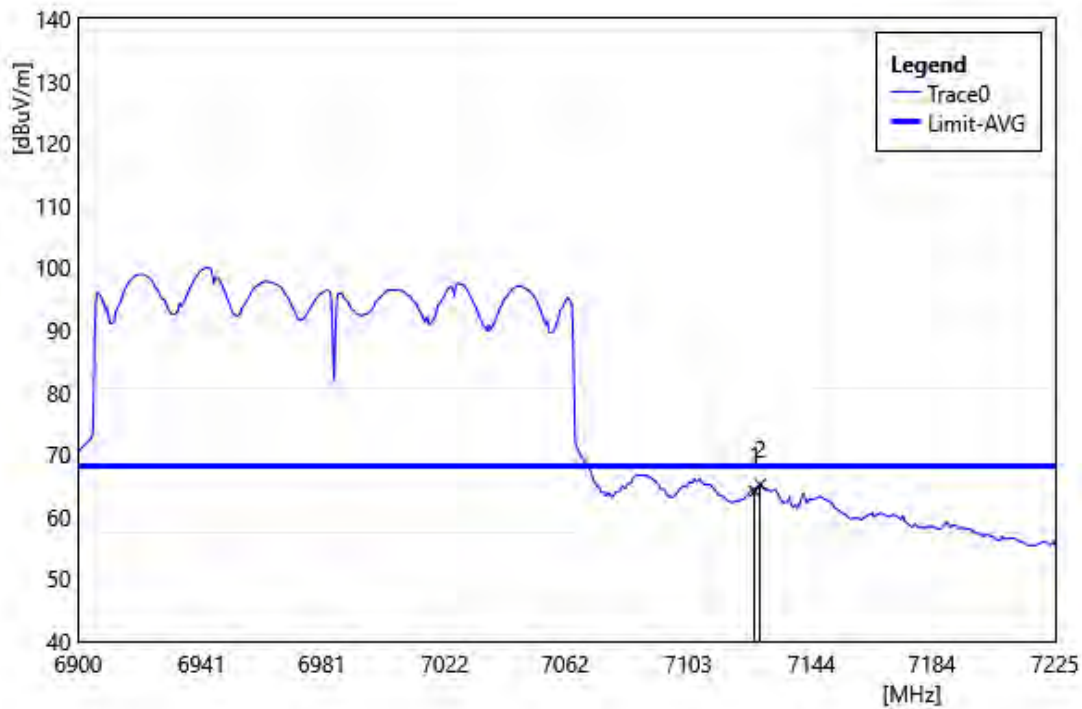


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	57.66	6.43	64.09	68.20	-4.11	AVG
2	7126.85	58.76	6.42	65.18	68.20	-3.02	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT160 6985
MHz
Polarization: Vertical
Remark:

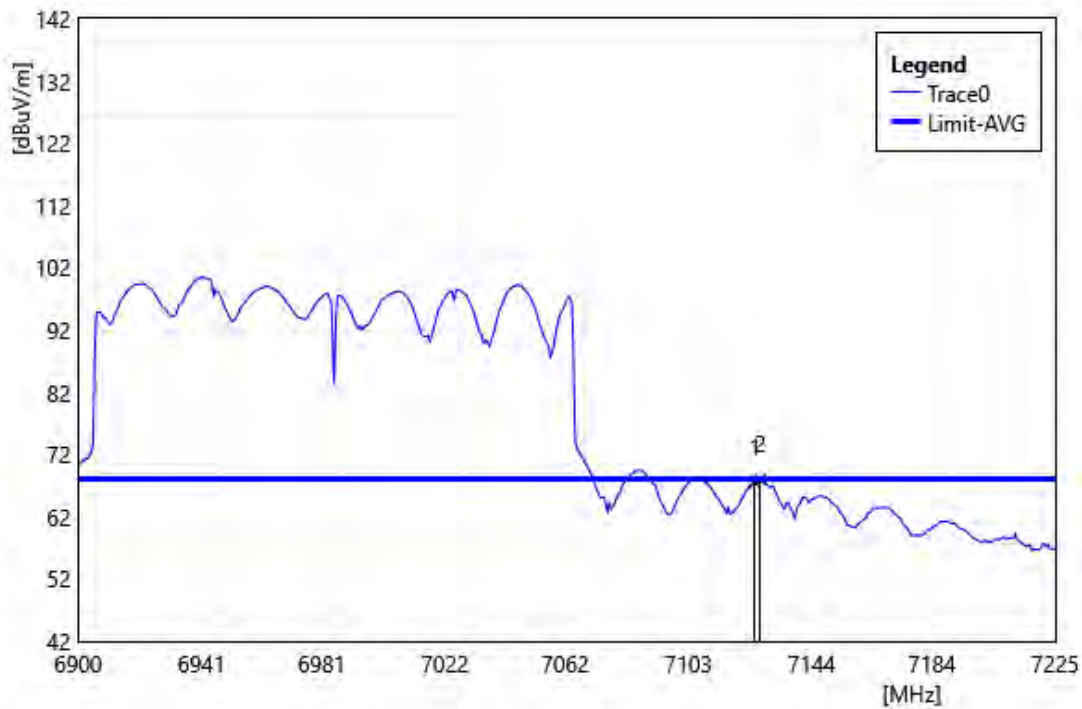


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	61.12	6.43	67.55	68.20	-0.65	AVG
2	7126.85	61.55	6.42	67.97	68.20	-0.23	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Horizontal		
Remark:			

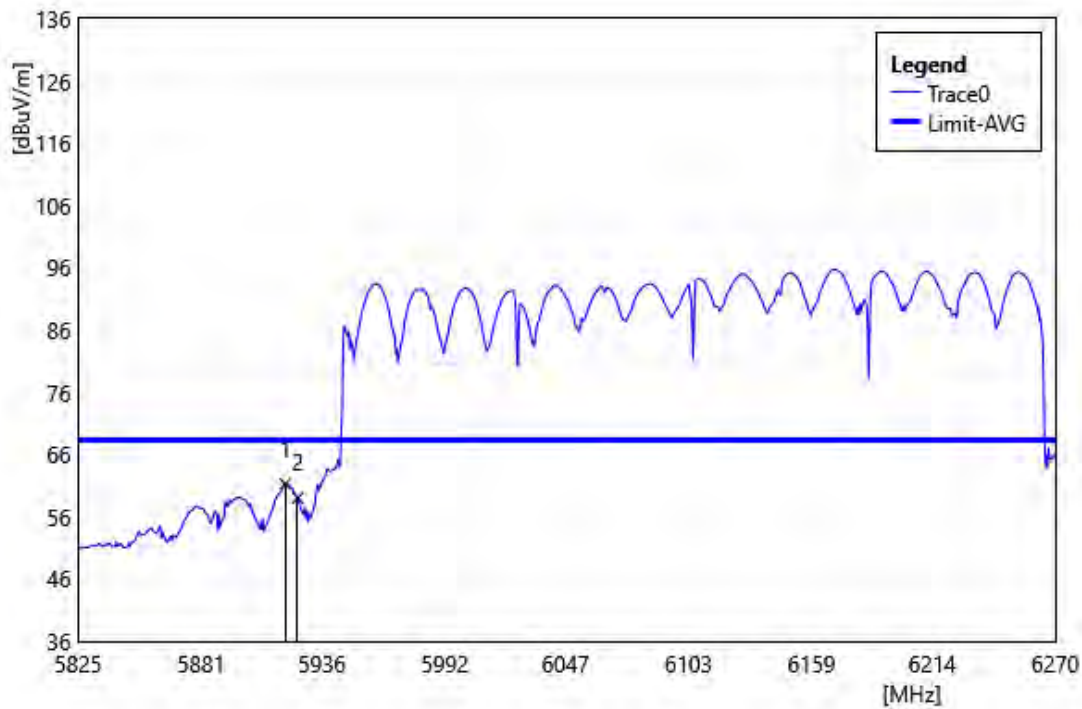


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5919.34	57.91	3.35	61.26	68.20	-6.94	AVG
2	5925.00	55.71	3.31	59.02	68.20	-9.18	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6105		
	MHz		
Polarization:	Vertical		
Remark:			

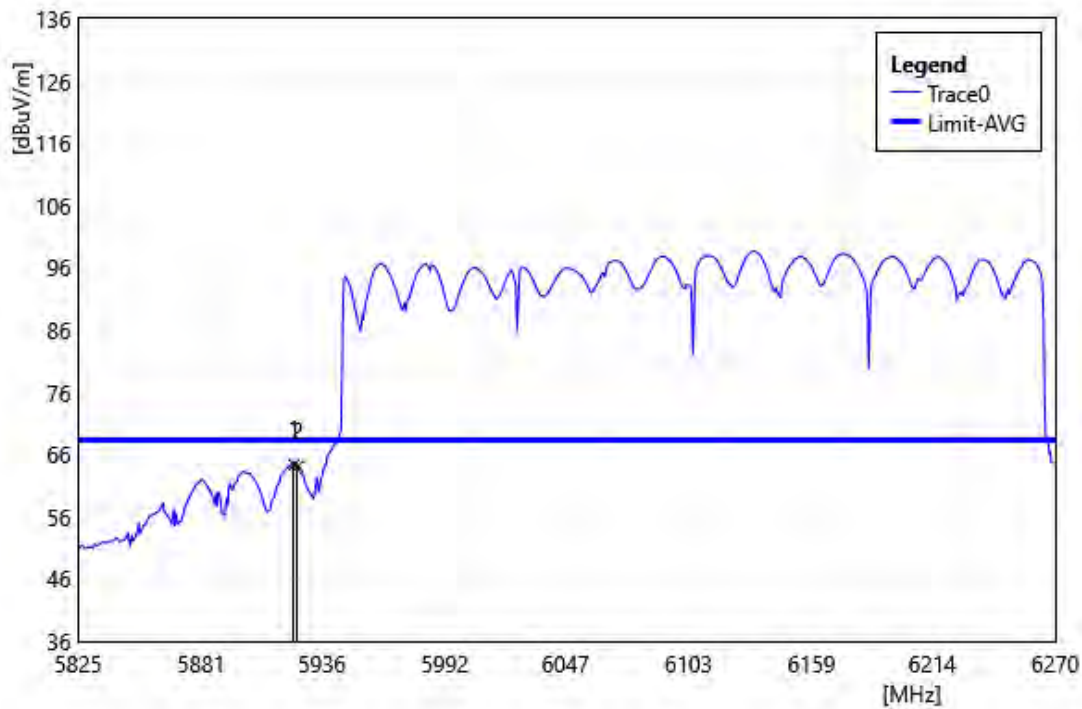


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5923.35	61.07	3.32	64.39	68.20	-3.81	AVG
2	5925.00	60.76	3.31	64.07	68.20	-4.13	AVG

Test Site: 96603-WG Standard: Part 15.407
Test Mode: 802.11be EHT320 6905
MHz
Polarization: Horizontal
Remark:

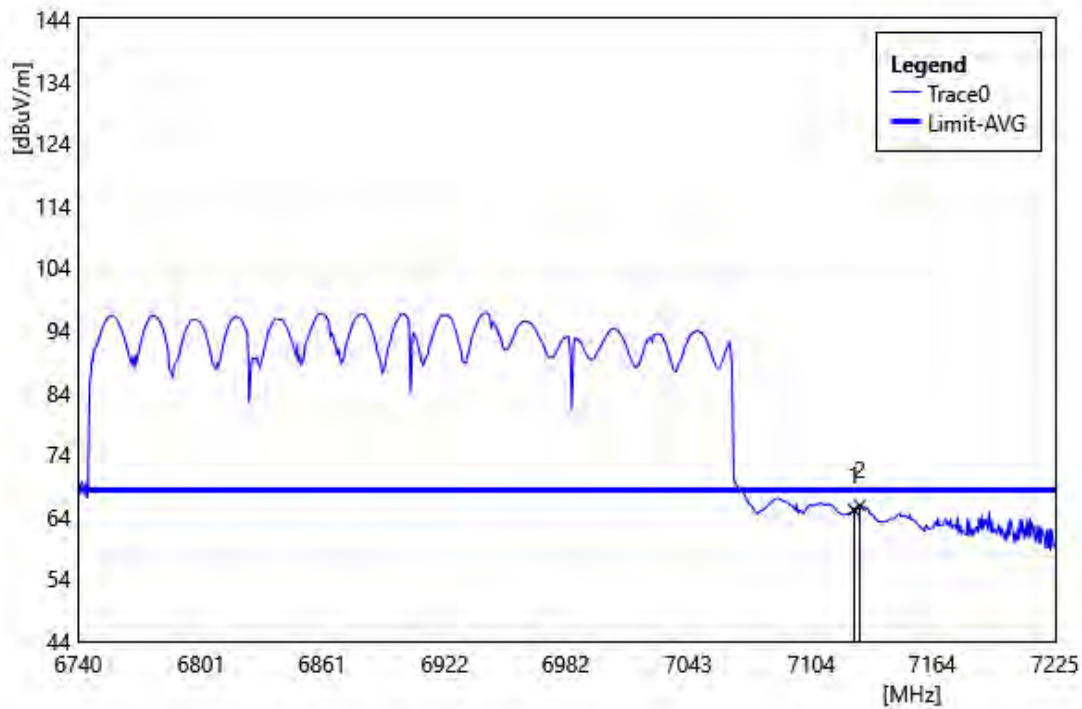

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	58.66	6.43	65.09	68.20	-3.11	AVG
2	7128.00	59.35	6.43	65.78	68.20	-2.42	AVG

Test Site:	96603-WG	Standard:	Part 15.407
Test Mode:	802.11be EHT320 6905		
	MHz		
Polarization:	Vertical		
Remark:			

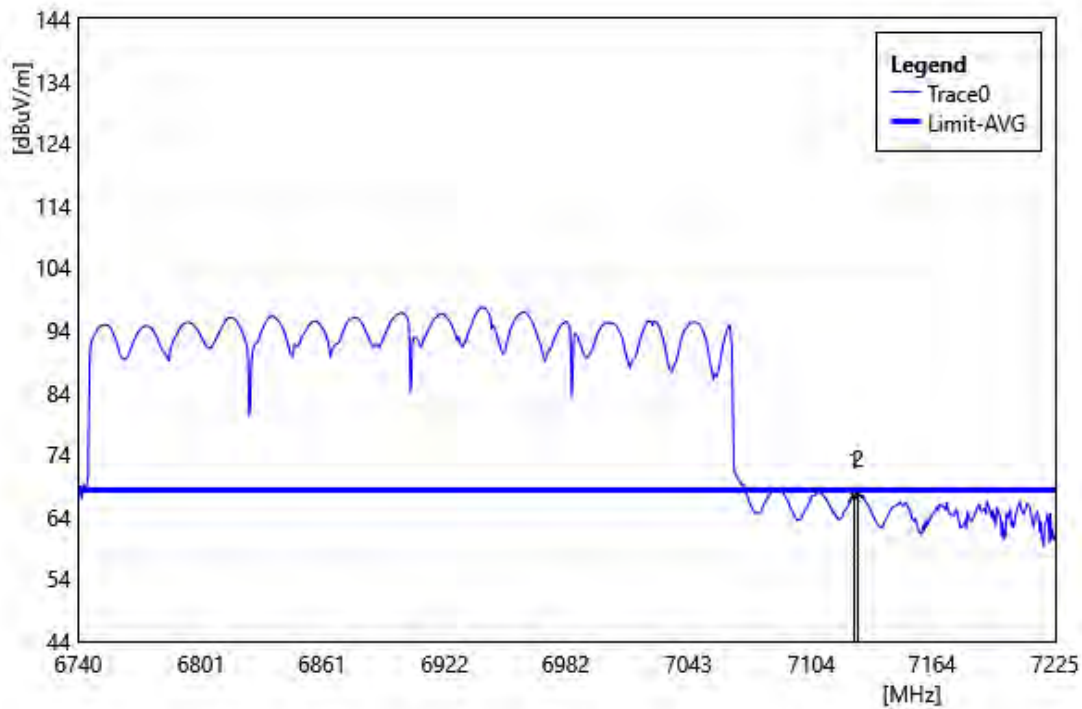

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	7125.00	60.93	6.43	67.36	68.20	-0.84	AVG
2	7127.03	61.31	6.42	67.73	68.20	-0.47	AVG