

产品规格书

PRODUCT SPECIFICATION

Customer: Actions Microelectronics Co., Ltd.

Customer’s part number: RBT-WIFI-524-004-2P5-L

Product description: 2.4G/5G iron sheet antenna

Manufacturer: Shenzhen RedbirdTek Technology Co., Ltd./銳博泰科技有限公司

Manufacturer Address: 201, No.9 Building, Software Park, KeJiZhong Er
Road, GaoXinQu, NanShan, Shenzhen, China

1、产品技术指标（PRODUCT TECHNICAL SPECIFICATION）

电性能指标 Electrical Specifications	
频率范围 Frequency Range (MHz)	2400-2500/5150-5350/5700-5850
频带宽度 Bandwidth (MHz)	2.4G: 100 5G: 350
输入阻抗 Input Impendence (Ω)	50
电压驻波比 V.S.W.R	≤2.0
增益 Gain (dBi)	2.4G: <3.04 5.1G: <2.22 5.8G: <2.12
极化形式 Polarization Type	垂直 Vertical
机械指标 Mechanical Specifications	
天线长度 Antenna Length (mm)	21.5*3.5*4.5mm
辐射体 Radiator	Nickel plating on steel sheet
连接器型号 Connect Type	DIP

工作温度 Working Temp(°C)	-20~90
储藏温度 Storage Temperature(°C)	-40~95
外壳颜色 Radome Color	silvery
重量 Weight (g)	0.5


Product Introduction

This antenna is designed and produced specifically for wireless built-in antenna devices, with the advantages of beautiful appearance, compact structure, and easy installation. The material is made of nickel plated stainless steel, with sufficient hardness.


2、产品图片（PRODUCT PICTURE）



3、产品规格图(PRODUCT SPECIFICATION CHART)

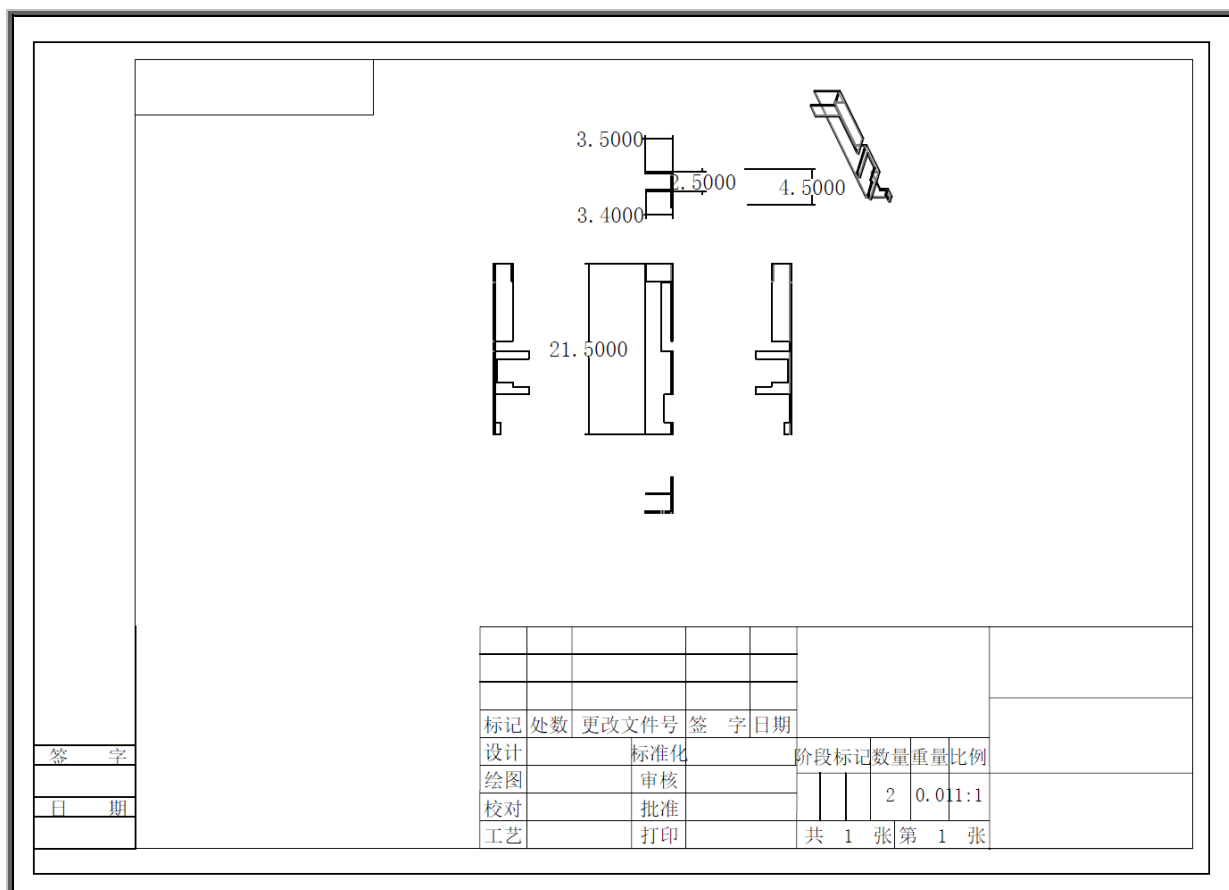

4、驻波图（STATIONARY WAVE PATTERN）

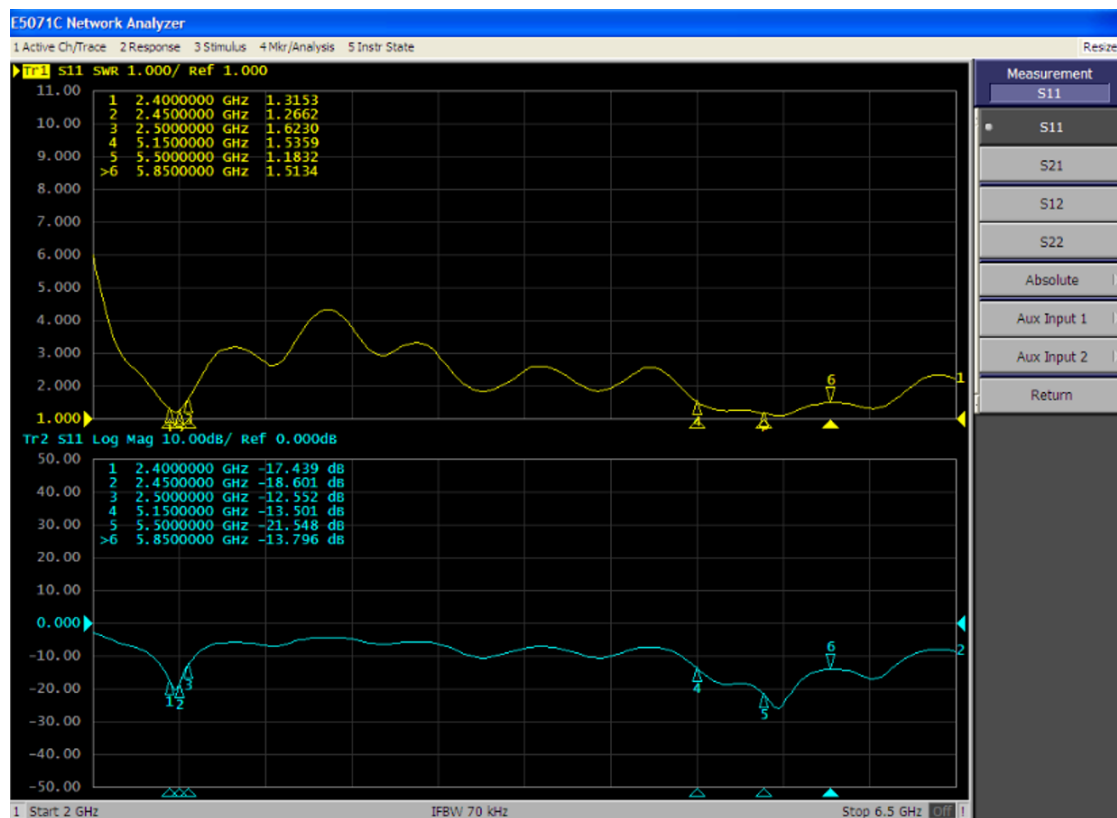

5.Gain efficiency value:

Frequency ID	1	2	3	4	5	6	7	8	9	10	11	
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0	
Gain (dBi)	3.04	2.08	2.18	2.16	2.08	1.97	2.23	2.20	2.30	1.95	2.01	
Efficiency (%)	56.40	61.23	54.23	56.21	49.45	57.12	56.43	51.78	57.23	52.02	48.54	

12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
5150.0	5200.0	5250.0	5300.0	5350.0	5400.0	5450.0	5500.0	5550.0	5600.0	5650.0	5700.0	5750.0	5800.0	5850.0
2.01	1.93	2.22	1.56	1.23	1.45	1.32	1.87	1.67	2.01	2.12	1.98	1.78	2.08	2.12
48.20	49.10	52.10	49.67	49.21	36.56	52.11	48.76	45.65	39.23	45.62	48.76	51.22	49.12	45.78

6.Field diagram

