

TEST REPORT

FCC DTS Test for IL7SF
Certification

APPLICANT
LG Electronics Inc.

REPORT NO.
HCT-RF-2101-FC119

DATE OF ISSUE
January 28, 2021

Tested by
Jin Gwan Lee



Technical Manager
Jong Seok Lee



HCT CO., LTD.

Soo Chan Lee
SooChan Lee / CEO

HCT CO., LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 F ax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

TEST REPORT

FCC DTS Test for
IL7SF

REPORT NO.

HCT-RF-2101-FC119

DATE OF ISSUE

January 28, 2021

Additional Model

-

Applicant

LG Electronics Inc.

222, LG-ro, Jinwi-myeon, Pyeongtaek-si, Gyeonggi-do, 451-713, Korea

**Eut Type
Model Name**

Silverbox RADIO ASM-RECEIVER
IL7SF

FCC ID

BEJIL7SF2

Modulation type

CCK/DSSS/OFDM

FCC Classification

Digital Transmission System(DTS)

FCC Rule Part(s)

Part 15.247

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	January 28, 2021	Initial Release

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

According to the Evaluation report, all of the data contained herein is reused from the reference FCC ID : BEJIL7SB2 report.

CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	7
GENERAL TEST PROCEDURES	7
DESCRIPTION OF TEST MODES	8
3. INSTRUMENT CALIBRATION	8
4. FACILITIES AND ACCREDITATIONS	8
FACILITIES	8
EQUIPMENT	8
5. ANTENNA REQUIREMENTS	9
6. MEASUREMENT UNCERTAINTY	9
7. DESCRIPTION OF TESTS	10
8. SUMMARY TEST OF RESULTS	27
9. TEST RESULT	28
9.1 DUTY CYCLE	28
9.2 6dB BANDWIDTH	31
9.3 OUTPUT POWER	40
9.4 POWER SPECTRAL DENSITY	54
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	60
9.6 RADIATED SPURIOUS EMISSIONS	97
9.7 RADIATED RESTRICTED BAND EDGES	105
10. LIST OF TEST EQUIPMENT	108
11. ANNEX A_ TEST SETUP PHOTO	110

1. EUT DESCRIPTION

Model	IL7SF		
Additional Model	-		
EUT Type	Silverbox RADIO ASM-RECEIVER		
Power Supply	DC 12.0 V		
Frequency Range	2412 MHz - 2462 MHz		
Max. RF Output Power	Peak Power	Internal Ant. (SISO)	802.11b: 18.96 dBm 802.11g: 24.18 dBm 802.11n(HT20): 24.45 dBm
		External Ant. (SISO)	802.11b: 23.14 dBm 802.11g: 24.71 dBm 802.11n(HT20): 25.04 dBm
		Internal Ant. + External Ant. (MIMO)	802.11n(HT20): 27.93 dBm
	Average Power	Internal Ant. (SISO)	802.11b: 13.19 dBm 802.11g: 16.34 dBm 802.11n(HT20): 16.20 dBm
		External Ant. (SISO)	802.11b: 17.08 dBm 802.11g: 18.86 dBm 802.11n(HT20): 16.82 dBm
		Internal Ant. + External Ant. (MIMO)	802.11n(HT20): 19.67 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n(HT20)		
Number of Channels	11 Channels		
Antenna Peak Gain	Internal Antenna - Peak Gain : 5.40 dBi External Antenna - Peak Gain : 1.20 dBi - PART NUMBER : TE : 2310901 / GM : 84610506		
Date(s) of Tests	December 11, 2020 ~ January 22, 2021		
Support for datarate	- 802.11b(Mbps) : 1, 2, 5.5, 11 - 802.11g(Mbps) : 6, 9, 12, 18, 24, 36, 48, 54 - [SISO] 802.11n : MCS0 ~ MCS7 - [MIMO] 802.11n : MCS8 ~ MCS15		
Multiple Outputs in Same Band	- 802.11n is only supported. - Multiple spatial streams : Supported. - Cyclic Delay Diversity : Not supported.		

Directional gain	5.40 dBi
EUT serial numbers	Conduction : 012023401 Radiation : 012023405

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10 (Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

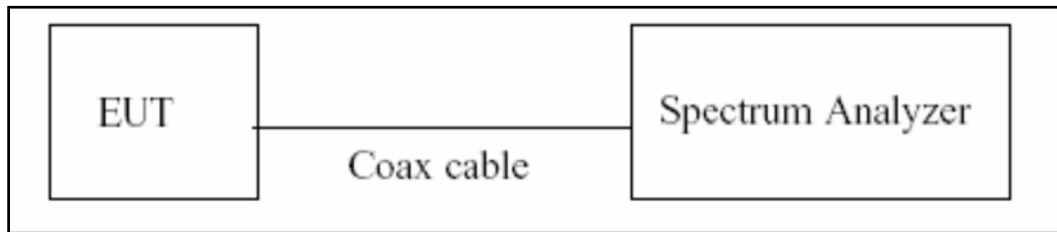

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. (50/6.25 = 8)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)


- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
: Measure the peak power of the transmitter.
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10.2 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
 - 2) Span = 1.5 times the DTS channel bandwidth.
 - 3) $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$.
 - 4) $VBW \geq 3 \times RBW$.
 - 5) Sweep = auto couple
 - 6) Detector = peak
 - 7) Trace Mode = max hold
 - 8) Allow trace to fully stabilize.
 - 9) Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 20 dBc]

Test Configuration



Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points $\geq 2 \times$ Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Internal Ant. Port Factor(dB)	External Ant. Port Factor(dB)
30	20.55	22.15
100	20.60	22.19
200	20.64	22.24
300	20.69	22.28
400	20.75	22.34
500	20.75	22.34
600	20.76	22.34
700	20.77	22.37
800	20.78	22.38
900	20.80	22.39
1000	20.85	22.44
2000	21.00	22.59
2400	21.05	22.65
2412	21.05	22.65
2437	21.05	22.64
2462	21.04	22.63
2500	21.04	22.63
3000	21.14	22.75
4000	21.22	22.81
5000	21.29	22.90
5700	21.77	25.57
5800	21.97	24.97
6000	21.98	24.98
7000	22.11	25.10
8000	22.11	25.09
9000	22.19	25.18
10000	22.29	25.28
11000	22.38	25.37
12000	22.47	25.46
13000	22.48	25.47
14000	22.51	25.51
15000	22.61	25.60

16000	22.69	25.69
17000	22.90	25.88
18000	23.03	26.02
19000	22.95	25.94
20000	22.62	25.61
21000	22.75	25.74
22000	22.74	25.73
23000	22.75	25.70
24000	22.76	25.75
25000	22.86	25.86

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss + EUT Cable Loss


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

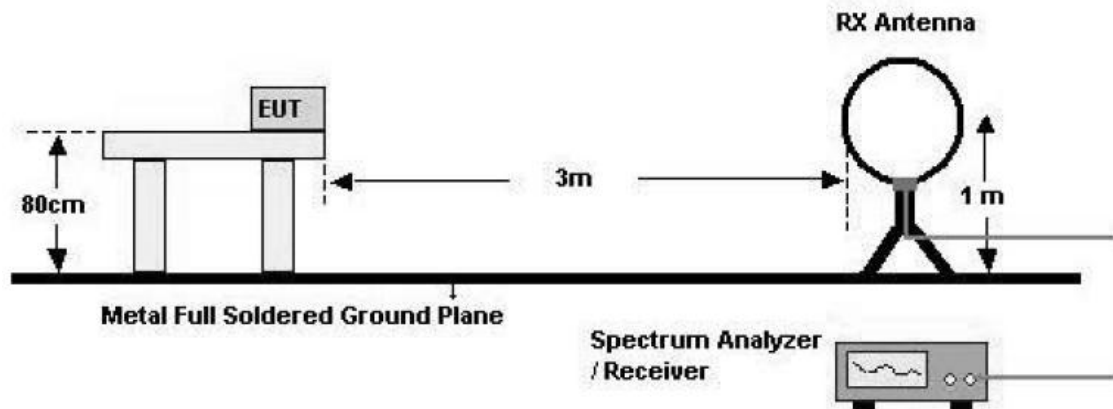

30 MHz - 1 GHz

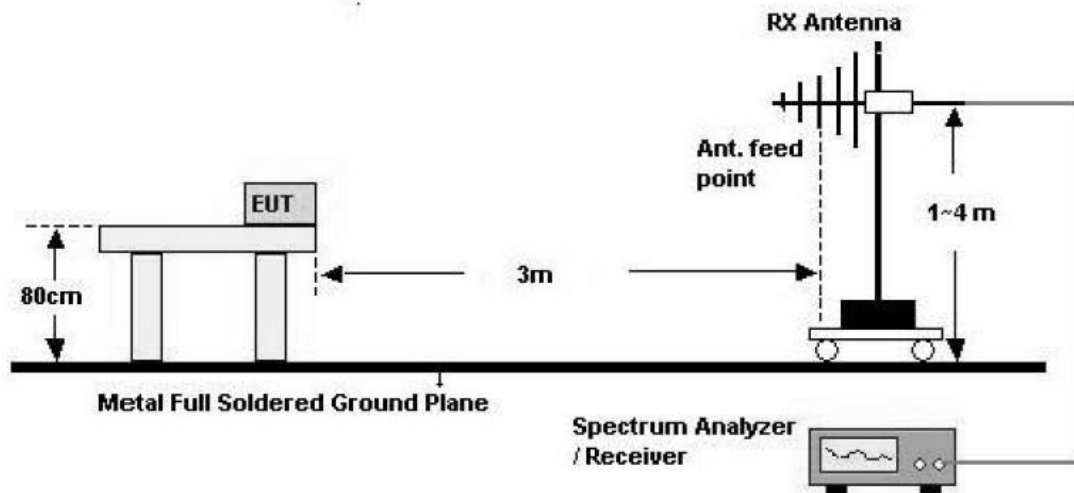

Above 1 GHz

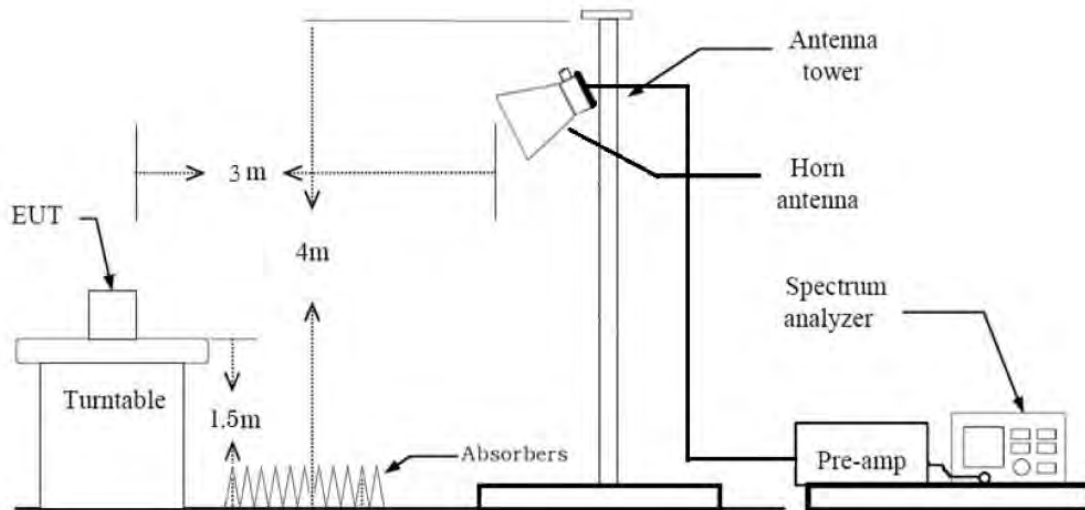

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = -80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered

that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
- ※In general, (1) is used mainly
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $< 98\%$)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98\%$,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
 - Detector = RMS
 - Averaging type = power (*i.e.*, RMS)
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - Sweep time = auto.
 - Trace mode = average (at least 100 traces).
 - Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
 - Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
11. Total(Measurement Type : Peak)
- = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle $\geq 98\%$)
- = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
- Total(Measurement Type : Average, Duty cycle < 98%)
- = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
- + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
2. All configurations of antenna were investigated and the worst case configuration results are reported.
 - Mode : Internal Ant(SISO), External Ant(SISO), Internal Ant+ External Ant(MIMO SDM)
 - Worstcase : Internal Ant(SISO)
3. EUT Axis
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X
4. Duty cycle factor applies only 802.11g/n (Duty cycle < 98%).
5. All datarate of operation were investigated and the worst case datarate results are reported
 - 802.11b : 1Mbps
 - 802.11g : 6Mbps
 - 802.11n : MCS0
6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. We don't perform powerline conducted emission test. Because this EUT is used with vehicle.

Conducted test

1. The EUT was configured with data rate of highest power.
2. SISO & MIMO were tested and the all case results are reported.
 - Mode : Internal Ant(SISO), External Ant(SISO), Internal Ant+ External Ant(SDM)

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		N/A(#Note)
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

#Note: Not Tested.


9. TEST RESULT

9.1 DUTY CYCLE


Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	12.420	12.520	0.992	0.035
	2	6.210	6.300	0.986	0.062
	5.5	2.320	2.411	0.962	0.167
	11	1.209	1.302	0.929	0.322
802.11g	6	2.065	2.165	0.954	0.205
	9	1.385	1.485	0.933	0.303
	12	1.040	1.147	0.907	0.425
	18	0.700	0.805	0.870	0.607
	24	0.532	0.634	0.839	0.762
	36	0.364	0.466	0.781	1.073
	48	0.276	0.378	0.730	1.366
	54	0.246	0.348	0.707	1.506
802.11n (HT20)	6.5 (MCS0)	1.920	2.020	0.950	0.221
	13 (MCS1)	0.980	1.085	0.903	0.442
	19.5 (MCS2)	0.665	0.770	0.864	0.637
	26 (MCS3)	0.505	0.610	0.828	0.820
	39 (MCS4)	0.354	0.456	0.776	1.100
	52 (MCS5)	0.272	0.374	0.727	1.383
	58.5 (MCS6)	0.248	0.350	0.709	1.496
	65 (MCS7)	0.228	0.330	0.691	1.606
802.11n (HT20) MIMO	MCS8	0.984	1.086	0.906	0.428
	MCS9	0.512	0.614	0.834	0.789
	MCS10	0.356	0.458	0.777	1.094
	MCS11	0.276	0.378	0.730	1.366
	MCS12	0.200	0.300	0.667	1.761
	MCS13	0.160	0.262	0.611	2.142
	MCS14	0.148	0.249	0.594	2.259
	MCS15	0.136	0.238	0.571	2.430

Test Plots


Duty cycle plot (802.11b(1Mbps))

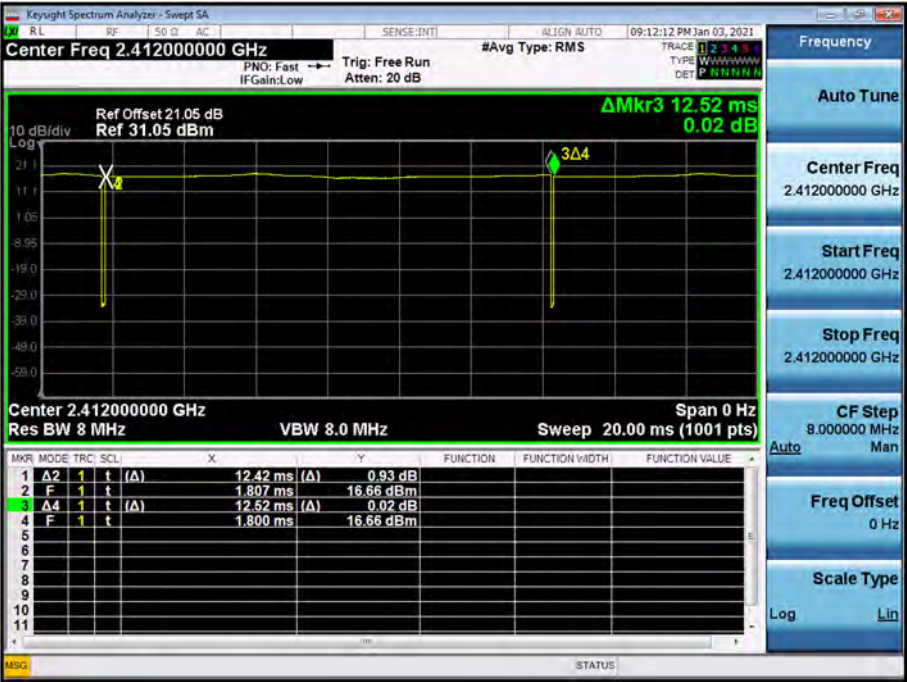


Duty cycle plot (802.11g(6Mbps))

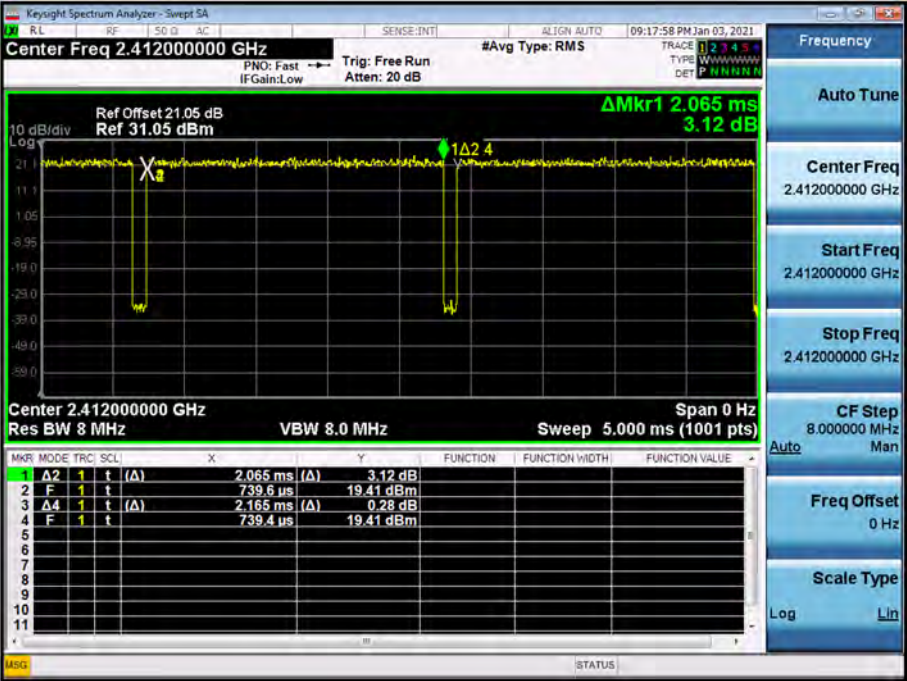

Duty cycle plot (802.11n(MCS0))

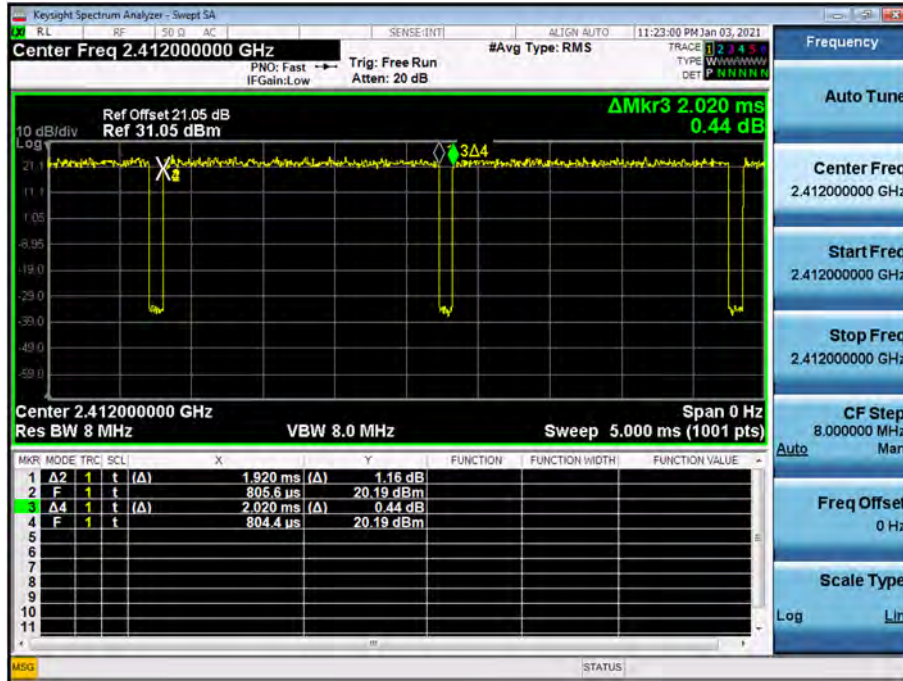

Duty cycle plot (802.11n MIMO(MCS8))

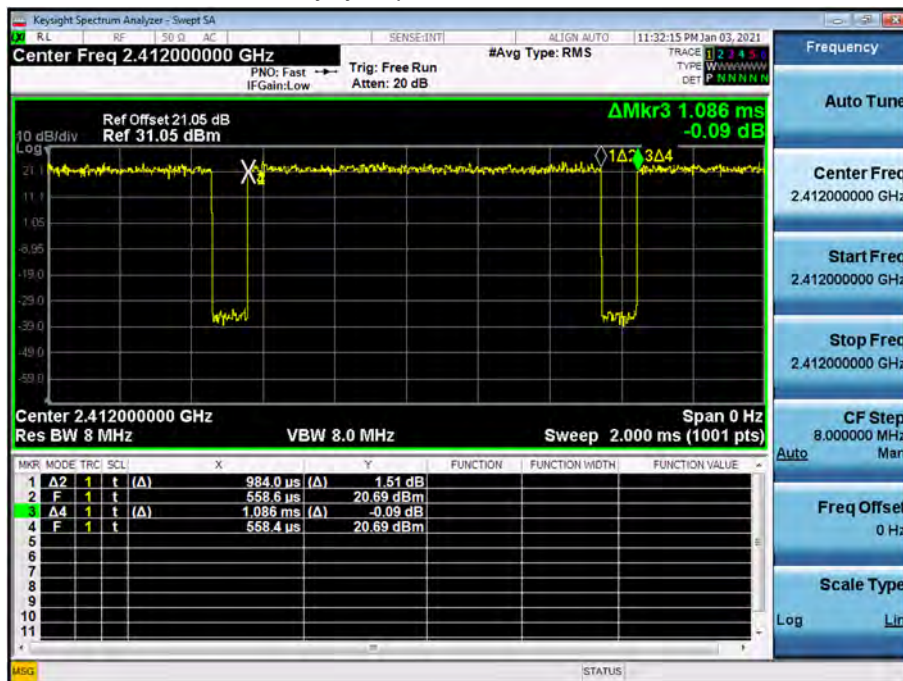

Note:

In order to simplify the report, attached plots were only the most lowest data rate.

9.2 6dB BANDWIDTH

[Internal ANT_SISO]

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	7.087	> 0.5
2437	6	7.101	> 0.5
2462	11	7.106	> 0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.09	> 0.5
2437	6	16.32	> 0.5
2462	11	16.34	> 0.5

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.21	> 0.5
2437	6	17.57	> 0.5
2462	11	17.32	> 0.5

[External ANT_SISO]

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	7.107	> 0.5
2437	6	7.109	> 0.5
2462	11	7.091	> 0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.31	> 0.5
2437	6	16.09	> 0.5
2462	11	16.31	> 0.5

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.32	> 0.5
2437	6	17.18	> 0.5
2462	11	17.07	> 0.5

[Internal ANT_MIMO]

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.20	> 0.5
2437	6	17.31	> 0.5
2462	11	17.29	> 0.5


[External ANT_MIMO]

802.11n(HT20) Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.55	> 0.5
2437	6	17.58	> 0.5
2462	11	17.58	> 0.5


[Internal ANT_SISO]

■ Test Plots


6dB Bandwidth plot (802.11b-CH 1)

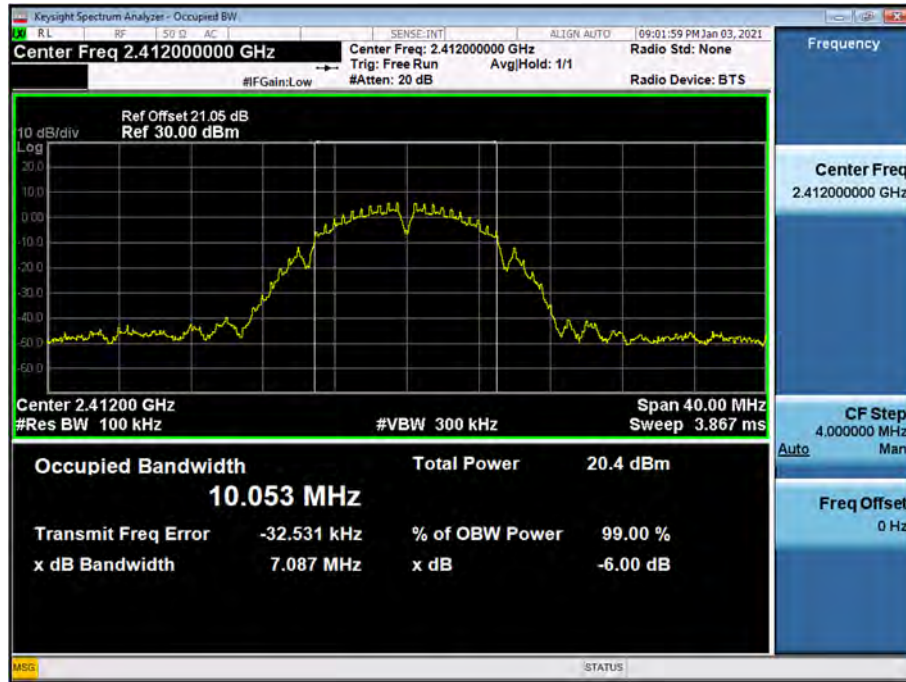

6dB Bandwidth plot (802.11g-CH 1)

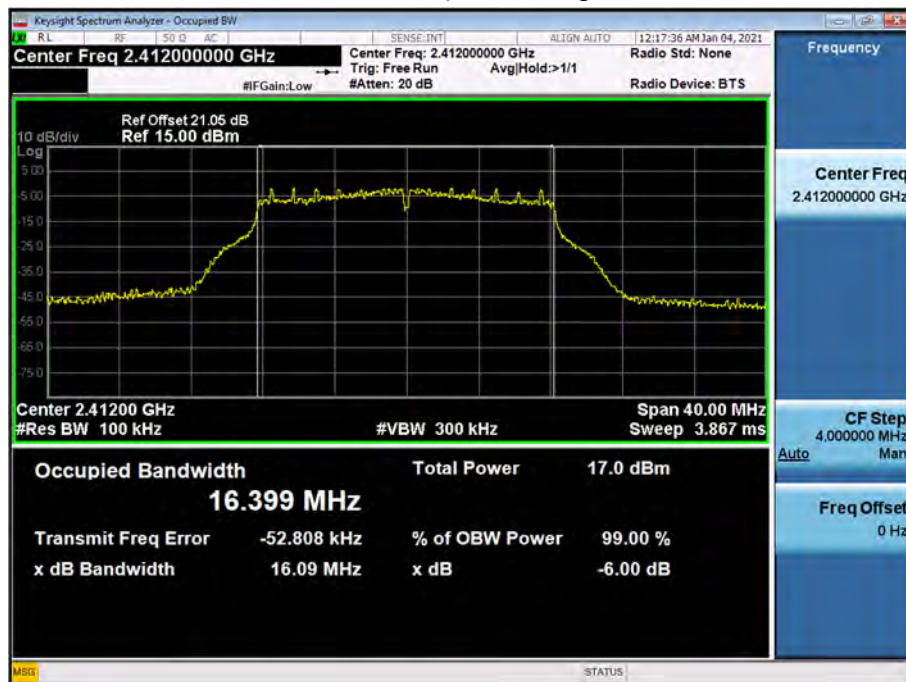


6dB Bandwidth plot (802.11n_HT20-CH 6)

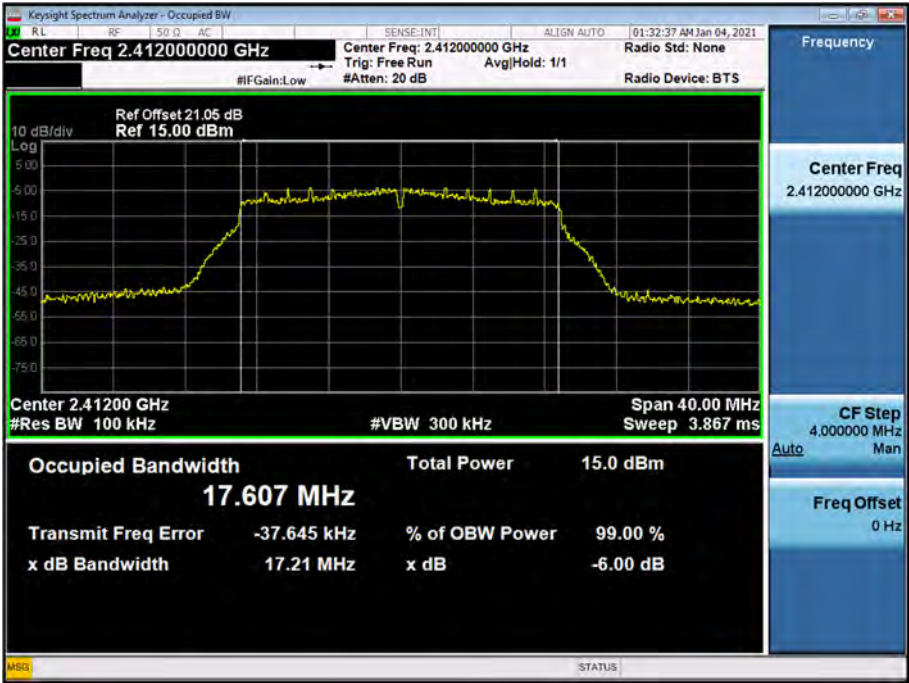

[External ANT_SISO]

■ Test Plots


6dB Bandwidth plot (802.11b-CH 11)

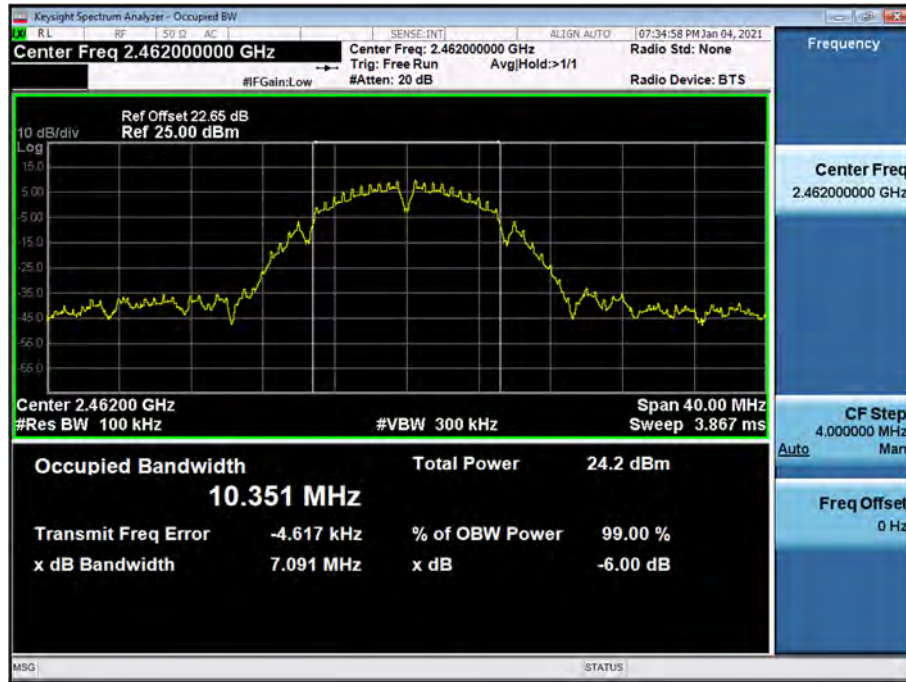

6dB Bandwidth plot (802.11g-CH 6)




6dB Bandwidth plot (802.11n_HT20-CH 11)

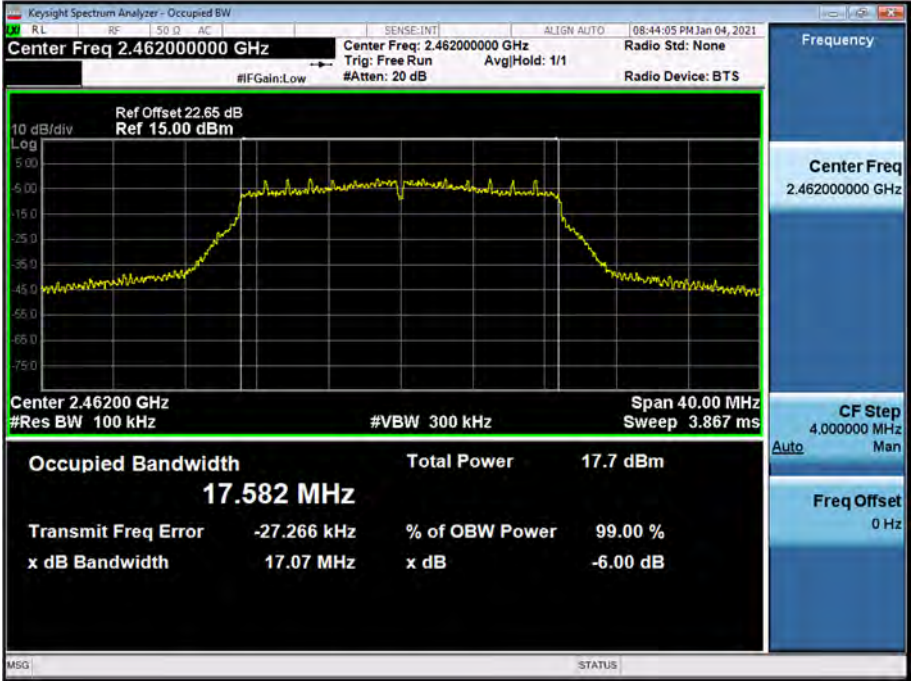

[Internal ANT_ MIMO]

■ Test Plots


6dB Bandwidth plot (802.11n_HT20-CH 1)

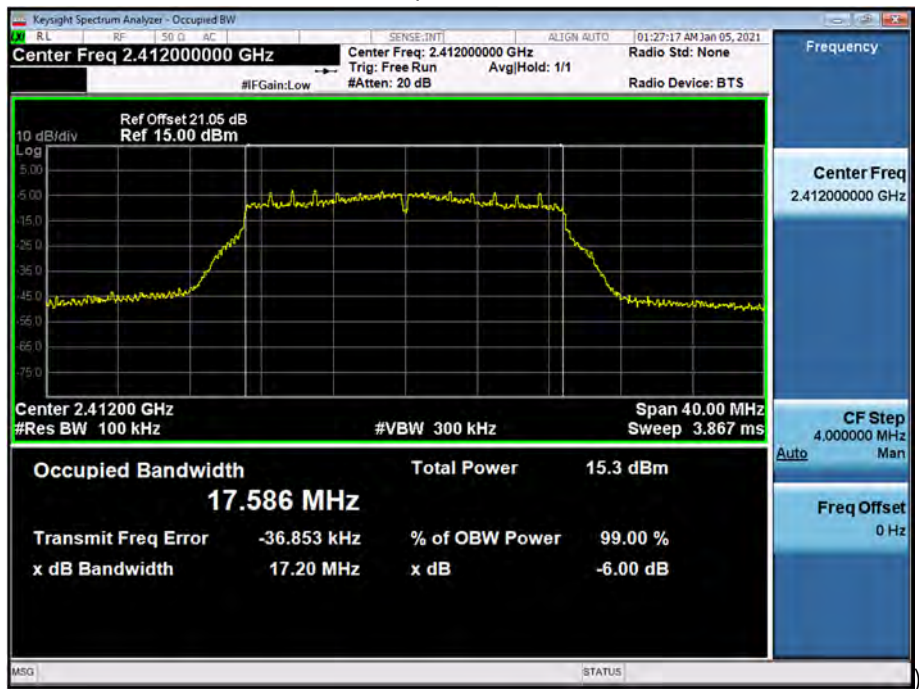

[External ANT_ MIMO]

■ Test Plots

6dB Bandwidth plot (802.11n_HT20-CH 1)

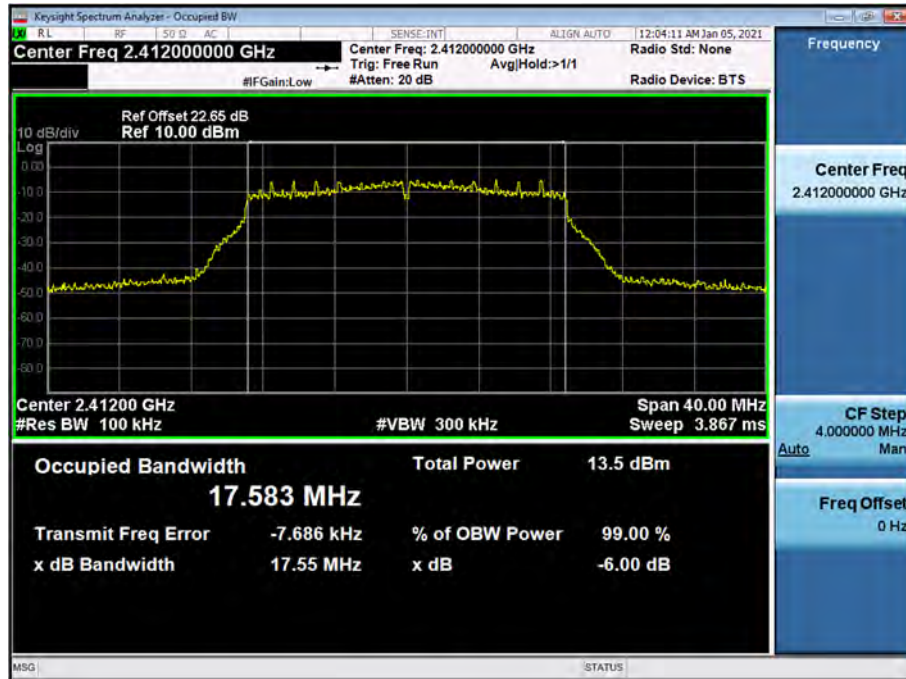

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

9.3 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss+ Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
 So, 20.48 dB is offset for 2.4 GHz Band

[Internal ANT_SISO]

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.				
2412	1	1	15.65	30	12
		2	15.71	30	
		5.5	17.11	30	
		11	18.96	30	
2437	6	1	15.42	30	13
		2	15.63	30	
		5.5	17.00	30	
		11	18.86	30	
2462	11	1	15.58	30	13
		2	15.42	30	
		5.5	16.82	30	
		11	18.74	30	

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.				
2412	1	6	18.10	30	8
		9	17.98	30	
		12	17.90	30	
		18	17.50	30	
		24	17.67	30	
		36	17.75	30	
		48	17.78	30	
		54	17.72	30	
2437	6	6	24.18	30	16
		9	24.06	30	
		12	23.96	30	
		18	23.56	30	
		24	23.75	30	
		36	23.72	30	
		48	23.79	30	
		54	23.79	30	
2462	11	6	19.20	30	10
		9	19.12	30	
		12	18.91	30	
		18	18.50	30	
		24	18.59	30	
		36	18.68	30	
		48	18.67	30	
		54	18.40	30	

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.				
2412	1	0	16.07	30	6
		1	16.17	30	
		2	16.10	30	
		3	16.22	30	
		4	16.15	30	
		5	16.22	30	
		6	16.26	30	
		7	16.10	30	
2437	6	0	24.03	30	16
		1	24.13	30	
		2	24.09	30	
		3	24.45	30	
		4	24.20	30	
		5	24.32	30	
		6	24.34	30	
		7	24.18	30	
2462	11	0	19.08	30	10
		1	19.08	30	
		2	19.17	30	
		3	19.09	30	
		4	19.07	30	
		5	19.06	30	
		6	19.09	30	
		7	18.99	30	

[External ANT_SISO]

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.				
2412	1	1	18.71	30	18
		2	18.94	30	
		5.5	20.47	30	
		11	22.28	30	
2437	6	1	19.18	30	18
		2	19.11	30	
		5.5	20.66	30	
		11	22.41	30	
2462	11	1	19.45	30	18
		2	19.65	30	
		5.5	21.36	30	
		11	23.14	30	

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.				
2412	1	6	18.44	30	10
		9	18.36	30	
		12	18.17	30	
		18	17.85	30	
		24	18.19	30	
		36	18.28	30	
		48	18.27	30	
		54	18.26	30	
2437	6	6	24.69	30	18
		9	12.78	30	
		12	24.43	30	
		18	24.07	30	
		24	24.60	30	
		36	24.45	30	
		48	24.71	30	
		54	24.54	30	
2462	11	6	18.85	30	10
		9	18.77	30	
		12	18.66	30	
		18	18.30	30	
		24	18.56	30	
		36	18.58	30	
		48	18.68	30	
		54	18.60	30	

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.				
2412	1	0	17.35	30	9
		1	17.46	30	
		2	17.47	30	
		3	17.64	30	
		4	17.56	30	
		5	17.57	30	
		6	17.67	30	
		7	17.67	30	
2437	6	0	24.73	30	18
		1	24.76	30	
		2	24.71	30	
		3	25.04	30	
		4	25.03	30	
		5	24.82	30	
		6	24.95	30	
		7	24.90	30	
2462	11	0	18.62	30	10
		1	18.80	30	
		2	18.75	30	
		3	18.97	30	
		4	18.96	30	
		5	18.96	30	
		6	18.98	30	
		7	18.96	30	

[MIMO]

802.11n(20MHz) Mode		Index	Result Internal (dBm)	Result External (dBm)	Sum (dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	MCS8	16.38	14.82	18.68	30	6
		MCS9	16.44	13.99	18.40	30	
		MCS10	16.22	14.00	18.26	30	
		MCS11	15.55	14.31	17.98	30	
		MCS12	16.32	14.19	18.39	30	
		MCS13	16.00	14.23	18.22	30	
		MCS14	16.21	13.99	18.25	30	
		MCS15	16.27	14.21	18.37	30	
2437	6	MCS8	24.20	25.53	27.93	30	16
		MCS9	24.15	24.89	27.54	30	
		MCS10	24.16	24.87	27.54	30	
		MCS11	24.17	25.44	27.86	30	
		MCS12	24.22	25.31	27.81	30	
		MCS13	24.18	25.27	27.77	30	
		MCS14	24.13	25.31	27.77	30	
		MCS15	24.14	25.29	27.76	30	
2462	11	MCS8	19.01	19.59	22.32	30	10
		MCS9	18.87	19.06	21.98	30	
		MCS10	18.93	18.90	21.93	30	
		MCS11	18.78	19.17	21.99	30	
		MCS12	18.89	19.19	22.05	30	
		MCS13	18.84	19.19	22.03	30	
		MCS14	18.86	19.07	21.97	30	
		MCS15	18.94	19.07	22.02	30	

Average Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
 So, 21.05 dB is offset for 2.4 GHz Band.

[Internal ANT_SISO]

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	1	13.16	0.035	13.19	30	12
		2	12.75	0.062	12.82	30	
		5.5	12.55	0.167	12.71	30	
		11	12.41	0.322	12.74	30	
2437	6	1	12.96	0.035	13.00	30	13
		2	12.87	0.062	12.93	30	
		5.5	12.59	0.167	12.76	30	
		11	12.62	0.322	12.95	30	
2462	11	1	12.84	0.035	12.88	30	13
		2	12.61	0.062	12.67	30	
		5.5	12.39	0.167	12.56	30	
		11	12.31	0.322	12.63	30	

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	6	9.99	0.205	10.20	30	8
		9	9.91	0.303	10.21	30	
		12	9.82	0.425	10.24	30	
		18	9.22	0.607	9.83	30	
		24	8.97	0.762	9.73	30	
		36	8.67	1.073	9.74	30	
		48	8.55	1.366	9.92	30	
		54	8.24	1.506	9.74	30	
2437	6	6	16.04	0.205	16.25	30	16
		9	15.91	0.303	16.21	30	
		12	15.92	0.425	16.34	30	
		18	15.31	0.607	15.92	30	
		24	15.03	0.762	15.79	30	
		36	14.75	1.073	15.82	30	
		48	14.38	1.366	15.74	30	
		54	14.32	1.506	15.82	30	
2462	11	6	10.93	0.205	11.13	30	10
		9	10.94	0.303	11.25	30	
		12	10.70	0.425	11.12	30	
		18	10.04	0.607	10.64	30	
		24	9.82	0.762	10.58	30	
		36	9.58	1.073	10.65	30	
		48	9.28	1.366	10.64	30	
		54	8.96	1.506	10.47	30	

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	0	7.78	0.221	8.00	30	6
		1	7.73	0.442	8.17	30	
		2	7.50	0.637	8.14	30	
		3	6.95	0.820	7.77	30	
		4	6.65	1.100	7.75	30	
		5	6.41	1.383	7.80	30	
		6	6.29	1.496	7.79	30	
		7	6.08	1.606	7.68	30	
2437	6	0	15.97	0.221	16.20	30	16
		1	15.65	0.442	16.10	30	
		2	15.48	0.637	16.12	30	
		3	15.21	0.820	16.03	30	
		4	14.72	1.100	15.82	30	
		5	14.37	1.383	15.75	30	
		6	14.31	1.496	15.81	30	
		7	14.04	1.606	15.65	30	
2462	11	0	10.76	0.221	10.98	30	10
		1	10.59	0.442	11.04	30	
		2	10.42	0.637	11.05	30	
		3	9.86	0.820	10.68	30	
		4	9.48	1.100	10.58	30	
		5	9.37	1.383	10.75	30	
		6	9.09	1.496	10.58	30	
		7	8.92	1.606	10.53	30	

[External ANT_SISO]

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	1	16.22	0.035	16.26	30	18
		2	16.18	0.062	16.24	30	
		5.5	16.06	0.167	16.22	30	
		11	15.92	0.322	16.24	30	
2437	6	1	16.56	0.035	16.59	30	18
		2	16.36	0.062	16.43	30	
		5.5	16.23	0.167	16.39	30	
		11	16.07	0.322	16.39	30	
2462	11	1	17.02	0.035	17.06	30	18
		2	16.91	0.062	16.97	30	
		5.5	16.91	0.167	17.08	30	
		11	16.73	0.322	17.05	30	

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	6	10.36	0.205	10.56	30	10
		9	10.28	0.303	10.58	30	
		12	10.06	0.425	10.49	30	
		18	9.52	0.607	10.13	30	
		24	9.40	0.762	10.16	30	
		36	9.03	1.073	10.10	30	
		48	8.79	1.366	10.16	30	
		54	8.68	1.506	10.19	30	
2437	6	6	16.59	0.205	16.80	30	18
		9	16.48	0.303	16.78	30	
		12	16.44	0.425	16.86	30	
		18	15.93	0.607	16.54	30	
		24	15.98	0.762	16.74	30	
		36	15.68	1.073	16.75	30	
		48	15.45	1.366	16.81	30	
		54	15.12	1.506	16.63	30	
2462	11	6	10.76	0.205	10.97	30	10
		9	10.67	0.303	10.97	30	
		12	10.64	0.425	11.06	30	
		18	10.00	0.607	10.61	30	
		24	9.89	0.762	10.65	30	
		36	9.49	1.073	10.56	30	
		48	9.32	1.366	10.69	30	
		54	9.14	1.506	10.64	30	

802.11n(HT20) Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor (dB)	Result (dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	0	9.07	0.221	9.29	30	9
		1	9.10	0.442	9.54	30	
		2	8.92	0.637	9.56	30	
		3	8.30	0.820	9.12	30	
		4	8.02	1.100	9.12	30	
		5	7.86	1.383	9.24	30	
		6	7.63	1.496	9.13	30	
		7	7.60	1.606	9.21	30	
2437	6	0	16.50	0.221	16.72	30	18
		1	16.31	0.442	16.75	30	
		2	16.19	0.637	16.82	30	
		3	15.90	0.820	16.72	30	
		4	15.64	1.100	16.74	30	
		5	15.18	1.383	16.57	30	
		6	15.10	1.496	16.59	30	
		7	15.07	1.606	16.67	30	
2462	11	0	10.50	0.221	10.72	30	10
		1	10.31	0.442	10.75	30	
		2	10.15	0.637	10.79	30	
		3	9.69	0.820	10.51	30	
		4	9.43	1.100	10.53	30	
		5	9.13	1.383	10.52	30	
		6	8.99	1.496	10.49	30	
		7	9.04	1.606	10.64	30	

[MIMO]

802.11n(20MHz) Mode		Rate (Mbps)	Duty Cycle Factor (dB)	Measured Power Internal (dBm)	Measured Power External (dBm)	Total Power Internal (dBm)	Total Power External (dBm)	Sum (dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.									
2412	1	MCS8	0.428	7.97	5.79	8.40	6.22	10.45	30	6
		MCS9	0.789	7.56	5.49	8.35	6.28	10.45	30	
		MCS10	1.094	7.14	4.88	8.23	5.98	10.26	30	
		MCS11	1.366	6.71	4.46	8.07	5.82	10.10	30	
		MCS12	1.761	6.53	3.97	8.29	5.73	10.21	30	
		MCS13	2.142	5.82	3.75	7.96	5.89	10.06	30	
		MCS14	2.259	5.67	3.43	7.93	5.69	9.96	30	
		MCS15	2.430	5.55	3.44	7.98	5.87	10.06	30	
2437	6	MCS8	0.428	15.78	16.64	16.21	17.07	19.67	30	16
		MCS9	0.789	15.30	16.16	16.09	16.95	19.55	30	
		MCS10	1.094	15.08	15.94	16.17	17.03	19.63	30	
		MCS11	1.366	14.37	15.69	15.74	17.06	19.46	30	
		MCS12	1.761	14.05	15.10	15.81	16.86	19.38	30	
		MCS13	2.142	13.62	14.88	15.76	17.03	19.45	30	
		MCS14	2.259	13.43	14.70	15.69	16.96	19.38	30	
		MCS15	2.430	13.35	14.59	15.78	17.02	19.45	30	
2462	11	MCS8	0.428	10.61	10.58	11.04	11.01	14.04	30	10
		MCS9	0.789	10.07	10.26	10.85	11.05	13.96	30	
		MCS10	1.094	9.84	9.89	10.93	10.99	13.97	30	
		MCS11	1.366	9.13	9.34	10.50	10.70	13.61	30	
		MCS12	1.761	8.73	8.90	10.49	10.66	13.59	30	
		MCS13	2.142	8.26	8.56	10.40	10.70	13.57	30	
		MCS14	2.259	8.20	8.44	10.46	10.70	13.59	30	
		MCS15	2.430	8.12	8.28	10.55	10.71	13.64	30	

9.4 POWER SPECTRAL DENSITY

[Internal ANT_SISO]

Mode	Frequency (MHz)	Channel No.	Test Result	
			Measured PSD (dBm)	Limit (dBm)
802.11b	2412	1	-9.635	8
	2437	6	-8.517	
	2462	11	-9.523	
802.11g	2412	1	-12.801	
	2437	6	-6.378	
	2462	11	-11.784	
802.11n(HT20)	2412	1	-17.838	
	2437	6	-9.285	
	2462	11	-14.645	

[External ANT_SISO]

Mode	Frequency (MHz)	Channel No.	Test Result	
			Measured PSD (dBm)	Limit (dBm)
802.11b	2412	1	-4.364	8
	2437	6	-5.397	
	2462	11	-4.763	
802.11g	2412	1	-12.374	
	2437	6	-10.017	
	2462	11	-15.990	
802.11n(HT20)	2412	1	-16.102	
	2437	6	-8.297	
	2462	11	-15.189	

[MIMO]

Mode	Frequency (MHz)	Channel No.	Test Result			
			Result Internal (dBm)	Result External (dBm)	Sum Data (dBm)	Limit (dBm)
802.11n(HT20)	2412	1	-16.315	-17.879	-14.017	8
	2437	6	-9.654	-5.212	-3.878	
	2462	11	-13.106	-12.817	-9.949	

Note :

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.


2. Spectrum offset = Attenuator loss(20 dB) + Cable loss(1ea)

3. 21.05 dB is offset for 2.4 GHz Band.


[Internal ANT_SISO]

▣ Test Plots


Power Spectral Density (802.11b-CH 6)

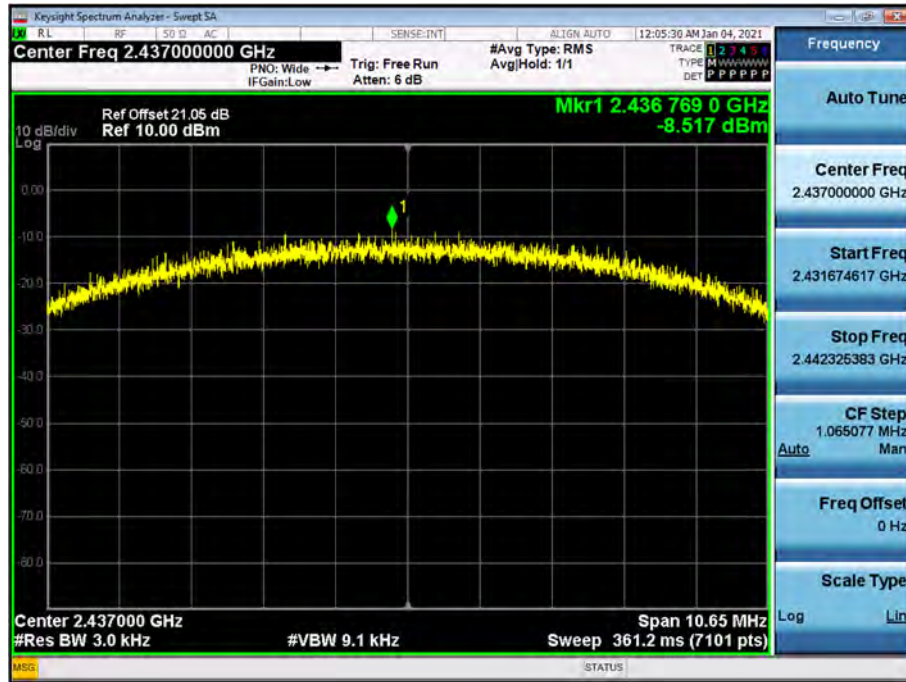

Power Spectral Density (802.11g-CH 6)

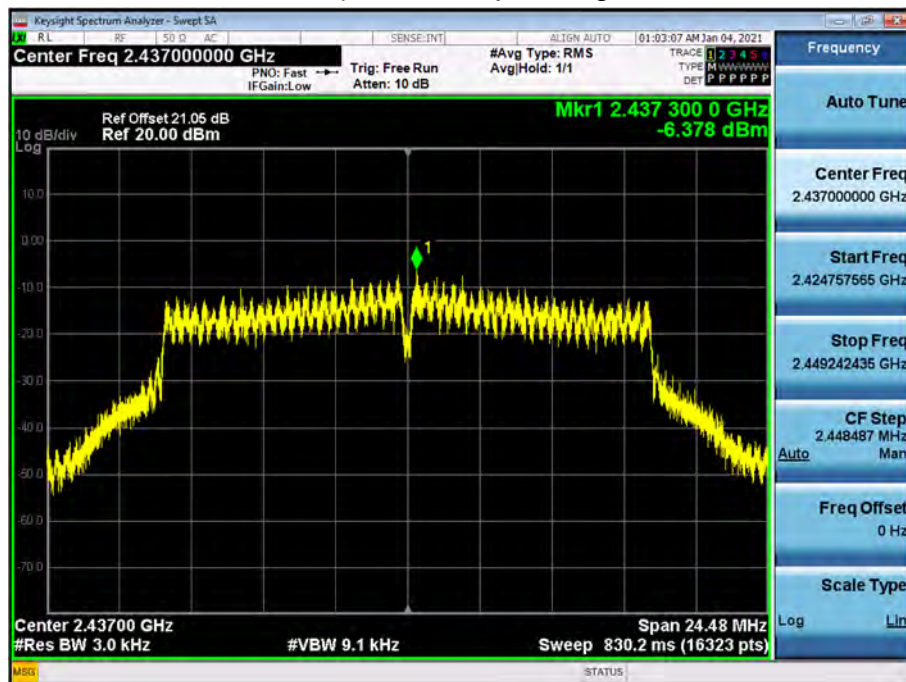

Power Spectral Density (802.11n_HT20 -CH 6)

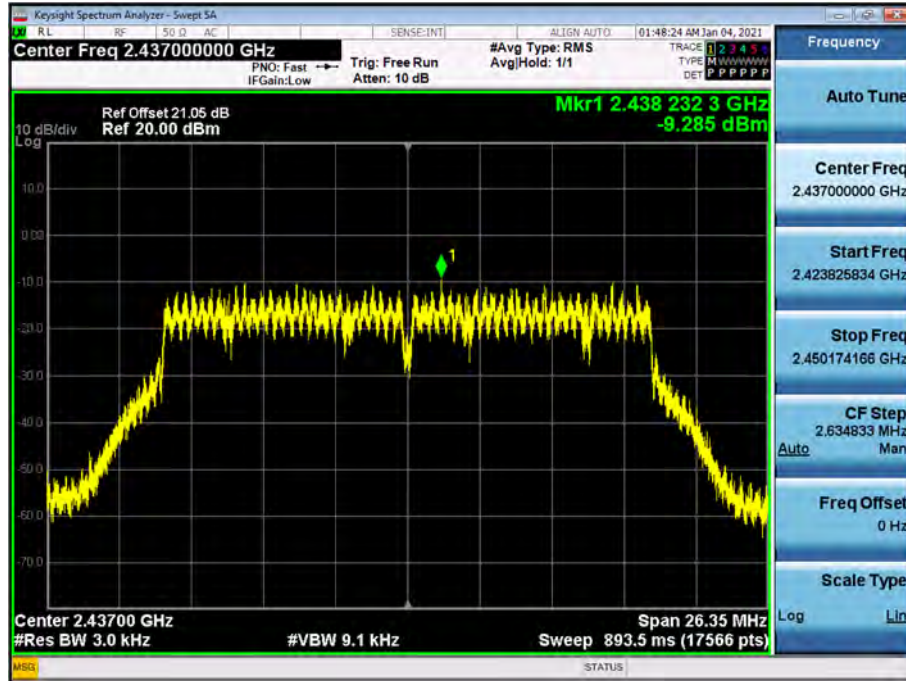


Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.


[External ANT_SISO]

▣ Test Plots


Power Spectral Density (802.11b-CH 1)

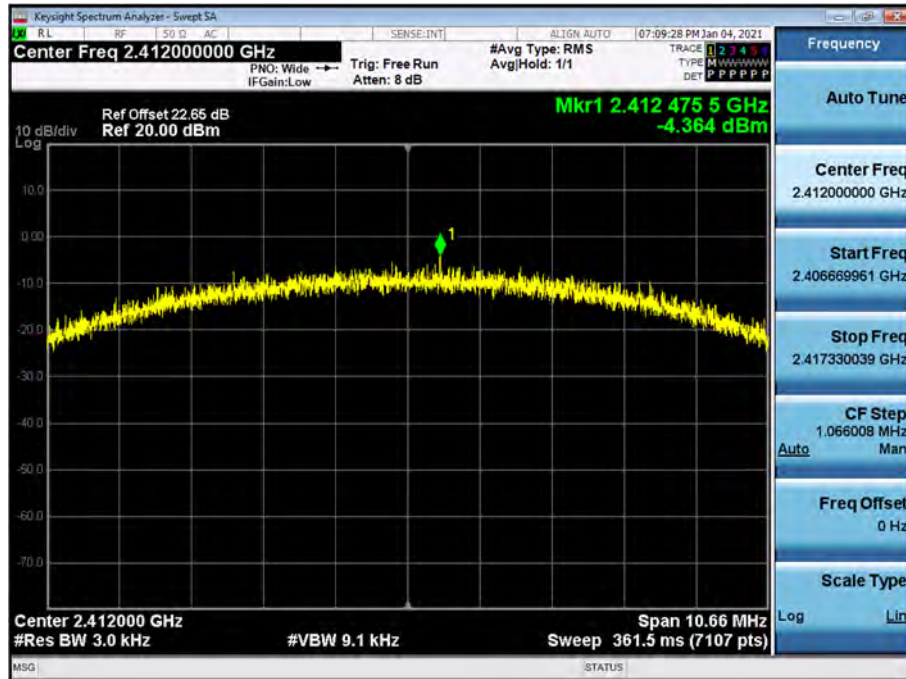

Power Spectral Density (802.11g-CH 6)

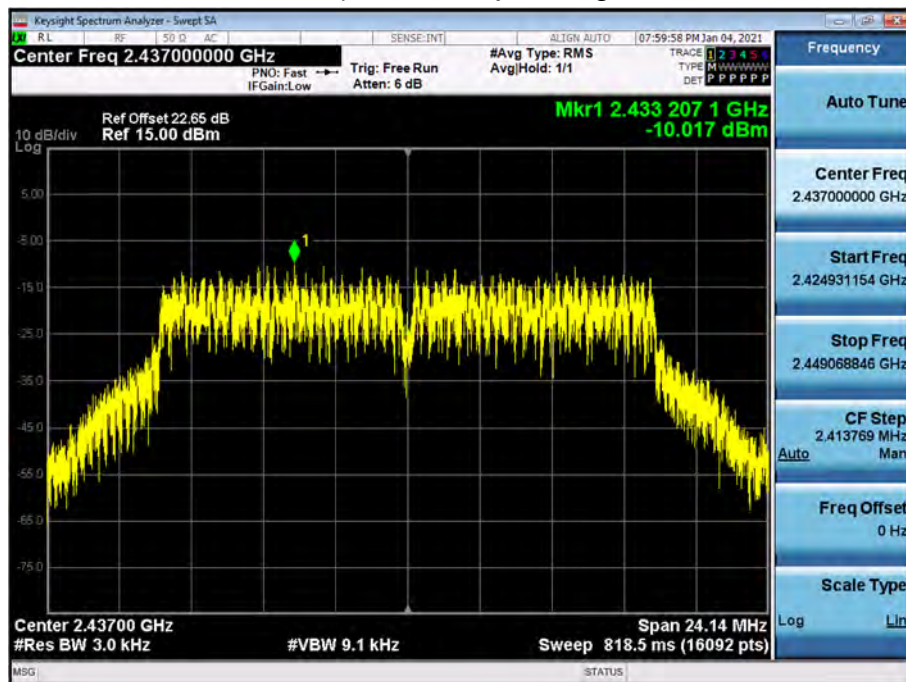

Power Spectral Density (802.11n_HT20 -CH 6)

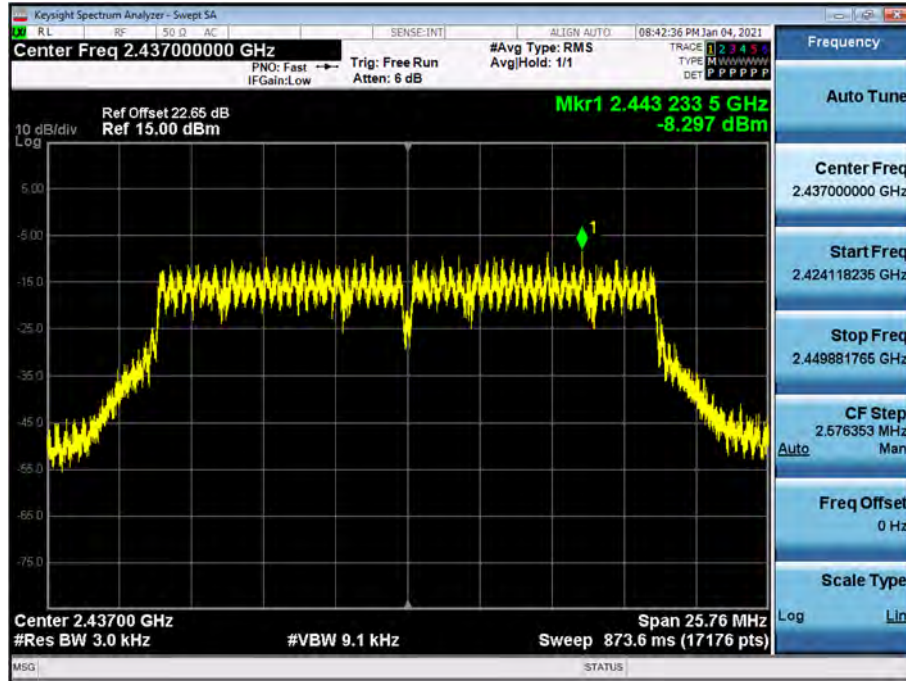

Note :

In order to simplify the report, attached plots were only the worstcase PSD channel.

9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS


Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.


[Internal ANT_SISO]

▣ Test Plots(BandEdge)

Band Edge (802.11b-CH1)

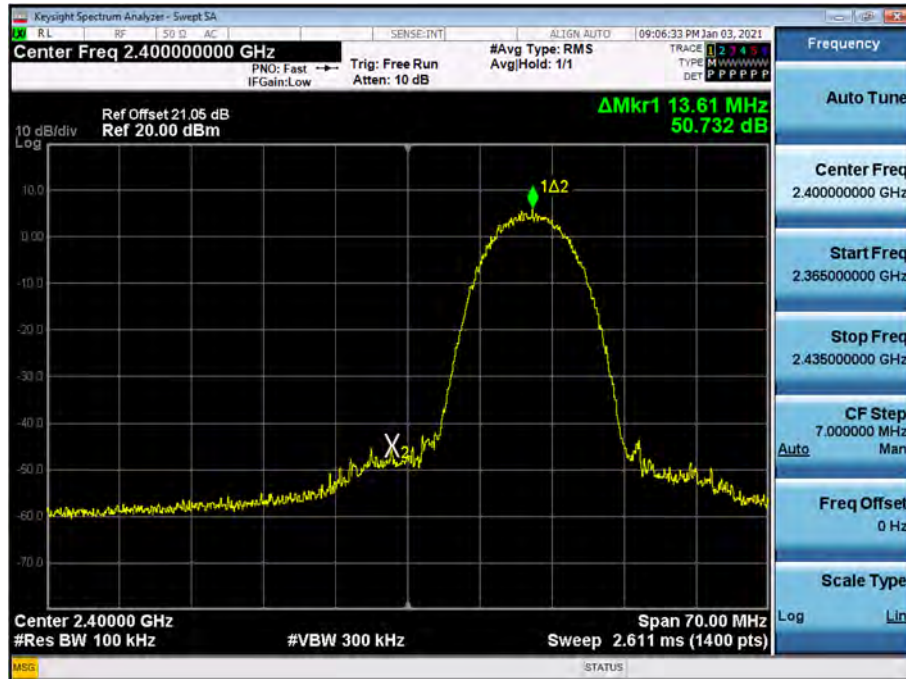

Band Edge (802.11b-CH11)

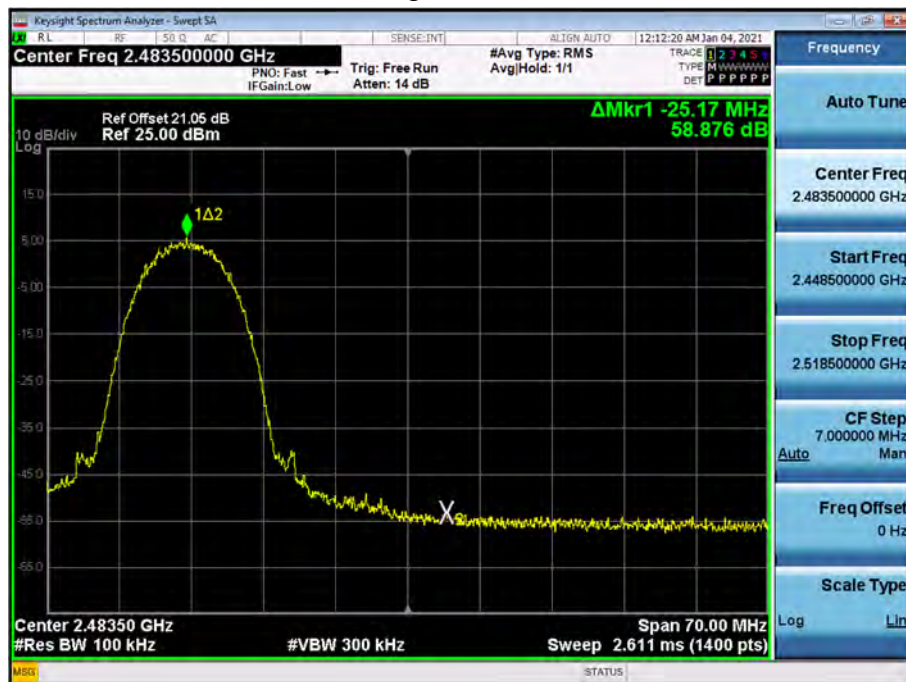


Band Edge (802.11g-CH1)




Band Edge (802.11g-CH11)



Band Edge (802.11n_HT20 -CH1)

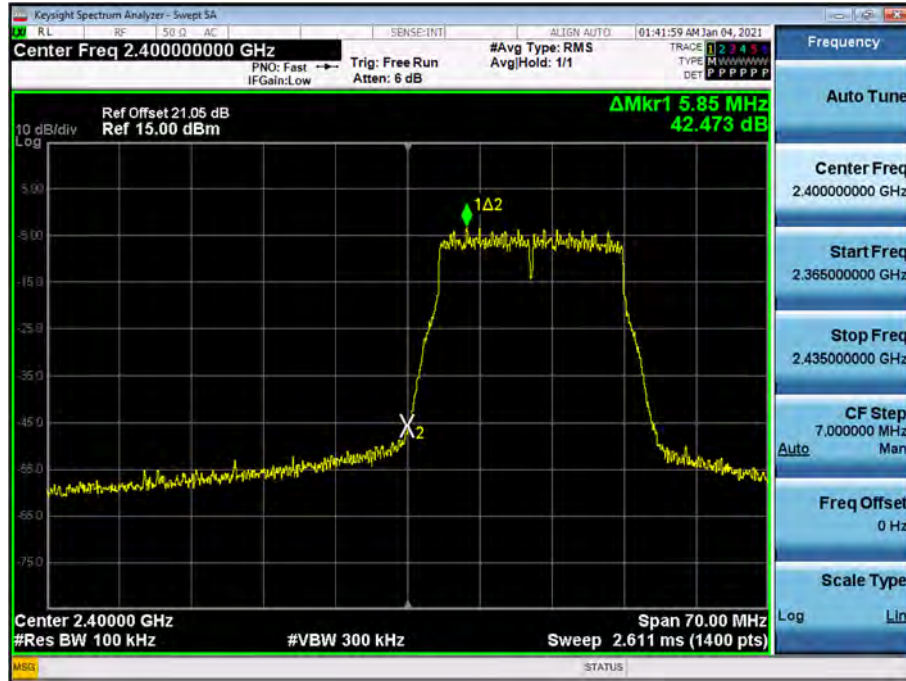


Band Edge (802.11n_HT20 -CH11)

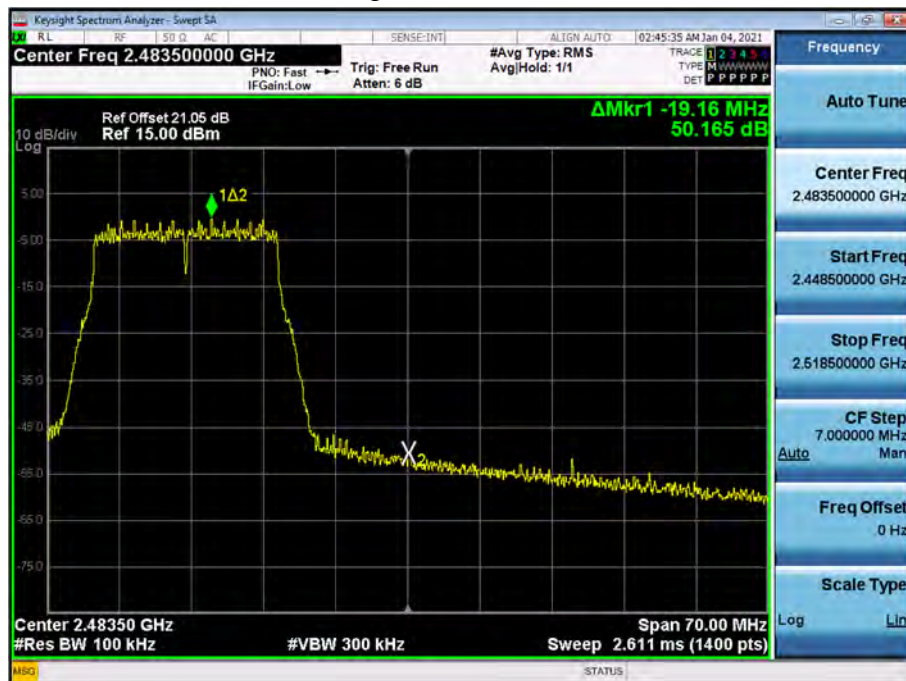

Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

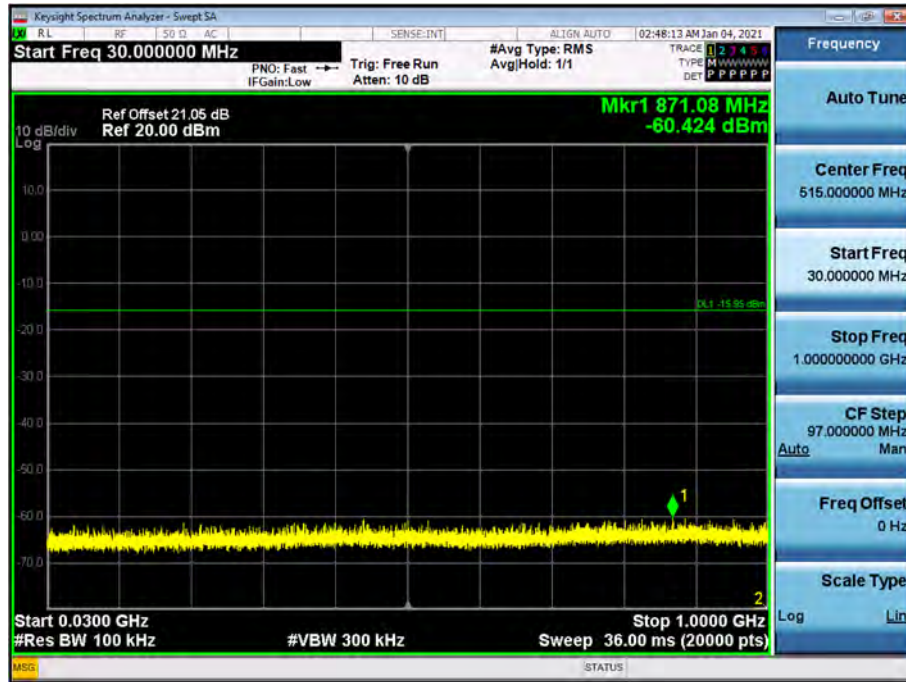


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

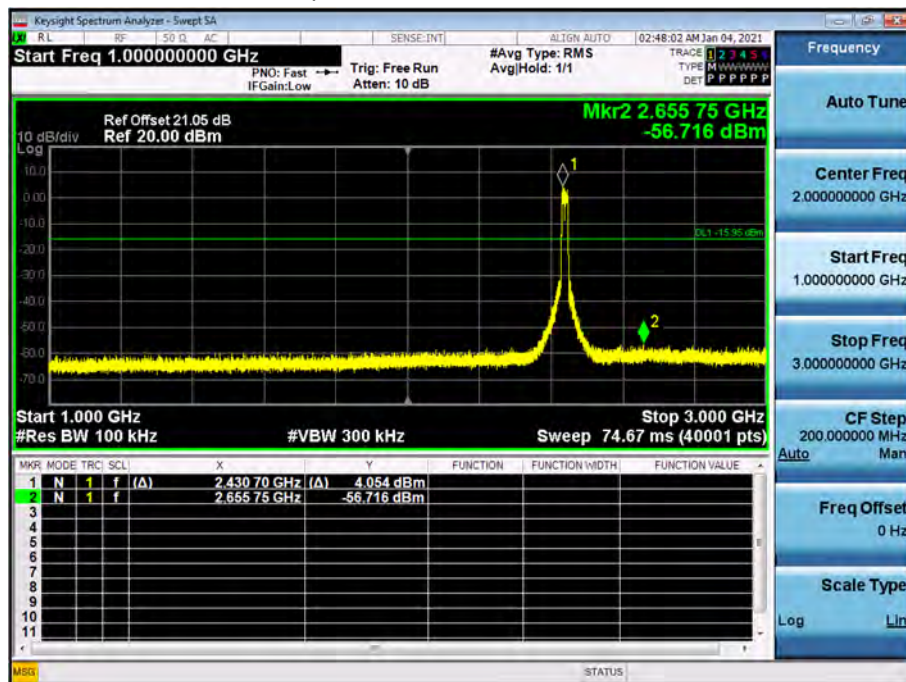


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

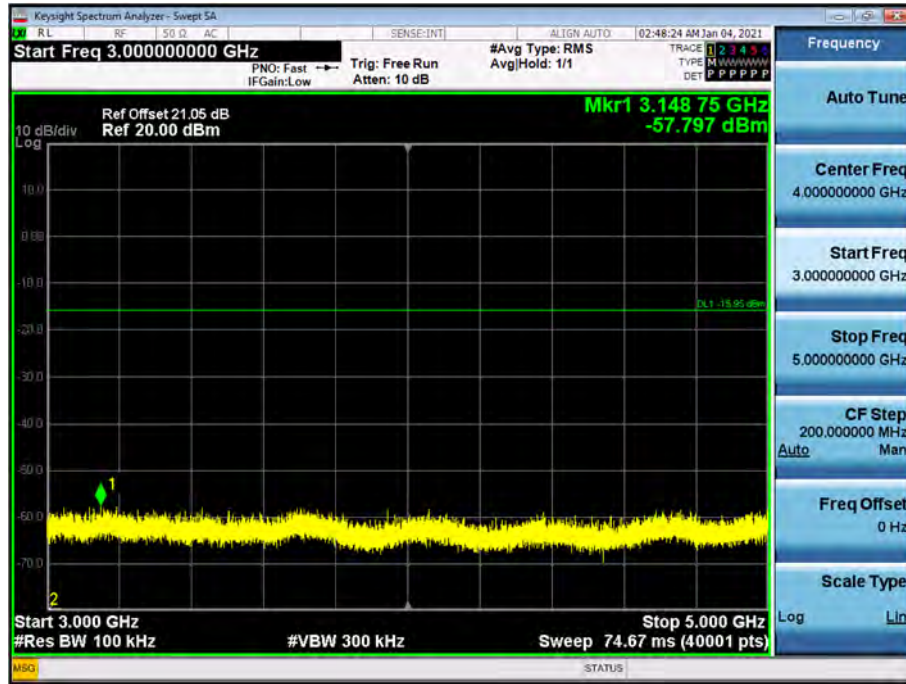


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

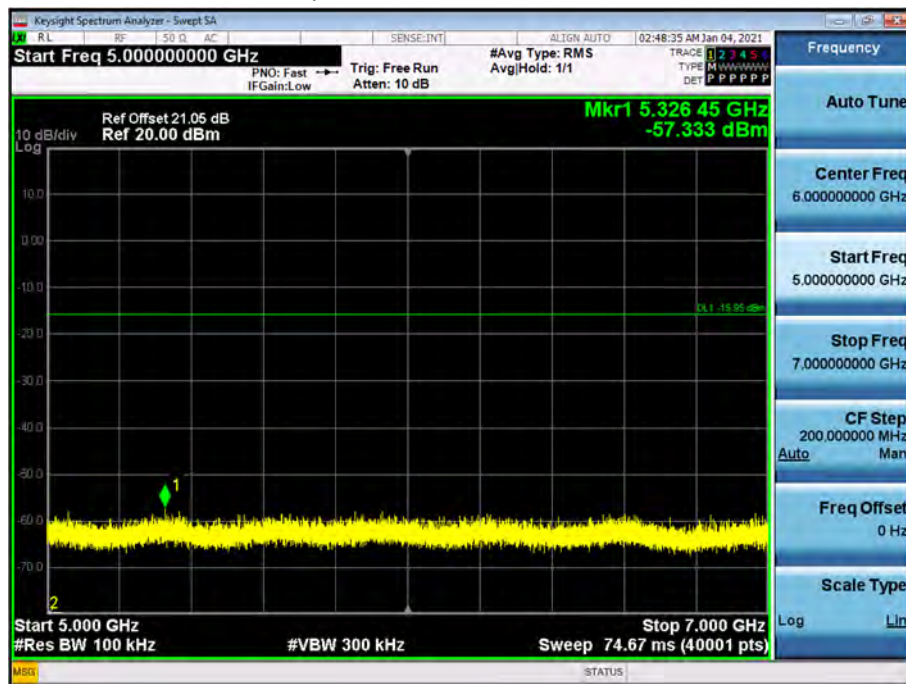


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

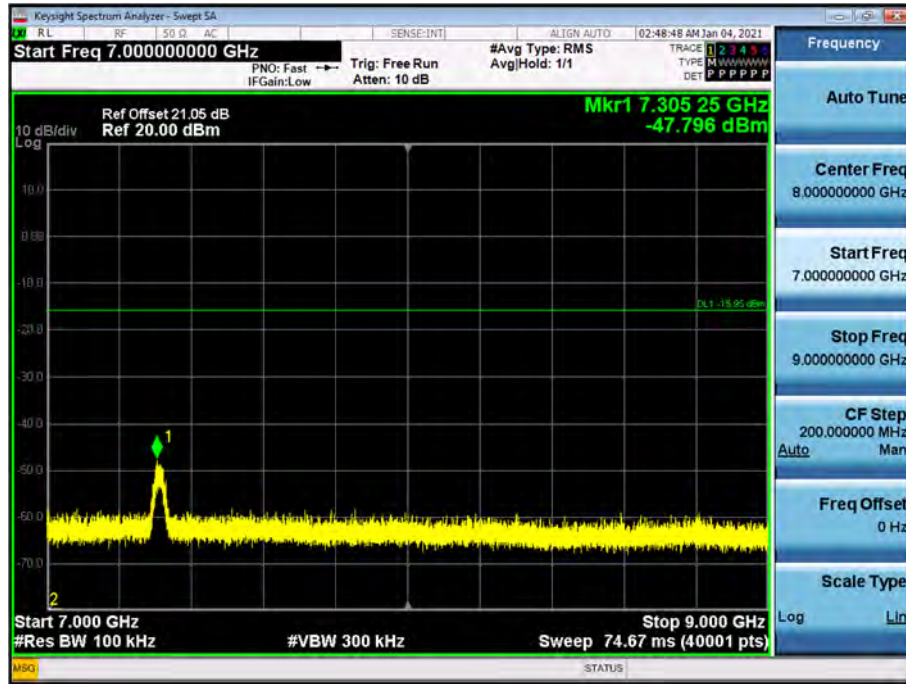


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

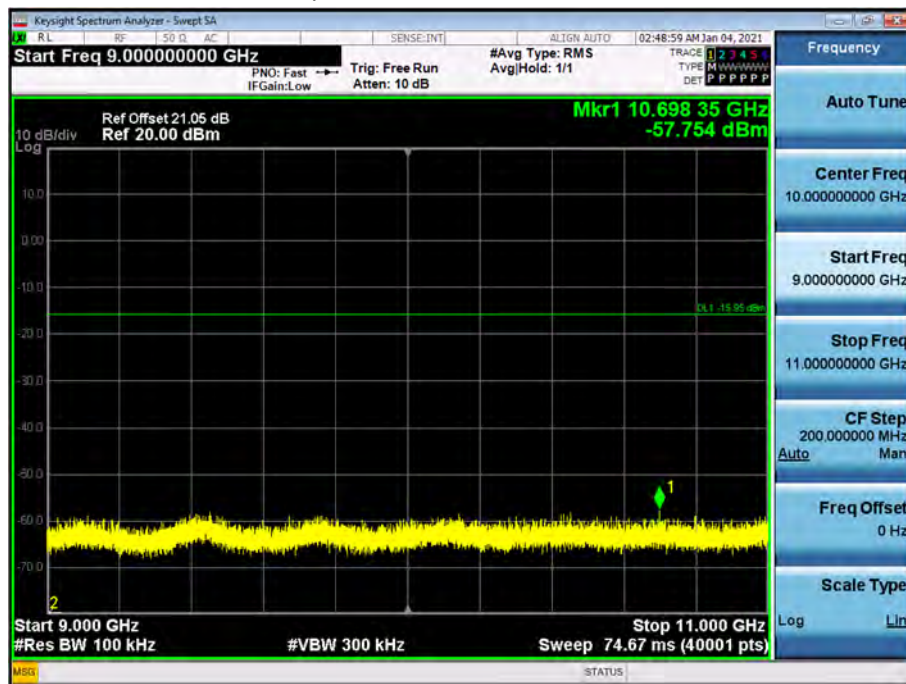


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

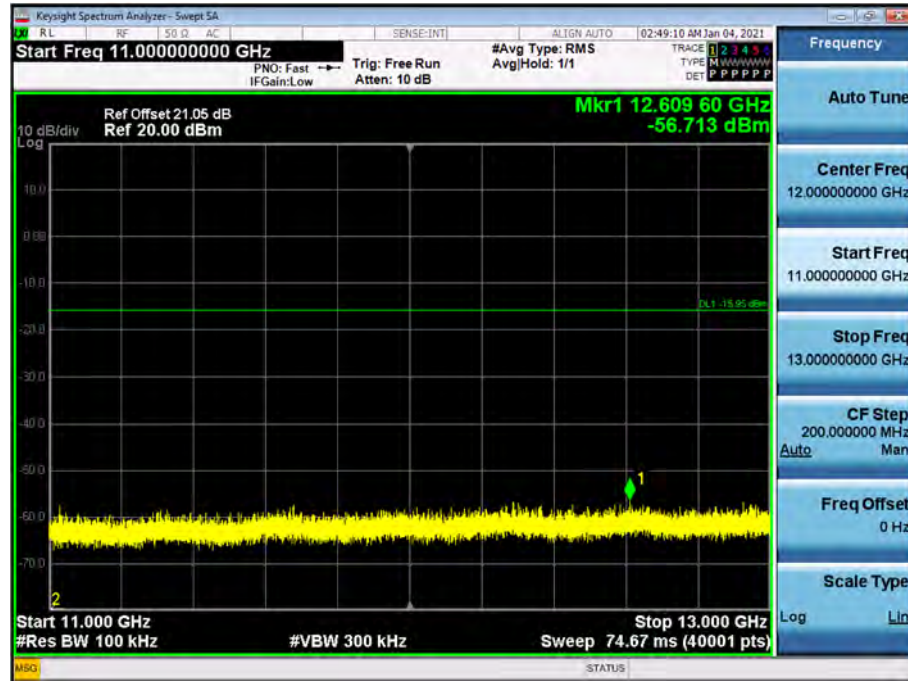


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

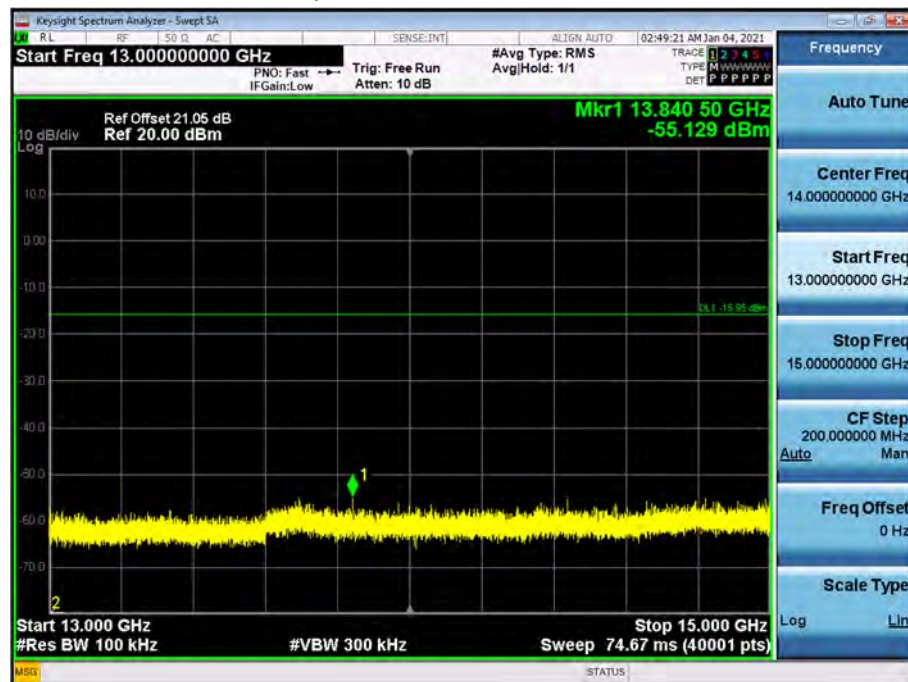


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

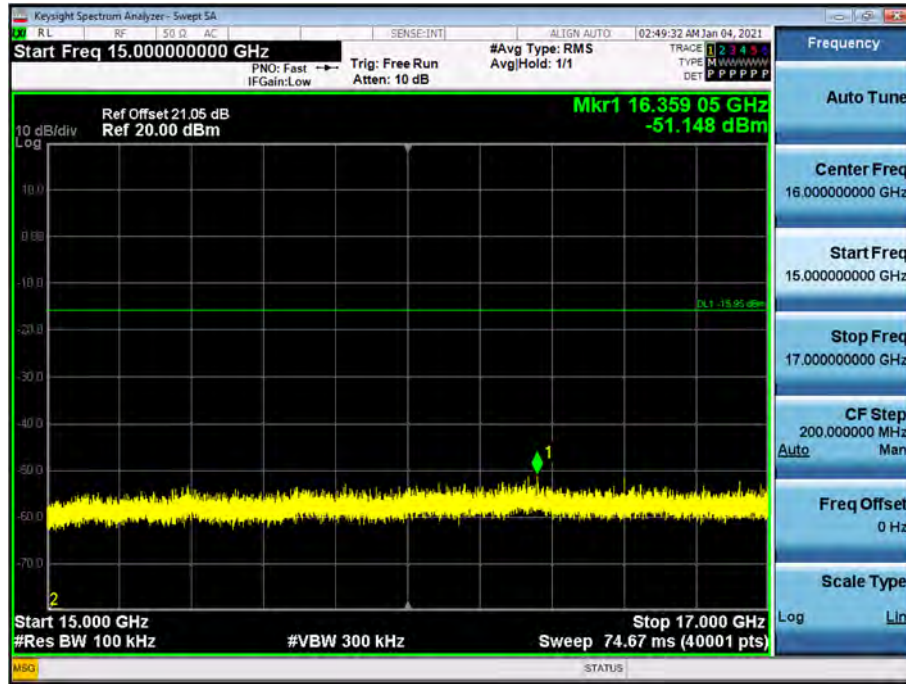


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

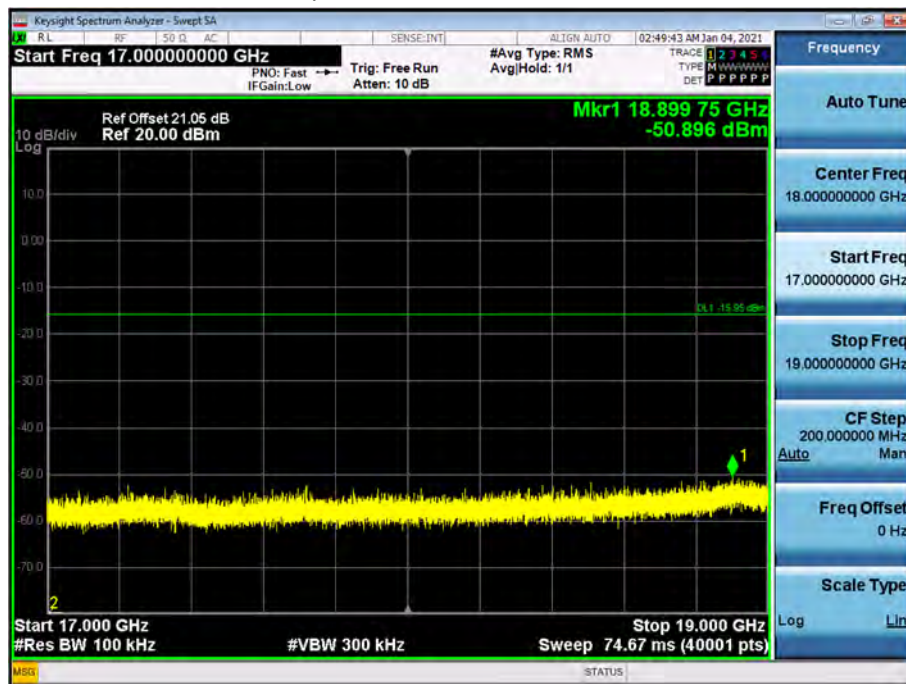


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

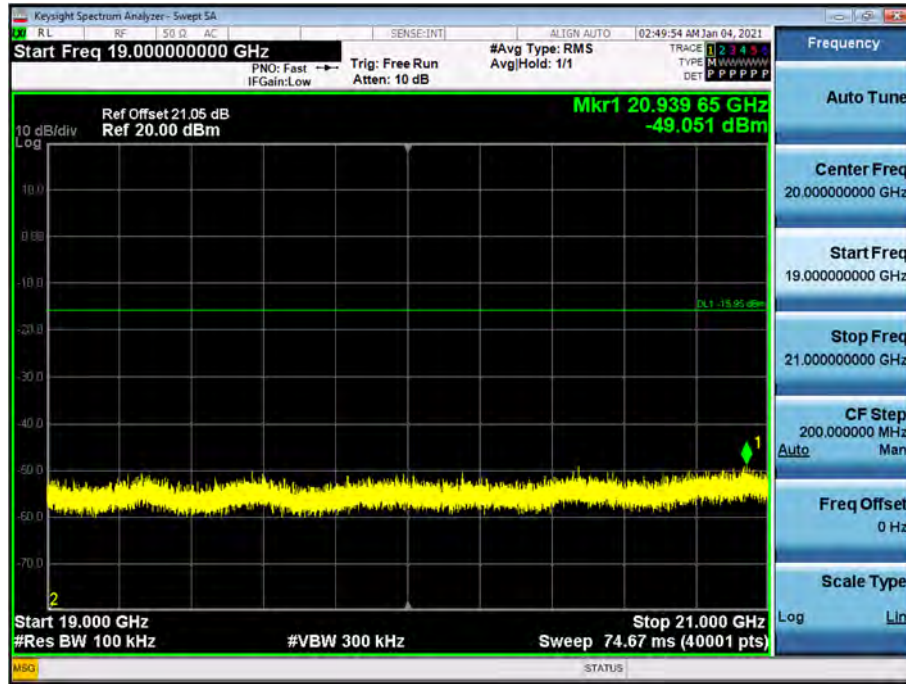


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

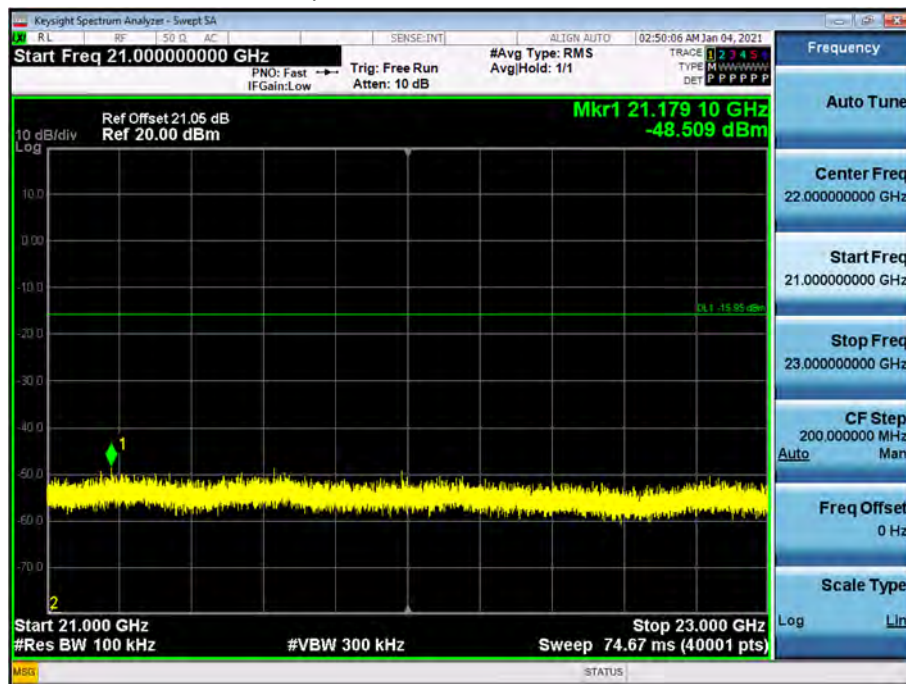

23 GHz ~ 25 GHz


Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

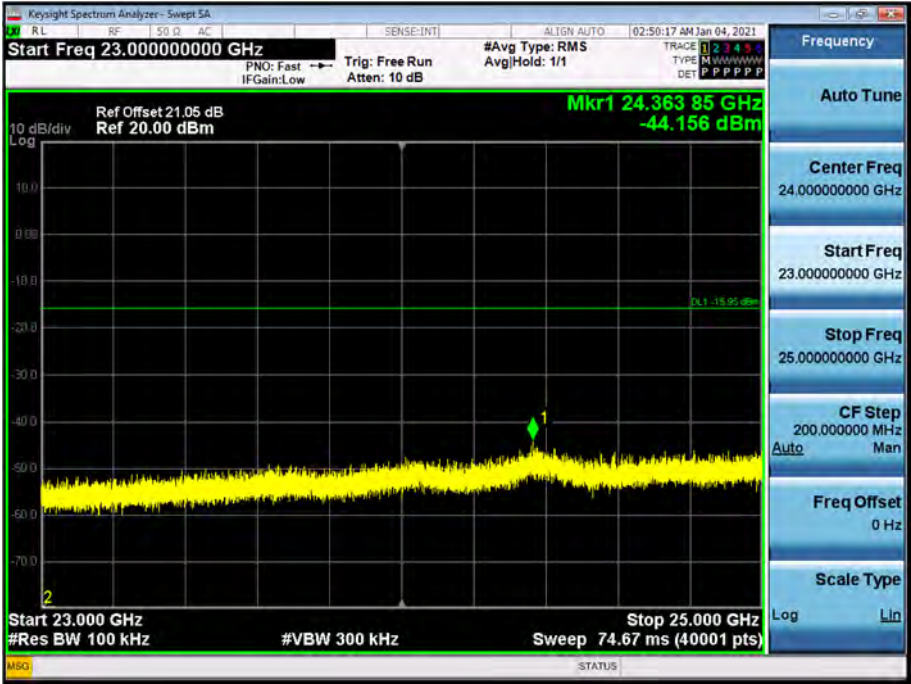


[External ANT_SISO]

▣ Test Plots(BandEdge)


Band Edge (802.11b-CH1)

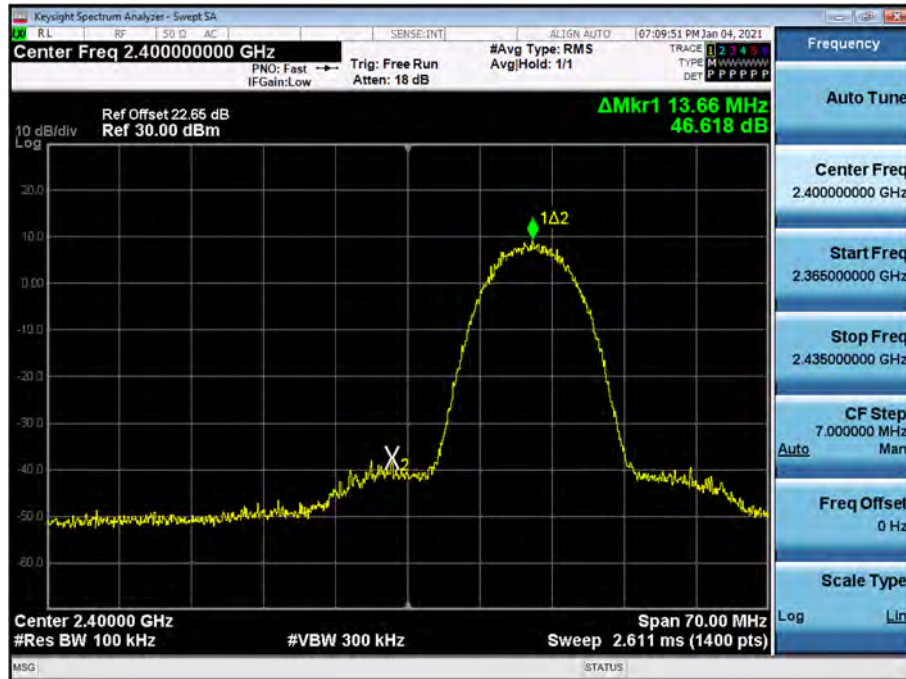

Band Edge (802.11b-CH11)

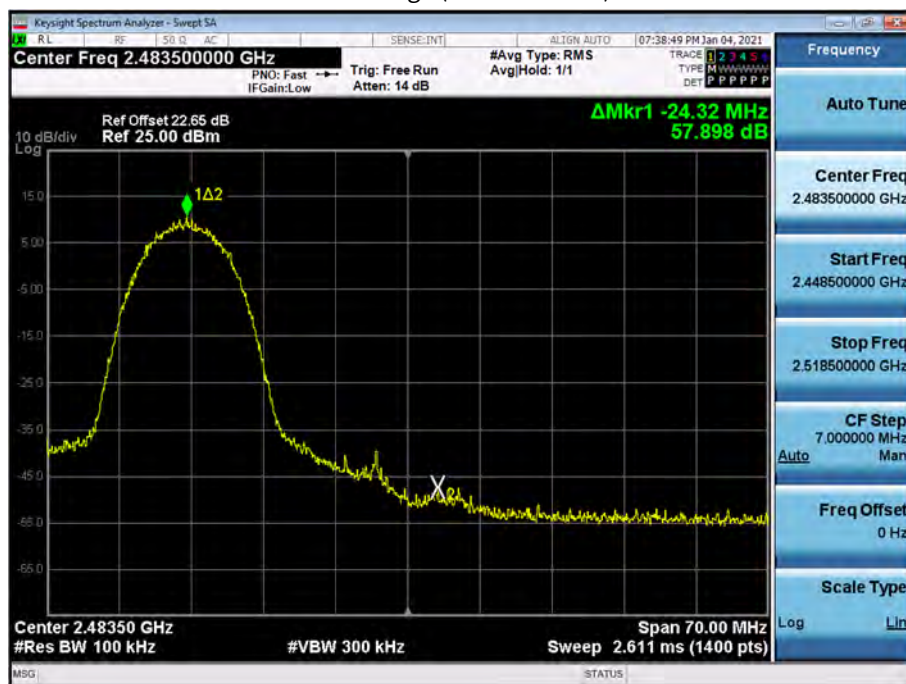


Band Edge (802.11g-CH1)

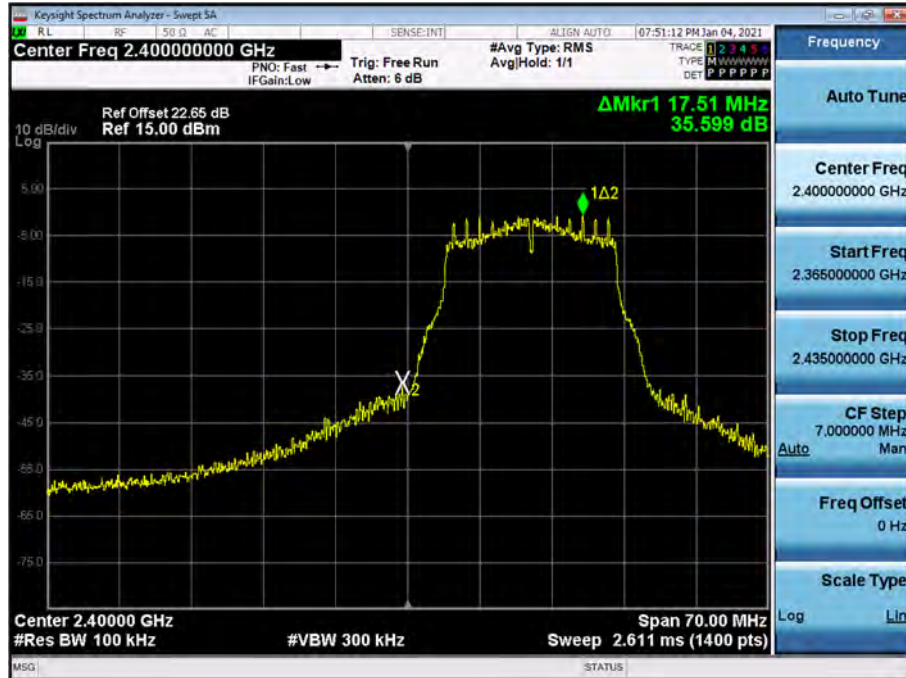


Band Edge (802.11g-CH11)



Band Edge (802.11n_HT20 -CH1)

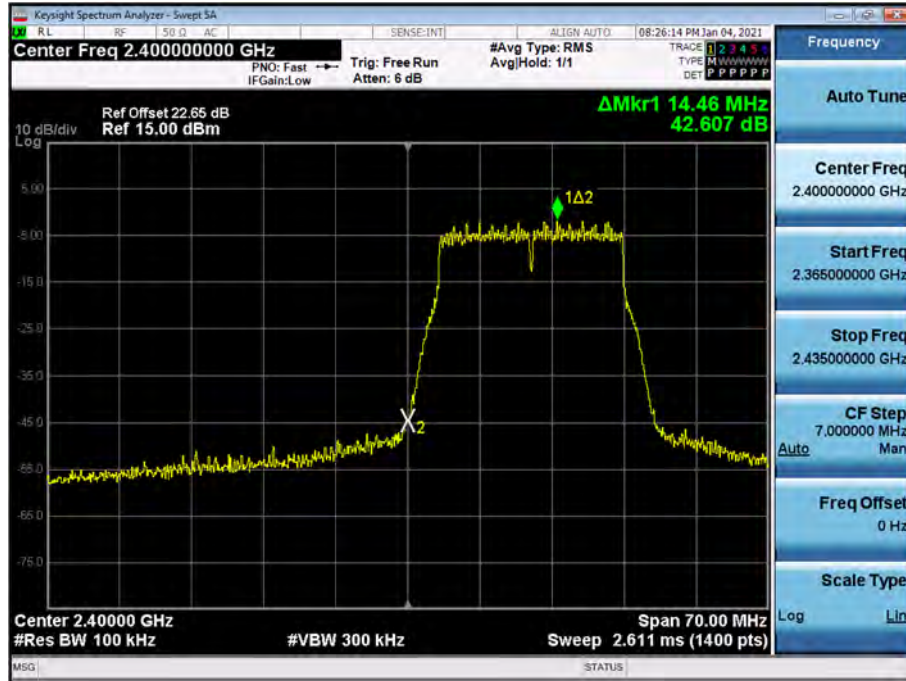


Band Edge (802.11n_HT20 -CH11)

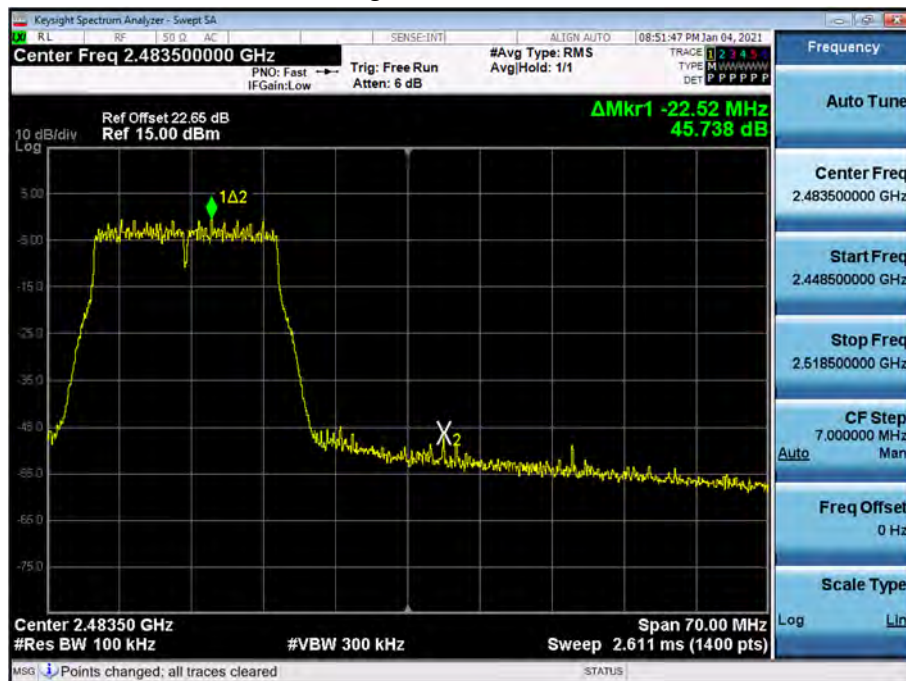

Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

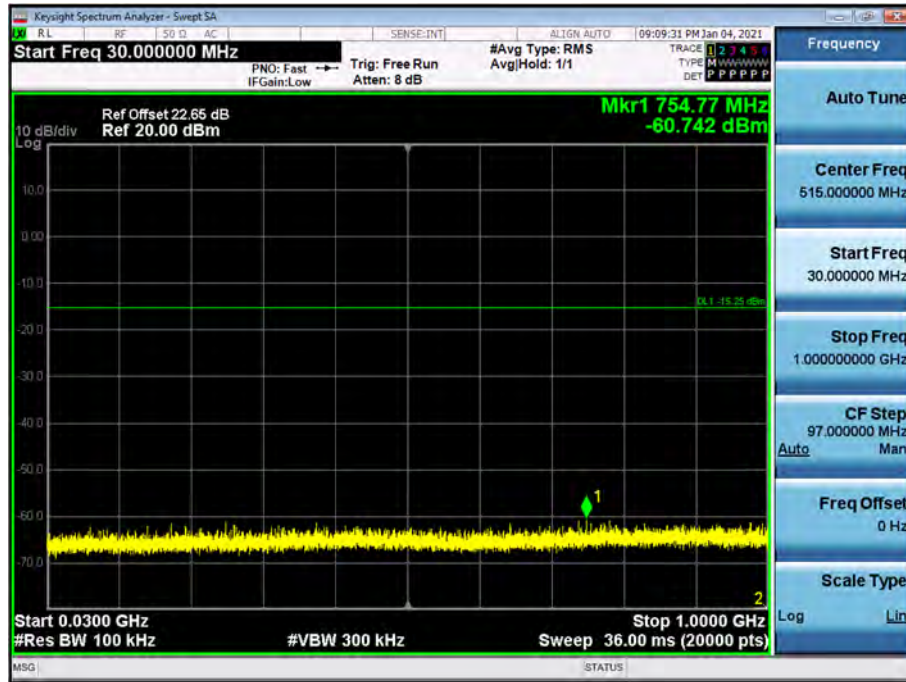


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

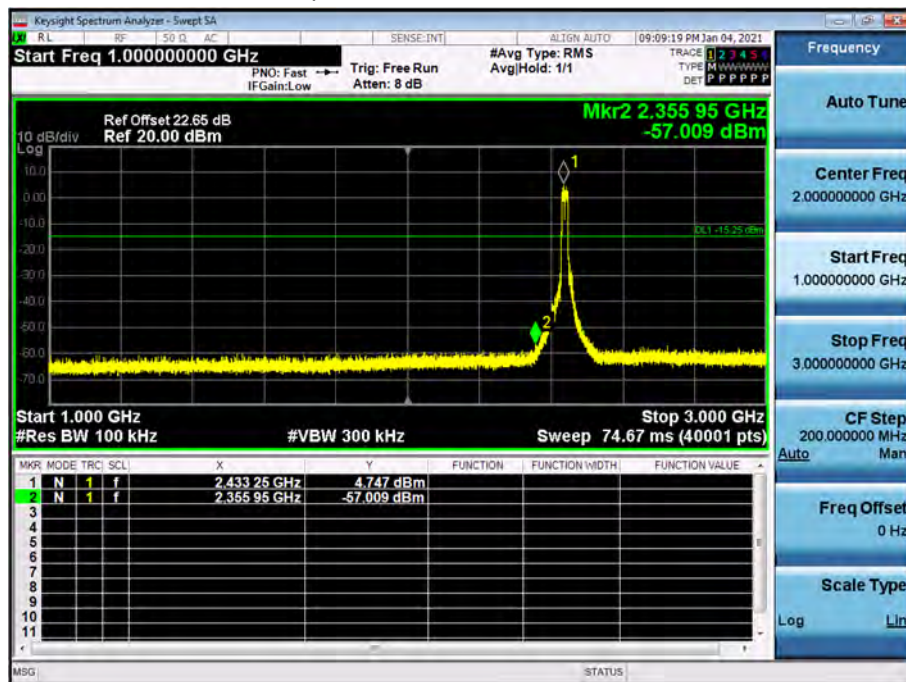


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

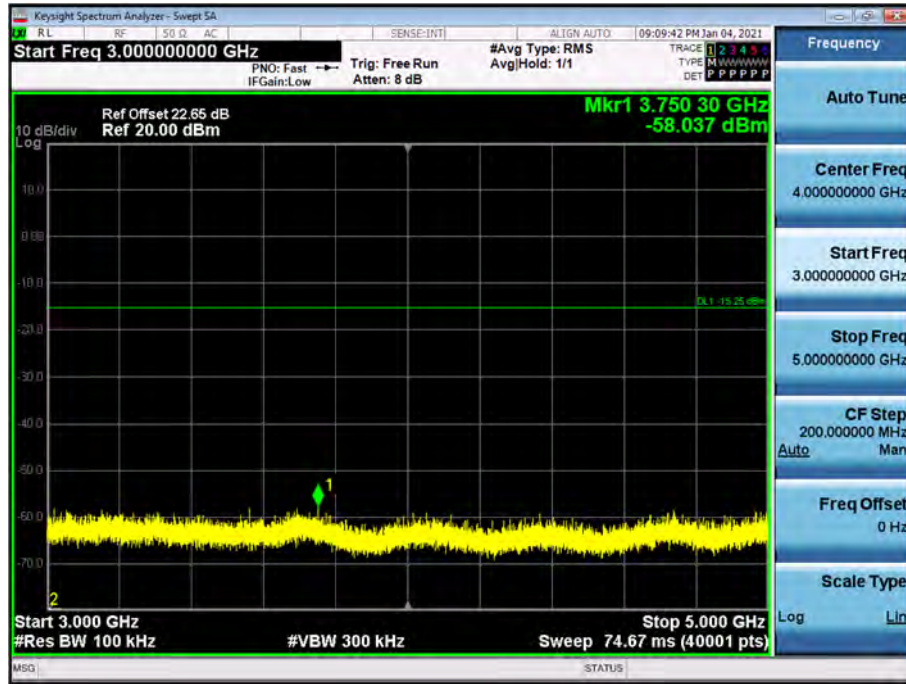


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

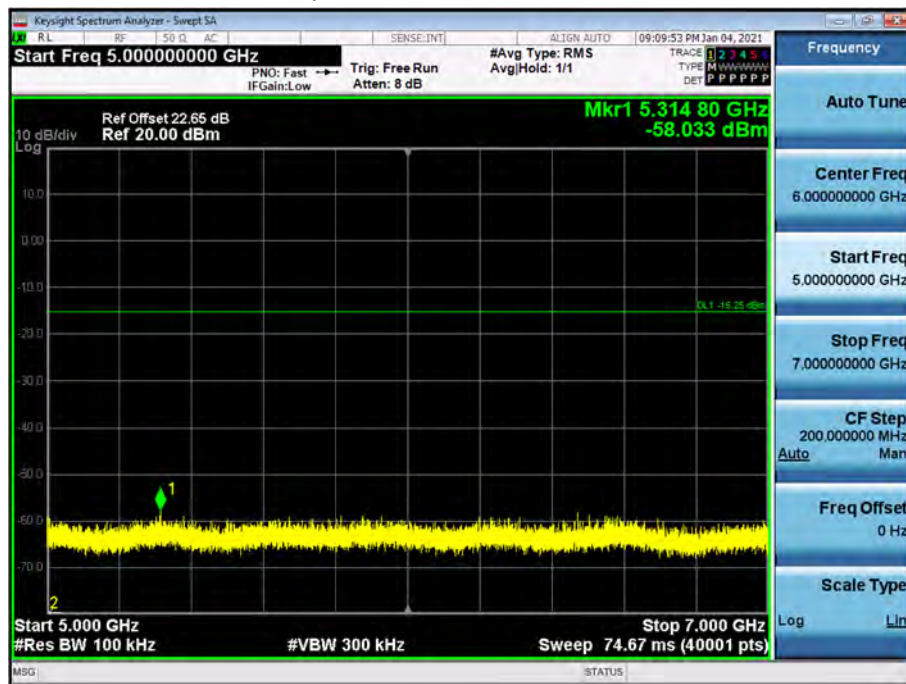


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

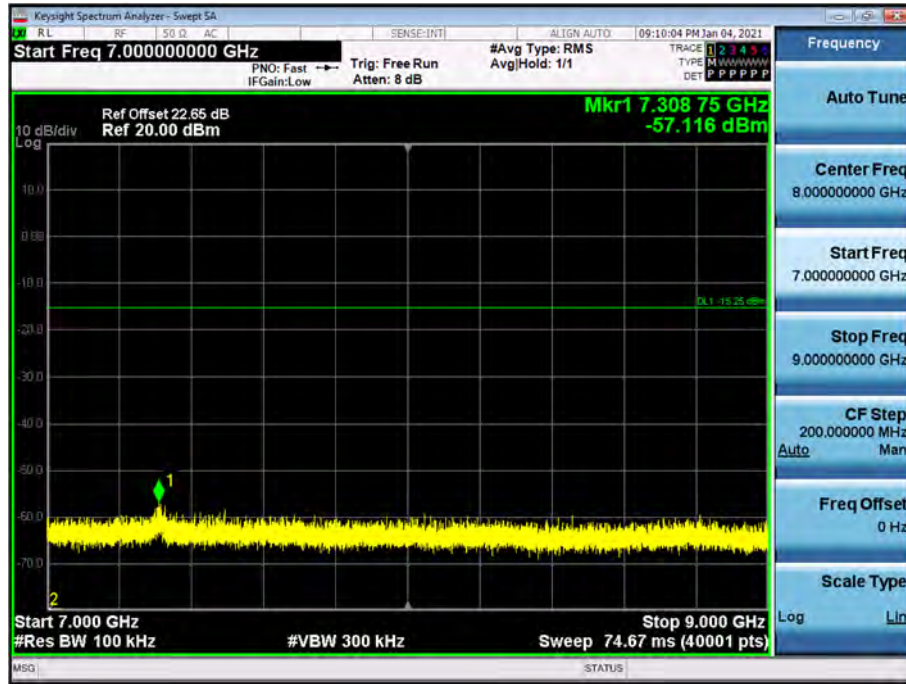


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

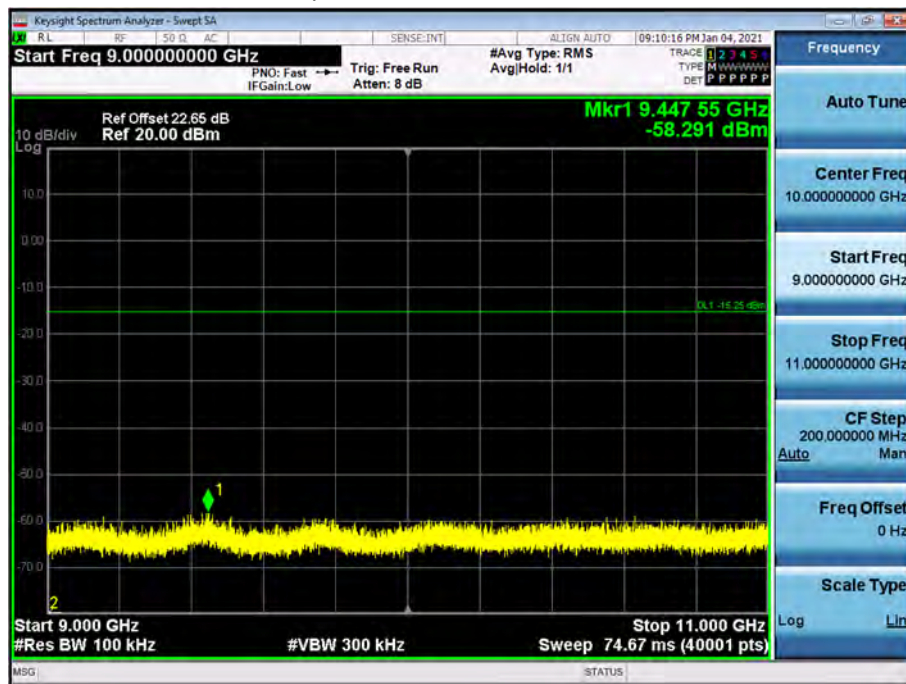


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

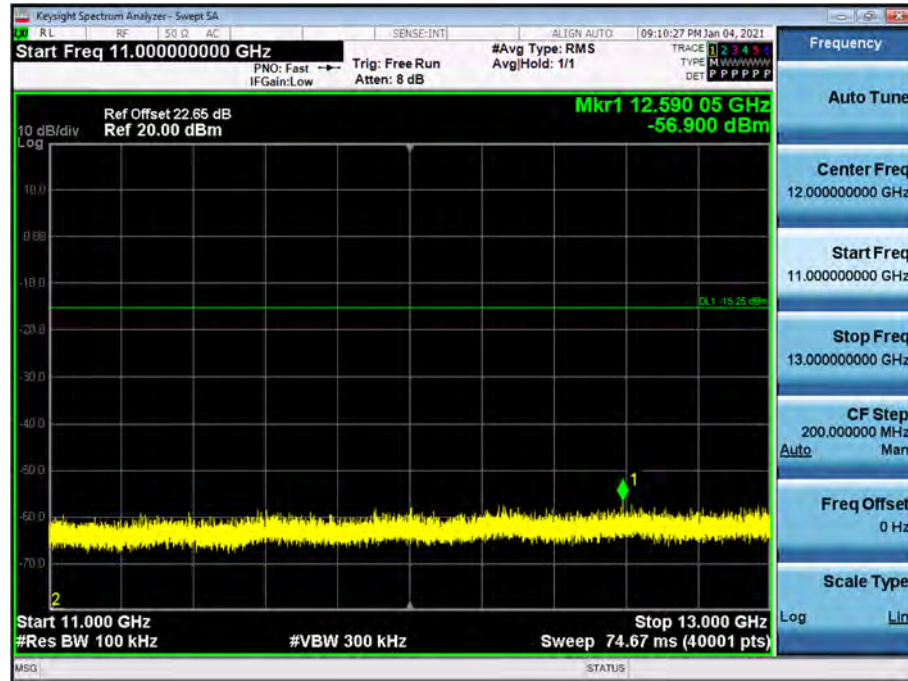


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

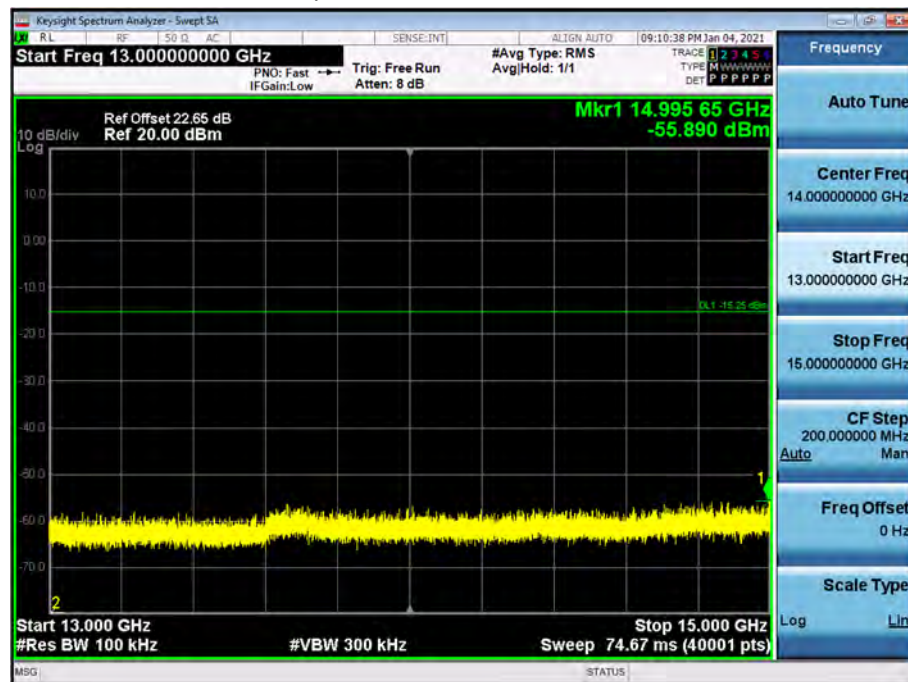


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

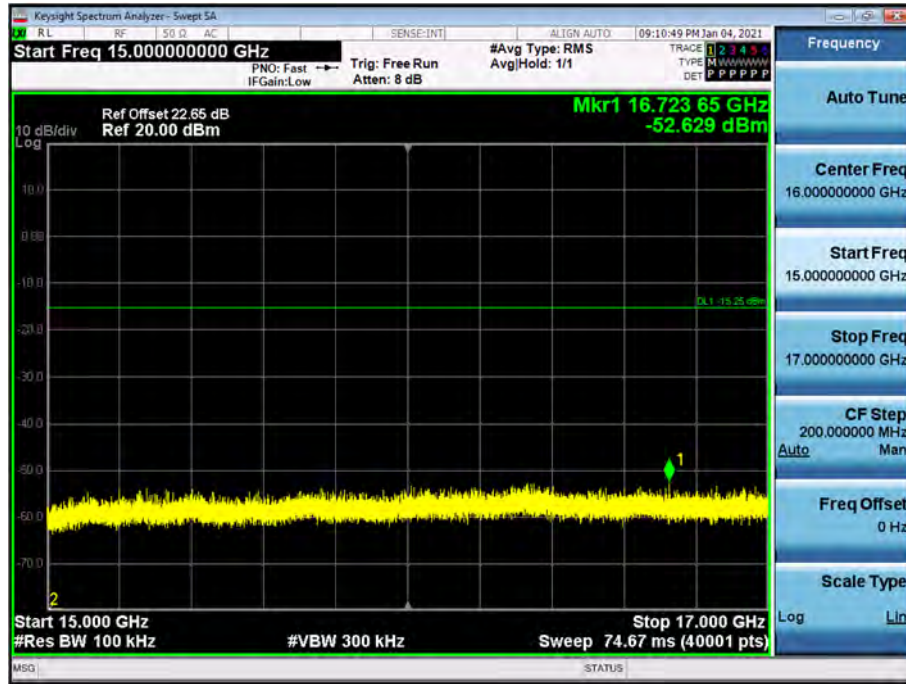


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

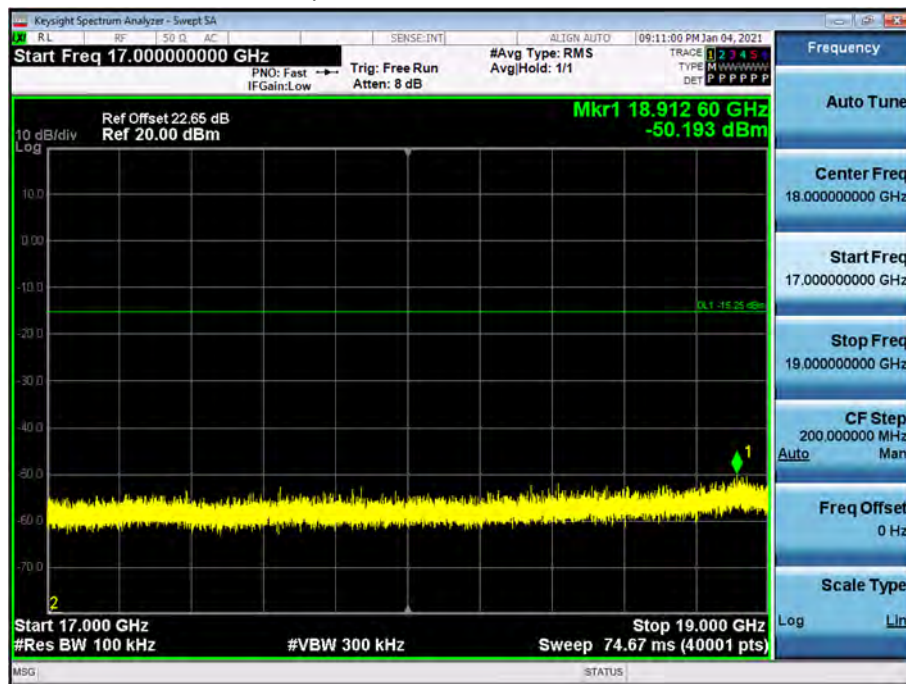


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

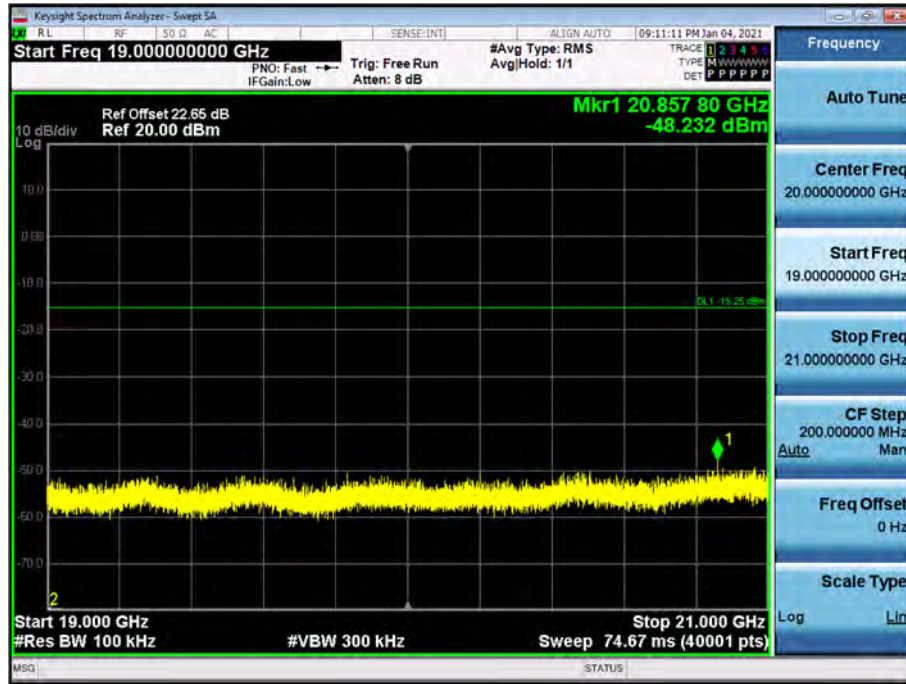


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

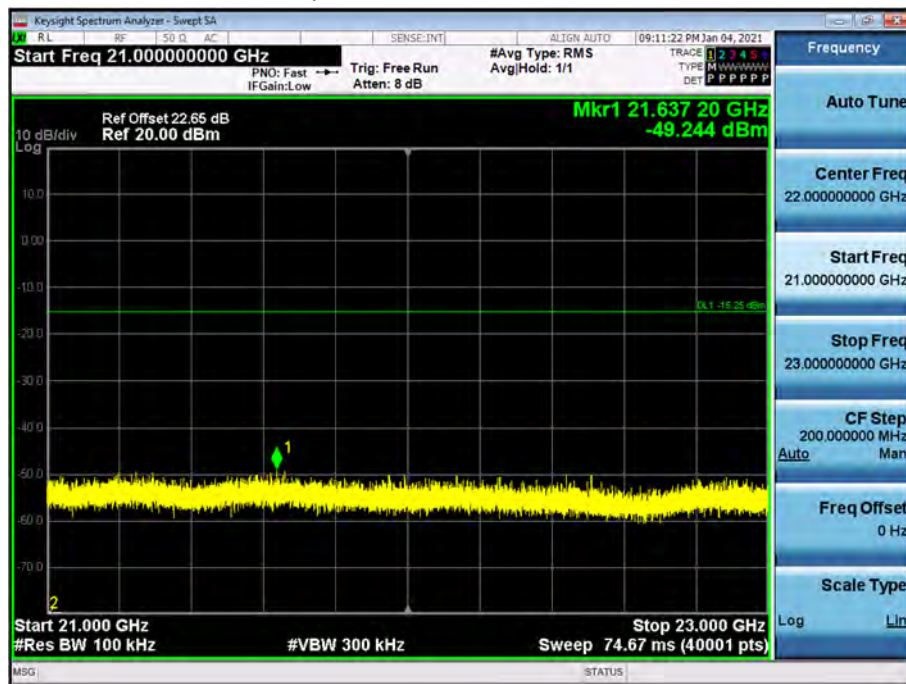

23 GHz ~ 25 GHz


Conducted Spurious Emission (802.11n_Ch.6_MCS 3)

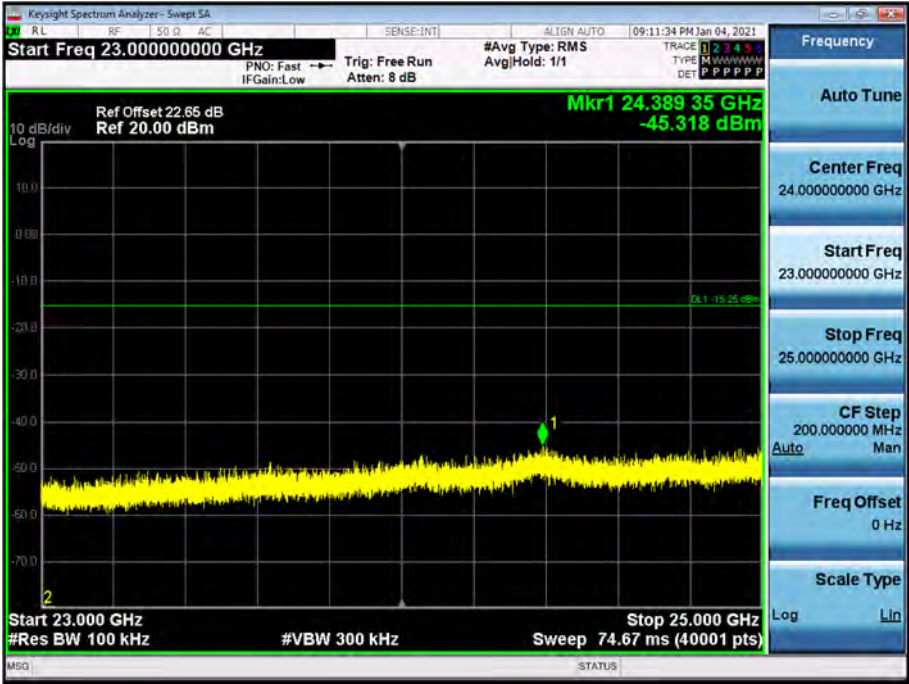

[Internal ANT_MIMO]

▣ Test Plots(BandEdge)

Band Edge (802.11n_HT20 -CH1)

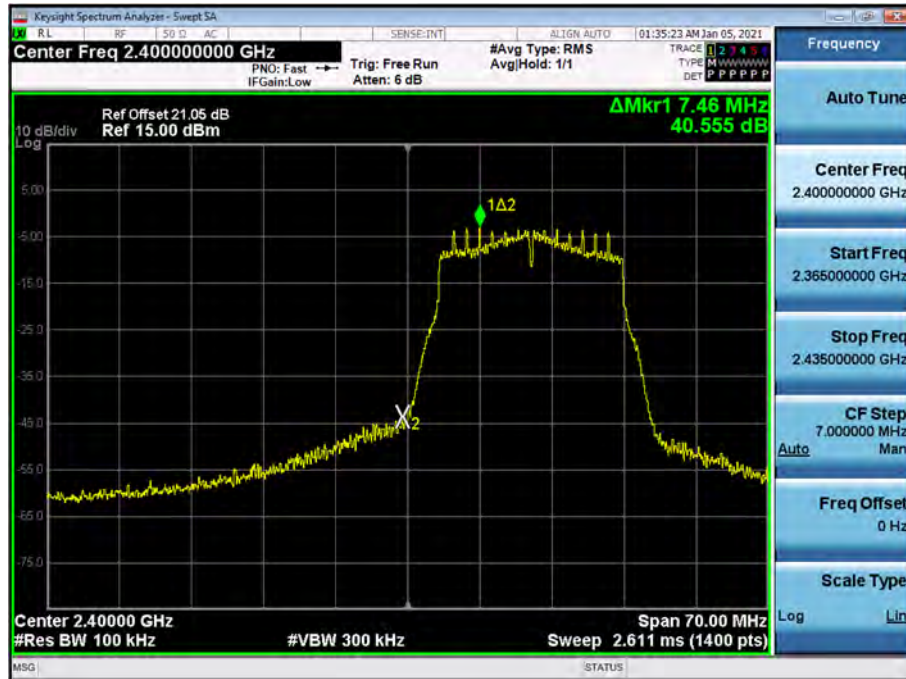


Band Edge (802.11n_HT20 -CH11)



□ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 12)

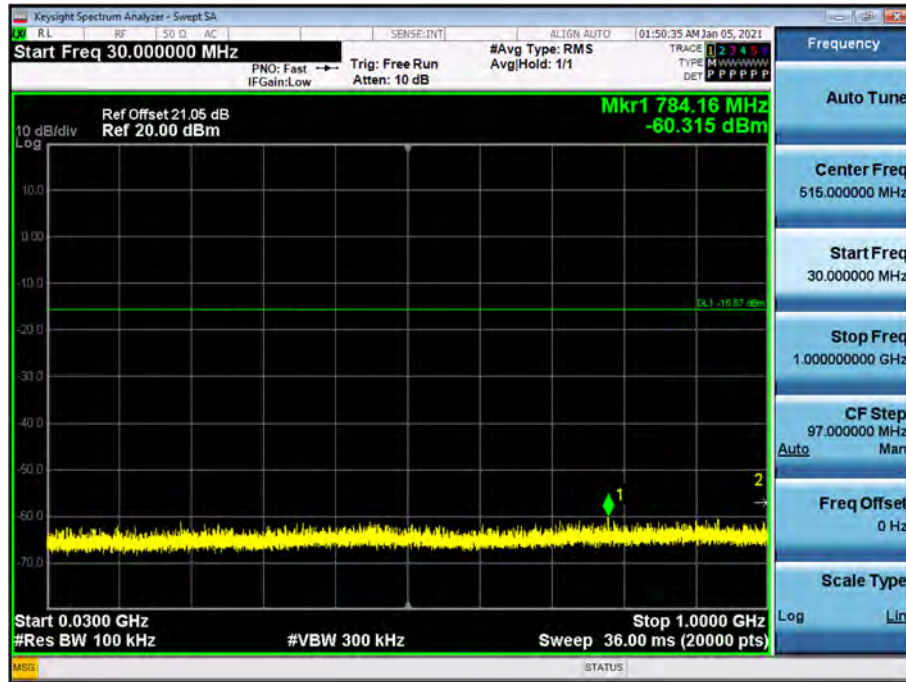


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 12)

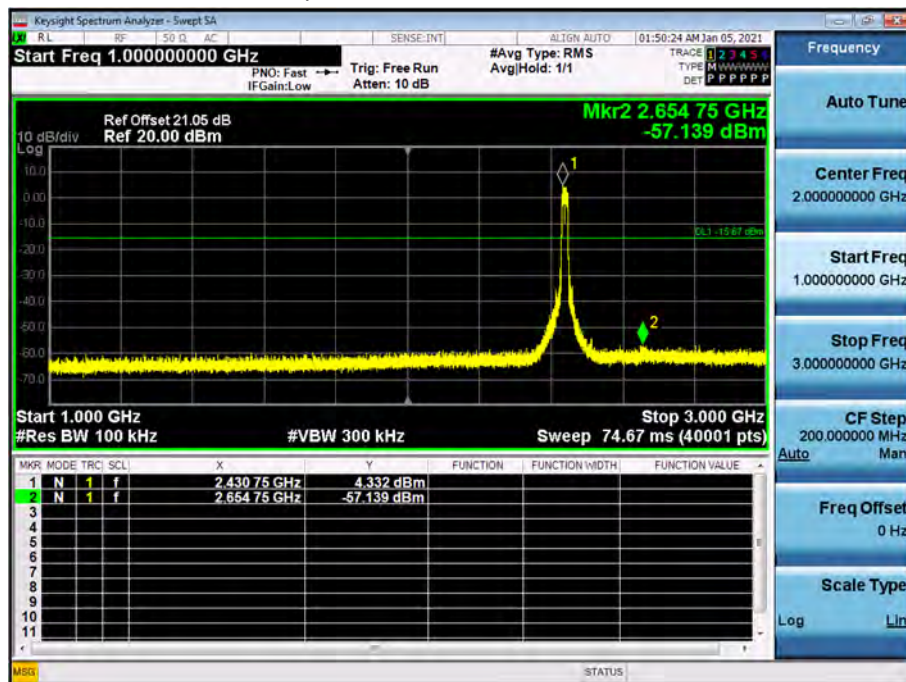


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 12)

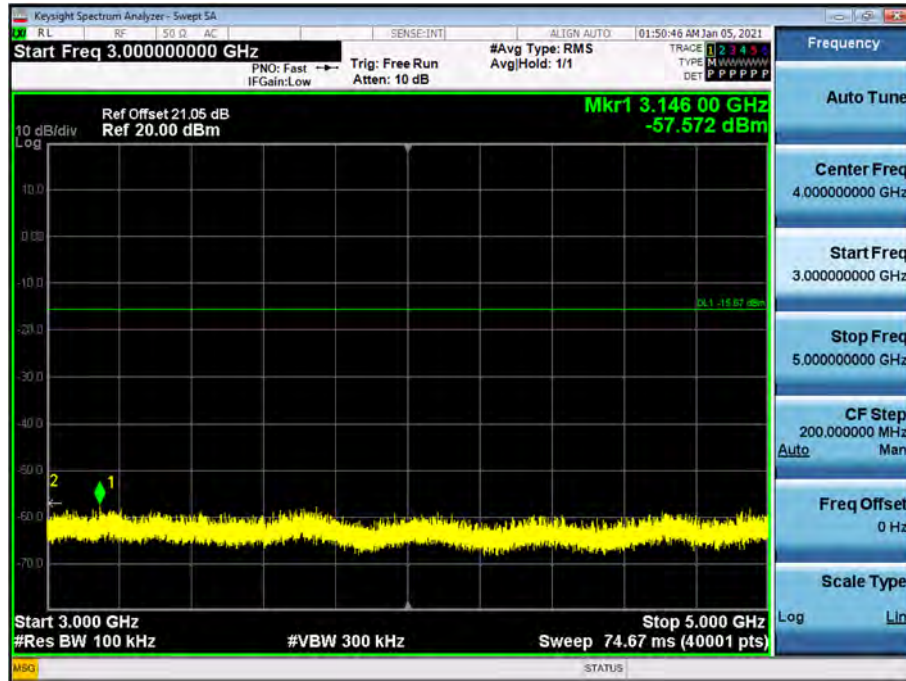


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 12)

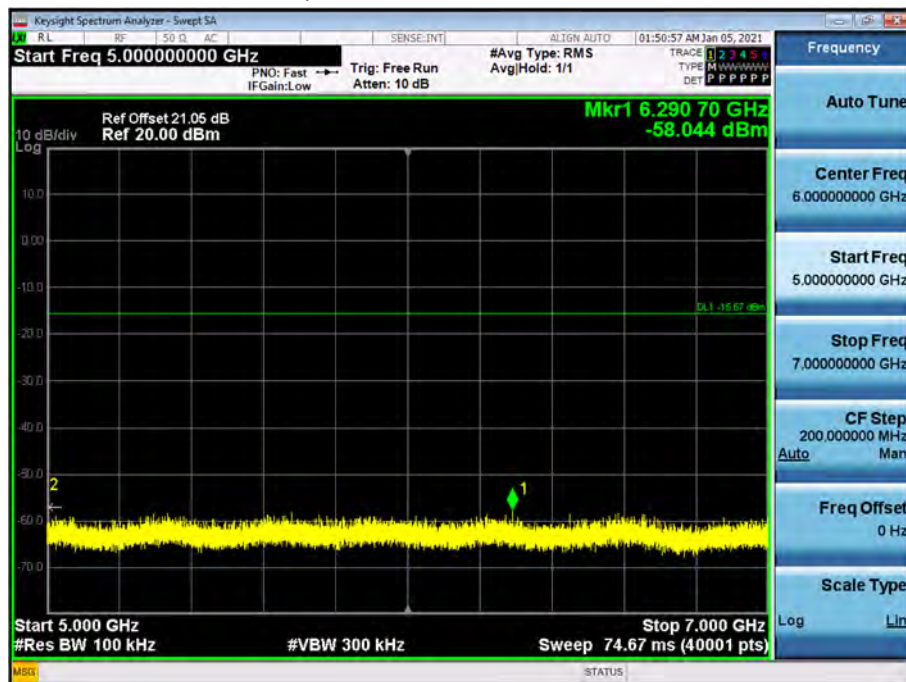


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 12)

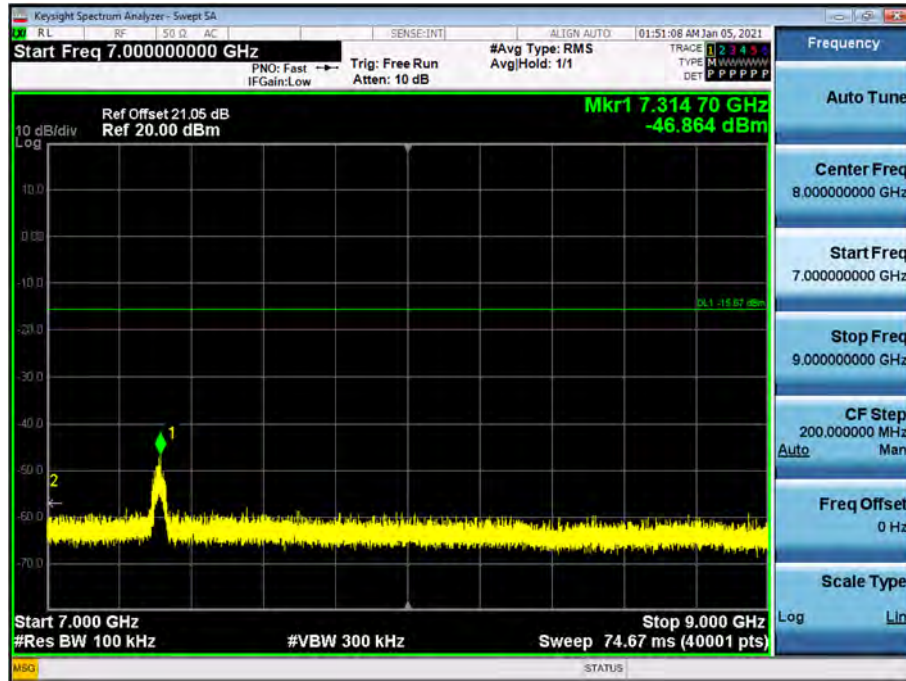


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 12)

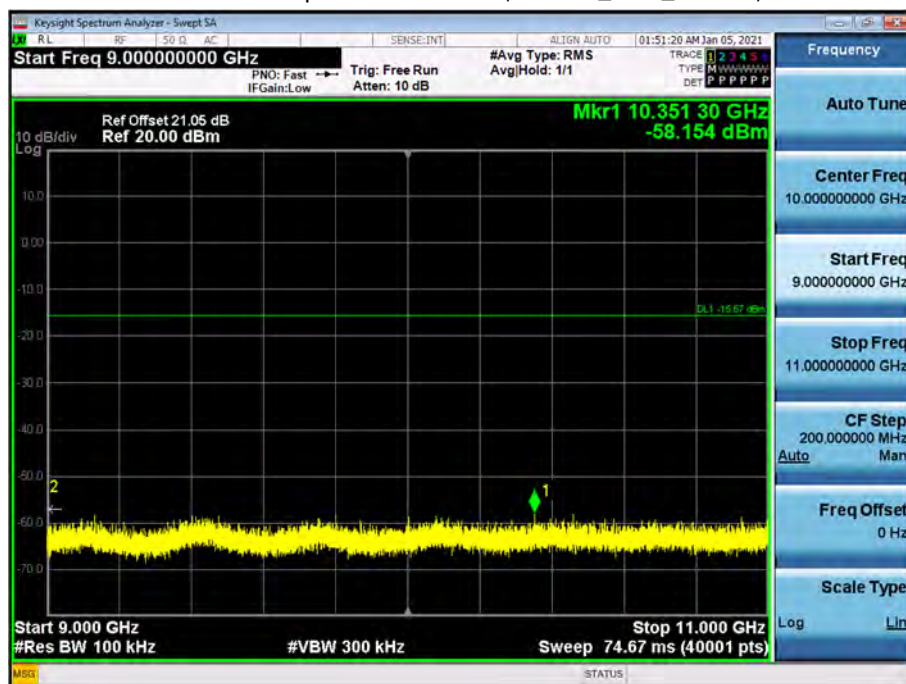


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 12)

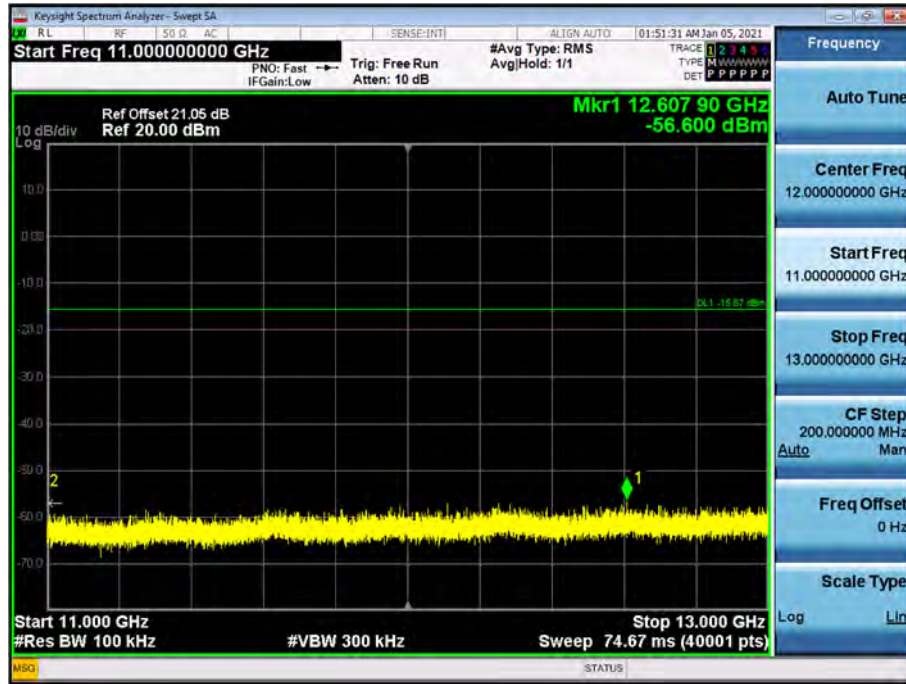


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 12)

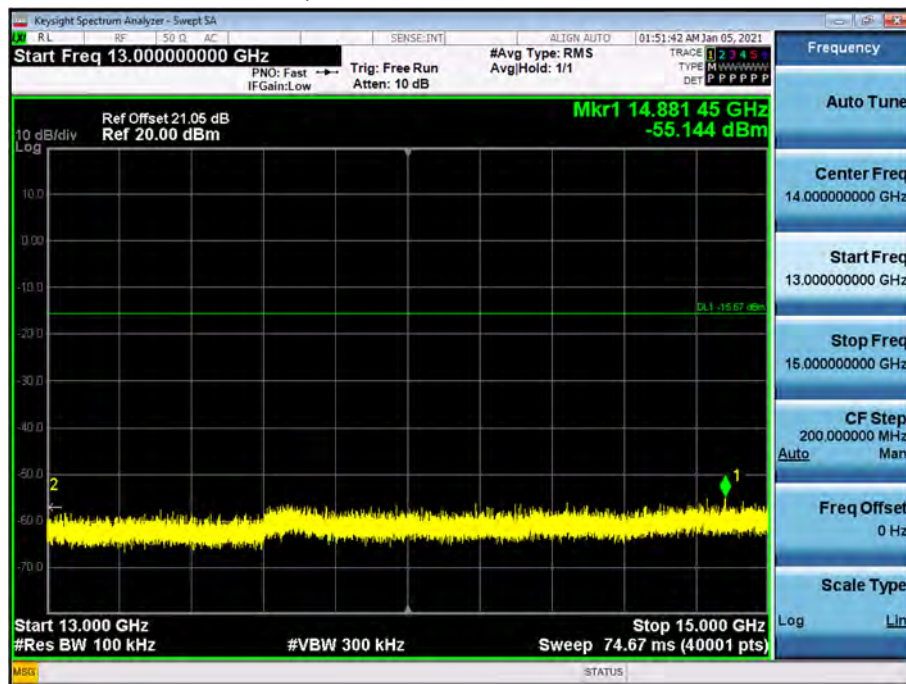


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 12)

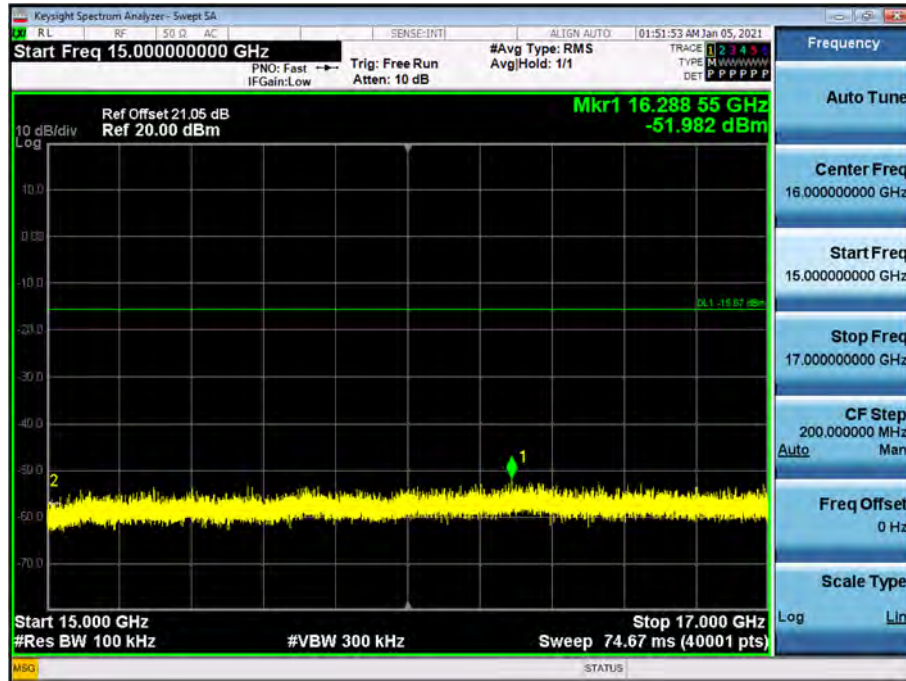


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 12)

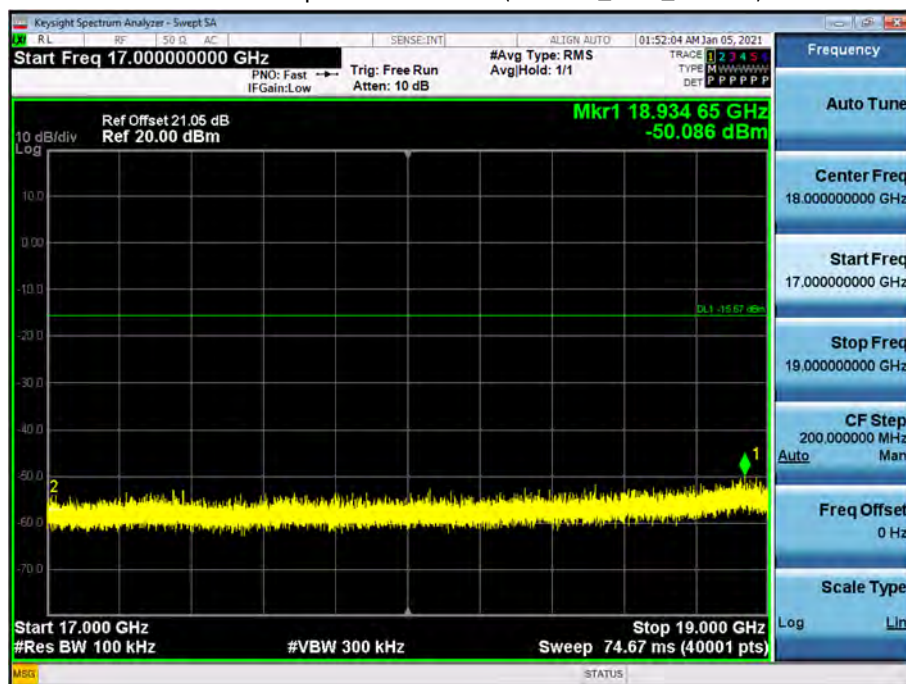


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 12)

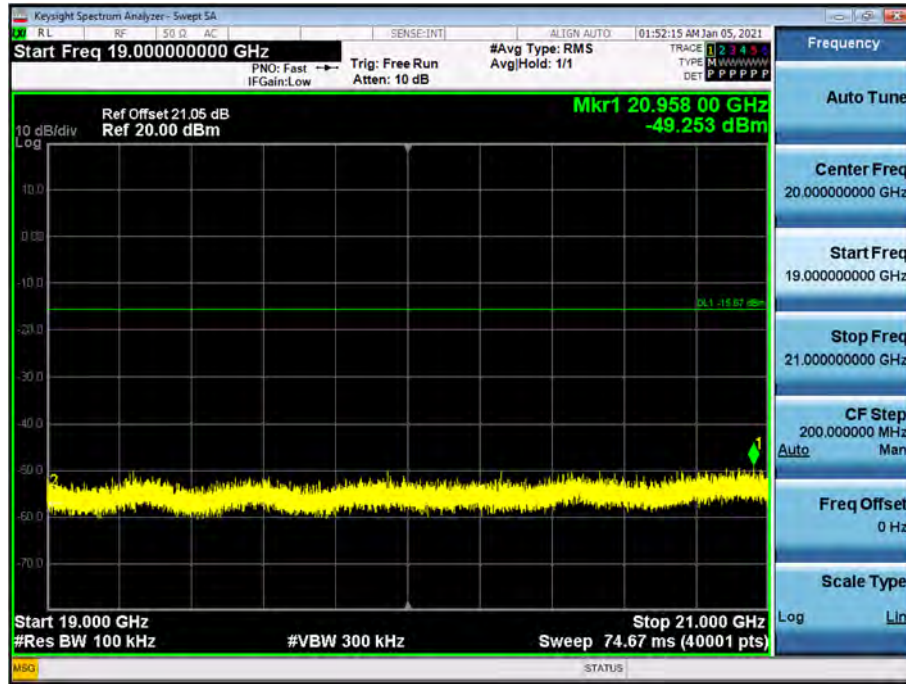


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 12)

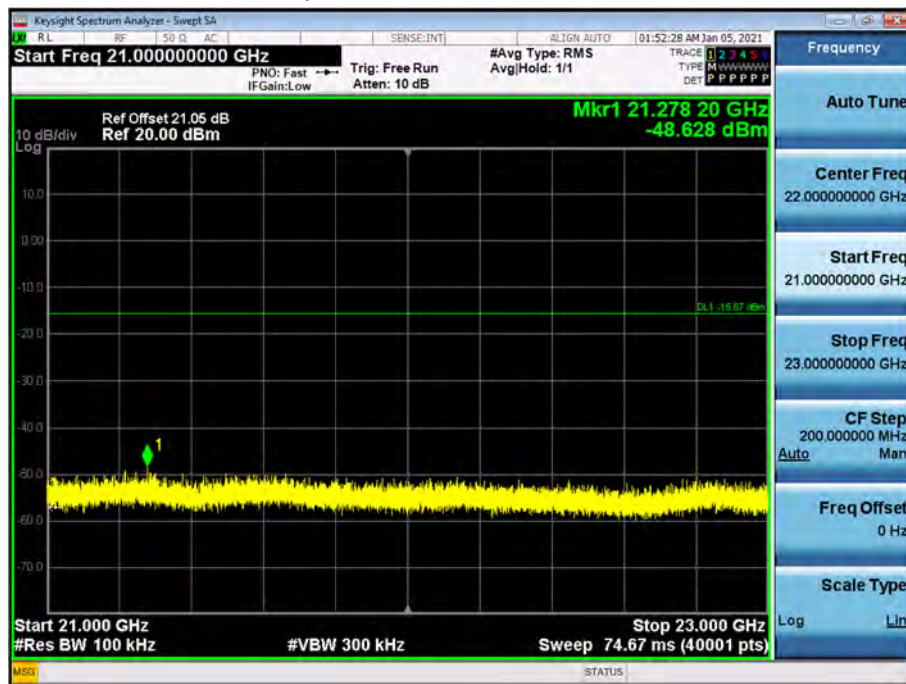

23 GHz ~ 25 GHz


Conducted Spurious Emission (802.11n_Ch.6_MCS 12)

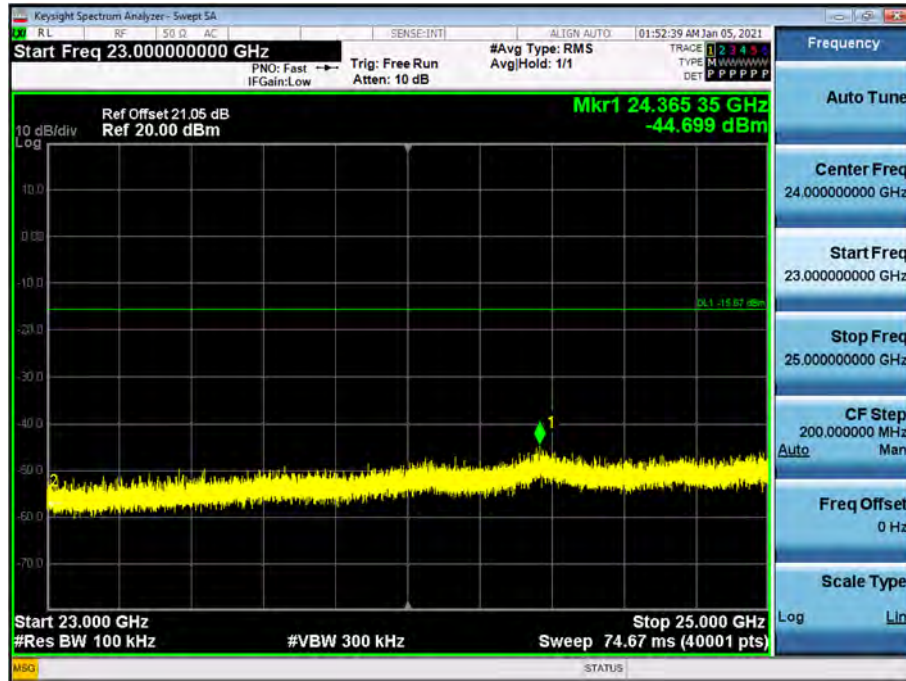


[External ANT_MIMO]

▣ Test Plots(BandEdge)

Band Edge (802.11n_HT20 -CH1)

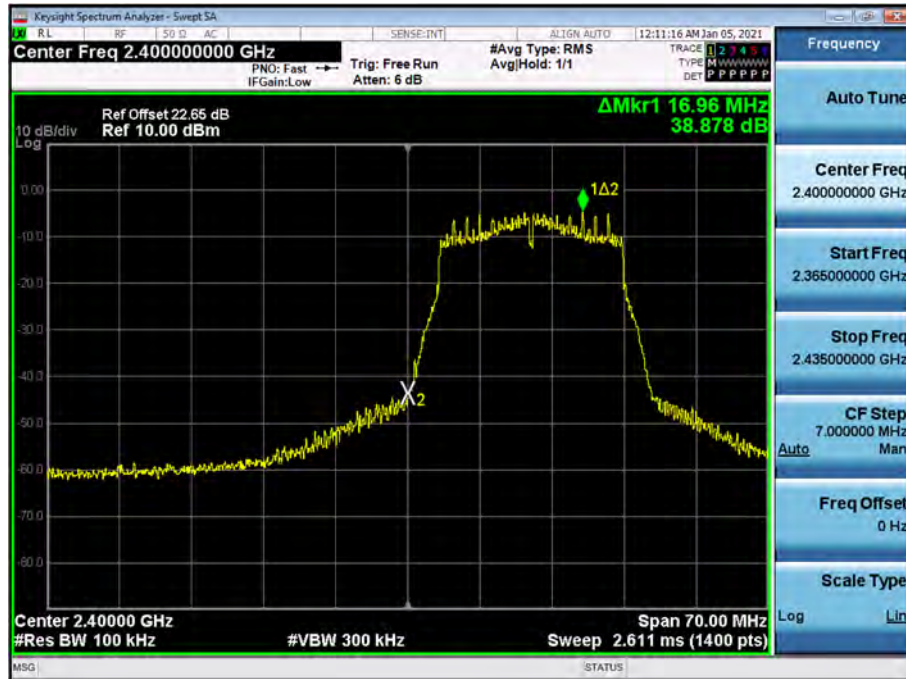


Band Edge (802.11n_HT20 -CH11)

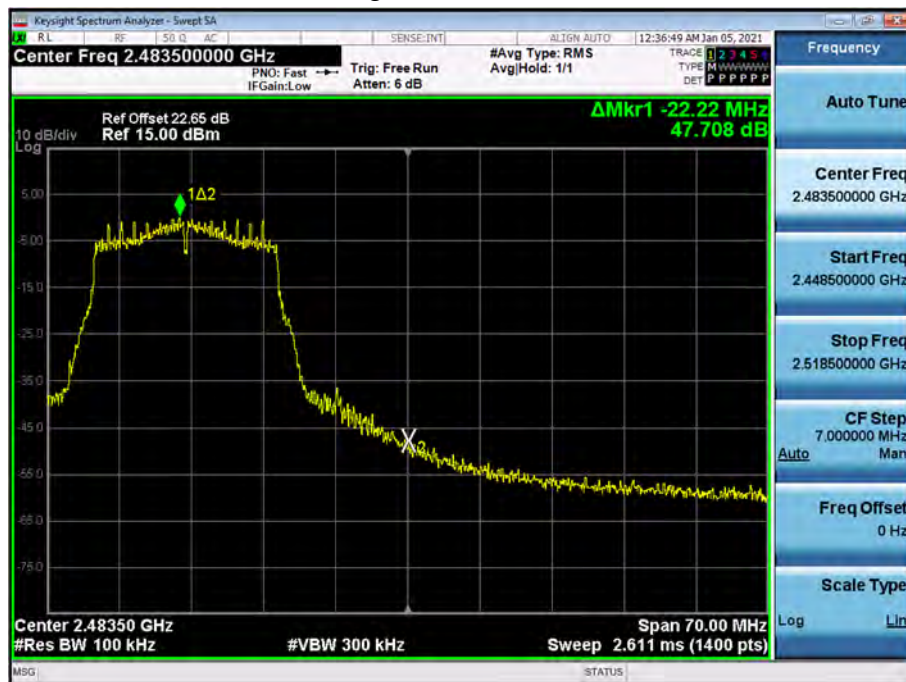

Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 8)

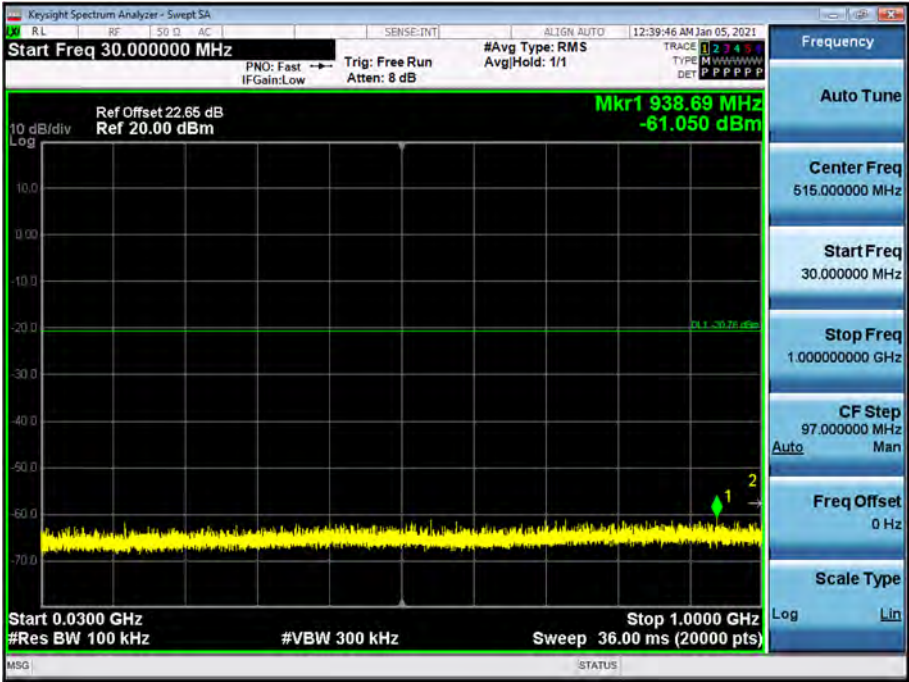


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 8)

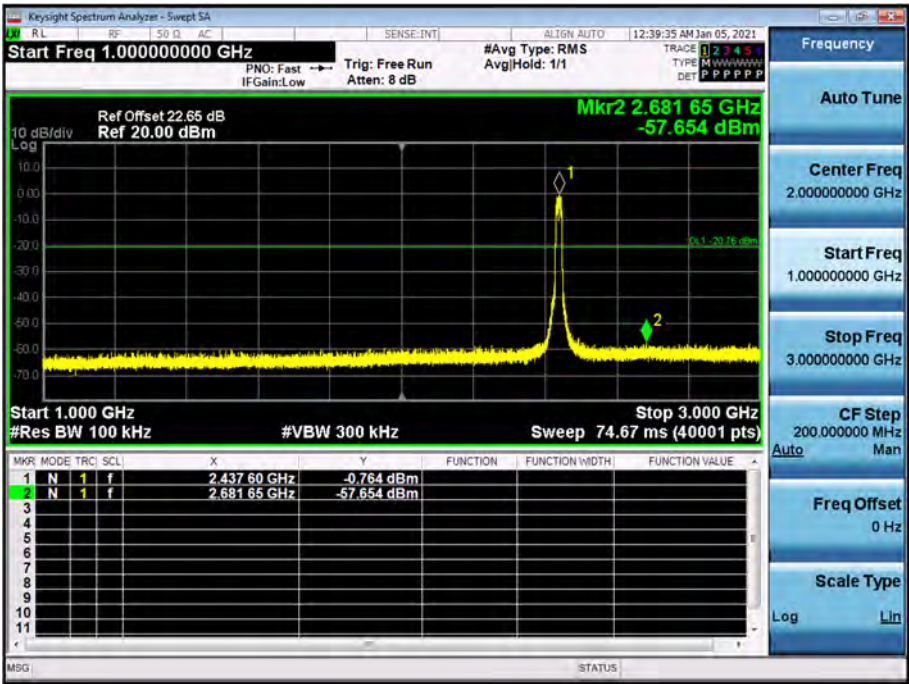


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 8)

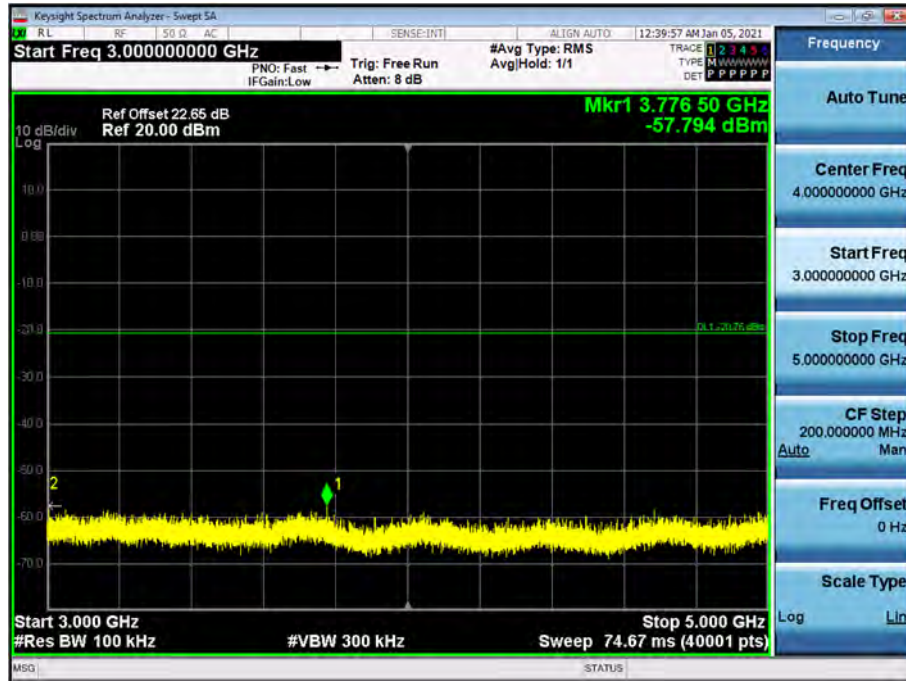


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 8)

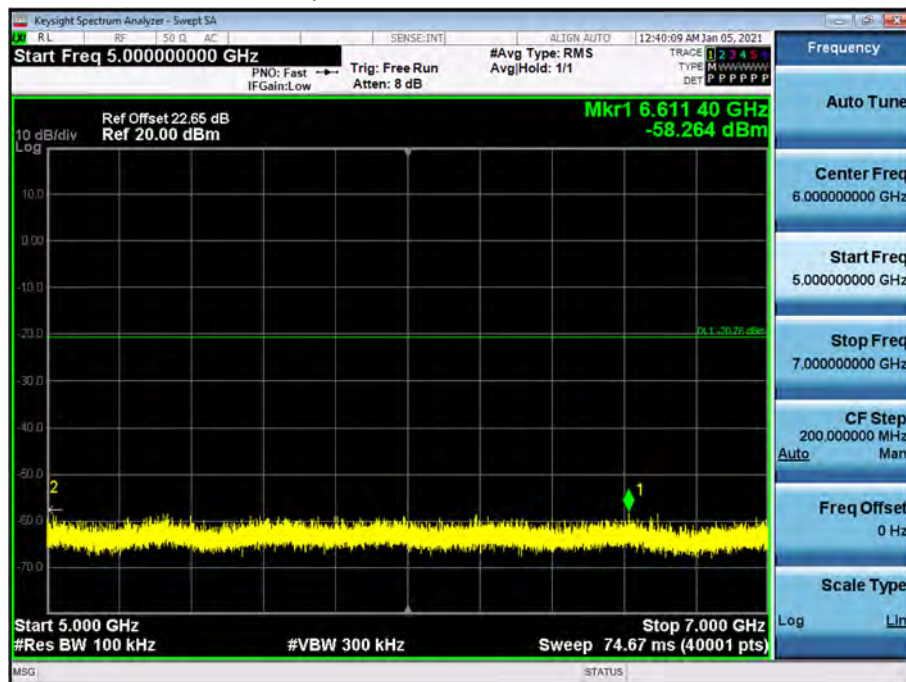


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 8)

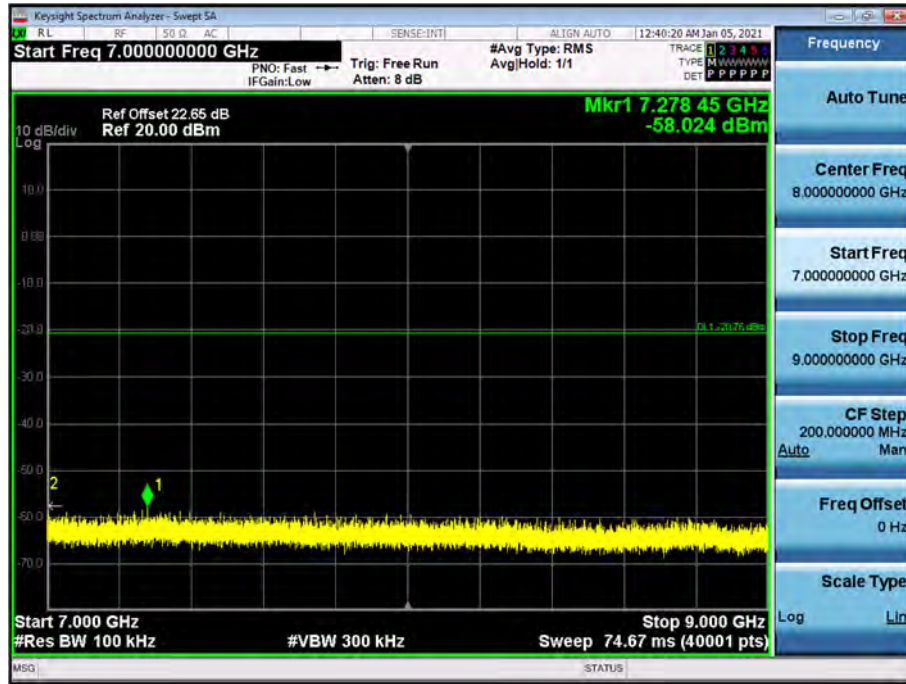


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 8)

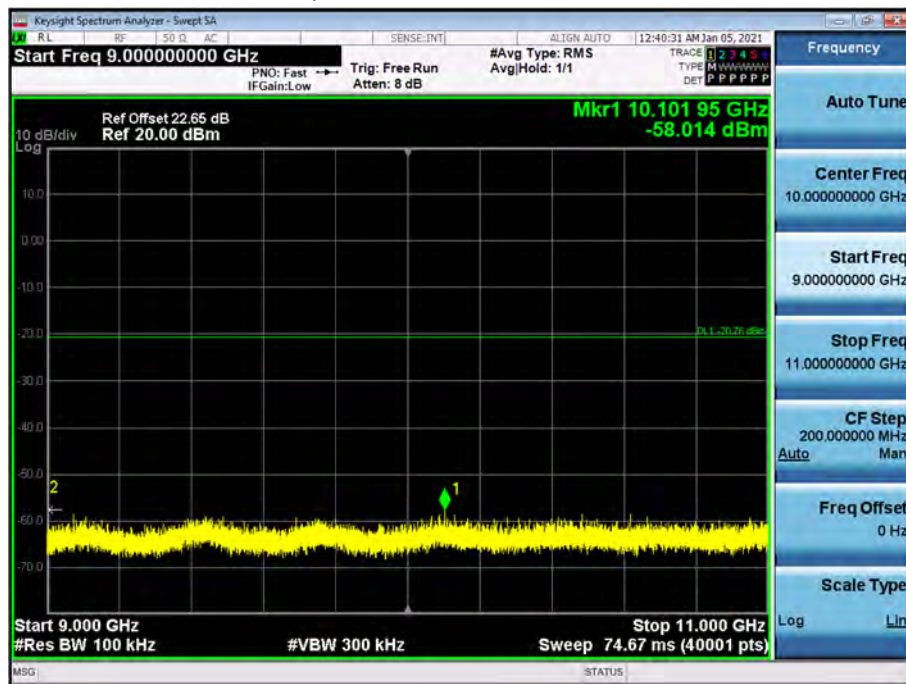


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 8)

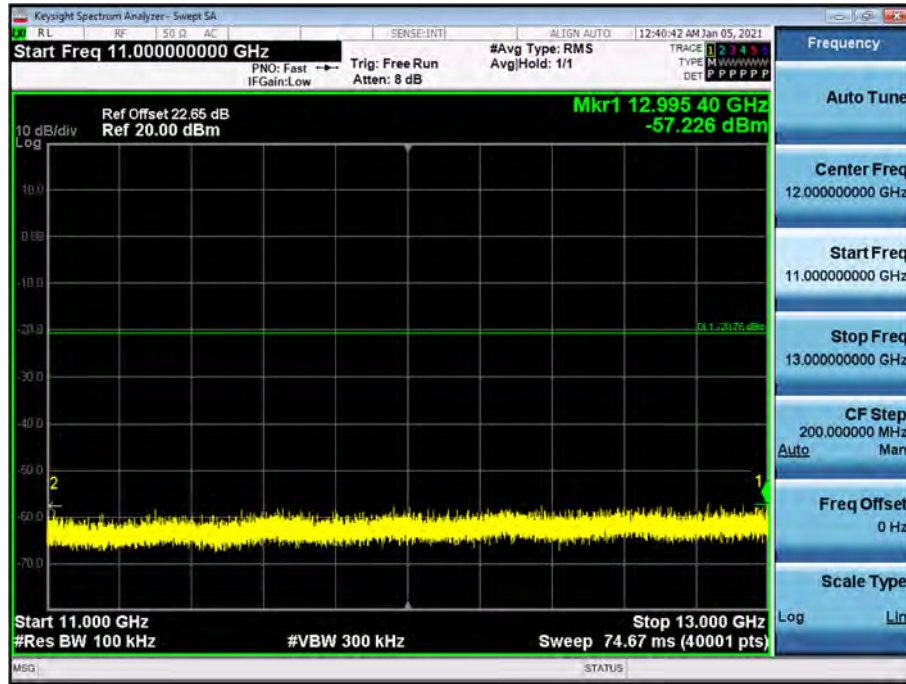

13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 8)

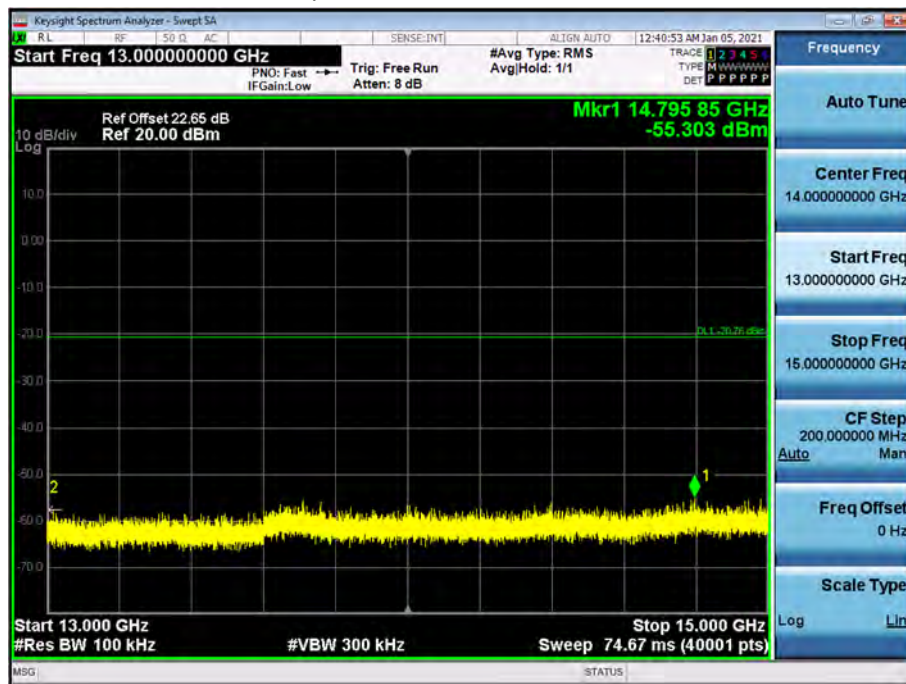


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 8)




17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 8)

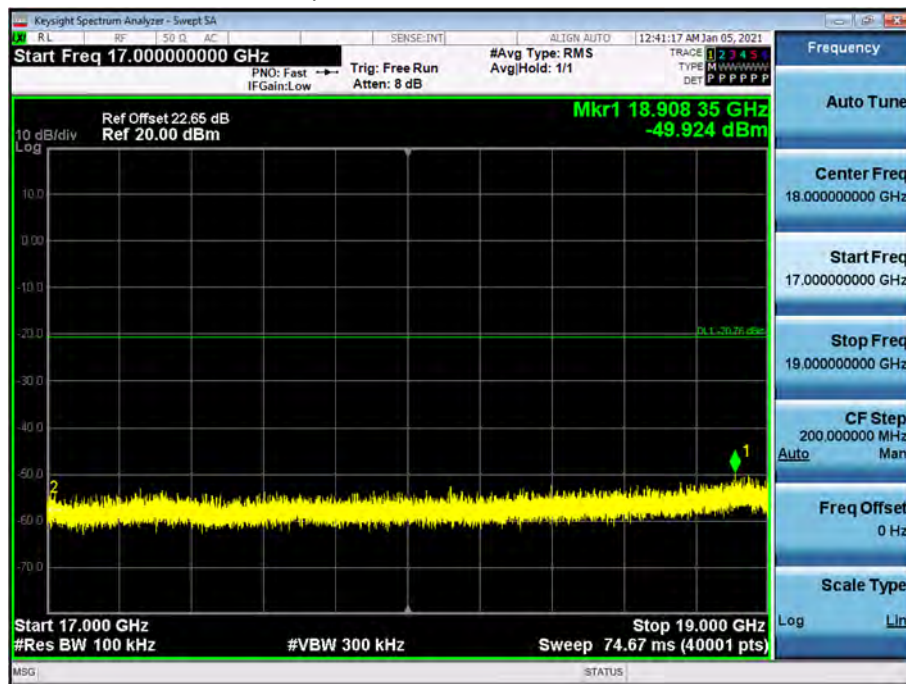


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 8)

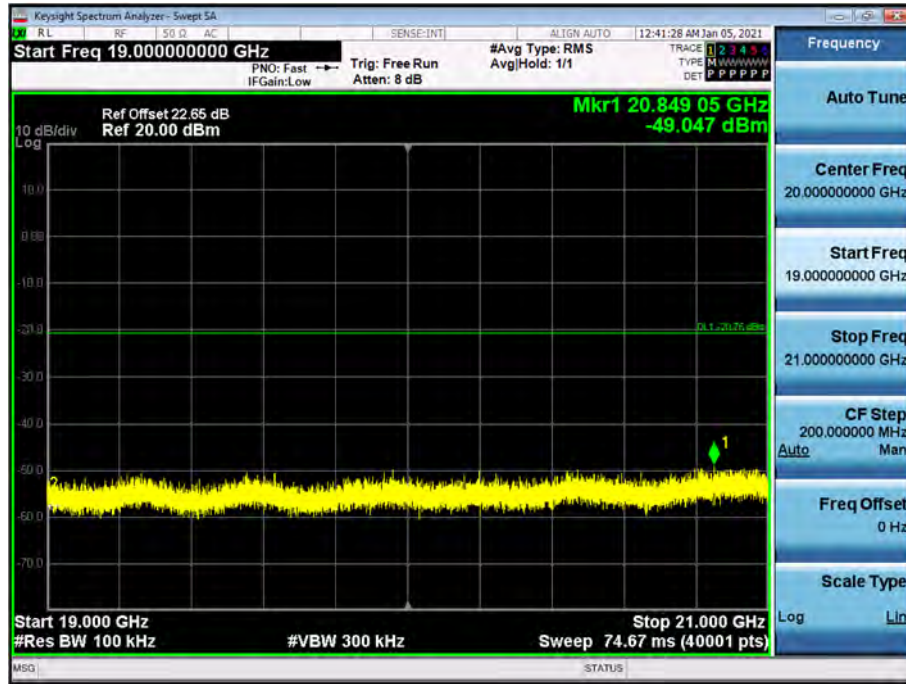


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 8)

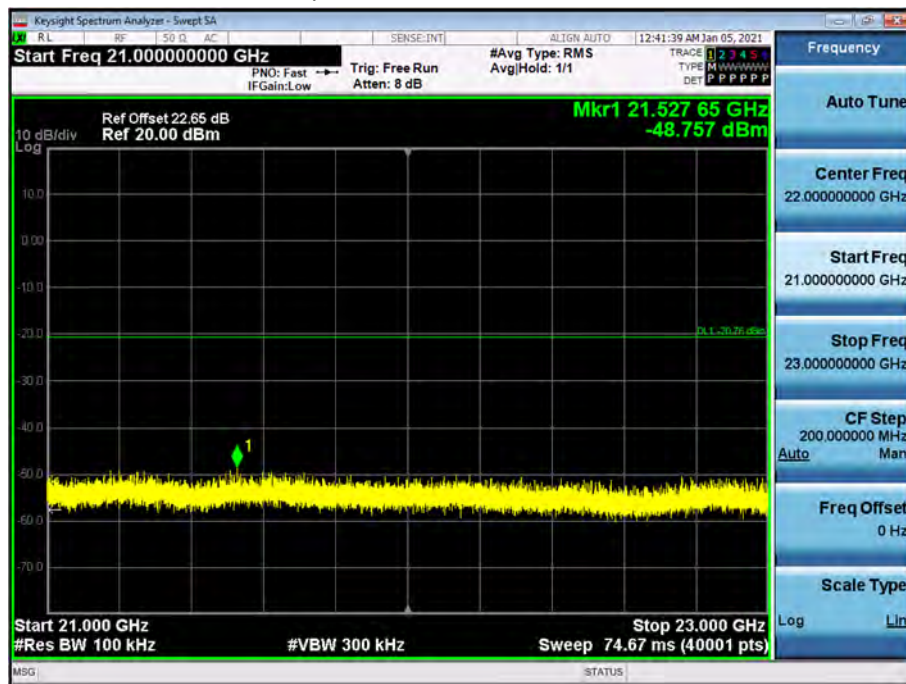

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS 8)

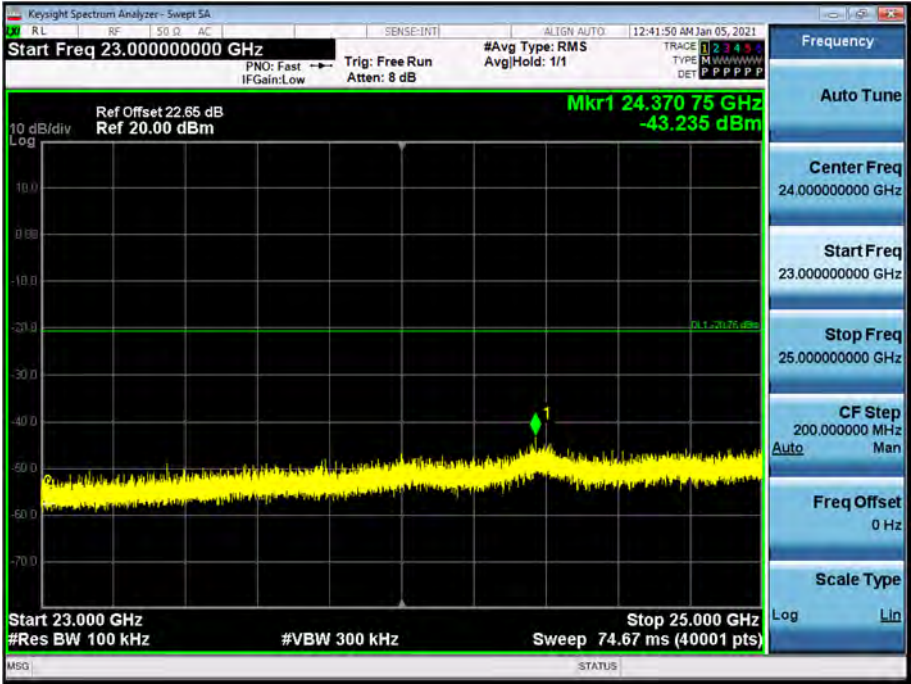

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB

No Critical peaks found

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

[Internal Ant SISO]
Frequency Range : Above 1 GHz

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4824	43.72	3.62	V	47.34	73.98	26.64	PK
4824	32.36	3.62	V	35.98	53.98	18.00	AV
7236	42.69	9.26	V	51.95	73.98	22.03	PK
7236	34.28	9.26	V	43.54	53.98	10.44	AV
4824	43.69	3.62	H	47.31	73.98	26.67	PK
4824	31.02	3.62	H	34.64	53.98	19.34	AV
7236	45.29	9.26	H	54.55	73.98	19.43	PK
7236	37.69	9.26	H	46.95	53.98	7.03	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency	Reading	Duty Cycle Factor	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4824	43.34	0.00	3.62	V	46.96	73.98	27.02	PK
4824	31.26	0.21	3.62	V	35.09	53.98	18.89	AV
7236	41.60	0.00	9.26	V	50.86	73.98	23.12	PK
7236	29.09	0.21	9.26	V	38.55	53.98	15.43	AV
4824	43.22	0.00	3.62	H	46.84	73.98	27.14	PK
4824	30.15	0.21	3.62	H	33.98	53.98	20.00	AV
7236	43.93	0.00	9.26	H	53.19	73.98	20.79	PK
7236	30.29	0.21	9.26	H	39.75	53.98	14.23	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2412
Channel No.	01 Ch

Frequency	Reading	Duty Cycle Factor	AN.+CL -AMP G	ANT. POL	Total	Limit	Margin [dB]	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]		
4824	43.61	0.00	3.62	V	47.23	73.98	26.75	PK
4824	31.29	0.22	3.62	V	35.13	53.98	18.85	AV
7236	40.11	0.00	9.26	V	49.37	73.98	24.61	PK
7236	28.04	0.22	9.26	V	37.52	53.98	16.46	AV
4824	41.36	0.00	3.62	H	44.98	73.98	29.00	PK
4824	30.34	0.22	3.62	H	34.18	53.98	19.80	AV
7236	41.12	0.00	9.26	H	50.38	73.98	23.60	PK
7236	28.86	0.22	9.26	H	38.34	53.98	15.64	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4874	42.37	3.36	V	45.73	73.98	28.25	PK
4874	32.18	3.36	V	35.54	53.98	18.44	AV
7311	42.90	10.27	V	53.17	73.98	20.81	PK
7311	34.47	10.27	V	44.74	53.98	9.24	AV
4874	41.67	3.36	H	45.03	73.98	28.95	PK
4874	31.11	3.36	H	34.47	53.98	19.51	AV
7311	45.76	10.27	H	56.03	73.98	17.95	PK
7311	37.95	10.27	H	48.22	53.98	5.76	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency	Reading	Duty Cycle Factor	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4874	44.10	0.00	3.36	V	47.46	73.98	26.52	PK
4874	31.41	0.21	3.36	V	34.97	53.98	19.01	AV
7311	48.04	0.00	10.27	V	58.31	73.98	15.67	PK
7311	34.31	0.21	10.27	V	44.79	53.98	9.19	AV
4874	41.83	0.00	3.36	H	45.19	73.98	28.79	PK
4874	30.28	0.21	3.36	H	33.84	53.98	20.14	AV
7311	51.14	0.00	10.27	H	61.41	73.98	12.57	PK
7311	37.76	0.21	10.27	H	48.24	53.98	5.74	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2437
Channel No.	06 Ch

Frequency	Reading	Duty Cycle Factor	AN.+CL -AMP G	ANT. POL	Total	Limit	Margin [dB]	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]		
4874	43.41	0.00	3.36	V	46.77	73.98	27.21	PK
4874	31.23	0.22	3.36	V	34.81	53.98	19.17	AV
7311	47.82	0.00	10.27	V	58.09	73.98	15.89	PK
7311	33.99	0.22	10.27	V	44.48	53.98	9.50	AV
4874	41.76	0.00	3.36	H	45.12	73.98	28.86	PK
4874	30.20	0.22	3.36	H	33.78	53.98	20.20	AV
7311	51.53	0.00	10.27	H	61.80	73.98	12.18	PK
7311	37.23	0.22	10.27	H	47.72	53.98	6.26	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency	Reading	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4924	42.34	2.80	V	45.14	73.98	28.84	PK
4924	30.91	2.80	V	33.71	53.98	20.27	AV
7386	44.45	11.07	V	55.52	73.98	18.46	PK
7386	36.32	11.07	V	47.39	53.98	6.59	AV
4924	42.17	2.80	H	44.97	73.98	29.01	PK
4924	30.08	2.80	H	32.88	53.98	21.10	AV
7386	45.47	11.07	H	56.54	73.98	17.44	PK
7386	37.51	11.07	H	48.58	53.98	5.40	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2462
Channel No.	11 Ch


Frequency	Reading	Duty Cycle Factor	AN.+CL-AMP G	ANT. POL	Total	Limit	Margin	Measurement
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	Type
4924	42.13	0.00	2.80	V	44.93	73.98	29.05	PK
4924	29.97	0.21	2.80	V	32.98	53.98	21.00	AV
7386	43.46	0.00	11.07	V	54.53	73.98	19.45	PK
7386	30.16	0.21	11.07	V	41.44	53.98	12.54	AV
4924	40.81	0.00	2.80	H	43.61	73.98	30.37	PK
4924	29.40	0.21	2.80	H	32.41	53.98	21.57	AV
7386	44.29	0.00	11.07	H	55.36	73.98	18.62	PK
7386	30.90	0.21	11.07	H	42.18	53.98	11.80	AV

Operation Mode:	802.11n (HT20)
Transfer MCS Index:	0
Operating Frequency	2462
Channel No.	11 Ch

Frequency	Reading	Duty Cycle Factor	AN.+CL -AMP G	ANT. POL	Total	Limit	Margin [dB]	Measurement Type
[MHz]	[dBuV]	[dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]		
4924	42.60	0.00	2.80	V	45.40	73.98	28.58	PK
4924	29.93	0.22	2.80	V	32.95	53.98	21.03	AV
7386	41.28	0.00	11.07	V	52.35	73.98	21.63	PK
7386	28.16	0.22	11.07	V	39.45	53.98	14.53	AV
4924	40.95	0.00	2.80	H	43.75	73.98	30.23	PK
4924	29.42	0.22	2.80	H	32.44	53.98	21.54	AV
7386	44.75	0.00	11.07	H	55.82	73.98	18.16	PK
7386	30.60	0.22	11.07	H	41.89	53.98	12.09	AV


■ Test Plots (Worst case : Z-H)

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.11 3rd Harmonic)

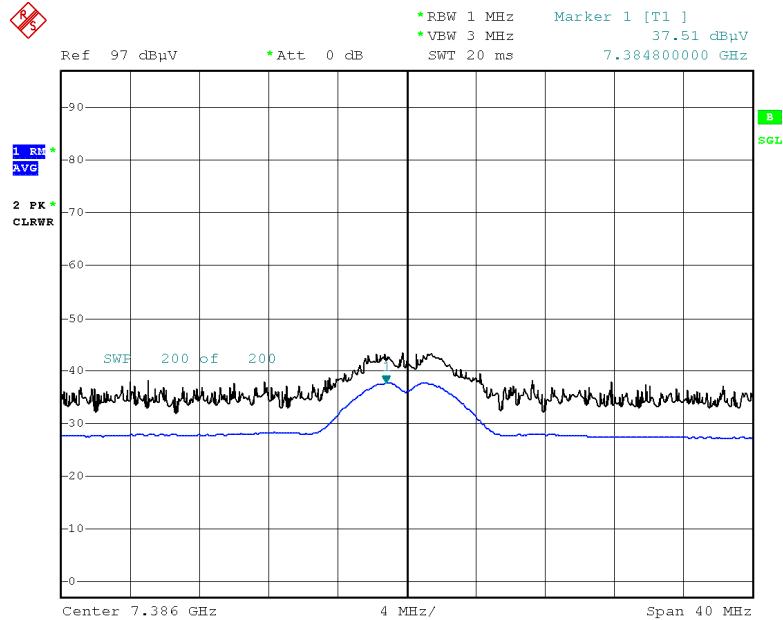

Date: 8.JAN.2021 10:17:55

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.11 3rd Harmonic)

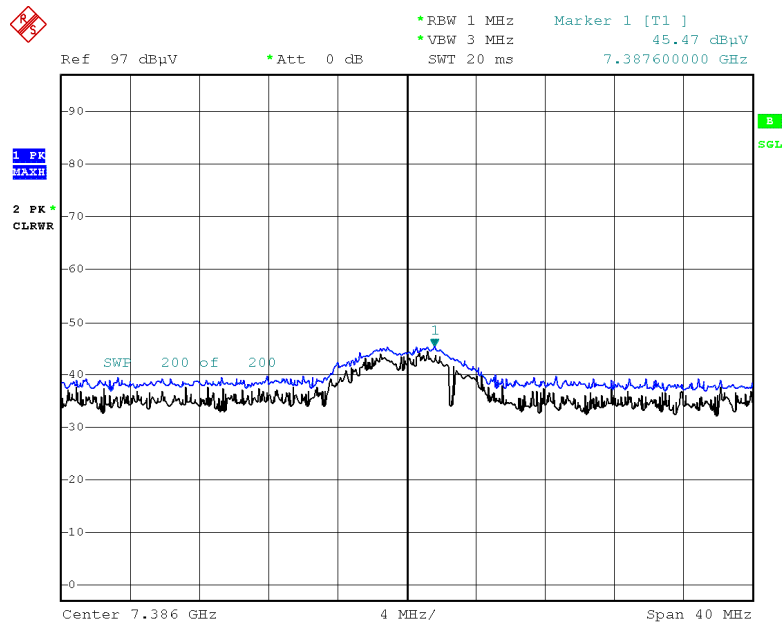

Date: 8.JAN.2021 10:18:06

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency	Reading	AN.+CL -AMP G	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	48.43	0.941	H	49.37	73.98	24.61	PK
2390.0	37.75	0.941	H	38.69	53.98	15.29	AV
2390.0	50.59	0.941	V	51.53	73.98	22.45	PK
2390.0	40.72	0.941	V	41.66	53.98	12.32	AV
2483.5	48.21	1.195	H	49.41	73.98	24.57	PK
2483.5	37.24	1.195	H	38.44	53.98	15.54	AV
2483.5	50.52	1.195	V	51.72	73.98	22.26	PK
2483.5	40.33	1.195	V	41.53	53.98	12.45	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch


Frequency	Reading	Duty Cycle	AN.+CL -AMP G	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	Factor [dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	54.69	0.00	0.941	H	55.63	73.98	18.35	PK
2390.0	41.57	0.21	0.941	H	42.72	53.98	11.26	AV
2390.0	58.93	0.00	0.941	V	59.87	73.98	14.11	PK
2390.0	46.41	0.21	0.941	V	47.56	53.98	6.42	AV
2483.5	53.94	0.00	1.195	H	55.14	73.98	18.84	PK
2483.5	41.64	0.21	1.195	H	43.04	53.98	10.94	AV
2483.5	67.28	0.00	1.195	V	68.48	73.98	5.50	PK
2483.5	48.84	0.21	1.195	V	50.24	53.98	3.74	AV

Operation Mode:	802.11n (HT20)
Transfer Rate:	0
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency	Reading	Duty Cycle	AN.+CL -AMP G	ANT. POL	Total	Limit	Margin	Measurement Type
[MHz]	[dBuV]	Factor [dB]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	54.13	0.00	0.941	H	55.07	73.98	18.91	PK
2390.0	39.55	0.22	0.941	H	40.71	53.98	13.27	AV
2390.0	58.48	0.00	0.941	V	59.42	73.98	14.56	PK
2390.0	44.74	0.22	0.941	V	45.90	53.98	8.08	AV
2483.5	57.25	0.00	1.195	H	58.45	73.98	15.53	PK
2483.5	42.39	0.22	1.195	H	43.81	53.98	10.17	AV
2483.5	62.49	0.00	1.195	V	63.69	73.98	10.29	PK
2483.5	46.10	0.22	1.195	V	47.52	53.98	6.46	AV


Test Plots

Radiated Restricted Band Edges plot – Average Reading (802.11g_Ch.11, Z-V)

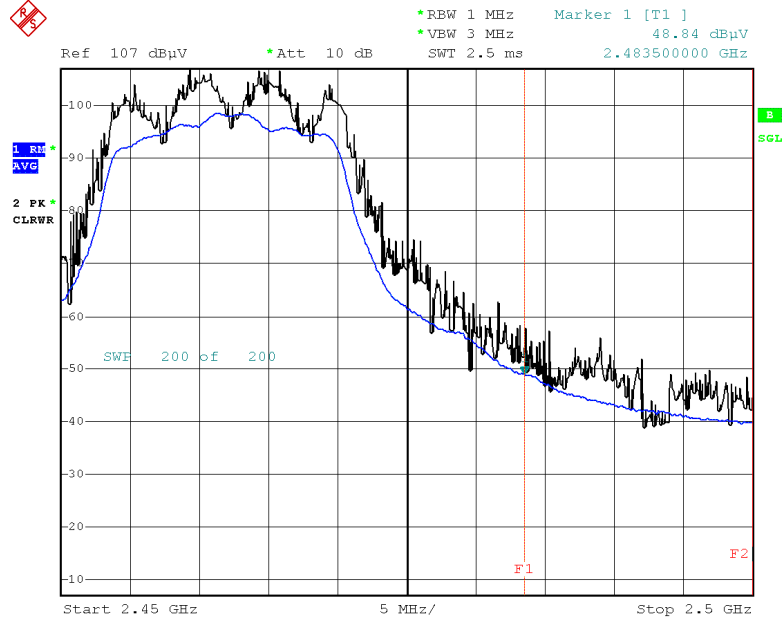

Date: 8.JAN.2021 09:34:54

Radiated Restricted Band Edges plot – Peak Reading (802.11g_Ch.11, Z-V)

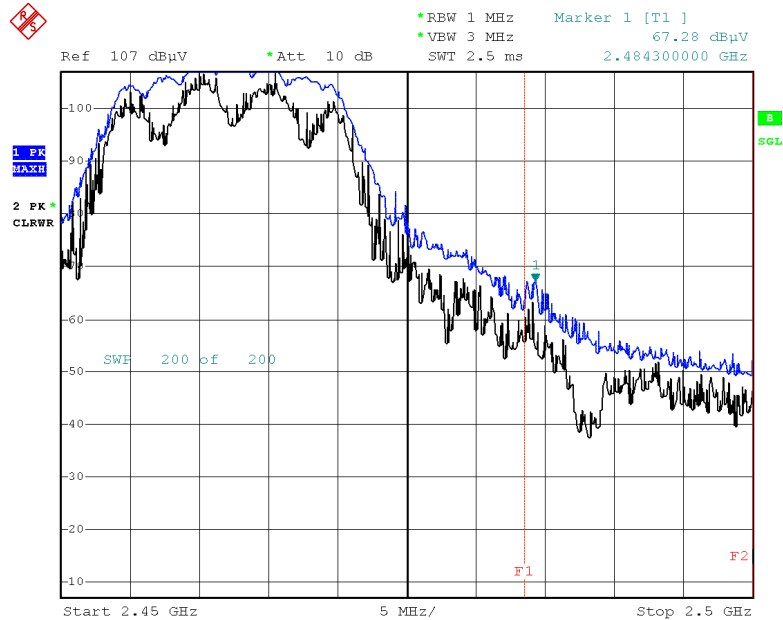

Date: 8.JAN.2021 09:35:05

Note:

Plot of worst case are only reported.

10. LIST OF TEST EQUIPMENT

Conducted Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/04/2020	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/10/2020	Annual	100584
ESPAC	SU-642 / Temperature Chamber	03/18/2020	Annual	0093008124
Agilent	N9030A / Signal Analyzer	01/11/2021	Annual	MY49431210
Rohde & Schwarz	OSP 120 / Power Measurement Set	07/02/2020	Annual	101231
Agilent	N1911A / Power Meter	04/07/2020	Annual	MY45100523
Keysight	N1921A / Power Sensor	06/08/2020	Annual	MY57820067
Agilent	87300B / Directional Coupler	11/10/2020	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/25/2020	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/12/2020	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	06/26/2020	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	05/12/2020	Annual	100422
Agilent	11636A / Power Divider	07/24/2020	Annual	9109
Agilent	N5182A / Vector Signal Generator	08/26/2020	Annual	MY50140312

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Emco	2090 / Controller	N/A	N/A	060520
Ets	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9160 / Hybrid Antenna	08/19/2020	Biennial	9160-3368
Schwarzbeck	VULB 9168 / Hybrid Antenna	09/04/2020	Biennial	9168-0895
Schwarzbeck	BBHA 9120D / Horn Antenna	11/18/2019	Biennial	9120D-1191
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	11/29/2019	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	09/14/2020	Annual	836650/016
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/22/2020	Annual	101068-SZ
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/06/2021	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/10/2020	Annual	1
CERNEX WEINSCHEL	CBLU1183540B-01/Broadband Bench Top LNA 56-10 / Attenuator(10 dB)	12/23/2020	Annual	N/A
CERNEX Api tech.	CBL06185030 / Broadband Low Noise Amplifier 18B-03 / Attenuator (3 dB)	12/23/2020	Annual	N/A
Wainwright Instruments	WHKX10-2700-3000-18000-40SS / High Pass Filter	12/23/2020	Annual	N/A
Wainwright Instruments	WHKX8-6090-7000-18000-40SS / High Pass Filter	12/23/2020	Annual	N/A
T&M SYSTEM	COAXIAL ATTENUATOR / Thru	12/23/2020	Annual	N/A
CERNEX	CBL18265035 / Power Amplifier	12/04/2020	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	03/18/2020	Annual	3000C000276

Note:

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2101-FC119-P