

TEST REPORT

Reference No...... : WTD21D05043716W001
FCC ID : 2AQA6-H5082
Applicant..... : Shenzhen Intellirocks Tech. Co., Ltd.
Address..... : No. 2901-2904, 3002, Block C, Section 1, Chuangzhi Yuncheng Building, Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen, Guangdong, China
Manufacturer : NanChang Innotech Homesmart Co., Ltd
Address..... : 1st to 5th floor, 2-1#, Nanchang Small and Medium-sized Enterprises Entrepreneurship Incubation Base (Phase II), Guowei Industrial Park, No. 669 Huangtang E Rd, Linkong Economic Zone, Nanchang, Jiangxi, China
Product..... : Dual Smart Plug
Model(s) : H5082
Brand Name..... : 
Standards..... : FCC CFR47 Part 15.247
Date of Receipt sample : 2021-05-10
Date of Test : 2021-05-10 to 2021-05-19
Date of Issue..... : 2021-05-20
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:



Estel Qian / Project Engineer

Approved by:





Daniel Liu / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.	4
4.2 DETAILS OF E.U.T.	4
4.3 TEST FACILITY.....	4
4.4 CHANNEL LIST.....	5
4.5 TEST MODE	6
5 TEST SUMMARY	7
6 EQUIPMENT USED DURING TEST	8
6.1 EQUIPMENTS LIST	8
6.2 DESCRIPTION OF SUPPORT UNITS	9
6.3 MEASUREMENT UNCERTAINTY	9
6.4 TEST EQUIPMENT CALIBRATION	9
7 EMC REQUIREMENTS FOR EMISSIONS.....	10
7.1 CONDUCTED EMISSIONS.....	10
7.1.2 <i>E.U.T. Operation</i>	10
7.1.3 <i>Test Setup</i>	10
7.1.4 <i>Measurement Description</i>	10
7.1.5 <i>Test Results</i>	11
8 RADIATED EMISSIONS.....	13
8.1 EUT OPERATION.....	13
8.2 TEST SETUP	14
8.3 SPECTRUM ANALYZER SETUP	15
8.4 TEST PROCEDURE	16
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	16
8.6 SUMMARY OF TEST RESULTS	17
9 DUTY CYCLE.....	29
10 BAND EDGE MEASUREMENT	30
10.1 TEST PRODUCE	30
10.2 TEST RESULT	31
11 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	33
11.1 TEST PROCEDURE:.....	33
11.2 TEST RESULT:	33
12 MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	40
12.1 TEST PROCEDURE:.....	40
12.2 TEST RESULT:	41
13 POWER SPECTRAL DENSITY	46
13.1 TEST PROCEDURE:.....	46
13.2 TEST RESULT:	46
14 ANTENNA REQUIREMENT	51
15 RF EXPOSURE.....	52
16 PHOTOGRAPHS OF TEST SETUP AND EUT.....	52

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD21D05043716 W001	2021-05-10	2021-05-10 to 2021-05-19	2021-05-20	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Dual Smart Plug
Model(s):	H5082
Model Description:	N/A
Wi-Fi Specification:	2.4G-802.11b/g/n HT20
Bluetooth Version:	5.0
Hardware Version:	1.2
Software Version:	1.00.09

4.2 Details of E.U.T.

Operation Frequency:	Wi-Fi: 802.11b/g/n HT20: 2412~2462MHz BLE:2402-2480MHz
Max. RF output power:	Wi-Fi: 11.42dBm BLE: 7.81dBm
Type of Modulation:	Wi-Fi: CCK, OFDM BLE: GFSK
Antenna installation:	Wi-Fi/BLE: PCB printed antenna
Antenna Gain:	Wi-Fi/BLE: 2.0dBi
Ratings:	Input/Output: 120V~ 60Hz 15A Max

4.3 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.
Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

4.4 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

4.5 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

Note: Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3), (4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	EMI Test Receiver	R&S	ESCI	100947	2020-07-30	1Year
2	LISN	R&S	ENV216	101215	2020-07-30	1Year
3	Cable	Top	TYPE16(3.5M)	-	2020-07-30	1Year
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	EMI Test Receiver	R&S	ESCI	101155	2020-07-30	1Year
2	LISN	SCHWARZBECK	NSLK 8128	8128-289	2020-07-30	1Year
3	Limiter	York	MTS-IMP-136	261115-001-0024	2020-07-30	1Year
4	Cable	LARGE	RF300	-	2020-07-30	1Year
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	Spectrum Analyzer	R&S	FSP30	100091	2021-04-26	1Year
2	Amplifier	Agilent	8447D	2944A10178	2020-08-26	1Year
4	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2020-08-22	1Year
5	Coaxial Cable	Top	TYPE16(13M)	-	2021-04-26	1Year
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2021-04-30	1Year
7	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2020-08-01	1Year
8	Broadband Preamplifier	COMPLIANCE	PAP-1G18	2004	2020-08-26	1Year
9	Coaxial Cable	ZT26-NJ-NJ-8M/FA	1GHz-18GHz	NA	2021-04-26	1Year
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	Test Receiver	R&S	ESCI	101296	2021-04-26	1Year
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2020-10-31	1Year
3	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2021-04-29	1Year
4	Amplifier	ANRITSU	MH648A	M43381	2021-04-26	1Year
5	Cable	HUBER+SUHNER	CBL2	525178	2021-04-26	1Year
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	Spectrum Analyzer	R&S	FSP30	100091	2021-04-26	1Year
2	Spectrum Analyzer	R&S	FSP40	100501	2020-07-30	1Year
3	Signal Analyzer	Agilent	N9010A	MY50520207	2021-04-19	1Year

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	$\pm 3.64\text{dB}$ (AC mains 150KHz~30MHz)
Radiated Spurious Emissions	$\pm 5.08\text{dB}$ (Bilog antenna 30M~1000MHz)
	$\pm 5.47\text{ dB}$ (Horn antenna 1000M~25000MHz)
Radio Frequency	$\pm 1 \times 10^{-7}\text{Hz}$
RF Power	$\pm 0.42\text{ dB}$
RF Power Density	$\pm 0.7\text{dB}$
Conducted Spurious Emissions	$\pm 2.76\text{ dB}$ (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor: k=2	

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 EMC Requirements for Emissions

7.1 Conducted Emissions

Test Method	: EN 301 489-1, EN 55032
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B/ Table A.10 of EN 55032
Detector	: Peak for pre-scan (9kHz Resolution Bandwidth)

7.1.2 E.U.T. Operation


Operating Environment:

Temperature	: 21.5°C
Humidity	: 52.2 % RH
Atmospheric Pressure	: 101.3kPa

EUT Operation: Refer to section 4.5.

7.1.3 Test Setup

The conducted emission tests were performed using the setup accordance with the EN 55032.

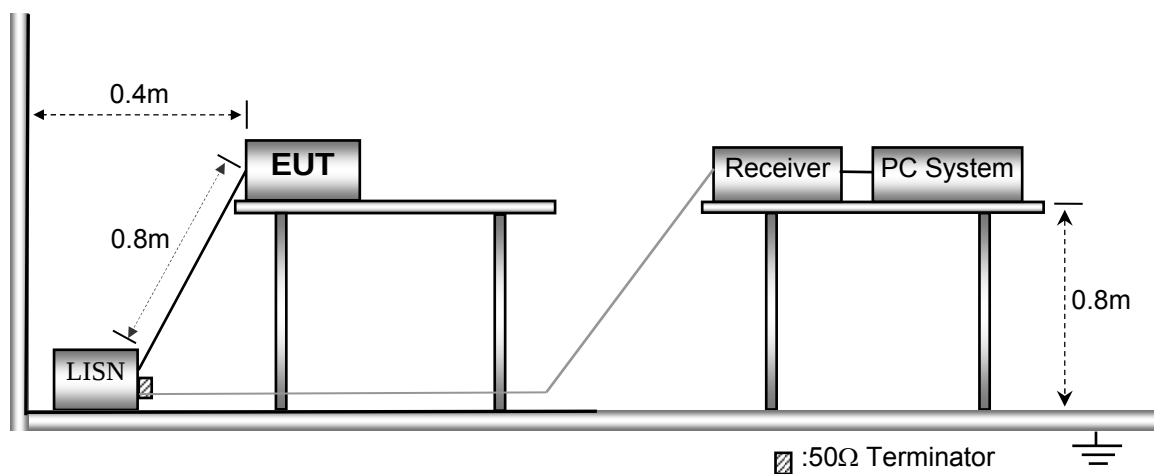

7.1.4 Measurement Description


An initial pre-scan was performed on the live and neutral lines.

No further quasi-peak or average measurements were performed since no peak emissions were detected within 10dB line below the average limit.

Please refer to the following peak scan graph for reference.


7.1.5 Test Results

Live Line:

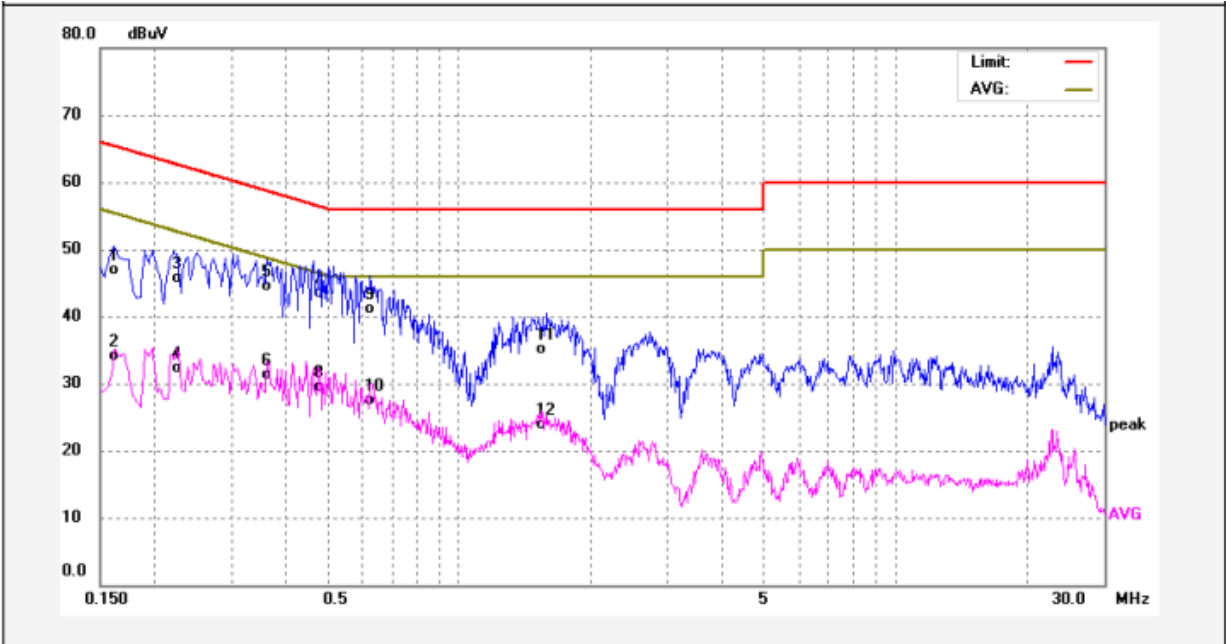

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1620	36.85	9.98	46.83	65.36	-18.53	QP	
2	0.1620	24.10	9.98	34.08	55.36	-21.28	AVG	
3	0.2260	35.74	10.00	45.74	62.59	-16.85	QP	
4	0.2260	22.34	10.00	32.34	52.59	-20.25	AVG	
5	0.3620	34.44	10.02	44.46	58.68	-14.22	QP	
6	0.3620	21.34	10.02	31.36	48.68	-17.32	AVG	
7	0.4780	33.31	10.10	43.41	56.37	-12.96	QP	
8	0.4780	19.47	10.10	29.57	46.37	-16.80	AVG	
9	0.6300	31.08	10.07	41.15	56.00	-14.85	QP	
10	0.6300	17.48	10.07	27.55	46.00	-18.45	AVG	
11	1.5380	24.89	10.14	35.03	56.00	-20.97	QP	
12	1.5380	13.73	10.14	23.87	46.00	-22.13	AVG	

Neutral Line:

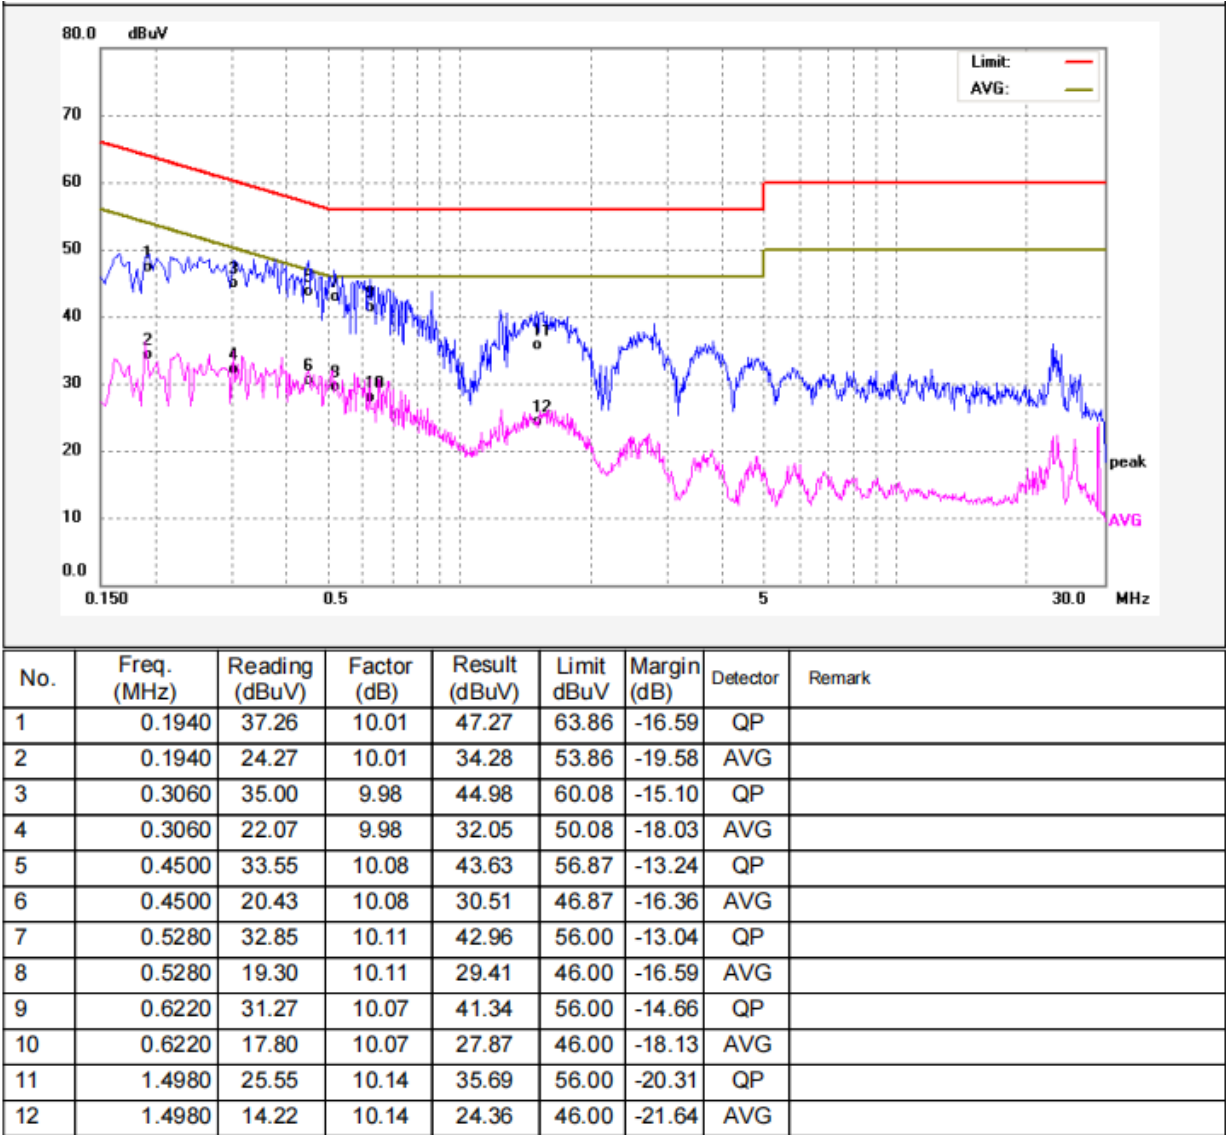

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in TX transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

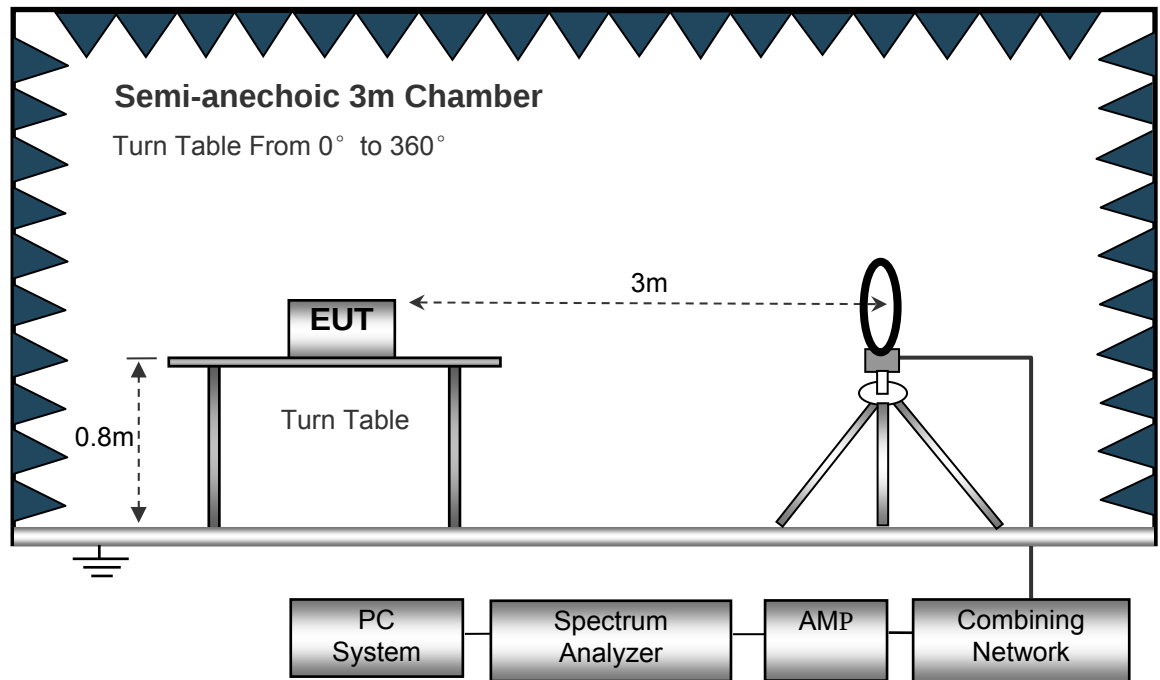

The test setup for emission measurement from 30 MHz to 1 GHz.

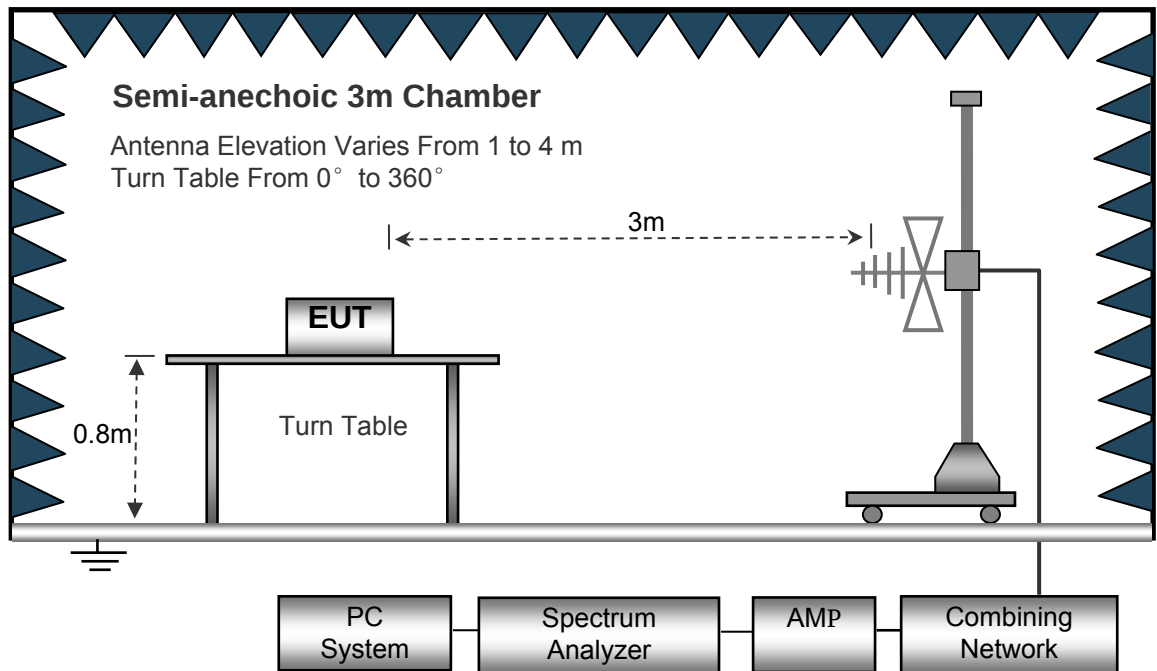

The test setup for emission measurement above 1 GHz.

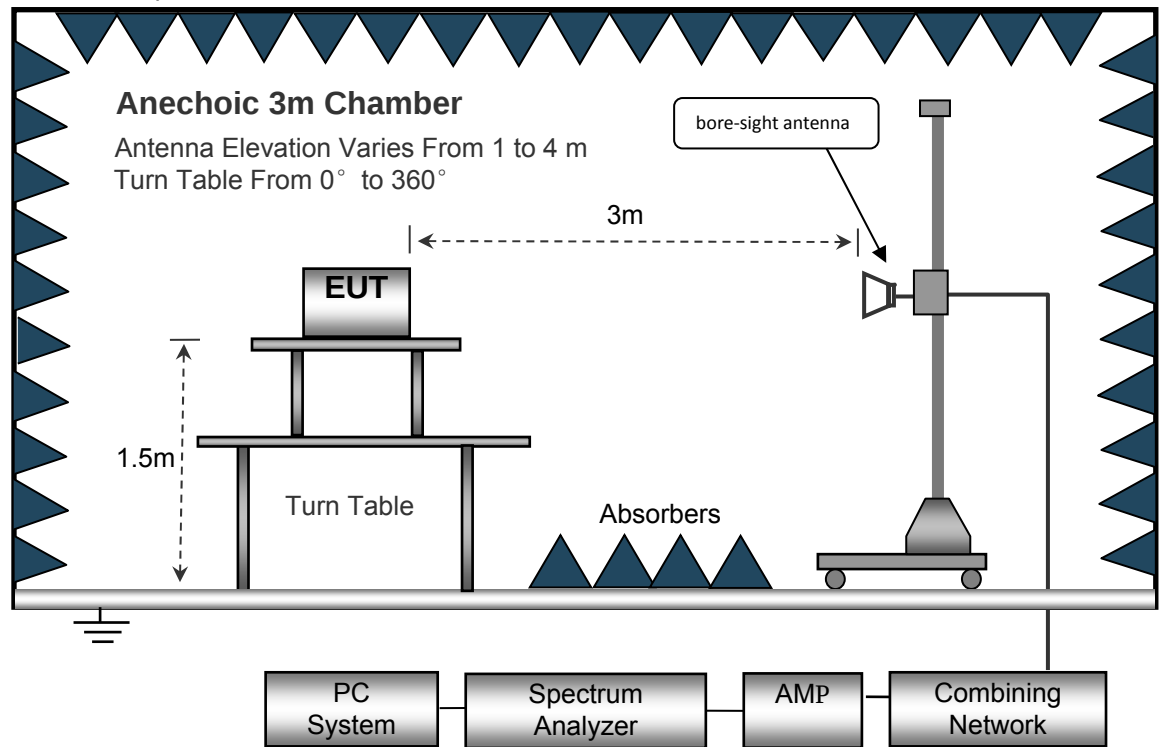

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
DetectorAve.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Note: Lowest frequency generated in the device is 40MHz, frequency range of measurement should be above 30MHz.

Wi-Fi:

Test Frequency: 30MHz ~ 8GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Low Channel 2412MHz									
143.32	39.94	QP	110	1.3	H	-11.62	28.32	46.00	-17.68
143.32	34.76	QP	343	1.8	V	-11.62	23.14	46.00	-22.86
4824.00	48.52	PK	316	1.2	V	-1.06	47.46	74.00	-26.54
4824.00	47.37	Ave	316	1.2	V	-1.06	46.31	54.00	-7.69
7236.00	42.63	PK	207	1.6	H	1.33	43.96	74.00	-30.04
7236.00	42.45	Ave	207	1.6	H	1.33	43.78	54.00	-10.22
2348.11	46.18	PK	31	1.7	V	-13.19	32.99	74.00	-41.01
2348.11	37.50	Ave	31	1.7	V	-13.19	24.31	54.00	-29.69
2383.77	44.18	PK	218	1.5	H	-13.14	31.04	74.00	-42.96
2383.77	37.55	Ave	218	1.5	H	-13.14	24.41	54.00	-29.59
2491.07	44.58	PK	85	1.1	V	-13.08	31.50	74.00	-42.50
2491.07	36.37	Ave	85	1.1	V	-13.08	23.29	54.00	-30.71

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: Middle Channel 2437MHz									
143.32	39.30	QP	348	1.8	H	-11.62	27.68	46.00	-18.32
143.32	33.42	QP	284	1.5	V	-11.62	21.80	46.00	-24.20
4874.00	49.26	PK	18	1.4	V	-0.62	48.64	74.00	-25.36
4874.00	47.32	Ave	18	1.4	V	-0.62	46.70	54.00	-7.30
7311.00	41.37	PK	116	1.4	H	2.21	43.58	74.00	-30.42
7311.00	41.91	Ave	116	1.4	H	2.21	44.12	54.00	-9.88
2337.55	46.47	PK	83	1.3	V	-13.19	33.28	74.00	-40.72
2337.55	39.76	Ave	83	1.3	V	-13.19	26.57	54.00	-27.43
2369.39	43.35	PK	262	1.1	H	-13.14	30.21	74.00	-43.79
2369.39	36.88	Ave	262	1.1	H	-13.14	23.74	54.00	-30.26
2499.91	43.57	PK	163	1.4	V	-13.08	30.49	74.00	-43.51
2499.91	36.09	Ave	163	1.4	V	-13.08	23.01	54.00	-30.99

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11b: High Channel 2462MHz									
143.32	38.82	QP	154	1.4	H	-11.62	27.20	46.00	-18.80
143.32	34.08	QP	35	1.3	V	-11.62	22.46	46.00	-23.54
4924.00	49.77	PK	90	1.4	V	-0.24	49.53	74.00	-24.47
4924.00	48.00	Ave	90	1.4	V	-0.24	47.76	54.00	-6.24
7386.00	41.95	PK	228	1.9	H	2.84	44.79	74.00	-29.21
7386.00	41.08	Ave	228	1.9	H	2.84	43.92	54.00	-10.08
2323.63	46.92	PK	132	1.1	V	-13.19	33.73	74.00	-40.27
2323.63	39.54	Ave	132	1.1	V	-13.19	26.35	54.00	-27.65
2385.63	43.36	PK	261	1.3	H	-13.14	30.22	74.00	-43.78
2385.63	38.76	Ave	261	1.3	H	-13.14	25.62	54.00	-28.38
2493.58	42.98	PK	235	1.1	V	-13.08	29.90	74.00	-44.10
2493.58	39.00	Ave	235	1.1	V	-13.08	25.92	54.00	-28.08

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Low Channel 2412MHz									
143.32	38.93	QP	295	1.2	H	-11.62	27.31	46.00	-18.69
143.32	33.95	QP	162	1.8	V	-11.62	22.33	46.00	-23.67
4824.00	49.55	PK	80	1.5	V	-1.06	48.49	74.00	-25.51
4824.00	46.75	Ave	80	1.5	V	-1.06	45.69	54.00	-8.31
7236.00	41.73	PK	50	1.8	H	1.33	43.06	74.00	-30.94
7236.00	39.75	Ave	50	1.8	H	1.33	41.08	54.00	-12.92
2339.89	45.57	PK	198	1.4	V	-13.19	32.38	74.00	-41.62
2339.89	37.50	Ave	198	1.4	V	-13.19	24.31	54.00	-29.69
2353.39	42.34	PK	346	1.2	H	-13.14	29.20	74.00	-44.80
2353.39	36.04	Ave	346	1.2	H	-13.14	22.90	54.00	-31.10
2498.38	42.85	PK	94	1.8	V	-13.08	29.77	74.00	-44.23
2498.38	38.40	Ave	94	1.8	V	-13.08	25.32	54.00	-28.68

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: Middle Channel 2437MHz									
143.32	39.82	QP	175	1.9	H	-11.62	28.20	46.00	-17.80
143.32	32.97	QP	320	1.4	V	-11.62	21.35	46.00	-24.65
4874.00	49.50	PK	81	1.4	V	-0.62	48.88	74.00	-25.12
4874.00	46.83	Ave	81	1.4	V	-0.62	46.21	54.00	-7.79
7311.00	40.48	PK	98	1.7	H	2.21	42.69	74.00	-31.31
7311.00	39.84	Ave	98	1.7	H	2.21	42.05	54.00	-11.95
2339.58	46.88	PK	214	1.0	V	-13.19	33.69	74.00	-40.31
2339.58	39.03	Ave	214	1.0	V	-13.19	25.84	54.00	-28.16
2365.95	43.92	PK	256	1.1	H	-13.14	30.78	74.00	-43.22
2365.95	38.20	Ave	256	1.1	H	-13.14	25.06	54.00	-28.94
2499.58	42.31	PK	9	1.9	V	-13.08	29.23	74.00	-44.77
2499.58	37.73	Ave	9	1.9	V	-13.08	24.65	54.00	-29.35

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11g: High Channel 2462MHz									
143.32	39.26	QP	81	1.4	H	-11.62	27.64	46.00	-18.36
143.32	31.60	QP	133	1.8	V	-11.62	19.98	46.00	-26.02
4924.00	48.08	PK	300	1.4	V	-0.24	47.84	74.00	-26.16
4924.00	47.45	Ave	300	1.4	V	-0.24	47.21	54.00	-6.79
7386.00	39.00	PK	102	1.8	H	2.84	41.84	74.00	-32.16
7386.00	41.27	Ave	102	1.8	H	2.84	44.11	54.00	-9.89
2329.38	46.22	PK	50	1.3	V	-13.19	33.03	74.00	-40.97
2329.38	38.02	Ave	50	1.3	V	-13.19	24.83	54.00	-29.17
2384.31	44.61	PK	119	1.2	H	-13.14	31.47	74.00	-42.53
2384.31	37.89	Ave	119	1.2	H	-13.14	24.75	54.00	-29.25
2491.00	42.45	PK	173	1.6	V	-13.08	29.37	74.00	-44.63
2491.00	37.79	Ave	173	1.6	V	-13.08	24.71	54.00	-29.29

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n HT20: Low Channel 2412MHz									
143.32	38.44	QP	324	1.6	H	-11.62	26.82	46.00	-19.18
143.32	31.52	QP	327	1.3	V	-11.62	19.90	46.00	-26.10
4824.00	49.07	PK	210	1.4	V	-1.06	48.01	74.00	-25.99
4824.00	47.67	Ave	210	1.4	V	-1.06	46.61	54.00	-7.39
7236.00	39.97	PK	300	1.1	H	1.33	41.30	74.00	-32.70
7236.00	41.43	Ave	300	1.1	H	1.33	42.76	54.00	-11.24
2321.87	45.10	PK	150	1.9	V	-13.19	31.91	74.00	-42.09
2321.87	39.84	Ave	150	1.9	V	-13.19	26.65	54.00	-27.35
2377.94	42.67	PK	230	1.2	H	-13.14	29.53	74.00	-44.47
2377.94	39.00	Ave	230	1.2	H	-13.14	25.86	54.00	-28.14
2484.81	43.60	PK	308	1.6	V	-13.08	30.52	74.00	-43.48
2484.81	36.42	Ave	308	1.6	V	-13.08	23.34	54.00	-30.66

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n HT20: Middle Channel 2437MHz									
143.32	37.36	QP	59	1.2	H	-11.62	25.74	46.00	-20.26
143.32	30.36	QP	138	1.7	V	-11.62	18.74	46.00	-27.26
4874.00	49.58	PK	212	2.0	V	-0.62	48.96	74.00	-25.04
4874.00	49.06	Ave	212	2.0	V	-0.62	48.44	54.00	-5.56
7311.00	38.64	PK	322	1.0	H	2.21	40.85	74.00	-33.15
7311.00	40.87	Ave	322	1.0	H	2.21	43.08	54.00	-10.92
2346.08	46.77	PK	160	1.7	V	-13.19	33.58	74.00	-40.42
2346.08	37.38	Ave	160	1.7	V	-13.19	24.19	54.00	-29.81
2370.45	44.81	PK	247	1.3	H	-13.14	31.67	74.00	-42.33
2370.45	37.55	Ave	247	1.3	H	-13.14	24.41	54.00	-29.59
2495.27	43.15	PK	17	1.4	V	-13.08	30.07	74.00	-43.93
2495.27	37.25	Ave	17	1.4	V	-13.08	24.17	54.00	-29.83

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
11n HT20: High Channel 2462MHz									
143.32	38.56	QP	72	1.0	H	-11.62	26.94	46.00	-19.06
143.32	29.27	QP	219	1.0	V	-11.62	17.65	46.00	-28.35
4924.00	50.58	PK	236	1.1	V	-0.24	50.34	74.00	-23.66
4924.00	48.27	Ave	236	1.1	V	-0.24	48.03	54.00	-5.97
7386.00	38.11	PK	116	1.1	H	2.84	40.95	74.00	-33.05
7386.00	41.79	Ave	116	1.1	H	2.84	44.63	54.00	-9.37
2325.60	45.41	PK	359	1.4	V	-13.19	32.22	74.00	-41.78
2325.60	37.62	Ave	359	1.4	V	-13.19	24.43	54.00	-29.57
2374.27	42.07	PK	298	2.0	H	-13.14	28.93	74.00	-45.07
2374.27	38.12	Ave	298	2.0	H	-13.14	24.98	54.00	-29.02
2495.69	43.48	PK	322	1.6	V	-13.08	30.40	74.00	-43.60
2495.69	37.76	Ave	322	1.6	V	-13.08	24.68	54.00	-29.32

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

BLE:**Test Frequency: 30MHz ~ 8GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Low Channel 2402MHz									
141.82	32.90	QP	78	1.2	H	-13.35	19.55	46.00	-26.45
141.82	39.22	QP	124	1.5	V	-13.35	25.87	46.00	-20.13
4804.00	43.46	PK	354	1.9	V	-1.06	42.40	74.00	-31.60
4804.00	41.24	Ave	354	1.9	V	-1.06	40.18	54.00	-13.82
7206.00	44.66	PK	87	1.7	H	1.33	45.99	74.00	-28.01
7206.00	35.99	Ave	87	1.7	H	1.33	37.32	54.00	-16.68
2339.01	46.60	PK	59	1.3	V	-13.19	33.41	74.00	-40.59
2339.01	37.87	Ave	59	1.3	V	-13.19	24.68	54.00	-29.32
2381.86	44.80	PK	21	1.2	H	-13.14	31.66	74.00	-42.34
2381.86	36.43	Ave	21	1.2	H	-13.14	23.29	54.00	-30.71
2490.30	43.60	PK	38	1.6	V	-13.08	30.52	74.00	-43.48
2490.30	38.18	Ave	38	1.6	V	-13.08	25.10	54.00	-28.90

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Middle Channel 2440MHz									
141.82	34.08	QP	24	1.9	H	-13.35	20.73	46.00	-25.27
141.82	39.21	QP	351	1.4	V	-13.35	25.86	46.00	-20.14
4880.00	43.46	PK	252	1.5	V	-0.62	42.84	74.00	-31.16
4880.00	40.46	Ave	252	1.5	V	-0.62	39.84	54.00	-14.16
7320.00	44.30	PK	192	1.5	H	2.21	46.51	74.00	-27.49
7320.00	37.27	Ave	192	1.5	H	2.21	39.48	54.00	-14.52
2310.53	46.85	PK	87	1.6	V	-13.19	33.66	74.00	-40.34
2310.53	38.03	Ave	87	1.6	V	-13.19	24.84	54.00	-29.16
2352.20	44.98	PK	34	1.9	H	-13.14	31.84	74.00	-42.16
2352.20	38.44	Ave	34	1.9	H	-13.14	25.30	54.00	-28.70
2484.77	42.99	PK	1	1.8	V	-13.08	29.91	74.00	-44.09
2484.77	38.77	Ave	1	1.8	V	-13.08	25.69	54.00	-28.31

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK High Channel 2480MHz									
141.82	33.69	QP	42	1.9	H	-13.35	20.34	46.00	-25.66
141.82	38.46	QP	236	1.8	V	-13.35	25.11	46.00	-20.89
4960.00	42.32	PK	152	1.7	V	-0.24	42.08	74.00	-31.92
4960.00	39.44	Ave	152	1.7	V	-0.24	39.20	54.00	-14.80
7440.00	44.44	PK	102	1.3	H	2.84	47.28	74.00	-26.72
7440.00	36.29	Ave	102	1.3	H	2.84	39.13	54.00	-14.87
2313.57	46.63	PK	237	1.0	V	-13.19	33.44	74.00	-40.56
2313.57	38.32	Ave	237	1.0	V	-13.19	25.13	54.00	-28.87
2380.32	44.97	PK	65	1.9	H	-13.14	31.83	74.00	-42.17
2380.32	38.54	Ave	65	1.9	H	-13.14	25.40	54.00	-28.60
2489.71	44.20	PK	328	1.4	V	-13.08	31.12	74.00	-42.88
2489.71	37.48	Ave	328	1.4	V	-13.08	24.40	54.00	-29.60

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

9 Duty Cycle



Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
802.11b	12.42	12.58	0.99	98.73	0.06	-0.11
GFSK	0.3920	0.6320	0.62	62.03	2.07	-4.15

Remark:

Duty cycle=On Time/period;

Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$;

Average factor= $20 \log_{10} \text{Duty cycle}$

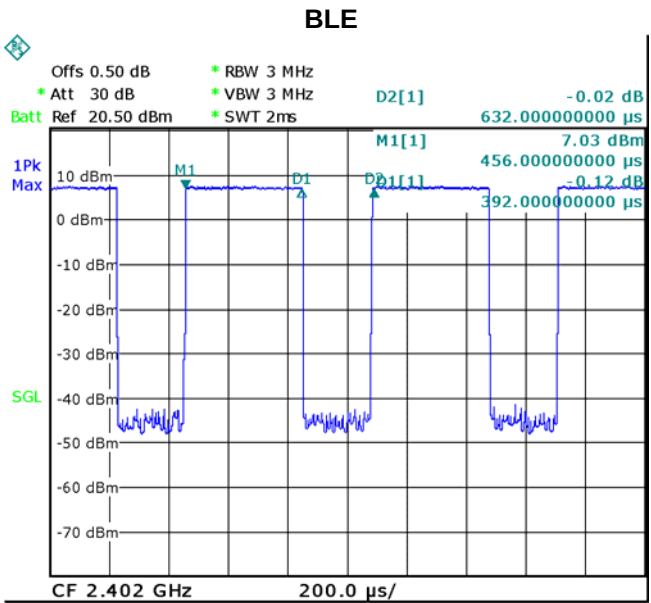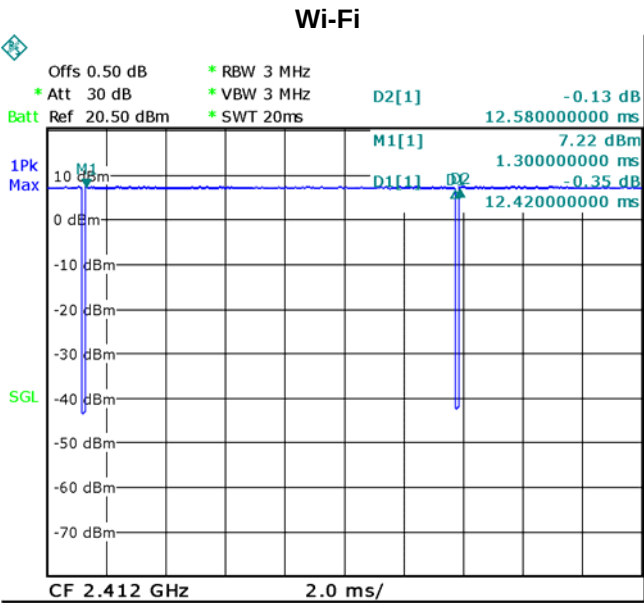

10 Band Edge Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting

10.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

10.2 Test Result


Test result plots shown as follows:

Wi-Fi


TX 11b: Band edge-left side

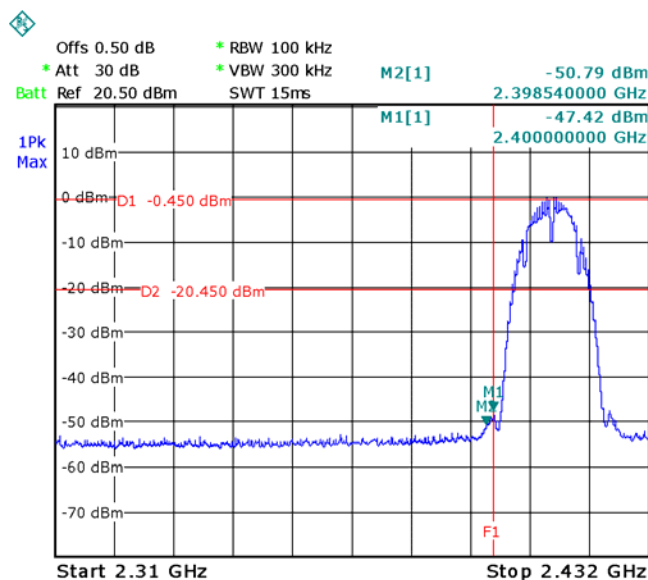


TX 11b: Band edge-right side

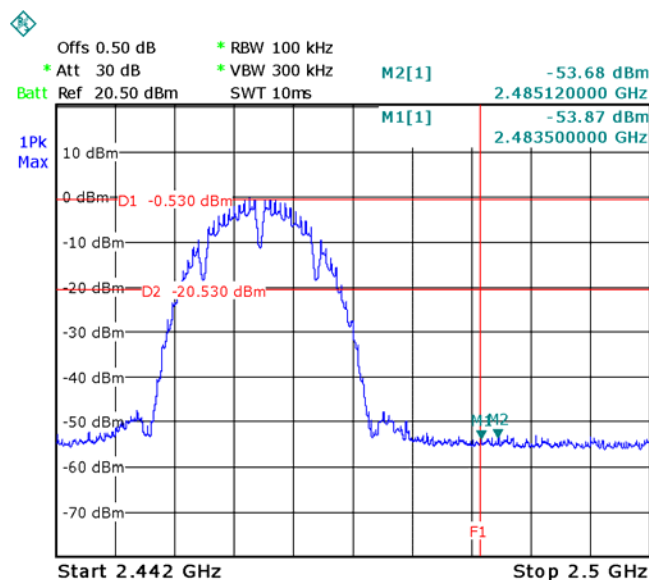


TX 11g: Band edge-left side

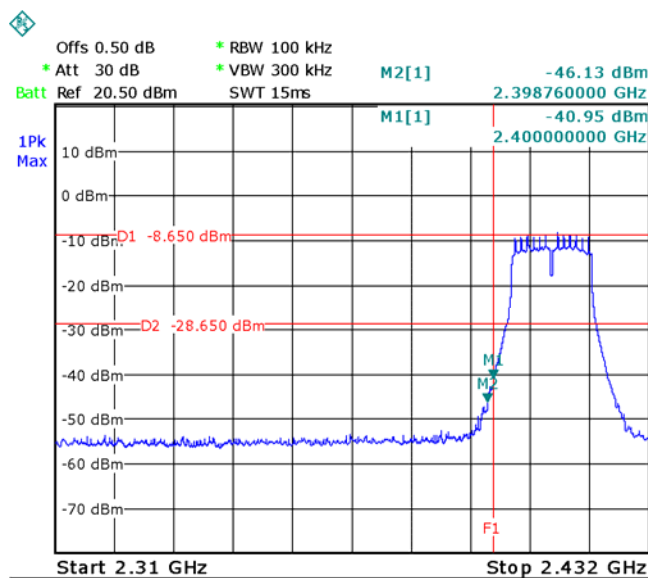


TX 11g: Band edge-right side

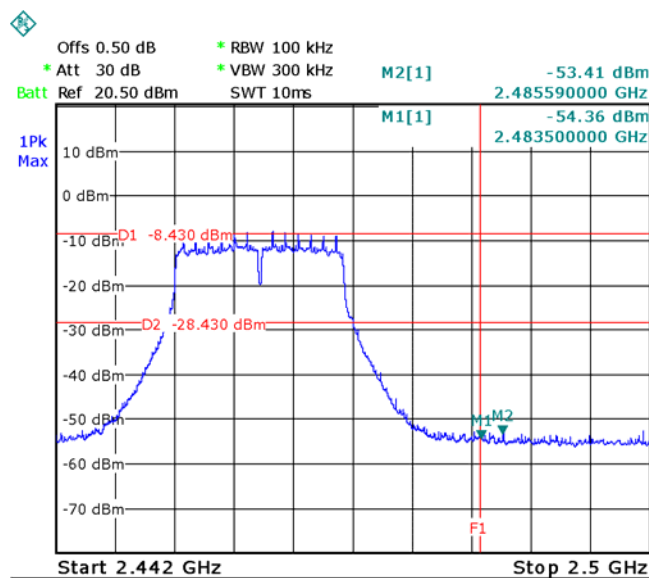

TX 11n HT20: Band edge-left side

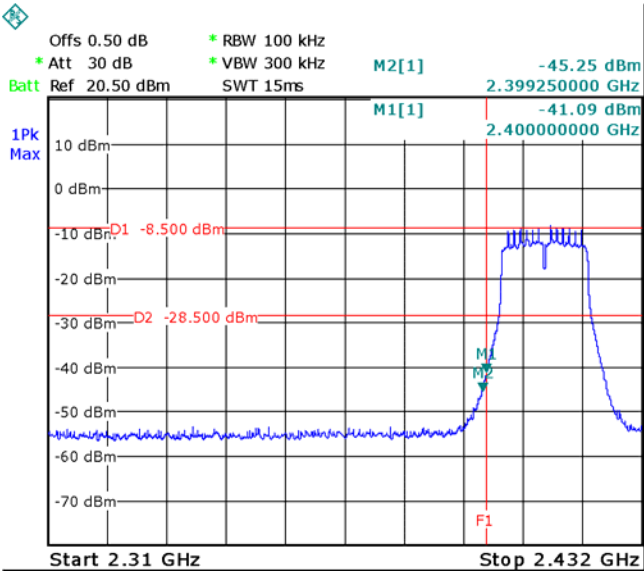


TX 11n HT20: Band edge-right side

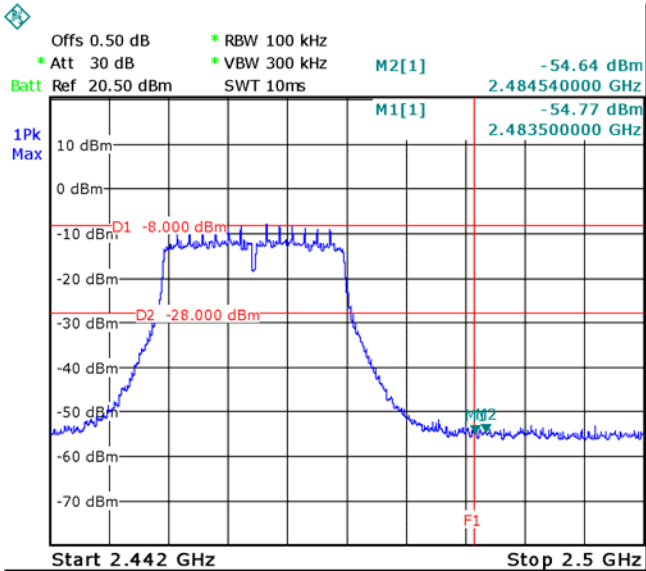


BLE

BLE: Band edge-left side

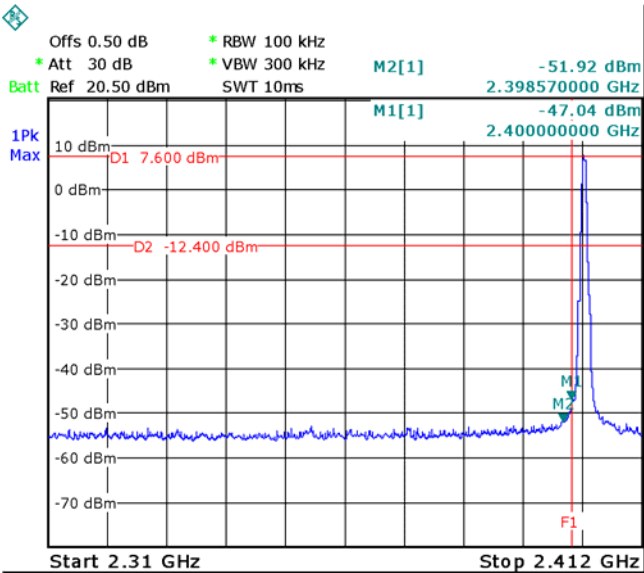

BLE: Band edge-right side

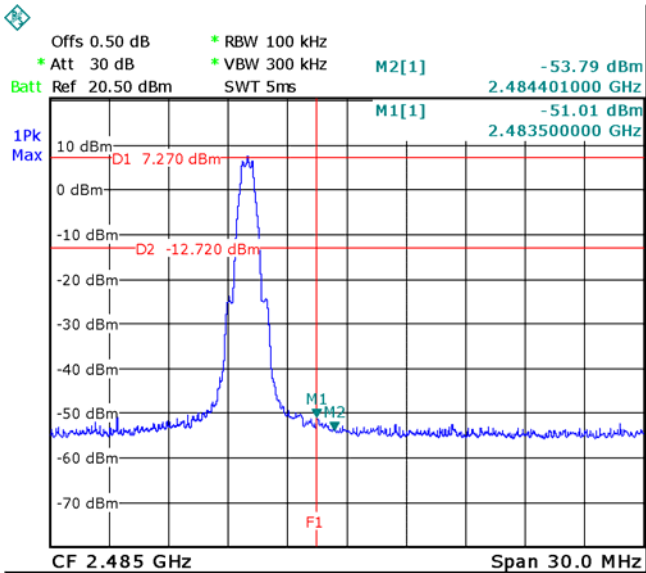

11 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

11.2 Test Result:

Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	9.517	13.701
	Channel 6	9.517	13.764
	Channel 11	9.006	13.828
TX 11g	Channel 1	16.367	16.467
	Channel 6	16.417	16.417
	Channel 11	16.417	16.417
TX 11n HT20	Channel 1	17.353	17.623
	Channel 6	17.515	17.623
	Channel 11	17.246	17.677
BLE	Channel 0	0.677	1.024
	Channel 19	0.671	1.036
	Channel 39	0.719	1.036



Test result plot:

Wi-Fi



6 dB Bandwidth

99% Bandwidth

Mode: TX 11b channel 1

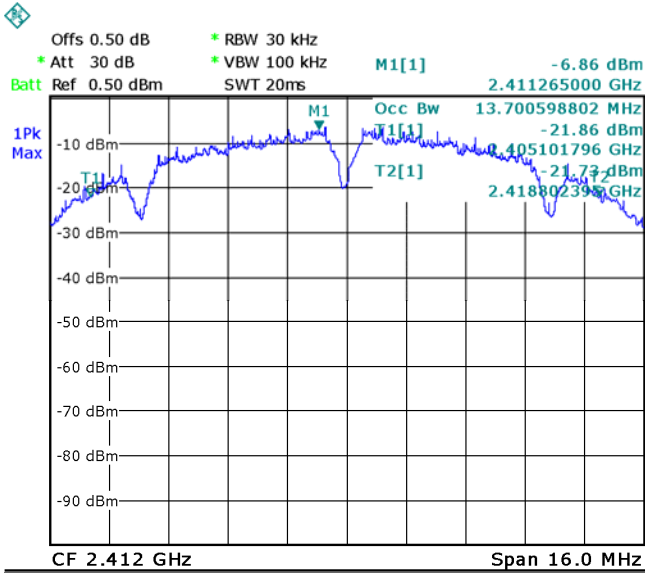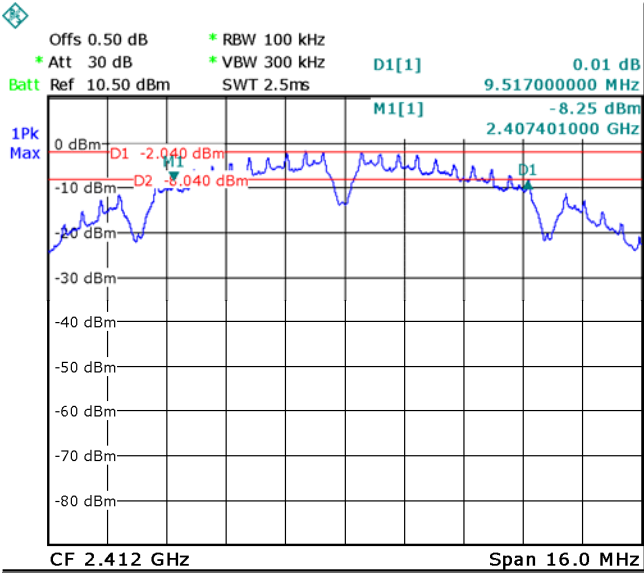



Mode: TX 11b channel 6

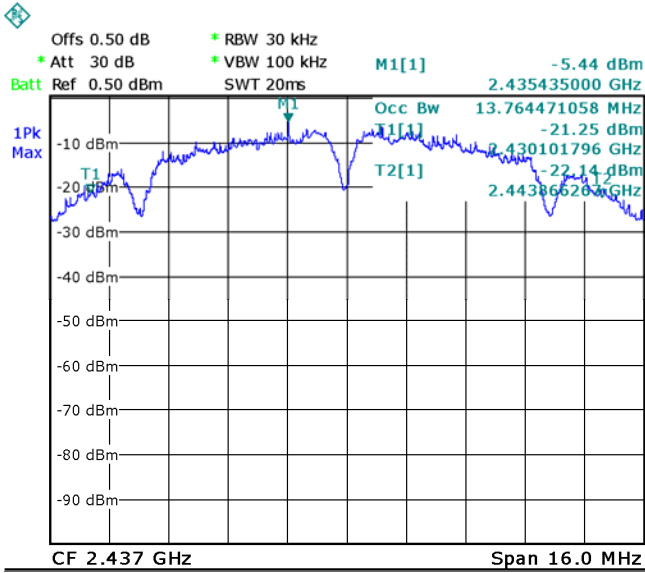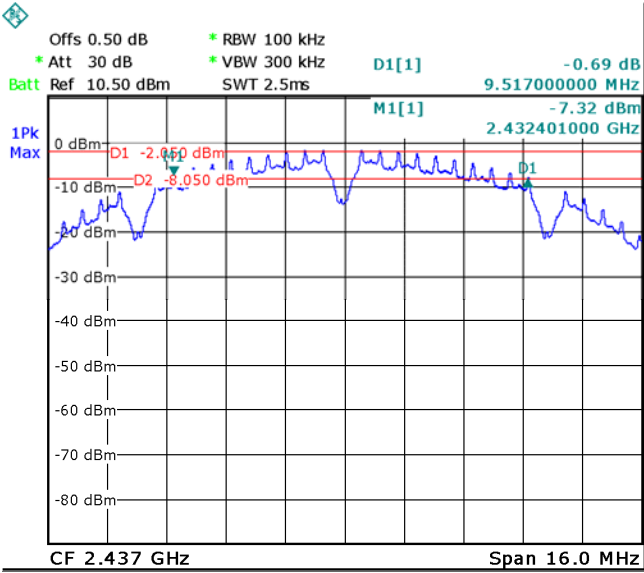



6 dB Bandwidth

99% Bandwidth

Mode: TX 11b channel 11

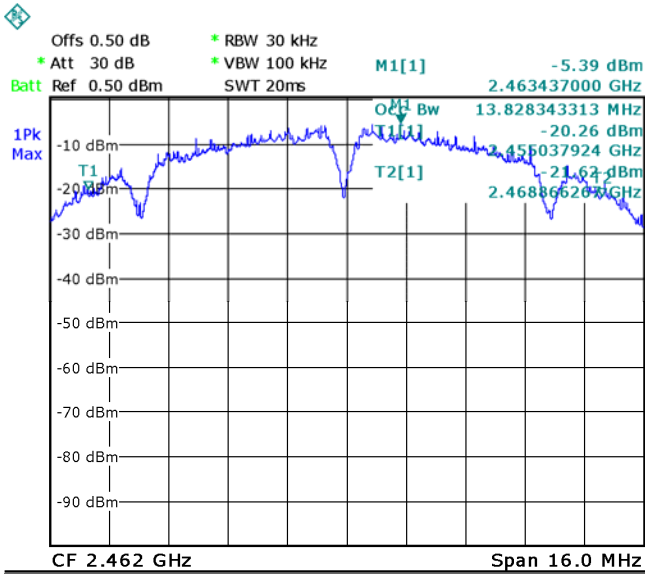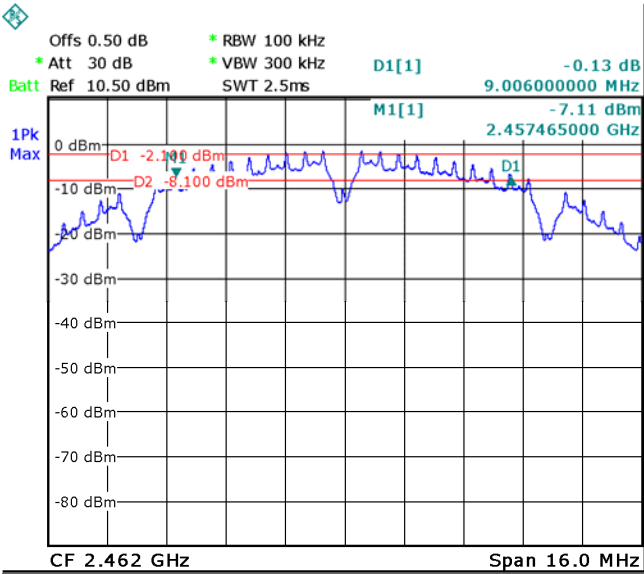



Mode: TX 11g channel 1

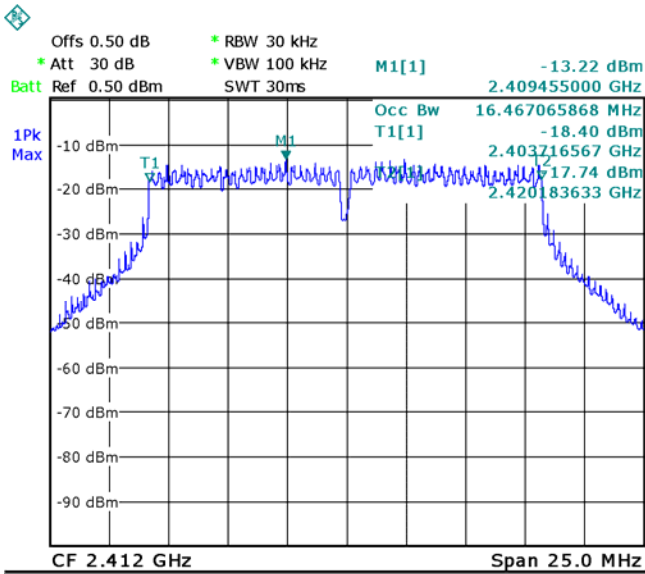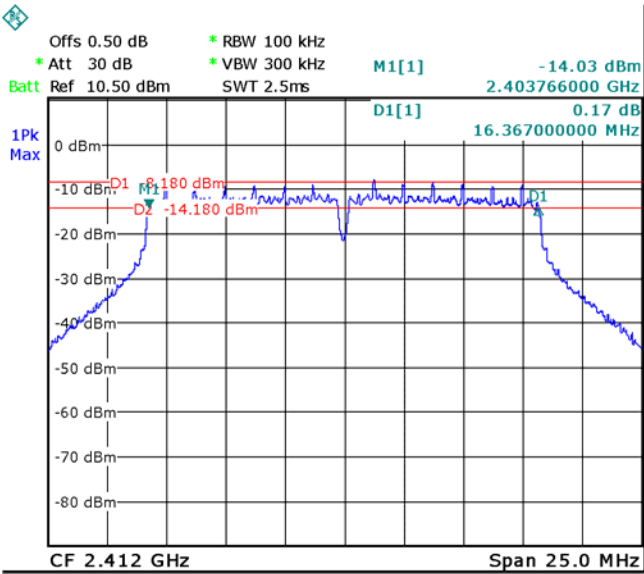



6 dB Bandwidth

99% Bandwidth

Mode: TX 11g channel 6

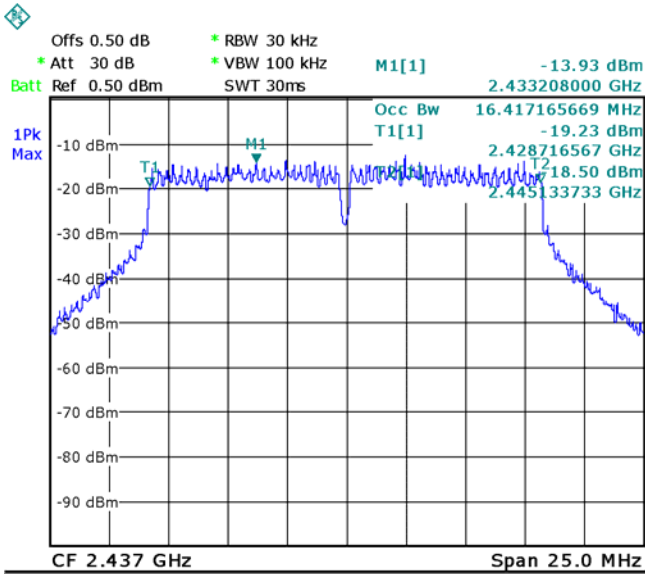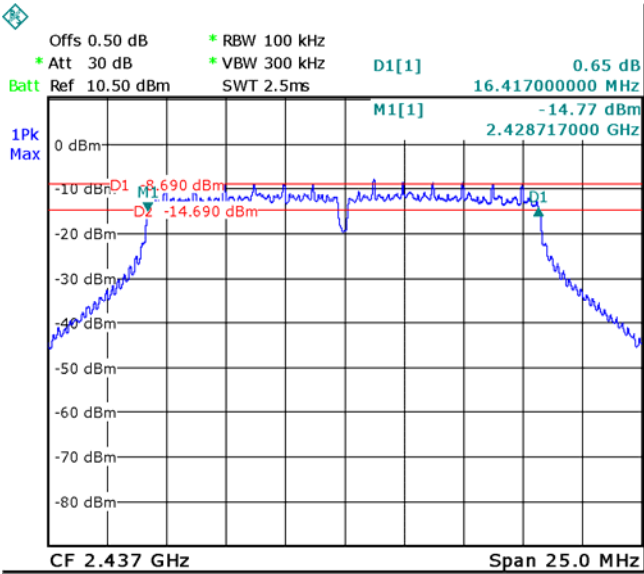



Mode: TX 11g channel 11

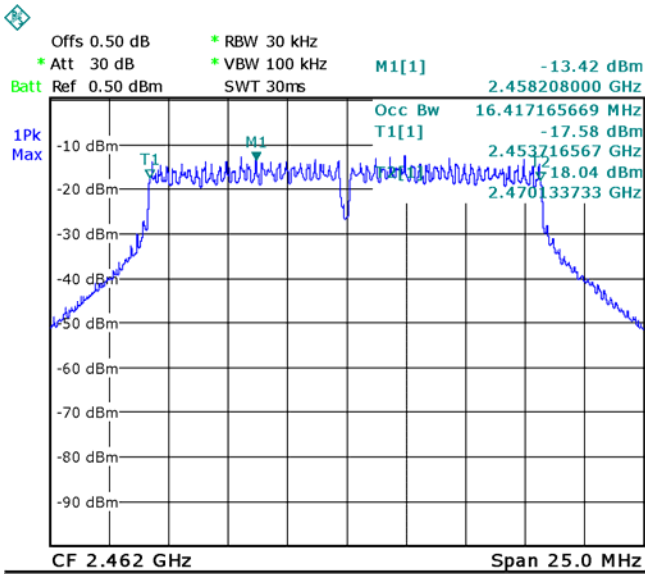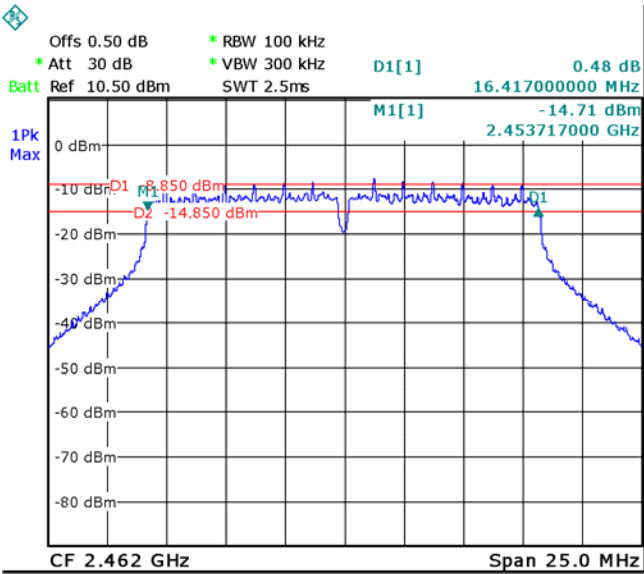



6 dB Bandwidth

99% Bandwidth

Mode: TX 11n HT20 channel 1

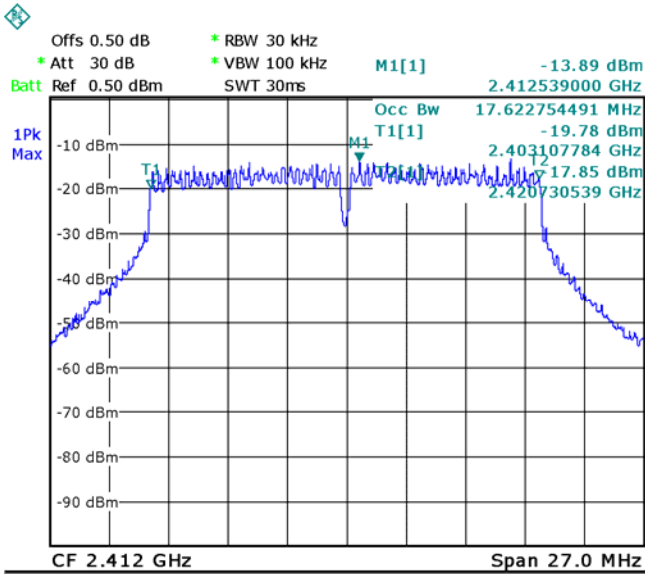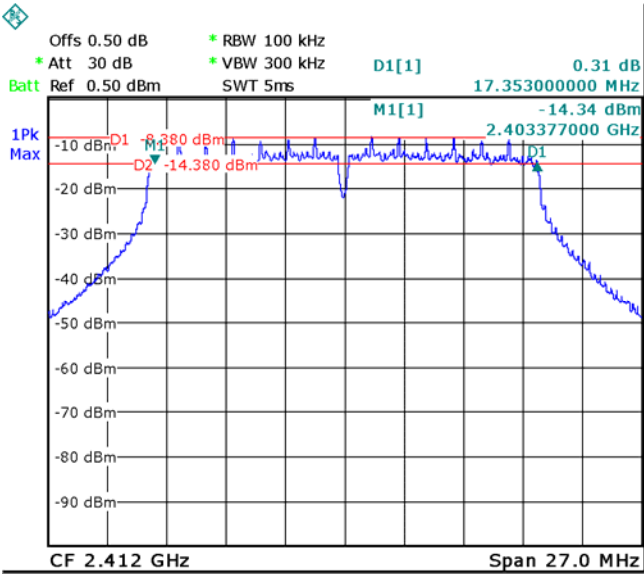



Mode: TX 11n HT20 channel 3

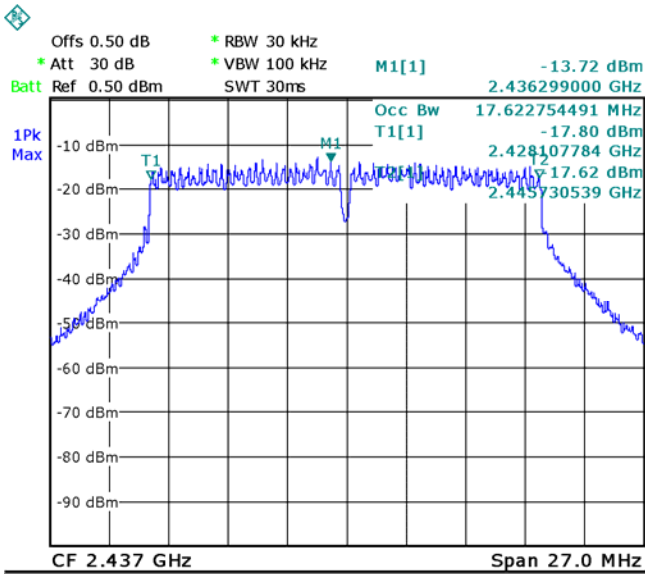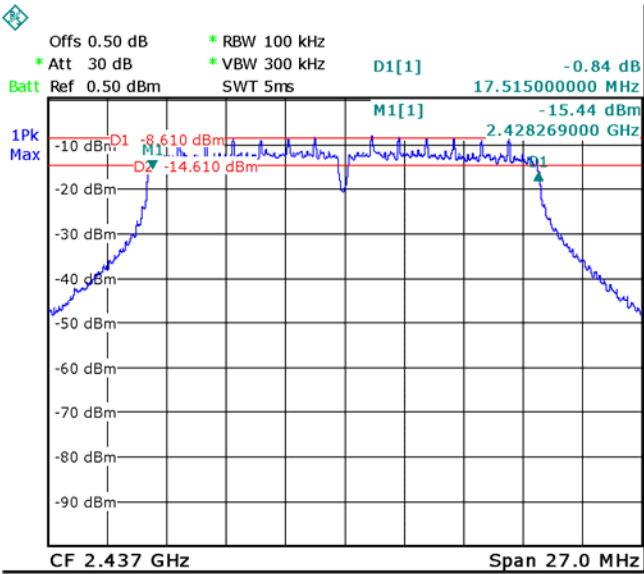

6 dB Bandwidth

99% Bandwidth

Mode: TX 11n HT20 channel 11

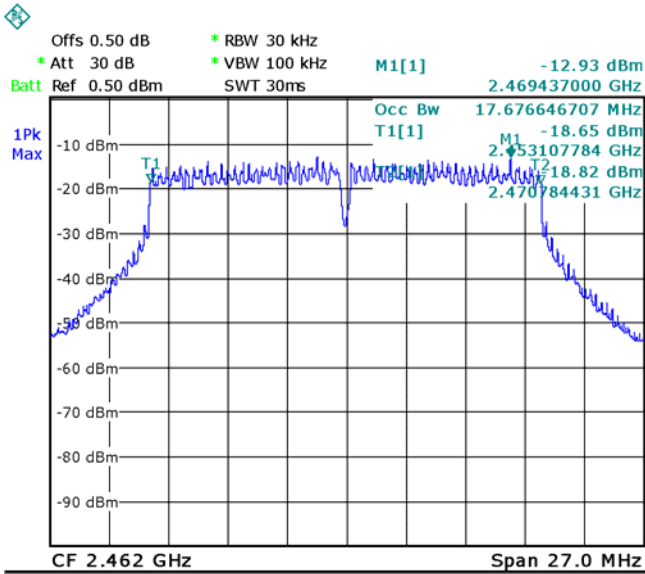
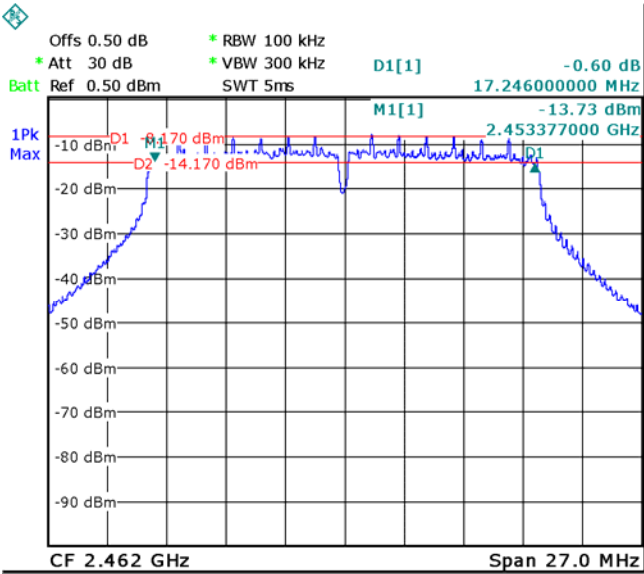


BLE

6 dB Bandwidth

99% Bandwidth



Mode: TX GFSK channel 0

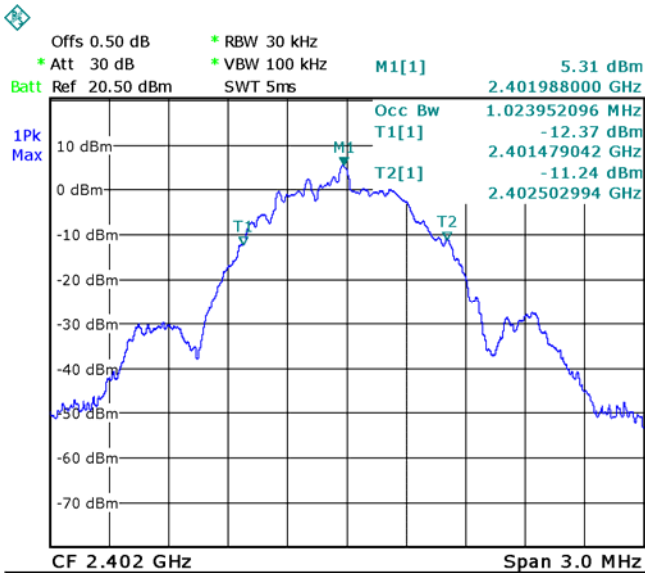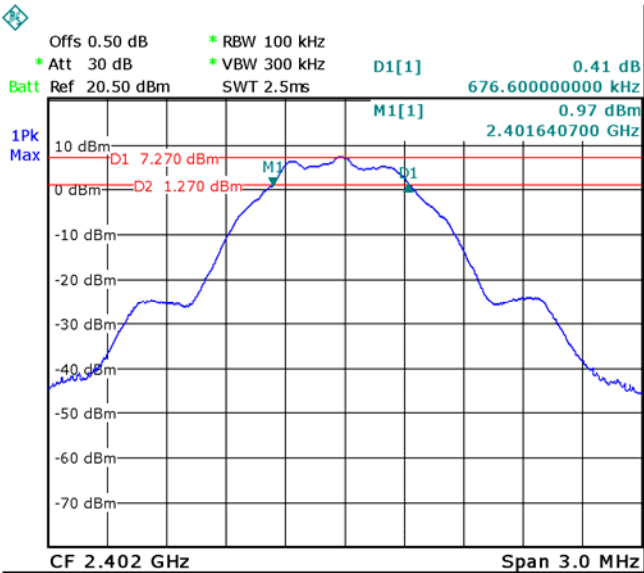



6 dB Bandwidth

99% Bandwidth

Mode: TX GFSK channel 19

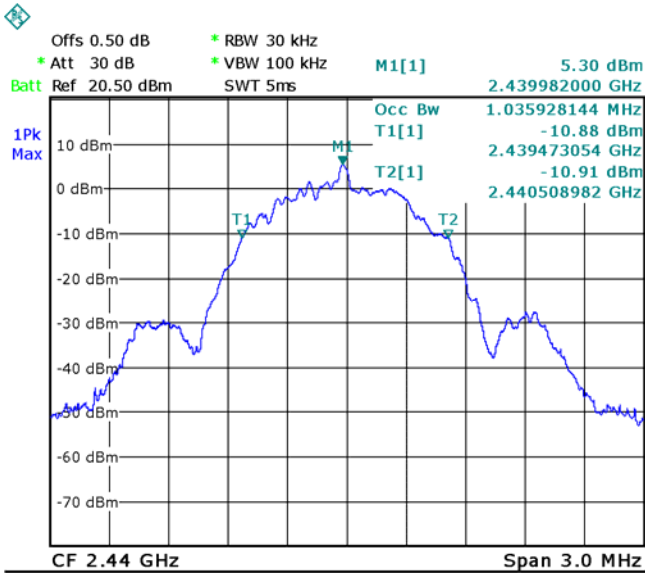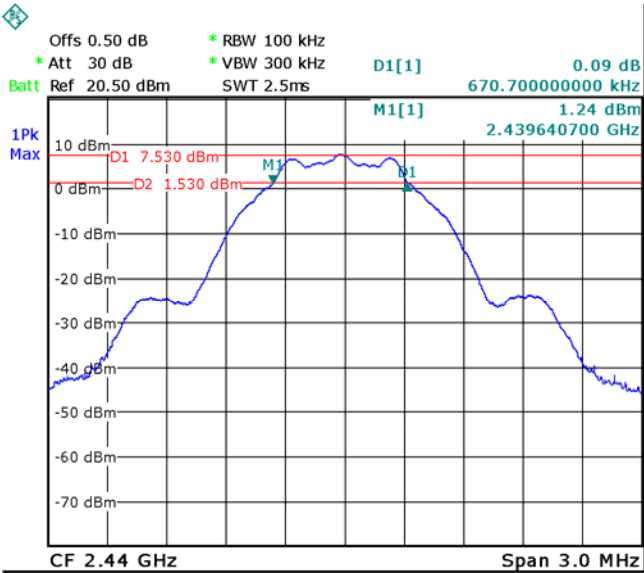

Mode: TX GFSK channel 39

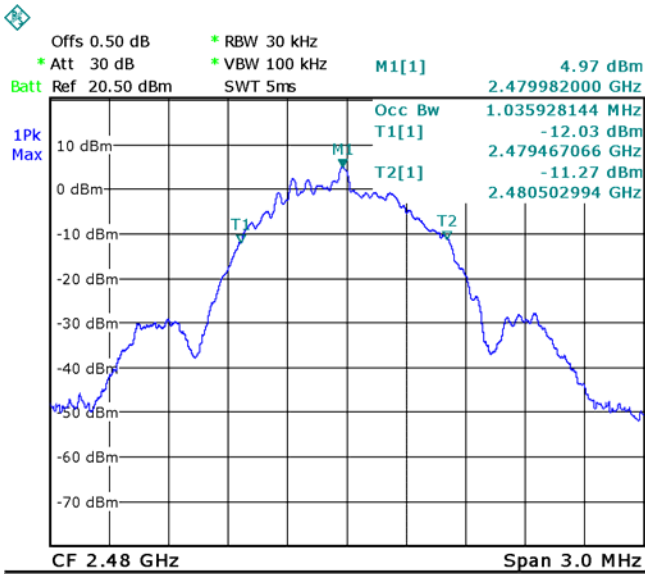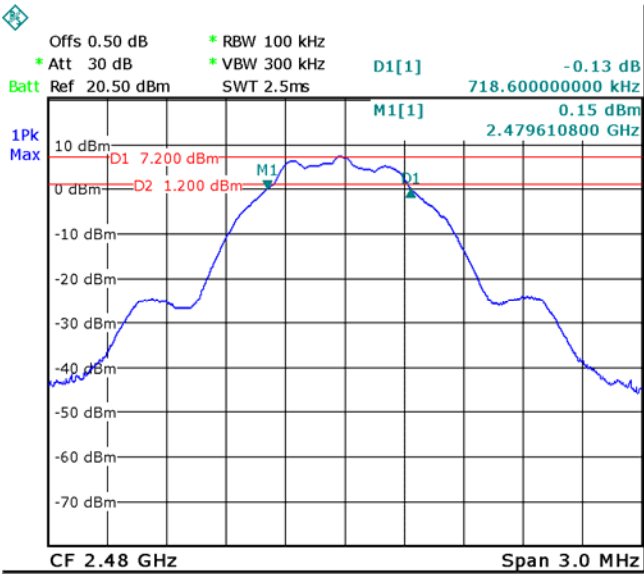

12 Maximum Peak conducted Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

12.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018

section 8.3.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW $\geq$ DTS bandwidth.
- b) Set VBW ≥ 3 RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 8.3.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- a) Set the RBW = 1% to 5% of the OBW, not to exceed 1 MHz..
- b) Set the VBW $\geq 3 \times$ RBW
- c) Set the span $\geq 1.5 \times$ OBW.
- d) Detector = RMS.
- e) Sweep time = auto couple.
- f) trigger = free run.
- g) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\geq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.


12.2 Test Result:

Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
TX 11b	Low-2412	11.29	1W/30dBm
	Middle-2437	11.34	1W/30dBm
	High-2462	11.42	1W/30dBm
TX 11g	Low-2412	10.53	1W/30dBm
	Middle-2437	10.73	1W/30dBm
	High-2462	10.92	1W/30dBm
TX 11n HT20	Low-2412	10.56	1W/30dBm
	Middle-2437	10.85	1W/30dBm
	High-2462	11.02	1W/30dBm
BLE	Low-2402	7.53	1W/30dBm
	Middle-2440	7.81	1W/30dBm
	High-2480	7.45	1W/30dBm


Test Plot:

Wi-Fi


Mode: TX 11b channel 1

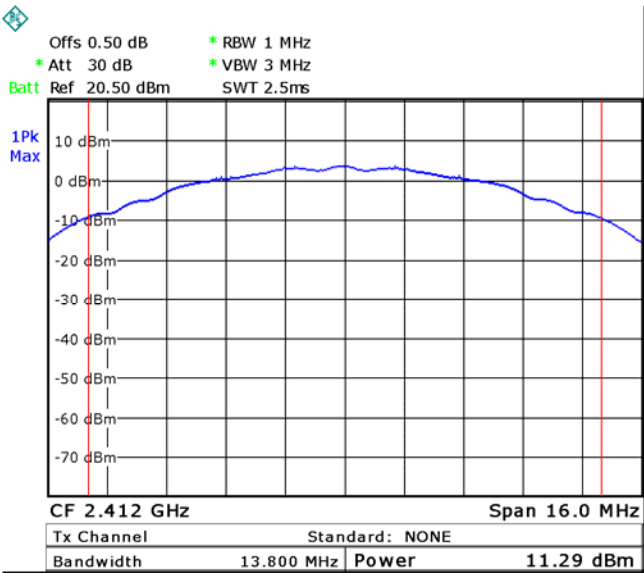


Mode: TX 11b channel 6

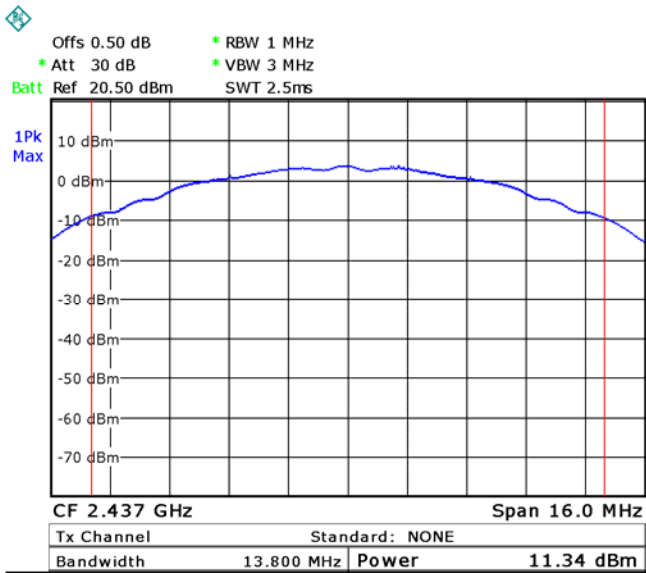


Mode: TX 11b channel 11

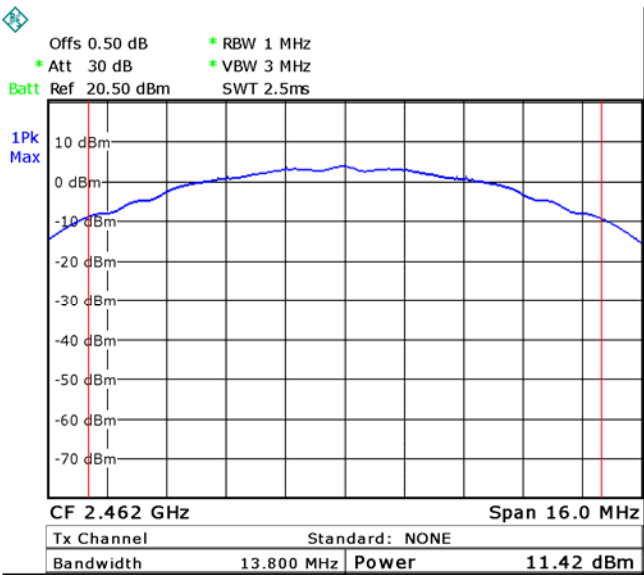


Mode: TX 11g channel 1

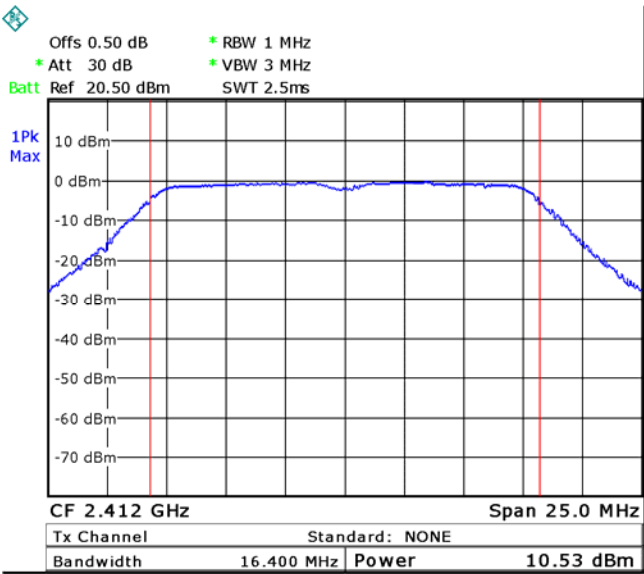


Mode: TX 11g channel 6

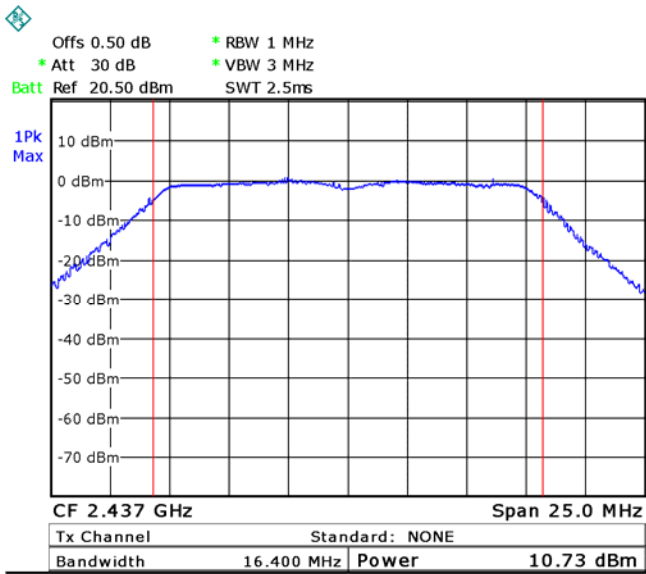


Mode: TX 11g channel 11

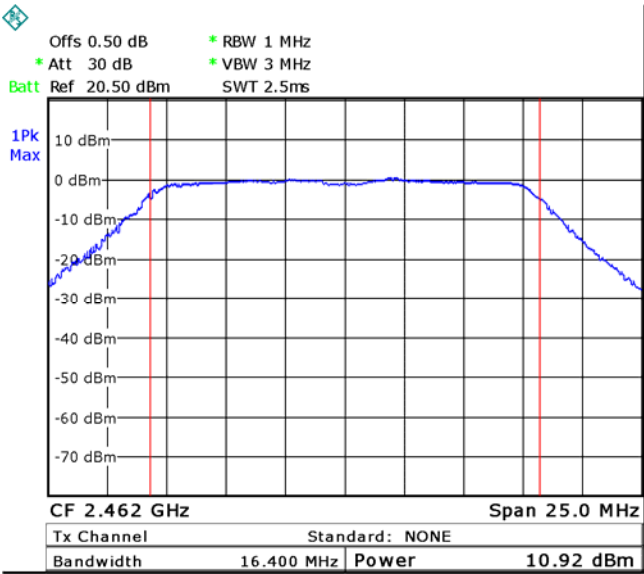


Mode: TX 11n HT20 channel 1

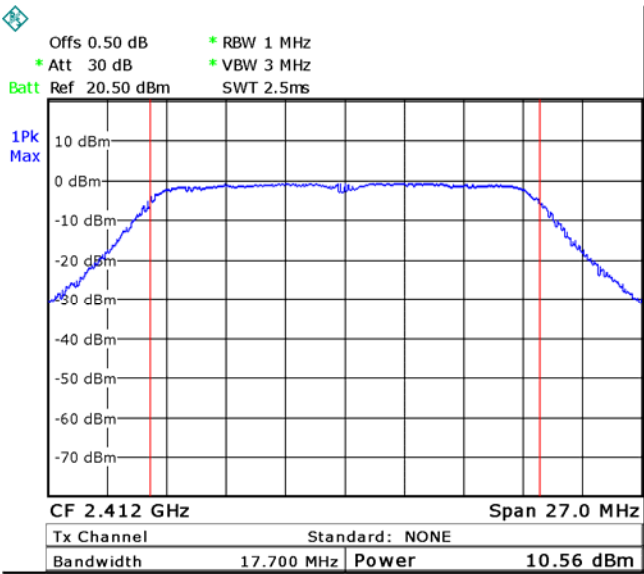

Mode: TX 11n HT20 channel 6

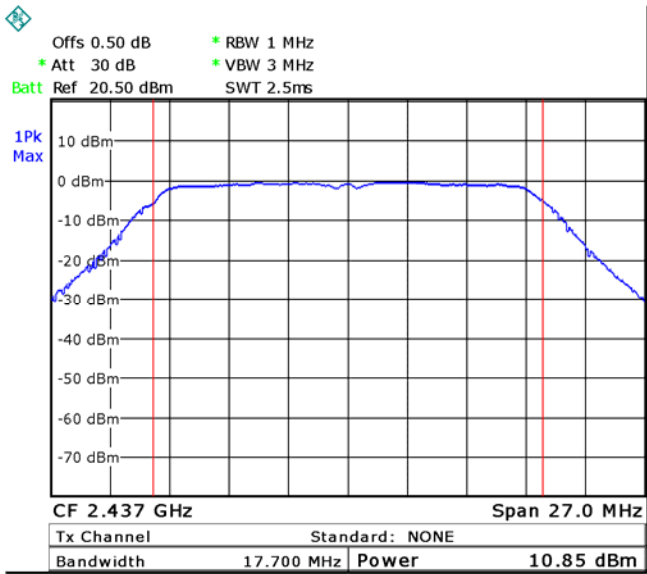


Mode: TX 11n HT20 channel 11

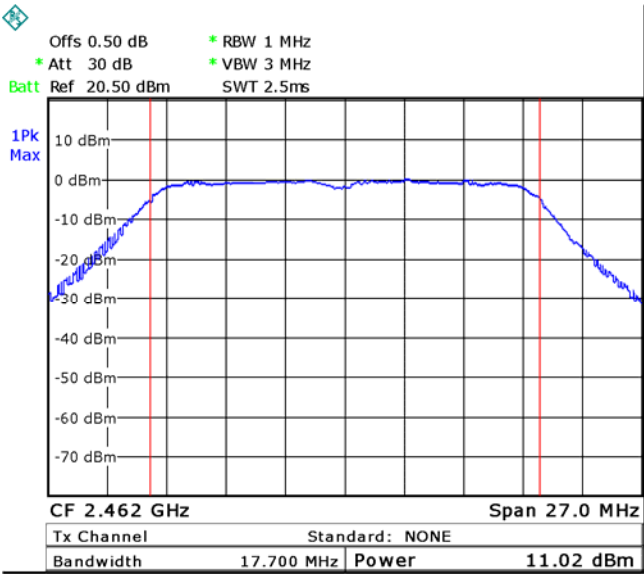


BLE


Mode: TX GFSK channel 0

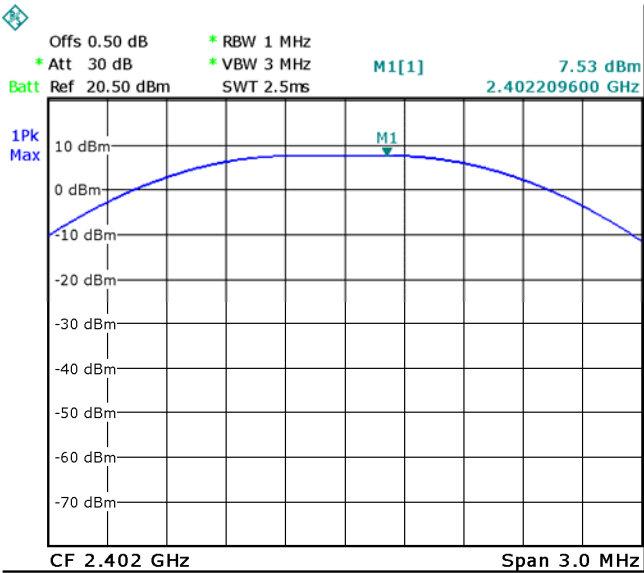

Mode: TX GFSK channel 19

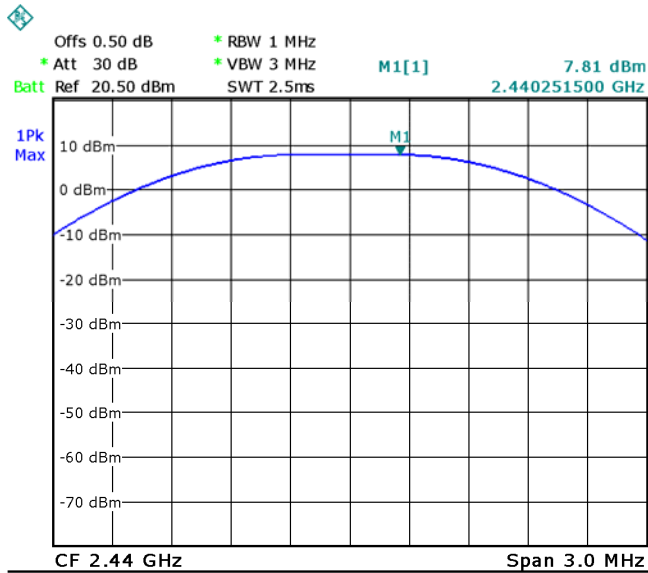

Mode: TX GFSK channel 39

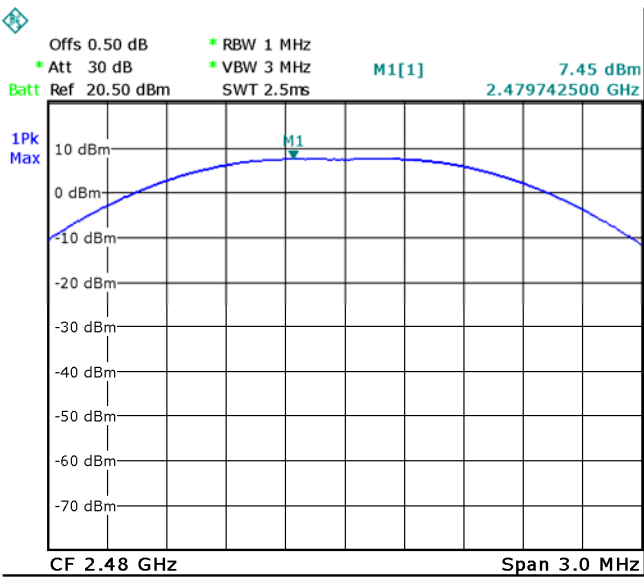

13 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018;
ANSI C63.10:2013

13.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05 August 24, 2018 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


13.2 Test Result:

Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
TX 11b	Low-2412	-15.14	8dBm per 3kHz
	Middle-2437	-14.34	8dBm per 3kHz
	High-2462	-14.34	8dBm per 3kHz
TX 11g	Low-2412	-23.28	8dBm per 3kHz
	Middle-2437	-23.59	8dBm per 3kHz
	High-2462	-21.95	8dBm per 3kHz
TX 11n HT20	Low-2412	-23.43	8dBm per 3kHz
	Middle-2437	-22.48	8dBm per 3kHz
	High-2462	-22.64	8dBm per 3kHz
BLE	Low-2402	-7.29	8dBm per 3kHz
	Middle-2440	-6.59	8dBm per 3kHz
	High-2480	-8.10	8dBm per 3kHz


Test Plot:

Wi-Fi


Mode: TX 11b channel 1

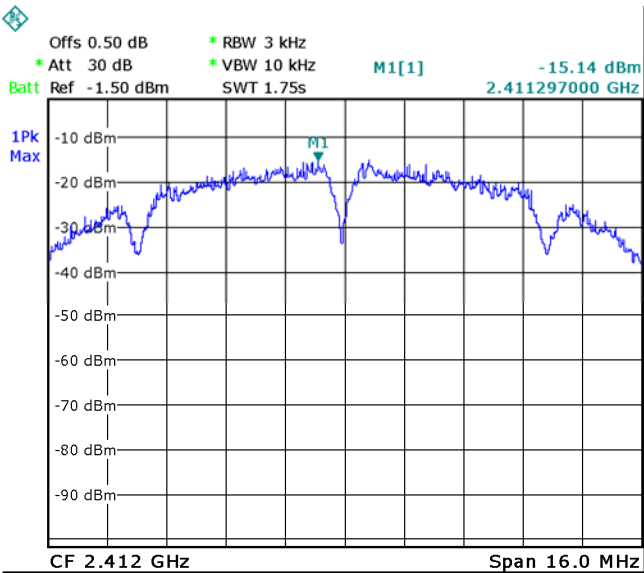


Mode: TX 11b channel 6

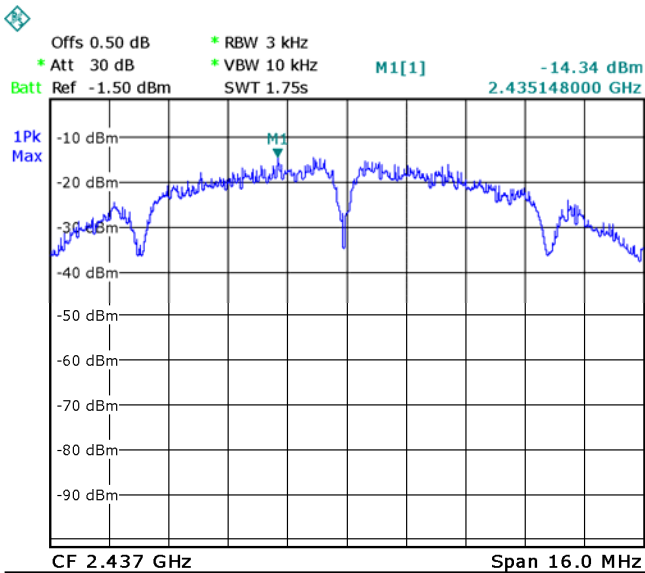


Mode: TX 11b channel 11

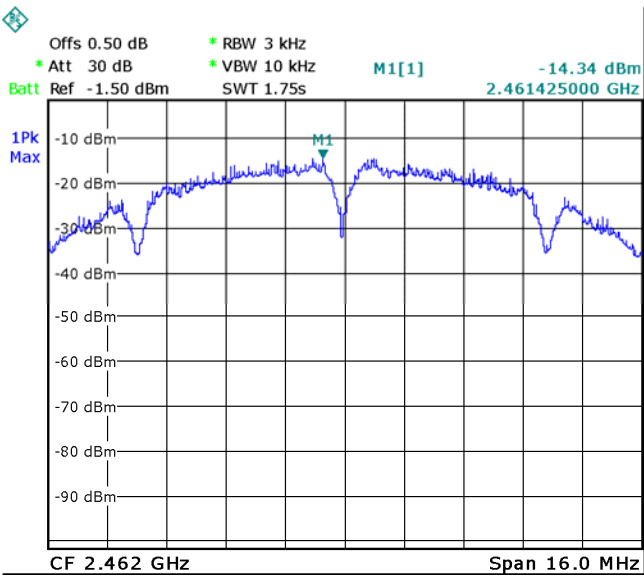


Mode: TX 11g channel 1

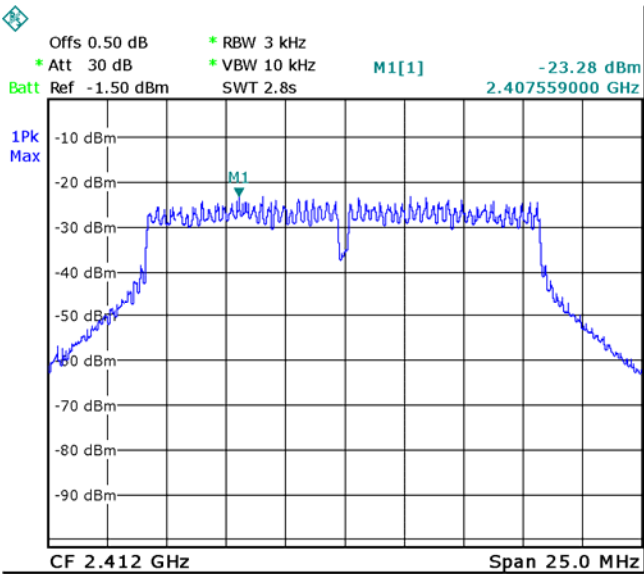


Mode: TX 11g channel 6

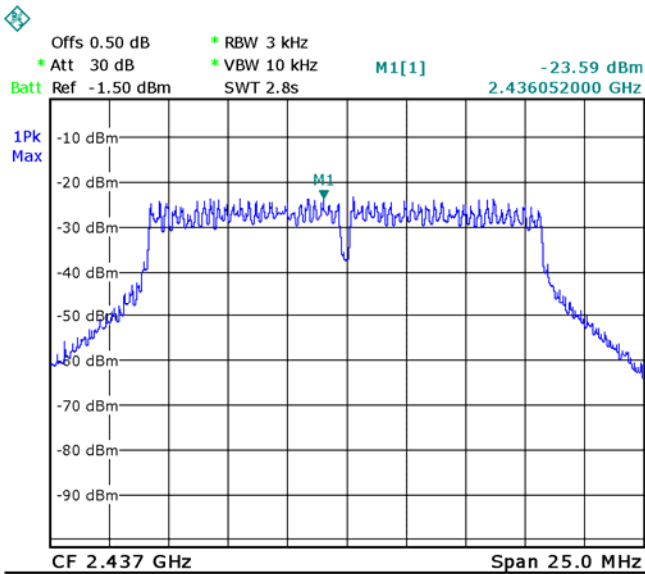


Mode: TX 11g channel 11

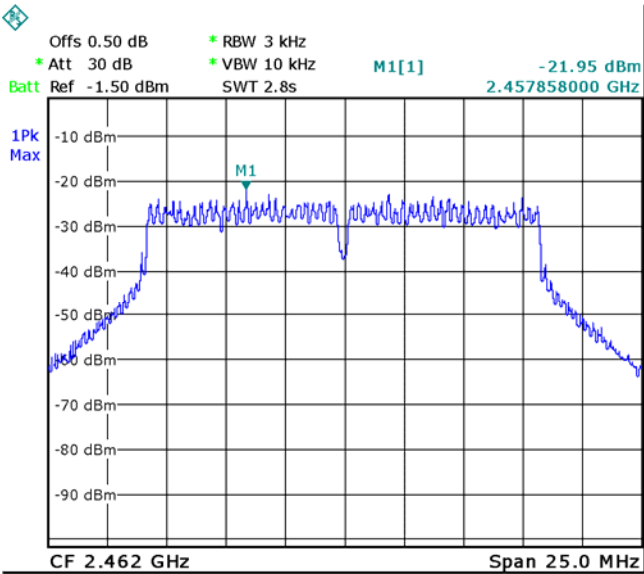


Mode: TX 11n HT20 channel 1

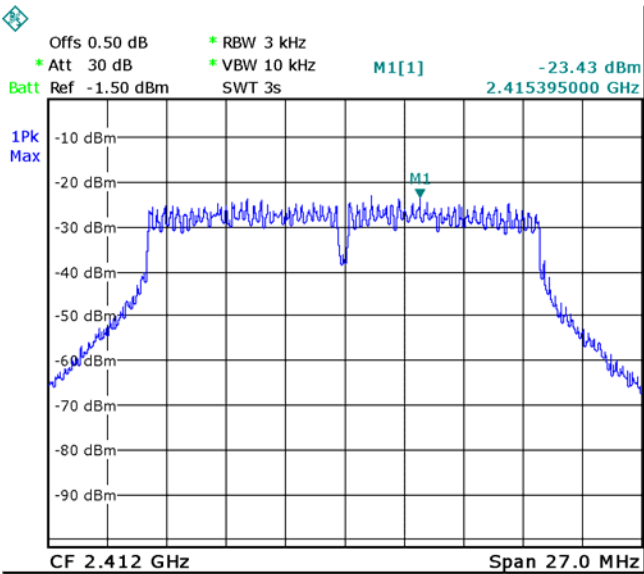

Mode: TX 11n HT20 channel 6

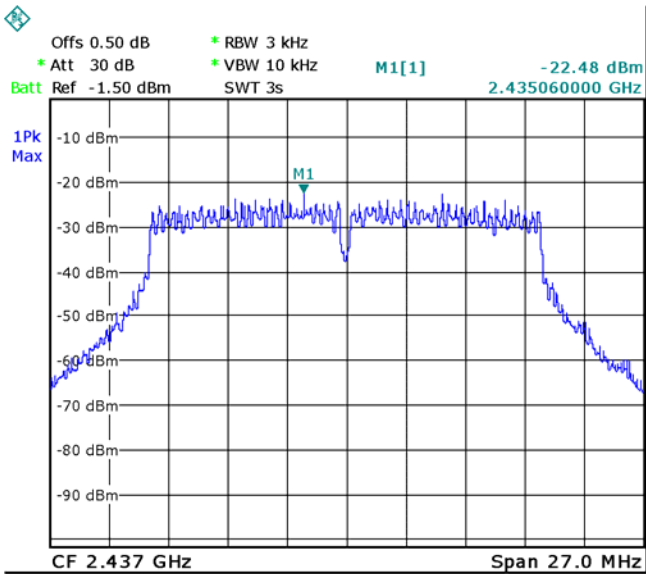


Mode: TX 11n HT20 channel 11

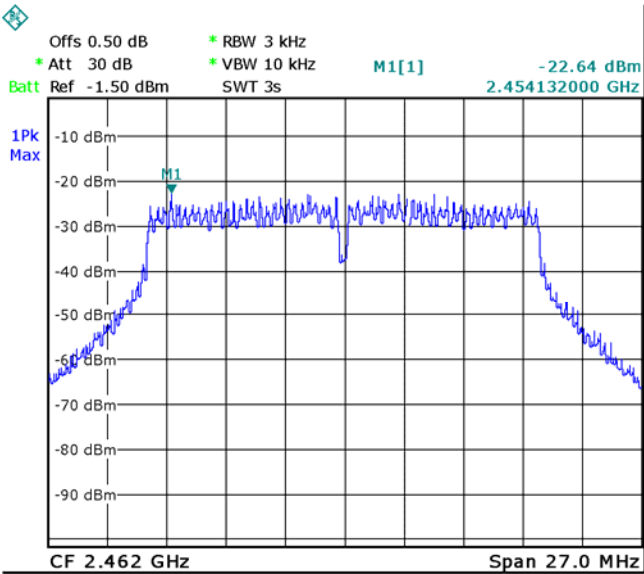


BLE


Mode: TX GFSK channel 0

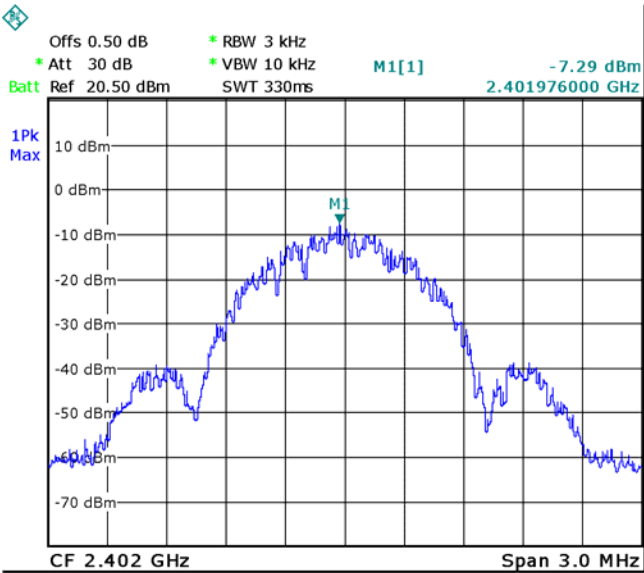

Mode: TX GFSK channel 19

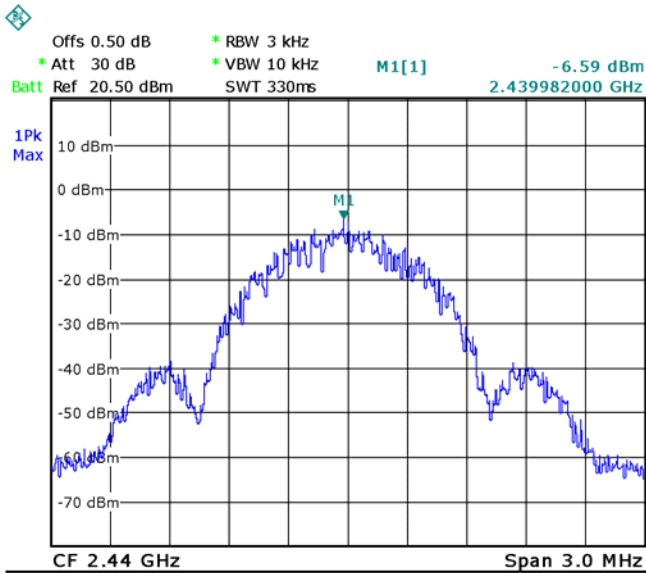


Mode: TX GFSK channel 39

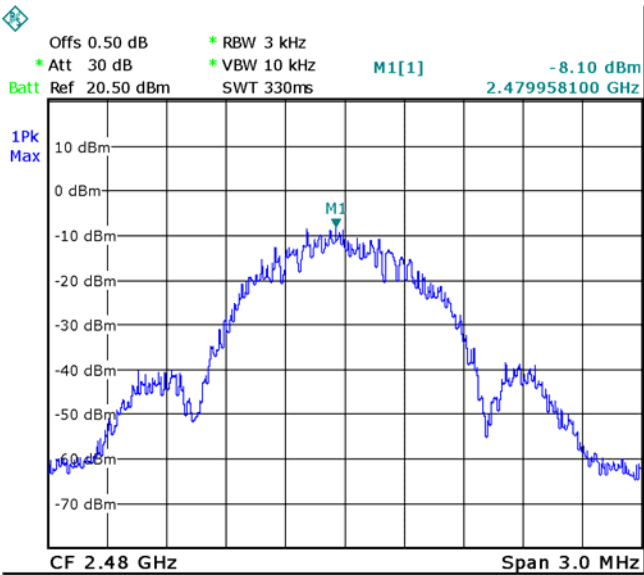

14 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

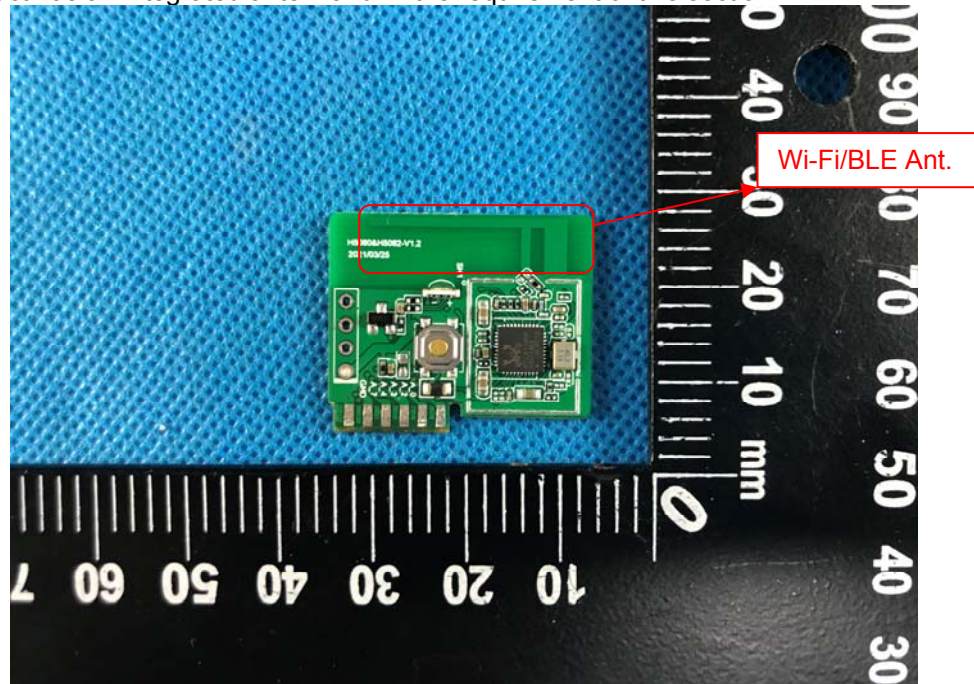

15 RF Exposure

Note: Please refer to RF Exposure Report: WTD21D05043716W002.

16 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-H5082-Photos.

=====End of Report=====