



TESTING LABORATORY  
CERTIFICATE #4820.01



FCC PART 15.247

RSS-GEN, ISSUE 5, FEBRUARY 2021 AMENDMENT 2

RSS-247, ISSUE 2, FEBRUARY 2017

## TEST REPORT

For

**Dong guan shi san hua shi dai ke ji you xian gong si**


FCC: hu men zhen nan shan min chang lu liu xiang 3 hao 1001 shi Dongguan, Guangdong China

IC: hu men zhen nan shan min chang lu liu xiang 3 hao 1001 shi

Guang dong sheng dong guan shi 523932 China

**FCC ID: 2AZY5Q37**

**IC: 27319-Q37**

|  |   |
|--|---|
| <b>Report Type:</b><br>Original Report     | <b>Product Name:</b><br>Karaoke microphone  |
| <b>Report Number:</b> DG8210507-15632E-00B |   |
| <b>Report Date:</b> 2021-05-26             |   |
| <b>Reviewed By:</b>                        | Ivan Cao<br>   |
| <b>Test Laboratory:</b>                    | Bay Area Compliance Laboratories Corp. (Dongguan)<br>No.12, Pulong East 1 <sup>st</sup> Road, Tangxia Town, Dongguan,<br>Guangdong, China<br>Tel: +86-769-86858888<br>Fax: +86-769-86858891<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

## **TABLE OF CONTENTS**

|   |           |
|---|-----------|
| <b>GENERAL INFORMATION.....</b>   | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....  | 4         |
| OBJECTIVE .....   | 4         |
| TEST METHODOLOGY .....  | 4         |
| MEASUREMENT UNCERTAINTY .....   | 5         |
| TEST FACILITY .....   | 5         |
| DECLARATIONS.....   | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>   | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....   | 6         |
| EUT EXERCISE SOFTWARE .....   | 6         |
| EQUIPMENT MODIFICATIONS .....   | 6         |
| SUPPORT EQUIPMENT LIST AND DETAILS .....  | 6         |
| SUPPORT CABLE LIST AND DETAILS .....  | 6         |
| BLOCK DIAGRAM OF TEST SETUP .....   | 7         |
| <b>SUMMARY OF TEST RESULTS .....</b>  | <b>8</b>  |
| <b>FCC §15.247 (i) &amp; §1.1310 &amp; §2.1093- RF Exposure .....</b>   | <b>9</b>  |
| APPLICABLE STANDARD .....   | 9         |
| <b>RSS-102 § 2.5.1 EXEMPTION LIMITS FOR ROUTINE EVALUATION – SAR EVALUATION .....</b>                               | <b>10</b> |
| APPLICABLE STANDARD .....   | 10        |
| <b>FCC §15.203 &amp; RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT .....</b>   | <b>11</b> |
| APPLICABLE STANDARD .....   | 11        |
| ANTENNA INFORMATION AND CONNECTOR CONSTRUCTION.....   | 11        |
| <b>FCC §15.207 (a) &amp; RSS-GEN CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS.....</b>                                  | <b>12</b> |
| APPLICABLE STANDARD .....   | 12        |
| EUT SETUP .....   | 12        |
| EMI TEST RECEIVER SETUP.....  | 12        |
| TEST PROCEDURE .....  | 13        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....  | 13        |
| TEST EQUIPMENT LIST AND DETAILS.....  | 13        |
| TEST DATA .....   | 14        |
| <b>FCC §15.209, §15.205 &amp; §15.247(d) &amp; RSS-247 CLAUSE 5.5,RSS -GEN CLAUSE 8.10- SPURIOUS EMISSIONS.....</b> | <b>16</b> |
| APPLICABLE STANDARD .....   | 16        |
| EUT SETUP .....   | 16        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....   | 17        |
| TEST PROCEDURE .....  | 17        |
| TEST EQUIPMENT LIST AND DETAILS.....  | 17        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....  | 18        |
| TEST DATA .....   | 18        |
| <b>FCC §15.247(a) (1)&amp; RSS-247 CLAUSE 5.1 b) - CHANNEL SEPARATION TEST .....</b>                                | <b>24</b> |
| APPLICABLE STANDARD .....   | 24        |

|   |           |
|---|-----------|
| TEST EQUIPMENT LIST AND DETAILS.....  | 24        |
| TEST PROCEDURE .....  | 24        |
| TEST DATA .....   | 24        |
| <b>RSS-247 CLAUSE 5.1&amp;RSS-GEN CLAUSE 6.7 – 20 dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH TESTING .....</b> | <b>29</b> |
| APPLICABLE STANDARD .....   | 29        |
| TEST PROCEDURE .....  | 30        |
| TEST EQUIPMENT LIST AND DETAILS.....  | 30        |
| TEST DATA .....   | 30        |
| <b>FCC §15.247(a) (1) (iii)&amp; RSS-247 CLAUSE 5.1 d) - QUANTITY OF HOPPING CHANNEL TEST.....</b>          | <b>38</b> |
| APPLICABLE STANDARD .....   | 38        |
| TEST PROCEDURE .....  | 38        |
| TEST EQUIPMENT LIST AND DETAILS.....  | 38        |
| TEST DATA .....   | 38        |
| <b>FCC §15.247(a) (1) (iii)&amp; RSS-247 Clause 5.1 d) - TIME OF OCCUPANCY (DWELL TIME) .....</b>           | <b>41</b> |
| APPLICABLE STANDARD .....   | 41        |
| TEST PROCEDURE .....  | 41        |
| TEST EQUIPMENT LIST AND DETAILS.....  | 41        |
| TEST DATA .....   | 41        |
| <b>FCC §15.247(b) (1), RSS-247 Clause 5.4 b) - PEAK OUTPUT POWER MEASUREMENT .....</b>                      | <b>46</b> |
| APPLICABLE STANDARD .....   | 46        |
| TEST PROCEDURE .....  | 46        |
| TEST EQUIPMENT LIST AND DETAILS.....  | 46        |
| TEST DATA .....   | 46        |
| <b>FCC §15.247(d) &amp; RSS-247 CLAUSE 5.5- BAND EDGES TESTING.....</b>                                     | <b>48</b> |
| APPLICABLE STANDARD .....   | 48        |
| TEST PROCEDURE .....  | 48        |
| TEST EQUIPMENT LIST AND DETAILS.....  | 49        |
| TEST DATA .....   | 49        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|   |   |
|---|---|
| <b>EUT Name:</b>                              | Karaoke microphone  |
| <b>EUT Model:</b>                             | Q37   |
| <b>Multiple Models:</b>                       | Q78, Q36, 868, 858L   |
| <b>Part Number:</b>                           | Q37: BKMK002H12RG<br>Q78: BKBT019ARG<br>Q36: BKBT016<br>868: BT035BRG<br>858L: AKBT031AB-UKAE |
| <b>Model Difference:</b>                      | Refer to the DOS letter   |
| <b>Operation Frequency:</b>                   | 2402-2480 MHz   |
| <b>Maximum Peak Output Power (Conducted):</b> | 2.61 dBm  |
| <b>Modulation Type:</b>                       | GFSK, $\pi/4$ -DQPSK  |
| <b>Antenna Gain<sup>▲</sup>:</b>              | -0.58 dBi   |
| <b>Rated Input Voltage:</b>                   | DC 3.7V from Battery or DC 5V from USB port   |
| <b>Serial Number:</b>                         | DG8210507-15632E-RF-S1  |
| <b>EUT Received Date:</b>                     | 2021.05.10  |
| <b>EUT Received Status:</b>                   | Good  |

### Objective

This report is prepared on behalf of *Dong guan shi san hua shi dai ke ji you xian gong si* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules and RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, February 2021 Amendment 2 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules and RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, February 2021 Amendment 2 of the Innovation, Science and Economic Development Canada.

### Test Methodology

All measurements detailed in this test report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices" and KDB 558074 D01 15.247 Meas Guidance v05r02. And RSS-247, Issue 2, February 2017, RSS-Gen, Issue 5, February 2021 Amendment 2 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

## Measurement Uncertainty

| Parameter                         | Measurement Uncertainty   |
|-----------------------------------|---|
| Occupied Channel Bandwidth        | $\pm 5\%$   |
| RF output power, conducted        | $\pm 0.61\text{ dB}$  |
| Unwanted Emissions, radiated      | 30M~200MHz: 4.55 dB, 200M~1GHz: 5.92 dB, 1G~6GHz: 4.98 dB,<br>6G~18GHz: 5.89 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB |
| Unwanted Emissions, conducted     | $\pm 1.5\text{ dB}$   |
| Temperature                       | $\pm 1^\circ\text{C}$   |
| Humidity                          | $\pm 5\%$   |
| DC and low frequency voltages     | $\pm 0.4\%$   |
| Duty Cycle                        | 1%  |
| AC Power Lines Conducted Emission | 3.12 dB (150 kHz to 30 MHz)   |

*Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1<sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

## Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in engineering mode, which was provided by manufacturer.

### EUT Exercise Software

The software "FCC Assist 1.0.0.2" was used for testing and the maximum power was configured as below, which was provided by the manufacturer ▲:

| Mode           | Channel | Test Frequency (MHz) | Power Level Setting |
|----------------|---------|----------------------|---------------------|
| GFSK           | Low     | 2402                 | 4                   |
|                | Middle  | 2441                 | 4                   |
|                | High    | 2480                 | 4                   |
| $\pi/4$ -DQPSK | Low     | 2402                 | 4                   |
|                | Middle  | 2441                 | 4                   |
|                | High    | 2480                 | 4                   |

### Equipment Modifications

No modification was made to the EUT.


### Support Equipment List and Details

| Manufacturer                      | Description | Model             | Serial Number |
|-----------------------------------|-------------|-------------------|---------------|
| Dongguan Aohai Technology Co.,Ltd | adapter     | A138A-120150U-US2 | AH2002105372  |

### Support Cable List and Details

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From Port           | To  |
|-------------------|----------------|--------------|------------|---------------------|-----|
| USB Cable         | yes            | No           | 0.8        | USB Port of adapter | EUT |

## Block Diagram of Test Setup

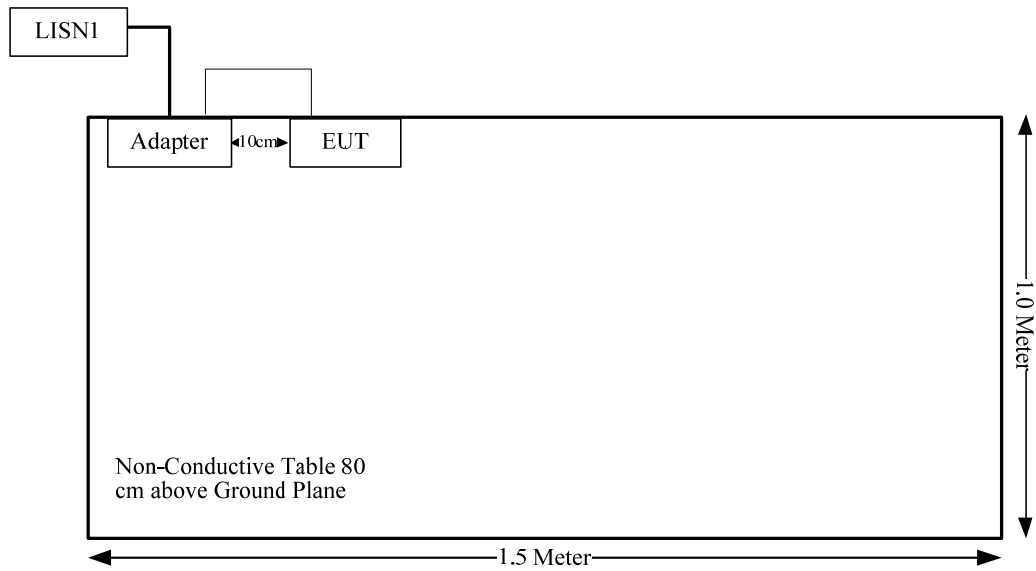

## SUMMARY OF TEST RESULTS

| Rules   | Description of Test                                    | Result     |
|---|--|------------|
| FCC§15.247 (i) & §1.1310 & §2.1093  | RF Exposure  | Compliance |
| RSS-102 Clause 2.5.1  | Exemption Limits For Routine Evaluation-SAR Evaluation | Compliance |
| FCC§15.203,<br>RSS-Gen Clause 6.8   | Antenna Requirement                                    | Compliance |
| FCC§15.207 (a),<br>RSS-Gen Clause 8.8   | Conducted Emissions                                    | Compliance |
| FCC§15.205, §15.209,<br>FCC §15.247(d),<br>RSS-247 Clause 5.5,<br>RSS-Gen Clause 8.10 | Spurious Emissions                                     | Compliance |
| FCC §15.247 (a)(1),<br>RSS-247 Clause 5.1 b)<br>RSS-Gen Clause 6.7                    | Emission Bandwidth                                     | Compliance |
| FCC §15.247(a)(1),<br>RSS-247 Clause 5.1 b)   | Channel Separation Test                                | Compliance |
| FCC§15.247(a)(1)(iii),<br>RSS-247 Clause 5.1 d)                                       | Time of Occupancy (Dwell Time)                         | Compliance |
| FCC§15.247(a)(1)(iii),<br>RSS-247 Clause 5.1 d)                                       | Quantity of hopping channel Test                       | Compliance |
| FCC§15.247(b)(1),<br>RSS-247 Clause 5.4 b)  | Peak Output Power Measurement                          | Compliance |
| FCC§15.247(d)<br>RSS-247 Clause 5.5   | Band Edges   | Compliance |



---

**FCC §15.247 (i) & §1.1310 & §2.1093- RF Exposure**

---

**Applicable Standard**

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

**Measurement Result**

The max conducted power including tune-up tolerance is 3.0 dBm (2 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$   
 $= 2/5 * (\sqrt{2.480}) = 0.6 < 3.0$

**Result: Compliance. The stand-alone SAR evaluation is not necessary.**

## RSS-102 § 2.5.1 EXEMPTION LIMITS FOR ROUTINE EVALUATION – SAR EVALUATION

### Applicable Standard

SAR evaluation is required if the separation distance between the user and/or bystander and the antenna and/or radiating element of the device is less than or equal to 20 cm, except when the device operates at or below the applicable output power level (adjusted for tune-up tolerance) for the specified separation distance defined in Table 1. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 2.5.

**Table 1: SAR evaluation – Exemption limits for routine evaluation based on frequency and separation distance<sup>4,5</sup>**

| Frequency (MHz) | Exemption Limits (mW)           |                                 |                                 |                                 |                                 |
|-----------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
|                 | At separation distance of ≤5 mm | At separation distance of 10 mm | At separation distance of 15 mm | At separation distance of 20 mm | At separation distance of 25 mm |
| ≤300            | 71 mW                           | 101 mW                          | 132 mW                          | 162 mW                          | 193 mW                          |
| 450             | 52 mW                           | 70 mW                           | 88 mW                           | 106 mW                          | 123 mW                          |
| 835             | 17 mW                           | 30 mW                           | 42 mW                           | 55 mW                           | 67 mW                           |
| 1900            | 7 mW                            | 10 mW                           | 18 mW                           | 34 mW                           | 60 mW                           |
| 2450            | 4 mW                            | 7 mW                            | 15 mW                           | 30 mW                           | 52 mW                           |
| 3500            | 2 mW                            | 6 mW                            | 16 mW                           | 32 mW                           | 55 mW                           |
| 5800            | 1 mW                            | 6 mW                            | 15 mW                           | 27 mW                           | 41 mW                           |

| Frequency (MHz) | Exemption Limits (mW)           |                                 |                                 |                                 |                                  |
|-----------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|----------------------------------|
|                 | At separation distance of 30 mm | At separation distance of 35 mm | At separation distance of 40 mm | At separation distance of 45 mm | At separation distance of ≥50 mm |
| ≤300            | 223 mW                          | 254 mW                          | 284 mW                          | 315 mW                          | 345 mW                           |
| 450             | 141 mW                          | 159 mW                          | 177 mW                          | 195 mW                          | 213 mW                           |
| 835             | 80 mW                           | 92 mW                           | 105 mW                          | 117 mW                          | 130 mW                           |
| 1900            | 99 mW                           | 153 mW                          | 225 mW                          | 316 mW                          | 431 mW                           |
| 2450            | 83 mW                           | 123 mW                          | 173 mW                          | 235 mW                          | 309 mW                           |
| 3500            | 86 mW                           | 124 mW                          | 170 mW                          | 225 mW                          | 290 mW                           |
| 5800            | 56 mW                           | 71 mW                           | 85 mW                           | 97 mW                           | 106 mW                           |

### Measurement Result:

The max tune-up conducted power is 3dBm(2 mW), Antenna Gain:-0.58 dBi

The exemption power(P) limits for routine evaluation in 2402-2480MHz is:

$$(2480-2450)/(3500-2450)=(P-4)/(2-4)$$

$$\Rightarrow P=3.94 \text{ mW}@2480 \text{ MHz}$$

$$> 2 \text{ mW}$$

**So the stand-alone SAR evaluation can be exempted.**

## FCC §15.203 & RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT

### Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to RSS-Gen §6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

### Antenna Information And Connector Construction

The EUT has one internal antenna arrangement, fulfill the requirement of this section. Please refer to below information and the EUT photos:

| Antenna Type | input impedance (Ohm) | Antenna Gain /Frequency Range |
|--------------|-----------------------|-------------------------------|
| PCB          | 50                    | -0.58 dBi/2.4~2.5GHz          |


**Result:** Compliance.

## FCC §15.207 (a) & RSS-GEN CLAUSE 8.8 – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207(a), RSS-GEN CLAUSE 8.8.

### EUT Setup

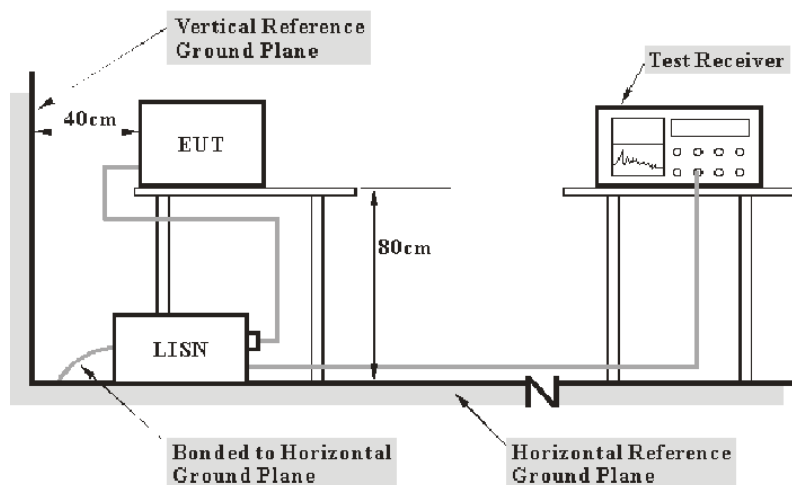

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 and RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

## Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

$V_C$ : corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

| Manufacturer | Description       | Model     | Serial Number   | Calibration Date | Calibration Due Date |
|--------------|-------------------|-----------|-----------------|------------------|----------------------|
| R&S          | LISN              | ENV 216   | 101614          | 2020-09-12       | 2021-09-12           |
| R&S          | EMI Test Receiver | ESCI      | 101121          | 2020-07-07       | 2021-07-07           |
| MICRO-COAX   | Coaxial Cable     | C-NJNJ-50 | C-0200-01       | 2020-09-05       | 2021-09-05           |
| R&S          | Test Software     | EMC32     | Version 9.10.00 | N/A              | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


## Test Data

### Environmental Conditions

|                    |             |
|--------------------|-------------|
| Temperature:       | 25.5°C      |
| Relative Humidity: | 60%         |
| ATM Pressure:      | 100.3kPa    |
| Test by:           | Walker Chen |
| Test Date:         | 2021-05-20  |


**Test Result:** Compliance

**Test Mode:** Transmitting  
AC120V, 60 Hz, Line:

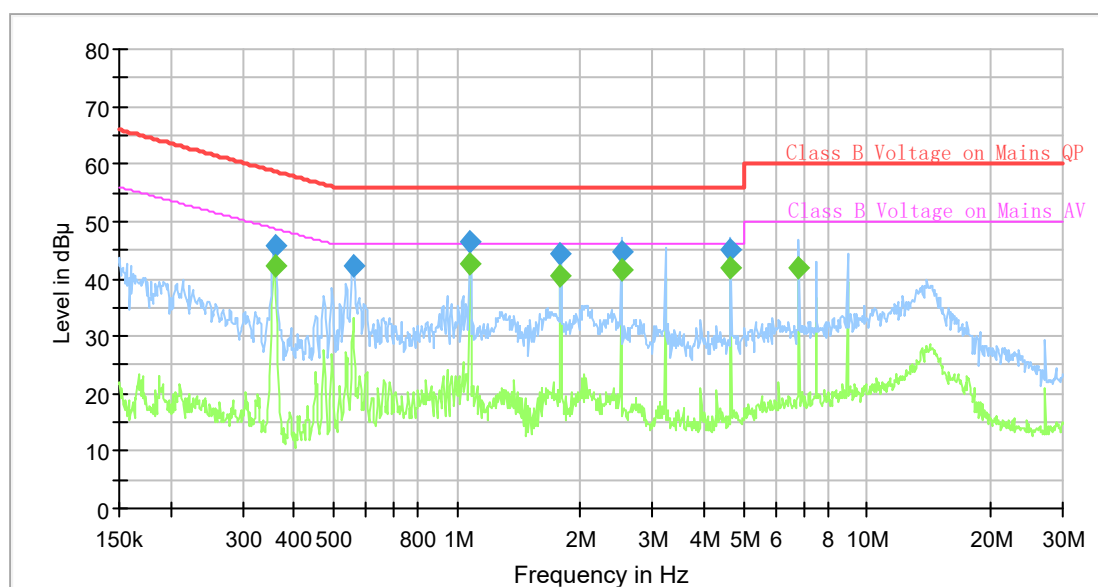

## Final Result

| Frequency (MHz) | QuasiPeak (dB $\mu$ V) | Average (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|------------------------|----------------------|--------------------|-------------|-----------------|------|------------|
| 0.359048        | ---                    | 42.41                | 48.75              | 6.34        | 9.000           | L1   | 9.6        |
| 0.359048        | 45.66                  | ---                  | 58.75              | 13.09       | 9.000           | L1   | 9.6        |
| 0.559669        | 42.25                  | ---                  | 56.00              | 13.75       | 9.000           | L1   | 9.6        |
| 1.075686        | ---                    | 42.74                | 46.00              | 3.26        | 9.000           | L1   | 9.7        |
| 1.075686        | 46.62                  | ---                  | 56.00              | 9.38        | 9.000           | L1   | 9.7        |
| 1.789056        | ---                    | 40.42                | 46.00              | 5.58        | 9.000           | L1   | 9.7        |
| 1.789056        | 44.35                  | ---                  | 56.00              | 11.65       | 9.000           | L1   | 9.7        |
| 2.511402        | ---                    | 41.68                | 46.00              | 4.32        | 9.000           | L1   | 9.7        |
| 2.511402        | 44.79                  | ---                  | 56.00              | 11.21       | 9.000           | L1   | 9.7        |
| 4.661308        | ---                    | 42.03                | 46.00              | 3.97        | 9.000           | L1   | 9.7        |
| 4.661308        | 45.09                  | ---                  | 56.00              | 10.91       | 9.000           | L1   | 9.7        |
| 6.809708        | ---                    | 41.83                | 50.00              | 8.17        | 9.000           | L1   | 9.8        |

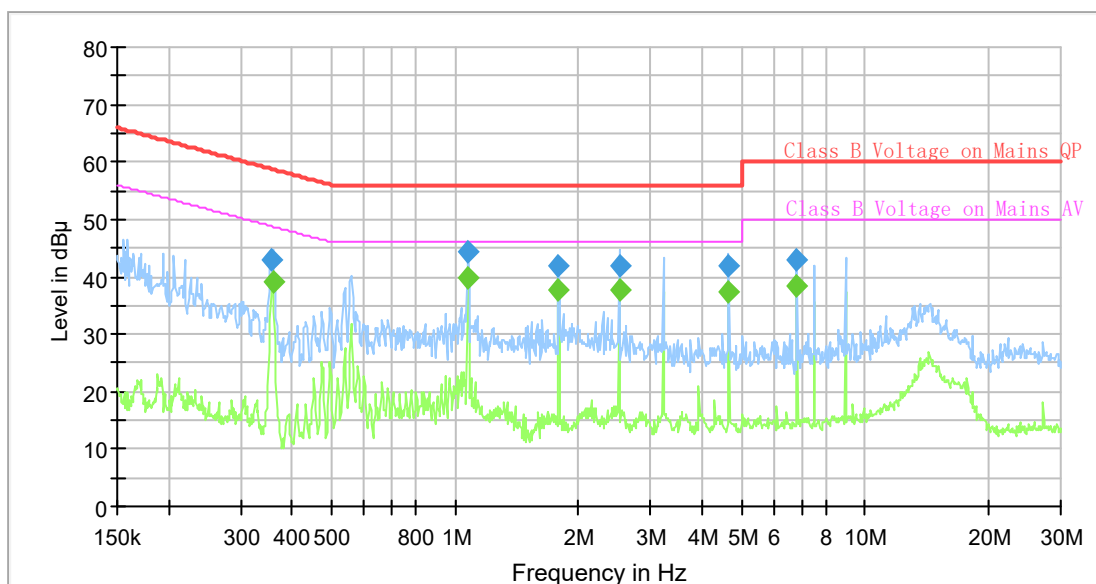**AC120V, 60 Hz, Neutral:****Final Result**

| Frequency (MHz) | QuasiPeak (dB μV) | Average (dB μV) | Limit (dB μV) | Margin (dB) | Bandwidth (kHz) | Line | Corr. (dB) |
|-----------------|-------------------|-----------------|---------------|-------------|-----------------|------|------------|
| 0.357261        | 43.08             | ---             | 58.79         | 15.71       | 9.000           | N    | 9.6        |
| 0.359048        | ---               | 39.04           | 48.75         | 9.71        | 9.000           | N    | 9.6        |
| 1.075686        | ---               | 39.83           | 46.00         | 6.17        | 9.000           | N    | 9.6        |
| 1.075686        | 44.24             | ---             | 56.00         | 11.76       | 9.000           | N    | 9.6        |
| 1.789056        | ---               | 37.90           | 46.00         | 8.10        | 9.000           | N    | 9.6        |
| 1.789056        | 41.96             | ---             | 56.00         | 14.04       | 9.000           | N    | 9.6        |
| 2.511402        | 41.98             | ---             | 56.00         | 14.02       | 9.000           | N    | 9.6        |
| 2.511402        | ---               | 37.72           | 46.00         | 8.28        | 9.000           | N    | 9.6        |
| 4.661308        | 41.77             | ---             | 56.00         | 14.23       | 9.000           | N    | 9.6        |
| 4.661308        | ---               | 37.50           | 46.00         | 8.50        | 9.000           | N    | 9.6        |
| 6.809708        | ---               | 38.60           | 50.00         | 11.40       | 9.000           | N    | 9.6        |
| 6.809708        | 42.93             | ---             | 60.00         | 17.07       | 9.000           | N    | 9.6        |


## FCC §15.209, §15.205 & §15.247(d) & RSS-247 CLAUSE 5.5, RSS -GEN CLAUSE 8.10- SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205; RSS-247 Clause 5.5, RSS-GEN Clause 8.10

### EUT Setup

#### Below 1GHz:

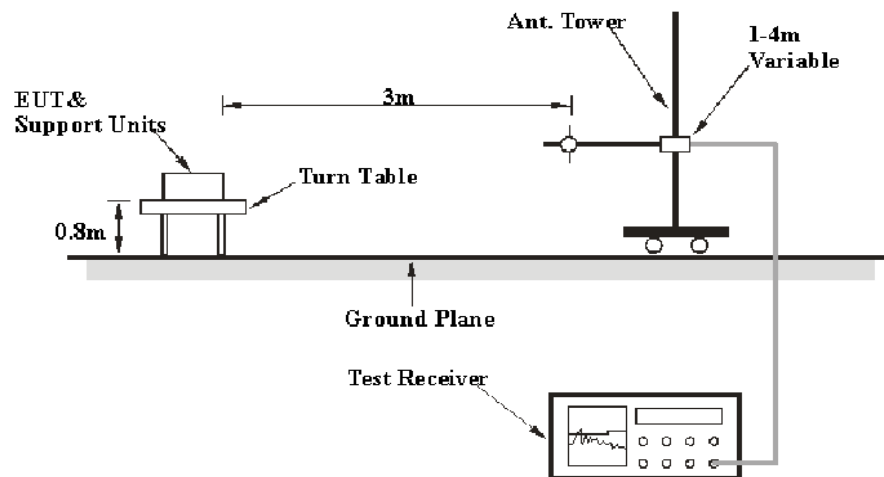

#### Above 1GHz:

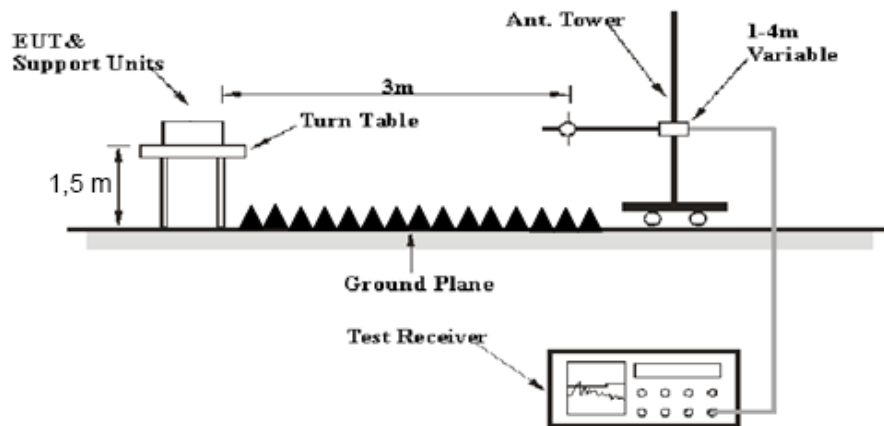

The radiated emission below 1GHz tests were performed in the 10 meters chamber test site, above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 and the RSS-247 Clause 5.5, RSS-GEN Clause 8.10 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.



## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 30 MHz – 1000 MHz | 120 kHz | 300 kHz   | 120 kHz | QP          |
| Above 1 GHz       | 1MHz    | 3 MHz     | /       | PK          |
|                   | 1MHz    | 10 Hz     | /       | AV          |

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

## Test Equipment List and Details

| Manufacturer          | Description       | Model              | Serial Number      | Calibration Date | Calibration Due Date |
|-----------------------|-------------------|--------------------|--------------------|------------------|----------------------|
| Radiation Below 1GHz  |                   |                    |                    |                  |                      |
| Sunol Sciences        | Antenna           | JB3                | A060611-2          | 2020-08-25       | 2023-08-25           |
| R&S                   | EMI Test Receiver | ESCI               | 100224             | 2020-09-12       | 2021-09-12           |
| Unknown               | Coaxial Cable     | C-NJNJ-50          | C-1000-01          | 2020-09-05       | 2021-09-05           |
| Unknown               | Coaxial Cable     | C-NJNJ-50          | C-0400-02          | 2020-09-05       | 2021-09-05           |
| Unknown               | Coaxial Cable     | C-NJNJ-50          | C-0530-01          | 2020-09-24       | 2021-09-24           |
| Sonoma                | Amplifier         | 310N               | 185914             | 2020-10-13       | 2021-10-13           |
| Farad                 | Test Software     | EZ-EMC             | V1.1.4.2           | N/A              | N/A                  |
| Radiation Above 1GHz  |                   |                    |                    |                  |                      |
| ETS-Lindgren          | Horn Antenna      | 3115               | 000 527 35         | 2018-10-12       | 2021-10-12           |
| Ducommun Technologies | Horn Antenna      | ARH-4223-02        | 1007726-01<br>1304 | 2020-12-05       | 2023-12-04           |
| Agilent               | Spectrum Analyzer | E4440A             | SG43360054         | 2020-07-07       | 2021-07-07           |
| Unknown               | Coaxial Cable     | C-SJSJ-50          | C-0800-01          | 2020-09-05       | 2021-09-05           |
| Unknown               | Coaxial Cable     | C-2.4J2.4J-50      | C-0700-02          | 2020-06-27       | 2021-06-27           |
| Mini-Circuit          | Amplifier         | ZVA-213-S+         | 54201245           | 2020-09-05       | 2021-09-05           |
| Quinstar              | Amplifier         | QLW-18405536-JO    | 15964001001        | 2020-06-27       | 2021-06-27           |
| Farad                 | Test Software     | EZ-EMC             | V1.1.4.2           | N/A              | N/A                  |
| E-Microwave           | Band-stop Filters | OBSF-2400-2483.5-S | OE01601525         | 2020-06-16       | 2021-06-16           |
| Mini Circuits         | High Pass Filter  | VHF-6010+          | 31118              | 2020-06-16       | 2021-06-16           |

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Data

### Environmental Conditions


| Test Items         | Radiation Below 1GHz | Radiation Above 1GHz |
|--------------------|----------------------|----------------------|
| Temperature:       | 24.9°C               | 29.4 °C              |
| Relative Humidity: | 53.8%                | 53 %                 |
| ATM Pressure:      | 100.2kPa             | 100.2kPa             |
| Tester:            | Asa Chen             | Lee Li               |
| Test Date:         | 2021.05.21           | 2021.05.19           |

*Test Mode: Transmitting*


*Test Result: Compliance. Please refer to the following table and plots.*

## 1) 30MHz-1GHz (GFSK Low channel was the worst)

Horizontal:

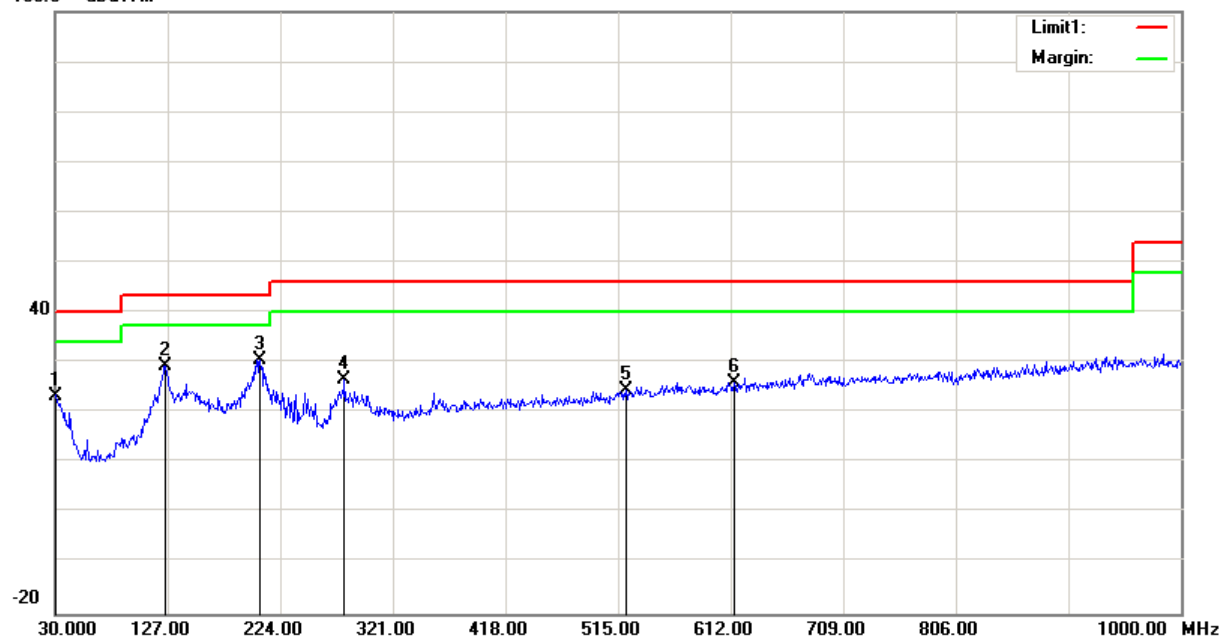100.0 dB $\mu$ V/m

| Frequency (MHz) | Receiver Reading (dB $\mu$ V) | Detector | Correction Factor (dB/m) | Cord. Amp. (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|-------------------------------|----------|--------------------------|---------------------------|----------------------|-------------|
| 30.0000         | 27.60                         | peak     | -4.10                    | 23.50                     | 40.00                | 16.50       |
| 125.0600        | 40.51                         | peak     | -11.27                   | 29.24                     | 43.50                | 14.26       |
| 206.5400        | 41.18                         | peak     | -10.57                   | 30.61                     | 43.50                | 12.89       |
| 279.2900        | 35.33                         | peak     | -8.57                    | 26.76                     | 46.00                | 19.24       |
| 521.7900        | 27.09                         | peak     | -2.60                    | 24.49                     | 46.00                | 21.51       |
| 614.9100        | 27.06                         | peak     | -0.92                    | 26.14                     | 46.00                | 19.86       |

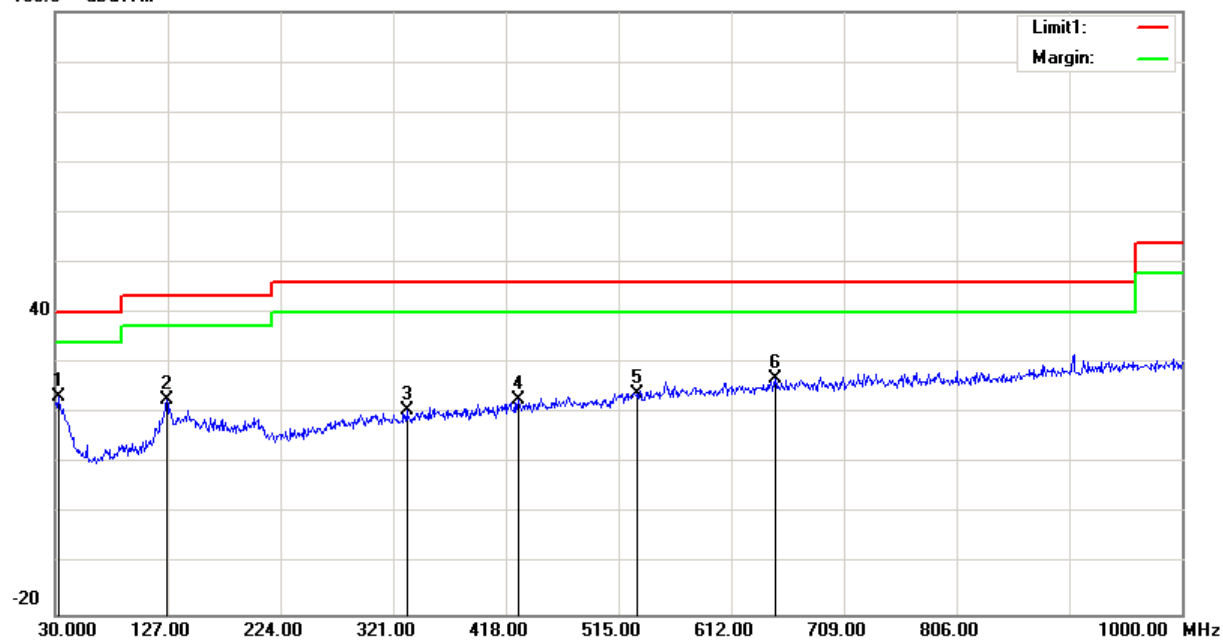**Vertical:**100.0 dB $\mu$ V/m

| Frequency (MHz) | Receiver Reading (dB $\mu$ V) | Detector | Correction Factor (dB/m) | Cord. Amp. (dB $\mu$ V/m) | Limit (dB $\mu$ V/m) | Margin (dB) |
|-----------------|-------------------------------|----------|--------------------------|---------------------------|----------------------|-------------|
| 32.9100         | 28.97                         | peak     | -5.69                    | 23.28                     | 40.00                | 16.72       |
| 126.0300        | 33.72                         | peak     | -10.99                   | 22.73                     | 43.50                | 20.77       |
| 332.6400        | 27.63                         | peak     | -6.96                    | 20.67                     | 46.00                | 25.33       |
| 428.6700        | 27.52                         | peak     | -4.68                    | 22.84                     | 46.00                | 23.16       |
| 530.5200        | 26.54                         | peak     | -2.44                    | 24.10                     | 46.00                | 21.90       |
| 649.8300        | 27.38                         | peak     | -0.45                    | 26.93                     | 46.00                | 19.07       |




**2) 1GHz-25GHz:***BDR Mode (GFSK was the worst case):*

| Frequency<br>(MHz)       | Receiver          |          | Rx Antenna     |                  | Cable<br>loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Corrected<br>Amplitude<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBµV) | Detector | Polar<br>(H/V) | Factor<br>(dB/m) |                       |                           |                                    |                   |                |
| Low Channel: 2402 MHz    |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2390.00                  | 28.88             | PK       | H              | 28.08            | 1.80                  | 0.00                      | 58.76                              | 74.00             | 15.24          |
| 2390.00                  | 16.93             | AV       | H              | 28.08            | 1.80                  | 0.00                      | 46.81                              | 54.00             | 7.19           |
| 4804.00                  | 41.60             | PK       | H              | 32.91            | 3.17                  | 25.60                     | 52.08                              | 74.00             | 21.92          |
| 4804.00                  | 31.37             | AV       | H              | 32.91            | 3.17                  | 25.60                     | 41.85                              | 54.00             | 12.15          |
| 7206.00                  | 35.66             | PK       | H              | 35.74            | 4.82                  | 25.60                     | 50.62                              | 74.00             | 23.38          |
| 7206.00                  | 23.77             | AV       | H              | 35.74            | 4.82                  | 25.60                     | 38.73                              | 54.00             | 15.27          |
| 1056.00                  | 41.95             | PK       | V              | 23.69            | 1.54                  | 25.98                     | 41.20                              | 74.00             | 32.80          |
| 1056.00                  | 29.33             | AV       | V              | 23.69            | 1.54                  | 25.98                     | 28.58                              | 54.00             | 25.42          |
| Middle Channel: 2441 MHz |                   |          |                |                  |                       |                           |                                    |                   |                |
| 4882.00                  | 40.93             | PK       | H              | 33.06            | 3.27                  | 25.66                     | 51.60                              | 74.00             | 22.40          |
| 4882.00                  | 30.46             | AV       | H              | 33.06            | 3.27                  | 25.66                     | 41.13                              | 54.00             | 12.87          |
| 7323.00                  | 35.50             | PK       | H              | 36.04            | 4.62                  | 25.73                     | 50.43                              | 74.00             | 23.57          |
| 7323.00                  | 23.35             | AV       | H              | 36.04            | 4.62                  | 25.73                     | 38.28                              | 54.00             | 15.72          |
| High Channel: 2480 MHz   |                   |          |                |                  |                       |                           |                                    |                   |                |
| 2483.50                  | 29.12             | PK       | H              | 28.27            | 1.84                  | 0.00                      | 59.23                              | 74.00             | 14.77          |
| 2483.50                  | 17.16             | AV       | H              | 28.27            | 1.84                  | 0.00                      | 47.27                              | 54.00             | 6.73           |
| 4960.00                  | 41.09             | PK       | H              | 33.22            | 3.23                  | 25.63                     | 51.91                              | 74.00             | 22.09          |
| 4960.00                  | 30.62             | AV       | H              | 33.22            | 3.23                  | 25.63                     | 41.44                              | 54.00             | 12.56          |
| 7440.00                  | 35.66             | PK       | H              | 36.34            | 4.41                  | 25.85                     | 50.56                              | 74.00             | 23.44          |
| 7440.00                  | 23.51             | AV       | H              | 36.34            | 4.41                  | 25.85                     | 38.41                              | 54.00             | 15.59          |

# Worst plots(GFSK Low channel)




## Horizontal

Fundamental  
Test with Band  
Rejection Filter

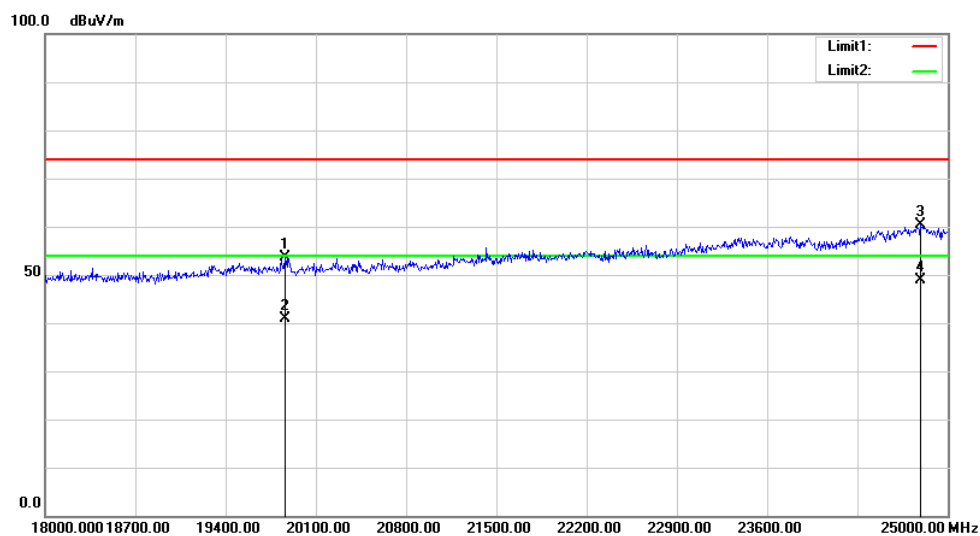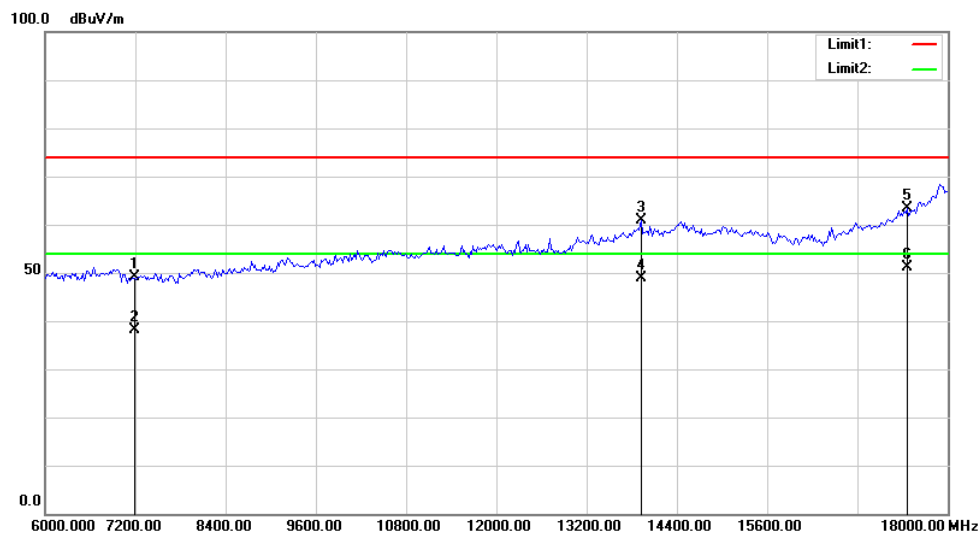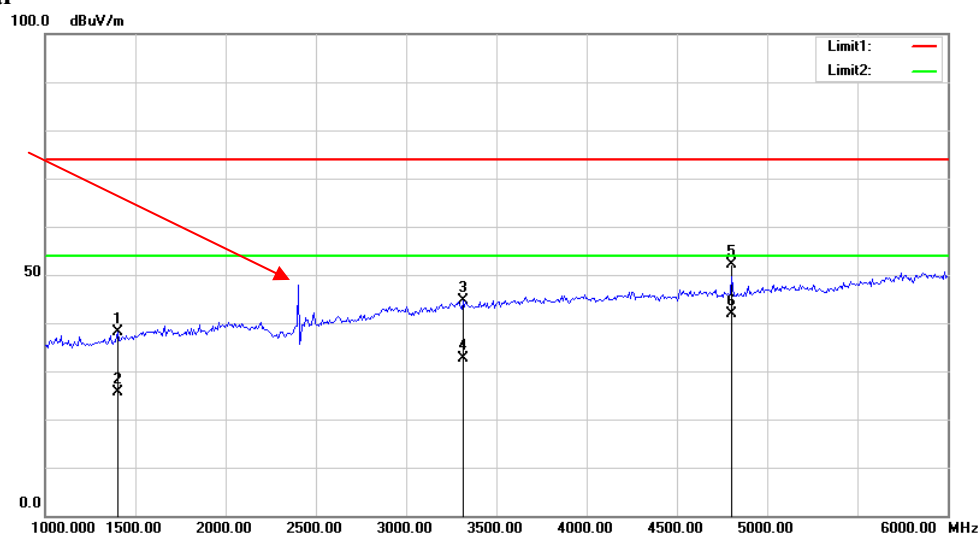

# Vertical

Fundamental  
Test with Band  
Rejection Filter

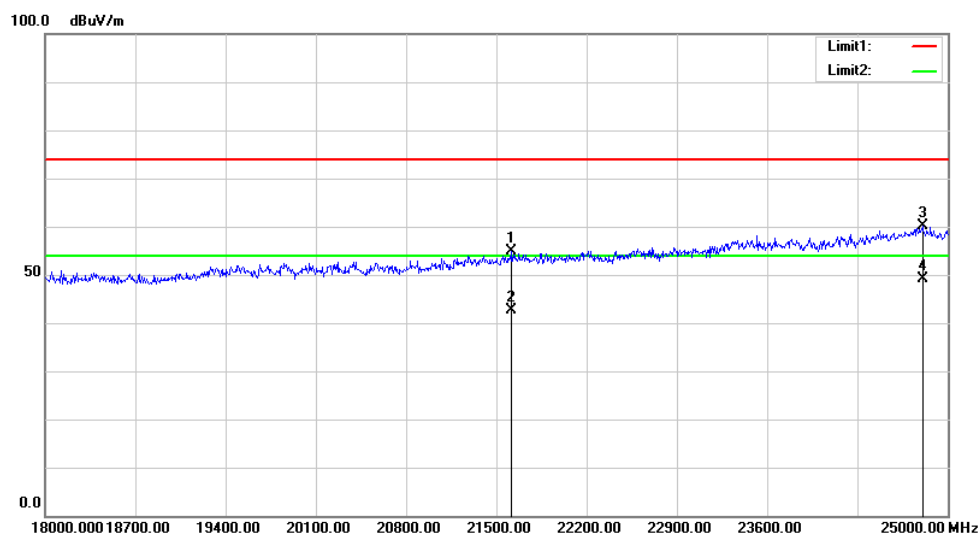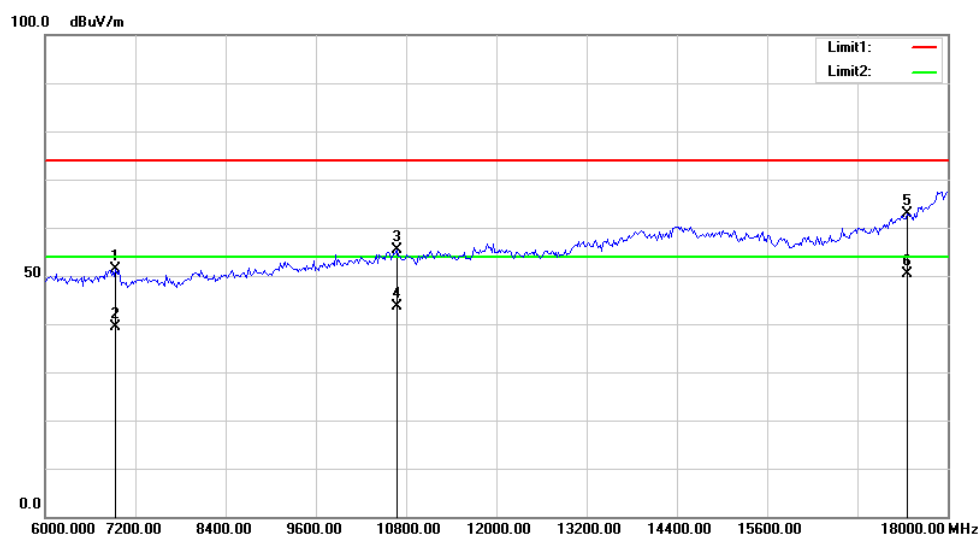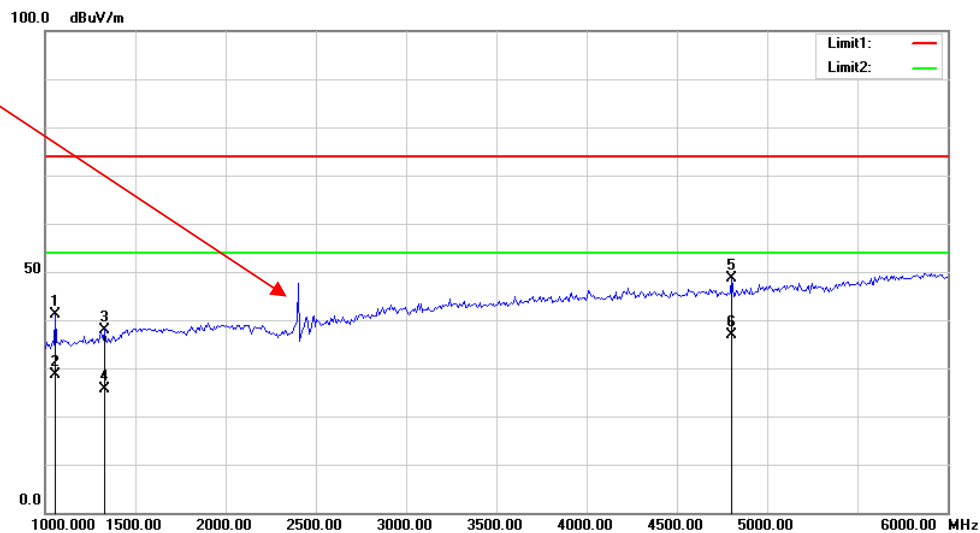

## FCC §15.247(a) (1)& RSS-247 CLAUSE 5.1 b) - CHANNEL SEPARATION TEST

### Applicable Standard

According to FCC §15.247(a) (1), RSS-247 Clause 5.1 b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### Test Equipment List and Details

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSV40       | 101591        | 2020-06-29       | 2021-06-28           |
| Unknown      | Coaxial Cable     | C-SJ00-0010 | C0010/01      | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

### Test Data

#### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 28.4°C     |
| Relative Humidity: | 47 %       |
| ATM Pressure:      | 100.3kPa   |
| Tester:            | Tiger Mo   |
| Test Date:         | 2021-05-13 |

**Test Result:** Compliance. Please refer to following tables and plots




*Test Mode: Transmitting*

| Mode                     | Channel | Frequency (MHz) | Channel Separation (MHz) | Limit (MHz) |
|--------------------------|---------|-----------------|--------------------------|-------------|
| BDR<br>(GFSK)            | Low     | 2402            | 1.000                    | 0.59        |
|                          | Middle  | 2441            | 1.000                    | 0.59        |
|                          | High    | 2480            | 1.006                    | 0.59        |
| EDR<br>( $\pi/4$ -DQPSK) | Low     | 2402            | 1.000                    | 0.85        |
|                          | Middle  | 2441            | 0.994                    | 0.85        |
|                          | High    | 2480            | 1.006                    | 0.84        |

Note: Limit=  $(2/3) \times 20\text{dB bandwidth}$

BDR Mode (GFSK):

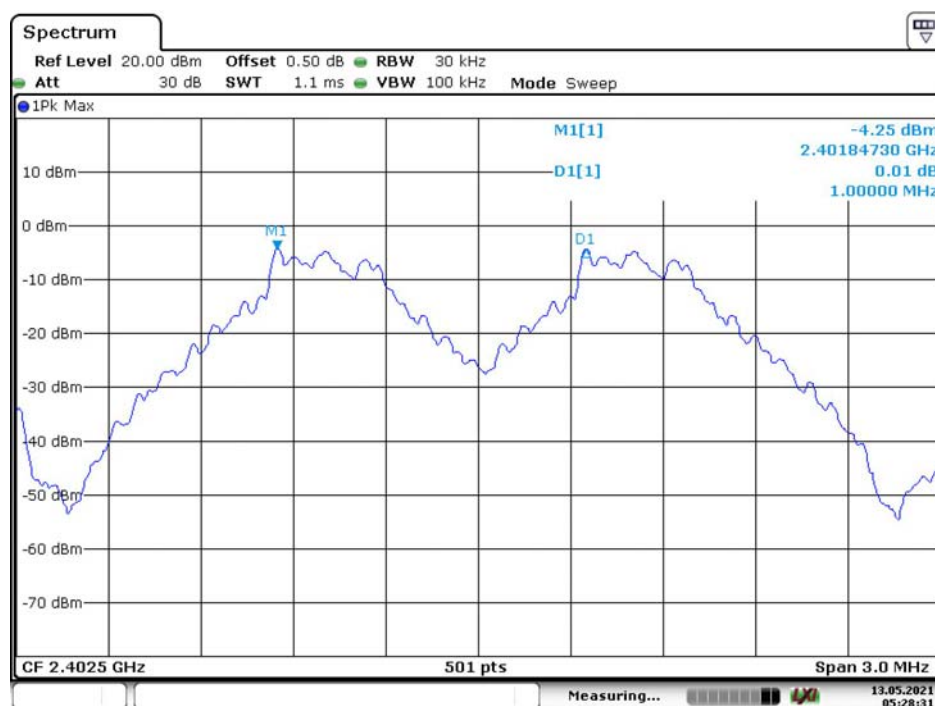**Low Channel**


Date: 13.MAY.2021 05:28:31

## Middle Channel



Date: 13.MAY.2021 05:30:45

## High Channel

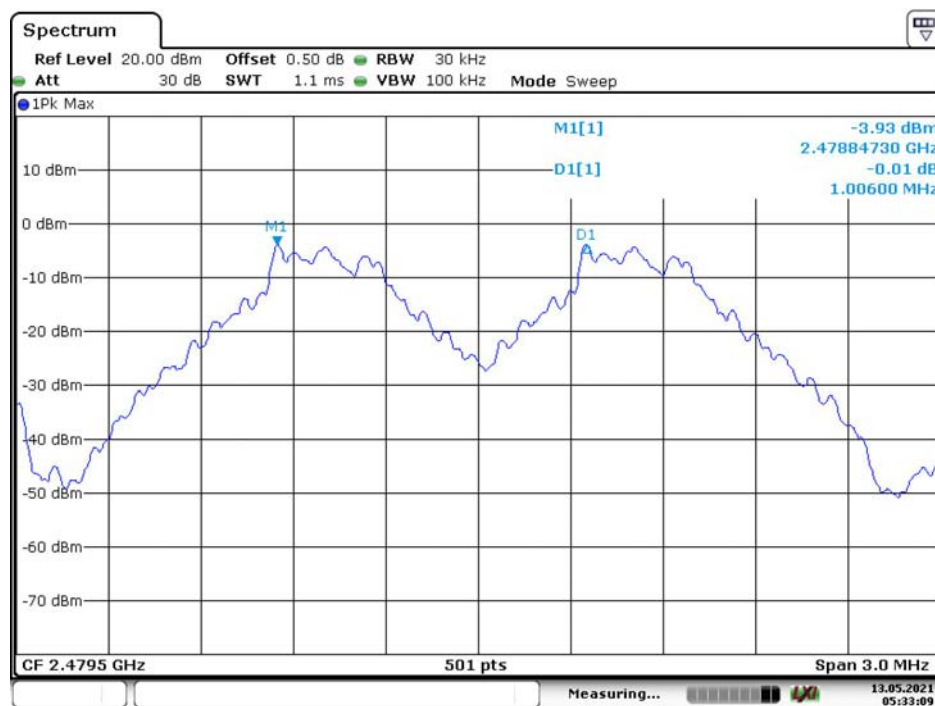

Date: 13.MAY.2021 05:33:09

EDR Mode ( $\pi/4$ -DQPSK):

### Low Channel



### Middle Channel



## High Channel



Date: 13.MAY.2021 07:43:49

## **RSS-247 CLAUSE 5.1&RSS-GEN CLAUSE 6.7 – 20 dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH TESTING**

### **Applicable Standard**

According to FCC §15.247(a) (1)

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to RSS-247 Clause 5.1 b):

- b) FHSs shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, FHSs operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided that the systems operate with an output power no greater than 0.125 W.

According to RSS-Gen Clause 6.7:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

## Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Use Occupied bandwidth test function, measure the 99% Occupied bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

## Test Equipment List and Details

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSV40       | 101591        | 2020-06-29       | 2021-06-28           |
| Unknown      | Coaxial Cable     | C-SJ00-0010 | C0010/01      | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Data


### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 28.4°C     |
| Relative Humidity: | 47%        |
| ATM Pressure:      | 100.3kPa   |
| Tester:            | Tiger Mo   |
| Test Date:         | 2021-05-13 |

**Test Result:** Compliance. Please refer to following tables and plots


*Test Mode: Transmitting*

| Mode                       | Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) | 99% occupied Bandwidth (MHz) |
|----------------------------|---------|-----------------|-----------------------|------------------------------|
| BDR Mode (GFSK)            | Low     | 2402            | 0.892                 | 0.826                        |
|                            | Middle  | 2441            | 0.884                 | 0.826                        |
|                            | High    | 2480            | 0.888                 | 0.826                        |
| EDR Mode ( $\pi/4$ -DQPSK) | Low     | 2402            | 1.276                 | 1.166                        |
|                            | Middle  | 2441            | 1.280                 | 1.170                        |
|                            | High    | 2480            | 1.260                 | 1.166                        |

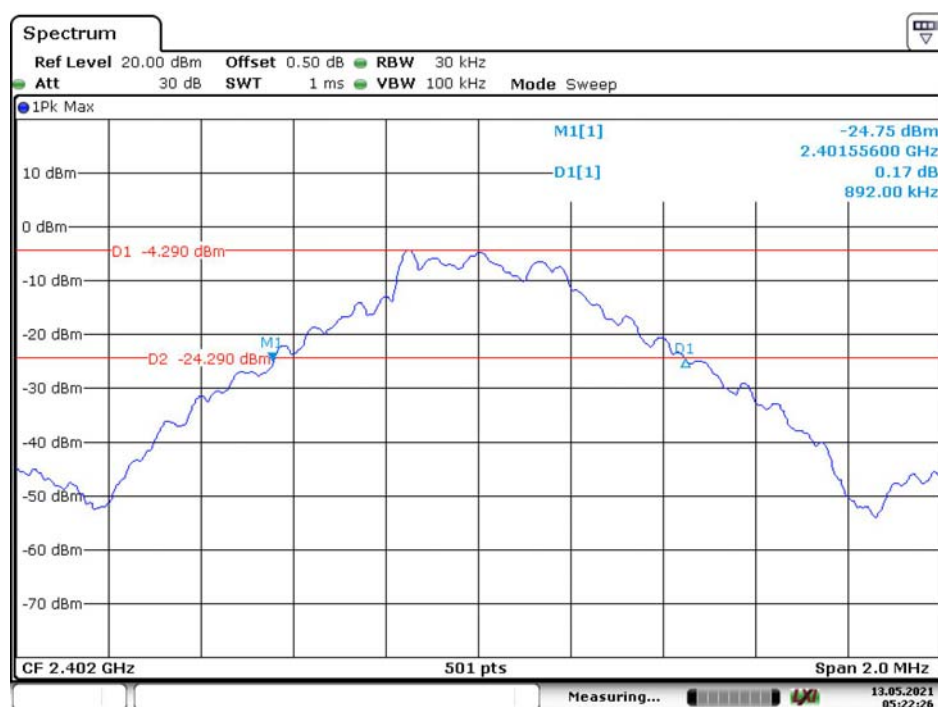**20dB Bandwidth:***BDR Mode (GFSK):***Low Channel**


Date: 13.MAY.2021 05:22:26

## Middle Channel

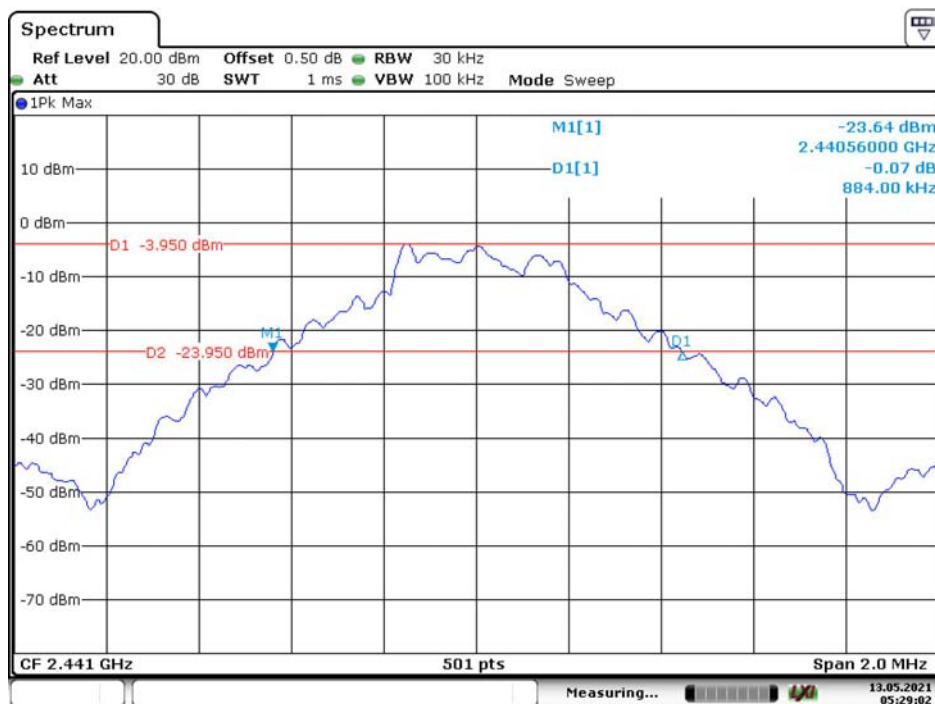

Date: 13.MAY.2021 05:29:02

## High Channel

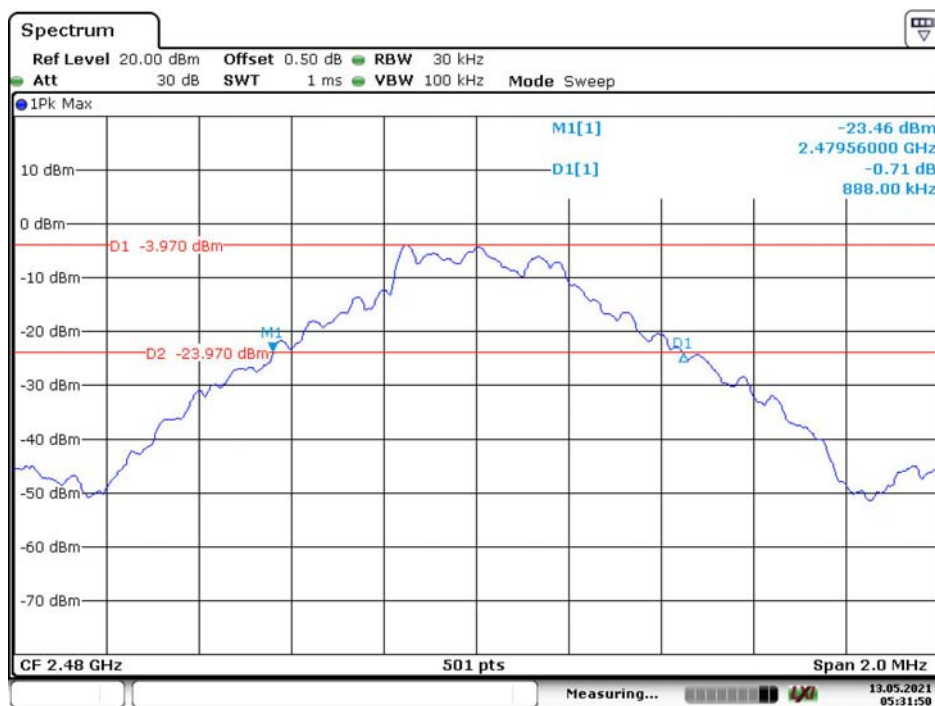


Date: 13.MAY.2021 05:31:50




EDR Mode ( $\pi/4$ -DQPSK):


### Low Channel

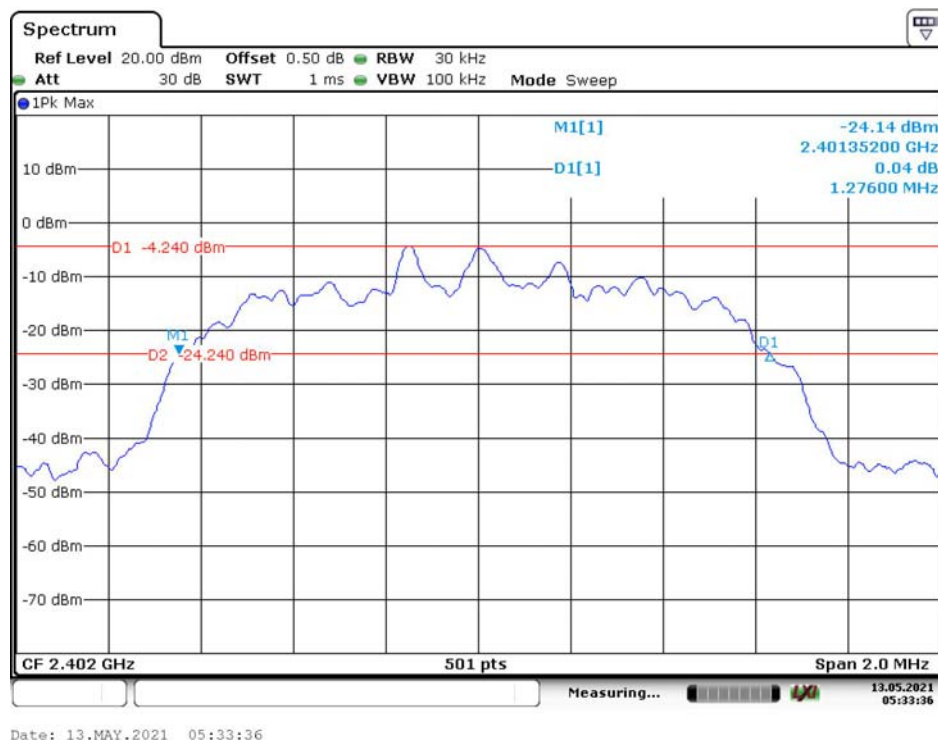

### Middle Channel

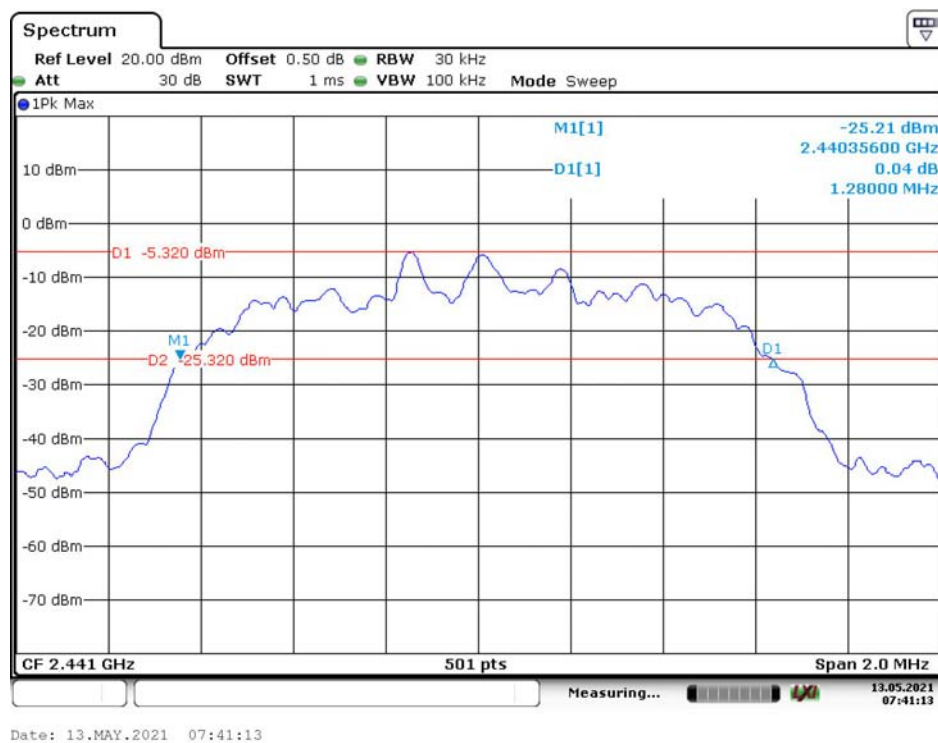

## High Channel

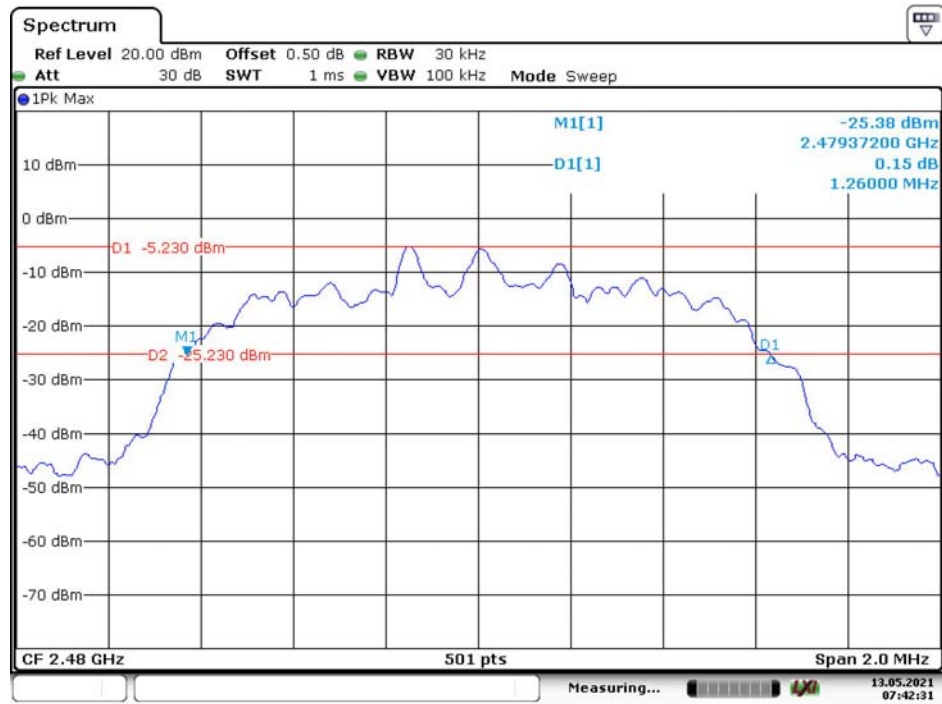

Date: 13.MAY.2021 07:42:32

**99% Occupied Bandwidth:**  
*BDR Mode (GFSK):***Low Channel**

Date: 13.MAY.2021 05:22:37

**Middle Channel**

Date: 13.MAY.2021 05:29:16

## High Channel



EDR Mode ( $\pi/4$ -DQPSK):

## Low Channel



## Middle Channel



Date: 13.MAY.2021 07:41:24

## High Channel



Date: 13.MAY.2021 07:42:46

## FCC §15.247(a) (1) (iii)& RSS-247 CLAUSE 5.1 d) - QUANTITY OF HOPPING CHANNEL TEST

### Applicable Standard

According to FCC §15.247(a) (1) (iii), RSS-247 Clause 5.1 d)

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

### Test Equipment List and Details

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSV40       | 101591        | 2020-06-29       | 2021-06-28           |
| Unknown      | Coaxial Cable     | C-SJ00-0010 | C0010/01      | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


|                    |            |
|--------------------|------------|
| Temperature:       | 28.4°C     |
| Relative Humidity: | 47%        |
| ATM Pressure:      | 100.3kPa   |
| Tester:            | Tiger Mo   |
| Test Date:         | 2021-05-13 |

**Test Result:** Compliance. Please refer to following tables and plots


Test Mode: Transmitting

| Test mode      | Frequency Range (MHz) | Number of Hopping Channel | Limit     |
|----------------|-----------------------|---------------------------|-----------|
| GFSK           | 2400-2483.5           | 79                        | $\geq 15$ |
| $\pi/4$ -DQPSK | 2400-2483.5           | 79                        | $\geq 15$ |

### GFSK

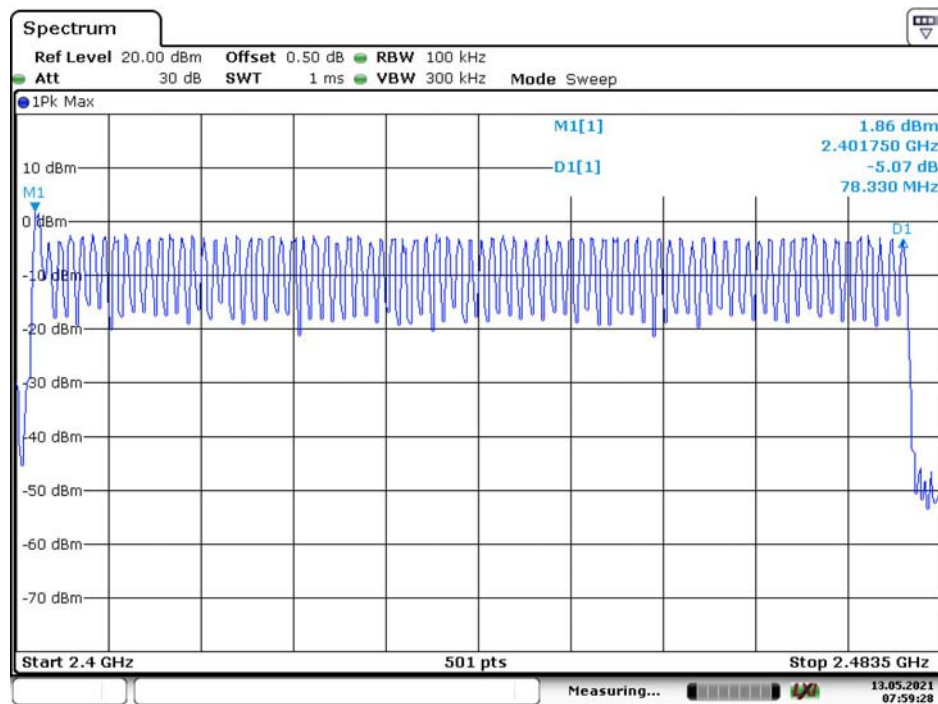

Date: 13.MAY.2021 07:59:28

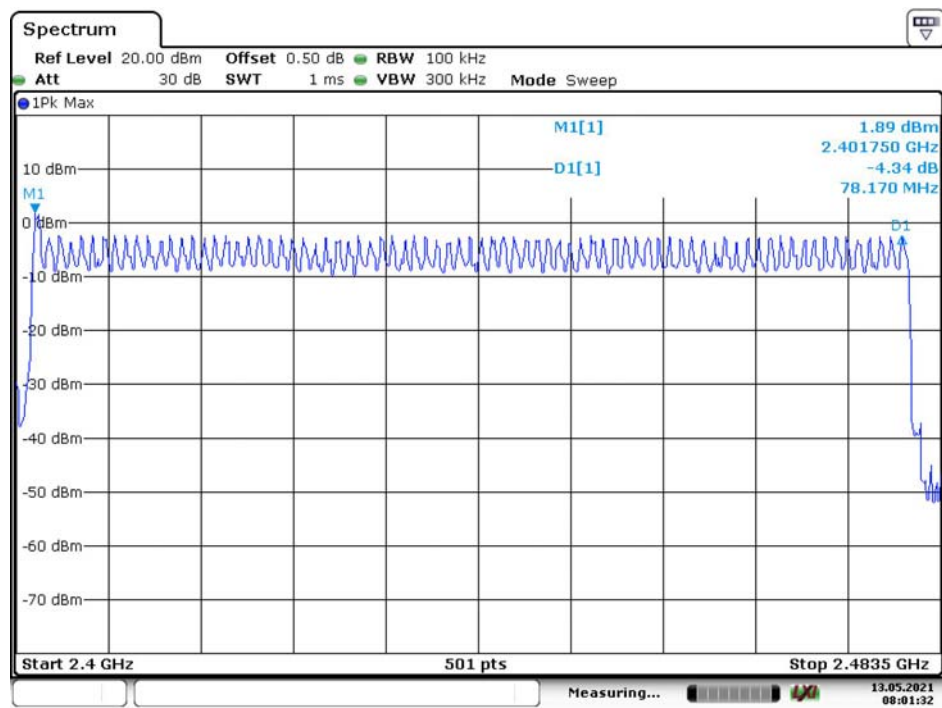$\pi/4$ -DQPSK

Date: 13.MAY.2021 08:01:32



**FCC §15.247(a) (1) (iii)& RSS-247 Clause 5.1 d) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

According to FCC §15.247(a) (1) (iii), RSS-247 Clause 5.1 d)

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

The EUT was worked in channel hopping; the time of single pulses was tested.

**Test Equipment List and Details**

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSV40       | 101591        | 2020-06-29       | 2021-06-28           |
| Unknown      | Coaxial Cable     | C-SJ00-0010 | C0010/01      | Each time        | N/A                  |


\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**


|                           |            |
|---------------------------|------------|
| <b>Temperature:</b>       | 28.4°C     |
| <b>Relative Humidity:</b> | 47%        |
| <b>ATM Pressure:</b>      | 100.3kPa   |
| <b>Tester:</b>            | Tiger Mo   |
| <b>Test Date:</b>         | 2021-05-13 |

*Test Mode: Transmitting*

| Mode   | Packet type | Channel | Frequency (MHz) | Puse width (ms) | Result (s) | Limit (s) |
|--|-------------|---------|-----------------|-----------------|------------|-----------|
| GFSK   | DH1         | Middle  | 2441            | 0.38            | 0.122      | 0.4       |
|  | DH3         | Middle  | 2441            | 1.653           | 0.264      |           |
|  | DH5         | Middle  | 2441            | 2.915           | 0.311      |           |
| $\pi/4$ -DQPSK   | 2DH1        | Middle  | 2441            | 0.392           | 0.125      |           |
|  | 2DH3        | Middle  | 2441            | 1.665           | 0.266      |           |
|  | 2DH5        | Middle  | 2441            | 2.925           | 0.312      |           |
| Note:<br>DH1:Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s<br>DH3:Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s<br>DH5:Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s |             |         |                 |                 |            |           |

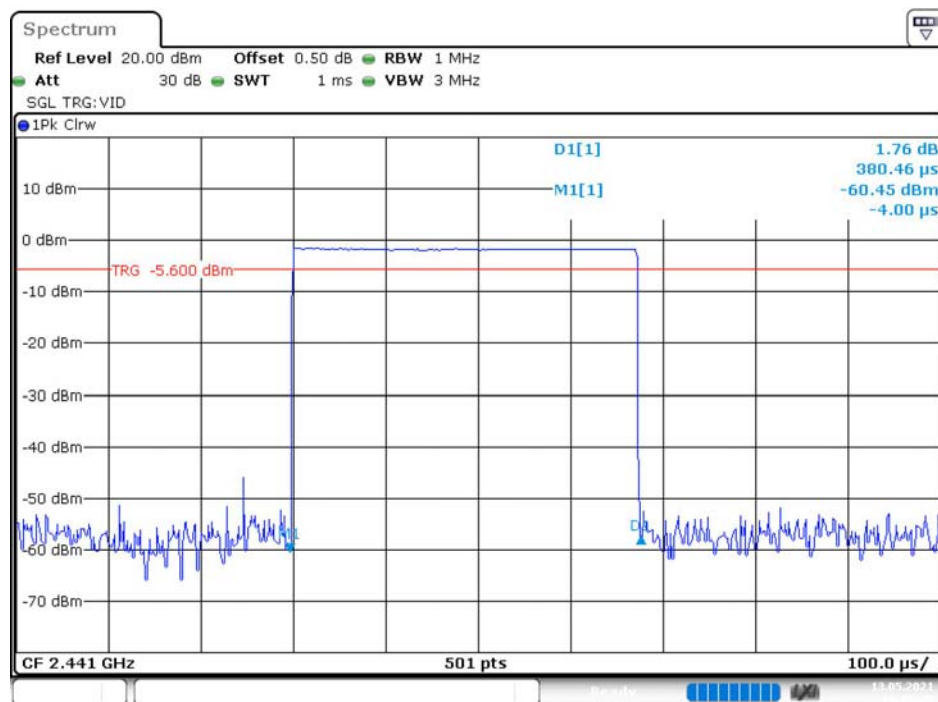
*BDR Mode (GFSK):***DH1: Middle Channel**

## DH3: Middle Channel

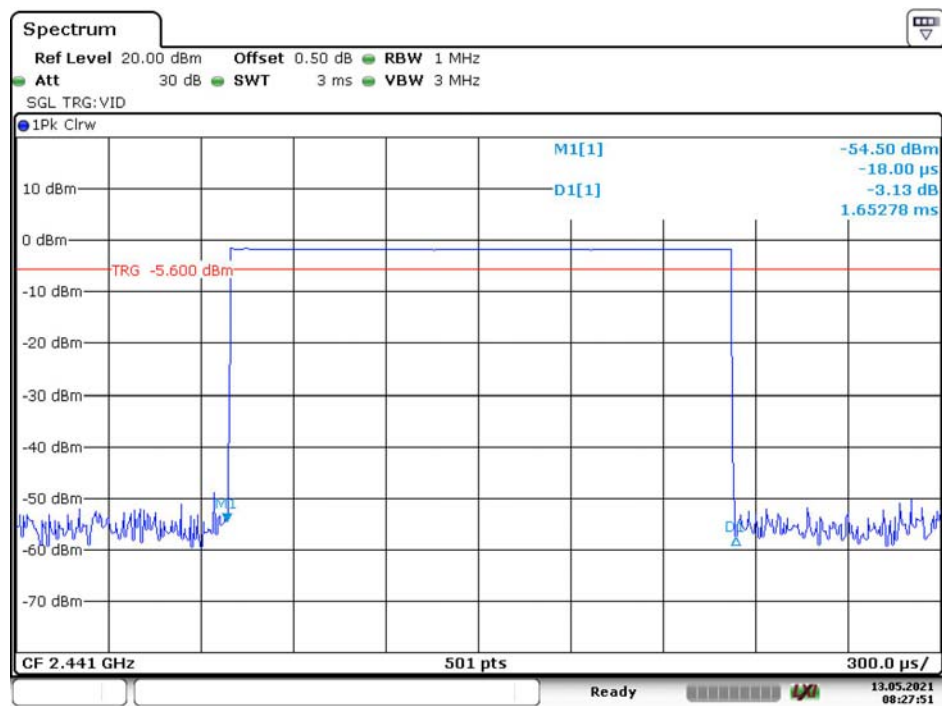

Date: 13.MAY.2021 08:27:52


## DH5: Middle Channel

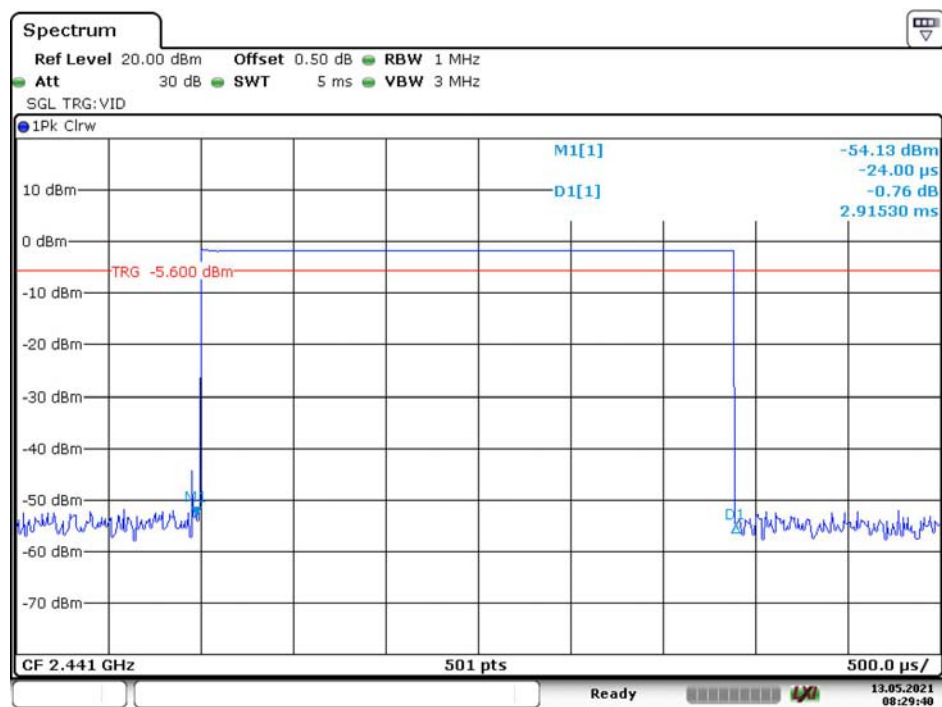


Date: 13.MAY.2021 08:29:41

EDR Mode ( $\pi/4$ -DQPSK):


### 2DH1: Middle Channel

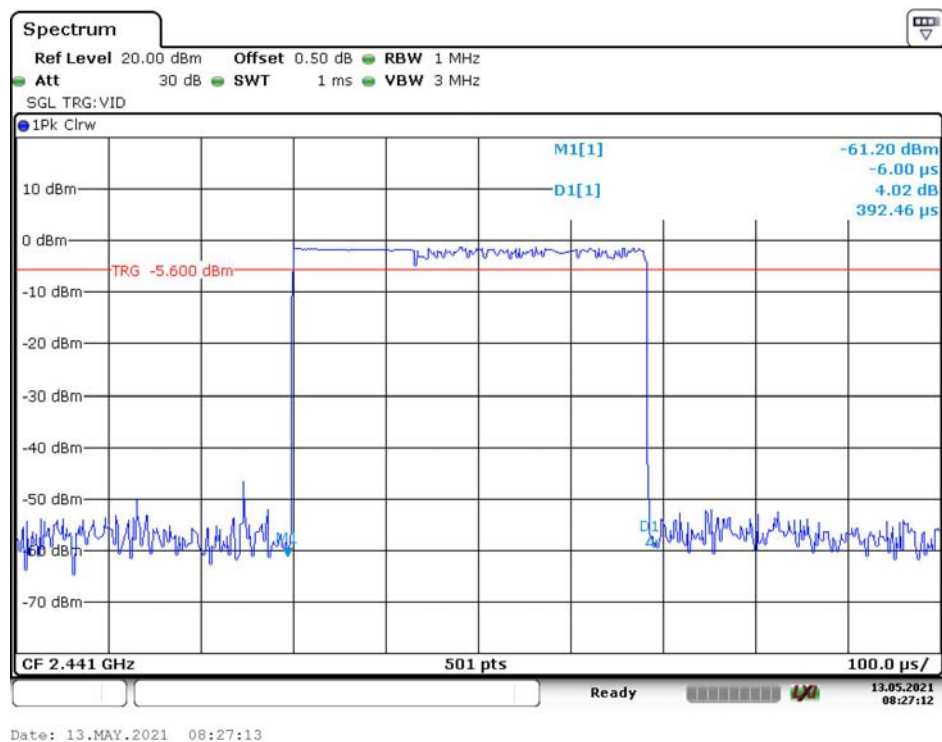

### 2DH3: Middle Channel

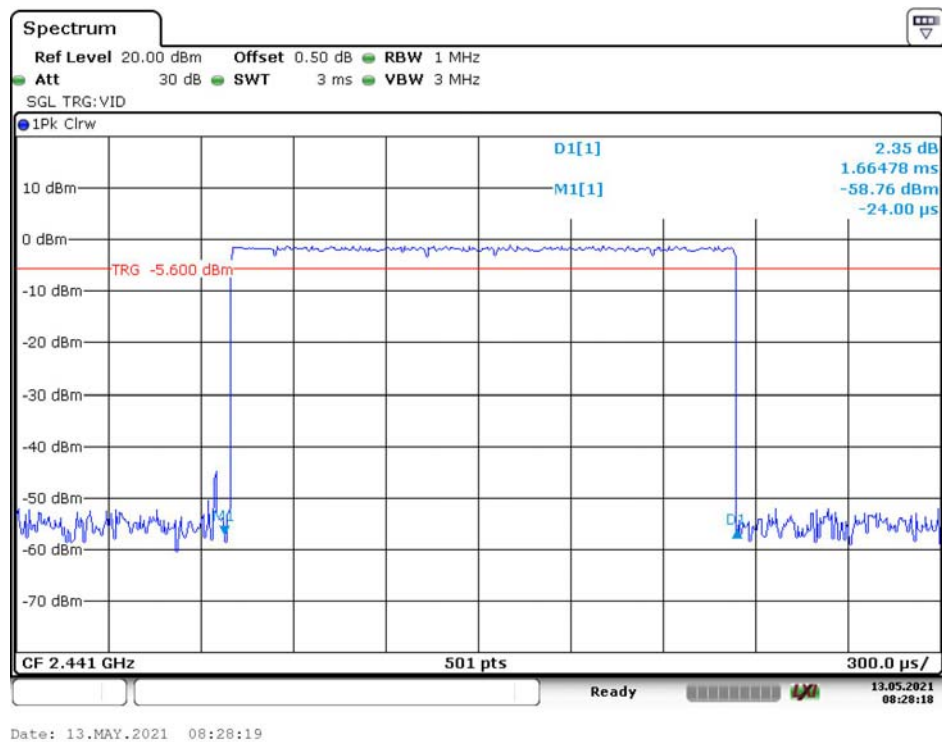

## 2DH5: Middle Channel

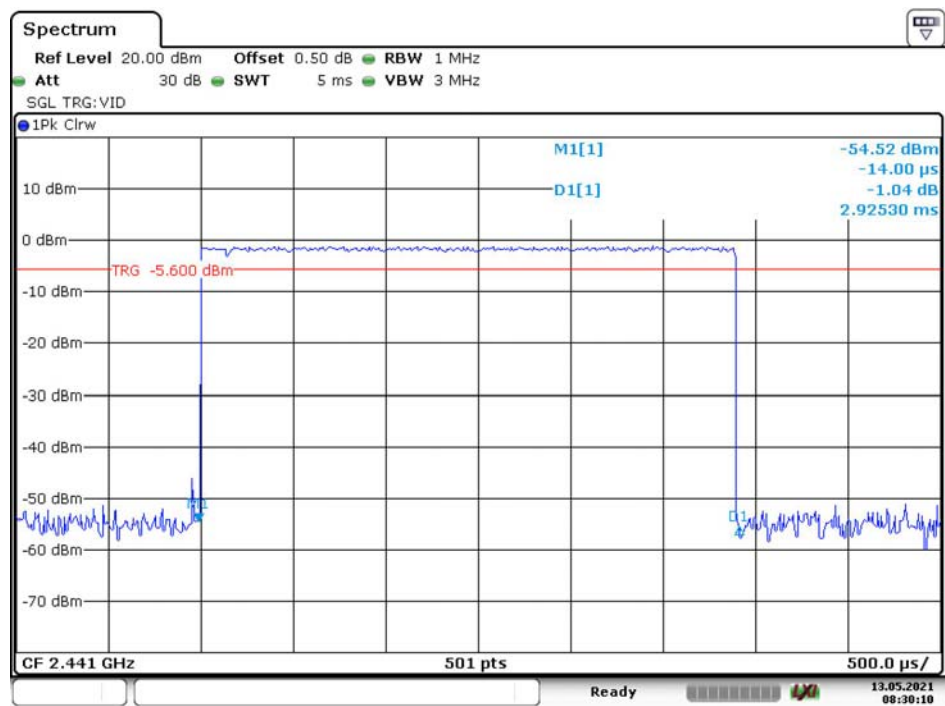

Date: 13.MAY.2021 08:30:11

## FCC §15.247(b) (1), RSS-247 Clause 5.4 b) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to FCC §15.247(b) (1)

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt.  
For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

According to RSS-247 Clause 5.4 b)

- b) For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

### Test Equipment List and Details

| Manufacturer | Description               | Model        | Serial Number | Calibration Date | Calibration Due Date |
|--------------|---------------------------|--------------|---------------|------------------|----------------------|
| Unknown      | Coaxial Cable             | C-SJ00-0010  | C0010/01      | Each time        | N/A                  |
| E-Microwave  | Coaxial Attenuators       | EMCA10-5RN-6 | OE01203239    | Each time        | N/A                  |
| Agilent      | USB Wideband Power Sensor | U2022XA      | MY5417006     | 2020-09-12       | 2021-09-12           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 28.4°C     |
| Relative Humidity: | 47%        |
| ATM Pressure:      | 100.3kPa   |
| Tester:            | Tiger Mo   |
| Test Date:         | 2021-05-13 |

**Test Result:** Compliance.

*Test Mode: Transmitting*

| Mode                       | Frequency (MHz) | Peak Conducted Output power (dBm) | Peak Conducted Output power Limit (dBm) | EIRP (dBm) | EIRP Limit For ISSED (dBm) |
|----------------------------|-----------------|-----------------------------------|---|------------|----------------------------|
| BDR Mode (GFSK)            | 2402            | 2.61                              | 21                                      | 2.03       | 36                         |
|                            | 2441            | -1.43                             | 21                                      | -2.01      | 36                         |
|                            | 2480            | -1.42                             | 21                                      | -2         | 36                         |
| EDR Mode ( $\pi/4$ -DQPSK) | 2402            | 2.61                              | 21                                      | 2.03       | 36                         |
|                            | 2441            | -1.59                             | 21                                      | -2.17      | 36                         |
|                            | 2480            | -1.58                             | 21                                      | -2.16      | 36                         |

Note: The data above was tested in conducted mode, the antenna gain is -0.58 dBi.

---

## FCC §15.247(d) & RSS-247 CLAUSE 5.5- BAND EDGES TESTING

---

### Applicable Standard

According to FCC §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



**Test Equipment List and Details**

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSV40       | 101591        | 2020-06-29       | 2021-06-28           |
| Unknown      | Coaxial Cable     | C-SJ00-0010 | C0010/01      | Each time        | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |            |
|---------------------------|------------|
| <b>Temperature:</b>       | 28.4°C     |
| <b>Relative Humidity:</b> | 47%        |
| <b>ATM Pressure:</b>      | 100.3kPa   |
| <b>Tester:</b>            | Tiger Mo   |
| <b>Test Date:</b>         | 2021-05-13 |

**Test Result:** Compliance

Single mode:


BDR Mode (GFSK):

### Band Edge, Left Side



Date: 13.MAY.2021 08:03:33

### Band Edge, Right Side

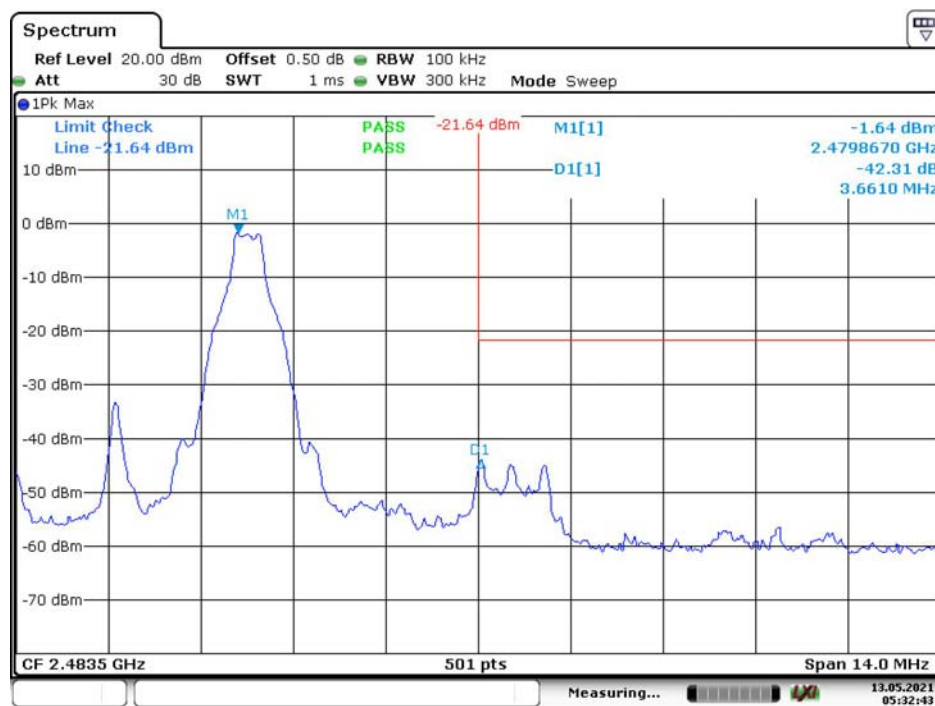

Date: 13.MAY.2021 09:32:43


EDR Mode ( $\pi/4$ -DQPSK):

### Band Edge, Left Side



Date: 13.MAY.2021 08:04:24

### Band Edge, Right Side

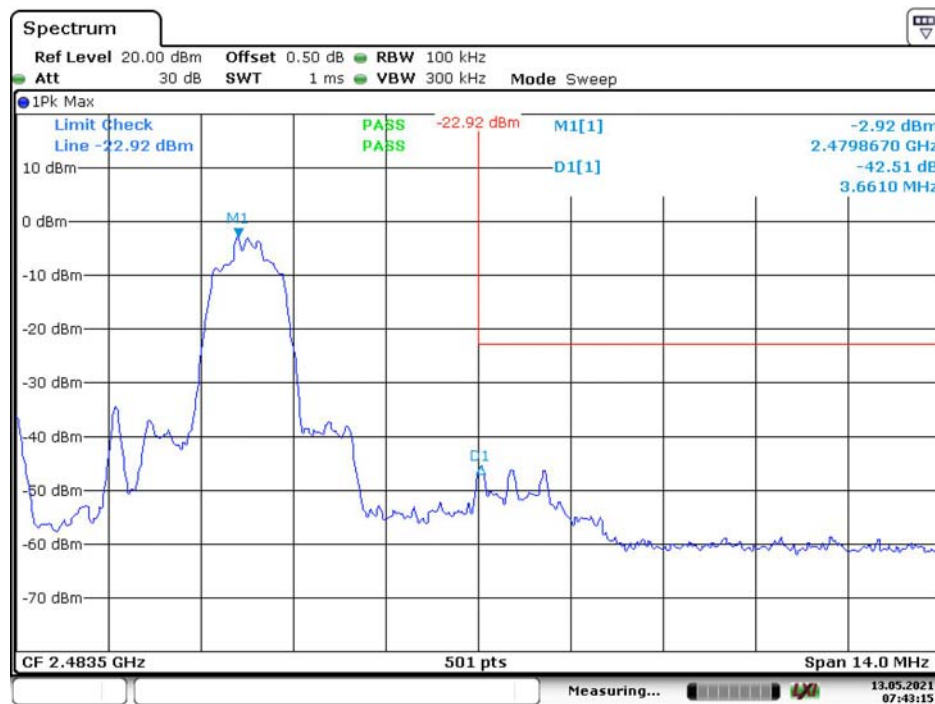


Date: 13.MAY.2021 07:43:15

Hopping mode:


BDR Mode (GFSK):

### Band Edge, Left Side

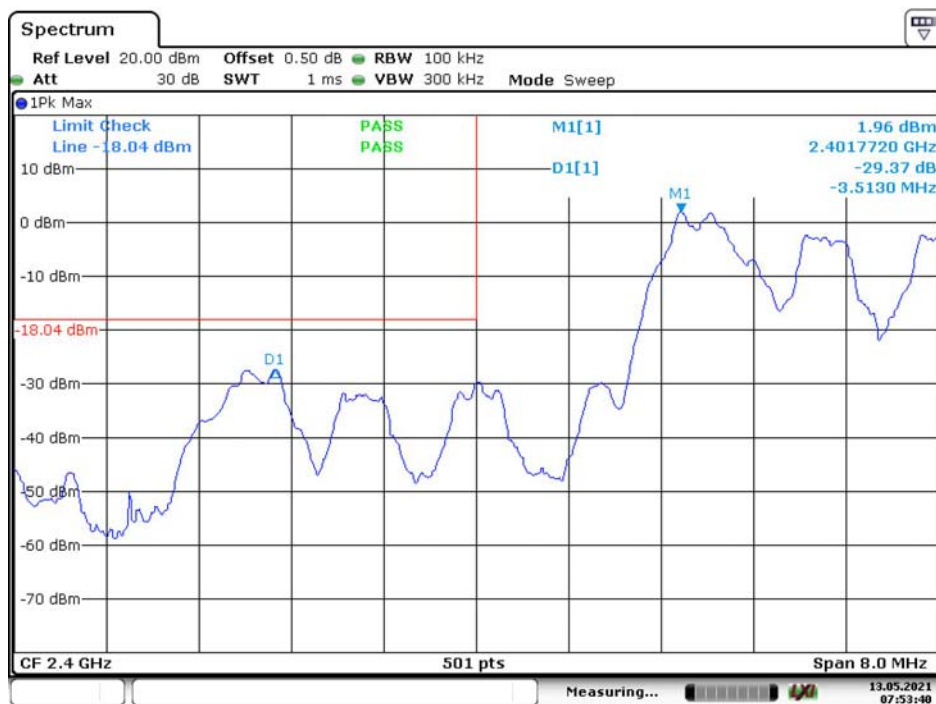

Date: 13.MAY.2021 07:53:40

### Band Edge, Right Side

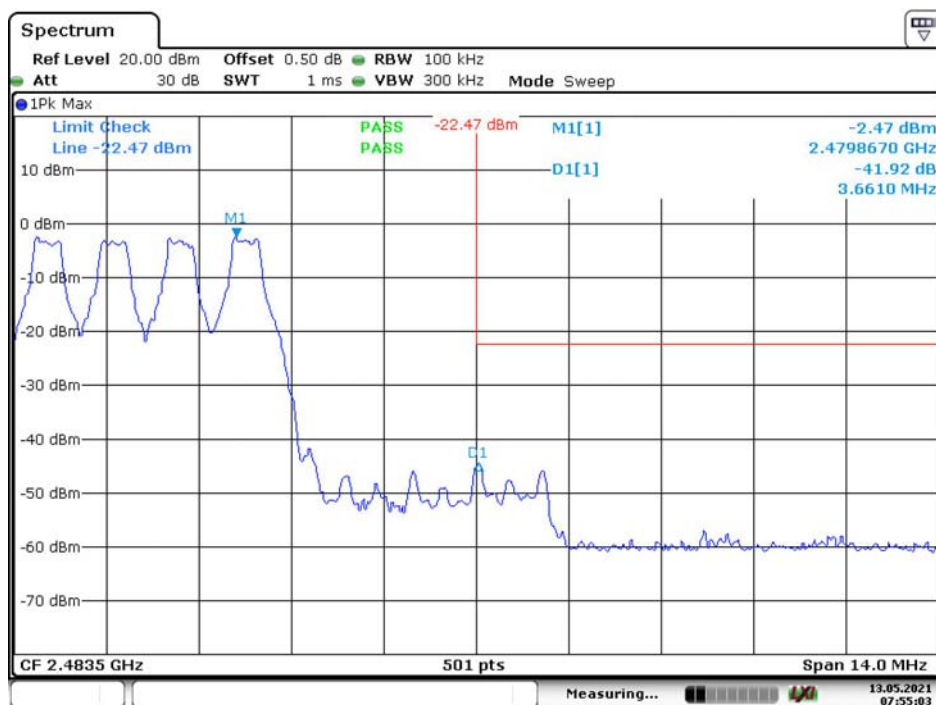

Date: 13.MAY.2021 07:55:03


EDR Mode ( $\pi/4$ -DQPSK):

### Band Edge, Left Side



Date: 13.MAY.2021 07:56:18

### Band Edge, Right Side

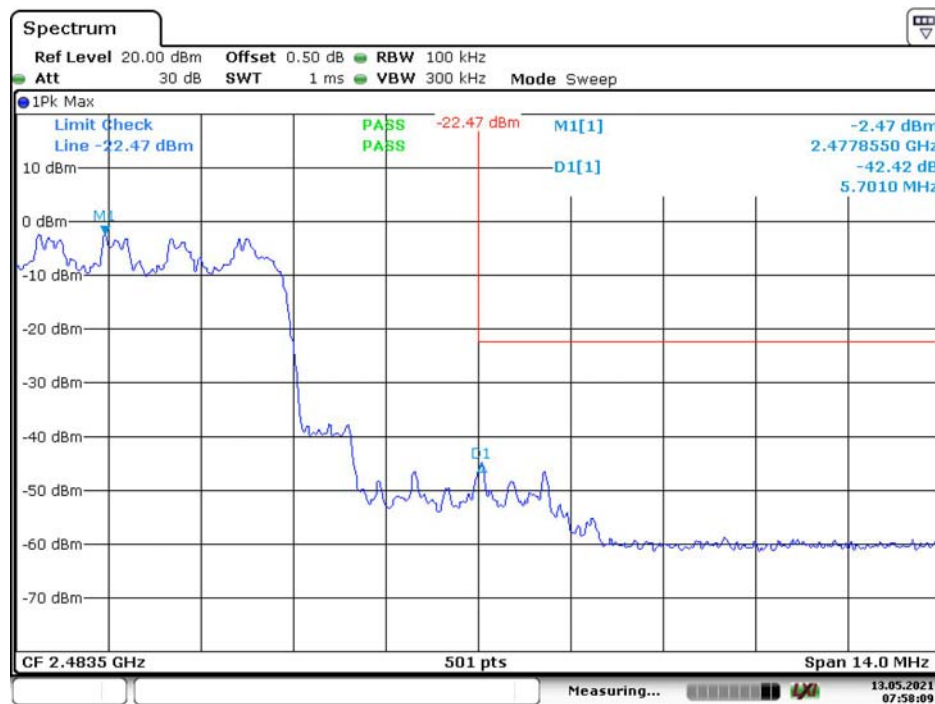

Date: 13.MAY.2021 07:58:09

\*\*\*\*\* END OF REPORT \*\*\*\*\*