



ISRAEL TESTING LABORATORIES
Global Certifications You Can Trust



DATE: 27 December 2016

I.T.L. (PRODUCT TESTING) LTD.
FCC Radio Test Report
for
Corning Optical Communication Wireless
Equipment under test:
ONE - Optical Network Evolution DAS

RAU-5 Remote Antenna Unit

AWS, CELL/ESMR, LTE, PCS
(CELL/ESMR Section)

Tested by:


M. Zohar

Approved by:


D. Shidlowsky

This report must not be reproduced, except in full, without the written
permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



ISRAEL TESTING LABORATORIES
Global Certifications You Can Trust



Measurement/Technical Report for Corning Optical Communication Wireless ONE - Optical Network Evolution DAS

FCC ID: OJF1RAU5

This report concerns:

Original Grant:

Class II change: X

Class I change:

Equipment type:

Part 20 Industrial Booster (CMRS)

Limits used:

47CFR Parts 2, 22, 20, 90

Measurement procedure used is KDB 971168 D03 v01 and
KDB 935210 D05 v01r01.

Substitution Method used as in ANSI/TIA-603-D: 2010

Application for Certification
prepared by:

R. Pinchuck
ITL (Product Testing) Ltd.
1 Bat Sheva St.
Lod 7120101
Israel
e-mail rpinchuck@itl.co.il

Applicant for this device:
(different from "prepared by")

Habib Riazi
Corning Optical Communication Wireless
13221 Woodland Park Rd., Suite #400
Herndon, VA. 20171
U.S.A.
Tel: +1-541-758-2880
Fax: +1-703-848-0260
e-mail: RiaziH@corning.com



TABLE OF CONTENTS

1.	GENERAL INFORMATION	5
1.1	Administrative Information	5
1.2	List of Accreditations	6
1.3	Product Description	7
1.4	Test Methodology	7
1.5	Test Facility	7
1.6	Measurement Uncertainty	7
2.	SYSTEM TEST CONFIGURATION	8
2.1	Justification	8
2.2	EUT Exercise Software	8
2.3	Special Accessories	8
2.4	Equipment Modifications	8
2.5	Configuration of Tested System	9
3.	TEST SET-UP PHOTOS	11
4.	PEAK OUTPUT POWER CELL	15
4.1	Test Specification	15
4.2	Test Procedure	15
4.3	Test Limit	15
4.4	Test Results	15
4.5	Test Equipment Used; Peak Output Power CELL	21
5.	OCCUPIED BANDWIDTH CELL	22
5.1	Test Specification	22
5.2	Test Procedure	22
5.3	Test Limit	22
5.4	Test Results	22
5.5	Test Equipment Used; Occupied Bandwidth CELL	32
6.	SPURIOUS EMISSIONS AT ANTENNA TERMINALS CELL	33
6.1	Test Specification	33
6.2	Test Procedure	33
6.3	Test Limit	33
6.4	Test Results	33
6.5	Test Equipment Used; Out of Band Emission at Antenna Terminals CELL	37
7.	BAND EDGE SPECTRUM CELL	38
7.1	Test Specification	38
7.2	Test Procedure	38
7.3	Test Limit	38
7.4	Test Results	38
7.5	Test Equipment Used; Band Edge Spectrum CELL	42
8.	SPURIOUS EMISSIONS (RADIATED) CELL	43
8.1	Test Specification	43
8.2	Test Procedure	43
8.3	Test Limit	44
8.4	Test Results	44
8.5	Test Instrumentation Used, Radiated Measurements CELL	45
9.	PEAK OUTPUT POWER (ESMR)	46
9.1	Test Specification	46
9.2	Test Procedure	46
9.3	Test Results	46
9.4	Test Equipment Used; Peak Power (ESMR)	51



10. OCCUPIED BANDWIDTH (ESMR)	52
10.1 Test Specification	52
10.2 Test Procedure	52
10.3 Test Limit	52
10.4 Test Results	52
10.5 Test Equipment Used; Occupied Bandwidth (ESMR)	59
11. SPURIOUS EMISSIONS AT ANTENNA TERMINALS (ESMR)	60
11.1 Test Specification	60
11.2 Test Procedure	60
11.3 Test Limit	60
11.4 Test Results	60
11.5 Test Equipment Used; Spurious Emissions at Antenna Terminals (ESMR)	64
12. BAND EDGE SPECTRUM ESMR	65
12.1 Test Specification	65
12.2 Test Procedure	65
12.3 Test Limit	65
12.4 Test Results	65
12.5 Test Equipment Used; Band Edge Spectrum ESMR	69
13. SPURIOUS EMISSIONS (RADIATED) (ESMR)	70
13.1 Test Specification	70
13.2 Test Procedure	70
13.3 Test Results	71
13.4 Test Equipment Used; Spurious Emissions (Radiated) (ESMR)	72
14. INTERMODULATION CONDUCTED	73
14.1 Test Procedure	73
14.2 Test Limit	73
14.3 Test Results	73
14.4 Test Equipment Used; Intermodulation Conducted	74
15. INTERMODULATION RADIATED	75
15.1 Test Procedure	75
15.2 Test Limit	76
15.3 Test Results	76
15.4 Test Instrumentation Used; Radiated Measurements Intermodulation	78
16. OUT-OF-BAND REJECTION (CELL&ESMR)	79
16.1 Test Specification	79
16.2 Test Procedure	79
16.3 Test Limit	79
16.4 Test Results	79
16.5 Test Equipment Used; Out-of-Band Rejection	80
17. APPENDIX A - CORRECTION FACTORS	81
17.1 Correction factors for RF OATS Cable 35m	81
17.2 Correction factors for RF OATS Cable 10m	82
17.3 Correction factors for Horn Antenna	83
17.4 Correction factors for Horn ANTENNA	84
17.5 Correction factors for Log Periodic Antenna	85
17.6 Correction factors for Biconical Antenna	86
17.7 Correction factors for ACTIVE LOOP ANTENNA	87



1. General Information

1.1 Administrative Information

Manufacturer:	Corning Optical Communication Wireless
Manufacturer's Address:	13221 Woodland Park Rd., Suite #400 Herndon, VA. 20171 U.S.A. Tel: +1-541-758-2880 Fax: +1-703-848-0260
Manufacturer's Representative:	Habib Riazi
Equipment Under Test (E.U.T):	ONE - Optical Network Evolution DAS
Equipment Model No.:	RAU-5 Remote Antenna Unit
Equipment Serial No.:	05144900098
Date of Receipt of E.U.T:	July 13, 2016
Start of Test:	July 13, 2016
End of Test:	September 15, 2016
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St, Lod, Israel 7116002
Test Specifications:	FCC Parts 2, 22, 20,90



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by/registered with the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation Number IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-3006, R-2729, T-1877, G-245.
5. Industry Canada (Canada), IC File No.: 46405-4025; Site No. IC 4025A-1, IC 4025A-2.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

1.3 Product Description

The Optical Network Platform (ONE™) by Corning provides a flexible in-building RF and network digital coverage solution based on a fiber optic transport backbone.

The fiber-optics infrastructure is easily deployable via a wide range of pre-terminated composite cables and advanced end-to-end equipment. Easy to design, Plug and Play™ connectors, significantly reduce installation cost and deployment time.

The ONE™ solution is an ideal fit for large, high-rise or campus-style deployments. It generates significant CAPEX savings and OPEX savings through the use of user configurable sectorization and an infrastructure that is simple to deploy and efficient in usage.

Dynamic sectorization management allows precise service distribution control to meet changing density needs, and provides further savings by enabling sharing of equipment at various levels for service providers.

Radio source agnostic, remote units can be used as network extenders. Ethernet capability with dedicated fiber link for Wi-Fi offload brings a higher level of granularity and support for devices and applications with very high speed requirements.

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in KDB 971168 D03 v01, KDB 935210 D05 v01r01 and ANSI/TIA-603-D: 2010. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

Both conducted and radiated emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

1.6 Measurement Uncertainty

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)

0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.44 dB

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4) for open site 30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.98 dB



2. System Test Configuration

2.1 *Justification*

The E.U.T. was originally FCC certified on 12/26/2014 under FCC ID: OJF1RAU5.

The E.U.T. is part of a booster system operated with the RXU certified under FCC ID: OJF1RXU.

No changes have been made to the E.U.T.

The C2PC change is to allow the E.U.T. to operate as part of a booster system with the new RXU2325 certified under FCC ID: OJF1RXUN.

The E.U.T. has been fully tested with the RXU2325 and results presented in the four reports (for bands AWS, CELL/ESMR, PCS & LTE) submitted with this application.

The test setup was configured to closely resemble the standard installation.

The EUT consists of the HEU, the OIU and the RAU-5.

All source signals are represented in the setup by appropriate signal generators.

An "Exercise" SW on the computer was used to enable / disable transmission of the RAU-5, while the EUT output was connected to the spectrum analyzer.

All channels transmitted during the testing.

There is neither an intermediate amplified nor donor antenna in the uplink.

All components included in the UL path are connected by cables.

2.2 *EUT Exercise Software*

HCM_2.2 Build23

ACM_2a00_22_11.bin

RMM_5a00_22_02. bin

OIM_7a03_22_05. bin

RAU5_9a64_22_12.bin

2.3 *Special Accessories*

No special accessories were needed in order to achieve compliance.

2.4 *Equipment Modifications*

No modifications were needed in order to achieve compliance.

2.5 Configuration of Tested System

Product Name	ONE - Wireless Platform
Model Name	RAU-5
Working voltage	48.0VDC
Mode of operation	Industrial Booster for CELL/ESMR band
Modulations	WCDMA, LTE(64QAM), GSM
Assigned Frequency Range	CELL: 869MHz-894MHz ESMR:862MHZ-869MHz
Transmit power	~15.0 dBm
Antenna Gain	12.5dBi
DATA rate	N/A
Modulation BW	CELL: 0.5MHz(GSM), 10MHz(LTE), 5MHz(WCDMA) ESMR: 0.5MHz(GSM), 5MHz(LTE), 5MHz(WCDMA)

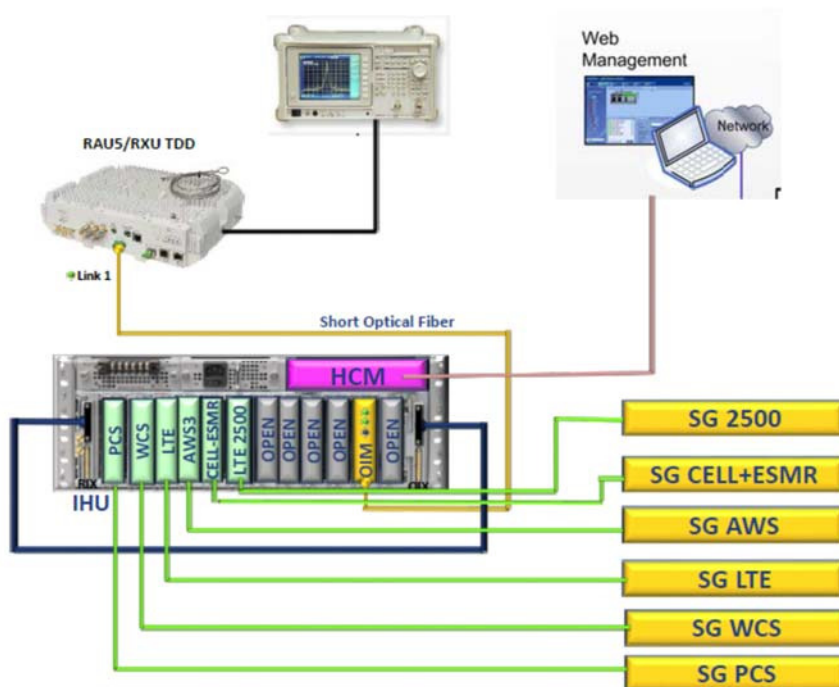


Figure 1. Test Set-Up Conducted

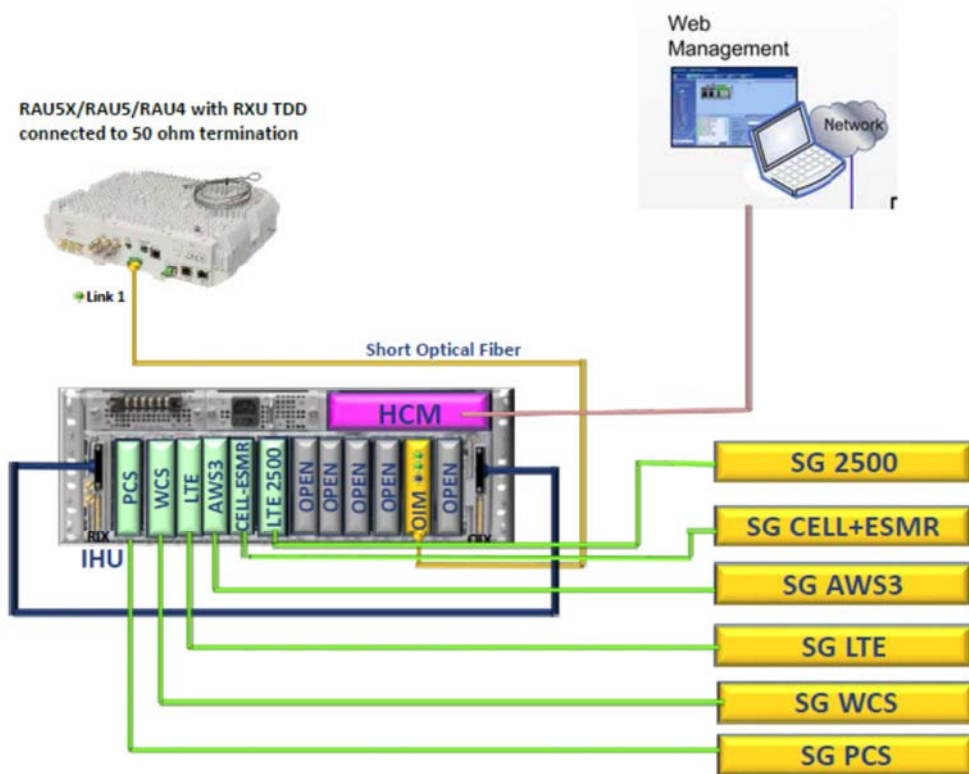


Figure 2. Test Set-Up Radiated

3. Test Set-Up Photos



Figure 3. Conducted Emission From Antenna Port Test



Figure 4. Radiated Emission Test



Figure 5. Radiated Emission Test

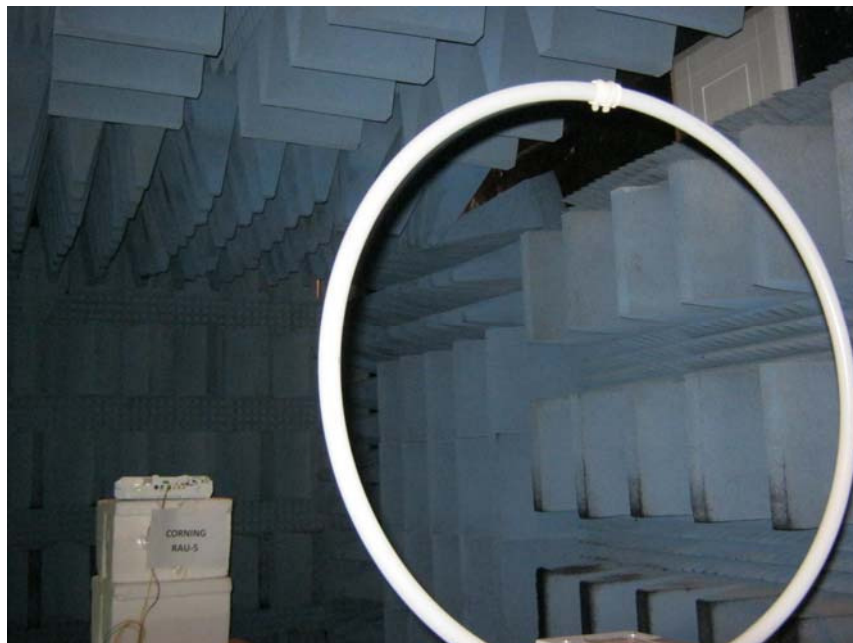


Figure 6. Radiated Emission Test



Figure 7. Radiated Emission Test

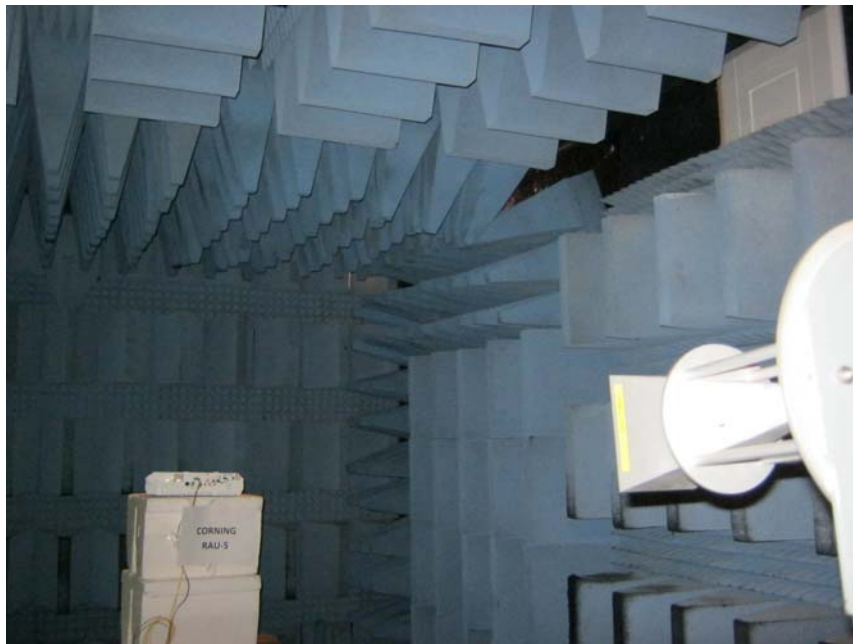


Figure 8. Radiated Emission Test

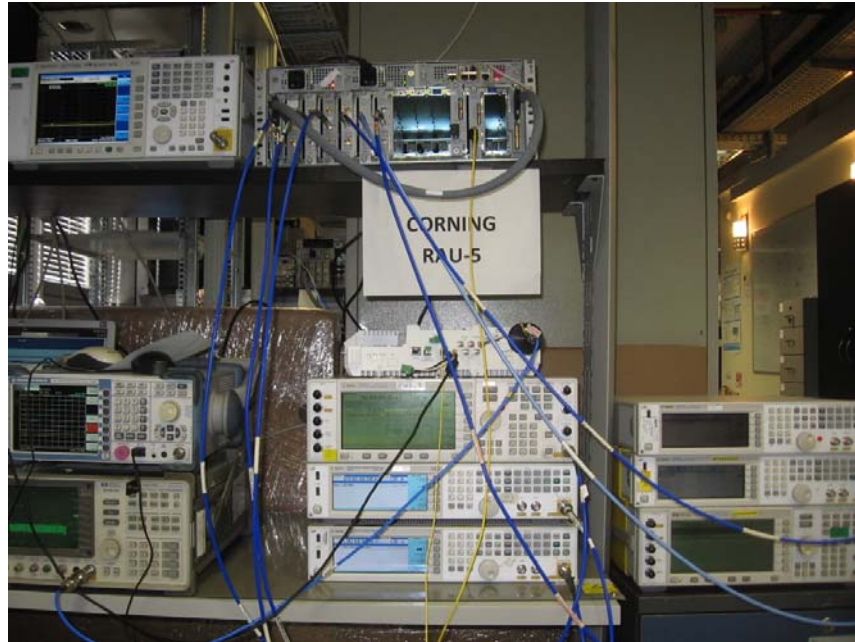


Figure 9. Intermodulated Conducted

4. Peak Output Power CELL

4.1 Test Specification

FCC Part 22.913

4.2 Test Procedure

(Temperature (22°C)/ Humidity (35%RH))

The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable (loss = 31.0 dB). The E.U.T. RF output was modulated with W-CDMA, GSM and LTE 64QAM. Special attention was taken to prevent Spectrum Analyzer RF input overload.

4.3 Test Limit

Peak Power Output must not exceed 500 Watts (57dBm).

4.4 Test Results

Modulation	Operation Frequency	Reading	Antenna Gain	EIRP	Limit	Margin
	(MHz)	(dBm)	(dBi)	(dBm)	(dBm)	(dB)
LTE 64QAM	874.0	16.6	12.5	29.1	57.00	-27.9
	881.0	16.5	12.5	29.0	57.00	-28.0
	889.0	16.8	12.5	29.3	57.00	-27.7
GSM	870.2	16.3	12.5	28.8	57.00	-28.2
	881.0	16.5	12.5	29.0	57.00	-28.0
	892.8	16.8	12.5	29.3	57.00	-27.7
W-CDMA	871.5	16.7	12.5	29.2	57.00	-27.8
	881.0	16.4	12.5	28.9	57.00	-28.1
	891.5	15.9	12.5	28.4	57.00	-28.6

Figure 10 Peak Output Power CELL

JUDGEMENT: Passed by 27.7 dB

See additional information in *Figure 11 to Figure 19*.

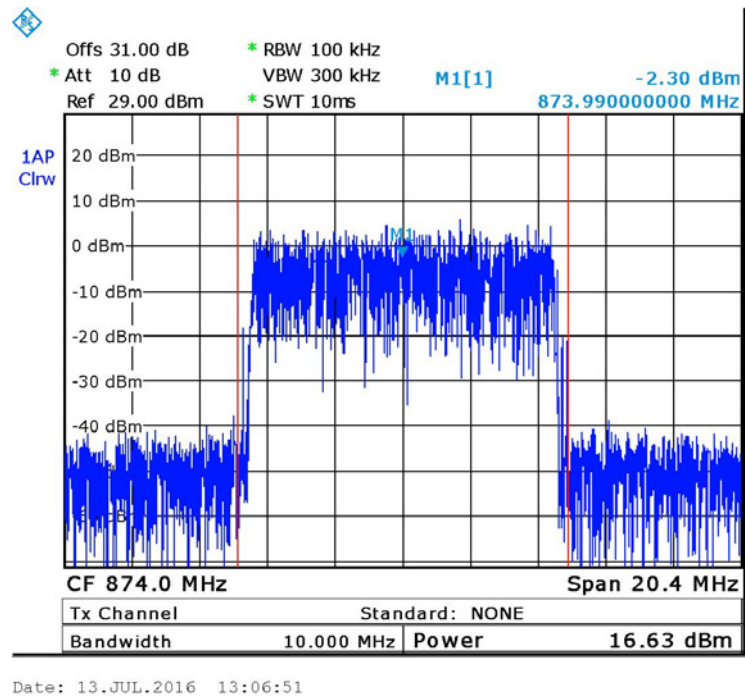


Figure 11. — LTE 64QAM - 874.0 MHz

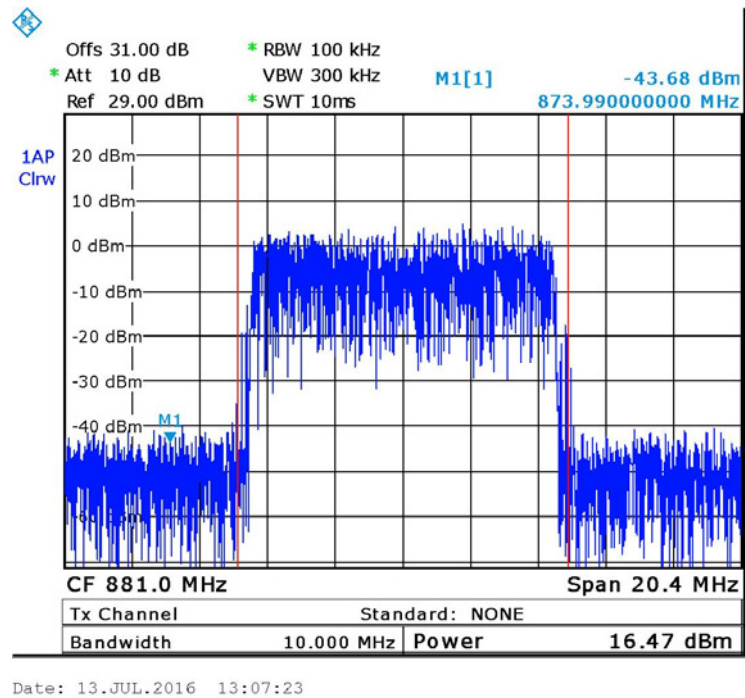


Figure 12. — LTE 64QAM - 881.0 MHz

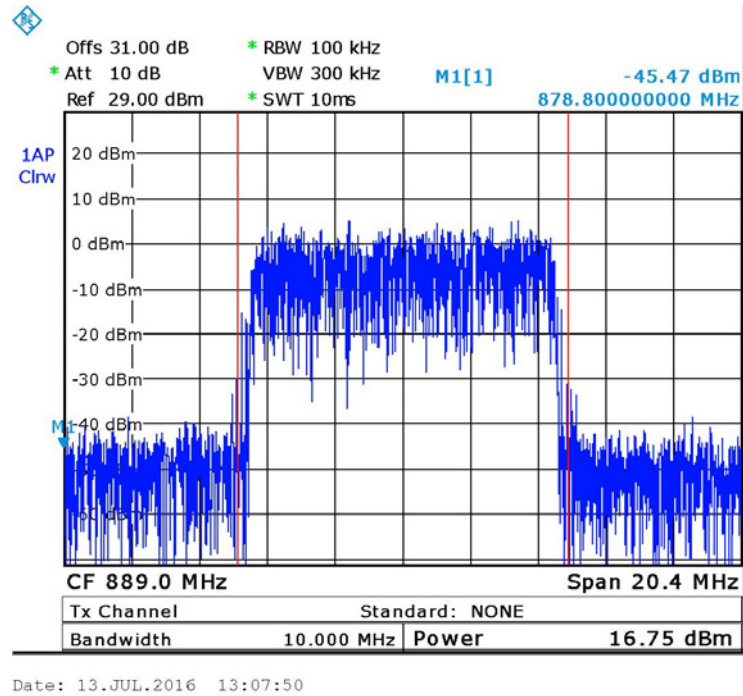


Figure 13. — LTE 64QAM - 889.0 MHz

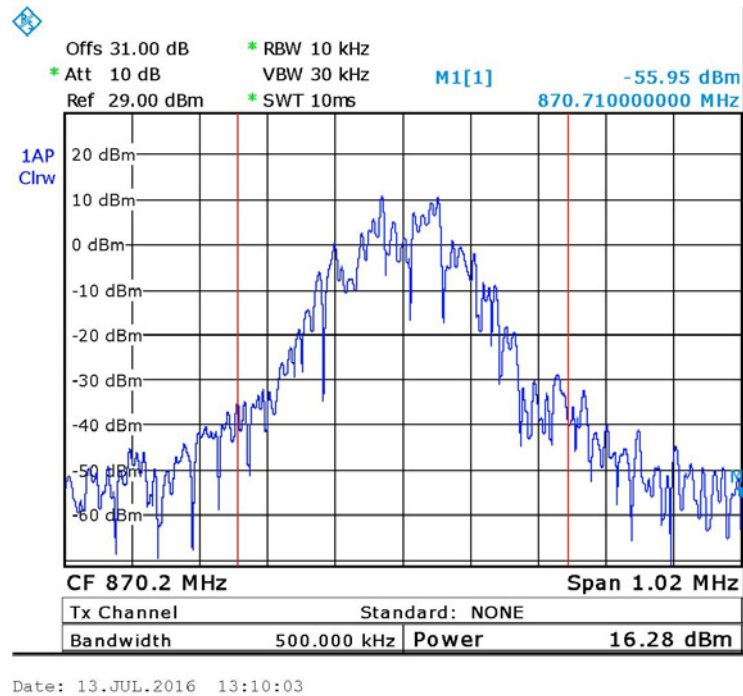


Figure 14. — GSM - 870.2 MHz

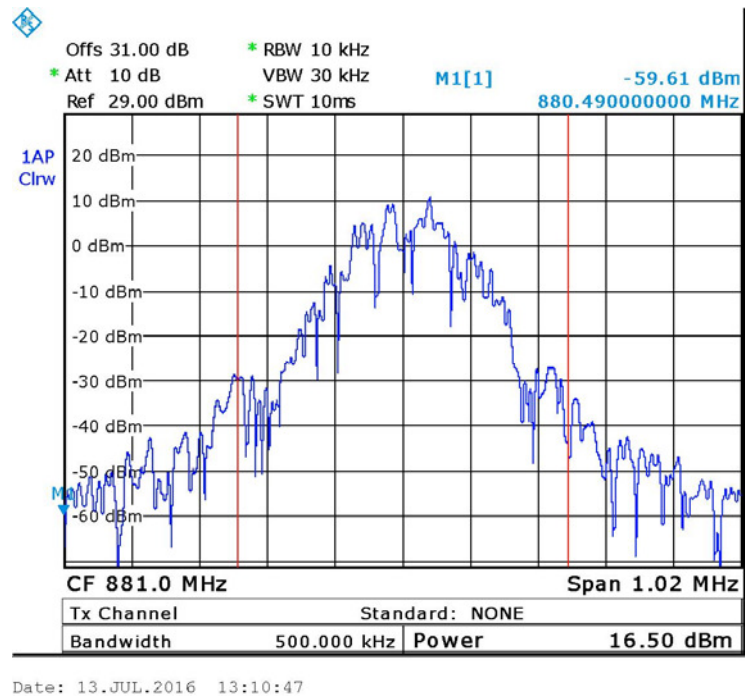


Figure 15. — GSM - 881.0 MHz

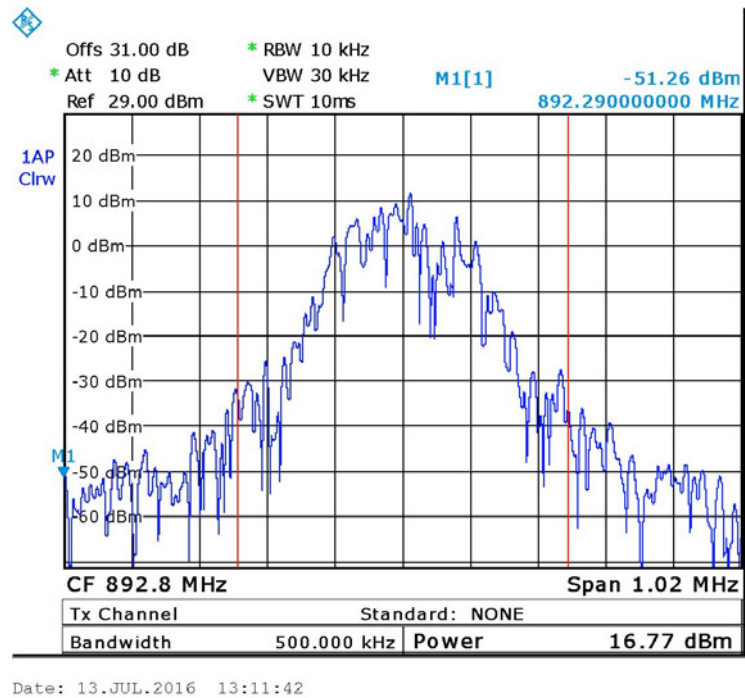


Figure 16. — GSM - 892.8 MHz

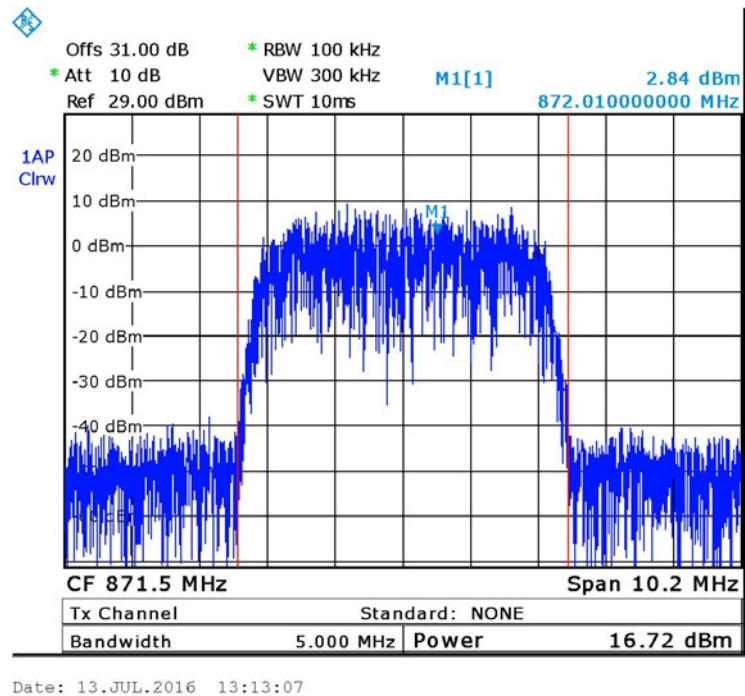


Figure 17. — W-CDMA - 871.5 MHz


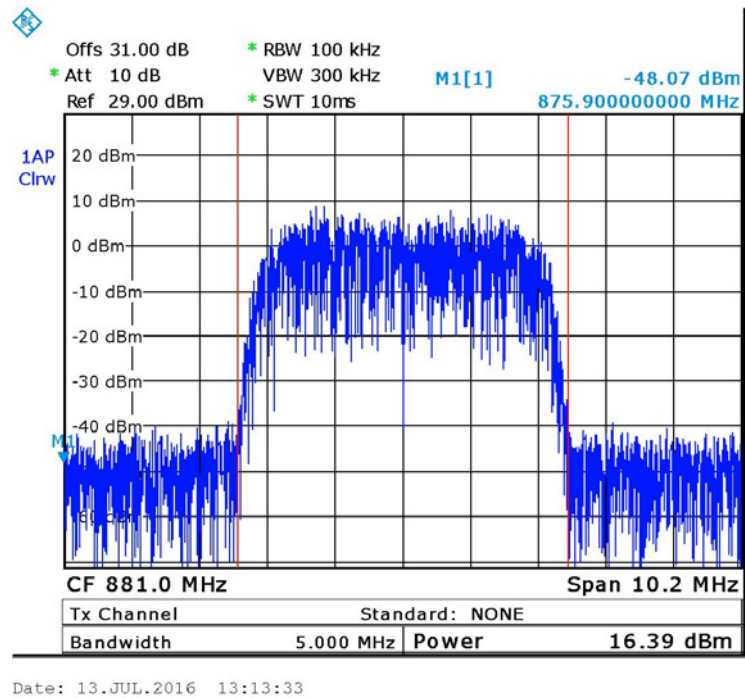


Figure 18. — W-CDMA - 881.0 MHz



Date: 13.JUL.2016 13:14:29

Figure 19. — W-CDMA - 891.5 MHz

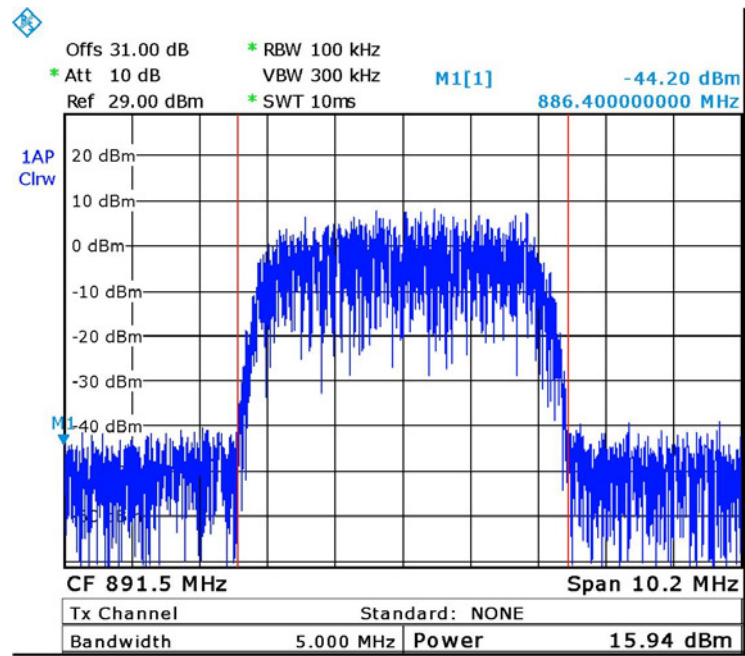

4.5 Test Equipment Used; Peak Output Power CELL

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
Spectrum Analyzer	R&S	FSL6	100194	February 29, 2016	March 1, 2017
Vector Signal Generator	Agilent	N5172B	MY51350584	July 1, 2016	July 1, 2017
30 dB Attenuator	MCL	BW-S30W5	533	July 5, 2016	July 5, 2017

Figure 20 Test Equipment Used

5. Occupied Bandwidth CELL

5.1 Test Specification

FCC Part 2, Section 1049

5.2 Test Procedure

(Temperature (22°C)/ Humidity (35%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (loss=31.0 dB). The spectrum analyzer was set to proper resolution B.W.

OBW function (99%) was employed for this evaluation. Occupied bandwidth measured was repeated in the input terminal of the E.U.T.

5.3 Test Limit

N/A

5.4 Test Results

Modulation	Port	Operating Frequency	Reading
	(Input/ Output)	(MHz)	(MHz)
LTE 64QAM	Input	874.0	8.9
	Output	874.0	8.9
	Input	881.0	8.9
	Output	881.0	9.0
	Input	889.0	8.9
	Output	889.0	8.9
GSM	Input	870.2	0.2
	Output	870.2	0.2
	Input	881.0	0.2
	Output	881.0	0.2
	Input	892.8	0.2
	Output	892.8	0.2
W-CDMA	Input	871.5	4.1
	Output	871.5	4.1
	Input	881.0	4.1
	Output	881.0	4.2
	Input	891.5	4.1
	Output	891.5	4.1

Figure 21 Occupied Bandwidth CELL

JUDGEMENT: Passed

See additional information in *Figure 22* to *Figure 39*.

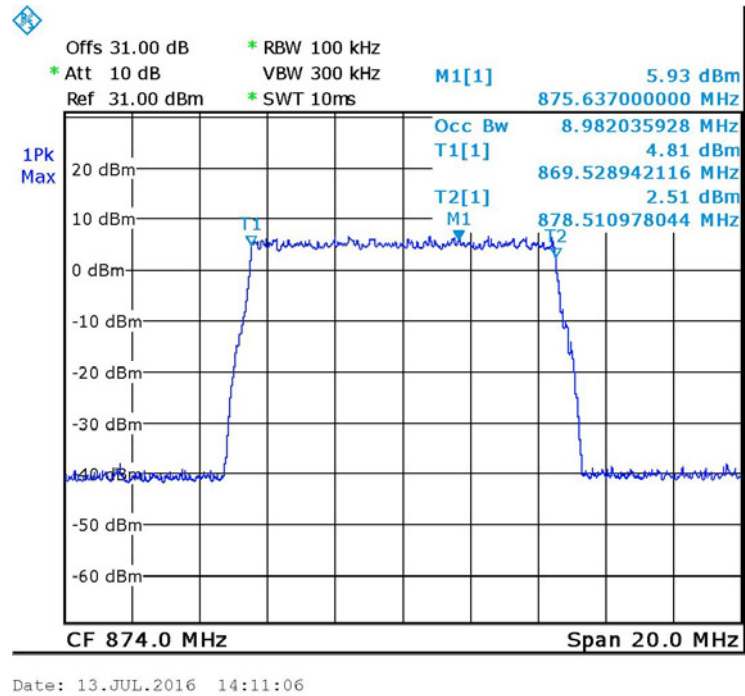


Figure 22. — LTE 64QAM Input 874.0MHz

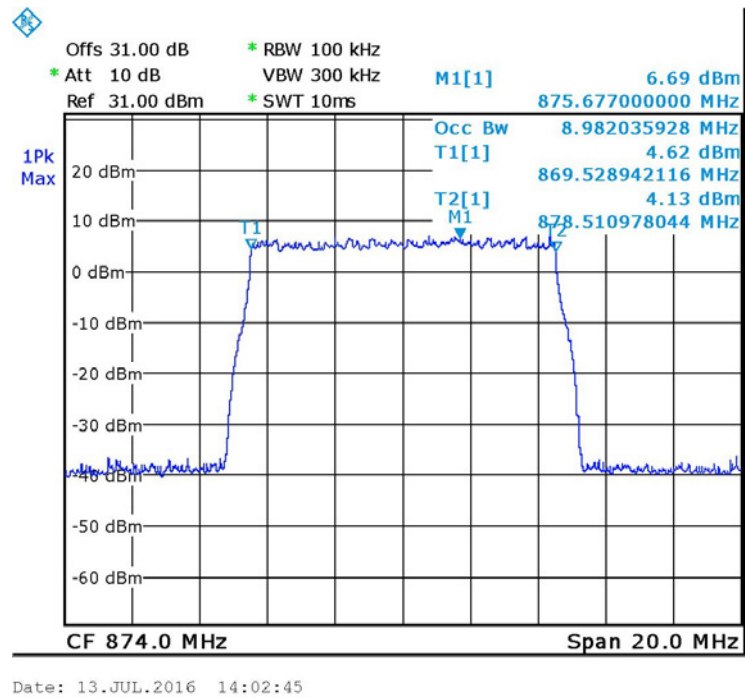


Figure 23. — LTE 64QAM Output 874.0MHz

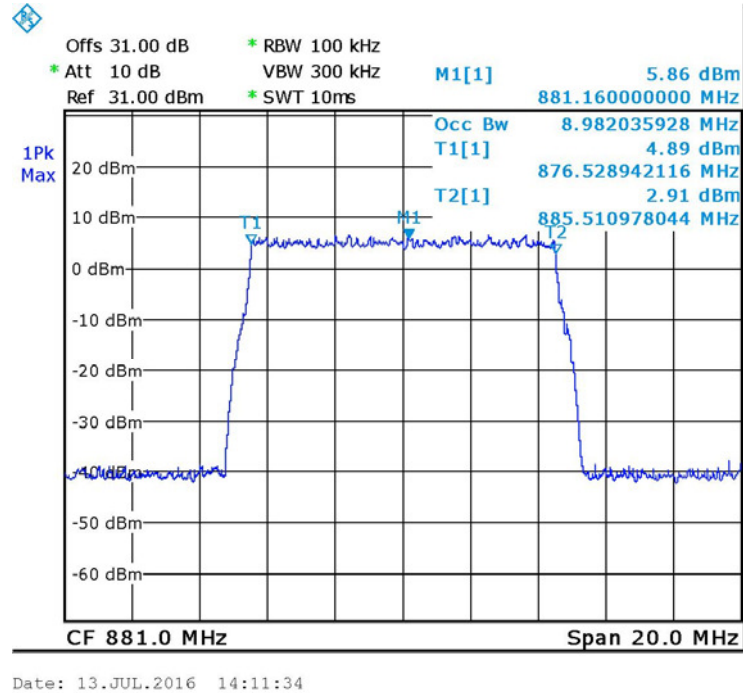


Figure 24. — LTE 64QAM Input 881.0 MHz

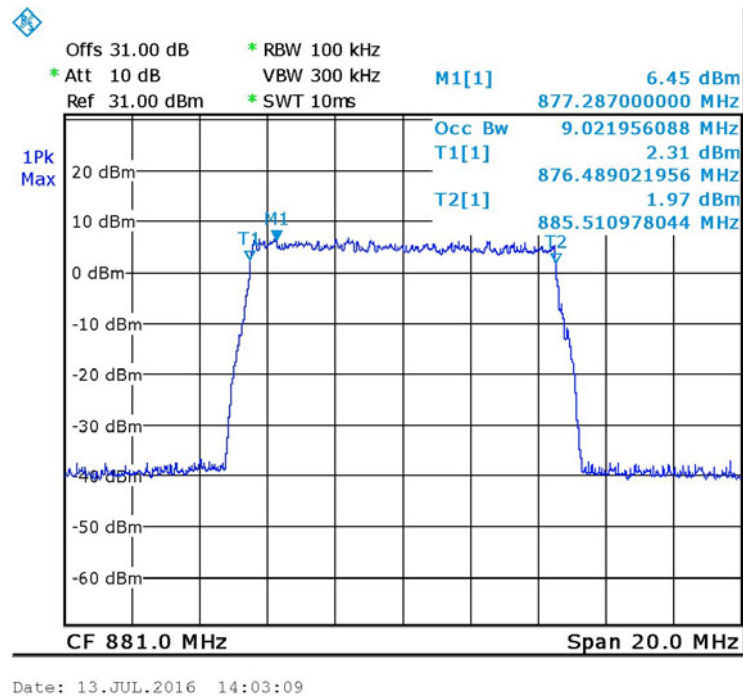


Figure 25. — LTE 64QAM Output 881.0MHz

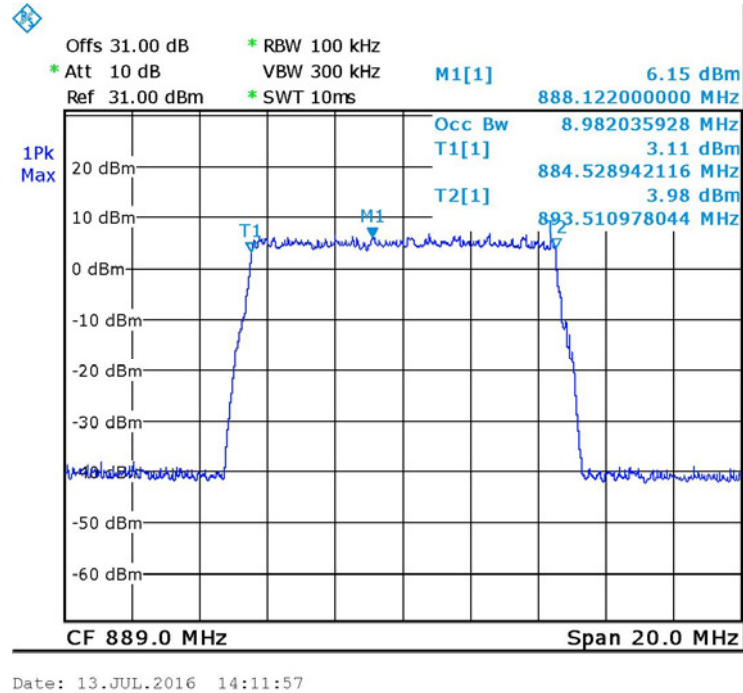


Figure 26. — LTE 64QAM Input 889.00 MHz

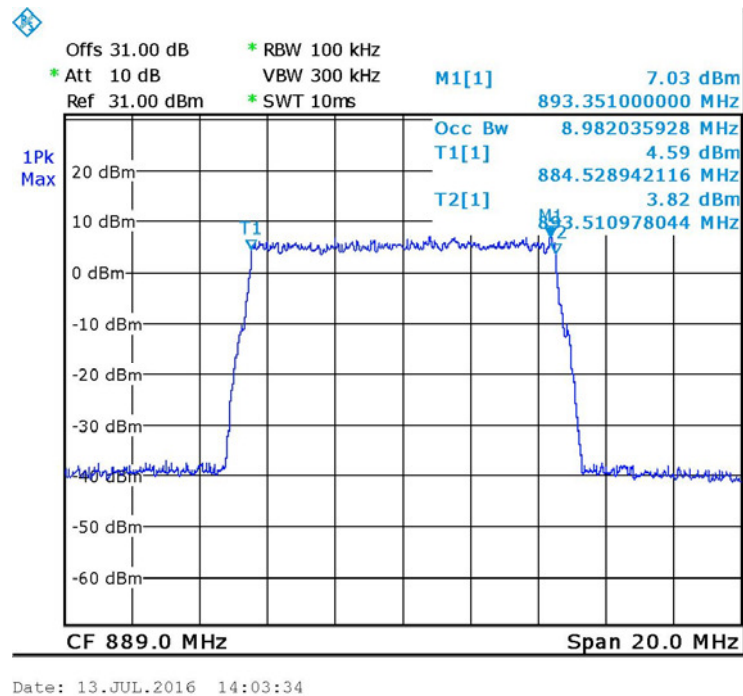


Figure 27. — LTE 64QAM Output 889.0 MHz

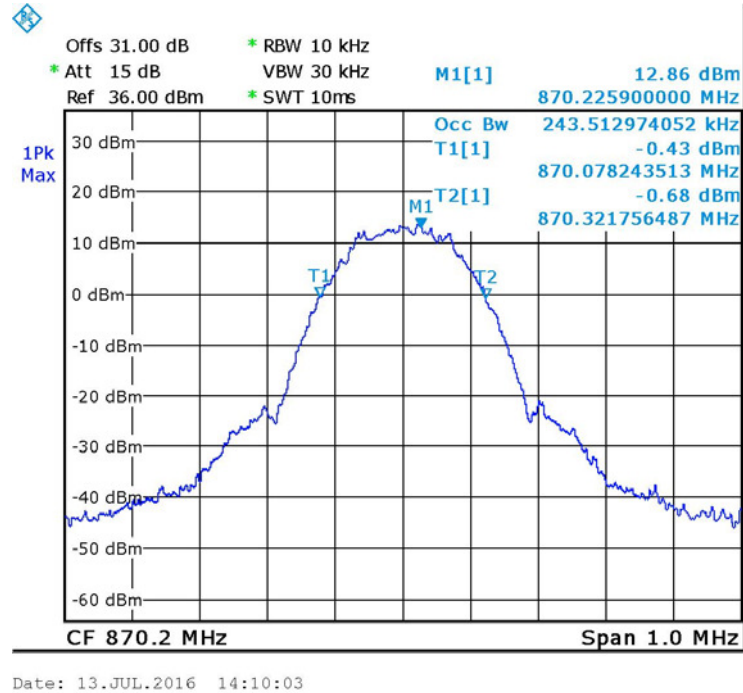


Figure 28. — GSM - Input 870.2MHz

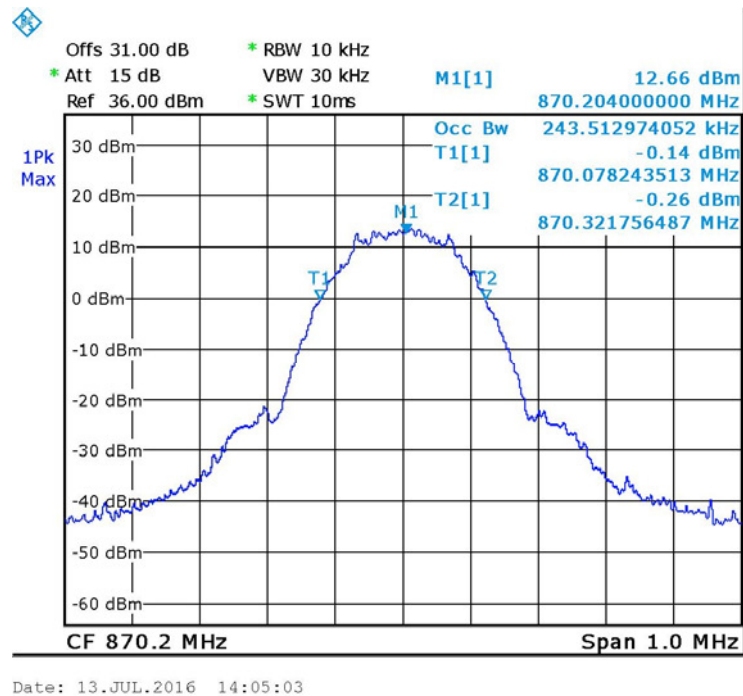


Figure 29. — GSM - Output 870.2MHz

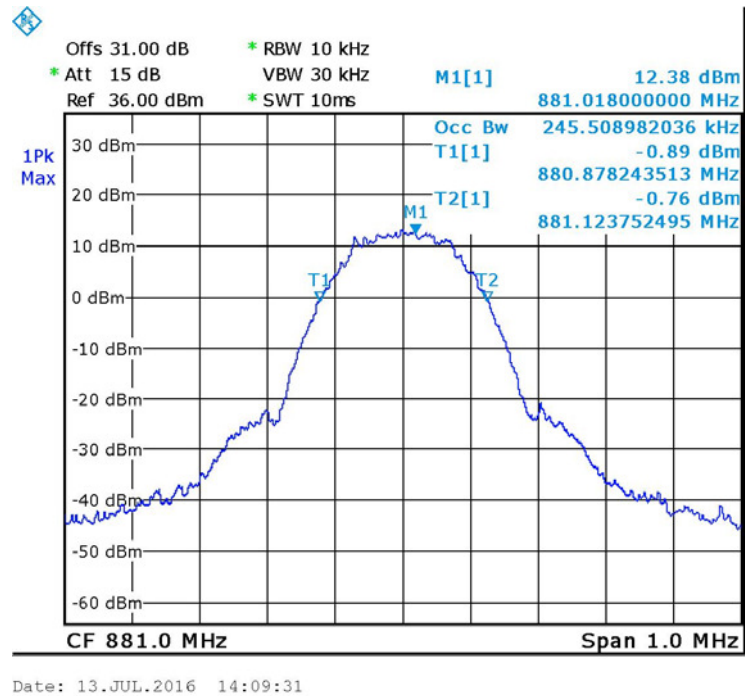


Figure 30. — GSM - Input 881.0 MHz

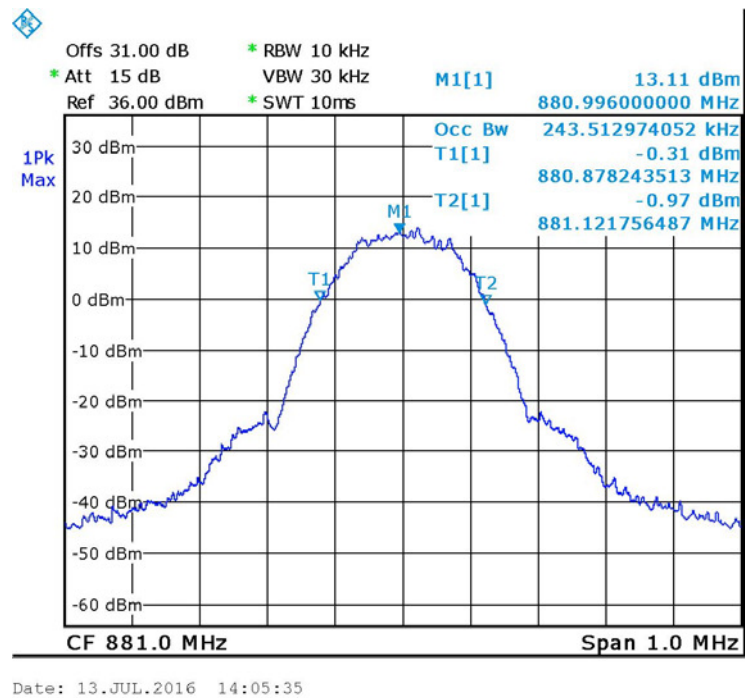


Figure 31. — GSM - Output 881.0MHz

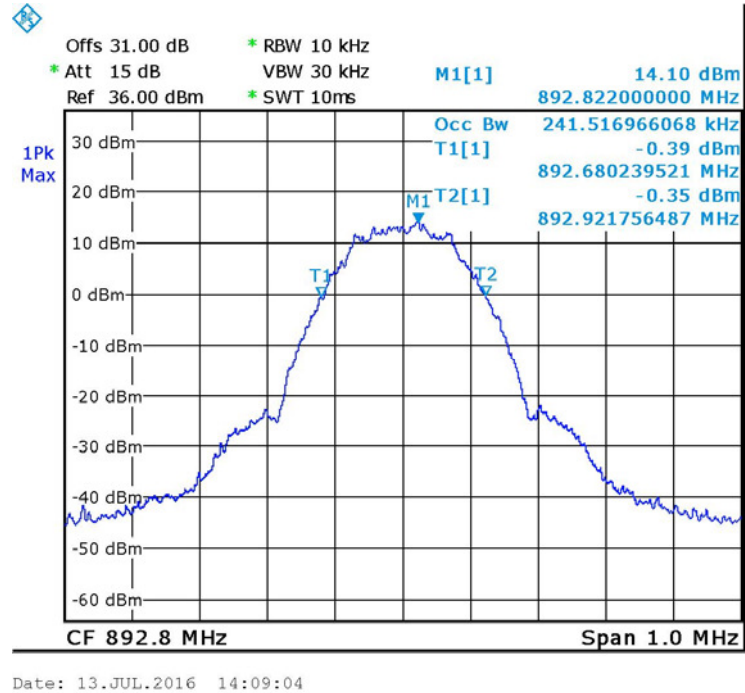


Figure 32. — GSM - Input 892.8 MHz

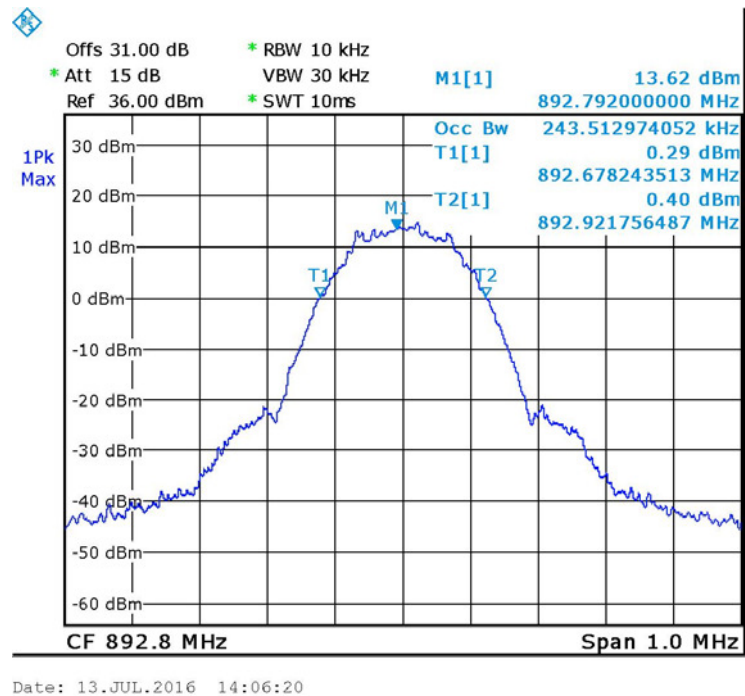


Figure 33. — GSM - Output 892.8 MHz

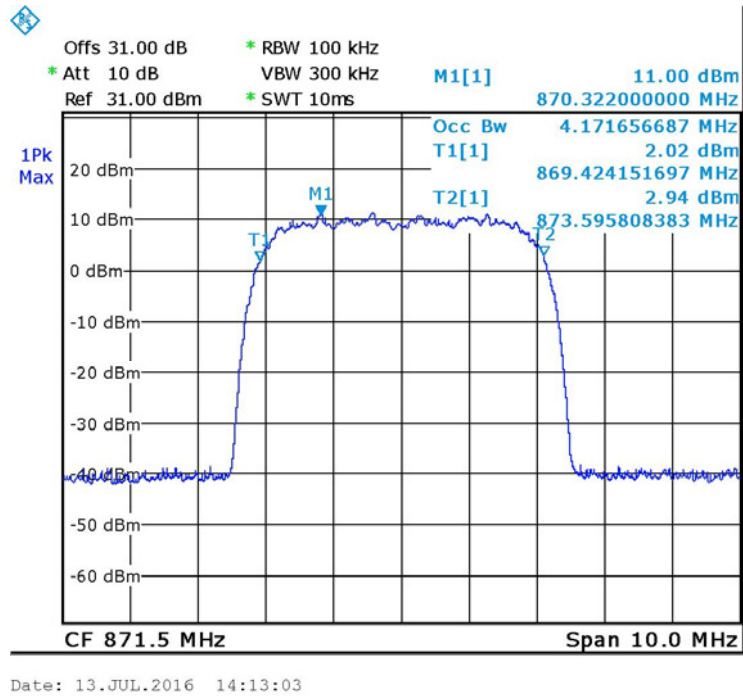


Figure 34. — W-CDMA - Input 871.5MHz

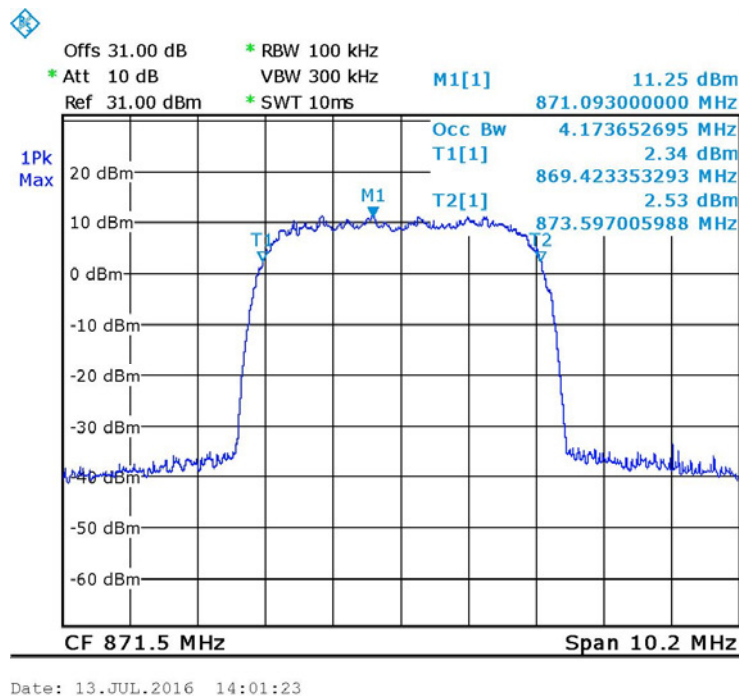


Figure 35. — W-CDMA - Output 871.5MHz

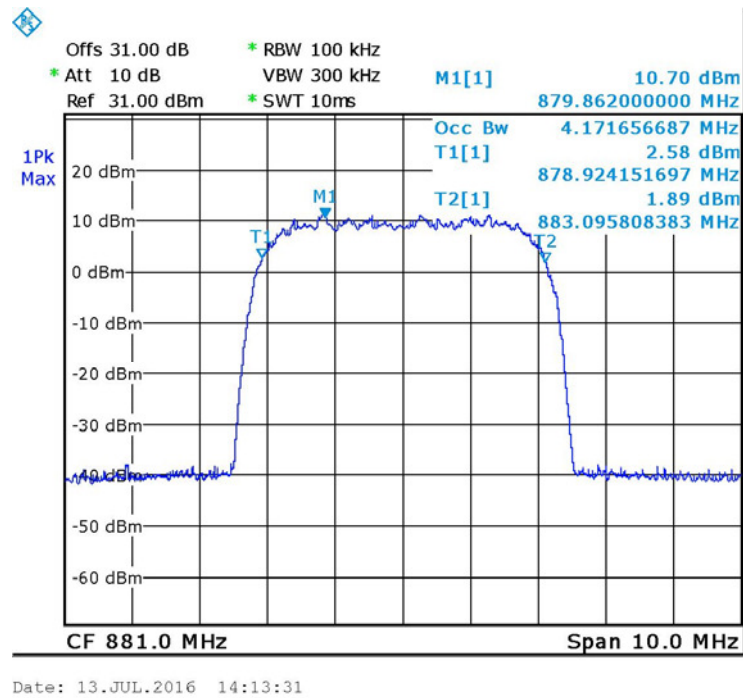


Figure 36. — W-CDMA - Input 881.0 MHz

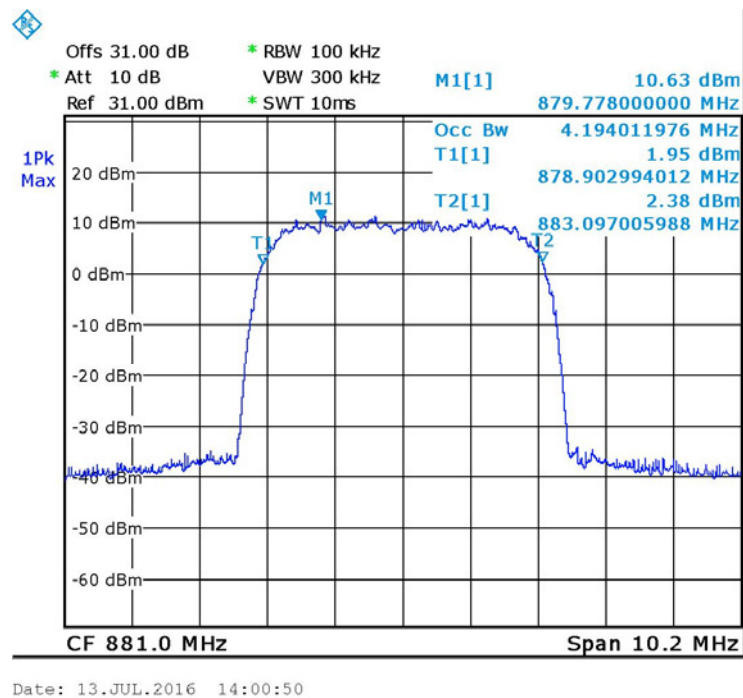


Figure 37. — W-CDMA - Output 881.0MHz

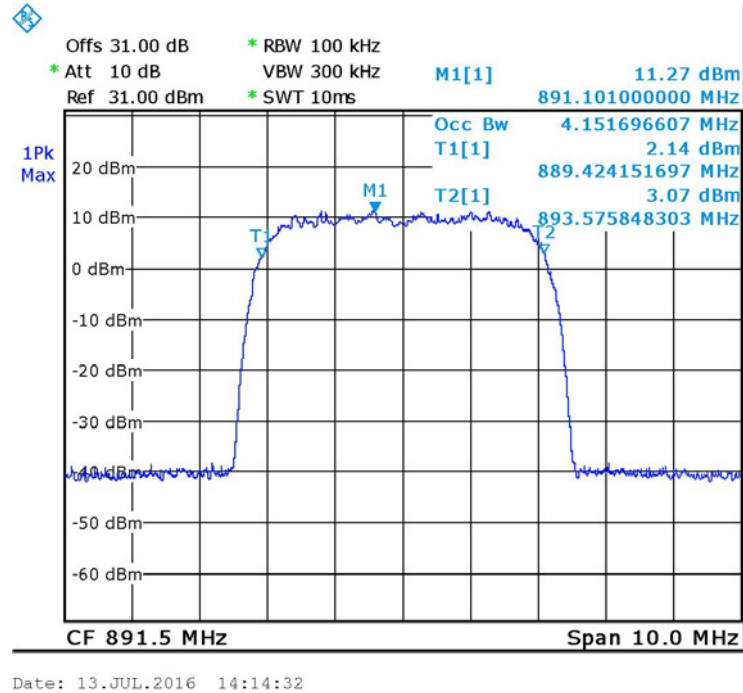


Figure 38. — W-CDMA - Input 891.5 MHz

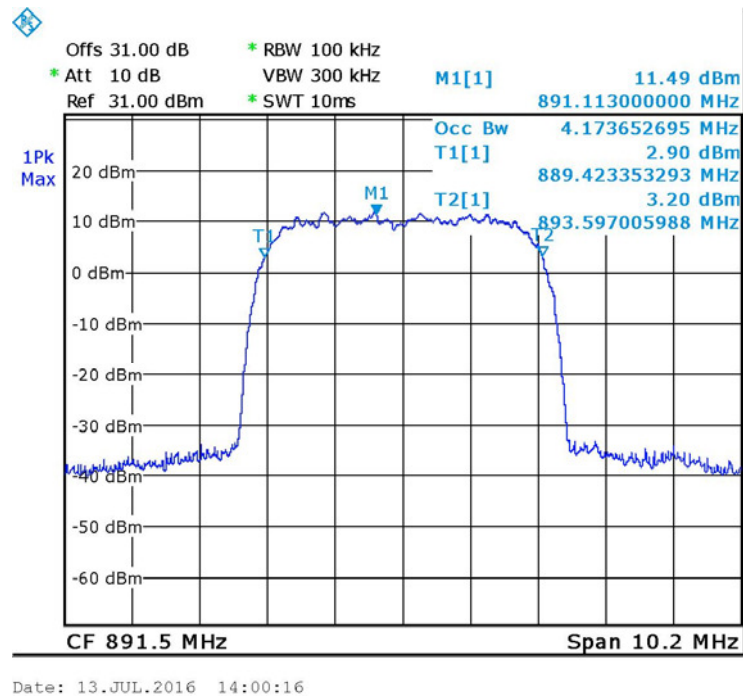


Figure 39. — W-CDMA - Output 891.5 MHz



5.5 Test Equipment Used; Occupied Bandwidth CELL

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
Spectrum Analyzer	R&S	FSL6	100194	February 29, 2016	March 1, 2017
Vector Signal Generator	Agilent	N5172B	MY51350584	July 1, 2016	July 1, 2017
30 dB Attenuator	MCL	BW-S30W5	533	July 5, 2016	July 5, 2017

Figure 40 Test Equipment Used



6. Spurious Emissions at Antenna Terminals CELL

6.1 Test Specification

FCC Part 22, Section 917; FCC Part 2.1051

6.2 Test Procedure

(Temperature (25°C)/ Humidity (35%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (max loss=31.5dB).

The spectrum analyzer was set to 1 kHz R.B.W for the frequency range of 9 kHz – 1 MHz, 100 kHz for the frequency range of 1 – 30 MHz, and 1 MHz for the frequency range of 30 MHz – 10 GHz.

6.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges(869 - 894 MHz) must be attenuated below the transmitting power (P) by a factor of at least $43 + \log (P)$ dB, yielding -13dBm.

6.4 Test Results

JUDGEMENT: Passed

See additional information in *Figure 41* to *Figure 49*.

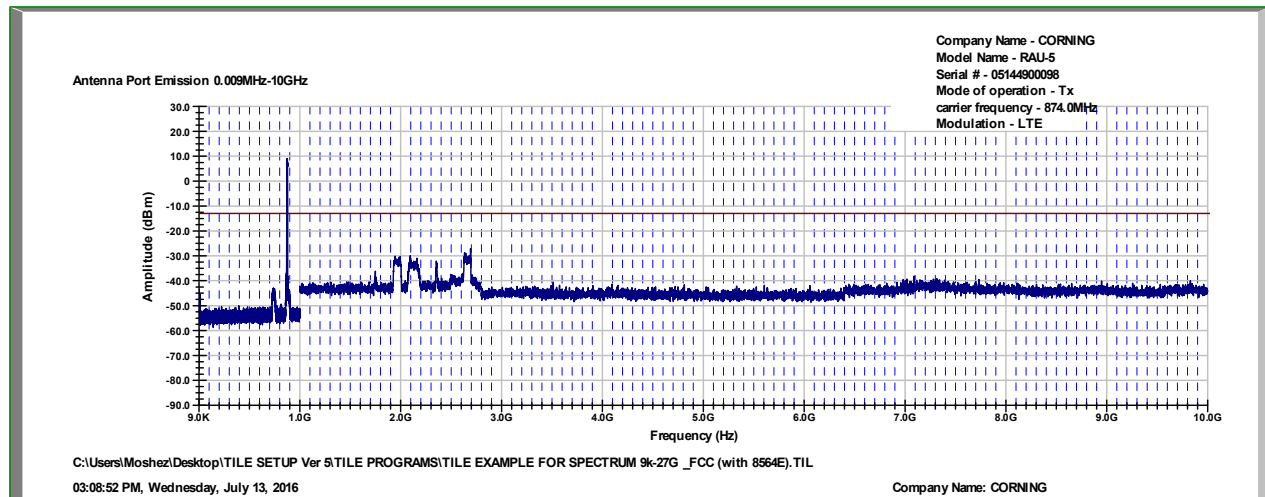


Figure 41. — LTE 64QAM - 874.0 MHz

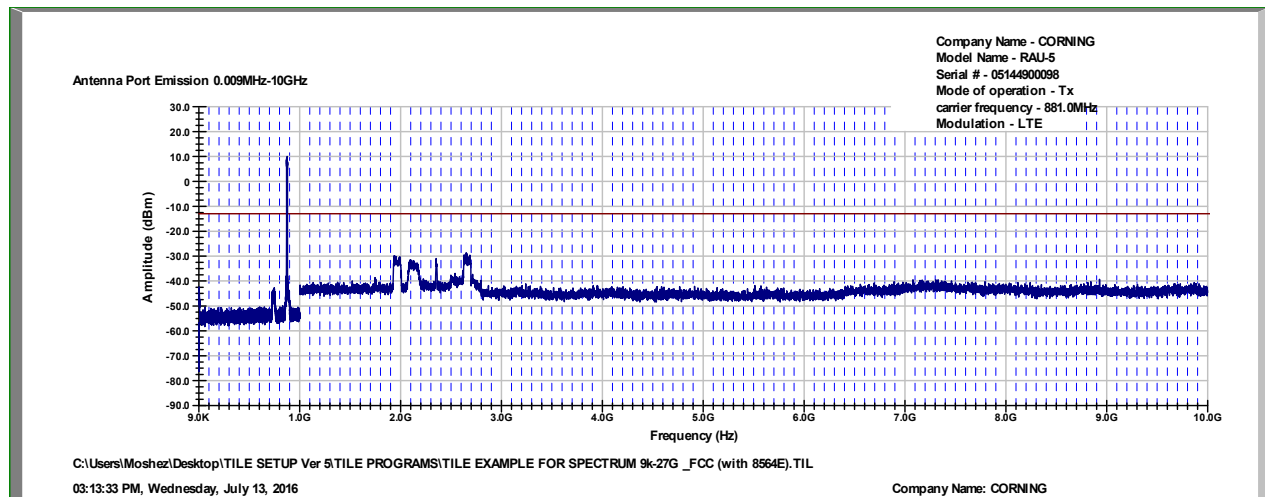


Figure 42. — LTE 64QAM - 881.0 MHz

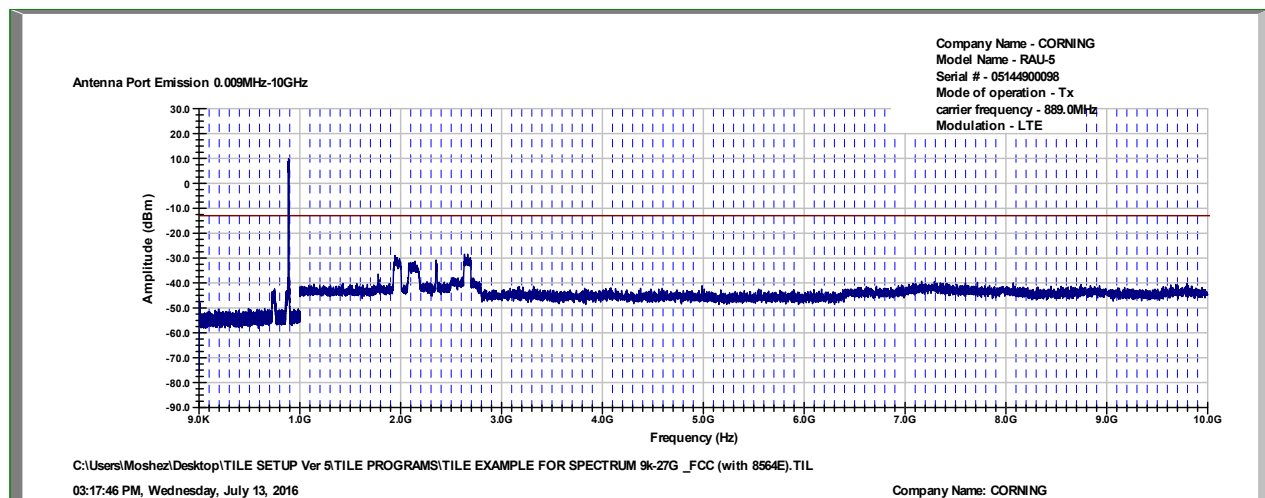


Figure 43. — LTE 64QAM - 889.0 MHz

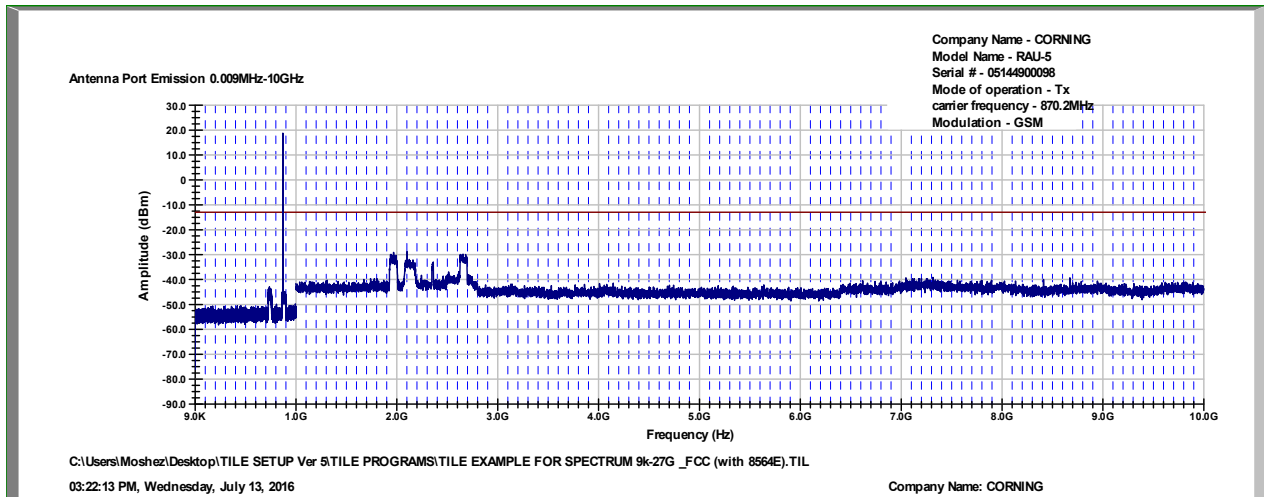


Figure 44. — GSM - 870.2 MHz

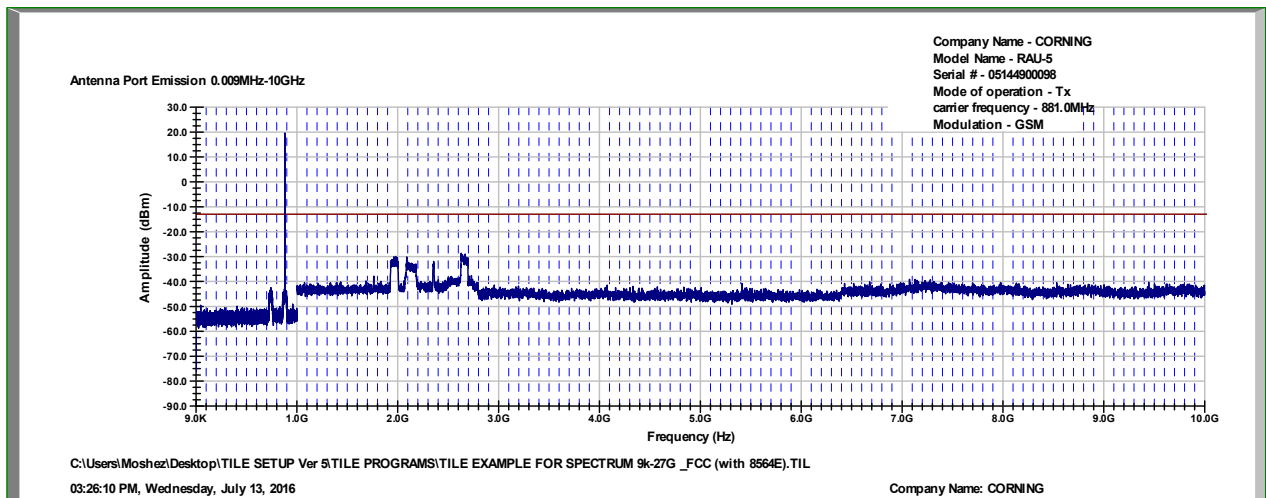


Figure 45. — GSM - 881.0 MHz

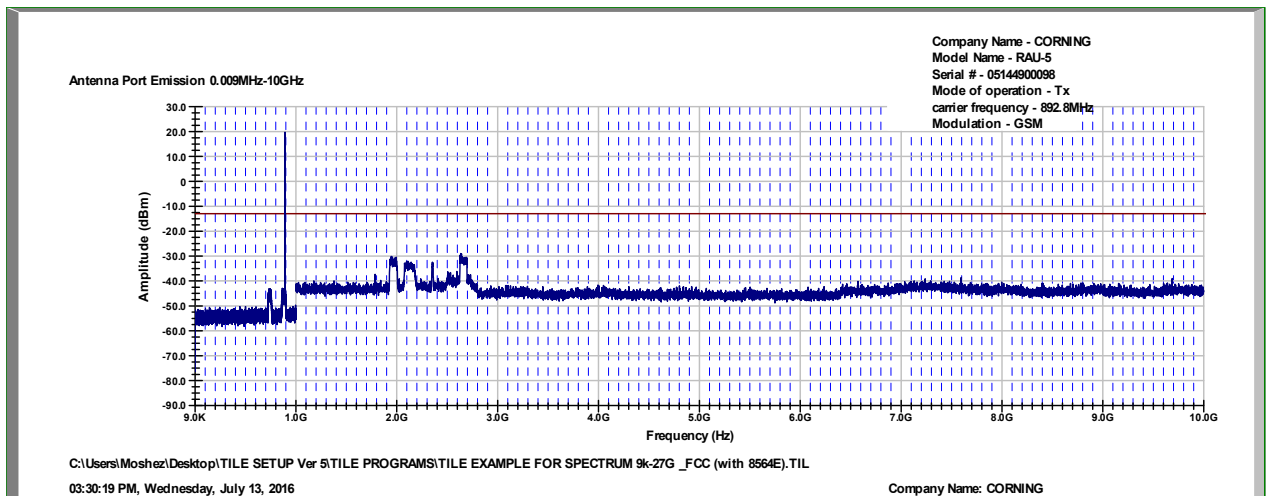


Figure 46. — GSM - 892.8 MHz

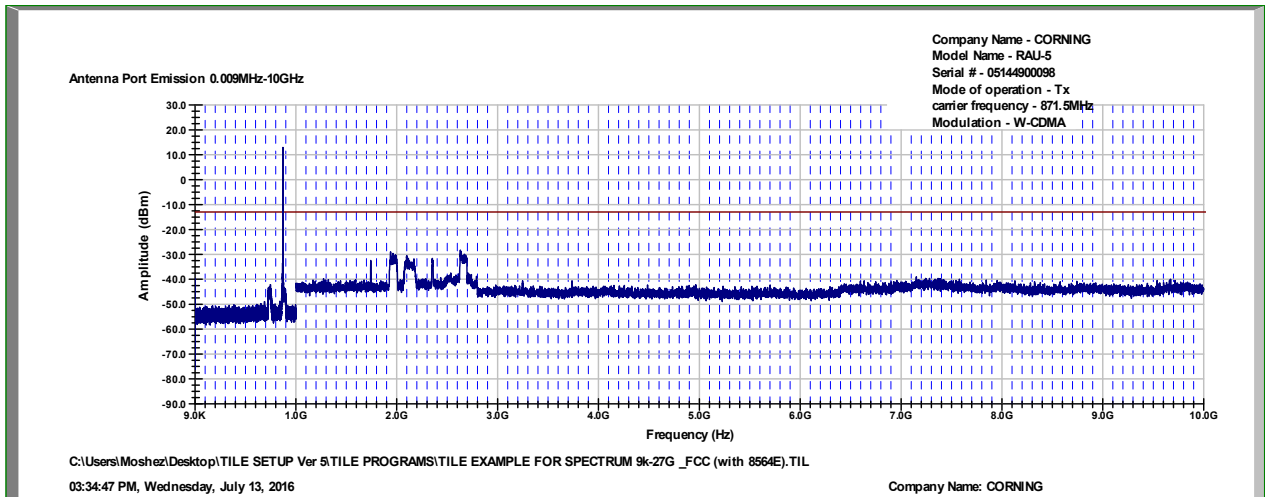


Figure 47. — W-CDMA - 871.5 MHz

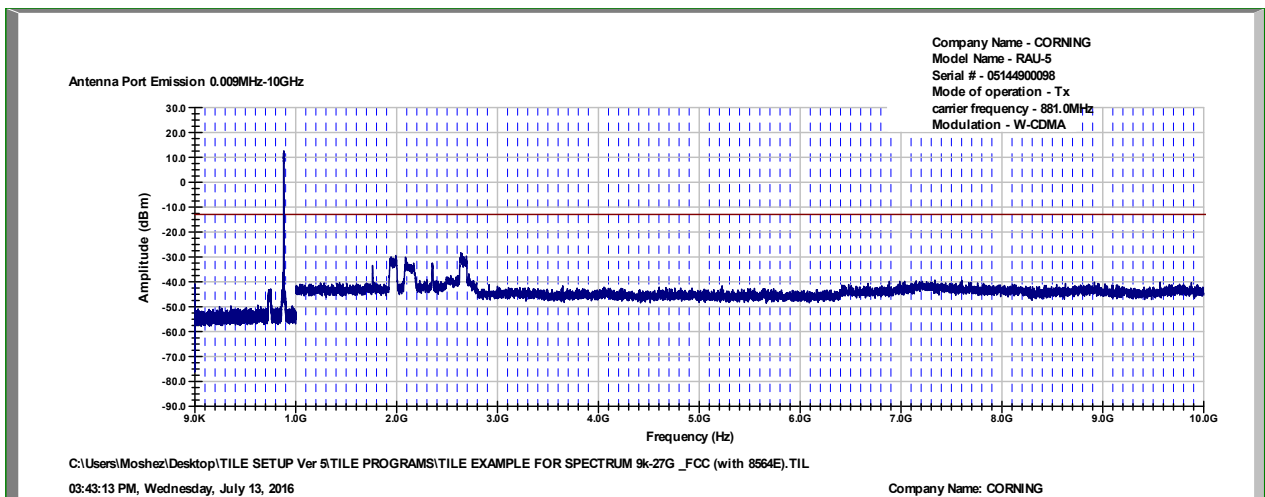


Figure 48. — W-CDMA - 881.0 MHz

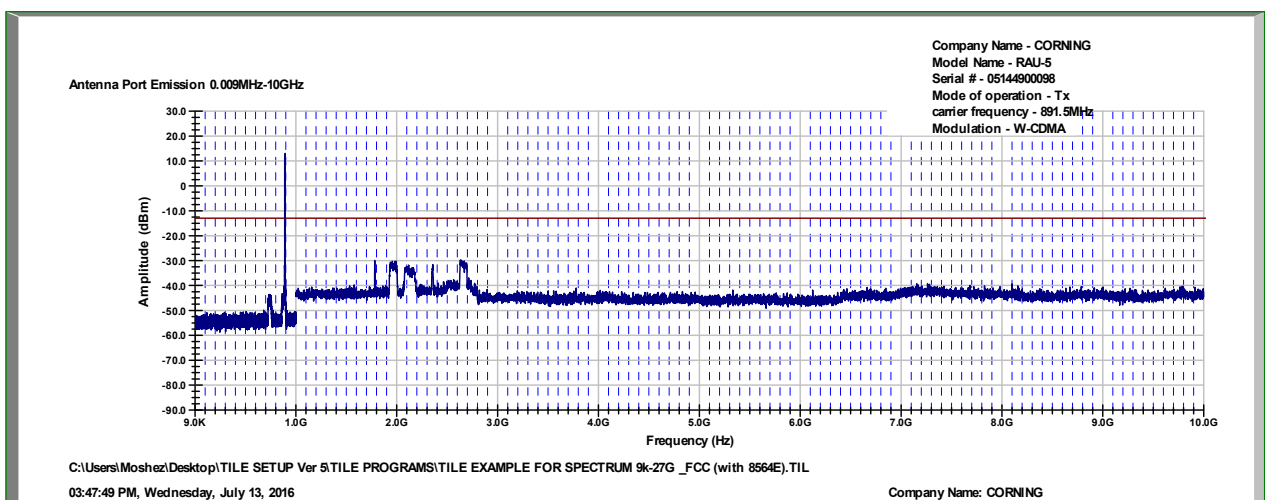


Figure 49. — W-CDMA - 891.5 MHz



6.5 Test Equipment Used; Out of Band Emission at Antenna Terminals CELL

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
Spectrum Analyzer	HP	8564E	3442A00275	March 10, 2016	March 10, 2017
Signal Generator	Agilent	N5172B	MY48180244	July 1, 2016	July 1, 2017
30 dB Attenuator	MCL	BW-S30W5	533	July 5, 2016	July 5, 2017

Figure 50 Test Equipment Used

7. Band Edge Spectrum CELL

7.1 Test Specification

FCC Part 22, FCC Part 2.1051

7.2 Test Procedure

(Temperature (22°C)/ Humidity (37%RH))

The E.U.T. antenna terminal was connected to the spectrum analyzer through an external attenuator and an appropriate coaxial cable (31.0 dB).

The spectrum analyzer was set to 100 kHz R.B.W.

7.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges (869 - 894 MHz) must be attenuated below the transmitting power (P) by a factor of at least $43 + \log(P)$ dB, yielding -13dBm.

7.4 Test Results

Modulation	Operation Frequency	Band Edge Frequency	Reading	Limit	Margin
	(MHz)	(MHz)	(dBm)	(dBm)	(dB)
LTE 64QAM	874.0	869.0	-31.6	-13.0	-18.6
	889.0	894.0	-27.5	-13.0	-14.5
GSM	870.2	869.0	-38.9	-13.0	-25.9
	892.8	894.0	-38.1	-13.0	-25.1
W-CDMA	871.5	869.0	-34.3	-13.0	-21.3
	891.5	894.0	-34.2	-13.0	-21.2

Figure 51 Band Edge Spectrum Results CELL

JUDGEMENT: Passed by 14.5dB

See additional information in *Figure 52* to *Figure 57*.

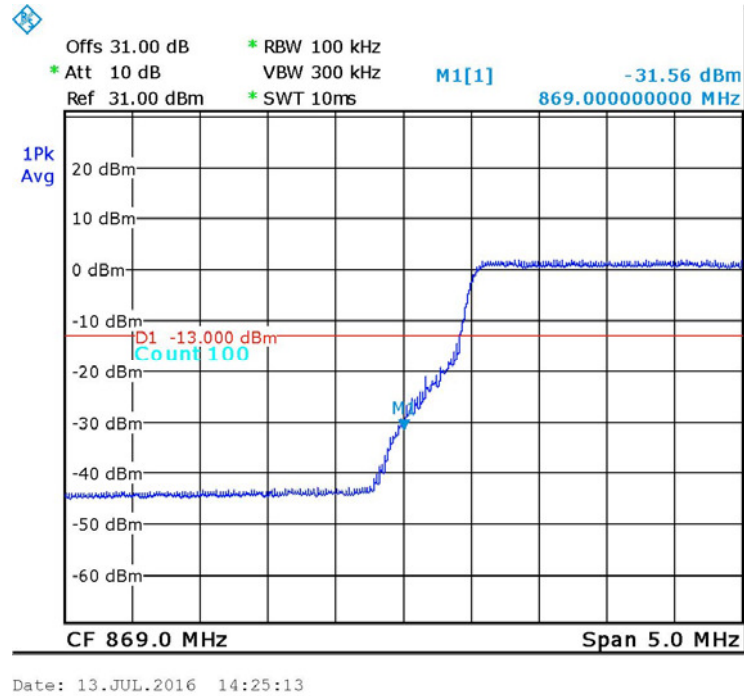


Figure 52. — LTE 64QAM 874.0 MHz

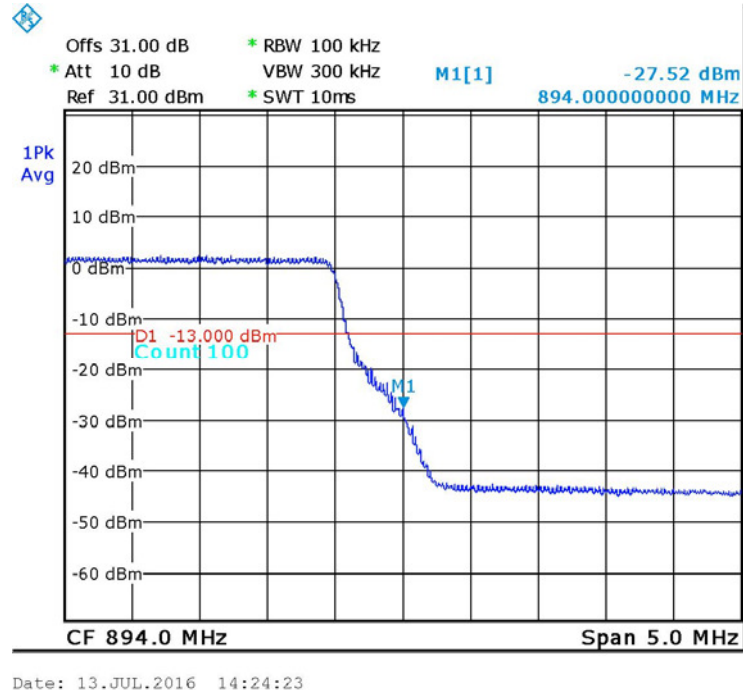


Figure 53. — LTE 64QAM 889.0 MHz

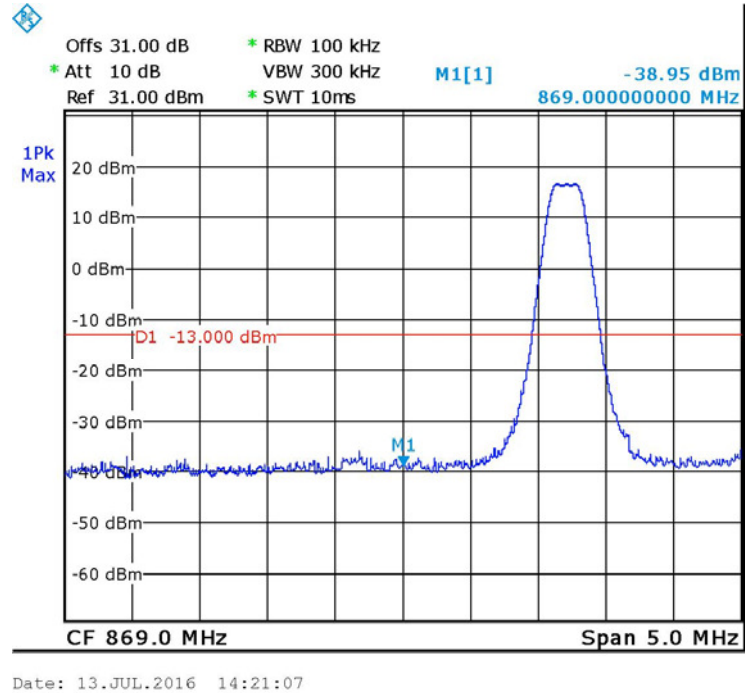


Figure 54. — GSM - 870.2 MHz

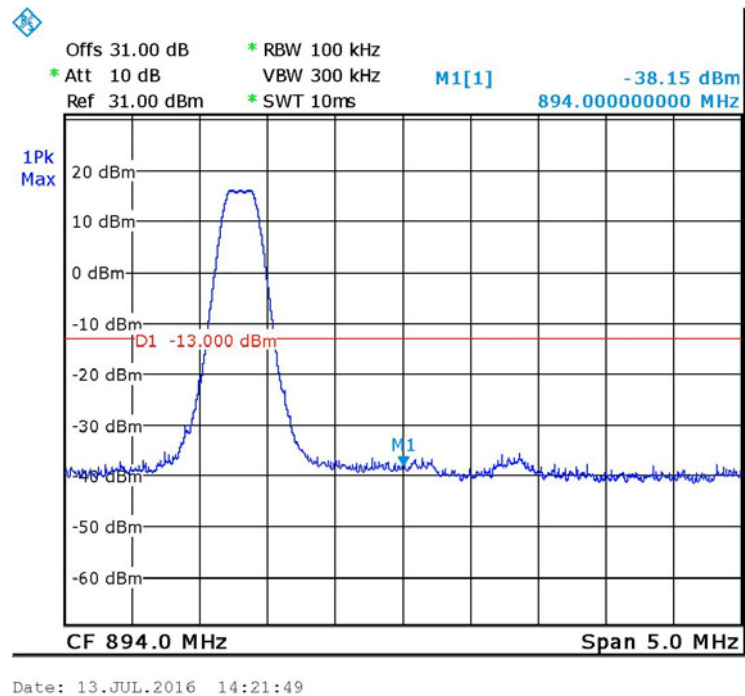


Figure 55. — GSM - 892.8 MHz

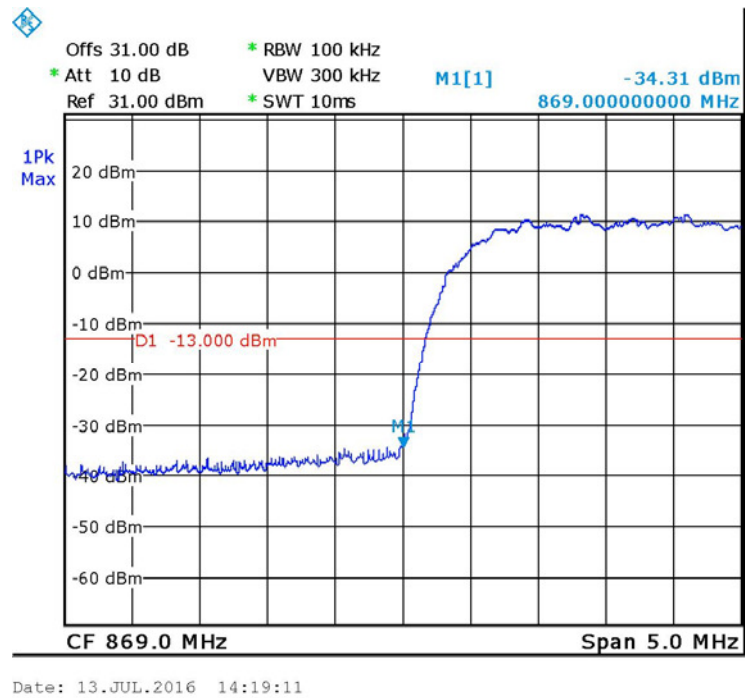


Figure 56. — W-CDMA - 871.5 MHz

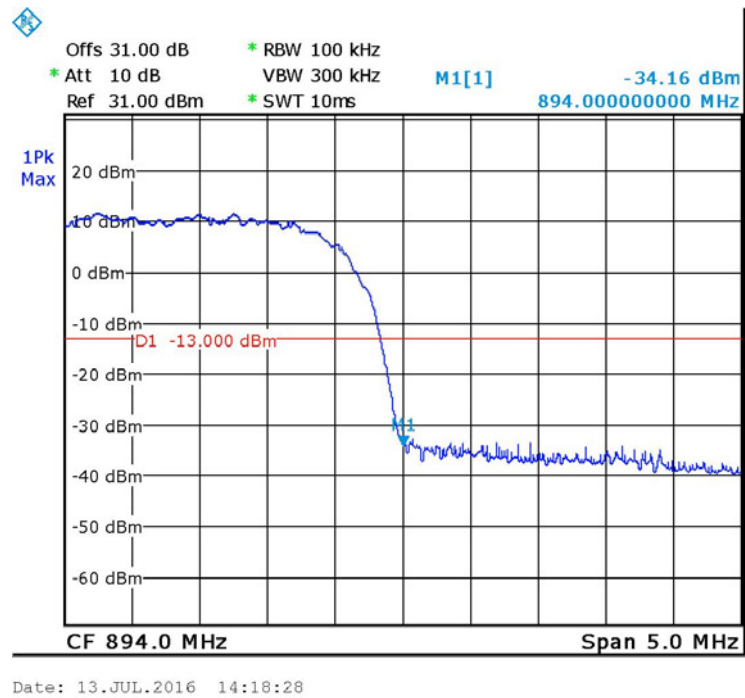


Figure 57. — W-CDMA - 891.5 MHz



7.5 Test Equipment Used; Band Edge Spectrum CELL

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
Spectrum Analyzer	R&S	FSL6	100194	February 29, 2016	March 1, 2017
Vector Signal Generator	Agilent	N5172B	MY51350584	July 1, 2016	July 1, 2017
30 dB Attenuator	MCL	BW-S30W5	533	July 5, 2016	July 5, 2017

Figure 58 Test Equipment Used



8. Spurious Emissions (Radiated) CELL

8.1 Test Specification

FCC Part 22, Section 917; FCC Part 2.1053

8.2 Test Procedure

(Temperature (23°C)/ Humidity (47%RH))

The test method was based on ANSI/TIA-603-D: 2010, Section 2.2.12 Unwanted Emissions: Radiated Spurious.

For measurements between 0.009MHz-30MHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 0.009MHz-30MHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

For measurements between 30.0MHz-1.0GHz:

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 30.0MHz -1.0GHz was scanned and the list of the highest emissions was verified and updated accordingly.

The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

For measurements between 1.0GHz-10.0GHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 1.0GHz -10.0GHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization.

The emissions were measured at a distance of 3 meters.

The E.U.T. was replaced by a substitution antenna (dipole 30MHz-1GHz, Horn Antenna above 1GHz) driven by a signal generator. The height was readjusted for maximum reading. The signal generator level was adjusted to obtain the same reading on the EMI receiver as in step (a).

The signals observed in step (a) were converted to radiated power using:

$$P_d(\text{dBm}) = P_g(\text{dBm}) - \text{Cable Loss (dB)} + \text{Substitution Antenna Gain (dBd)}$$

P_d = Dipole equivalent power (result).

P_g = Signal generator output level.

A Peak detector was used for this test.

The test was performed in 3 operation frequencies: low, mid and high.

Testing was performed when the RF port was connected to 50 Ω termination.

The table below describe only results with the highest radiation.



8.3 Test Limit

The power of any emission outside of the authorized operating frequency ranges (MHz) must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB, yielding -13dBm.

8.4 Test Results

Carrier Channel	Freq.	Antenna Pol.	Maximum Peak Level	Signal Generator RF Output	Cable Loss	Antenna Gain	Effective Radiated Power Level	Limit	Margin
(MHz)	(MHz)	(V/H)	(dBμV/m)	(dBm)	(dB)	(dBd)	(dBm)	(dBm)	(dB)
870.2	1740.4	V	50.6	-50.1	0.5	7.0	-43.6	-13.0	-30.6
	1740.4	H	50.5	-49.4	0.5	7.0	-42.9	-13.0	-29.9
881.0	1762.0	V	50.4	-50.1	0.5	7.0	-43.6	-13.0	-30.6
	1762.0	H	50.5	-49.4	0.5	7.0	-42.9	-13.0	-29.9
892.8	1785.6	V	50.5	-50.1	0.5	7.0	-43.6	-13.0	-30.6
	1785.6	H	50.4	-49.4	0.5	7.0	-42.9	-13.0	-29.9

Figure 59 Spurious Emission (Radiated) CELL

JUDGEMENT; Passed by 29.9dB

The E.U.T met the requirements of the FCC Part 22, Section 917
FCC Part 2.1053 specifications.



8.5 Test Instrumentation Used, Radiated Measurements CELL

Instrument	Manufacturer	Model	Serial Number	Calibration	
				Last Calibration Date	Next Calibration Due
EMI Receiver	HP	85422E	3906A00276	March 3, 2016	March 3, 2017
RF Filter Section	HP	85420E	3705A00248	March 3, 2016	March 3, 2017
EMI Receiver	R&S	ESCI7	100724	February 29, 2016	March 1, 2017
Spectrum Analyzer	HP	8593EM	3536A00120ADI	March 10, 2016	March 10, 2017
Active Loop Antenna	EMCO	6502	9506-2950	November 5, 2015	November 30, 2016
Antenna Biconical	EMCO	3110B	9912-3337	March 24, 2016	March 24, 2018
Antenna Log Periodic	EMCO	3146	9505-4081	April 23, 2016	April 23, 2017
Horn Antenna 1G-18G	ETS	3115	29845	May 19, 2015	May 19, 2018
Low Noise Amplifier	Narda	LNA-DBS-0411N313	013	March 1, 2015	September 30, 2016
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	March 1, 2015	September 30, 2016
MXG Vector Signal generator	Agilent	N5182A	MY49060440	July 1, 2016	July 1, 2017
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	N/A	N/A
Antenna Mast	ETS	2070-2	-	N/A	N/A
Turntable	ETS	2087	-	N/A	N/A
Mast & Table Controller	ETS/EMCO	2090	9608-1456	N/A	N/A

Figure 60 Test Equipment Used