

产品规格书



规格编号	20221104002
生效日期	2022/11/4

客户名称	亿倍电子
产品类型	线圈
超能料号	CN-A43.5-L40MM开双槽
客户料号	

【☒新版发行, ☐版本修订】 【本规范含目录共 7 页】 【RoHS Compliant Parts】

编制	审核	批准
黄剑峰	/	梁英

东莞市超能电子科技有限公司

工厂地址：东莞市塘厦镇莲塘角一路7号
电话：18824390596

本承认书在客户收到30天内，请务必签章返回，逾期视为生产时按此承认书的标准执行。

【客户核准】

日期:

承认状态: ☐完全承认 ☐条件承认 ☐拒绝承认

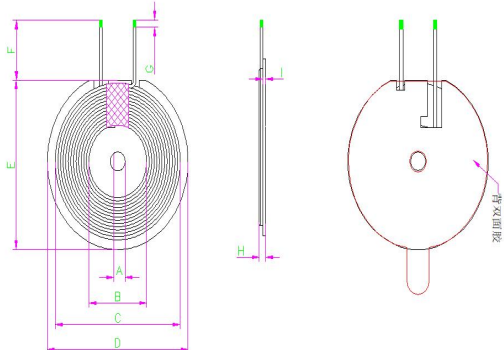
批准	审核	复检	检查

说明:

产 品 规 格 书

客户名称	亿倍电子	客户料号	
超能料号	CN-A43.5-L40MM开双槽	规格编号	20221104002
发行/修订记录			
版本	生效日期	变更内容/原因	核准
01	2022/11/4	新规格发行	梁英
编制		审核	批准
黄剑峰		/	梁英

产品规格书

客户名称	亿倍电子	客户料号				
超能料号	CN-A43.5-L40MM开双槽	规格编号	20221104002	版本	01	
◆、外形尺寸 				(单位: mm)		
				A	5.3 ±0.5	
				B	20.5 ±1.0	
				C	40.0 ±1.5	
				D	43.5 ±1.0	
				E	41.5 ±1.0	
				F	40.0 ±2.0	
				G	2.0 ±1.0	
				H	1.45 ±0.2	
				I	0.65 ±0.2 (磁片)	
				(1)wire size: 0.08*24P		
				(2)Number of coils wound:10TS		
				(3)Does the starting and ending lines intersect:yes		
				(4)High temperature adhesive tape		
				(5)The coil and magnetic sheet need to be pasted in the center		
				(6)Magnetic back 43 round slotted white adhesive		
◆、Electrical Characteristic:						
parameter		specifications		Test conditions	testing instrument	
L0		6.4 ±10%		μH	100KHz/1V	■TH1816B
Q		>40		m	100KHz/1V	■TH1816B
DCR		<90		mΩ	@ 25℃	■CH-502BC
◆、Temperature rating:						
operate temperature		-40℃~ 125℃				
◆、Bill of Material:						
NO.	Product Name	Specification		notes		
1	magnetic sheet	43.5*5.3*0.65		PC95Mengzi Zinc		
2	silk covered wire	0.08*24		enameled wire		
3	High temperature adhesive	8MM		Environmentally friendly tape		
4	glue	43 round slotted white glue		Environmentally friendly adhesive paper		
6	tin	107H		Qiandao Environmental Protection Tin		
7	glue	Yellow Glue		Environmentally friendly adhesive paper		
DRAWN BY			CHECKED BY		APPROVED BY	
张晋					梁英	

