



Element Washington DC LLC  
18855 Adams Court, Morgan Hill, CA 95037 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
<http://www.element.com>



## DATA REFERENCE REPORT

### FCC PART 15.519 / ISED RSS-220 Ultra-Wideband

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

6/7/2022 – 8/5/2022

**Test Site/Location:**

Element Washington DC LLC, Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2205090043-13.BCG

<b>FCC ID:</b>	<b>BCG-A2684</b>
<b>IC:</b>	<b>579C-A2684</b>
<b>APPLICANT:</b>	<b>Apple Inc.</b>

<b>Reference Model/HVIN:</b>	A2622
<b>Variant Model/HVIN:</b>	A2684 (A2859)
<b>EUT Type:</b>	Watch
<b>Operational Frequency:</b>	6489.6MHz (Ch 5) and 7987.2MHz (Ch 9)
<b>FCC Classification:</b>	Ultra-Wideband Transmitter (UWB)
<b>FCC Rule Part(s):</b>	Part 15 Subpart F (15.519)
<b>ISED Specification:</b>	RSS-Gen Issue 5, RSS-220 Issue 1
<b>RSS-220 Subclass:</b>	Hand-held Communication Devices
<b>Test Procedure(s):</b>	ANSI C63.10-2013, KDB 393764 D01 v02r01,

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 393764 D01 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez  
Executive Vice President



<b>FCC ID:</b> BCG-A2684 <b>IC:</b> 579C-A2684		<b>DATA REFERENCE REPORT</b> (CERTIFICATION)	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090043-13.BCG	<b>Test Dates:</b> 6/7/2022 – 8/5/2022	<b>EUT Type:</b> Watch	Page 1 of 7

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@element.COM](mailto:INFO@element.COM).

## TABLE OF CONTENTS

1.0	INTRODUCTION .....	3
1.1	Scope .....	3
1.2	Element Washington DC LLC Test Location .....	3
1.3	Test Facility / Accreditations .....	3
2.0	PRODUCT INFORMATION.....	4
2.1	Equipment Description .....	4
2.2	Device Capabilities .....	4
2.3	Antenna Description .....	5
3.0	CONCLUSION.....	6
4.0	APPENDIX A: REFERENCE MODEL TEST REPORT.....	7

<b>FCC ID:</b> BCG-A2684 <b>IC:</b> 579C-A2684		<b>DATA REFERENCE REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090043-13.BCG	<b>Test Dates:</b> 6/7/2022 – 8/5/2022	<b>EUT Type:</b> Watch	Page 2 of 7

V 10.5 12/15/2021

## 1.0 INTRODUCTION

### 1.1 Scope

Per manufacturer declaration, there are two watch models, A2622 and A2684 (A2859), with high degree of similarity, reference model FCC ID: BCG-A2622 / IC: 579C-A2622 and variant model **FCC ID: BCG-A2684 / IC: 579C-A2684**. Both models share the same material, form factor, circuit design, and components, including antennas and their locations. The reference and variant models use the same power tables and have same tune-up tolerances.

Per FCC/ISED approved Data Referencing Test Plan, testing was done fully on the reference model FCC ID: BCG-A2622 / IC: 579C-A2622, while radiated and conducted spot-check verification has been performed on variant model **FCC ID: BCG-A2684 / IC: 579C-A2684**. Spot-check measurements were conducted, all measurements were investigated and found to be within acceptable tolerance.

Equipment Class	Reference Model FCC ID & IC	Reference Report	Report Title
UWB	BCG-A2622 579C-A2622	1C2205090042-13.BCG	RF UWB Test Report

Table 1-1. Reference Model Details

Spot-check verification are not applicable to this test report; therefore, all data for variant model **FCC ID: BCG-A2684 / IC: 579C-A2684** can be fully referenced from the reference model.

Reference model FCC ID: BCG-A2622 / IC: 579C-A2622 test report has been included in Appendix A.


### 1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

Measurements were performed at Element Washington DC LLC located in Morgan Hill, CA 95037, U.S.A.

- Element Washinton DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISED.

FCC ID: BCG-A2684 IC: 579C-A2684		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090043-13.BCG	Test Dates: 6/7/2022 – 8/5/2022	EUT Type: Watch	Page 3 of 7

V 10.5 12/15/2021

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID: BCG-A2684 / IC: 579C-A2684**. The test data contained in this report pertains only to the emissions due to the EUT's Ultra-Wideband (UWB) transmitter.

**Test Device Serial No.:** WWPJWNMVMV, X7YQ2PKF9G, FN622250N6617WR4H

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n UNII, Bluetooth (1x, EDR, HDR4, HDR8, LE1M, LE2M), NFC, UWB, 60.5GHz Transmitter.

For ISSED, this device is under subclass 5.3 Hand-held Communication Devices of RSS-220

Data Port UWB Radio Terminal Access: No

Ch.	Frequency [MHz]	Config	Payload
5	6500	0	25
			65
			125
		1	45
			85
			125
		4	0
9	8000	0	25
			65
			125
		1	45
			85
			125
		4	0
		5	0

Table 2-1. UWB Frequency / Channel Operations

FCC ID: BCG-A2684 IC: 579C-A2684	 <b>DATA REFERENCE REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090043-13.BCG	Test Dates: 6/7/2022 – 8/5/2022	EUT Type: Watch	Page 4 of 7

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@element.COM.

#### Notes:

1. This device supports simultaneous multi radio transmission feature, which allows multiple radios to transmit simultaneously at the same antenna. The table below shows all the possible multi radio TX combinations:

Simultaneous Tx Config	Antenna FCM				
	WLAN	Bluetooth	LTE/WCDMA	UNII	UWB
	802.11 b/g/n	BDR, EDR, HDR4/8, LE	Mid band/ High band	802.11 a/n	Ch.5, Ch.9
Config 1	✓	✗	✗	✗	✓
Config 2	✗	✓	✗	✗	✓
Config 3	✗	✗	✓	✗	✓
Config 4	✗	✓	✓	✗	✗
Config 5	✓	✗	✓	✗	✗
Config 6	✗	✗	✓	✓	✗
Config 7	✗	✗	✓	✗	✓
Config 8	✗	✓	✓	✗	✓
Config 9	✓	✗	✓	✗	✓
Config 10	✗	✓	✓	✓	✗

**Table 2-2. Simultaneous Transmission Configurations**

✓ = Support ; ✗ = NOT Support

2. All above simultaneous transmission configurations have been tested and the worst case configuration was found to be configuration 10 (BT, LTE Band41, and UNII). These results can be found in the RF Bluetooth, RF UNII and RF Part 27b/ RSS-199 reports.

## 2.3 Antenna Description

Following antenna gains provided by manufacturer were used for testing.

Frequency [GHz]	Antenna Gain (dBi)
6250-6750	-9.9
7750-8250	-9.0

**Table 2-3. Highest Antenna Gain**

FCC ID: BCG-A2684 IC: 579C-A2684		DATA REFERENCE REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090043-13.BCG	Test Dates: 6/7/2022 – 8/5/2022	EUT Type: Watch	Page 5 of 7

V 10.5 12/15/2021

### 3.0 CONCLUSION

The spot-check data measured for variant model **FCC ID: BCG-A2684 / IC: 579C-A2684** is in tolerance with reference model FCC ID: BCG-A2622 / IC: 579C-A2622 per FCC/ISED Approved Data Referencing Test Plan.

<b>FCC ID:</b> BCG-A2684 <b>IC:</b> 579C-A2684		<b>DATA REFERENCE REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090043-13.BCG	<b>Test Dates:</b> 6/7/2022 – 8/5/2022	<b>EUT Type:</b> Watch	Page 6 of 7

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@element.COM](mailto:INFO@element.COM).


## 4.0 APPENDIX A: REFERENCE MODEL TEST REPORT

Attached is the test report (1C2205090042-13.BCG) from reference model FCC ID: BCG-A2622 / IC: 579C-A2622, which includes referenced data results.

<b>FCC ID:</b> BCG-A2684 <b>IC:</b> 579C-A2684		<b>DATA REFERENCE REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090043-13.BCG	<b>Test Dates:</b> 6/7/2022 – 8/5/2022	<b>EUT Type:</b> Watch	Page 7 of 7

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [INFO@element.COM](mailto:INFO@element.COM).



## MEASUREMENT REPORT

### FCC PART 15.519 / ISSED RSS-220 Ultra-Wideband

**Applicant Name:**

Apple Inc.  
One Apple Park Way  
Cupertino, CA 95014  
United States

**Date of Testing:**

6/7/2022 - 8/5/2022

**Test Site/Location:**

Element Washington DC LLC Morgan Hill, CA, USA

**Test Report Serial No.:**

1C2205090042-13.BCG

**FCC ID:**

BCG-A2622

**IC:**

579C-A2622

**APPLICANT:**

Apple Inc.

**Application Type:**

Certification

**Model/HVIN:**

A2622

**EUT Type:**

Watch

**Operational Frequency:**

6489.6MHz (Ch 5) and 7987.2MHz (Ch 9)

**FCC Classification:**

Ultra-Wideband Transmitter (UWB)

**FCC Rule Part(s):**

Part 15 Subpart F (15.519)

**ISED Specification:**

RSS-Gen Issue 5, RSS-220 Issue 1

**RSS-220 Subclass:**

Hand-held Communication Devices

**Test Procedure(s):**

ANSI C63.10-2013, KDB 393764 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 393764 D01 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



RJ Ortanez

Executive Vice President



<b>FCC ID:</b> BCG-A2622 <b>IC:</b> 579C-A2622	 <b>MEASUREMENT REPORT</b> (CERTIFICATION)		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 1 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## T A B L E O F C O N T E N T S

1.0	INTRODUCTION .....	3
1.1	Scope .....	3
1.2	Element Washington DC LLC Test Location .....	3
1.3	Test Facility / Accreditations .....	3
2.0	PRODUCT INFORMATION .....	4
2.1	Equipment Description .....	4
2.2	Device Capabilities .....	4
2.3	Antenna Description .....	5
2.4	Test Support Equipment .....	6
2.5	Test Configuration .....	6
2.6	Software and Firmware .....	7
2.7	EMI Suppression Device(s)/Modifications .....	7
3.0	DESCRIPTION OF TESTS .....	8
3.1	Evaluation Procedure .....	8
3.2	AC Line Conducted Emissions .....	8
3.3	Radiated Emissions .....	9
3.4	Environmental Conditions .....	9
4.0	ANTENNA REQUIREMENTS .....	10
5.0	MEASUREMENT UNCERTAINTY .....	11
6.0	TEST EQUIPMENT CALIBRATION DATA .....	12
7.0	TEST RESULTS .....	13
7.1	Summary .....	13
7.2	10dBc Bandwidth Measurement .....	14
7.3	Bandwidth Measurement .....	18
7.4	Maximum Peak and Average Radiated Power (EIRP) .....	22
7.4.1	Peak Radiated Power Measurement .....	24
7.4.2	Average Radiated Power Measurement .....	26
7.5	Cease Transmission Time .....	28
7.6	Radiated Spurious Emission Measurements .....	33
7.7	Radiated Spurious Emissions Measurements – Below 960MHz .....	51
7.8	AC Line-Conducted Emission Measurement .....	56
8.0	CONCLUSION .....	62
9.0	APPENDIX A .....	63

<b>FCC ID:</b> BCG-A2622 <b>IC:</b> 579C-A2622		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 2 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 1.0 INTRODUCTION

### 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

### 1.2 Element Washington DC LLC Test Location

These measurement tests were conducted at the Element Washington DC LLC facility located at 18855 Adams Court, Morgan Hill, CA 95037. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014 and KDB 414788 D01 v01r01.

### 1.3 Test Facility / Accreditations

Measurements were performed at Element Washington DC LLC located in Morgan Hill, CA 95037, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.02 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- Element Washington DC LLC facility is a registered (22831) test laboratory with the site description on file with ISSED.

<b>FCC ID:</b> BCG-A2622 <b>IC:</b> 579C-A2622		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 3 of 63

V 10.5 12/15/2021

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Apple Watch FCC ID: BCG-A2622** and **IC: 579C-A2622**. The test data contained in this report pertains only to the emissions due to the EUT's Ultra-Wideband (UWB) transmitter.

**Test Device Serial No.:** J2QJRvw60K, VF29XV4FVH, N4F4NXRFx1

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n UNII, Bluetooth (1x, EDR, HDR4, HDR8, LE1M, LE2M), NFC, UWB, 60.5GHz Transmitter.

For ISSED, this device is under subclass 5.3 Hand-held Communication Devices of RSS-220

Data Port UWB Radio Terminal Access: No

Ch.	Frequency [MHz]	Config	Payload
5	6500	0	25
			65
			125
		1	45
			85
			125
		4	0
9	8000	5	0
		0	25
			65
			125
		1	45
			85
			125
		4	0
		5	0

**Table 2-1. UWB Frequency / Channel Operations**

<b>FCC ID:</b> BCG-A2622 <b>IC:</b> 579C-A2622		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 4 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

#### Notes:

1. This device supports simultaneous multi radio transmission feature, which allows multiple radios to transmit simultaneously at the same antenna. The table below shows all the possible multi radio TX combinations:

Simultaneous Tx Config	Antenna FCM				
	WLAN	Bluetooth	LTE/WCDMA	UNII	UWB
	802.11 b/g/n	BDR, EDR, HDR4/8, LE	Mid band/ High band	802.11 a/n	Ch.5, Ch.9
Config 1	✓	✗	✗	✗	✓
Config 2	✗	✓	✗	✗	✓
Config 3	✗	✗	✓	✗	✓
Config 4	✗	✓	✓	✗	✗
Config 5	✓	✗	✓	✗	✗
Config 6	✗	✗	✓	✓	✗
Config 7	✗	✗	✓	✗	✓
Config 8	✗	✓	✓	✗	✓
Config 9	✓	✗	✓	✗	✓
Config 10	✗	✓	✓	✓	✗

**Table 2-2. Simultaneous Transmission Configurations**

✓ = Support; ✗ = NOT Support

2. All above simultaneous transmission configurations have been tested and the worst case configuration was found to be configuration 10 (BT, LTE Band41, and UNII). These results can be found in the RF Bluetooth, RF UNII and RF Part 27b/ RSS-199 reports.

## 2.3 Antenna Description

Following antenna gain provided by manufacturer was used for the testing.

Frequency [MHz]	Antenna Gain (dBi)
6250-6750	-9.9
7750-8250	-9.0

**Table 2-3. Highest Antenna Gain**

**Note:** Antenna Specifications has been attached to Appendix A

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 5 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 2.4 Test Support Equipment

1	Apple Macbook	Model:	A1398	S/N:	C2QKP008F6F3
	w/AC/DC Adapter	Model:	A1435	S/N:	N/A
	Apple iPhone	Model:	993-89846LL/A	S/N:	QHLHY57CJ9
2	Apple USB-C cable	Model:	N/A	S/N:	N/A
	w/ Charging Dock	Model:	N/A	S/N:	LF09D601GH
	w/ Cradle	Model:	LE1-POR-P1	S/N:	CYV1427015UE1EN01MP1J
3	Apple Magnetic Charger	Model:	A2515	S/N:	DLC035200UJMFROAJ
4	Pathfinder Falcon	Model:	920-11647-01	S/N:	HV007825
	SiP Socket	Model:	N/A	S/N:	X2920 P1 PF 142
5	DC Power Supply	Model:	KPS3010D	S/N:	N/A
6	Store Sample Wristband	Model:	N/A	S/N:	DLC219400361YDQ2W

**Table 2-4. Test Support Equipment Used**

## 2.5 Test Configuration

The EUT was tested per the guidance of ANSI C63.10-2013 and KDB 393764 D01 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups.

The worst case configuration was investigated with various types of wristbands, metal and non-metal wristbands. The EUT was also investigated with and without wireless charger. The worst case configuration found was used for all testing.

For emissions from 960MHz – 18GHz, channel 5 and channel 9 were tested with highest power and worst case configuration. The emissions below 960MHz and above 18GHz were tested with the highest transmitting power and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

For AC line conducted emission and radiated test below 960MHz, following configuration were investigated and the worst case was reported.

- EUT powered by AC/DC adaptor via USB-C cable with magnetic charger
- EUT powered by host PC via USB-C cable with magnetic charger

<b>FCC ID:</b> BCG-A2622 <b>IC:</b> 579C-A2622		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 6 of 63

V 10.5 12/15/2021



## 2.6 Software and Firmware

The test was conducted with firmware version watchOS 9.0 installed on the EUT.

## 2.7 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

<b>FCC ID:</b> BCG-A2622 <b>IC:</b> 579C-A2622		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 7 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 393764 D01 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is EPCOS 2X60A Power Line Filter (100dB Attenuation, 14kHz-18GHz) and the two EPCOs 2X48A filters (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.50.40.

FCC ID: BCG-A2622 IC: 579C-A2622	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 8 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

Per KDB 414788, radiated emission test sites other than open-field test sites (e.g., shielded anechoic chambers), may be employed for emission measurements below 30MHz if characterized so that the measurements correspond to those obtained at an open-field test site. To determine test site equivalency, a reference sample transmitting at 149kHz was measured on an open field test site (asphalt with no ground plane) and then measured in the 3m semi-anechoic chamber. A calibrated 60cm loop antenna was rotated about its vertical axis while the reference device was rotated through the X, Y and Z axis in order to capture the worst case level. A maximum deviation of 2.77dB at 149kHz was measured when comparing the 3 meter semi-anechoic chamber to the open field site.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: BCG-A2622 IC: 579C-A2622			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch		Page 9 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## 4.0 ANTENNA REQUIREMENTS

### Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna(s) of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

### Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 10 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.23-2012. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.77
Line Conducted Disturbance	2.70
Radiated Disturbance (<30MHz)	4.38
Radiated Disturbance (<1GHz)	4.75
Radiated Disturbance (>1GHz)	5.20
Radiated Disturbance (>18GHz)	4.72

Parameter	Expanded Uncertainty
Time	$\pm 0.2\%$

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 11 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent Technologies	N9030A	3Hz-44GHz PXA Signal Analyzer	6/10/2022	Annual	6/10/2023	MY49430244
ATM	180-442A-KF	20dB Nominal Gain Horn Antenna	8/13/2021	Annual	8/13/2022	T058701-01
ETS-Lindgren	3142E	BiConiLog Antenna (30MHz - 6GHz)	10/21/2021	Annual	10/21/2022	208204
ETS-Lindgren	3117	Double Ridged Guide Antenna (1-18 GHz)	5/11/2022	Annual	5/11/2023	205956
Keysight Technology	N9040B	UXA Signal Analyzer	2/8/2022	Annual	2/8/2023	MY57212015
Rohde & Schwarz	TS-PR18	Pre-Amplifier (1GHz - 18GHz)	1/6/2022	Annual	1/6/2023	101639
Rohde & Schwarz	FSV40	Signal Analyzer (10Hz-40GHz)	3/4/2022	Annual	3/4/2023	101619
Rohde & Schwarz	ESW26	EMI Test Receiver	5/19/2022	Annual	5/19/2023	101299
Rohde & Schwarz	TS-PR8	Pre-Amplifier (30MHz - 8GHz)	1/6/2022	Annual	1/6/2023	102327
Rohde & Schwarz	ESW44	EMI Test Receiver	12/2/2021	Annual	12/2/2022	101570
Rohde & Schwarz	ENV216	Two-Line V-Network	1/14/2022	Annual	1/14/2023	101364
Rohde & Schwarz	TS-PR1840	Pre-Amplifier (18GHz - 40GHz)	4/18/2022	Annual	4/18/2023	100050
Rohde & Schwarz	TC-TA18	Cross Polarized Vivaldi Antenna (400MHz-18GHz)	1/25/2022	Annual	1/25/2023	101063
Rohde & Schwarz	HFH2-Z2	Loop Antenna	4/3/2022	Annual	4/3/2023	100546

**Table 6-1. Test Equipment List**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 12 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.0 TEST RESULTS

### 7.1 Summary


Company Name: Apple Inc.  
 FCC ID: BCG-A2622  
 IC: 579C-A2622  
 FCC Classification: Ultra-Wideband Transmitter

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
§15.503, §15.519 (b)	RSS-220 [2]	10dBc Bandwidth	≥ 500MHz	RADIATED	PASS	Section 7.2, 7.3
§ 2.1049	RSS-Gen [6.7]	Occupied Bandwidth	N/A		N/A	Section 7.3
§15.519 (e)	RSS-220 [5.3.1(g)]	Maximum Peak Power Spectral Density (Peak EIRP)	< 0 dBm/50MHz EIRP		PASS	Sections 7.4.1
§15.519 (c)	RSS-220 [5.3.1(d)]	Maximum Average Emission (Average EIRP)	< -41.3 dBm/MHz EIRP		PASS	Section 7.4.2
§15.519 (a)(1)	RSS-220 [5.3.1(b)]	Cease Transmission Time	See §15.519 (a)(1) and RSS-220 [5.3.1(b)] for details		PASS	Section 7.5
§15.519 (c)	RSS-220 [5.3.1(d)]	Radiated Emissions Above 960MHz	See table in §15.519 (c) and RSS-220[5.3.1(d)] for details		PASS	Sections 7.6
§15.519 (d)	RSS-220 [5.3.1(e)]	Radiated Emissions in the 1164 – 1240MHz and 1559 – 1610MHz GPS Bands	See §15.519 (d) and RSS-220 [5.3.1 (e)] for details		PASS	Sections 7.6
§15.519 (c), §15.209	RSS-220 [3.4] RSS-Gen [8.9]	Radiate Emissions Below 960MHz	Emissions in restricted bands must meet the radiated limits detailed in §15.209 (RSS-Gen [8.9])		PASS	Section 7.7
§15.207	RSS-Gen [8.8]	AC Line Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen [8.8])	AC LINE CONDUCTED	PASS	Section 7.8

**Table 7-1. Summary of Test Results**

#### Notes:

- All modes of operation were investigated. The test results shown in the following sections represent the worst case emissions.
- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 13 of 63

V 10.5 12/15/2021



## 7.2 10dBc Bandwidth Measurement

§15.503 §15.519 (b)

### Test Overview and Limit

The UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated  $F_H$  and the lower boundary is designated  $F_L$ . The frequency at which the highest radiated emission occurs is designated  $F_M$ .

- The center frequency,  $F_C$ , equals  $(F_H + F_L)/2$
- The fractional bandwidth equals  $2(F_H - F_L) / (F_H + F_L)$

The UWB bandwidth of a device operating under the provisions of this section must be contained between 3100MHz and 10,600MHz.

- a) *The minimum permissible 10dBc Bandwidth is 500 MHz*
- b) *Fractional bandwidth is equal or greater than 0.20*

### Test Procedure Used

ANSI C63.10-2013 – Section 10.1  
KDB 393764 D01 v02r01

### Test Settings

1. RBW = 1MHz
2. VBW = 3MHz
3. Detector = Peak
4. Trace mode = max hold
5. Sweep = auto couple
6. The trace was allowed to stabilize


FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 14 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

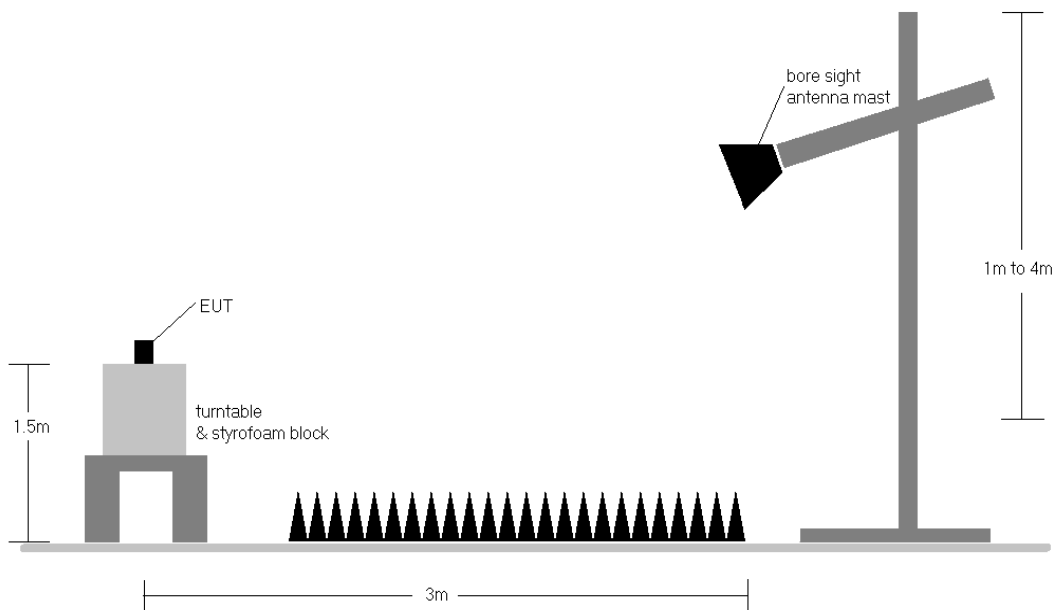

**Figure 7-1. Test Setup**

## Test Notes

1. In those cases where the measured emission spectrum contains multiple (more than two)  $-10\text{dBc}$  points, the outermost points define the UWB bandwidth (i.e., the widest bandwidth is reported).
2. All modes of operation were investigated and the worst-case emissions are reported.

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 15 of 63

V 10.5 12/15/2021

Frequency [GHz]	Channel	Config	Payload	F <sub>M</sub> [GHz]	F <sub>L</sub> [GHz]	F <sub>H</sub> [GHz]	F <sub>c</sub> [GHz]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
6.5	5	0	125	6.729	6.226	6.753	6.490	526.80	500	Pass


**Table 7-2. 10dBc Bandwidth Measurements (UWB, Ch.5, 6.5GHz)**

Frequency [GHz]	Channel	Config	Payload	F <sub>M</sub> [GHz]	F <sub>L</sub> [GHz]	F <sub>H</sub> [GHz]	F <sub>c</sub> [GHz]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
8.0	9	0	125	7.748	7.723	8.250	7.987	527.10	500	Pass


**Table 7-3. 10dBc Bandwidth Measurements (UWB, Ch.9, 8GHz)**

<b>FCC ID:</b> BCG-A2622 <b>IC:</b> 579C-A2622		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 16 of 63

V 10.5 12/15/2021

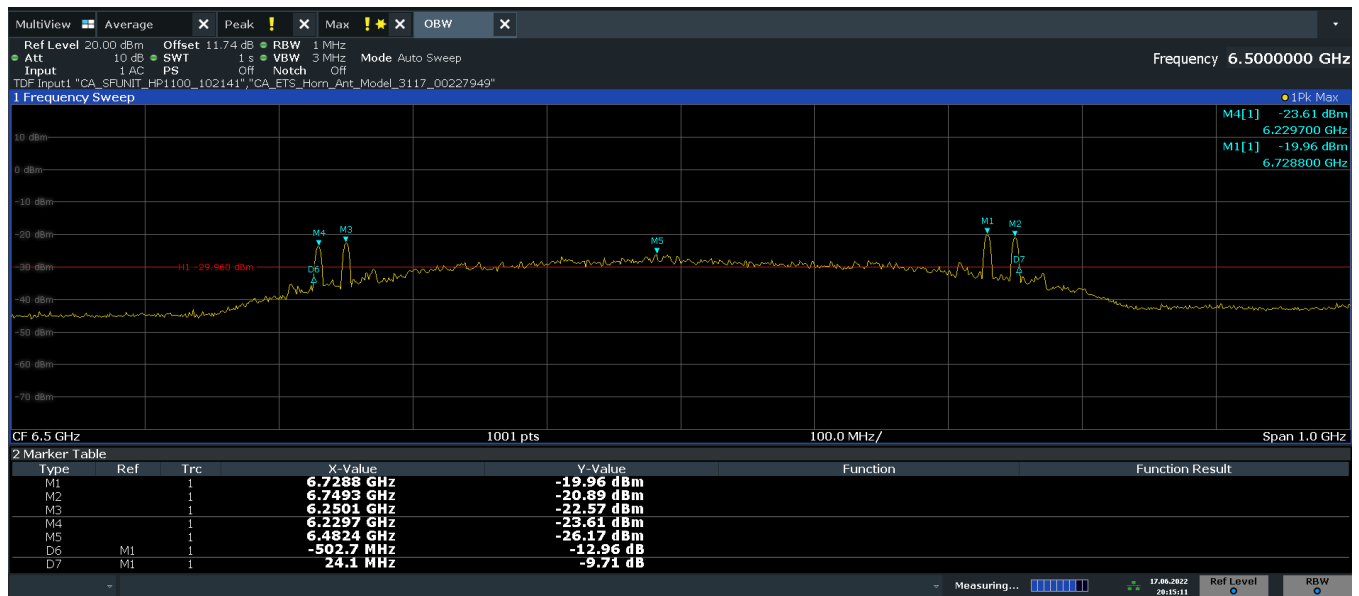

Plot 7-1. 10dBc Bandwidth (Ch. 5, Config 0/Payload 125)

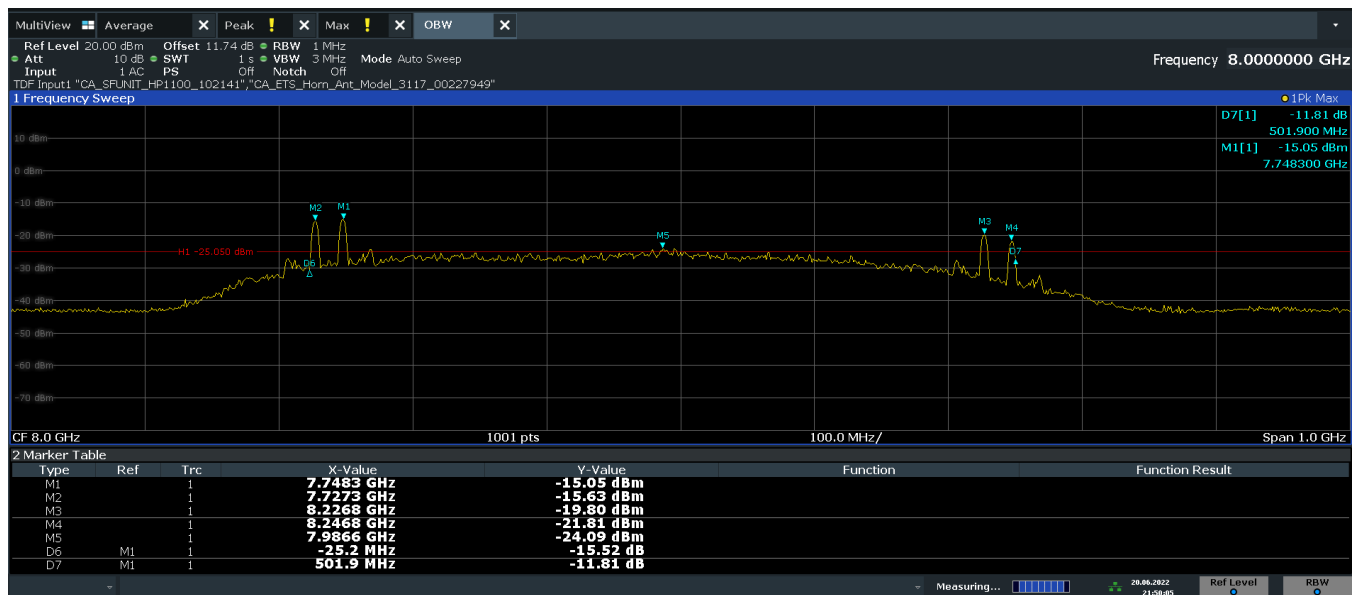

Plot 7-2. 10dBc Bandwidth (Ch. 9, Config 0/Payload 125)

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 17 of 63



## 7.3 Bandwidth Measurement

RSS-220 [2], RSS-Gen [6.7]

### Test Overview and Limit

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Procedure Used

ANSI C63.10-2013 – Section 6.9

RSS-Gen [6.7]

### Test Settings


1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 10dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 18 of 63

V 10.5 12/15/2021

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

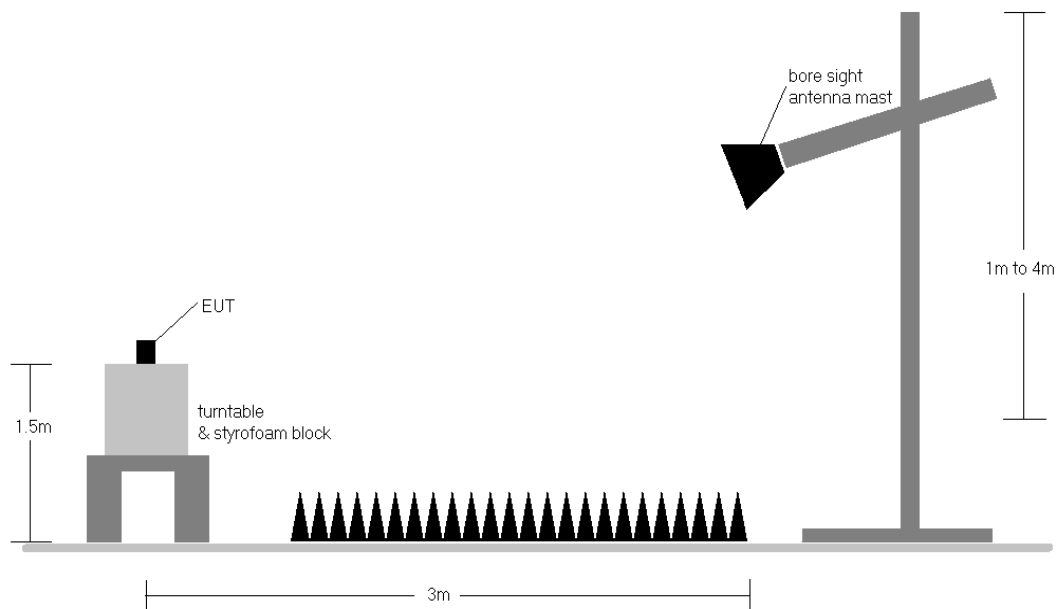

**Figure 7-2. Test Instrument & Measurement Setup**

## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported.

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 19 of 63

V 10.5 12/15/2021

Frequency [GHz]	Channel	Config	Payload	Measured OBW [MHz]	Measured 10dBc Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
6.5	5	0	125	617.980	533.10	500	Pass


**Table 7-4. ISED 10dBc Bandwidth & 99% OBW Measurements (UWB, Ch.5, 6.5GHz)**

Frequency [GHz]	Channel	Config	Payload	Measured OBW [MHz]	Measured 10dBc Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
8.0	9	0	125	623.590	538.50	500	Pass


**Table 7-5. ISED 10dBc Bandwidth & 99% OBW Measurements (UWB, Ch.9, 8GHz)**

<b>FCC ID:</b> BCG-A2622 <b>IC:</b> 579C-A2622		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 20 of 63

V 10.5 12/15/2021

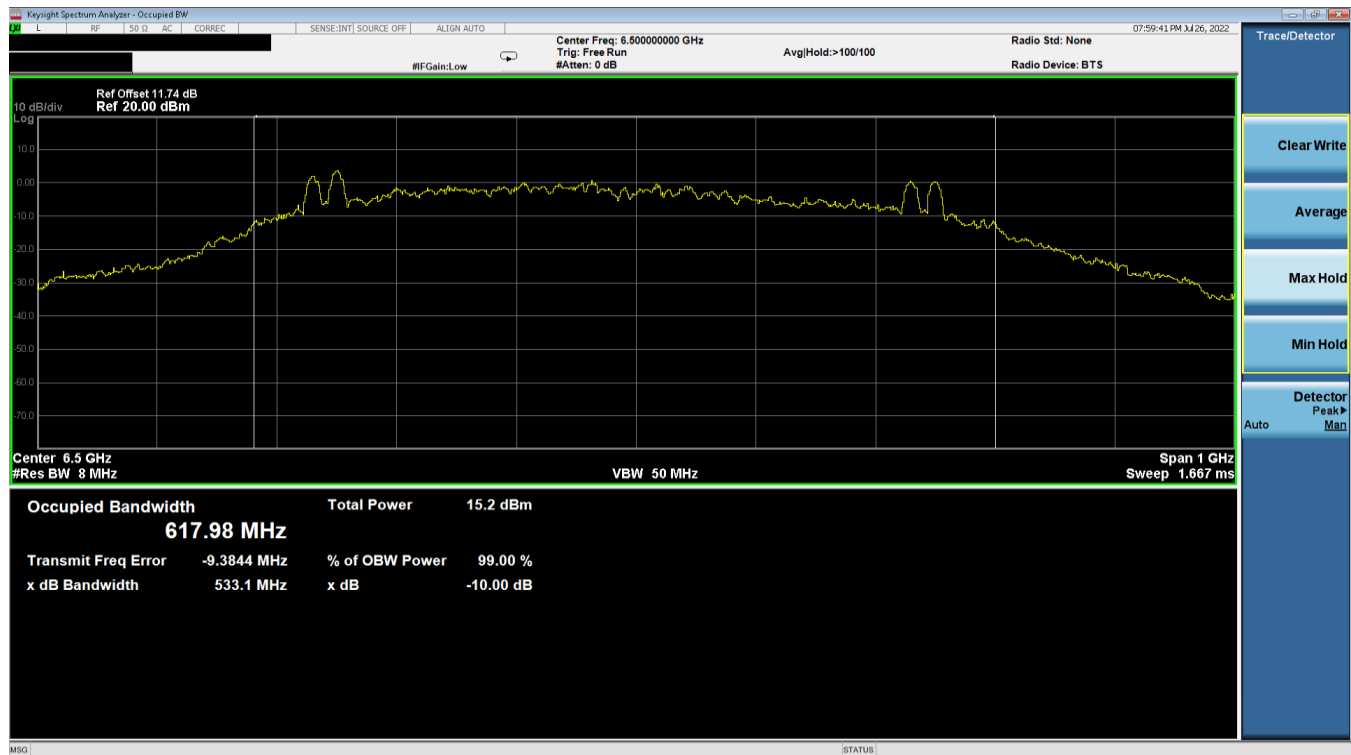

Plot 7-3. ISED 10dBc Occupied Bandwidth & 99% (Ch. 5, Config 0/Payload 125)

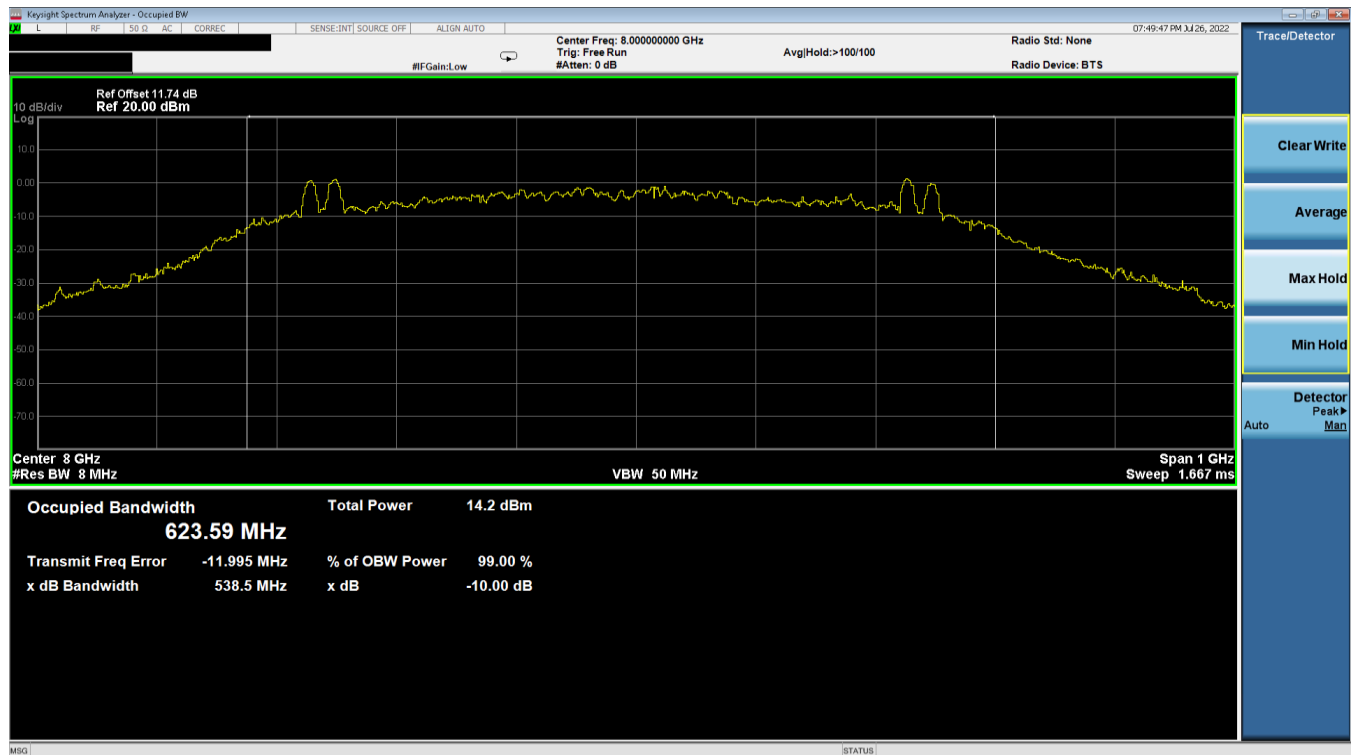

Plot 7-4. ISED 10dBc Occupied Bandwidth & 99 (Ch. 9, Config 0/Payload125)

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 21 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [cl.info@element.com](mailto:cl.info@element.com).

## 7.4 Maximum Peak and Average Radiated Power (EIRP)

§15.519 (c) §15.519 (e); RSS-220 [5.3.1(d)] RSS-220 [5.3.1(g)]

### Test Overview and Limits

15.519 (e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs,  $F_M$ . That limit is 0 dBm for Peak EIRP.

15.519 (c) The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency [MHz]	EIRP [dBm]
3100-10600	-41.3

**Table 7-6. FCC 15.519 Average EIRP limit**

Frequency [MHz]	EIRP [dBm]
4750-10600	-41.3

**Table 7-7. RSS-220 Average EIRP limit**

### Test Procedure Used

ANSI C63.10-2013 – Section 10.3.5 and 10.3.7  
KDB 393764 D01 v02r01

### Test Settings

#### Average EIRP Measurements

1. RBW = 1MHz
2. VBW = 3MHz
3. Detector = Average (RMS)
4. Sweep time = No more than a 1 ms integration period over each measurement bin
5. Trace mode = Max hold
6. Trace was allowed to stabilize

#### Peak EIRP Measurements


1. RBW = 50MHz
2. VBW = 50MHz
3. Detector = Peak
4. Sweep time = auto couple
5. Trace mode = Max hold
6. Trace was allowed to stabilize

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 22 of 63

V 10.5 12/15/2021

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

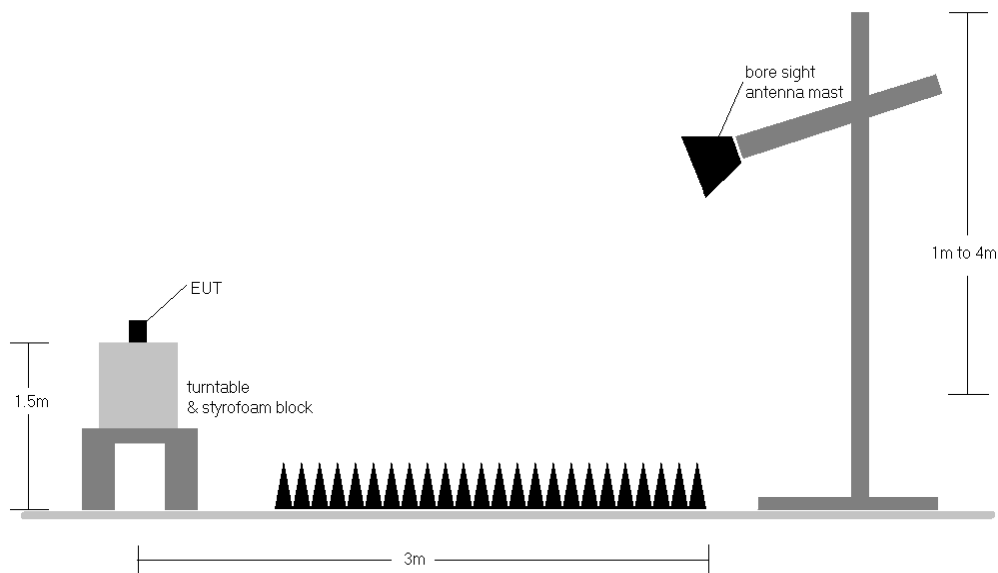

**Figure 7-3. Test Instrument & Measurement Setup**

## Test Notes

1. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
2. All modes of operation were investigated and the worst-case emissions are reported.

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 23 of 63

V 10.5 12/15/2021

### 7.4.1 Peak Radiated Power Measurement

§15.519(e); RSS-220 [5.3.1(g)]

Frequency [GHz]	Channel	Config	Payload	Antenna Polarity [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	F <sub>M</sub> [GHz]	Peak EIRP [dBm/50MHz]	Peak EIRP Limit [dBm/50MHz]	Margin [dB]
6.5	5	0	125	H	101	224	6.4773	-3.56	0.00	-3.56


**Table 7-8. Peak EIRP Measurements (Channel 5)**

Frequency [GHz]	Channel	Config	Payload	Antenna Polarity [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	F <sub>M</sub> [GHz]	Peak EIRP [dBm/50MHz]	Peak EIRP Limit [dBm/50MHz]	Margin [dB]
8.0	9	0	125	H	269	85	7.9918	-3.54	0.00	-3.54


**Table 7-9. Peak EIRP Measurements (Channel 9)**

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 24 of 63

V 10.5 12/15/2021

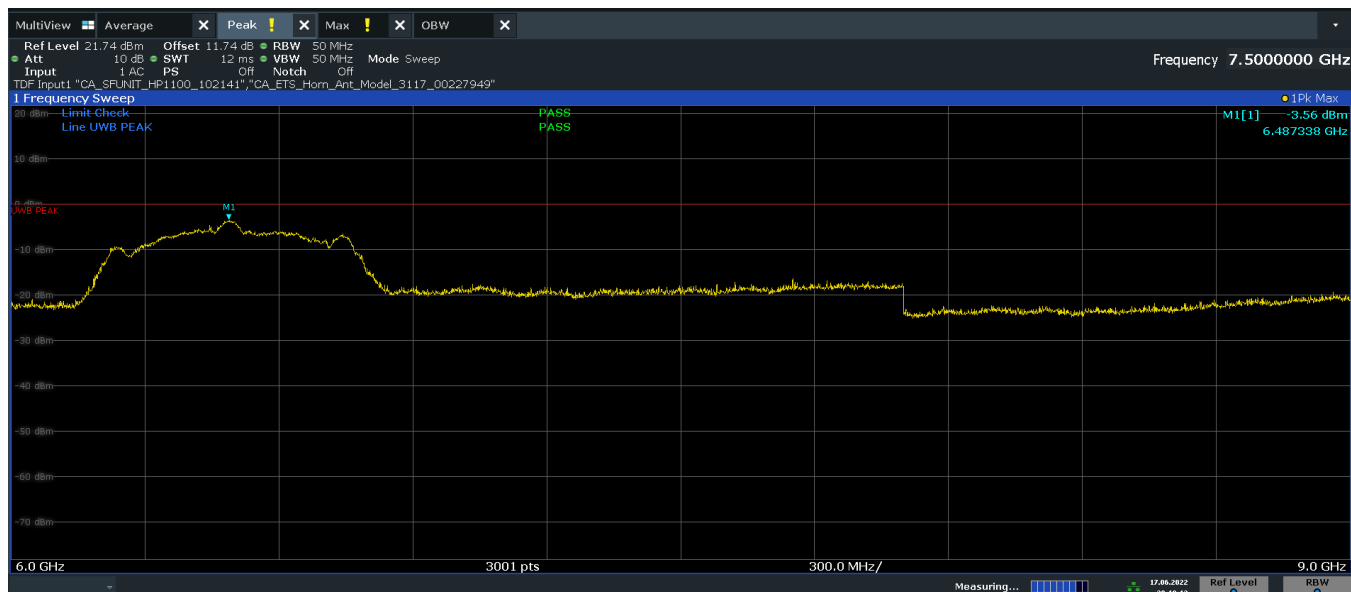

Plot 7-5. Peak Radiated Power (Ch. 5, Config 0/Payload 125)

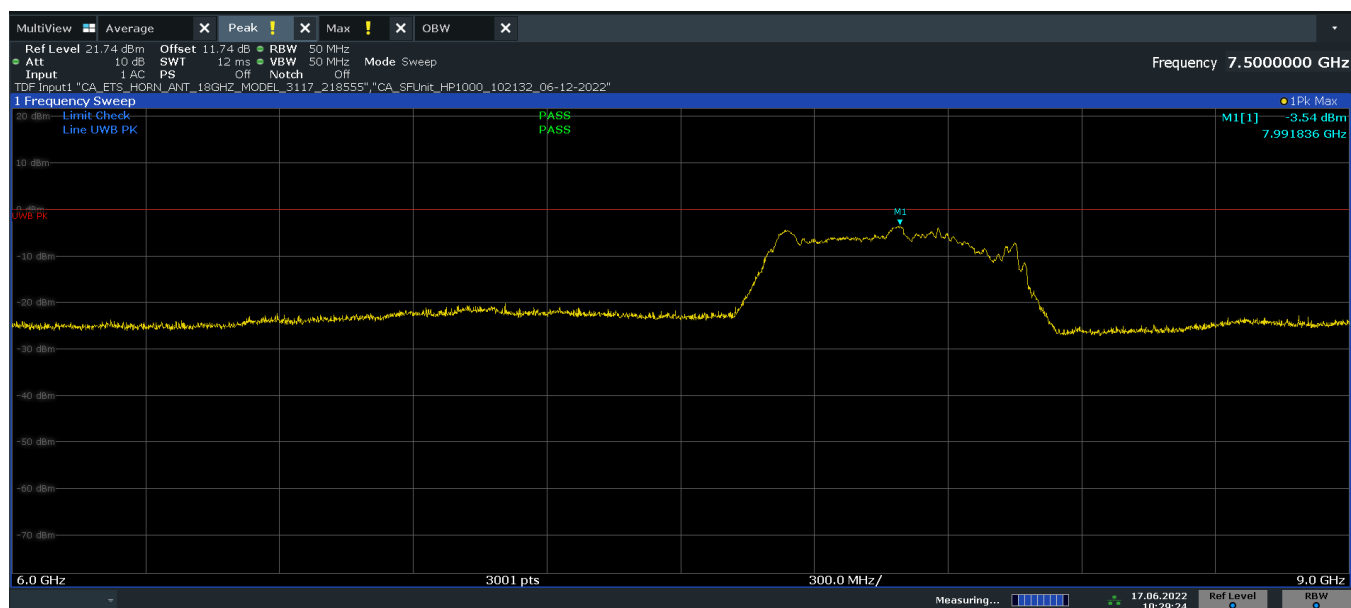

10:29:25 17.06.2022

Plot 7-6. Peak Radiated Power (Ch. 9, Config 0/Payload 125)

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 25 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## 7.4.2 Average Radiated Power Measurement

§15.519(c); RSS-220 [5.3.1(d)]

Frequency [GHz]	Channel	Config	Payload	Antenna Polarity [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	F <sub>M</sub> [GHz]	Average EIRP [dBm/MHz]	Average EIRP Limit [dBm/MHz]	Margin [dB]
6.5	5	0	125	H	101	224	6.4064	-42.46	-41.30	-1.16


**Table 7-10. Average EIRP Measurements (Channel 5)**

Frequency [GHz]	Channel	Config	Payload	Antenna Polarity [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	F <sub>M</sub> [GHz]	Average EIRP [dBm/MHz]	Average EIRP Limit [dBm/MHz]	Margin [dB]
8.0	9	0	125	H	269	85	8.0681	-42.21	-41.30	-0.91


**Table 7-11. Average EIRP Measurements (Channel 9)**

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 26 of 63

V 10.5 12/15/2021

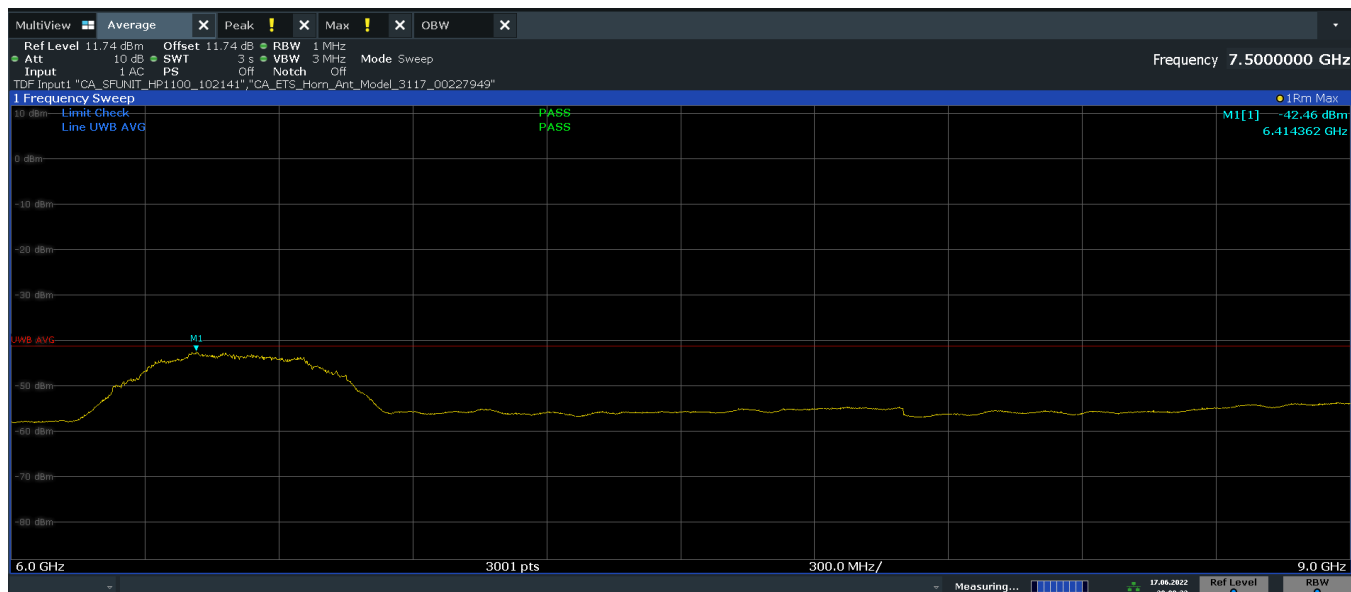

Plot 7-7. Average Radiated Power (Ch. 5, Config 0/Payload 125)

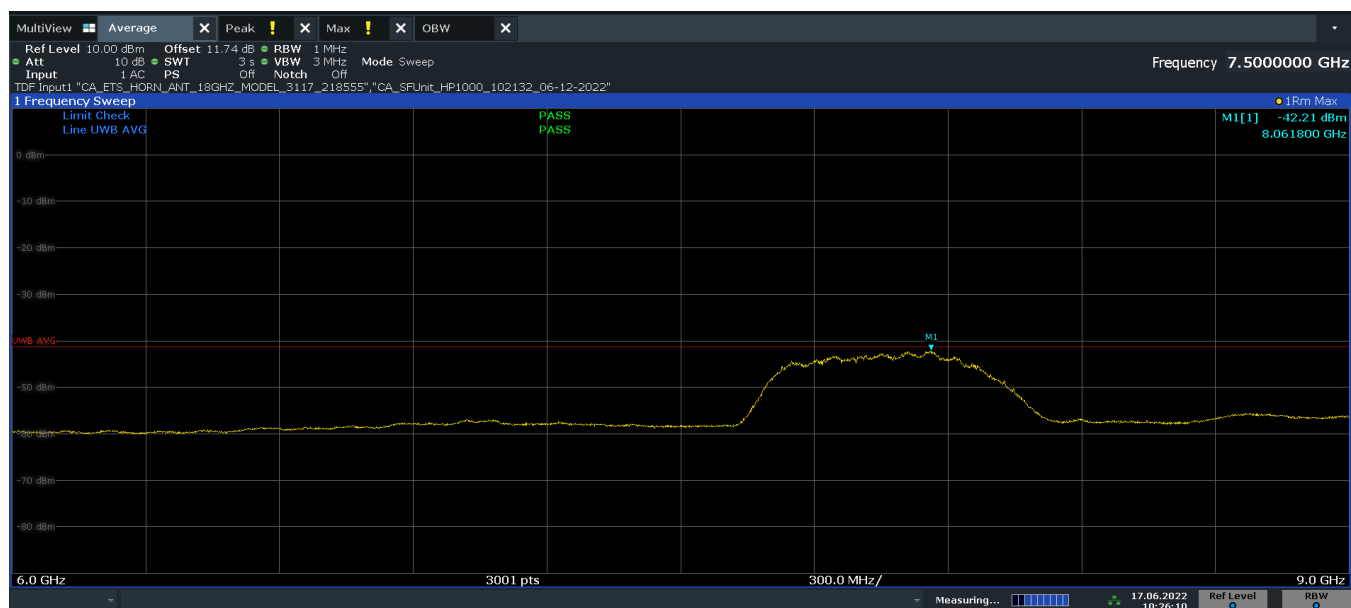

10:26:11 17.06.2022

Plot 7-8. Average Radiated Power (Ch. 9, Config 0/Payload 125)

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 27 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.5 Cease Transmission Time

§15.519(a)(1); RSS-220 [5.3.1(b)]

### Test Overview and Limit

A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

### Test Procedures Used


KDB 393764 D01 v02r01

### Test Settings

1. RBW = 1MHz
2. VBW = 3MHz
3. Span = Zero Span Mode
4. Sweep time shall be sufficient to demonstrate EUTs compliance with the rule part.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

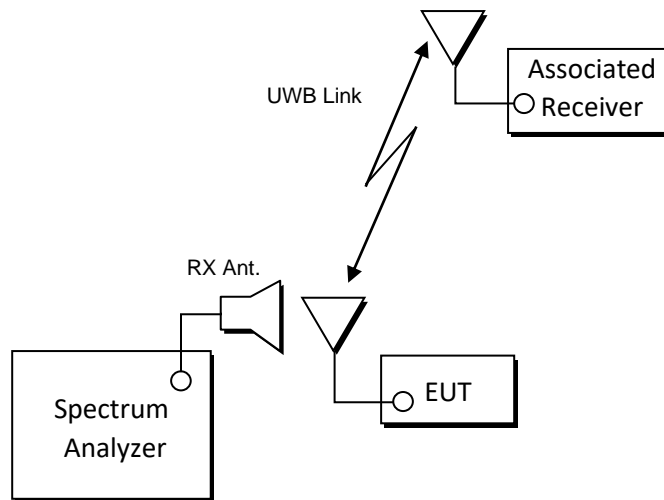

**Figure 7-4. Test Setup**

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 28 of 63

V 10.5 12/15/2021

## Test Configurations

The EUT was monitored in 2 different test configurations:

- Mode 1: EUT initiates the UWB link to the associated receiver (phone),
  - Associated receiver ends the link, and EUT ceases transmission of any information other than periodic signals (polling) for use in the establishment or re-establishment of a communications link with an associated receiver
- Mode 2: The associated receiver (phone) initiates the UWB link to the EUT
  - EUT ends the link, and stops sending acknowledgements to associated receiver

## Result


Parameter	Limit	Result
Cessation Time - Mode1	1) The UWB intentional radiator shall cease transmission within 10 seconds 2) An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.	Pass
Cessation Time - Mode2	1) The UWB intentional radiator shall cease transmission within 10 seconds 2) An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.	Pass

## Plots Description


- Cessation Time - Mode1 (Mode2) plot:
  - Marker 1 shows start time of initiating UWB link
  - Marker 2 shows stop time of sending acknowledgement
- Zoom in Cessation Time - Mode1 plot:
  - Marker 1 shows EUT traffic level
  - Marker 2 shows Associated receiver (Phone) traffic level
  - Marker 3 shows Associated receiver (Phone) Acknowledgement signal
  - Marker 4 shows EUT Polling signal (Before ceasing transmission)
  - Marker 5 shows EUT Polling signal (After ceasing transmission)

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 29 of 63

V 10.5 12/15/2021

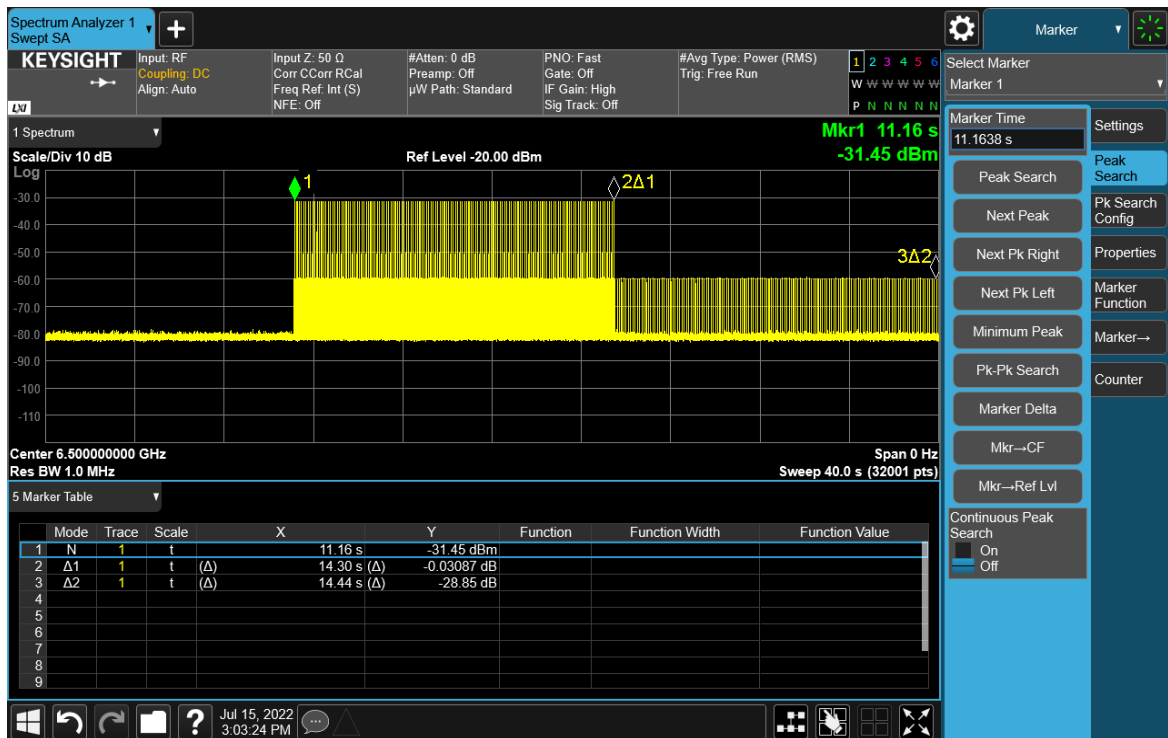


Plot 7-9. Cessation Time – Mode1 (Ch. 5, 6.5 GHz)

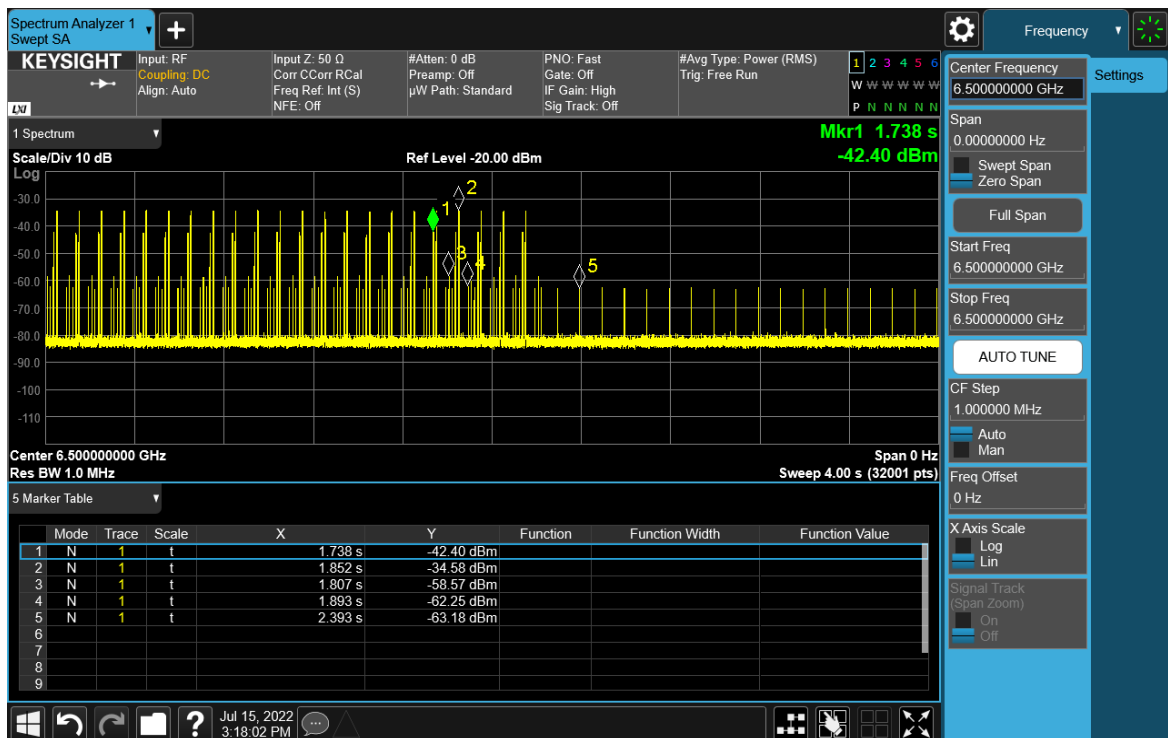


Plot 7-10. Zoom in Cessation Time – Mode1 (Ch. 5, 6.5 GHz)

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 30 of 63

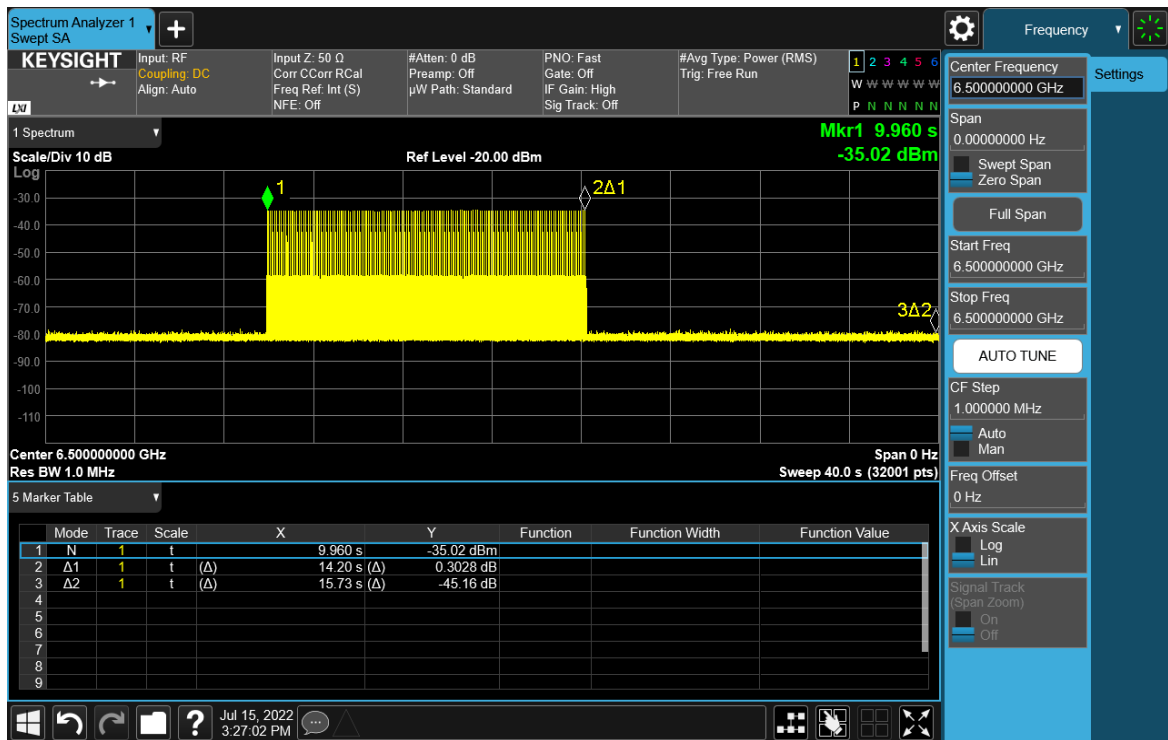

Plot 7-11. Cessation Time – Mode2 (Ch. 5, 6.5 GHz)

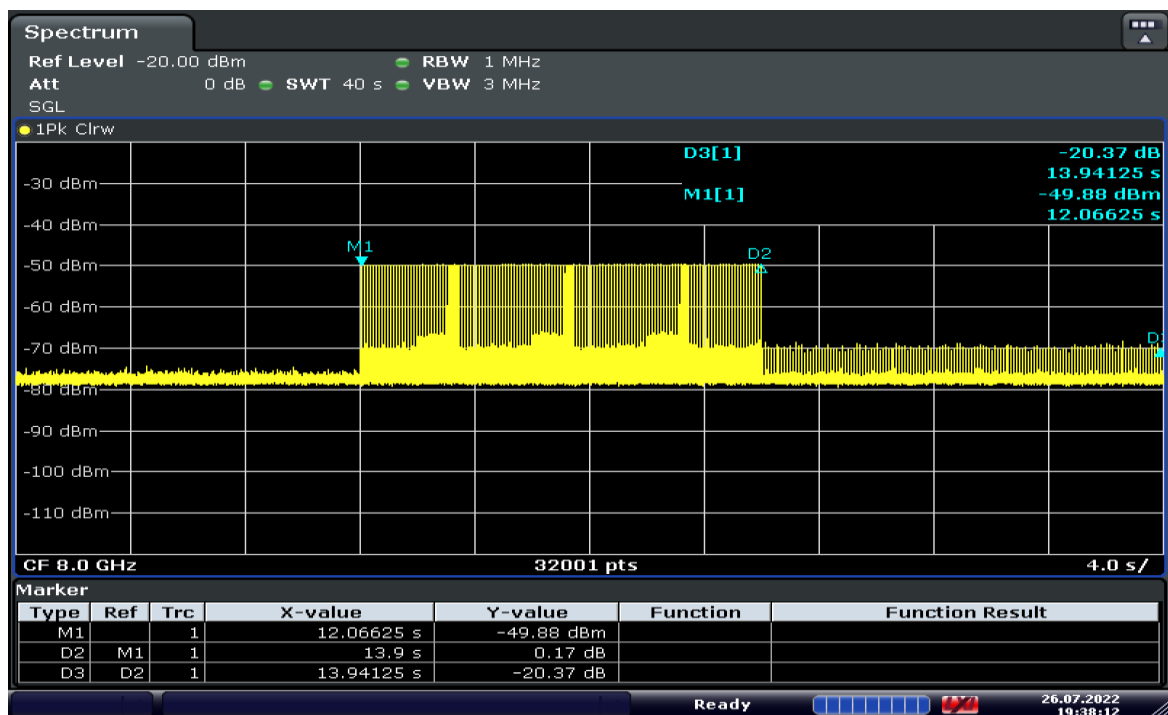


Plot 7-12. Cessation Time – Mode1 (Ch. 9, 8 GHz)


FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 31 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

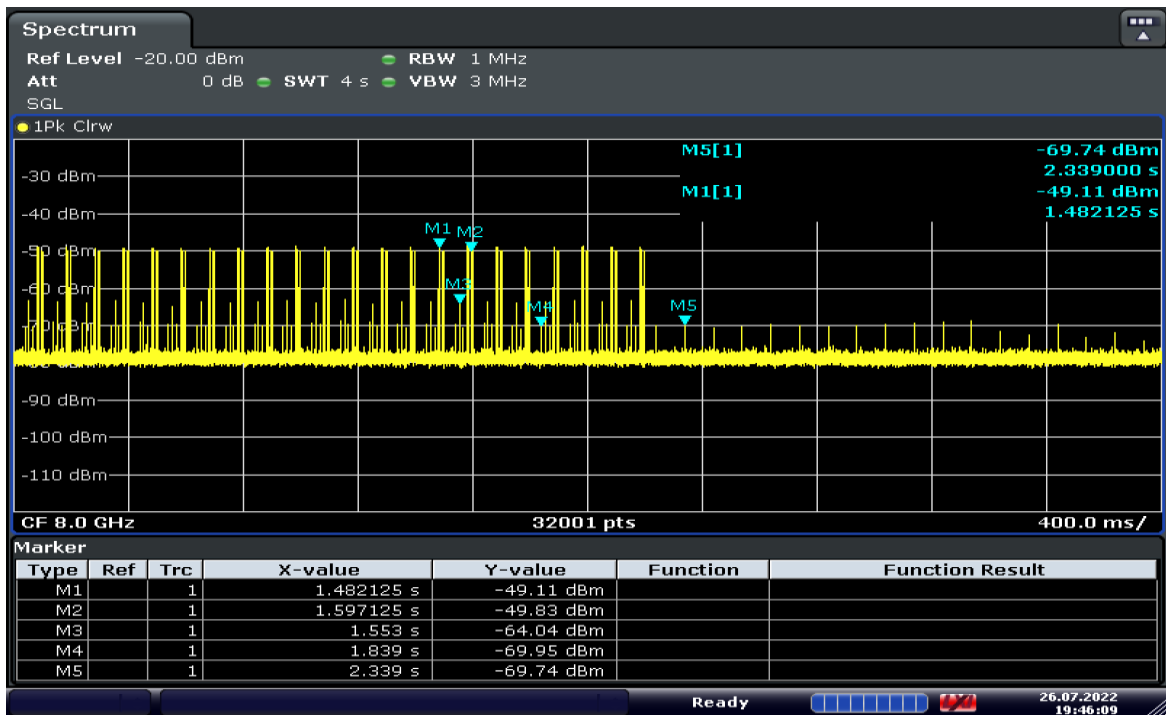

Plot 7-13. Zoom in Cessation Time – Mode1 (Ch. 9, 8 GHz)

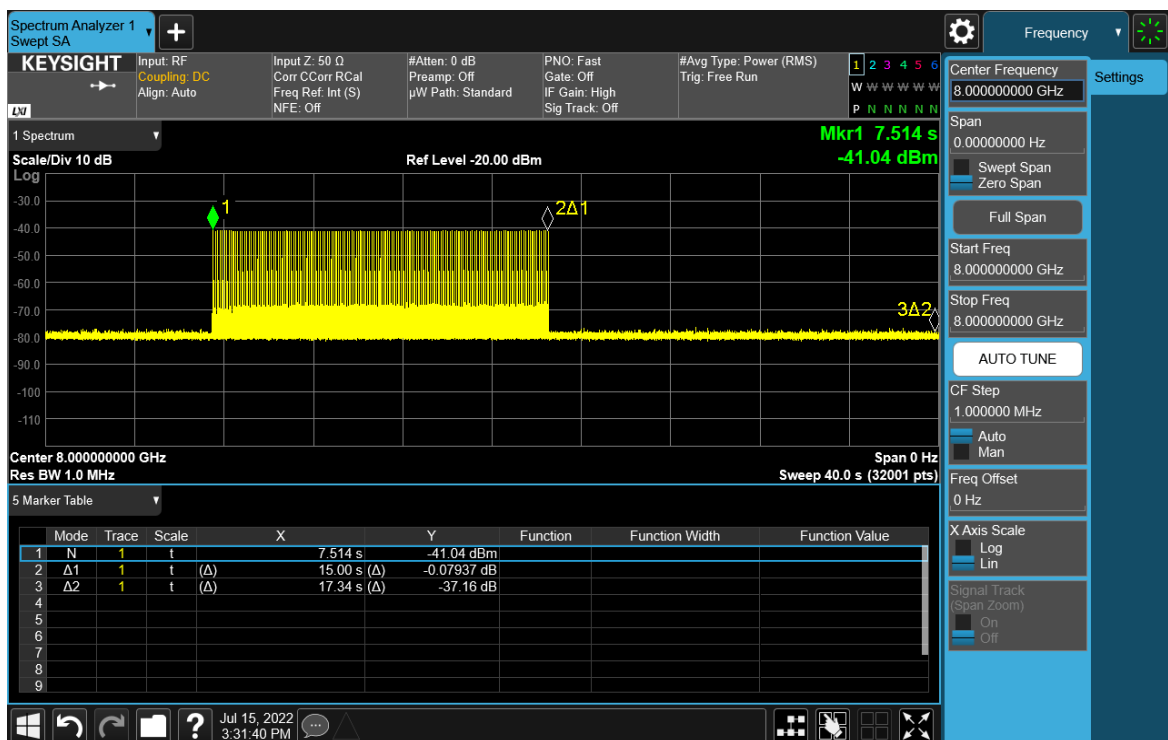

Plot 7-14. Cessation Time – Mode2 (Ch. 9, 8 GHz)

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 32 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.6 Radiated Spurious Emission Measurements

§15.519 (c) §15.519 (d); RSS-220 [5.3.1(d)] RSS-220 [5.3.1(e)]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

**All out of band emissions must not exceed the average limits shown in Table 7-12 and Table 7-13 per Section 15.519 (C) and RSS-220[5.3.1(d)] when measured using a resolution bandwidth of 1 MHz:**

Frequency [MHz]	EIRP [dBm]
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

Table 7-12. FCC 15.519 Radiated Spurious Emissions Limits

Frequency [MHz]	EIRP [dBm]
960-1610	-75.3
1610-4750	-70.0
4750-10600	-41.3
Above 10600	-61.3

Table 7-13. RSS-220 Radiated Spurious Emissions Limits

**All out of band emissions must not exceed the average limits shown in Table 7-14 per Section 15.519 (d) and RSS-220(5.3.1)(e) when measured using a resolution bandwidth greater than or equal to 1 kHz. The measurements shall demonstrate compliance with the stated limits at whatever resolution bandwidth is used.**

Frequency [MHz]	EIRP [dBm]
1164-1240	-85.3
1559-1610	-85.3

Table 7-14. FCC 15.519/RSS-220 Radiated Spurious Emissions Limits for GPS frequency bands

### Test Procedures Used

ANSI C63.10-2013 – Section 10.3  
KDB 393764 D01 v02r01

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 33 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).




## Test Settings

### Average RSE Measurements

1. RBW = 1MHz (30kHz for emissions in the GPS band)
2. VBW = 3MHz (100kHz for emissions in the GPS band)
3. Detector = Average (RMS)
4. Sweep time = No more than a 1 ms integration period over each measurement bin
5. Trace mode = Max hold
6. Trace was allowed to stabilize

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

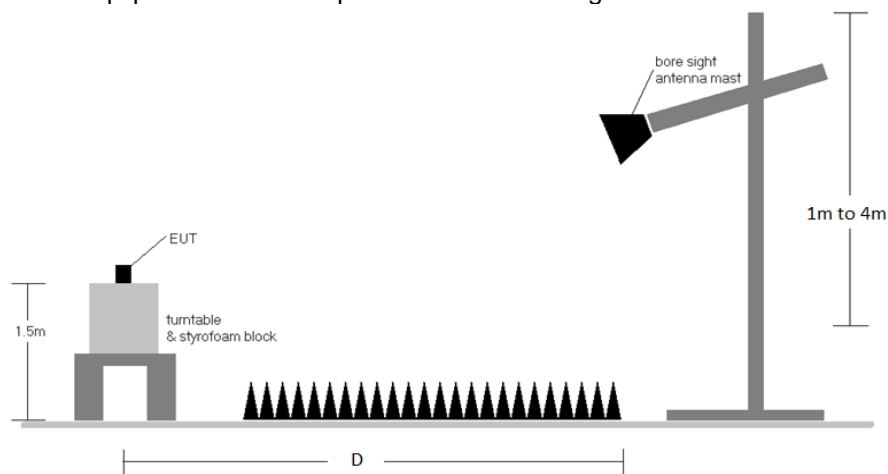

**Figure 7-5. Radiated Test Setup - Above 960MHz**

## Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported.
2. This unit was tested with its standard battery.
3. The RBW for measurements in the GPS Bands were reduced to 30kHz in order to show compliance.
4. D is the measurement test distance and emissions from 960MHz - 18GHz were measured at 0.6 meter test distance while emissions above 18GHz were measured at 0.5 meter test distance with the application of a distance correction factor.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
6. 6GHz - 9GHz RSE is covered in EIRP section (Section 7.4).

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 34 of 63

V 10.5 12/15/2021

## Sample Calculations

### Determining Spurious Emissions Levels

- $E_{[\text{dB}\mu\text{V/m}]} = \text{Analyzer level}_{[\text{dBm}]} + 107 + \text{AFCL}_{[\text{dB/m}]}$
- $\text{Spurious Emission Level}_{[\text{dBm}]} = E_{[\text{dB}\mu\text{V/m}]} + 20 \log(D_{\text{Meas}}) - 104.8$
- $\text{Spurious Emission Level}_{[\text{dBm}]} = \text{Analyzer Level}_{[\text{dBm}]} + \text{AFCL}_{[\text{dB/m}]} + \text{Conversion Factor}_{[\text{dB}]}$
- $\text{AFCL}_{[\text{dB/m}]} = (\text{Antenna Factor}_{[\text{dB/m}]} + \text{Cable Loss}_{[\text{dB}]} + \text{Attenuator}_{[\text{dB}]} - \text{Preamplifier Gain}_{[\text{dB}]})$
- $\text{Conversion Factor}_{[\text{dB}]} = 107 - 104.8 + 20 \log(D_{\text{Meas}})$
- $\text{Margin}_{[\text{dB}]} = \text{Spurious Emission Level}_{[\text{dBm}]} - \text{Limit}_{[\text{dBm}]}$


<b>FCC ID:</b> BCG-A2622 <b>IC:</b> 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 35 of 63

V 10.5 12/15/2021




## Radiated Spurious Emission Measurements (960MHz – 18GHz)

**\$15.519(c); RSS-220 [5.3.1(d)]**

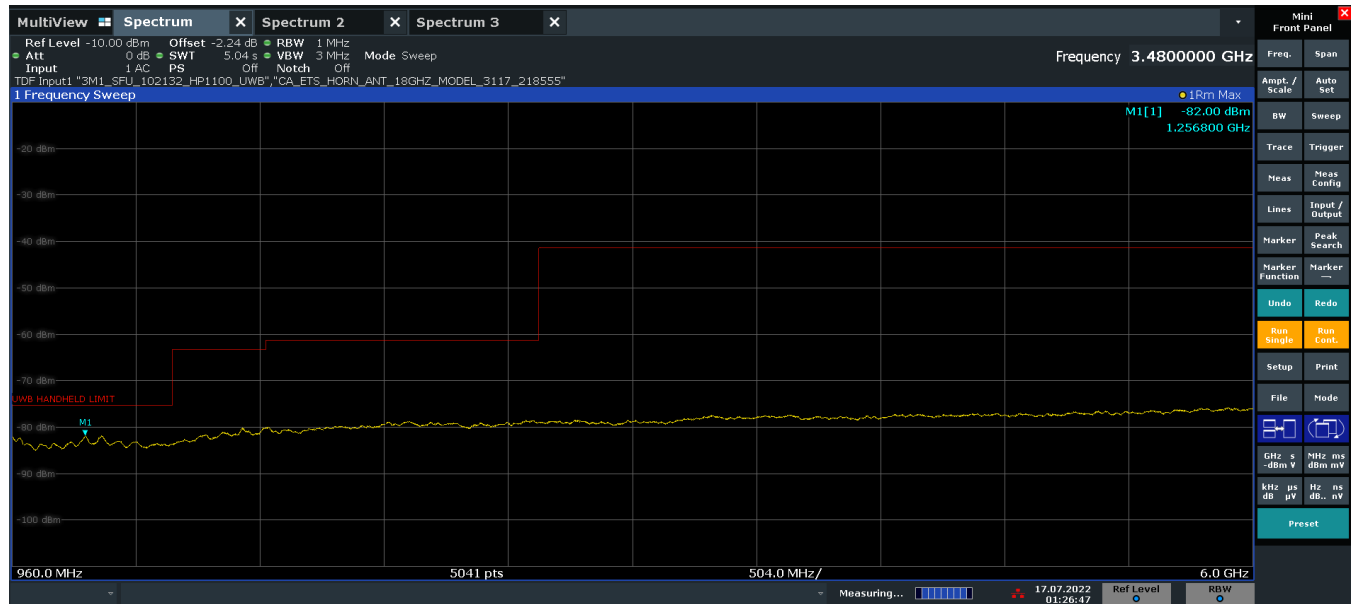

01:26:48 17.07.2022

**Plot 7-15. FCC Radiated Spurious Emission 960-6000MHz (Ch. 5, Config 0, Payload 125 Ant. Pol. H)**

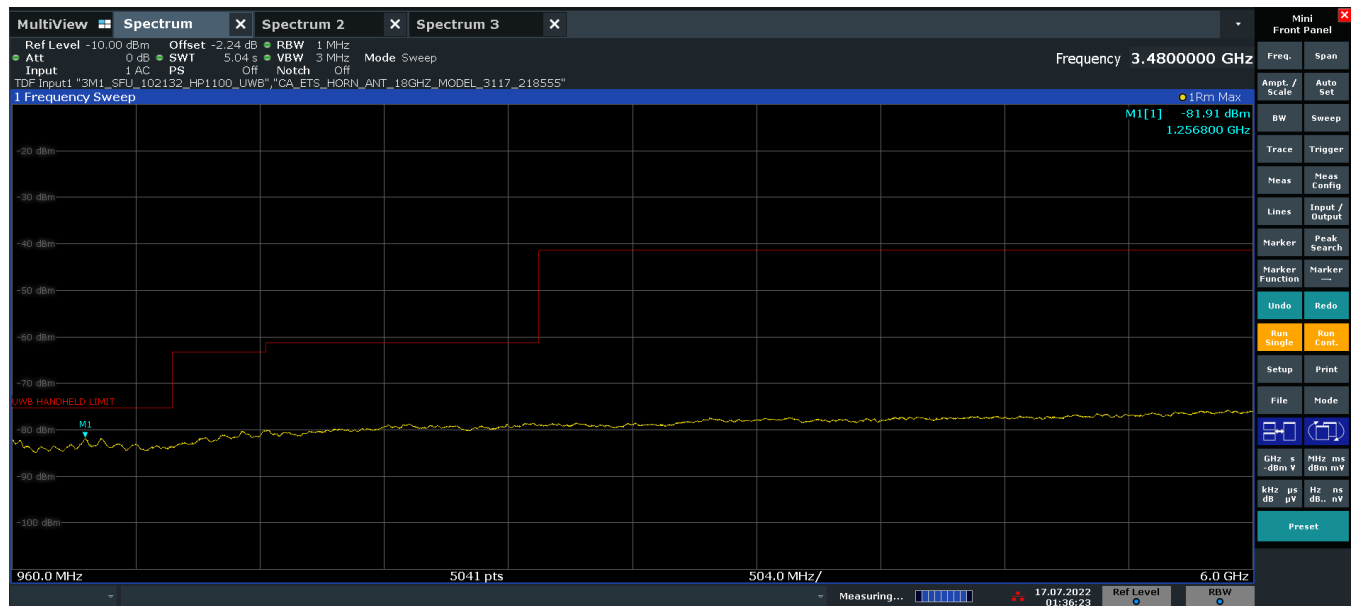


01:36:24 17.07.2022

**Plot 7-16. FCC Radiated Spurious Emissions 960-6000MHz (Ch. 5, Config 0, Payload 125 Ant. Pol. V)**

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 36 of 63


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [cl.info@element.com](mailto:cl.info@element.com).

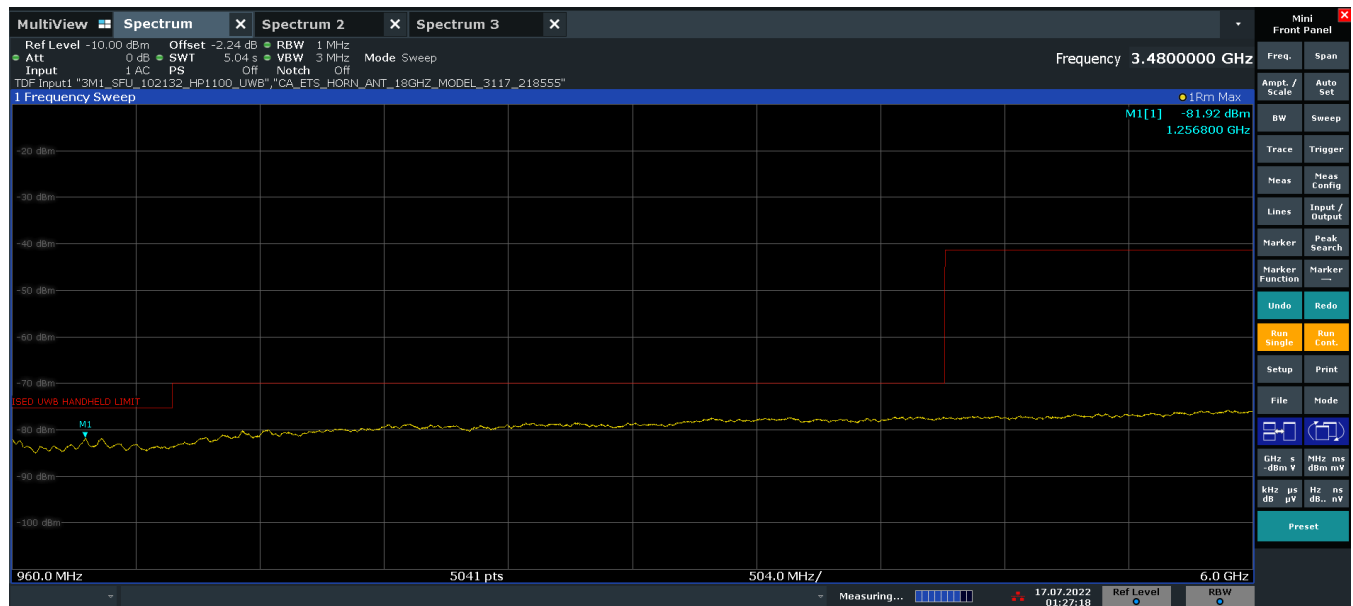

01:27:19 17.07.2022

Plot 7-17. ISCED Radiated Spurious Emission 960-6000MHz (Ch. 5, Config 0, Payload 125 Ant. Pol. H)

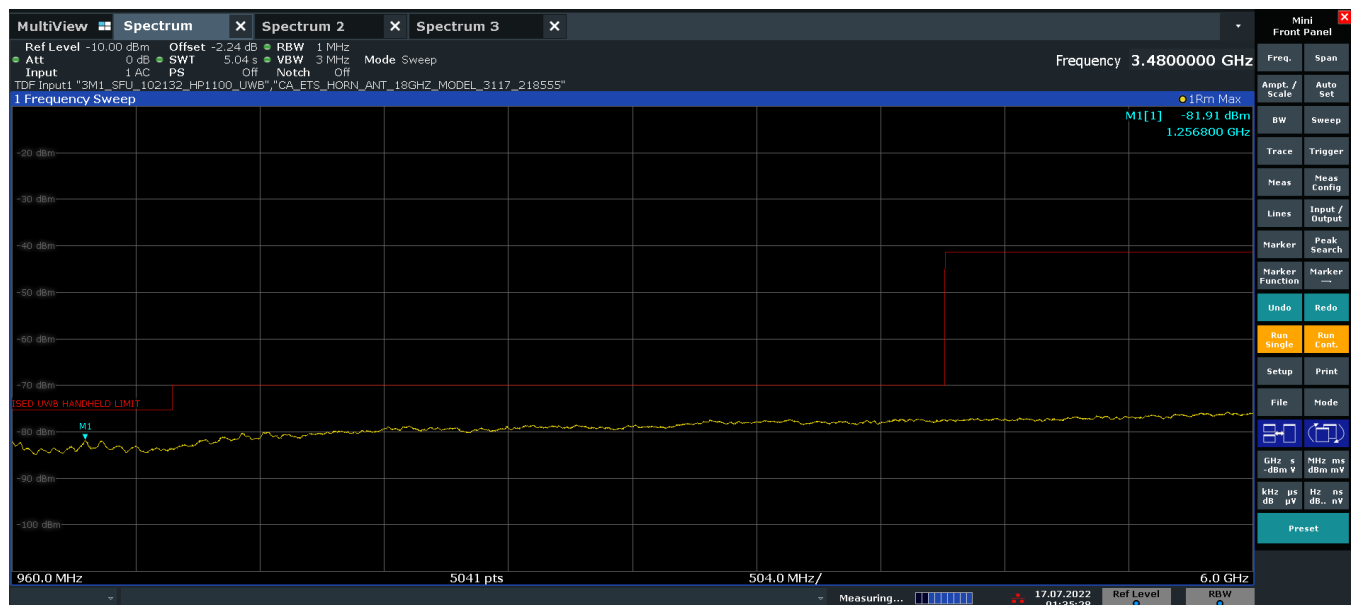


01:35:28 17.07.2022

Plot 7-18. ISCED Radiated Spurious Emission 960-6000MHz (Ch. 5, Config 0, Payload 125 Ant. Pol. V)

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 37 of 63


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

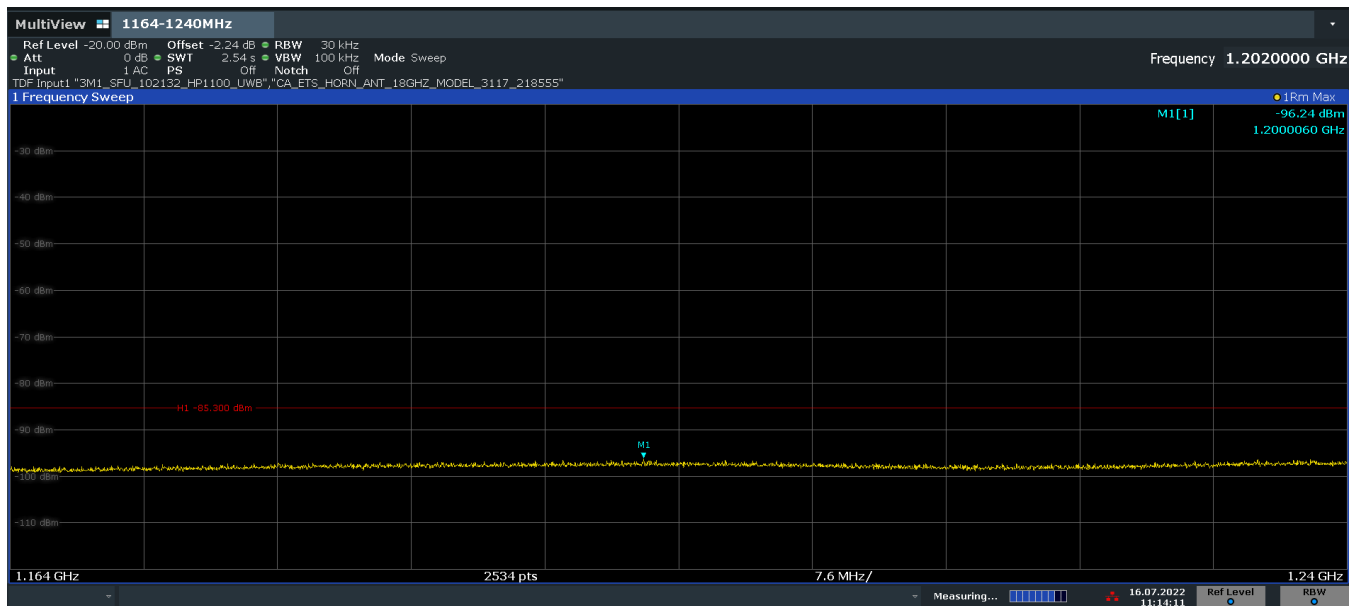

11:14:11 16.07.2022

Plot 7-19. Radiated Spurious Emission 1164-1240MHz (Ch. 5, Config 0, Payload 125 Ant. Pol. H)

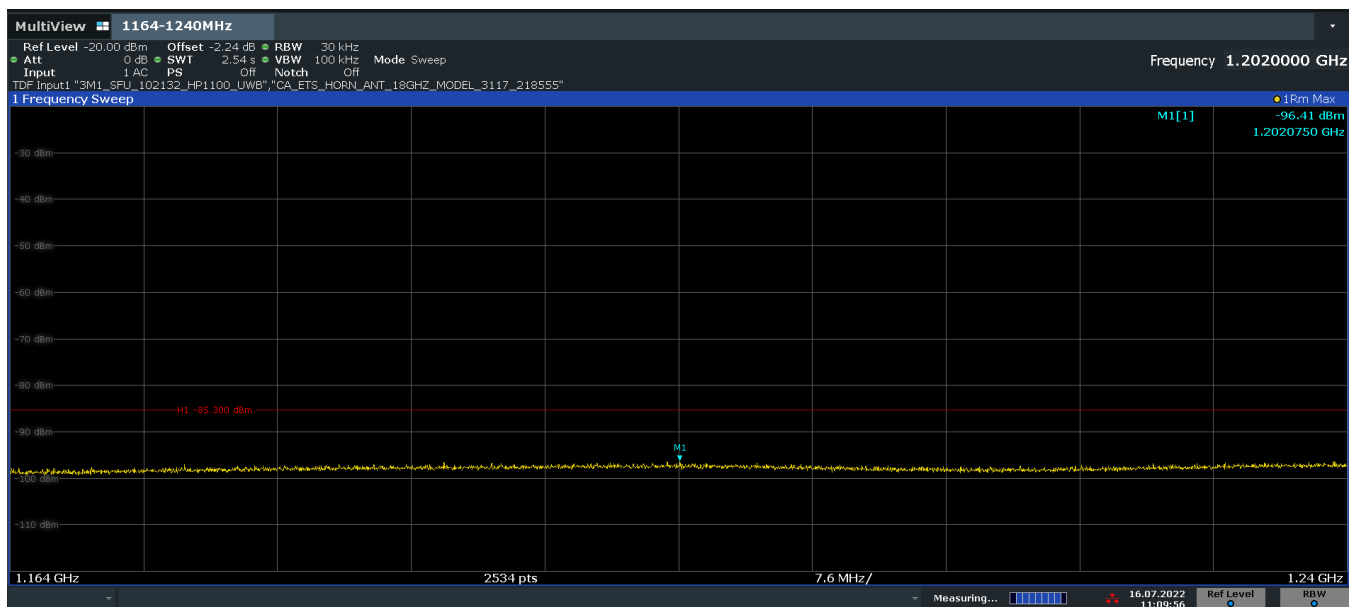


11:09:56 16.07.2022

Plot 7-20. Radiated Spurious Emission 1164-1240MHz (Ch. 5, Config 0, Payload 125 Ant. Pol. V)

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 38 of 63


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

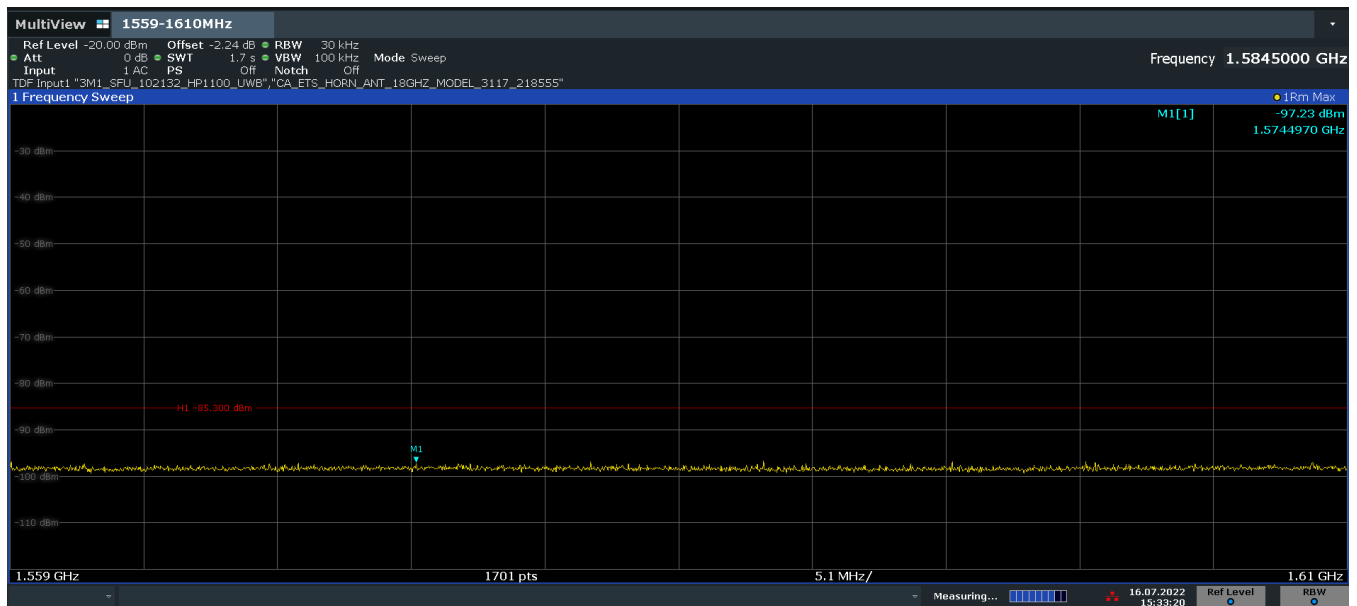

15:33:21 16.07.2022

Plot 7-21. Radiated Spurious Emission 1559-1610MHz (Ch. 5, Config 0, Payload 125 Ant. Pol. H)

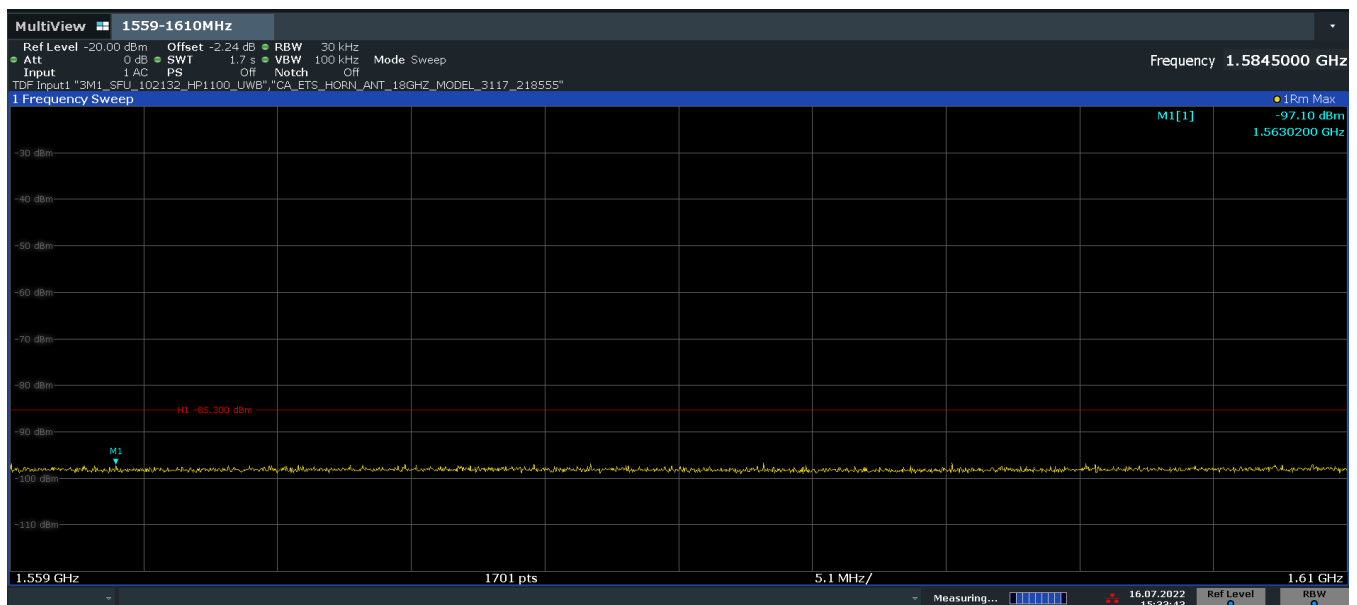


15:33:43 16.07.2022

Plot 7-22. Radiated Spurious Emission 1559-1610MHz (Ch. 5, Config 0, Payload 125 Ant. Pol. V)

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 39 of 63


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

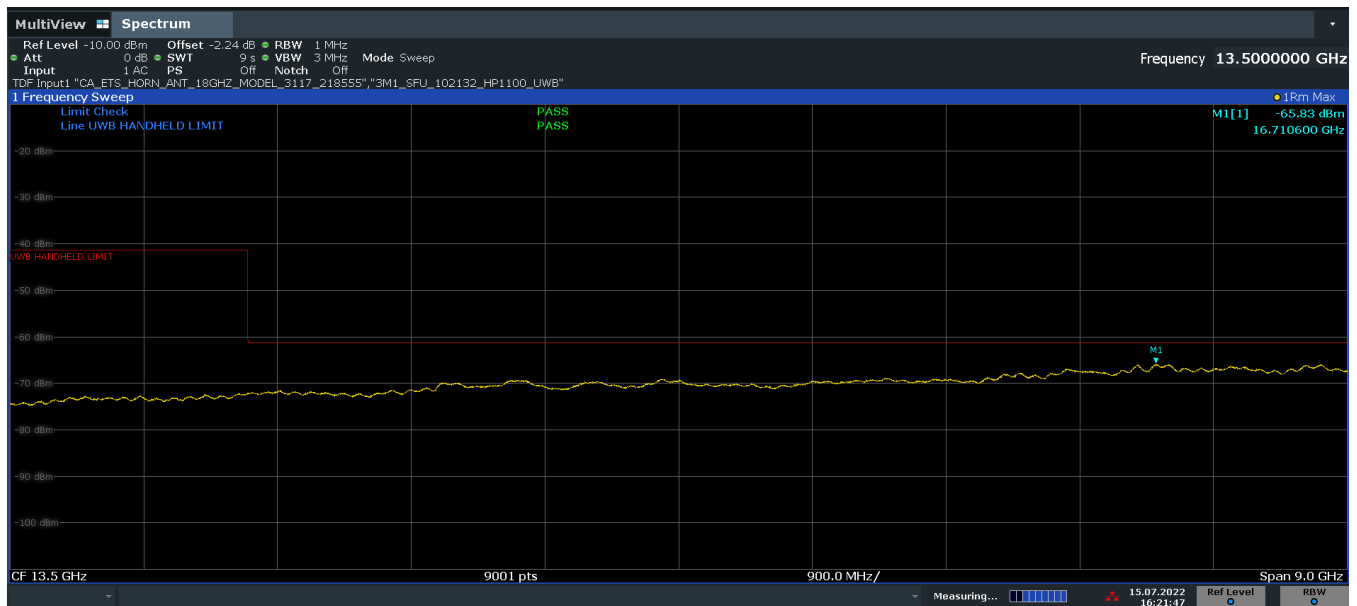

16:21:47 15.07.2022

Plot 7-23. Radiated Spurious Emission 9-18GHz (Ch. 5, Config 0, Payload 125 Ant. Pol. H)

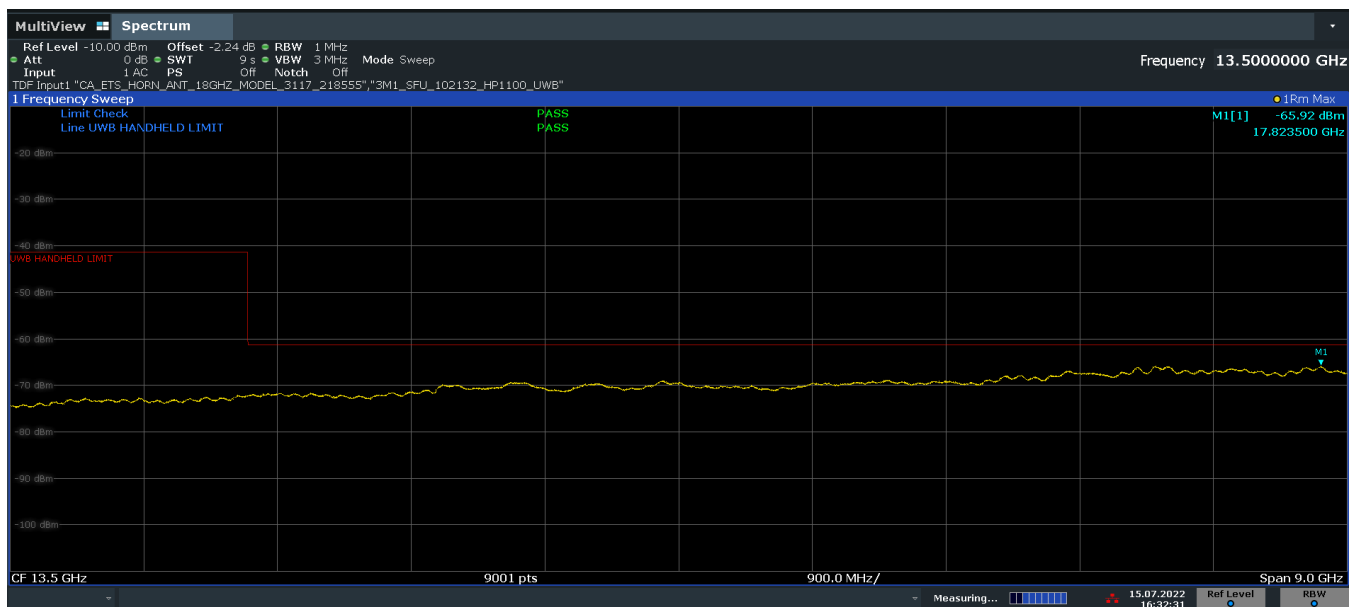


16:32:31 15.07.2022

Plot 7-24. Radiated Spurious Emission 9-18GHz (Ch. 5, Config 0, Payload 125 Ant. Pol. V)

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 40 of 63


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

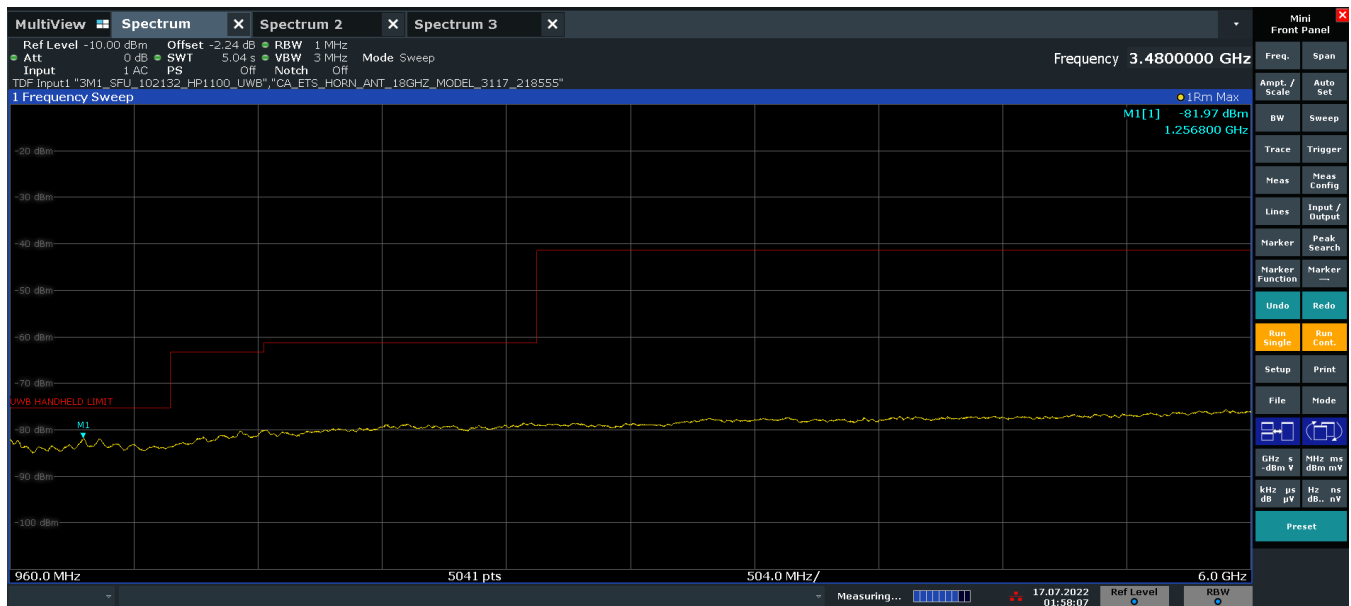

01:58:08 17.07.2022

Plot 7-25. FCC Radiated Spurious Emission 960-6000MHz (Ch. 9, Config 0, Payload 125 Ant. Pol. H)

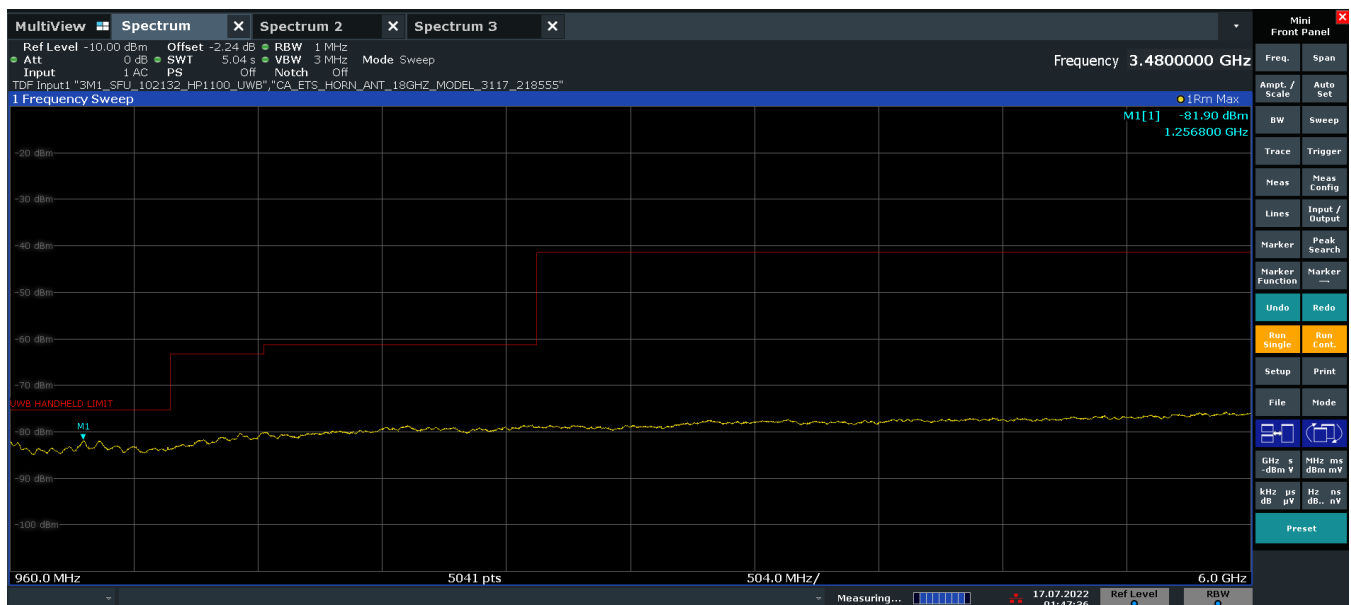

01:47:36 17.07.2022


Plot 7-26. FCC Radiated Spurious Emission 960-6000MHz (Ch.9, Config 0, Payload 125 Ant. Pol. V)

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 41 of 63

V 10.5 12/15/2021


Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



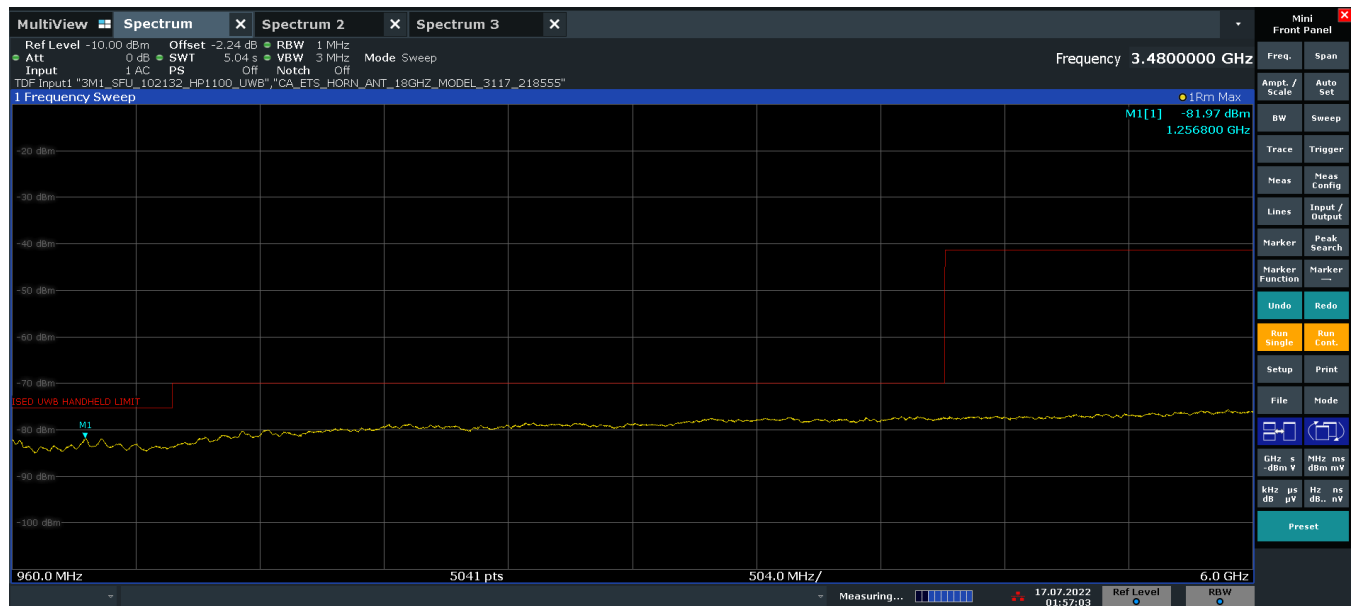

01:57:04 17.07.2022

**Plot 7-27. ISED Radiated Spurious Emission 960-6000MHz (Ch. 9, Config 0, Payload 125 Ant. Pol. H)**

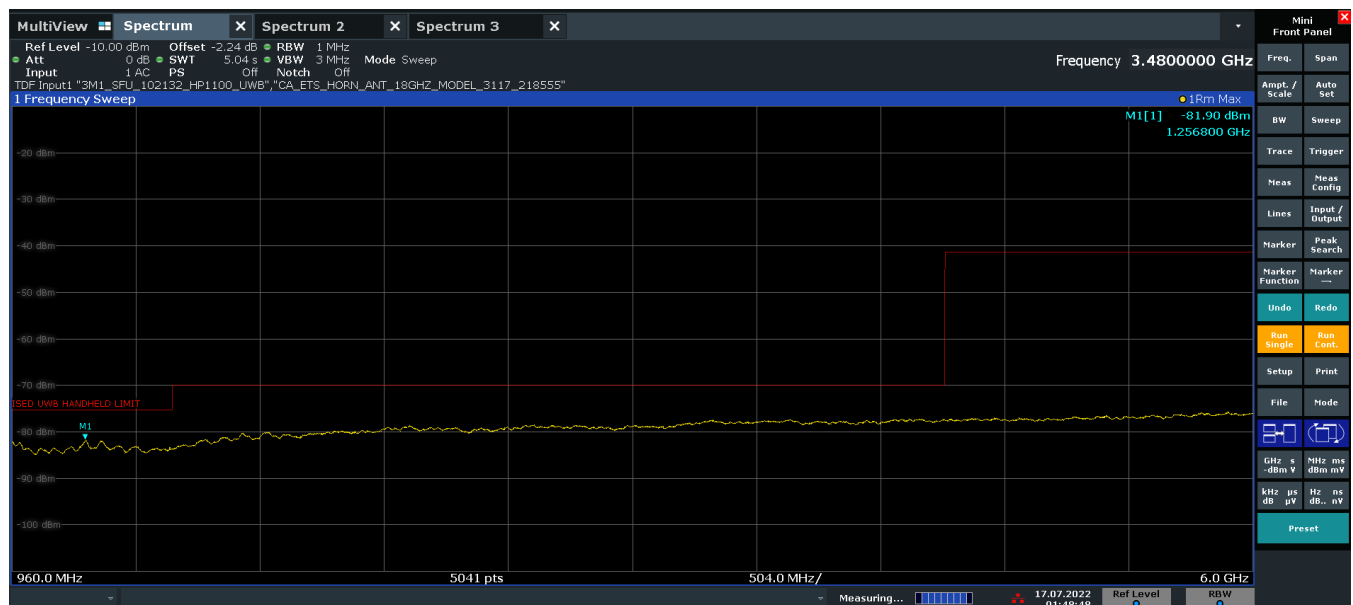


01:48:48 17.07.2022

**Plot 7-28. ISED Radiated Spurious Emission 960-6000MHz (Ch.9, Config 0, Payload 125 Ant. Pol. V)**

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 42 of 63


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

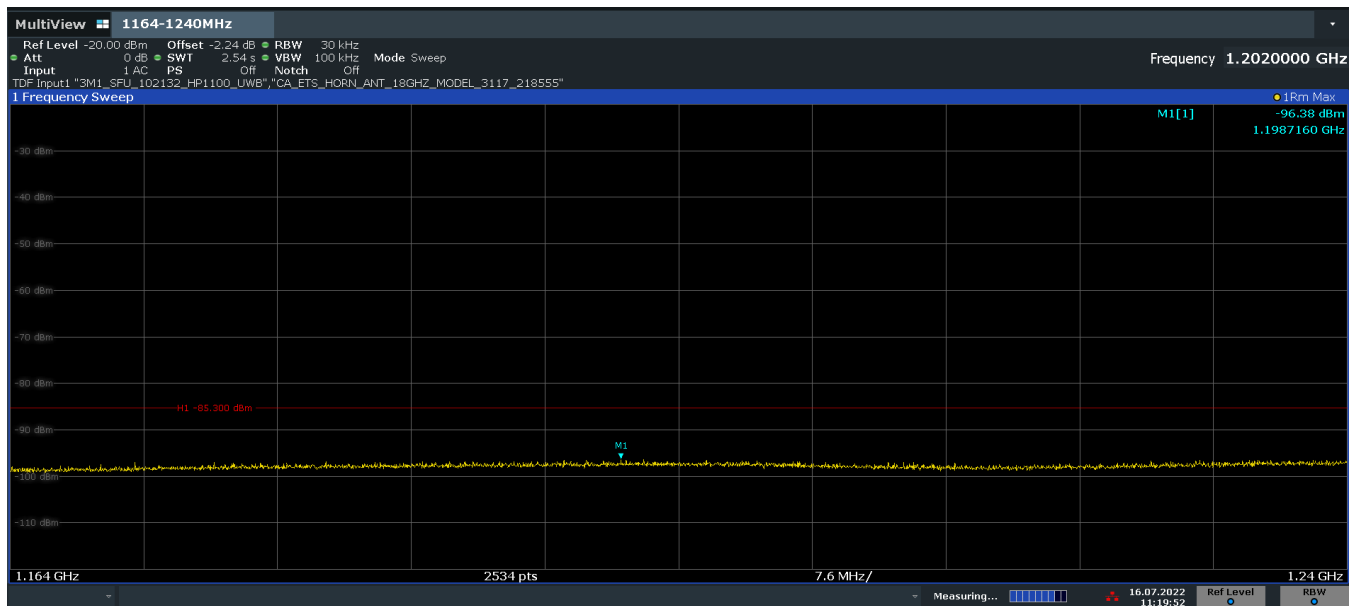

11:19:52 16.07.2022

Plot 7-29. Radiated Spurious Emission 1164-1240MHz (Ch. 9, Config 0, Payload 125 Ant. Pol. H)

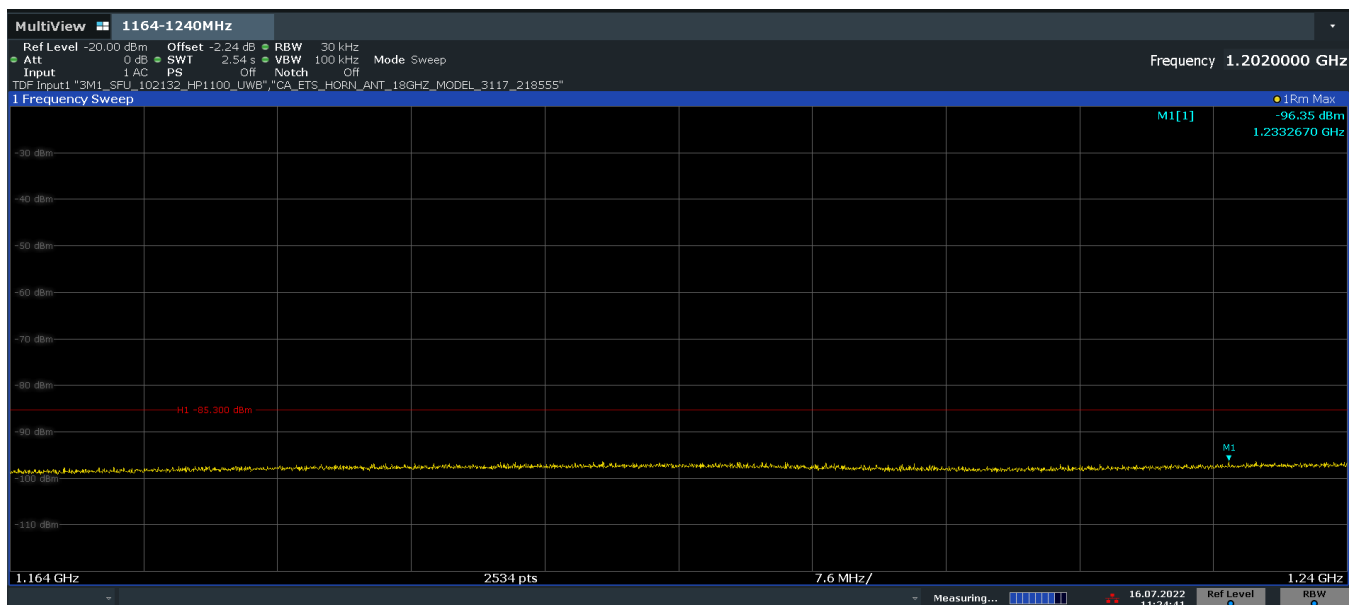


11:24:42 16.07.2022

Plot 7-30. Radiated Spurious Emission 1164-1240MHz (Ch. 9, Config 0, Payload 125 Ant. Pol. V)

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 43 of 63


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

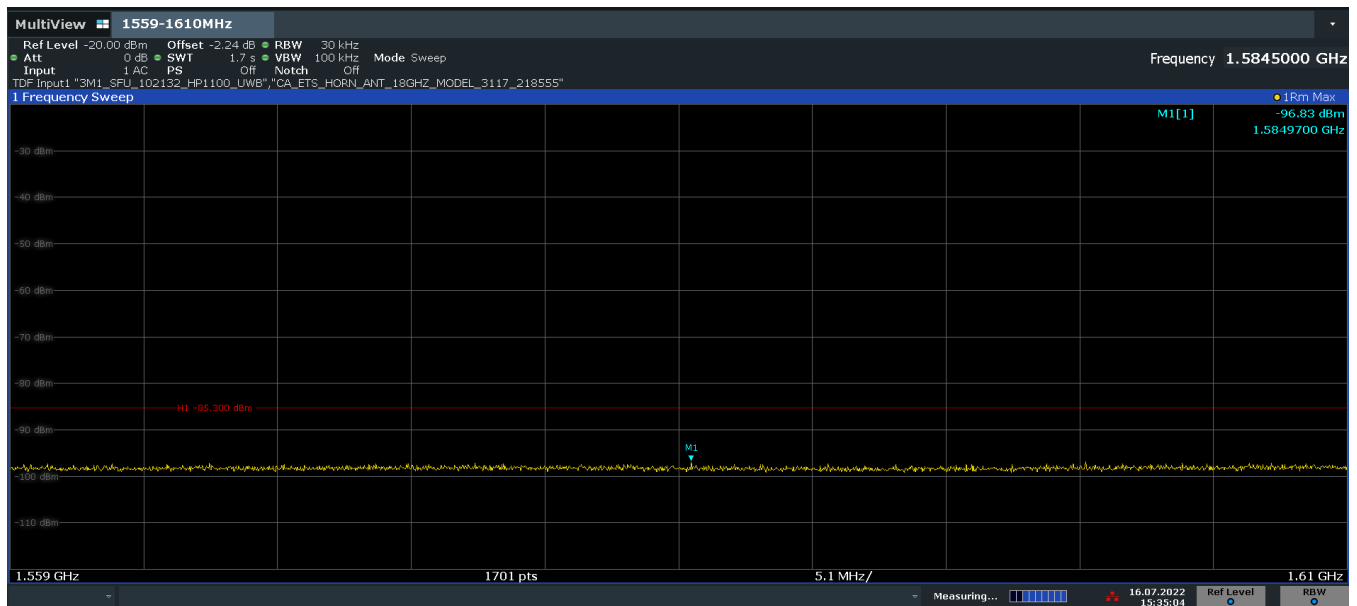

15:35:04 16.07.2022

Plot 7-31. Radiated Spurious Emission 1559-1610MHz (Ch. 9, Config 0, Payload 125 Ant. Pol. H)

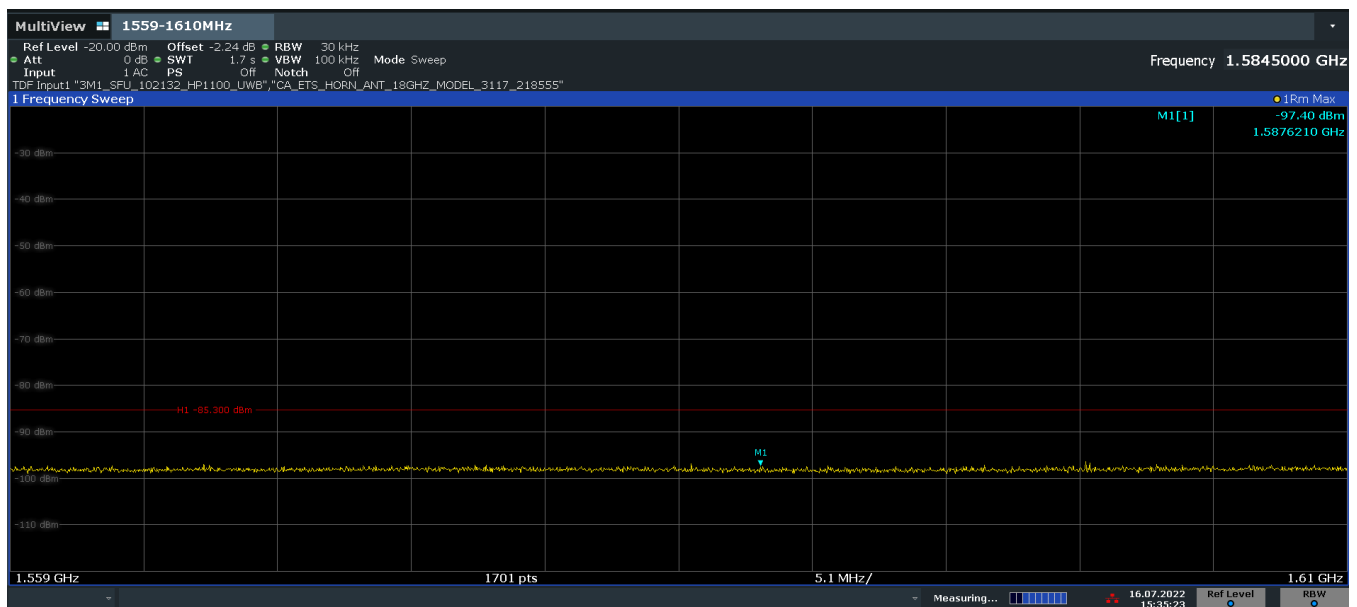


15:35:24 16.07.2022

Plot 7-32. Radiated Spurious Emission 1559-1610MHz (Ch. 9, Config 0, Payload 125 Ant. Pol. V)

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 44 of 63


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

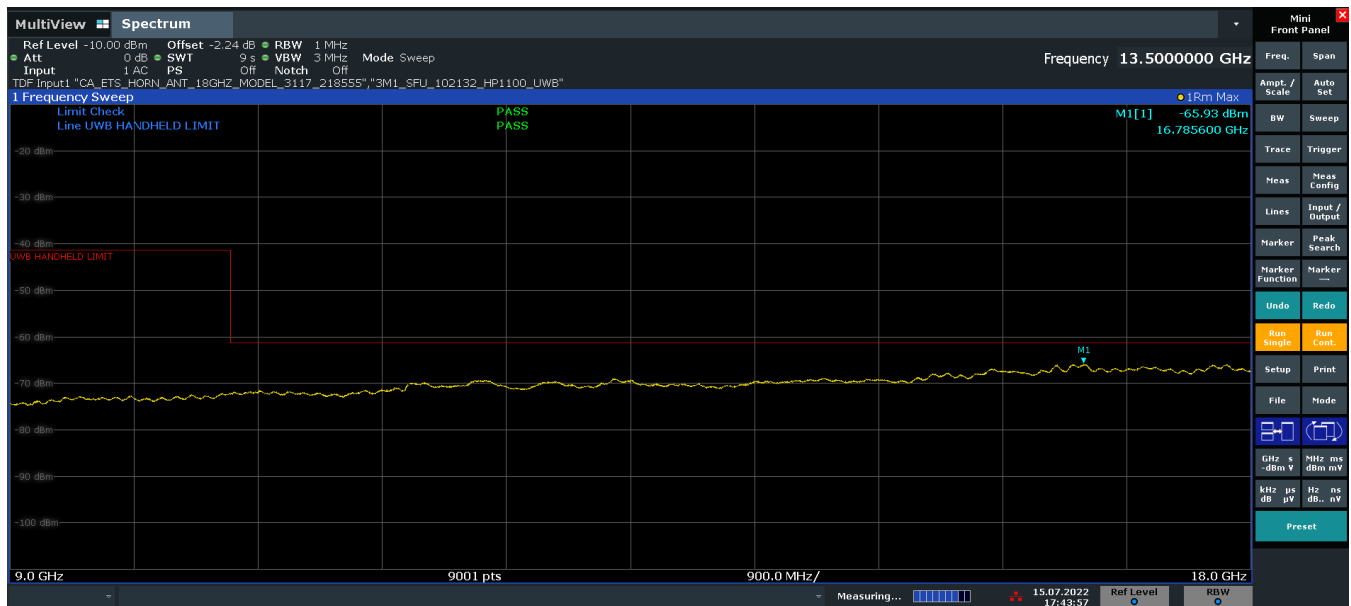

17:43:58 15.07.2022

Plot 7-33. Radiated Spurious Emission 9-18GHz (Ch. 9, Config 0, Payload 125 Ant. Pol. H)

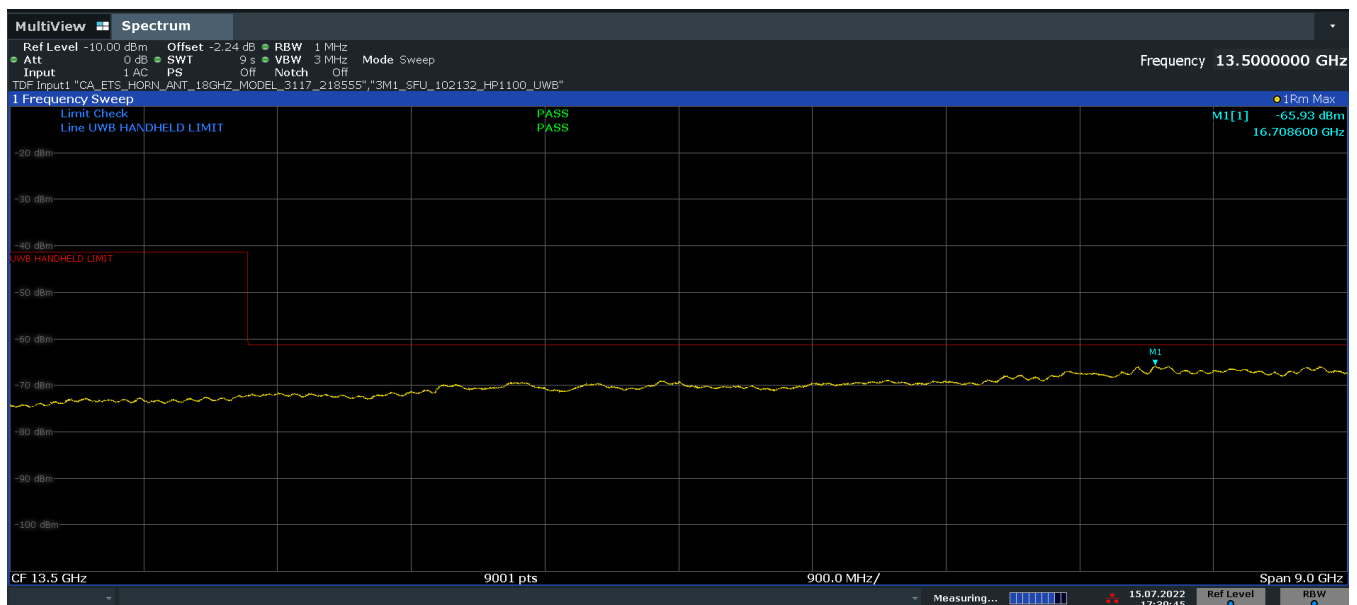

17:30:46 15.07.2022

Plot 7-34. Radiated Spurious Emission 9-18GHz (Ch. 9, Config 0, Payload 125 Ant. Pol. V)


FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 45 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).


## Radiated Spurious Emissions (Above 18GHz)

**\$15.519 (c); RSS-220 [5.3.1(d)]**

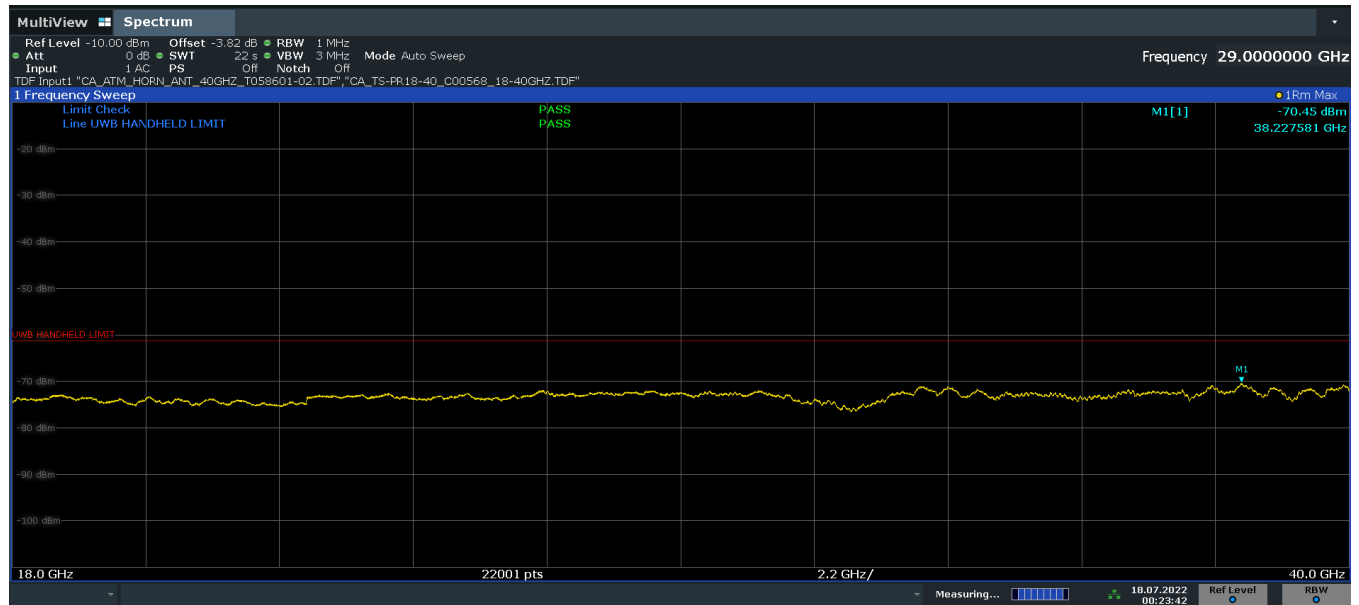

00:23:42 18.07.2022

**Plot 7-35. Radiated Spurious Emission 18-40GHz (Ch. 5, Config 0, Payload 125 Ant. Pol. H)**

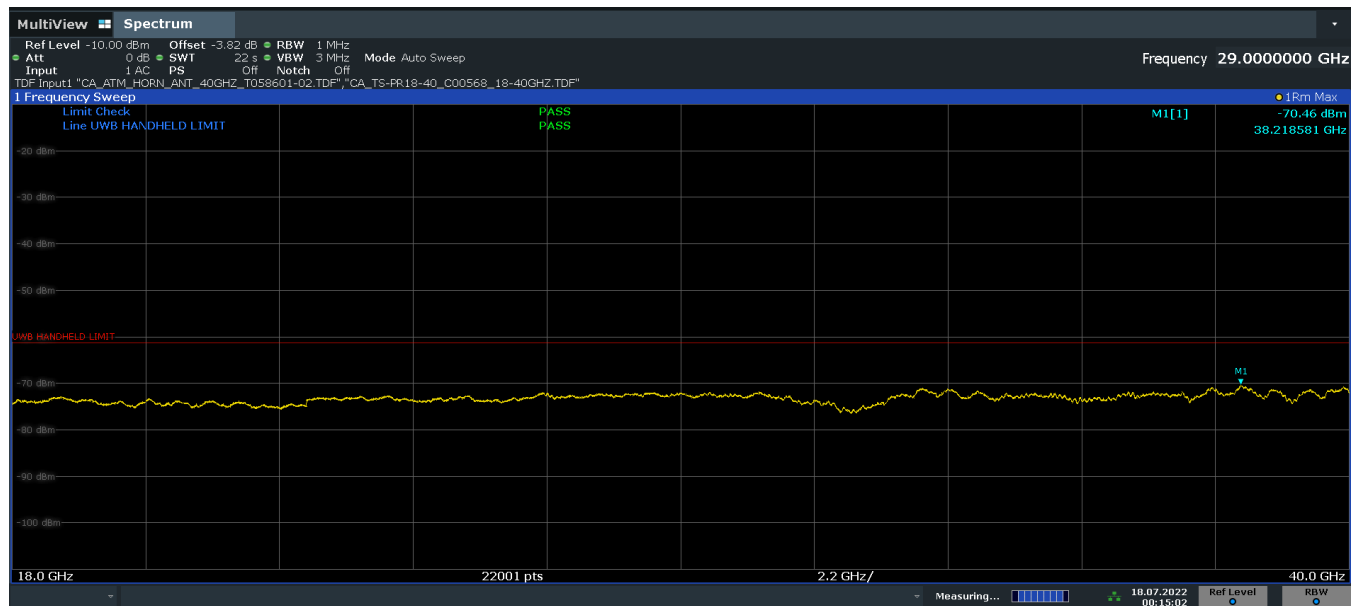


00:15:02 18.07.2022

**Plot 7-36. Radiated Spurious Emission 18-40GHz (Ch. 5, Config 0, Payload 125 Ant. Pol. V)**

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 46 of 63


V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

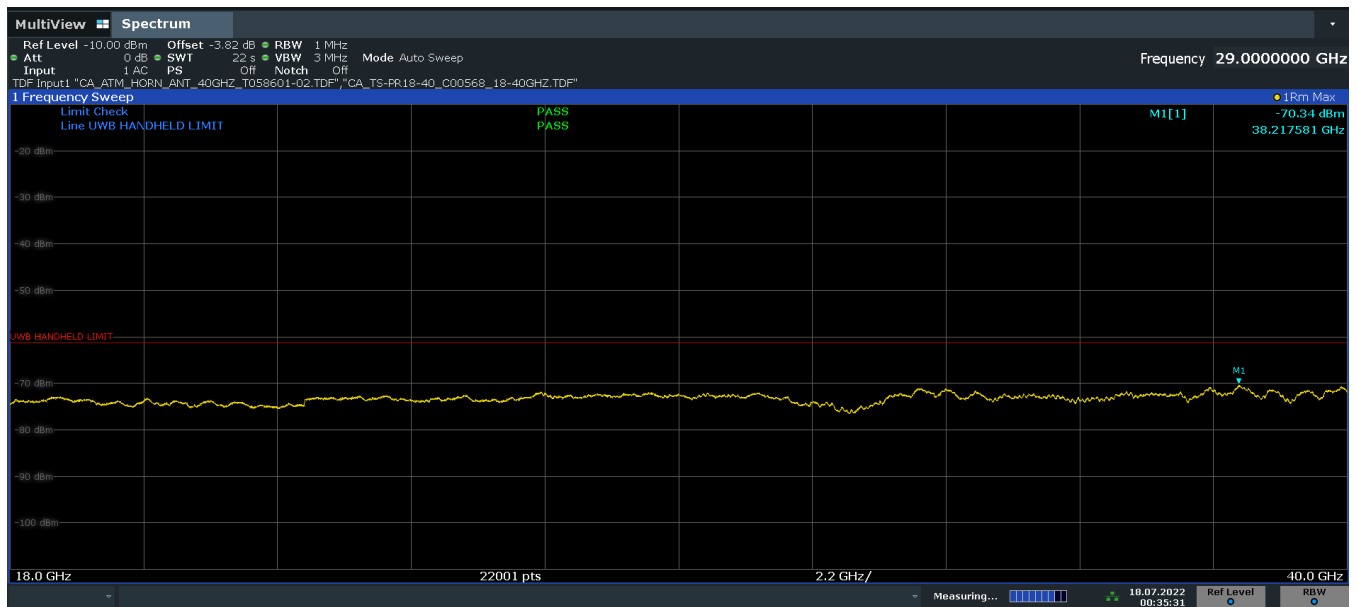

00:35:31 18.07.2022

Plot 7-37. Radiated Spurious Emission 18-40GHz (Ch. 9, Config 0, Payload 125 Ant. Pol. H)

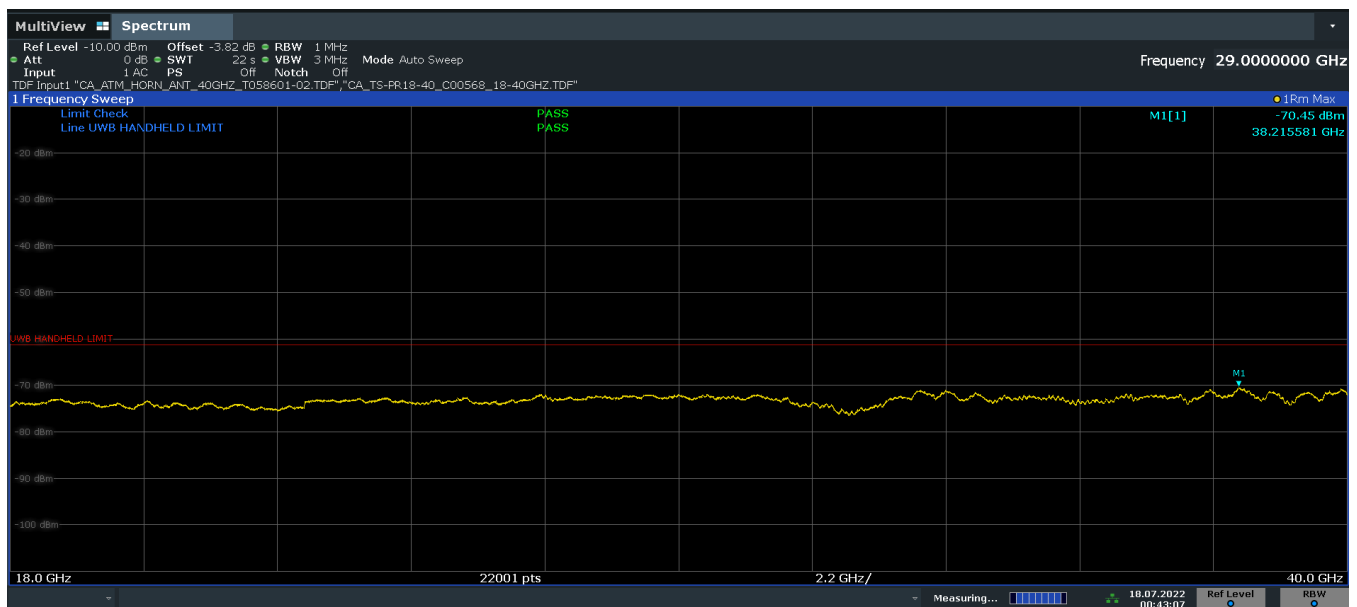

00:43:07 18.07.2022

Plot 7-38. Radiated Spurious Emission 18-40GHz (Ch. 9, Config 0, Payload 125 Ant. Pol. V)

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 47 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## Radiated Spurious Emission Measurements (960MHz-18GHz)

§15.519(c); RSS-220 [5.3.1(d)]

Distance of Measurements: 0.6 Meters  
Operating Frequency: 6500 MHz  
Channel: 5  
Config: 0  
Payload: 125

Frequency [MHz]	Detector	Antenna Polarity [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dBm]	Conversion Factor [dB]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1256	Avg	V	-	-	-74.93	-4.74	-2.24	-81.91	-75.30	-6.61
1988	Avg	V	-	-	-75.80	-2.07	-2.24	-80.11	-63.30	-16.81
2276	Avg	V	-	-	-76.10	-1.51	-2.24	-79.85	-61.30	-18.55
10900	Avg	H	-	-	-76.76	7.10	-2.24	-71.90	-61.30	-10.60
14800	Avg	H	-	-	-75.86	8.85	-2.24	-69.25	-61.30	-7.95
16710	Avg	H	-	-	-74.29	10.70	-2.24	-65.83	-61.30	-4.53

**Table 7-15. Radiated Spurious Emission Measurements 960MHz-18GHz (FCC)**

Distance of Measurements: 0.6 Meters  
Operating Frequency: 6500 MHz  
Channel: 5  
Config: 0  
Payload: 125

Frequency [MHz]	Detector	Antenna Polarity [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dBm]	Conversion Factor [dB]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1256	Avg	V	-	-	-74.93	-4.74	-2.24	-81.91	-75.30	-6.61
2271	Avg	V	-	-	-76.12	-1.52	-2.24	-79.88	-70.00	-9.88
4250	Avg	V	-	-	-76.81	1.04	-2.24	-78.01	-70.00	-8.01
10900	Avg	H	-	-	-76.76	7.10	-2.24	-71.90	-61.30	-10.60
14800	Avg	H	-	-	-75.86	8.85	-2.24	-69.25	-61.30	-7.95
16710	Avg	H	-	-	-74.29	10.70	-2.24	-65.83	-61.30	-4.53

**Table 7-16. Radiated Spurious Emission Measurements 960MHz-18GHz (ISED)**

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 48 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



## Radiated Spurious Emission Measurements (960MHz-18GHz)

§15.519 (c); RSS-220 [5.3.1(d)]

Distance of Measurements: 0.6 Meters  
Operating Frequency: 8000 MHz  
Channel: 9  
Config: 0  
Payload: 125

Frequency [MHz]	Detector	Antenna Polarity [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dBm]	Conversion Factor [dB]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1257	Avg	V	-	-	-74.90	-4.76	-2.24	-81.90	-75.30	-6.60
1830	Avg	V	-	-	-75.75	-3.29	-2.24	-81.28	-63.30	-17.98
2250	Avg	V	-	-	-76.53	-1.54	-2.24	-80.31	-61.30	-19.01
9900	Avg	V	-	-	-77.70	6.71	-2.24	-73.23	-61.30	-11.93
15000	Avg	V	-	-	-76.08	9.10	-2.24	-69.22	-61.30	-7.92
16709	Avg	V	-	-	-74.40	10.71	-2.24	-65.93	-61.30	-4.63

Table 7-17. Radiated Spurious Emission Measurements 960MHz-18GHz (FCC)

Distance of Measurements: 0.6 Meters  
Operating Frequency: 8000 MHz  
Channel: 9  
Config: 0  
Payload: 125

Frequency [MHz]	Detector	Antenna Polarity [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dBm]	Conversion Factor [dB]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1257	Avg	V	-	-	-74.90	-4.76	-2.24	-81.90	-75.30	-6.60
2250	Avg	V	-	-	-76.48	-1.54	-2.24	-80.26	-70.00	-10.26
4550	Avg	V	-	-	-76.73	1.53	-2.24	-77.44	-70.00	-7.44
9900	Avg	V	-	-	-77.70	6.71	-2.24	-73.23	-61.30	-11.93
15000	Avg	V	-	-	-76.08	9.10	-2.24	-69.22	-61.30	-7.92
16709	Avg	V	-	-	-74.40	10.71	-2.24	-65.93	-61.30	-4.63

Table 7-18. Radiated Spurious Emission Measurements 960MHz-18GHz (ISED)

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 49 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).





## Radiated Spurious Emission Measurements (Above 18GHz)

**§15.519 (c); RSS-220 [5.3.1(d)]**

Distance of Measurements: 0.5 Meters  
Operating Frequency: 6500 MHz  
Channel: 5  
Config: 0  
Payload: 125

Frequency [MHz]	Detector	Antenna Polarity [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dBm]	Conversion Factor [dB]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
19500	Avg	H	-	-	-64.12	-6.78	-3.82	-74.72	-61.30	-13.42
22000	Avg	H	-	-	-63.89	-7.54	-3.82	-75.25	-61.30	-13.95
26000	Avg	H	-	-	-64.03	-5.68	-3.82	-73.53	-61.30	-12.23
32000	Avg	H	-	-	-67.01	-4.06	-3.82	-74.89	-61.30	-13.59
38228	Avg	H	-	-	-61.64	-4.99	-3.82	-70.45	-61.30	-9.15

**Table 7-19. Radiated Spurious Emission Measurements 18-40GHz**

Distance of Measurements: 0.5 Meters  
Operating Frequency: 8000 MHz  
Channel: 9  
Config: 0  
Payload: 125

Frequency [MHz]	Detector	Antenna Polarity [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dBm]	Conversion Factor [dB]	Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
18500	Avg	H	-	-	-63.92	-6.09	-3.82	-73.83	-61.30	-12.53
24000	Avg	H	-	-	-62.96	-6.45	-3.82	-73.23	-61.30	-11.93
28500	Avg	H	-	-	-64.18	-4.10	-3.82	-72.10	-61.30	-10.80
32000	Avg	H	-	-	-67.06	-4.06	-3.82	-74.94	-61.30	-13.64
38218	Avg	H	-	-	-61.50	-5.02	-3.82	-70.34	-61.30	-9.04

**Table 7-20. Radiated Spurious Emission Measurements 18-40GHz**

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 50 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 7.7 Radiated Spurious Emissions Measurements – Below 960MHz

§15.209; RSS-Gen [8.9]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-21 per Section 15.209 and RSS-Gen (8.9).***

Frequency	Field Strength [ $\mu$ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 7-21. Radiated Limits**

### Test Procedures Used

ANSI C63.10-2013

### Test Settings

#### Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

#### Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. VBW = 300kHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 51 of 63


V 10.5 12/15/2021

## Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

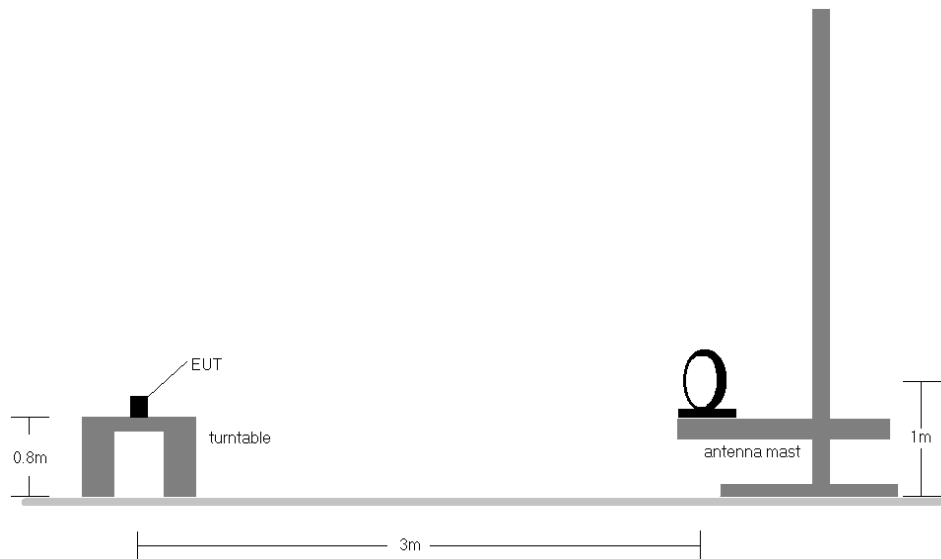

**Figure 7-6. Radiated Test Setup < 30Mhz**

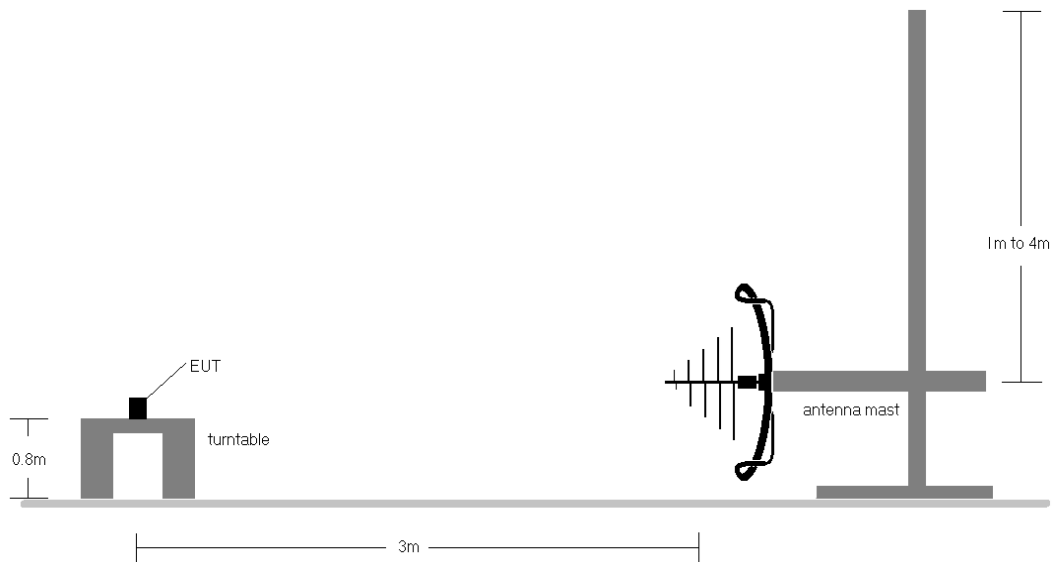

**Figure 7-7. Radiated Test Setup < 1GHz**

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 52 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-21.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes. For below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector for emissions within 6dB of the limit.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adaptor via USB-C cable with magnetic charger
  - b. EUT powered by host PC via USB-C cable with magnetic charger
10. All modes of operation were investigated and the worst-case emissions are reported.

## Sample Calculations

### Determining Spurious Emissions Levels


- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = (\text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} + \text{Attenuator }_{[dB]}) - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 53 of 63

V 10.5 12/15/2021

## Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209; RSS-Gen [8.9]

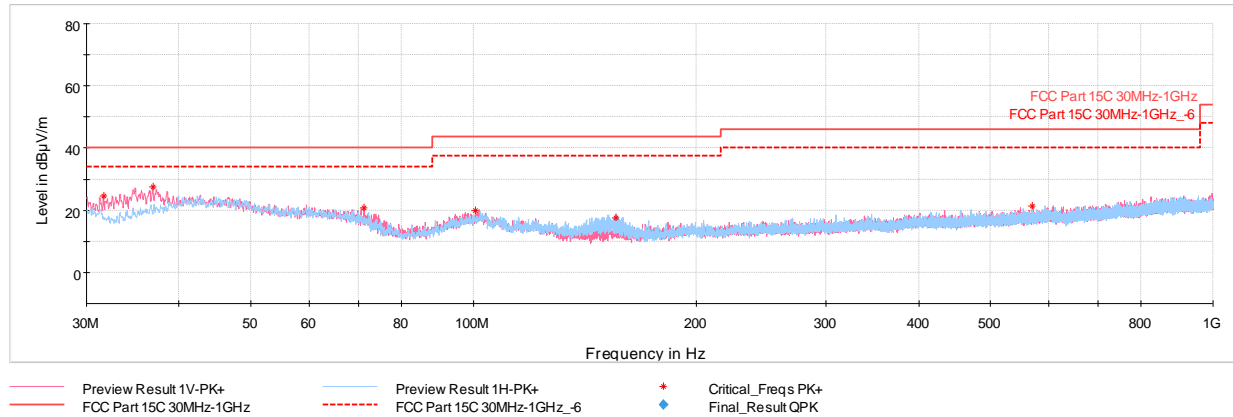


**Plot 7-39. Radiated Spurious Emission 30-960MHz (Ch. 5, Config 0, Payload 125 with AC/DC Adapter + Magnetic Charger)**

Frequency [MHz]	Detector	Antenna Polarity [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
31.65	Max-Peak	V	100	113	-62.63	-19.83	24.54	40.00	-15.46
36.89	Max-Peak	V	100	32	-61.35	-18.24	27.41	40.00	-12.59
71.13	Max-Peak	V	200	11	-65.59	-20.64	20.77	40.00	-19.23
100.57	Max-Peak	V	100	207	-68.81	-18.18	20.01	43.52	-23.51
156.10	Max-Peak	H	200	239	-68.56	-20.92	17.52	43.52	-26.00
570.29	Max-Peak	V	300	233	-76.26	-9.41	21.33	46.02	-24.70

**Table 7-22. Radiated Spurious Emission 30-960MHz (Ch. 5, Config 0, Payload 125 with AC/DC Adapter + Magnetic Charger)**

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 54 of 63

V 10.5 12/15/2021

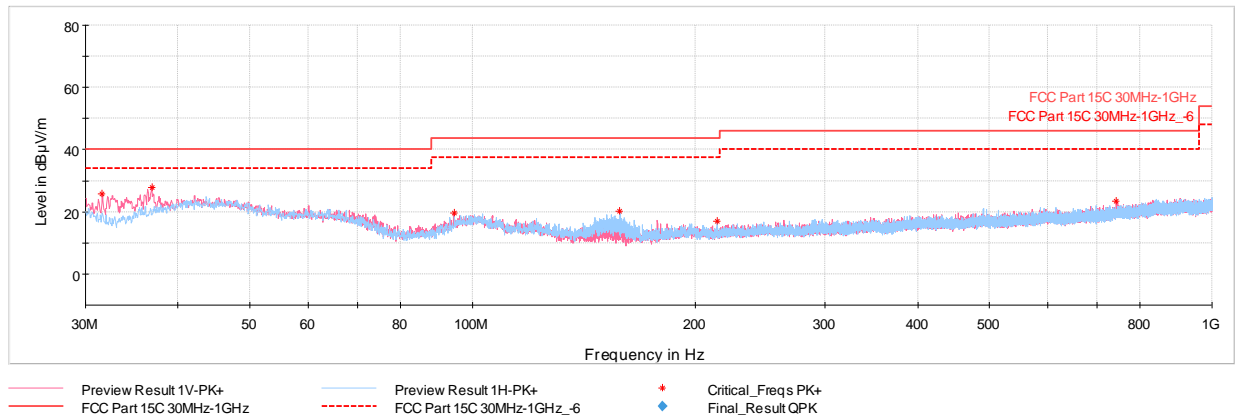

**Plot 7-40. Radiated Spurious Emission 30-960MHz (Ch. 9, Config 0, Payload 125 with AC/DC Adapter + Magnetic Charger)**

Frequency [MHz]	Detector	Antenna Polarity [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
31.60	Max-Peak	V	100	226	-61.21	-19.82	25.97	40.00	-14.03
36.89	Max-Peak	V	100	242	-61.18	-18.24	27.58	40.00	-12.42
94.46	Max-Peak	V	100	184	-68.27	-19.06	19.67	43.52	-23.85
158.33	Max-Peak	H	200	195	-65.87	-20.53	20.60	43.52	-22.93
214.11	Max-Peak	H	100	235	-71.89	-17.90	17.21	43.52	-26.31
742.22	Max-Peak	V	100	226	-76.55	-6.64	23.81	46.02	-22.21

**Table 7-23. Radiated Spurious Emission 30-960MHz (Ch. 9, Config 0, Payload 125 with AC/DC Adapter + Magnetic Charger)**

FCC ID: BCG-A2622 IC: 579C-A2622			MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch		Page 55 of 63

V 10.5 12/15/2021

## 7.8 AC Line-Conducted Emission Measurement

§15.207; RSS-Gen [8.8]

### Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for AC Line conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

***All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).***

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

**Table 7-24. Conducted Limits**

\*Decreases with the logarithm of the frequency.

### Test Procedures Used

ANSI C63.10-2013, Section 6.2

### Test Settings

#### Quasi-Peak Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

#### Average Measurements


1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 56 of 63

V 10.5 12/15/2021

## Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

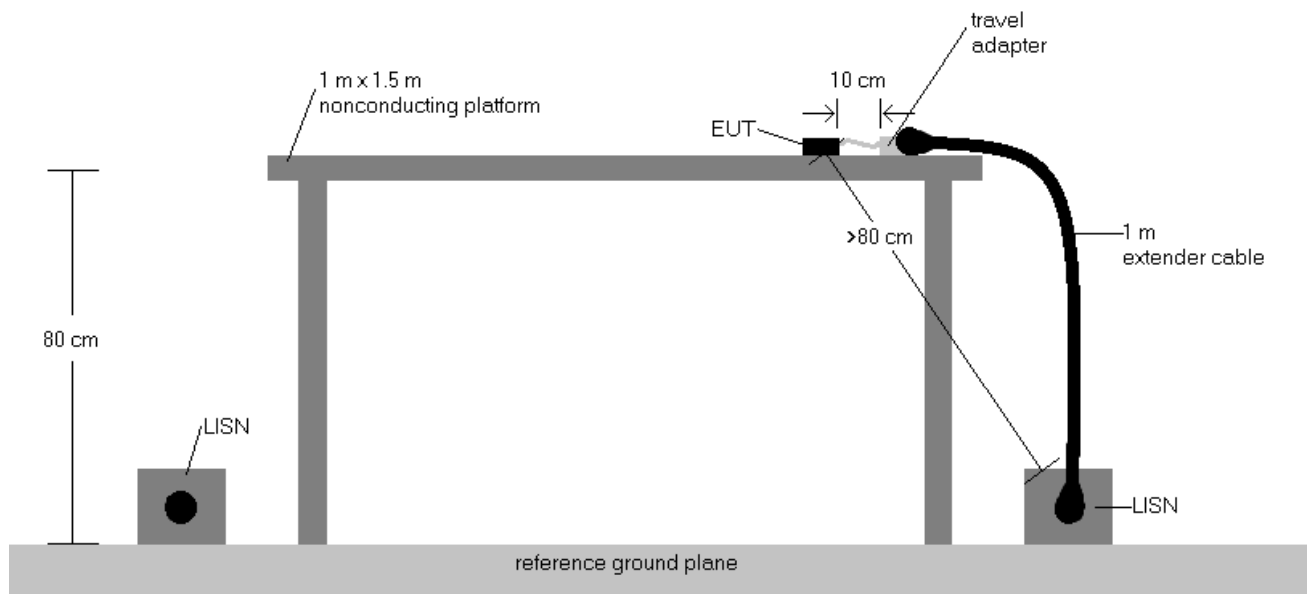

**Figure 7-8. Test Instrument & Measurement Setup**

## Test Notes


1. All modes of operation were investigated and the worst-case emissions are reported. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in Part 15.207 and RSS-Gen (8.8).
3.  $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4.  $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5.  $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a quasi-peak and average detectors
7. Deviations to the Specifications: None.
8. Both configurations below were investigated, and the worst case has been reported.
  - a. EUT powered by AC/DC adapter via USB-C cable with magnetic charger
  - b. EUT powered by host PC via USB-C cable with magnetic charger

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 57 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).



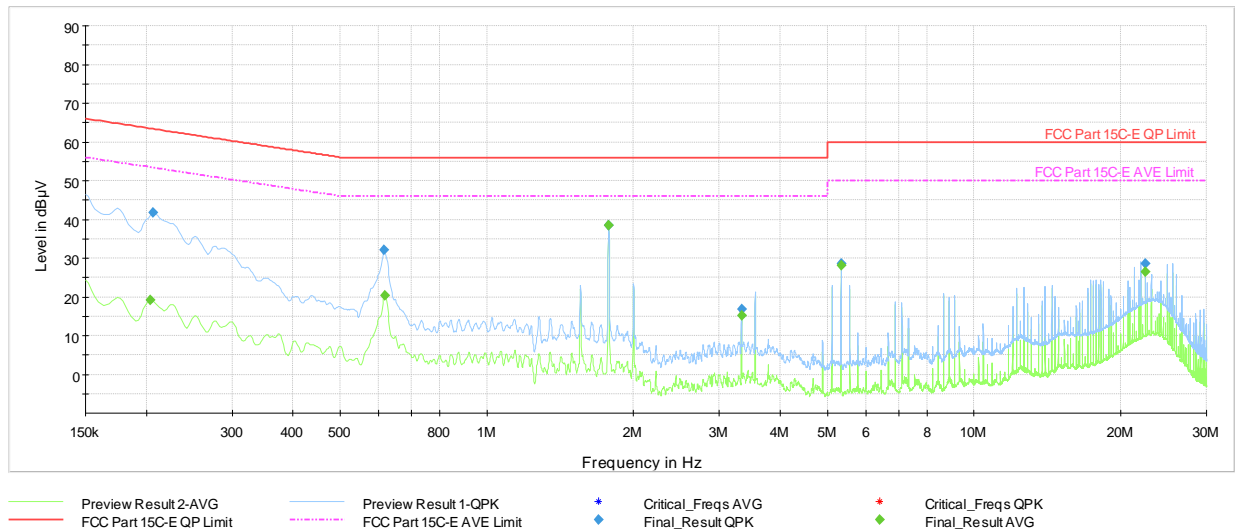


**Plot 7-41. AC Line Conducted (Ch. 5, Config 0, Payload 125 L1, with PC via USB-C cable with magnetic charger)**

Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.204	FINAL	—	19.25	53.45	-34.19	L1	ON
0.206	FINAL	41.7	—	63.36	-21.64	L1	ON
0.616	FINAL	32.1	—	56.00	-23.89	L1	ON
0.618	FINAL	—	20.26	46.00	-25.74	L1	ON
1.777	FINAL	—	38.39	46.00	-7.61	L1	ON
1.777	FINAL	38.4	—	56.00	-17.58	L1	ON
3.334	FINAL	16.8	—	56.00	-39.20	L1	ON
3.334	FINAL	—	15.17	46.00	-30.83	L1	ON
5.334	FINAL	28.6	—	60.00	-31.36	L1	ON
5.334	FINAL	—	28.13	50.00	-21.87	L1	ON
22.443	FINAL	—	26.41	50.00	-23.59	L1	ON
22.443	FINAL	28.7	—	60.00	-31.30	L1	ON

**Table 7-25. AC Line Conducted Data (Ch. 5, Config 0, Payload 125 L1, with PC via USB-C cable with magnetic charger)**

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 58 of 63

V 10.5 12/15/2021

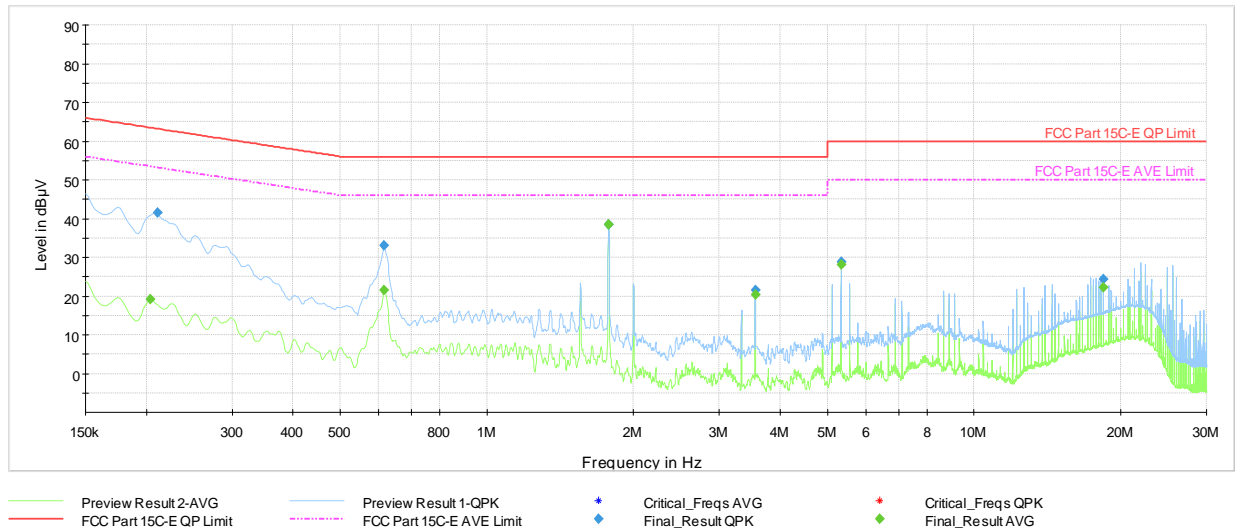

**Plot 7-42. AC Line Conducted (Ch. 5, Config 0, Payload 125 N, with PC via USB-C cable with magnetic charger)**


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.204	FINAL	—	19.08	53.45	-34.37	N	ON
0.211	FINAL	41.6	—	63.18	-21.61	N	ON
0.616	FINAL	—	21.43	46.00	-24.57	N	ON
0.616	FINAL	33.1	—	56.00	-22.94	N	ON
1.777	FINAL	—	38.37	46.00	-7.63	N	ON
1.777	FINAL	38.5	—	56.00	-17.55	N	ON
3.557	FINAL	21.4	—	56.00	-34.58	N	ON
3.557	FINAL	—	20.43	46.00	-25.57	N	ON
5.334	FINAL	28.7	—	60.00	-31.26	N	ON
5.334	FINAL	—	28.06	50.00	-21.94	N	ON
18.445	FINAL	—	22.16	50.00	-27.84	N	ON
18.445	FINAL	24.4	—	60.00	-35.65	N	ON

**Table 7-26. AC Line Conducted Data (Ch. 5, Config 0, Payload 125 N, with PC via USB-C cable with magnetic charger)**

<b>FCC ID:</b> BCG-A2622 <b>IC:</b> 579C-A2622		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 59 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

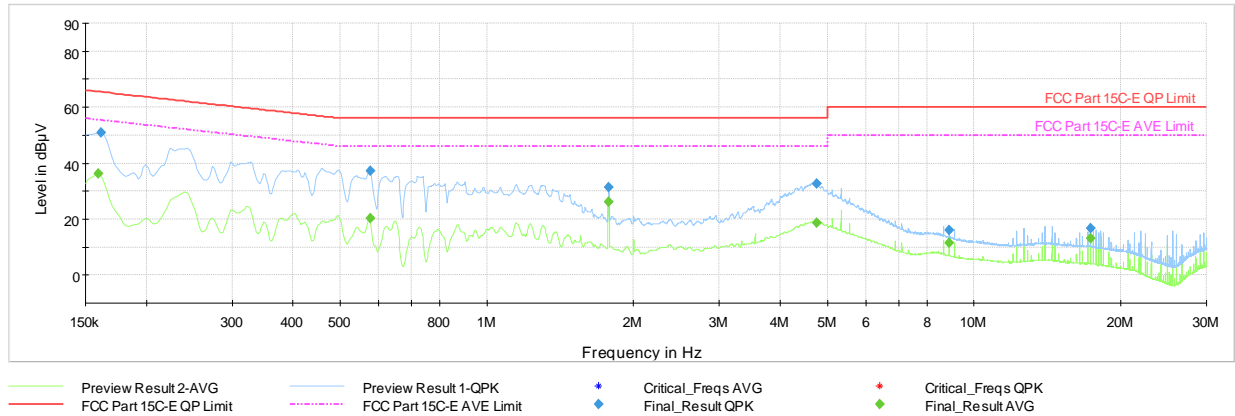

**Plot 7-43. AC Line Conducted (Ch. 9, Config 0, Payload 125 L1, with PC via USB-C cable with magnetic charger)**


Frequency [MHz]	Process State	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Line	PE
0.159	FINAL	—	36.15	55.52	-19.36	L1	ON
0.161	FINAL	51.1	—	65.40	-14.33	L1	ON
0.575	FINAL	—	20.42	46.00	-25.58	L1	ON
0.575	FINAL	37.2	—	56.00	-18.76	L1	ON
1.777	FINAL	—	26.19	46.00	-19.81	L1	ON
1.777	FINAL	31.5	—	56.00	-24.51	L1	ON
4.758	FINAL	32.8	—	56.00	-23.23	L1	ON
4.763	FINAL	—	18.77	46.00	-27.23	L1	ON
8.887	FINAL	16.0	—	60.00	-43.98	L1	ON
8.889	FINAL	—	11.51	50.00	-38.49	L1	ON
17.333	FINAL	—	13.23	50.00	-36.77	L1	ON
17.333	FINAL	16.8	—	60.00	-43.24	L1	ON

**Table 7-27. AC Line Conducted Data (Ch. 9, Config 0, Payload 125 L1, with PC via USB-C cable with magnetic charger)**

FCC ID: BCG-A2622 IC: 579C-A2622	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 60 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

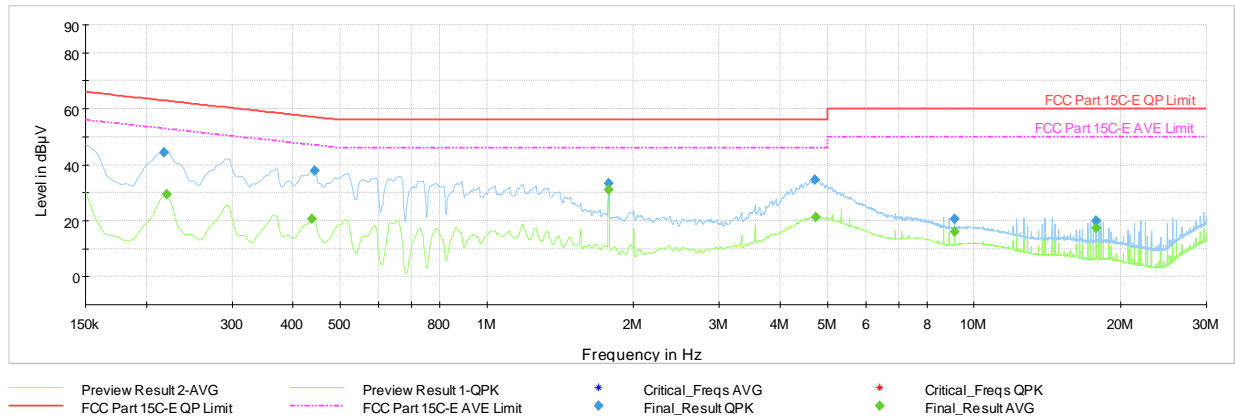

**Plot 7-44. AC Line Conducted Plot (Ch. 9, Config 0, Payload 125 N, with PC via USB-C cable with magnetic charger)**

Frequency [MHz]	Process State	QuasiPeak [dBμV]	Average [dBμV]	Limit [dBμV]	Margin [dB]	Line	PE
0.218	FINAL	44.5	—	62.91	-18.39	N	ON
0.220	FINAL	—	29.36	52.83	-23.47	N	ON
0.438	FINAL	—	20.56	47.10	-26.54	N	ON
0.443	FINAL	37.7	—	57.02	-19.28	N	ON
1.777	FINAL	—	31.18	46.00	-14.82	N	ON
1.777	FINAL	33.4	—	56.00	-22.58	N	ON
4.704	FINAL	34.5	—	56.00	-21.46	N	ON
4.729	FINAL	—	21.41	46.00	-24.59	N	ON
9.110	FINAL	20.6	—	60.00	-39.43	N	ON
9.112	FINAL	—	16.21	50.00	-33.79	N	ON
17.777	FINAL	—	17.26	50.00	-32.74	N	ON
17.777	FINAL	20.1	—	60.00	-39.92	N	ON

**Table 7-28. AC Line Conducted Data (Ch. 9, Config 0, Payload 125 N, with PC via USB-C cable with magnetic charger)**

FCC ID: BCG-A2622 IC: 579C-A2622		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 61 of 63

V 10.5 12/15/2021

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Apple Watch FCC ID: BCG-A2622** and **IC: 579C-A2622** is in compliance with Part 15 Subpart F (15.519) of the FCC Rules and RSS-220 of the Innovation, Science and Economic Development Canada Rules.

<b>FCC ID:</b> BCG-A2622 <b>IC:</b> 579C-A2622		<b>MEASUREMENT REPORT (CERTIFICATION)</b>	<b>Approved by:</b> Technical Manager
<b>Test Report S/N:</b> 1C2205090042-13.BCG	<b>Test Dates:</b> 6/7/2022 - 8/5/2022	<b>EUT Type:</b> Watch	Page 62 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).

## 9.0 APPENDIX A

Antenna gains provided by manufacturer.

WiFi/BT 2.4GHz, WiFi 5GHz, UWB Antenna Gain (FCM), Type: IFA		
Frequency (MHz)	Horizontal (dBi)	Vertical (dBi)
2412	-4.4	-4.5
2442	-4.3	-4.6
2472	-4.7	-4.5
5180	-10.7	-9.9
5260	-10.7	-9.5
5320	-10.2	-10.1
5500	-11.5	-9.5
5600	-11.4	-8.7
5700	-10.9	-7.5
5745	-10.3	-7.3
5785	-10.2	-7.4
5825	-9.8	-7.5
6250	-12.0	-10.8
6375	-11.3	-10.3
6500	-13.3	-10.3
6625	-13.4	-10.1
6750	-13.5	-9.9
7750	-9.0	-9.4
7875	-10.7	-11.3
8000	-9.6	-10.5
8125	-9.7	-10.9
8250	-12.4	-12.2

Table 9-1. Antenna gains

FCC ID: BCG-A2622 IC: 579C-A2622	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Technical Manager
Test Report S/N: 1C2205090042-13.BCG	Test Dates: 6/7/2022 - 8/5/2022	EUT Type: Watch	Page 63 of 63

V 10.5 12/15/2021

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element Washington DC LLC. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact [ct.info@element.com](mailto:ct.info@element.com).