



## CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.org.cn

# TEST REPORT

<b>Report No.</b>	<b>CTC20232381E03</b>
<b>FCC ID</b>	<b>2AGKB-KA1235</b>
<b>Applicant</b>	<b>Videostrong Technology Co.,Ltd</b>
Address	604, Lushi industrial Building, 28 District, Bao'an District, Shenzhen, China
Manufacturer	Videostrong Technology Co.,Ltd
Address	604, Lushi industrial Building, 28 District, Bao'an District, Shenzhen, China
<b>Product Name</b>	<b>Android TV Box</b>
Trade Mark	/
Model/Type reference	KA2
Listed Model(s)	KA1, KA1 PRO, KA2 PRO, KA3, KA3 PRO, KA5, KA5 PRO, KA6, OC-STB-01, OC-STB-02, OC-STB-03
<b>Standard</b>	<b>FCC CFR Title 47 Part 15 Subpart C Section 15.247</b>
Date of receipt of test sample....	Dec. 20, 2023
Date of testing.....	Dec. 21, 2023 ~ Jan. 08, 2024
Date of issue.....	Jan. 09, 2024
<b>Result</b>	<b>PASS</b>

Compiled by:	
(Printed name+signature)	Terry Su
Supervised by:	
(Printed name+signature)	Eric Zhang
Approved by:	
(Printed name+signature)	Totti Zhao

<b>Testing Laboratory Name</b>	<b>CTC Laboratories, Inc.</b>
Address	1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.

**Table of Contents**

	Page
<b>1. TEST SUMMARY.....</b>	<b>3</b>
1.1. TEST STANDARDS .....	3
1.2. REPORT VERSION .....	3
1.3. TEST DESCRIPTION .....	4
1.4. TEST FACILITY.....	5
1.5. MEASUREMENT UNCERTAINTY .....	5
1.6. ENVIRONMENTAL CONDITIONS .....	6
<b>2. GENERAL INFORMATION.....</b>	<b>7</b>
2.1. CLIENT INFORMATION.....	7
2.2. GENERAL DESCRIPTION OF EUT .....	7
2.3. ACCESSORY EQUIPMENT INFORMATION.....	8
2.4. OPERATION STATE .....	9
2.5. MEASUREMENT INSTRUMENTS LIST .....	10
<b>3. TEST ITEM AND RESULTS.....</b>	<b>12</b>
3.1. CONDUCTED EMISSION .....	12
3.2. RADIATED EMISSION.....	15
3.3. BAND EDGE EMISSIONS (RADIATED).....	38
3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED) .....	51
3.5. 20DB BANDWIDTH.....	66
3.6. CHANNEL SEPARATION .....	70
3.7. NUMBER OF HOPPING CHANNEL .....	72
3.8. DWELL TIME .....	74
3.9. PEAK OUTPUT POWER.....	80
3.10. DUTY CYCLE.....	84
3.11. ANTENNA REQUIREMENT .....	88



# 1. TEST SUMMARY

## 1.1. Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

RSS-247 Issue 3: Standard Specifications for Frequency Hopping Systems (FHSs) and Digital Transmission Systems (DTSS) Operating in the Bands 902-928MHz, 2400-2483.5MHz and 5725-5850MHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

RSS-Gen Issue 5: General Requirements for Compliance of Radio Apparatus.

## 1.2. Report version

Revised No.	Date of issue	Description
01	Jan. 09, 2024	Original



### 1.3. Test Description

FCC Part 15 Subpart C (15.247)/ RSS-247 Issue 3				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	/	Pass	Alicia Liu
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Seth Chen
Restricted Bands	15.205	RSS-Gen 8.10	Pass	Alicia Liu
Hopping Channel Separation	15.247(a)(1)	RSS 247 5.1 (b)	Pass	Alicia Liu
Dwell Time	15.247(a)(iii)	RSS 247 5.1 (d)	Pass	Alicia Liu
Peak Output Power	15.247(b)(1)	RSS 247 5.4 (b)	Pass	Alicia Liu
Number of Hopping Frequency	15.247(a)(iii)	RSS 247 5.1 (d)	Pass	Alicia Liu
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS 247 5.5	Pass	Alicia Liu
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS 247 5.5	Pass	Alicia Liu
Radiated Spurious Emission	15.247(d)&15.209	RSS 247 5.5&RSS-Gen 8.9	Pass	Alicia Liu
20dB Bandwidth	15.247(a)	RSS 247 5.1 (b)	Pass	Alicia Liu

Note: The measurement uncertainty is not included in the test result.



## 1.4. Test Facility

### CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

### Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

#### A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

#### FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

## 1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.



Test Items	Measurement Uncertainty	Notes
20dB Emission Bandwidth	±0.0196%	(1)
Carrier Frequency Separation	±1.9%	(1)
Number of Hopping Channel	±1.9%	(1)
Time of Occupancy	±0.028%	(1)
Max Peak Conducted Output Power	±0.743 dB	(1)
Band-edge Spurious Emission	±1.328 dB	(1)
Conducted RF Spurious Emission	9kHz-1GHz: ±0.746dB 1GHz-26GHz: ±1.328dB	(1)
Conducted Emissions 9kHz~30MHz	±3.08 dB	(1)
Radiated Emissions 30~1000MHz	±4.51 dB	(1)
Radiated Emissions 1~18GHz	±5.84 dB	(1)
Radiated Emissions 18~40GHz	±6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	21°C ~ 27°C
Relative Humidity:	40% ~ 60%
Air Pressure:	101kPa



## 2. GENERAL INFORMATION

### 2.1. Client Information

Applicant:	Videostrong Technology Co.,Ltd
Address:	604, Lushi industrial Building, 28 District, Bao'an District, Shenzhen, China
Manufacturer:	Videostrong Technology Co.,Ltd
Address:	604, Lushi industrial Building, 28 District, Bao'an District, Shenzhen, China

### 2.2. General Description of EUT

Product Name:	Android TV Box
Trade Mark:	/
Model/Type reference:	KA2
Listed Model(s):	KA1, KA1 PRO, KA2 PRO, KA3, KA3 PRO, KA5, KA5 PRO, KA6, OC-STB-01, OC-STB-02, OC-STB-03
Model Different:	All these models are identical in the same PCB, layout and electrical circuit, The difference is trade mark and appearance color.
Power supply:	5Vdc/2A from AC/DC Adapter
Adapter Model:	TEAK012-0502000UK Input: 100-240V~ 50/60Hz 0.35A Max Output: 5Vdc/2A
Hardware version:	/
Software version:	/
<b>Bluetooth 5.1/ BR+EDR</b>	
Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB Antenna
Antenna gain:	1dBi Max



## 2.3. Accessory Equipment information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkBook 14G3 ACL	MP246QDR	Lenovo
Cable Information			
Name	Shielded Type	Ferrite Core	Length
/	/	/	/
Test Software Information			
Name	Versions	/	/
SecureCRT.exe	8.7.1	/	/



## 2.4. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
<b>00</b>	<b>2402</b>
01	2403
:	:
38	2440
<b>39</b>	<b>2441</b>
40	2442
:	:
77	2479
<b>78</b>	<b>2480</b>

Note: The display in grey were the channel selected for testing.

Test mode

For RF test items: The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions: The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated spurious emissions test item: The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



## 2.5. Measurement Instruments List

RF Test System					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 14, 2024
2	Spectrum Analyzer	R&S	FSV40-N	101654	Aug. 07, 2024
3	Spectrum Analyzer	R&S	FSU26	100105	Dec. 12, 2024
4	MXA Signal Analyzer	Keysight	N9020A	MY46471737	Dec. 12, 2024
5	MXA Signal Analyzer	Keysight	N9020A	MY52091402	Aug. 22, 2024
6	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 12, 2024
7	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 12, 2024
8	EXG Analog Signal Generator	Keysight	N5173B	MY59100842	Dec. 12, 2024
9	MXG Vector Signal Generator	Keysight	N5182B	MY59100212	Dec. 12, 2024
10	Wideband Radio Communication Tester	R&S	CMW500	102257	May 25, 2024
11	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 12, 2024
12	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 24, 2024
13	RF Control Unit	Tonscend	JS0806-2	/	Aug. 22, 2024
14	Test Software	Tonscend	JS1120-3	V3.3.38	/

Radiated Emission (3m chamber 2)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-1013	Dec. 07, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-648	Dec. 07, 2024
3	Spectrum Analyzer	R&S	FSU26	100105	Dec. 12, 2024
4	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 14, 2024
5	Pre-Amplifier	SONOMA	310	186194	Dec. 12, 2024
6	Low Noise Pre-Amplifier	EMCI	EMC051835	980075	Dec. 12, 2024
7	Test Receiver	R&S	ESCI7	100967	Dec. 12, 2024
8	3m chamber 2	Frankonia	EE025	/	Oct. 23, 2024
9	Test Software	FARA	EZ-EMC	FA-03A2	/

Radiated Emission (3m chamber 3)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 18, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Dec. 01, 2024
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2024
4	Broadband Amplifier	SCHWARZBECK	BBV9743B	259	Dec. 12, 2024
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 12, 2024

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)



6	3m chamber 3	YIHENG	EE106	/	Aug. 28, 2026
7	Test Software	FARA	EZ-EMC	FA-03A2	/

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	LISN	R&S	ENV216	101112	Dec. 12, 2024
2	LISN	R&S	ENV216	101113	Dec. 12, 2024
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 12, 2024
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2024
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2024
6	Test Software	R&S	EMC32	6.10.10	/

- Note:
1. The Cal. Interval was one year.
  2. The Cal. Interval was three year of the chamber
  3. The cable loss has calculated in test result which connection between each test instruments.

### 3. TEST ITEM AND RESULTS

#### 3.1. Conducted Emission


##### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS – Gen 8.8

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

##### Test Configuration

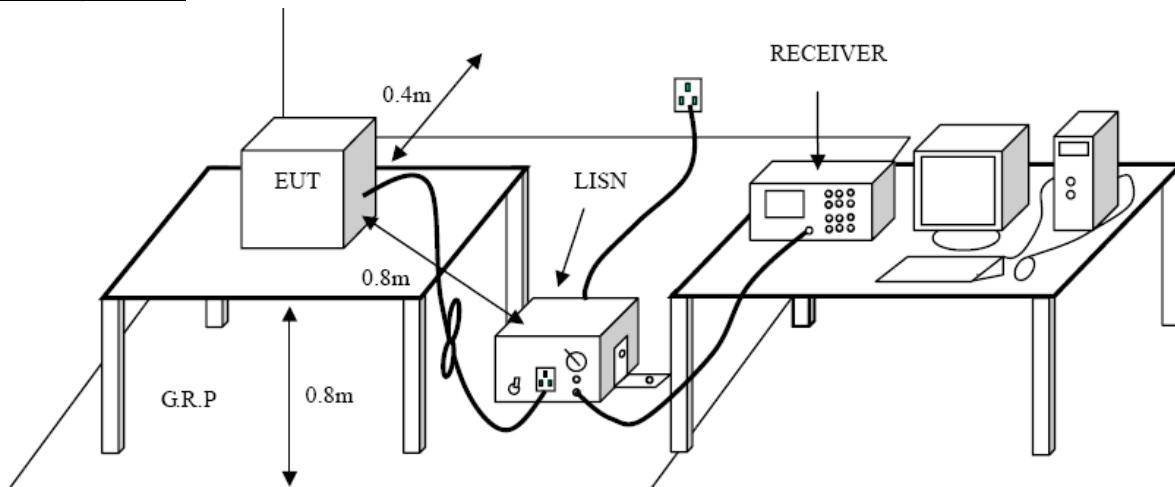


##### Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

##### Test Mode

Please refer to the clause 2.4.

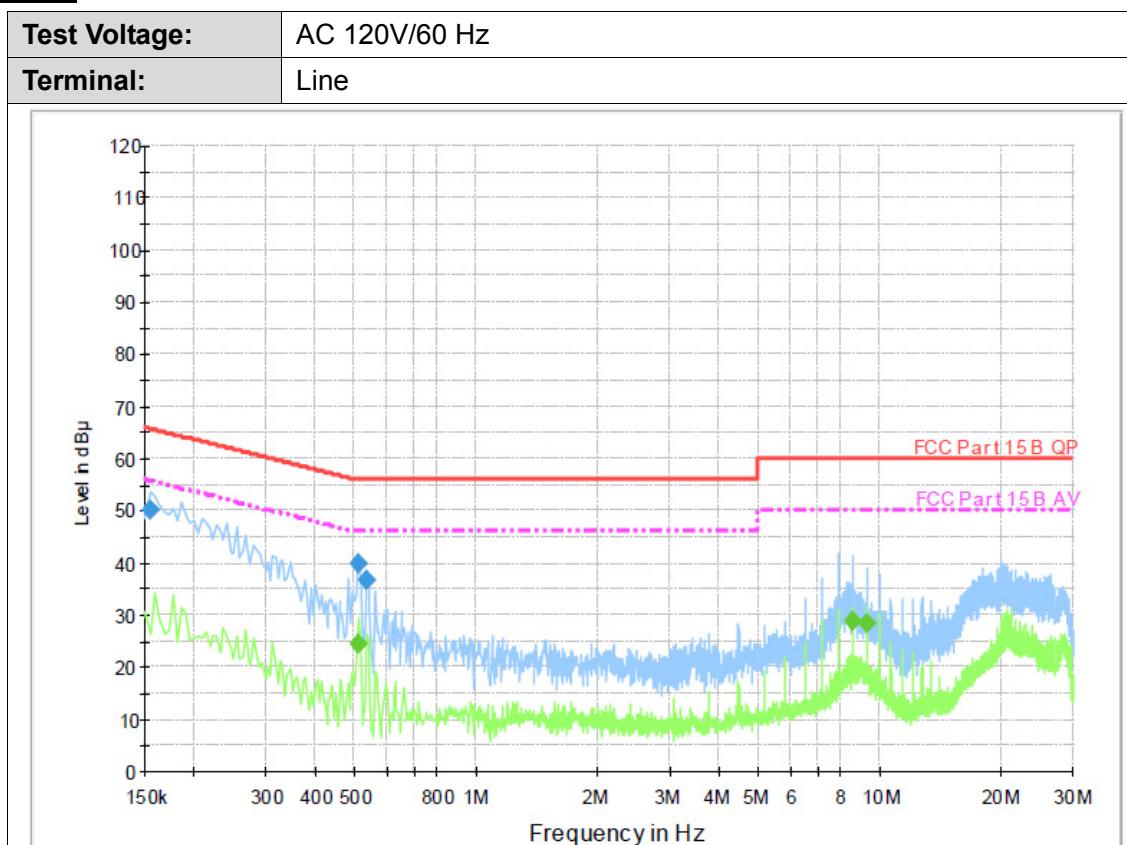**Test Results**

**Final Measurement Detector 1**


Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.154500	50.0	1000.00	9.000	On	L1	9.4	15.8	65.8	
0.510000	39.9	1000.00	9.000	On	L1	9.5	16.1	56.0	
0.532500	36.6	1000.00	9.000	On	L1	9.5	19.4	56.0	

**Final Measurement Detector 2**

Frequency (MHz)	Average (dB $\mu$ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)	Comment
0.510000	24.5	1000.00	9.000	On	L1	9.5	21.5	46.0	
8.547000	28.9	1000.00	9.000	On	L1	9.6	21.1	50.0	
9.231000	28.4	1000.00	9.000	On	L1	9.7	21.6	50.0	

Emission Level= Read Level+ Correct Factor



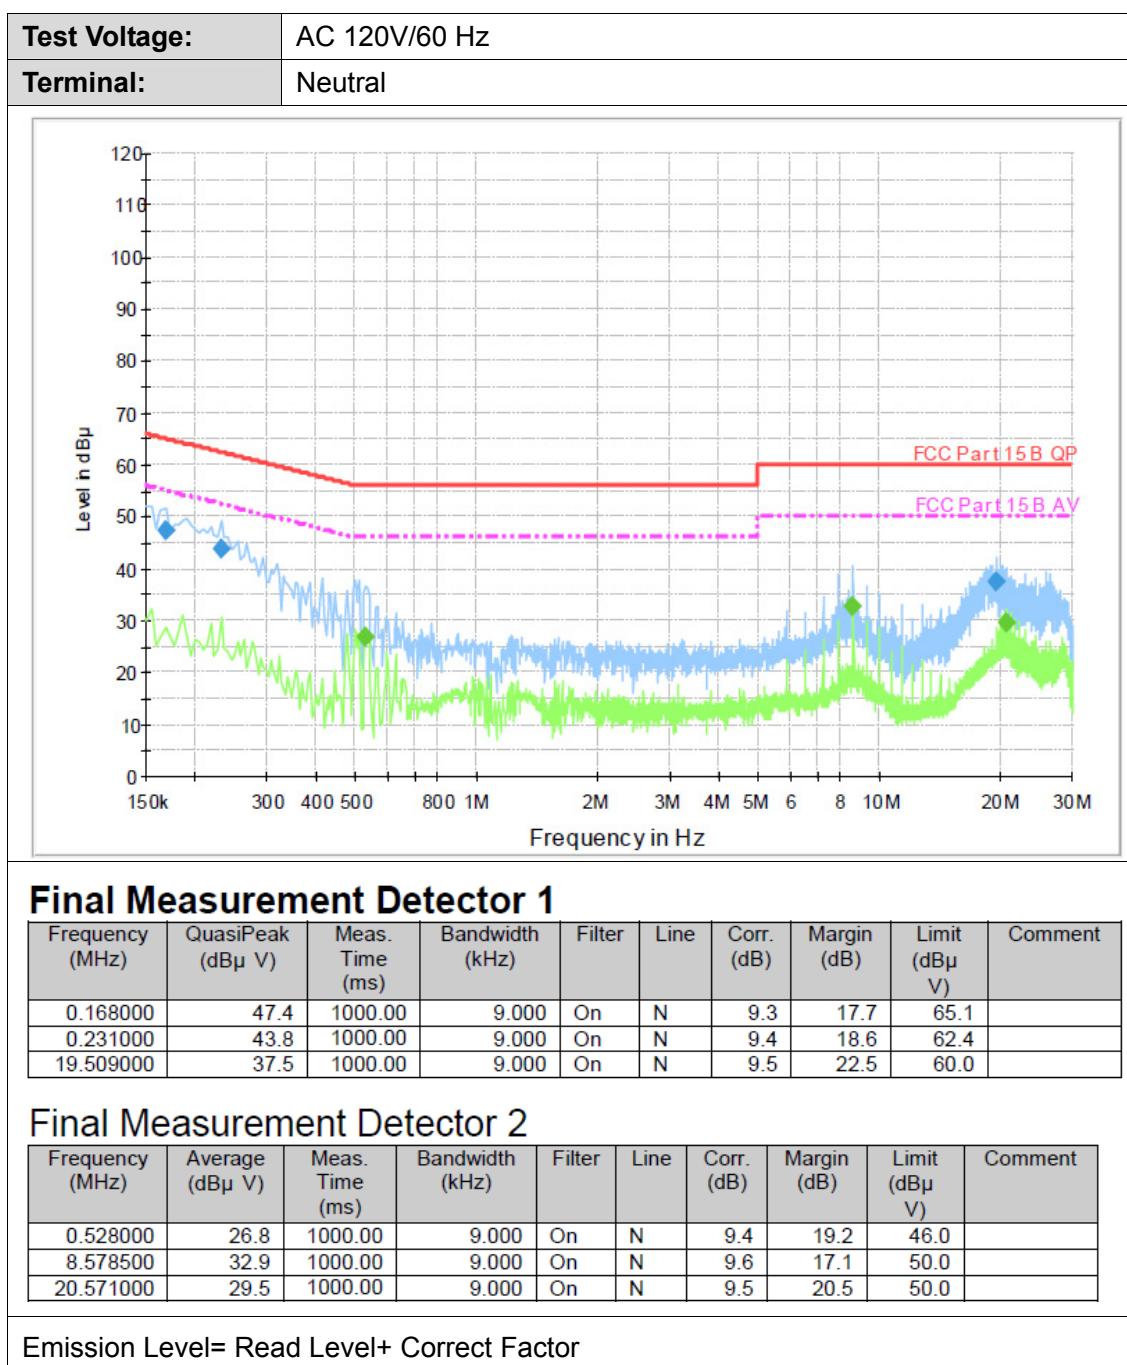

## 3.2. Radiated Emission

### Limit

#### FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS – Gen 8.9


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dB $\mu$ V/m (at 3 meters)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dB $\mu$ V/m)=20log Emission Level ( $\mu$ V/m).


### Test Configuration

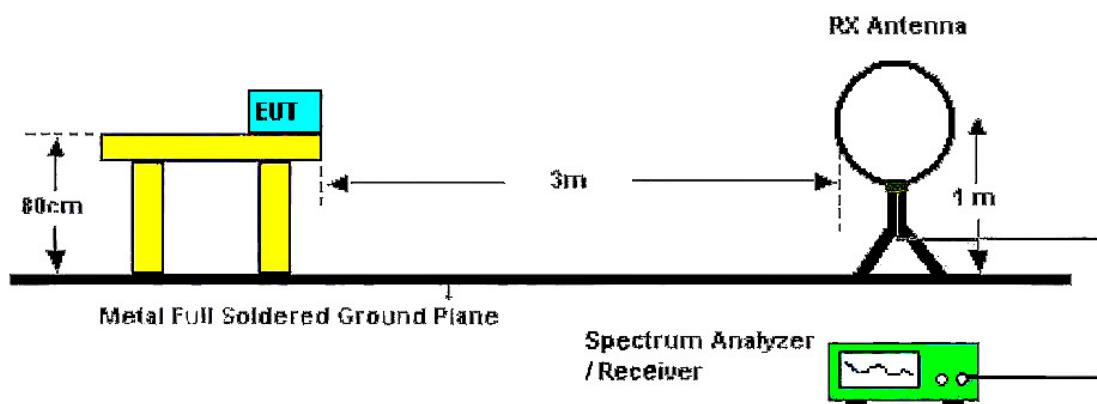

Below 30MHz Test Setup

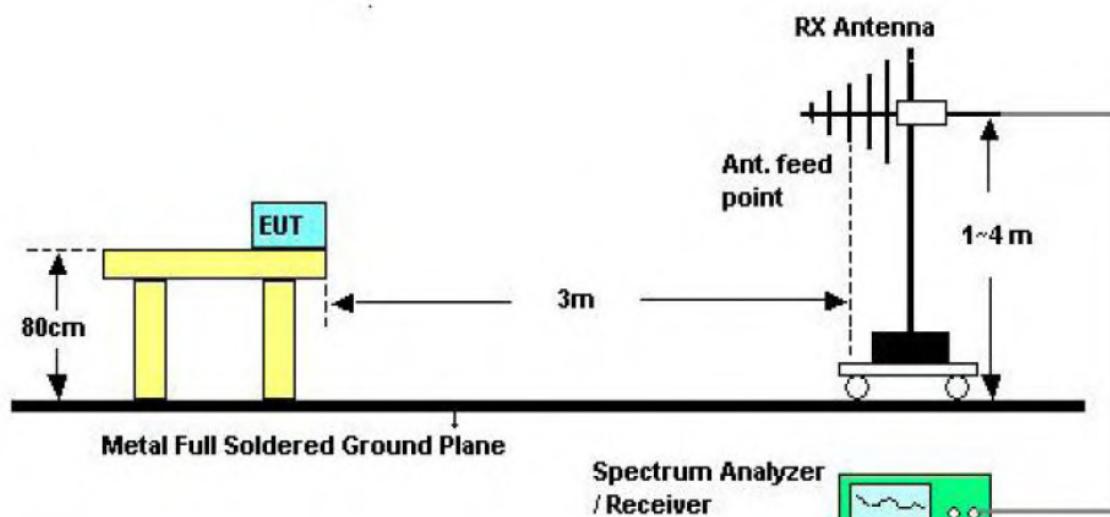

Below 1000MHz Test Setup

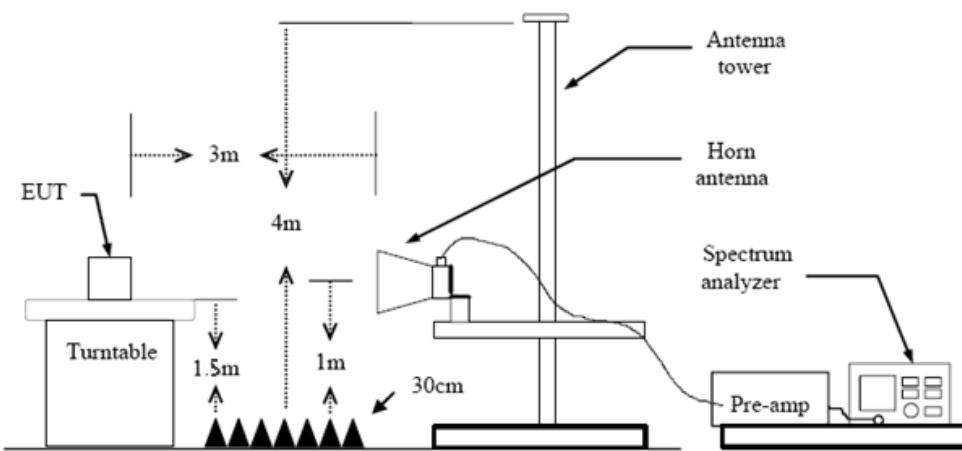

Above 1GHz Test Setup

### Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Below 30 MHz:  
9kHz – 150kHz, RBW=200Hz, VBW $\geq$ RBW, Sweep=auto, Detector function=peak, Trace=max hold;  
150kHz – 30MHz, RBW=9kHz, VBW $\geq$ RBW, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - (3) 30 MHz - 1 GHz:  
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;

---

 CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China :

[yz.cnca.cn](http://yz.cnca.cn)



If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(4) From 1 GHz to 10<sup>th</sup> harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW≥1/T Peak detector for Average value.

Note 1: For the 1/T& Duty Cycle please refer to clause 3.10 Duty Cycle.

### **Test Mode**

Please refer to the clause 2.4.

### **Test Result**


#### **9 KHz~30 MHz**


From 9 KHz to 30 MHz Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.




30MHz-1GHz

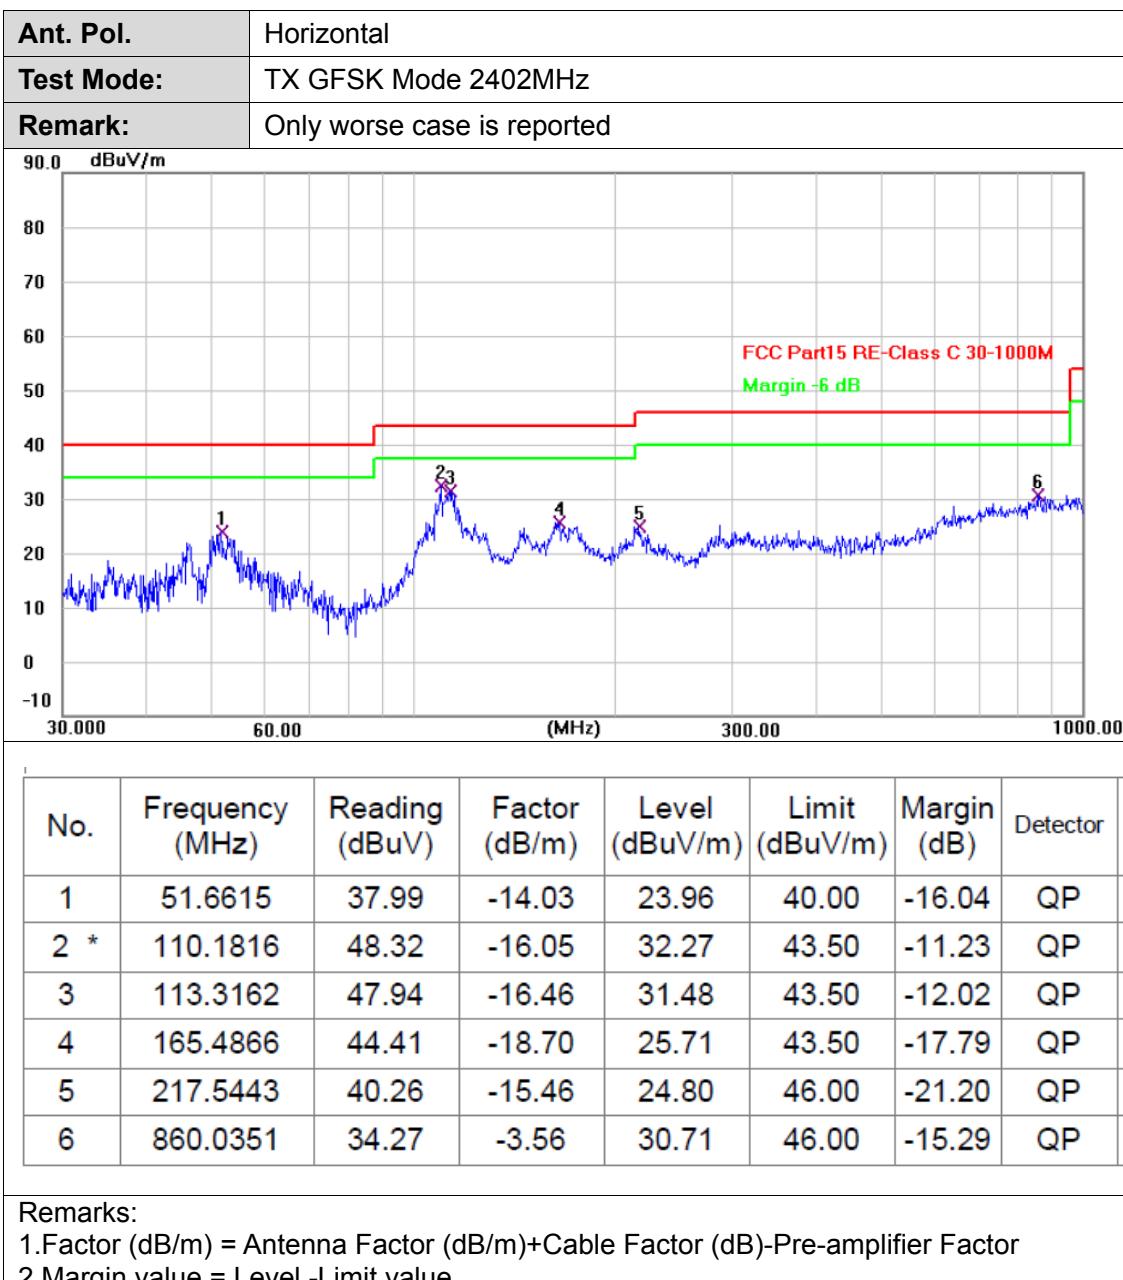

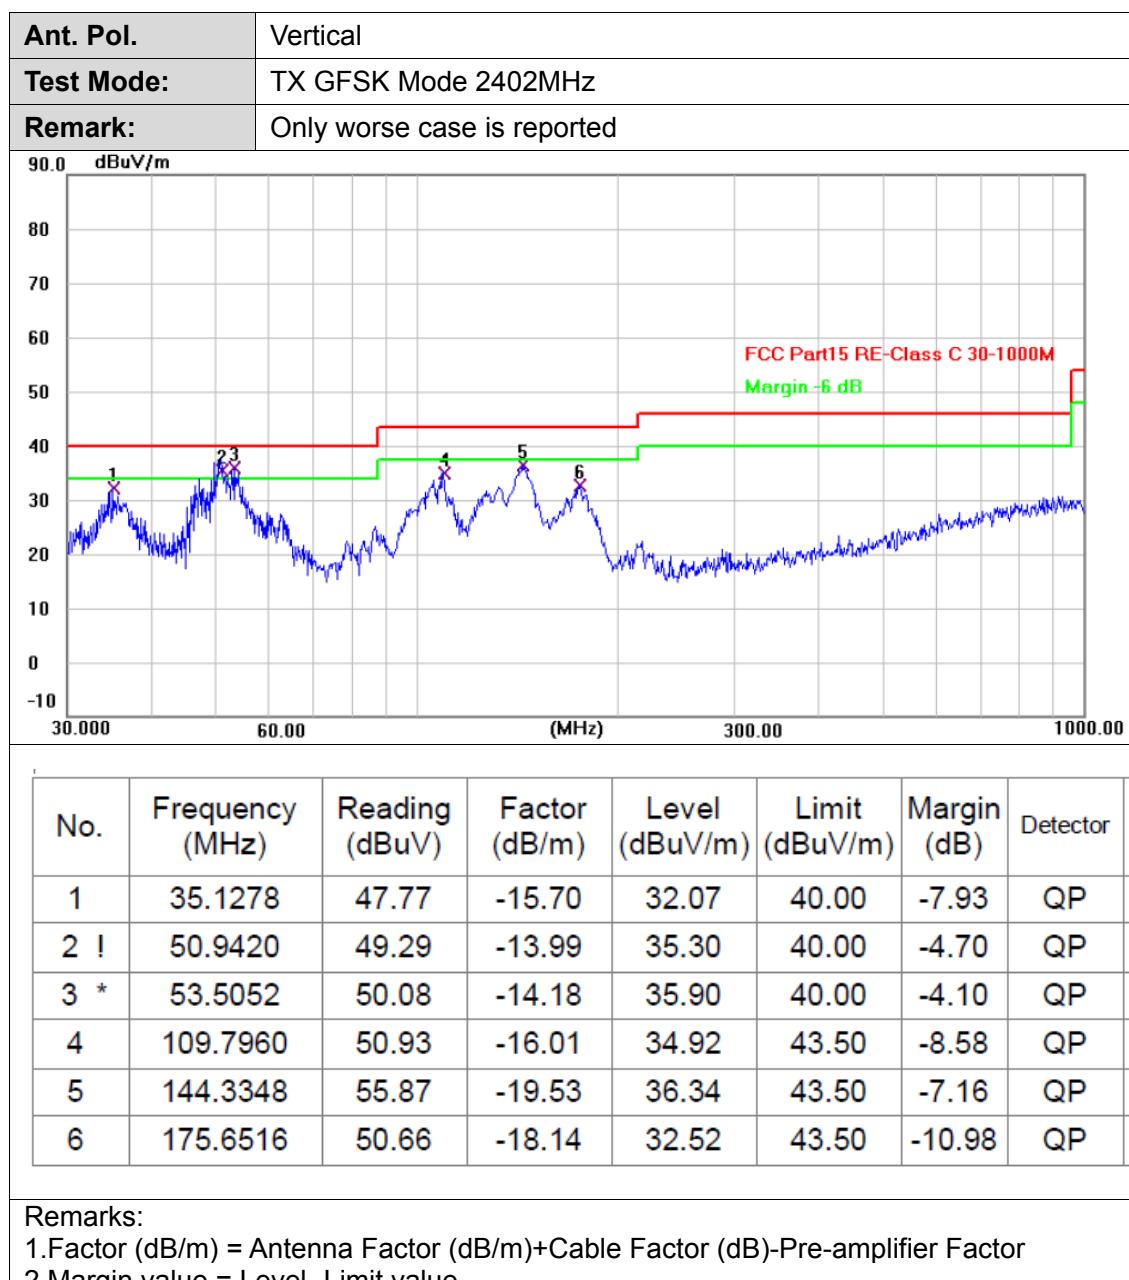



Above 1GHz

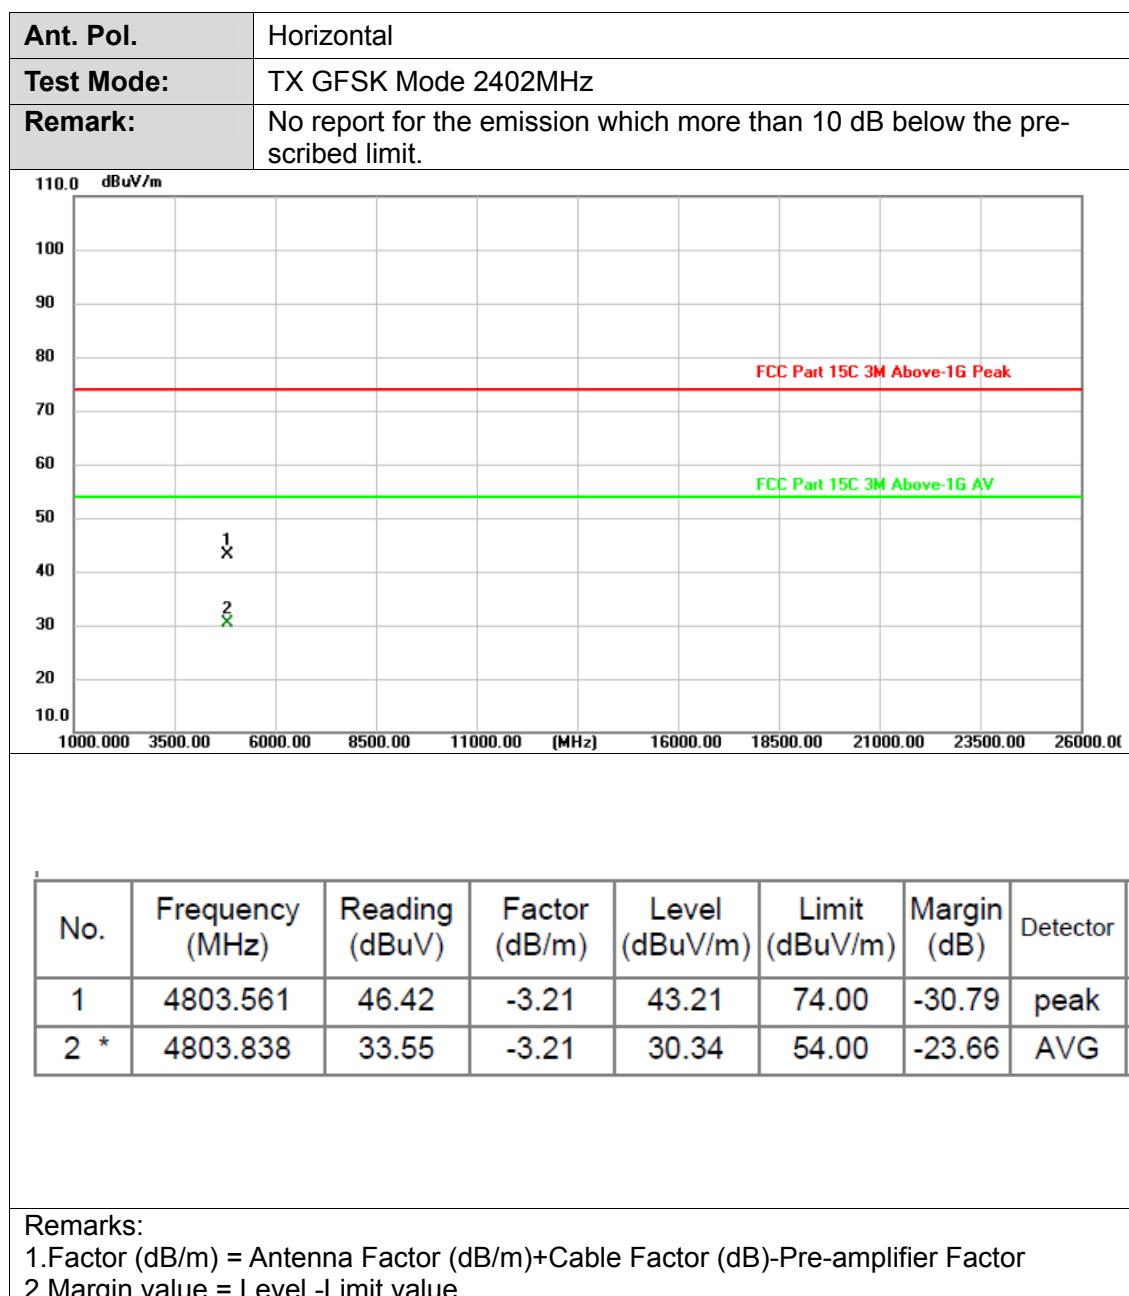

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Ac-

creditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnca.gov.cn)




Ant. Pol.	Vertical																															
Test Mode:	TX GFSK Mode 2402MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
<p>110.0 dBuV/m 100 90 80 70 60 50 40 30 20 10.0</p> <p>FCC Part 15C 3M Above-TG Peak FCC Part 15C 3M Above-TG AV</p> <p>2 X 1 X</p> <p>1000.000 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.00</p>																																
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4803.515</td><td>33.90</td><td>-3.21</td><td>30.69</td><td>54.00</td><td>-23.31</td><td>AVG</td></tr><tr><td>2</td><td>4803.768</td><td>48.41</td><td>-3.21</td><td>45.20</td><td>74.00</td><td>-28.80</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4803.515	33.90	-3.21	30.69	54.00	-23.31	AVG	2	4803.768	48.41	-3.21	45.20	74.00	-28.80	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4803.515	33.90	-3.21	30.69	54.00	-23.31	AVG																									
2	4803.768	48.41	-3.21	45.20	74.00	-28.80	peak																									
<p>Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value</p>																																



Ant. Pol.	Horizontal																															
Test Mode:	TX GFSK Mode 2441MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4881.673</td><td>33.24</td><td>-3.02</td><td>30.22</td><td>54.00</td><td>-23.78</td><td>AVG</td></tr><tr><td>2</td><td>4882.288</td><td>47.82</td><td>-3.02</td><td>44.80</td><td>74.00</td><td>-29.20</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4881.673	33.24	-3.02	30.22	54.00	-23.78	AVG	2	4882.288	47.82	-3.02	44.80	74.00	-29.20	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4881.673	33.24	-3.02	30.22	54.00	-23.78	AVG																									
2	4882.288	47.82	-3.02	44.80	74.00	-29.20	peak																									
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																																



Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2441MHz
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.

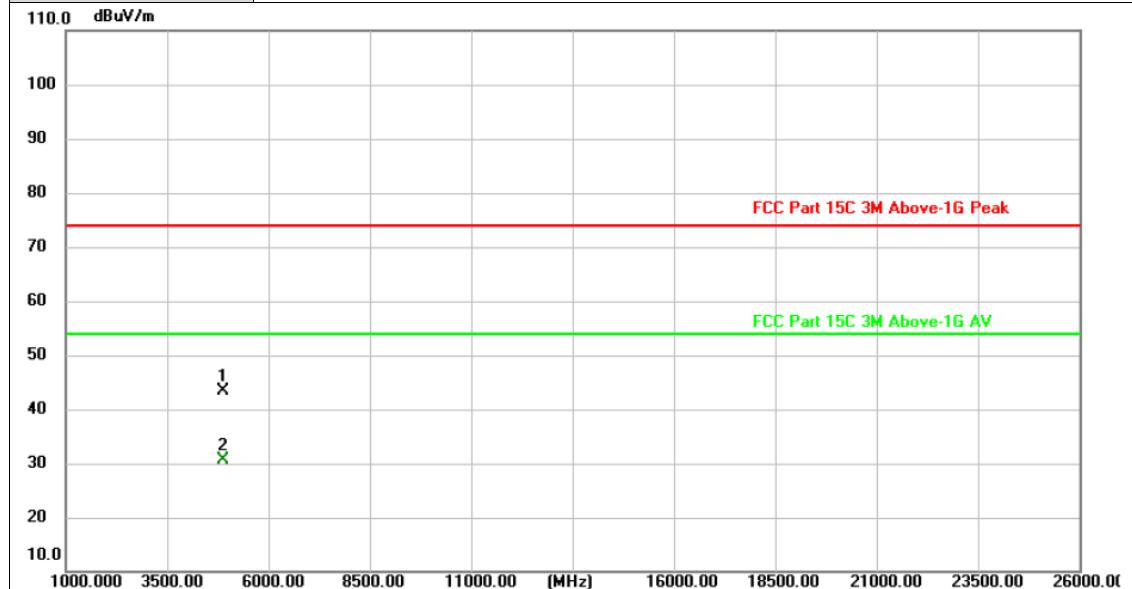

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4881.870	46.44	-3.02	43.42	74.00	-30.58	peak
2 *	4882.340	33.62	-3.02	30.60	54.00	-23.40	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value




Ant. Pol.	Horizontal																														
Test Mode:	TX GFSK Mode 2480MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4959.882</td><td>46.89</td><td>-2.82</td><td>44.07</td><td>74.00</td><td>-29.93</td><td>peak</td></tr><tr><td>2 *</td><td>4960.026</td><td>33.46</td><td>-2.82</td><td>30.64</td><td>54.00</td><td>-23.36</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4959.882	46.89	-2.82	44.07	74.00	-29.93	peak	2 *	4960.026	33.46	-2.82	30.64	54.00	-23.36	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4959.882	46.89	-2.82	44.07	74.00	-29.93	peak																								
2 *	4960.026	33.46	-2.82	30.64	54.00	-23.36	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															



Ant. Pol.	Vertical																													
Test Mode:	TX GFSK Mode 2480MHz																													
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																													
 <table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4959.942</td><td>47.56</td><td>-2.82</td><td>44.74</td><td>74.00</td><td>-29.26</td><td>peak</td></tr><tr><td>2 *</td><td>4960.282</td><td>33.86</td><td>-2.82</td><td>31.04</td><td>54.00</td><td>-22.96</td><td>AVG</td></tr></tbody></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4959.942	47.56	-2.82	44.74	74.00	-29.26	peak	2 *	4960.282	33.86	-2.82	31.04	54.00	-22.96	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																							
1	4959.942	47.56	-2.82	44.74	74.00	-29.26	peak																							
2 *	4960.282	33.86	-2.82	31.04	54.00	-22.96	AVG																							
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																														



Ant. Pol.	Horizontal
Test Mode:	TX π/4-DQPSK Mode 2402MHz
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.

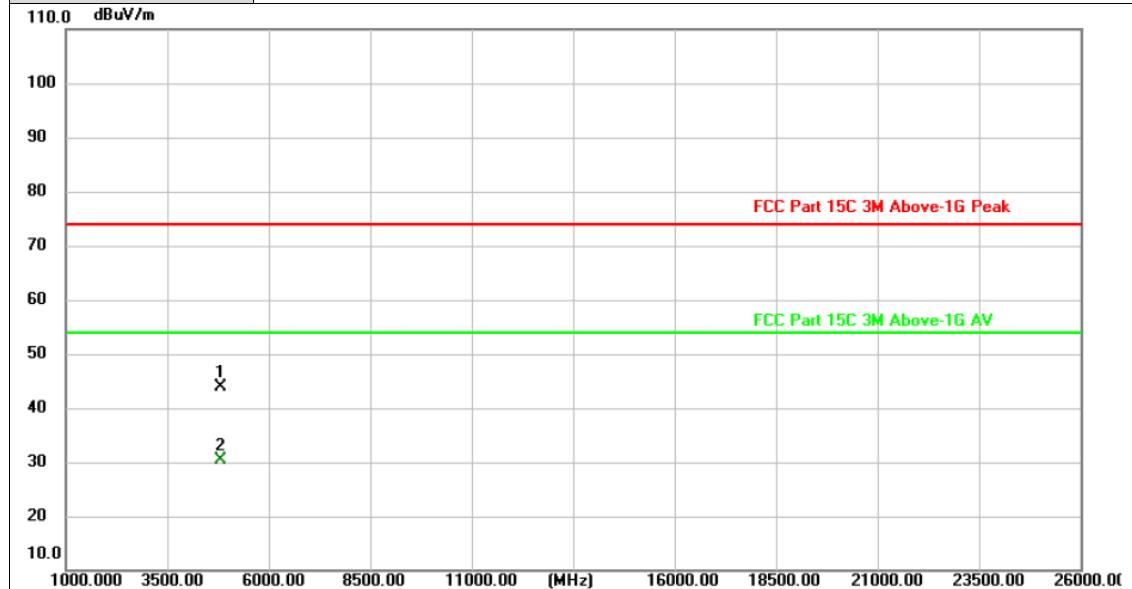

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4803.781	47.06	-3.21	43.85	74.00	-30.15	peak
2 *	4803.863	33.47	-3.21	30.26	54.00	-23.74	AVG

## Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



Ant. Pol.	Vertical																														
Test Mode:	TX π/4-DQPSK Mode 2402MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
 <table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4803.570</td><td>33.77</td><td>-3.21</td><td>30.56</td><td>54.00</td><td>-23.44</td><td>AVG</td></tr><tr><td>2</td><td>4804.372</td><td>47.23</td><td>-3.21</td><td>44.02</td><td>74.00</td><td>-29.98</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4803.570	33.77	-3.21	30.56	54.00	-23.44	AVG	2	4804.372	47.23	-3.21	44.02	74.00	-29.98	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4803.570	33.77	-3.21	30.56	54.00	-23.44	AVG																								
2	4804.372	47.23	-3.21	44.02	74.00	-29.98	peak																								
<b>Remarks:</b> 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																															



Ant. Pol.	Horizontal																															
Test Mode:	TX π/4-DQPSK Mode 2441MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4882.267</td><td>46.54</td><td>-3.02</td><td>43.52</td><td>74.00</td><td>-30.48</td><td>peak</td></tr><tr><td>2 *</td><td>4882.465</td><td>33.21</td><td>-3.02</td><td>30.19</td><td>54.00</td><td>-23.81</td><td>AVG</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4882.267	46.54	-3.02	43.52	74.00	-30.48	peak	2 *	4882.465	33.21	-3.02	30.19	54.00	-23.81	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1	4882.267	46.54	-3.02	43.52	74.00	-30.48	peak																									
2 *	4882.465	33.21	-3.02	30.19	54.00	-23.81	AVG																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																




Ant. Pol.	Vertical																														
Test Mode:	TX π/4-DQPSK Mode 2441MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
 <table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4881.540</td><td>33.54</td><td>-3.02</td><td>30.52</td><td>54.00</td><td>-23.48</td><td>AVG</td></tr><tr><td>2</td><td>4881.849</td><td>46.91</td><td>-3.02</td><td>43.89</td><td>74.00</td><td>-30.11</td><td>peak</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4881.540	33.54	-3.02	30.52	54.00	-23.48	AVG	2	4881.849	46.91	-3.02	43.89	74.00	-30.11	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4881.540	33.54	-3.02	30.52	54.00	-23.48	AVG																								
2	4881.849	46.91	-3.02	43.89	74.00	-30.11	peak																								
<b>Remarks:</b> 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																															



Ant. Pol.	Horizontal																													
Test Mode:	TX π/4-DQPSK Mode 2480MHz																													
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																													
 <table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4959.745</td><td>46.74</td><td>-2.82</td><td>43.92</td><td>74.00</td><td>-30.08</td><td>peak</td></tr><tr><td>2 *</td><td>4960.482</td><td>33.51</td><td>-2.82</td><td>30.69</td><td>54.00</td><td>-23.31</td><td>AVG</td></tr></tbody></table>							No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4959.745	46.74	-2.82	43.92	74.00	-30.08	peak	2 *	4960.482	33.51	-2.82	30.69	54.00	-23.31	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																							
1	4959.745	46.74	-2.82	43.92	74.00	-30.08	peak																							
2 *	4960.482	33.51	-2.82	30.69	54.00	-23.31	AVG																							
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value</p>																														



Ant. Pol.	Vertical
Test Mode:	TX π/4-DQPSK Mode 2480MHz
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.

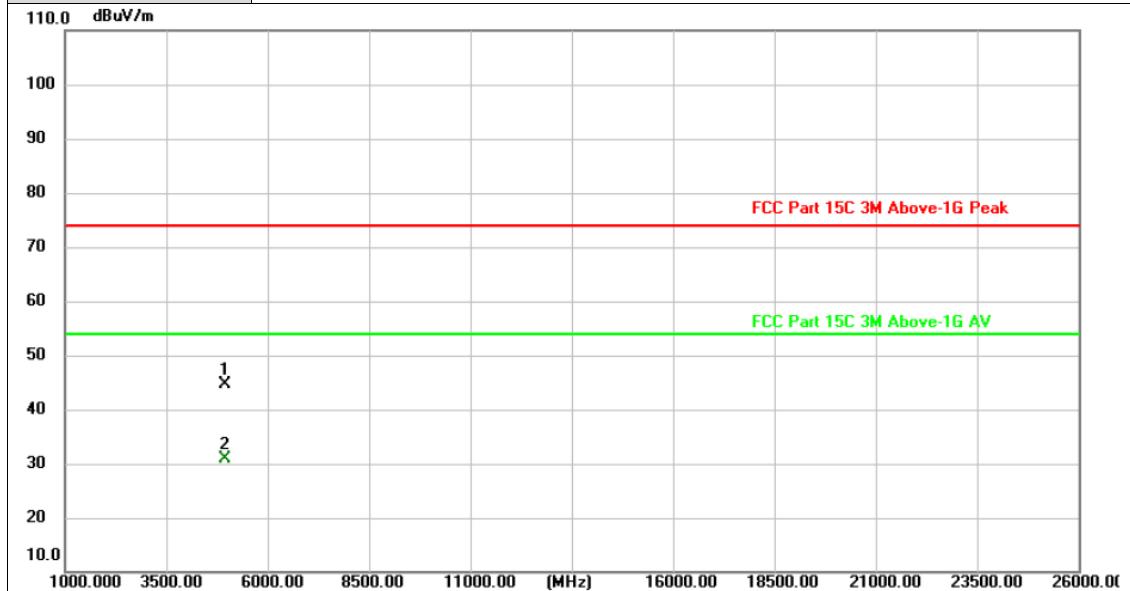

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4959.931	47.45	-2.82	44.63	74.00	-29.37	peak
2 *	4960.174	33.79	-2.82	30.97	54.00	-23.03	AVG

**Remarks:**

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



Ant. Pol.	Horizontal																															
Test Mode:	TX 8-DPSK Mode 2402MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
 110.0 dBuV/m 100 90 80 70 60 50 40 30 20 10.0 FCC Part 15C 3M Above-1G Peak FCC Part 15C 3M Above-1G AV 2 1 1000.000 3500.000 6000.000 8500.000 11000.000 (MHz) 16000.000 18500.000 21000.000 23500.000 26000.000																																
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4803.658</td><td>33.63</td><td>-3.21</td><td>30.42</td><td>54.00</td><td>-23.58</td><td>AVG</td></tr><tr><td>2</td><td>4804.090</td><td>46.93</td><td>-3.21</td><td>43.72</td><td>74.00</td><td>-30.28</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4803.658	33.63	-3.21	30.42	54.00	-23.58	AVG	2	4804.090	46.93	-3.21	43.72	74.00	-30.28	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4803.658	33.63	-3.21	30.42	54.00	-23.58	AVG																									
2	4804.090	46.93	-3.21	43.72	74.00	-30.28	peak																									
<p>Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value</p>																																



Ant. Pol.	Vertical																															
Test Mode:	TX 8-DPSK Mode 2402MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4803.642</td><td>33.74</td><td>-3.21</td><td>30.53</td><td>54.00</td><td>-23.47</td><td>AVG</td></tr><tr><td>2</td><td>4804.129</td><td>48.37</td><td>-3.21</td><td>45.16</td><td>74.00</td><td>-28.84</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4803.642	33.74	-3.21	30.53	54.00	-23.47	AVG	2	4804.129	48.37	-3.21	45.16	74.00	-28.84	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4803.642	33.74	-3.21	30.53	54.00	-23.47	AVG																									
2	4804.129	48.37	-3.21	45.16	74.00	-28.84	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level - Limit value</p>																																



Ant. Pol.	Horizontal																															
Test Mode:	TX 8-DPSK Mode 2441MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4881.602</td><td>33.30</td><td>-3.02</td><td>30.28</td><td>54.00</td><td>-23.72</td><td>AVG</td></tr><tr><td>2</td><td>4881.753</td><td>46.89</td><td>-3.02</td><td>43.87</td><td>74.00</td><td>-30.13</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4881.602	33.30	-3.02	30.28	54.00	-23.72	AVG	2	4881.753	46.89	-3.02	43.87	74.00	-30.13	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4881.602	33.30	-3.02	30.28	54.00	-23.72	AVG																									
2	4881.753	46.89	-3.02	43.87	74.00	-30.13	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																



Ant. Pol.	Vertical																															
Test Mode:	TX 8-DPSK Mode 2441MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
<p>110.0 dBuV/m</p> <p>FCC Part 15C 3M Above-1G Peak</p> <p>FCC Part 15C 3M Above-1G AV</p> <p>10.0 20 30 40 50 60 70 80 90 100</p> <p>1000.000 3500.000 6000.000 8500.000 11000.000 [MHz] 16000.000 18500.000 21000.000 23500.000 26000.000</p>																																
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4881.956</td><td>33.51</td><td>-3.02</td><td>30.49</td><td>54.00</td><td>-23.51</td><td>AVG</td></tr><tr><td>2</td><td>4882.319</td><td>46.81</td><td>-3.02</td><td>43.79</td><td>74.00</td><td>-30.21</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4881.956	33.51	-3.02	30.49	54.00	-23.51	AVG	2	4882.319	46.81	-3.02	43.79	74.00	-30.21	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4881.956	33.51	-3.02	30.49	54.00	-23.51	AVG																									
2	4882.319	46.81	-3.02	43.79	74.00	-30.21	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																



Ant. Pol.	Horizontal																														
Test Mode:	TX 8-DPSK Mode 2480MHz																														
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																														
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1</td><td>4959.593</td><td>46.47</td><td>-2.82</td><td>43.65</td><td>74.00</td><td>-30.35</td><td>peak</td></tr><tr><td>2 *</td><td>4960.054</td><td>33.49</td><td>-2.82</td><td>30.67</td><td>54.00</td><td>-23.33</td><td>AVG</td></tr></tbody></table>								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1	4959.593	46.47	-2.82	43.65	74.00	-30.35	peak	2 *	4960.054	33.49	-2.82	30.67	54.00	-23.33	AVG
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1	4959.593	46.47	-2.82	43.65	74.00	-30.35	peak																								
2 *	4960.054	33.49	-2.82	30.67	54.00	-23.33	AVG																								
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																															



Ant. Pol.	Vertical																															
Test Mode:	TX 8-DPSK Mode 2480MHz																															
Remark:	No report for the emission which more than 10 dB below the pre-scribed limit.																															
<p>110.0 dBuV/m</p> <p>74 dBuV/m (FCC Part 15C 3M Above-1G Peak)</p> <p>54 dBuV/m (FCC Part 15C 3M Above-1G AV)</p> <p>33.82 dBuV (Point 1)</p> <p>46.97 dBuV (Point 2)</p>																																
<table border="1"><thead><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr></thead><tbody><tr><td>1 *</td><td>4960.099</td><td>33.82</td><td>-2.82</td><td>31.00</td><td>54.00</td><td>-23.00</td><td>AVG</td></tr><tr><td>2</td><td>4960.288</td><td>46.97</td><td>-2.82</td><td>44.15</td><td>74.00</td><td>-29.85</td><td>peak</td></tr></tbody></table>									No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4960.099	33.82	-2.82	31.00	54.00	-23.00	AVG	2	4960.288	46.97	-2.82	44.15	74.00	-29.85	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																									
1 *	4960.099	33.82	-2.82	31.00	54.00	-23.00	AVG																									
2	4960.288	46.97	-2.82	44.15	74.00	-29.85	peak																									
<p>Remarks:</p> <p>1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor</p> <p>2. Margin value = Level -Limit value</p>																																


### 3.3. Band Edge Emissions (Radiated)

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

#### Test Configuration

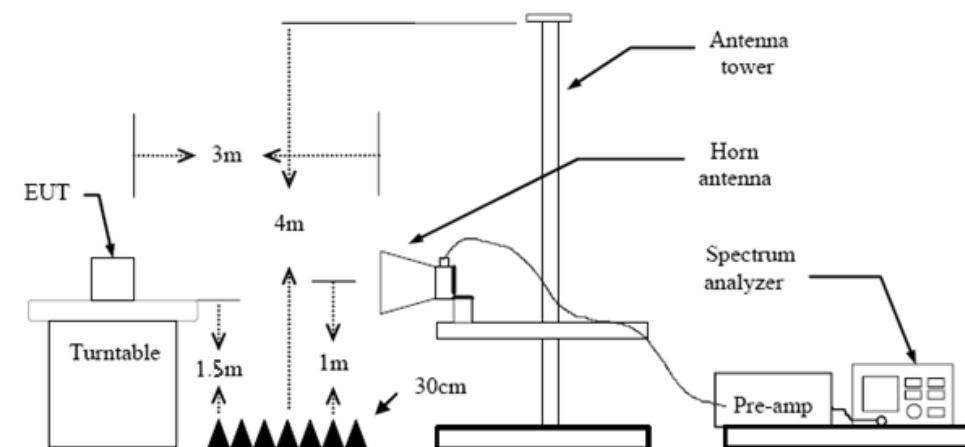

#### Test Procedure


1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:  
RBW=1MHz, VBW=3MHz Peak detector for Peak value.  
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.


#### Test Mode


Please refer to the clause 2.4.


**Test Results**

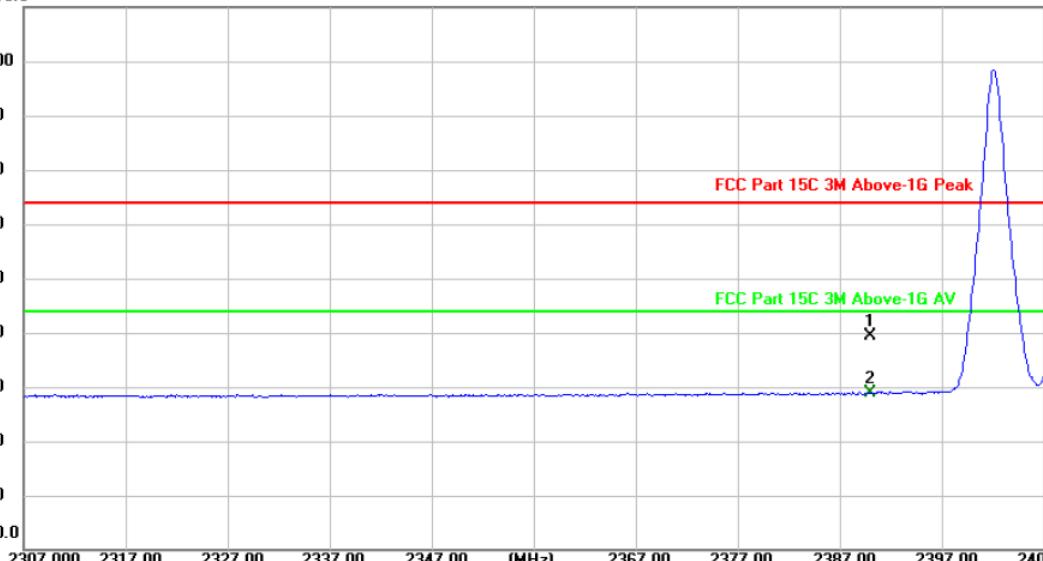
Ant. Pol.	Horizontal															
Test Mode:	GFSK Mode 2402MHz															
110.0 dBuV/m																
																
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector									
1	2390.000	18.36	31.08	49.44	74.00	-24.56	peak									
2 *	2390.000	7.84	31.08	38.92	54.00	-15.08	AVG									
Remarks: 1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2. Margin value = Level -Limit value																

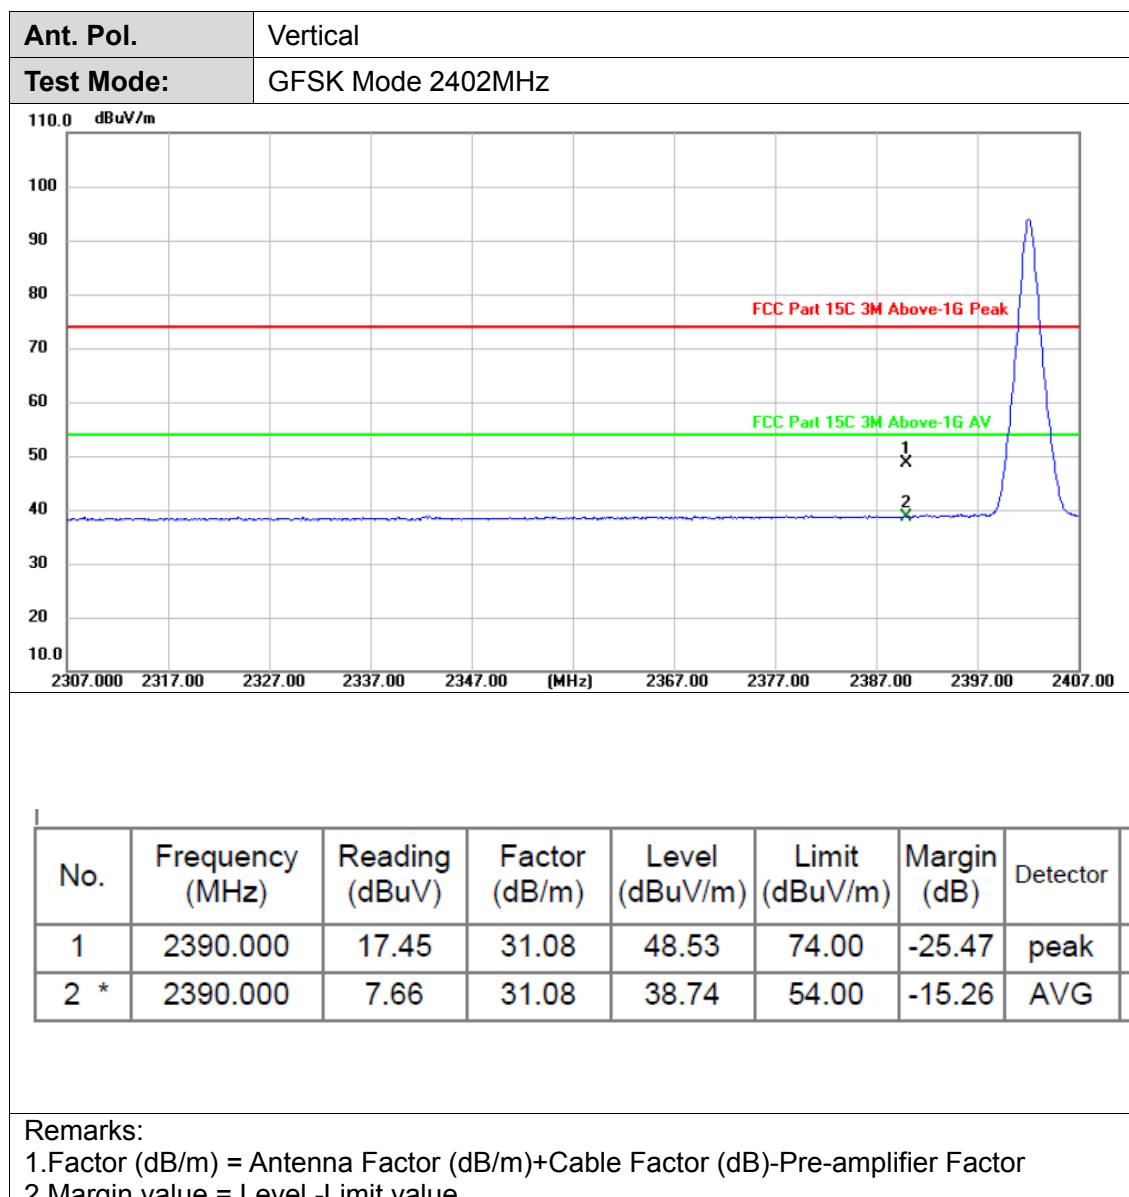


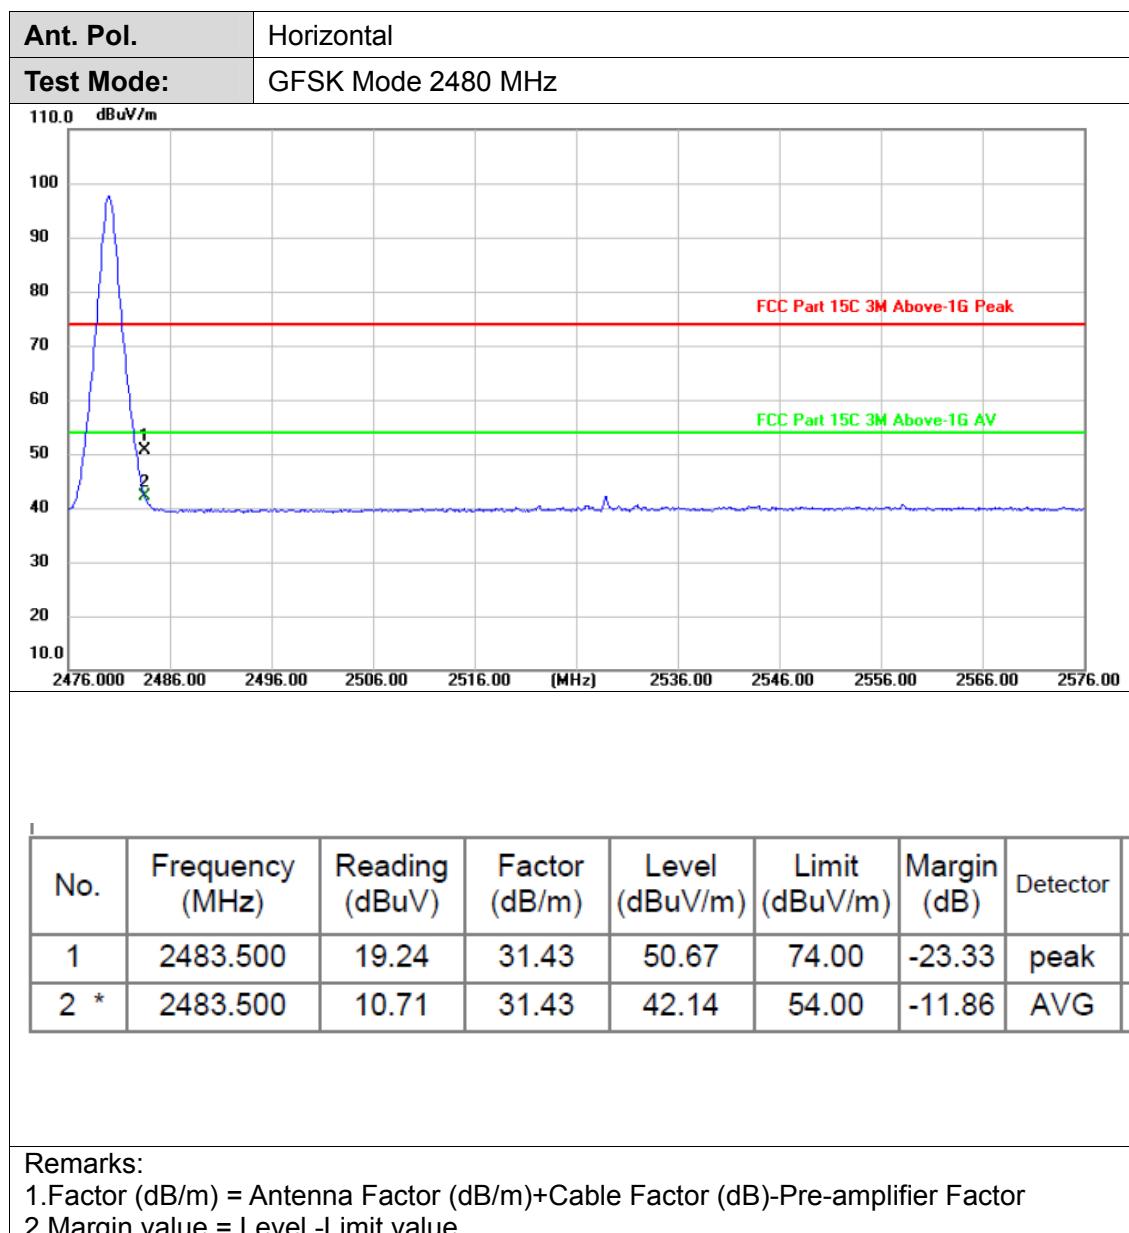


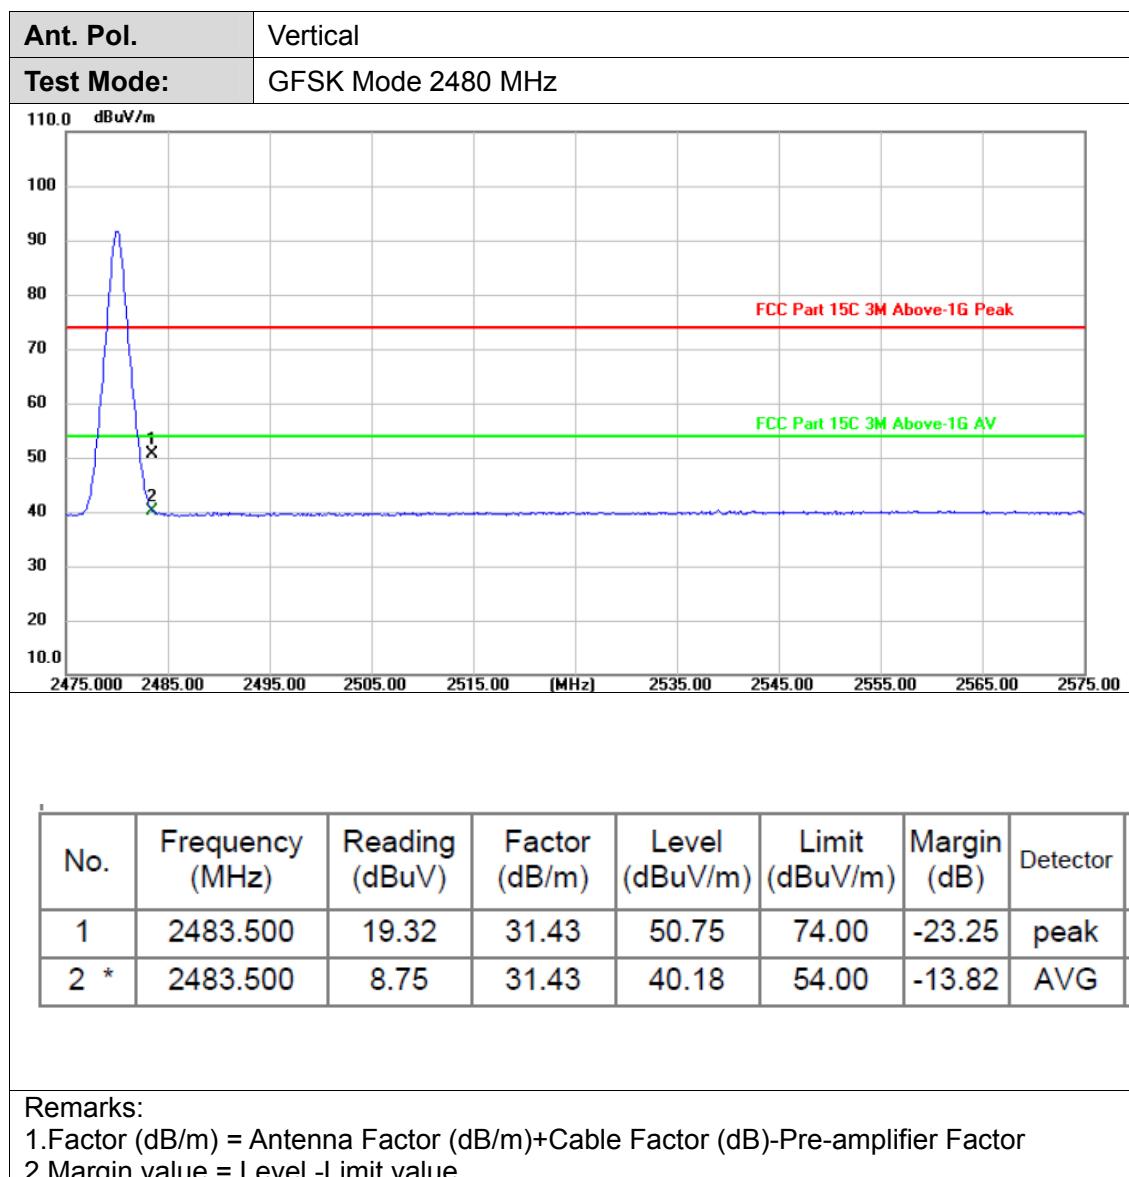


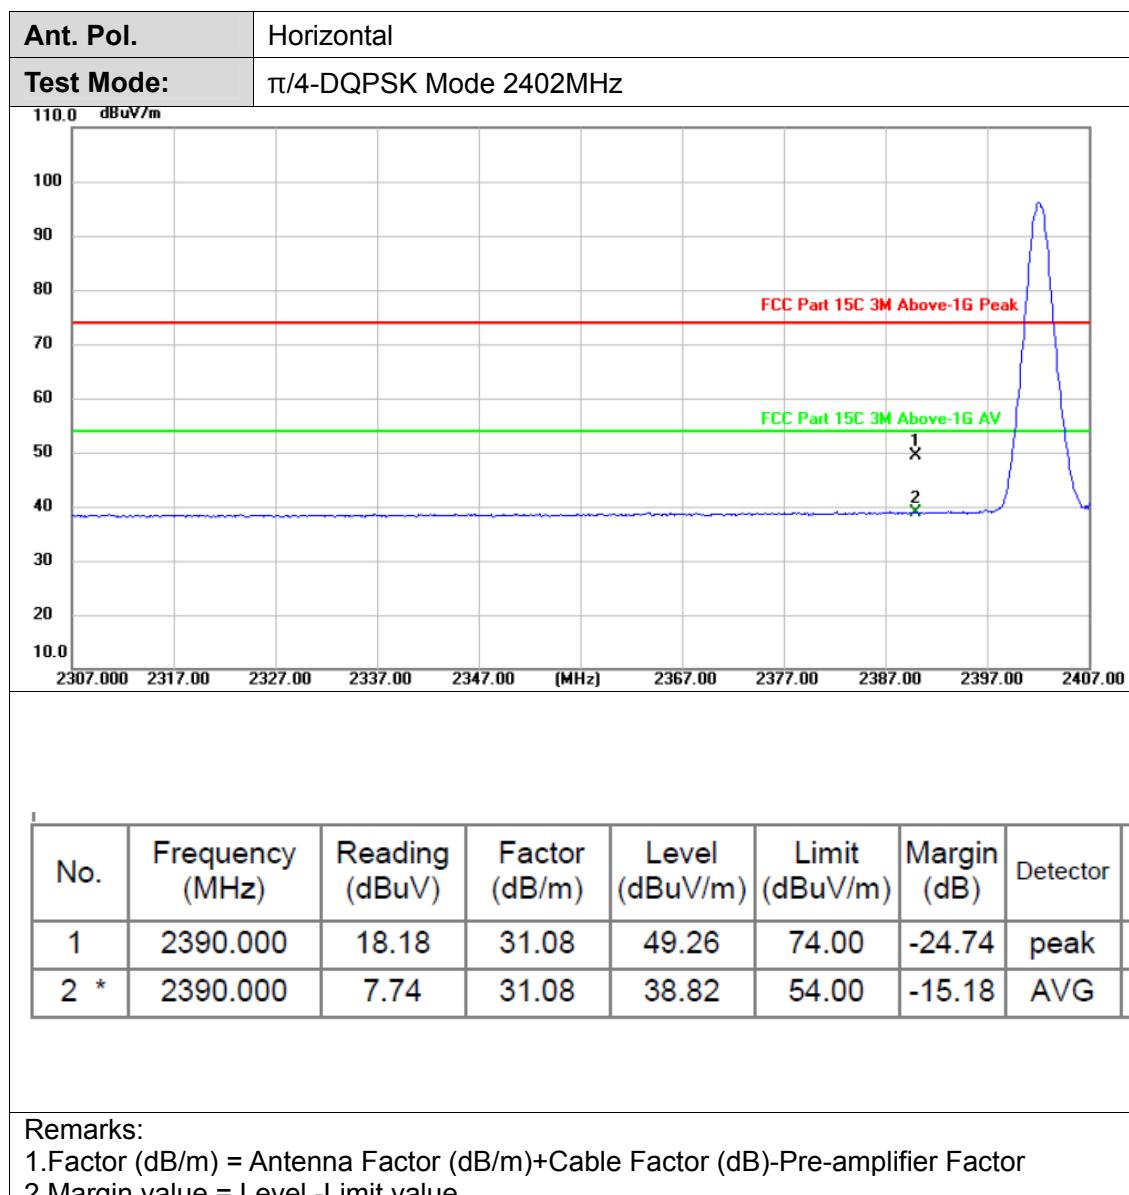


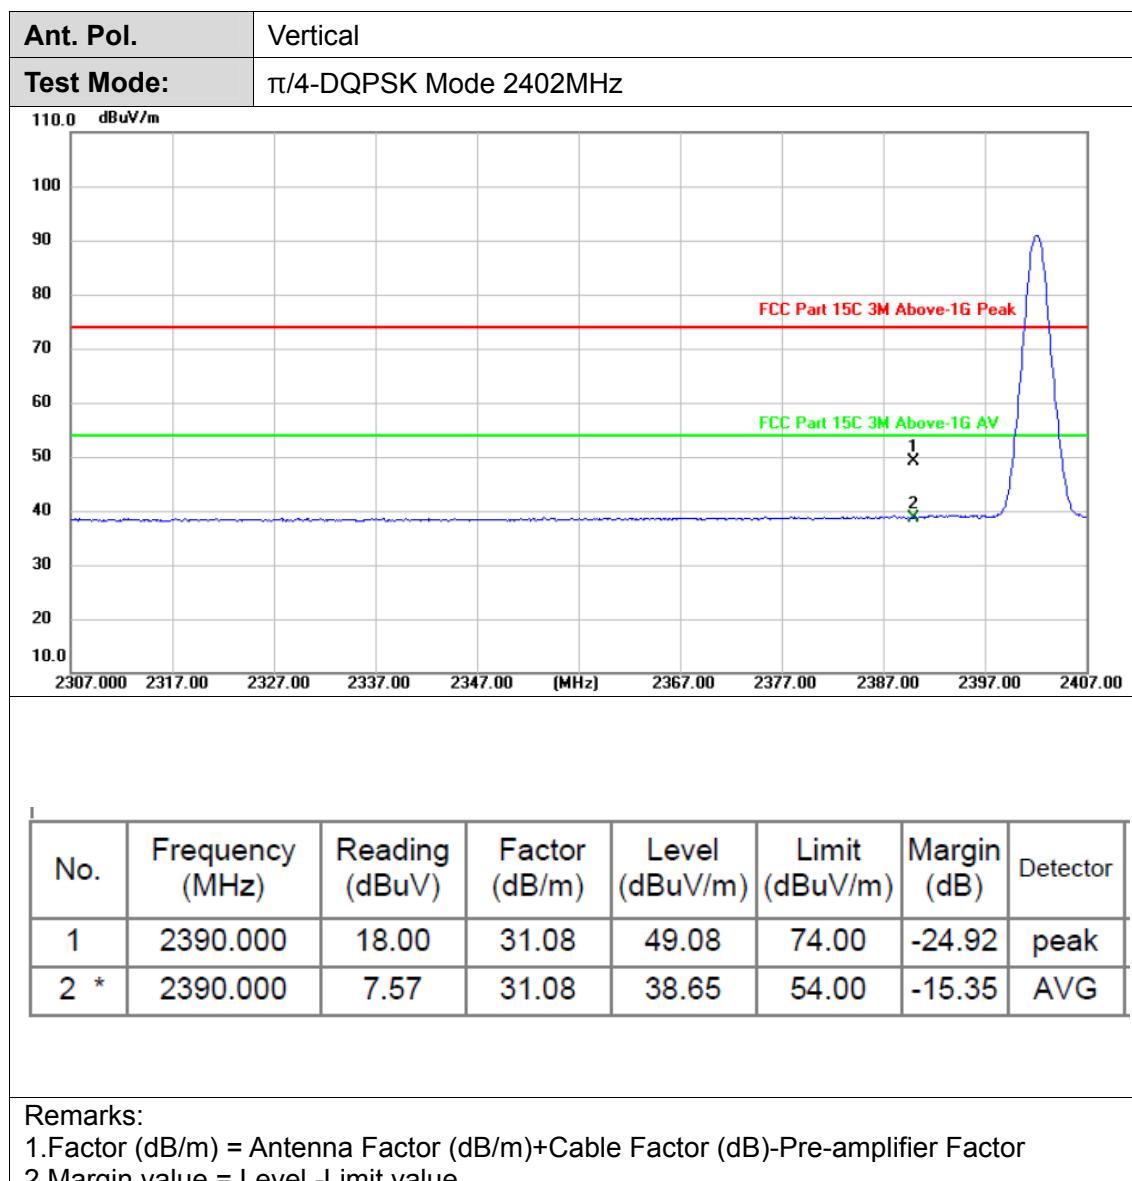


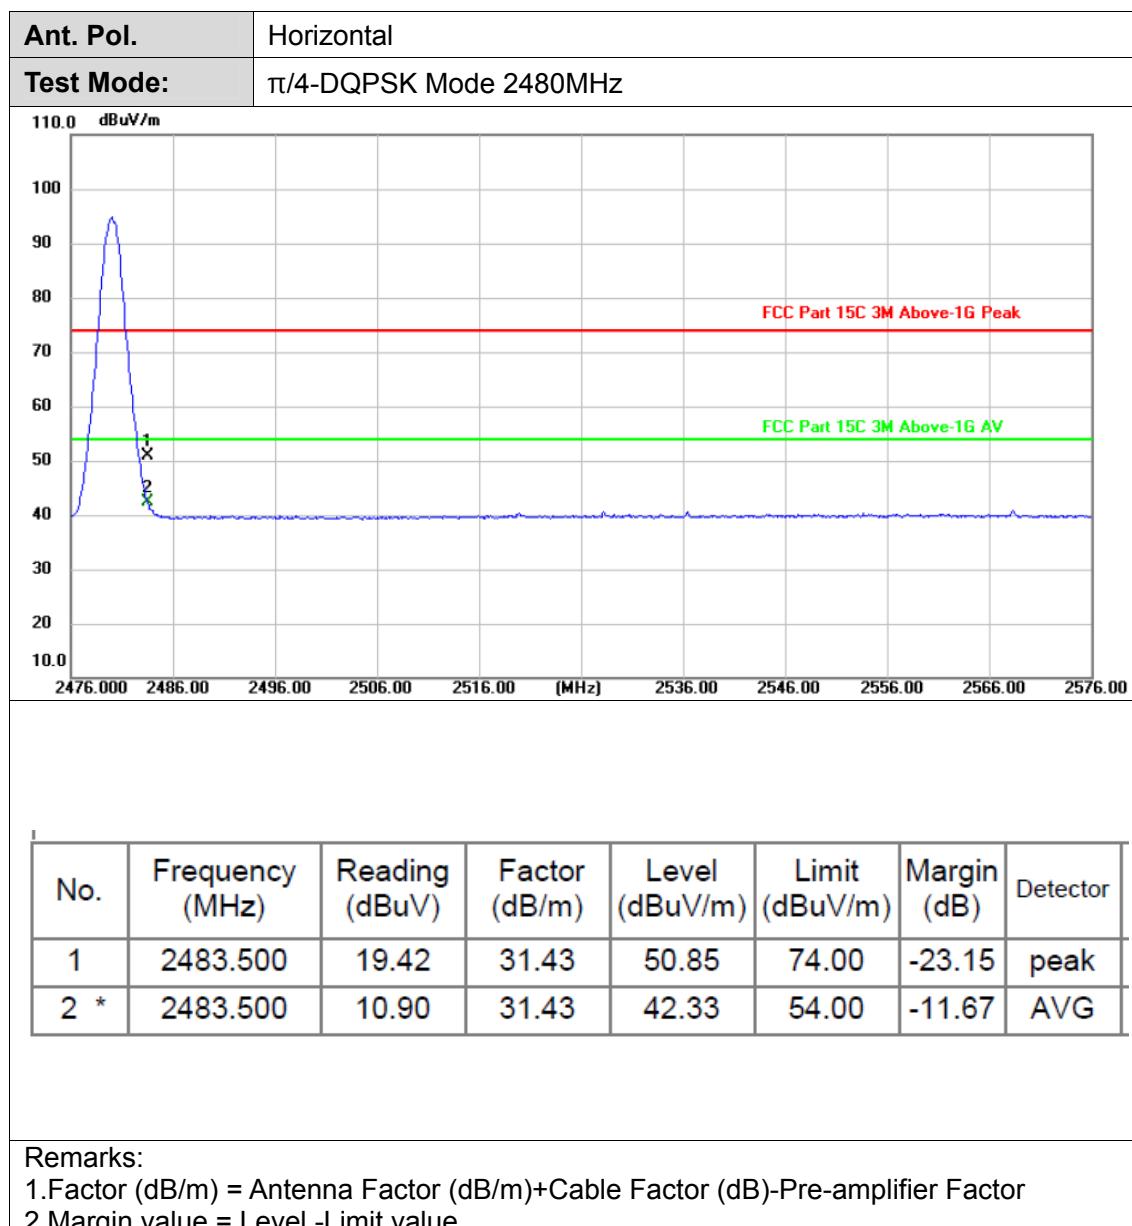


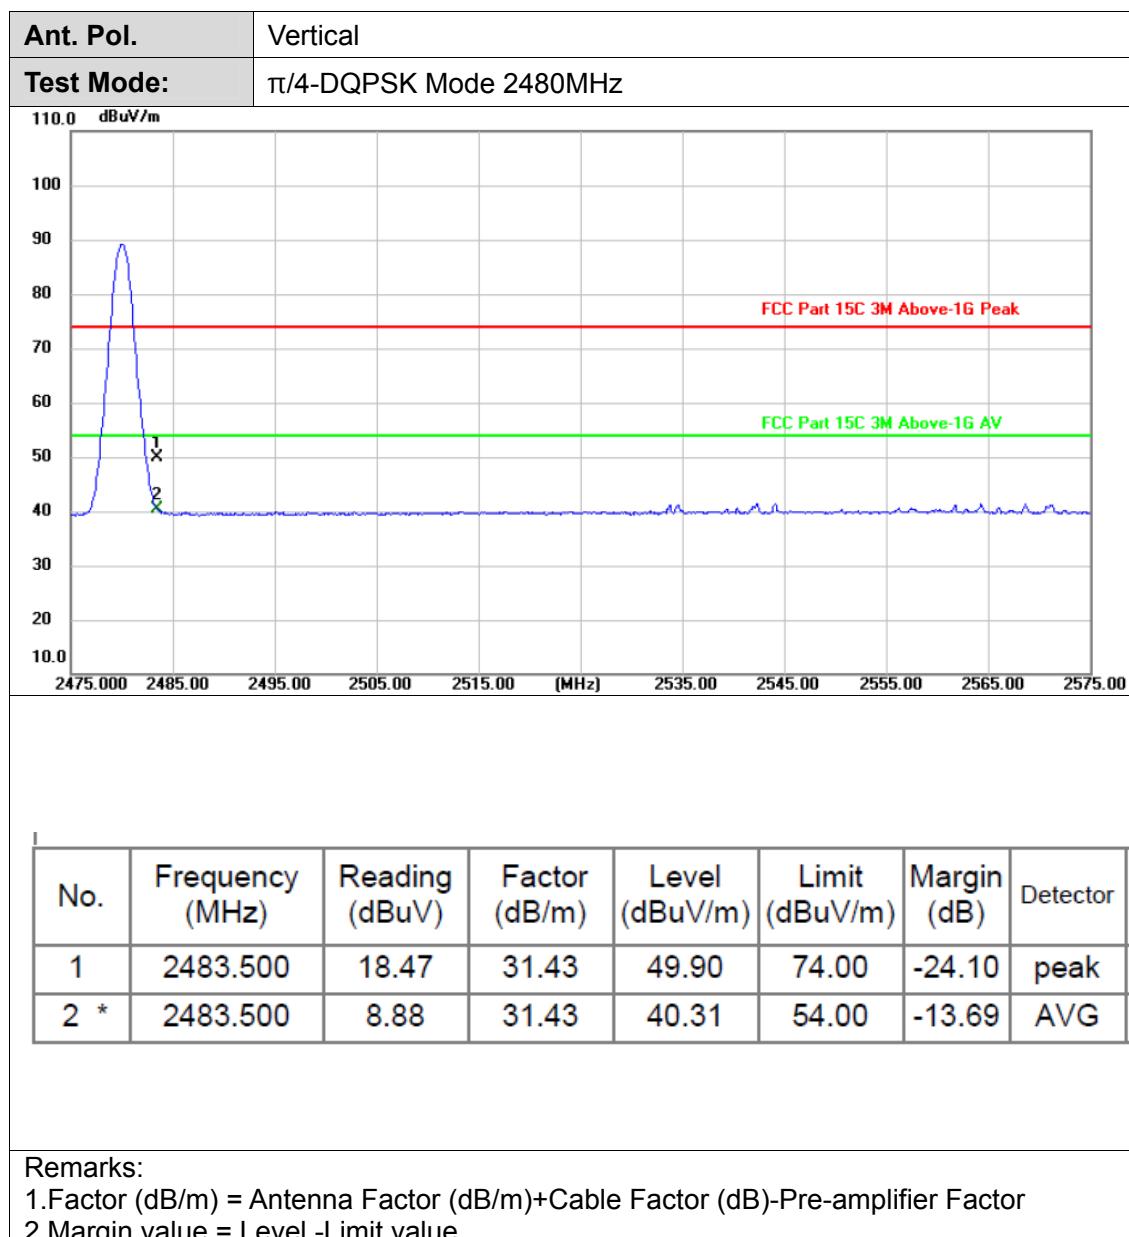

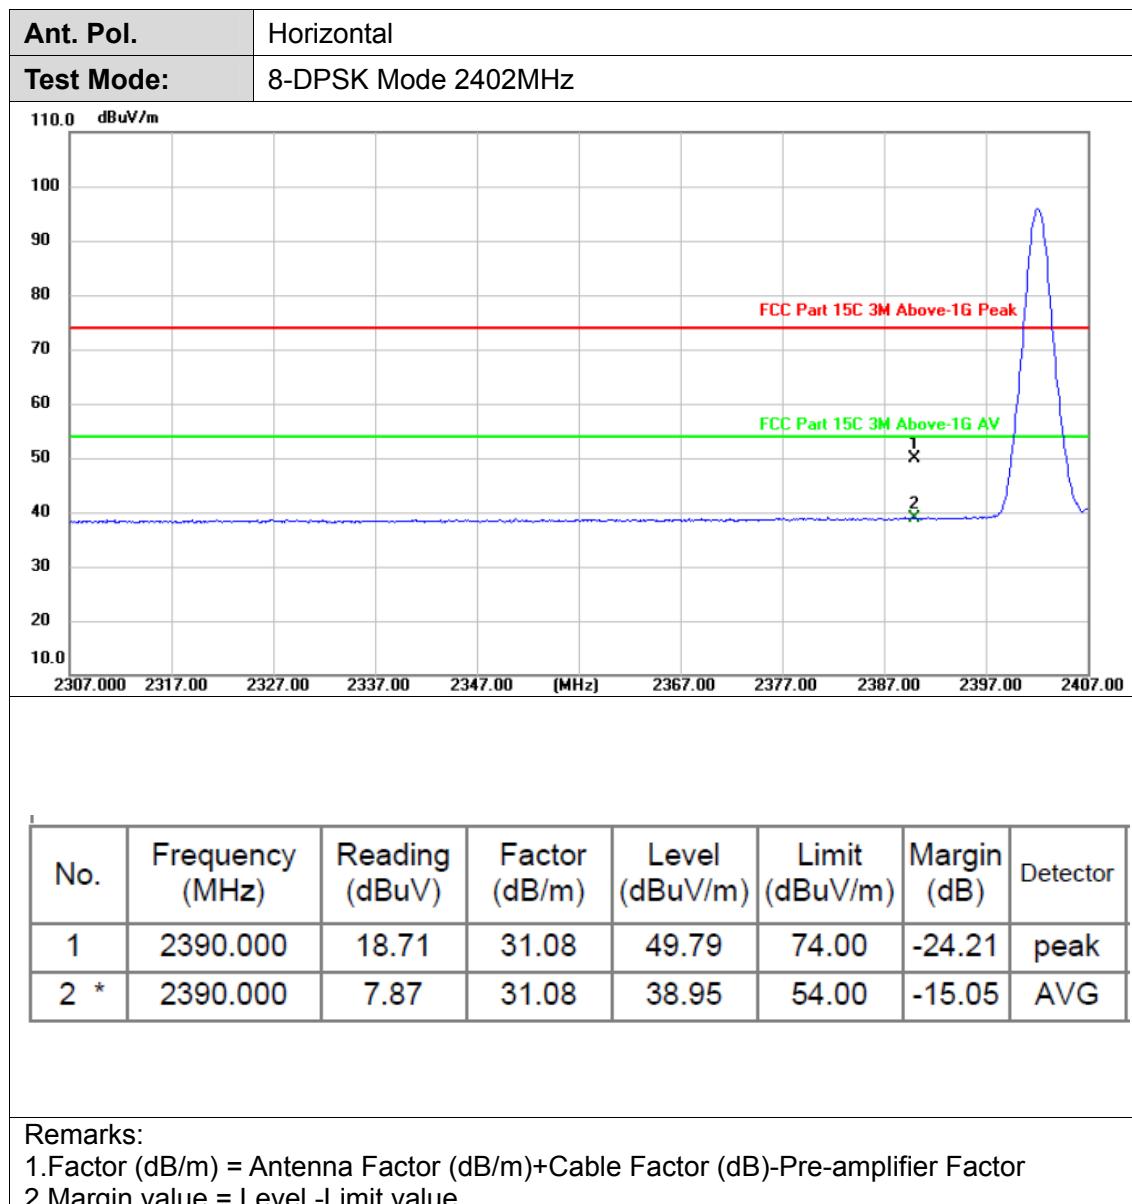

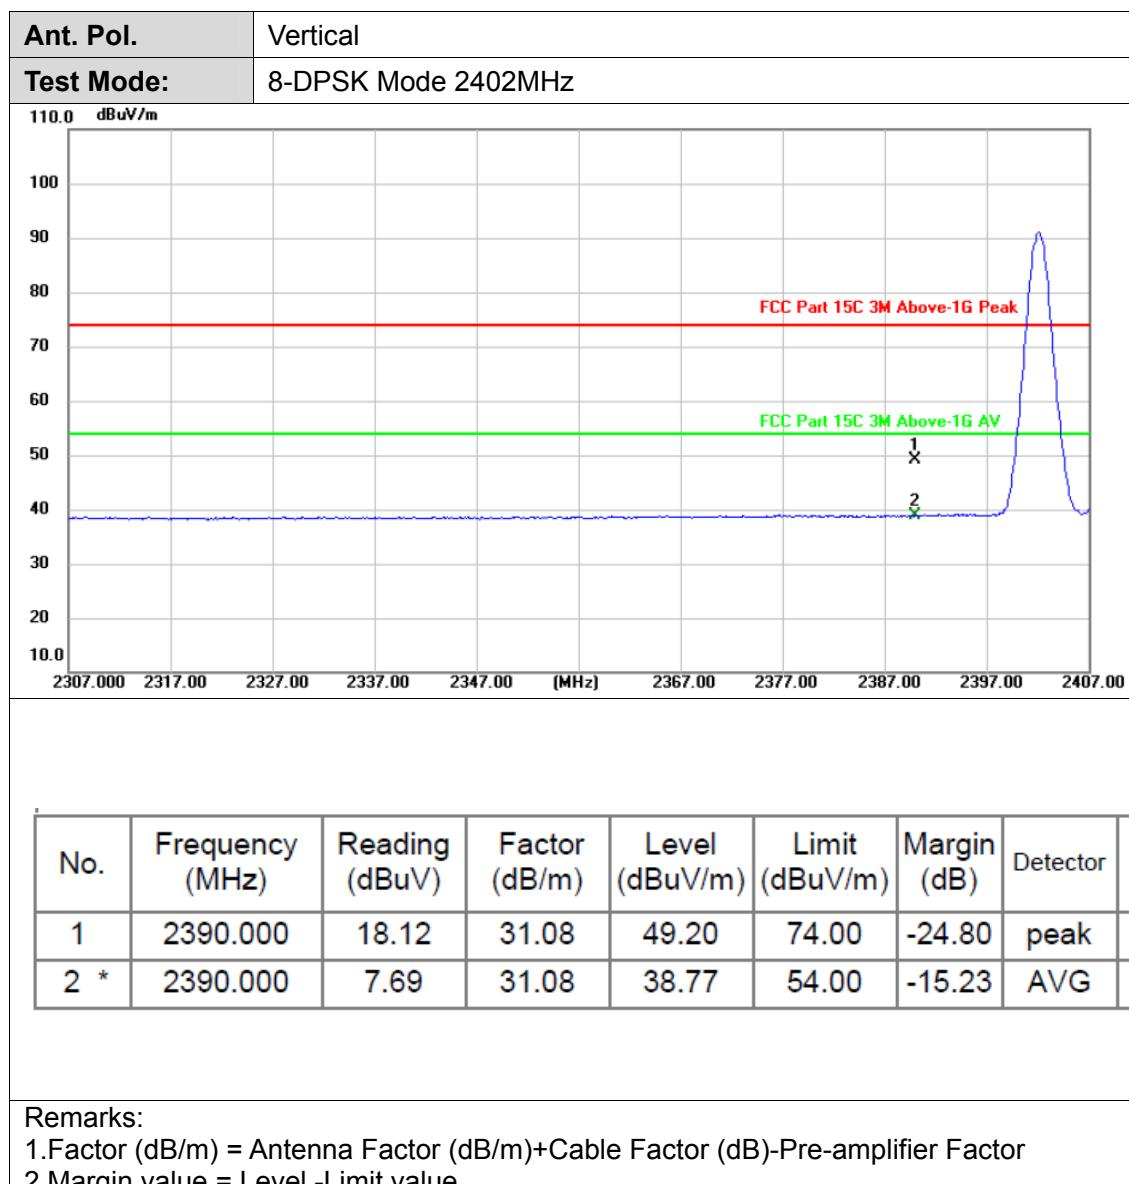

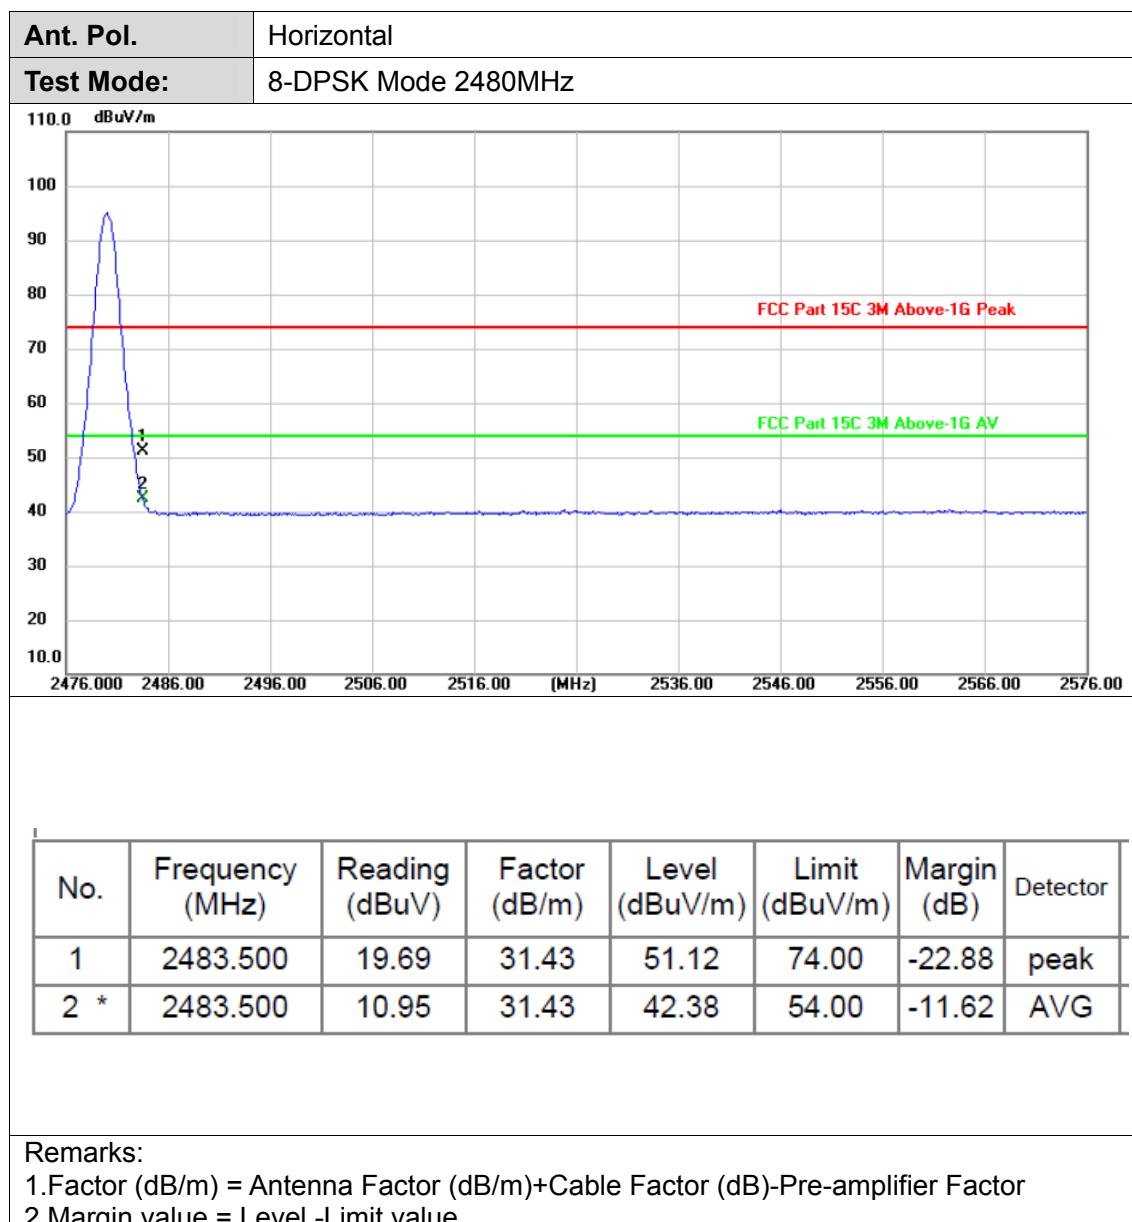

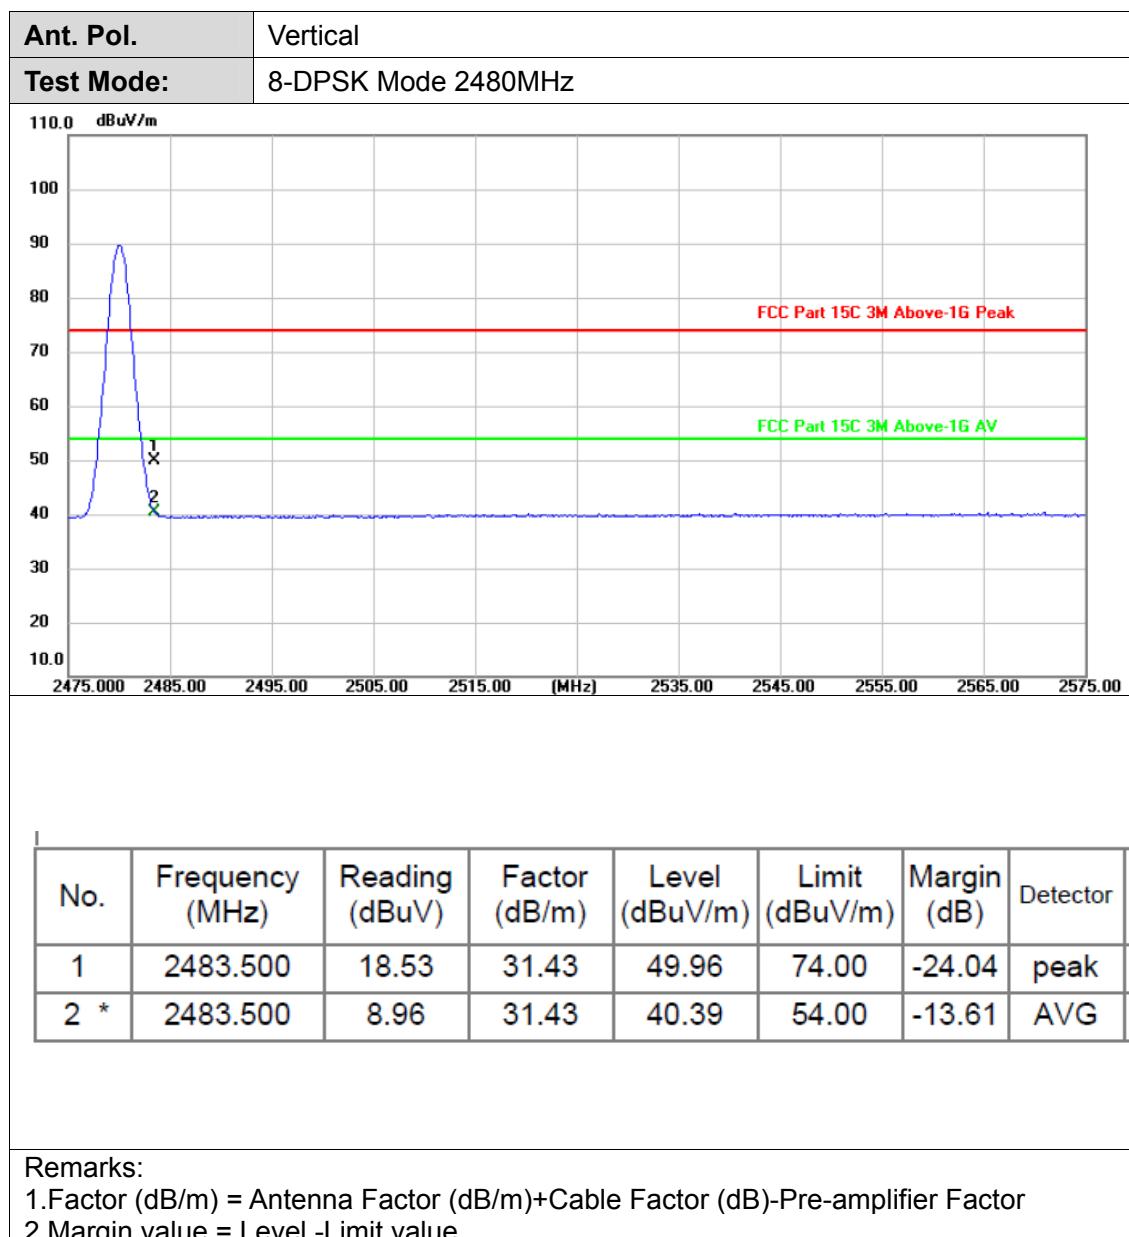




### 3.4. Band edge and Spurious Emissions (Conducted)

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

#### Test Configuration



#### Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
RBW = 100 kHz, VBW ≥ RBW, scan up through 10<sup>th</sup> harmonic.  
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

#### Test Mode

Please refer to the clause 2.4.


#### Test Results

##### (1) Band edge Conducted Test


Test Mode	Frequency[MHz]	Ref Level[dBm]	Result[dBm]	Limit[dBm]	Verdict
GFSK	2402	4.03	-51.51	≤-15.97	PASS
	2480	3.56	-56.92	≤-16.44	PASS
	Hop_2402	5.20	-53.66	≤-14.80	PASS
	Hop_2480	5.58	-57.52	≤-14.42	PASS
$\pi/4$ -DQPSK	2402	4.73	-53.30	≤-15.27	PASS
	2480	4.24	-57.74	≤-15.77	PASS
	Hop_2402	2.69	-52.20	≤-17.31	PASS
	Hop_2480	6.41	-56.82	≤-13.59	PASS
8-DPSK	2402	4.78	-51.61	≤-15.22	PASS
	2480	4.32	-57.01	≤-15.68	PASS
	Hop_2402	3.74	-50.12	≤-16.26	PASS
	Hop_2480	5.47	-57.22	≤-14.53	PASS



## GFSK\_Low\_2402

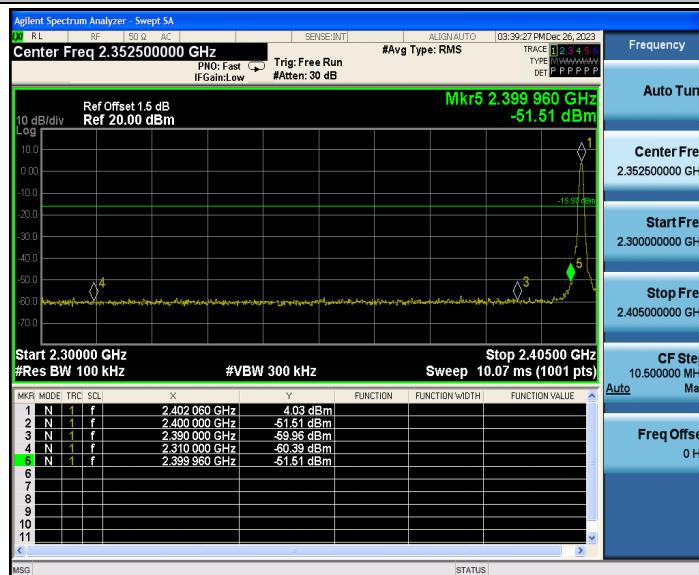

## GFSK\_High\_2480

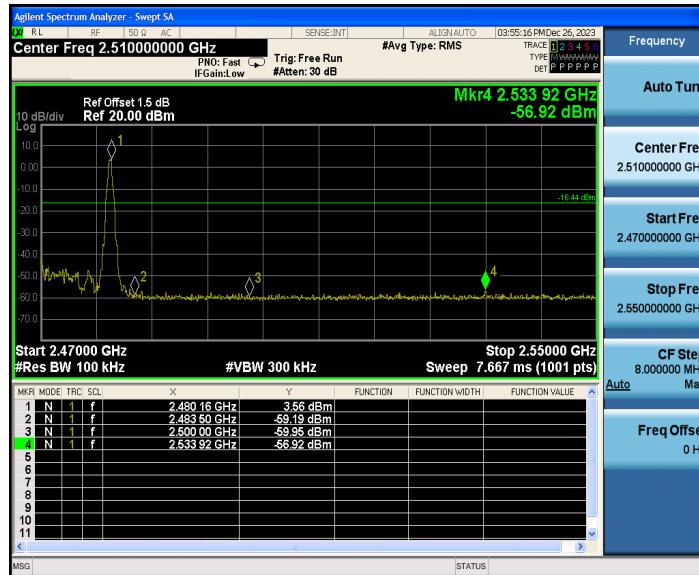

## GFSK\_Low\_Hop\_2402



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China


Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)




## GFSK\_High\_Hop\_2480

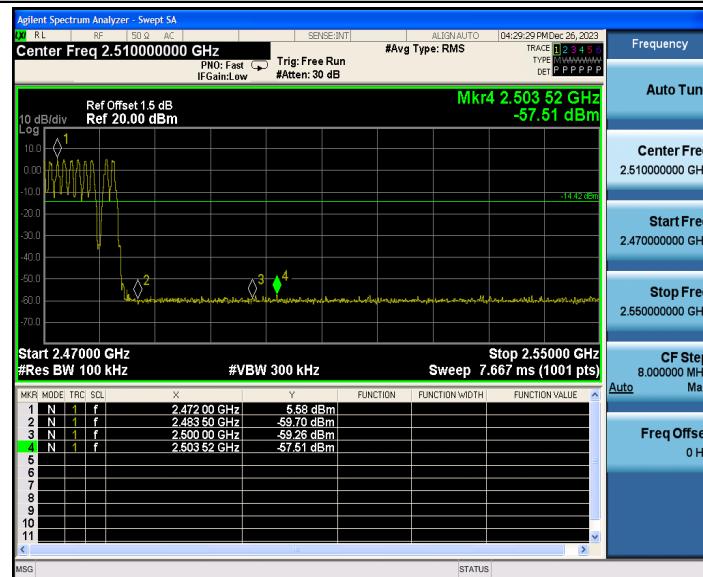

## π/4-DQPSK\_Low\_2402

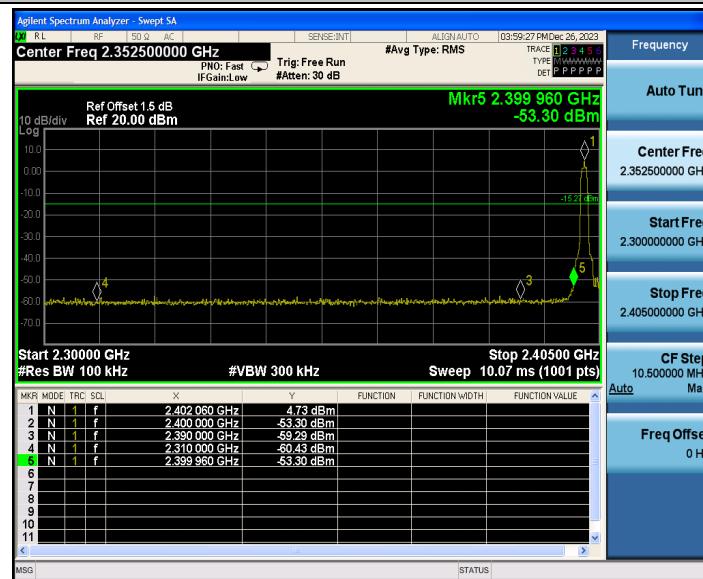

## π/4-DQPSK\_High\_2480

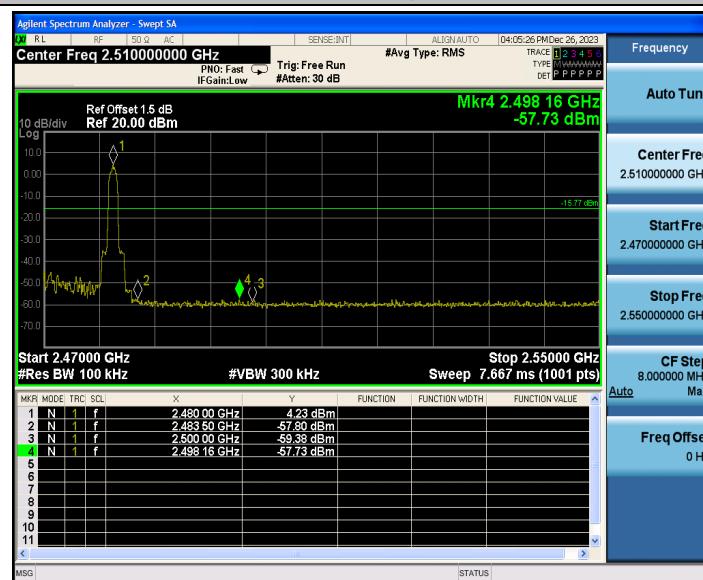

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.gov.cn)




### π/4-DQPSK\_Low\_Hop\_2402

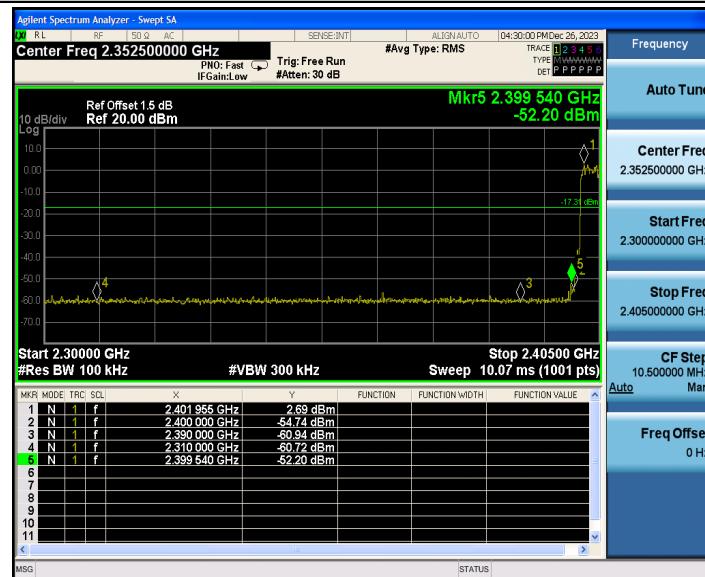

### π/4-DQPSK\_High\_Hop\_2480

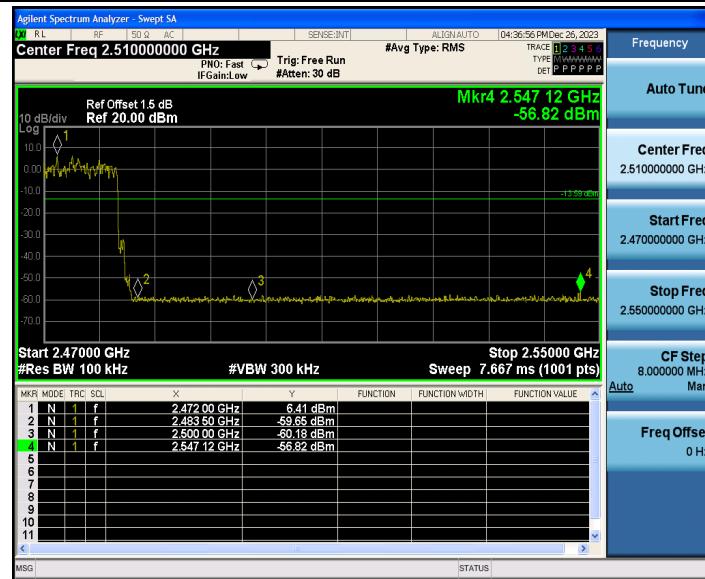

### 8-DPSK\_Low\_2402

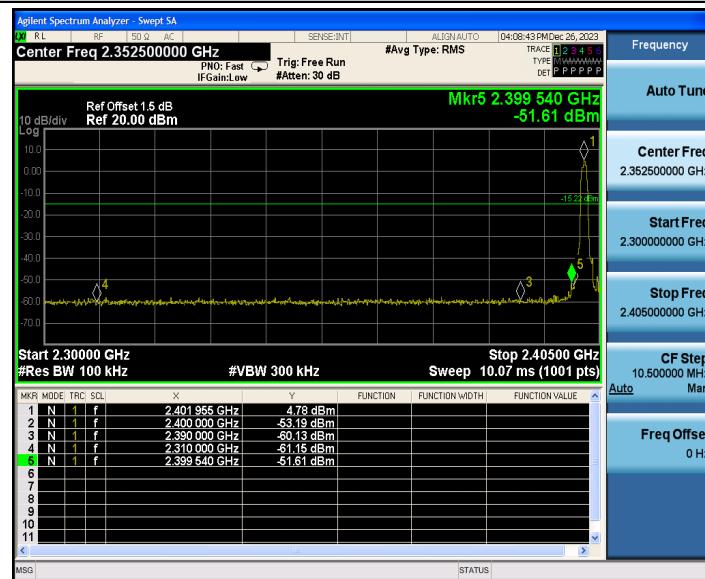

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011 Http://www.sz-ctc.org.cn




For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)




## 8-DPSK\_High\_2480

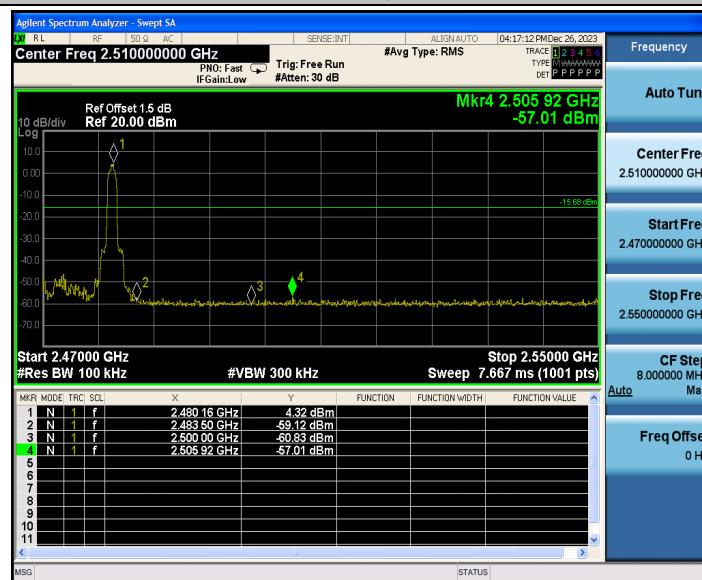

## 8-DPSK\_Low\_Hop\_2402

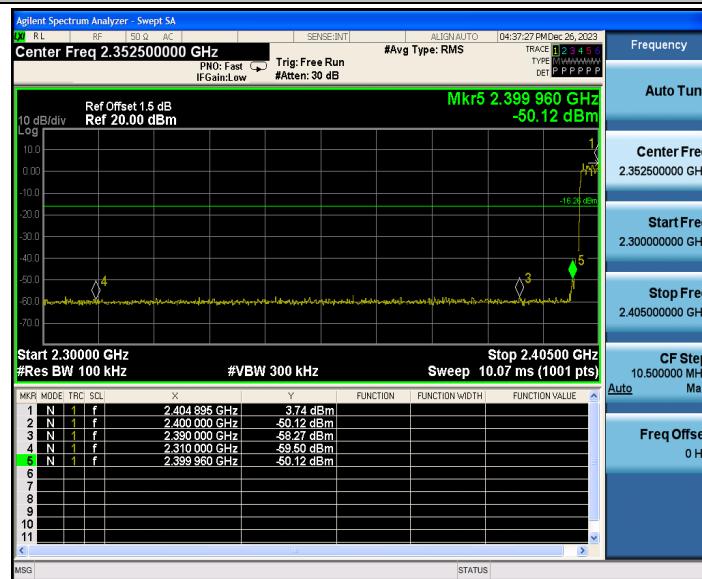

## 8-DPSK\_High\_Hop\_2480

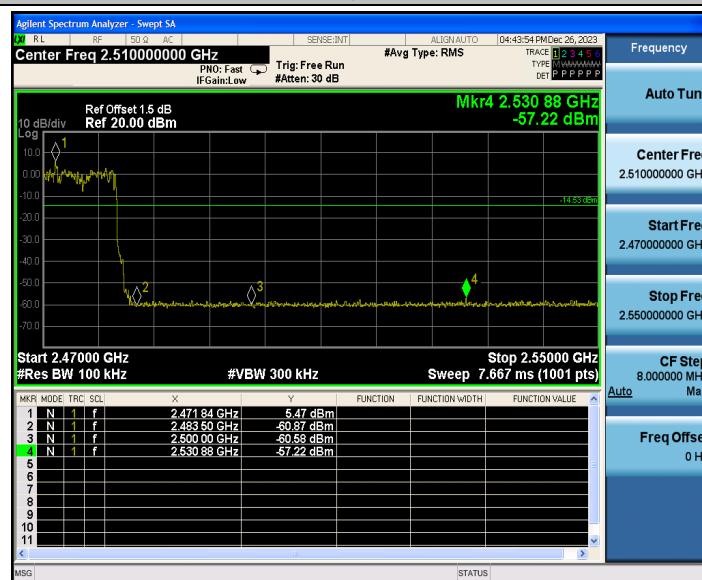


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059Fax: (86)755-27521011 Http://www.sz-ctc.org.cn  
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.gov.cn)



## (2) Conducted Spurious Emissions Test

Test Mode	Freq(MHz)	Freq Range [MHz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
GFSK	2402	Reference	4.03	4.03	---	PASS
		30~1000	4.03	-68.60	≤-15.97	PASS
		1000~26500	4.03	-37.33	≤-15.97	PASS
	2441	Reference	5.04	5.04	---	PASS
		30~1000	5.04	-68.19	≤-14.96	PASS
		1000~26500	5.04	-36.98	≤-14.96	PASS
	2480	Reference	3.43	3.43	---	PASS
		30~1000	3.43	-68.29	≤-16.57	PASS
		1000~26500	3.43	-39.45	≤-16.57	PASS
$\pi/4$ -DQPSK	2402	Reference	4.86	4.86	---	PASS
		30~1000	4.86	-52.32	≤-15.14	PASS
		1000~26500	4.86	-41.35	≤-15.14	PASS
	2441	Reference	5.32	5.32	---	PASS
		30~1000	5.32	-68.10	≤-14.68	PASS
		1000~26500	5.32	-34.89	≤-14.68	PASS
	2480	Reference	4.25	4.25	---	PASS
		30~1000	4.25	-67.73	≤-15.75	PASS
		1000~26500	4.25	-41.10	≤-15.75	PASS
8-DPSK	2402	Reference	4.92	4.92	---	PASS
		30~1000	4.92	-68.09	≤-15.08	PASS
		1000~26500	4.92	-41.34	≤-15.08	PASS
	2441	Reference	5.42	5.42	---	PASS
		30~1000	5.42	-68.43	≤-14.58	PASS
		1000~26500	5.42	-37.25	≤-14.58	PASS
	2480	Reference	4.33	4.33	---	PASS
		30~1000	4.33	-67.42	≤-15.67	PASS
		1000~26500	4.33	-40.18	≤-15.67	PASS

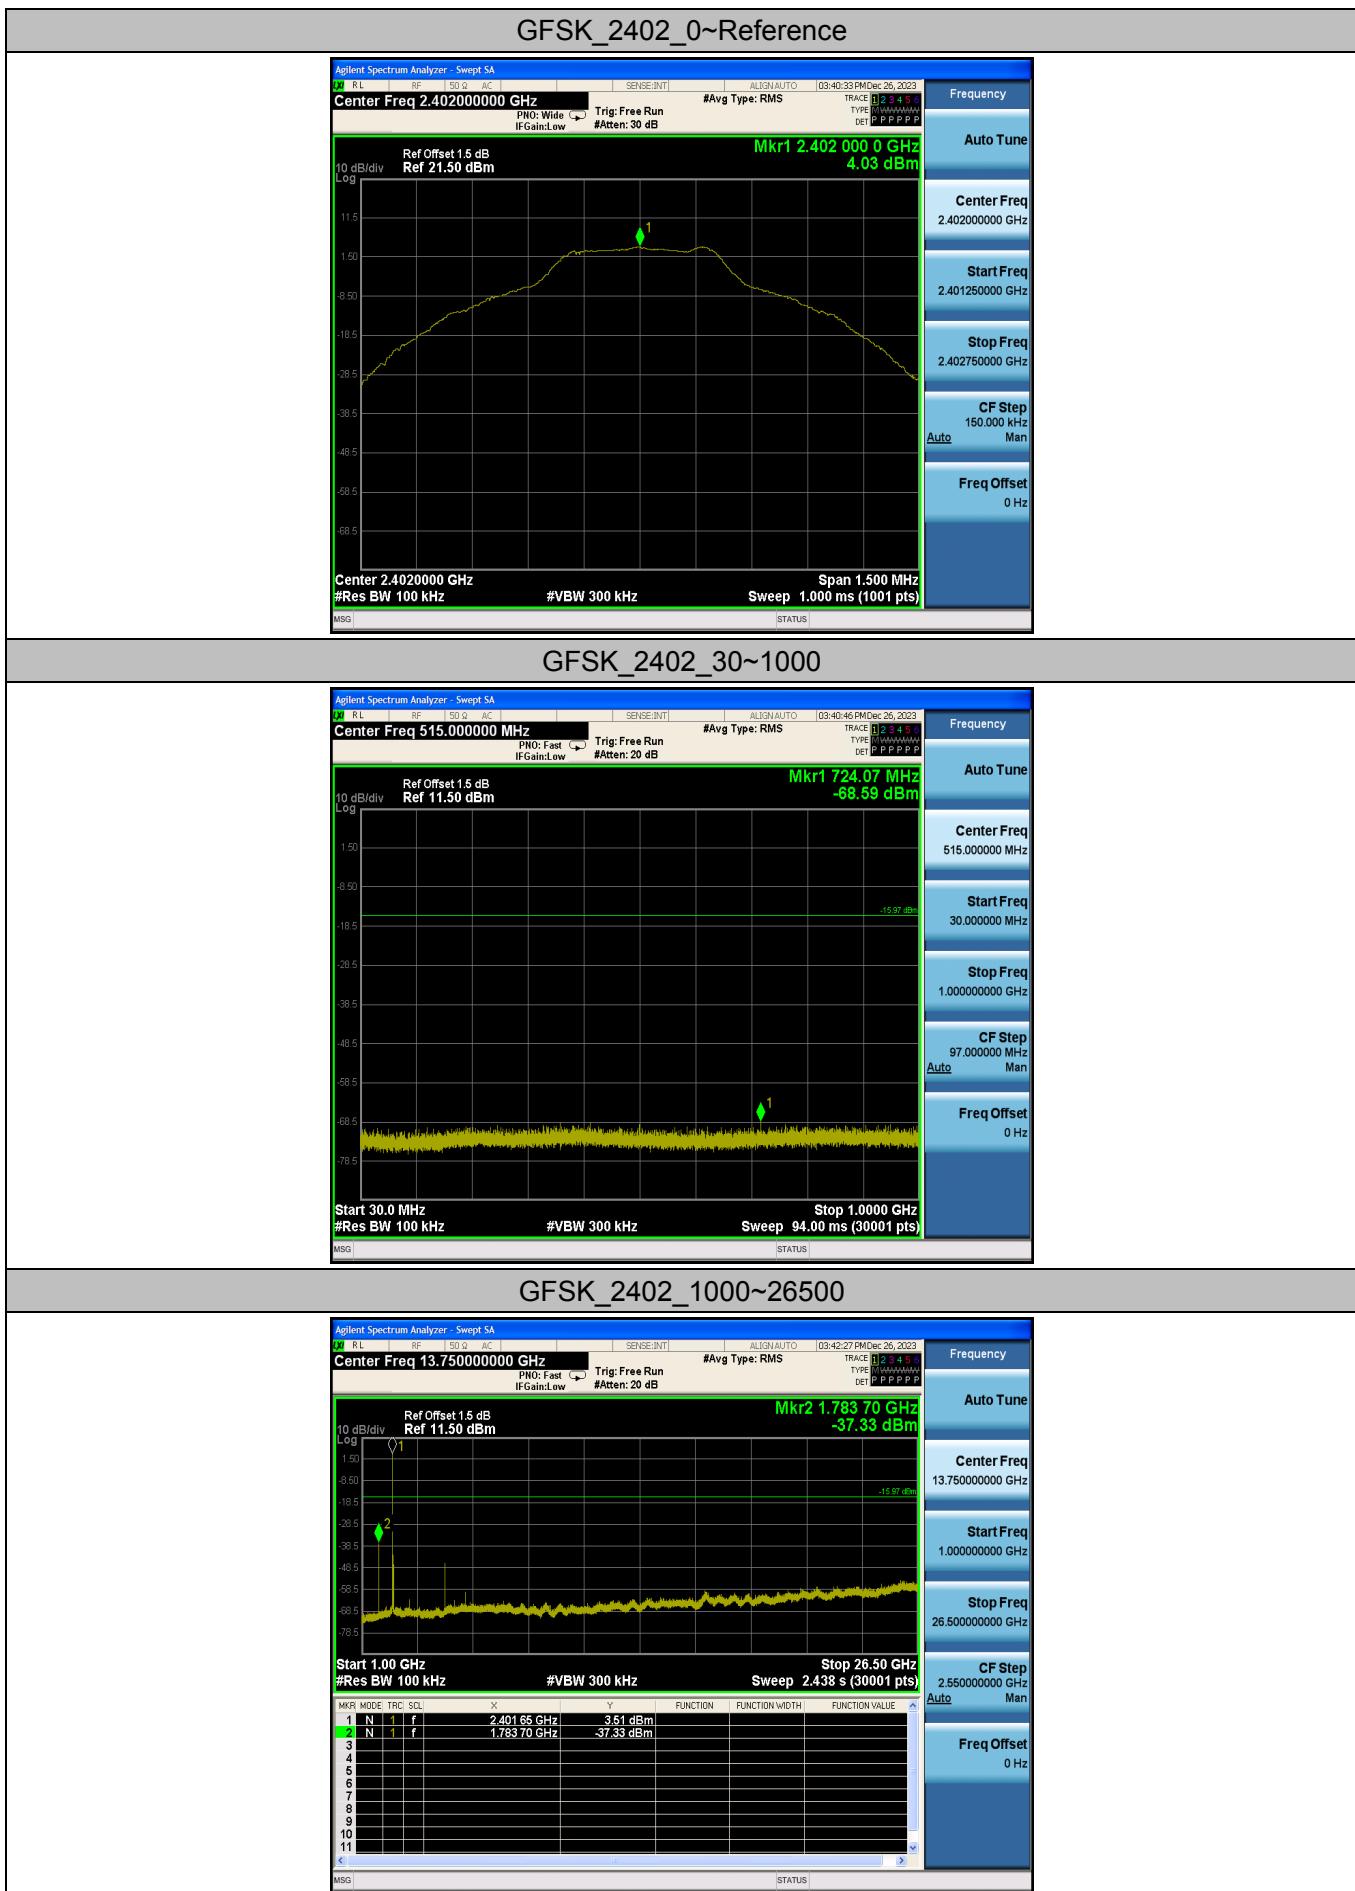

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.gov.cn)



## GFSK\_2441\_0~Reference



## GFSK\_2441\_30~1000

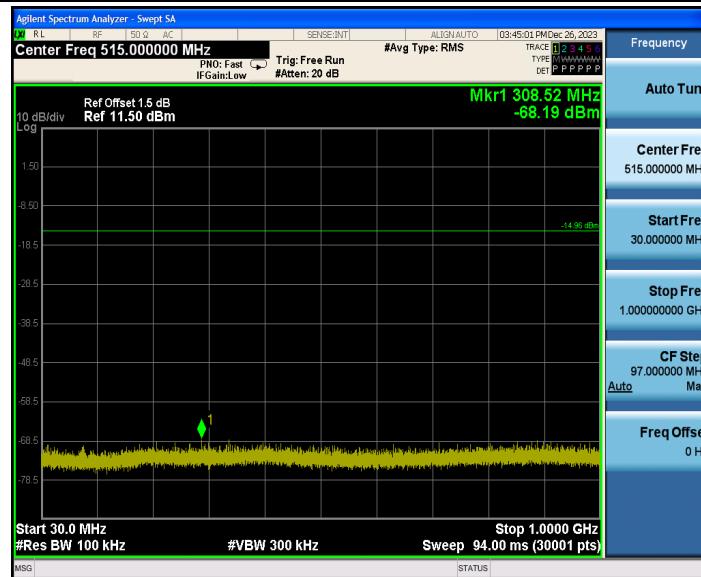

## GFSK\_2441\_1000~26500



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.gov.cn)




## GFSK\_2480\_0~Reference



## GFSK\_2480\_30~1000

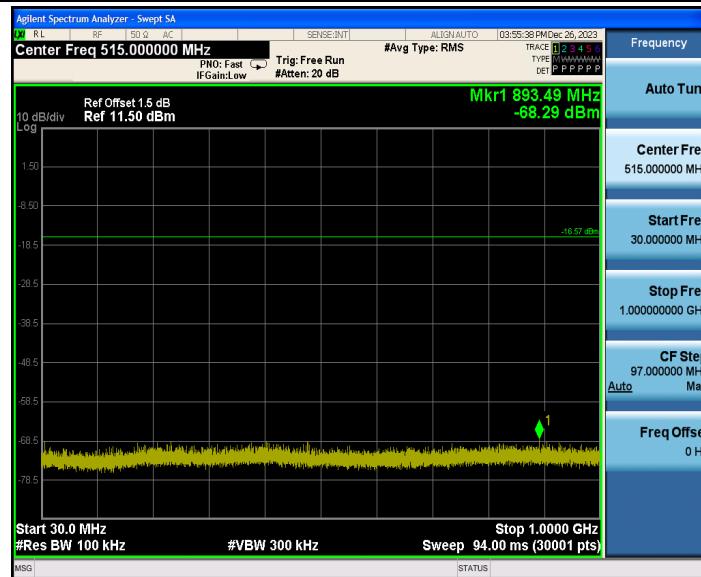

## GFSK\_2480\_1000~26500

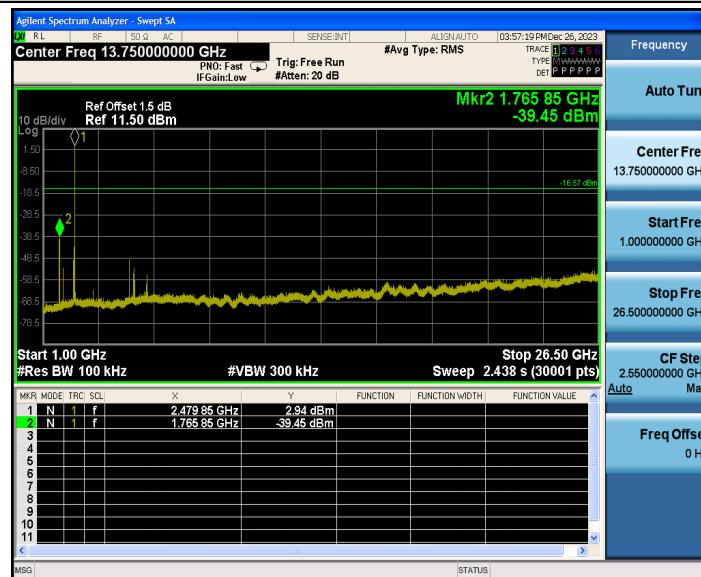


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.gov.cn)

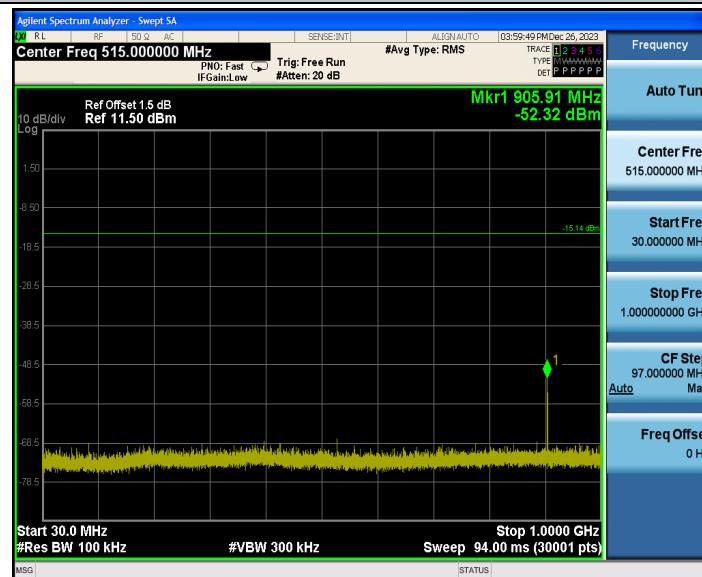**π/4-DQPSK\_2402\_0~Reference****π/4-DQPSK\_2402\_30~1000****π/4-DQPSK\_2402\_1000~26500**

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011



Http://www.sz-ctc.org.cn

Certification and Accreditation Administration of the People's Republic of China

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [www.cnta.gov.cn](http://www.cnta.gov.cn)

中国国家认证认可监督管理委员会

Certification and Accreditation Administration of the People's Republic of China

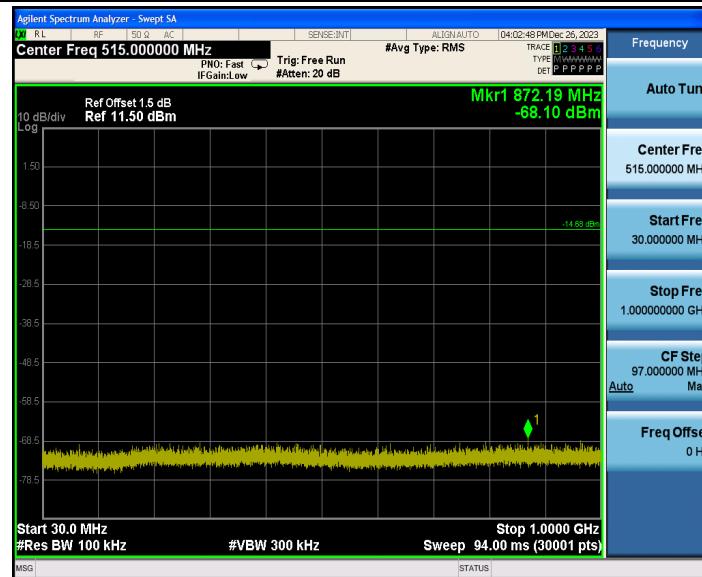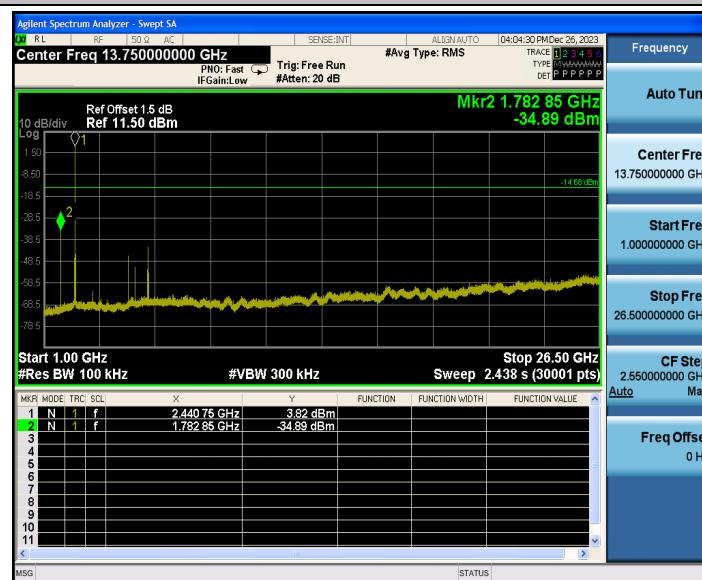
**π/4-DQPSK\_2441\_0~Reference****π/4-DQPSK\_2441\_30~1000****π/4-DQPSK\_2441\_1000~26500**

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.gov.cn)

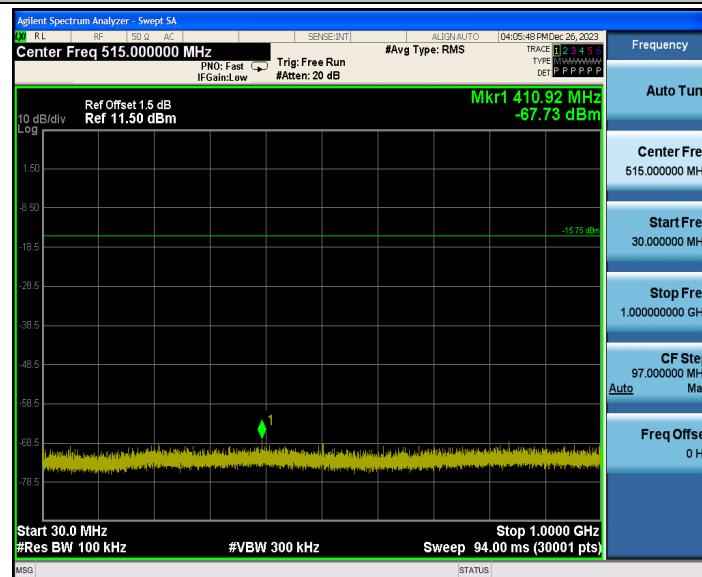**π/4-DQPSK\_2480\_0~Reference****π/4-DQPSK\_2480\_30~1000****π/4-DQPSK\_2480\_1000~26500**

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.gov.cn)




## 8-DPSK\_2402\_0~Reference



## 8-DPSK\_2402\_30~1000

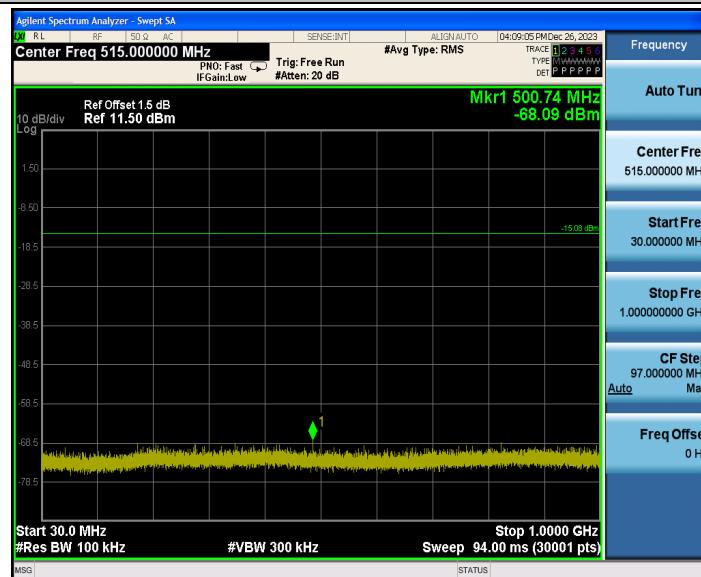

## 8-DPSK\_2402\_1000~26500

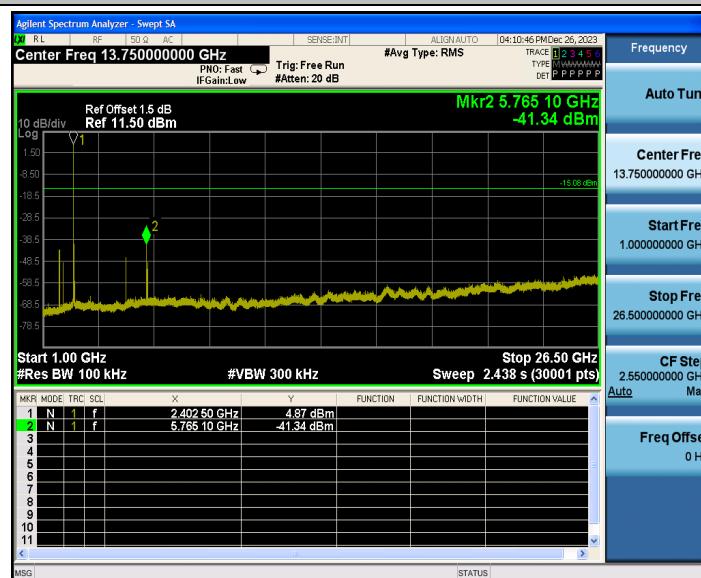

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.gov.cn)

中国国家认证认可监督管理委员会


Certification and Accreditation Administration of the People's Republic of China




## 8-DPSK\_2441\_0~Reference



## 8-DPSK\_2441\_30~1000

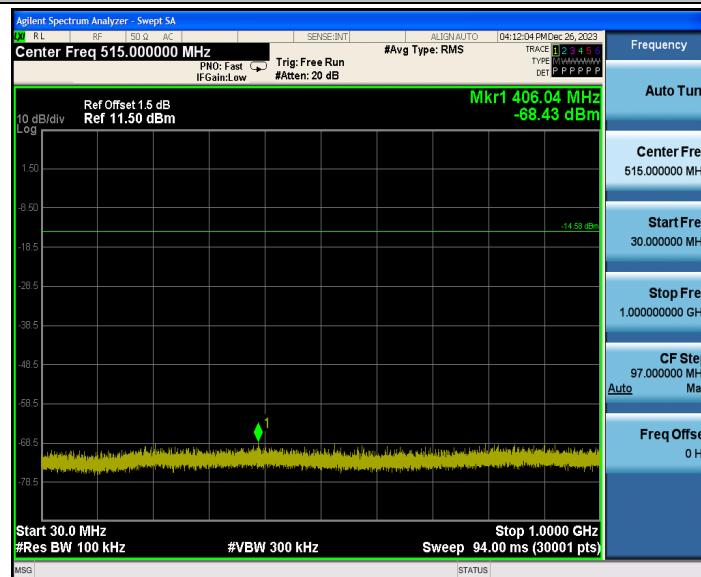

## 8-DPSK\_2441\_1000~26500

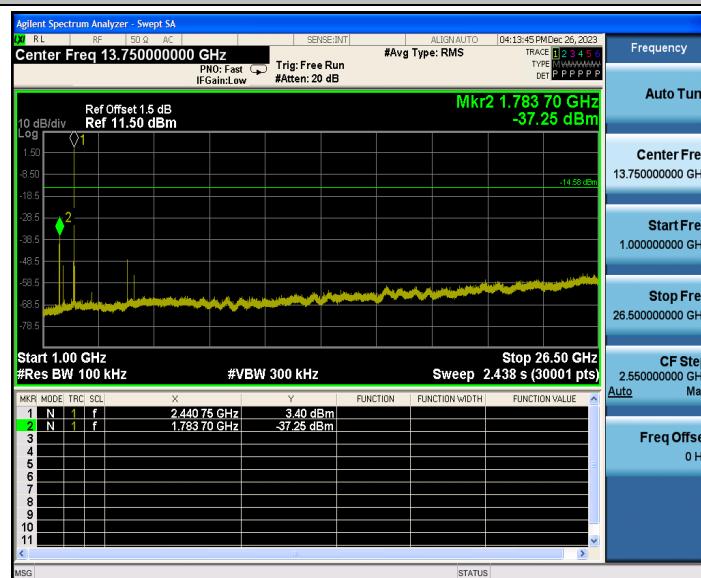

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059Fax: (86)755-27521011 Http://www.sz-ctc.org.cn  
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.gov.cn)

中国国家认证认可监督管理委员会


Certification and Accreditation Administration of the People's Republic of China




## 8-DPSK\_2480\_0~Reference



## 8-DPSK\_2480\_30~1000

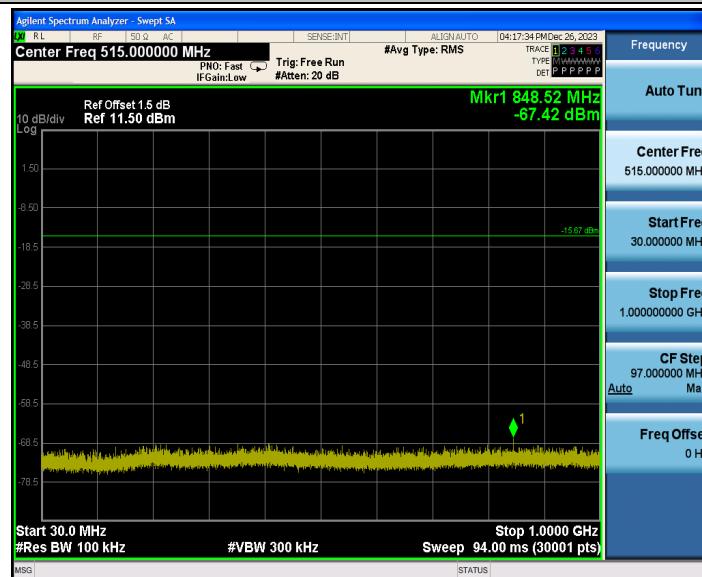

## 8-DPSK\_2480\_1000~26500

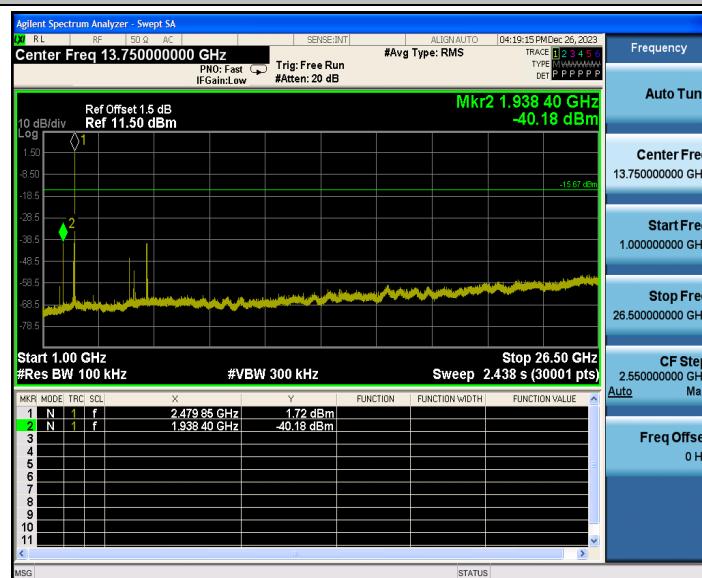

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.gov.cn)

中国国家认证认可监督管理委员会

Certification and Accreditation Administration of the People's Republic of China




### 3.5. 20DB Bandwidth

#### Limit

N/A

#### Test Configuration



#### Test Procedure

5. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
6. OCB and 20dB Spectrum Setting:
  - (1) Set RBW = 1% ~ 5% occupied bandwidth.
  - (2) Set the video bandwidth (VBW)  $\geq$  3 RBW.
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.

Note: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

#### Test Mode

Please refer to the clause 2.4.

#### Test Results

Test Mode	Frequency[MHz]	20db EBW[MHz]	20dB Bandwidth *2/3 (kHz)	Verdict
GFSK	2402	0.993	662	PASS
	2441	0.990	660	PASS
	2480	1.029	686	PASS
$\pi/4$ -DQPSK	2402	1.302	868	PASS
	2441	1.305	870	PASS
	2480	1.302	868	PASS
8-DPSK	2402	1.293	862	PASS
	2441	1.275	850	PASS
	2480	1.293	860	PASS



## GFSK\_2402



## GFSK\_2441



## GFSK\_2480



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)

中国国家认证认可监督管理委员会

Certification and Accreditation Administration of the People's Republic of China



### π/4-DQPSK\_2402



### π/4-DQPSK\_2441



### π/4-DQPSK\_2480



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn



For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.gov.cn)



## 8-DPSK\_2402



## 8-DPSK\_2441



## 8-DPSK\_2480



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)




## 3.6. Channel Separation

### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1)/ RSS-247 5.1 b :

Test Item	Limit	Frequency Range(MHz)
Channel Separation	>25KHz or >two-thirds of the 20 dB bandwidth Which is greater	2400~2483.5

### Test Configuration



### Test Procedure

7. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
8. Spectrum Setting:
  - (1) Set RBW = Set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
  - (2) Set the video bandwidth (VBW)  $\geq 3 \text{ RBW}$ .
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.

### Test Mode

Please refer to the clause 2.4.

### Test Results

Test Mode	Frequency[MHz]	Result[MHz]	Limit[kHz]	Verdict
GFSK	Hop_2441	0.994	>660	PASS
$\pi/4$ -DQPSK	Hop_2441	0.988	>870	PASS
8-DPSK	Hop_2441	1.026	>850	PASS



## GFSK\_Hop\_2441



Frequency  
Auto Tune  
Center Freq  
2.44150000 GHz  
Start Freq  
2.44050000 GHz  
Stop Freq  
2.44250000 GHz  
CF Step  
200.000 kHz  
Auto  
Freq Offset  
0 Hz

## π/4-DQPSK\_Hop\_2441



Frequency  
Auto Tune  
Center Freq  
2.44150000 GHz  
Start Freq  
2.44050000 GHz  
Stop Freq  
2.44250000 GHz  
CF Step  
200.000 kHz  
Auto  
Freq Offset  
0 Hz

## 8-DPSK\_Hop\_2441



Frequency  
Auto Tune  
Center Freq  
2.44150000 GHz  
Start Freq  
2.44050000 GHz  
Stop Freq  
2.44250000 GHz  
CF Step  
200.000 kHz  
Auto  
Freq Offset  
0 Hz

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)




### 3.7. Number of Hopping Channel

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(iii)/ RSS-247 5.1 d:

Section	Test Item	Limit
15.247 (a)(iii)/ RSS-247 5.1 d:	Number of Hopping Channel	>15

#### Test Configuration



#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
  - (1) Peak Detector: RBW=100 kHz, VBW≥RBW, Sweep time= Auto.

#### Test Mode

Please refer to the clause 2.4.

#### Test Result


Test Mode	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
GFSK	Hop	79	≥15	PASS
π/4-DQPSK	Hop	79	≥15	PASS
8-DPSK	Hop	79	≥15	PASS




## GFSK



## π/4-DQPSK

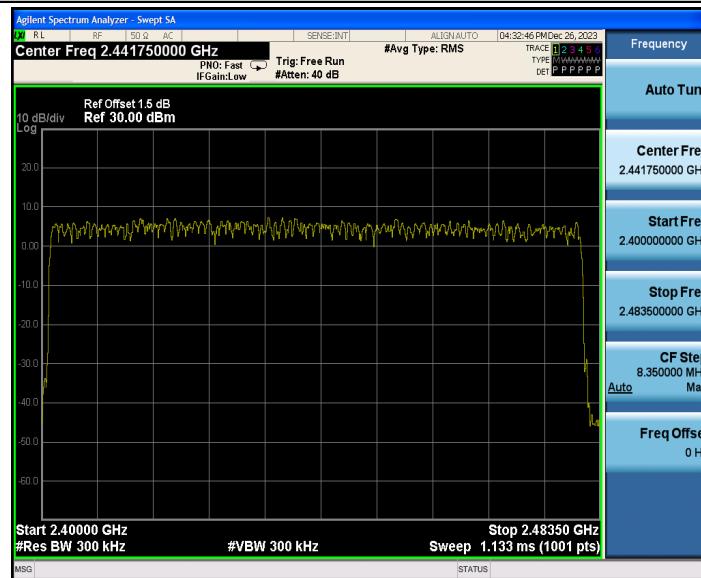

## 8-DPSK

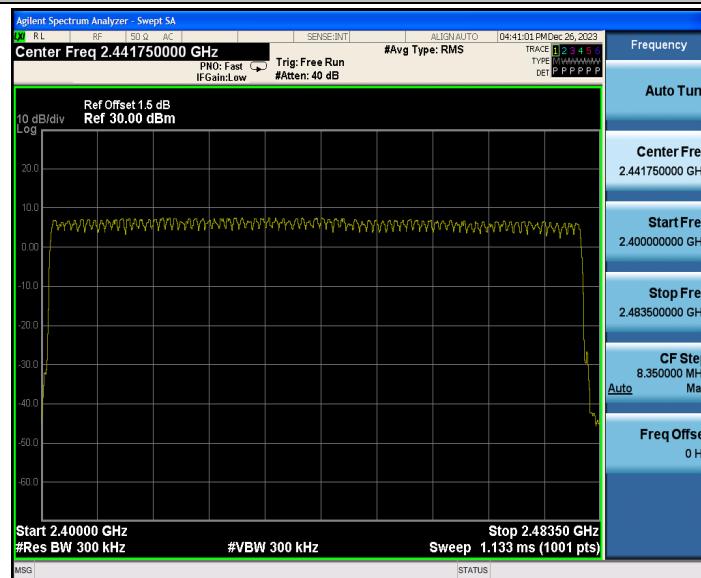

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.gov.cn)

### 3.8. Dwell Time

#### Limit

Section	Test Item	Limit
15.247(a)(iii)/ RSS-247 5.1 d	Average Time of Occupancy	0.4 sec

#### Test Configuration



#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
  - (1) Spectrum Setting: RBW=1MHz, VBW≥RBW.
  - (2) Use video trigger with the trigger level set to enable triggering only on full pulses.
  - (3) Sweep Time is more than once pulse time.
  - (4) Set the center frequency on any frequency would be measure and set the frequency span to zero.
  - (5) Measure the maximum time duration of one single pulse.
  - (6) Set the EUT for packet transmitting.

#### Test Mode

Please refer to the clause 2.4.

**Test Result**

Modulation type	Channel	Frequency [MHz]	Pulse Time (ms)	Total of Dwell (ms)	Period Time (ms)	Limit (Second)	Result
GFSK	DH1	2441	0.381	121.920	31.60	$\leq 0.40$	Pass
	DH3	2441	1.637	261.920	31.60		
	DH5	2441	2.885	307.733	31.60		
$\pi/4$ -DQPSK	2DH1	2441	0.390	124.800	31.60	$\leq 0.40$	Pass
	2DH3	2441	1.642	262.720	31.60		
	2DH5	2441	2.889	308.160	31.60		
8-DPSK	3DH1	2441	0.390	124.800	31.60	$\leq 0.40$	Pass
	3DH3	2441	1.640	262.400	31.60		
	3DH5	2441	2.892	308.480	31.60		

Note: 1DH1/2DH1/3DH1 Total of Dwell= Pulse Time\*(1600/2)\*31.6/79

1DH3/2DH3/3DH3 Total of Dwell= Pulse Time\*(1600/4)\*31.6/79


1DH5/2DH5/3DH5 Total of Dwell= Pulse Time\*(1600/6)\*31.6/79




## GFSK\_DH1\_2441



## GFSK\_DH3\_2441

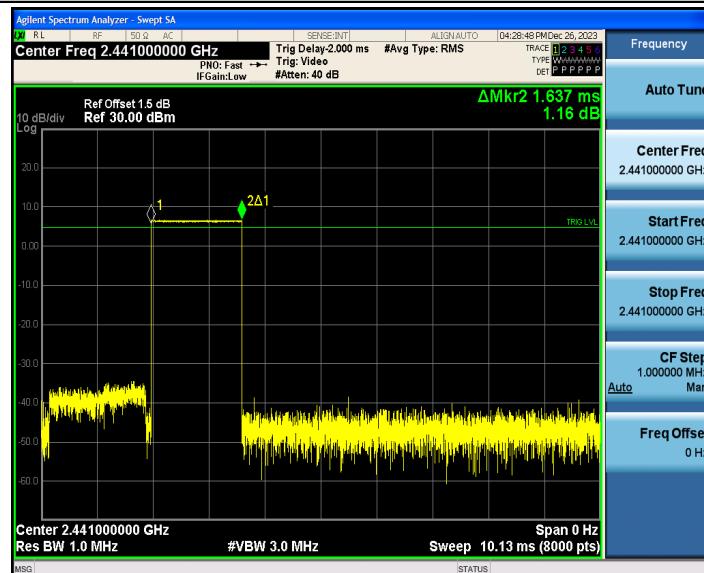

## GFSK\_DH5\_2441


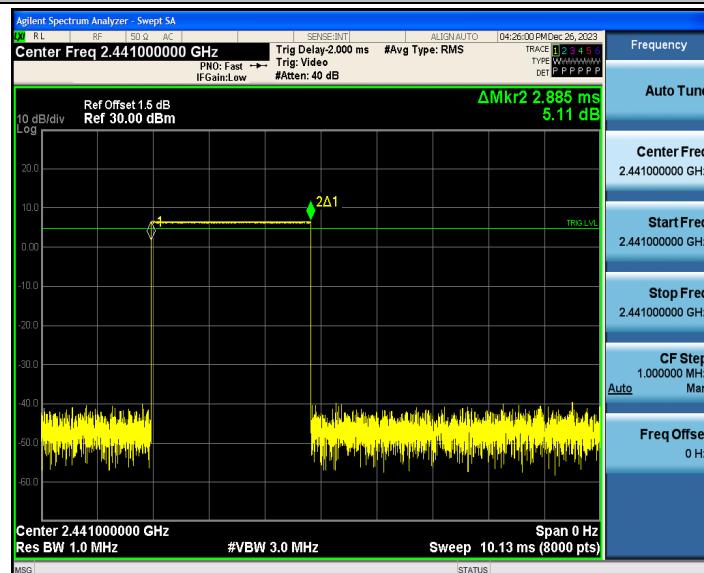


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)

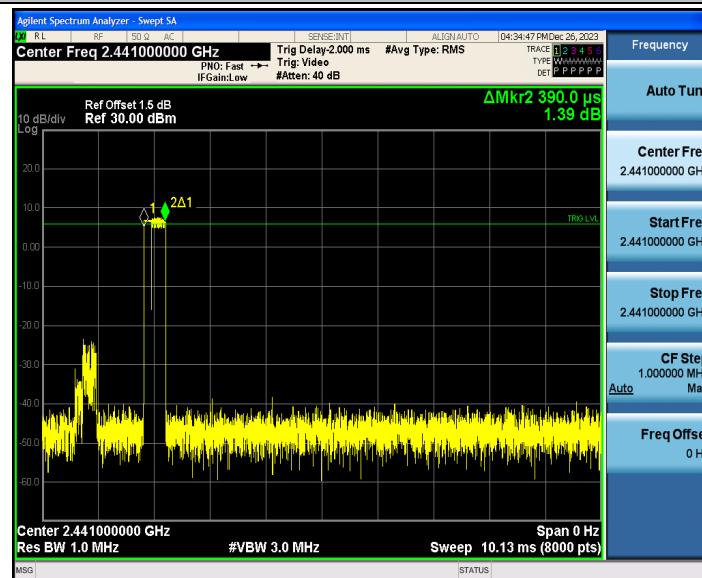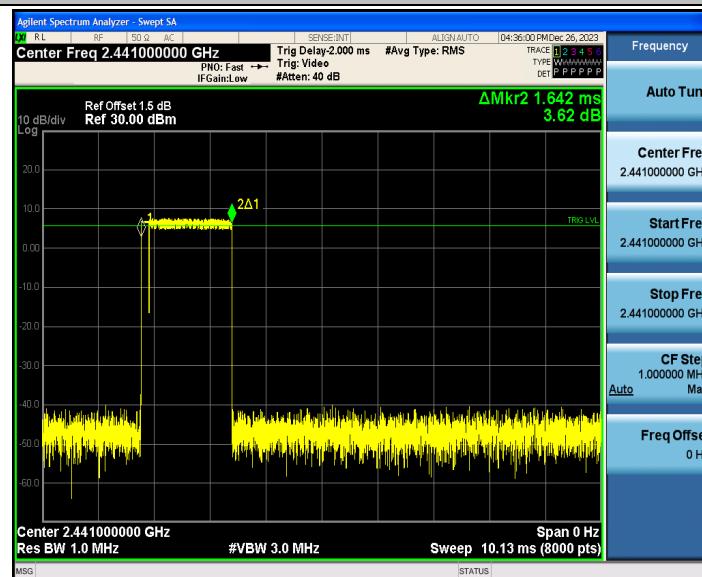**π/4-DQPSK\_2DH1\_2441****π/4-DQPSK\_2DH3\_2441****π/4-DQPSK\_2DH5\_2441**

CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)




### 8-DPSK\_3DH1\_2441

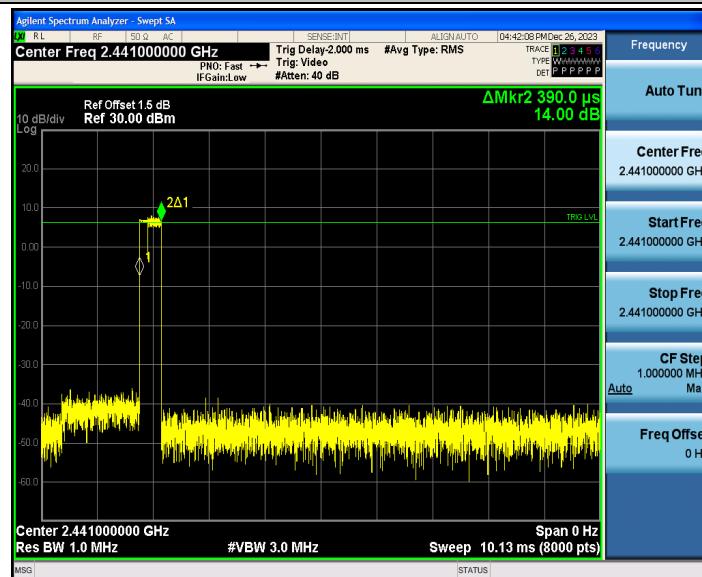

### 8-DPSK\_3DH3\_2441

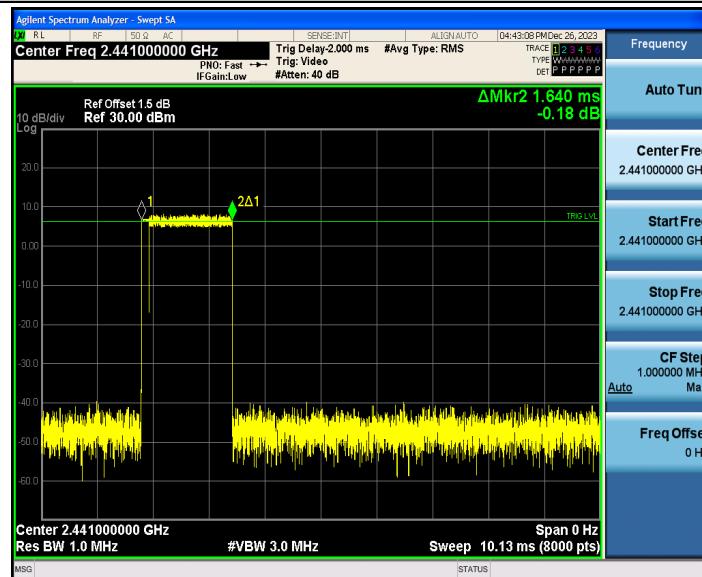

### 8-DPSK\_3DH5\_2441

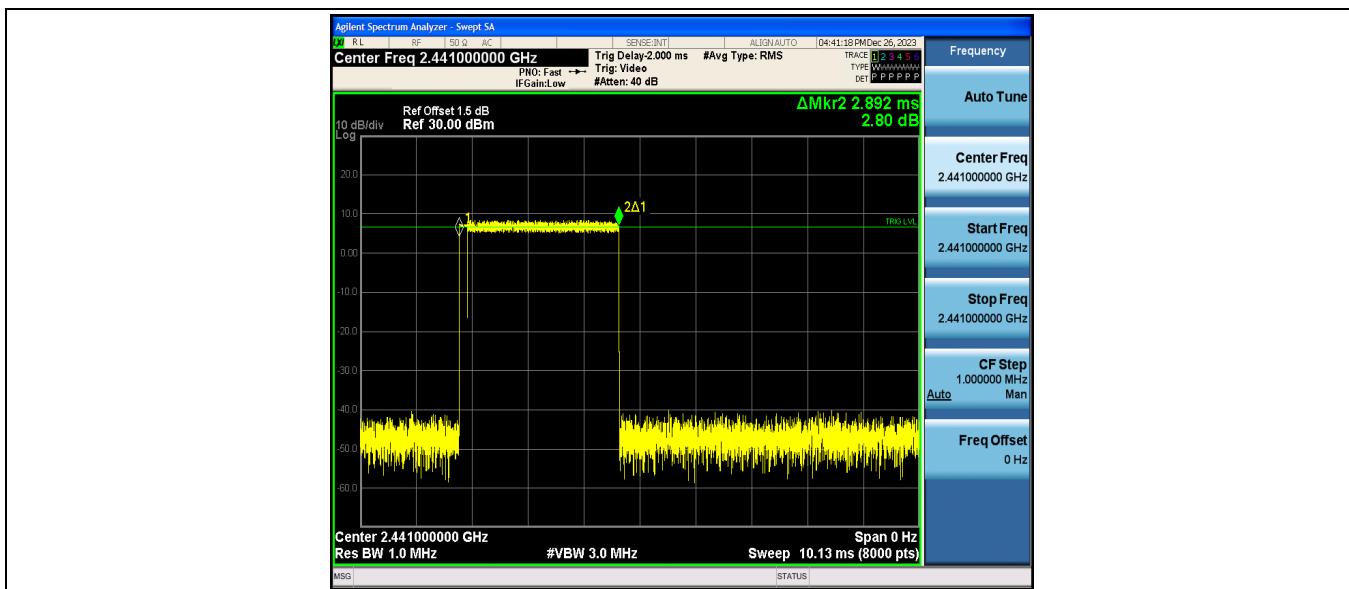




### 3.9. Peak Output Power

#### Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1) / RSS-247 5.4 b:

Test Item	Limit	Frequency Range(MHz)
Maximum Conducted Peak Output Power	Hopping Channels>75 Power<1W(30dBm) Other <125mW(21dBm)	2400~2483.5
E.I.R.P	4 Watt or 36dBm	2400~2483.5

#### Test Configuration



#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. Spectrum Setting:
  - (1) Set RBW> 20DB Bandwidth.
  - (2) Set the video bandwidth (VBW)  $\geq$  RBW.
  - (3) Detector = Peak.
  - (4) Trace mode = Max hold.
  - (5) Sweep = Auto couple.

#### Test Mode

Please refer to the clause 2.4.

#### Test Result

Test Mode	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
GFSK	2402	4.52	<=30	PASS
	2441	5.09	<=30	PASS
	2480	3.67	<=30	PASS
$\pi/4$ -DQPSK	2402	6.59	<=30	PASS
	2441	7.09	<=30	PASS
	2480	5.78	<=30	PASS
8-DPSK	2402	7.07	<=30	PASS
	2441	7.57	<=30	PASS
	2480	6.24	<=30	PASS



## GFSK\_2402



## GFSK\_2441



## GFSK\_2480



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)



### π/4-DQPSK\_2402



### π/4-DQPSK\_2441



### π/4-DQPSK\_2480



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 [Http://www.sz-ctc.org.cn](http://www.sz-ctc.org.cn)  
For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)



## 8-DPSK\_2402



## 8-DPSK\_2441



## 8-DPSK\_2480



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.gov.cn)




### 3.10. Duty Cycle

#### Limit

None, for report purposes only.

#### Test Configuration



#### Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
3. Spectrum Setting:  
Set analyzer center frequency to test channel center frequency.  
Set the span to 0Hz  
Set the RBW to 10MHz  
Set the VBW to 10MHz  
Detector: Peak  
Sweep time: Auto  
Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

#### Test Mode


Please refer to the clause 2.4.

#### Test Result

Test Mode	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
GFSK	2402	2.89	3.73	77.48	0.35	1
	2441	2.89	3.73	77.48	0.35	1
	2480	2.89	3.73	77.48	0.35	1
$\pi/4$ -DQPSK	2402	2.89	3.73	77.48	0.35	1
	2441	2.88	3.73	77.21	0.35	1
	2480	2.89	3.73	77.48	0.35	1
8-DPSK	2402	2.90	3.74	77.54	0.35	1
	2441	2.89	3.73	77.48	0.35	1
	2480	2.89	3.74	77.27	0.34	1



## GFSK\_2402

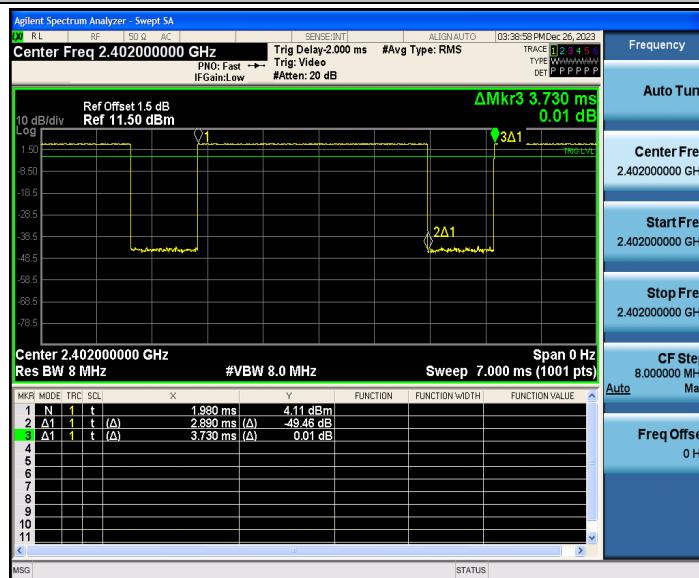

## GFSK\_2441



## GFSK\_2480



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://yz.cnca.cn)

中国国家认证认可监督管理委员会


Certification and Accreditation Administration of the People's Republic of China



### π/4-DQPSK\_2402



### π/4-DQPSK\_2441

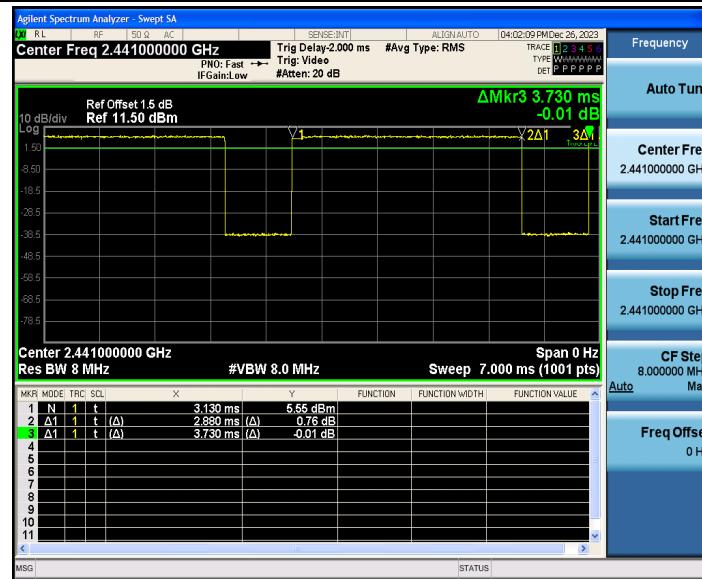

### π/4-DQPSK\_2480



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.ccaac.gov.cn)




## 8-DPSK\_2402

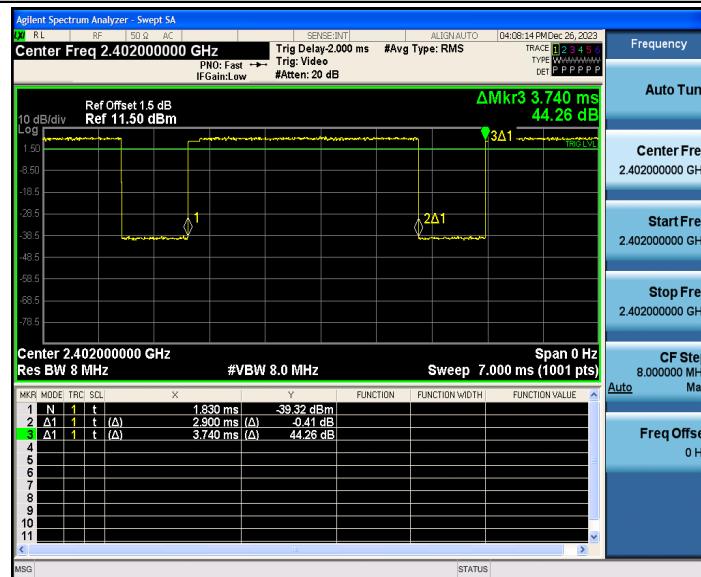

## 8-DPSK\_2441

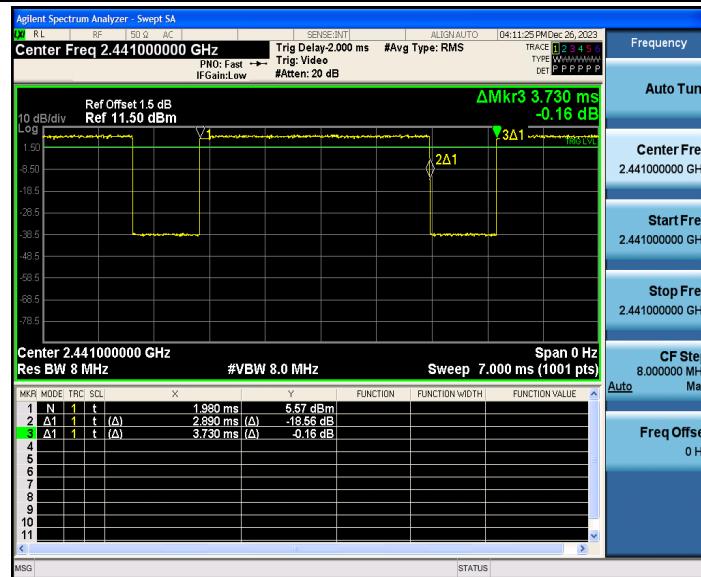

## 8-DPSK\_2480

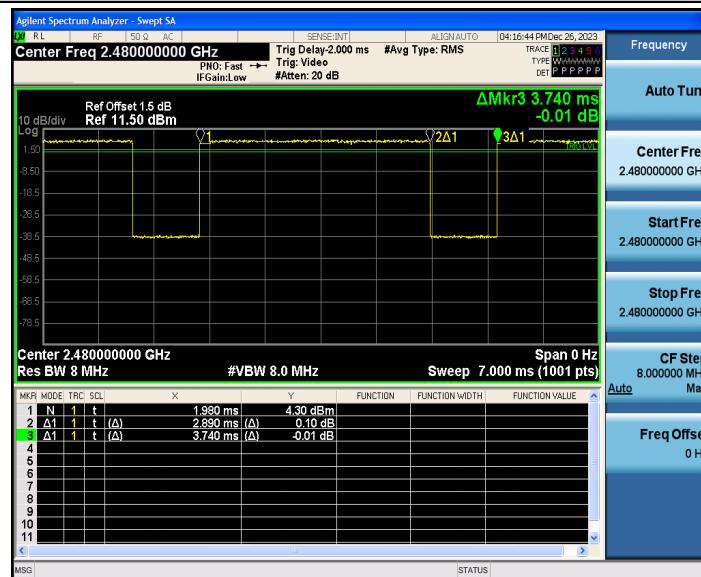

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China  
Tel.: (86)755-27521059

Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : [yz.cnca.cn](http://www.cnta.gov.cn)

中国国家认证认可监督管理委员会

Certification and Accreditation Administration of the People's Republic of China



### 3.11. Antenna requirement

#### Requirement

##### FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

##### FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

\*\*\*\*\*THE END\*\*\*\*\*