



FCC PART 15.247

TEST REPORT

For

Shenzhen Youmi Intelligent Technology Co., Ltd.

406-407 JinqiZhigu Building, 4/F, 1 Tangling Road, Nanshan District, Shenzhen City, China

FCC ID: 2ATZ4-ABLE01

Report Type: Original Report	Product Type: Tablet personal computer
Report Number: SZ1210901-53956E-RF-00B	
Report Date: 2021-11-09	
Reviewed By: RF Engineer	Candy Li 
Prepared By: Shenzhen Accurate Technology Co., Ltd. 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China Tel: (0755) 26503290 Fax: (0755) 26503396 Http://www.atc-lab.com	

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL I/O CABLE	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC§15.247 (i), §1.1307 (b)(1)&§2.1093 – RF EXPOSURE	13
APPLICABLE STANDARD	13
FCC §15.203 - ANTENNA REQUIREMENT	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP	15
TEST PROCEDURE	15
TRANSD FACTOR & MARGIN CALCULATION	16
TEST DATA	16
FCC §15.209, §15.205 &§15.247(d) - SPURIOUS EMISSIONS	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	20
TEST PROCEDURE	20
FACTOR& MARGIN CALCULATION	20
TEST DATA	20
FCC §15.247(a) (2) – 6dB EMISSION BANDWIDTH& OCCUPIED BANDWIDTH	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST DATA	30
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST DATA	31

FCC §15.247(d) – 100kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(e)- POWER SPECTRAL DENSITY	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33
APPENDIX Wi-Fi.....	34
APPENDIX A: DTS BANDWIDTH	34
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	39
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER	44
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	45
APPENDIX E: BAND EDGE MEASUREMENTS	50
APPENDIX F: DUTY CYCLE	53
APPENDIX BLE.....	56
APPENDIX A: DTS BANDWIDTH	56
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH	59
APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER.....	62
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY	63
APPENDIX E: BAND EDGE MEASUREMENTS	66
APPENDIX F: DUTY CYCLE	68

GENERAL INFORMATION**Product Description for Equipment under Test (EUT)**

Product	Tablet personal computer
Tested Model	MT01
Multiple Models	MT02, MT03, MT04
Model Differences	Please refer to DOS letter
Trade Name	UMIDIGI
Frequency Range	BLE: 2402-2480MHz Wi-Fi: 2412-2472MHz
Maximum Conducted Peak Output Power	Bluetooth LE 1M: -2.81dBm, Bluetooth LE 2M: -3.92dBm Wi-Fi: 14.46dBm(802.11b), 15.97dBm(802.11g) 16.78dBm(802.11n20), 16.54dBm(802.11n40)
Modulation Technique	Bluetooth LE 1M/2M: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification*	LDS antenna: 2.1dBi(provided by the applicant)
Voltage Range	DC 3.8V from battery or DC 5V from adapter
Sample serial number	SZ1210901-53956E-RF-S2 for CE&RE Test SZ1210901-53956E-RF-S1 for RF Conducted test (Assigned by ATC, Shenzhen)
Received date	2021-09-01
Sample/EUT Status	Good condition
Adapter information	Model: HJ-0502000W2-US Input: AC 100-240V~50/60Hz, 0.3A Output: DC 5V, 2A

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz- 18GHz	4.98dB
	18GHz- 26.5GHz	5.06dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION**Description of Test Configuration**

For 802.11b, 802.11g and 802.11n-HT20 mode, 13 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20 mode, EUT was tested with Channel 1, 7 and 13

For 802.11n-HT40 mode, 9 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2422	6	2447
2	2427	7	2452
3	2432	8	2457
4	2437	9	2462
5	2442	/	/

EUT was tested with Channel 1, 5 and 9.

For BLE mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

BLE & Wi-Fi test in mobile phone engineering mode.

The device was tested with the worst case was performed as below:

Mode	Data rate	Power level*		
		Low channel	Middle channel	High channel
802.11b	1 Mbps	16	16	16
802.11g	6 Mbps	15	15	15
802.11n-HT20	MCS0	15	15	15
802.11n-HT40	MCS0	15	15	15
BLE	1 Mbps/2Mbps	Default	Default	Default

The software and power level was provided by the applicant.

Pre-scan with all the data rates, the above data rate is the worst case for Wi-Fi test.

Duty cycle

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length(m)	From Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Adapter

Block Diagram of Test Setup

For conducted emission:

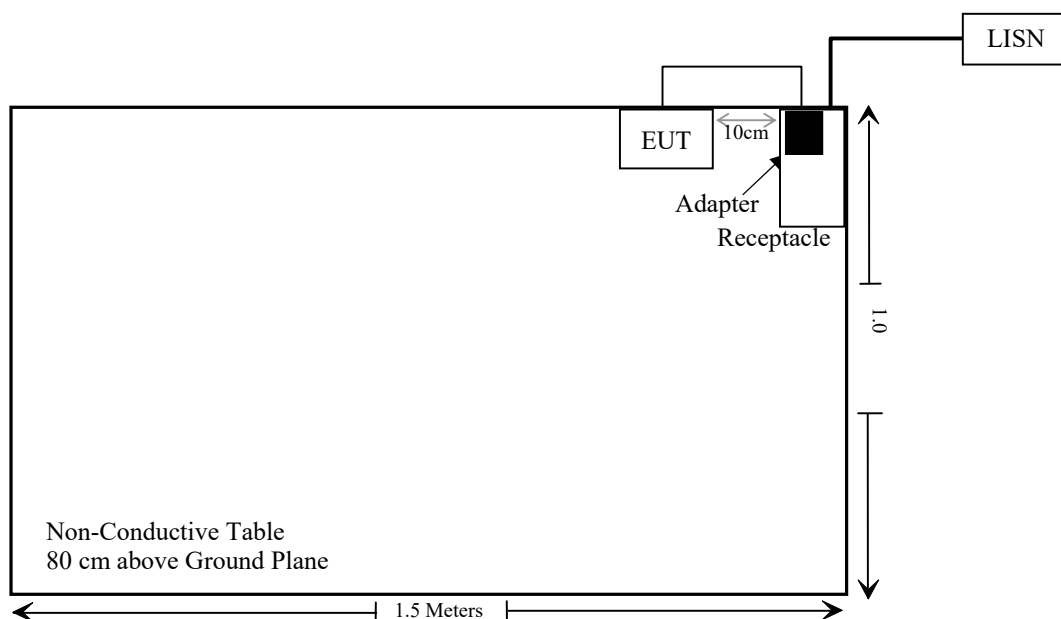

For radiated emission:

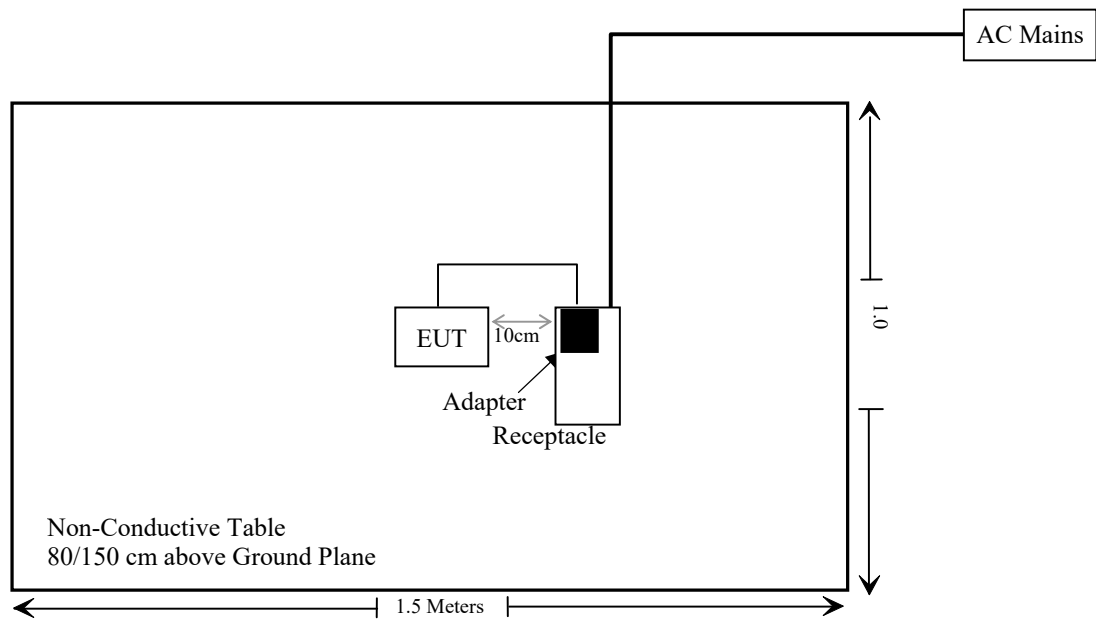

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth& Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	Test Receiver	ESPI3	100396	2020/12/24	2021/12/23
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50Ω Coaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Conducted Emission Test Software: ES-K1 V1.71					
Radiated Emissions Test					
Rohde&Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/07/08	2022/07/07
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Quinstar	Amplifier	QLW-1840553 6-J0	15964001002	2020/11/28	2021/11/27
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/04	2023/01/03
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.4	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.6	2020/12/25	2021/12/24
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2020/12/25	2021/12/24
Radiated Emission Test Software: EZ EMC V 1.1.4.2					
Radiated Emission Test Software: e3 19821b(V9)					

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
Tonscend	RF Control Unit	JS0806-2	19G8060182	2021/07/06	2022/07/05

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b)(1)&§2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Measurement Result

For worst case:

Mode	Frequency (MHz)	Max Tune-up Conducted Power (dBm)	Max Tune-up Conducted Power (mW)	Calculated Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
BLE	2402-2480	-2.5	0.56	5	0.2	3.0	Yes

Result: No SAR test is required

For Wi-Fi mode, please refer to SAR report: SZ1210901-53956E-20

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna, which was permanently attached, and the maximum antenna gain is 2.1dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

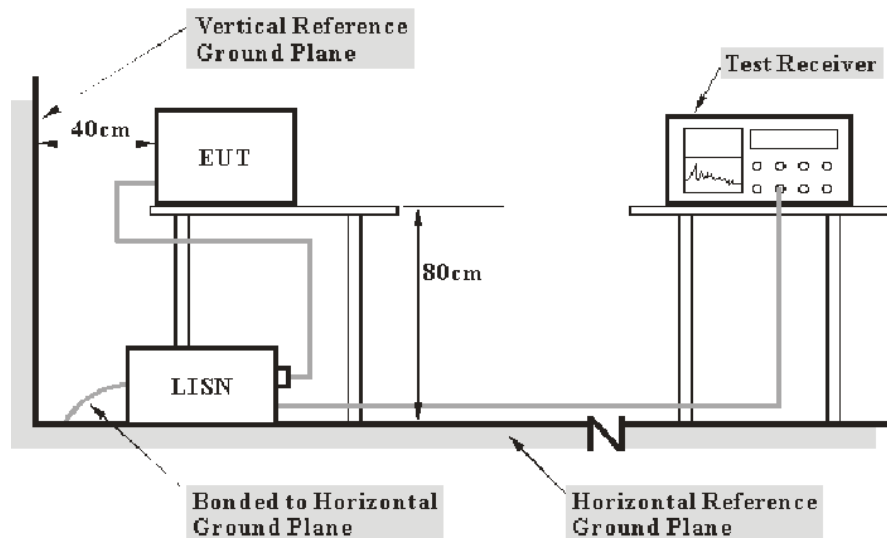

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

FrequencyRange	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{TransdFactor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Margin} &= \text{Limit} - \text{level} \\ \text{Level} &= \text{reading level} + \text{TransdFactor}\end{aligned}$$


Test Data

Environmental Conditions

Temperature:	24°C
Relative Humidity:	48%
ATM Pressure:	101.0 kPa

The testing was performed by Black Dington 2021-09-30.

EUT operation mode: Transmitting (Worst case is 802.11n20 mode, middle channel)

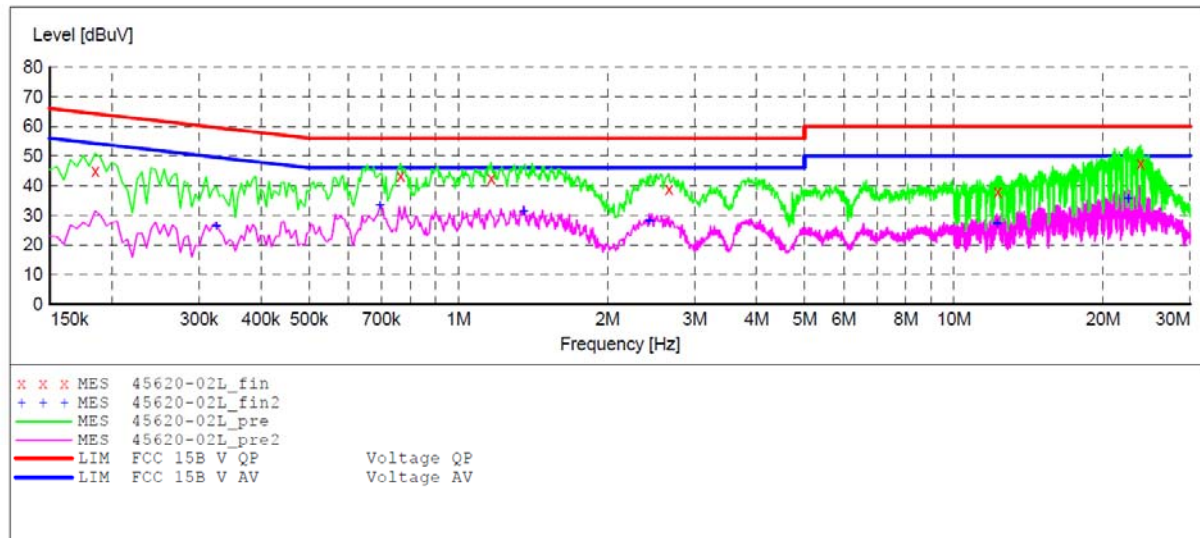AC 120V/60 Hz, Line**MEASUREMENT RESULT: "45620-02L_fin"**


2021-9-30 10:15

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.185000	45.10	10.8	64	18.9	QP	L1	GND
0.765000	43.40	11.1	56	12.6	QP	L1	GND
1.165000	42.40	11.2	56	13.6	QP	L1	GND
2.660000	38.80	11.3	56	17.2	QP	L1	GND
12.275000	38.00	11.6	60	22.0	QP	L1	GND
23.850000	47.50	11.7	60	12.5	QP	L1	GND

MEASUREMENT RESULT: "45620-02L_fin2"

2021-9-30 10:15

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.325000	26.30	10.9	50	23.7	AV	L1	GND
0.695000	33.20	11.1	46	12.8	AV	L1	GND
1.355000	31.20	11.2	46	14.8	AV	L1	GND
2.430000	28.00	11.3	46	18.0	AV	L1	GND
12.225000	27.20	11.6	50	22.8	AV	L1	GND
22.475000	35.40	11.7	50	14.6	AV	L1	GND

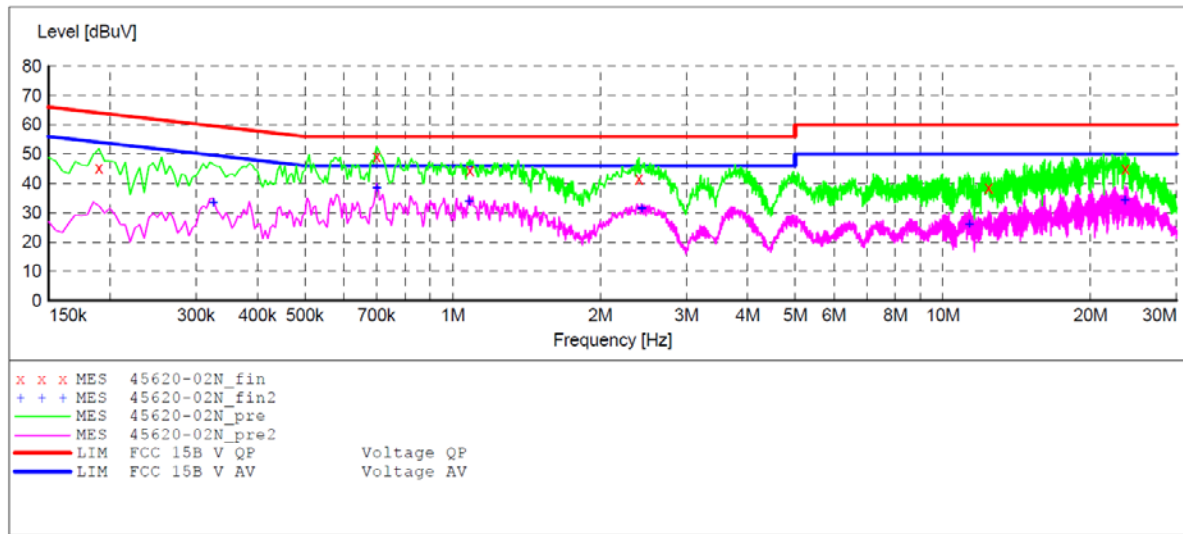AC 120V/60 Hz, Neutral**MEASUREMENT RESULT: "45620-02N_fin"**

2021-9-30 10:18

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.190000	45.40	10.8	64	18.6	QP	N	GND
0.700000	49.30	11.1	56	6.7	QP	N	GND
1.085000	44.40	11.1	56	11.6	QP	N	GND
2.400000	41.80	11.3	56	14.2	QP	N	GND
12.400000	38.50	11.6	60	21.5	QP	N	GND
23.550000	45.10	11.7	60	14.9	QP	N	GND

MEASUREMENT RESULT: "45620-02N_fin2"

2021-9-30 10:17


Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.325000	33.30	10.9	50	16.7	AV	N	GND
0.700000	38.30	11.1	46	7.7	AV	N	GND
1.080000	33.90	11.1	46	12.1	AV	N	GND
2.430000	31.40	11.3	46	14.6	AV	N	GND
11.325000	26.10	11.6	50	23.9	AV	N	GND
23.500000	34.20	11.7	50	15.8	AV	N	GND

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

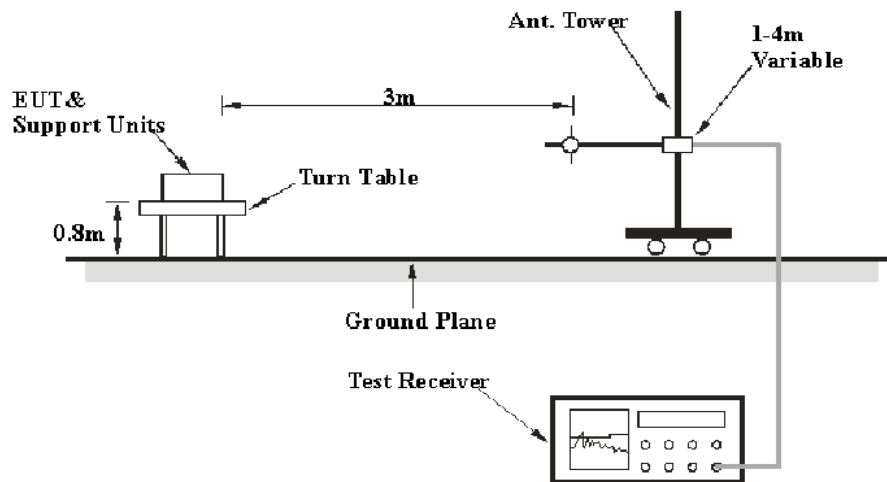

Above 1GHz:

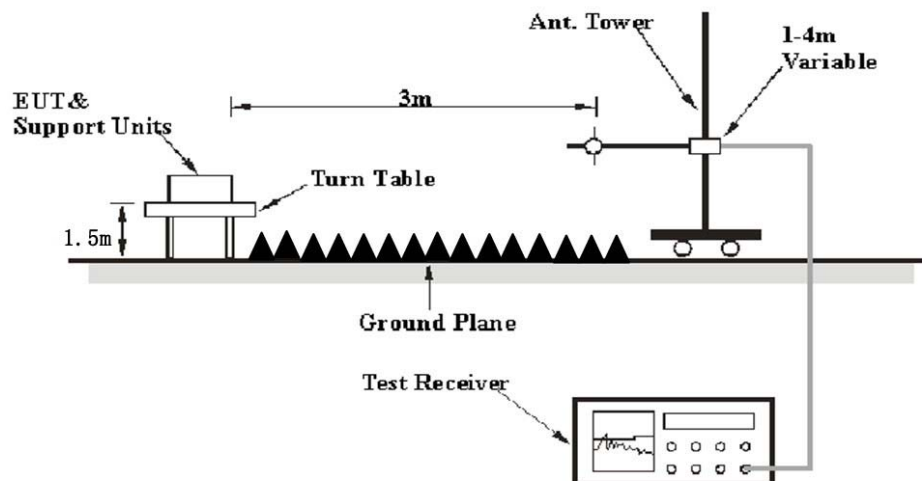

The radiated emission tests were performed in the 3meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor& Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the MeterReading. The basic equation is as follows:

$$\text{Factor} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin} &= \text{Result} - \text{Limit} \\ \text{Result} &= \text{Reading} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions


Temperature:	23~28.6℃
Relative Humidity:	48~54 %
ATM Pressure:	100.9~101.0kPa

The testing was performed by Icey Huang on 2021-10-01 for below 1GHz and Caro Hu on 2021-09-13.


Test mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

30MHz-1GHz: ((Worst case is 802.11n20 mode, middle channel))

Horizontal

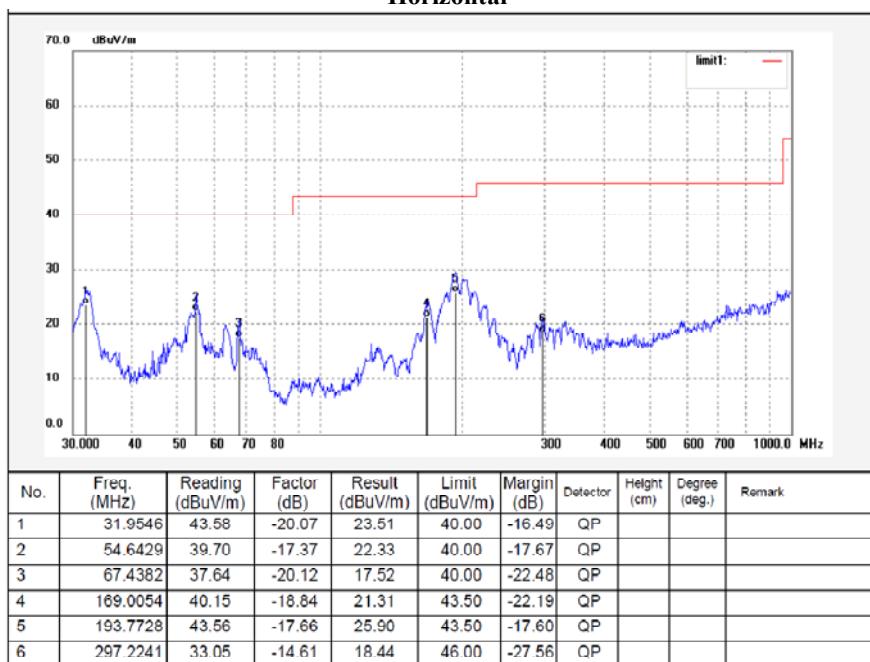

Vertical

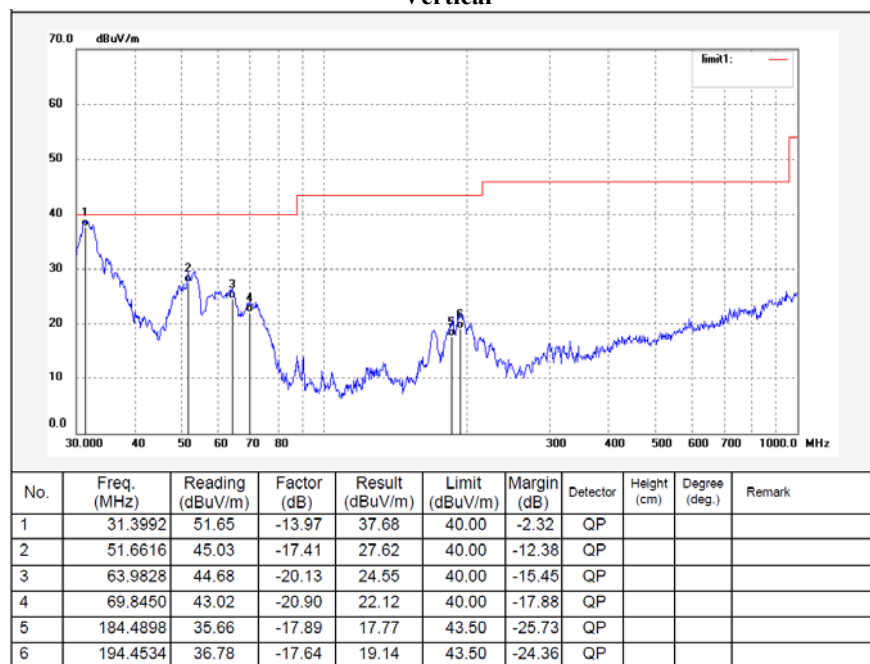

**1-25 GHz:
BLE 1M**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel(2402MHz)									
2310	63.99	PK	52	1.8	H	-6.84	57.15	74	-16.85
2310	50.09	Ave.	52	1.8	H	-6.84	43.25	54	-10.75
2310	53.80	PK	275	2.1	V	-6.84	46.96	74	-27.04
2310	49.85	Ave.	275	2.1	V	-6.84	43.01	54	-10.99
2390	67.91	PK	141	1.7	H	-6.44	61.47	74	-12.53
2390	53.84	Ave.	141	1.7	H	-6.44	47.40	54	-6.60
2390	64.96	PK	88	1.7	V	-6.44	58.52	74	-15.48
2390	50.98	Ave.	88	1.7	V	-6.44	44.54	54	-9.46
4804	47.22	PK	321	1.8	H	2.81	50.03	74	-23.97
4804	32.88	PK	321	1.6	V	2.81	35.69	74	-38.31
Middle Channel(2440MHz)									
4880	47.12	PK	325	2.0	H	3.04	50.16	74	-23.84
4880	45.21	PK	325	2.0	V	3.04	48.25	74	-25.75
High Channel(2480MHz)									
2483.5	67.05	PK	247	1.8	H	-5.96	61.09	74	-12.91
2483.5	53.79	Ave.	247	1.8	H	-5.96	47.83	54	-6.17
2483.5	66.10	PK	221	1.8	V	-5.96	60.14	74	-13.86
2483.5	51.98	Ave.	221	1.8	V	-5.96	46.02	54	-7.98
2500	65.77	PK	169	1.5	H	-5.88	59.89	74	-14.11
2500	50.46	Ave.	169	1.5	H	-5.88	44.58	54	-9.42
2500	64.24	PK	154	1.7	V	-5.88	58.36	74	-15.64
2500	46.13	Ave.	154	1.7	V	-5.88	40.25	54	-13.75
4960	47.12	PK	106	1.7	H	3.29	50.41	74	-23.59
4960	44.55	PK	94	1.7	V	3.29	47.84	74	-26.16

BLE 2M

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H/V)				
Low Channel(2402MHz)									
2310	65.06	PK	225	1.8	H	-6.84	58.22	74	-15.78
2310	50.09	Ave.	225	1.8	H	-6.84	43.25	54	-10.75
2310	53.42	PK	146	1.6	V	-6.84	46.58	74	-27.42
2310	48.69	Ave.	146	1.6	V	-6.84	41.85	54	-12.15
2390	67.77	PK	36	1.6	H	-6.44	61.33	74	-12.67
2390	54.02	Ave.	36	1.6	H	-6.44	47.58	54	-6.42
2390	64.40	PK	118	1.9	V	-6.44	57.96	74	-16.04
2390	49.46	Ave.	118	1.9	V	-6.44	43.02	54	-10.98
4804	46.71	PK	254	1.9	H	2.81	49.52	74	-24.48
4804	43.48	PK	254	1.9	V	2.81	46.29	74	-27.71
Middle Channel(2440MHz)									
4880	46.97	PK	175	1.6	H	3.04	50.01	74	-23.99
4880	44.54	PK	295	1.6	V	3.04	47.58	74	-26.42
High Channel(2480MHz)									
2483.5	67.27	PK	320	2.1	H	-5.96	61.31	74	-12.69
2483.5	53.74	Ave.	320	2.1	H	-5.96	47.78	54	-6.22
2483.5	65.21	PK	200	1.5	V	-5.96	59.25	74	-14.75
2483.5	51.53	Ave.	200	1.5	V	-5.96	45.57	54	-8.43
2500	64.13	PK	13	1.9	H	-5.88	58.25	74	-15.75
2500	47.89	Ave.	13	1.9	H	-5.88	42.01	54	-11.99
2500	63.10	PK	303	1.5	V	-5.88	57.22	74	-16.78
2500	48.90	Ave.	303	1.5	V	-5.88	43.02	54	-10.98
4960	46.73	PK	179	1.5	H	3.29	50.02	74	-23.98
4960	43.72	PK	179	1.6	V	3.29	47.01	74	-26.99

Note:

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude- Limit

The other spurious emission which is 20dB to the limit was not recorded.

The test result of peak was less than the limit of average, so just peak values were recorded.

Wi-Fi:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11b									
Low Channel(2412MHz)									
2310	66.52	PK	309	1.9	H	-6.84	59.68	74	-14.32
2310	52.45	Ave.	309	1.9	H	-6.84	45.61	54	-8.39
2310	64.89	PK	207	1.5	V	-6.84	58.05	74	-15.95
2310	51.07	Ave.	207	1.5	V	-6.84	44.23	54	-9.77
2390	65.97	PK	132	2.1	H	-6.44	59.53	74	-14.47
2390	51.85	Ave.	132	2.1	H	-6.44	45.41	54	-8.59
2390	64.87	PK	176	1.8	V	-6.44	58.43	74	-15.57
2390	50.75	Ave.	176	1.8	V	-6.44	44.31	54	-9.69
4824	46.57	PK	120	2.0	H	2.87	49.44	74	-24.56
4824	41.37	Ave.	120	2.0	H	2.87	44.24	54	-9.76
4824	44.09	PK	176	1.9	V	2.87	46.96	74	-27.04
4824	37.73	Ave.	176	1.9	V	2.87	40.60	54	-13.40
Middle Channel(2442MHz)									
4884	46.68	PK	194	1.6	H	3.04	49.72	74	-24.28
4884	40.17	Ave.	194	1.6	H	3.04	43.21	54	-10.79
4884	43.63	PK	47	1.7	V	3.04	46.67	74	-27.33
4884	37.32	Ave.	47	1.7	V	3.04	40.36	54	-13.64
High Channel(2472 MHz)									
2483.5	64.60	PK	70	1.9	H	-5.96	58.64	74	-15.36
2483.5	51.60	Ave.	70	1.9	H	-5.96	45.64	54	-8.36
2483.5	63.05	PK	211	1.8	V	-5.96	57.09	74	-16.91
2483.5	49.62	Ave.	211	1.8	V	-5.96	43.66	54	-10.34
2500	65.14	PK	159	2.0	H	-5.88	59.26	74	-14.74
2500	51.59	Ave.	159	2.0	H	-5.88	45.71	54	-8.29
2500	63.81	PK	86	2.0	V	-5.88	57.93	74	-16.07
2500	50.46	Ave.	86	2.0	V	-5.88	44.58	54	-9.42
4944	46.01	PK	271	1.6	H	3.23	49.24	74	-24.76
4944	38.40	Ave.	271	1.6	H	3.23	41.63	54	-12.37
4944	43.90	PK	92	1.6	V	3.23	47.13	74	-26.87
4944	36.14	Ave.	92	1.6	V	3.23	39.37	54	-14.63

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11g									
Low Channel(2412MHz)									
2310	65.77	PK	13	1.7	H	-6.84	58.93	74	-15.07
2310	52.31	Ave.	13	1.7	H	-6.84	45.47	54	-8.53
2310	64.00	PK	277	1.7	V	-6.84	57.16	74	-16.84
2310	50.52	Ave.	277	1.7	V	-6.84	43.68	54	-10.32
2390	65.85	PK	52	1.7	H	-6.44	59.41	74	-14.59
2390	51.92	Ave.	52	1.7	H	-6.44	45.48	54	-8.52
2390	65.91	PK	18	1.8	V	-6.44	59.47	74	-14.53
2390	52.22	Ave.	18	1.8	V	-6.44	45.78	54	-8.22
4824	46.33	PK	78	1.7	H	2.87	49.20	74	-24.80
4824	39.25	Ave.	78	1.7	H	2.87	42.12	54	-11.88
4824	44.05	PK	356	1.7	V	2.87	46.92	74	-27.08
4824	37.51	Ave.	356	1.7	V	2.87	40.38	54	-13.62
Middle Channel(2442MHz)									
4884	46.15	PK	85	1.8	H	3.04	49.19	74	-24.81
4884	38.00	Ave.	85	1.8	H	3.04	41.04	54	-12.96
4884	44.15	PK	109	1.6	V	3.04	47.19	74	-26.81
4884	35.96	Ave.	109	1.6	V	3.04	39.00	54	-15.00
High Channel(2472 MHz)									
2483.5	64.80	PK	80	1.8	H	-5.96	58.84	74	-15.16
2483.5	51.54	Ave.	80	1.8	H	-5.96	45.58	54	-8.42
2483.5	62.83	PK	169	1.8	V	-5.96	56.87	74	-17.13
2483.5	49.49	Ave.	169	1.8	V	-5.96	43.53	54	-10.47
2500	64.94	PK	67	1.8	H	-5.88	59.06	74	-14.94
2500	51.47	Ave.	67	1.8	H	-5.88	45.59	54	-8.41
2500	63.17	PK	88	2.0	V	-5.88	57.29	74	-16.71
2500	49.34	Ave.	88	2.0	V	-5.88	43.46	54	-10.54
4944	46.34	PK	142	2.0	H	3.23	49.57	74	-24.43
4944	39.06	Ave.	142	2.0	H	3.23	42.29	54	-11.71
4944	43.82	PK	42	1.6	V	3.23	47.05	74	-26.95
4944	36.97	Ave.	42	1.6	V	3.23	40.20	54	-13.80

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11n20									
Low Channel(2412MHz)									
2310	66.21	PK	209	2.1	H	-6.84	59.37	74	-14.63
2310	52.69	Ave.	209	2.1	H	-6.84	45.85	54	-8.15
2310	63.81	PK	290	2.0	V	-6.84	56.97	74	-17.03
2310	50.39	Ave.	290	2.0	V	-6.84	43.55	54	-10.45
2390	65.33	PK	15	1.9	H	-6.44	58.89	74	-15.11
2390	52.10	Ave.	15	1.9	H	-6.44	45.66	54	-8.34
2390	63.42	PK	58	1.6	V	-6.44	56.98	74	-17.02
2390	49.48	Ave.	58	1.6	V	-6.44	43.04	54	-10.96
4824	48.37	PK	109	1.6	H	2.87	51.24	74	-22.76
4824	36.03	Ave.	109	1.6	H	2.87	38.90	54	-15.10
4824	46.29	PK	198	1.7	V	2.87	49.16	74	-24.84
4824	33.93	Ave.	198	1.7	V	2.87	36.80	54	-17.20
Middle Channel(2442MHz)									
4884	45.08	PK	86	1.6	H	3.04	48.12	74	-25.88
4884	32.80	Ave.	86	1.6	H	3.04	35.84	54	-18.16
4884	43.13	PK	318	1.8	V	3.04	46.17	74	-27.83
4884	30.66	Ave.	318	1.8	V	3.04	33.70	54	-20.30
High Channel(2472 MHz)									
2483.5	64.40	PK	148	1.9	H	-5.96	58.44	74	-15.56
2483.5	51.33	Ave.	148	1.9	H	-5.96	45.37	54	-8.63
2483.5	62.32	PK	114	2.0	V	-5.96	56.36	74	-17.64
2483.5	49.43	Ave.	114	2.0	V	-5.96	43.47	54	-10.53
2500	64.55	PK	75	1.5	H	-5.88	58.67	74	-15.33
2500	51.75	Ave.	75	1.5	H	-5.88	45.87	54	-8.13
2500	62.76	PK	57	2.0	V	-5.88	56.88	74	-17.12
2500	49.70	Ave.	57	2.0	V	-5.88	43.82	54	-10.18
4944	45.20	PK	164	2.1	H	3.23	48.43	74	-25.57
4944	31.69	Ave.	164	2.1	H	3.23	34.92	54	-19.08
4944	45.16	PK	90	2.0	V	3.23	48.39	74	-25.61
4944	29.96	Ave.	90	2.0	V	3.23	33.19	54	-20.81

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
802.11n40									
Low Channel(2422MHz)									
2310	66.42	PK	176	1.5	H	-6.84	59.58	74	-14.42
2310	52.09	Ave.	176	1.5	H	-6.84	45.25	54	-8.75
2310	63.98	PK	209	2.0	V	-6.84	57.14	74	-16.86
2310	49.58	Ave.	209	2.0	V	-6.84	42.74	54	-11.26
2390	66.03	PK	340	1.8	H	-6.44	59.59	74	-14.41
2390	51.94	Ave.	340	1.8	H	-6.44	45.50	54	-8.50
2390	64.04	PK	346	1.8	V	-6.44	57.60	74	-16.40
2390	49.37	Ave.	346	1.8	V	-6.44	42.93	54	-11.07
4844	47.37	PK	171	1.6	H	2.92	50.29	74	-23.71
4844	32.28	Ave.	171	1.6	H	2.92	35.20	54	-18.80
4844	45.39	PK	28	1.5	V	2.92	48.31	74	-25.69
4844	30.52	Ave.	28	1.5	V	2.92	33.44	54	-20.56
Middle Channel(2442MHz)									
4884	46.49	PK	178	1.8	H	3.04	49.53	74	-24.47
4884	31.98	Ave.	178	1.8	H	3.04	35.02	54	-18.98
4884	44.48	PK	310	1.5	V	3.04	47.52	74	-26.48
4884	29.81	Ave.	310	1.5	V	3.04	32.85	54	-21.15
High Channel(2462 MHz)									
2483.5	64.82	PK	58	1.7	H	-5.96	58.86	74	-15.14
2483.5	51.32	Ave.	58	1.7	H	-5.96	45.36	54	-8.64
2483.5	62.63	PK	94	1.7	V	-5.96	56.67	74	-17.33
2483.5	49.19	Ave.	94	1.7	V	-5.96	43.23	54	-10.77
2500	65.01	PK	250	1.8	H	-5.88	59.13	74	-14.87
2500	51.57	Ave.	250	1.8	H	-5.88	45.69	54	-8.31
2500	62.57	PK	144	1.9	V	-5.88	56.69	74	-17.31
2500	49.24	Ave.	144	1.9	V	-5.88	43.36	54	-10.64
4924	47.13	PK	316	1.5	H	3.17	50.30	74	-23.70
4924	31.50	Ave.	316	1.5	H	3.17	34.67	54	-19.33
4924	44.86	PK	161	1.7	V	3.17	48.03	74	-25.97
4924	29.69	Ave.	161	1.7	V	3.17	32.86	54	-21.14

Note:

Corrected Factor=Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Corrected Factor + Reading

Margin =Corrected. Amplitude - Limit


The other spurious emission which is 20dB to the limit was not recorded.

1-18 GHz:

Pre-scan for Peak
802.11 bLow Channel
Horizontal

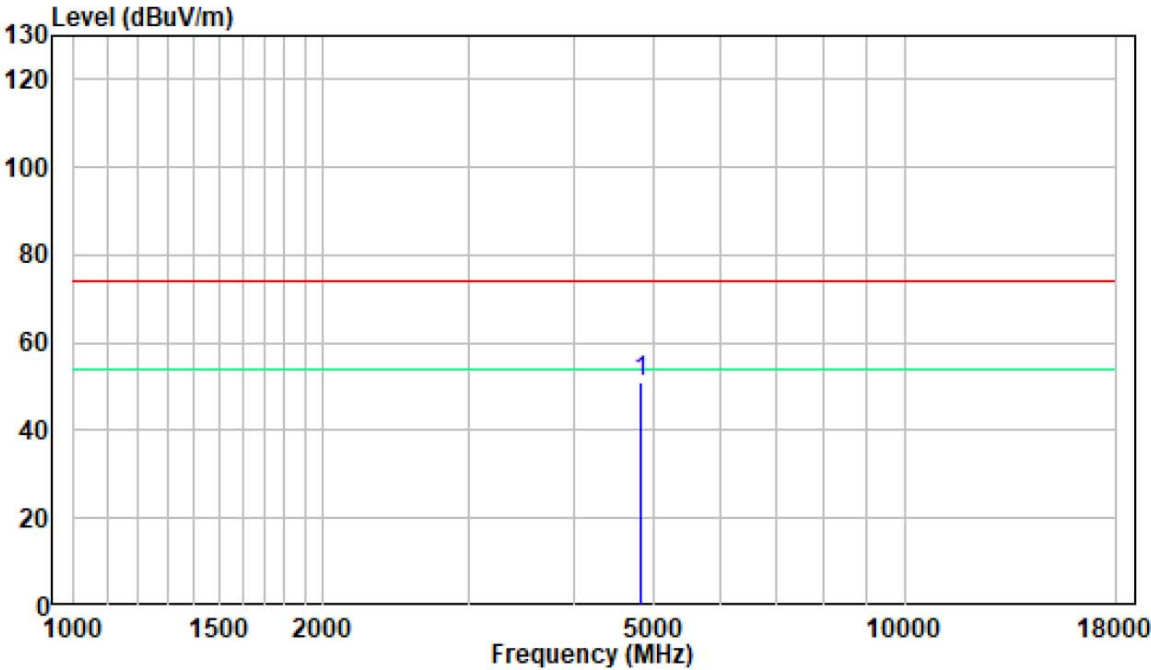


Vertical

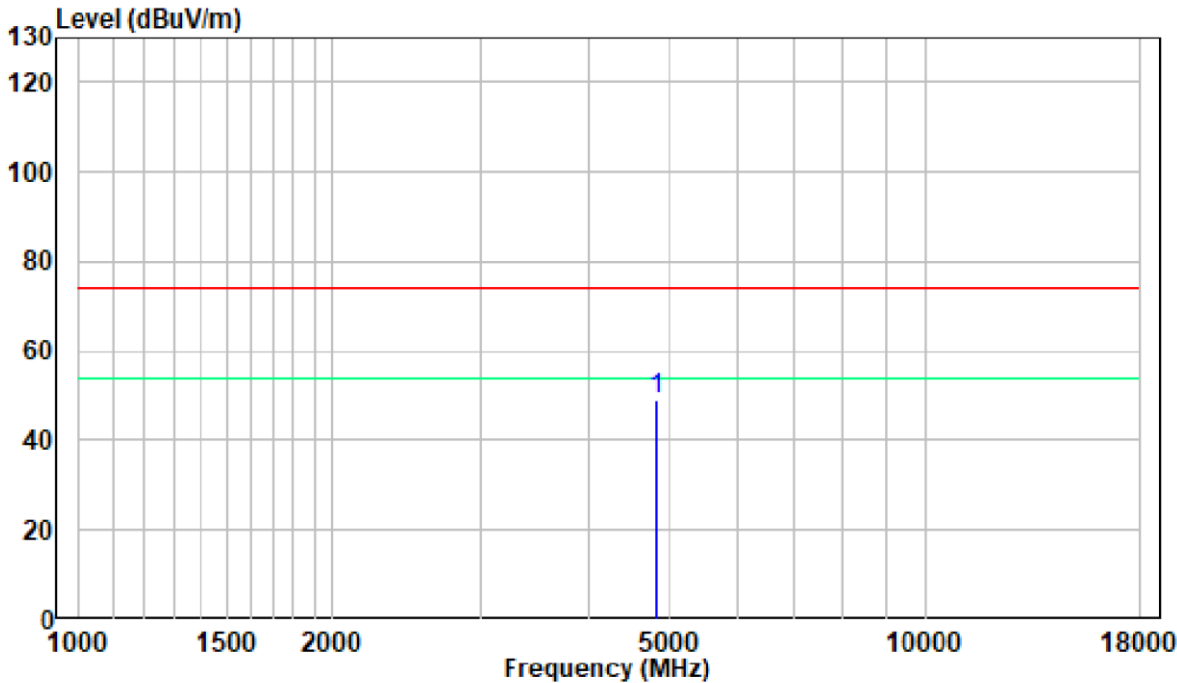


18 -25GHz:

Pre-scan for Peak
802.11 bLow Channel
Horizontal

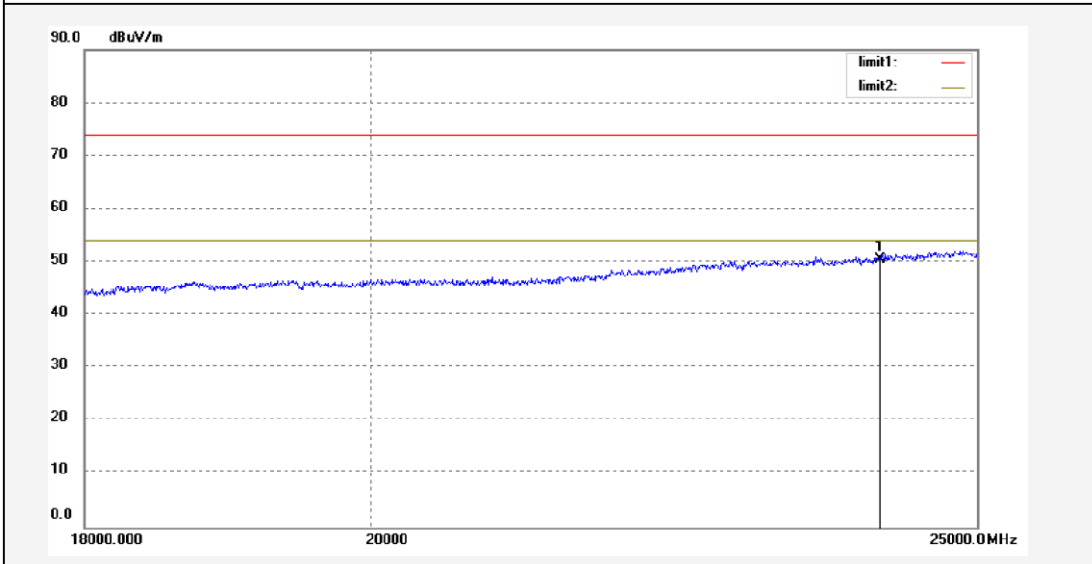

Vertical

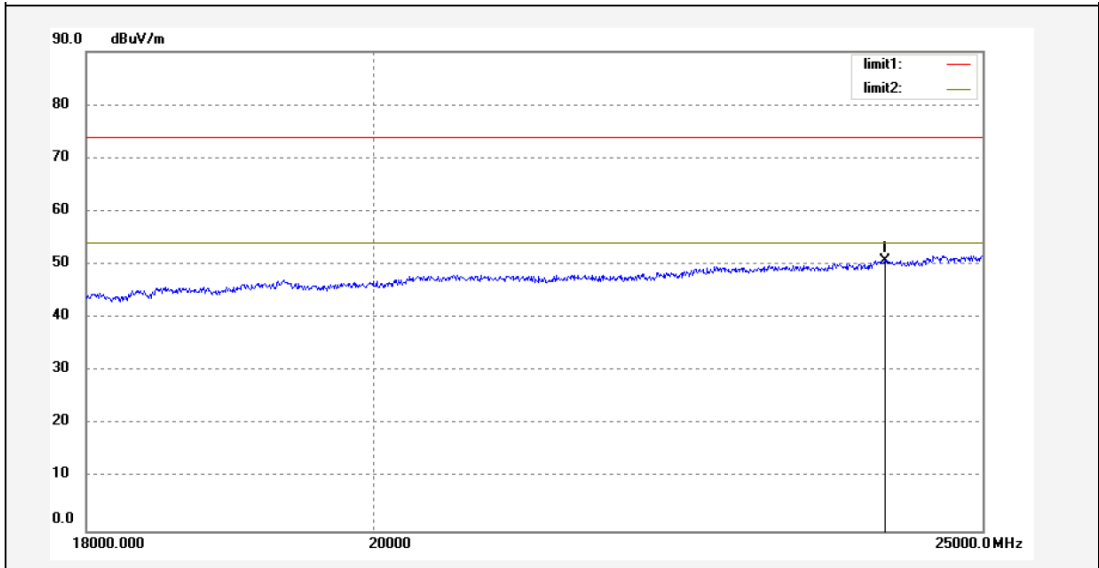


FCC §15.247(a) (2) – 6dB EMISSION BANDWIDTH& OCCUPIED BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	27°C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-09-15.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	27°C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-09-15.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

FCC §15.247(d) – 100kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

Temperature:	27°C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-09-15.

EUT operation mode: Transmitting

Test Result: Compliant.

Conducted Band Edge Result:

Please refer to the Appendix Wi-Fi and Appendix BLE.


FCC §15.247(e)- POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	27°C
Relative Humidity:	57 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-09-15.


EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

APPENDIX Wi-Fi**Appendix A: DTS Bandwidth
Test Result**

TestMode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	6.640	0.5	PASS
		2442	8.160	0.5	PASS
		2472	8.120	0.5	PASS
11G	Ant1	2412	13.920	0.5	PASS
		2442	15.760	0.5	PASS
		2472	10.760	0.5	PASS
11N20SISO	Ant1	2412	13.920	0.5	PASS
		2442	16.400	0.5	PASS
		2472	13.880	0.5	PASS
11N40SISO	Ant1	2422	30.160	0.5	PASS
		2442	35.840	0.5	PASS
		2462	16.480	0.5	PASS

Test Graphs

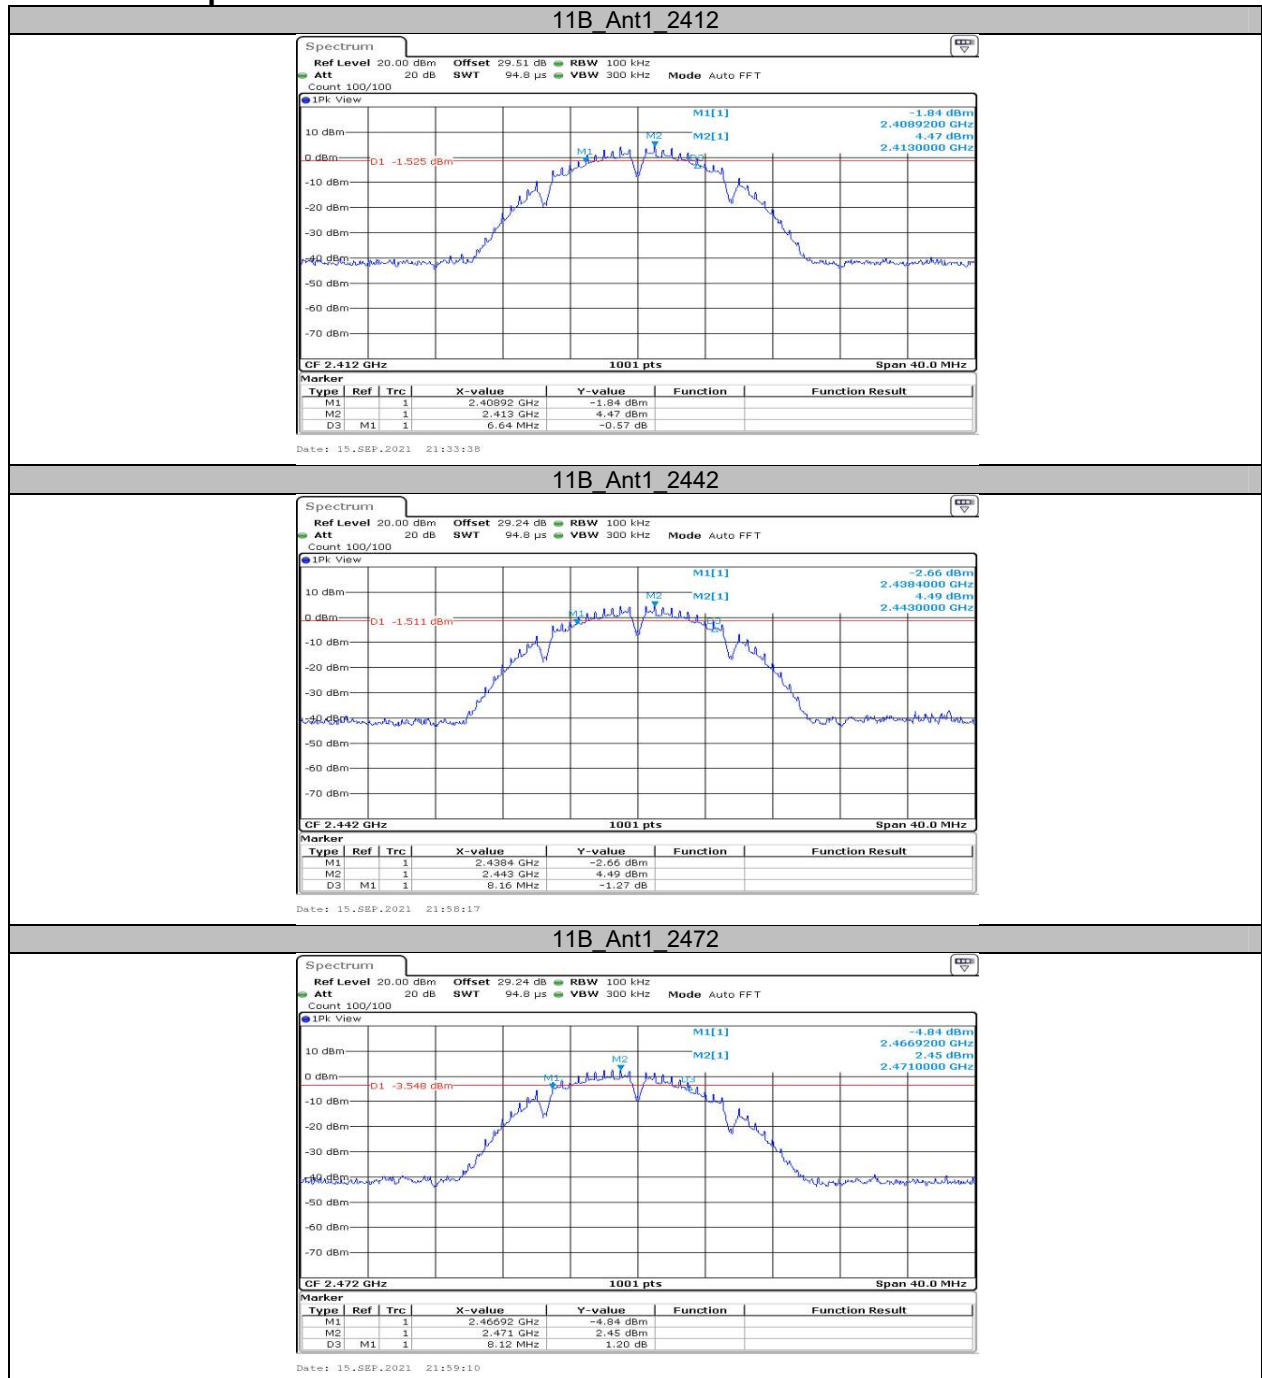

11G_Ant1_2412




11G_Ant1_2442



11G_Ant1_2472




11N20SISO_Ant1_2412

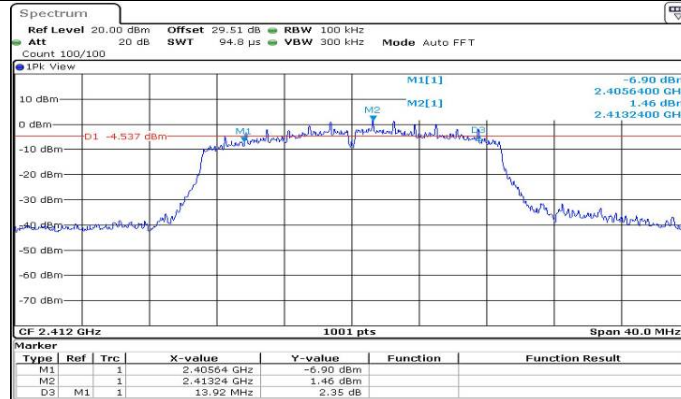


Date: 15.SEP.2021 22:03:41

11N20SISO_Ant1_2442

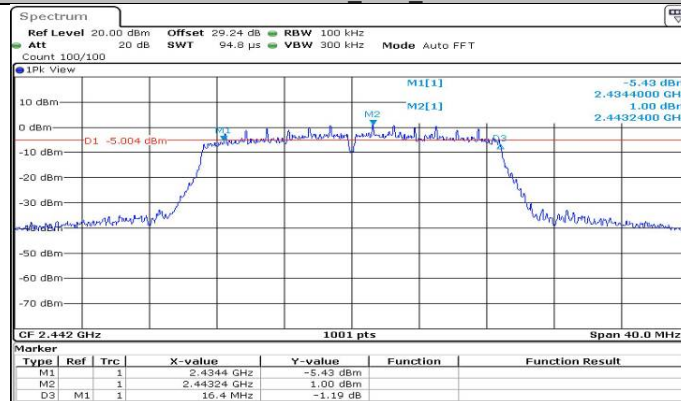

Date: 15.SEP.2021 22:04:57

11N20SISO_Ant1_2472

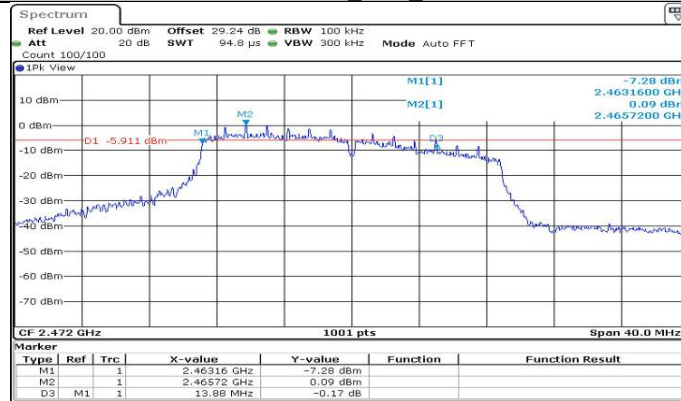

Date: 15.SEP.2021 22:05:50

11N40SISO_Ant1_2422



11N40SISO_Ant1_2442



11N40SISO_Ant1_2462



**Appendix B: Occupied Channel Bandwidth
Test Result**

TestMode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.587	---	PASS
		2442	13.107	---	PASS
		2472	13.107	---	PASS
11G	Ant1	2412	16.983	---	PASS
		2442	17.463	---	PASS
		2472	17.463	---	PASS
11N20SISO	Ant1	2412	17.902	---	PASS
		2442	18.262	---	PASS
		2472	18.342	---	PASS
11N40SISO	Ant1	2422	36.284	---	PASS
		2442	38.921	---	PASS
		2462	36.284	---	PASS

Test Graphs**11B_Ant1_2412****11B_Ant1_2442****11B_Ant1_2472**

11G_Ant1_2412



11G_Ant1_2442



11G_Ant1_2472



11N20SISO_Ant1_2412



11N20SISO_Ant1_2442



11N20SISO_Ant1_2472



11N40SISO_Ant1_2422



11N40SISO_Ant1_2442



11N40SISO_Ant1_2462



Appendix C: Maximum conducted output power Test Result

Peak:

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	14.17	≤30	PASS
		2442	14.46	≤30	PASS
		2472	13.42	≤30	PASS
11G	Ant1	2412	15.13	≤30	PASS
		2442	15.97	≤30	PASS
		2472	14.78	≤30	PASS
11N20SISO	Ant1	2412	16.74	≤30	PASS
		2442	16.78	≤30	PASS
		2472	15.53	≤30	PASS
11N40SISO	Ant1	2422	16.54	≤30	PASS
		2442	16.39	≤30	PASS
		2462	16.18	≤30	PASS


AV:

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	2412	12.12	≤30	PASS
		2442	12.74	≤30	PASS
		2472	11.79	≤30	PASS
11G	Ant1	2412	11.18	≤30	PASS
		2442	11.47	≤30	PASS
		2472	10.54	≤30	PASS
11N20SISO	Ant1	2412	11.64	≤30	PASS
		2442	11.43	≤30	PASS
		2472	10.47	≤30	PASS
11N40SISO	Ant1	2422	11.24	≤30	PASS
		2442	11.75	≤30	PASS
		2462	10.80	≤30	PASS


**Appendix D: Maximum power spectral density
Test Result**

TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-8.55	≤8	PASS
		2442	-8.46	≤8	PASS
		2472	-11.15	≤8	PASS
11G	Ant1	2412	-11.85	≤8	PASS
		2442	-12.71	≤8	PASS
		2472	-13.81	≤8	PASS
11N20SISO	Ant1	2412	-12.02	≤8	PASS
		2442	-12.66	≤8	PASS
		2472	-13.54	≤8	PASS
11N40SISO	Ant1	2422	-13.31	≤8	PASS
		2442	-12.58	≤8	PASS
		2462	-13.19	≤8	PASS


Test Graphs

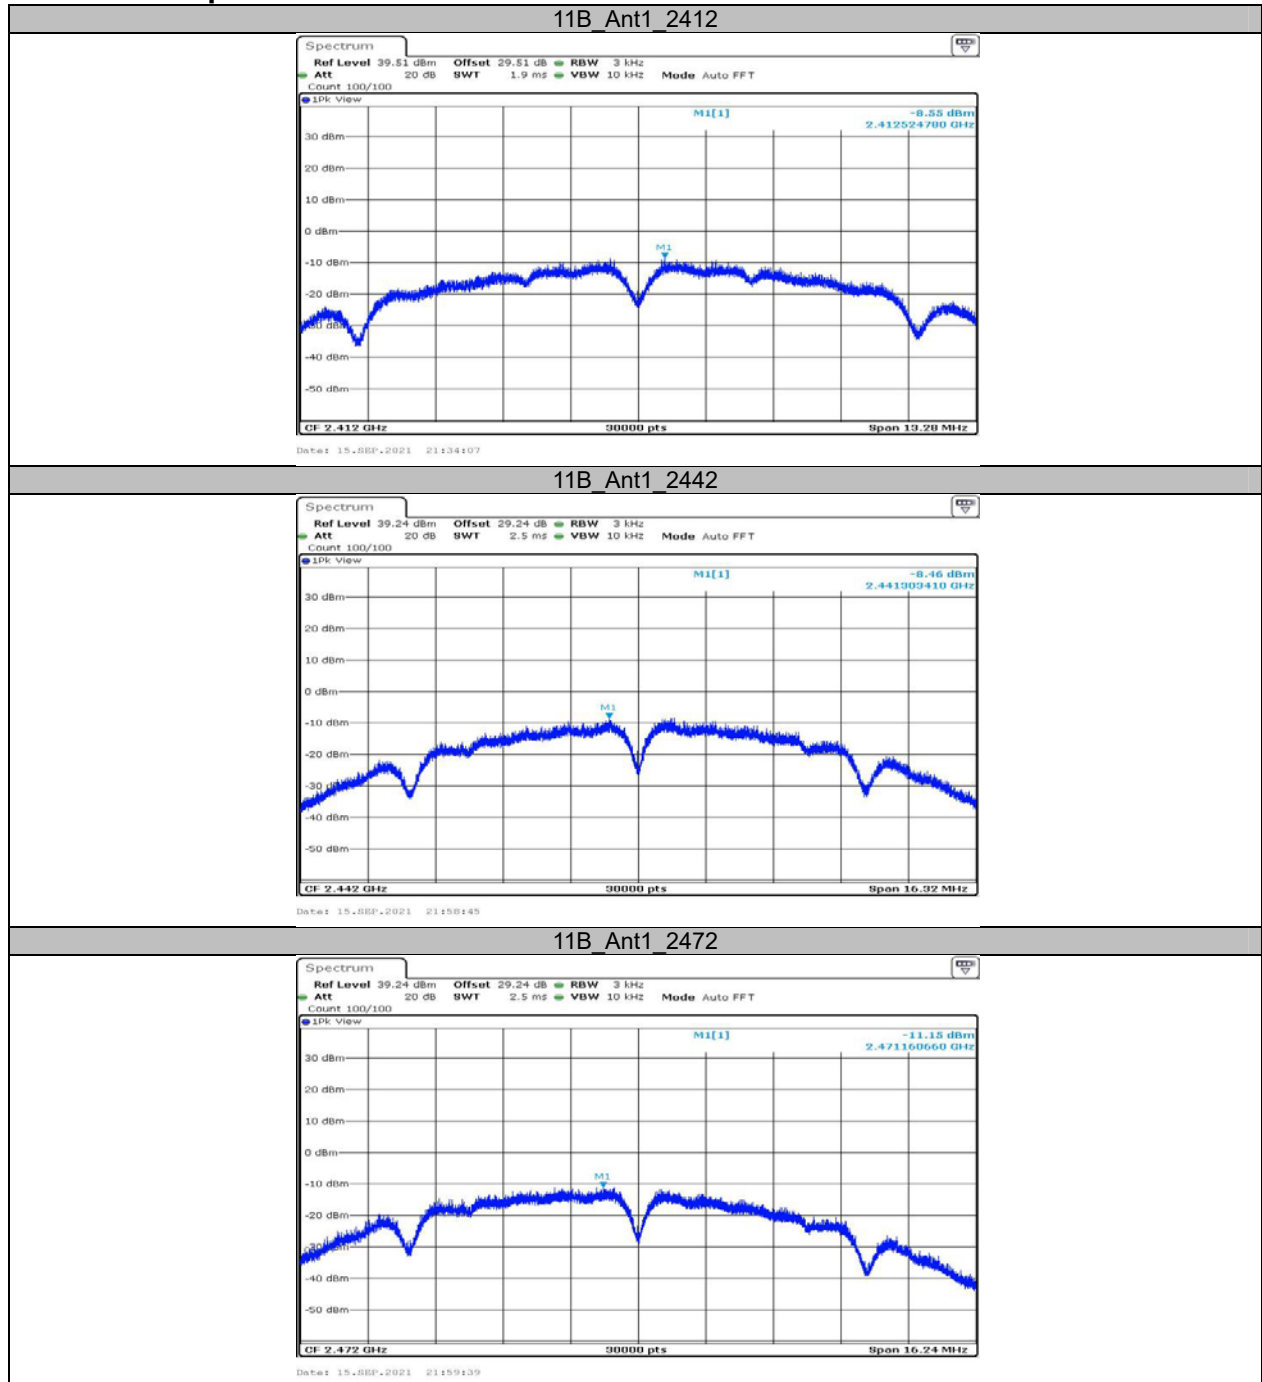


11G_Ant1_2412

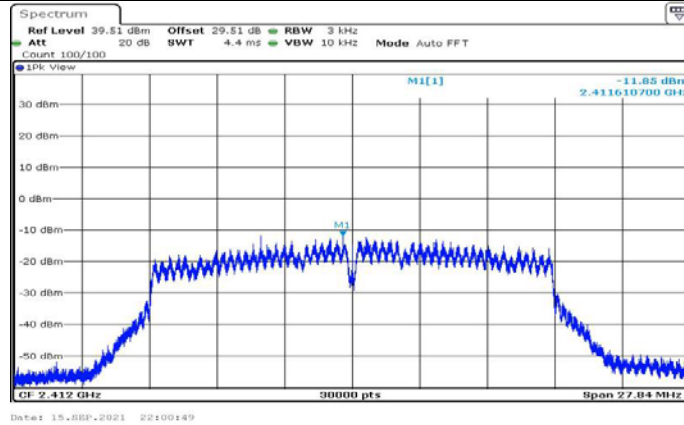


11G_Ant1_2442

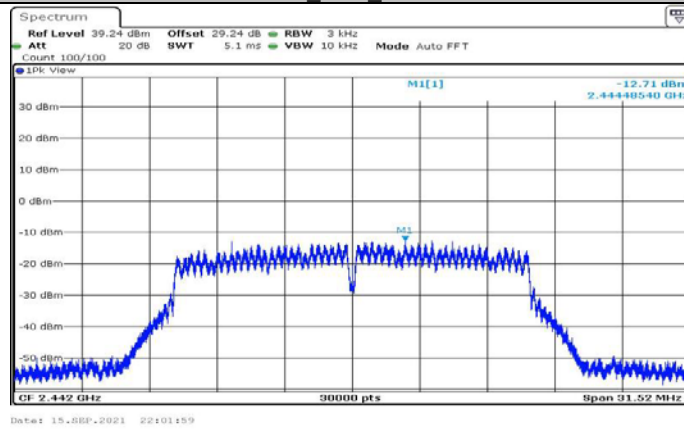


11G_Ant1_2472

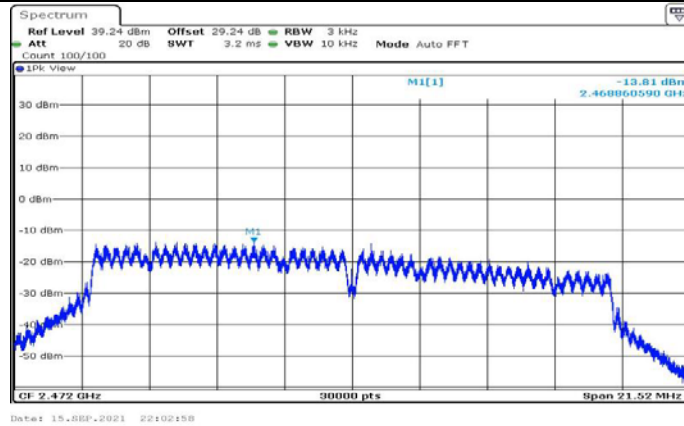


11N20SISO Ant1 2412

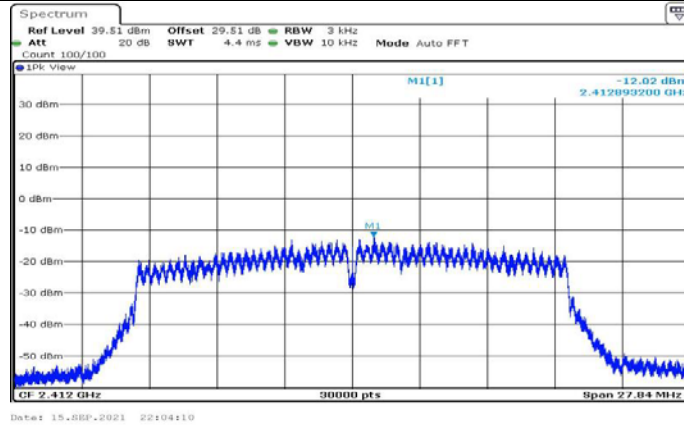


11N20SISO Ant1 2442

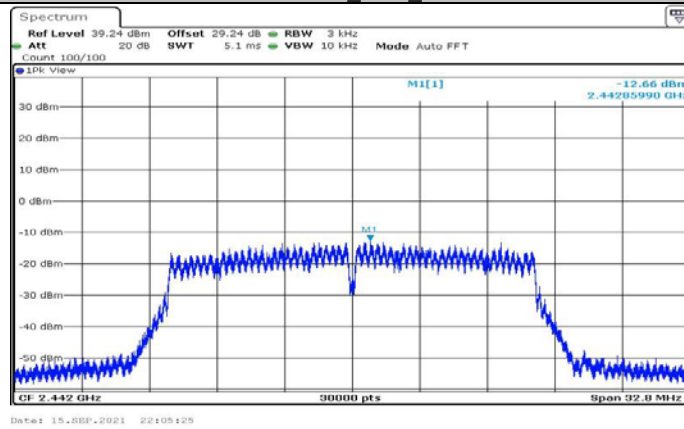


11N20SISO Ant1 2472

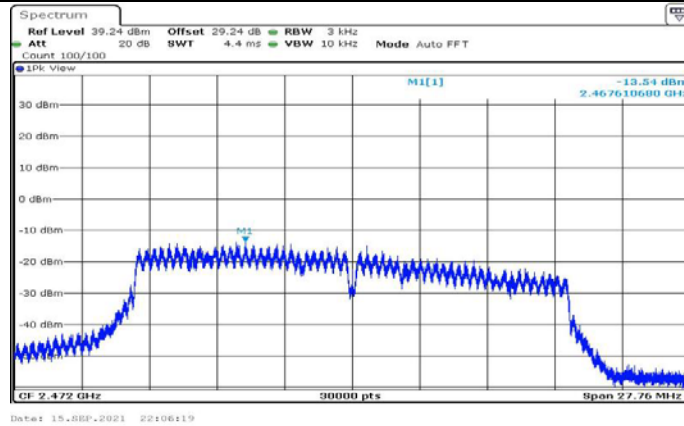


11N40SISO Ant1 2422

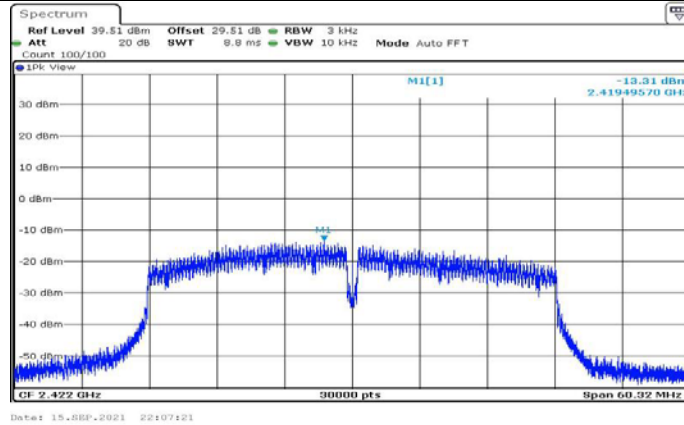

11N40SISO Ant1 2442

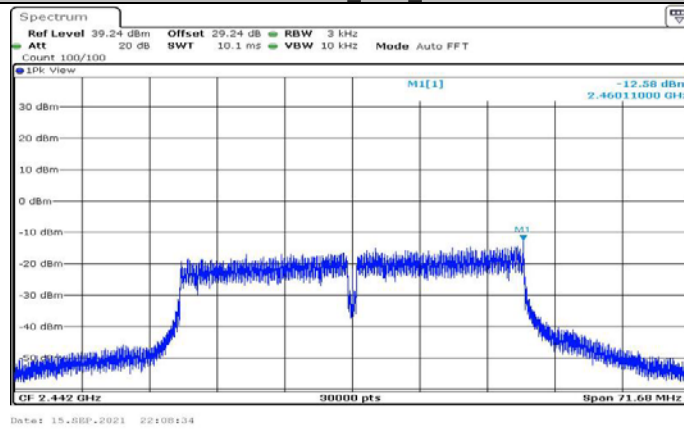


11N40SISO Ant1 2462

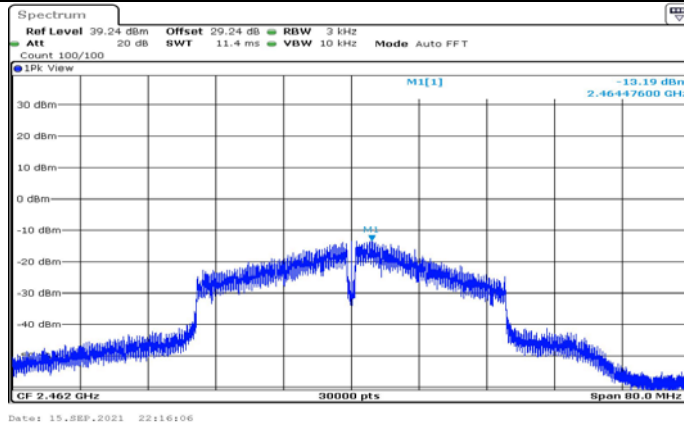


Appendix E: Band edge measurements


Test Graphs

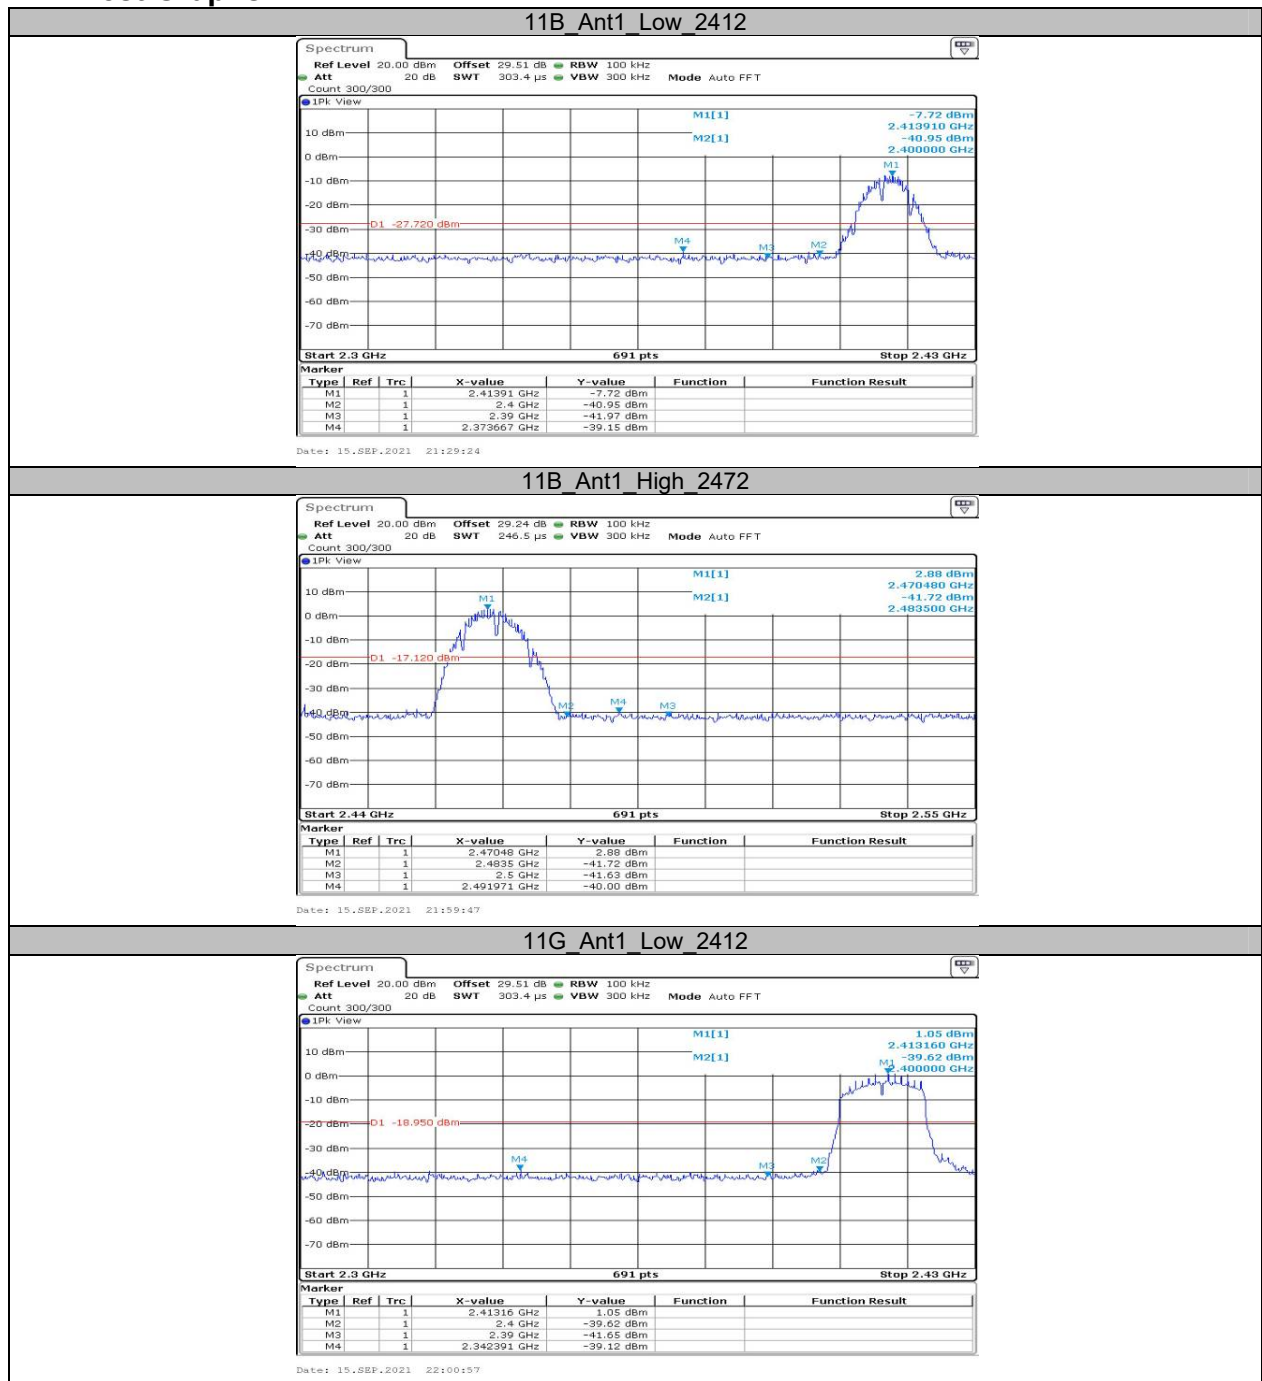

11G Ant1 High 2472

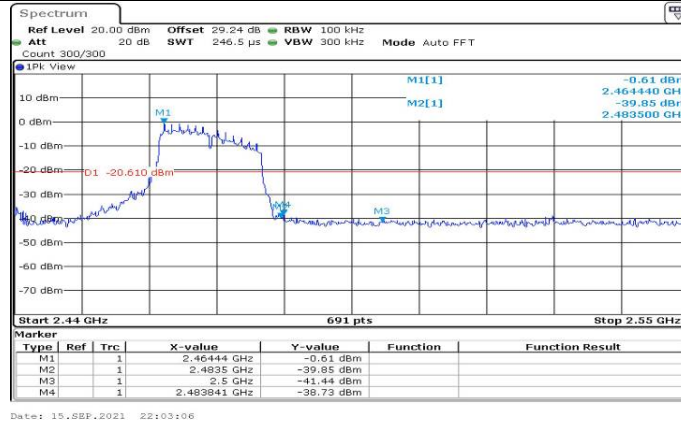


11N20SISO_Ant1_Low_2412

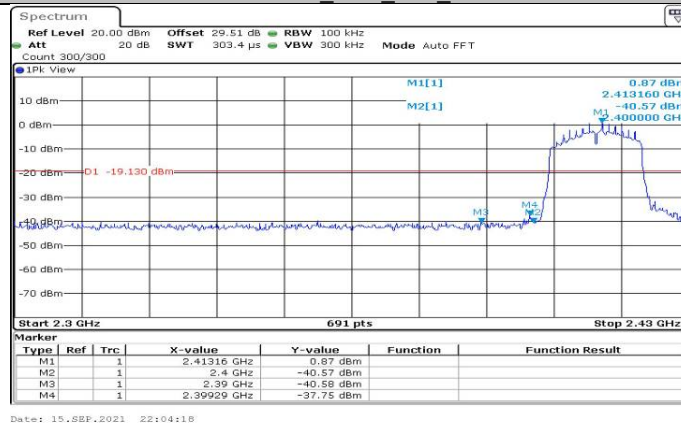

11N20SISO_Ant1_High_2472



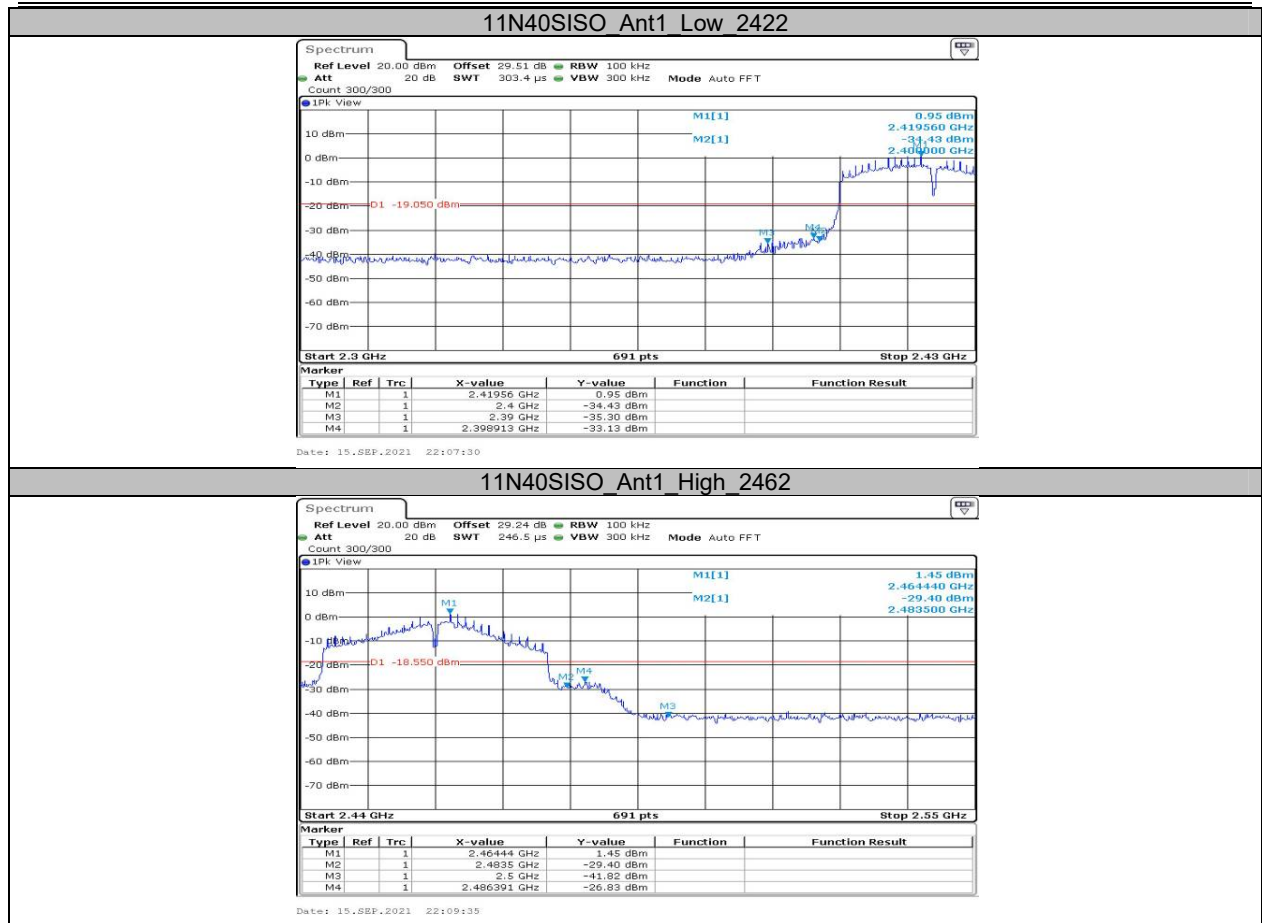


**Appendix F: Duty Cycle
Test Result**

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2442	8.38	8.42	99.52
11G	Ant1	2442	1.39	1.44	96.53
11N20SISO	Ant1	2442	1.30	1.35	96.30
11N40SISO	Ant1	2442	0.64	0.69	92.75

Test Graphs




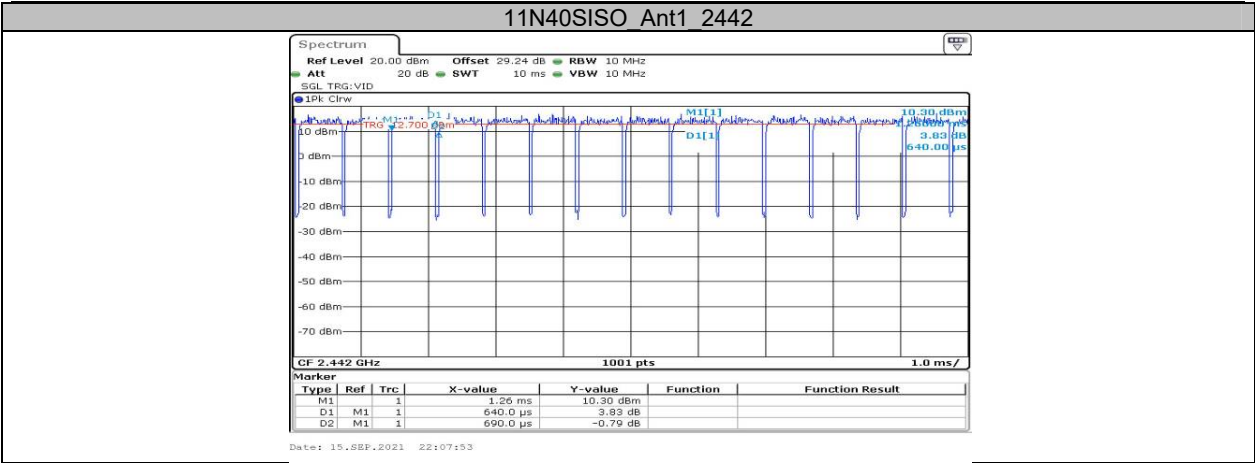

APPENDIX BLE**Appendix A: DTS Bandwidth
Test Result**

TestMode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.668	0.5	PASS
		2440	0.668	0.5	PASS
		2480	0.672	0.5	PASS
BLE_2M	Ant1	2402	1.164	0.5	PASS
		2440	1.168	0.5	PASS
		2480	1.172	0.5	PASS


Test Graphs

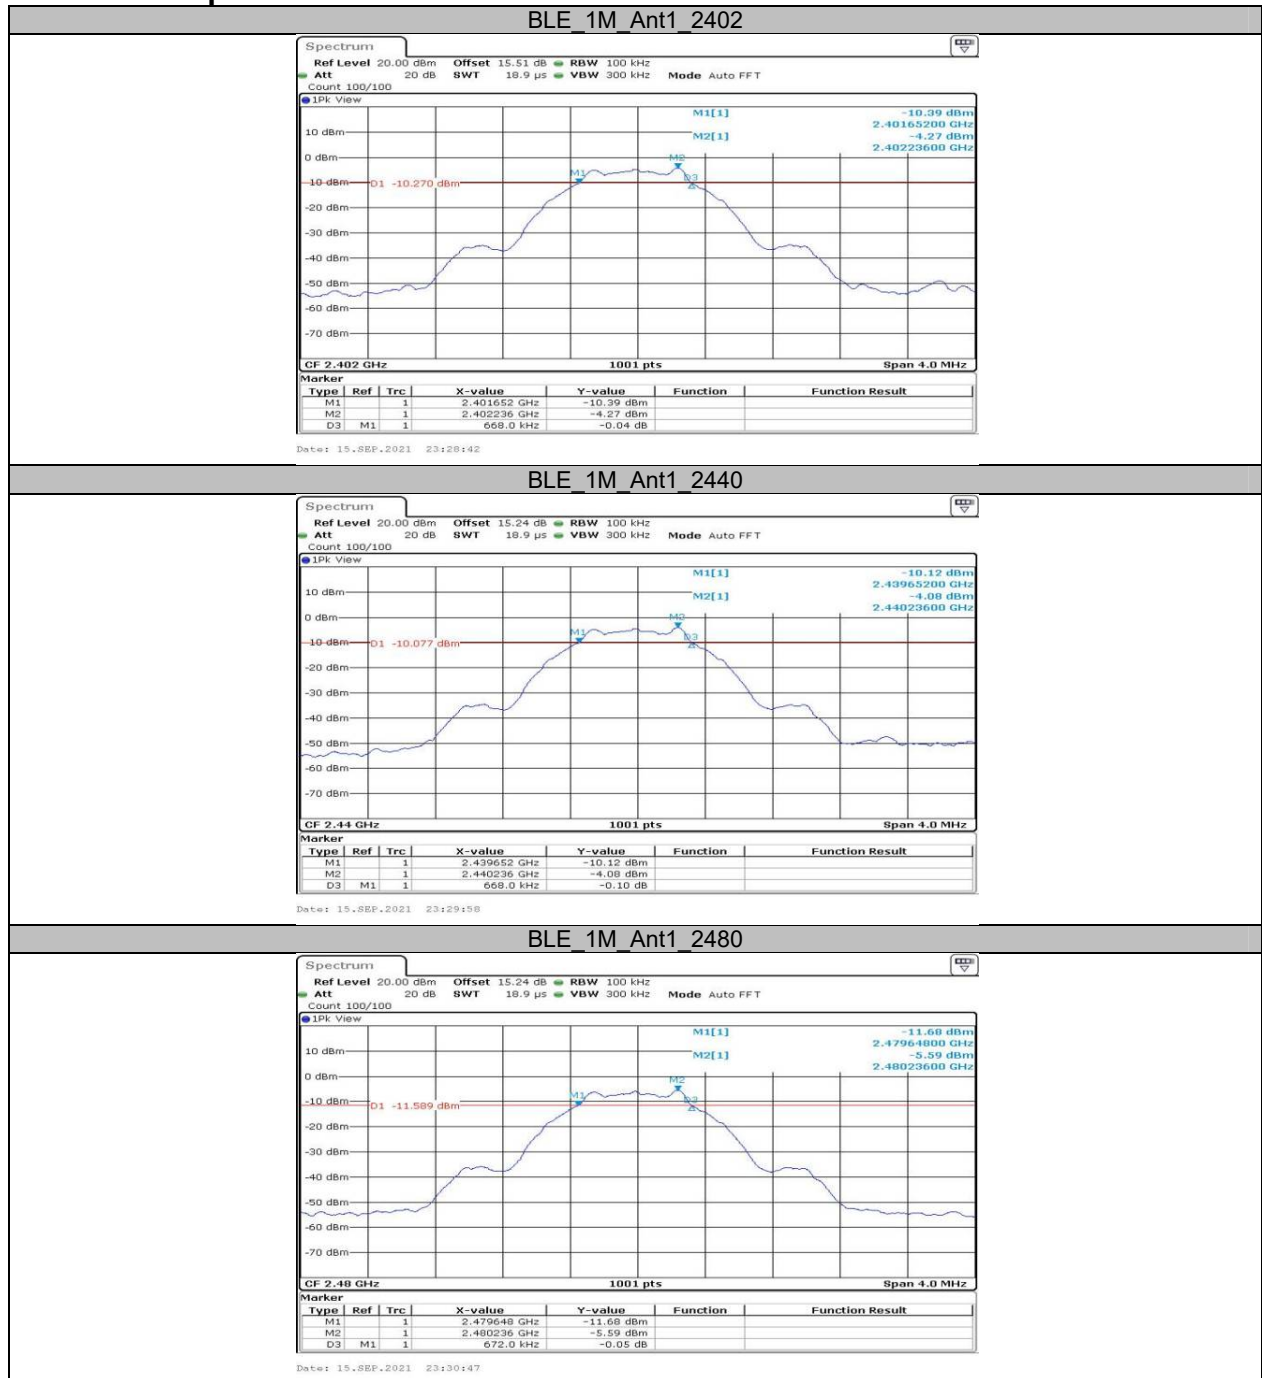


BLE 2M Ant1 2402



BLE 2M Ant1 2440

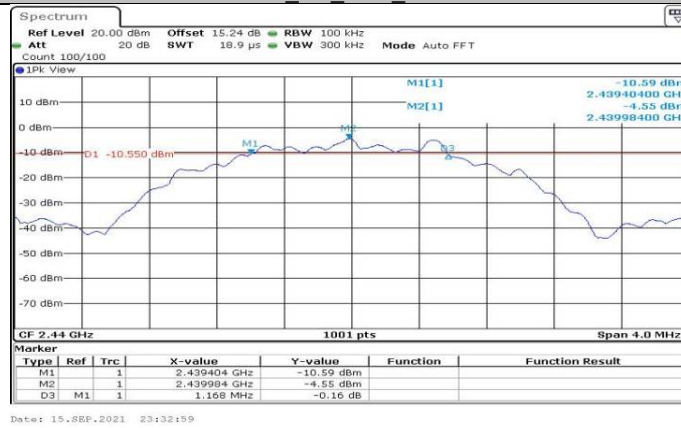


BLE 2M Ant1 2480

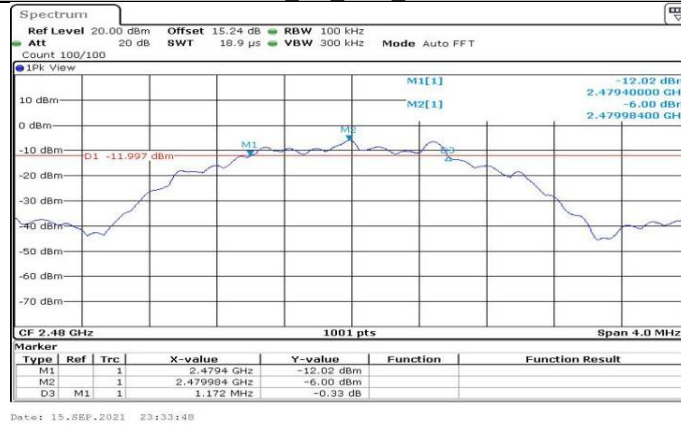

**Appendix B: Occupied Channel Bandwidth
Test Result**

TestMode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.035	---	PASS
		2440	1.035	---	PASS
		2480	1.039	---	PASS
BLE_2M	Ant1	2402	2.062	---	PASS
		2440	2.066	---	PASS
		2480	2.062	---	PASS

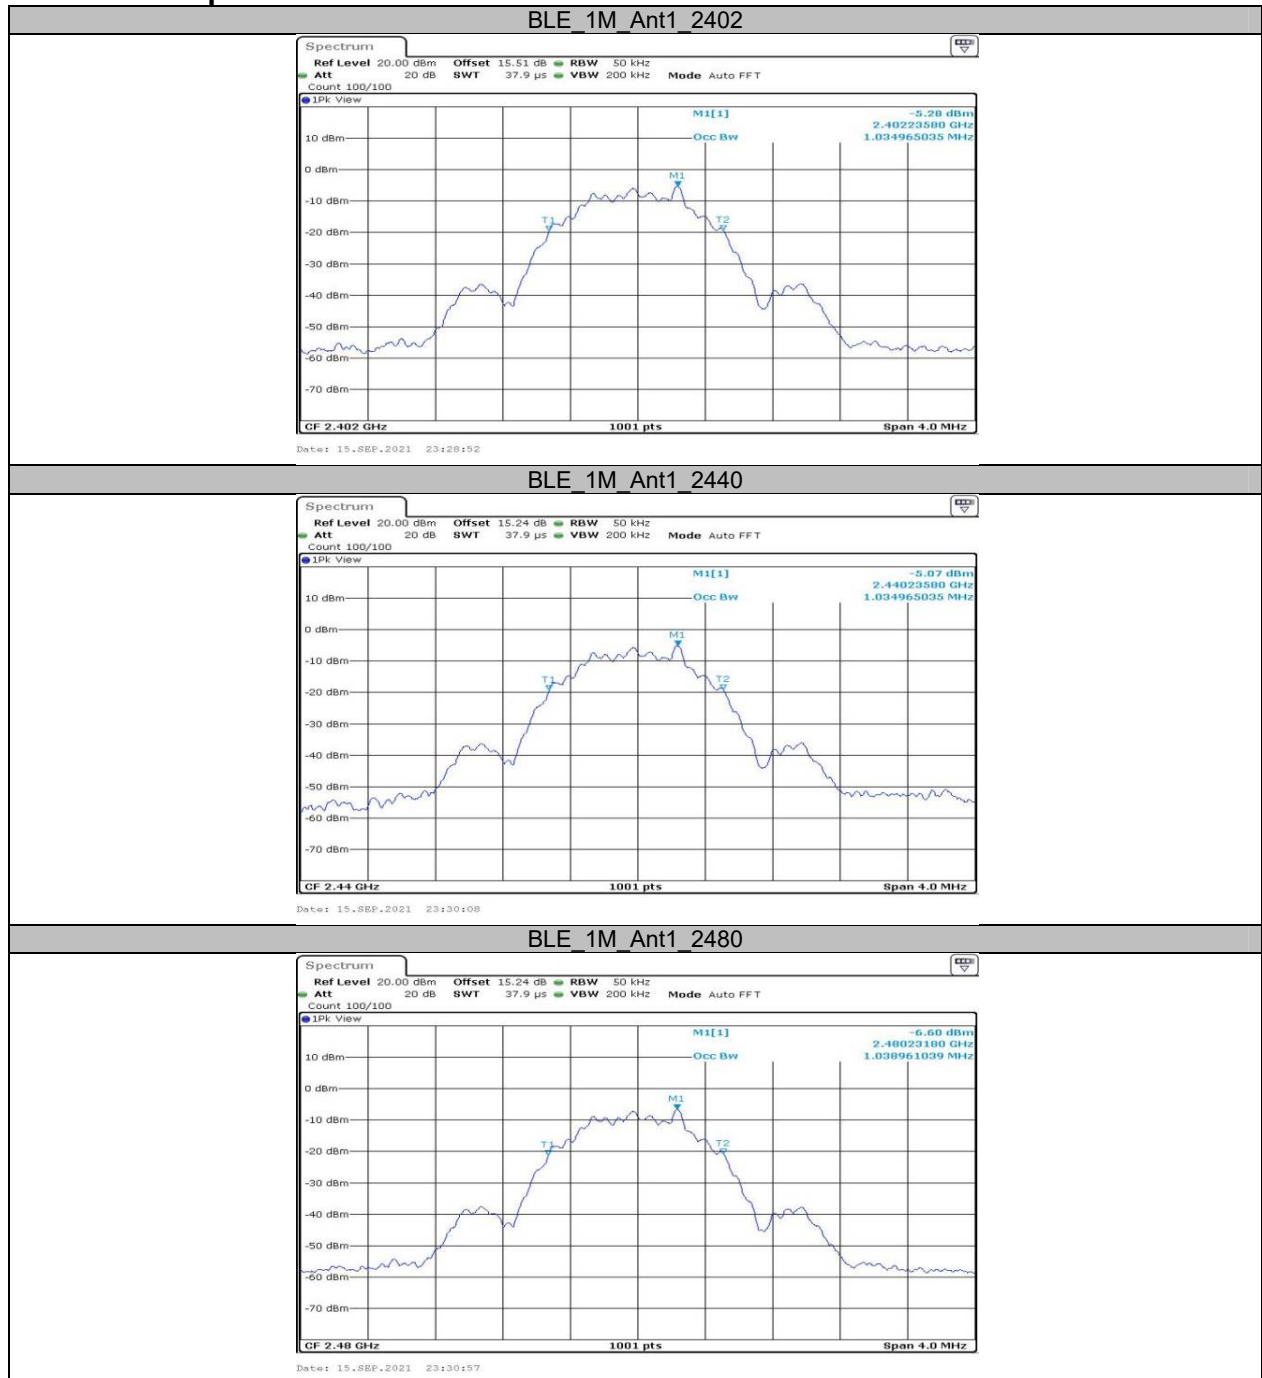Test Graphs

BLE 2M Ant1 2402



BLE 2M Ant1 2440



BLE 2M Ant1 2480




**Appendix C: Maximum conducted Peak output power
Test Result**

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-3.29	≤30	PASS
		2440	-2.81	≤30	PASS
		2480	-4.00	≤30	PASS
BLE_2M	Ant1	2402	-4.32	≤30	PASS
		2440	-3.92	≤30	PASS
		2480	-4.88	≤30	PASS


**Appendix D: Maximum power spectral density
Test Result**

TestMode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-20.81	≤8	PASS
		2440	-20.58	≤8	PASS
		2480	-22.04	≤8	PASS
BLE_2M	Ant1	2402	-22.97	≤8	PASS
		2440	-22.73	≤8	PASS
		2480	-24.16	≤8	PASS


Test Graphs

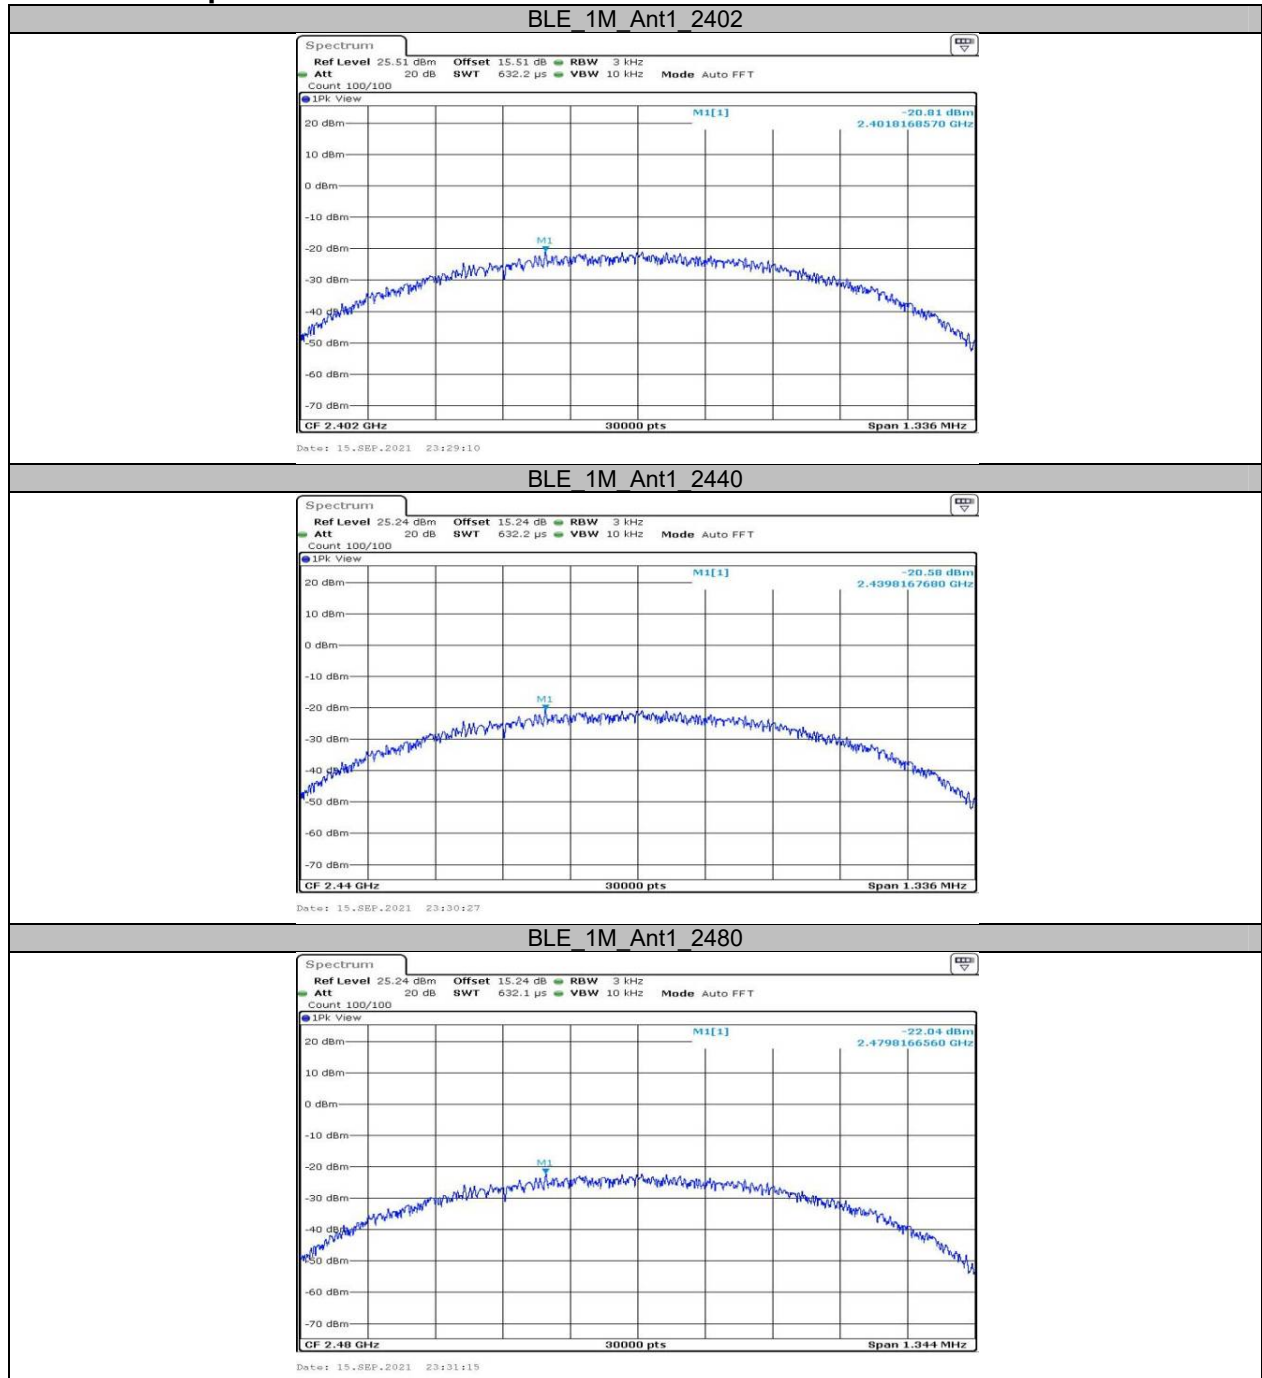


BLE_2M_Ant1_2402

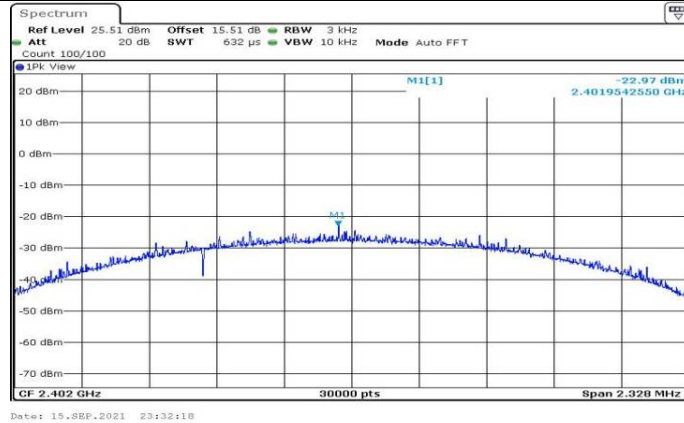

BLE_2M_Ant1_2440

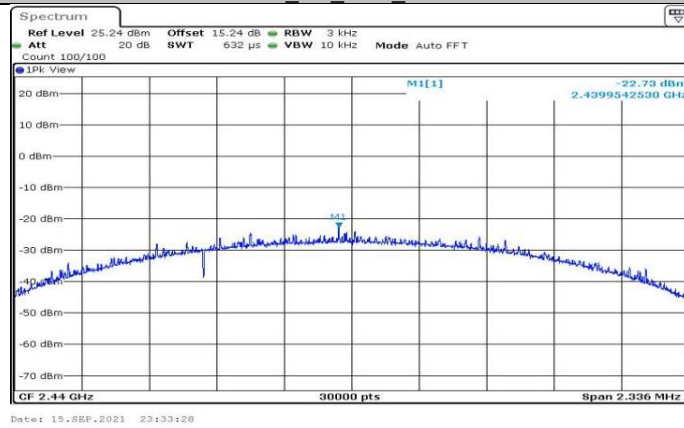



BLE_2M_Ant1_2480

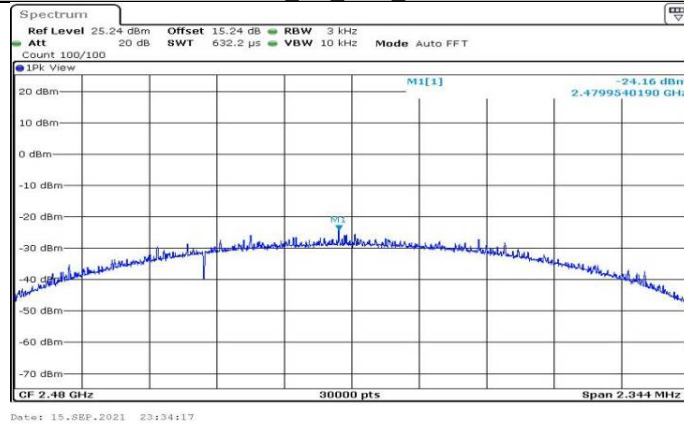

Appendix E: Band edge measurements

Test Graphs

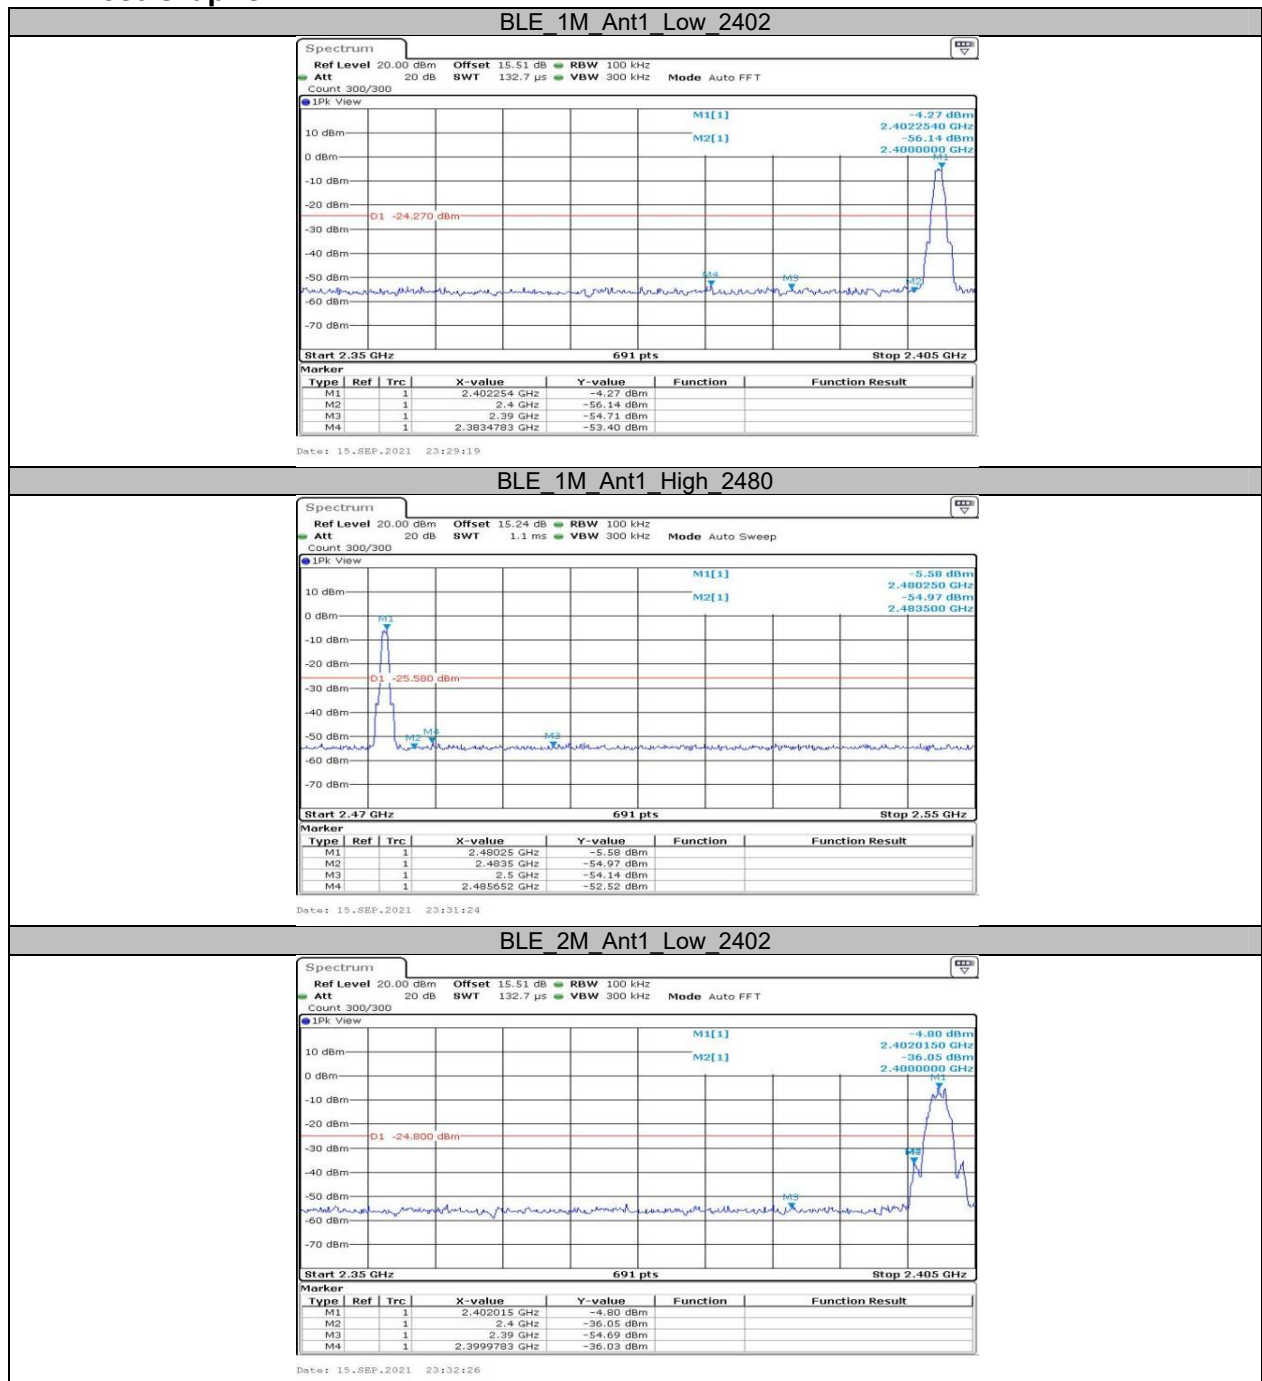


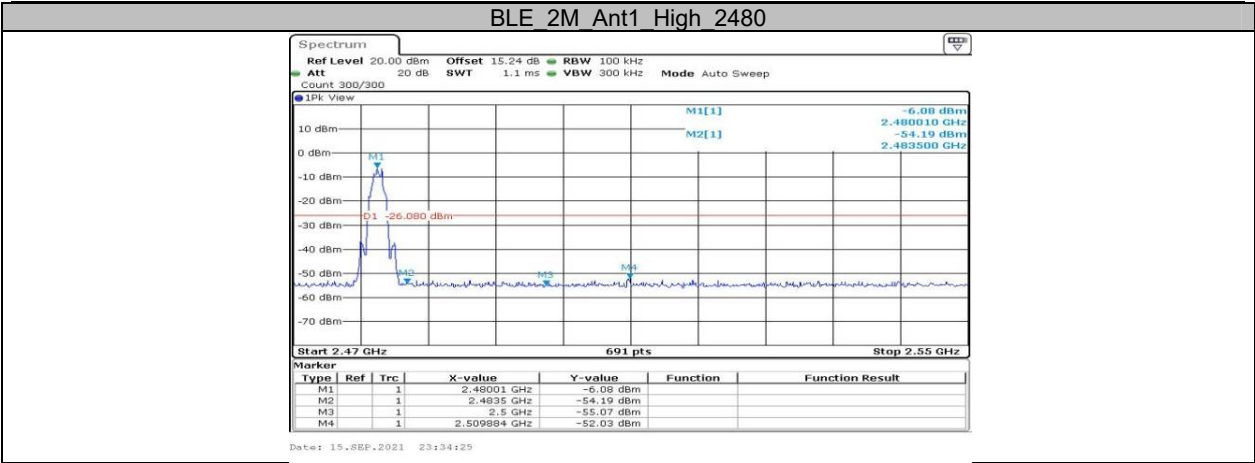

Appendix F: Duty Cycle Test Result

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
BLE_1M	Ant1	2440	2.13	2.50	85.20
BLE_2M	Ant1	2440	1.07	1.87	57.22

Test Graphs

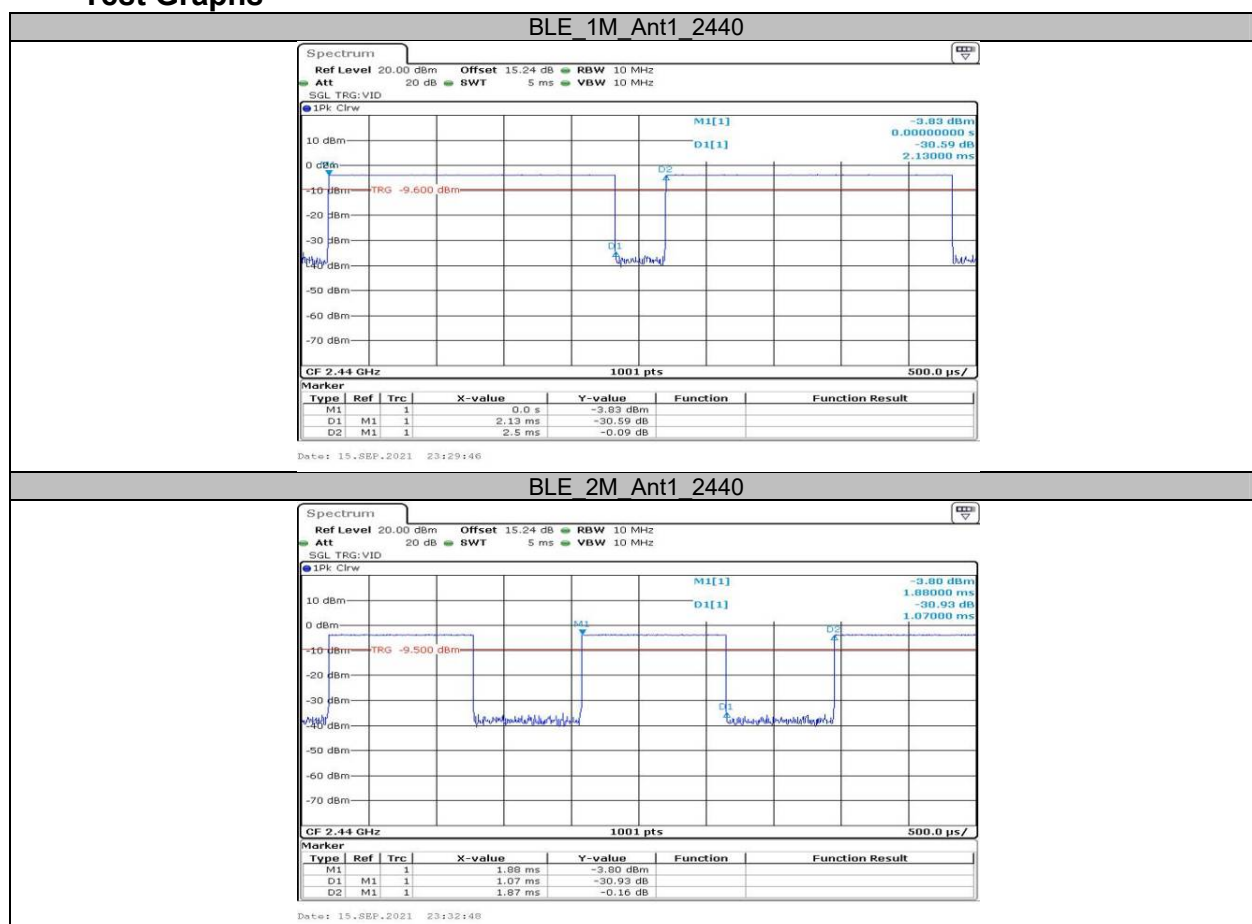

***** END OF REPORT *****